






2DH5_Ant1_2402

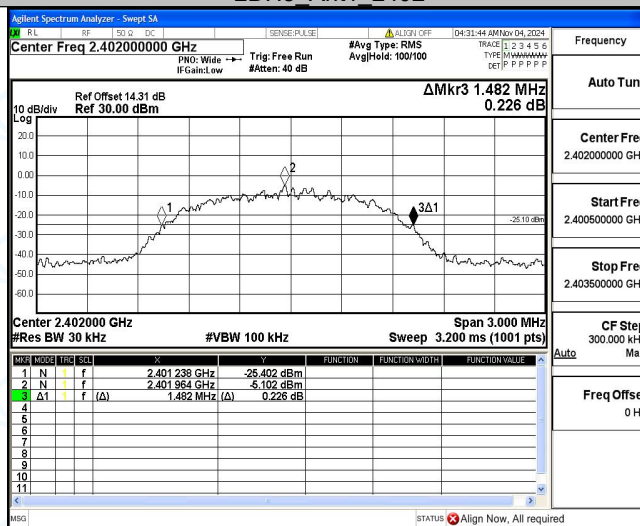

2DH5_Ant1_2441

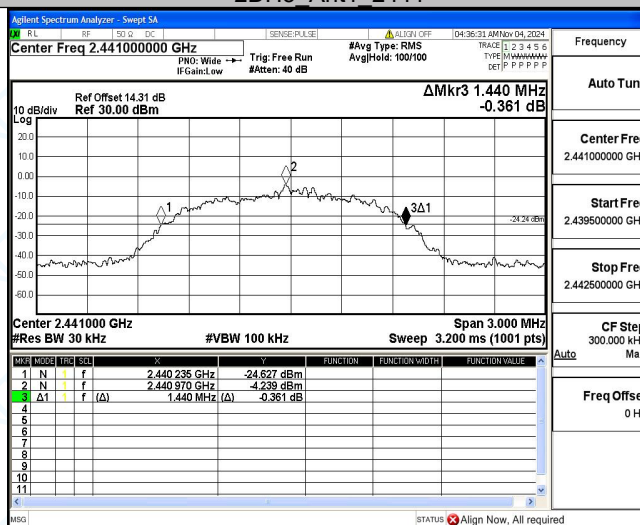


2DH5_Ant1_2480

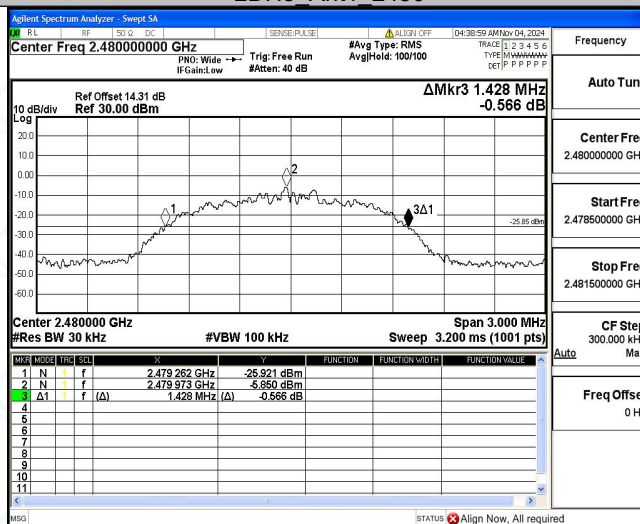





3DH5 Ant1_2402

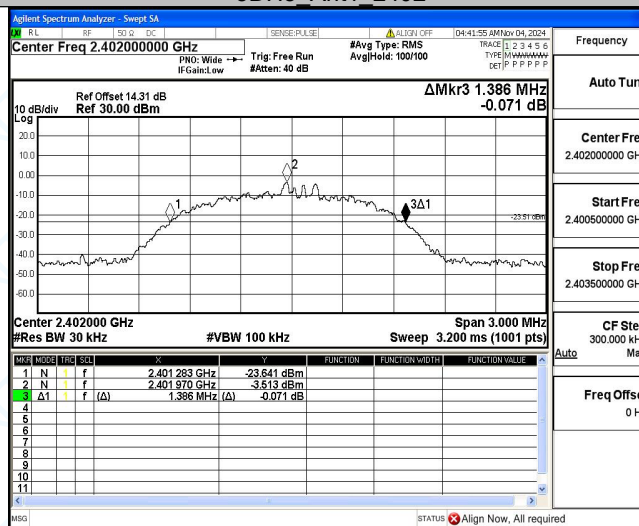

3DH5 Ant1_2441

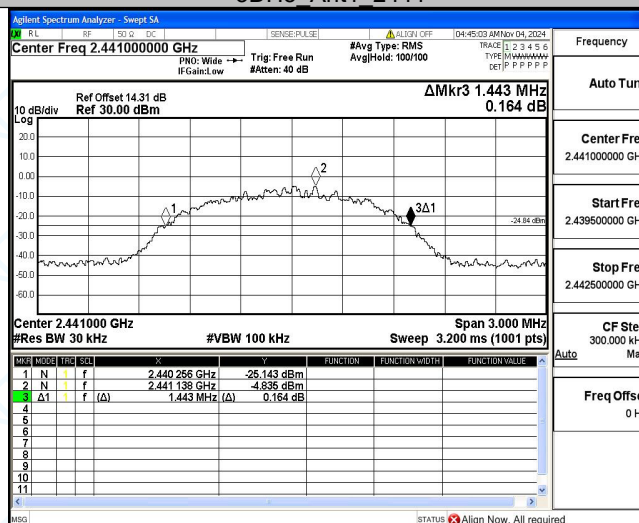

3DH5 Ant1_2480

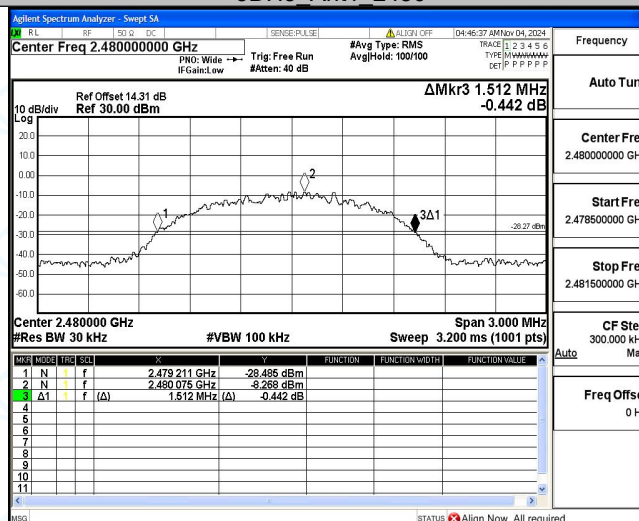



Appendix B: Maximum conducted output power


Test Result

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	0.75	≤20.97	PASS
		2441	1.08	≤20.97	PASS
		2480	-0.86	≤20.97	PASS
2DH5	Ant1	2402	0.71	≤20.97	PASS
		2441	1.22	≤20.97	PASS
		2480	-0.94	≤20.97	PASS
3DH5	Ant1	2402	0.67	≤20.97	PASS
		2441	1.14	≤20.97	PASS
		2480	-0.95	≤20.97	PASS




Test Graphs


DH5 Ant1 2402

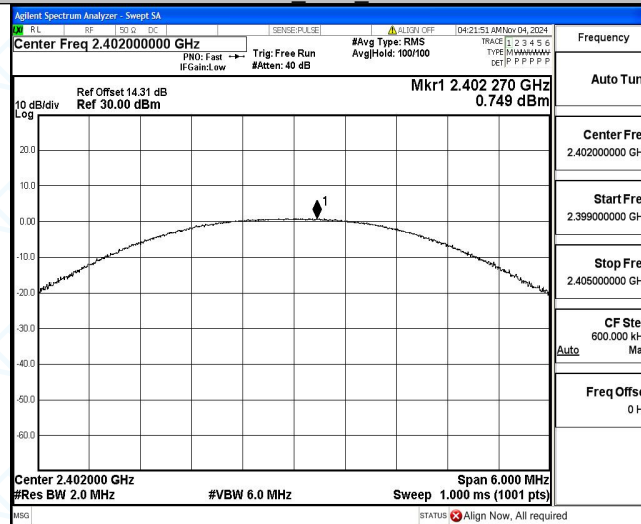

DH5 Ant1 2441

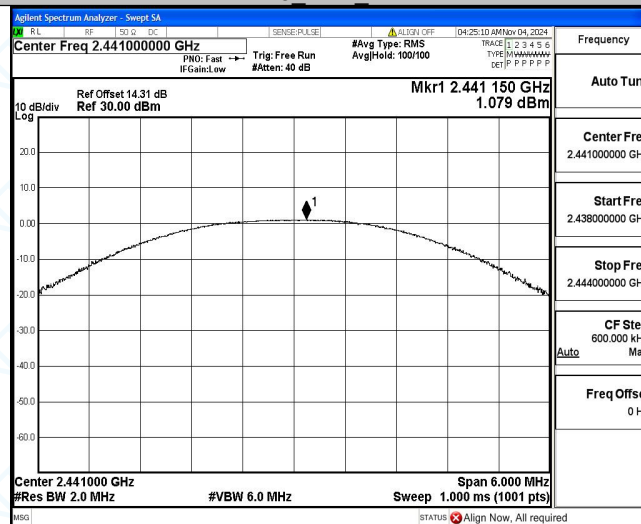


DH5 Ant1 2480

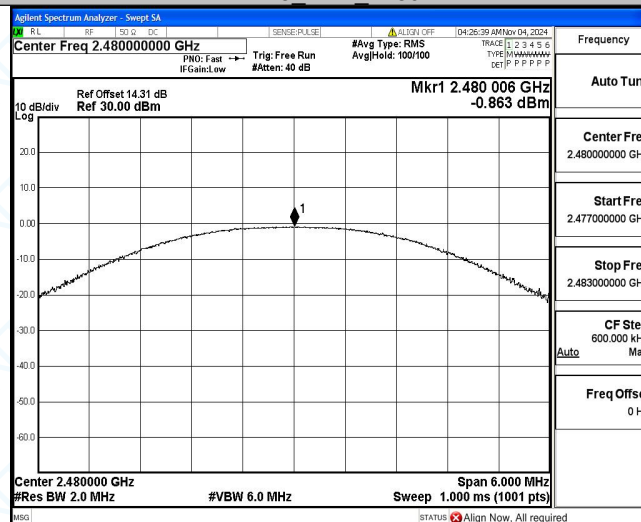





2DH5_Ant1_2402

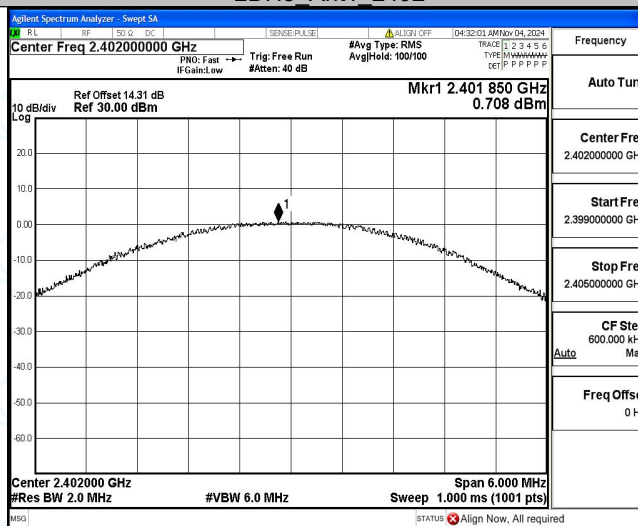

2DH5_Ant1_2441

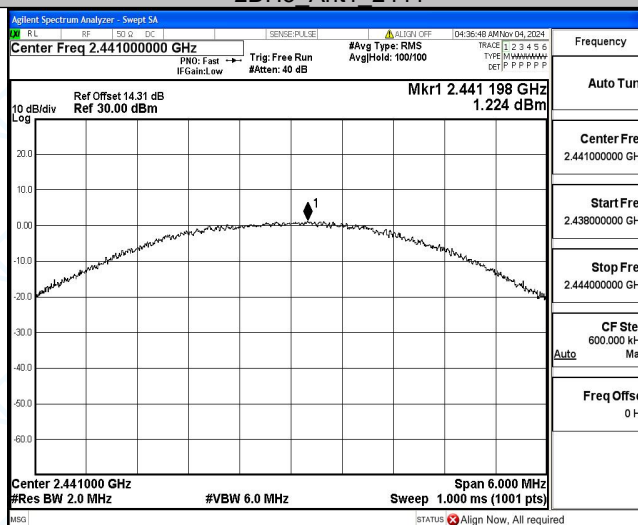


2DH5_Ant1_2480

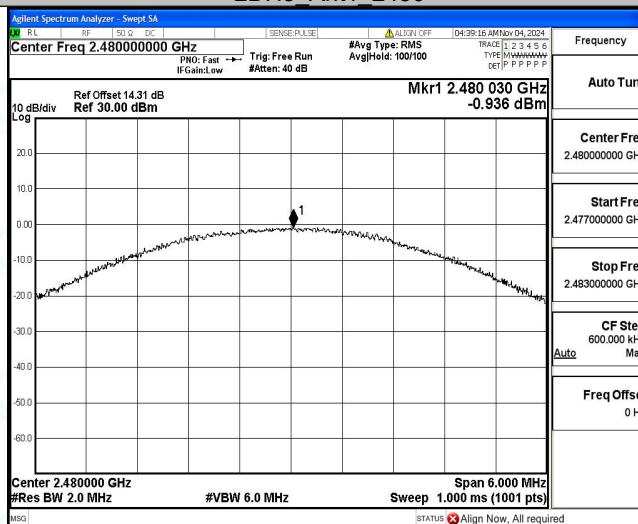





3DH5_Ant1_2402

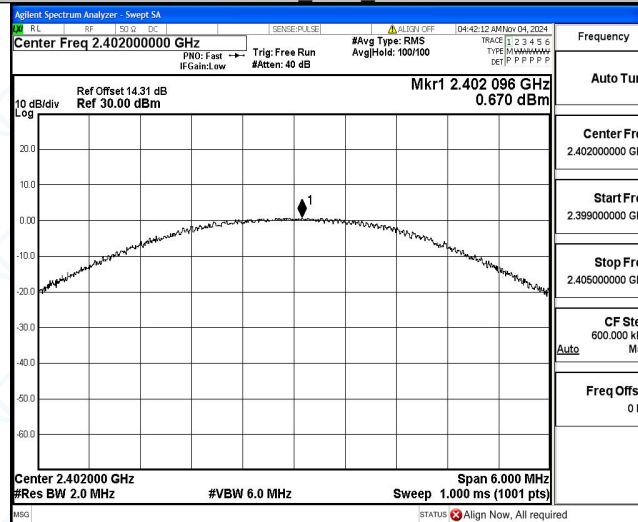

3DH5_Ant1_2441

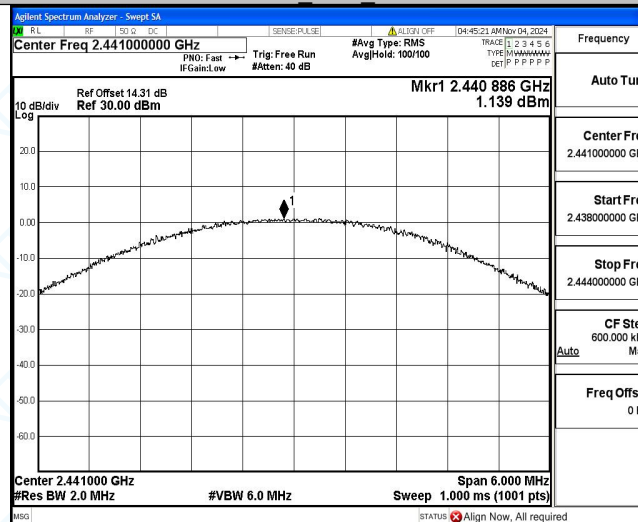

3DH5_Ant1_2480

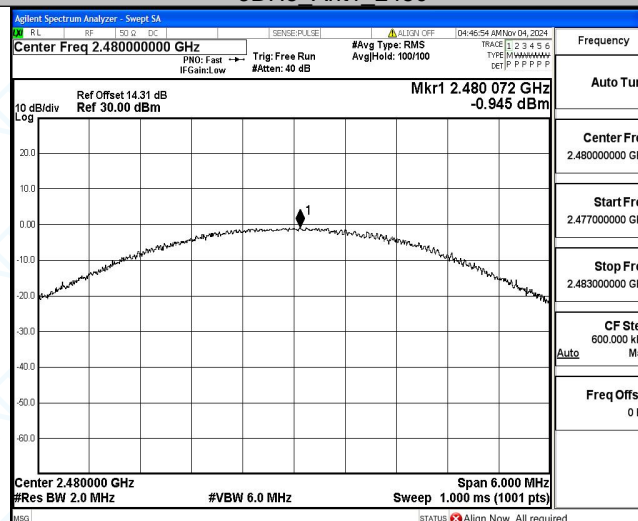



Appendix C: Carrier frequency separation


Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.016	≥0.766	PASS
2DH5	Ant1	Hop	1.172	≥0.988	PASS
3DH5	Ant1	Hop	1.158	≥1.008	PASS




Test Graphs


DH5_Ant1_Hop

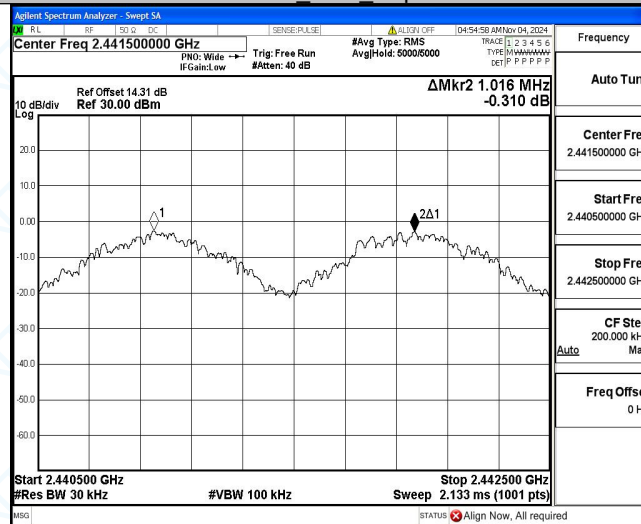

2DH5_Ant1_Hop

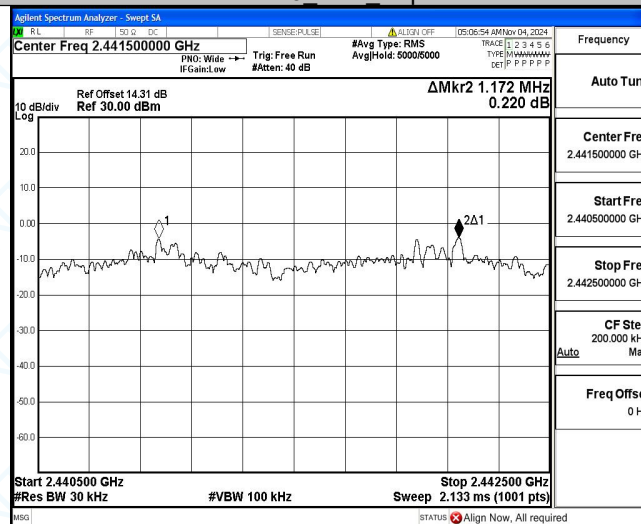

3DH5_Ant1_Hop

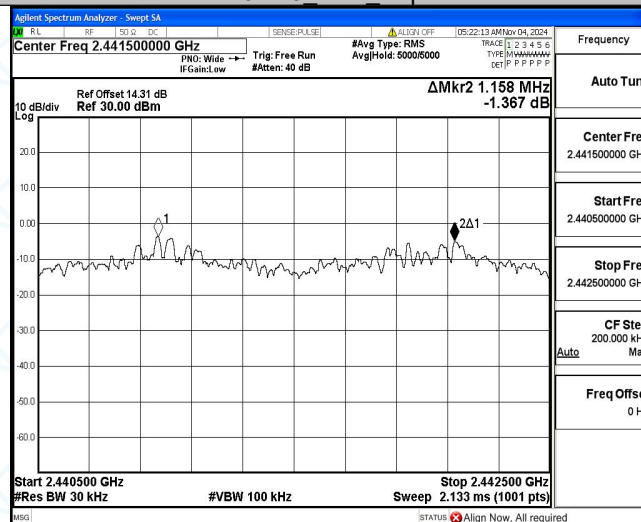



Appendix D: Dwell Time


Test Result

Test Mode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.407	320	0.13	≤0.4	PASS
DH3	Ant1	Hop	1.662	160	0.266	≤0.4	PASS
DH5	Ant1	Hop	2.910	106.67	0.31	≤0.4	PASS
2DH1	Ant1	Hop	0.417	320	0.133	≤0.4	PASS
2DH3	Ant1	Hop	1.668	160	0.267	≤0.4	PASS
2DH5	Ant1	Hop	2.917	106.67	0.311	≤0.4	PASS
3DH1	Ant1	Hop	0.419	320	0.134	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH5	Ant1	Hop	2.917	106.67	0.311	≤0.4	PASS




Test Graphs


DH1_Ant1_Hop

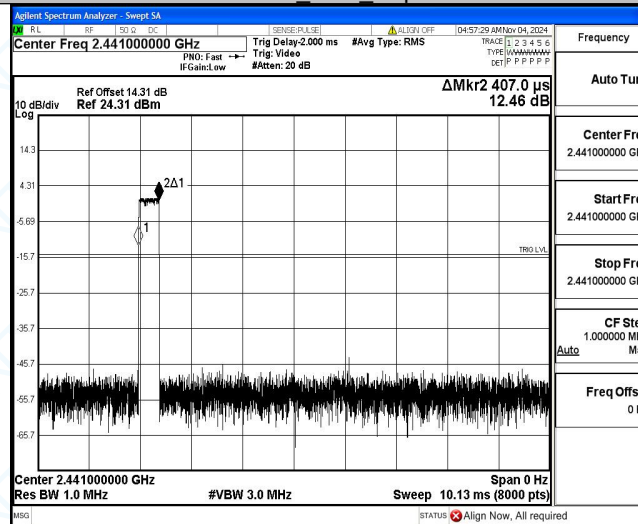

DH3_Ant1_Hop

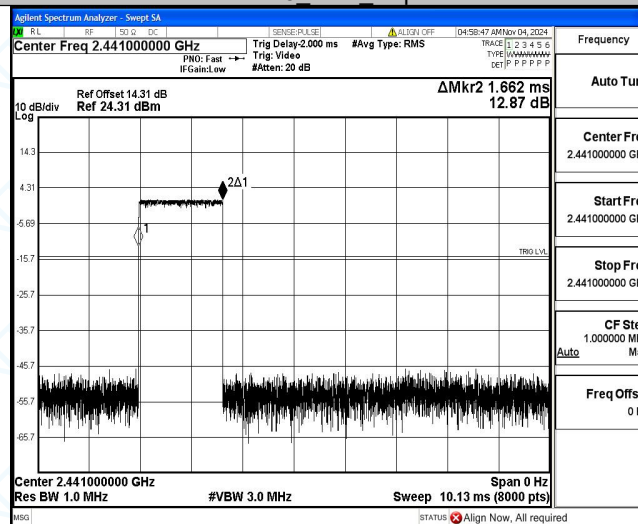


DH5_Ant1_Hop

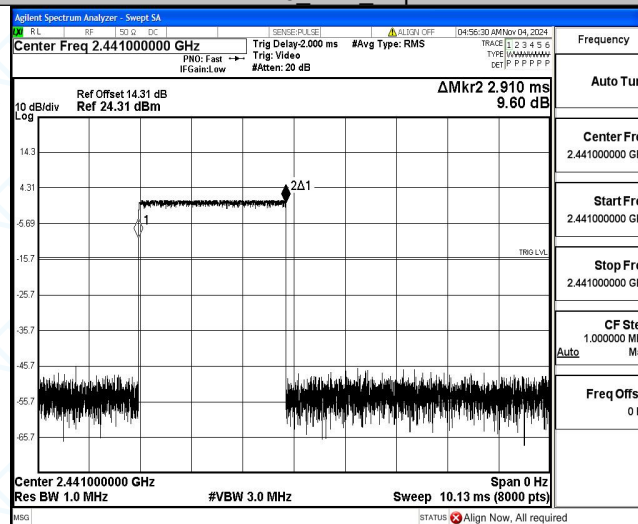





2DH1 Ant1 Hop

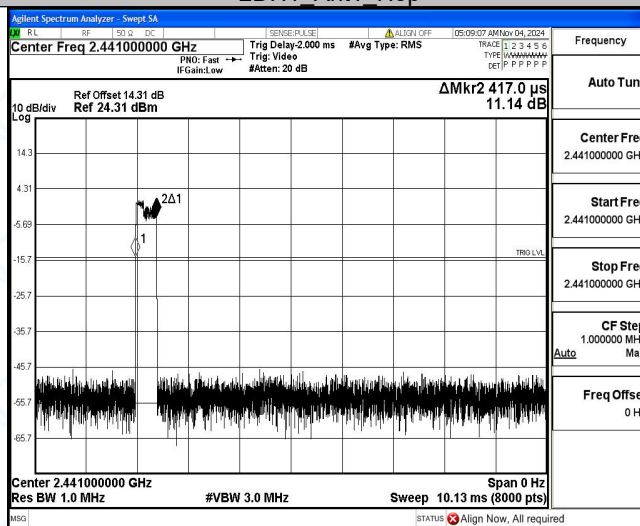

2DH3 Ant1 Hop

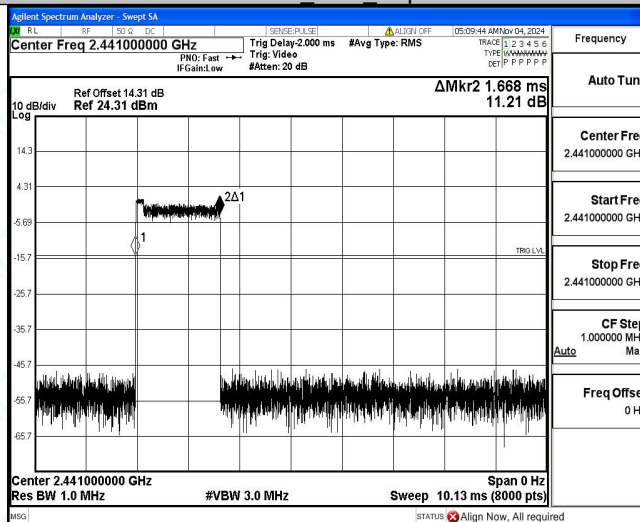


2DH5 Ant1 Hop

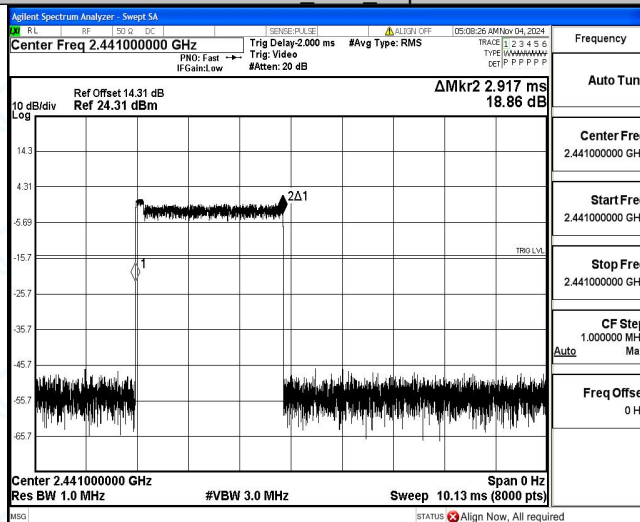





3DH1_Ant1_Hop

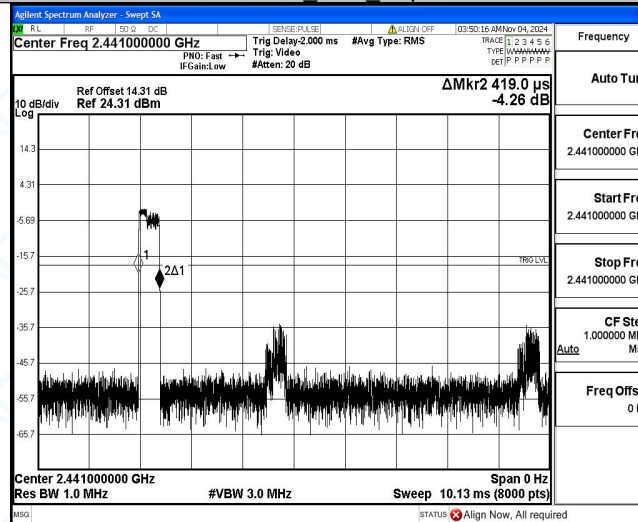

3DH3_Ant1_Hop

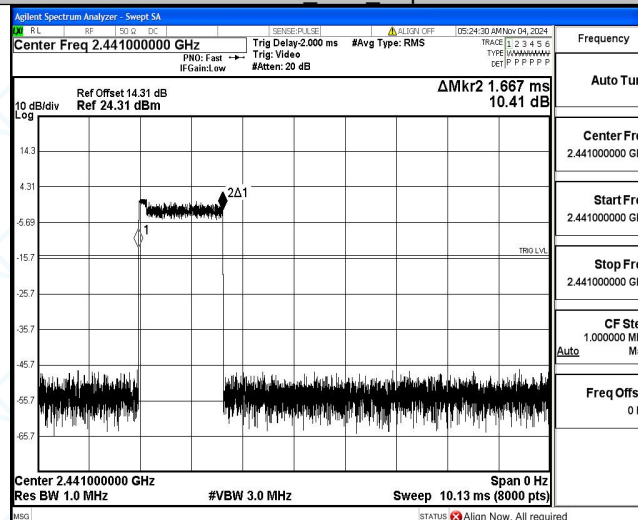

3DH5_Ant1_Hop

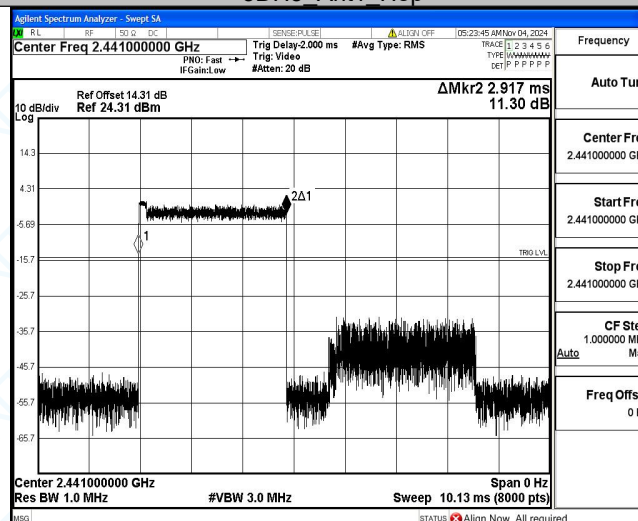



Appendix F: Number of hopping channels


Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS




Test Graphs


DH5_Ant1_Hop

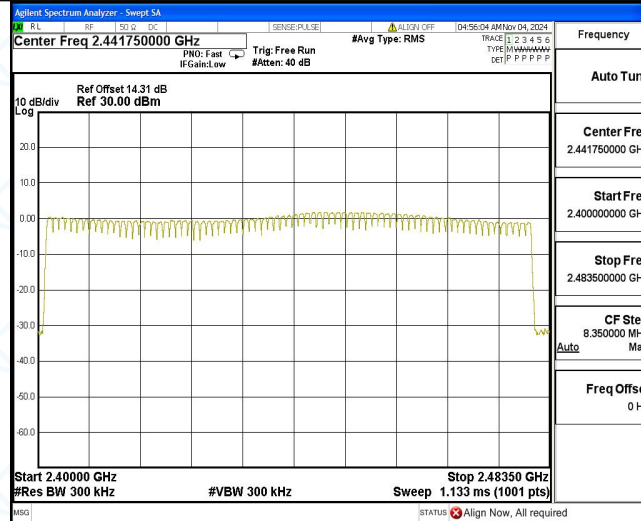

2DH5_Ant1_Hop

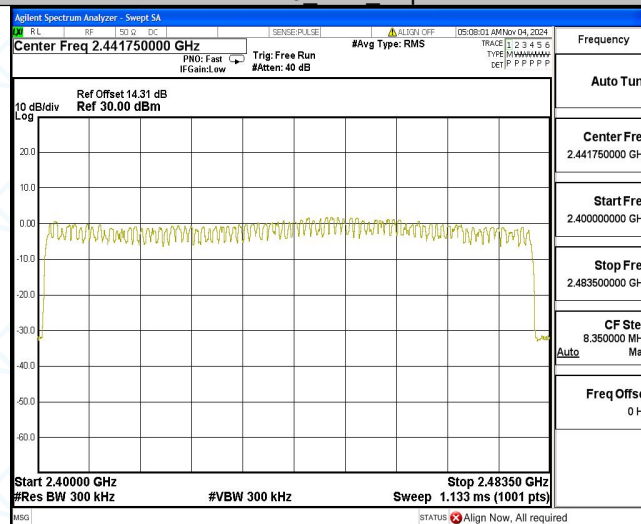

3DH5_Ant1_Hop

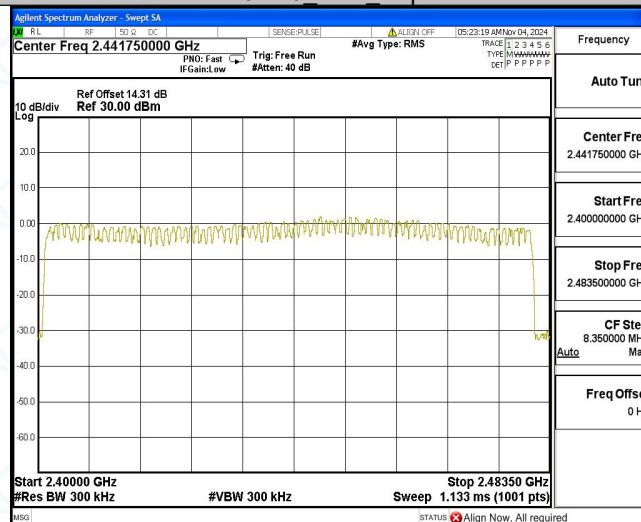



Appendix F: Band edge measurements

Test Result

Test Mode	Antenna	Ch Name	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-2.48	-49.37	≤-22.48	PASS
		High	2480	-4.90	-50.07	≤-24.9	PASS
		Low	Hop_2402	-5.14	-49.01	≤-25.14	PASS
		High	Hop_2480	-5.44	-49.54	≤-25.44	PASS
2DH5	Ant1	Low	2402	-4.20	-49.71	≤-24.2	PASS
		High	2480	-5.08	-49.18	≤-25.08	PASS
		Low	Hop_2402	-6.01	-50.05	≤-26.01	PASS
		High	Hop_2480	-8.62	-49.62	≤-28.62	PASS
3DH5	Ant1	Low	2402	-3.34	-49.76	≤-23.34	PASS
		High	2480	-5.59	-49.01	≤-25.59	PASS
		Low	Hop_2402	-6.02	-49.99	≤-26.02	PASS
		High	Hop_2480	-5.02	-49.08	≤-25.02	PASS