

FranklinWH Technologies Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:
aGate X

REPORT NUMBER:
211102597SHA-001

ISSUE DATE:
July 8, 2022

DOCUMENT CONTROL NUMBER:
TTRF15.247-03_V1 © 2018 Intertek



Applicant: FranklinWH Technologies Co., Ltd.
Room 301, Building 5A Skyworth Innovation Park, No.8 Tangtou 1st Road,
Tangtou community Shiyan sub-district , Baoan District, Shenzhen,
Guangdong, China

Manufacturer: FranklinWH Technologies Co., Ltd.
Room 301, Building 5A Skyworth Innovation Park, No.8 Tangtou 1st Road,
Tangtou community Shiyan sub-district , Baoan District, Shenzhen,
Guangdong, China

Factory: Mianyang Jiancheng Hengrui Group Co., Ltd, Dongguan Branch.
No.19, Shipai Taihe West Road, Shipai town, Dongguan,GuangDong
Province China

FCC ID: 2A34J-AGATEX

IC: 28082-AGATEX

SUMMARY:


The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2020): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (March 2019) Amendment1: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Project Engineer
Sky Yang**REVIEWED BY:**

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Content**

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 ANTENNA INFORMATION.....	8
1.4 DESCRIPTION OF TEST FACILITY	9
2 TEST SPECIFICATIONS	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST.....	11
2.3 TEST SOFTWARE LIST	12
2.4 TEST PERIPHERALS LIST	12
2.5 TEST ENVIRONMENT CONDITION:.....	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	14
3 MINIMUM 6DB BANDWIDTH	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	15
3.3 TEST CONFIGURATION	15
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	15
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	16
4.1 LIMIT	16
4.2 MEASUREMENT PROCEDURE	16
4.3 TEST CONFIGURATION	17
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER.....	17
5 POWER SPECTRUM DENSITY	18
5.1 LIMIT	18
5.2 MEASUREMENT PROCEDURE	18
5.3 TEST CONFIGURATION	19
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	19
6 EMISSION OUTSIDE THE FREQUENCY BAND	20
6.1 LIMIT	20
6.2 MEASUREMENT PROCEDURE	20
6.3 TEST CONFIGURATION	21
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND.....	21
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	22
7.1 LIMIT	22
7.2 MEASUREMENT PROCEDURE	22
7.3 TEST CONFIGURATION	24
7.4 TEST RESULTS OF RADIATED EMISSIONS	26
8 POWER LINE CONDUCTED EMISSION	29
8.1 LIMIT	29
8.2 TEST CONFIGURATION	29

TEST REPORT

8.3	MEASUREMENT PROCEDURE	30
8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	31
9	OCCUPIED BANDWIDTH	34
9.1	LIMIT	34
9.2	MEASUREMENT PROCEDURE	34
9.3	TEST CONFIGURATION	34
9.4	THE RESULTS OF OCCUPIED BANDWIDTH.....	34
10	ANTENNA REQUIREMENT.....	35
	APPENDIX A: TEST RESULTS	36

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
211102597SHA-001	Rev. 01	Initial issue of report	July 8, 2022

TEST REPORT**Measurement result summary**

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	aGate
Type/Model:	aGate X
Description of EUT:	Energy storage control system
Rating:	120/240VAC Split
EUT type:	<input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing
Software Version:	V10R00B00
Hardware Version:	A05
Sample received date:	November 25, 2021
Date of test:	November 25, 2021 to December 18, 2021

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11g
Type of Modulation:	IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels for 802.11g
Data Rate:	IEEE 802.11g: Up to 54 Mbps
Channel Separation:	5 MHz

TEST REPORT**1.3 Antenna information**

Antenna No.	Model	Antenna type	Antenna Gain	Note
1	Antenna	FPC antenna	5dB	/

Mode	Tx/Rx Function	Beamforming function	CDD function
802.11g	1Tx/1Rx	NO	NO

Frequency band	Mode	Directional Gain	Note
2.4 GHz	802.11g	5dB	/

Note: all transmit signals are completely uncorrelated with each other, Directional gain= G_{ANT} .

TEST REPORT**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab Registration code No.: 2042B-1
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

All tests were sub-contracted.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng Science and Technology Park, Longhua District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

All tests were sub-contracted at Shenzhen UnionTrust Quality and Technology Co., Ltd, and conducted by Dylan Zhang

Reviewed and approved by Wakeyou Wang from Intertek Testing Services Shanghai.

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

TEST REPORT**IC-Registration No.: 21600-1**

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

TEST REPORT**2 TEST SPECIFICATIONS****2.1 Standards or specification**

47CFR Part 15 (2020)
ANSI C63.10 (2013)
KDB 558074 (v05or02)
RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5 (April 2019) Amendment1

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
wifi_test.exe	NA	V1	Client

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Modulation	Lowest (L) (MHz)	Middle (M) (MHz)	Highest (H) (MHz)
2400-2483.5	OFDM	2412	2437	2462

TEST REPORT**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Radiated emission	e3	Audix	9.160323
Conducted emission	e3	Audix	9 20151119i

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	Lenovo E450	NA

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	24.3°C	51% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	24.1°C	49% RH
Power line conducted emission	23.5°C	48% RH

TEST REPORT
2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 04, 2022
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 04, 2022
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 04, 2022
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3m	N/A	Jan. 21, 2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 04, 2022
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 10, 2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 10, 2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 04, 2022
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	Apr. 29, 2023
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 13, 2022
<input checked="" type="checkbox"/>	Preamplifier	ETS-LINDGREN	00118384	00202652	Nov. 13, 2022
<input checked="" type="checkbox"/>	Preamplifier	ETS-LINDGREN	00118385	00201874	Nov. 05, 2022
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	Nov. 04, 2022
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 04, 2022

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.68dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 4.80dB
Emission outside the frequency band	± 4.80dB
Power line conducted emission	± 2.7dB

TEST REPORT

3 Minimum 6dB bandwidth

Test result: Pass

3.1 Limit

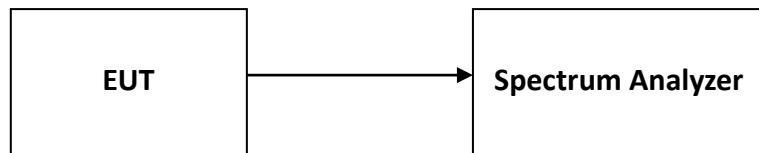
For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration



3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

TEST REPORT**4 Maximum conducted output power and e.i.r.p.**

Test result: Pass

4.1 Limit

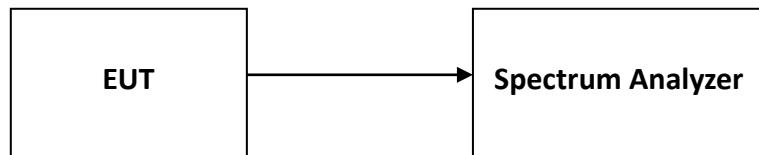
For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.2.2.4) for compliance requirements.

- a) Measure the duty cycle, x , of the transmitter output signal as described in Section 6.0.
- b) Set span to at least $1.5 \times \text{OBW}$.
- c) Set $\text{RBW} = 1\% \text{ to } 5\% \text{ of the OBW}$, not to exceed 1 MHz.
- d) Set $\text{VBW} \geq 3 \times \text{RBW}$.
- e) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run”.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on- and off-times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 %.

TEST REPORT**4.3 Test Configuration****4.4 Test Results of Maximum conducted output power**

Please refer to Appendix A

TEST REPORT

5 Power spectrum density

Test result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

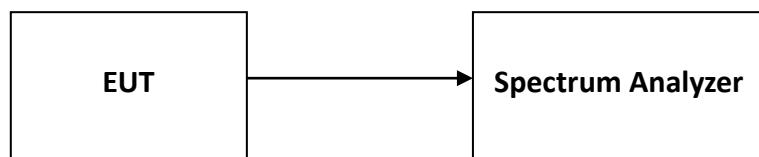
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and 8+ (6 –antenna gain-beam forming gain).

5.2 Measurement Procedure

The power output was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.5) for compliance requirements.

This procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., duty cycle < 98 %), and when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$):

- a) Measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least $1.5 \times \text{OBW}$.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to “free run”.
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If resultant value exceeds the limit, then reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

TEST REPORT**5.3 Test Configuration****5.4 Test Results of Power spectrum density**

Please refer to Appendix A

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 11.0) for compliance requirements.

Reference level measurement

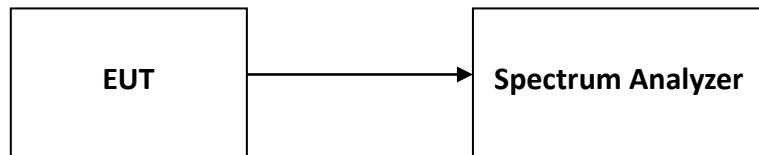
Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

TEST REPORT**6.3 Test Configuration****6.4 The results of Emission outside the frequency band**

Please refer to Appendix A

TEST REPORT**7 Radiated Emissions in restricted frequency bands****Test result:** Pass**7.1 Limit**

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure**For Radiated emission below 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**

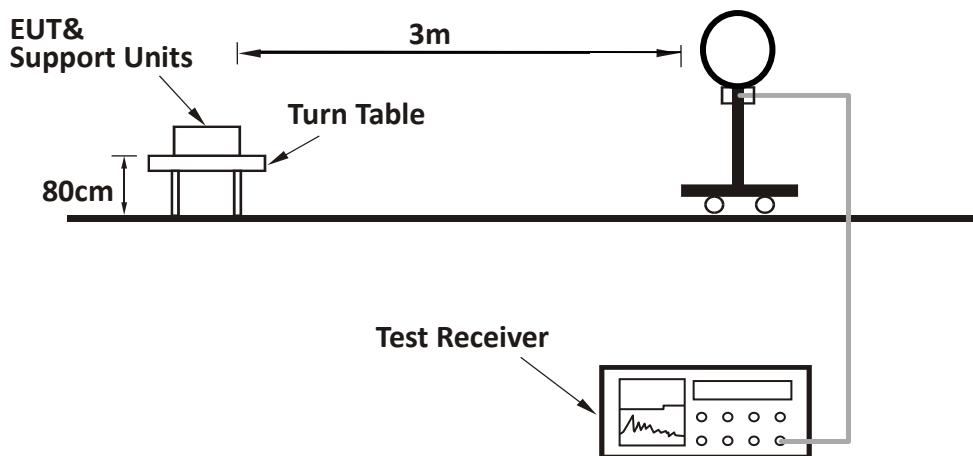
- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

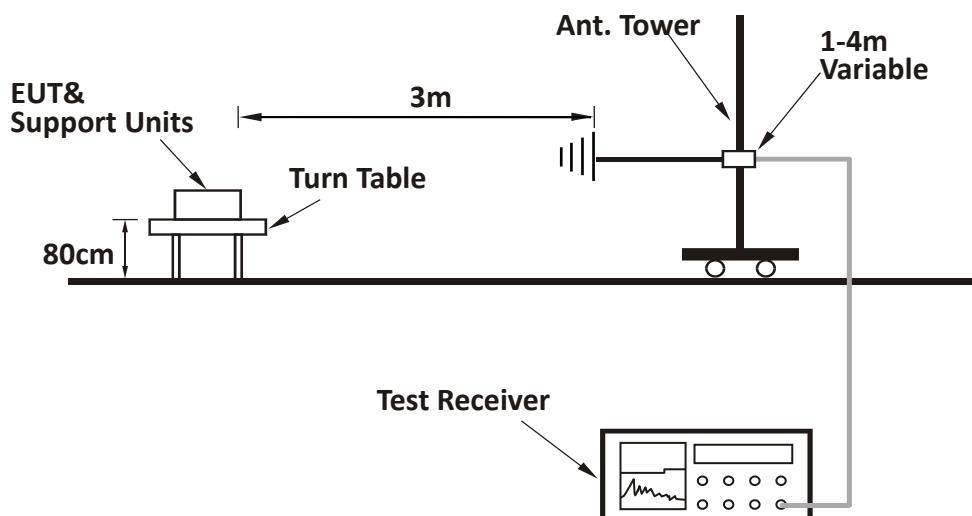
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

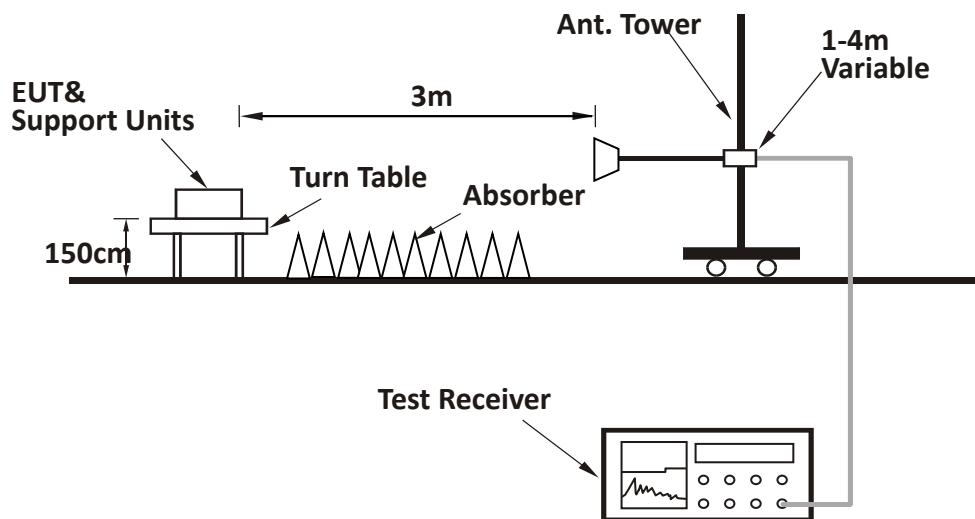
TEST REPORT**7.3 Test Configuration**

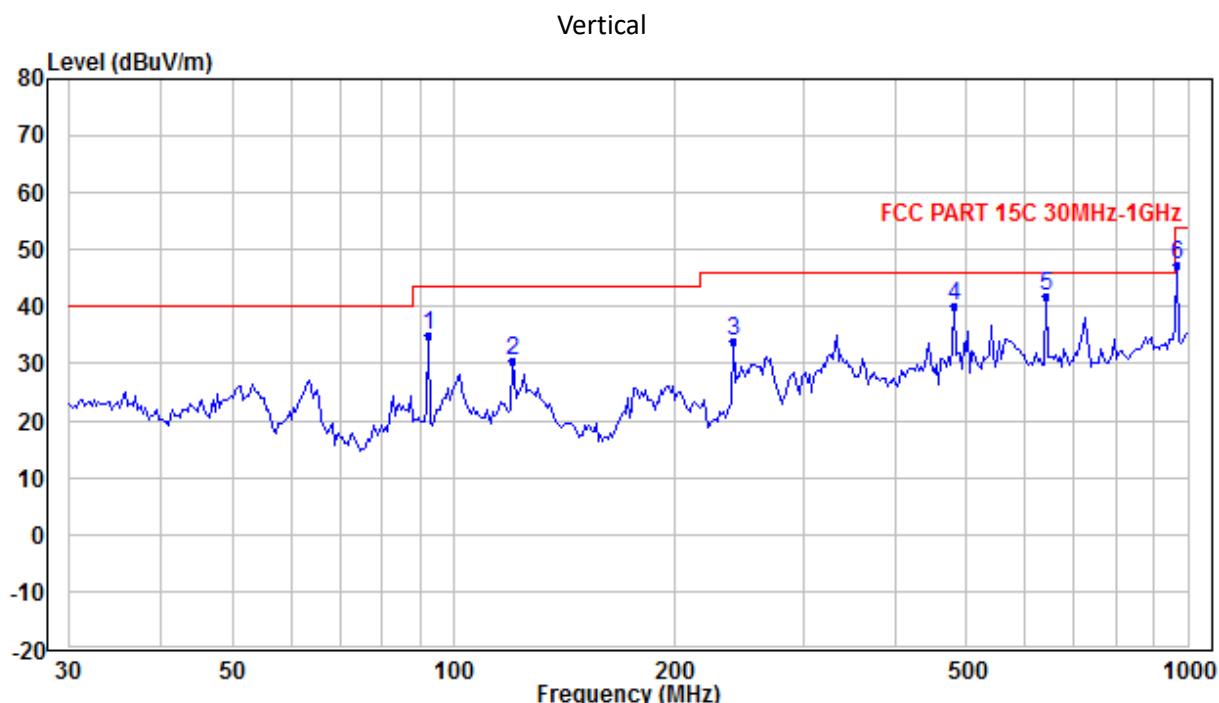
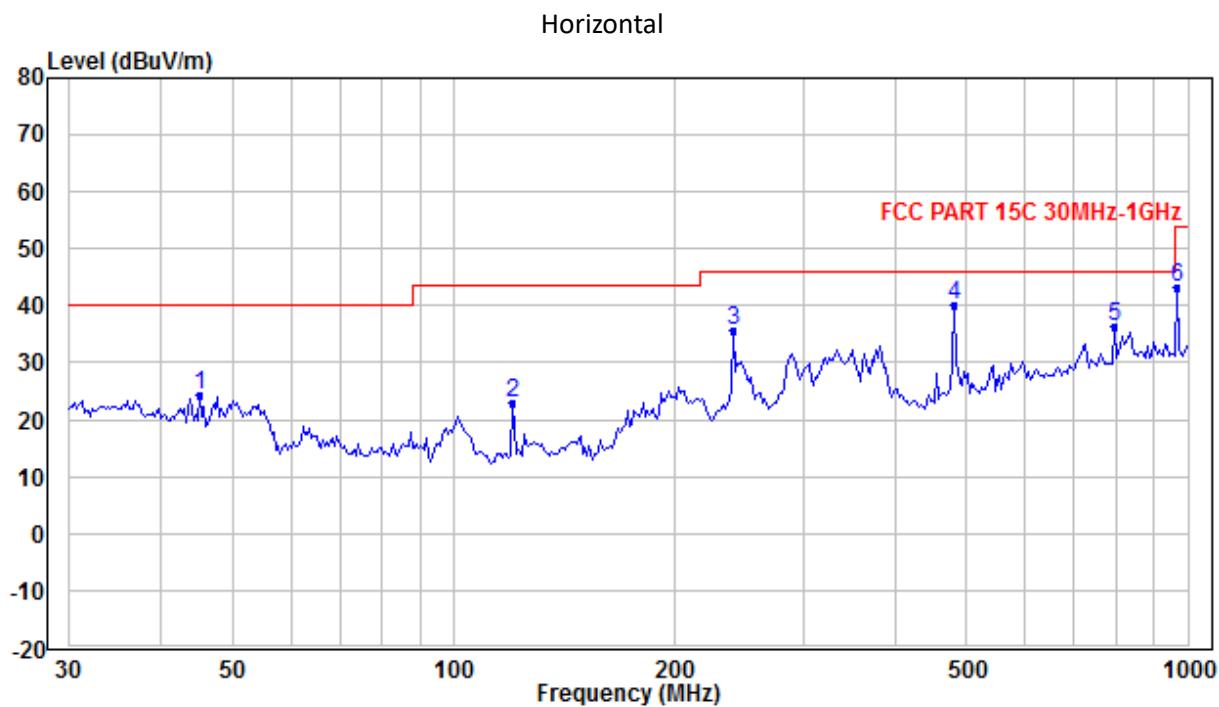
For Radiated emission below 30MHz:



For Radiated emission 30MHz to 1GHz:



TEST REPORT**For Radiated emission above 1GHz:**

TEST REPORT**7.4 Test Results of Radiated Emissions****Radiated Emissions(30MHz-1GHz)****Test data 30MHz~1GHz:**

TEST REPORT
Test data 30MHz~1GHz:

Polarization	Frequency (MHz)	Measured level (dB μ V/m)	Factor (dB/m)	Limits (dB μ V/m)	Margin (dB)	Detector
H	240.144	35.83	-9.29	46.00	10.17	Peak
	331.786	32.29	-5.85	46.00	13.71	Peak
	381.852	32.82	-5.13	46.00	13.18	Peak
	481.511	40.19	-3.56	46.00	5.81	Peak
	793.028	36.26	2.21	46.00	9.74	Peak
	833.013	35.47	2.94	46.00	10.53	Peak
V	92.346	34.90	-16.30	43.50	8.60	Peak
	240.144	34.01	-9.29	46.00	11.99	Peak
	331.786	35.14	-5.85	46.00	10.86	Peak
	481.511	40.20	-3.56	46.00	5.80	Peak
	642.292	41.80	-0.01	46.00	4.20	Peak
	723.793	38.10	1.64	46.00	7.90	Peak

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. All possible modes of operation were investigated, only the worst-case emissions reported.
5. Pre-scan test indicated that QP level is less than Peak level about 5dB in same frequency and same Polarization direction, so not all data was recorded by QP detector.

TEST REPORT
Radiated Emission Test Data (Above 1GHz):

IEEE 802.11g_ Channel 1:								
No.	Frequency (MHz)	Reading (dB μ V/m)	Correction factor (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824.00	40.35	-2.77	37.58	74.00	-36.42	Peak	Horizontal
2	7236.00	41.23	1.10	42.33	74.00	-31.67	Peak	Horizontal
3	4824.00	41.84	-2.77	39.07	74.00	-34.93	Peak	Vertical
4	7236.00	41.17	1.10	42.27	74.00	-31.73	Peak	Vertical

IEEE 802.11g_ Channel 6:								
No.	Frequency (MHz)	Reading (dB μ V/m)	Correction factor (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
1	4874.00	41.13	-2.72	38.41	74.00	-35.59	Peak	Horizontal
2	7311.00	41.61	1.31	42.92	74.00	-31.08	Peak	Horizontal
3	4874.00	41.30	-2.72	38.58	74.00	-35.42	Peak	Vertical
4	7311.00	40.97	1.31	42.28	74.00	-31.72	Peak	Vertical

IEEE 802.11g_ Channel 11:								
No.	Frequency (MHz)	Reading (dB μ V/m)	Correction factor (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
1	4924.00	42.40	-2.68	39.72	74.00	-34.28	Peak	Horizontal
2	7386.00	42.21	1.50	43.71	74.00	-30.29	Peak	Horizontal
3	4924.00	41.66	-2.68	38.98	74.00	-35.02	Peak	Vertical
4	7386.00	42.79	1.50	44.29	74.00	-29.71	Peak	Vertical

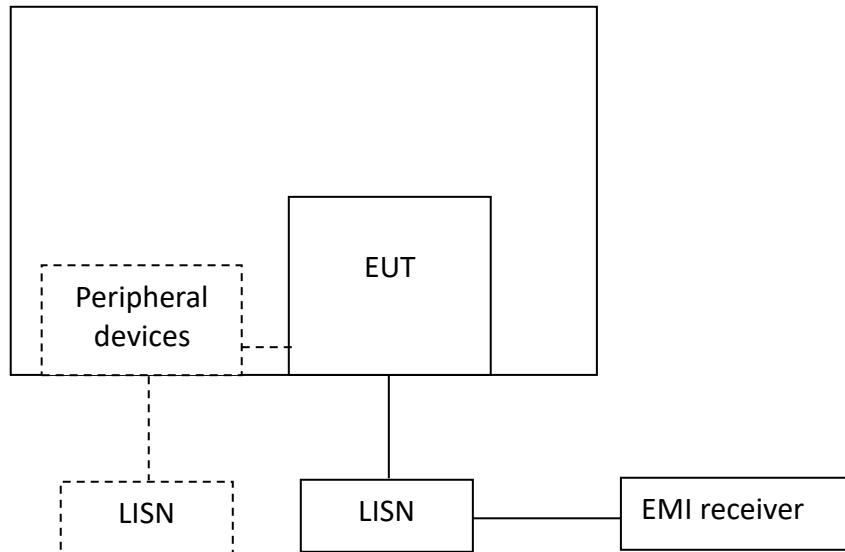
Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. The Peak level is less than AV limit, so only peak value was recorded in final data.
5. WiFi transmitting generated the higher emission than WiFi and LTE simultaneously, so the data of WiFi transmitting was recorded as final result.

TEST REPORT**8 Power line conducted emission****Test result:** Pass**8.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

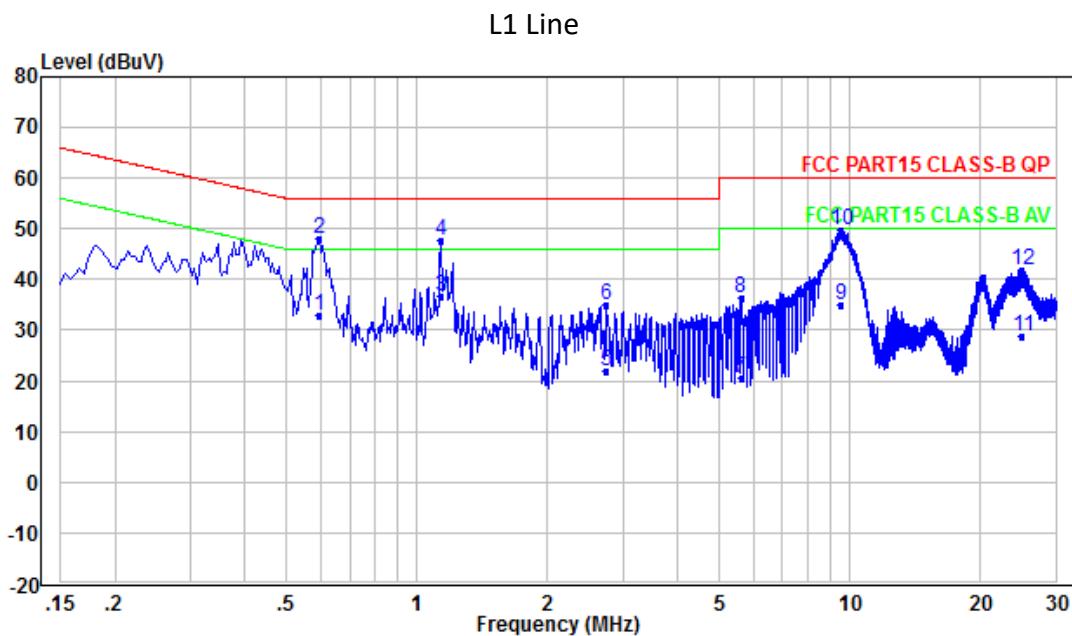
8.2 Test Configuration

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

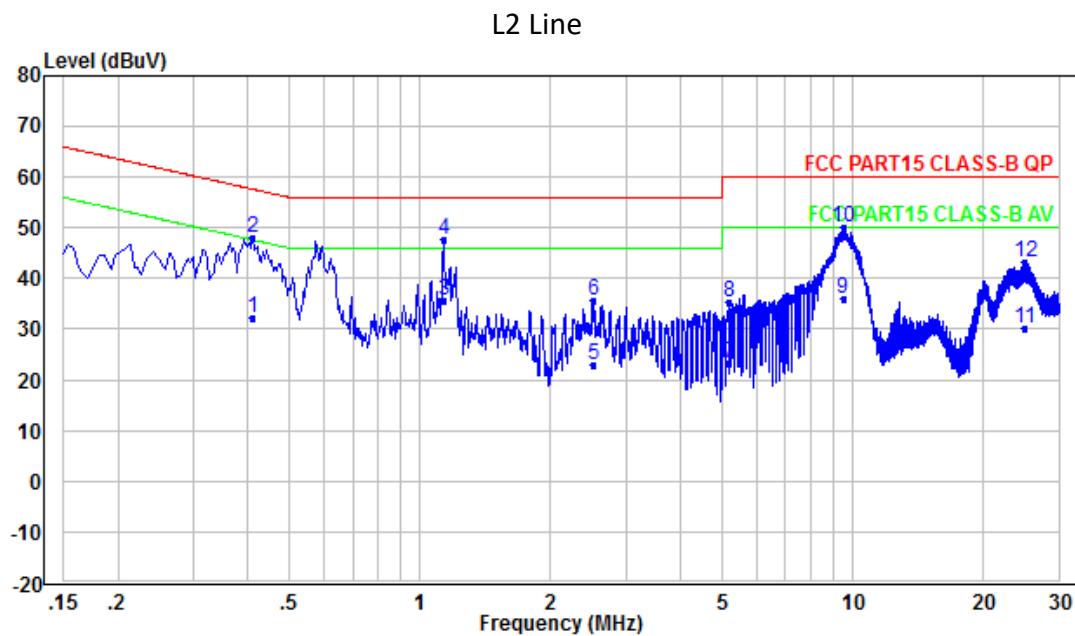
Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT
8.4 Test Results of Power line conducted emission
Test Curve:

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(μV)	Limit dB(μV)	Margin (dB)	Level dB(μV)	Limit dB(μV)	Margin (dB)
0.594	47.89	56.00	8.11	32.89	46.00	13.11
1.134	47.82	56.00	8.18	36.82	46.00	9.18
2.742	34.97	56.00	21.03	21.97	46.00	24.03
5.610	36.39	60.00	23.61	20.39	50.00	29.61
9.517	49.87	60.00	10.13	34.87	50.00	15.13
25.100	41.90	60.00	18.10	28.90	50.00	21.10

TEST REPORT

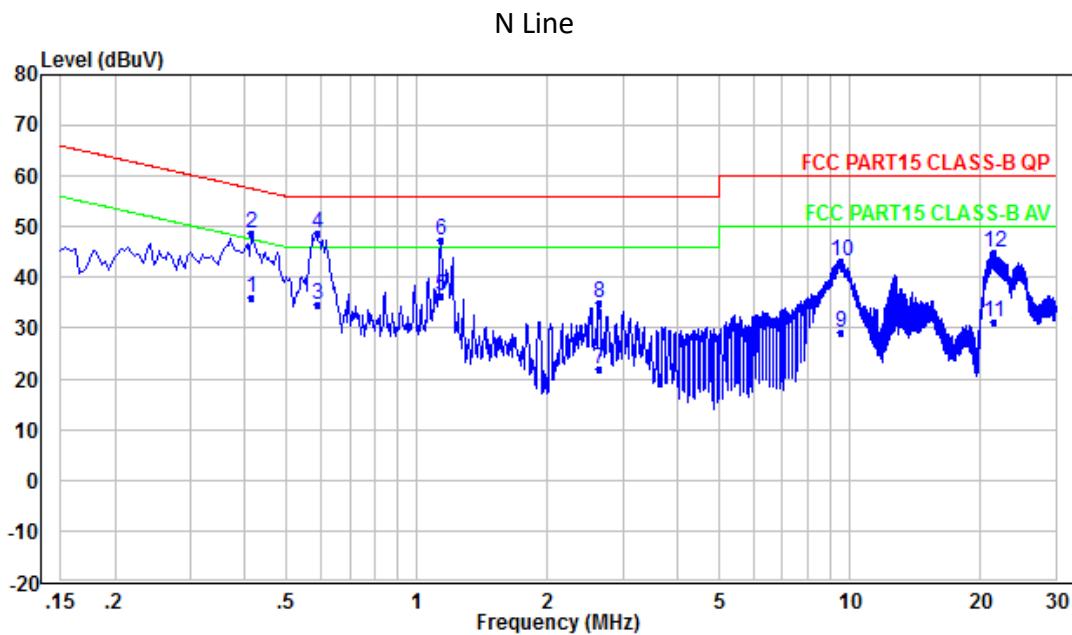


Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(µV)	Limit dB(µV)	Margin (dB)	Level dB(µV)	Limit dB(µV)	Margin (dB)
0.410	48.09	57.65	9.56	32.09	47.65	15.56
1.134	47.61	56.00	8.39	35.61	46.00	10.39
2.526	35.82	56.00	20.18	22.82	46.00	23.18
5.170	35.45	60.00	24.55	23.45	50.00	26.55
9.513	49.95	60.00	10.05	35.95	50.00	14.05
24.968	43.20	60.00	16.80	30.20	50.00	19.80

TEST REPORT

Test Curve:



Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(µV)	Limit dB(µV)	Margin (dB)	Level dB(µV)	Limit dB(µV)	Margin (dB)
0.414	48.89	57.57	8.68	35.89	47.57	11.68
0.586	48.78	56.00	7.22	34.78	46.00	11.22
1.134	47.50	56.00	8.50	36.50	46.00	9.50
2.642	34.87	56.00	21.13	21.87	46.00	24.13
9.517	43.30	60.00	16.70	29.30	50.00	20.70
21.537	45.10	60.00	14.90	31.10	50.00	18.90

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Level
 4. All possible modes of operation were investigated, only the worst-case emissions reported.

TEST REPORT

9 Occupied Bandwidth

Test result: **Tested**

9.1 Limit

None

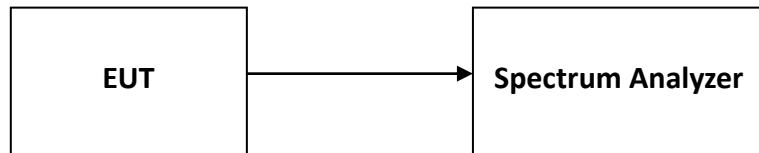
9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration



9.4 The results of Occupied Bandwidth

Please refer to Appendix A

TEST REPORT

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT**Appendix A: Test results**

Refer to Appendix A for test results.

***** END *****