



Freedom

Part No: FXP70.76.0040A

Description:

2.4GHz Freedom Flexible PCB Antenna with 40mm 1.13 Cable and IPEX MHF I LK Connector

Features:

Low profile antenna

High performance magnetic field antenna

Flexible PCB Antenna with 3M adhesive

Dimensions: 27*25*0.2mm

Cable: 40mm 1.13

Connector: IPEX MHF I LK
RoHS & Reach Compliant



1.	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	7
5.	Mechanical Drawing	9
6.	Packaging	10
	Changelog	11

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.















The FXP70 Freedom 2.4GHz Antenna works on Wi-Fi, ZigBee, Bluetooth and ISM band at 2.4GHz. This antenna has been designed as a general solution to cover the current market applications, with easy installation through a cable connection. The antenna has been designed to work on different plastics material and thickness. We have selected a piece of ABS plastic with 2mm of thickness as a baseline for testing.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

The cable and connector are fully customizable, for more information please contact your regional Taoglas customer support team.



2. Specifications


Wi-Fi MIMO						
Frequency (MHz)	2400~2500					
Efficiency (%)						
2mm ABS	63.7					
Free Space	30.5					
Average Gain (dB)						
2mm ABS	-2					
Free Space	-5.2					
Peak Gain (dBi)						
2mm ABS	1.1					
Free Space	-1.9					
Impedance	50 Ω					
Polarization	Linear					
Radiation Pattern	Omni					
VSWR	≤1.5:1					
Max. input power	5W					

Mechanical					
Dimensions	27 X 25 X 0.08 mm				
Weight	1.2 g				
Connector	IPEX MHF I LK				
Cable	40mm of Mini-Coax 1.13 mm				
Adhesive	3M 467				
Environmental					
Temperature Range	-40°C to 85°C				
Humidity	Non-condensing 65°C 95% RH				




3. Antenna Characteristics

3.1 Return Loss

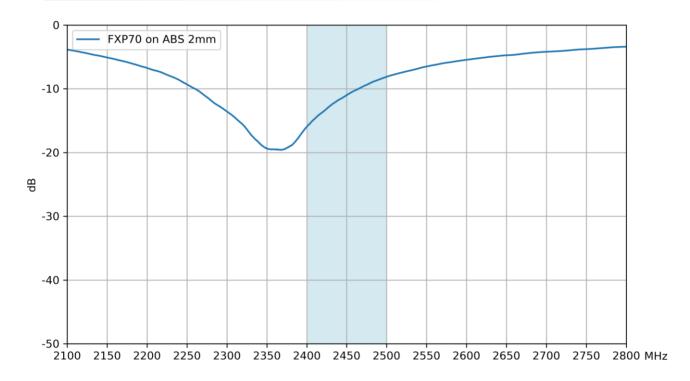


3.2 Efficiency

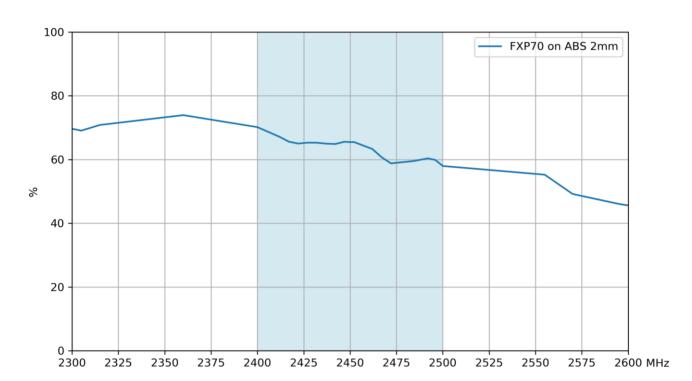




3.3 Average Gain

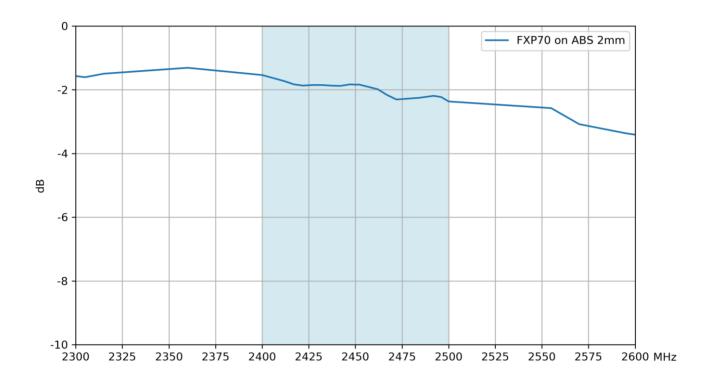


3.4 Peak Gain

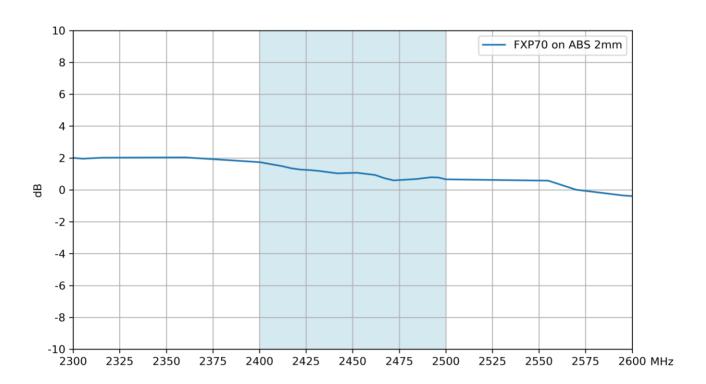



4. Radiation Patterns


4.1 Test Setup

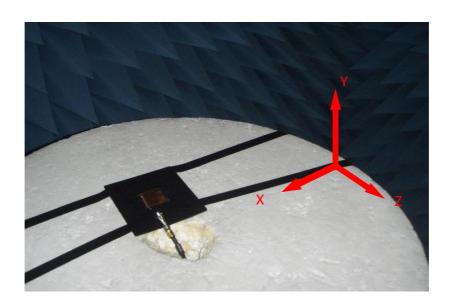




8


4.2 2450MHz 3D and 2D Radiation Patterns

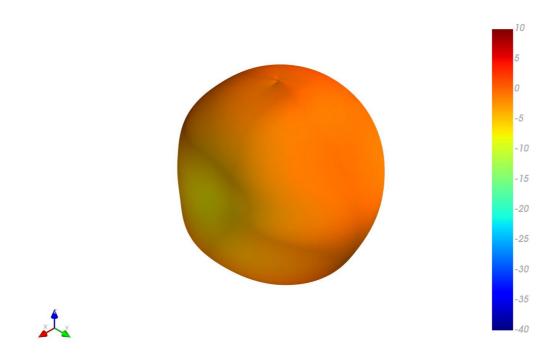


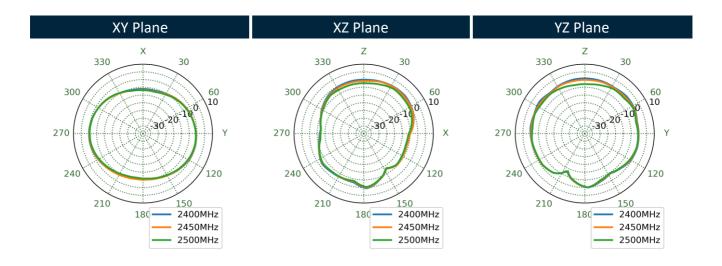




Mechanical Drawing (Units: mm)

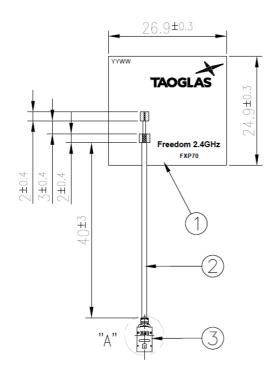

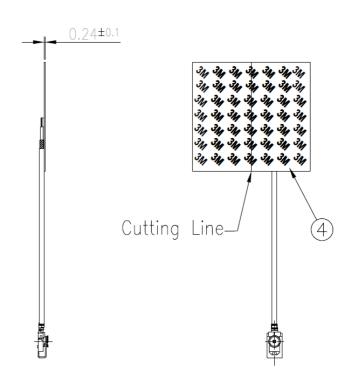

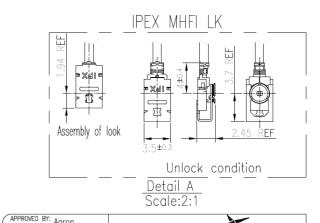

			,	dron		
					aron	TAOGLAS. TW Design Centre
				DRAWN BY: F	Ruby	This drawing is Taoglas Confidential Information and its inherent design concepts are property of Taoglas. This is not to be copied or shared with third parties without the prior written consent of Taoglas.
Name	Material	Finish	QTY	DATE:	2022/08/26	TITLE: 2.4GHz Flex PCB Antenna 40mm 1.13 lpex
FXP70 PCB	Polymer 0.24t	Black	1	UNLESS OTHERWISE	XX.±0.5 X.±0.3	MHFI(U.FL) Lock
1.13 Coaxial Cable	FEP	Black	1	SPECFIED TOLERANCES ON:	.X±0.2 .XX±0.1	PART NO. : FXP70.76.0040A
IPEX MHF I LK	MANY I Plug:Copper Alloy		1	7,000		
Double-Sided Adhesive		Brown Liner	1	THIRD ANGLE PROJECTION	$\oplus \subseteq$	UNIT: mm SCALE: 1.25:1 PAGES: 1/1 REV. DO2
			_	ı		

www.taoglas.com SPE-22-8-174-A



6. Packaging

100pcs FXP70.76.0040A per PE Bag Dimensions - 180*100mm Weight - 130g



180mm


1000pcs FXP70.76.0040A per Large PE Bag Dimensions - 280*450mm Weight - 1.4Kg



450mm

10

6000pcs FXP70.76.0040A per carton Dimensions - 320*250*230mm Weight - 8.5Kg

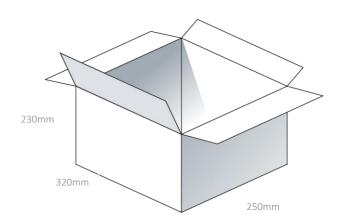



Changelog for the datasheet

SPE-22-8-174 - FXP70.76.0040A

Revision: A (Original First Release)				
Date:	2022-11-14			
Notes:	New Custom Datasheet.			
Author:	Gary West			

Previous Revisions				



www.taoglas.com

