

MojoBox

User Guide



Specification

Model Name	MojoBox
Wireless Type:	Bluetooth
Battery Type:	3 x AA batteries
Emergency Power Supply:	USB Type C

Packaging Contents

MojoBox, Shackle, Shackle hole seals, Screwdriver, QR code card

Working Conditions

Application:	For indoor and outdoor use
Temperature:	-35°C to 60°C
Waterproof:	IP55

Precautions

Please read the user guide before usage. Improper operation may cause failing to operate the product.

Before You Start

1. If you are an existing ShowMojo customer, download the [ShowMojo Mobile App](#) and log in.
2. Unpack the contents of the box to find the MojoBox and an accessory bag which contains the shackle, shackle weather seals and a small Phillips screwdriver.

Step 1: Install the Batteries

1. Your MojoBox was shipped with the door open or unlatched.
2. Using the small, Phillips screwdriver (included), remove the battery cover and insert three AA batteries.



3. Replace the battery cover.
4. Remove the black strip that holds the latch open.



5. If your MojoBox becomes latched before the batteries are installed, connect a USB Type C cable to the USB port to provide external power.



- Follow Steps 2 and 3 below to open the MojoBox.
- Once you have the MojoBox open, refer to Step 1 above to install the batteries.

Step 2: Add the MojoBox to Your Account

1. Open the ShowMojo or MojoLock app.
2. Select menu in the top right of the screen.
3. Select **Add Lock**.
4. Press any number on the MojoBox to turn on the Bluetooth.
5. Select **Add Lock** on the ShowMojo app.
6. Find the MojoBox by serial number on the "nearby locks" list and select "+" to add the MojoBox to your account.
7. Select the MojoBox by serial number or assigned listing from the Digital Access List.
8. Manual codes can now be generated from the mobile app, or the mobile app can open the MojoBox via Bluetooth.

Step 3: Operation

Manual code entry: Enter the access code and press OK, upon acceptance of the code, the MojoBox will beep and flash the green LEDs. Move the slider to the right to open the key compartment. The MojoBox will automatically re-lock in six seconds.

Bluetooth operation: Press any key on the keypad to turn on the Bluetooth, open the mobile app, ensure you are within six feet of the MojoBox and press the open button, upon acceptance of the code, the MojoBox will beep and flash the green LEDs. Move the slider to the right to open the key compartment. The MojoBox will automatically re-lock in six seconds.

Step 4: Field Test



1. Assign the MojoBox to a listing.
2. Conduct a self-showing test.
3. Enter the access code received from your approved showing notification to ensure the MojoBox opens properly.


Step 5: Shackle Operation

1. Open the MojoBox key compartment.

2. Rotate the lock away from the shackle release mechanism.



3. Insert the double-latching shackle until you hear it click. There will be some resistance while inserting the shackle due to the weather seals. Gently pull on the MojoBox against the shackle to ensure it is fully secured on both legs.
4. Rotate the shackle safety lock back into the locked position.

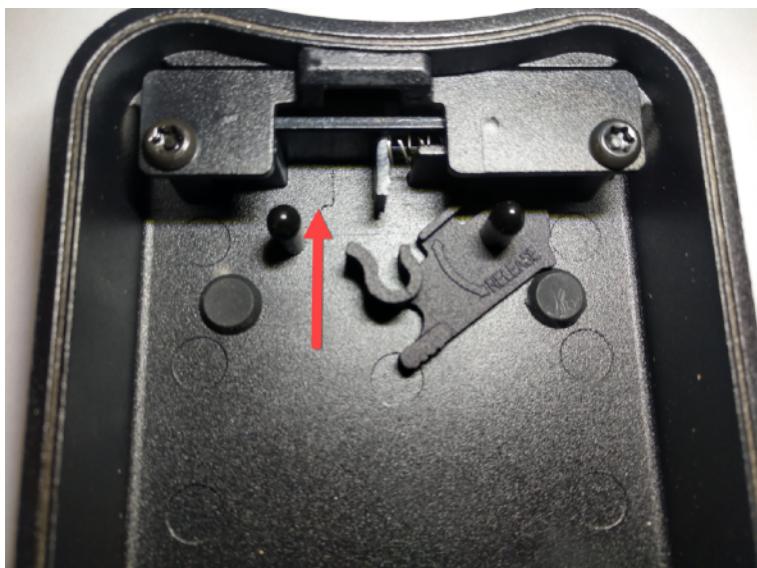

5. To release the shackle, rotate the lock away from the shackle release mechanism and move the shackle slider to the right while gently pulling the shackle away from the MojoBox.

FCC Warnings

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement Économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

l'appareil numérique conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité .

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé .

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 0mm between the radiator & your body.

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.