



Report No.: E01A22060794F00101

1 of 57

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
FCC PART 15 SUBPART C REQUIREMENT**

OF

4” Wifi Led Recessed Lights, 6” Wifi Led Recessed Lights

Model No.: EPCL-WIFI-RGBCW-WC-4INCH, EPCL-WIFI-RGBCW-WC-6INCH

Trademark: N/A

FCC ID: 2A358CLWC

Report No.: E01A22060794F00101

Issue Date: July 21, 2022

Prepared for

Shenzhen Ephan Technology Co., Ltd

**Rm. 306-308, Fl. 3, No. 2 Bldg. CHENGHEDE Industrial Zone, HENGLANG
Community, DALANG residential district, LONGHUA Town, Shenzhen City.**

Prepared by

Dong Guan Anci Electronic Technology Co., Ltd.

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech
Industrial Development Zone, Dongguan City, Guangdong Pr., China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**



Report No.: E01A22060794F00101

2 of 57

VERIFICATION OF COMPLIANCE

Applicant:	Shenzhen Ephan Technology Co., Ltd Rm. 306-308, Fl. 3, No. 2 Bldg. CHENGHEDE Industrial Zone, HENGLANG Community, DALANG residential district, LONGHUA Town, Shenzhen City.
Manufacturer:	Dongguan Ephan Intelligent Technology Co.,Ltd Rm. 601, No. 1 Bldg., No.136 YongJun Rd., DaLingShan Town, DongGuan city, China.
Product Description:	4" Wifi Led Recessed Lights, 6" Wifi Led Recessed Lights
Trade Mark:	N/A
Model Number:	EPCL-WIFI-RGBCW-WC-4INCH, EPCL-WIFI-RGBCW-WC-6INCH (The two models have the same circuit principle, PCB, and LED driver, the difference is that the number of lamp beads is different, resulting in different power. We choose model: EPCL-WIFI-RGBCW-WC-6INCH for all tests, model: EPCL-WIFI-RGBCW-WC-4INCH for radiation and conducted emission difference tests.)

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2022).

Date of Test :

July 06, 2022 to July 19, 2022

Prepared by :

Tomas Yang/Supervisor

Approved & Authorized Signer :

Tiger /Supervisor



Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E01A22060794F00101



Table of Contents

1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION	6
1.2 TEST METHODOLOGY	6
2. TEST FACILITY	7
3. DESCRIPTION OF TEST MODES	8
4. SUMMARY OF TEST RESULTS	10
5. TEST SYSTEM UNCERTAINTY	11
6. CONDUCTED EMISSIONS TEST	12
6.1 MEASUREMENT PROCEDURE:	12
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
6.3 MEASUREMENT EQUIPMENT USED:	12
6.4 CONDUCTED EMISSION LIMIT	12
6.5 MEASUREMENT RESULT:	13
6.5 CONDUCTED MEASUREMENT PHOTOS:	17
7. RADIATED EMISSION TEST	18
7.1 MEASUREMENT PROCEDURE	18
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
7.3 MEASUREMENT EQUIPMENT USED:	21
7.4 RADIATED EMISSION LIMIT	22
7.5 MEASUREMENT RESULT	23
7.6 RADIATED MEASUREMENT PHOTOS:	31
8. 6DB BANDWIDTH MEASUREMENT	32
8.1 MEASUREMENT PROCEDURE	32
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	32
8.3 MEASUREMENT EQUIPMENT USED:	32
8.4 LIMIT	32
8.5 MEASUREMENT RESULTS:	32
9. MAXIMUM PEAK OUTPUT POWER TEST	33
9.1 MEASUREMENT PROCEDURE	35
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	35
9.3 MEASUREMENT EQUIPMENT USED:	35
9.4 PEAK POWER OUTPUT LIMIT	35
9.5 MEASUREMENT RESULTS:	35
10.1 MEASUREMENT PROCEDURE	37
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	37



Report No.: E01A22060794F00101

5 of 57

10.3 MEASUREMENT EQUIPMENT USED:	37
10.4 MEASUREMENT PROCEDURE	37
10.5 MEASUREMENT RESULTS:	38
11. BAND EDGE TEST	41
11.1 MEASUREMENT PROCEDURE	41
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	42
11.3 MEASUREMENT EQUIPMENT USED:	42
11.4 MEASUREMENT RESULTS:	43
12 ANTENNA APPLICATION	49
12.1 ANTENNA REQUIREMENT.....	49
12.2 RESULT	49
13 PHOTOS OF EUT	50



1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	4" Wifi Led Recessed Lights, 6" Wifi Led Recessed Lights
Model number	EPCL-WIFI-RGBCW-WC-4INCH, EPCL-WIFI-RGBCW-WC-6INCH
Input Rating	AC 120V, 60Hz
Power Supply	AC 120V 60Hz
Kind of Device	Bluetooth Ver.5.1 BLE
Modulation	GFSK
Operating Frequency Range	2402-2480MHz
Number of Channels	40
Transmit Power Max(PK)	1.07dBm(0.0013W)
Antenna Type	PCB antenna
Antenna Gain	1.3 dBi
Date of Received	July 06, 2022

1.2 Test Methodology

All the test program has follow FCC new test procedure KDB 558074 D01 DTS Meas Guidance v05 and in accordance with the procedures given in ANSI C63.10-2013.



Report No.: E01A22060794F00101

7 of 57

2. Test Facility

Site Description


Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.
Site Location : 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan,
Lake Hi-tech Industrial Development Zone, Dongguan City,
Guangdong Pr., China.

3. Description of test modes

The EUT has been tested under its typical operating condition and fully-charged battery for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

Configuration of Tested System



Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	4" Wifi Led Recessed Lights, 6" Wifi Led Recessed Lights	N/A	EPCL-WIFI-RGBCW-WC-4INCH, EPCL-WIFI-RGBCW-WC-6INCH	2A358CLW C	EUT



The EUT has been tested under TX operating condition.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.

4. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d), §15.209	Radiated Emission	Compliant
§15.247(a)(2)	6dB Bandwidth Measurement	Compliant
§15.247(b)	MAXIMUM PEAK OUTPUT POWER TEST	Compliant
§15.247(e)	Power Spectral Density Measurement	Compliant
§15.247(d)	Band EDGE test	Compliant
§15.203	Antenna Requirement	Compliant
Remark: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		



5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

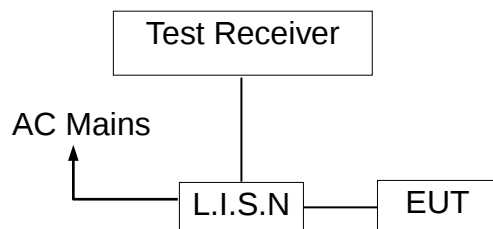

6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2023-05-12
10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2023-05-12
RF Cable	N/A	N/A	2#	2023-05-12
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2023-05-12

6.4 Conducted Emission Limit

(7) Conducted Emission

Frequency(MHz)

0.15-0.5

0.5-5.0

5.0-30.0

Quasi-peak

66-56

56

60

Average

56-46


46

50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


6.5 Measurement Result:

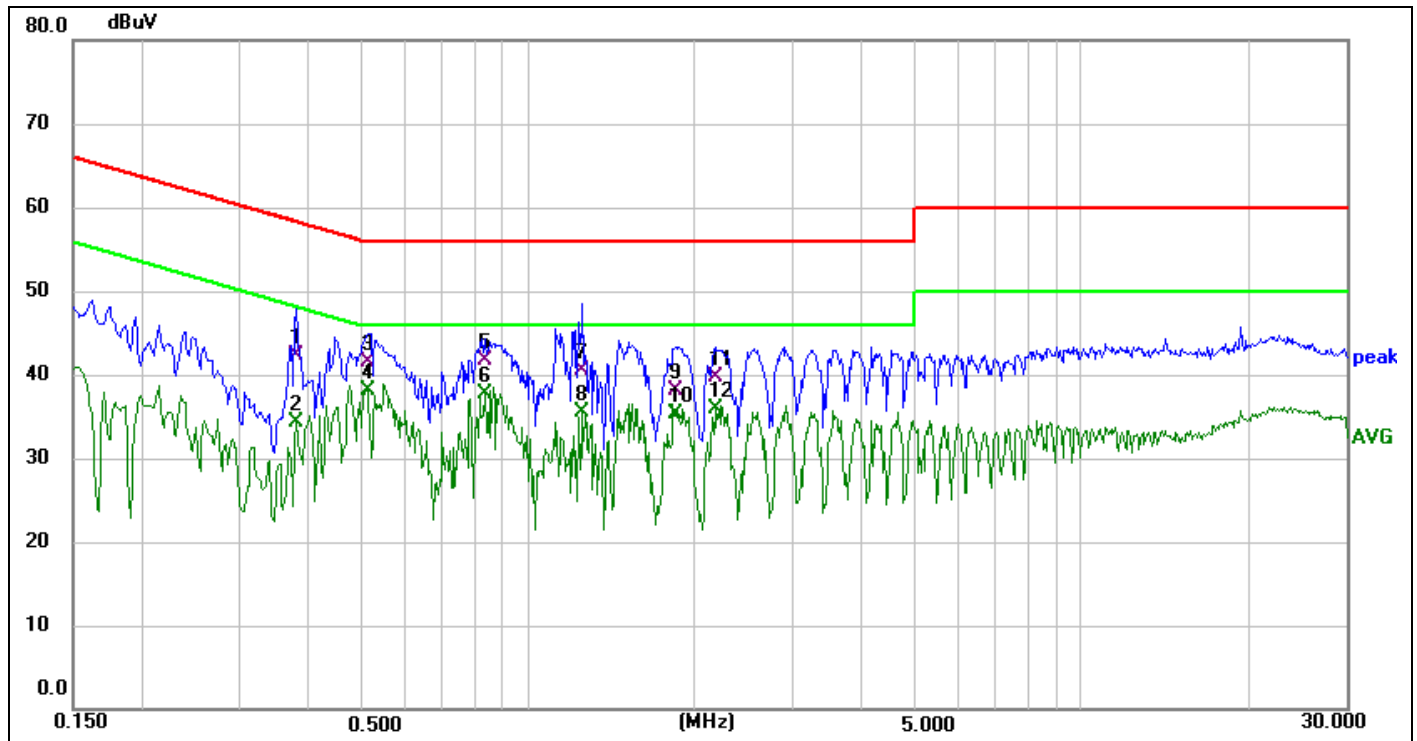

Site:	843	Phase:	L1	Temperature(C):	26(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:		Humidity(%):	60%
EUT:	4" Wifi Led Recessed Lights	Power Rating:		2022-07-12	
M/N.:	EPCL-WIFI-RGBCW-WC-4INCH	Test Engineer:		AC 120V/60Hz	
Mode:	BT			Sunshine	
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.3780	32.32	9.90	42.22	58.32	-16.10	QP	
2	0.3780	24.40	9.90	34.30	48.32	-14.02	AVG	
3	0.5100	31.70	9.82	41.52	56.00	-14.48	QP	
4 *	0.5100	28.32	9.82	38.14	46.00	-7.86	AVG	
5	0.8340	32.13	9.58	41.71	56.00	-14.29	QP	
6	0.8340	28.22	9.58	37.80	46.00	-8.20	AVG	
7	1.2500	31.36	9.16	40.52	56.00	-15.48	QP	
8	1.2500	26.42	9.16	35.58	46.00	-10.42	AVG	
9	1.8420	27.69	10.41	38.10	56.00	-17.90	QP	
10	1.8420	24.95	10.41	35.36	46.00	-10.64	AVG	
11	2.1780	29.22	10.42	39.64	56.00	-16.36	QP	
12	2.1780	25.50	10.42	35.92	46.00	-10.08	AVG	


*:Maximum data x:Over limit !:over margin

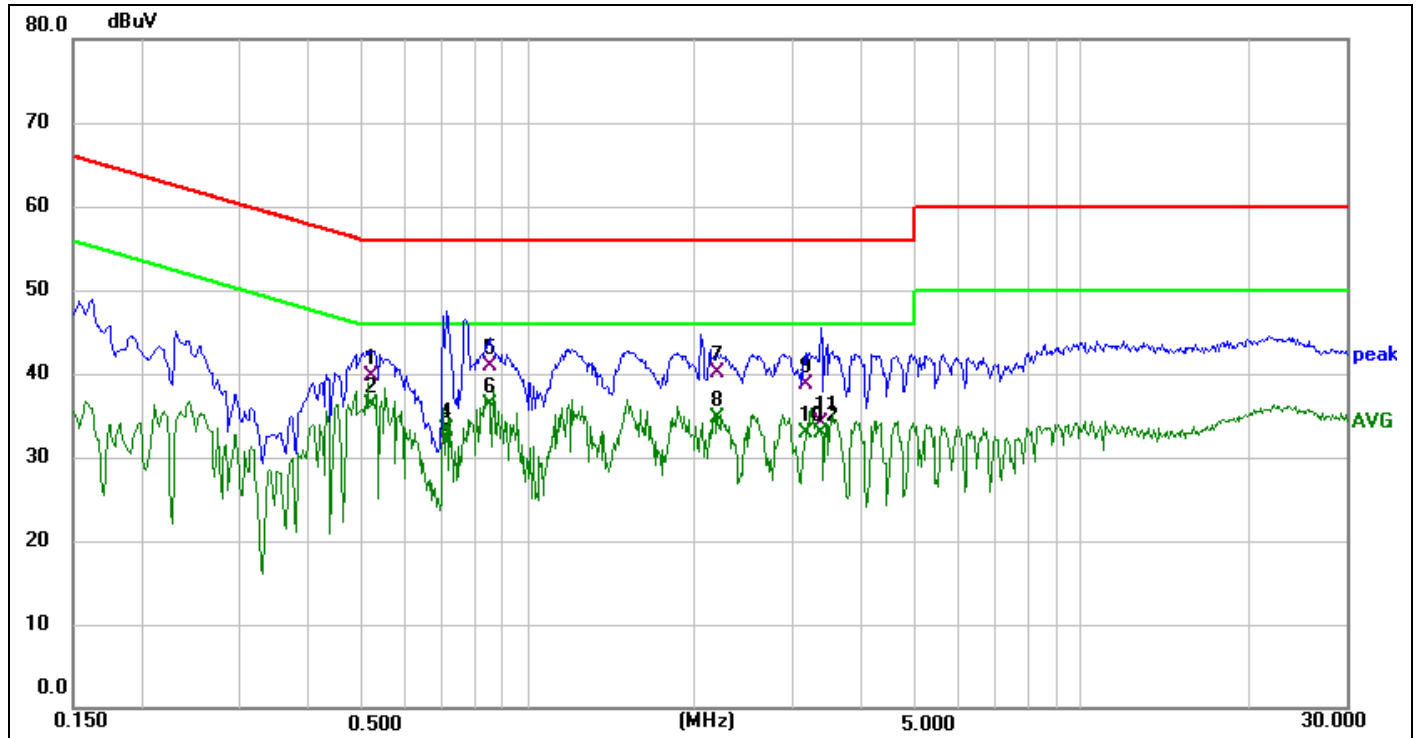

Site:	843	Phase:	N	Temperature(C):	26(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:		Humidity(%):	60%
EUT:	4" Wifi Led Recessed Lights	Power Rating:		AC 120V/60Hz	
M/N.:	EPCL-WIFI-RGBCW-WC-4INCH	Test Engineer:		Sunshine	
Mode:	BT				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.5180	29.95	9.81	39.76	56.00	-16.24	QP	
2	0.5180	26.45	9.81	36.26	46.00	-9.74	AVG	
3	0.7100	22.02	9.67	31.69	56.00	-24.31	QP	
4	0.7100	23.57	9.67	33.24	46.00	-12.76	AVG	
5	0.8500	31.28	9.56	40.84	56.00	-15.16	QP	
6 *	0.8500	26.80	9.56	36.36	46.00	-9.64	AVG	
7	2.1940	29.58	10.47	40.05	56.00	-15.95	QP	
8	2.1940	24.16	10.47	34.63	46.00	-11.37	AVG	
9	3.1700	28.15	10.48	38.63	56.00	-17.37	QP	
10	3.1700	22.37	10.48	32.85	46.00	-13.15	AVG	
11	3.3660	23.64	10.49	34.13	56.00	-21.87	QP	
12	3.3660	22.36	10.49	32.85	46.00	-13.15	AVG	

*:Maximum data x:Over limit !:over margin

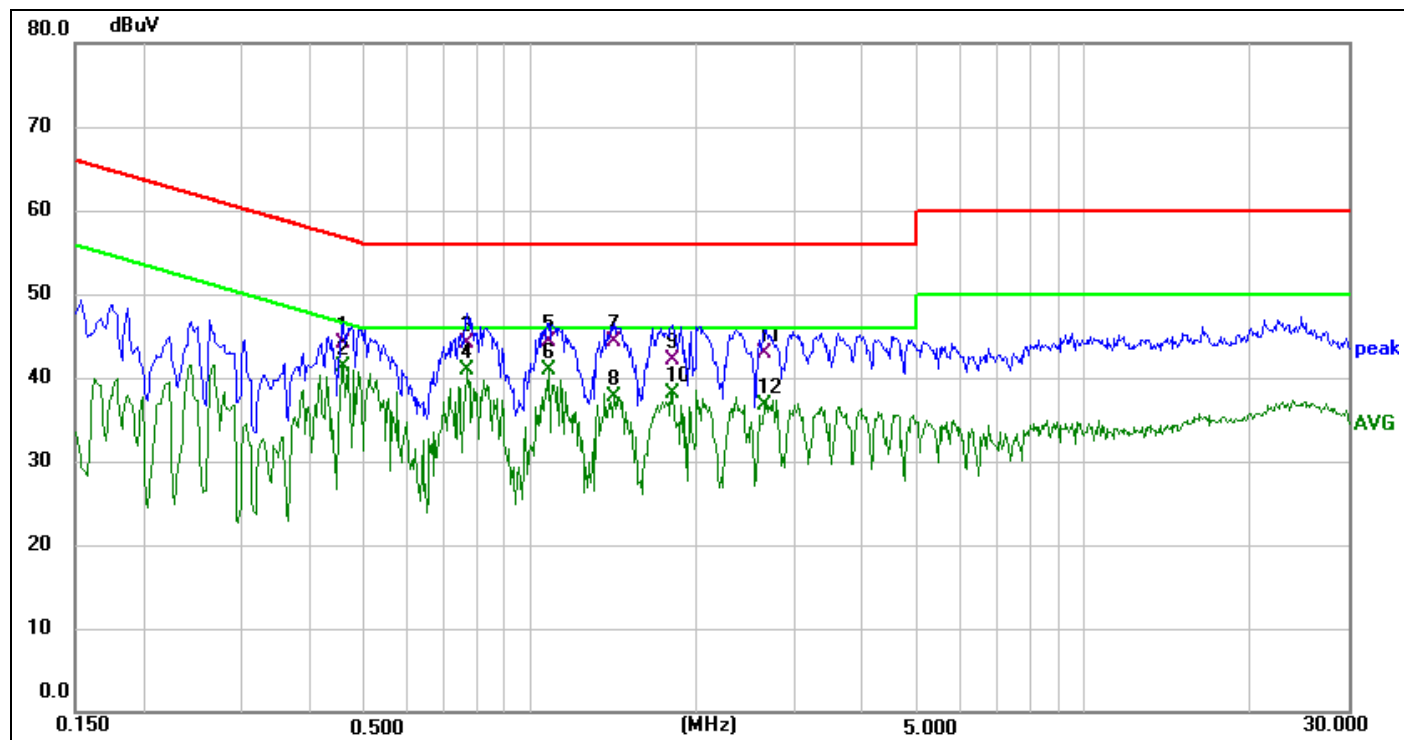

Site:	843	Phase:L1	Temperature(C):26(C)
Limit:	FCC Part 15 C Conduction(QP)		Humidity(%):60%
EUT:	6" Wifi Led Recessed Lights	Test Time:	2022-07-12
M/N.:	EPCL-WIFI-RGBCW-WC-6INCH	Power Rating:	AC 120V/60Hz
Mode:	BT	Test Engineer:	Sunshine
Note:			


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.4580	34.29	9.85	44.14	56.73	-12.59	QP	
2	0.4580	31.38	9.85	41.23	46.73	-5.50	AVG	
3	0.7700	34.42	9.63	44.05	56.00	-11.95	QP	
4 *	0.7700	31.32	9.63	40.95	46.00	-5.05	AVG	
5	1.0780	34.98	9.32	44.30	56.00	-11.70	QP	
6	1.0780	31.59	9.32	40.91	46.00	-5.09	AVG	
7	1.4140	33.96	10.41	44.37	56.00	-11.63	QP	
8	1.4140	27.24	10.41	37.65	46.00	-8.35	AVG	
9	1.8060	31.67	10.41	42.08	56.00	-13.92	QP	
10	1.8060	27.63	10.41	38.04	46.00	-7.96	AVG	
11	2.6500	32.37	10.44	42.81	56.00	-13.19	QP	
12	2.6500	26.32	10.44	36.76	46.00	-9.24	AVG	

*:Maximum data x:Over limit !:over margin



Report No.: E01A22060794F00101

16 of 57

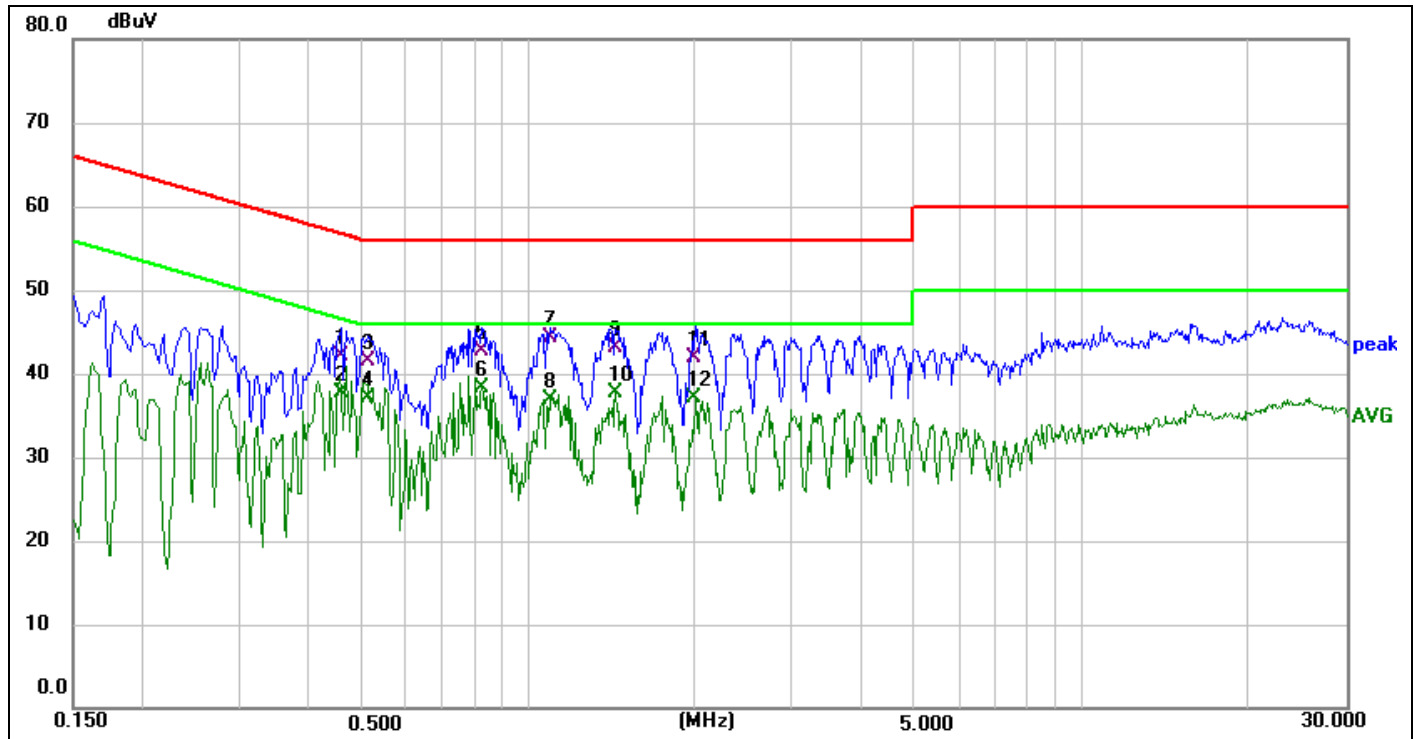

Site:	843	Phase:	N	Temperature(C):	26(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:		Humidity(%):	60%
EUT:	6" Wifi Led Recessed Lights	Power Rating:		2022-07-12	
M/N.:	EPCL-WIFI-RGBCW-WC-6INCH	Test Engineer:		AC 120V/60Hz	
Mode:	BT			Sunshine	
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.4580	32.15	9.86	42.01	56.73	-14.72	QP	
2	0.4580	27.77	9.86	37.63	46.73	-9.10	AVG	
3	0.5140	31.66	9.82	41.48	56.00	-14.52	QP	
4	0.5140	27.33	9.82	37.15	46.00	-8.85	AVG	
5	0.8220	33.21	9.59	42.80	56.00	-13.20	QP	
6 *	0.8220	28.76	9.59	38.35	46.00	-7.65	AVG	
7	1.0980	35.01	9.32	44.33	56.00	-11.67	QP	
8	1.0980	27.61	9.32	36.93	46.00	-9.07	AVG	
9	1.4380	32.62	10.44	43.06	56.00	-12.94	QP	
10	1.4380	27.17	10.44	37.61	46.00	-8.39	AVG	
11	2.0059	31.45	10.47	41.92	56.00	-14.08	QP	
12	2.0059	26.55	10.47	37.02	46.00	-8.98	AVG	

*:Maximum data x:Over limit !:over margin

6.5 Conducted Measurement Photos:

7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. The EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
5. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.



Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Average
Trace	Max hold

For Average Measurement:


VBW=10Hz, when duty cycle is no less than 98 percent.

$VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(KHz)	Average Correction Factor	VBW Setting
2402-2480	100	-	-	0	10Hz

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

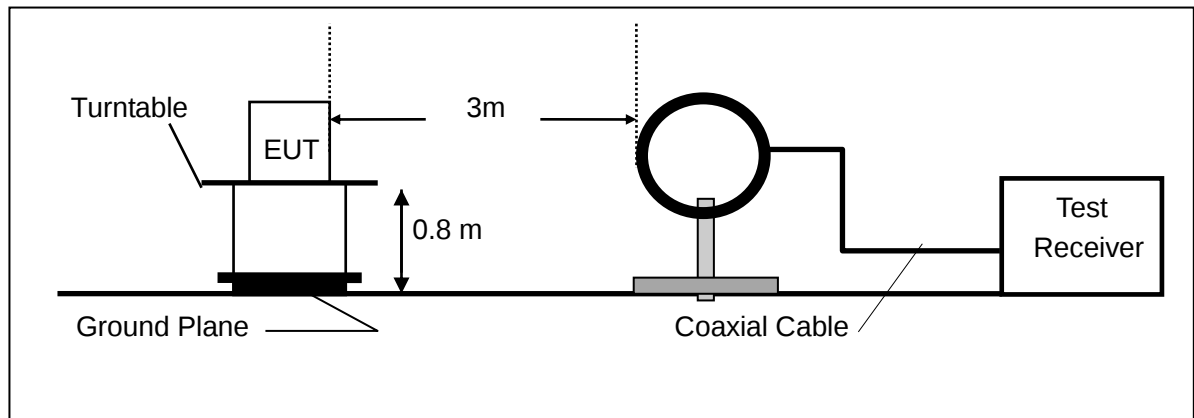

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

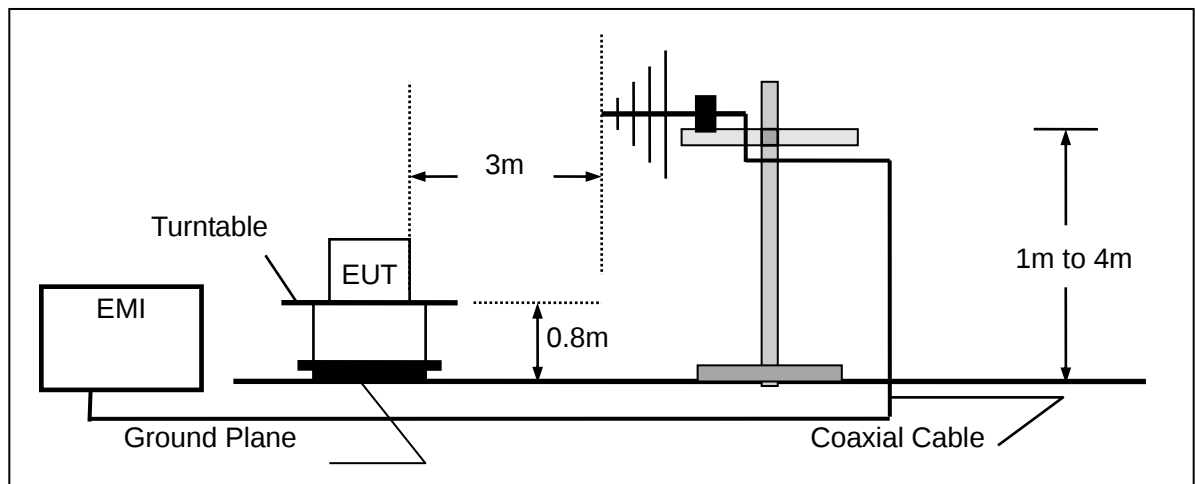

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

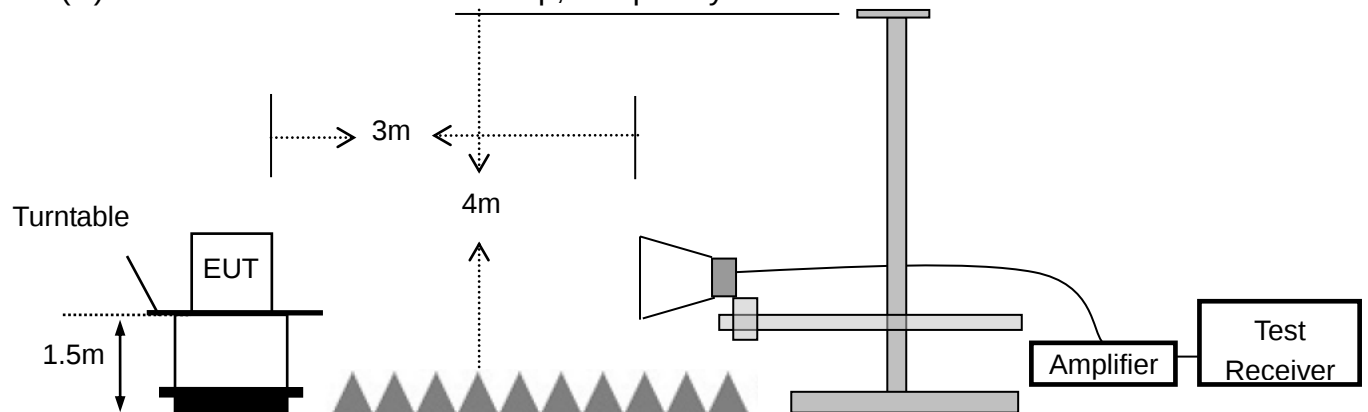

7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2022-11-12
2.	Pre-Amplifier	HP	8447D	2727A06172	2023-05-12
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2023-05-12
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2022-11-12
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12
6.	Low noise Amplifiers	A-INFO	LA1018N4009	J101313052400 1	2023-05-12
7.	Horn antenna	A-INFO	LB-10180-SF	J203109061212 3	2023-05-12
8.	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX10 0KHz-40GHz	J101313052400 1	2022-11-12
9.	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J203109061212 3	2022-11-12
10.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-2m	N/A	2022-11-12
11.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-0.3m	N/A	2022-11-12
12.	RF Cable	N/A	N/A	6#	2023-05-12
13.	RF Cable	N/A	N/A	1-1#	2023-05-12
14.	RF Cable	N/A	N/A	1-2#	2023-05-12
15.	RF Cable	N/A	N/A	7#	2023-05-12
16.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2023-05-12
17.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

7.4 Radiated emission limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.



7.5 Measurement Result

Below 30MHz:

Operation Mode:	TX	Test Date :	2022-07-19
Frequency Range:	9KHz~30MHz	Temperature :	25°C
Test Result:	PASS	Humidity :	58 %
Measured Distance:	3m	Test By:	Ellie


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Below 1000MHz:

Pass.

The data of the mode (GFSK 2480MHz) are recorded in the following pages.

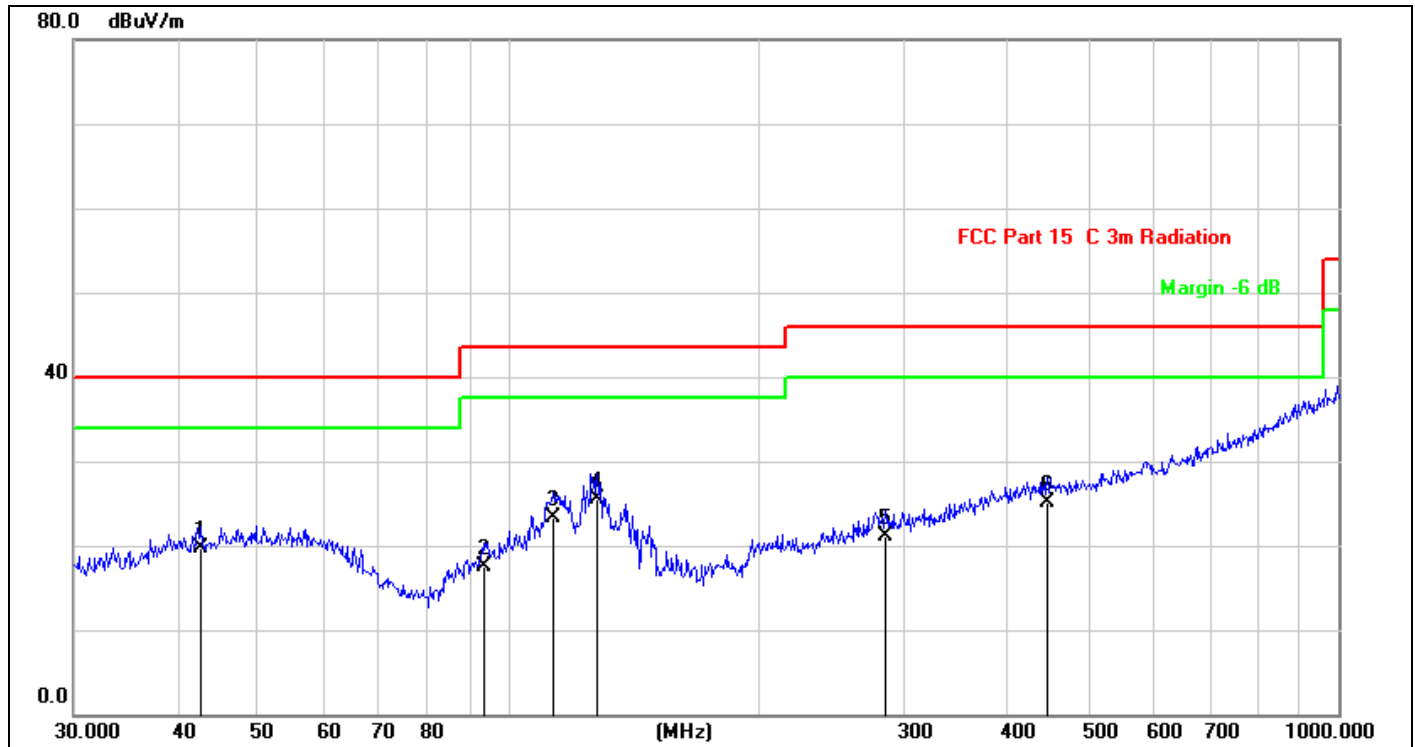


Site: 843.3
Limit: FCC Part 15 C Conduction(QP)
EUT: 4"Wifi Led Recessed Lights
M/N.: EPCL-WIFI-RGBCW-WC-4INCH
Mode: TX2480
Note:

Antenna::Horizontal Temperature(C):26(C)
Humidity(%):60%
Test Time: 2022-07-19
Power Rating: AC 120V/60Hz
Test Engineer: Ellie

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	42.7496	24.06	-4.42	19.64	40.00	-20.36	QP	
2	93.4402	24.25	-6.69	17.56	43.50	-25.94	QP	
3	113.3163	28.20	-4.84	23.36	43.50	-20.14	QP	
4 *	128.1130	32.42	-6.86	25.56	43.50	-17.94	QP	
5	284.9767	23.56	-2.52	21.04	46.00	-24.96	QP	
6	446.4141	24.02	1.16	25.18	46.00	-20.82	QP	

*:Maximum data x:Over limit !:over margin

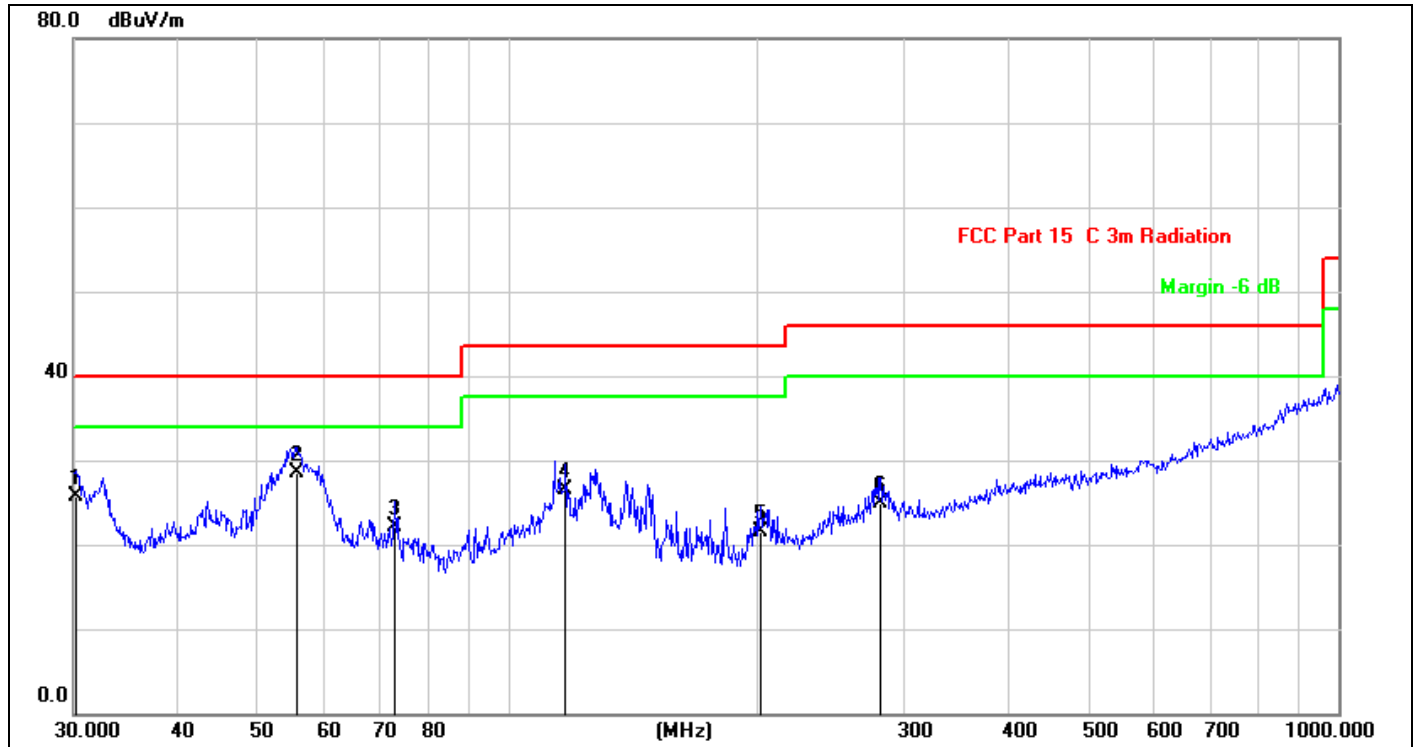


Site: 843.3
Limit: FCC Part 15 C Conduction(QP)
EUT: 4"Wifi Led Recessed Lights
M/N.: EPCL-WIFI-RGBCW-WC-4INCH
Mode: TX2480
Note:

Antenna::Vertical Temperature(C):26(C)
Humidity(%):60%
Test Time: 2022-07-19
Power Rating: AC 120V/60Hz
Test Engineer: Ellie

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	30.2111	33.22	-7.61	25.61	40.00	-14.39	QP	
2 *	55.6094	33.10	-4.52	28.58	40.00	-11.42	QP	
3	73.1025	31.60	-9.46	22.14	40.00	-17.86	QP	
4	117.3603	31.71	-5.28	26.43	43.50	-17.07	QP	
5	201.3930	26.50	-5.02	21.48	43.50	-22.02	QP	
6	281.0075	27.58	-2.67	24.91	46.00	-21.09	QP	

*:Maximum data x:Over limit !:over margin

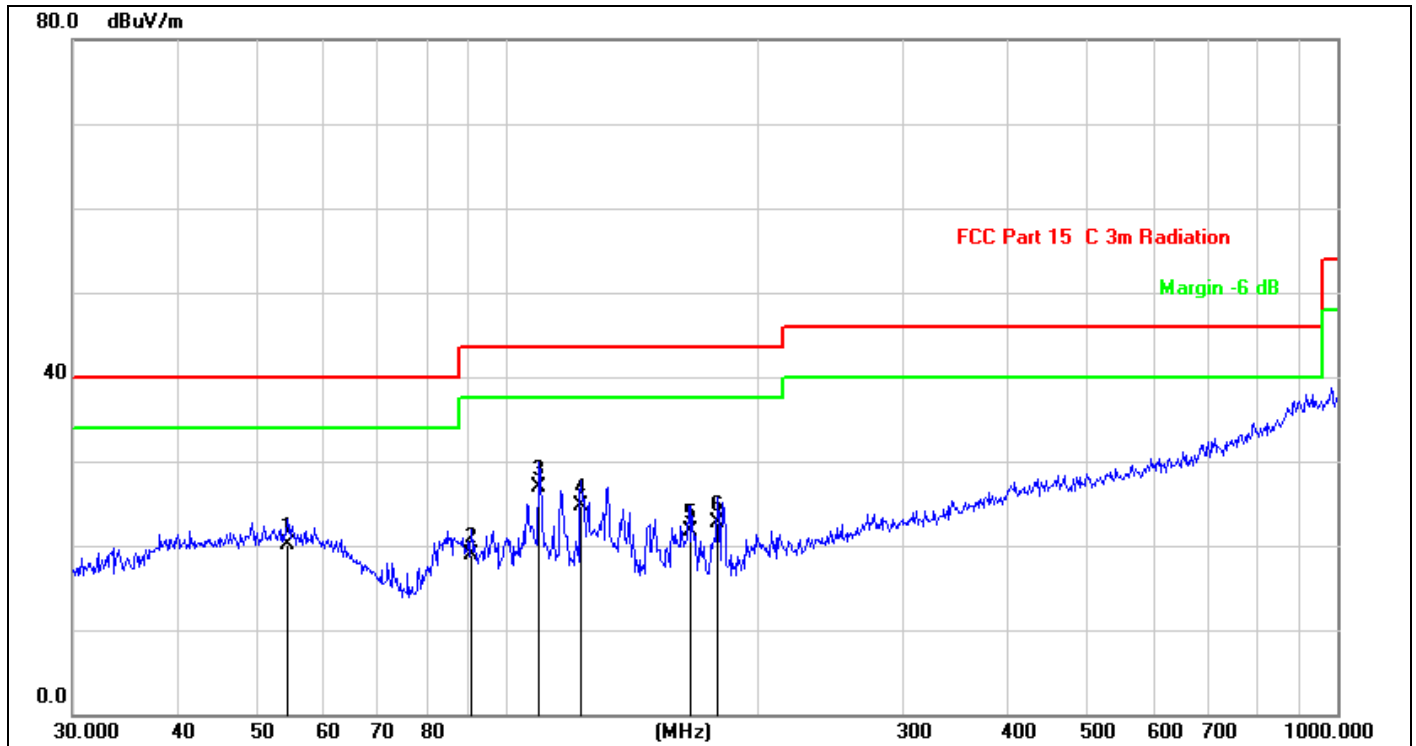

Site:	843.3	Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:	Humidity(%):60%
EUT:	6"Wifi Led Recessed Lights	Power Rating:	2022-07-19
M/N.:	EPCL-WIFI-RGBCW-WC-6INCH	Test Engineer:	AC 120V/60Hz
Mode:	TX2480		Ellie
Note:			


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	54.4516	24.50	-4.45	20.05	40.00	-19.95	QP	
2	90.5374	26.30	-7.48	18.82	43.50	-24.68	QP	
3 *	109.4116	31.45	-4.51	26.94	43.50	-16.56	QP	
4	122.8340	30.81	-6.02	24.79	43.50	-18.71	QP	
5	166.6514	30.67	-9.03	21.64	43.50	-21.86	QP	
6	179.3863	31.18	-8.47	22.71	43.50	-20.79	QP	

*:Maximum data x:Over limit !:over margin



Report No.: E01A22060794F00101

27 of 57

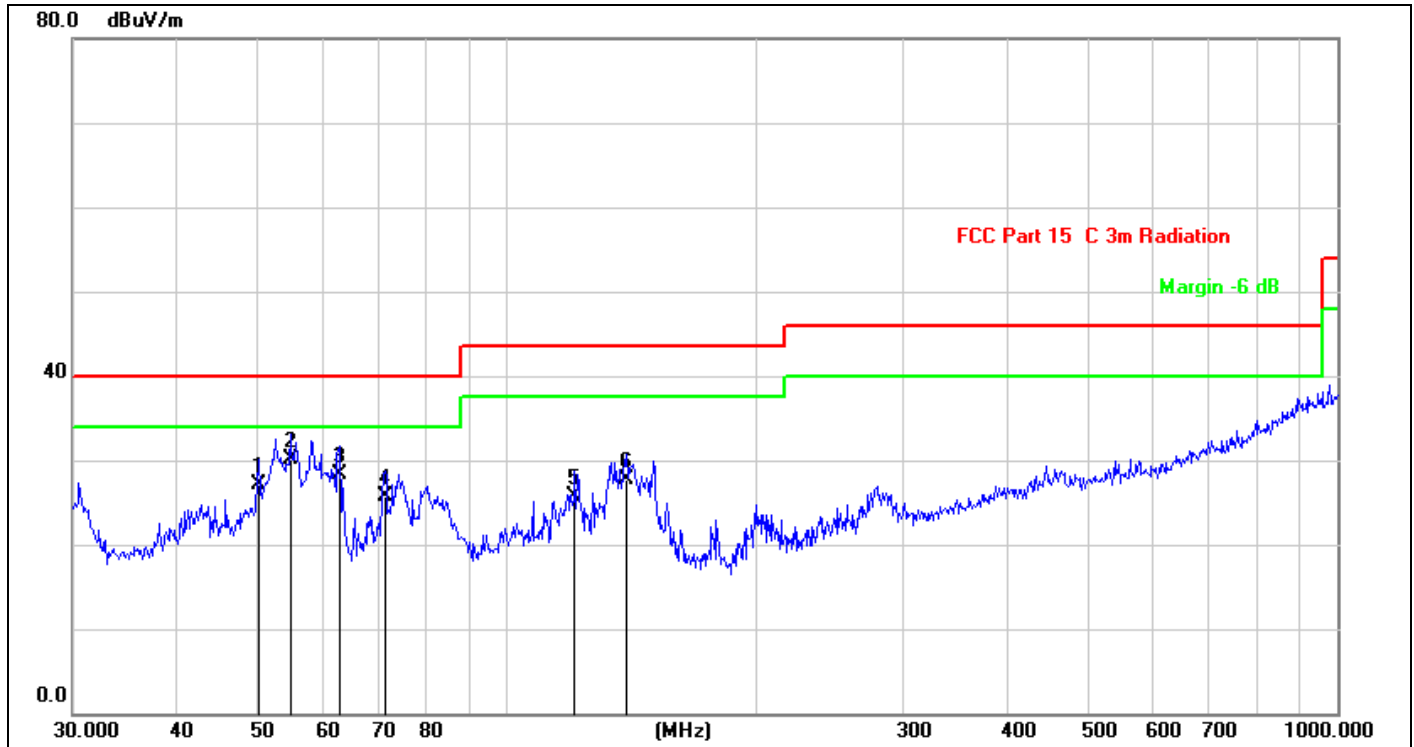

Site:	843.3	Antenna::Vertical	Temperature(C):26(C)
Limit:	FCC Part 15 C Conduction(QP)		Humidity(%):60%
EUT:	6"Wifi Led Recessed Lights	Test Time:	2022-07-19
M/N.:	EPCL-WIFI-RGBCW-WC-6INCH	Power Rating:	AC 120V/60Hz
Mode:	TX2480	Test Engineer:	Ellie
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	50.2324	31.23	-4.19	27.04	40.00	-12.96	QP	
2 *	54.8348	34.52	-4.48	30.04	40.00	-9.96	QP	
3	62.8708	34.25	-5.92	28.33	40.00	-11.67	QP	
4	71.3300	34.78	-9.04	25.74	40.00	-14.26	QP	
5	120.6991	31.35	-5.68	25.67	43.50	-17.83	QP	
6	139.3613	36.52	-8.84	27.68	43.50	-15.82	QP	

*:Maximum data x:Over limit !:over margin

**Above 1000MHz~10th Harmonics:**

Operation Mode: TX Mode (CH00: 2402MHz) Test Date : 2022-07-12
Frequency Range: 1-25GHz Temperature : 25°C
Test Result: PASS Humidity : 58 %
Measured Distance: 3m Test By: Ellie

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	94.85	76.28	-32.3	63.25	43.98	74	54	-10.75	-10.02
7206	V	97.5	78.01	-37.2	60.3	40.81	74	54	-13.7	-13.19
9608	V	97.25	78.05	-39.8	57.45	38.25	74	54	-16.55	-15.75
12010	V	96.82	77.75	-40.5	56.32	37.25	74	54	-17.68	-16.75
14412	V	97.88	78.86	-41.7	56.18	37.16	74	54	-17.82	-16.84
16814	V	94.02	75.62	-40	54.02	35.62	74	54	-19.98	-18.38
4804	H	94.75	75.38	-31.6	63.15	43.78	74	54	-10.85	-10.22
7206	H	95.52	77.02	-35.5	60.02	41.52	74	54	-13.98	-12.48
9608	H	95.45	76.95	-38.3	57.15	38.65	74	54	-16.85	-15.35
12010	H	95.22	76.23	-39	56.22	37.23	74	54	-17.78	-16.77
14412	H	98.17	79.11	-42	56.17	37.11	74	54	-17.83	-16.89
16814	H	94.19	75.88	-39.3	54.89	36.58	74	54	-19.11	-17.42

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.



Operation Mode: TX Mode (CH19: 2440MHz) Test Date : 2022-07-12
Frequency Range: 1-25GHz Temperature : 25°C
Test Result: PASS Humidity : 58 %
Measured Distance: 3m Test By: Ellie

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4880	V	95.31	76.99	-32.3	63.01	44.69	74	54	-10.99	-9.31
7320	V	97.45	78.45	-37.2	60.25	41.25	74	54	-13.75	-12.75
9760	V	98.2	79.38	-39.8	58.4	39.58	74	54	-15.6	-14.42
12200	V	96.75	78.02	-40.5	56.25	37.52	74	54	-17.75	-16.48
14640	V	96.17	77.58	-41	55.17	36.58	74	54	-18.83	-17.42
17080	V	96.46	77.68	-41.1	55.36	36.58	74	54	-18.64	-17.42
4880	H	94.74	75.63	-31.6	63.14	44.03	74	54	-10.86	-9.97
7320	H	96.08	76.02	-35.5	60.58	40.52	74	54	-13.42	-13.48
9760	H	96.46	77.46	-38.3	58.16	39.16	74	54	-15.84	-14.84
12200	H	95.22	76.8	-39	56.22	37.8	74	54	-17.78	-16.2
14640	H	97.03	78.08	-42	55.03	36.08	74	54	-18.97	-17.92
17080	H	96.69	78.08	-41.5	55.19	36.58	74	54	-18.81	-17.42

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(3) The average measurement was not performed when the peak measured data under the limit of average detection.
(4) Measuring frequencies from 1GHz to 25GHz.



Operation Mode: TX Mode (CH39: 2480MHz) Test Date : 2022-07-12
Frequency Range: 1-25GHz Temperature : 25°C
Test Result: PASS Humidity : 58 %
Measured Distance: 3m Test By: Ellie

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	95.17	75.41	-32.3	62.87	43.11	74	54	-11.13	-10.89
7440	V	97.23	78.22	-37.2	60.03	41.02	74	54	-13.97	-12.98
9920	V	98.27	79.38	-39.8	58.47	39.58	74	54	-15.53	-14.42
12400	V	96.75	77.64	-40.5	56.25	37.14	74	54	-17.75	-16.86
14880	V	96.47	77.25	-41	55.47	36.25	74	54	-18.53	-17.75
17360	V	96.42	77.35	-41.1	55.32	36.25	74	54	-18.68	-17.75
4960	H	94.31	74.93	-31.6	62.71	43.33	74	54	-11.29	-10.67
7440	H	96.52	77.86	-35.5	61.02	42.36	74	54	-12.98	-11.64
9920	H	98.31	78.52	-38.3	60.01	40.22	74	54	-13.99	-13.78
12400	H	97.36	78.18	-39	58.36	39.18	74	54	-15.64	-14.82
14880	H	98.14	79.04	-42	56.14	37.04	74	54	-17.86	-16.96
17360	H	96.52	77.75	-41.5	55.02	36.25	74	54	-18.98	-17.75

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.

7.6 Radiated Measurement Photos:




8. 6dB Bandwidth Measurement

8.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

8.4 Limit

The minimum 6dB bandwidth shall be at least 500kHz.


8.5 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	2022-07-08
Test By:	Ellie	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %


Channel number	Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)
00	2402	732	>500
19	2440	765	>500
39	2480	751	>500

6dB NVNT BLE 2402MHz Ant1

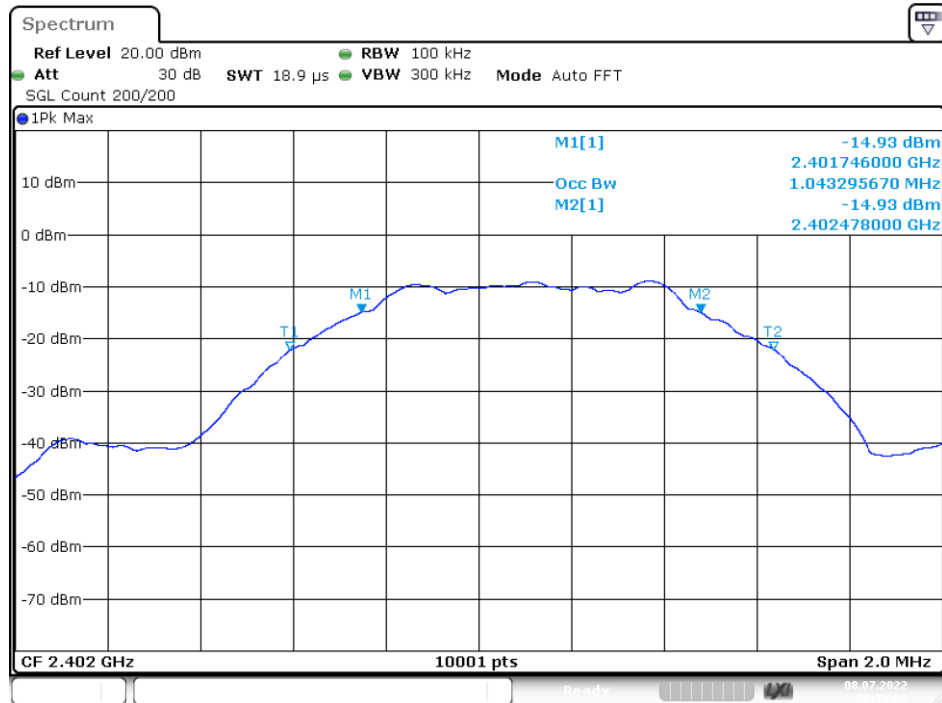

Date: 8.JUL.2022 20:59:08

6dB NVNT BLE 2440MHz Ant1

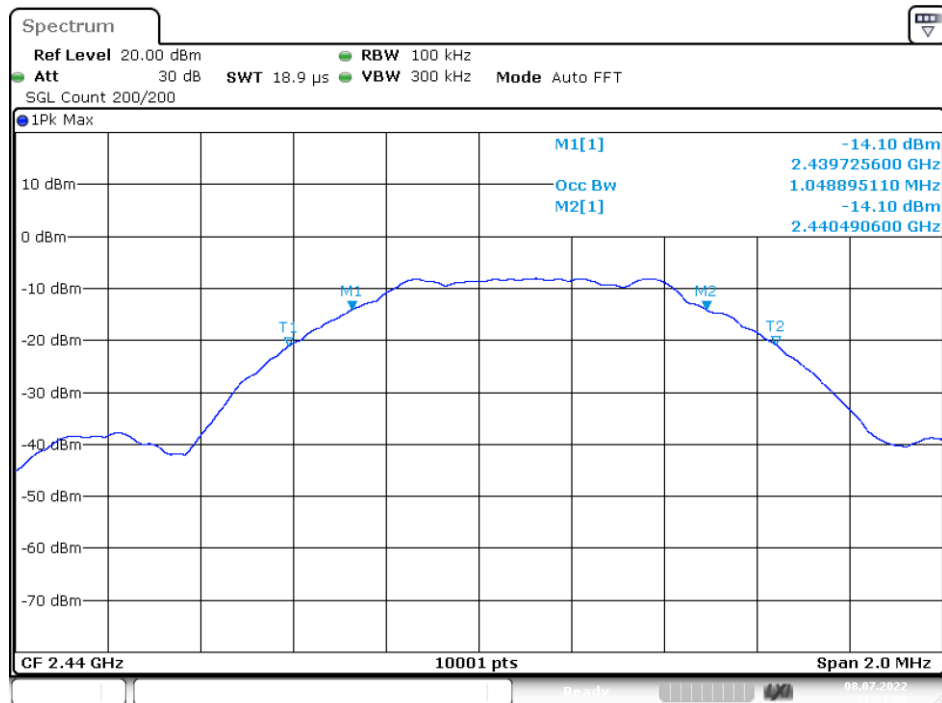


Date: 8.JUL.2022 21:01:00



Report No.: E01A22060794F00101

34 of 57

6dB NVNT BLE 2480MHz Ant1

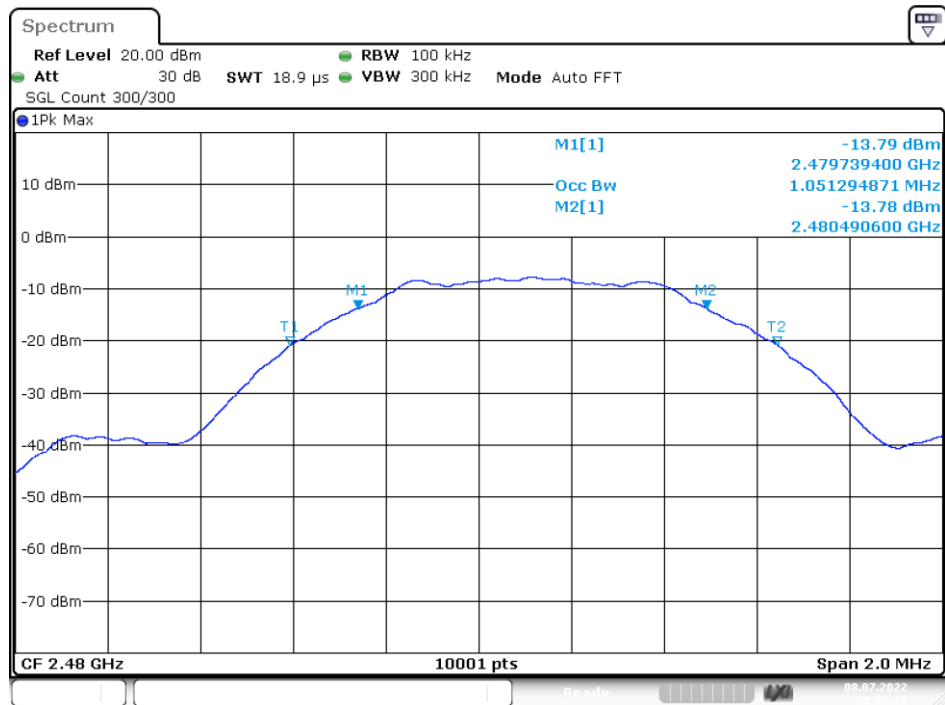

Date: 8.JUL.2022 21:02:11

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1 Measurement Procedure

- The Transmitter output (antenna port) was connected to the spectrum Analyzer.
- Turn on the EUT and then record the peak power value.
- Repeat above procedures on all channels needed to be tested.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
USB RF Power sensor	RadiPower	RPR3006W	17I00015SNO88	2022-11-12
RF Test Software	MAIWEI	MTS 8310	N/A	N/A

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

9.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

9.5 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	2022-07-08
Test By:	Ellie	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %



Report No.: E01A22060794F00101

36 of 57


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
0	2402	-1.120	0.773	1000	PASS
19	2440	1.060	1.276	1000	PASS
39	2480	1.07	1.279	1000	PASS

10. Power Spectral Density Measurement

10.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Procedure

10.4.1 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

10.4.2. Set to the maximum power setting and enable the EUT transmit continuously.

10.4.3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)

10.4.4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.

10.4.5. Measure and record the results in the test report.

10.4.6. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

10.5 Measurement Results:

The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	3KHz
VB	10KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	2022-07-08
Test By:	Ellie	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

Channel number	Channel frequency (MHz)	Measurement level (dBm)	Required Limit (dBm/3kHz)	Pass/Fail
		PSD/3kHz		
00	2402	-17.44	8	PASS
19	2440	-15.5	8	PASS
39	2480	-15.63	8	PASS

Note:


1. Measured power density(dBm) has offset with cable loss.
2. The measured power density(dBm)/100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



Report No.: E01A22060794F00101


39 of 57

PSD NVNT BLE 2402MHz Ant1

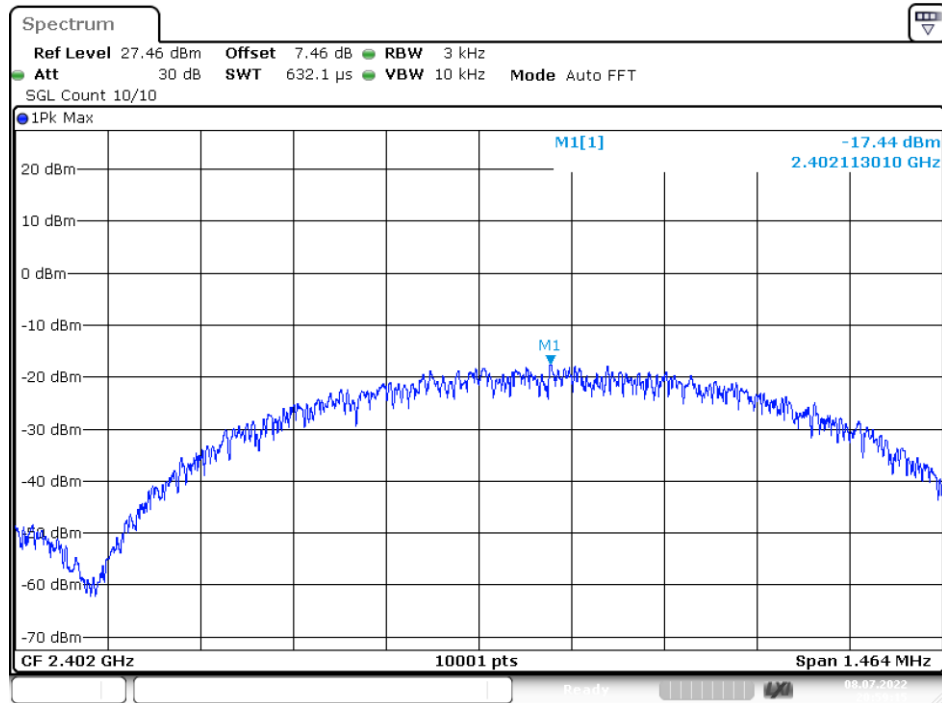

Date: 8.JUL.2022 20:59:15

PSD NVNT BLE 2440MHz Ant1

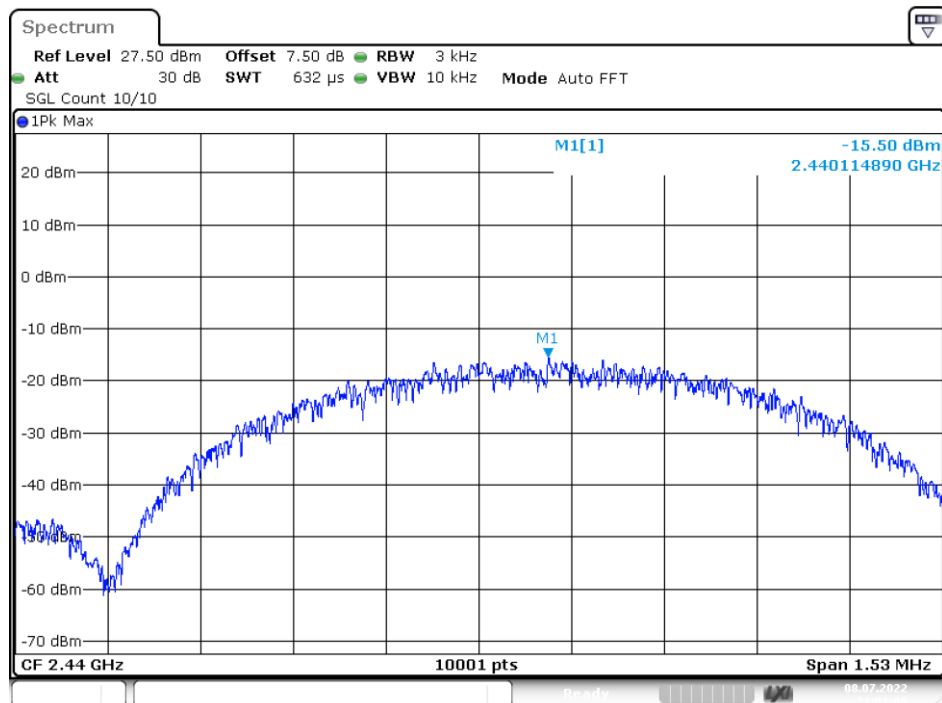


Date: 8.JUL.2022 21:01:06



Report No.: E01A22060794F00101

40 of 57

PSD NVNT BLE 2480MHz Ant1

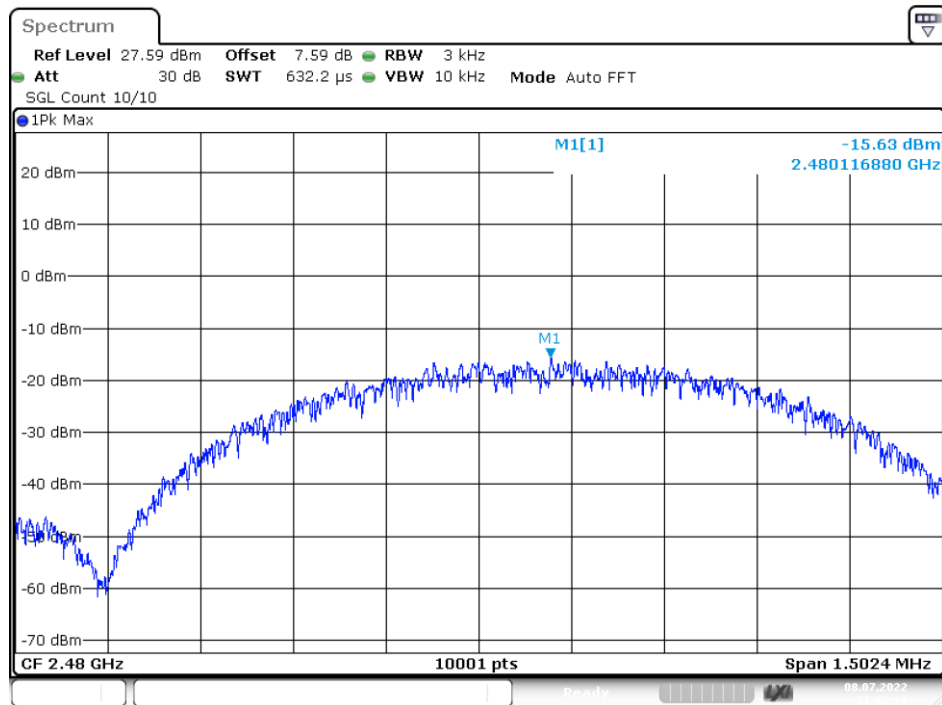

Date: 8.JUL.2022 21:02:18

11. Band EDGE test

11.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

11.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

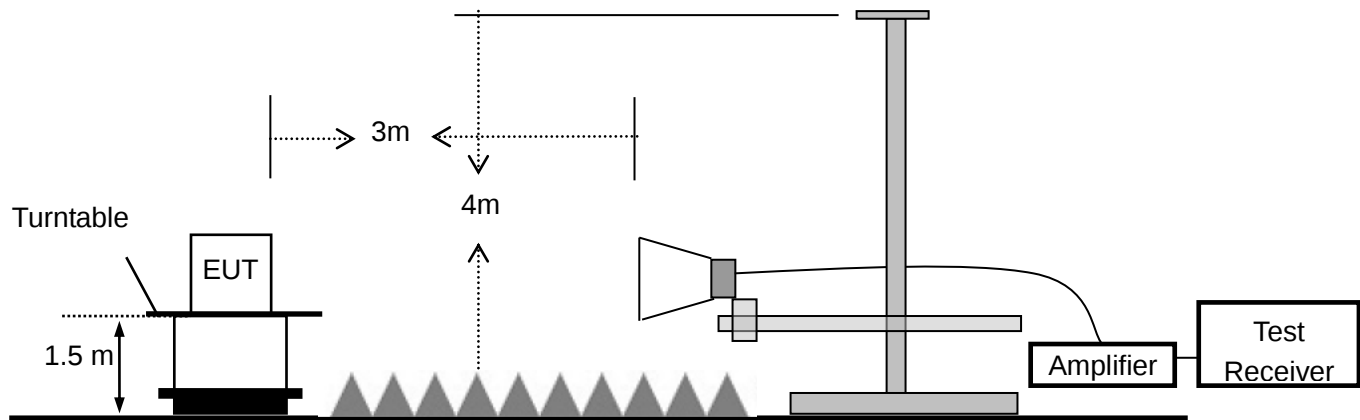

11.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Signal Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12
2	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX100KHz-40G Hz	J1013130524 001	2022-11-12
3	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J2031090612 123	2022-11-12
4	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92J-2m	N/A	2023-05-12
5	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92J-0.3m	N/A	2023-05-12



Report No.: E01A22060794F00101

43 of 57


11.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	2022-07-08
Test By:	Ellie	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

1. Conducted Test


Frequency (MHz)	Peak Power Output(dBm)	Emission(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2386	-1.57	-41.69	40.12	>20dBc
2492	-0.03	-43.15	43.12	>20dBc

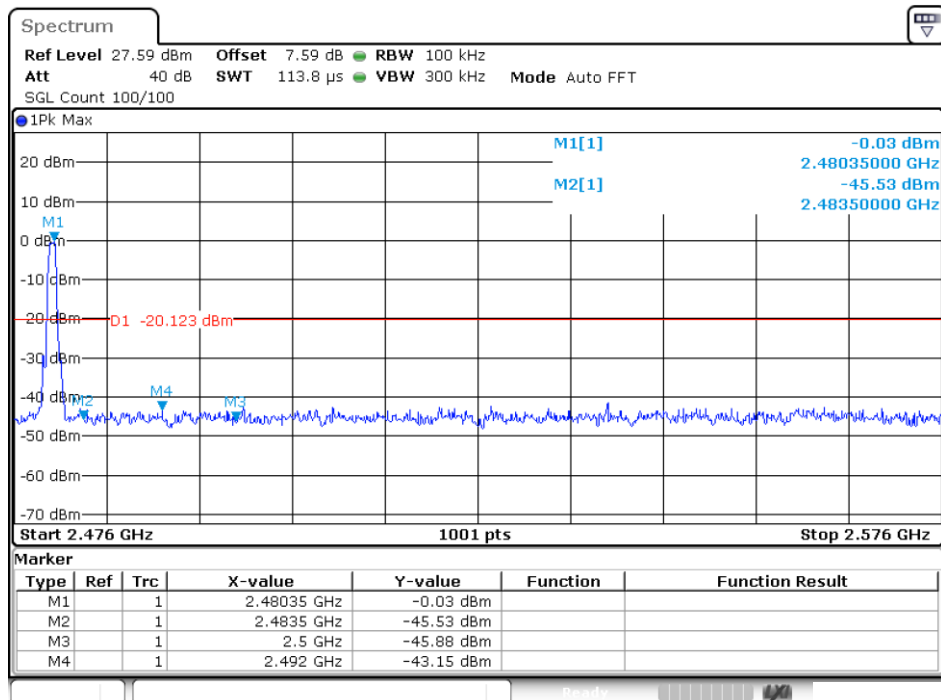



Report No.: E01A22060794F00101

46 of 57

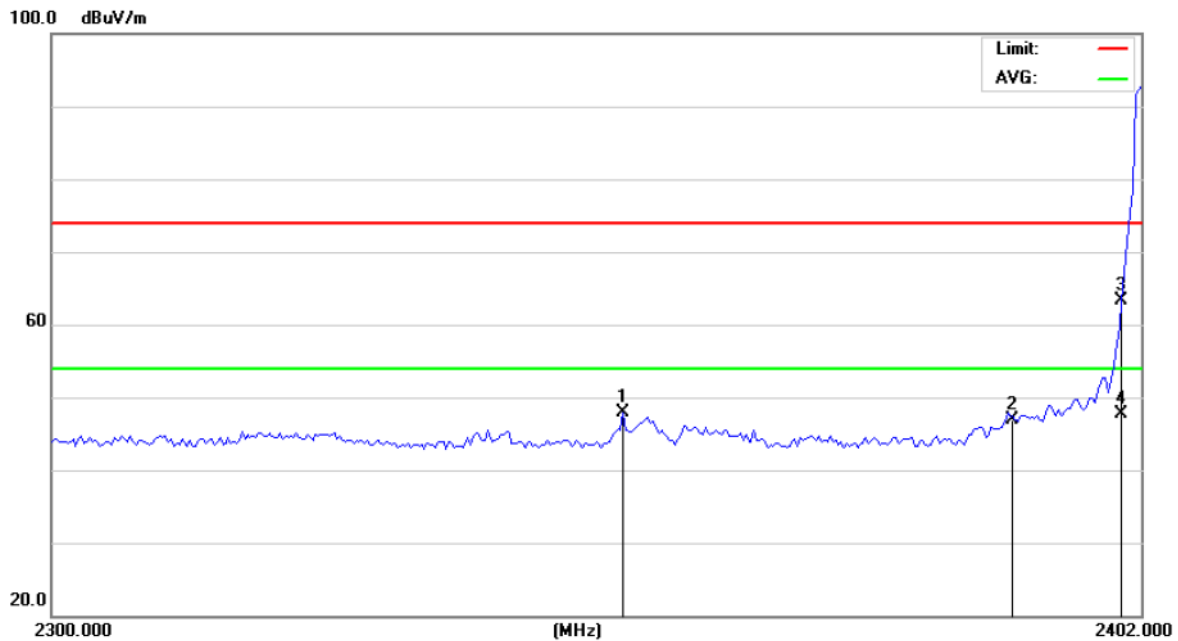

Site 843

Polarization: **Vertical**

Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: AC 120V/60Hz

Humidity: 60.6 %

Mode: TX2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Table		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Battery 3.7V	ree	Comment
1		2352.998	52.99	-5.07	47.92	74.00	-26.08	peak		
2		2390.000	51.68	-4.82	46.86	74.00	-27.14	peak		
3		2400.000	68.00	-4.75	63.25	74.00	-10.75	peak		
4	*	2400.000	52.36	-4.75	47.61	54.00	-6.39	AVG		


*:Maximum data x:Over limit !:over margin

(Reference Only)



Report No.: E01A22060794F00101

47 of 57

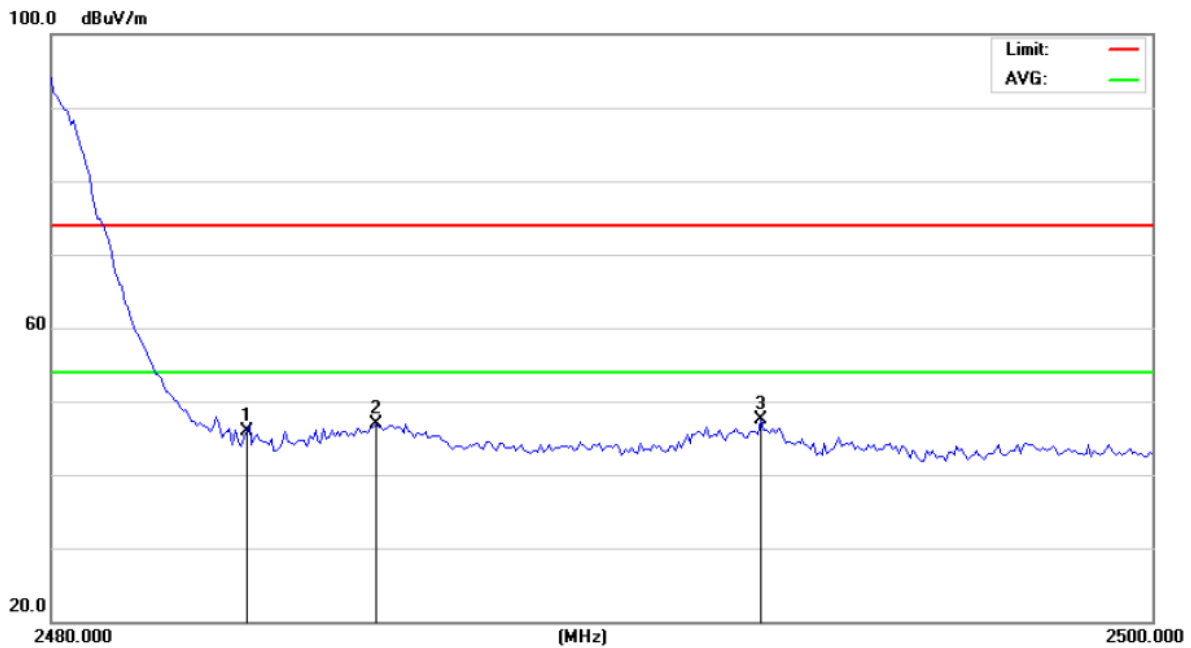

Site 843

Polarization: *Horizontal*

Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: AC 120V/60Hz

Humidity: 60.6 %

Mode: TX2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		2483.500	50.05	-4.19	45.86	74.00	-28.14	peak		
2		2485.883	51.16	-4.18	46.98	74.00	-27.02	peak		
3	*	2492.882	51.58	-4.14	47.44	74.00	-26.56	peak		


*:Maximum data x:Over limit !:over margin

⟨Reference Only



Report No.: E01A22060794F00101

48 of 57

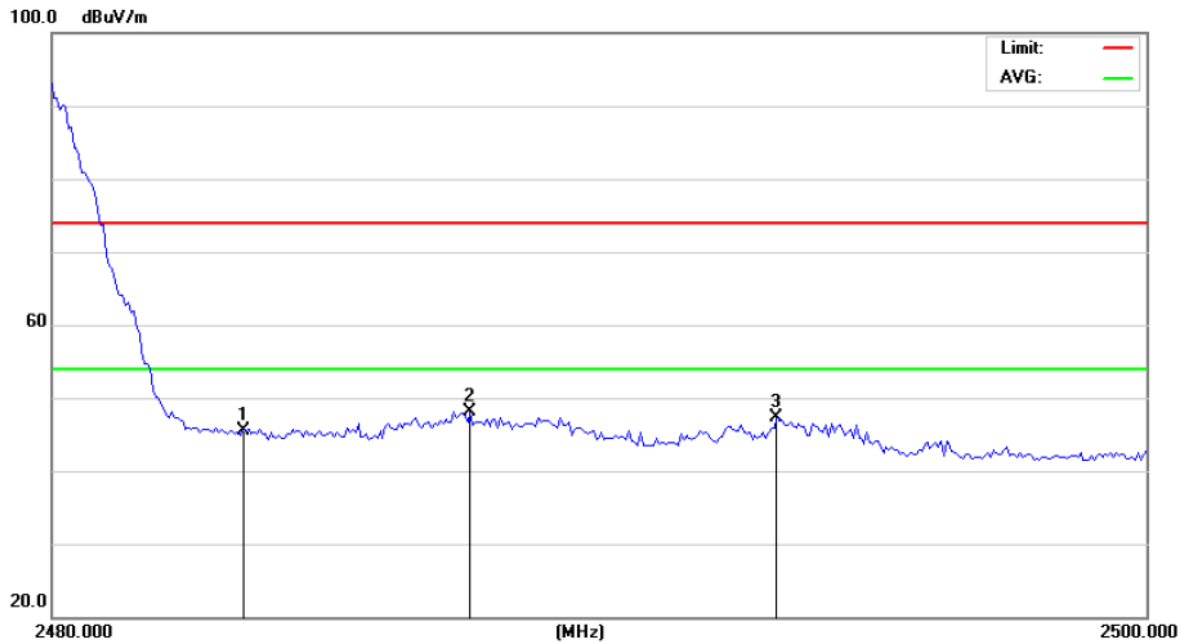

Site 843

Polarization: **Vertical**

Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: AC 120V/60Hz

Humidity: 60.6 %

Mode: TX2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2483.500	49.64	-4.19	45.45	74.00	-28.55	peak		
2	*	2487.631	52.35	-4.16	48.19	74.00	-25.81	peak		
3		2493.232	51.40	-4.14	47.26	74.00	-26.74	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only



12 Antenna Application

12.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:



Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.



12.2 Result



The EUT'S antenna is an PCB antenna. The antenna's gain is 1.3dBi and meets the requirement.



13 Photos of EUT

Model: EPCL-WIFI-RGBCW-WC-4INCH

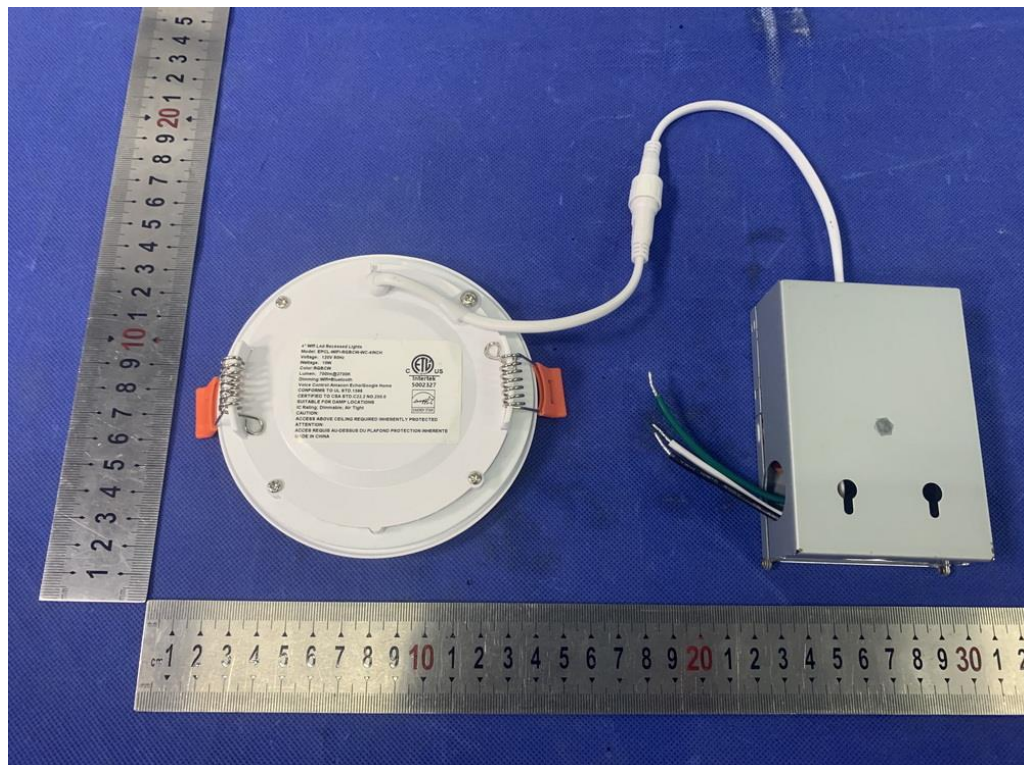
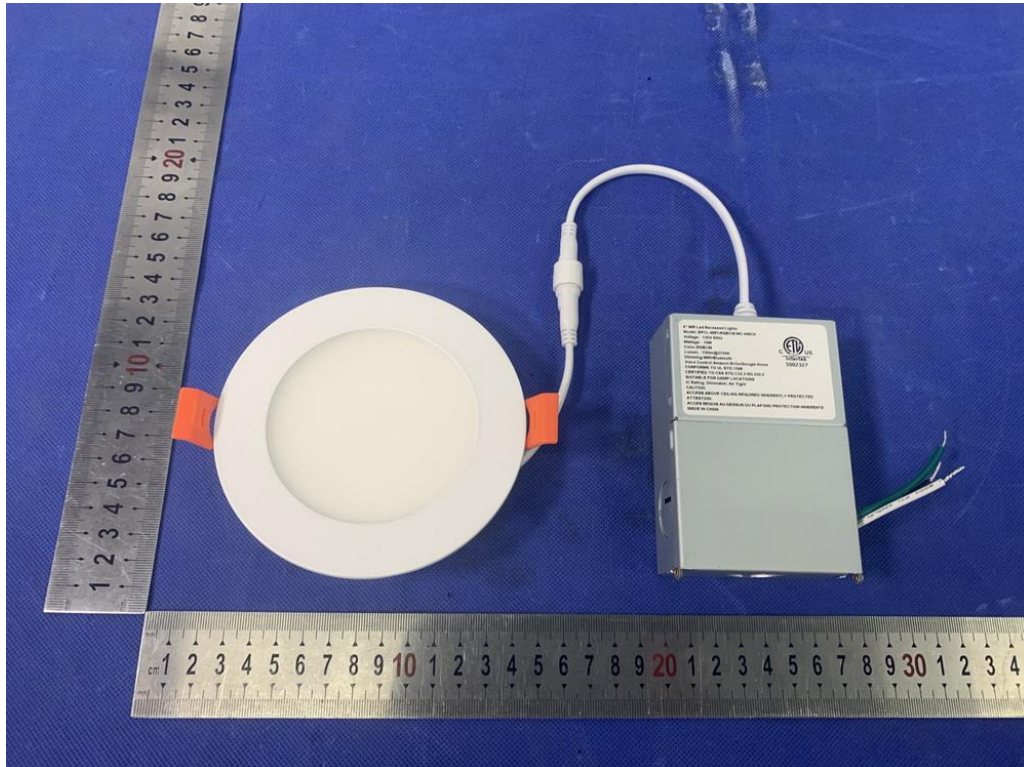


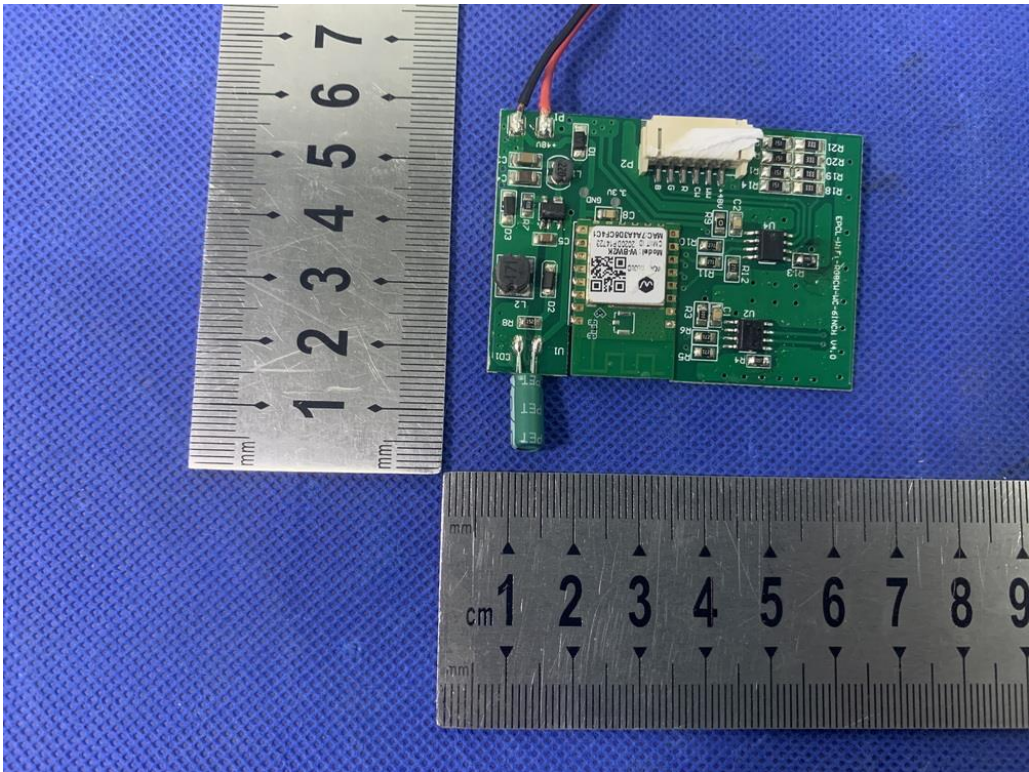
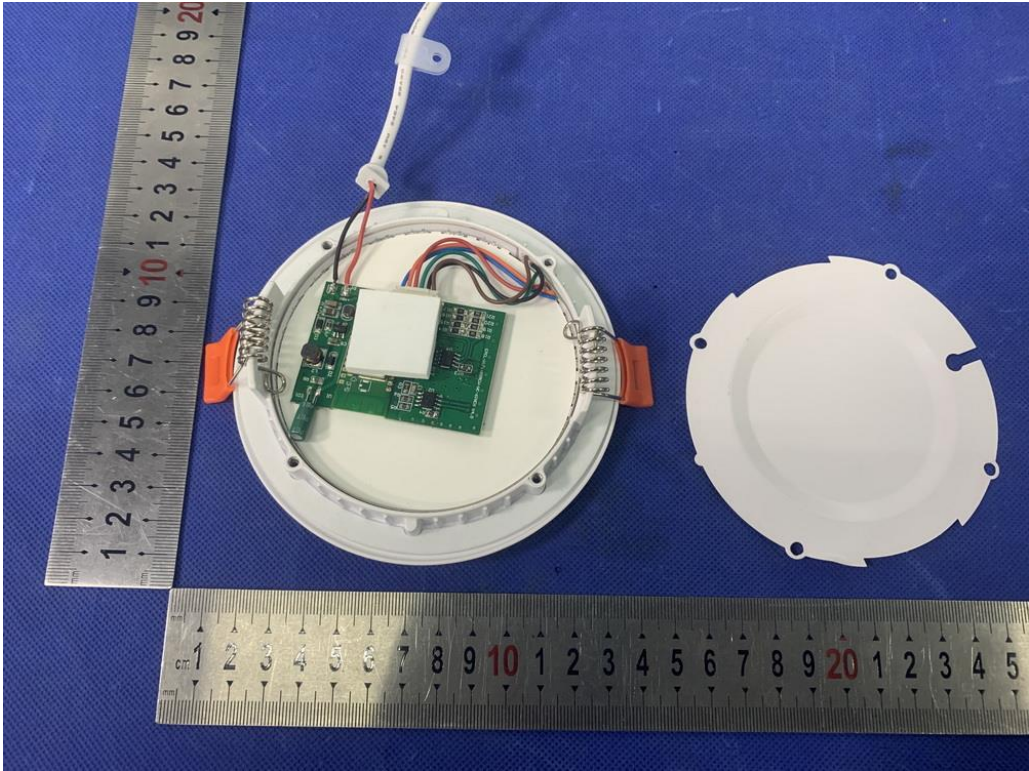


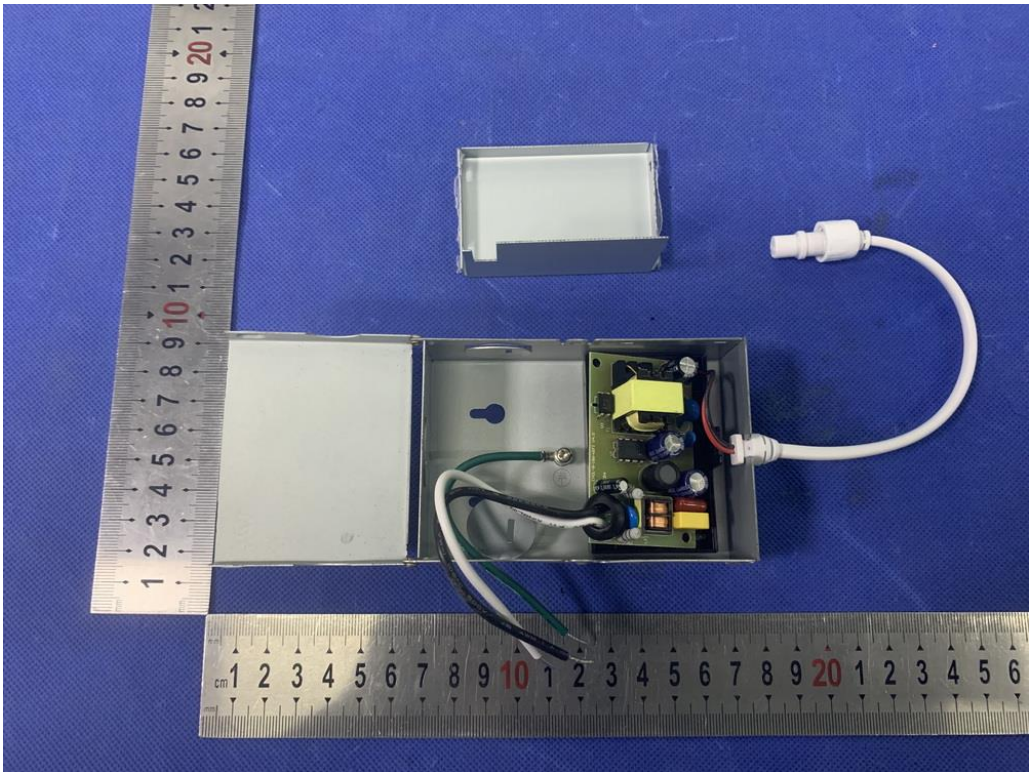
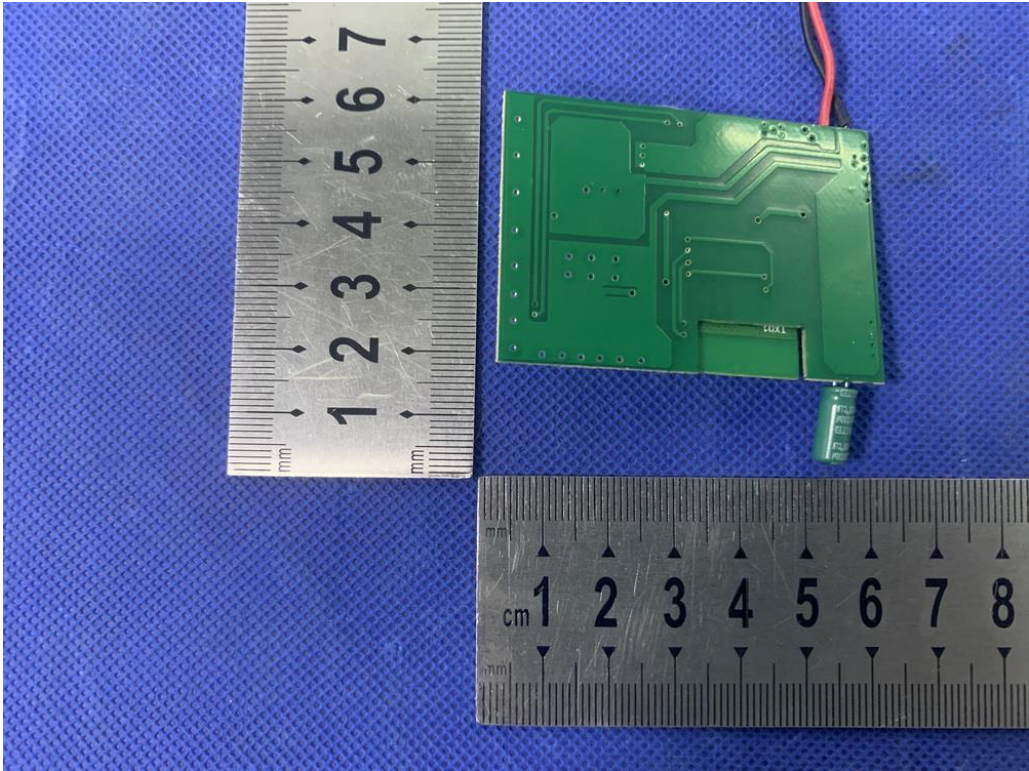


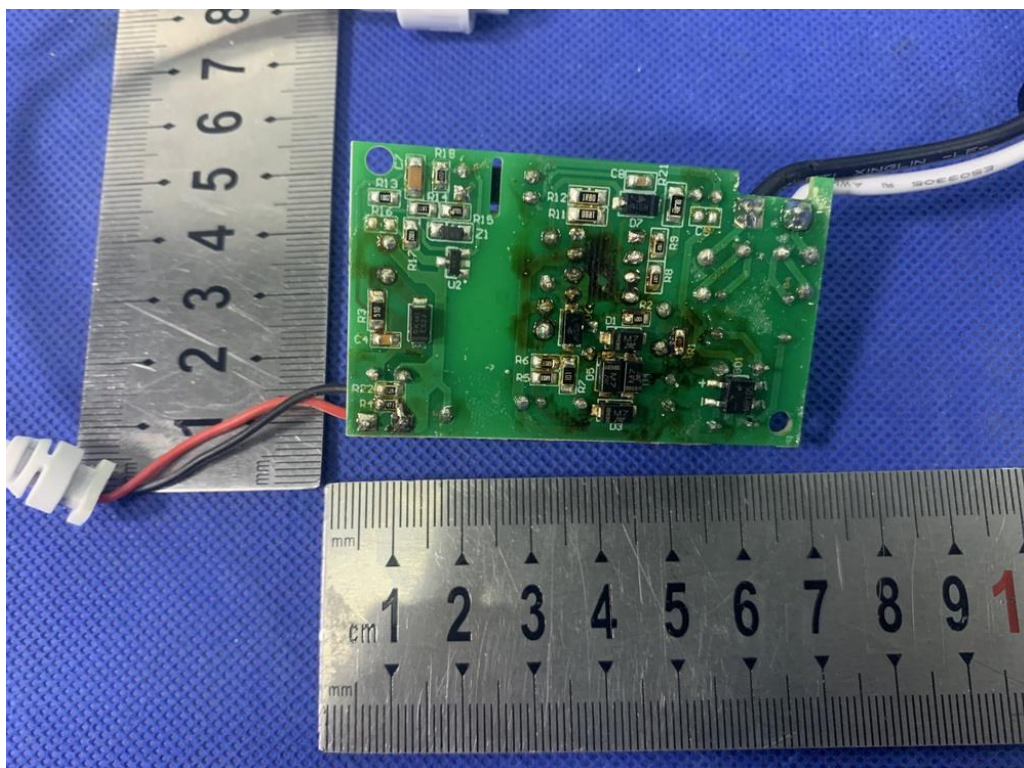
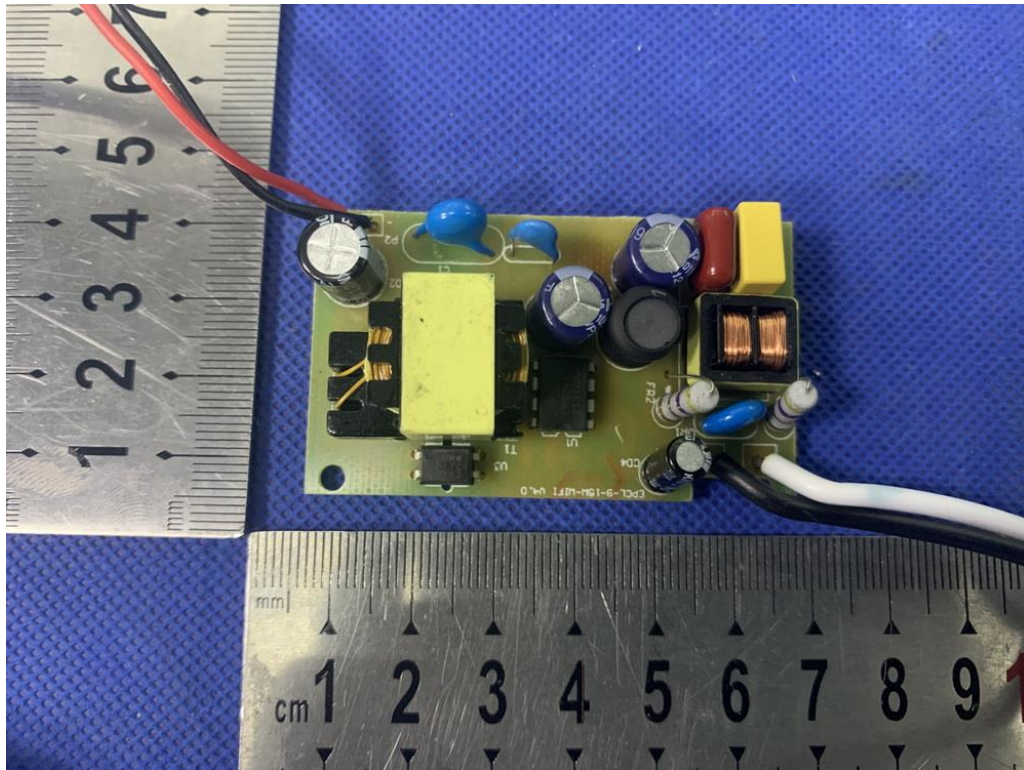


Model: EPCL-WIFI-RGBCW-WC-6INCH

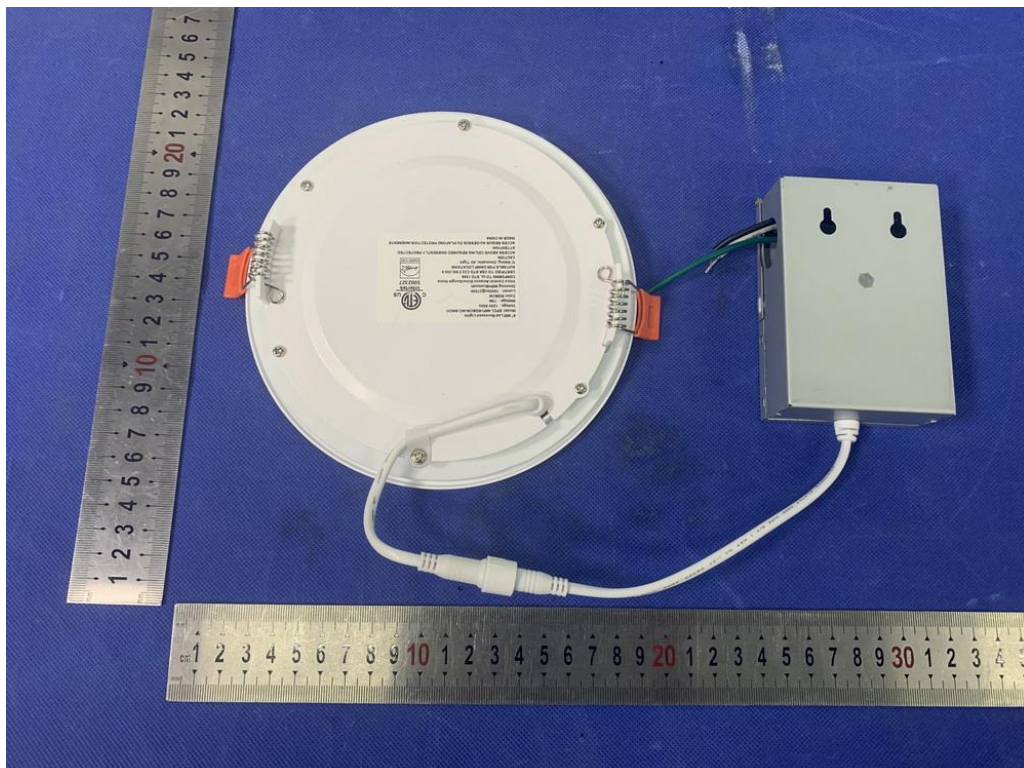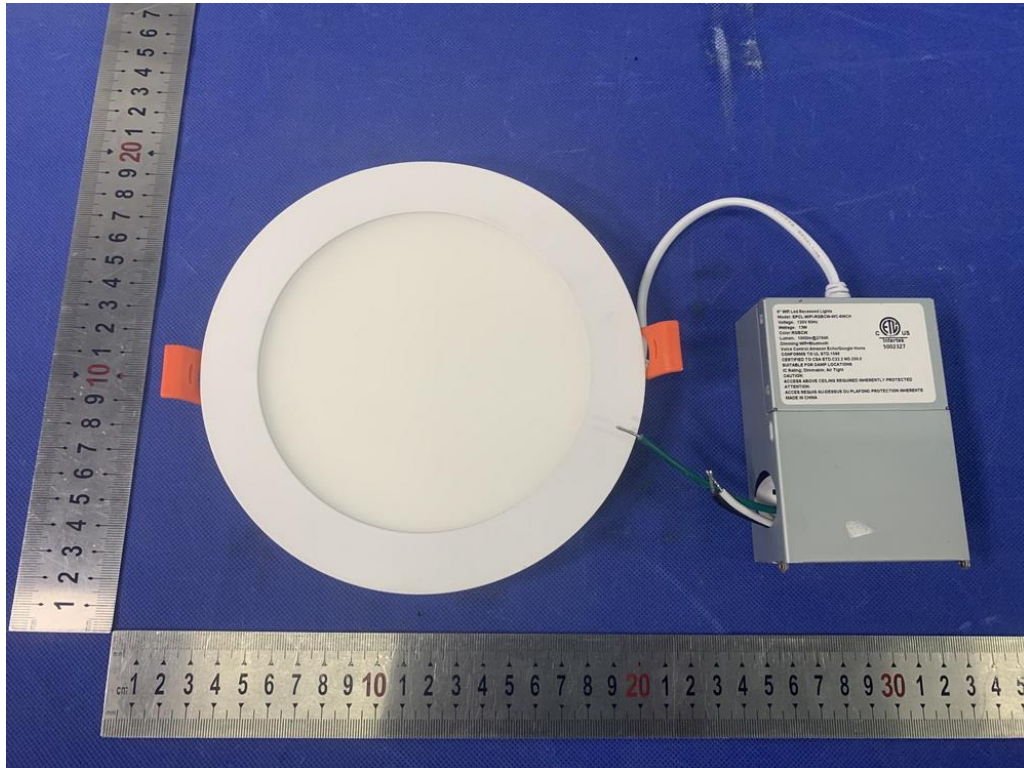

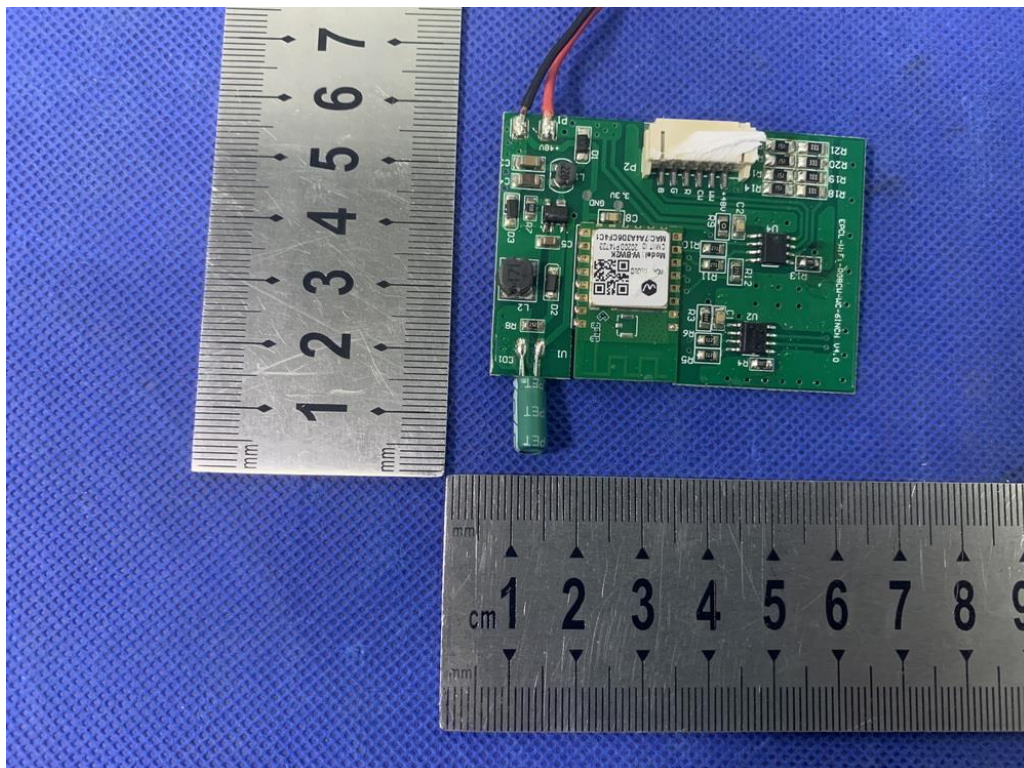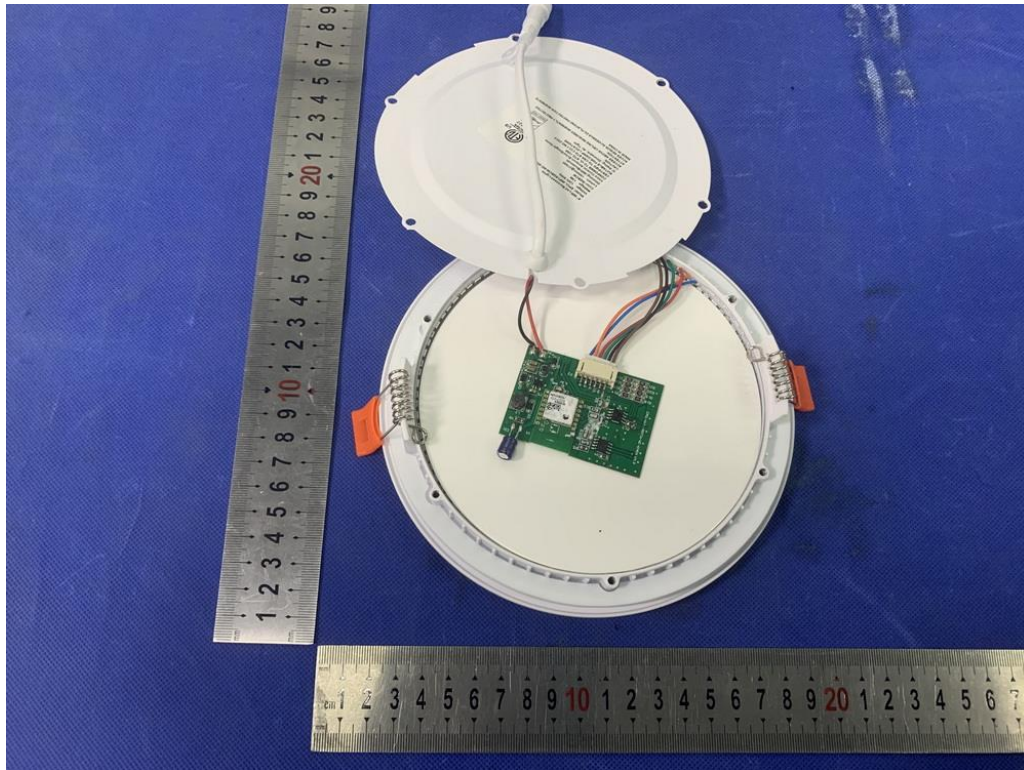

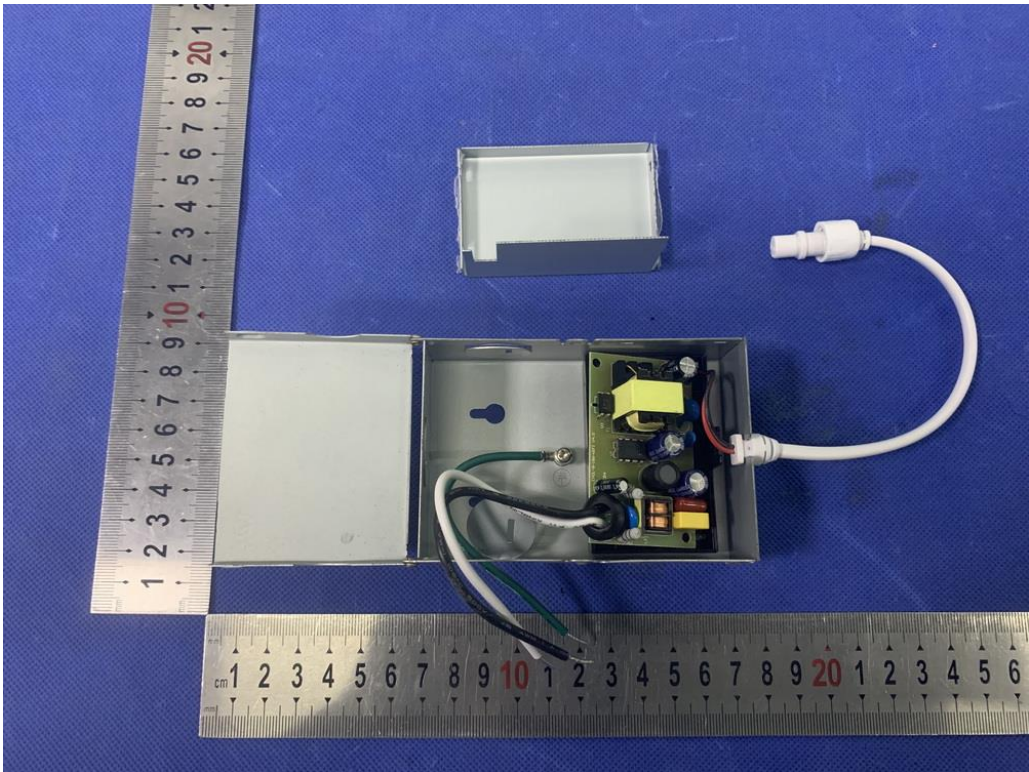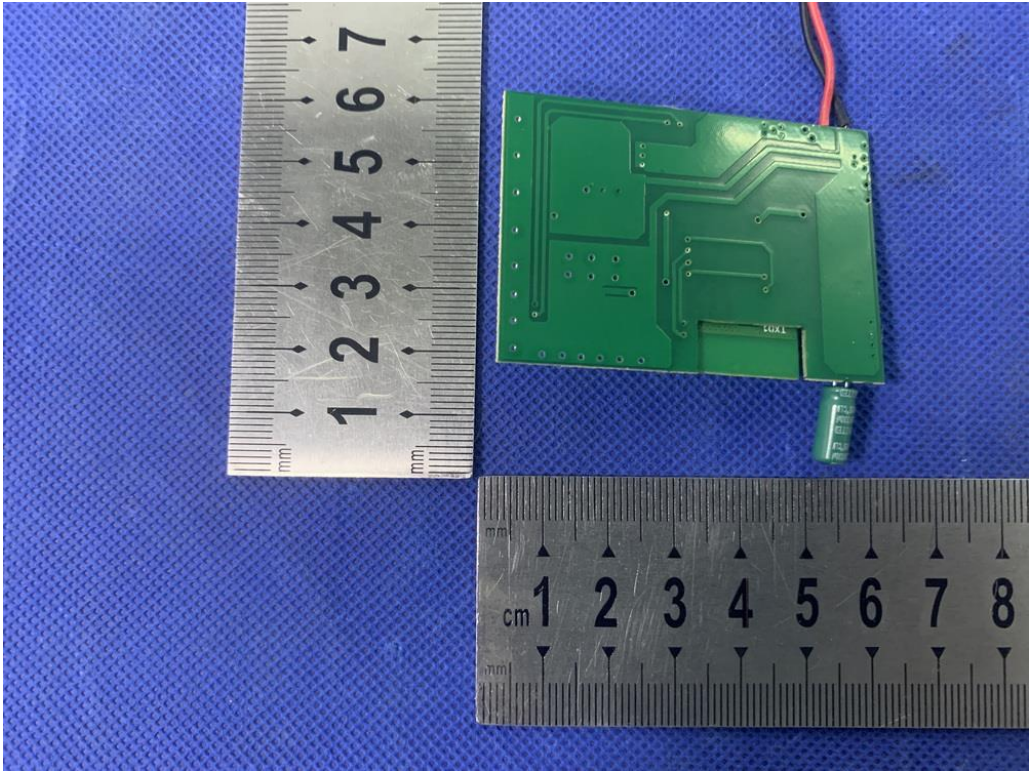

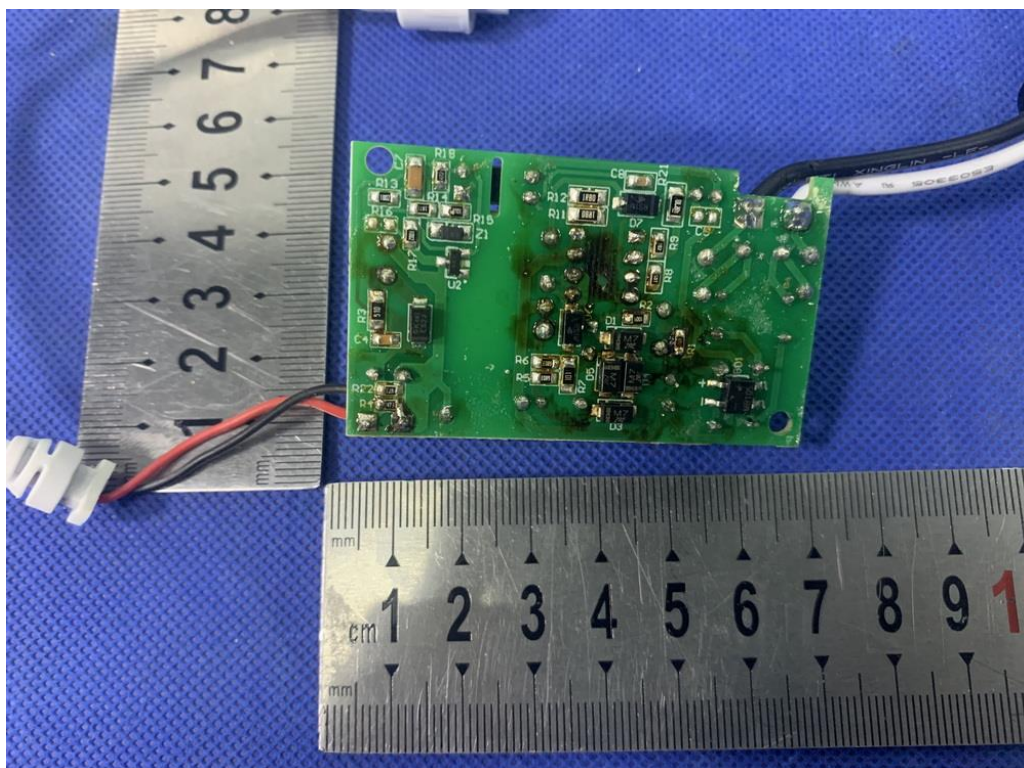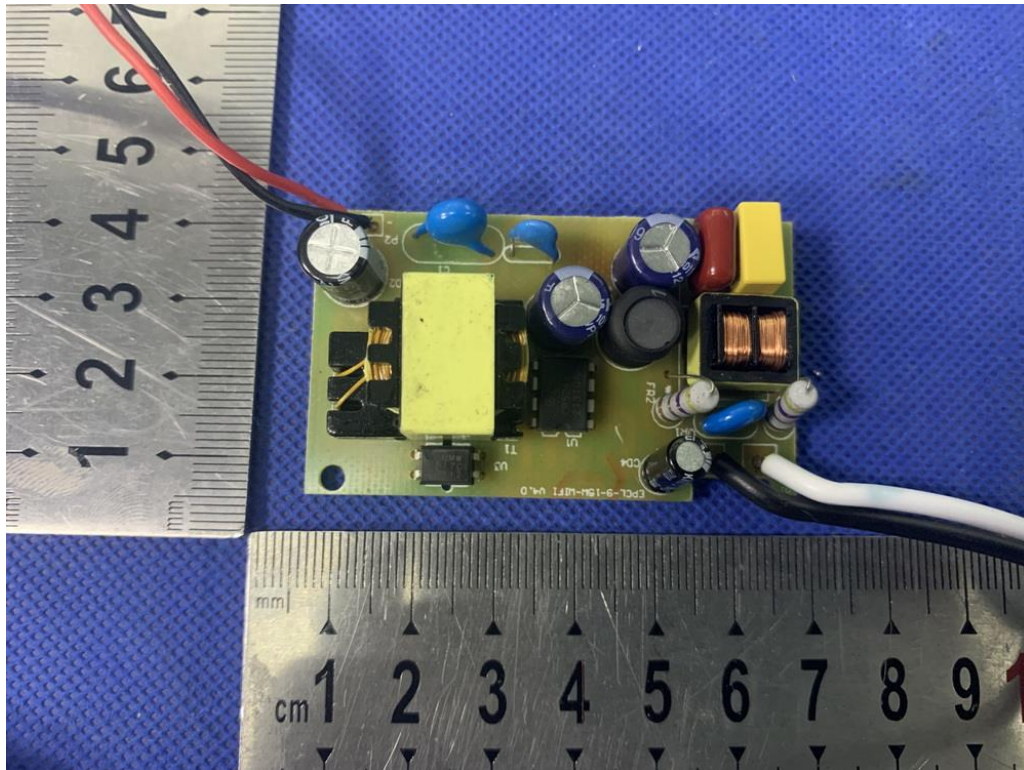

-----The end of report-----