

TEST REPORT

Product Name: Interactive Flat Panel
FCC ID: 2A6UD-W75A1
Trademark: HEYLUCK
Model Number: HK-W75A1, HK-D32XX, HK-D43XX, HK-D49XX, HK-D55XX, HK-D65XX, HK-D75XX, HK-D86XX, HK-W55XX, HK-W65XX, HK-W75XX, HK-W85XX, HK-W86XX, HK-W98XX, HK-W105XX, HK-W110XX, HK-S75XX, HK-S85XX, HK-S86XX, HK-S98XX
Prepared For: Shenzhen Heyluck Times Intelligent Technology Co., Ltd
Address: 508B, Floor 5, Warehouse # 10, Sungang Warehouse, No. 3039 Bao'an North Road, Tianxin Community, Sungang Street, Luohu District, Shenzhen, China
Manufacturer: Shenzhen Heyluck Times Intelligent Technology Co., Ltd
Address: 508B, Floor 5, Warehouse # 10, Sungang Warehouse, No. 3039 Bao'an North Road, Tianxin Community, Sungang Street, Luohu District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Oct. 27, 2021
Sample tested Date: Oct. 27, 2021 to Nov. 10, 2021
Issue Date: Apr. 10, 2022
Report No.: CTB211110037RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

He Xiaona

He Xiaona

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
8.4 Test Result	41
9. CONDUCTED OUTPUT POWER	49
9.1 Block Diagram Of Test Setup	49
9.2 Limit	49
9.3 Test procedure	49
9.4 Test Result	50
10. 6DB OCCUPIED BANDWIDTH	55
10.1 Block Diagram Of Test Setup	55
10.2 Limit	55
10.3 Test procedure	55
10.4 Test Result	55
11. POWER SPECTRAL DENSITY	61
11.1 Block Diagram Of Test Setup	61
11.2 Limit	61
11.3 Test procedure	61

11.4	Test Result	62
12.	ANTENNA REQUIREMENT	67
13.	EUT PHOTOGRAPHS	68
14.	EUT TEST SETUP PHOTOGRAPHS	69

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB211110037RFX	Apr. 10, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	HK-W75A1, HK-D32XX, HK-D43XX, HK-D49XX, HK-D55XX, HK-D65XX, HK-D75XX, HK-D86XX, HK-W55XX, HK-W65XX, HK-W75XX, HK-W85XX, HK-W86XX, HK-W98XX, HK-W105XX, HK-W110XX, HK-S75XX, HK-S85XX, HK-S86XX, HK-S98XX
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: HK-W75A1
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	SRC.WiFi_AP.02C
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 8.081dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: External Antenna
Antenna Gain:	WiFi (2.4G) : 1.0dBi
Ratings:	Input:100~240V~,50/60Hz, 4A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	notebook	DELL	Vostro 5490	/	AE
2	Keyboard	DELL	KB216t	/	AE
3	Mouse	DELL	MS116c	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY5209007 3	2020.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2020.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2020.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2020.09.27	2021.10.30
6	Signal Generator	Agilent	N5181A	MY4906092 0	2020.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY4742019 5	2020.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY5010256 7	2020.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-248 3.5MS-1154	2018101500 1	2020.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-585 0MS-1155	2018101500 1	2020.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA1 20	190821-1-1	2020.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2020.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2020.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2020.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2020.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2020.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2020.09.27	2022.08.05

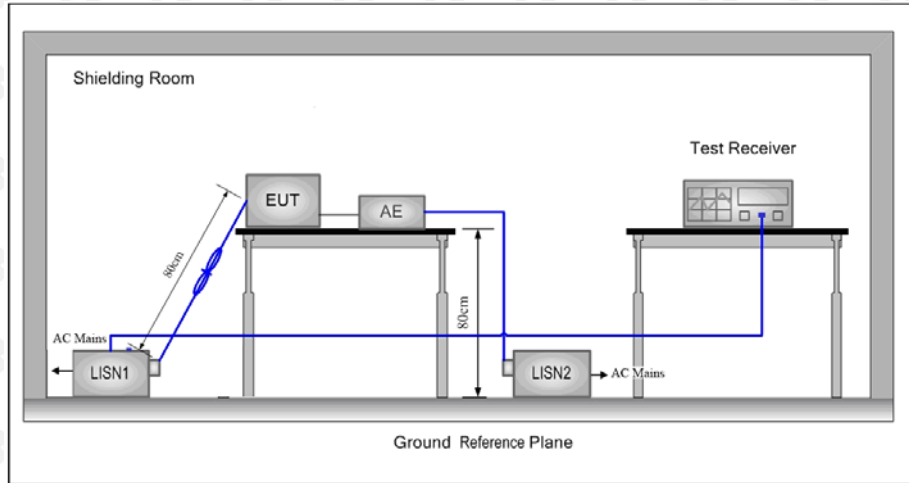
18	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2020.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2020.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2020.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2020.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2020.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2020.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2020.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2020.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2020.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2020.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2020.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2020.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A 1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2020.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2020.09.27	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2020.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2020.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2020.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2020.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2020.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup



6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

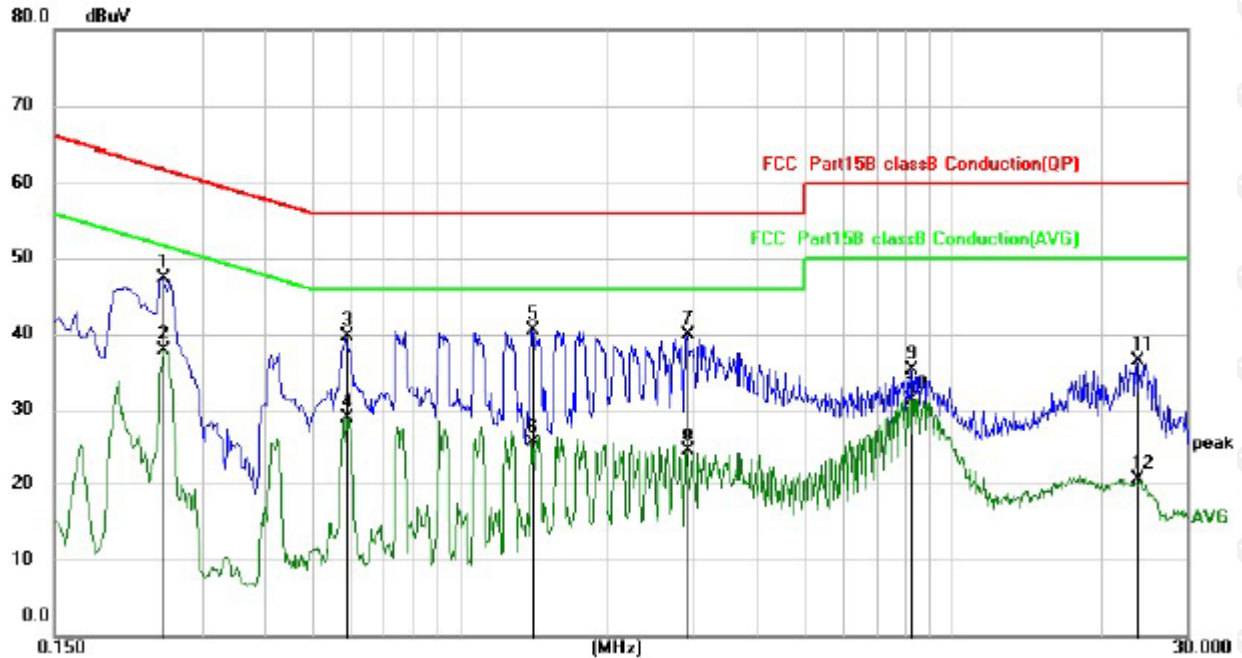
- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2500	37.44	9.96	47.40	61.76	-14.36	QP
2	*	0.2500	27.99	9.96	37.95	51.76	-13.81	AVG
3		0.5899	29.80	9.96	39.76	56.00	-16.24	QP
4		0.5899	18.97	9.96	28.93	46.00	-17.07	AVG
5		1.4060	30.53	9.98	40.51	56.00	-15.49	QP
6		1.4060	15.54	9.98	25.52	46.00	-20.48	AVG
7		2.9060	29.85	10.06	39.91	56.00	-16.09	QP
8		2.9060	14.16	10.06	24.22	46.00	-21.78	AVG
9		8.2020	24.67	10.57	35.24	60.00	-24.76	QP
10		8.2020	20.72	10.57	31.29	50.00	-18.71	AVG
11		23.7220	25.40	11.20	36.60	60.00	-23.40	QP
12		23.7220	9.28	11.20	20.48	50.00	-29.52	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

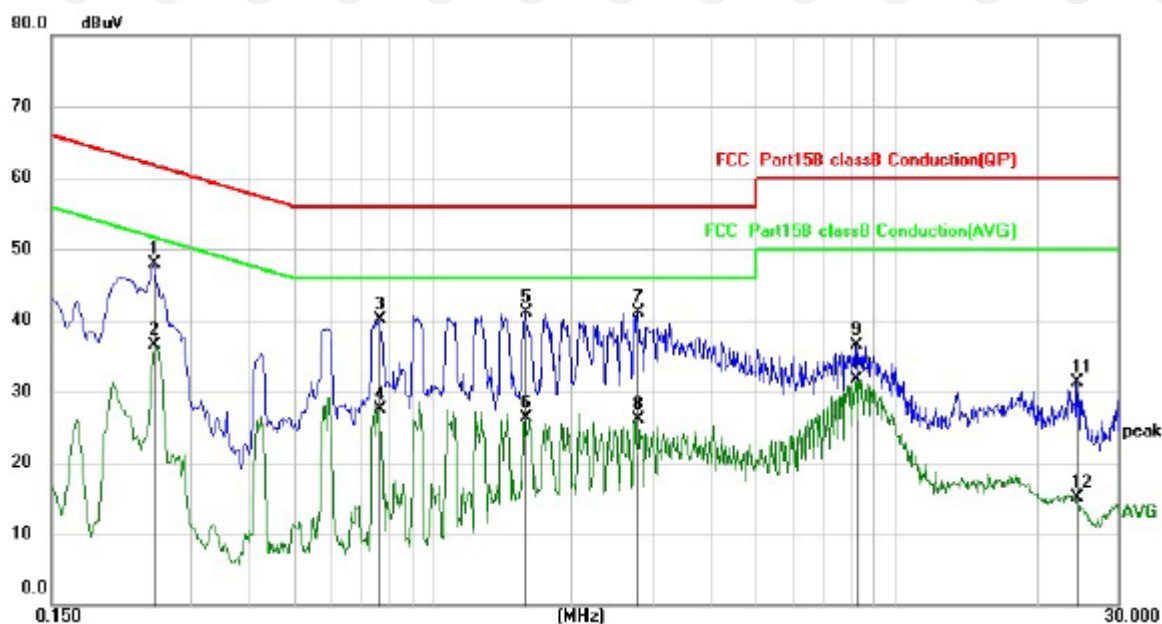Test Specification: Neutral
AC 120V 60Hz



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.2500	37.89	9.96	47.85	61.76	-13.91	QP
2		0.2500	26.56	9.96	36.52	51.76	-15.24	AVG
3		0.7660	30.11	9.96	40.07	56.00	-15.93	QP
4		0.7660	17.53	9.96	27.49	46.00	-18.51	AVG
5		1.5859	31.17	9.99	41.16	56.00	-14.84	QP
6		1.5859	16.41	9.99	26.40	46.00	-19.60	AVG
7		2.7700	31.06	10.05	41.11	56.00	-14.89	QP
8		2.7700	16.02	10.05	26.07	46.00	-19.93	AVG
9		8.2020	25.90	10.57	36.47	60.00	-23.53	QP
10		8.2020	21.23	10.57	31.80	50.00	-18.20	AVG
11		24.4580	20.01	11.21	31.22	60.00	-28.78	QP
12		24.4580	3.84	11.21	15.05	50.00	-34.95	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

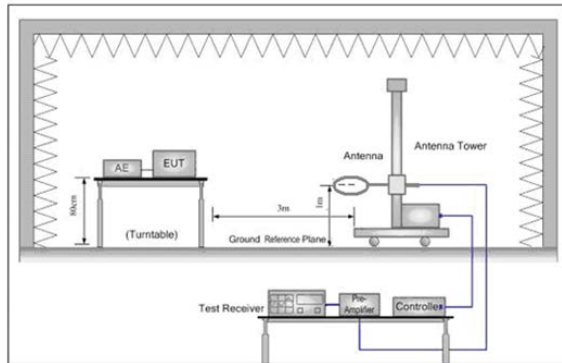


Figure 1. Below 30MHz

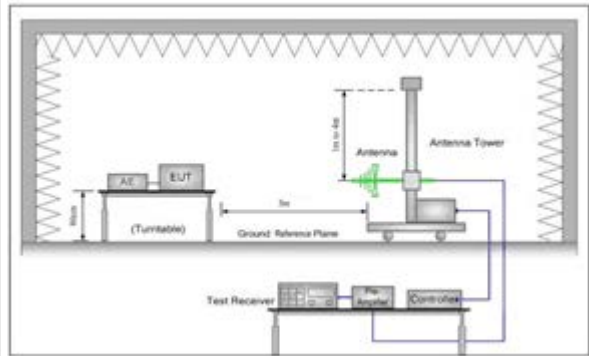


Figure 2. 30MHz to 1GHz

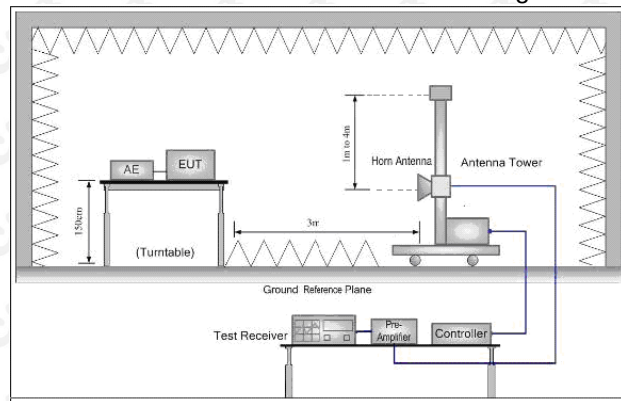


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:

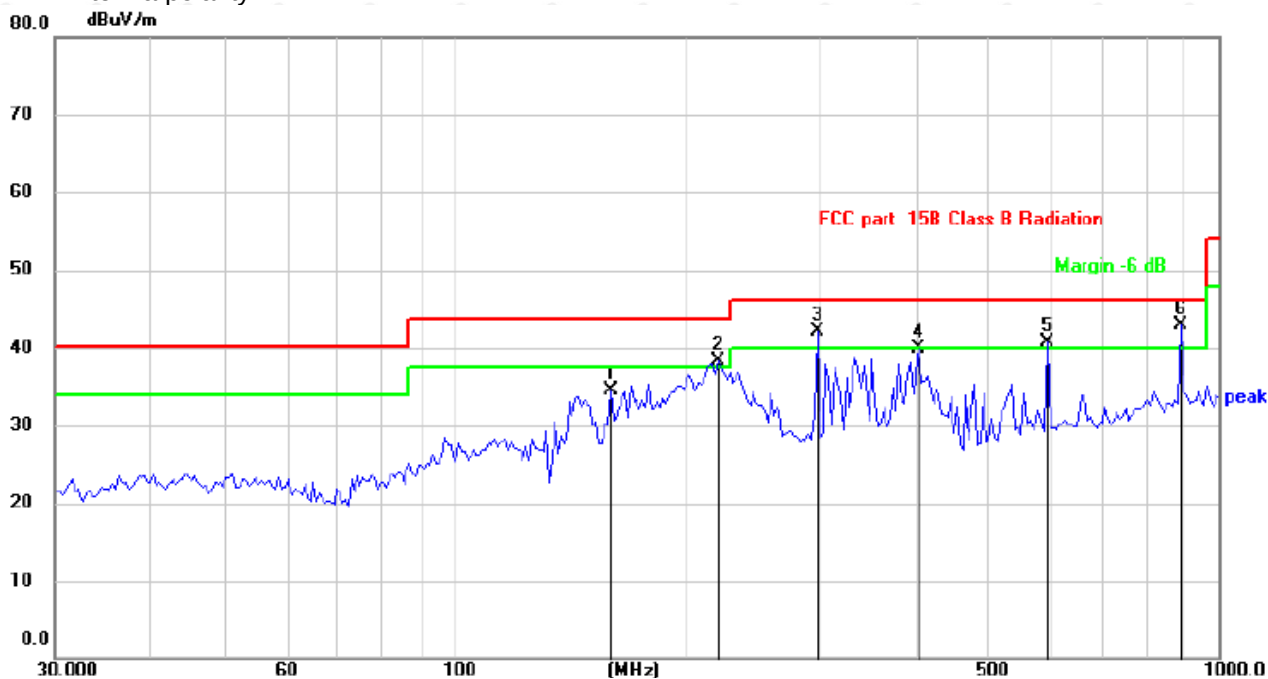
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		160.0646	40.12	-5.57	34.55	43.50	-8.95	QP
2	!	221.3917	44.89	-6.58	38.31	43.50	-5.19	QP
3	!	298.2681	47.39	-5.24	42.15	46.00	-3.85	QP
4		405.3765	41.44	-1.55	39.89	46.00	-6.11	QP
5	!	596.1770	38.23	2.50	40.73	46.00	-5.27	QP
6	*	892.2907	36.62	6.20	42.82	46.00	-3.18	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

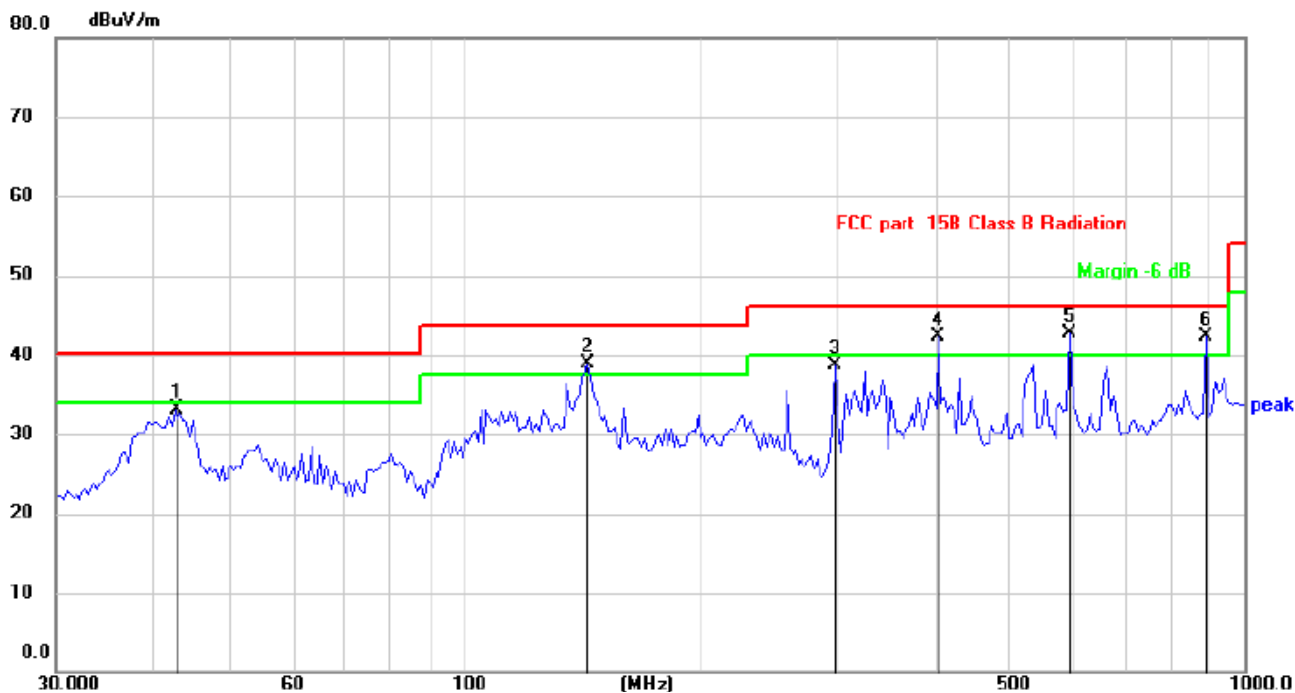Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		42.6000	38.40	-5.37	33.03	40.00	-6.97	QP
2	!	144.0817	44.31	-5.46	38.85	43.50	-4.65	QP
3		298.2681	44.01	-5.24	38.77	46.00	-7.23	QP
4	!	405.3765	43.85	-1.55	42.30	46.00	-3.70	QP
5	*	596.1770	40.20	2.50	42.70	46.00	-3.30	QP
6	!	892.2907	36.02	6.20	42.22	46.00	-3.78	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.06	-3.64	60.42	74	-13.58	peak
4824	50.88	-3.64	47.24	54	-6.76	AVG
7236	58.10	-0.95	57.15	74	-16.85	peak
7236	44.57	-0.95	43.62	54	-10.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.33	-3.64	62.69	74	-11.31	peak
4824	48.23	-3.64	44.59	54	-9.41	AVG
7236	57.61	-0.95	56.66	74	-17.34	peak
7236	43.36	-0.95	42.41	54	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.86	-3.51	61.35	74	-12.65	peak
4874	48.14	-3.51	44.63	54	-9.37	AVG
7311	59.32	-0.82	58.50	74	-15.50	peak
7311	45.29	-0.82	44.47	54	-9.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.41	-3.51	60.90	74	-13.10	peak
4874	49.31	-3.51	45.80	54	-8.20	AVG
7311	58.19	-0.82	57.37	74	-16.63	peak
7311	43.35	-0.82	42.53	54	-11.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.70	-3.43	60.27	74	-13.73	peak
4924	47.14	-3.43	43.71	54	-10.29	AVG
7386	58.56	-0.75	57.81	74	-16.19	peak
7386	42.41	-0.75	41.66	54	-12.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.74	-3.43	61.31	74	-12.69	peak
4924	46.86	-3.43	43.43	54	-10.57	AVG
7386	58.99	-0.75	58.24	74	-15.76	peak
7386	41.67	-0.75	40.92	54	-13.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.86	-3.64	60.22	74	-13.78	peak
4824	48.34	-3.64	44.70	54	-9.30	AVG
7236	58.26	-0.95	57.31	74	-16.69	peak
7236	45.50	-0.95	44.55	54	-9.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.25	-3.64	59.61	74	-14.39	peak
4824	46.50	-3.64	42.86	54	-11.14	AVG
7236	59.23	-0.95	58.28	74	-15.72	peak
7236	42.73	-0.95	41.78	54	-12.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.91	-3.51	59.40	74	-14.60	peak
4874	46.73	-3.51	43.22	54	-10.78	AVG
7311	59.86	-0.82	59.04	74	-14.96	peak
7311	44.47	-0.82	43.65	54	-10.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.96	-3.51	60.45	74	-13.55	peak
4874	48.44	-3.51	44.93	54	-9.07	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	43.10	-0.82	42.28	54	-11.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.49	-3.43	60.06	74	-13.94	peak
4924	48.08	-3.43	44.65	54	-9.35	AVG
7386	58.76	-0.75	58.01	74	-15.99	peak
7386	42.84	-0.75	42.09	54	-11.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.13	-3.43	59.70	74	-14.30	peak
4924	47.67	-3.43	44.24	54	-9.76	AVG
7386	57.02	-0.75	56.27	74	-17.73	peak
7386	41.35	-0.75	40.60	54	-13.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.30	-3.64	60.66	74	-13.34	peak
4824	49.28	-3.64	45.64	54	-8.36	AVG
7236	57.58	-0.95	56.63	74	-17.37	peak
7236	43.23	-0.95	42.28	54	-11.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.20	-3.64	58.56	74	-15.44	peak
4824	47.13	-3.64	43.49	54	-10.51	AVG
7236	58.01	-0.95	57.06	74	-16.94	peak
7236	42.41	-0.95	41.46	54	-12.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	65.65	-3.51	62.14	74.00	-11.86	peak
4874.00	50.31	-3.51	46.80	54.00	-7.20	AVG
7311.00	57.52	-0.82	56.70	74.00	-17.30	peak
7311.00	42.94	-0.82	42.12	54.00	-11.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.12	-3.51	58.61	74.00	-15.39	peak
4874.00	48.54	-3.51	45.03	54.00	-8.97	AVG
7311.00	58.85	-0.82	58.03	74.00	-15.97	peak
7311.00	44.01	-0.82	43.19	54.00	-10.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.85	-3.43	58.42	74	-15.58	peak
4924	46.41	-3.43	42.98	54	-11.02	AVG
7386	56.90	-0.75	56.15	74	-17.85	peak
7386	43.13	-0.75	42.38	54	-11.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.99	-3.43	59.56	74	-14.44	peak
4924	46.09	-3.43	42.66	54	-11.34	AVG
7386	56.07	-0.75	55.32	74	-18.68	peak
7386	43.97	-0.75	43.22	54	-10.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.33	-3.63	60.70	74	-13.30	peak
4844	48.26	-3.63	44.63	54	-9.37	AVG
7266	59.33	-0.94	58.39	74	-15.61	peak
7266	44.34	-0.94	43.40	54	-10.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.78	-3.63	62.15	74	-11.85	peak
4844	48.05	-3.63	44.42	54	-9.58	AVG
7266	58.49	-0.94	57.55	74	-16.45	peak
7266	44.79	-0.94	43.85	54	-10.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.75	-3.51	59.24	74	-14.76	peak
4874	49.09	-3.51	45.58	54	-8.42	AVG
7311	59.23	-0.82	58.41	74	-15.59	peak
7311	43.87	-0.82	43.05	54	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.45	-3.51	42.94	54	-11.06	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.28	-0.82	42.46	54	-11.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.99	-3.43	59.56	74	-14.44	peak
4904	48.77	-3.43	45.34	54	-8.66	AVG
7356	56.18	-0.75	55.43	74	-18.57	peak
7356	43.63	-0.75	42.88	54	-11.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.32	-3.43	58.89	74	-15.11	peak
4904	46.36	-3.43	42.93	54	-11.07	AVG
7356	56.26	-0.75	55.51	74	-18.49	peak
7356	44.80	-0.75	44.05	54	-9.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.89	-5.81	51.08	74	-22.92	peak
2390	/	-5.81	/	54	/	AVG
2399	64.85	-5.84	59.01	74	-14.99	peak
2399	48.19	-5.84	42.35	54	-11.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.97	-5.81	50.16	74	-23.84	peak
2390	/	-5.81	/	54	/	AVG
2399	62.60	-5.84	56.76	74	-17.24	peak
2399	46.64	-5.84	40.80	54	-13.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.45	-5.65	51.80	74	-22.20	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.00	-5.65	51.35	74	-22.65	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.31	-5.81	52.50	74	-21.50	peak
2390	/	-5.81	/	54	/	AVG
2399	62.87	-5.84	57.03	74	-16.97	peak
2399	46.48	-5.84	40.64	54	-13.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.13	-5.81	50.32	74	-23.68	peak
2390	/	-5.81	/	54	/	AVG
2399	63.08	-5.84	57.24	74	-16.76	peak
2399	45.68	-5.84	39.84	54	-14.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.28	-5.65	51.63	74	-22.37	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.80	-5.81	50.99	74	-23.01	peak
2390	/	-5.81	/	54	/	AVG
2399	62.14	-5.84	56.30	74	-17.70	peak
2399	48.40	-5.84	42.56	54	-11.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.24	-5.81	51.43	74	-22.57	peak
2390	/	-5.81	/	54	/	AVG
2399	59.83	-5.84	53.99	74	-20.01	peak
2399	47.02	-5.84	41.18	54	-12.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.16	-5.65	51.51	74	-22.49	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.15	-5.81	53.34	74	-20.66	peak
2390	/	-5.81	/	54	/	AVG
2399	62.20	-5.84	56.36	74	-17.64	peak
2399	47.00	-5.84	41.16	54	-12.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.04	-5.81	51.23	74	-22.77	peak
2390	/	-5.81	/	54	/	AVG
2399	61.34	-5.84	55.50	74	-18.50	peak
2399	45.73	-5.84	39.89	54	-14.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.44	-5.65	50.79	74	-23.21	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.75	-5.65	52.10	74	-21.90	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

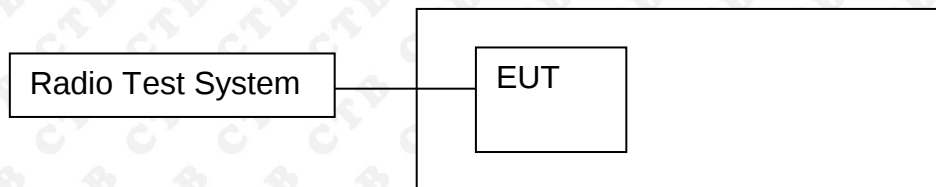8.1 Block Diagram Of Test Setup



8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

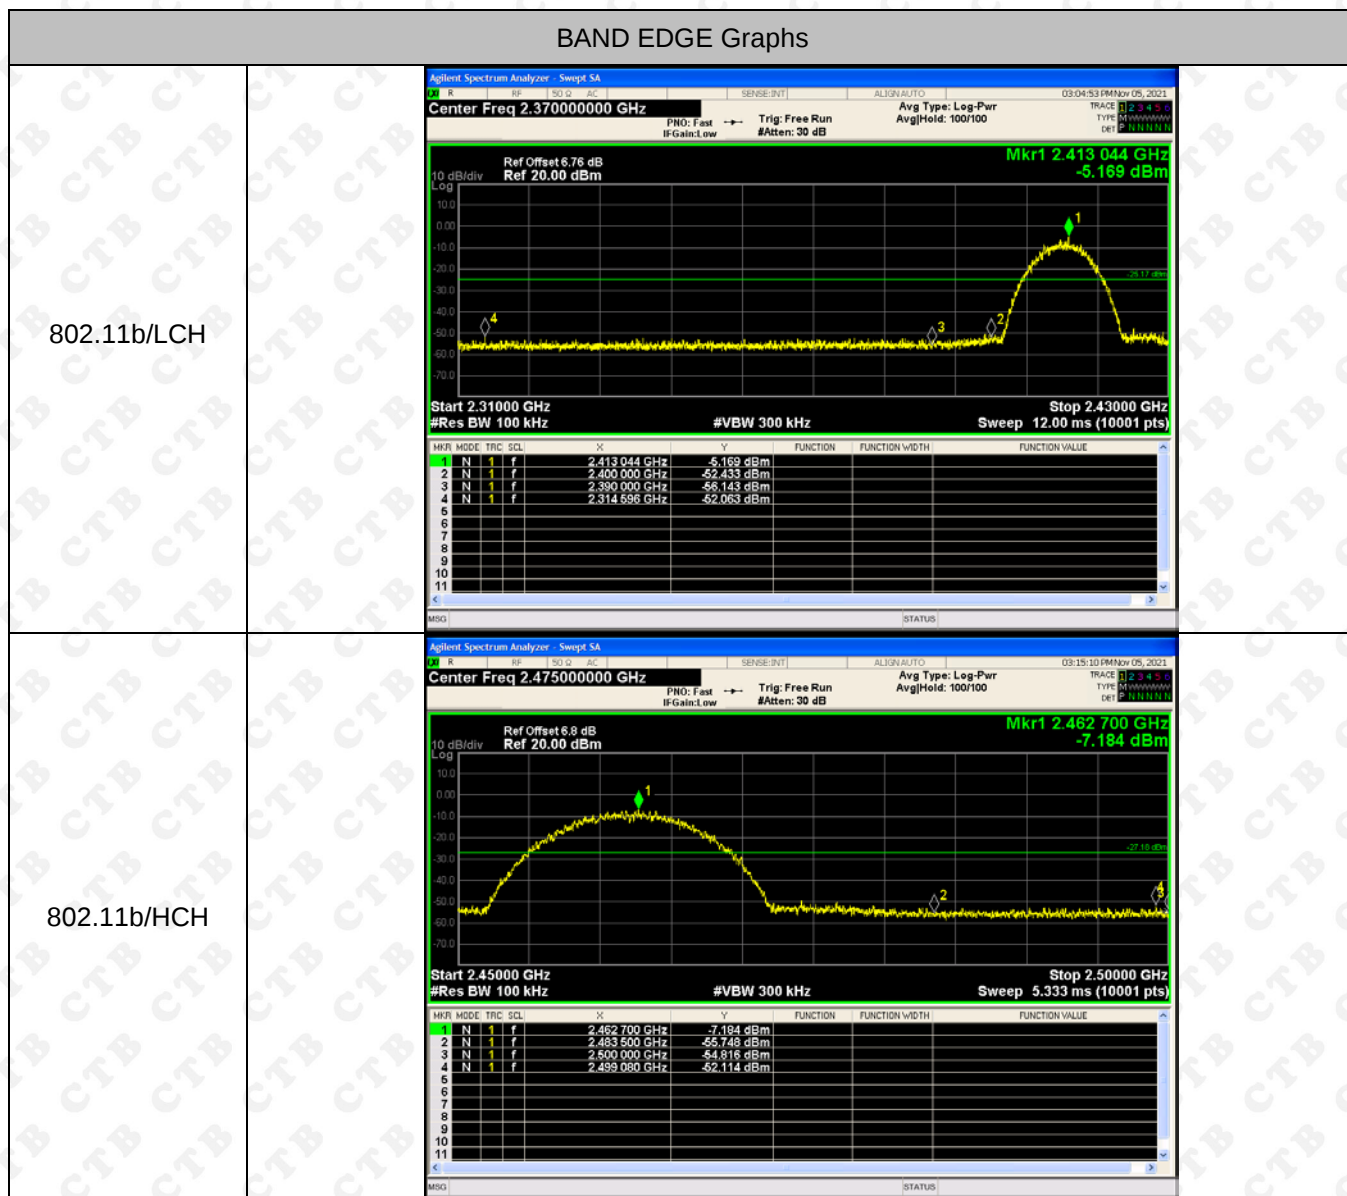
Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result




BAND EDGE Graphs

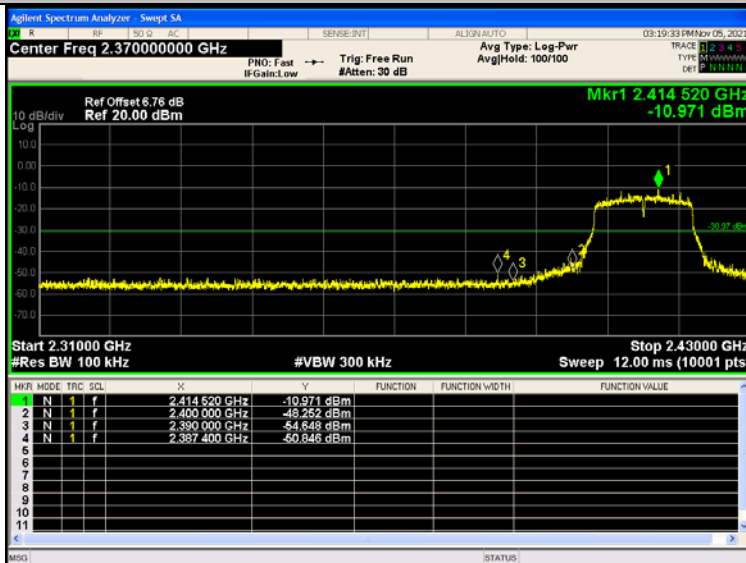802.11g/LCH




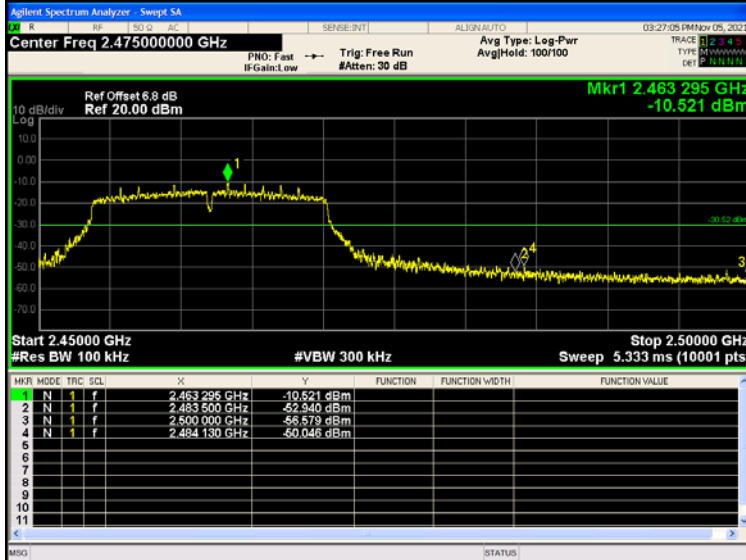802.11g/HCH





BAND EDGE Graphs

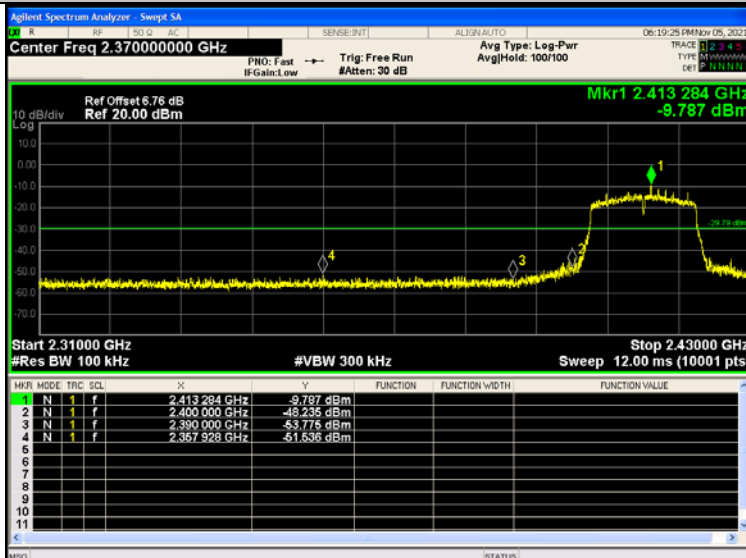802.11n(HT20)/L
CH






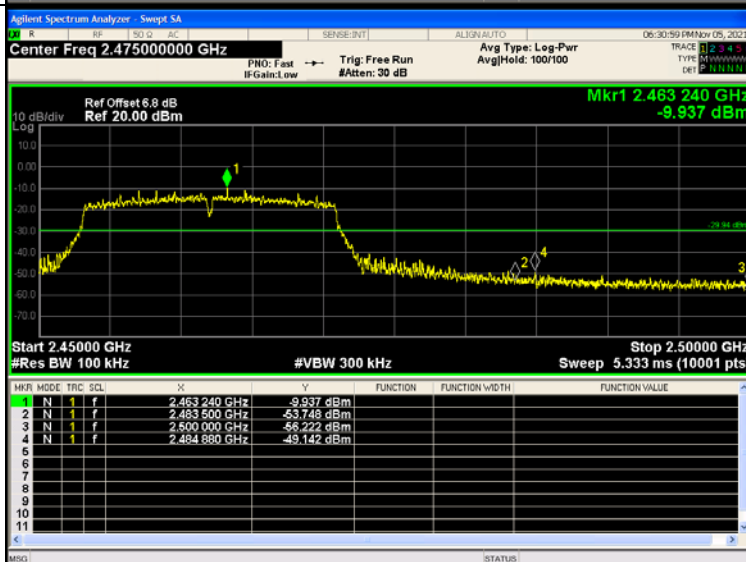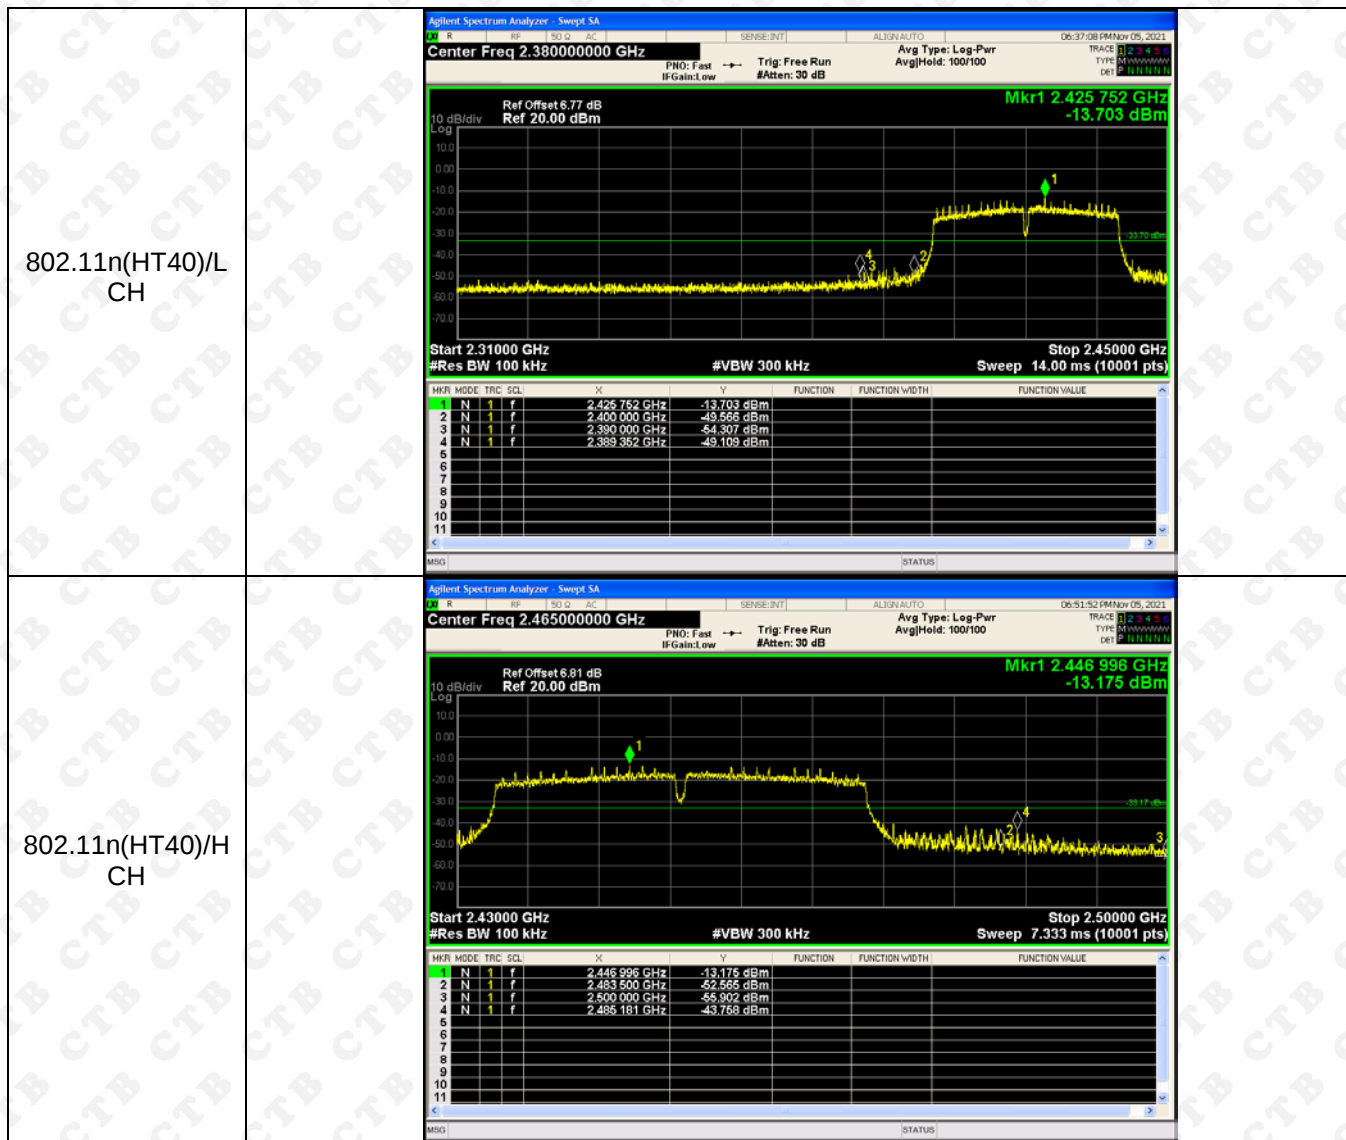802.11n(HT20)/H
CH








RF Conducted Spurious Emissions Graphs

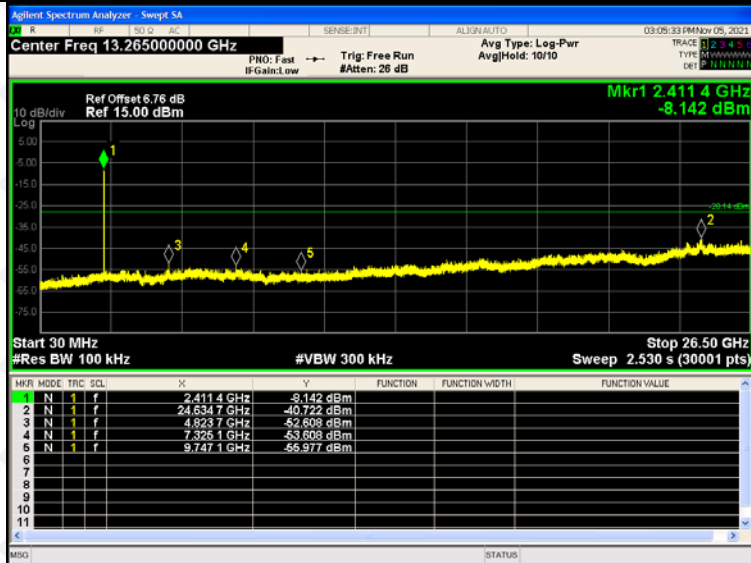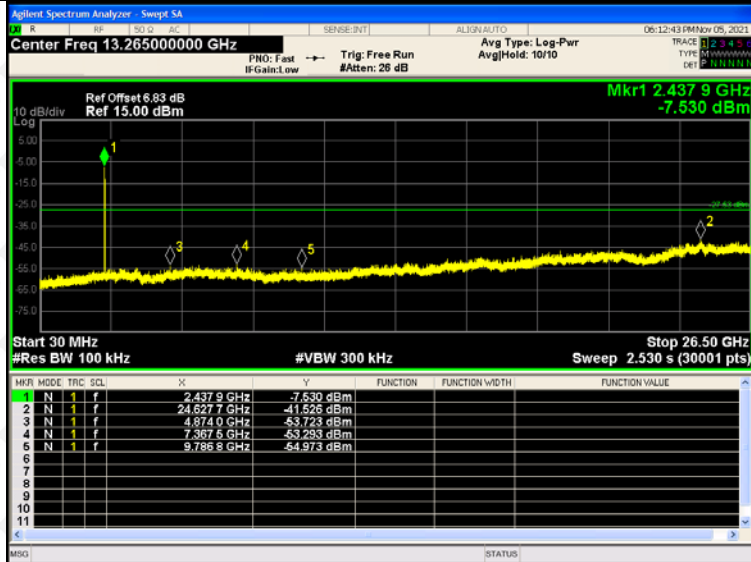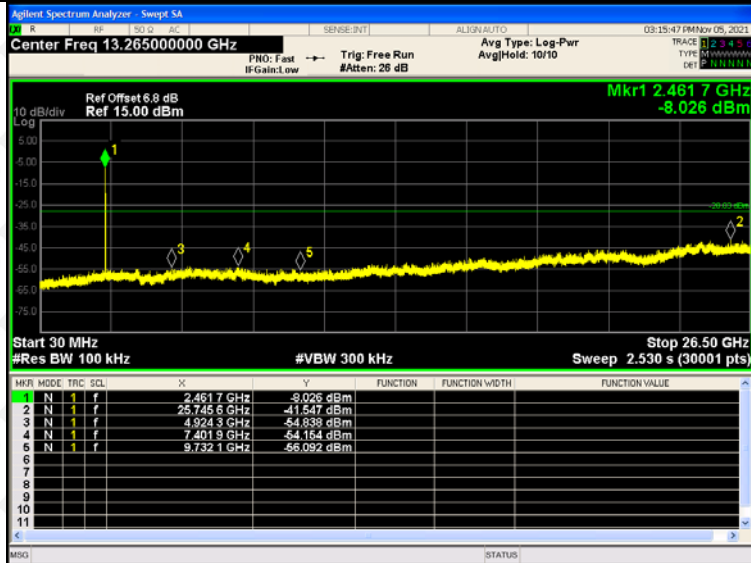
802.11b
/LCH

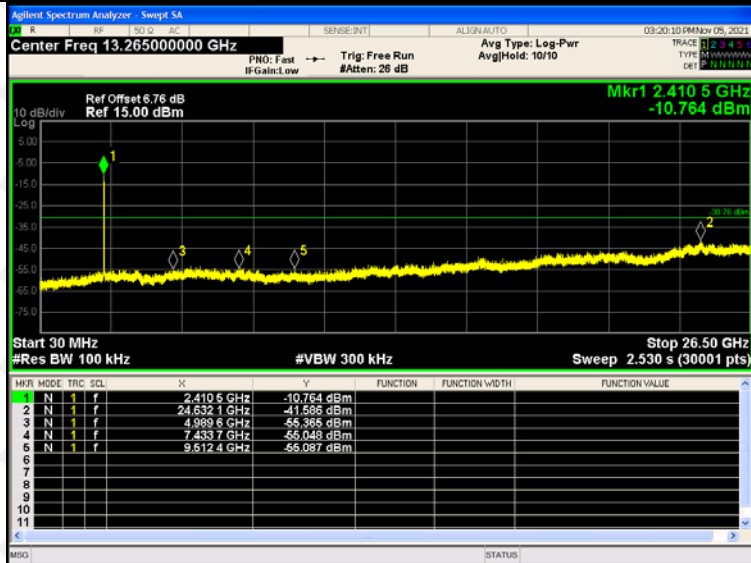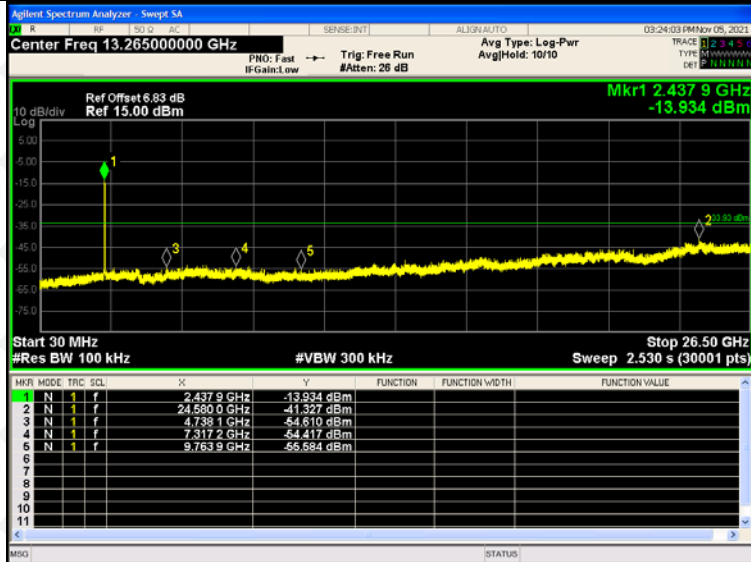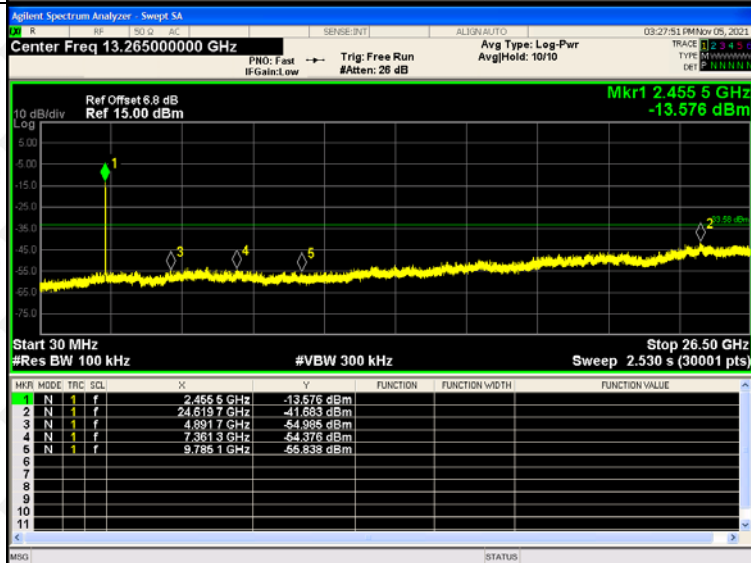802.11b
/MCH

802.11b
/HCH


RF Conducted Spurious Emissions Graphs

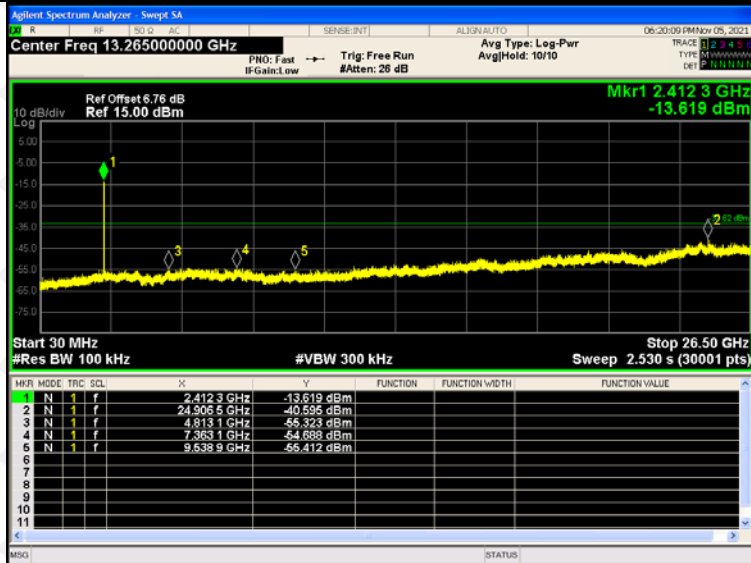
802.11g
/LCH

802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

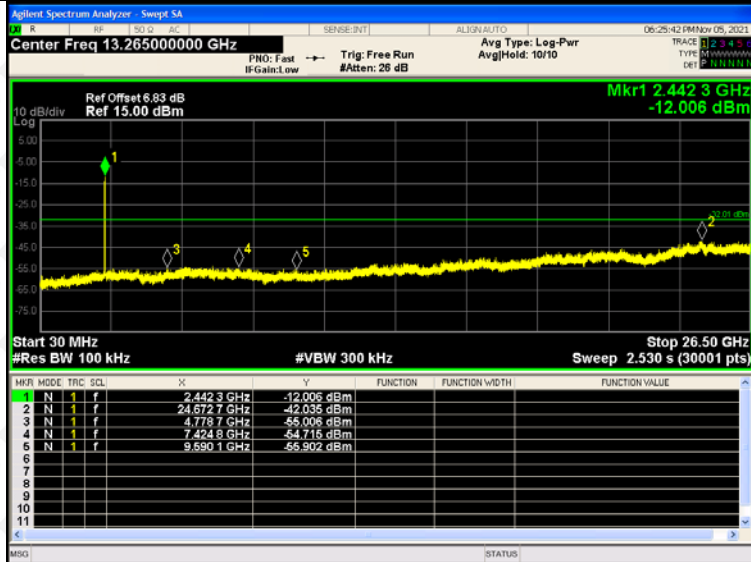
802.11n
(HT20)/
LCH



802.11
n(HT20)
/MCH



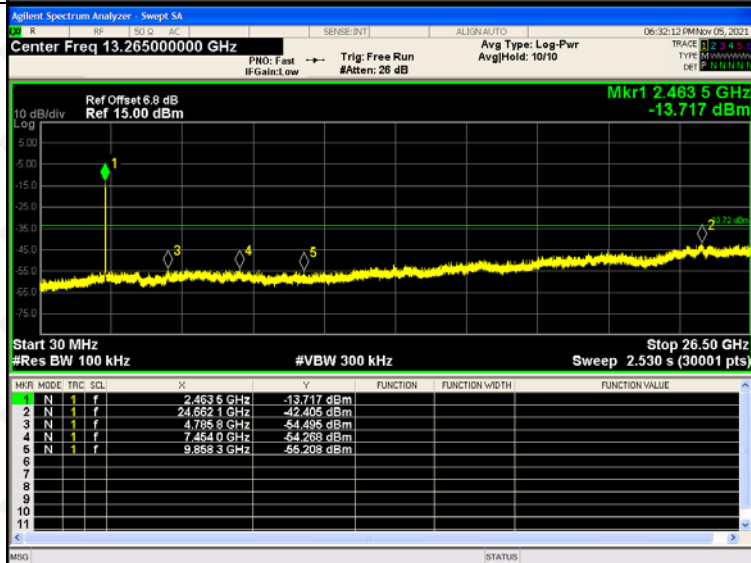802.11
n(HT20)
/HCH




RF Conducted Spurious Emissions Graphs

802.11 n(HT40) /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.77 dB Ref 15.00 dBm Mkr1 2.425 5 GHz -16.632 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.425 5 GHz</td><td>-16.632 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4511 GHz</td><td>-41.167 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.988 7 GHz</td><td>-55.033 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.426 6 GHz</td><td>-53.940 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.561 3 GHz</td><td>-55.113 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	-16.632 dBm				2	N	1	f	2.4511 GHz	-41.167 dBm				3	N	1	f	4.988 7 GHz	-55.033 dBm				4	N	1	f	7.426 6 GHz	-53.940 dBm				5	N	1	f	9.561 3 GHz	-55.113 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.425 5 GHz	-16.632 dBm																																																		
2	N	1	f	2.4511 GHz	-41.167 dBm																																																		
3	N	1	f	4.988 7 GHz	-55.033 dBm																																																		
4	N	1	f	7.426 6 GHz	-53.940 dBm																																																		
5	N	1	f	9.561 3 GHz	-55.113 dBm																																																		
802.11 n(HT40) /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.430 8 GHz -14.310 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.430 8 GHz</td><td>-14.310 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4554 GHz</td><td>-41.010 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.767 2 GHz</td><td>-54.764 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.369 2 GHz</td><td>-54.403 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.548 8 GHz</td><td>-55.249 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 8 GHz	-14.310 dBm				2	N	1	f	2.4554 GHz	-41.010 dBm				3	N	1	f	4.767 2 GHz	-54.764 dBm				4	N	1	f	7.369 2 GHz	-54.403 dBm				5	N	1	f	9.548 8 GHz	-55.249 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.430 8 GHz	-14.310 dBm																																																		
2	N	1	f	2.4554 GHz	-41.010 dBm																																																		
3	N	1	f	4.767 2 GHz	-54.764 dBm																																																		
4	N	1	f	7.369 2 GHz	-54.403 dBm																																																		
5	N	1	f	9.548 8 GHz	-55.249 dBm																																																		
802.11 n(HT40) /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.81 dB Ref 15.00 dBm Mkr1 2.454 7 GHz -12.853 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.454 7 GHz</td><td>-12.853 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4970 GHz</td><td>-41.049 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.787 5 GHz</td><td>-55.624 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.316 3 GHz</td><td>-54.401 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.663 3 GHz</td><td>-55.976 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.454 7 GHz	-12.853 dBm				2	N	1	f	2.4970 GHz	-41.049 dBm				3	N	1	f	4.787 5 GHz	-55.624 dBm				4	N	1	f	7.316 3 GHz	-54.401 dBm				5	N	1	f	9.663 3 GHz	-55.976 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.454 7 GHz	-12.853 dBm																																																		
2	N	1	f	2.4970 GHz	-41.049 dBm																																																		
3	N	1	f	4.787 5 GHz	-55.624 dBm																																																		
4	N	1	f	7.316 3 GHz	-54.401 dBm																																																		
5	N	1	f	9.663 3 GHz	-55.976 dBm																																																		

9. COUDUCTED OUTPUT POWER

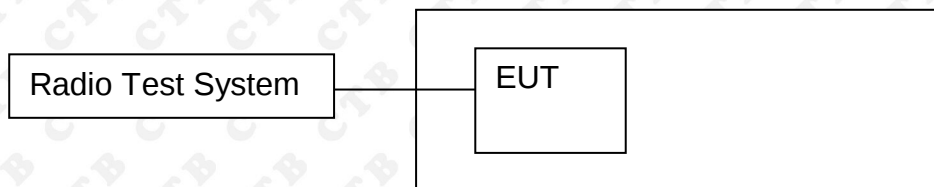9.1 Block Diagram Of Test Setup



9.2 Limit




FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.664	30	PASS
	MCH	7.065	30	PASS
	HCH	7.506	30	PASS
802.11g	LCH	7.042	30	PASS
	MCH	7.164	30	PASS
	HCH	6.886	30	PASS
802.11n(HT20)	LCH	7.436	30	PASS
	MCH	7.509	30	PASS
	HCH	8.081	30	PASS
802.11n(HT40)	LCH	6.46	30	PASS
	MCH	7.097	30	PASS
	HCH	7.535	30	PASS

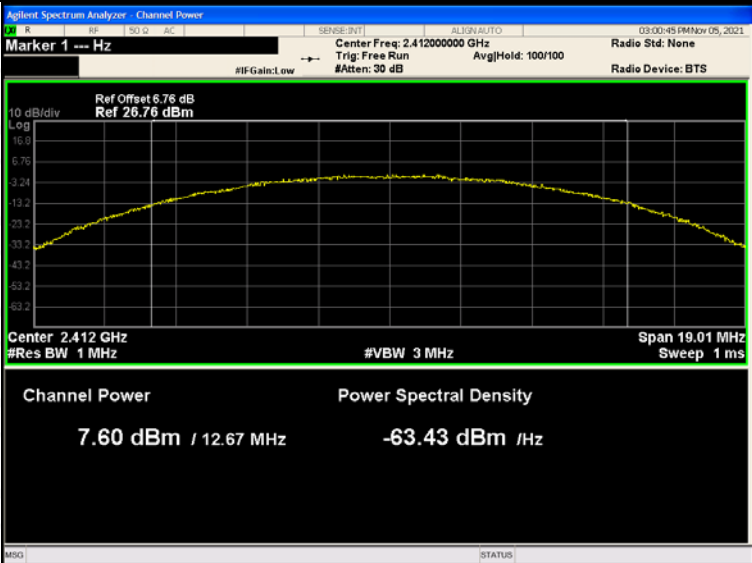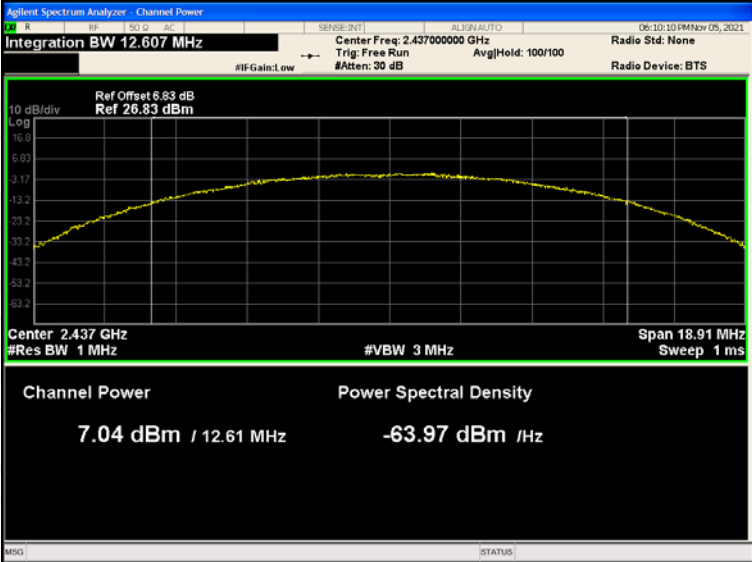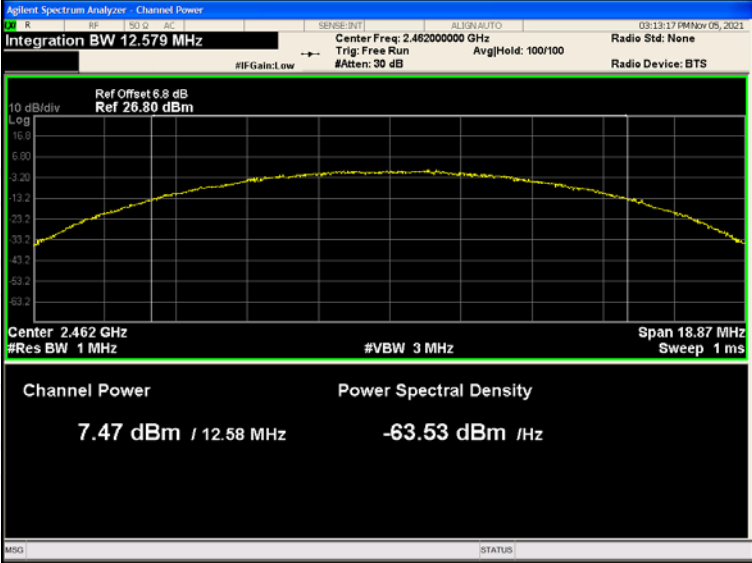Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	 Agilent Spectrum Analyzer - Channel Power Marker 1 --- Hz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.76 dB Ref 26.76 dBm 10 dB/div Log Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Span 19.01 MHz Sweep 1 ms Channel Power Power Spectral Density 7.60 dBm / 12.67 MHz -63.43 dBm /Hz
	MCH	 Agilent Spectrum Analyzer - Channel Power Integration BW 12.607 MHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.83 dB Ref 26.83 dBm 10 dB/div Log Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 18.91 MHz Sweep 1 ms Channel Power Power Spectral Density 7.04 dBm / 12.61 MHz -63.97 dBm /Hz
	HCH	 Agilent Spectrum Analyzer - Channel Power Integration BW 12.579 MHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.8 dB Ref 26.80 dBm 10 dB/div Log Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 18.87 MHz Sweep 1 ms Channel Power Power Spectral Density 7.47 dBm / 12.58 MHz -63.53 dBm /Hz


802.11g	LCH	Agilent Spectrum Analyzer - Channel Power Integration BW 16.347 MHz Center Freq: 2.412000000 GHz Channel Power: 6.91 dBm / 16.35 MHz Power Spectral Density: -65.23 dBm / Hz
	MCH	Agilent Spectrum Analyzer - Channel Power Integration BW 16.349 MHz Center Freq: 2.437000000 GHz Channel Power: 7.04 dBm / 16.35 MHz Power Spectral Density: -65.09 dBm / Hz
	HCH	Agilent Spectrum Analyzer - Channel Power Integration BW 16.384 MHz Center Freq: 2.462000000 GHz Channel Power: 6.77 dBm / 16.38 MHz Power Spectral Density: -65.37 dBm / Hz

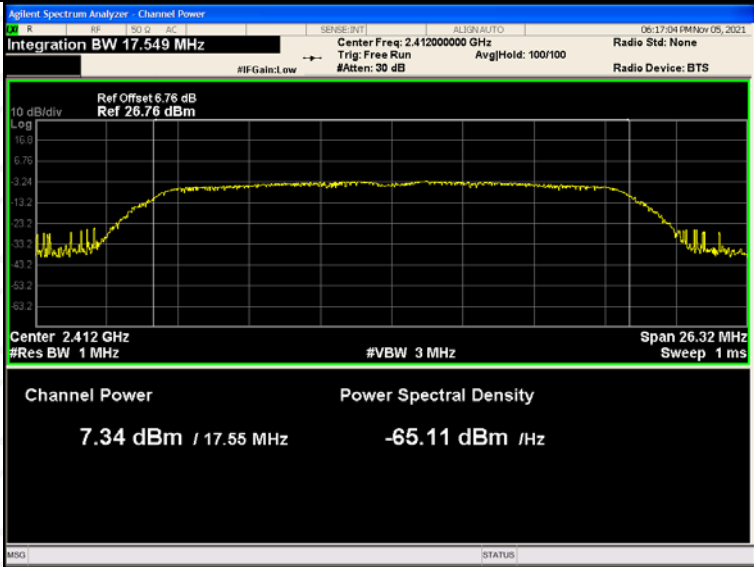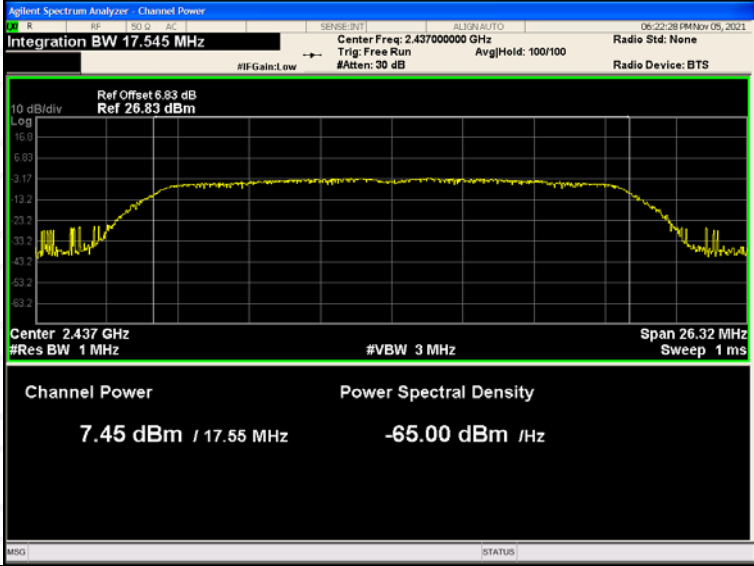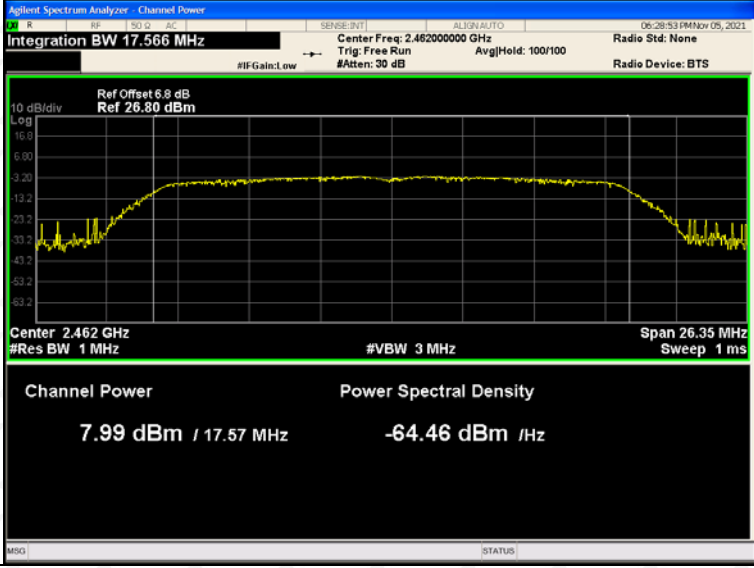802.11n(HT20)	LCH	
	MCH	
	HCH	

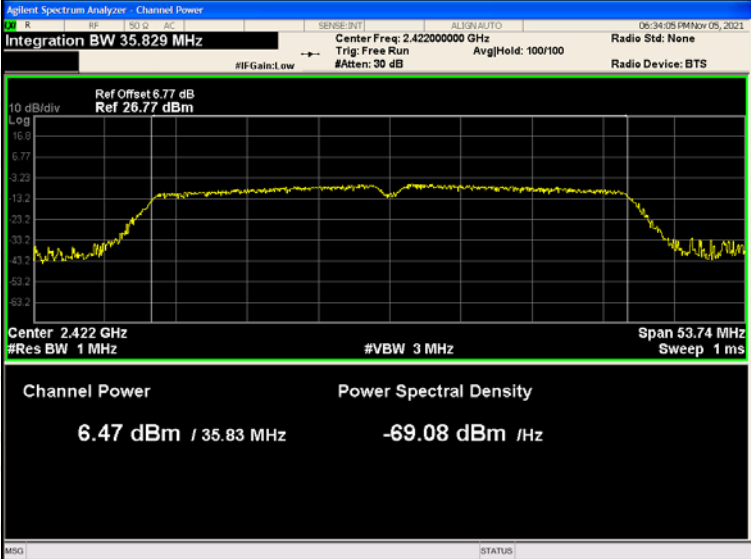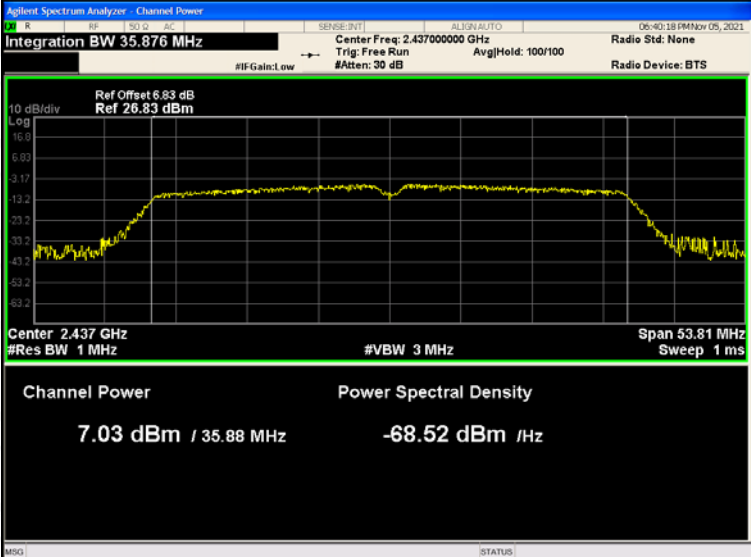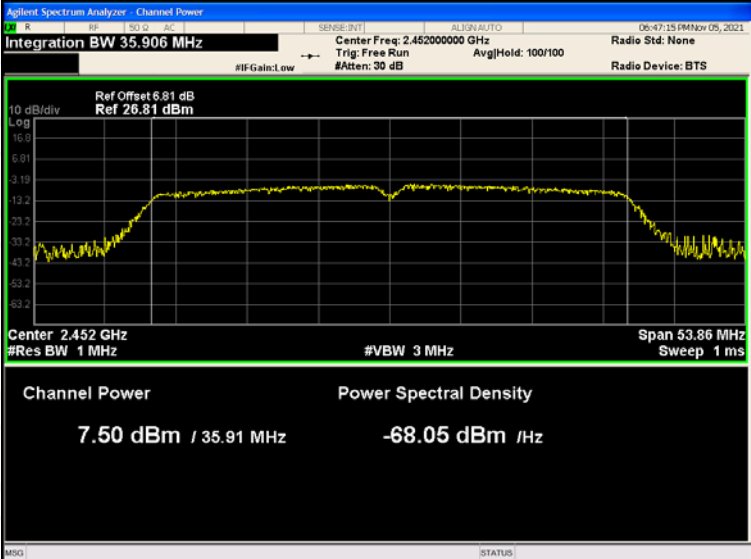	LCH	 Agilent Spectrum Analyzer - Channel Power Integration BW 35.829 MHz Center Freq: 2.42200000 GHz Channel Power: 6.47 dBm / 35.83 MHz Power Spectral Density: -69.08 dBm / Hz
802.11n(HT40)	MCH	 Agilent Spectrum Analyzer - Channel Power Integration BW 35.876 MHz Center Freq: 2.437000000 GHz Channel Power: 7.03 dBm / 35.88 MHz Power Spectral Density: -68.52 dBm / Hz
	HCH	 Agilent Spectrum Analyzer - Channel Power Integration BW 35.906 MHz Center Freq: 2.452000000 GHz Channel Power: 7.50 dBm / 35.91 MHz Power Spectral Density: -68.05 dBm / Hz

10. 6DB OCCUPIED BANDWIDTH

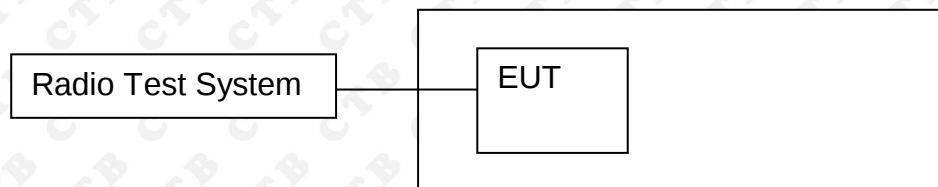10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	6.37	500	PASS
	MCH	7.949	500	PASS
	HCH	7.931	500	PASS
802.11g	LCH	15.688	500	PASS
	MCH	15.344	500	PASS
	HCH	15.733	500	PASS
802.11n(HT20)	LCH	16.001	500	PASS
	MCH	15.916	500	PASS
	HCH	15.977	500	PASS
802.11n(HT40)	LCH	35.094	500	PASS
	MCH	35.118	500	PASS
	HCH	35.079	500	PASS

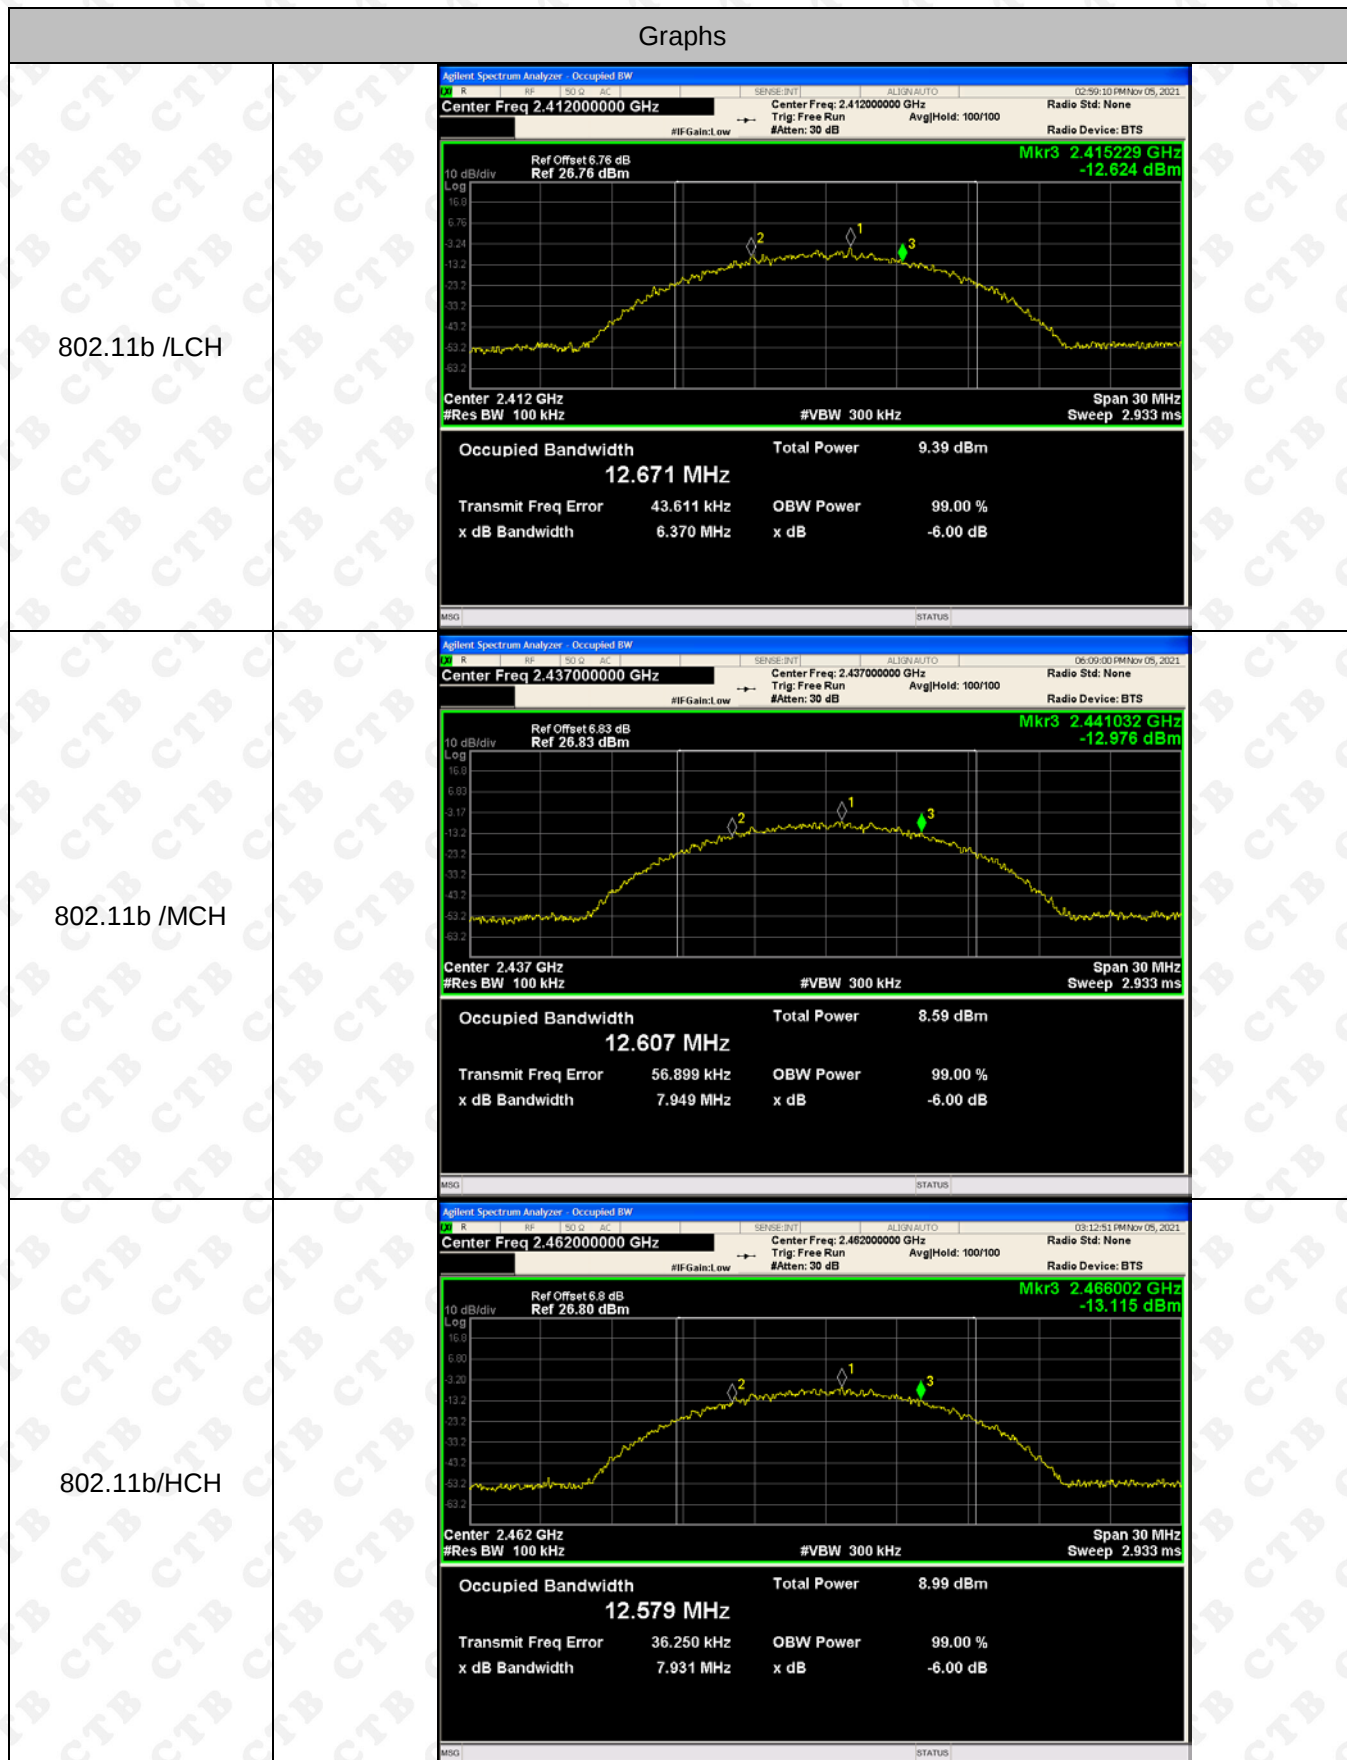
Test Graph:



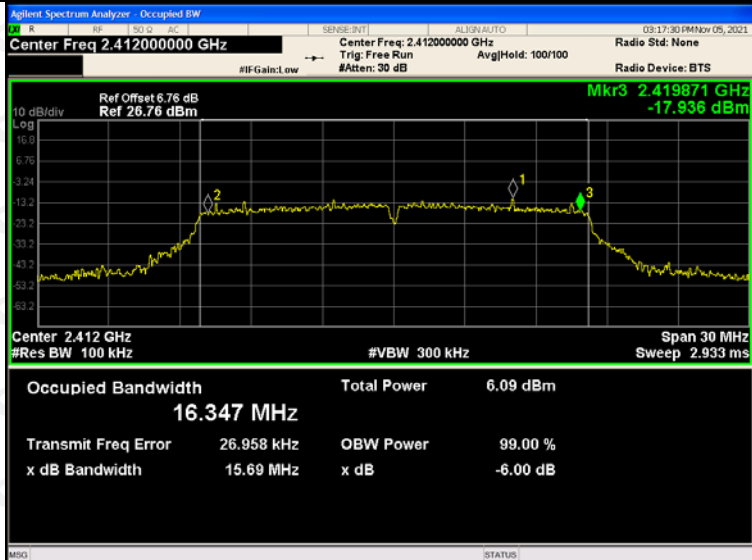
802.11g/LCH








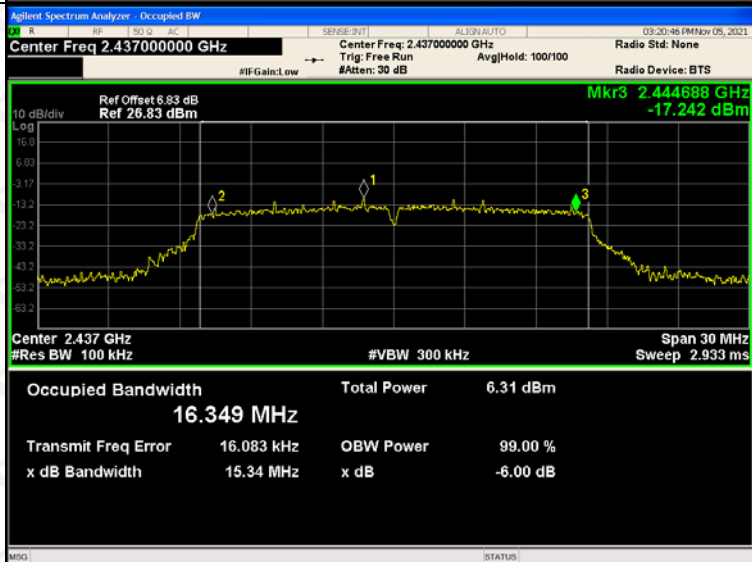
802.11g/MCH



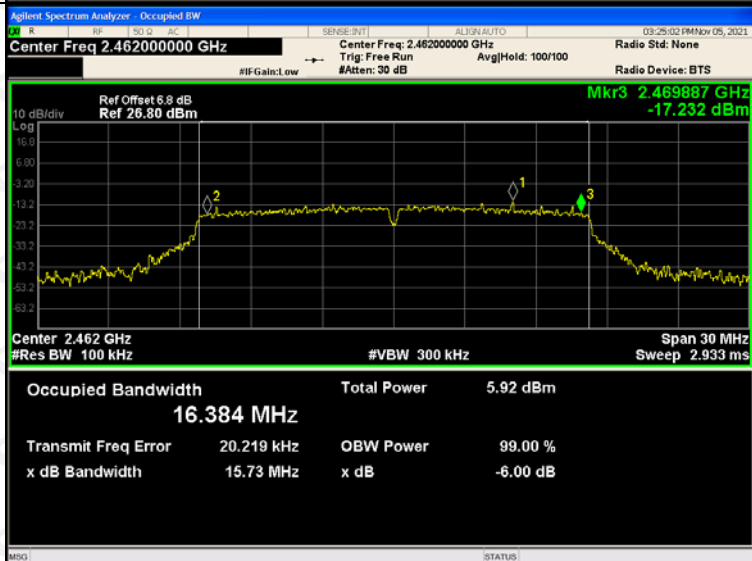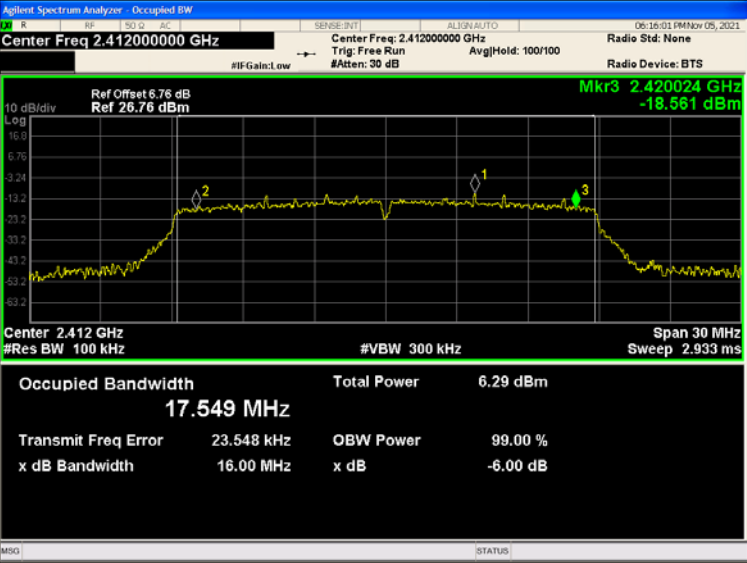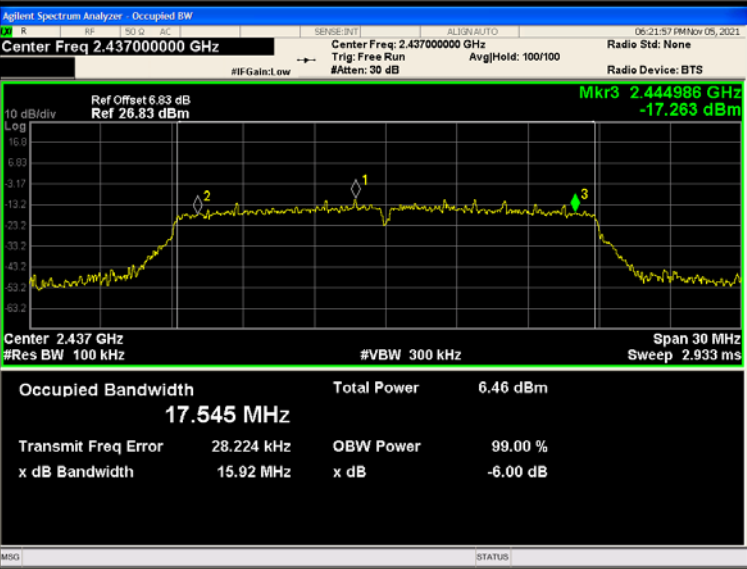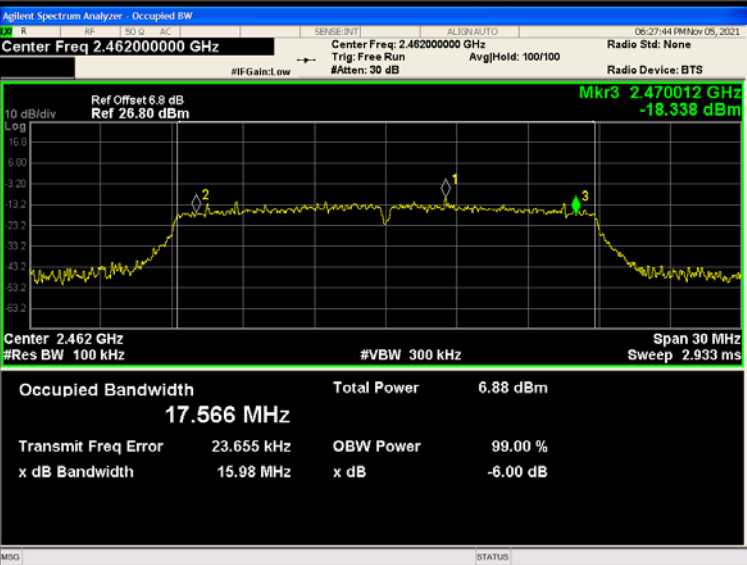802.11g/HCH




802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 26.76 dBm Mkr3 2.420024 GHz -18.561 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.549 MHz Total Power 6.29 dBm Transmit Freq Error 23.548 kHz OBW Power 99.00 % x dB Bandwidth 16.00 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.444986 GHz -17.263 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.545 MHz Total Power 6.46 dBm Transmit Freq Error 28.224 kHz OBW Power 99.00 % x dB Bandwidth 15.92 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.470012 GHz -18.338 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.566 MHz Total Power 6.88 dBm Transmit Freq Error 23.655 kHz OBW Power 99.00 % x dB Bandwidth 15.98 MHz x dB -6.00 dB

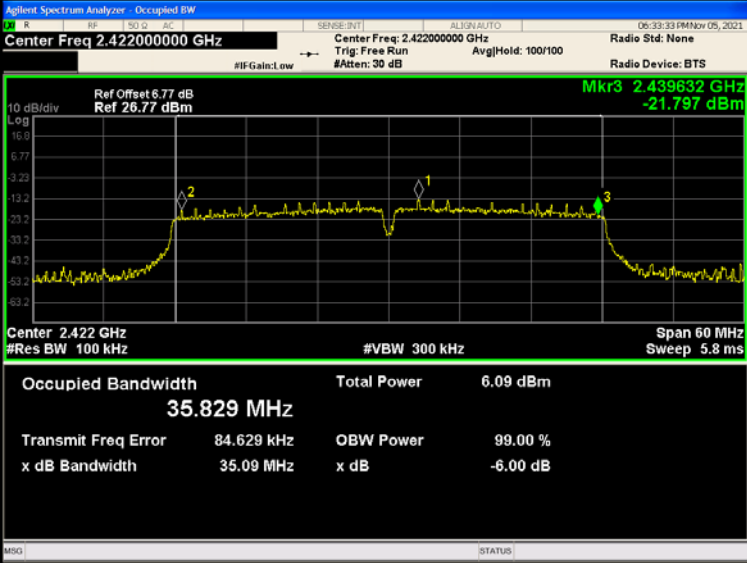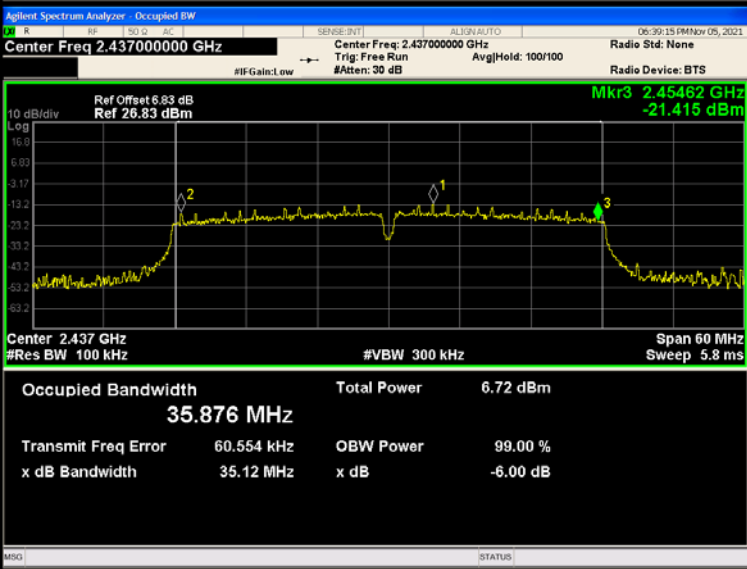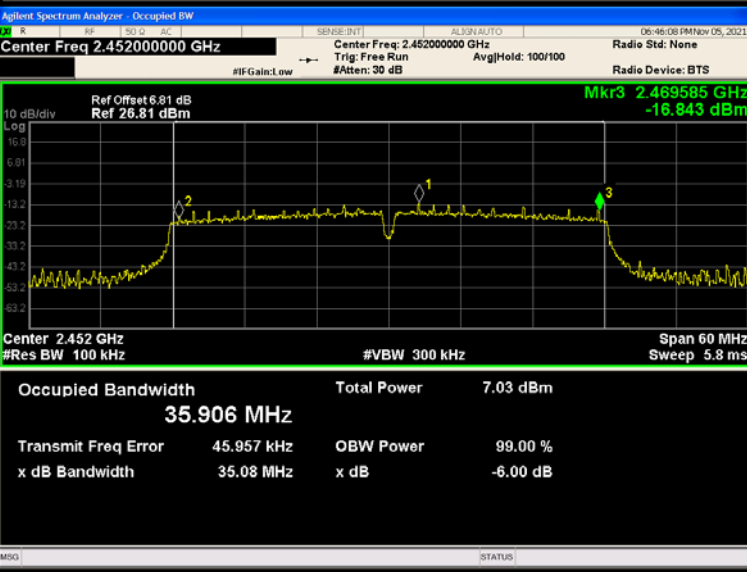802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.77 dB Ref: 26.77 dBm Mkr3: 2.439832 GHz -21.797 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 35.829 MHz Total Power: 6.09 dBm Transmit Freq Error: 84.629 kHz OBW Power: 99.00 % x dB Bandwidth: 35.09 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.83 dB Ref: 26.83 dBm Mkr3: 2.45462 GHz -21.415 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 35.876 MHz Total Power: 6.72 dBm Transmit Freq Error: 60.554 kHz OBW Power: 99.00 % x dB Bandwidth: 35.12 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.81 dB Ref: 26.81 dBm Mkr3: 2.469585 GHz -16.843 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 35.906 MHz Total Power: 7.03 dBm Transmit Freq Error: 45.957 kHz OBW Power: 99.00 % x dB Bandwidth: 35.08 MHz x dB: -6.00 dB

11. POWER SPECTRAL DENSITY

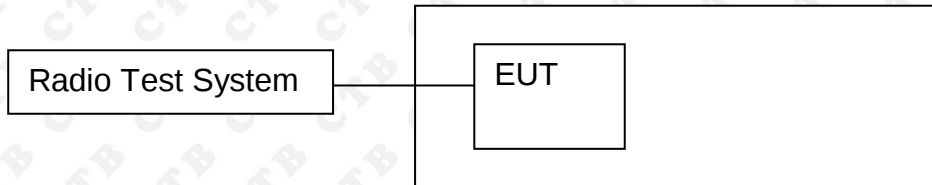11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-10.211	8	PASS
	MCH	-13.622	8	PASS
	HCH	-14.48	8	PASS
802.11g	LCH	-26.07	8	PASS
	MCH	-25.383	8	PASS
	HCH	-25.115	8	PASS
802.11n(H T20)	LCH	-25.841	8	PASS
	MCH	-25.414	8	PASS
	HCH	-25.329	8	PASS
802.11n(H T40)	LCH	-27.92	8	PASS
	MCH	-28.088	8	PASS
	HCH	-27.935	8	PASS

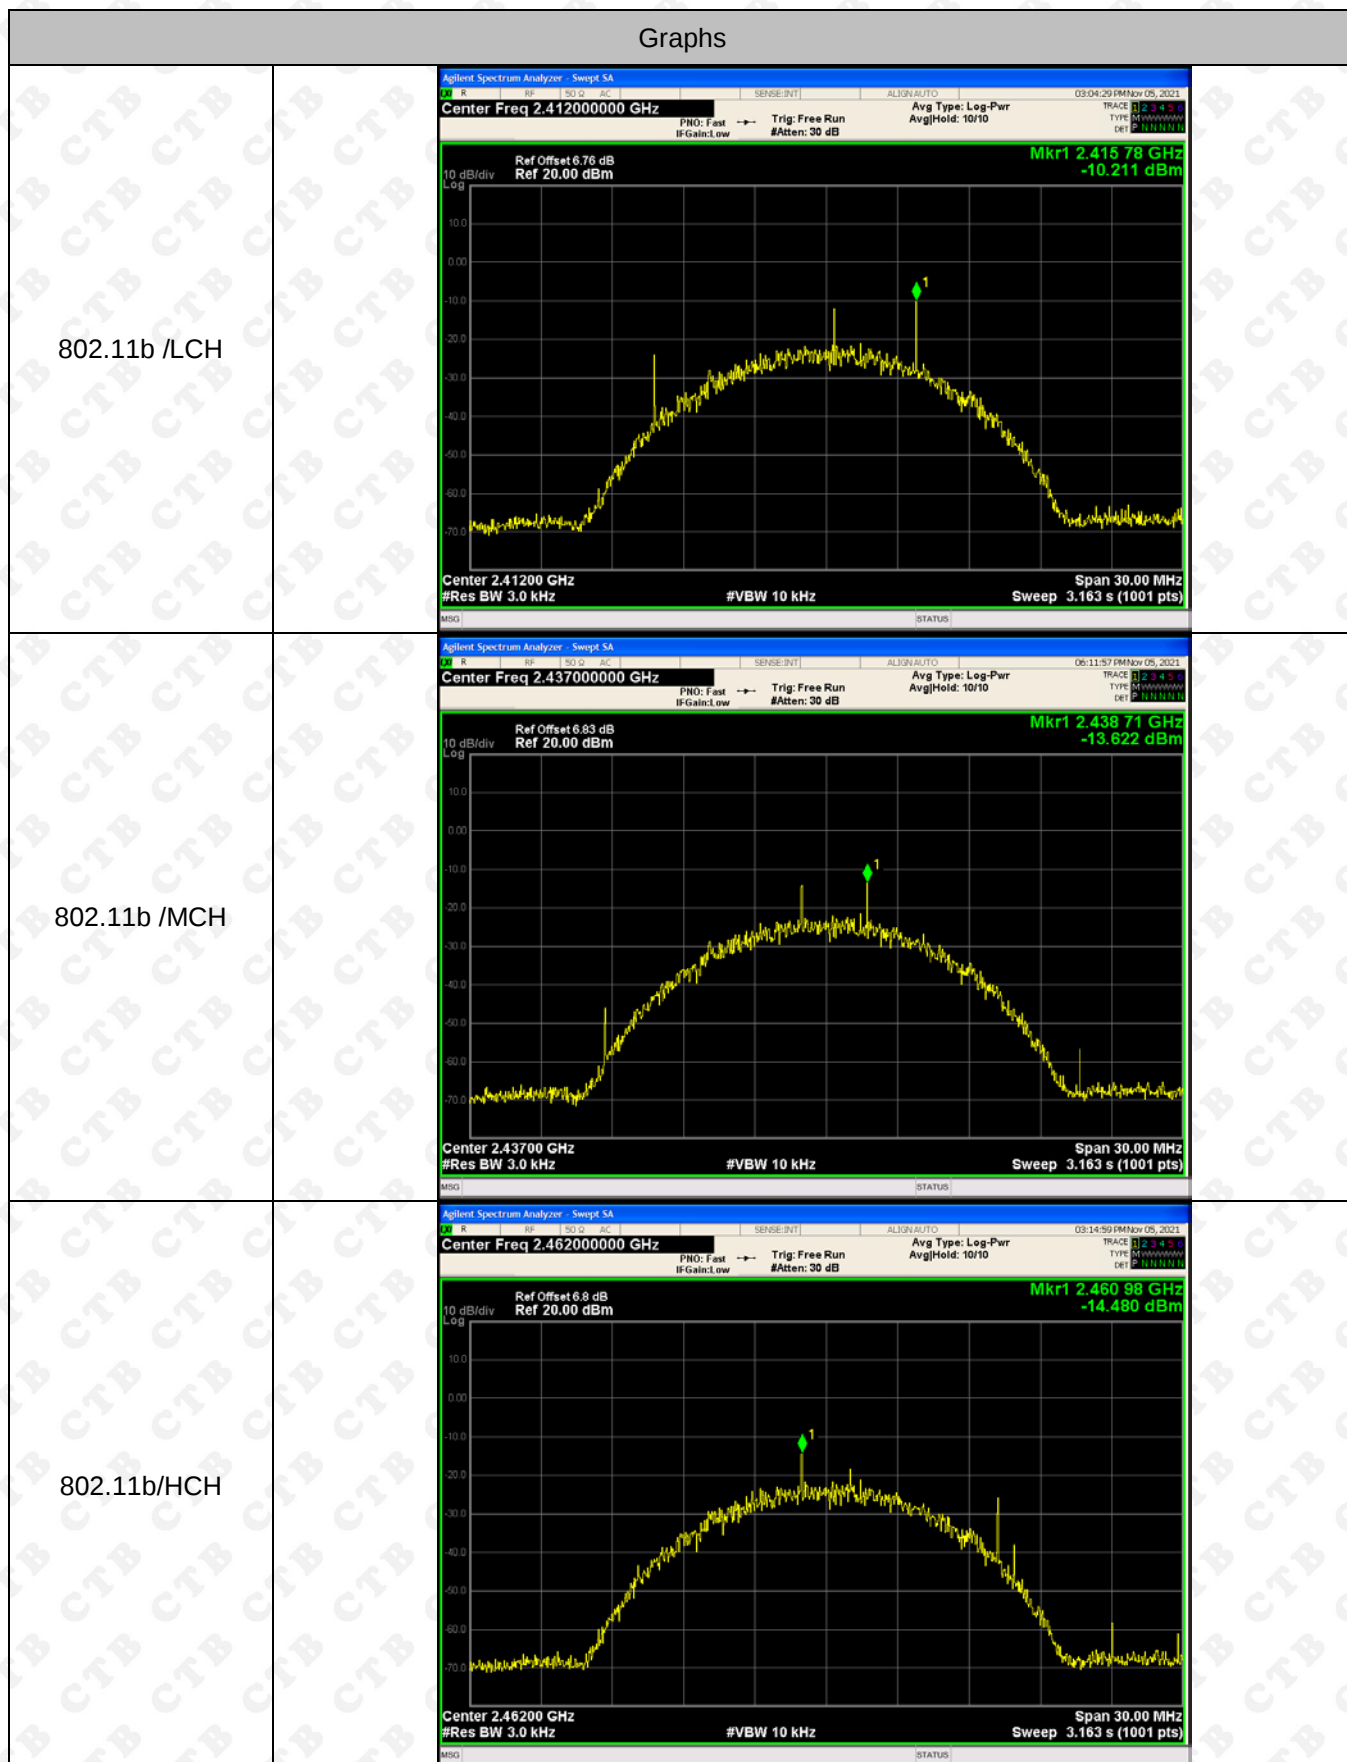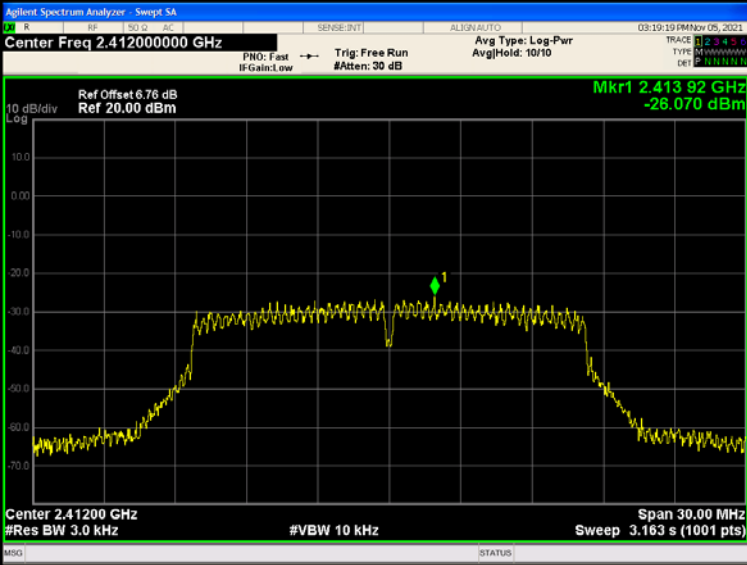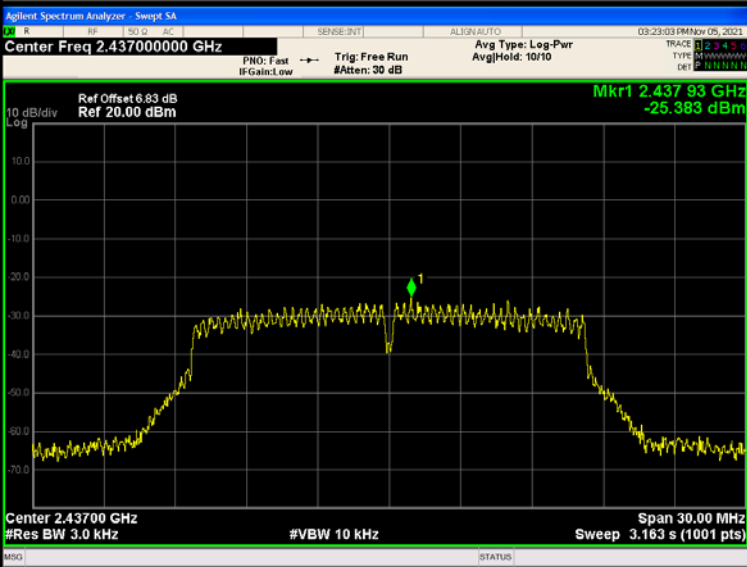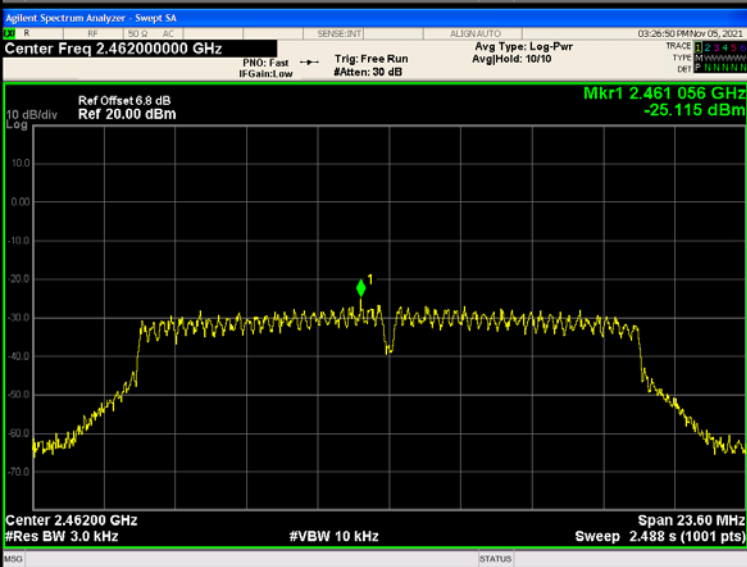Test Graph



802.11g/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.41392 GHz -26.070 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.43793 GHz -25.383 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.461056 GHz -25.115 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 23.60 MHz Sweep 2.488 s (1001 pts)

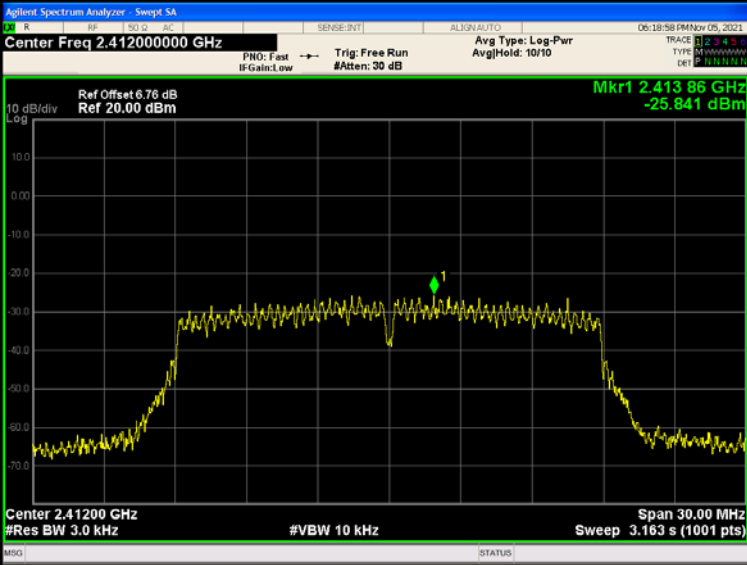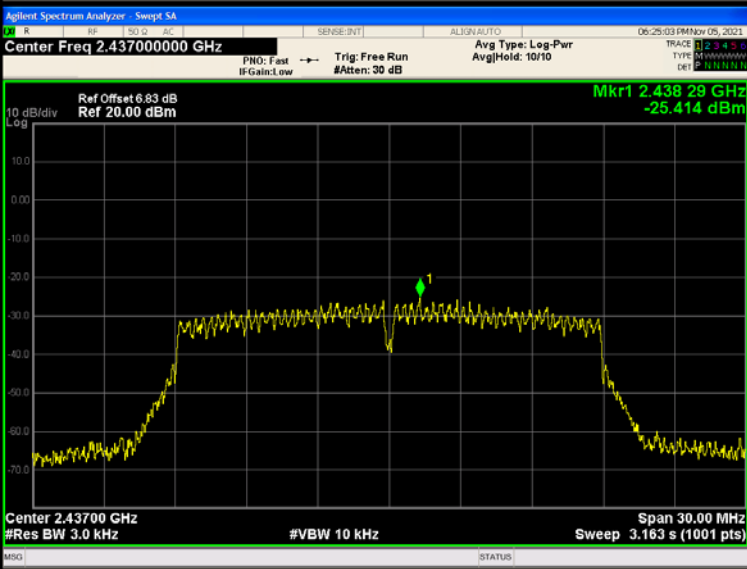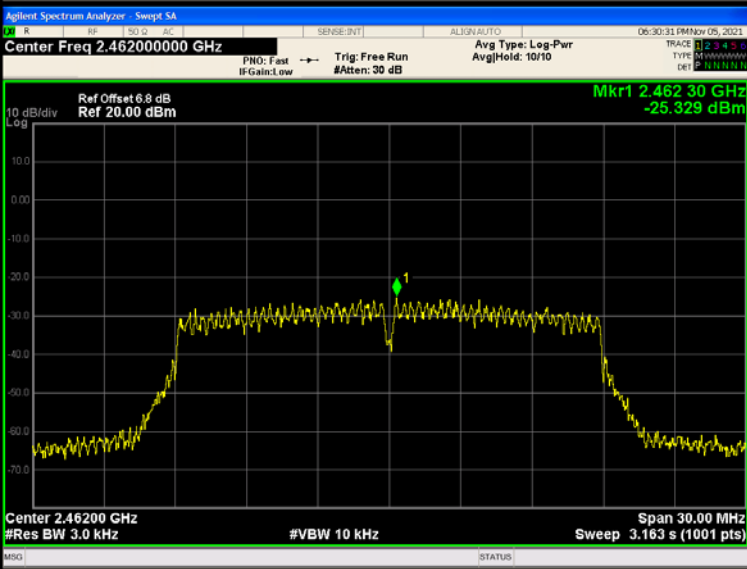802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.41386 GHz -25.841 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.43829 GHz -25.414 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.46230 GHz -25.329 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

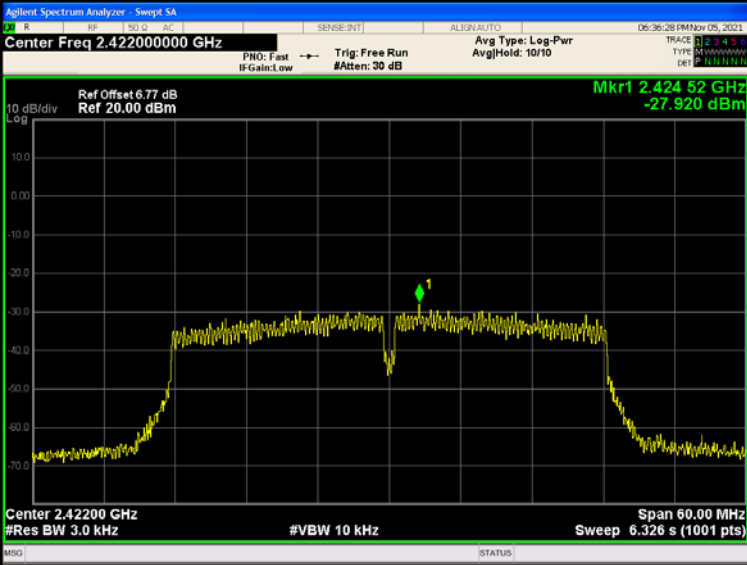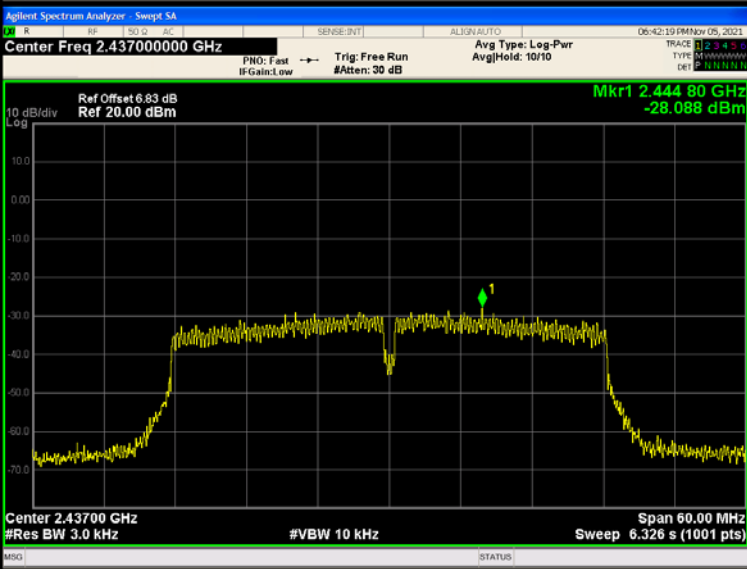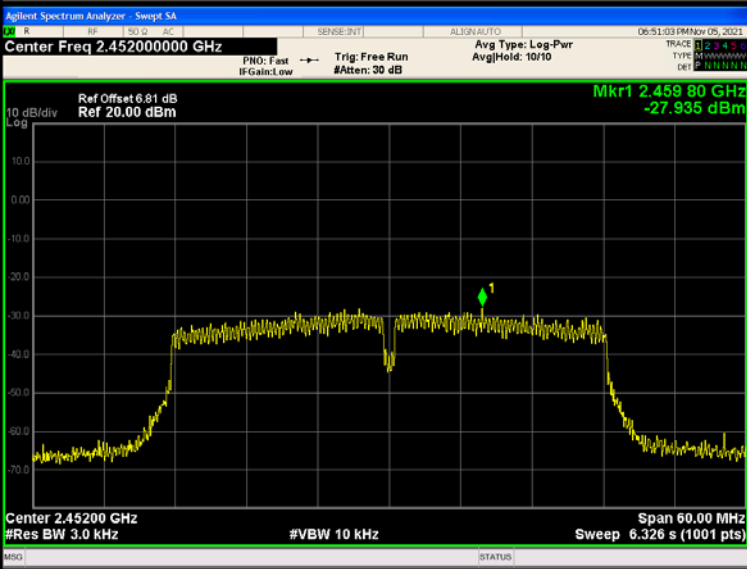802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset: 6.77 dB Ref 20.00 dBm Mkr1 2.424 62 GHz -27.920 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset: 6.83 dB Ref 20.00 dBm Mkr1 2.444 80 GHz -28.088 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset: 6.81 dB Ref 20.00 dBm Mkr1 2.459 80 GHz -27.935 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



***** END OF REPORT *****