



TEST REPORT

Product Name: DLP Portable Projector
FCC ID: 2A6W6-B0004
Trademark: CASIRIS
Model Number: SHP-K7A, SHP-K7B, SHP-K7C, SHP-K7D, SHP-K7E
Prepared For: HANGZHOU ZHONGKEJIGUANG TECHNOLOGY CO., LTD
Address: Room107, Building 2, No.600, 21 Street, ETDA Hangzhou, Zhejiang, China
Manufacturer: HANGZHOU ZHONGKEJIGUANG TECHNOLOGY CO., LTD
Address: Room107, Building 2, No.600, 21 Street, ETDA Hangzhou, Zhejiang, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Nov. 19, 2024
Sample tested Date: Nov. 19, 2024 to Nov. 25, 2024
Issue Date: Nov. 25, 2024
Report No.: CTB24111911501RF03
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit.....	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup.....	15
7.2 Limit.....	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup.....	39
8.2 Limit.....	39
8.3 Test procedure	39
9. CONDUCTED OUTPUT POWER.....	56
9.1 Block Diagram Of Test Setup.....	56
9.2 Limit.....	56
9.3 Test procedure	56
9.4 Test Result	57
10. 6DB OCCUPIED BANDWIDTH.....	58
10.1 Block Diagram Of Test Setup.....	58
10.2 Limit.....	58
10.3 Test procedure	58
10.4 Test Result	59
11. POWER SPECTRAL DENSITY.....	69
11.1 Block Diagram Of Test Setup.....	69
11.2 Limit.....	69
11.3 Test procedure	69
11.4 Test Result	70
12. ANTENNA REQUIREMENT	79
13. EUT TEST SETUP PHOTOGRAPHS.....	80

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB24111911501RF03	Nov. 25, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59℃
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	SHP-K7A, SHP-K7B, SHP-K7C, SHP-K7D, SHP-K7E
Model Description:	All the model are the same circuit and RF module, only the model names are different. Test sample model: SHP-K7A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi (2.4G): IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.721dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): FPC antenna
Antenna Gain:	WiFi (2.4G): Ant1: 0.46dBi Ant2: 1.02dBi ADAPTER: INPUT: 100-240V~, 50/60Hz 1.0A OUTPUT: 5.0V --- 3.0A or 9.0V --- 3.0A or 12.0V --- 3.0A or 15.0V --- 3.0A or 20.0V --- 2.25A DC 7.2V by battery
Ratings:	

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Quick Charger	JUEDING	PD045E-D1C0AVU	/	EUT

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	7.2V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28


Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/10/25



10	Coaxial cable	Times	2m	/	/	2025/10/25
11	Coaxial cable	Times	2m	/	/	2025/10/25
12	Coaxial cable	Times	1m	/	/	2025/10/25
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

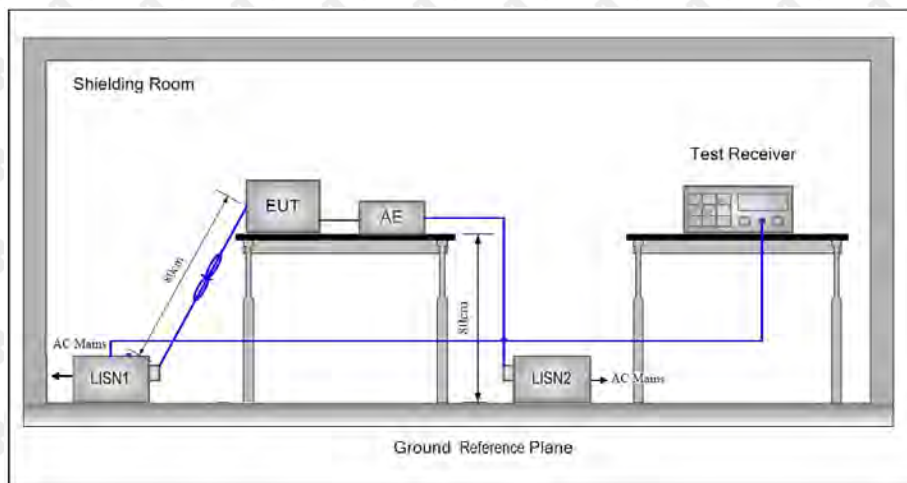

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

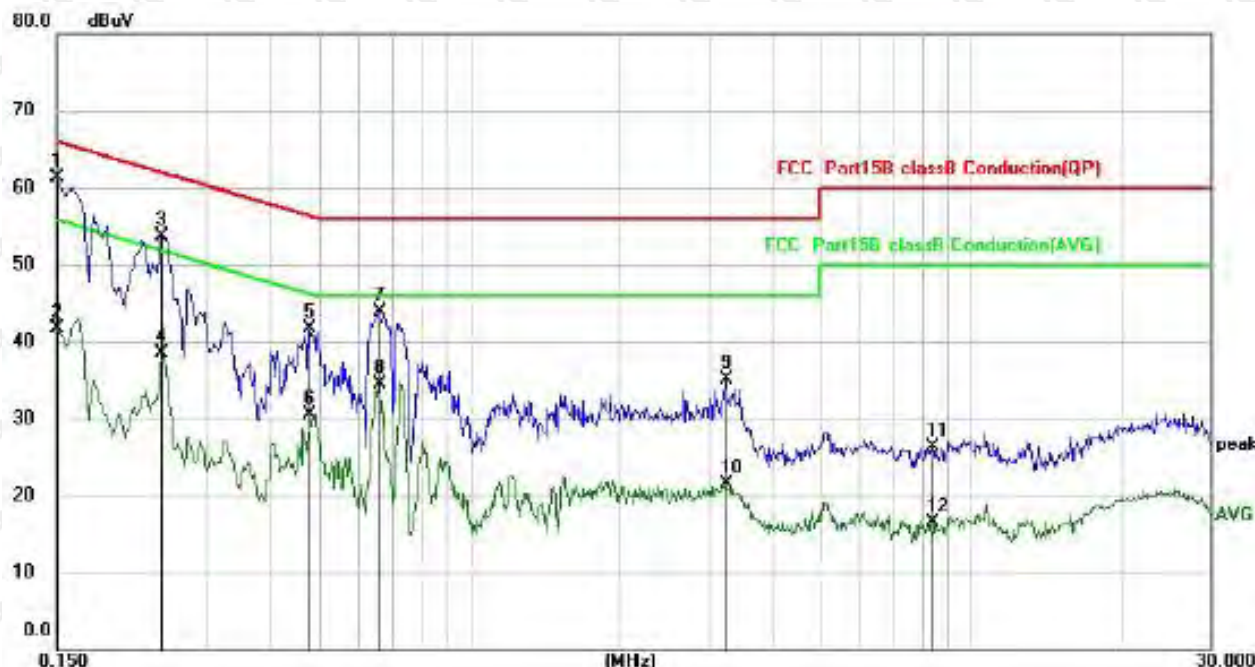

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	50.40	10.89	61.29	66.00	-4.71	QP
2		0.1500	30.76	10.89	41.65	56.00	-14.35	AVG
3		0.2419	43.05	10.68	53.73	62.03	-8.30	QP
4		0.2419	27.73	10.68	38.41	52.03	-13.62	AVG
5		0.4779	31.26	10.52	41.78	56.38	-14.60	QP
6		0.4779	20.06	10.52	30.58	46.38	-15.80	AVG
7		0.6620	33.31	10.68	43.99	56.00	-12.01	QP
8		0.6620	23.76	10.68	34.44	46.00	-11.56	AVG
9		3.2259	23.25	11.85	35.10	56.00	-20.90	QP
10		3.2259	9.66	11.85	21.51	46.00	-24.49	AVG
11		8.3500	13.16	13.07	26.23	60.00	-33.77	QP
12		8.3500	3.34	13.07	16.41	50.00	-33.59	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

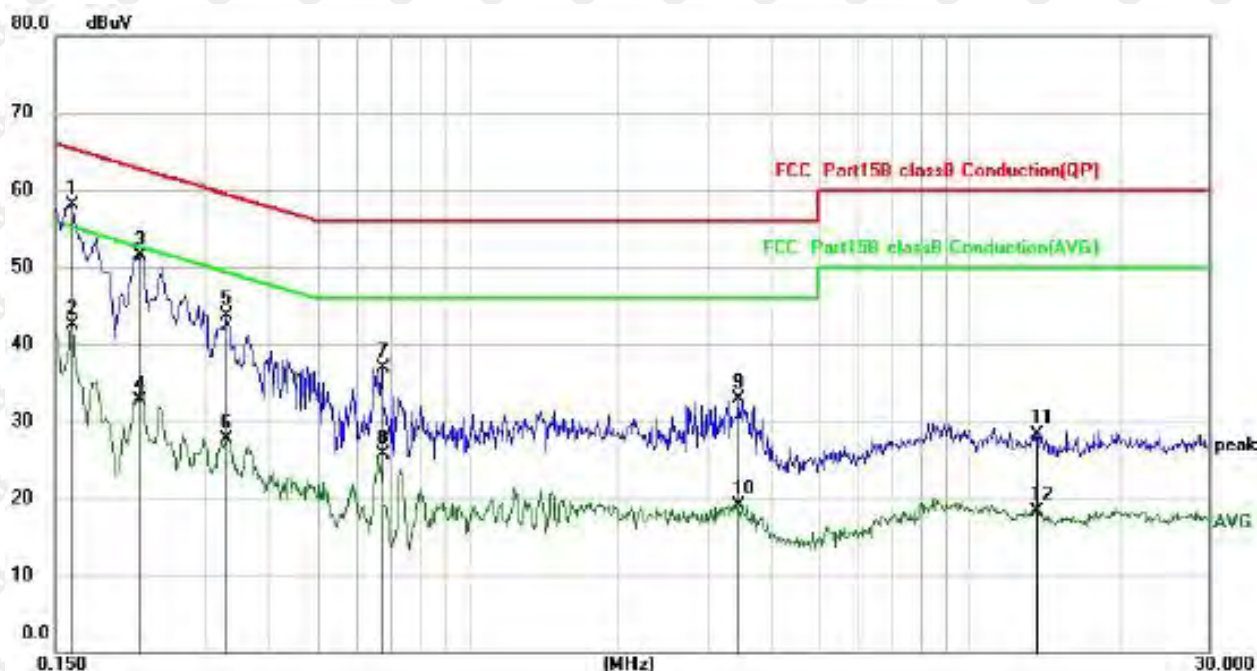

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1620	47.32	10.85	58.17	65.36	-7.19	QP
2		0.1620	31.65	10.85	42.50	55.36	-12.86	AVG
3		0.2220	40.76	10.69	51.45	62.74	-11.29	QP
4		0.2220	22.01	10.69	32.70	52.74	-20.04	AVG
5		0.3300	33.13	10.62	43.75	59.45	-15.70	QP
6		0.3300	17.01	10.62	27.63	49.45	-21.82	AVG
7		0.6740	26.28	10.69	36.97	56.00	-19.03	QP
8		0.6740	14.99	10.69	25.68	46.00	-20.32	AVG
9		3.4660	20.97	11.90	32.87	56.00	-23.13	QP
10		3.4660	7.26	11.90	19.16	46.00	-26.84	AVG
11		13.5937	15.06	13.31	28.37	60.00	-31.63	QP
12		13.5937	5.06	13.31	18.37	50.00	-31.63	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

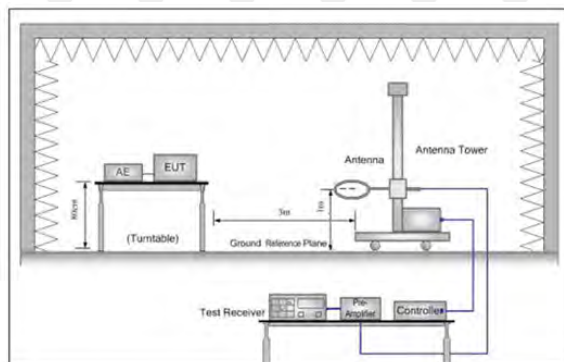


Figure 1. Below 30MHz

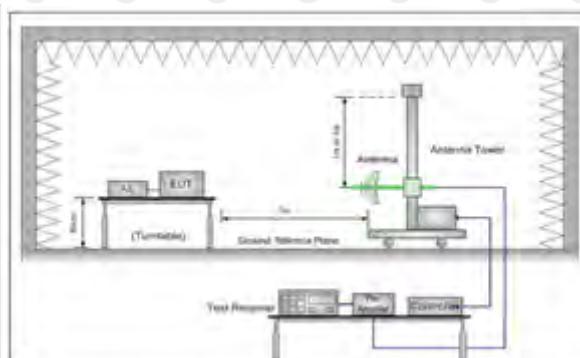


Figure 2. 30MHz to 1GHz

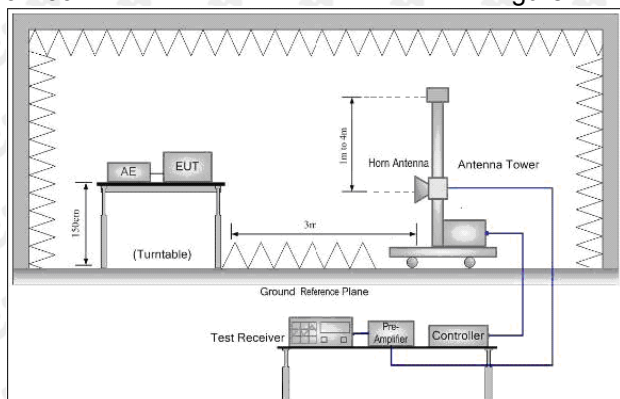


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:


Antenna polarity: H

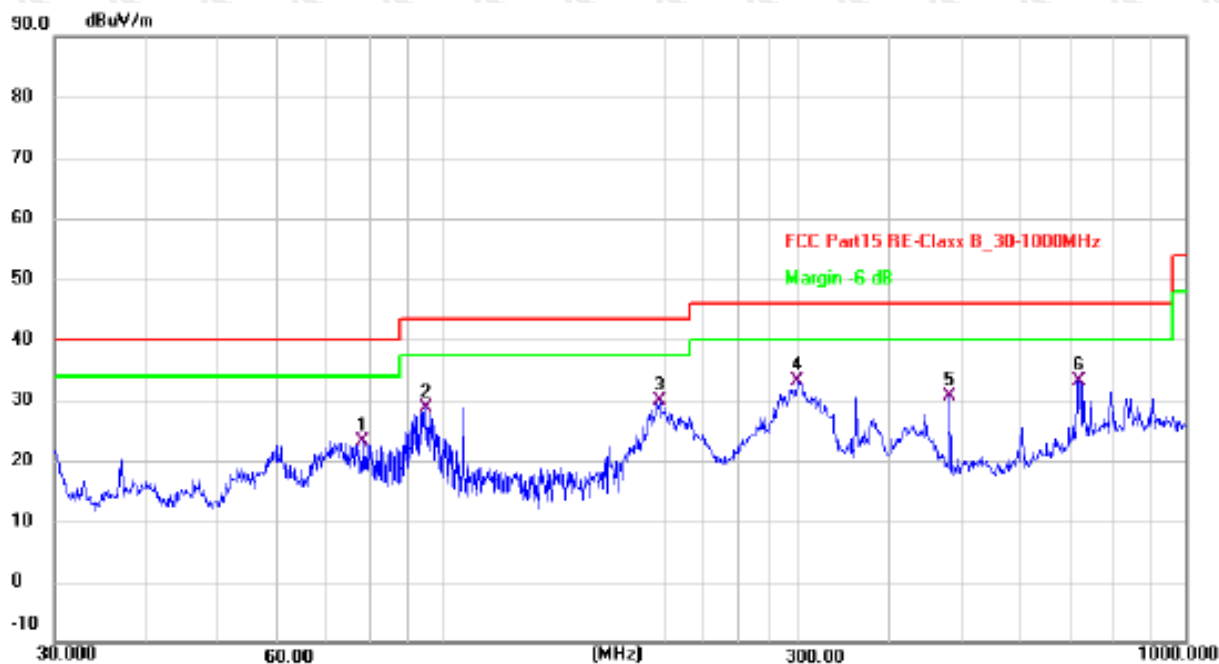

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	78.1389	41.47	-18.29	23.18	40.00	-16.82	QP
2	95.0930	46.84	-18.23	28.61	43.50	-14.89	QP
3	195.8220	46.86	-17.02	29.84	43.50	-13.66	QP
4	300.3672	46.90	-13.78	33.12	46.00	-12.88	QP
5	480.5276	40.47	-9.89	30.58	46.00	-15.42	QP
6 *	719.1995	38.04	-4.90	33.14	46.00	-12.86	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

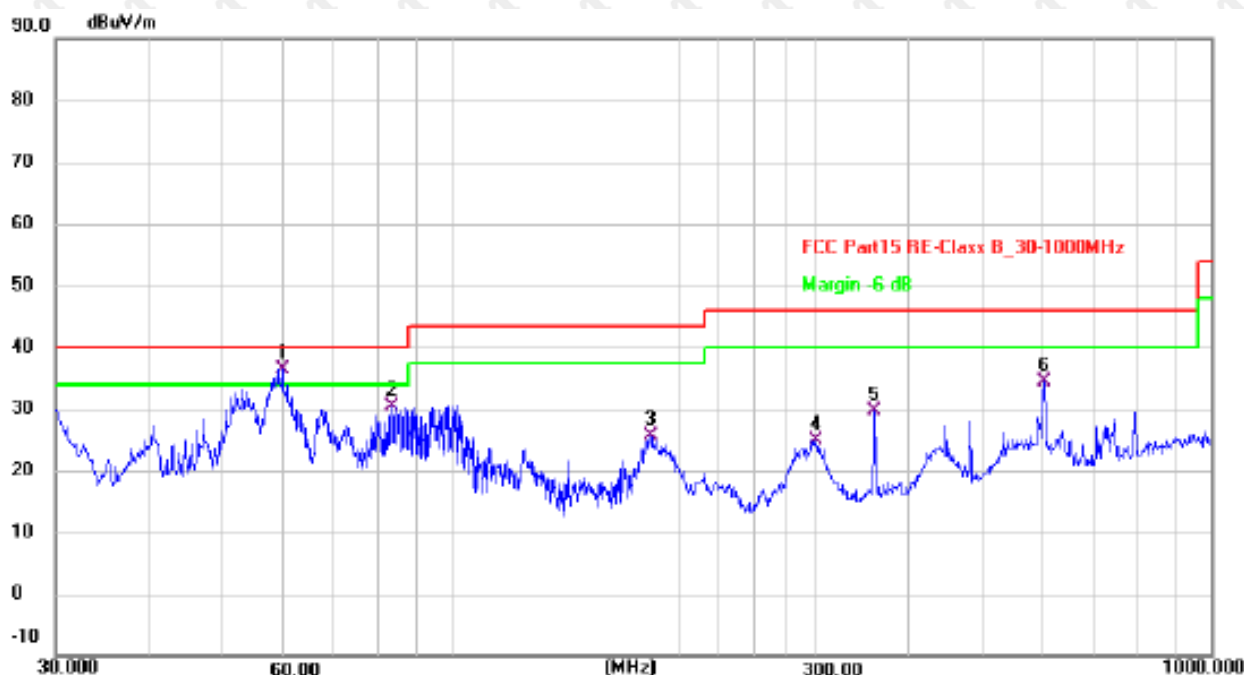

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	59.6493	50.99	-14.64	36.35	40.00	-3.65	QP
2	83.2298	48.83	-18.41	30.42	40.00	-9.58	QP
3	182.5592	41.86	-16.17	25.69	43.50	-17.81	QP
4	301.4224	38.76	-13.76	25.00	46.00	-21.00	QP
5	360.4476	42.61	-12.96	29.65	46.00	-16.35	QP
6	601.4265	40.84	-6.46	34.38	46.00	-11.62	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.64	-3.64	61.00	74	-13.00	peak
4824	50.19	-3.64	46.55	54	-7.45	AVG
7236	58.28	-0.95	57.33	74	-16.67	peak
7236	46.55	-0.95	45.60	54	-8.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.53	-3.64	61.89	74	-12.11	peak
4824	48.78	-3.64	45.14	54	-8.86	AVG
7236	58.06	-0.95	57.11	74	-16.89	peak
7236	44.45	-0.95	43.50	54	-10.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.00	-3.51	61.49	74	-12.51	peak
4874	49.57	-3.51	46.06	54	-7.94	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	45.83	-0.82	45.01	54	-8.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.44	-3.51	61.93	74	-12.07	peak
4874	48.57	-3.51	45.06	54	-8.94	AVG
7311	60.49	-0.82	59.67	74	-14.33	peak
7311	44.61	-0.82	43.79	54	-10.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.71	-3.43	60.28	74	-13.72	peak
4924	46.75	-3.43	43.32	54	-10.68	AVG
7386	59.63	-0.75	58.88	74	-15.12	peak
7386	43.27	-0.75	42.52	54	-11.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.12	-3.43	60.69	74	-13.31	peak
4924	48.51	-3.43	45.08	54	-8.92	AVG
7386	56.58	-0.75	55.83	74	-18.17	peak
7386	43.04	-0.75	42.29	54	-11.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.65	-3.64	62.01	74	-11.99	peak
4824	49.54	-3.64	45.90	54	-8.10	AVG
7236	57.06	-0.95	56.11	74	-17.89	peak
7236	45.27	-0.95	44.32	54	-9.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.98	-3.64	62.34	74	-11.66	peak
4824	49.57	-3.64	45.93	54	-8.07	AVG
7236	56.21	-0.95	55.26	74	-18.74	peak
7236	43.49	-0.95	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.10	-3.51	61.59	74	-12.41	peak
4874	49.55	-3.51	46.04	54	-7.96	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	45.60	-0.82	44.78	54	-9.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.35	-3.51	59.84	74	-14.16	peak
4874	49.18	-3.51	45.67	54	-8.33	AVG
7311	57.75	-0.82	56.93	74	-17.07	peak
7311	43.69	-0.82	42.87	54	-11.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.48	-3.43	60.05	74	-13.95	peak
4924	48.44	-3.43	45.01	54	-8.99	AVG
7386	57.91	-0.75	57.16	74	-16.84	peak
7386	42.34	-0.75	41.59	54	-12.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.14	-3.43	61.71	74	-12.29	peak
4924	46.03	-3.43	42.60	54	-11.40	AVG
7386	58.57	-0.75	57.82	74	-16.18	peak
7386	43.86	-0.75	43.11	54	-10.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.45	-3.64	60.81	74	-13.19	peak
4824	48.52	-3.64	44.88	54	-9.12	AVG
7236	59.53	-0.95	58.58	74	-15.42	peak
7236	46.28	-0.95	45.33	54	-8.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	67.01	-3.64	63.37	74	-10.63	peak
4824	47.50	-3.64	43.86	54	-10.14	AVG
7236	57.84	-0.95	56.89	74	-17.11	peak
7236	45.50	-0.95	44.55	54	-9.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.11	-3.51	61.60	74	-12.40	peak
4874	50.48	-3.51	46.97	54	-7.03	AVG
7311	58.13	-0.82	57.31	74	-16.69	peak
7311	43.17	-0.82	42.35	54	-11.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.49	-3.51	60.98	74	-13.02	peak
4874	46.58	-3.51	43.07	54	-10.93	AVG
7311	58.15	-0.82	57.33	74	-16.67	peak
7311	44.53	-0.82	43.71	54	-10.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.28	-3.43	58.85	74	-15.15	peak
4924	47.74	-3.43	44.31	54	-9.69	AVG
7386	58.68	-0.75	57.93	74	-16.07	peak
7386	44.58	-0.75	43.83	54	-10.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.18	-3.43	61.75	74	-12.25	peak
4924	48.17	-3.43	44.74	54	-9.26	AVG
7386	56.91	-0.75	56.16	74	-17.84	peak
7386	43.34	-0.75	42.59	54	-11.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.85	-3.63	60.22	74	-13.78	peak
4844	47.17	-3.63	43.54	54	-10.46	AVG
7266	59.11	-0.94	58.17	74	-15.83	peak
7266	44.53	-0.94	43.59	54	-10.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.88	-3.63	61.25	74	-12.75	peak
4844	49.45	-3.63	45.82	54	-8.18	AVG
7266	58.42	-0.94	57.48	74	-16.52	peak
7266	44.38	-0.94	43.44	54	-10.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.08	-3.51	61.57	74	-12.43	peak
4874	48.81	-3.51	45.30	54	-8.70	AVG
7311	60.70	-0.82	59.88	74	-14.12	peak
7311	46.44	-0.82	45.62	54	-8.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.46	-3.51	42.95	54	-11.05	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.84	-3.43	60.41	74	-13.59	peak
4904	47.19	-3.43	43.76	54	-10.24	AVG
7356	57.96	-0.75	57.21	74	-16.79	peak
7356	43.55	-0.75	42.80	54	-11.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.69	-3.43	59.26	74	-14.74	peak
4904	47.26	-3.43	43.83	54	-10.17	AVG
7356	56.48	-0.75	55.73	74	-18.27	peak
7356	42.81	-0.75	42.06	54	-11.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.02	-5.81	51.21	74	-22.79	peak
2390	/	-5.81	/	54	/	AVG
2399	63.87	-5.84	58.03	74	-15.97	peak
2399	48.17	-5.84	42.33	54	-11.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.45	-5.81	51.64	74	-22.36	peak
2390	/	-5.81	/	54	/	AVG
2399	62.20	-5.84	56.36	74	-17.64	peak
2399	46.14	-5.84	40.30	54	-13.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.76	-5.65	51.11	74	-22.89	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.48	-5.81	53.67	74	-20.33	peak
2390	/	-5.81	/	54	/	AVG
2399	62.55	-5.84	56.71	74	-17.29	peak
2399	46.66	-5.84	40.82	54	-13.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.43	-5.81	50.62	74	-23.38	peak
2390	/	-5.81	/	54	/	AVG
2399	63.20	-5.84	57.36	74	-16.64	peak
2399	46.15	-5.84	40.31	54	-13.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.62	-5.65	51.97	74	-22.03	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.56	-5.65	51.91	74	-22.09	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.83	-5.81	51.02	74	-22.98	peak
2390	/	-5.81	/	54	/	AVG
2399	62.01	-5.84	56.17	74	-17.83	peak
2399	46.90	-5.84	41.06	54	-12.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.21	-5.81	51.40	74	-22.60	peak
2390	/	-5.81	/	54	/	AVG
2399	61.11	-5.84	55.27	74	-18.73	peak
2399	46.73	-5.84	40.89	54	-13.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.86	-5.65	50.21	74	-23.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.06	-5.65	51.41	74	-22.59	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.75	-5.81	51.94	74	-22.06	peak
2390	/	-5.81	/	54	/	AVG
2399	63.16	-5.84	57.32	74	-16.68	peak
2399	46.84	-5.84	41.00	54	-13.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.05	-5.81	51.24	74	-22.76	peak
2390	/	-5.81	/	54	/	AVG
2399	61.48	-5.84	55.64	74	-18.36	peak
2399	46.18	-5.84	40.34	54	-13.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.94	-5.65	52.29	74	-21.71	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.94	-5.65	52.29	74	-21.71	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

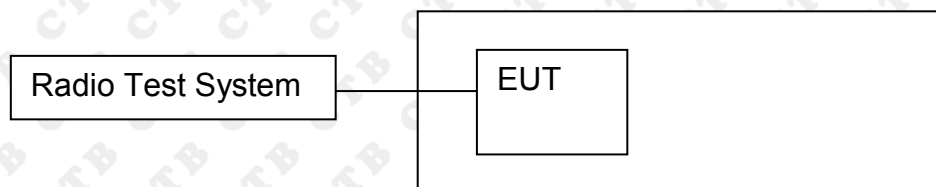

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:




BAND EDGE Graphs

802.11g/LCH

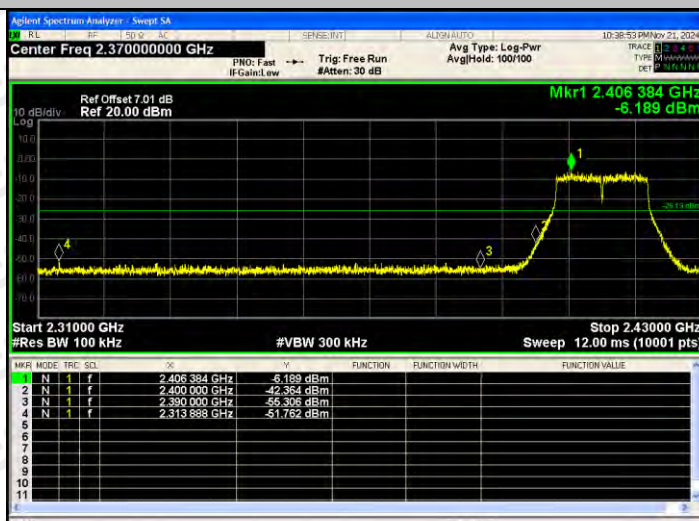


802.11g/HCH

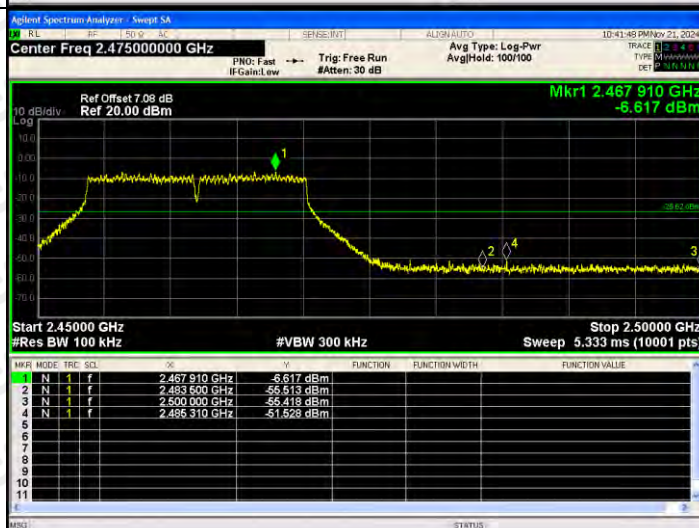


BAND EDGE Graphs

802.11n(HT20)/L
CH

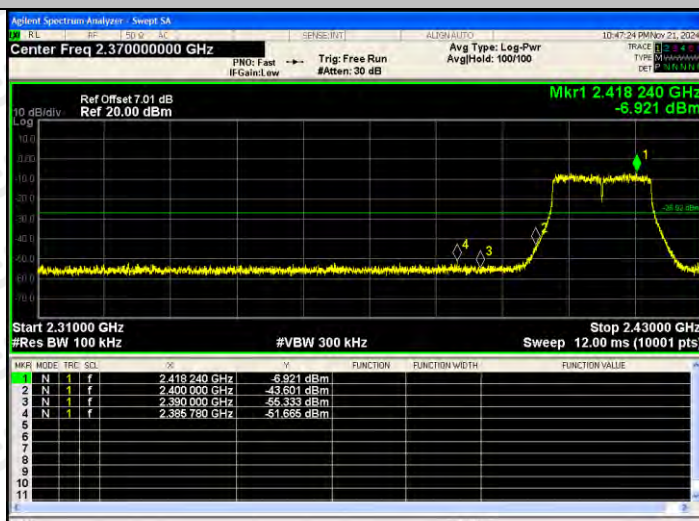


802.11n(HT20)/H
CH

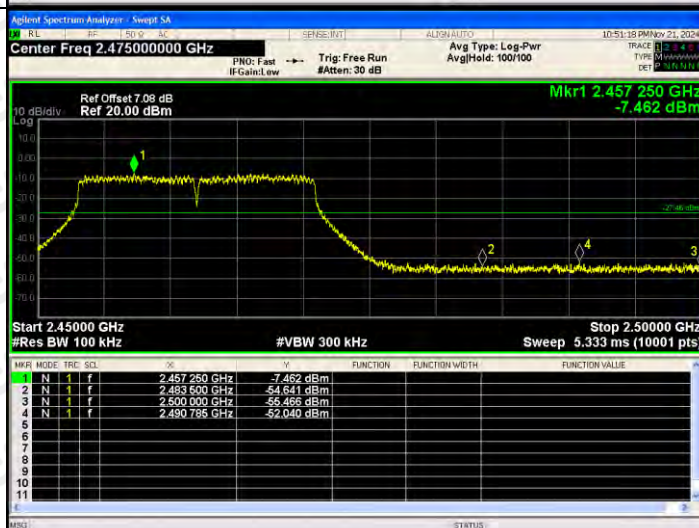


BAND EDGE Graphs


802.11n(HT40)/L
CH

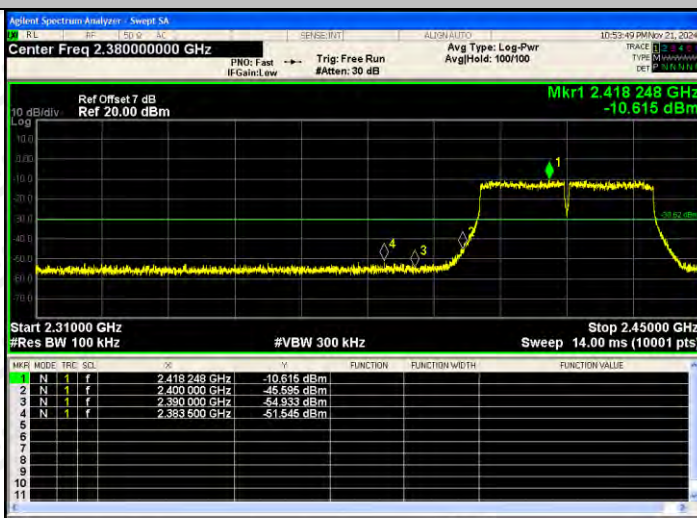


802.11n(HT40)/H
CH

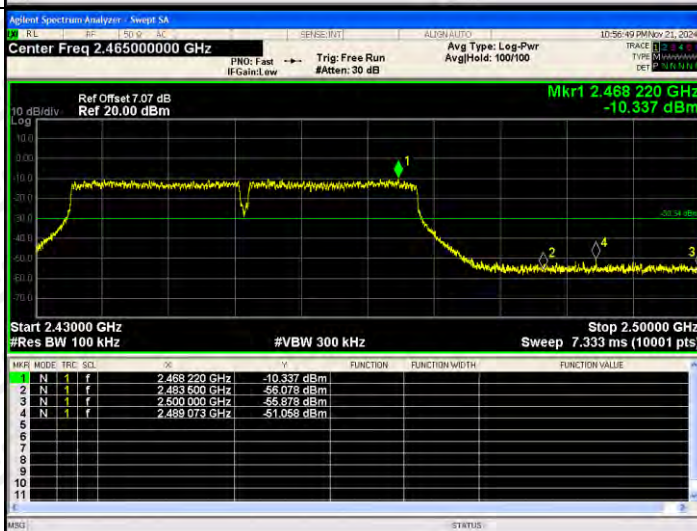

RF Conducted Spurious Emissions Graphs



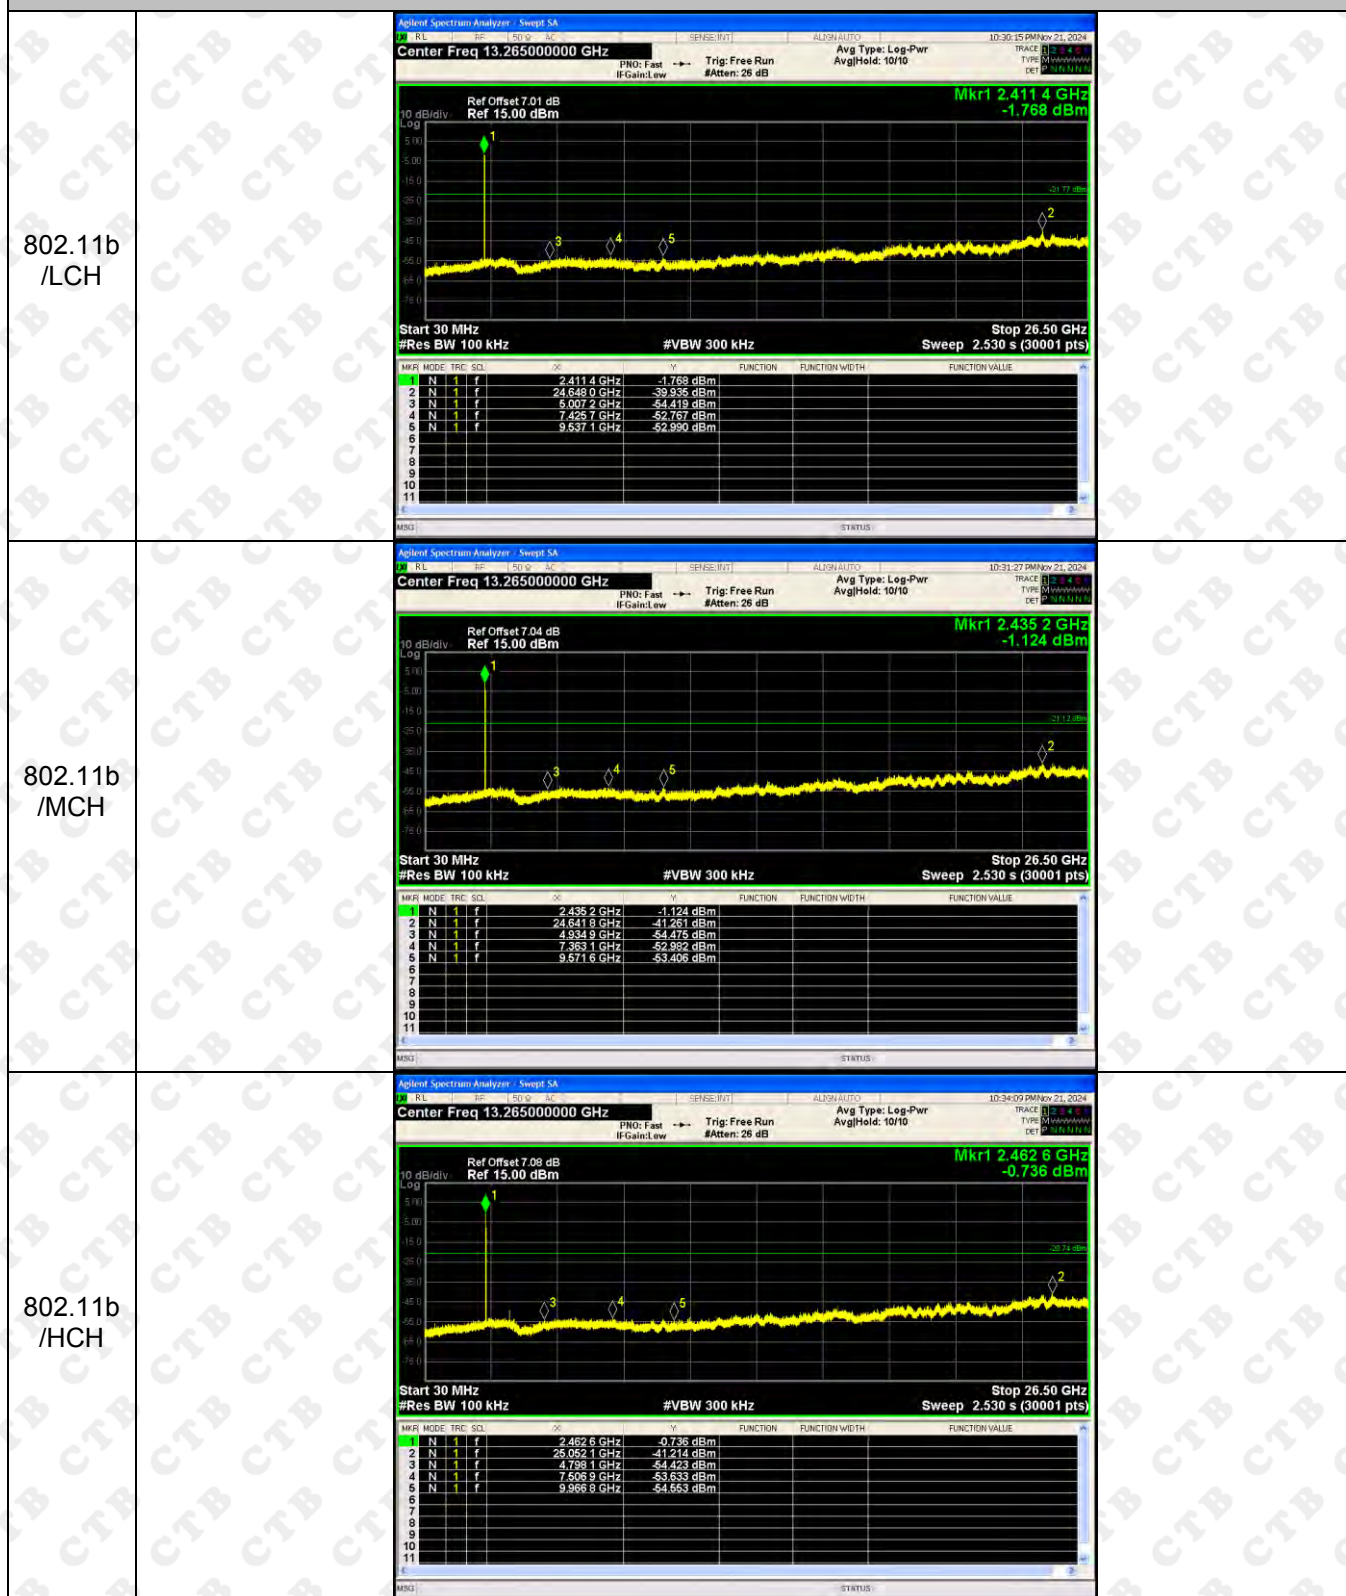


RF Conducted Spurious Emissions Graphs

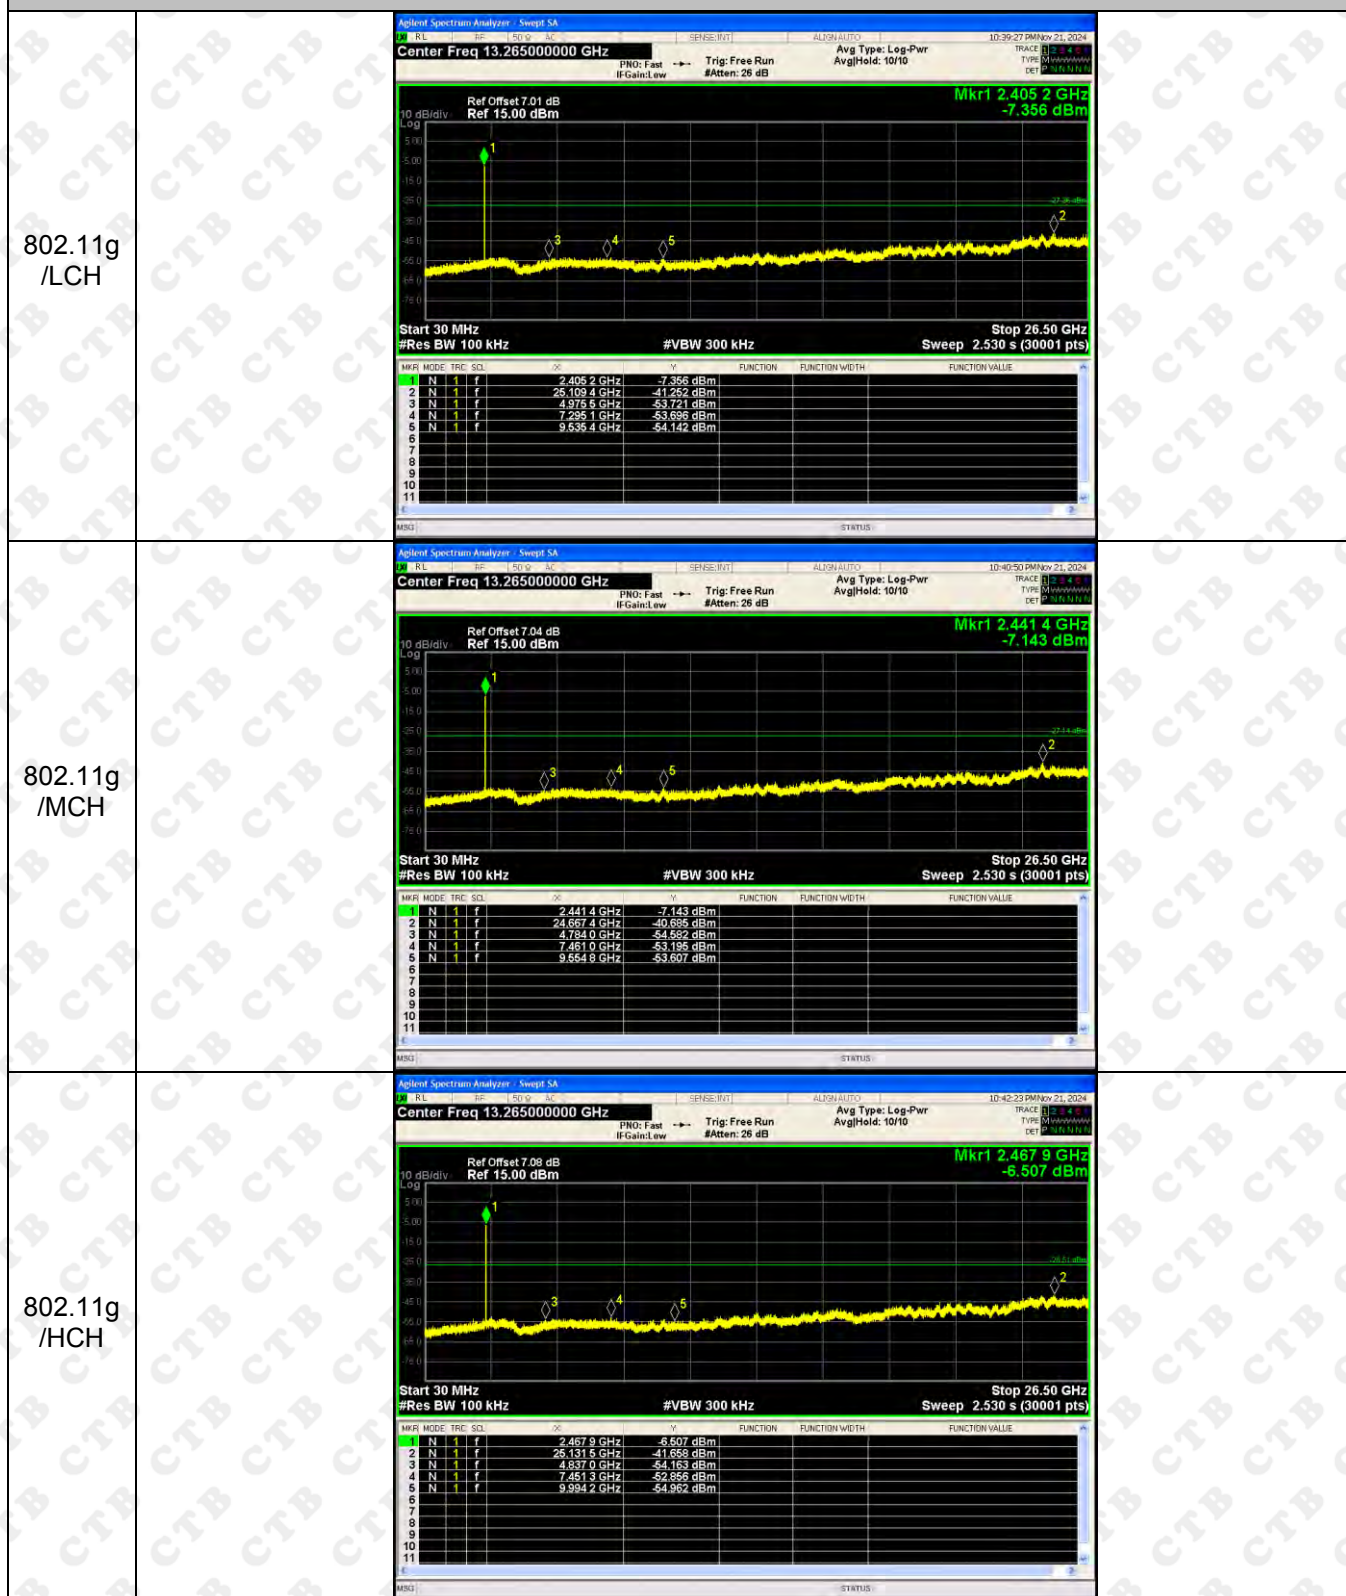


RF Conducted Spurious Emissions Graphs

802.11n (HT20)/ LCH	<table><tr><th>CH</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.4185 GHz</td><td>-7.407 dBm</td></tr><tr><td>2</td><td>24.2077 GHz</td><td>-41.397 dBm</td></tr><tr><td>3</td><td>4.7528 GHz</td><td>-54.791 dBm</td></tr><tr><td>4</td><td>7.4495 GHz</td><td>-53.624 dBm</td></tr><tr><td>5</td><td>9.5124 GHz</td><td>-53.341 dBm</td></tr></table>	CH	Freq	Power	1	2.4185 GHz	-7.407 dBm	2	24.2077 GHz	-41.397 dBm	3	4.7528 GHz	-54.791 dBm	4	7.4495 GHz	-53.624 dBm	5	9.5124 GHz	-53.341 dBm
CH	Freq	Power																	
1	2.4185 GHz	-7.407 dBm																	
2	24.2077 GHz	-41.397 dBm																	
3	4.7528 GHz	-54.791 dBm																	
4	7.4495 GHz	-53.624 dBm																	
5	9.5124 GHz	-53.341 dBm																	
802.11 n(HT20) /MCH	<table><tr><th>CH</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.4414 GHz</td><td>-7.857 dBm</td></tr><tr><td>2</td><td>24.6665 GHz</td><td>-41.373 dBm</td></tr><tr><td>3</td><td>4.9781 GHz</td><td>-54.172 dBm</td></tr><tr><td>4</td><td>7.4760 GHz</td><td>-53.692 dBm</td></tr><tr><td>5</td><td>9.6220 GHz</td><td>-54.653 dBm</td></tr></table>	CH	Freq	Power	1	2.4414 GHz	-7.857 dBm	2	24.6665 GHz	-41.373 dBm	3	4.9781 GHz	-54.172 dBm	4	7.4760 GHz	-53.692 dBm	5	9.6220 GHz	-54.653 dBm
CH	Freq	Power																	
1	2.4414 GHz	-7.857 dBm																	
2	24.6665 GHz	-41.373 dBm																	
3	4.9781 GHz	-54.172 dBm																	
4	7.4760 GHz	-53.692 dBm																	
5	9.6220 GHz	-54.653 dBm																	
802.11 n(HT20) /HCH	<table><tr><th>CH</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.4661 GHz</td><td>-7.793 dBm</td></tr><tr><td>2</td><td>24.6400 GHz</td><td>-41.166 dBm</td></tr><tr><td>3</td><td>4.8472 GHz</td><td>-54.288 dBm</td></tr><tr><td>4</td><td>7.3578 GHz</td><td>-53.641 dBm</td></tr><tr><td>5</td><td>9.6742 GHz</td><td>-54.910 dBm</td></tr></table>	CH	Freq	Power	1	2.4661 GHz	-7.793 dBm	2	24.6400 GHz	-41.166 dBm	3	4.8472 GHz	-54.288 dBm	4	7.3578 GHz	-53.641 dBm	5	9.6742 GHz	-54.910 dBm
CH	Freq	Power																	
1	2.4661 GHz	-7.793 dBm																	
2	24.6400 GHz	-41.166 dBm																	
3	4.8472 GHz	-54.288 dBm																	
4	7.3578 GHz	-53.641 dBm																	
5	9.6742 GHz	-54.910 dBm																	

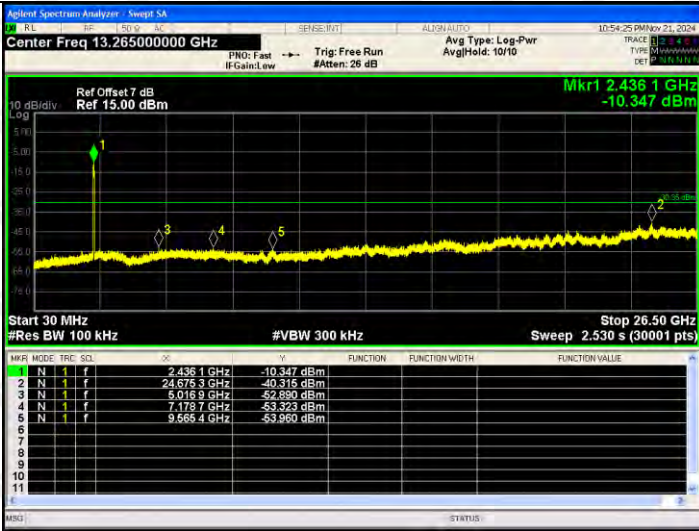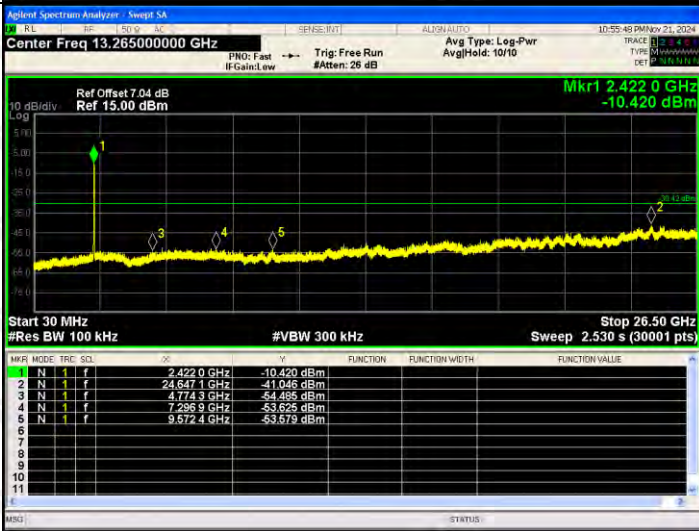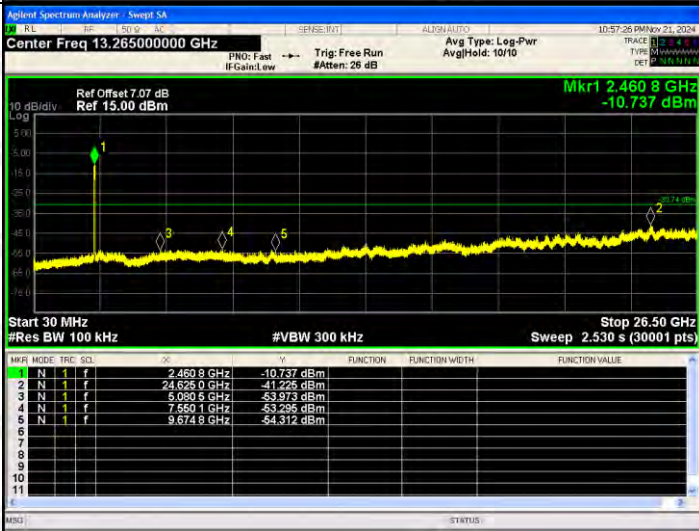
802.11n (HT40)/ LCH	
802.11 n(HT40)/ MCH	
802.11 n(HT40)/ HCH	

ANT2:

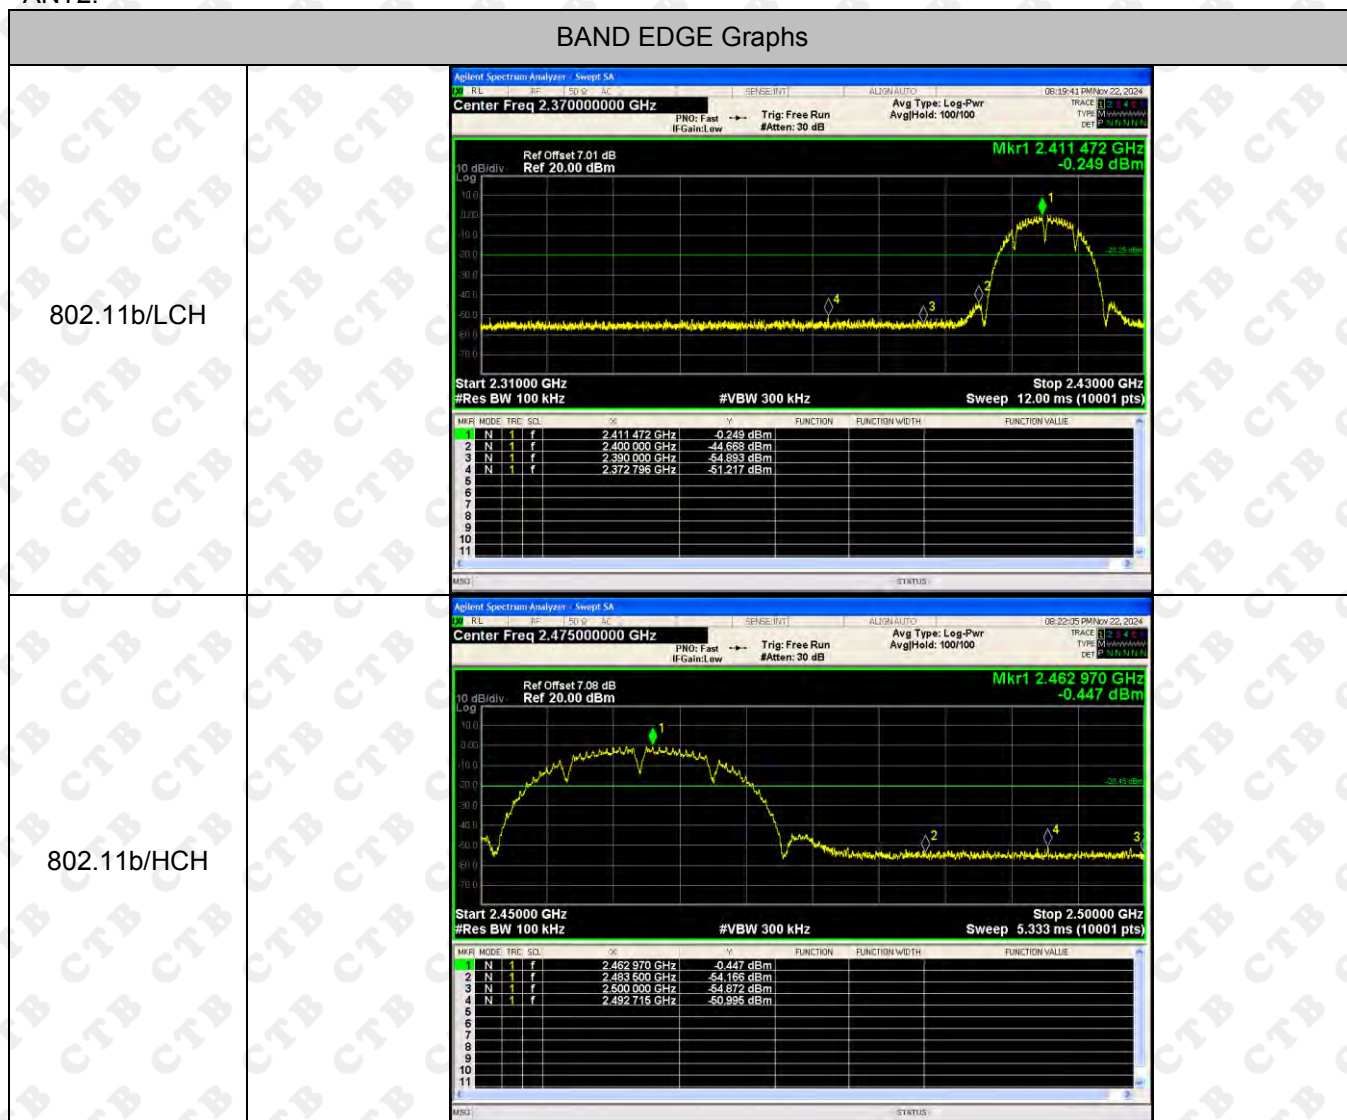


BAND EDGE Graphs

802.11g/LCH

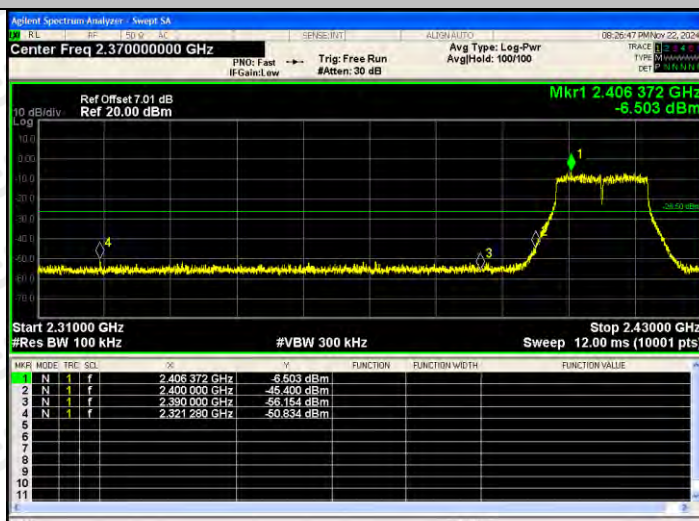


802.11g/HCH

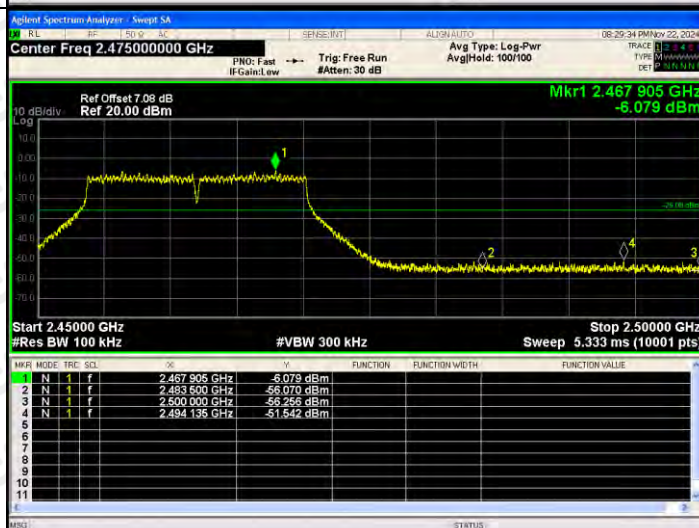


BAND EDGE Graphs

802.11n(HT20)/L
CH

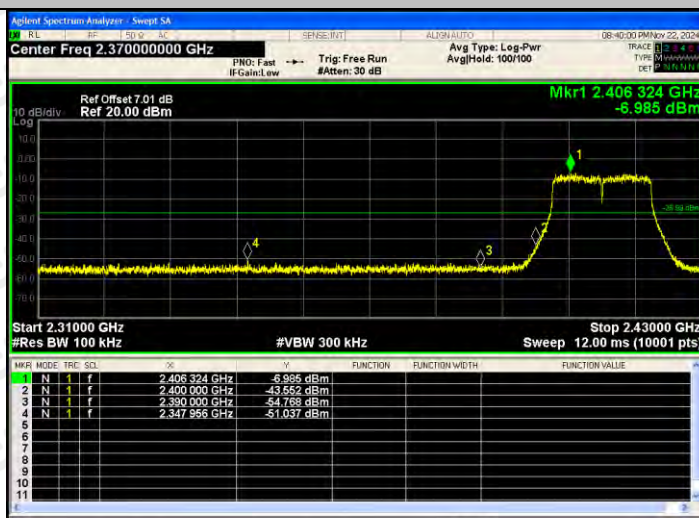


802.11n(HT20)/H
CH

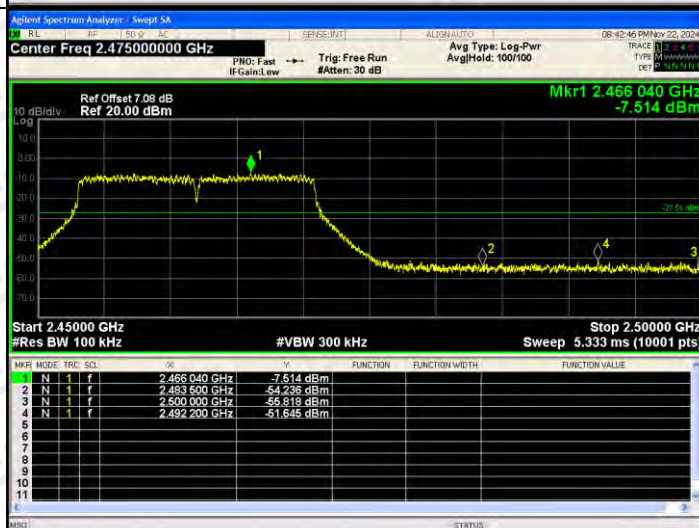

BAND EDGE Graphs

802.11n(HT40)/L
CH

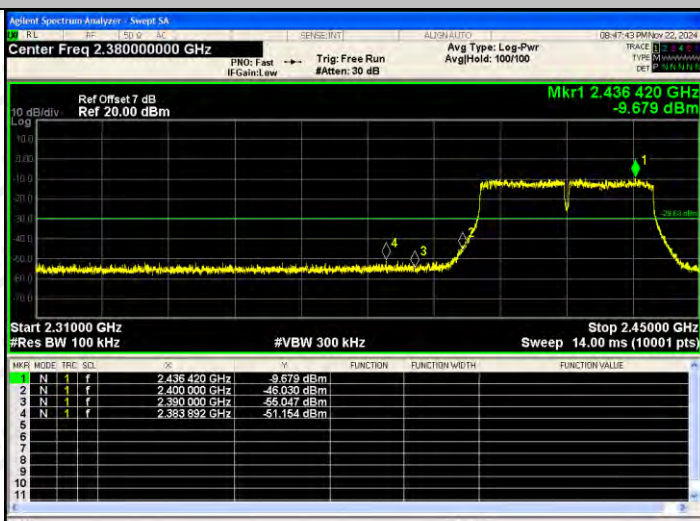


802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

802.11b /LCH	Agilent Spectrum Analyzer - Sweep SA RL RF LO 13.26500000 GHz SENSE: PWR ALIGN: AUTO 06:20:14 PM Nov 22, 2024 Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr Avg Hold: 10/10 10 dB/div Ref Offset 7.01 dB Ref 15.00 dBm Mkr1 2.4114 GHz -0.829 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>Δf</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.4114 GHz</td><td>-0.829 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>24.6392 GHz</td><td>-40.103 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.6693 GHz</td><td>-54.119 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.2704 GHz</td><td>-52.355 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.6256 GHz</td><td>-52.171 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MNO STATUS	MFR	MODE	TRC	SQL	Δf	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4114 GHz	-0.829 dBm				2	N	1	f		24.6392 GHz	-40.103 dBm				3	N	1	f		4.6693 GHz	-54.119 dBm				4	N	1	f		7.2704 GHz	-52.355 dBm				5	N	1	f		9.6256 GHz	-52.171 dBm				6										7										8										9										10										11									
MFR	MODE	TRC	SQL	Δf	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																
1	N	1	f		2.4114 GHz	-0.829 dBm																																																																																																																			
2	N	1	f		24.6392 GHz	-40.103 dBm																																																																																																																			
3	N	1	f		4.6693 GHz	-54.119 dBm																																																																																																																			
4	N	1	f		7.2704 GHz	-52.355 dBm																																																																																																																			
5	N	1	f		9.6256 GHz	-52.171 dBm																																																																																																																			
6																																																																																																																									
7																																																																																																																									
8																																																																																																																									
9																																																																																																																									
10																																																																																																																									
11																																																																																																																									
802.11b /MCH	Agilent Spectrum Analyzer - Sweep SA RL RF LO 13.26500000 GHz SENSE: PWR ALIGN: AUTO 06:21:23 PM Nov 22, 2024 Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr Avg Hold: 10/10 10 dB/div Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.4361 GHz -0.387 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>Δf</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.4361 GHz</td><td>-0.387 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>25.0963 GHz</td><td>-40.691 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.7637 GHz</td><td>-54.074 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.1416 GHz</td><td>-52.311 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.6521 GHz</td><td>-53.329 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MNO STATUS	MFR	MODE	TRC	SQL	Δf	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4361 GHz	-0.387 dBm				2	N	1	f		25.0963 GHz	-40.691 dBm				3	N	1	f		4.7637 GHz	-54.074 dBm				4	N	1	f		7.1416 GHz	-52.311 dBm				5	N	1	f		9.6521 GHz	-53.329 dBm				6										7										8										9										10										11									
MFR	MODE	TRC	SQL	Δf	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																
1	N	1	f		2.4361 GHz	-0.387 dBm																																																																																																																			
2	N	1	f		25.0963 GHz	-40.691 dBm																																																																																																																			
3	N	1	f		4.7637 GHz	-54.074 dBm																																																																																																																			
4	N	1	f		7.1416 GHz	-52.311 dBm																																																																																																																			
5	N	1	f		9.6521 GHz	-53.329 dBm																																																																																																																			
6																																																																																																																									
7																																																																																																																									
8																																																																																																																									
9																																																																																																																									
10																																																																																																																									
11																																																																																																																									
802.11b /HCH	Agilent Spectrum Analyzer - Sweep SA RL RF LO 13.26500000 GHz SENSE: PWR ALIGN: AUTO 06:22:39 PM Nov 22, 2024 Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr Avg Hold: 10/10 10 dB/div Ref Offset 7.08 dB Ref 15.00 dBm Mkr1 2.4626 GHz -0.684 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>Δf</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.4626 GHz</td><td>-0.684 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>25.1474 GHz</td><td>-41.697 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>5.0540 GHz</td><td>-54.142 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.3913 GHz</td><td>-53.050 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.9739 GHz</td><td>-54.609 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MNO STATUS	MFR	MODE	TRC	SQL	Δf	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4626 GHz	-0.684 dBm				2	N	1	f		25.1474 GHz	-41.697 dBm				3	N	1	f		5.0540 GHz	-54.142 dBm				4	N	1	f		7.3913 GHz	-53.050 dBm				5	N	1	f		9.9739 GHz	-54.609 dBm				6										7										8										9										10										11									
MFR	MODE	TRC	SQL	Δf	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																
1	N	1	f		2.4626 GHz	-0.684 dBm																																																																																																																			
2	N	1	f		25.1474 GHz	-41.697 dBm																																																																																																																			
3	N	1	f		5.0540 GHz	-54.142 dBm																																																																																																																			
4	N	1	f		7.3913 GHz	-53.050 dBm																																																																																																																			
5	N	1	f		9.9739 GHz	-54.609 dBm																																																																																																																			
6																																																																																																																									
7																																																																																																																									
8																																																																																																																									
9																																																																																																																									
10																																																																																																																									
11																																																																																																																									


RF Conducted Spurious Emissions Graphs

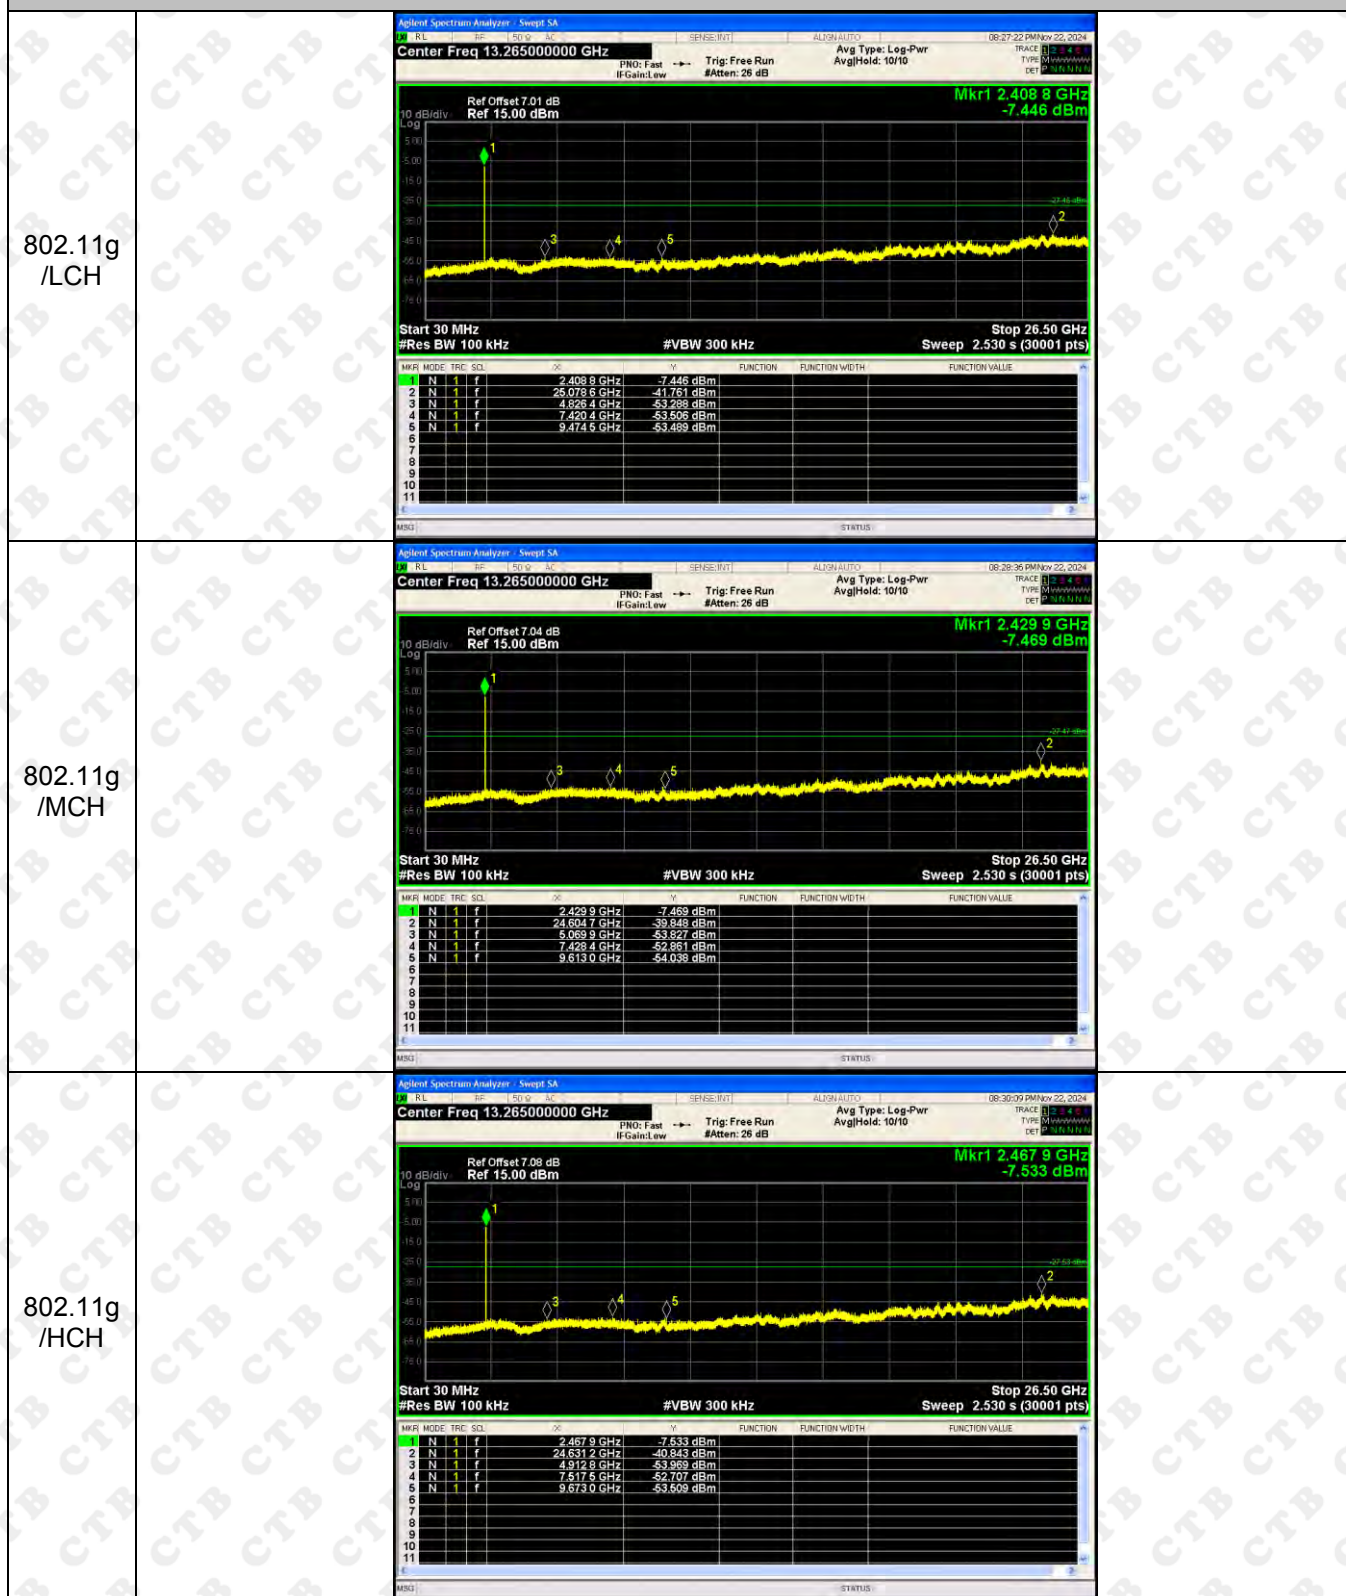

RF Conducted Spurious Emissions Graphs

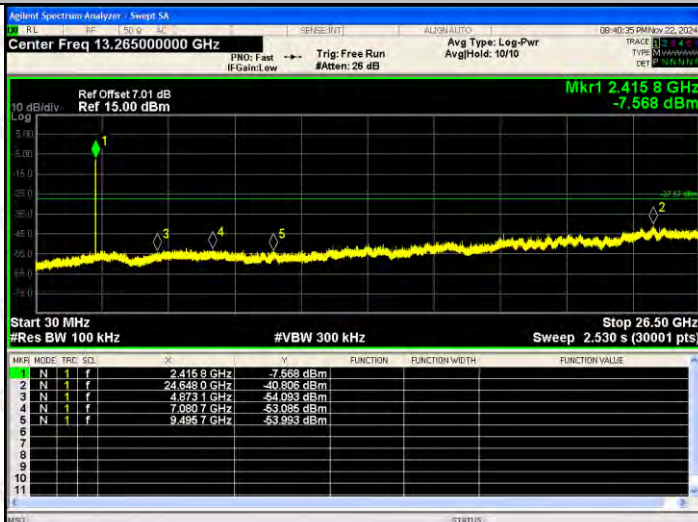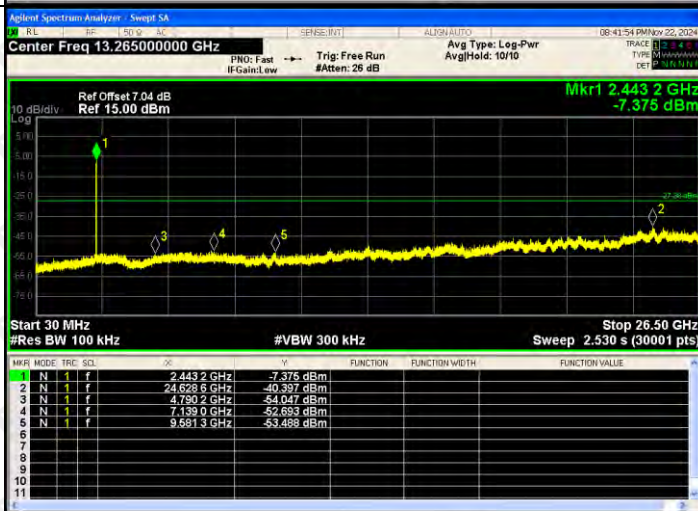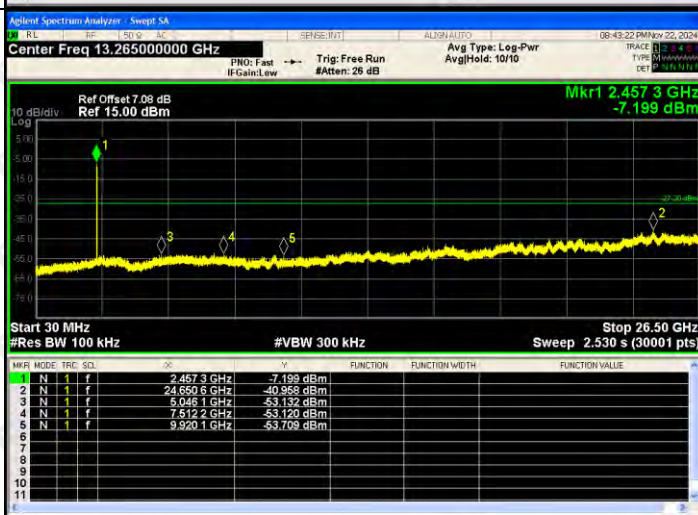802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4158 GHz</td><td>-7.688 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6480 GHz</td><td>-40.806 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8731 GHz</td><td>-54.093 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.6897 GHz</td><td>-53.085 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.4987 GHz</td><td>-53.955 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4158 GHz	-7.688 dBm				2	N	1	f	24.6480 GHz	-40.806 dBm				3	N	1	f	4.8731 GHz	-54.093 dBm				4	N	1	f	7.6897 GHz	-53.085 dBm				5	N	1	f	9.4987 GHz	-53.955 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4158 GHz	-7.688 dBm																																																		
2	N	1	f	24.6480 GHz	-40.806 dBm																																																		
3	N	1	f	4.8731 GHz	-54.093 dBm																																																		
4	N	1	f	7.6897 GHz	-53.085 dBm																																																		
5	N	1	f	9.4987 GHz	-53.955 dBm																																																		
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4432 GHz</td><td>-7.375 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6286 GHz</td><td>-40.397 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7902 GHz</td><td>-54.047 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1390 GHz</td><td>-52.693 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5813 GHz</td><td>-53.468 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4432 GHz	-7.375 dBm				2	N	1	f	24.6286 GHz	-40.397 dBm				3	N	1	f	4.7902 GHz	-54.047 dBm				4	N	1	f	7.1390 GHz	-52.693 dBm				5	N	1	f	9.5813 GHz	-53.468 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4432 GHz	-7.375 dBm																																																		
2	N	1	f	24.6286 GHz	-40.397 dBm																																																		
3	N	1	f	4.7902 GHz	-54.047 dBm																																																		
4	N	1	f	7.1390 GHz	-52.693 dBm																																																		
5	N	1	f	9.5813 GHz	-53.468 dBm																																																		
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4573 GHz</td><td>-7.199 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6506 GHz</td><td>-40.968 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0481 GHz</td><td>-53.132 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5122 GHz</td><td>-53.120 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5201 GHz</td><td>-53.709 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4573 GHz	-7.199 dBm				2	N	1	f	24.6506 GHz	-40.968 dBm				3	N	1	f	5.0481 GHz	-53.132 dBm				4	N	1	f	7.5122 GHz	-53.120 dBm				5	N	1	f	9.5201 GHz	-53.709 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4573 GHz	-7.199 dBm																																																		
2	N	1	f	24.6506 GHz	-40.968 dBm																																																		
3	N	1	f	5.0481 GHz	-53.132 dBm																																																		
4	N	1	f	7.5122 GHz	-53.120 dBm																																																		
5	N	1	f	9.5201 GHz	-53.709 dBm																																																		

RF Conducted Spurious Emissions Graphs

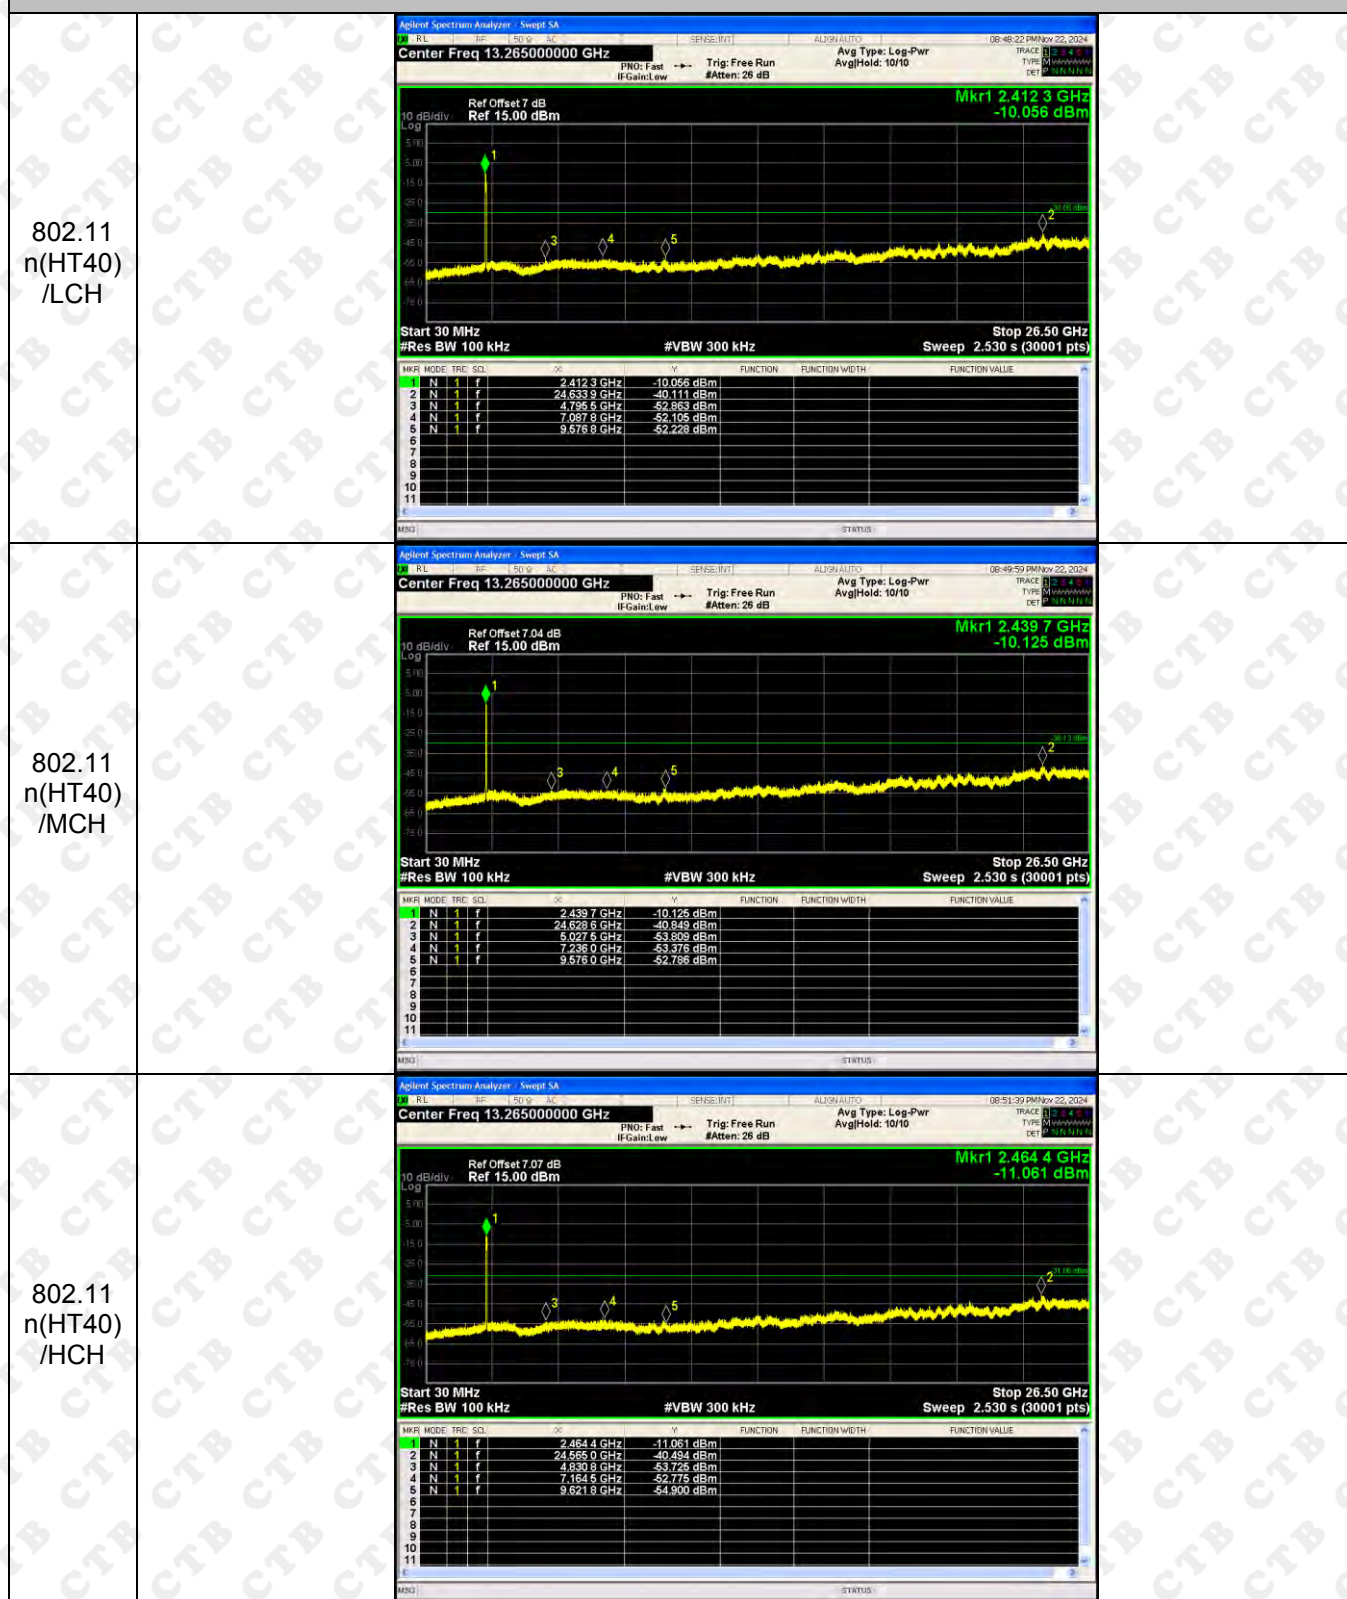

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.297	13.098	/	30
	MCH	12.652	13.159	/	30
	HCH	12.655	12.975	/	30
802.11g	LCH	14.002	13.638	/	30
	MCH	13.625	13.734	/	30
	HCH	13.426	13.463	/	30
802.11n(HT20)	LCH	13.671	13.389	16.543	30
	MCH	13.305	13.363	16.344	30
	HCH	13.169	13.203	16.196	30
802.11n(HT40)	LCH	13.423	13.98	16.721	30
	MCH	13.628	13.717	16.683	30
	HCH	13.384	13.642	16.525	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

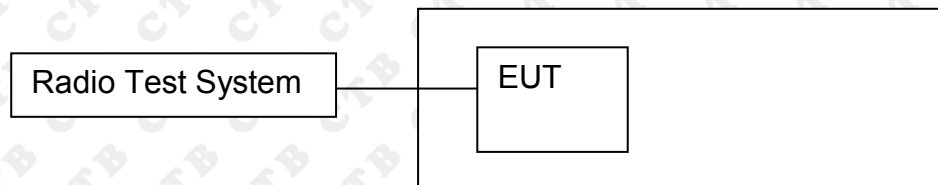

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result


ANT1:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.083	500	PASS
	MCH	10.092	500	PASS
	HCH	10.126	500	PASS
802.11g	LCH	16.550	500	PASS
	MCH	16.507	500	PASS
	HCH	16.520	500	PASS
802.11n(HT20)	LCH	17.781	500	PASS
	MCH	17.731	500	PASS
	HCH	17.772	500	PASS
802.11n(HT40)	LCH	36.475	500	PASS
	MCH	36.492	500	PASS
	HCH	36.496	500	PASS




ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.127	500	PASS
	MCH	10.088	500	PASS
	HCH	10.118	500	PASS
802.11g	LCH	16.489	500	PASS
	MCH	16.529	500	PASS
	HCH	16.493	500	PASS
802.11n(HT20)	LCH	17.770	500	PASS
	MCH	17.786	500	PASS
	HCH	17.770	500	PASS
802.11n(HT40)	LCH	36.470	500	PASS
	MCH	36.502	500	PASS
	HCH	36.495	500	PASS

ANT1:
Test Graph:

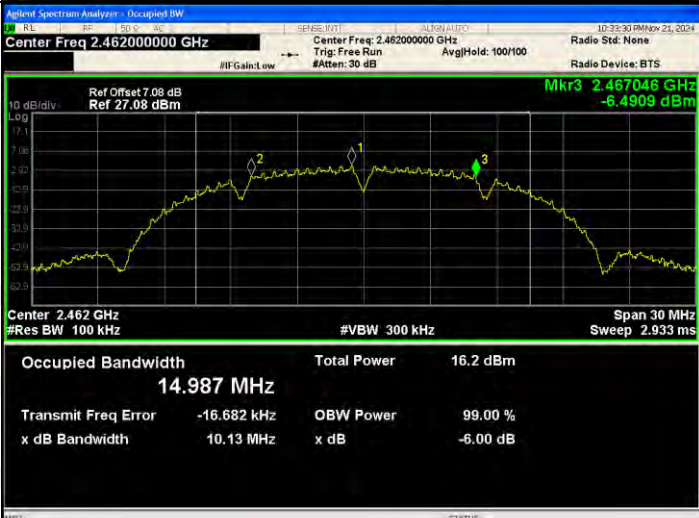Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 7.01 dB, Ref: 27.01 dBm Occupied Bandwidth: 15.013 MHz Total Power: 16.1 dBm Transmit Freq Error: -40.235 kHz OBW Power: 99.00 % x dB Bandwidth: 10.08 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.04 dB, Ref: 27.04 dBm Occupied Bandwidth: 14.992 MHz Total Power: 16.2 dBm Transmit Freq Error: -49.457 kHz OBW Power: 99.00 % x dB Bandwidth: 10.09 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 7.08 dB, Ref: 27.08 dBm Occupied Bandwidth: 14.987 MHz Total Power: 16.2 dBm Transmit Freq Error: -16.682 kHz OBW Power: 99.00 % x dB Bandwidth: 10.13 MHz x dB: -6.00 dB

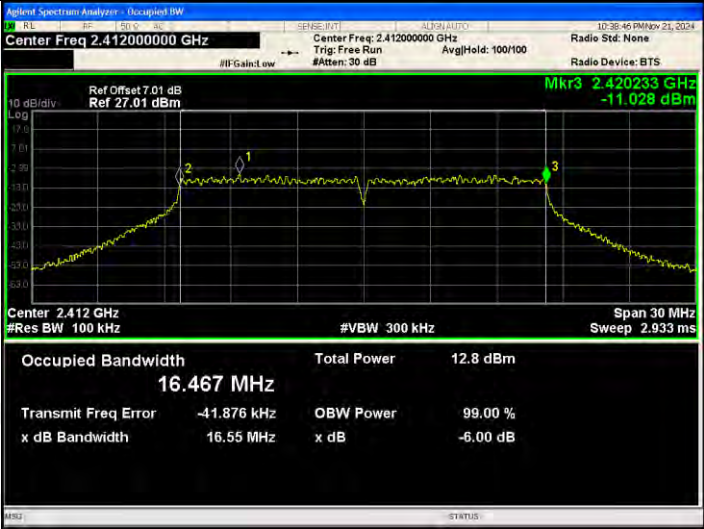
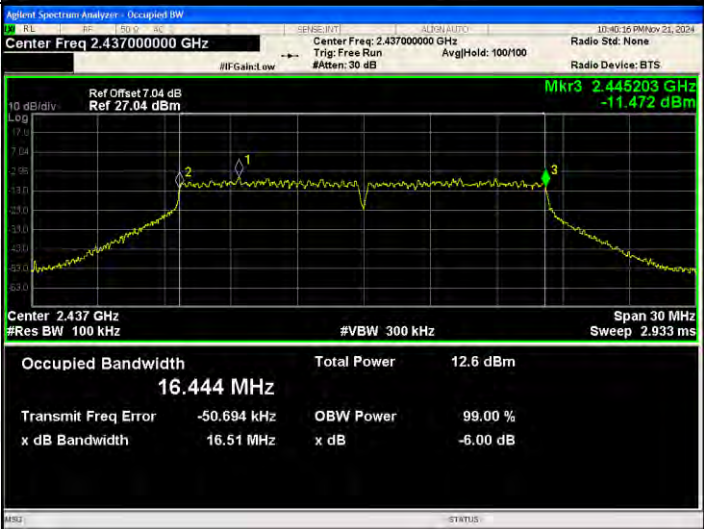
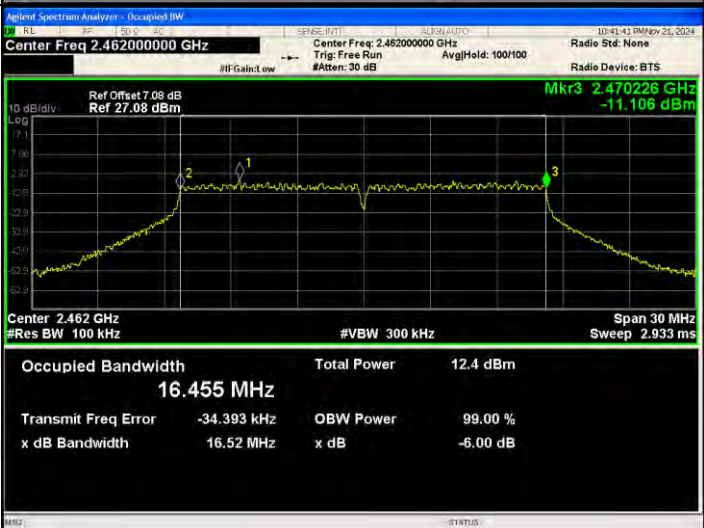
802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

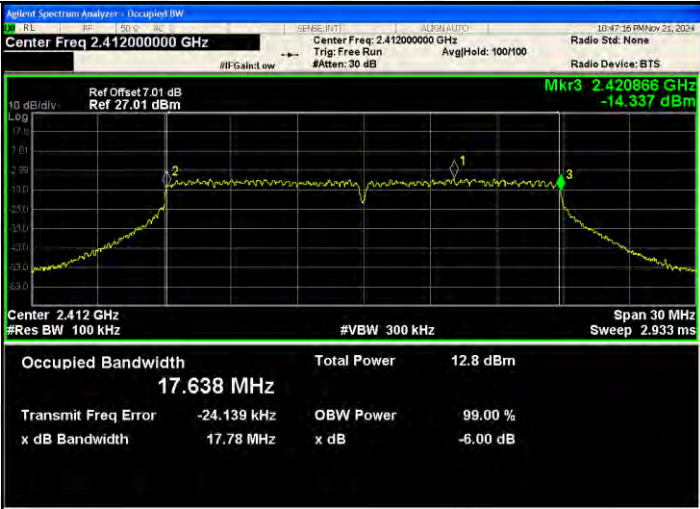
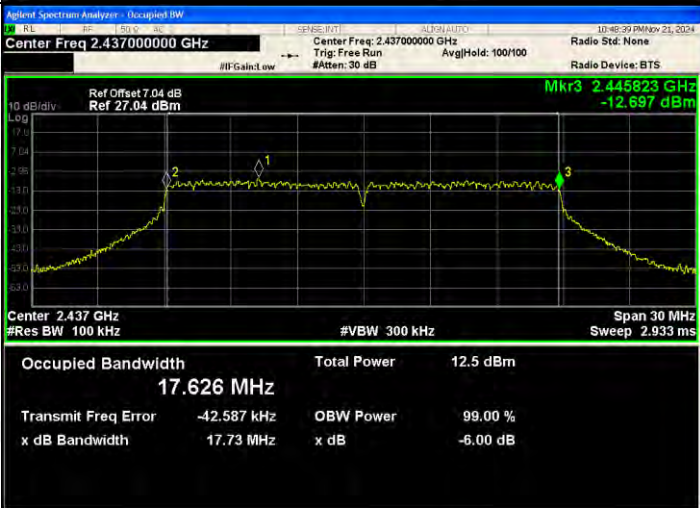
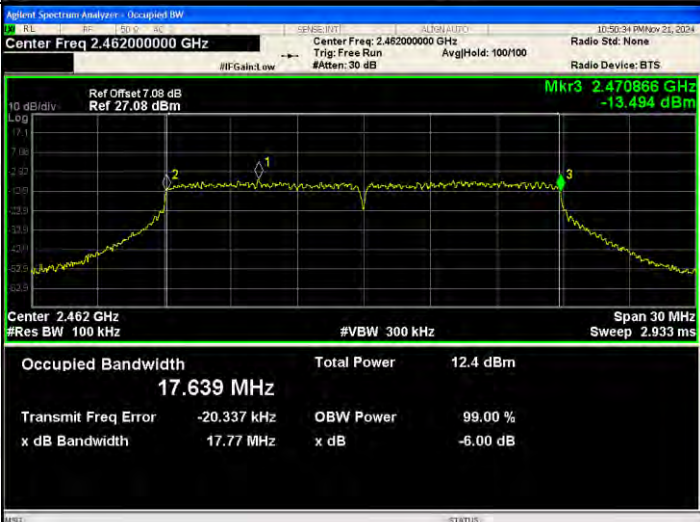
802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420866 GHz -14.337 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.638 MHz Total Power 12.8 dBm Transmit Freq Error -24.139 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445823 GHz -12.697 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.626 MHz Total Power 12.5 dBm Transmit Freq Error -42.587 kHz OBW Power 99.00 % x dB Bandwidth 17.73 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.470866 GHz -13.494 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.639 MHz Total Power 12.4 dBm Transmit Freq Error -20.337 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB

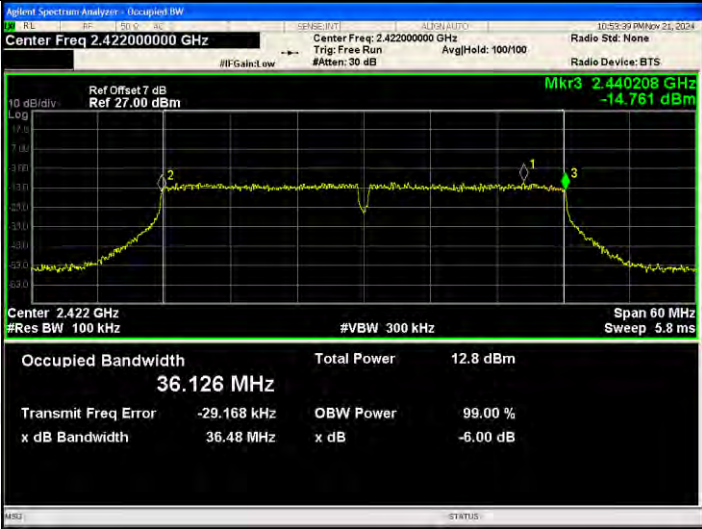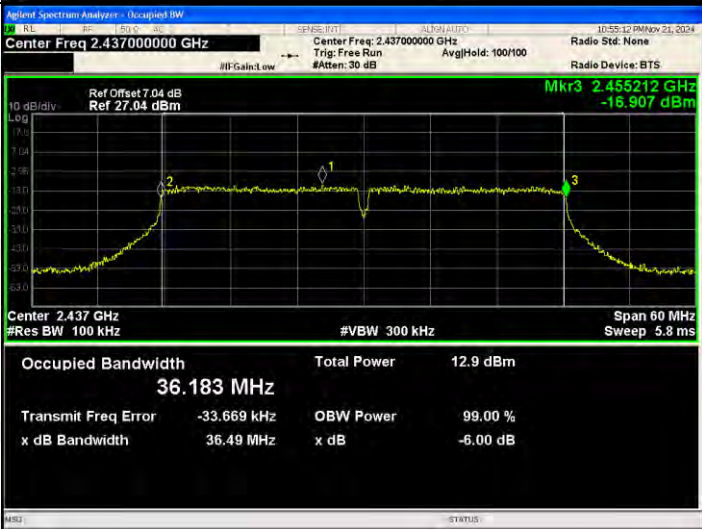
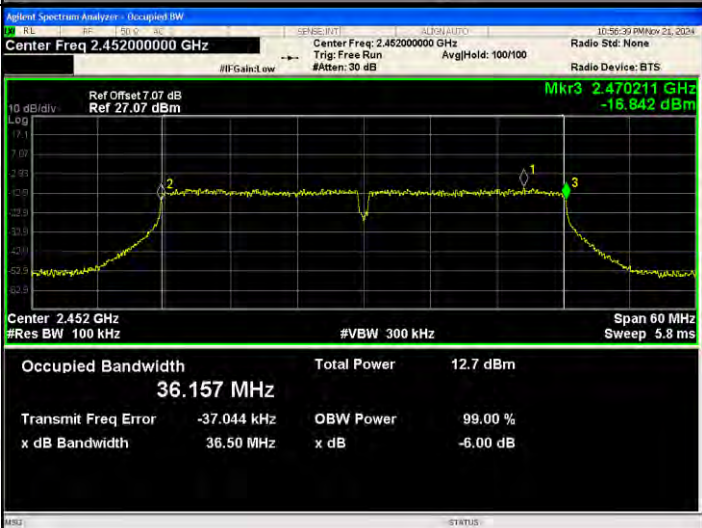
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 27.00 dBm Center Freq: 2.42200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.440208 GHz -14.761 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.126 MHz Total Power 12.8 dBm Transmit Freq Error -29.168 kHz OBW Power 99.00 % x dB Bandwidth 36.48 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Center Freq: 2.43700000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.455212 GHz -16.907 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.183 MHz Total Power 12.9 dBm Transmit Freq Error -33.669 kHz OBW Power 99.00 % x dB Bandwidth 36.49 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Center Freq: 2.45200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.470211 GHz -16.842 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.157 MHz Total Power 12.7 dBm Transmit Freq Error -37.044 kHz OBW Power 99.00 % x dB Bandwidth 36.50 MHz x dB -6.00 dB

ANT2:
Test Graph:

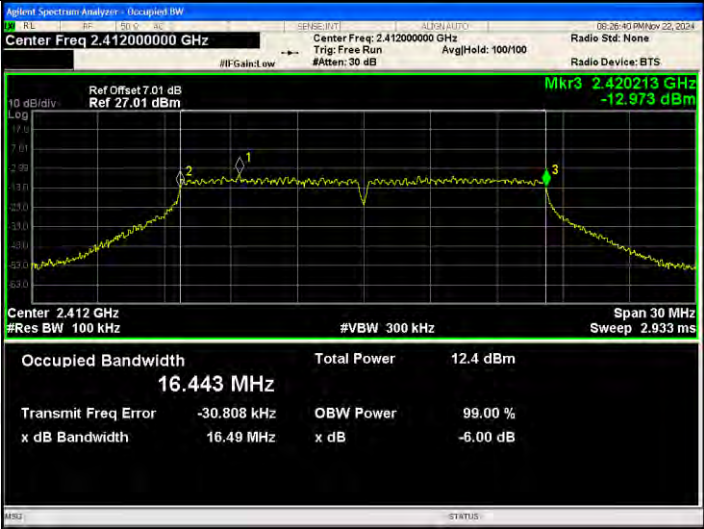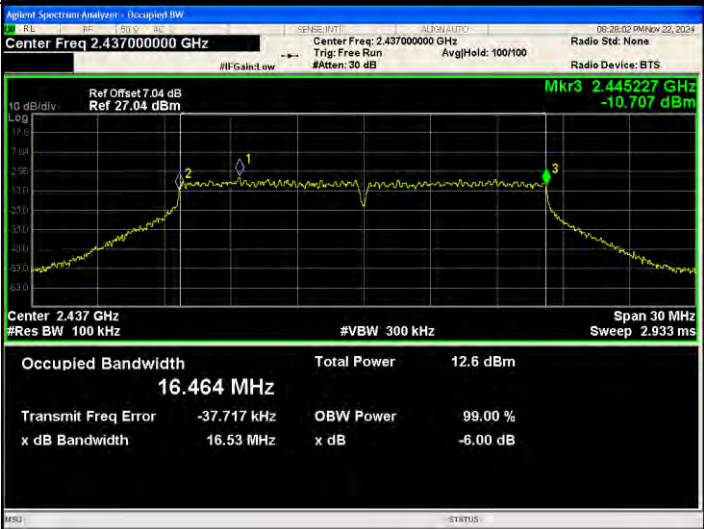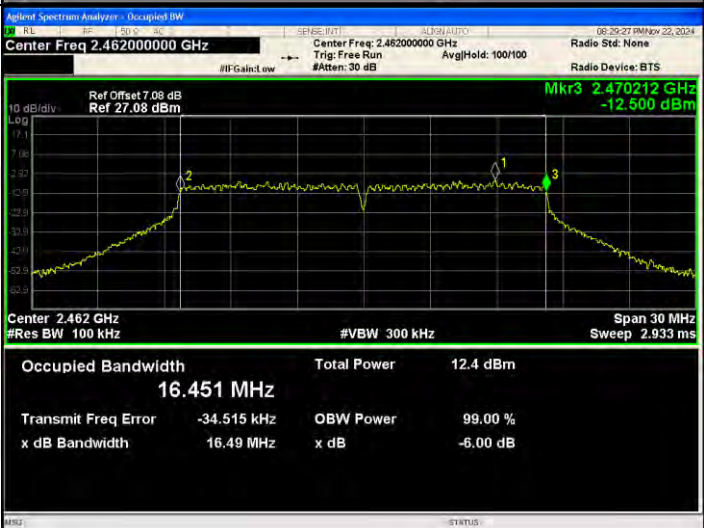


802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

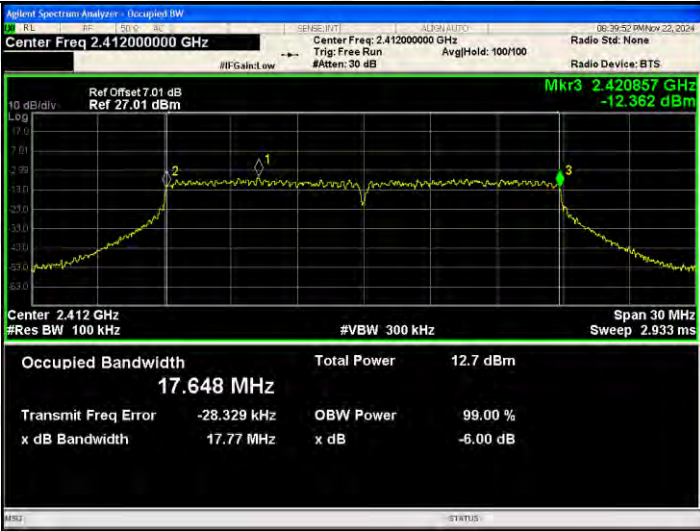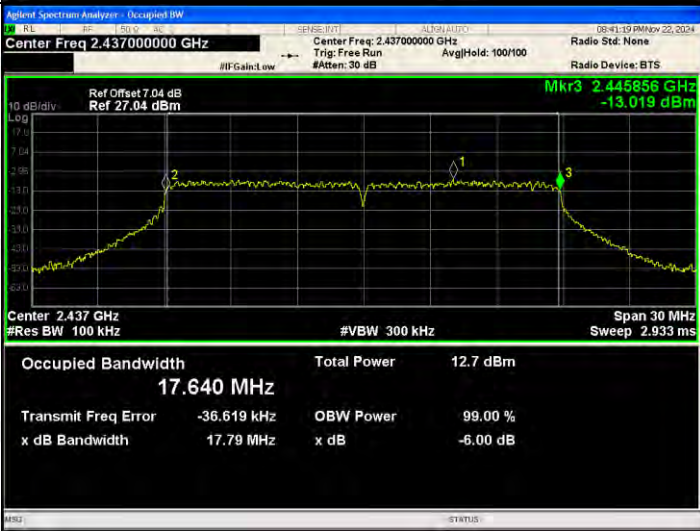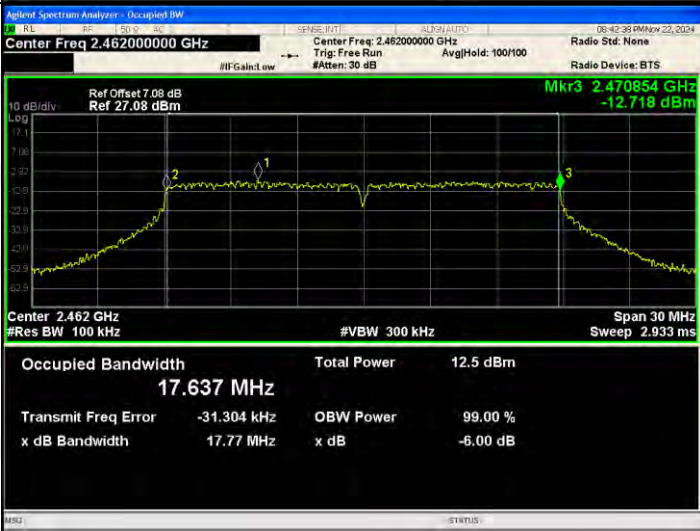802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

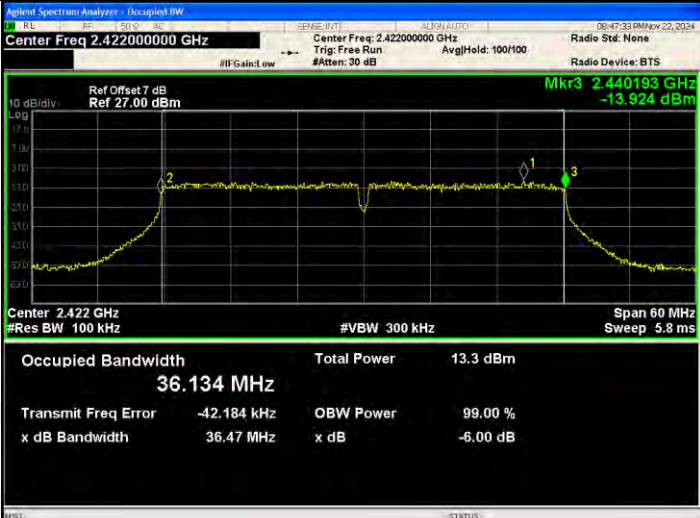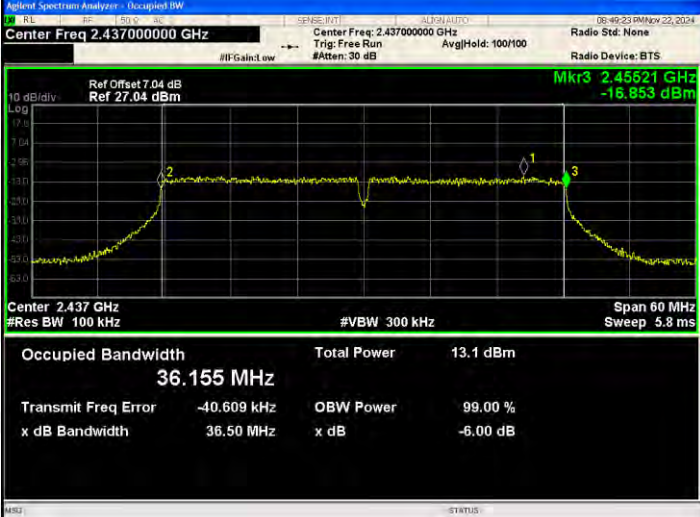802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 27.00 dBm Occupied Bandwidth 36.134 MHz Total Power 13.3 dBm Transmit Freq Error -42.184 kHz OBW Power 99.00 % x dB Bandwidth 36.47 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Occupied Bandwidth 36.155 MHz Total Power 13.1 dBm Transmit Freq Error -40.609 kHz OBW Power 99.00 % x dB Bandwidth 36.50 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Occupied Bandwidth 36.164 MHz Total Power 13.0 dBm Transmit Freq Error -36.487 kHz OBW Power 99.00 % x dB Bandwidth 36.49 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

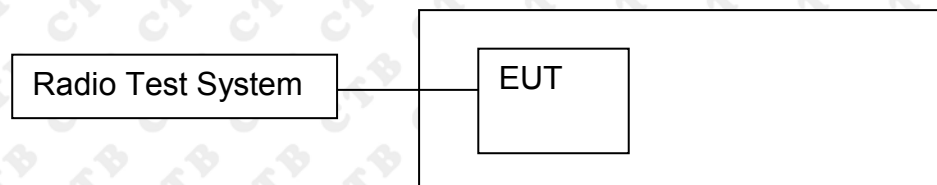

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



11.4 Test Result


Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-20.408	-19.840	/	8
	MCH	-20.905	-19.964	/	8
	HCH	-20.840	-20.300	/	8
802.11g	LCH	-20.189	-20.366	/	8
	MCH	-20.414	-20.128	/	8
	HCH	-20.553	-20.587	/	8
802.11n(H T20)	LCH	-20.699	-20.831	-17.754	8
	MCH	-21.326	-21.076	-18.189	8
	HCH	-20.938	-21.142	-18.029	8
802.11n(H T40)	LCH	-22.143	-22.073	-19.098	8
	MCH	-22.181	-22.337	-19.248	8
	HCH	-22.685	-22.435	-19.548	8

ANT1:
Test Graph

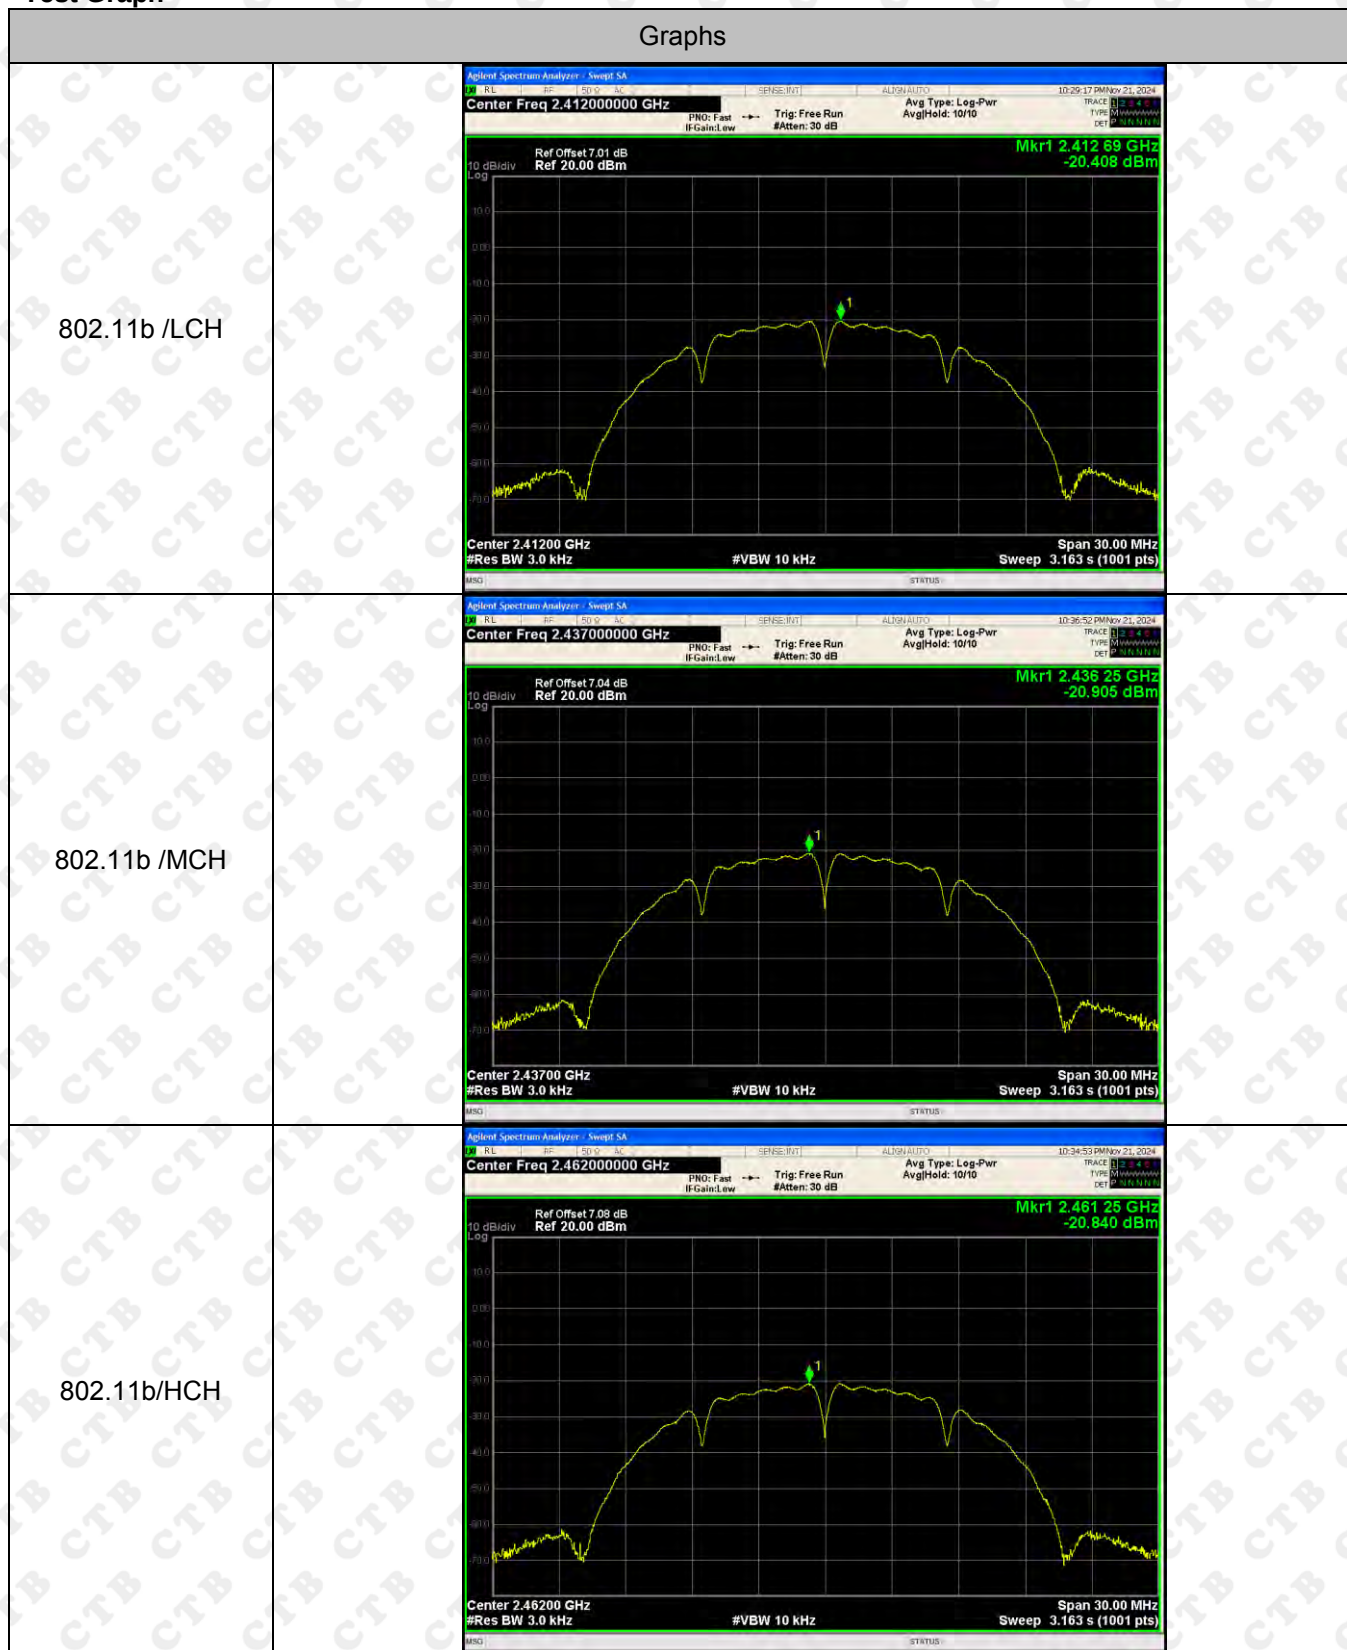

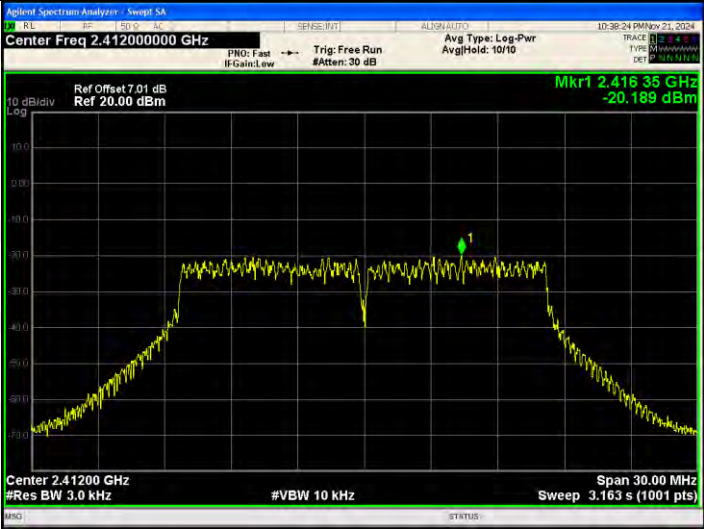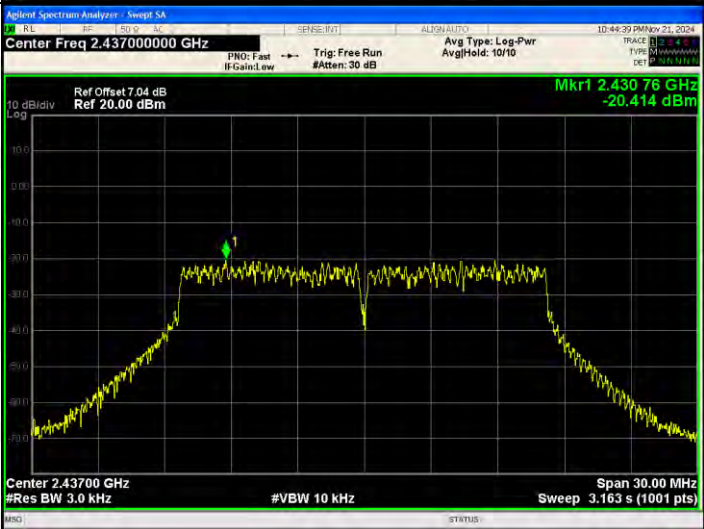
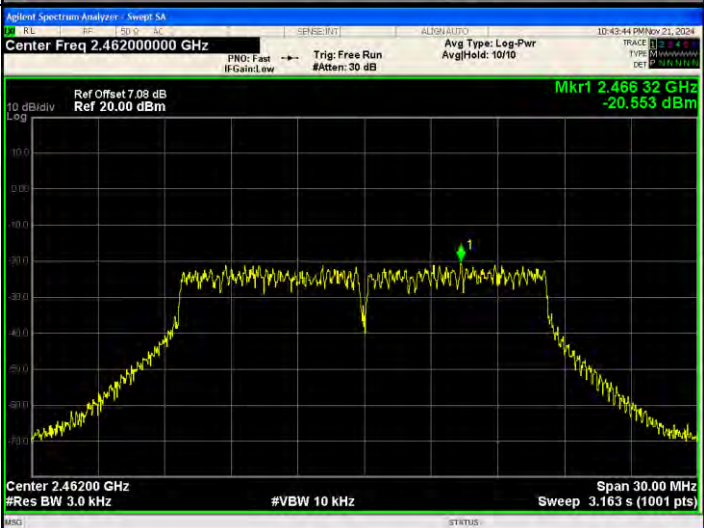
802.11g/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41835 GHz -20.189 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.43076 GHz -20.414 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.46632 GHz -20.563 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

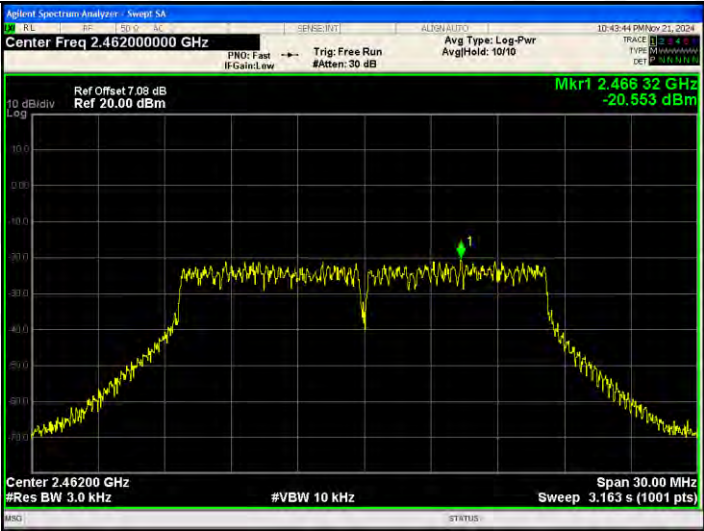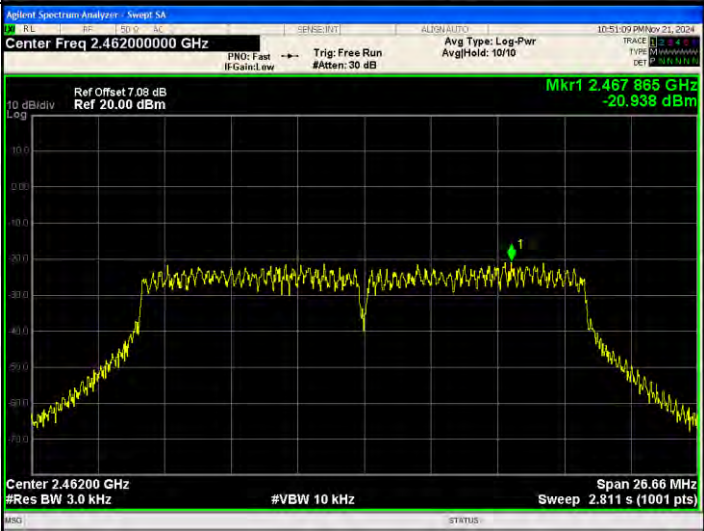802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	


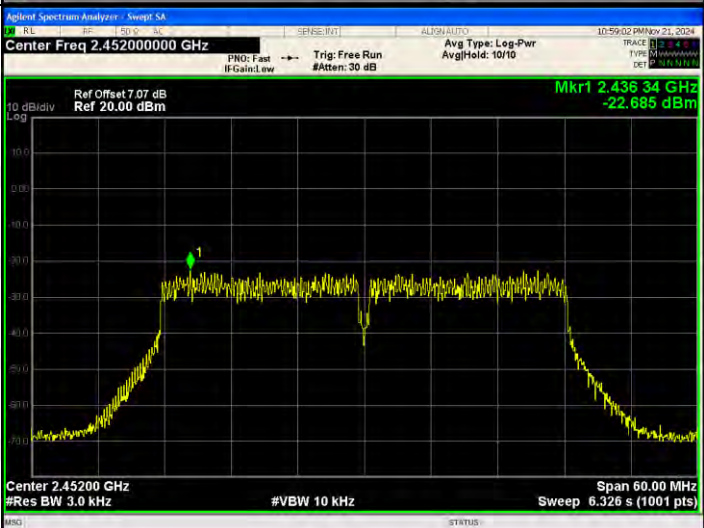
802.11n(HT40)/LC H		
802.11n(HT40)/MC H		
802.11n(HT40)/HC H		

ANT 2:
Test Graph

Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.412 89 GHz -19.840 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.436 22 GHz -19.964 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.462 75 GHz -20.300 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

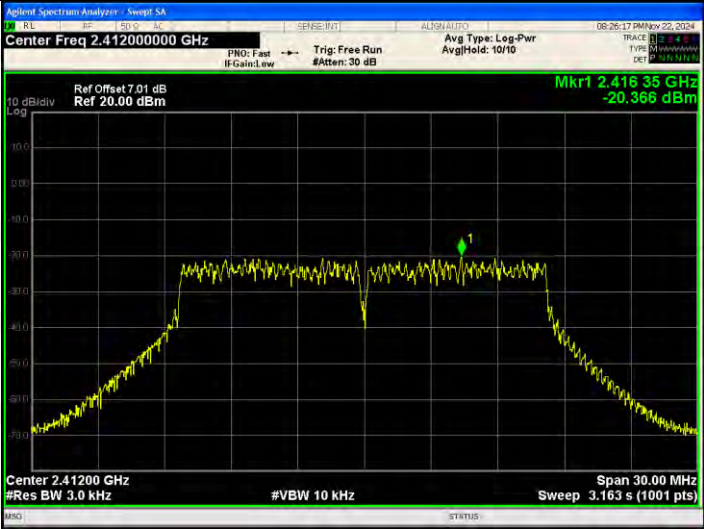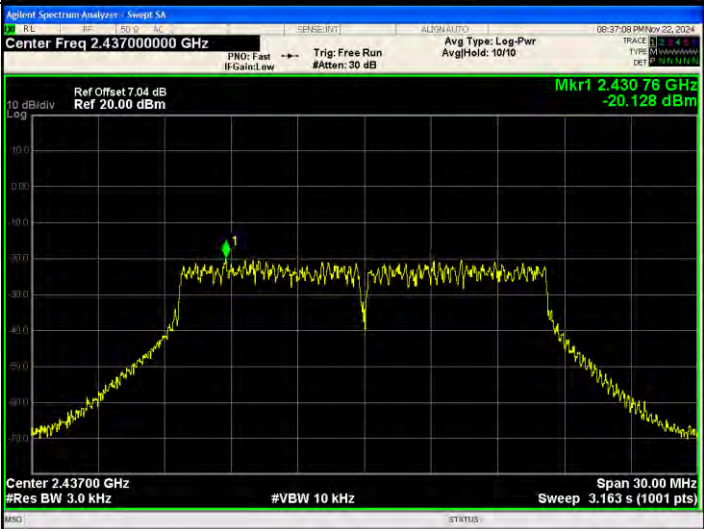802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

802.11n(HT20)/LC H		
802.11n(HT20)/MC H		
802.11n(HT20)/HC H		

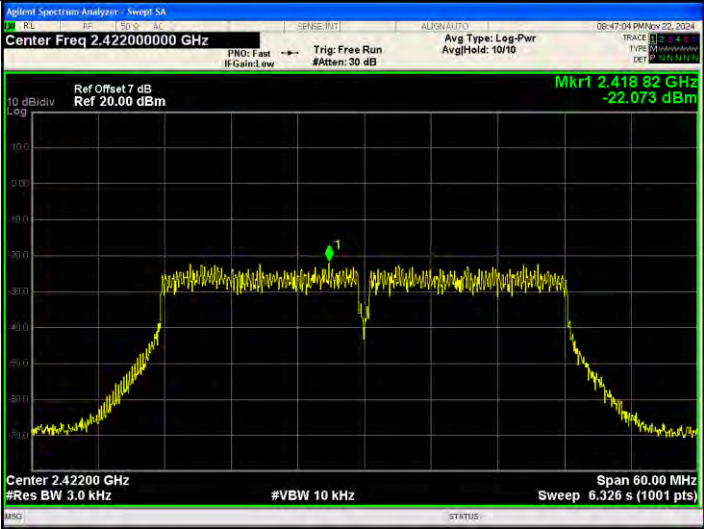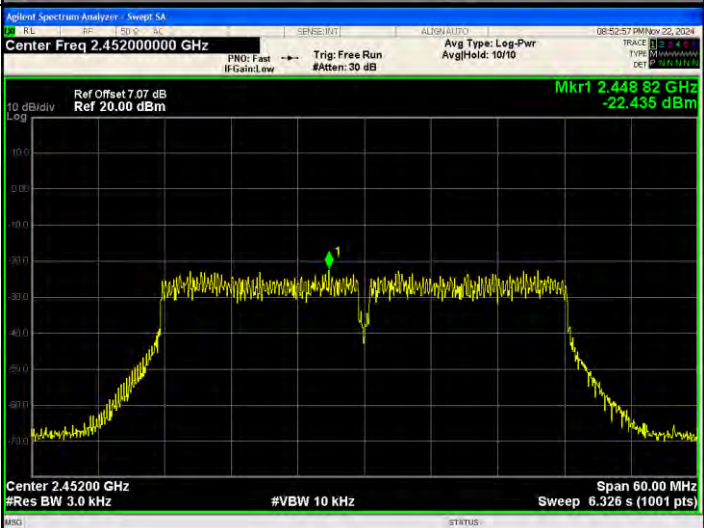802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.418 82 GHz -22.073 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.433 82 GHz -22.337 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.448 82 GHz -22.435 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is WiFi (2.4G): Ant1: 0.46dBi, Ant2: 1.02dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

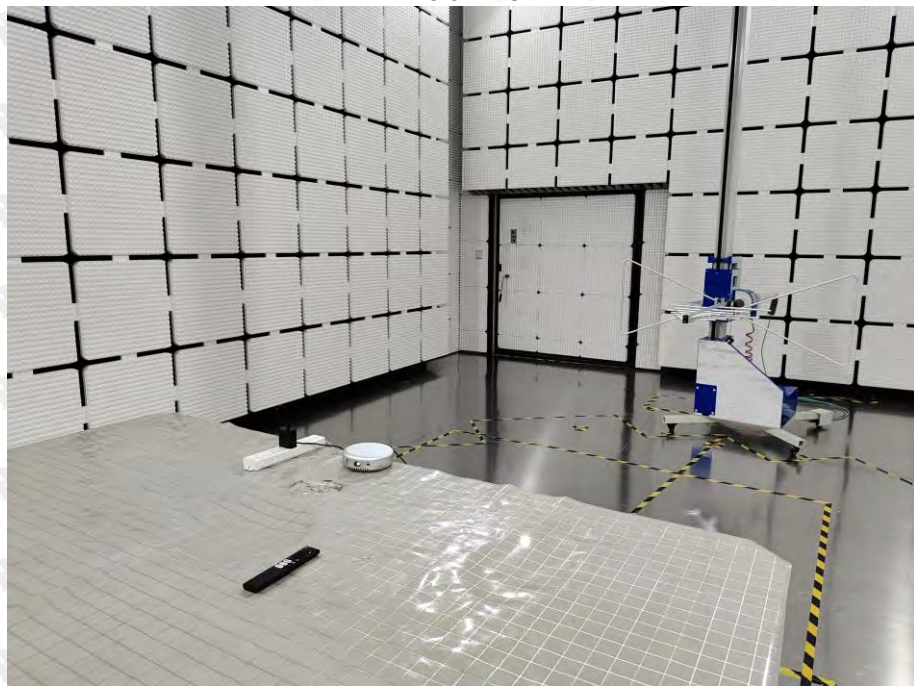

Above 1G



Conducted Emission

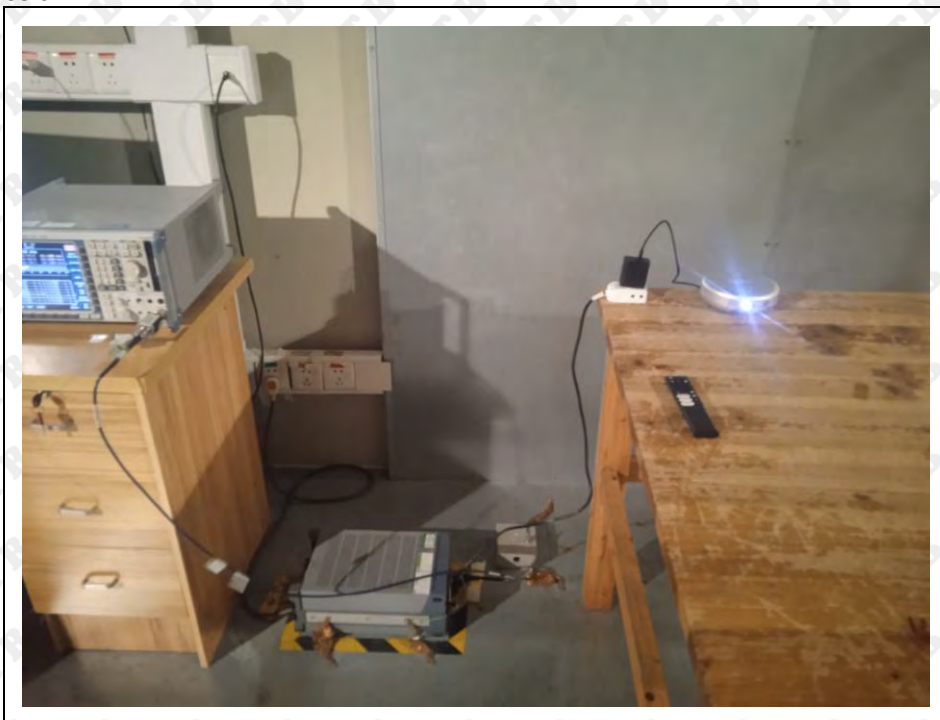

***** END OF REPORT *****