




Microwave induction Ceiling Light

Model CK-W06A-001

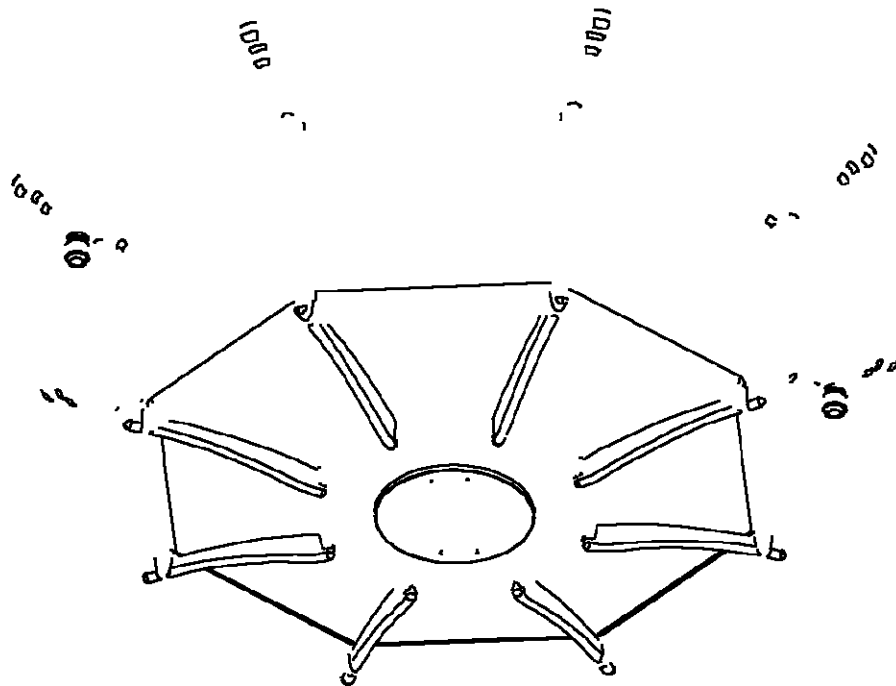

SPECIFICATIONS

Range	Up to 24 ft. (8 m)
Sensing Radius.....	Up to 3m
Electrical load - integrated LED	13Watts
Lumens	700lm Power
Requirements	100-240VAC



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate, or install the product.

This light fixture requires 100-240VAC. All wiring must be in accordance with the National Electrical Code (Canadian Electrical Code in Canada). Some local electrical codes

WARNING

•

CAUTION

- Do not cut any wires that have factory installed wire connectors or remove the wire connectors.

PREPARATION

Before beginning installation of product, make sure all parts are present. Compare parts with hardware contents list. If any part is missing or damaged, do not attempt to assemble, install, or operate the product.

Tools Required for Assembly (not included): Phillips and

meter, electrical tape, silicone sealant, safety glasses, work gloves, and ladder


- Do not connect to dimmers or timers.
-

above the ground.

Estimated Installation Time: 30 minutes

HARDWARE CONTENTS

Note: Illustrations may vary from actual unit.



2x – Wire Connectors




2x – Decorative Nut
(Pre-installed)



2x – Mounting Screw

DISASSEMBLE LIGHT FIXTURE

- 1.
2. Remove cover from base.

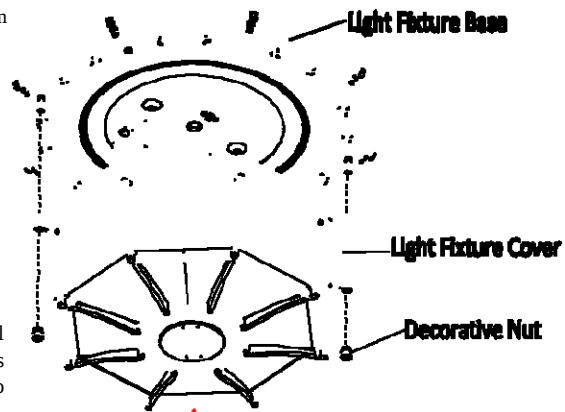


LIGHT FIXTURE INSTALLATION



or fuse. Place tape over circuit breaker switch and **verify power is off at the fixture.**

1. Tighten mounting screws finger tight
2. Attach mounting bracket to junction box using the two mounting bracket screws (supplied). Tighten securely.

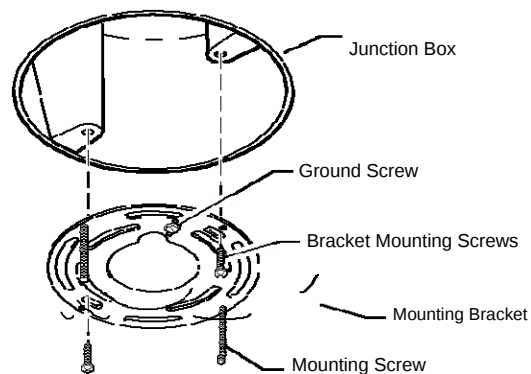



WIRING THE LIGHT FIXTURE

Note: All wiring must be run in accordance with the National Electrical Code through conduit or another acceptable means.

question as to the suitability of the system.


Twist the wires together and secure with wire connectors.

1. Route the junction box ground wire through the large White hole next to the ground screw (GND). Attach the ground wire under the ground screw.
2. Using the wire connectors:
 - Connect all white wires together.
 - Connect all black wires together.

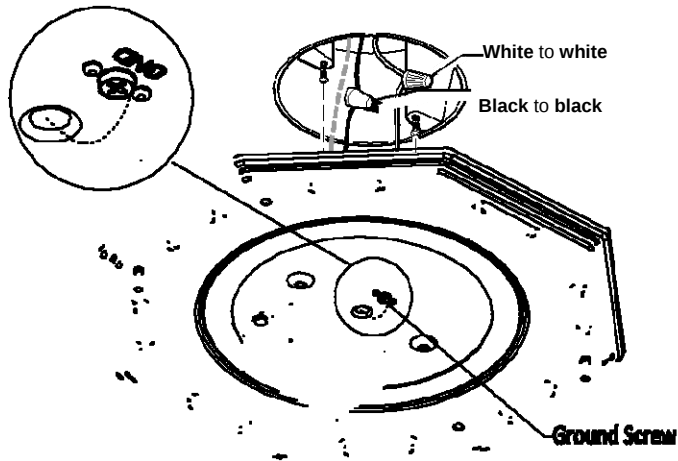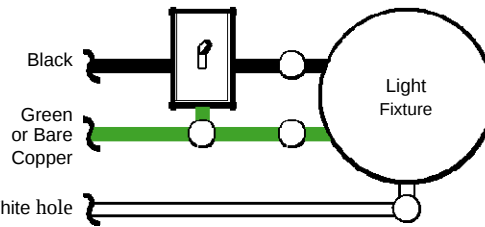


MOUNTING THE LIGHT FIXTURE

1. Make sure wire connectors and wires are inside the junction box.
2. Slide the fixture base onto the mounting screw
3. Tighten the mounting screws securely against the light fixture base.

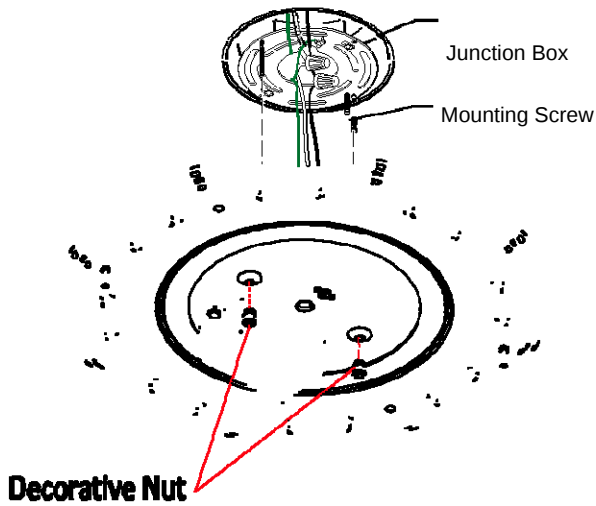

4. Use the two decorative nut to install the light fixture cover.

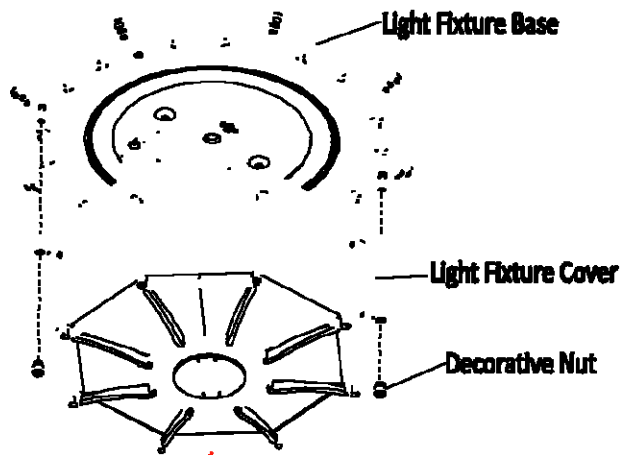

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.