

TEST REPORT

Product Name: Deligo food delivery robot
FCC ID: 2A7DE-FBOT12D
Trademark: 
Model Number: FBOT12D
Prepared For: Shenzhen Reeman Intelligent Equipment Co.,Ltd
Address: NO.401, Building NO.15, Incubator, Robot Zhizao Industries Park, COFCO (Fu'an), Dayang Road, Fuyong Sub-district, Bao'an District, Shenzhen China
Manufacturer: Shenzhen Reeman Intelligent Equipment Co.,Ltd
Address: NO.401, Building NO.15, Incubator, Robot Zhizao Industries Park, COFCO (Fu'an), Dayang Road, Fuyong Sub-district, Bao'an District, Shenzhen China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Apr. 16, 2022
Sample tested Date: Apr. 16, 2022 to May.17, 2022
Issue Date: May.17, 2022
Report No.: CTB220115006RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION.....	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit.....	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION.....	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit.....	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	61
8.1 Block Diagram Of Test Setup	61
8.2 Limit.....	61
8.3 Test procedure	61
8.4 Test Result	62
9. CONDUCTED OUTPUT POWER.....	86
9.1 Block Diagram Of Test Setup	86

9.2	Limit.....	86
9.3	Test procedure	86
9.4	Test Result	87
10.	6DB OCCUPIED BANDWIDTH.....	88
10.1	Block Diagram Of Test Setup	88
10.2	Limit.....	88
10.3	Test procedure	88
10.4	Test Result	89
11.	POWER SPECTRAL DENSITY	109
11.1	Block Diagram Of Test Setup	109
11.2	Limit.....	109
11.3	Test procedure	109
11.4	Test Result	109
12.	ANTENNA REQUIREMENT	123
13.	EUT PHOTOGRAPHS.....	124
14.	EUT TEST SETUP PHOTOGRAPHS	125

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220517009RF	May.17, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted emission(150K-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	FBOT12D
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	RK3128_Main_A1.5
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 9.53dBm
Type of Modulation:	WiFi: OFDM, CCK, DSSS
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	ANT 1 : 1.9dBi, ANT 2 : 1.9dBi, ANT 3 : 1.9dBi
Ratings:	Input: AC 100-240V 50/60Hz Output: 29.4V $\Rightarrow$ 4.0A 25.9V $\Rightarrow$ 538.72Wh(Built-in battery)

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	Foshan Shunde Guan Yuda Power Supply Co.,LTD	GM130-2940400-F	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 2+ANT 3)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.0dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=0dB,

So the directional gain for PSD is 1.9dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.9dBi

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY5209007 3	2020.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2020.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2020.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2020.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY4906092 0	2020.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY4742019 5	2020.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY5010256 7	2020.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-248 3.5MS-1154	2018101500 1	2020.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-585 0MS-1155	2018101500 1	2020.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA1 20	190821-1-1	2020.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2020.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2020.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2020.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2020.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2020.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2020.09.27	2022.08.05

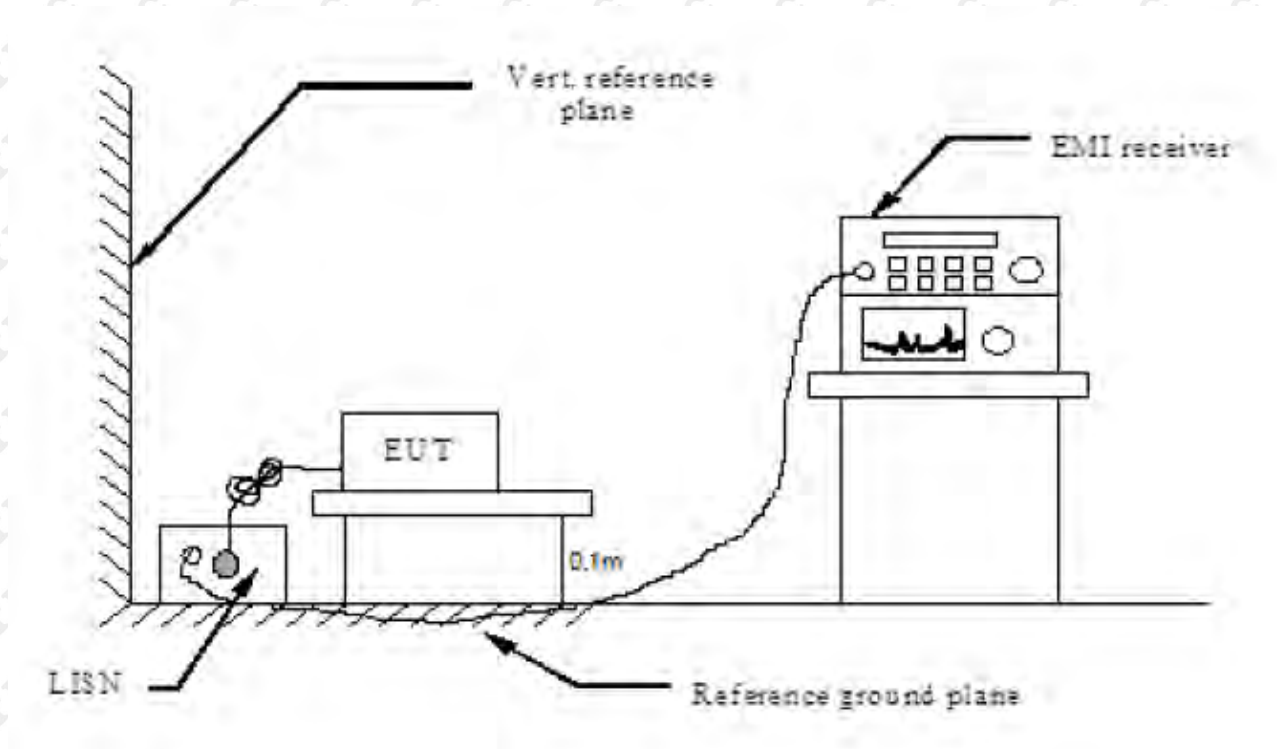
18	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2020.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2020.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2020.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2020.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2020.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2020.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2020.09.27	2022.08.05

Continuous Emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2020.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2020.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2020.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2020.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2020.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A 1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2020.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2020.09.27	2022.11.01
3	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2020.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2020.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2020.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2020.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2020.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup



6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

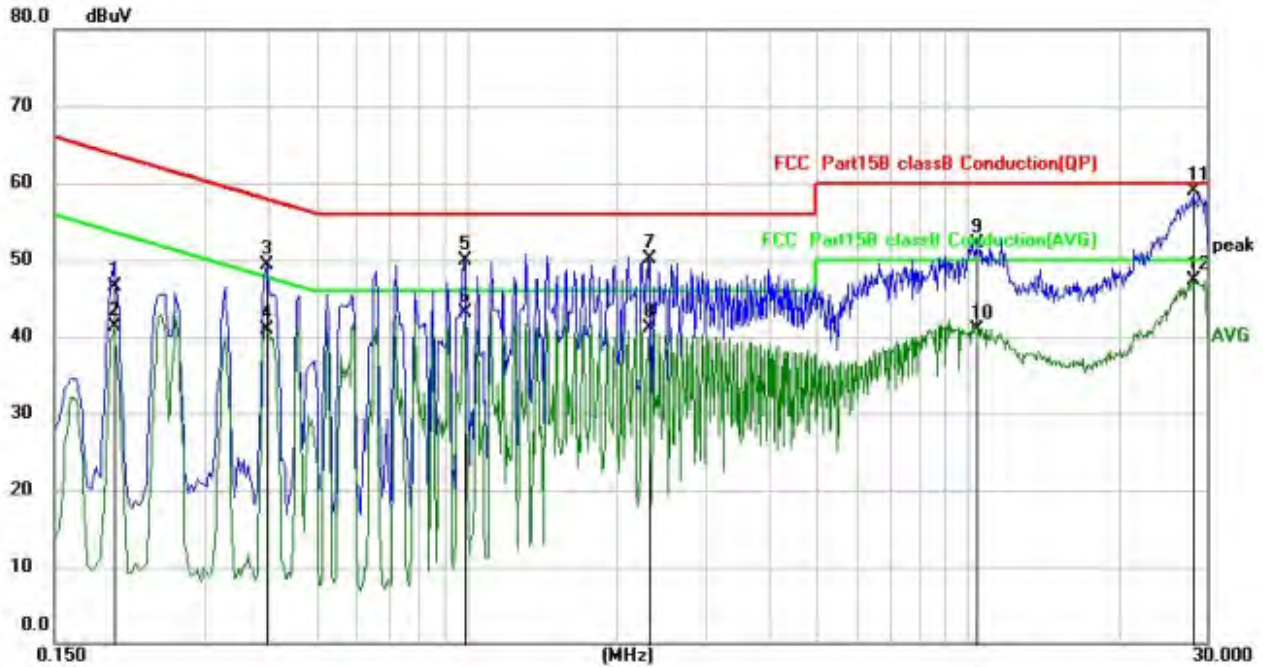
- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being

measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.1m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1980	35.72	10.69	46.41	63.69	-17.28	QP
2		0.1980	30.54	10.69	41.23	53.69	-12.46	AVG
3		0.3980	38.81	10.58	49.39	57.90	-8.51	QP
4		0.3980	30.37	10.58	40.95	47.90	-6.95	AVG
5		0.9860	39.21	10.62	49.83	56.00	-6.17	QP
6		0.9860	32.46	10.62	43.08	46.00	-2.92	AVG
7		2.3020	39.42	10.63	50.05	56.00	-5.95	QP
8		2.3020	30.42	10.63	41.05	46.00	-4.95	AVG
9		10.4460	41.27	10.83	52.10	60.00	-7.90	QP
10		10.4460	30.09	10.83	40.92	50.00	-9.08	AVG
11	*	28.1860	47.90	11.02	58.92	60.00	-1.08	QP
12		28.1860	36.35	11.02	47.37	50.00	-2.63	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

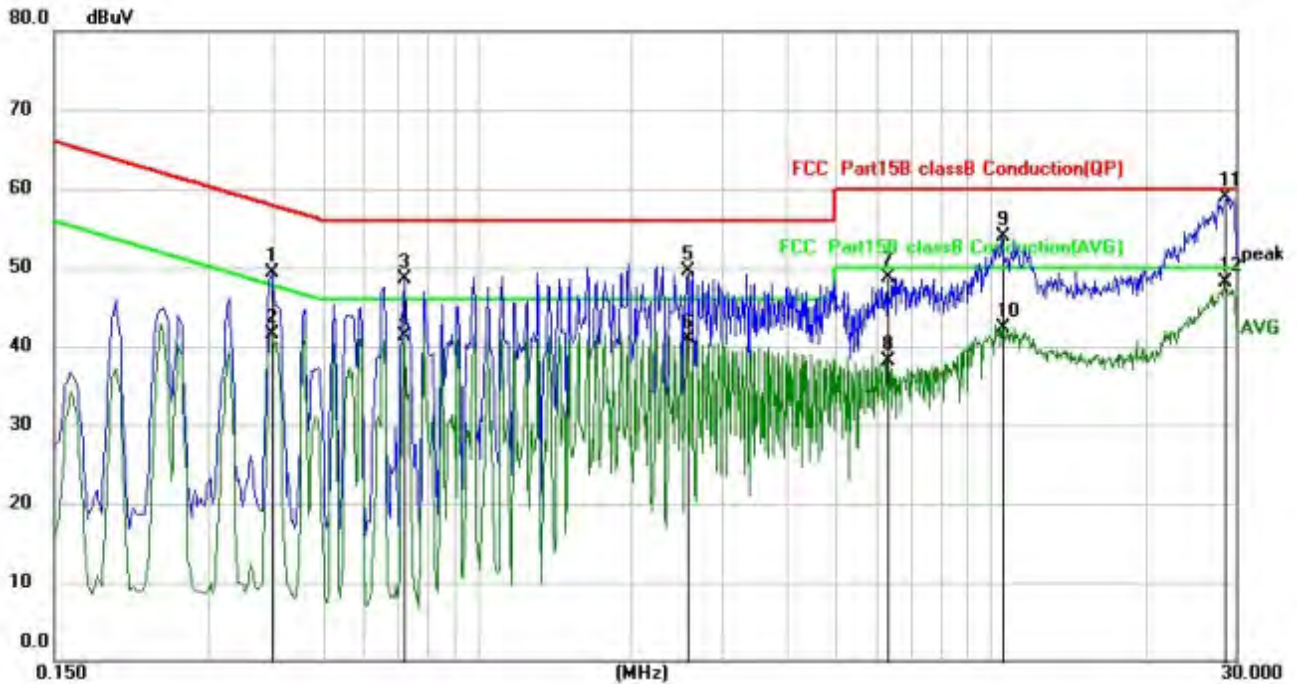Test Specification: Neutral
AC 120V 60Hz



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.3980	38.78	10.58	49.36	57.90	-8.54	QP
2		0.3980	30.90	10.58	41.48	47.90	-6.42	AVG
3		0.7220	37.96	10.56	48.52	56.00	-7.48	QP
4		0.7220	30.66	10.56	41.22	46.00	-4.78	AVG
5		2.5620	38.89	10.63	49.52	56.00	-6.48	QP
6		2.5620	30.34	10.63	40.97	46.00	-5.03	AVG
7		6.3100	37.98	10.69	48.67	60.00	-11.33	QP
8		6.3100	27.38	10.69	38.07	50.00	-11.93	AVG
9		10.5140	43.04	10.83	53.87	60.00	-6.13	QP
10		10.5140	31.49	10.83	42.32	50.00	-7.68	AVG
11	*	28.5860	47.86	11.02	58.88	60.00	-1.12	QP
12		28.5860	37.09	11.02	48.11	50.00	-1.89	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

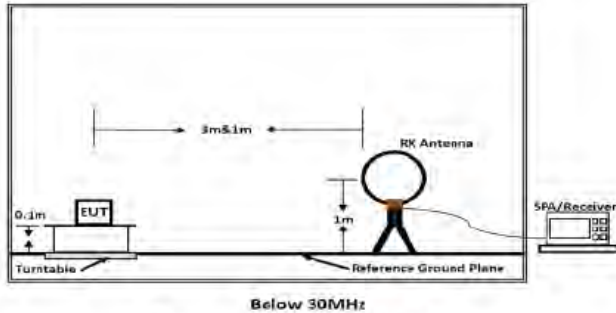


Figure 1. Below 30MHz

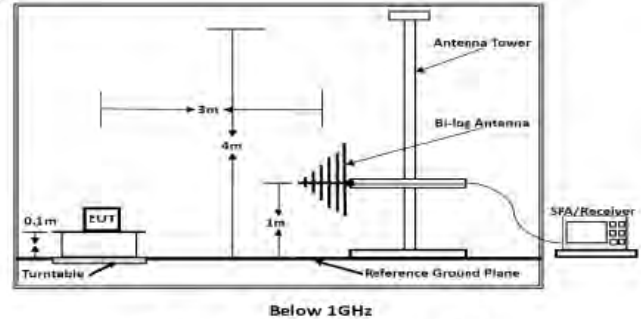


Figure 2. 30MHz to 1GHz

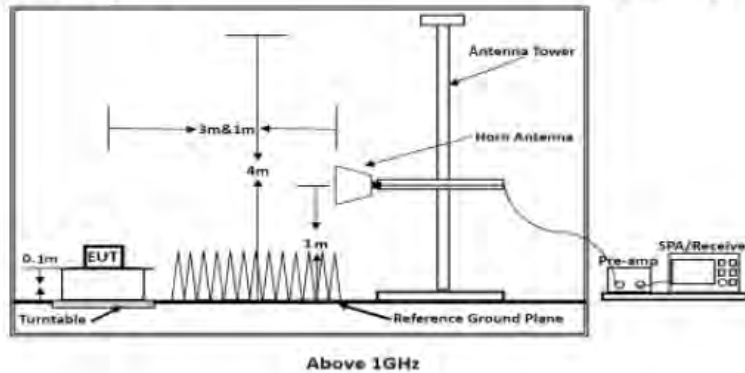


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

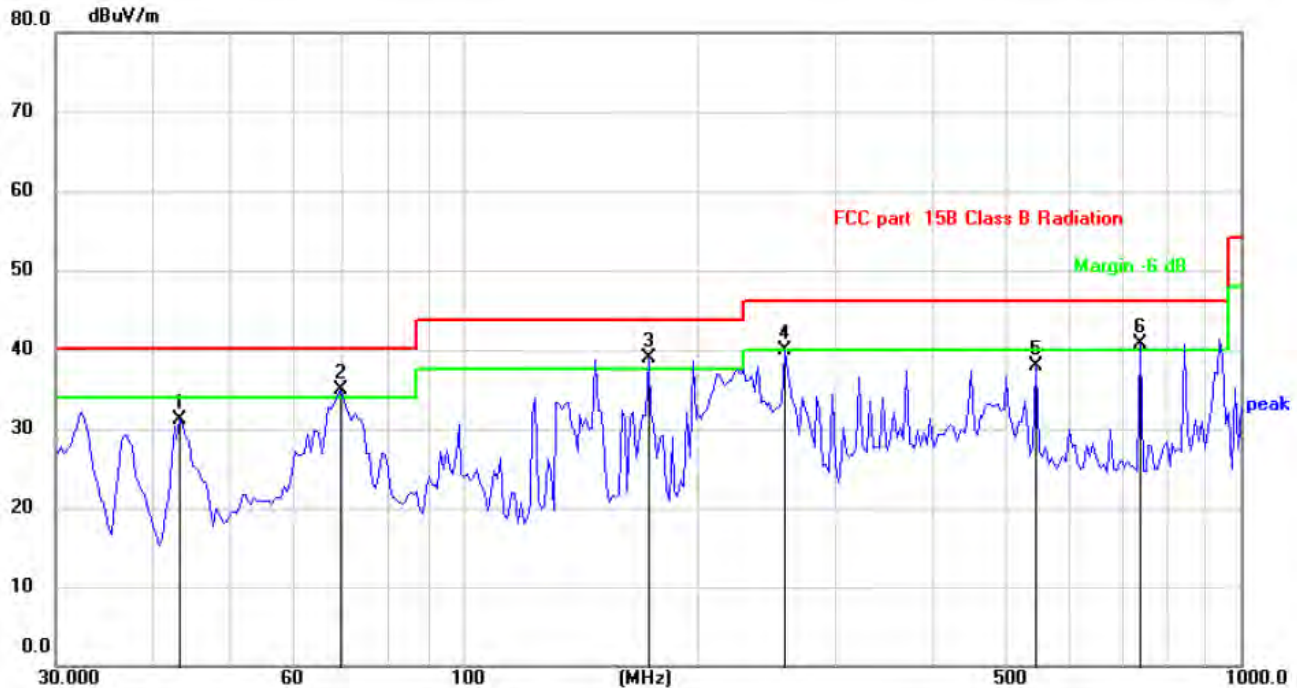
Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.3534	36.54	-5.39	31.15	40.00	-8.85	QP
2	!	69.6003	42.69	-7.86	34.83	40.00	-5.17	QP
3	*	173.2050	45.56	-6.68	38.88	43.50	-4.62	QP
4		259.2336	45.59	-5.61	39.98	46.00	-6.02	QP
5		546.1390	36.24	1.57	37.81	46.00	-8.19	QP
6	!	742.2586	35.94	4.84	40.78	46.00	-5.22	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

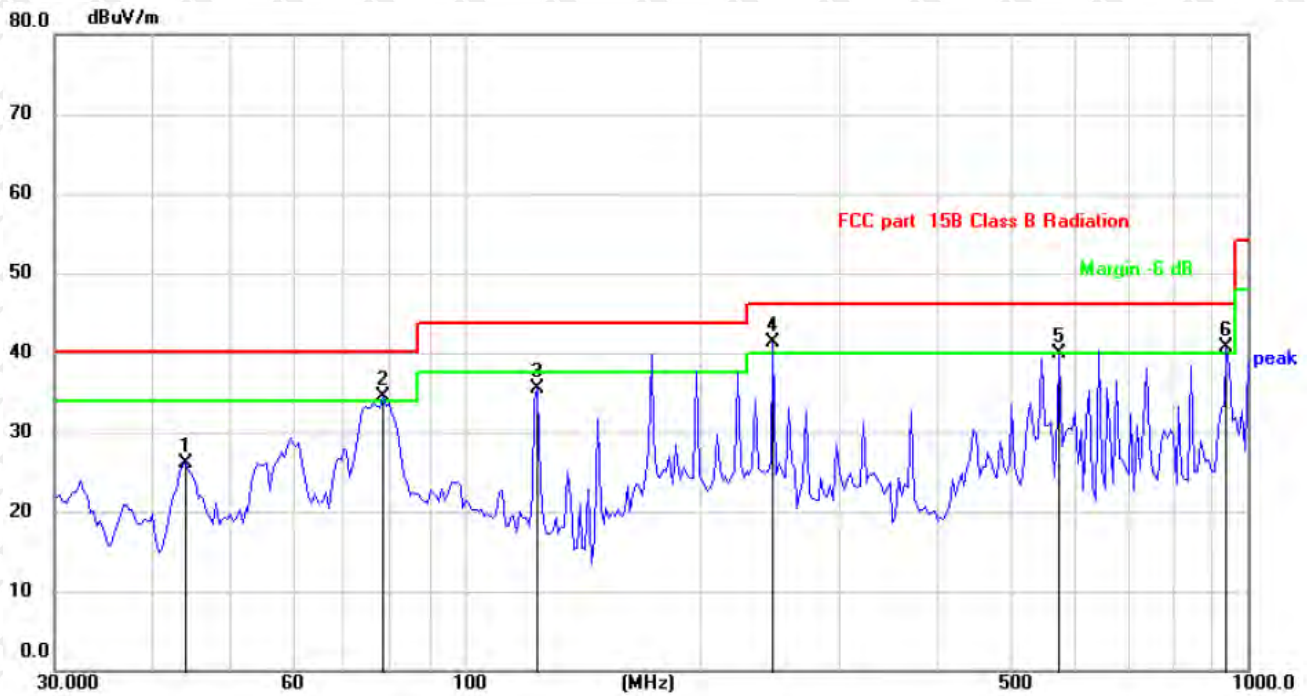Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.1200	31.53	-5.42	26.11	40.00	-13.89	QP
2	!	78.6885	43.95	-9.52	34.43	40.00	-5.57	QP
3		124.1329	42.02	-6.58	35.44	43.50	-8.06	QP
4	*	248.1165	46.94	-5.72	41.22	46.00	-4.78	QP
5		575.6340	37.81	2.12	39.93	46.00	-6.07	QP
6	!	940.4800	34.70	5.96	40.66	46.00	-5.34	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

ANT1

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.36	-3.64	61.72	74	-12.28	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	57.28	-0.95	56.33	74	-17.67	peak
7236	44.19	-0.95	43.24	54	-10.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.59	-3.64	62.95	74	-11.05	peak
4824	49.25	-3.64	45.61	54	-8.39	AVG
7236	57.72	-0.95	56.77	74	-17.23	peak
7236	42.90	-0.95	41.95	54	-12.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.48	-3.51	60.97	74	-13.03	peak
4874	49.78	-3.51	46.27	54	-7.73	AVG
7311	59.36	-0.82	58.54	74	-15.46	peak
7311	45.98	-0.82	45.16	54	-8.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.10	-3.51	59.59	74	-14.41	peak
4874	49.07	-3.51	45.56	54	-8.44	AVG
7311	59.40	-0.82	58.58	74	-15.42	peak
7311	42.94	-0.82	42.12	54	-11.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.18	-3.43	60.75	74	-13.25	peak
4924	46.17	-3.43	42.74	54	-11.26	AVG
7386	59.47	-0.75	58.72	74	-15.28	peak
7386	45.22	-0.75	44.47	54	-9.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.01	-3.43	59.58	74	-14.42	peak
4924	48.27	-3.43	44.84	54	-9.16	AVG
7386	57.63	-0.75	56.88	74	-17.12	peak
7386	41.43	-0.75	40.68	54	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.82	-3.64	60.18	74	-13.82	peak
4824	49.85	-3.64	46.21	54	-7.79	AVG
7236	59.76	-0.95	58.81	74	-15.19	peak
7236	45.62	-0.95	44.67	54	-9.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.17	-3.64	58.53	74	-15.47	peak
4824	46.55	-3.64	42.91	54	-11.09	AVG
7236	58.55	-0.95	57.60	74	-16.40	peak
7236	43.02	-0.95	42.07	54	-11.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.80	-3.51	61.29	74	-12.71	peak
4874	47.39	-3.51	43.88	54	-10.12	AVG
7311	58.02	-0.82	57.20	74	-16.80	peak
7311	45.54	-0.82	44.72	54	-9.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.29	-3.51	59.78	74	-14.22	peak
4874	46.99	-3.51	43.48	54	-10.52	AVG
7311	56.06	-0.82	55.24	74	-18.76	peak
7311	42.19	-0.82	41.37	54	-12.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.83	-3.43	59.40	74	-14.60	peak
4924	48.93	-3.43	45.50	54	-8.50	AVG
7386	58.76	-0.75	58.01	74	-15.99	peak
7386	44.05	-0.75	43.30	54	-10.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.20	-3.43	59.77	74	-14.23	peak
4924	46.59	-3.43	43.16	54	-10.84	AVG
7386	56.09	-0.75	55.34	74	-18.66	peak
7386	42.64	-0.75	41.89	54	-12.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.66	-3.64	61.02	74	-12.98	peak
4824	49.13	-3.64	45.49	54	-8.51	AVG
7236	57.82	-0.95	56.87	74	-17.13	peak
7236	42.69	-0.95	41.74	54	-12.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.80	-3.64	62.16	74	-11.84	peak
4824	48.56	-3.64	44.92	54	-9.08	AVG
7236	59.39	-0.95	58.44	74	-15.56	peak
7236	46.11	-0.95	45.16	54	-8.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	62.30	-3.51	58.79	74.00	-15.21	peak
4874.00	50.26	-3.51	46.75	54.00	-7.25	AVG
7311.00	58.92	-0.82	58.10	74.00	-15.90	peak
7311.00	46.72	-0.82	45.90	54.00	-8.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	62.78	-3.51	59.27	74.00	-14.73	peak
4874.00	46.41	-3.51	42.90	54.00	-11.10	AVG
7311.00	57.78	-0.82	56.96	74.00	-17.04	peak
7311.00	43.67	-0.82	42.85	54.00	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.55	-3.43	58.12	74	-15.88	peak
4924	47.44	-3.43	44.01	54	-9.99	AVG
7386	57.47	-0.75	56.72	74	-17.28	peak
7386	43.05	-0.75	42.30	54	-11.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.29	-3.43	59.86	74	-14.14	peak
4924	47.26	-3.43	43.83	54	-10.17	AVG
7386	56.88	-0.75	56.13	74	-17.87	peak
7386	43.15	-0.75	42.40	54	-11.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.73	-3.63	61.10	74	-12.90	peak
4844	49.81	-3.63	46.18	54	-7.82	AVG
7266	59.15	-0.94	58.21	74	-15.79	peak
7266	46.03	-0.94	45.09	54	-8.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.21	-3.63	60.58	74	-13.42	peak
4844	48.94	-3.63	45.31	54	-8.69	AVG
7266	58.70	-0.94	57.76	74	-16.24	peak
7266	45.73	-0.94	44.79	54	-9.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.13	-3.51	59.62	74	-14.38	peak
4874	49.14	-3.51	45.63	54	-8.37	AVG
7311	58.93	-0.82	58.11	74	-15.89	peak
7311	45.70	-0.82	44.88	54	-9.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.53	-3.51	43.02	54	-10.98	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.72	-3.43	59.29	74	-14.71	peak
4904	47.99	-3.43	44.56	54	-9.44	AVG
7356	57.66	-0.75	56.91	74	-17.09	peak
7356	41.20	-0.75	40.45	54	-13.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.11	-3.43	58.68	74	-15.32	peak
4904	47.10	-3.43	43.67	54	-10.33	AVG
7356	56.84	-0.75	56.09	74	-17.91	peak
7356	42.46	-0.75	41.71	54	-12.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2+ANT3

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.57	-3.64	60.93	74	-13.07	peak
4824	50.65	-3.64	47.01	54	-6.99	AVG
7236	57.15	-0.95	56.20	74	-17.80	peak
7236	43.89	-0.95	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.22	-3.64	62.58	74	-11.42	peak
4824	46.87	-3.64	43.23	54	-10.77	AVG
7236	58.49	-0.95	57.54	74	-16.46	peak
7236	43.29	-0.95	42.34	54	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.59	-3.51	61.08	74	-12.92	peak
4874	48.33	-3.51	44.82	54	-9.18	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	44.56	-0.82	43.74	54	-10.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.04	-3.51	59.53	74	-14.47	peak
4874	47.52	-3.51	44.01	54	-9.99	AVG
7311	58.76	-0.82	57.94	74	-16.06	peak
7311	42.34	-0.82	41.52	54	-12.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.48	-3.43	61.05	74	-12.95	peak
4924	46.46	-3.43	43.03	54	-10.97	AVG
7386	59.78	-0.75	59.03	74	-14.97	peak
7386	42.48	-0.75	41.73	54	-12.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.65	-3.43	61.22	74	-12.78	peak
4924	47.03	-3.43	43.60	54	-10.40	AVG
7386	57.47	-0.75	56.72	74	-17.28	peak
7386	44.01	-0.75	43.26	54	-10.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.06	-3.64	61.42	74	-12.58	peak
4824	49.64	-3.64	46.00	54	-8.00	AVG
7236	57.03	-0.95	56.08	74	-17.92	peak
7236	45.52	-0.95	44.57	54	-9.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.80	-3.64	61.16	74	-12.84	peak
4824	47.30	-3.64	43.66	54	-10.34	AVG
7236	60.35	-0.95	59.40	74	-14.60	peak
7236	43.82	-0.95	42.87	54	-11.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.81	-3.51	60.30	74	-13.70	peak
4874	48.12	-3.51	44.61	54	-9.39	AVG
7311	60.20	-0.82	59.38	74	-14.62	peak
7311	44.71	-0.82	43.89	54	-10.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.83	-3.51	59.32	74	-14.68	peak
4874	48.30	-3.51	44.79	54	-9.21	AVG
7311	56.52	-0.82	55.70	74	-18.30	peak
7311	42.65	-0.82	41.83	54	-12.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.07	-3.43	59.64	74	-14.36	peak
4924	49.23	-3.43	45.80	54	-8.20	AVG
7386	58.17	-0.75	57.42	74	-16.58	peak
7386	42.04	-0.75	41.29	54	-12.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.51	-3.43	60.08	74	-13.92	peak
4924	48.05	-3.43	44.62	54	-9.38	AVG
7386	57.75	-0.75	57.00	74	-17.00	peak
7386	41.55	-0.75	40.80	54	-13.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.63	-3.64	60.99	74	-13.01	peak
4824	48.30	-3.64	44.66	54	-9.34	AVG
7236	58.87	-0.95	57.92	74	-16.08	peak
7236	44.13	-0.95	43.18	54	-10.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.17	-3.64	62.53	74	-11.47	peak
4824	46.77	-3.64	43.13	54	-10.87	AVG
7236	58.86	-0.95	57.91	74	-16.09	peak
7236	45.09	-0.95	44.14	54	-9.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.86	-3.51	59.35	74.00	-14.65	peak
4874.00	48.25	-3.51	44.74	54.00	-9.26	AVG
7311.00	58.17	-0.82	57.35	74.00	-16.65	peak
7311.00	45.20	-0.82	44.38	54.00	-9.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.50	-3.51	59.99	74.00	-14.01	peak
4874.00	46.77	-3.51	43.26	54.00	-10.74	AVG
7311.00	58.90	-0.82	58.08	74.00	-15.92	peak
7311.00	43.08	-0.82	42.26	54.00	-11.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.84	-3.43	58.41	74	-15.59	peak
4924	46.59	-3.43	43.16	54	-10.84	AVG
7386	56.35	-0.75	55.60	74	-18.40	peak
7386	42.56	-0.75	41.81	54	-12.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.95	-3.43	60.52	74	-13.48	peak
4924	46.07	-3.43	42.64	54	-11.36	AVG
7386	56.67	-0.75	55.92	74	-18.08	peak
7386	41.32	-0.75	40.57	54	-13.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.51	-3.63	60.88	74	-13.12	peak
4844	47.15	-3.63	43.52	54	-10.48	AVG
7266	58.40	-0.94	57.46	74	-16.54	peak
7266	46.75	-0.94	45.81	54	-8.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.14	-3.63	60.51	74	-13.49	peak
4844	47.97	-3.63	44.34	54	-9.66	AVG
7266	57.99	-0.94	57.05	74	-16.95	peak
7266	44.29	-0.94	43.35	54	-10.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.67	-3.51	60.16	74	-13.84	peak
4874	48.88	-3.51	45.37	54	-8.63	AVG
7311	60.55	-0.82	59.73	74	-14.27	peak
7311	45.82	-0.82	45.00	54	-9.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.25	-3.51	58.74	74	-15.26	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.68	-0.82	55.86	74	-18.14	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.97	-3.43	60.54	74	-13.46	peak
4904	49.08	-3.43	45.65	54	-8.35	AVG
7356	56.82	-0.75	56.07	74	-17.93	peak
7356	41.43	-0.75	40.68	54	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	61.78	-3.43	58.35	74	-15.65	peak
4904	47.79	-3.43	44.36	54	-9.64	AVG
7356	58.48	-0.75	57.73	74	-16.27	peak
7356	42.57	-0.75	41.82	54	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.64	-5.81	51.83	74	-22.17	peak
2390	/	-5.81	/	54	/	AVG
2399	64.70	-5.84	58.86	74	-15.14	peak
2399	48.71	-5.84	42.87	54	-11.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	62.96	-5.84	57.12	74	-16.88	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.07	-5.65	50.42	74	-23.58	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.93	-5.65	50.28	74	-23.72	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.55	-5.81	52.74	74	-21.26	
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	46.43	-5.84	40.59	54	-13.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	55.93	-5.81	50.12	74	-23.88	
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	46.15	-5.84	40.31	54	-13.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.72	-5.65	51.07	74	-22.93	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	63.18	-5.84	57.34	74	-16.66	peak
2399	47.64	-5.84	41.80	54	-12.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.84	-5.81	50.03	74	-23.97	peak
2390	/	-5.81	/	54	/	AVG
2399	61.24	-5.84	55.40	74	-18.60	peak
2399	46.42	-5.84	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.27	-5.65	50.62	74	-23.38	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.55	-5.65	49.90	74	-24.10	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.35	-5.81	53.54	74	-20.46	peak
2390	/	-5.81	/	54	/	AVG
2399	63.72	-5.84	57.88	74	-16.12	peak
2399	47.26	-5.84	41.42	54	-12.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.94	-5.81	52.13	74	-21.87	peak
2390	/	-5.81	/	54	/	AVG
2399	61.88	-5.84	56.04	74	-17.96	peak
2399	47.02	-5.84	41.18	54	-12.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.60	-5.65	50.95	74	-23.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.05	-5.65	50.40	74	-23.60	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT 2+ ANT 3

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.49	-5.81	51.68	74	-22.32	peak
2390	/	-5.81	/	54	/	AVG
2399	64.10	-5.84	58.26	74	-15.74	peak
2399	48.49	-5.84	42.65	54	-11.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.62	-5.81	51.81	74	-22.19	peak
2390	/	-5.81	/	54	/	AVG
2399	61.90	-5.84	56.06	74	-17.94	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.76	-5.65	51.11	74	-22.89	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.71	-5.65	51.06	74	-22.94	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.71	-5.81	51.90	74	-22.10	
2390	/	-5.81	/	54	/	AVG
2399	62.06	-5.84	56.22	74	-17.78	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.24	-5.81	50.43	74	-23.57	
2390	/	-5.81	/	54	/	AVG
2399	63.21	-5.84	57.37	74	-16.63	peak
2399	46.12	-5.84	40.28	54	-13.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.66	-5.65	52.01	74	-21.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.53	-5.65	50.88	74	-23.12	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.22	-5.81	50.41	74	-23.59	peak
2390	/	-5.81	/	54	/	AVG
2399	62.00	-5.84	56.16	74	-17.84	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.96	-5.81	50.15	74	-23.85	peak
2390	/	-5.81	/	54	/	AVG
2399	61.32	-5.84	55.48	74	-18.52	peak
2399	47.85	-5.84	42.01	54	-11.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.79	-5.65	50.14	74	-23.86	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.34	-5.81	52.53	74	-21.47	peak
2390	/	-5.81	/	54	/	AVG
2399	62.14	-5.84	56.30	74	-17.70	peak
2399	46.42	-5.84	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.65	-5.81	51.84	74	-22.16	peak
2390	/	-5.81	/	54	/	AVG
2399	61.78	-5.84	55.94	74	-18.06	peak
2399	46.56	-5.84	40.72	54	-13.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.57	-5.65	51.92	74	-22.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.64	-5.65	50.99	74	-23.01	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

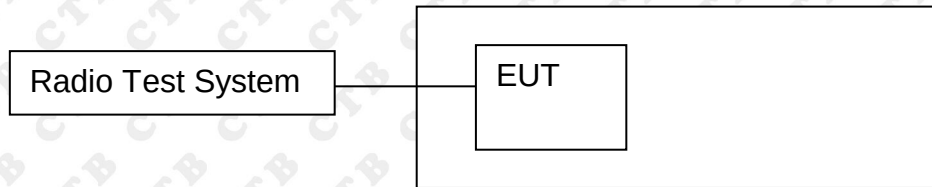8.1 Block Diagram Of Test Setup



8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result


Above 12.75GHz Test Results: Power below the limit of 20dbm, so do not put the test results.

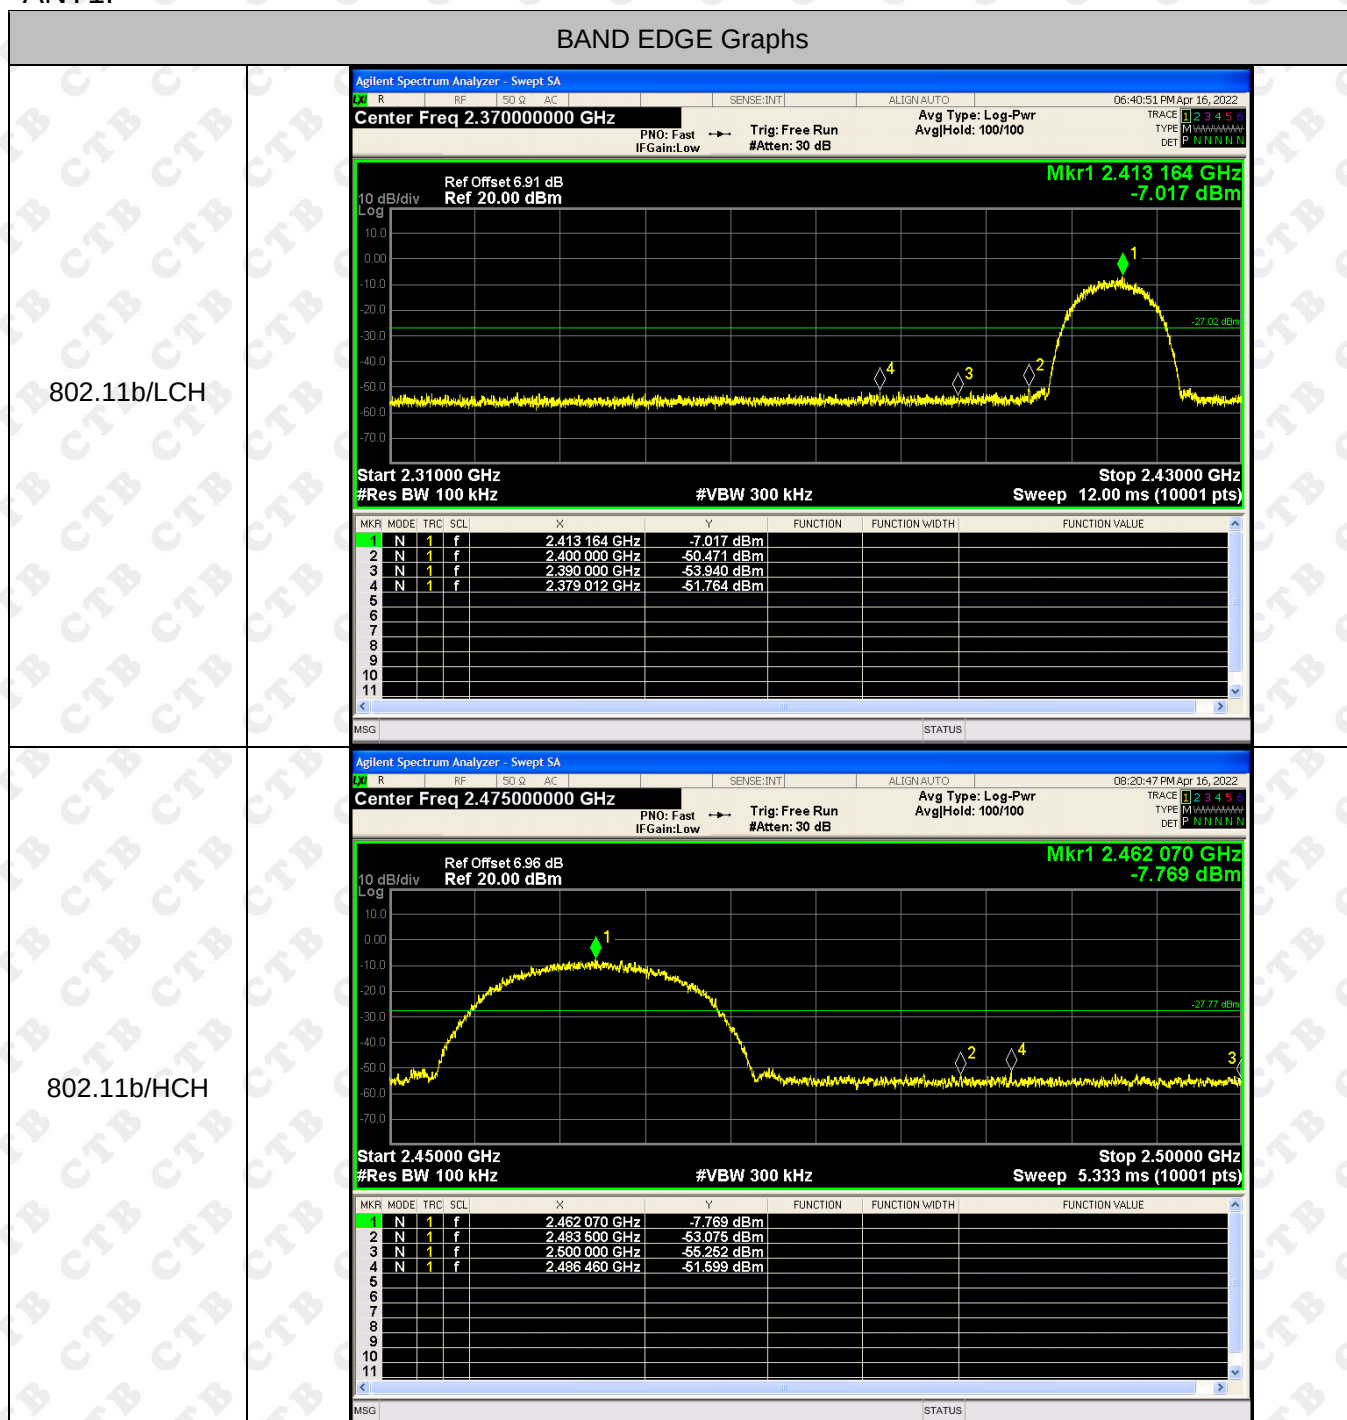ANT1:




BAND EDGE Graphs


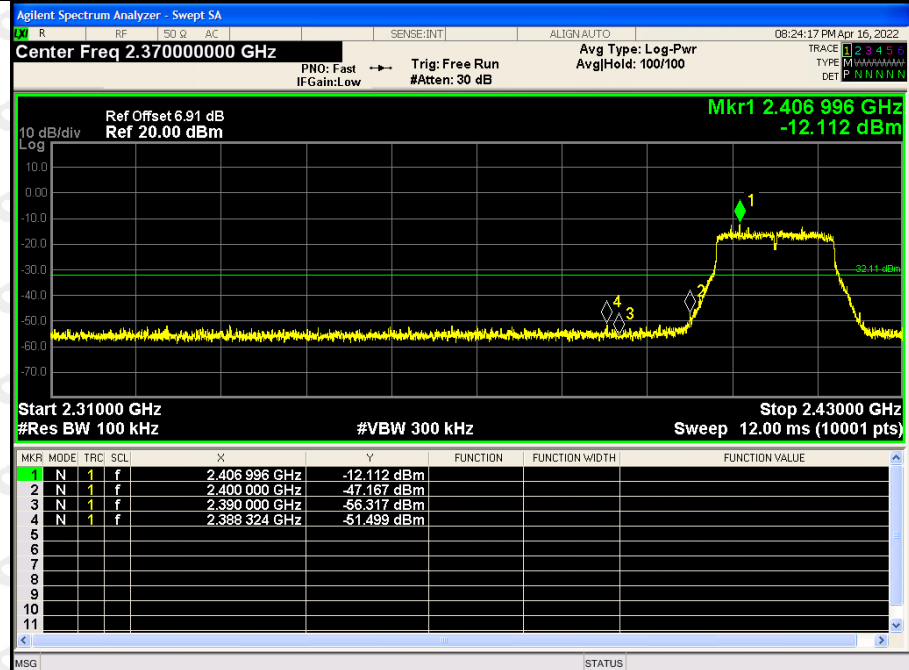
802.11g/LCH



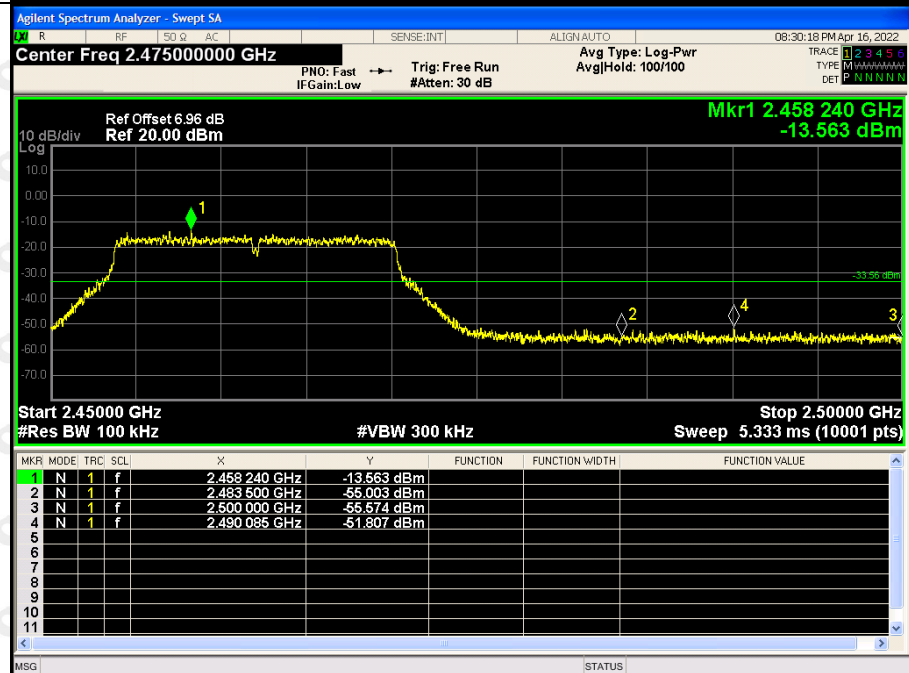802.11g/HCH




BAND EDGE Graphs

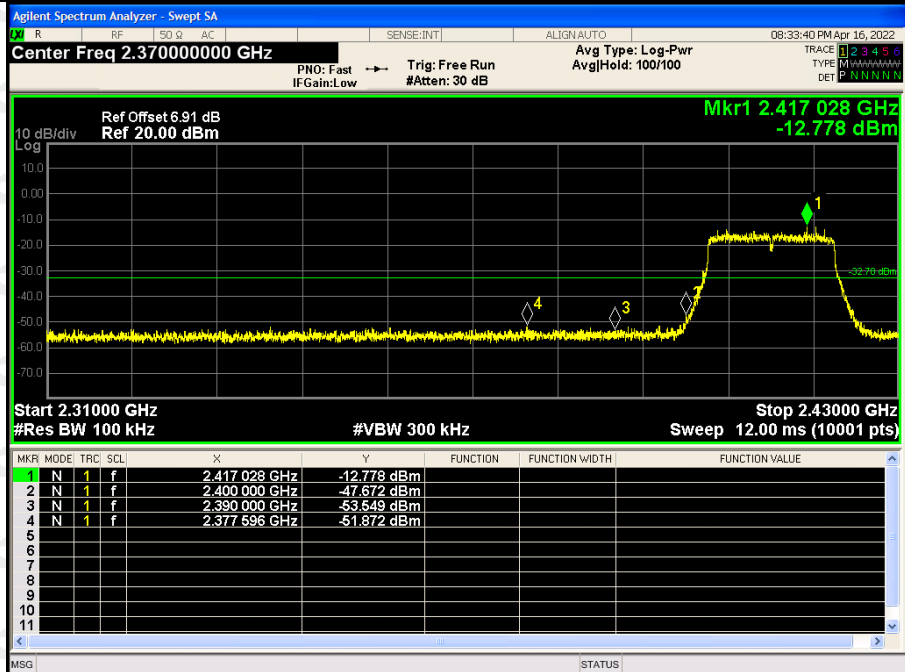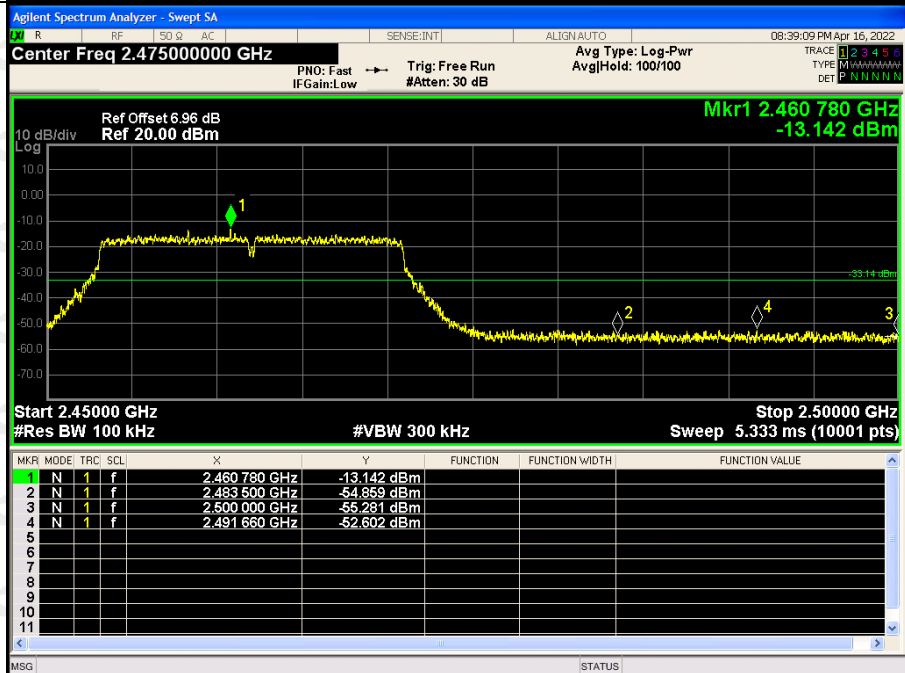
802.11n(HT20)/L
CH

802.11n(HT20)/H
CH

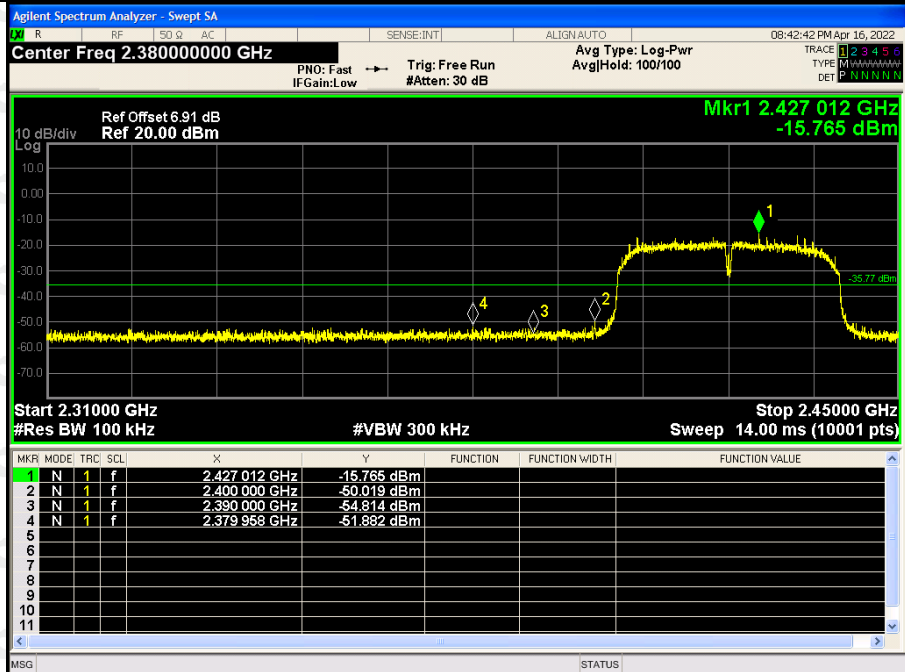
BAND EDGE Graphs

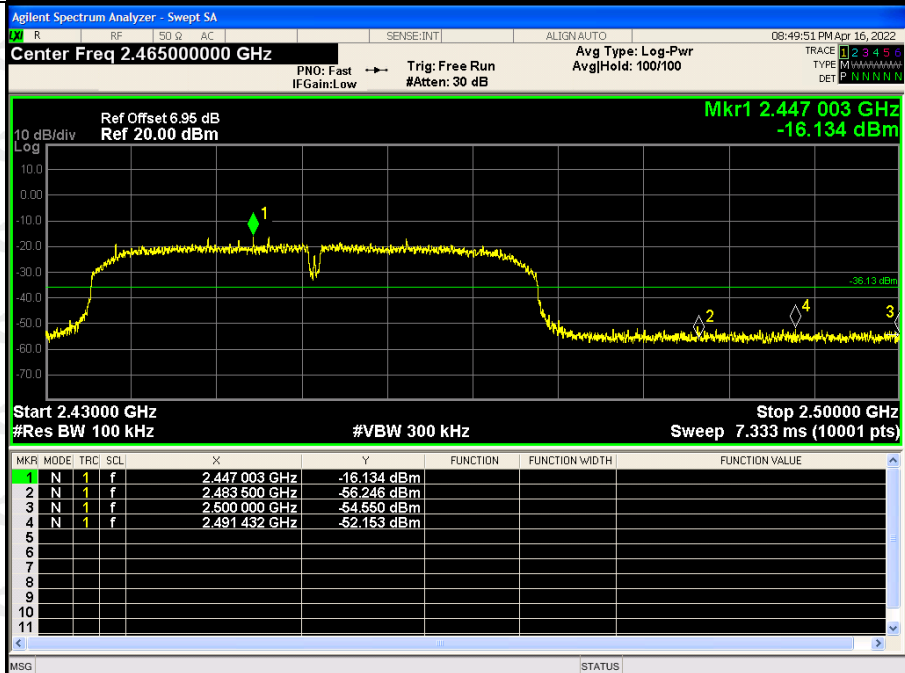802.11n(HT40)/L
CH






802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs

802.11b /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.91 dB Ref 15.00 dBm Mkr1 2.411 4 GHz -7.096 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.411 4 GHz</td><td>-7.096 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.624 2 GHz</td><td>-41.472 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.819 3 GHz</td><td>-54.906 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.047 2 GHz</td><td>-54.883 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.504 5 GHz</td><td>-55.373 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.411 4 GHz	-7.096 dBm				2	N	1	f	24.624 2 GHz	-41.472 dBm				3	N	1	f	4.819 3 GHz	-54.906 dBm				4	N	1	f	7.047 2 GHz	-54.883 dBm				5	N	1	f	9.504 5 GHz	-55.373 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.411 4 GHz	-7.096 dBm																																																		
2	N	1	f	24.624 2 GHz	-41.472 dBm																																																		
3	N	1	f	4.819 3 GHz	-54.906 dBm																																																		
4	N	1	f	7.047 2 GHz	-54.883 dBm																																																		
5	N	1	f	9.504 5 GHz	-55.373 dBm																																																		
802.11b /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.435 2 GHz -8.296 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.435 2 GHz</td><td>-8.296 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.628 6 GHz</td><td>-41.846 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.790 2 GHz</td><td>-54.794 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.320 7 GHz</td><td>-53.267 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.807 1 GHz</td><td>-54.977 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.435 2 GHz	-8.296 dBm				2	N	1	f	24.628 6 GHz	-41.846 dBm				3	N	1	f	4.790 2 GHz	-54.794 dBm				4	N	1	f	7.320 7 GHz	-53.267 dBm				5	N	1	f	9.807 1 GHz	-54.977 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.435 2 GHz	-8.296 dBm																																																		
2	N	1	f	24.628 6 GHz	-41.846 dBm																																																		
3	N	1	f	4.790 2 GHz	-54.794 dBm																																																		
4	N	1	f	7.320 7 GHz	-53.267 dBm																																																		
5	N	1	f	9.807 1 GHz	-54.977 dBm																																																		
802.11b /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.483 5 GHz -9.251 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 5 GHz</td><td>-9.251 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.143 3 GHz</td><td>-41.538 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.846 7 GHz</td><td>-54.459 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.437 2 GHz</td><td>-53.625 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.694 2 GHz</td><td>-55.888 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 5 GHz	-9.251 dBm				2	N	1	f	24.143 3 GHz	-41.538 dBm				3	N	1	f	4.846 7 GHz	-54.459 dBm				4	N	1	f	7.437 2 GHz	-53.625 dBm				5	N	1	f	9.694 2 GHz	-55.888 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.483 5 GHz	-9.251 dBm																																																		
2	N	1	f	24.143 3 GHz	-41.538 dBm																																																		
3	N	1	f	4.846 7 GHz	-54.459 dBm																																																		
4	N	1	f	7.437 2 GHz	-53.625 dBm																																																		
5	N	1	f	9.694 2 GHz	-55.888 dBm																																																		

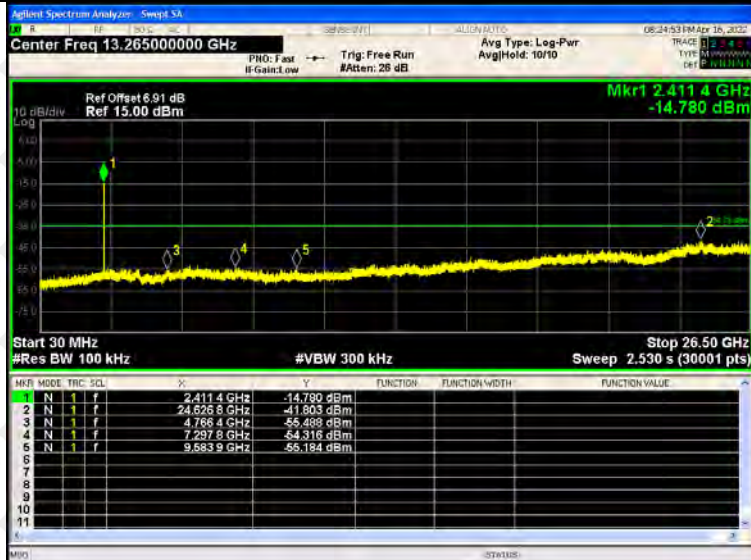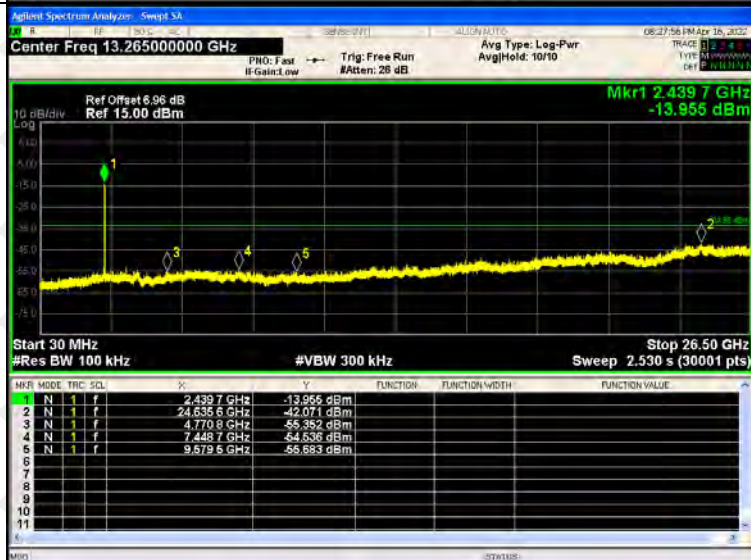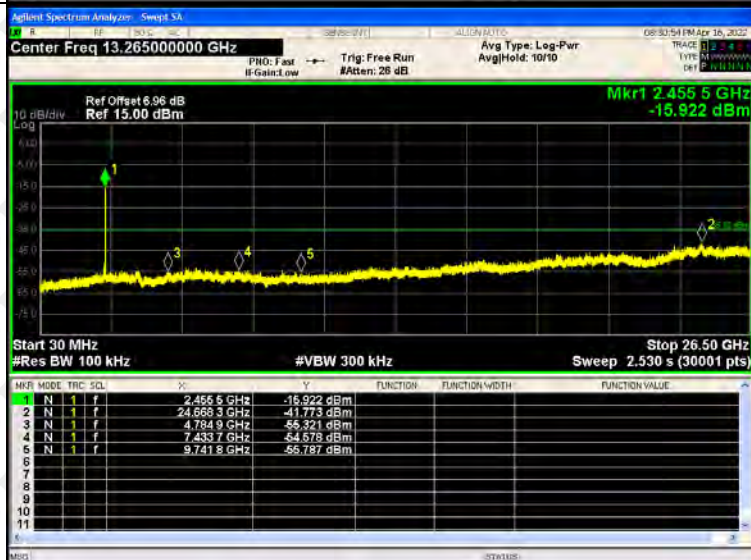RF Conducted Spurious Emissions Graphs


802.11g
/LCH

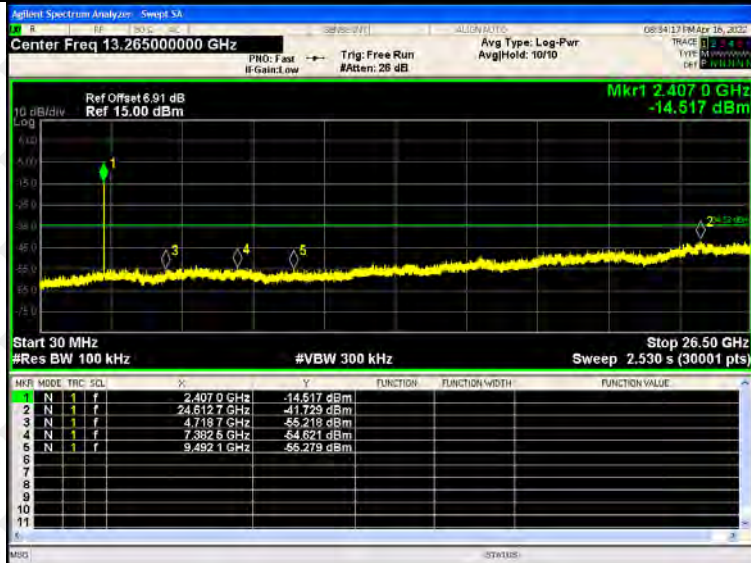802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

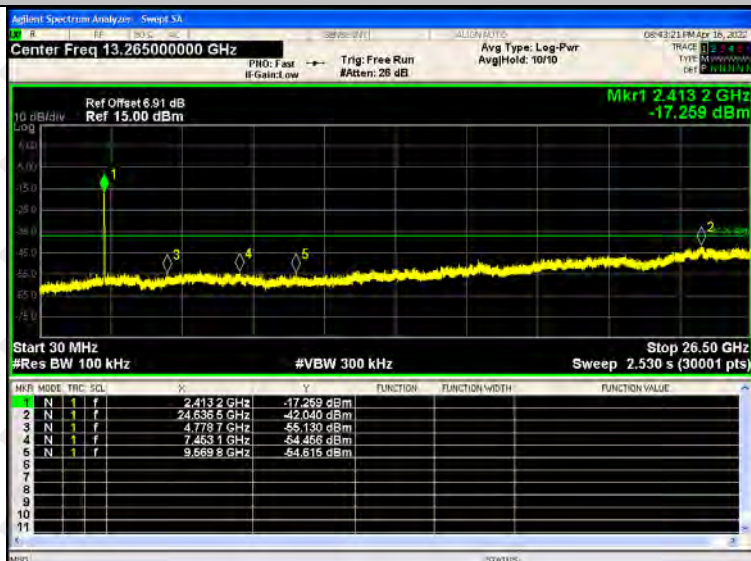802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


RF Conducted Spurious Emissions Graphs


802.11
n(HT40)
/LCH

802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH



ANT2:

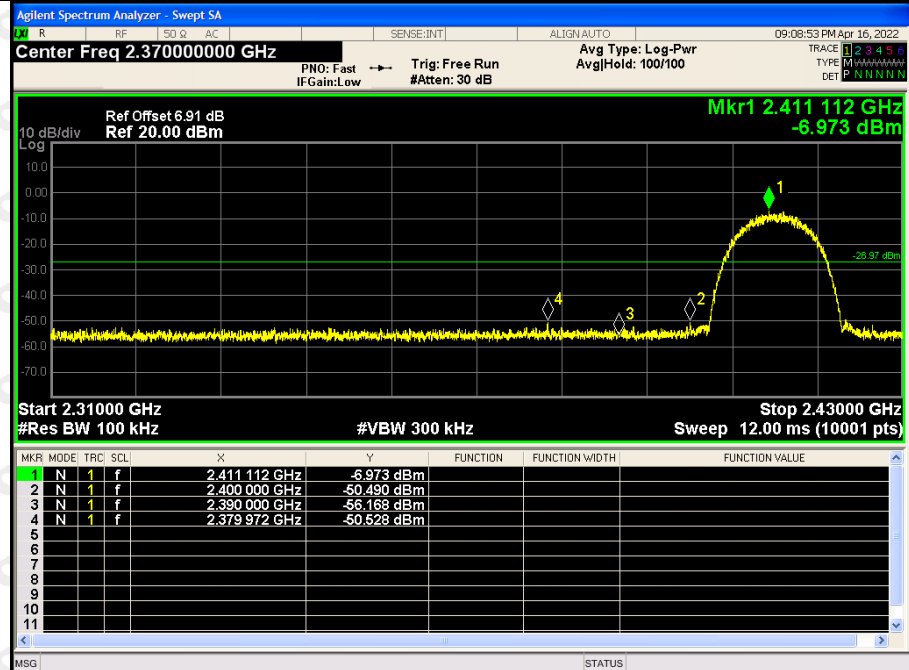BAND EDGE Graphs

802.11b/LCH




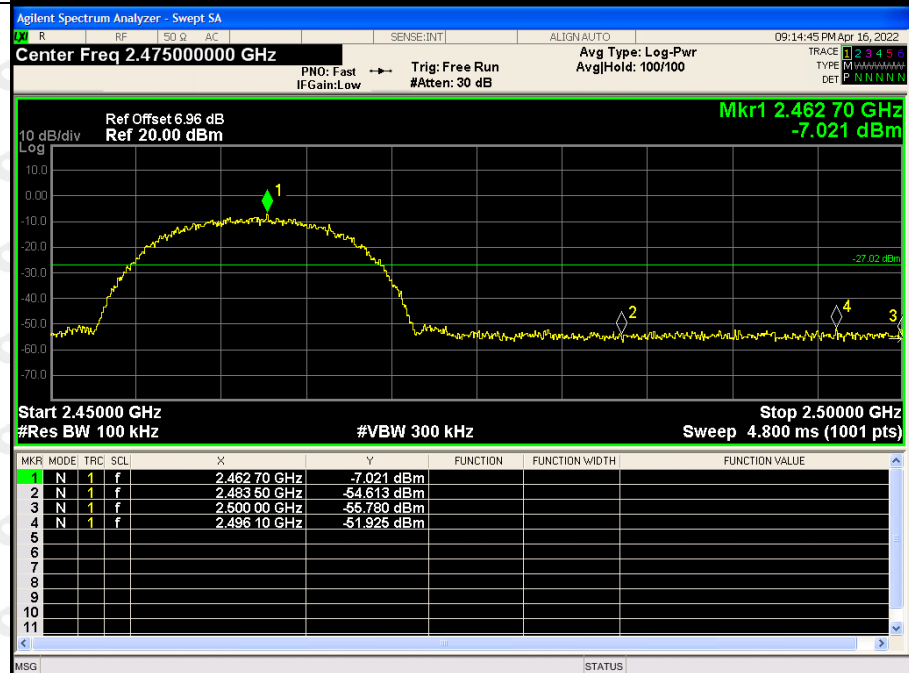802.11b/HCH




BAND EDGE Graphs

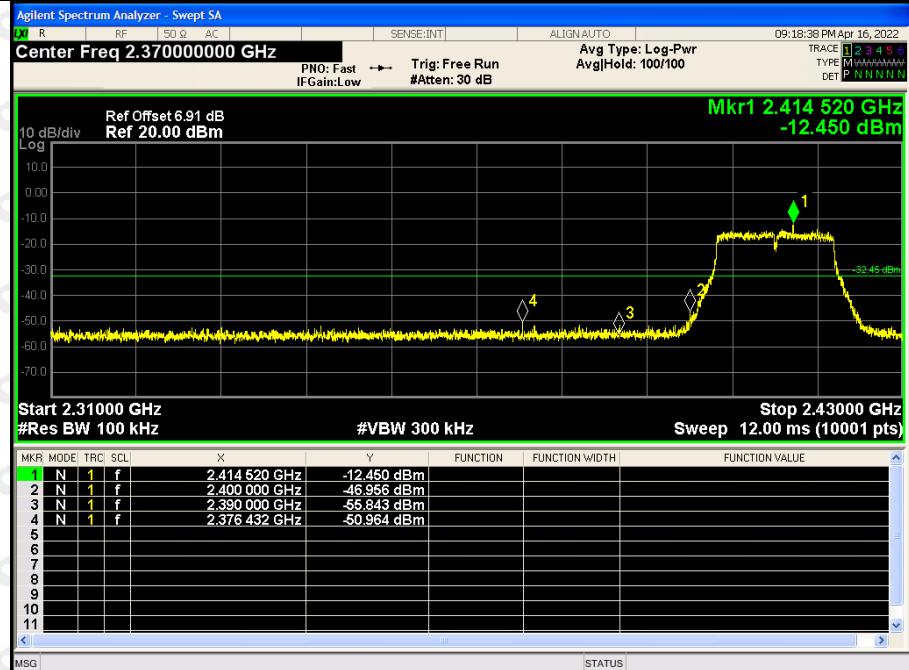802.11g/LCH




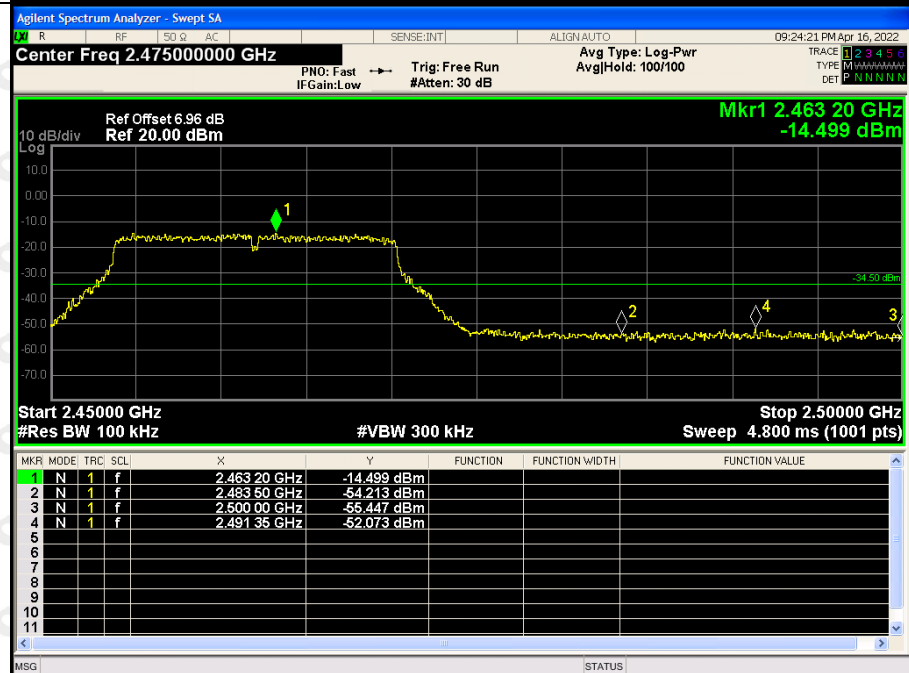802.11g/HCH




BAND EDGE Graphs


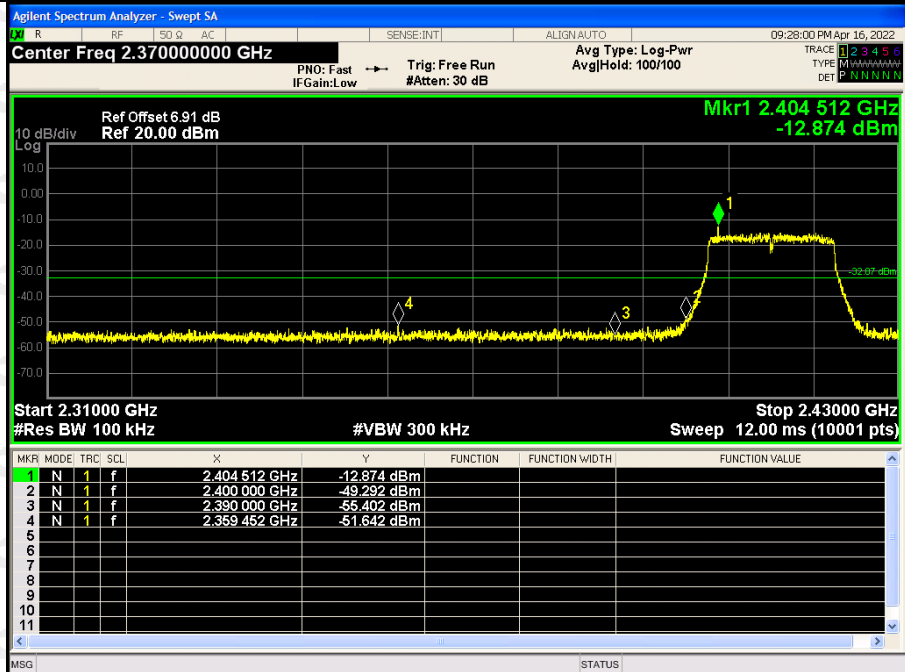
802.11n(HT20)/L
CH





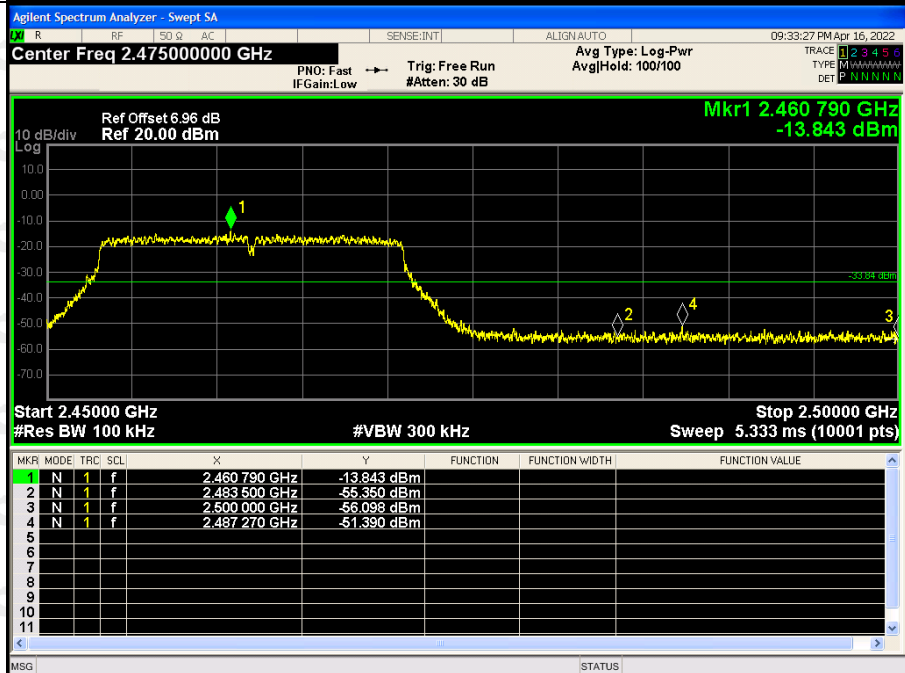
802.11n(HT20)/H
CH






BAND EDGE Graphs

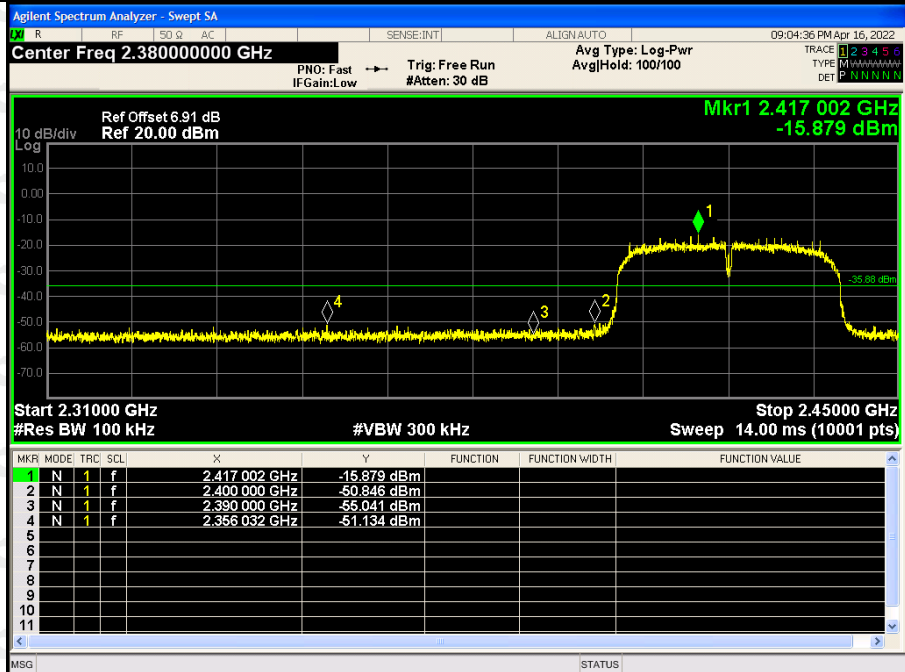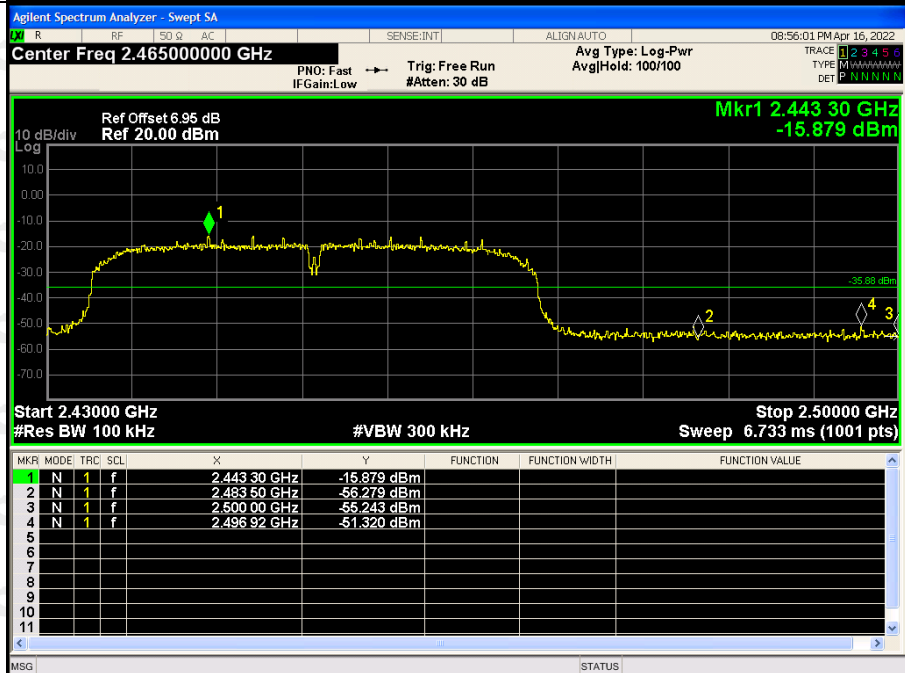802.11n(HT40)/L
CH

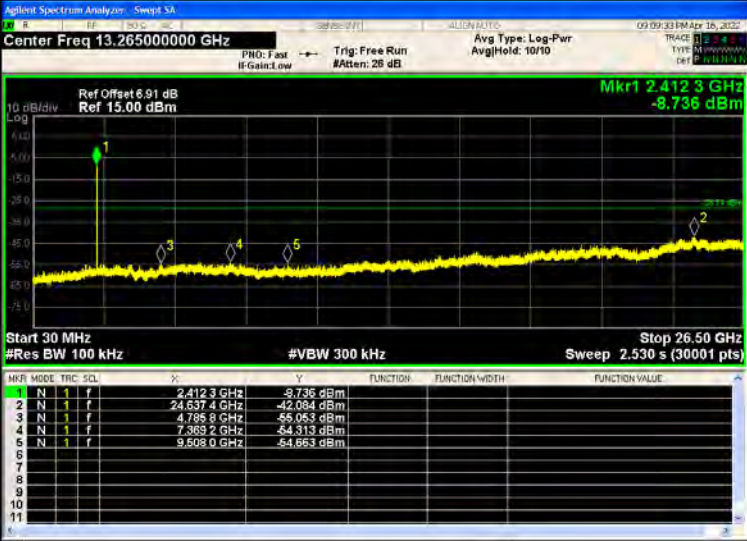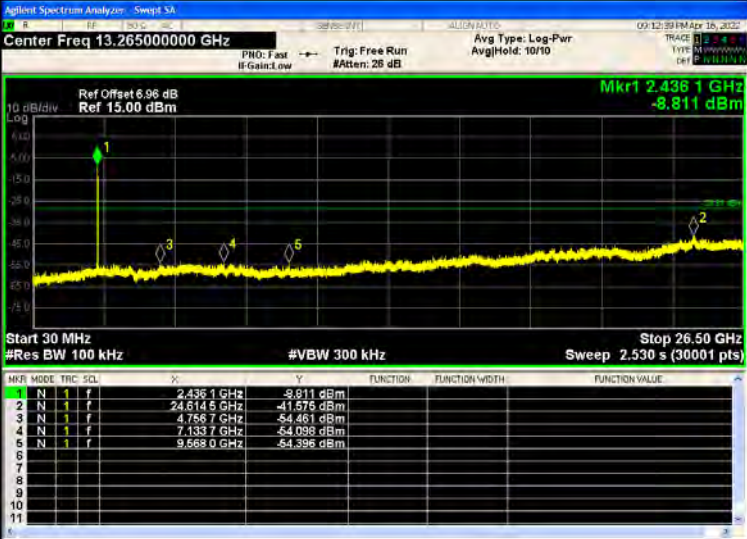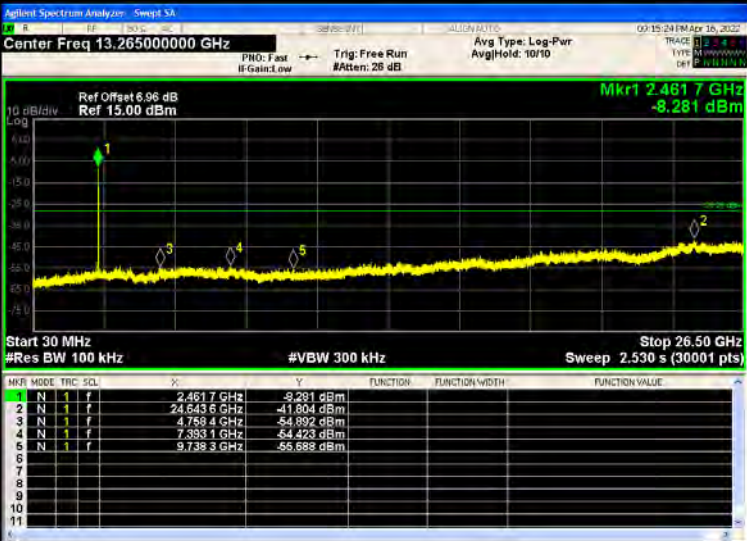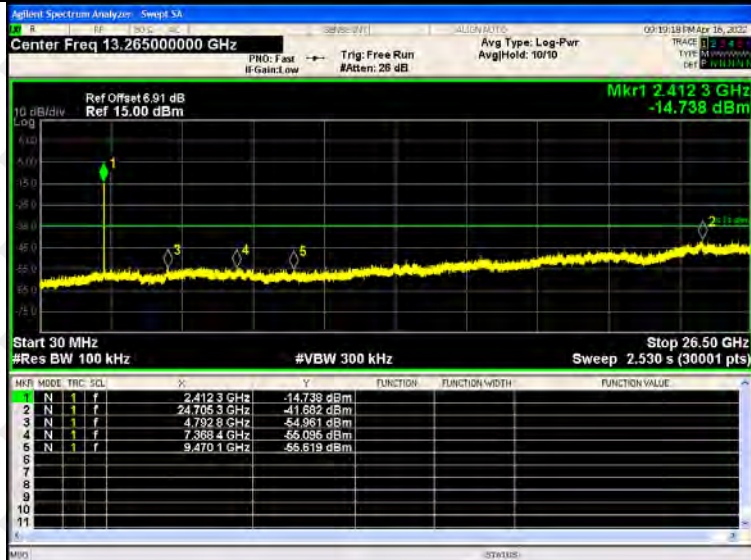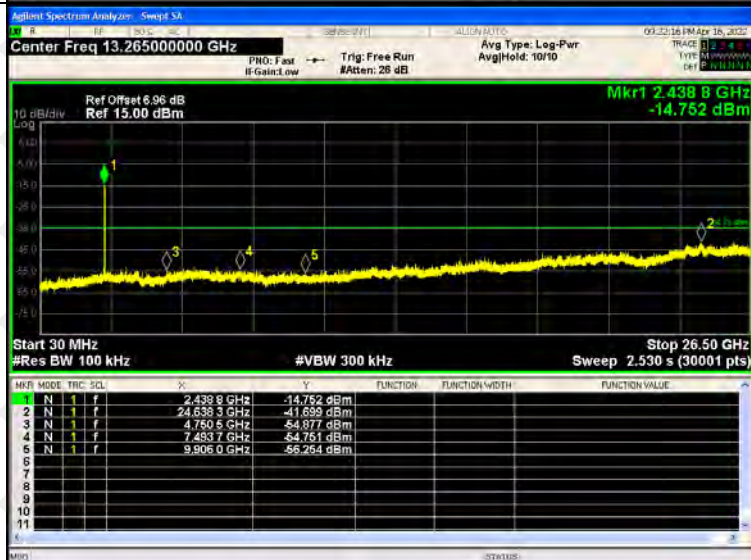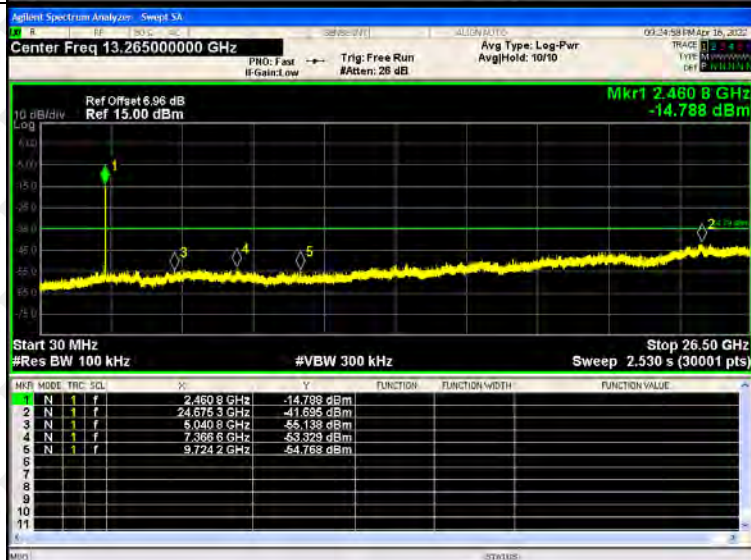802.11n(HT40)/H
CH


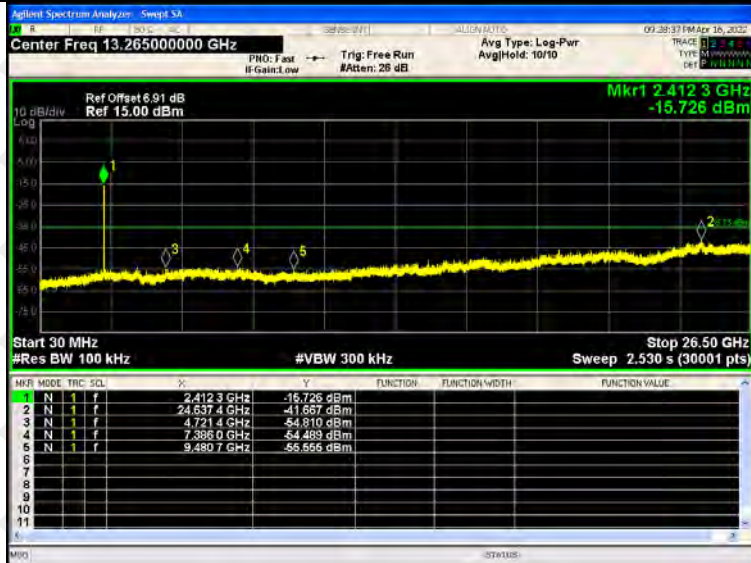
RF Conducted Spurious Emissions Graphs

802.11b /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.91 dB Ref 15.00 dBm Mkr1 2.412 3 GHz -8.736 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.412 3 GHz</td><td>-8.736 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.637 4 GHz</td><td>-42.084 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.786 8 GHz</td><td>-55.053 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.383 2 GHz</td><td>-54.513 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.508 0 GHz</td><td>-54.863 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 3 GHz	-8.736 dBm				2	N	1	f	24.637 4 GHz	-42.084 dBm				3	N	1	f	4.786 8 GHz	-55.053 dBm				4	N	1	f	7.383 2 GHz	-54.513 dBm				5	N	1	f	9.508 0 GHz	-54.863 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.412 3 GHz	-8.736 dBm																																																		
2	N	1	f	24.637 4 GHz	-42.084 dBm																																																		
3	N	1	f	4.786 8 GHz	-55.053 dBm																																																		
4	N	1	f	7.383 2 GHz	-54.513 dBm																																																		
5	N	1	f	9.508 0 GHz	-54.863 dBm																																																		
802.11b /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.436 1 GHz -8.811 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.436 1 GHz</td><td>-8.811 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.614 5 GHz</td><td>-41.576 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.758 7 GHz</td><td>-54.461 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.133 7 GHz</td><td>-54.038 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.568 0 GHz</td><td>-54.396 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-8.811 dBm				2	N	1	f	24.614 5 GHz	-41.576 dBm				3	N	1	f	4.758 7 GHz	-54.461 dBm				4	N	1	f	7.133 7 GHz	-54.038 dBm				5	N	1	f	9.568 0 GHz	-54.396 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.436 1 GHz	-8.811 dBm																																																		
2	N	1	f	24.614 5 GHz	-41.576 dBm																																																		
3	N	1	f	4.758 7 GHz	-54.461 dBm																																																		
4	N	1	f	7.133 7 GHz	-54.038 dBm																																																		
5	N	1	f	9.568 0 GHz	-54.396 dBm																																																		
802.11b /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.461 7 GHz -8.281 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.461 7 GHz</td><td>-8.281 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.543 5 GHz</td><td>-41.804 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.759 4 GHz</td><td>-54.892 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.393 1 GHz</td><td>-54.423 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.738 3 GHz</td><td>-55.688 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.461 7 GHz	-8.281 dBm				2	N	1	f	24.543 5 GHz	-41.804 dBm				3	N	1	f	4.759 4 GHz	-54.892 dBm				4	N	1	f	7.393 1 GHz	-54.423 dBm				5	N	1	f	9.738 3 GHz	-55.688 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.461 7 GHz	-8.281 dBm																																																		
2	N	1	f	24.543 5 GHz	-41.804 dBm																																																		
3	N	1	f	4.759 4 GHz	-54.892 dBm																																																		
4	N	1	f	7.393 1 GHz	-54.423 dBm																																																		
5	N	1	f	9.738 3 GHz	-55.688 dBm																																																		

RF Conducted Spurious Emissions Graphs

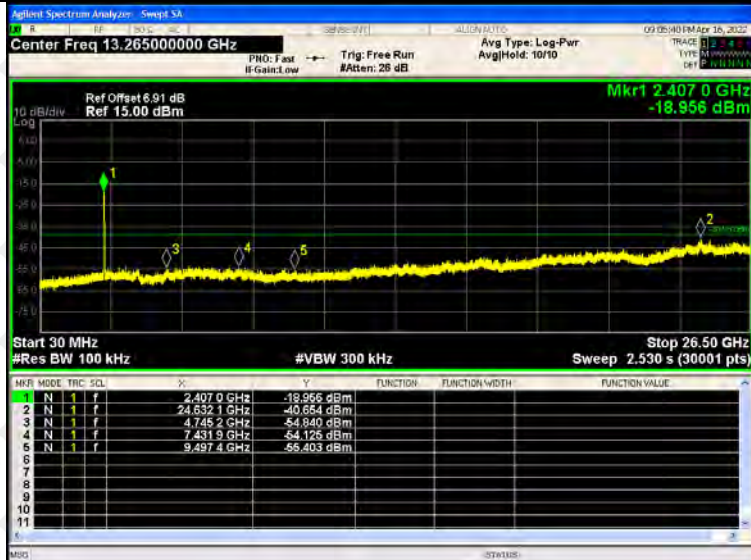
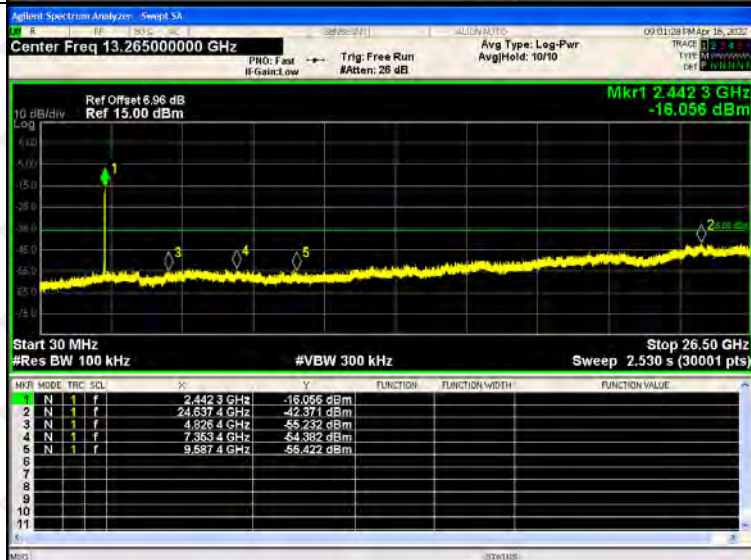
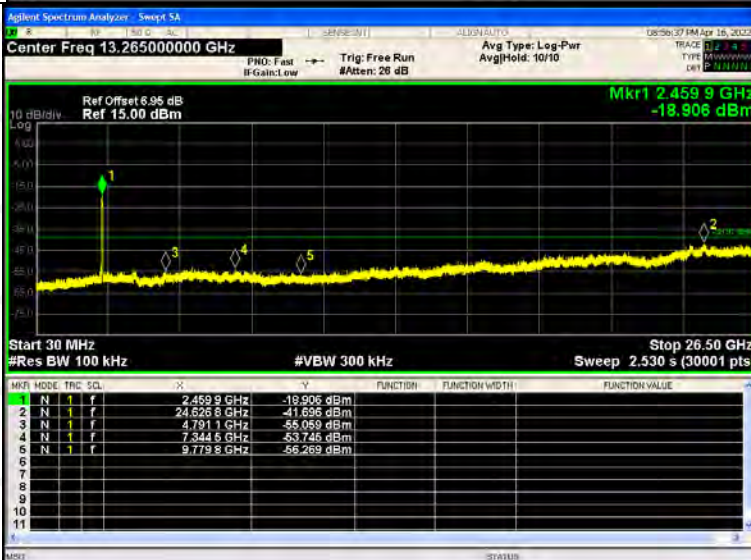
802.11g
/LCH

802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH

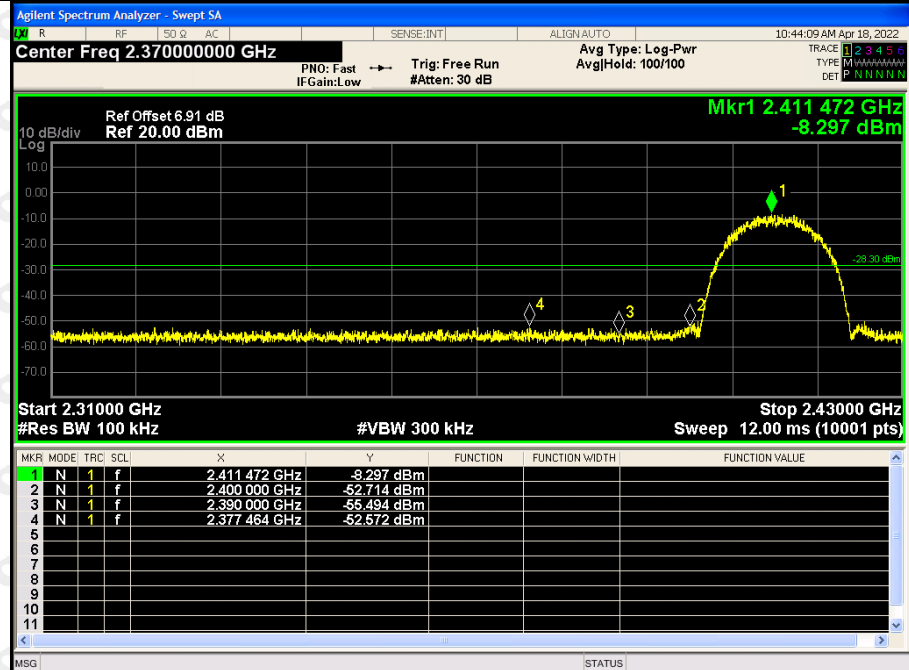

RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH


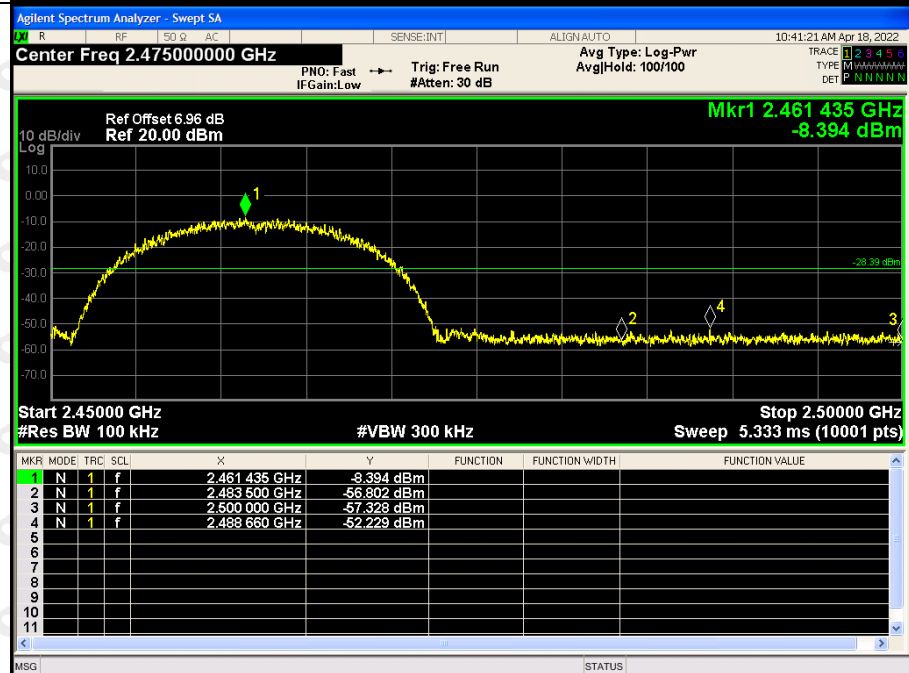
ANT3:

BAND EDGE Graphs

802.11b/LCH

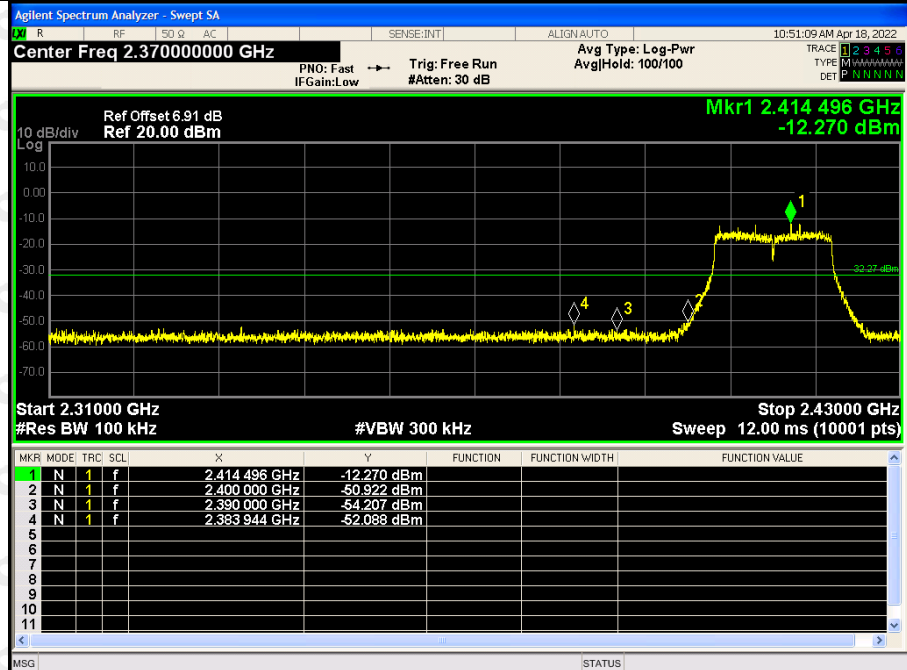


802.11b/HCH




BAND EDGE Graphs

802.11g/LCH




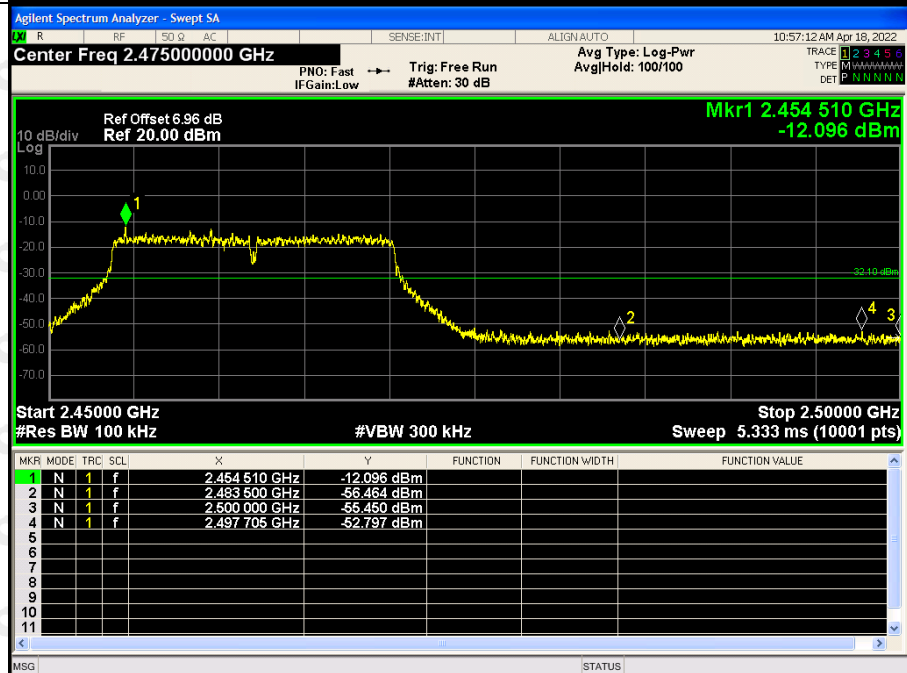802.11g/HCH




BAND EDGE Graphs

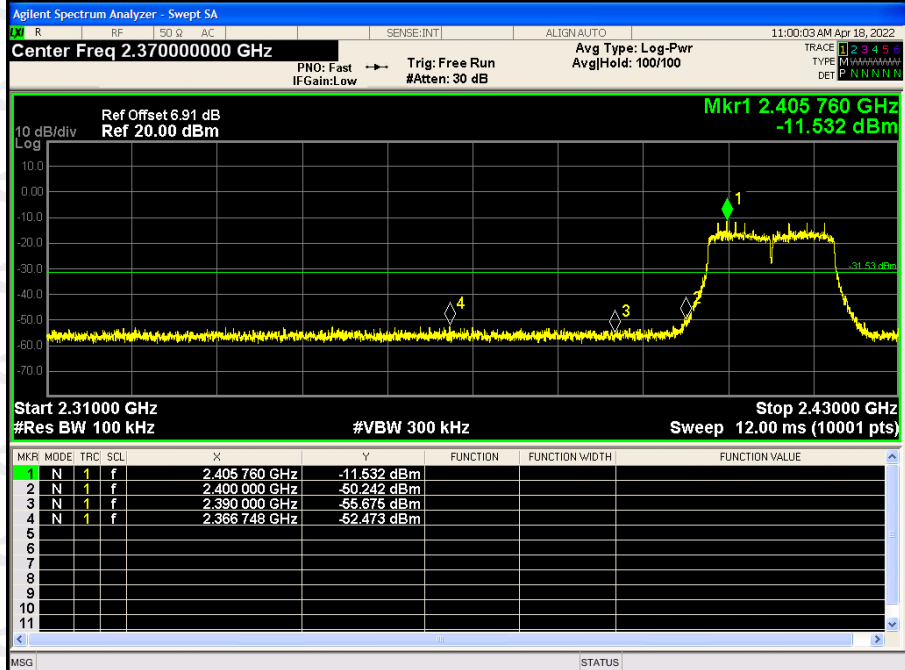802.11n(HT20)/L
CH




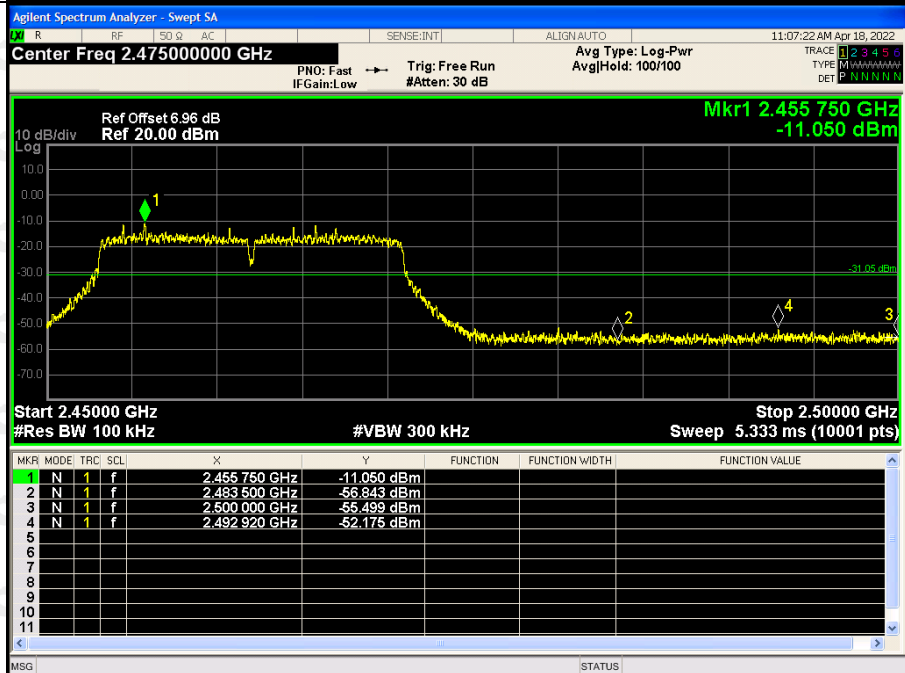802.11n(HT20)/H
CH




BAND EDGE Graphs

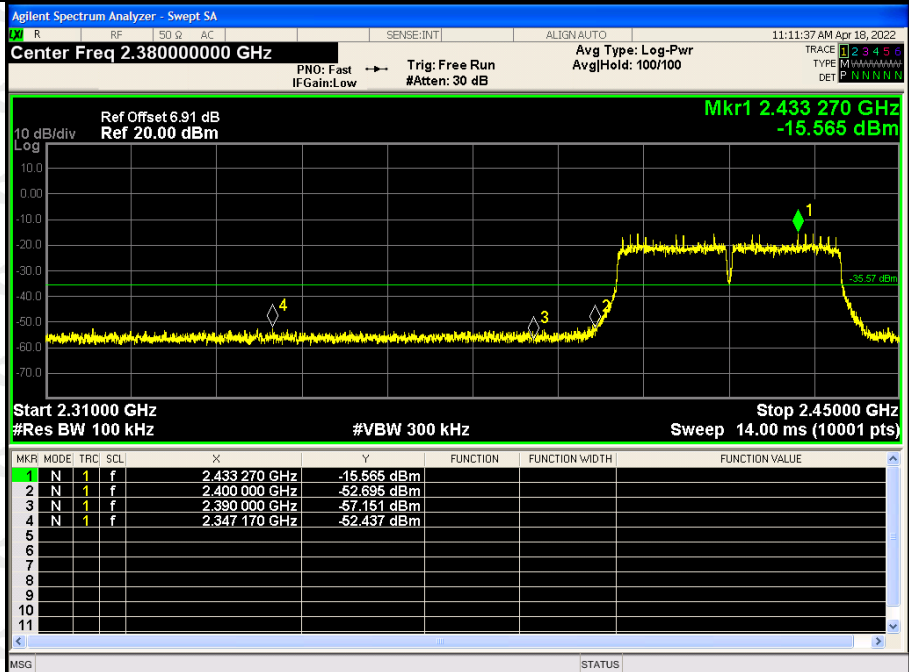
802.11n(HT40)/L
CH



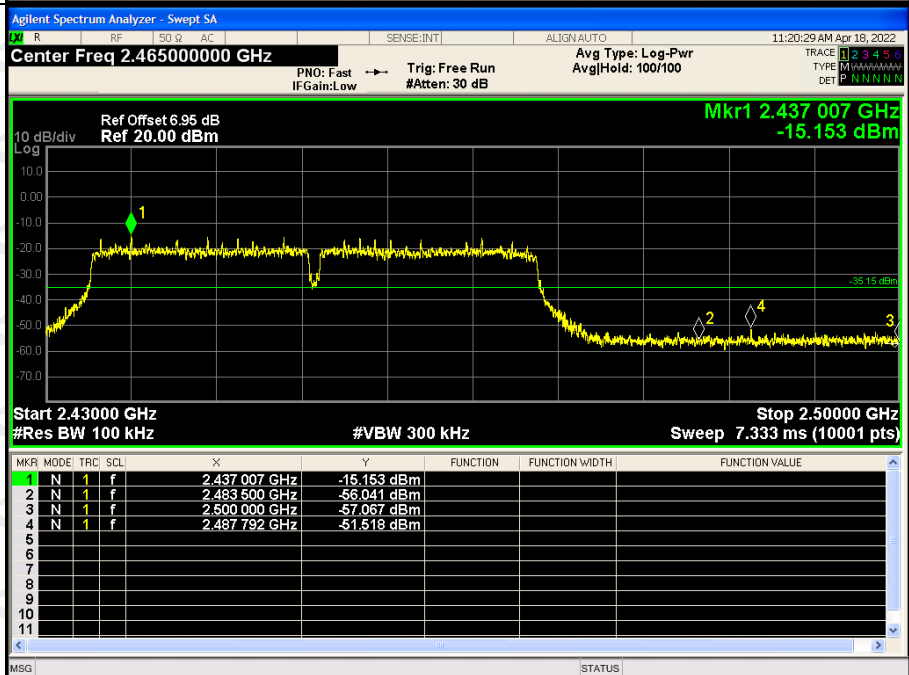
802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

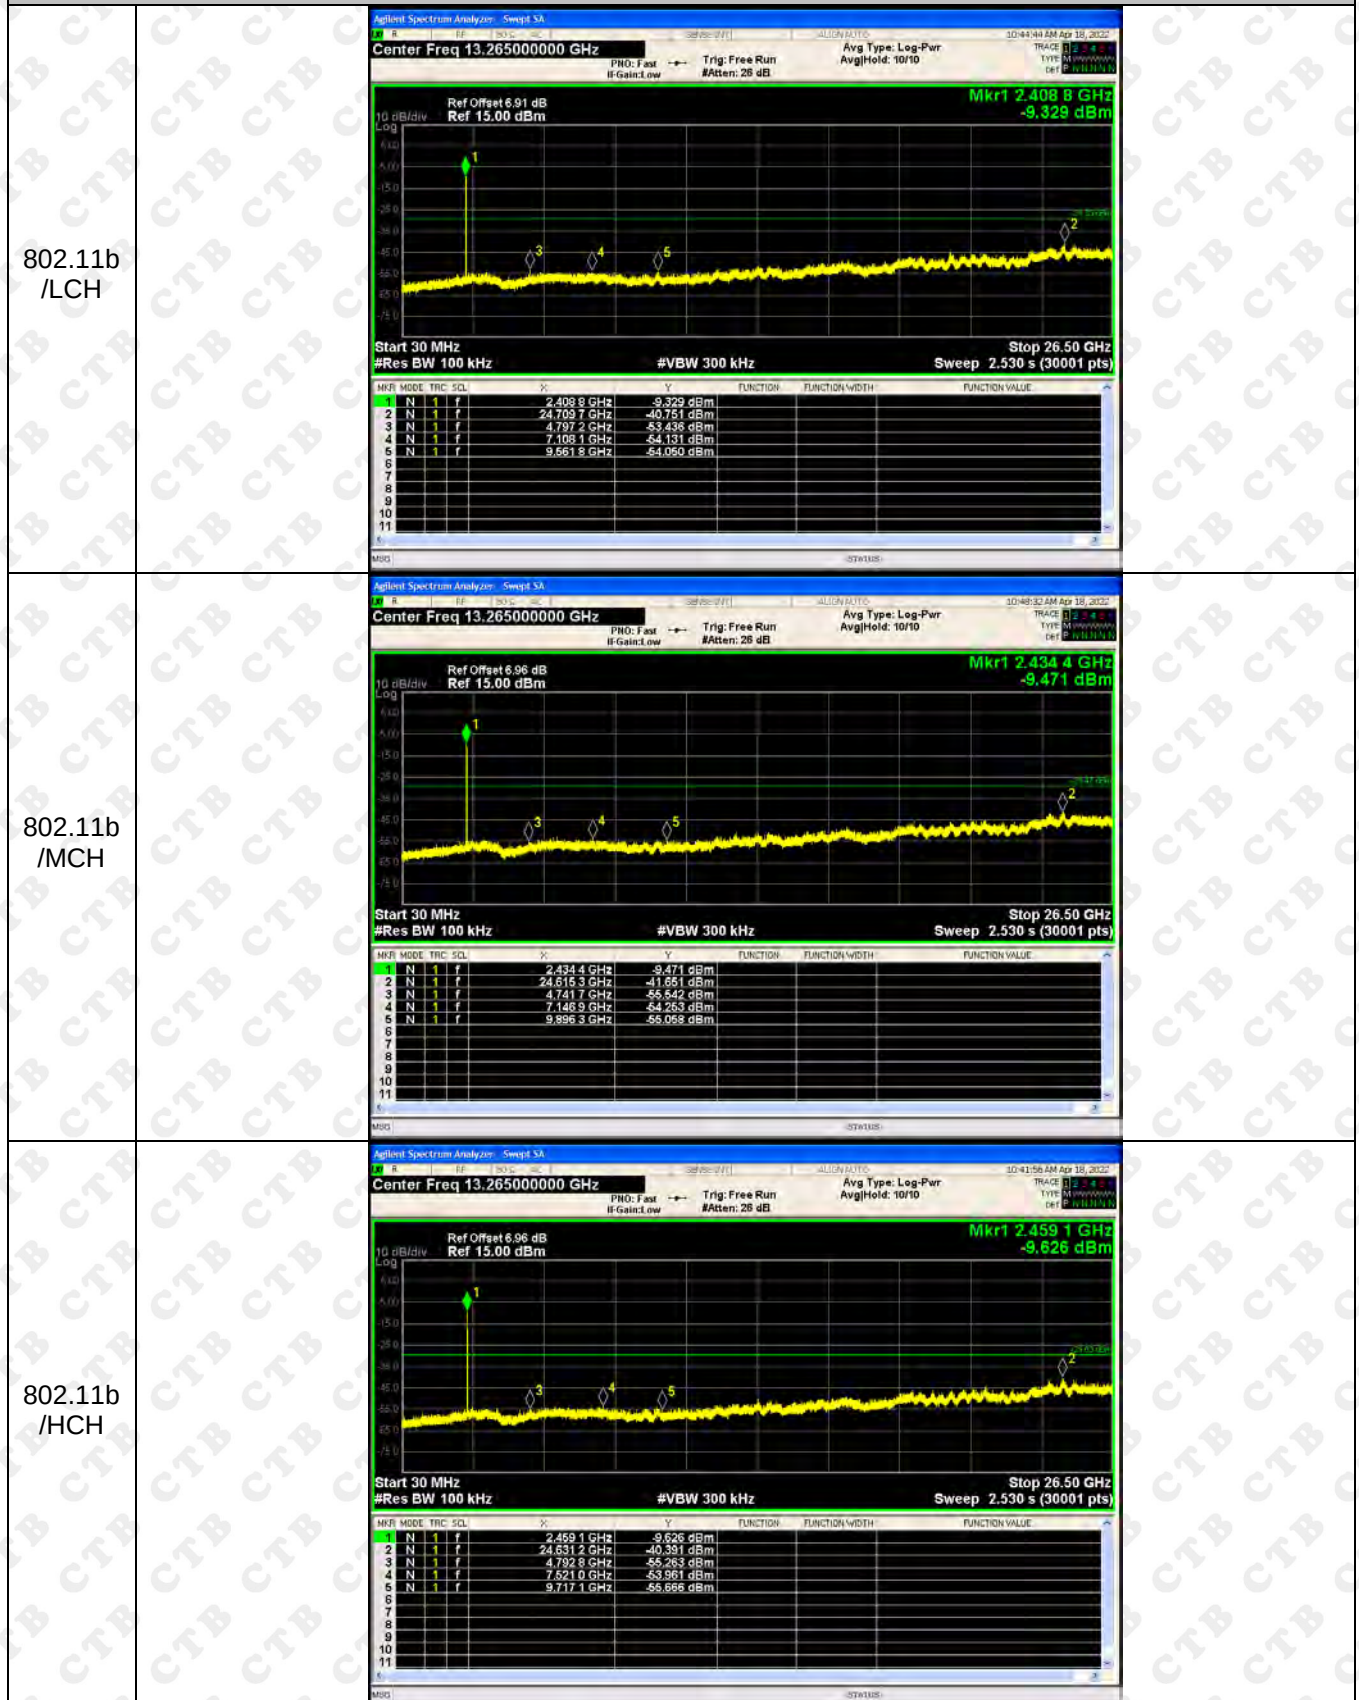




RF Conducted Spurious Emissions Graphs

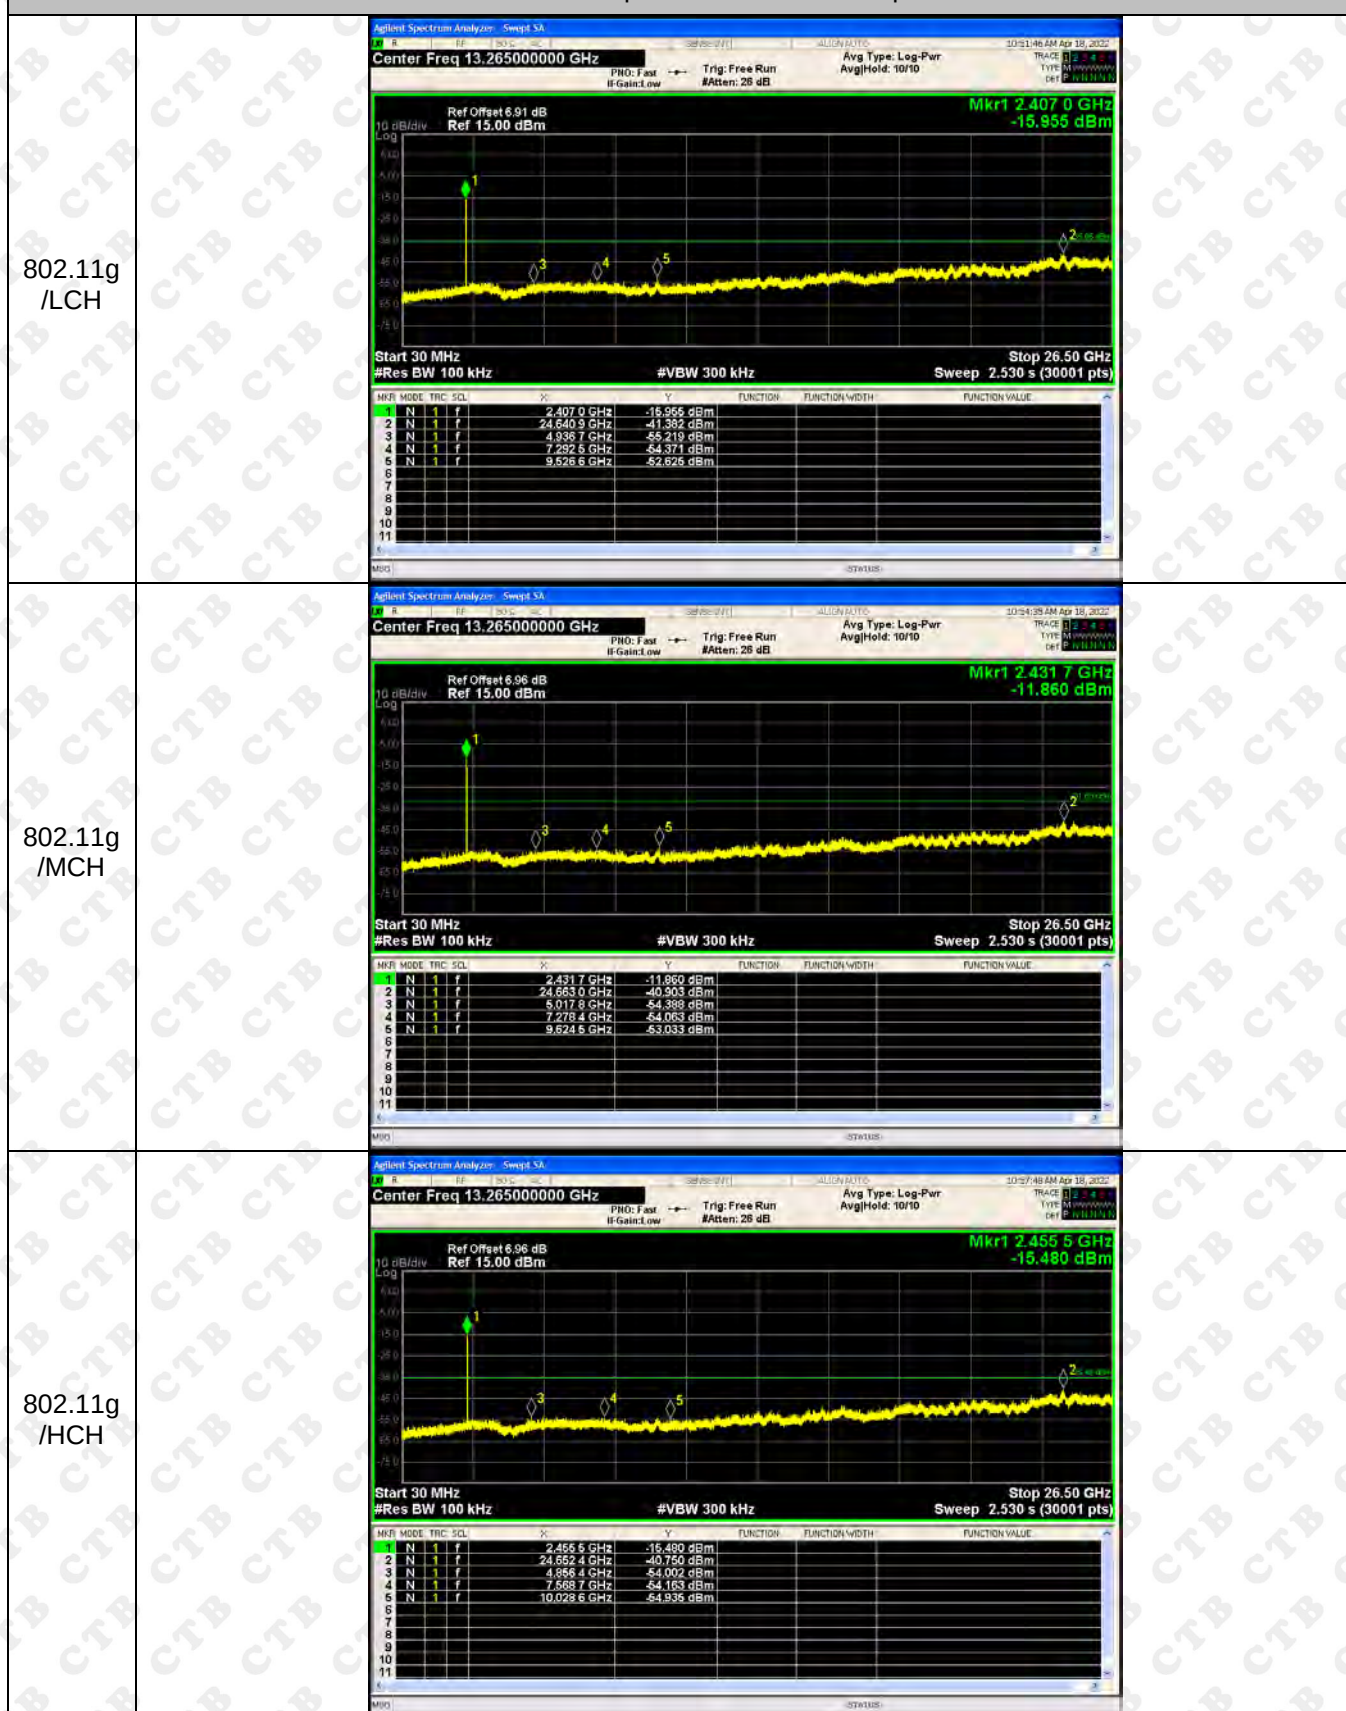

RF Conducted Spurious Emissions Graphs

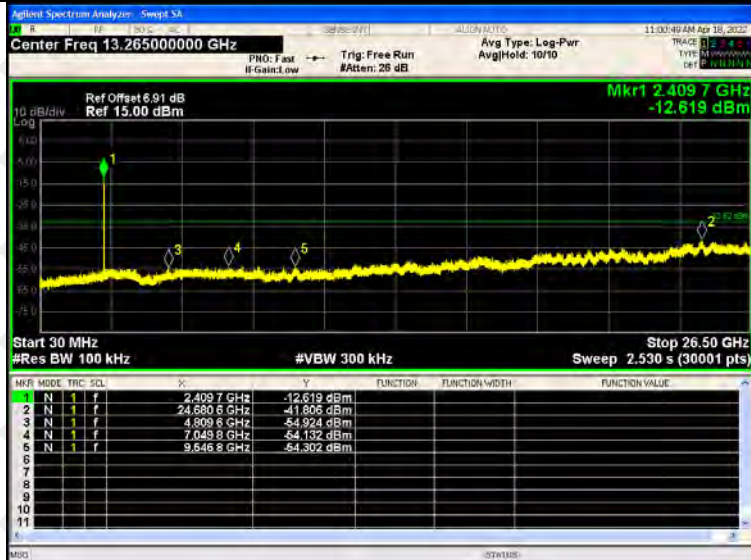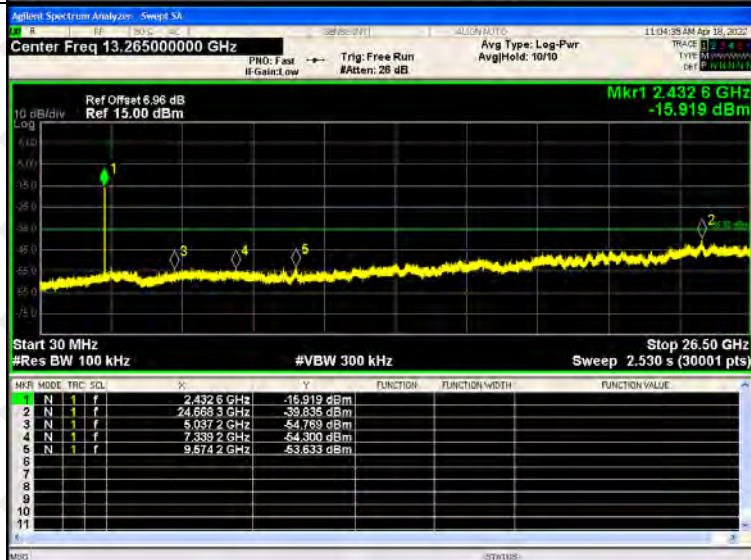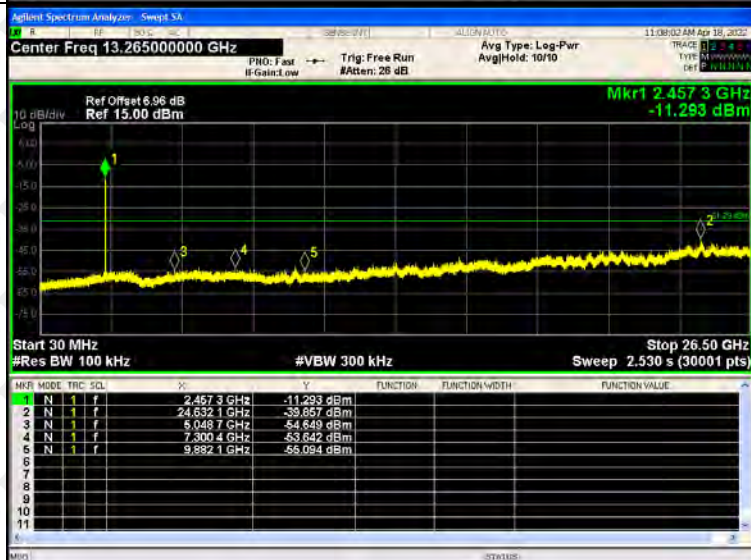802.11n
(HT20)/
LCH

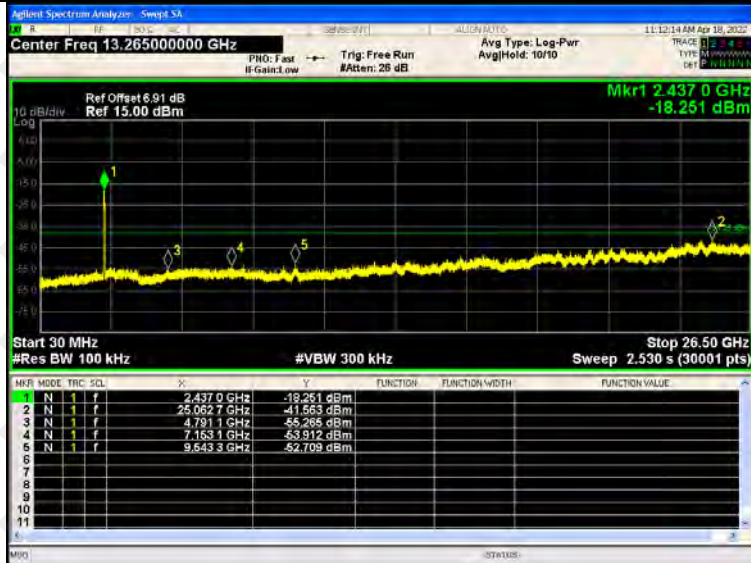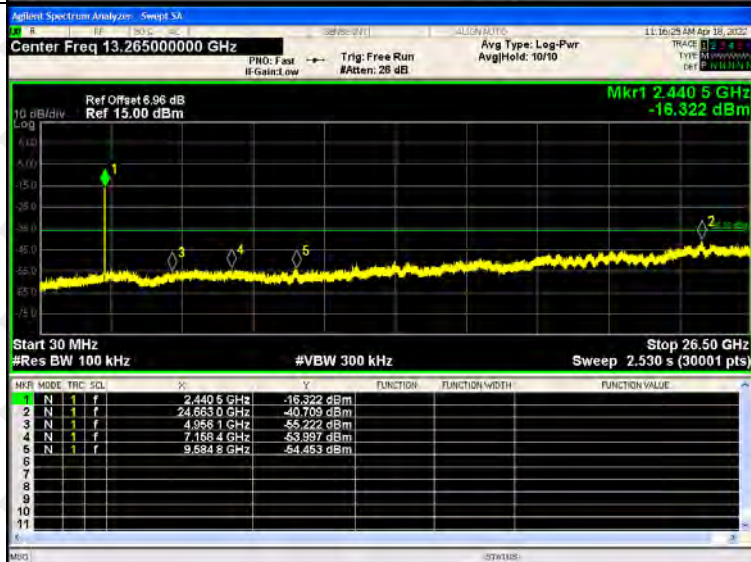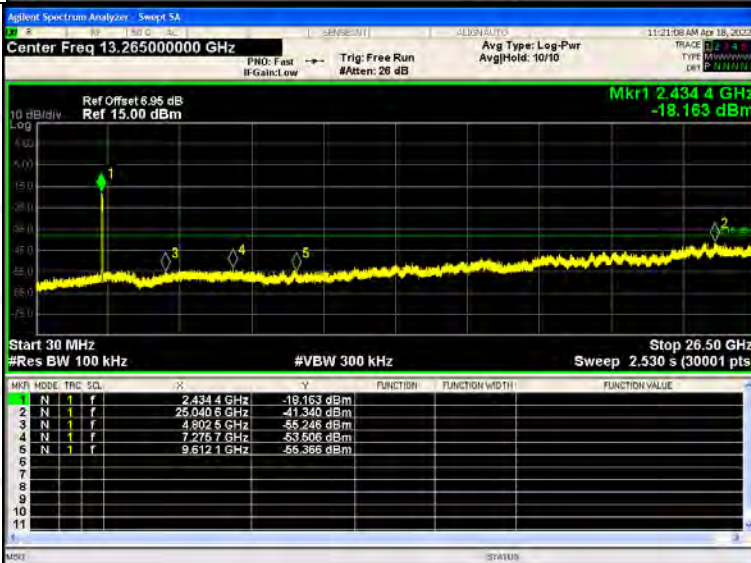802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH


9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. The EUT was directly connected to the Power meter


9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.59	30	PASS
	MCH	7.34	30	PASS
	HCH	7.28	30	PASS
802.11g	LCH	6.65	30	PASS
	MCH	6.52	30	PASS
	HCH	6.10	30	PASS
802.11n(HT20)	LCH	6.45	30	PASS
	MCH	6.53	30	PASS
	HCH	6.44	30	PASS
802.11n(HT40)	LCH	5.57	30	PASS
	MCH	5.51	30	PASS
	HCH	5.41	30	PASS

Mode	Channel.	Maximum Output Power [dBm] ant 2	Maximum Output Power [dBm] ant 3	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	7.39	7.60	/	30
	MCH	7.41	7.51	/	30
	HCH	7.45	7.26	/	30
802.11g	LCH	6.50	6.36	/	30
	MCH	6.57	6.41	/	30
	HCH	6.45	6.28	/	30
802.11n(HT20)	LCH	6.29	6.41	9.36	30
	MCH	6.66	6.22	9.46	30
	HCH	6.39	6.64	9.53	30
802.11n(HT40)	LCH	5.30	5.21	8.27	30
	MCH	5.51	5.27	8.40	30
	HCH	5.22	5.44	8.34	30

10. 6DB OCCUPIED BANDWIDTH

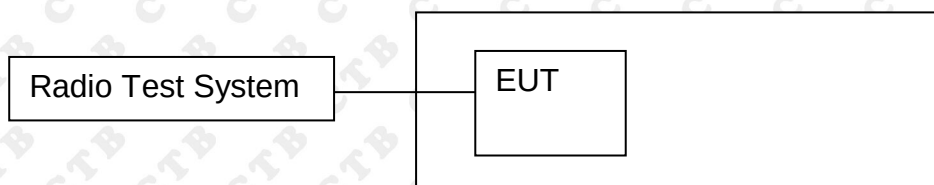10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.515	500	PASS
	MCH	9.762	500	PASS
	HCH	9.019	500	PASS
802.11g	LCH	16.368	500	PASS
	MCH	16.477	500	PASS
	HCH	16.336	500	PASS
802.11n(HT20)	LCH	17.658	500	PASS
	MCH	17.598	500	PASS
	HCH	17.31	500	PASS
802.11n(HT40)	LCH	31.652	500	PASS
	MCH	31.465	500	PASS
	HCH	30.483	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.544	500	PASS
	MCH	8.975	500	PASS
	HCH	8.623	500	PASS
802.11g	LCH	16.508	500	PASS
	MCH	16.351	500	PASS
	HCH	16.418	500	PASS
802.11n(HT20)	LCH	17.595	500	PASS
	MCH	17.56	500	PASS
	HCH	17.59	500	PASS
802.11n(HT40)	LCH	30.633	500	PASS
	MCH	31.325	500	PASS
	HCH	32.604	500	PASS


ANT3:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.186	500	PASS
	MCH	10.132	500	PASS
	HCH	10.301	500	PASS
802.11g	LCH	16.367	500	PASS
	MCH	16.365	500	PASS
	HCH	16.357	500	PASS
802.11n(HT20)	LCH	17.402	500	PASS
	MCH	17.016	500	PASS
	HCH	16.932	500	PASS
802.11n(HT40)	LCH	35.855	500	PASS
	MCH	35.687	500	PASS
	HCH	35.185	500	PASS


ANT1: Test Graph:



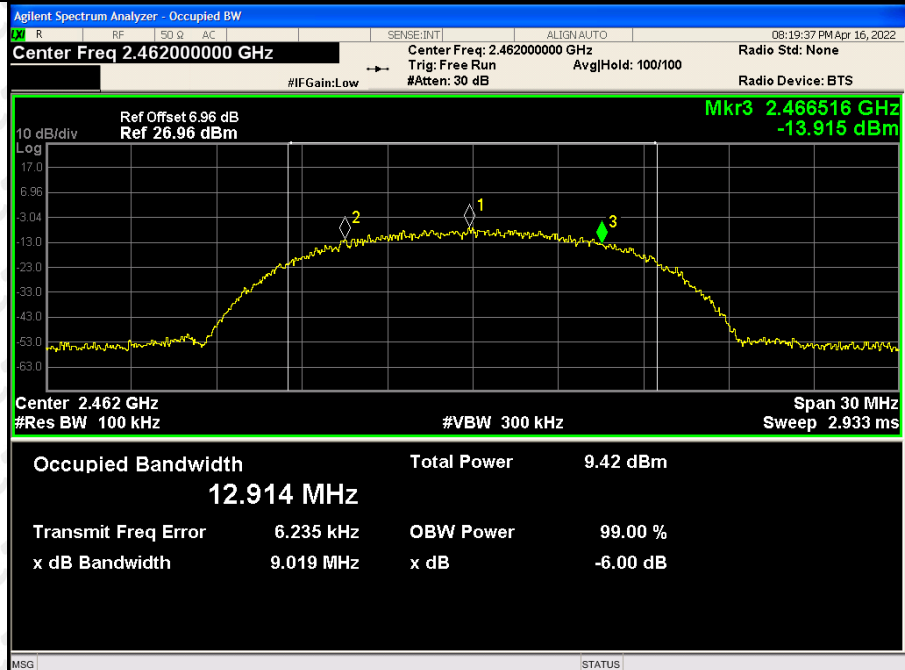
802.11b/HCH



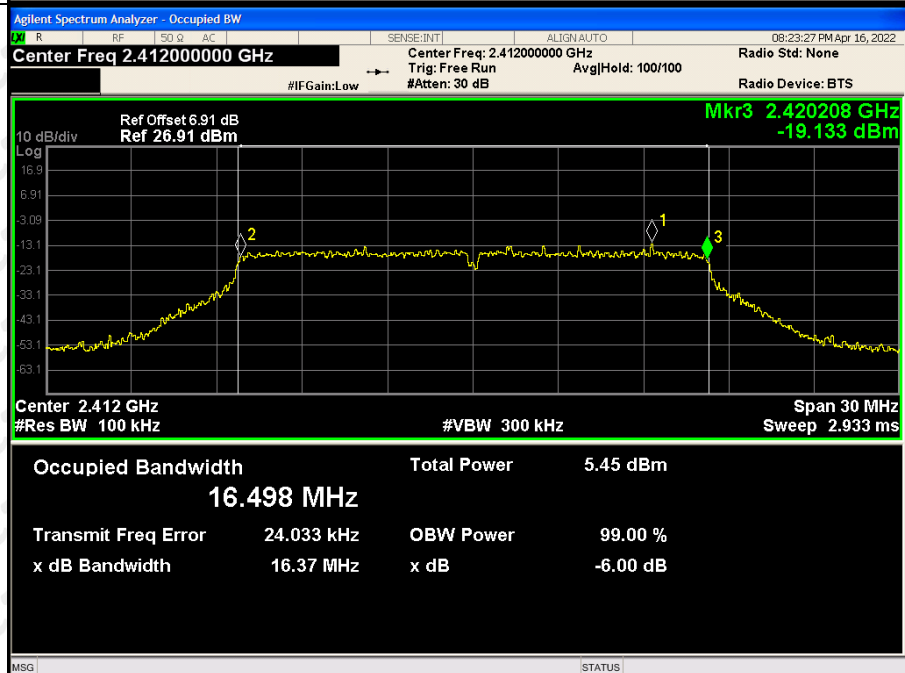
802.11g/LCH





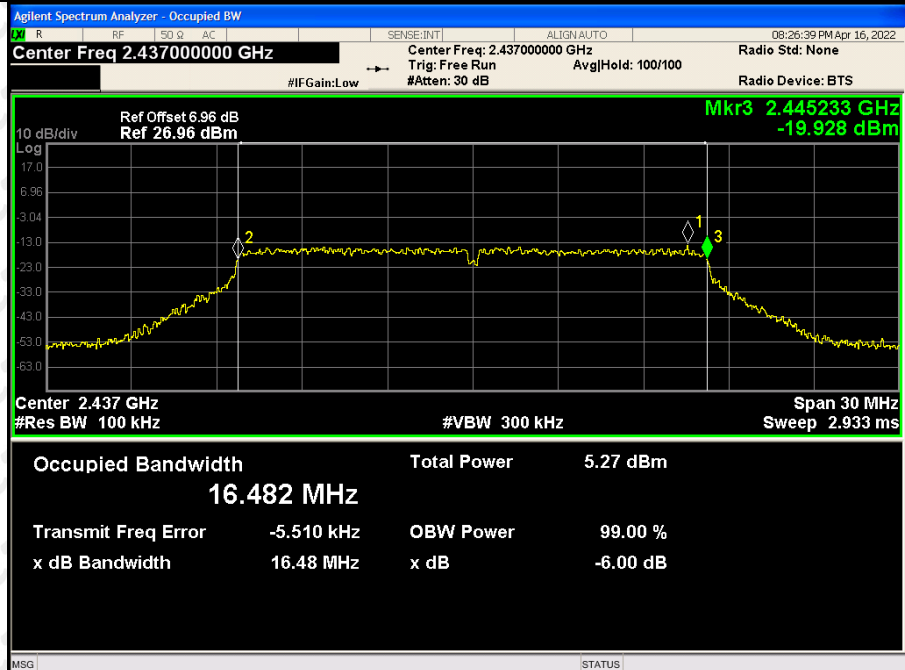
802.11g/MCH



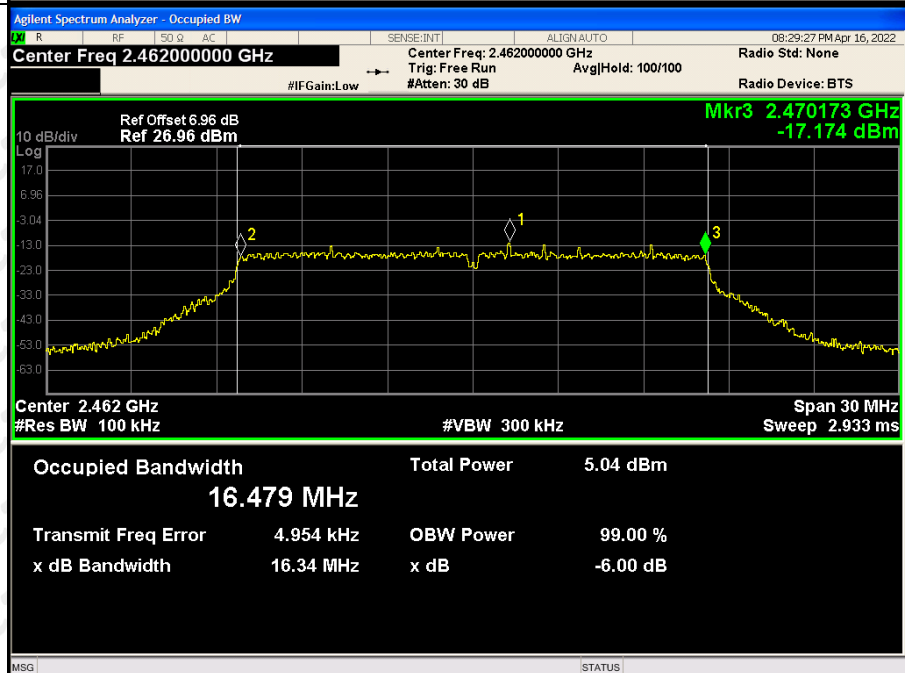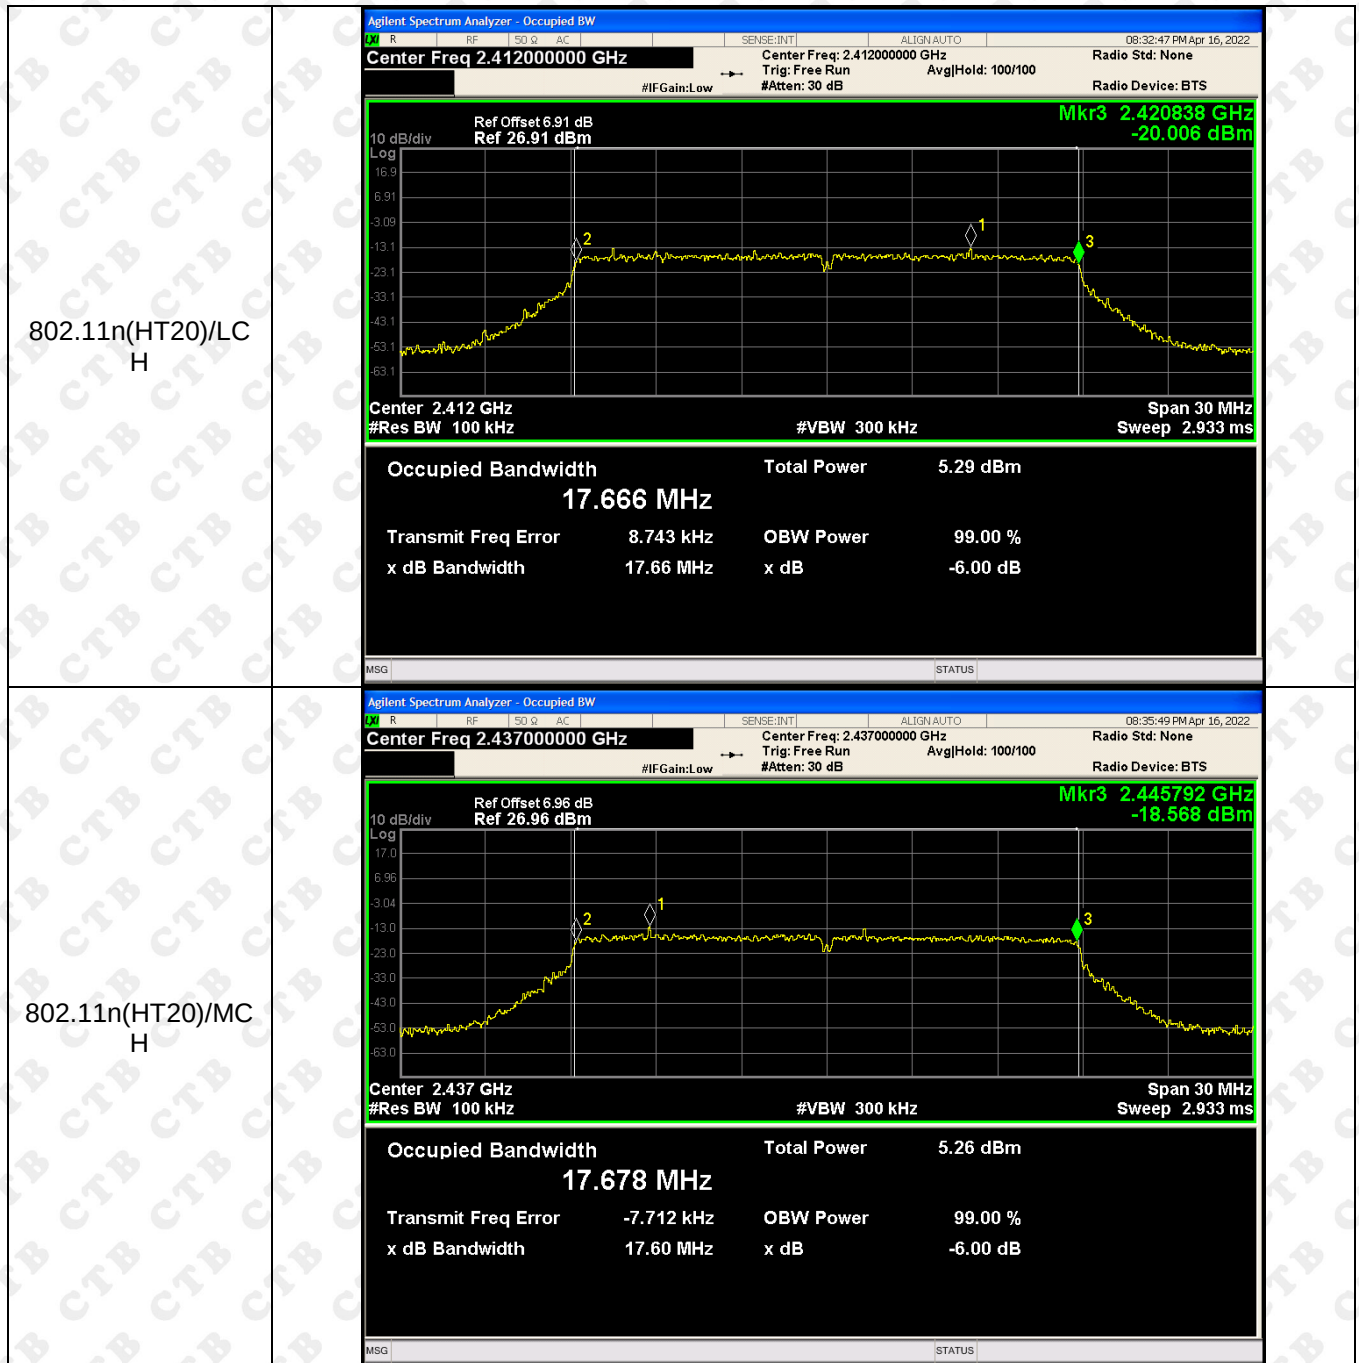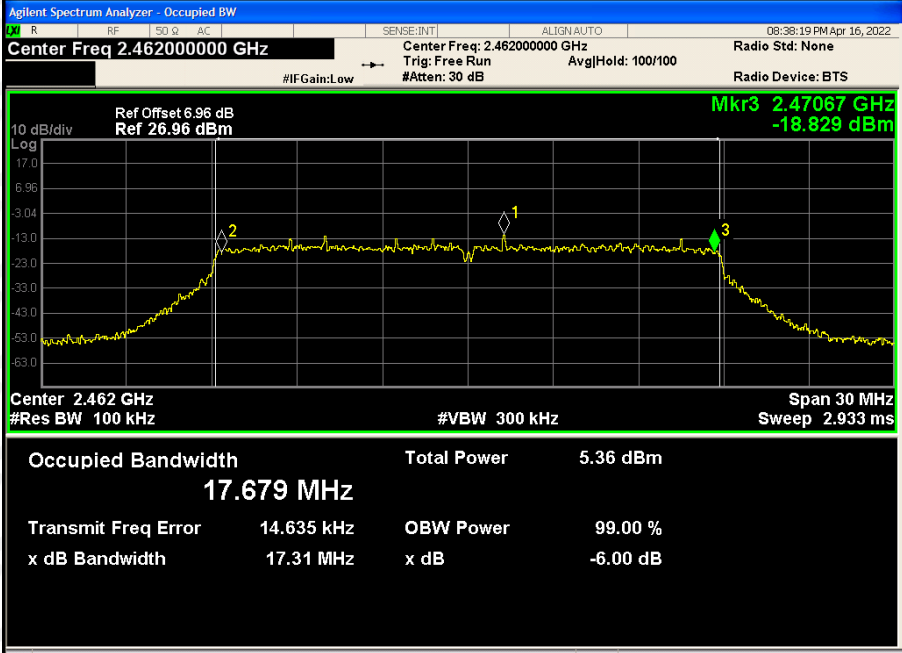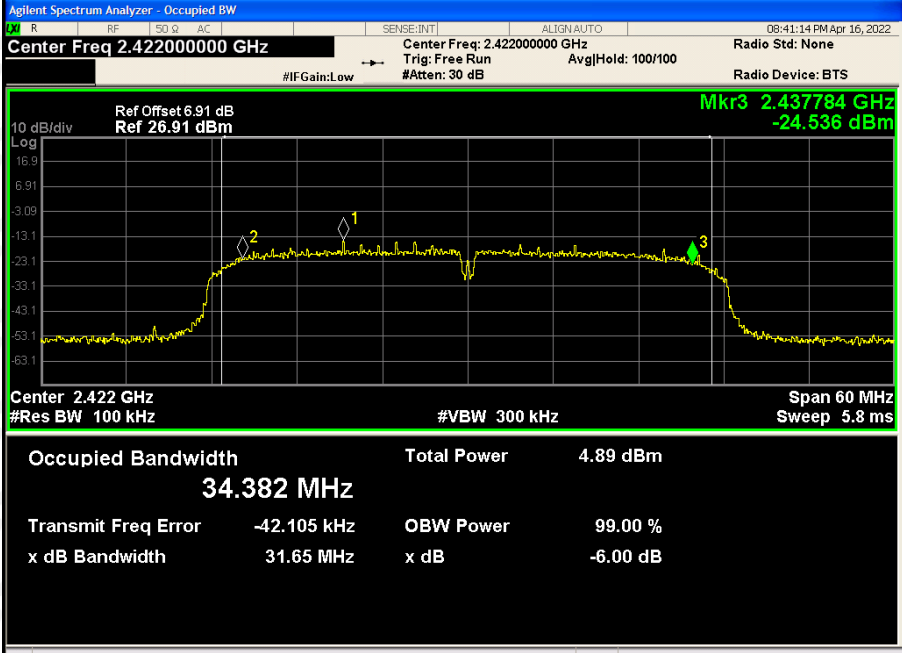802.11g/HCH






802.11n(HT20)/HC H	
802.11n(HT40)/LC H	

802.11n(HT40)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB ALIGN AUTO Radio Std: None Radio Device: BTS 08:45:02 PM Apr 16, 2022 #IFGain:Low AvgHld: 100/100 Ref Offset 6.96 dB Ref 26.96 dBm Mkr1 2.4295 GHz -16.108 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.74 dBm</td></tr><tr><td>34.446 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-79.419 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>31.47 MHz</td><td></td><td></td></tr></table> MSG STATUS	Occupied Bandwidth	Total Power	4.74 dBm	34.446 MHz			Transmit Freq Error	OBW Power	99.00 %	-79.419 kHz			x dB Bandwidth	x dB	-6.00 dB	31.47 MHz		
Occupied Bandwidth	Total Power	4.74 dBm																	
34.446 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-79.419 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
31.47 MHz																			
802.11n(HT40)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 30 dB ALIGN AUTO Radio Std: None Radio Device: BTS 08:48:25 PM Apr 16, 2022 #IFGain:Low AvgHld: 100/100 Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.467191 GHz -22.226 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.60 dBm</td></tr><tr><td>34.413 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-50.585 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>30.48 MHz</td><td></td><td></td></tr></table> MSG STATUS	Occupied Bandwidth	Total Power	4.60 dBm	34.413 MHz			Transmit Freq Error	OBW Power	99.00 %	-50.585 kHz			x dB Bandwidth	x dB	-6.00 dB	30.48 MHz		
Occupied Bandwidth	Total Power	4.60 dBm																	
34.413 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-50.585 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
30.48 MHz																			


ANT2: Test Graph:



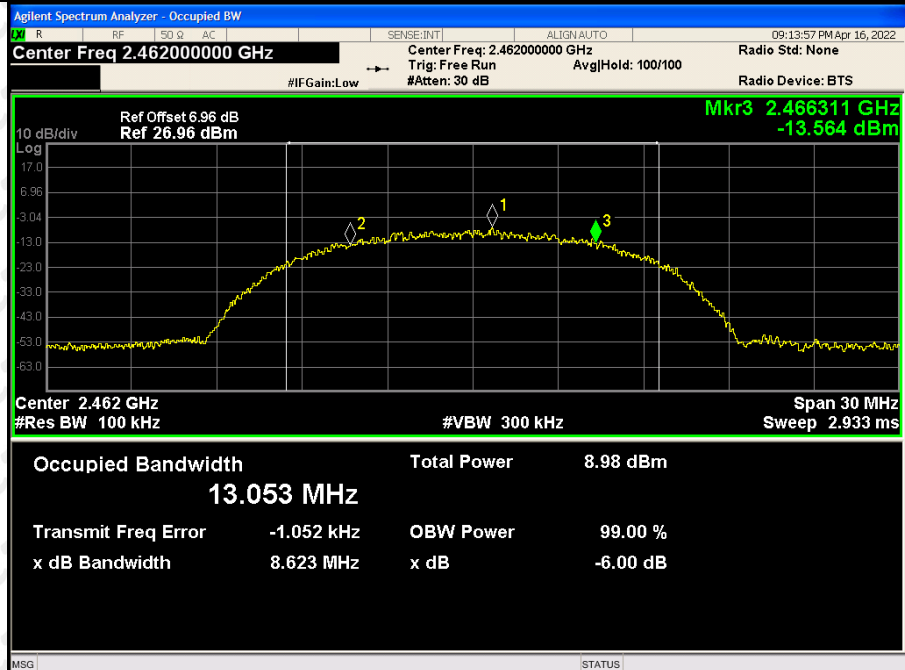
802.11b/HCH



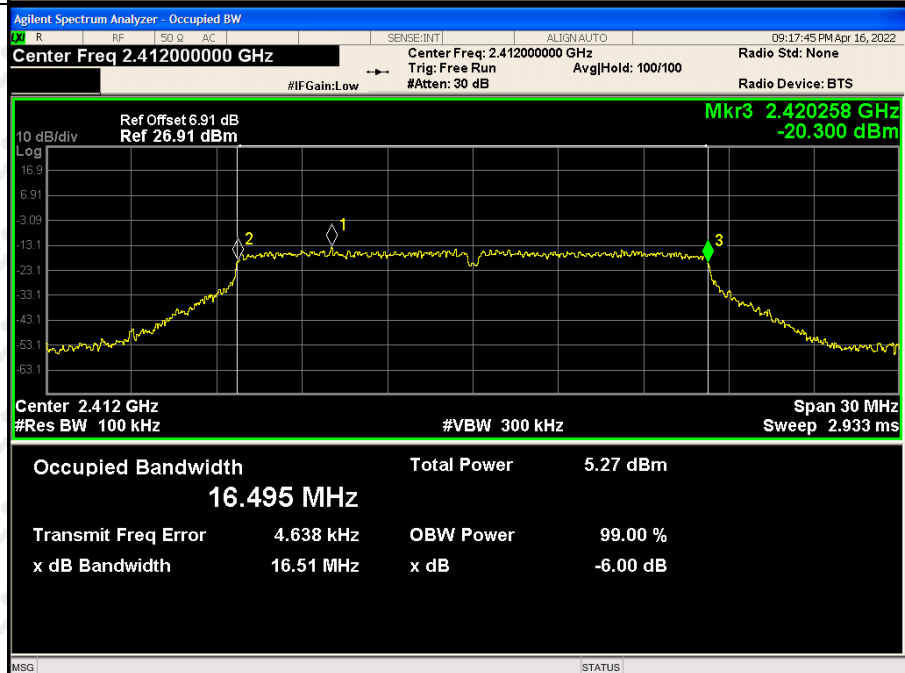
802.11g/LCH






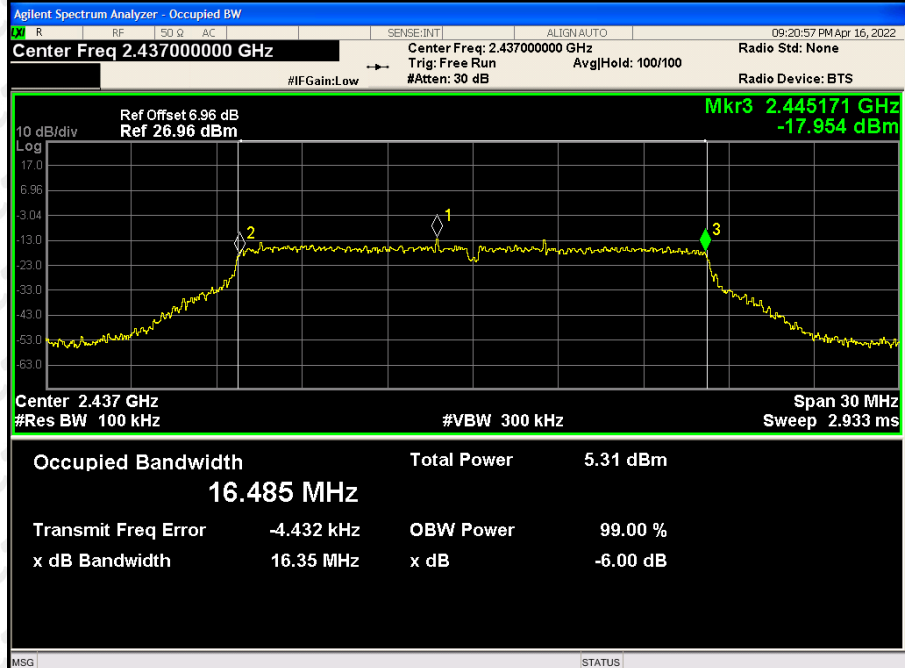
802.11g/MCH





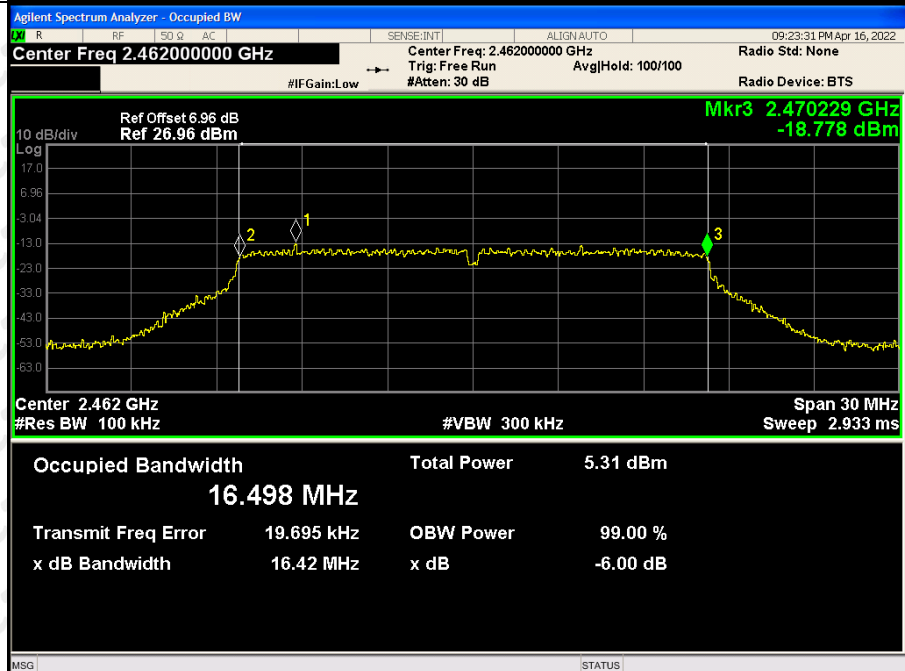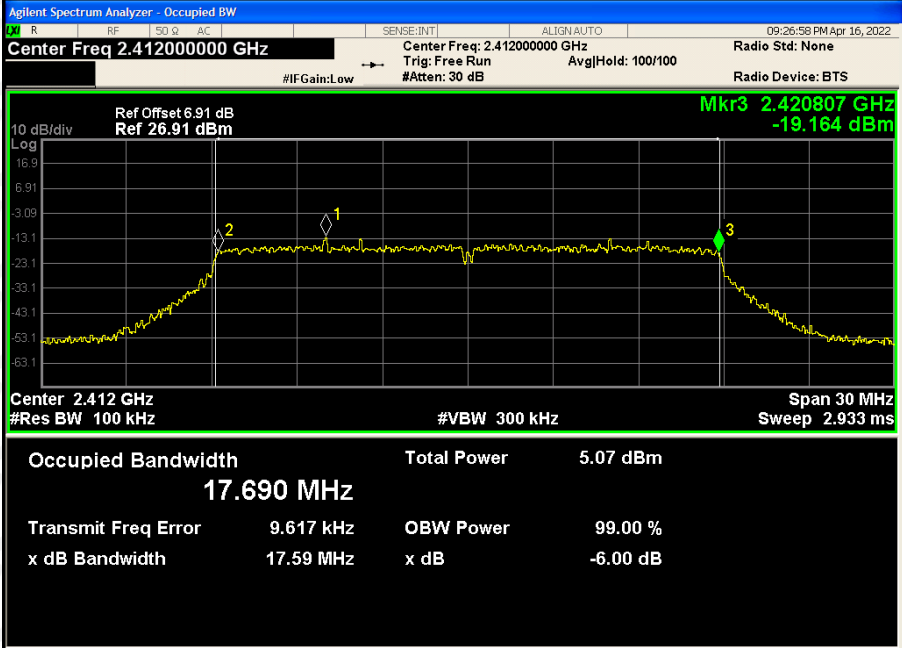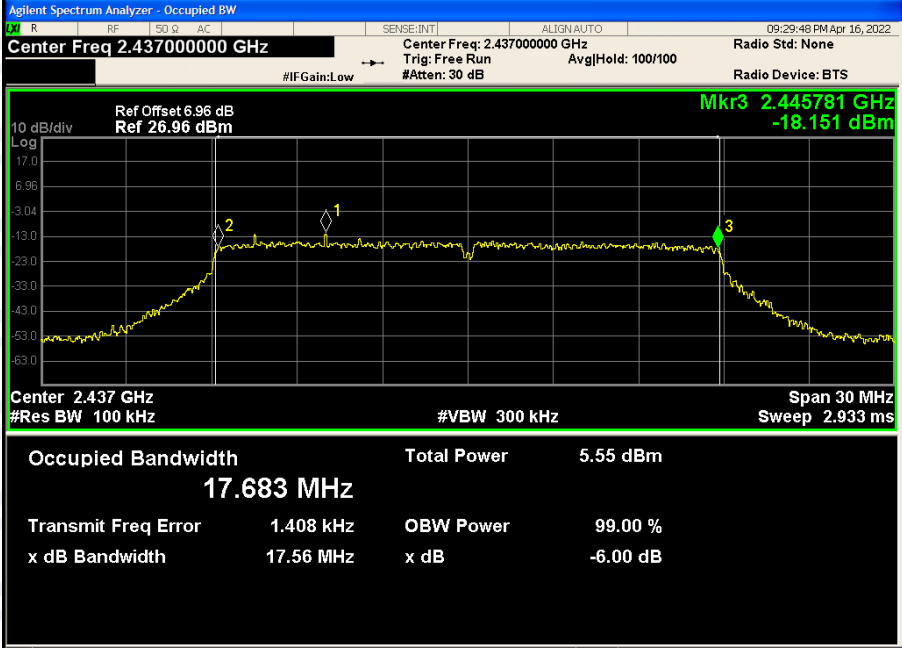802.11g/HCH




802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.420807 GHz -19.164 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.690 MHz Total Power 5.07 dBm Transmit Freq Error 9.617 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.445781 GHz -18.151 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.683 MHz Total Power 5.55 dBm Transmit Freq Error 1.408 kHz OBW Power 99.00 % x dB Bandwidth 17.56 MHz x dB -6.00 dB

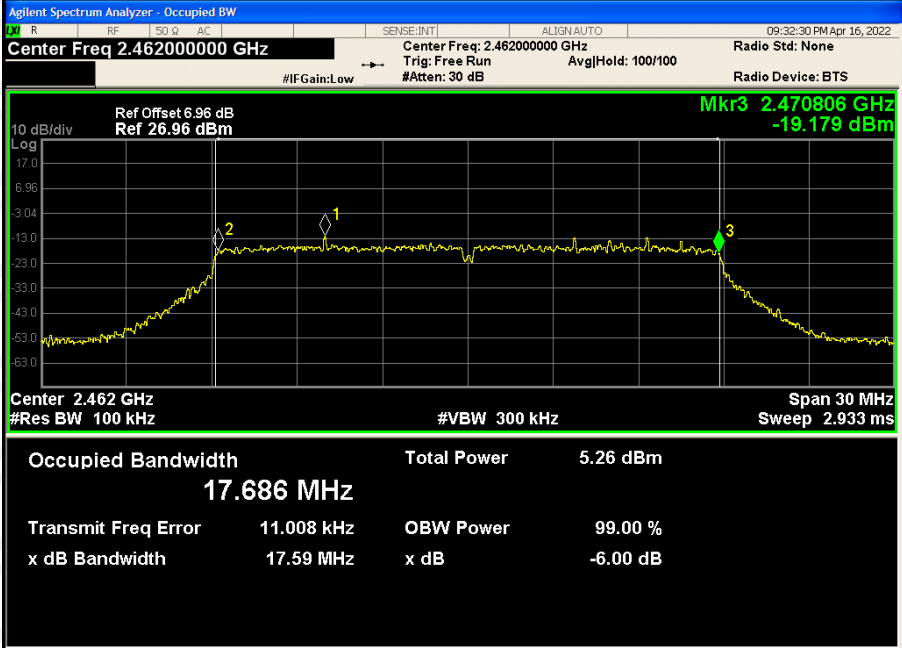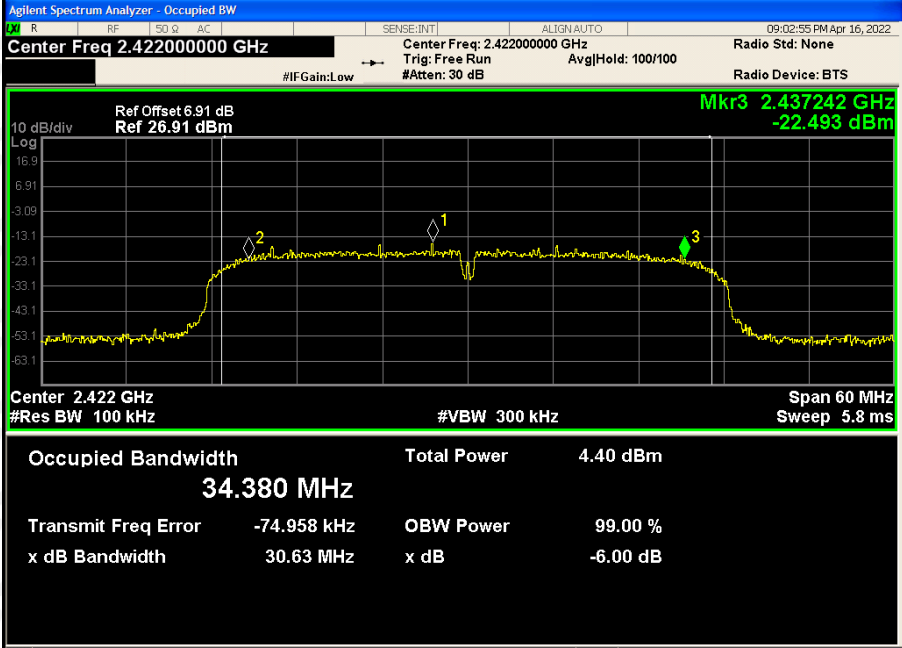
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470806 GHz -19.179 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.686 MHz Total Power 5.26 dBm Transmit Freq Error 11.008 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz x dB -6.00 dB
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.437242 GHz -22.493 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 34.380 MHz Total Power 4.40 dBm Transmit Freq Error -74.958 kHz OBW Power 99.00 % x dB Bandwidth 30.63 MHz x dB -6.00 dB

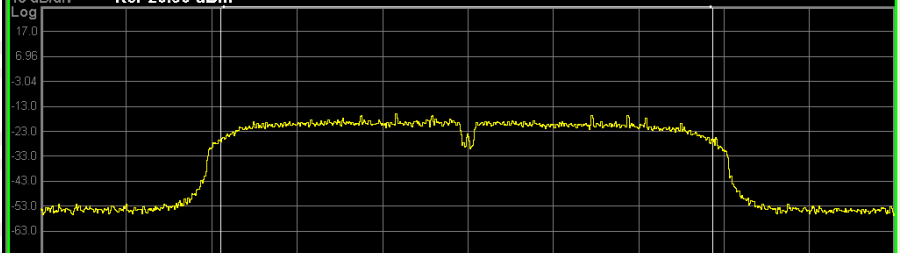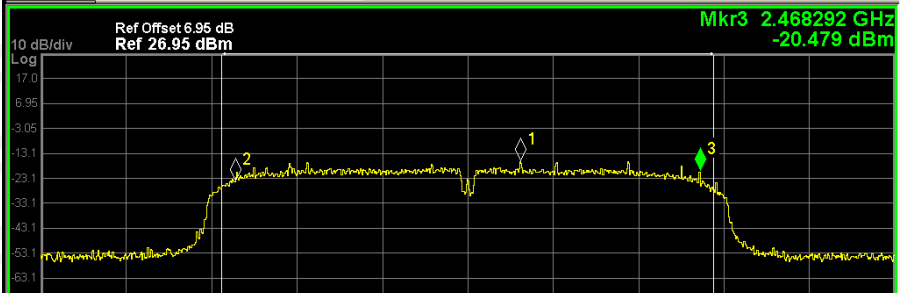802.11n(HT40)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Avg/Hold: 100/100 Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm  Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.72 dBm</td></tr><tr><td>34.487 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>-57.755 kHz</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>31.32 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	4.72 dBm	34.487 MHz			Transmit Freq Error	-57.755 kHz	OBW Power	99.00 %	x dB Bandwidth	31.32 MHz	x dB	-6.00 dB
Occupied Bandwidth	Total Power	4.72 dBm													
34.487 MHz															
Transmit Freq Error	-57.755 kHz	OBW Power	99.00 %												
x dB Bandwidth	31.32 MHz	x dB	-6.00 dB												
802.11n(HT40)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Avg/Hold: 100/100 Radio Device: BTS Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.468292 GHz -20.479 dBm  Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.45 dBm</td></tr><tr><td>34.563 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>-9.689 kHz</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>32.60 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	4.45 dBm	34.563 MHz			Transmit Freq Error	-9.689 kHz	OBW Power	99.00 %	x dB Bandwidth	32.60 MHz	x dB	-6.00 dB
Occupied Bandwidth	Total Power	4.45 dBm													
34.563 MHz															
Transmit Freq Error	-9.689 kHz	OBW Power	99.00 %												
x dB Bandwidth	32.60 MHz	x dB	-6.00 dB												

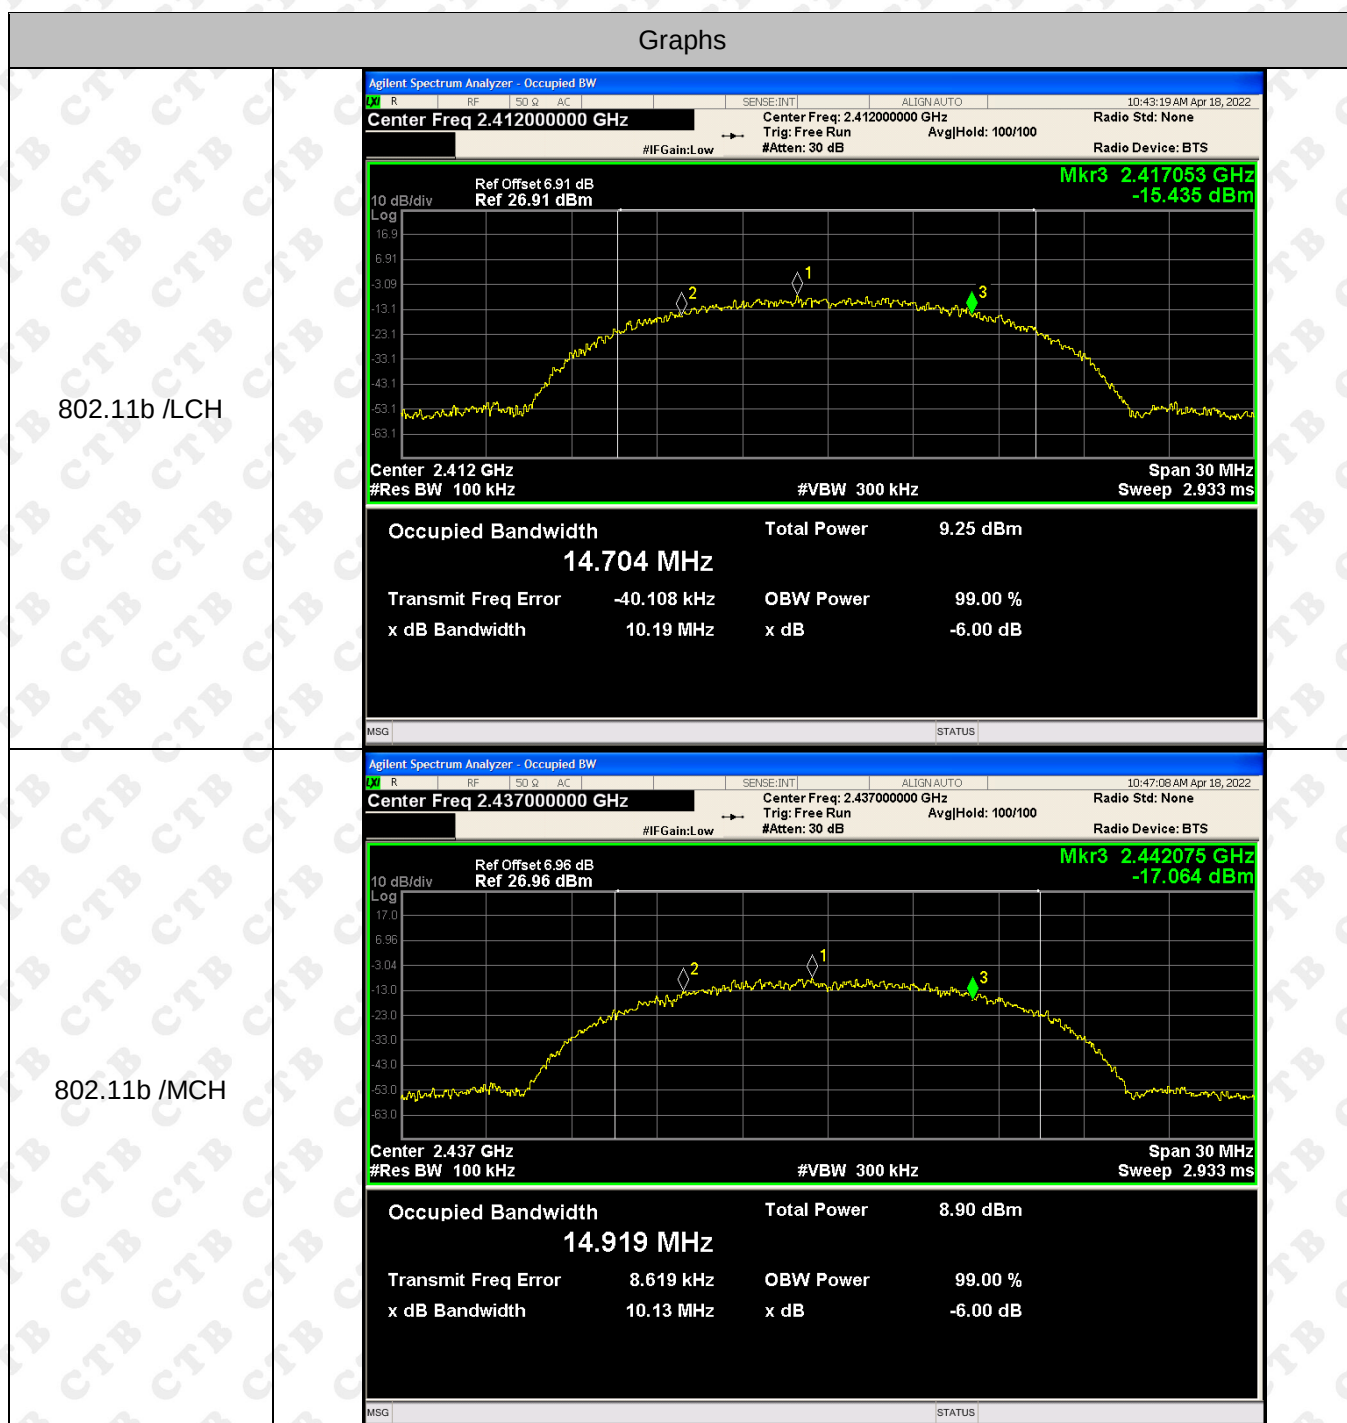
ANT3: Test Graph:



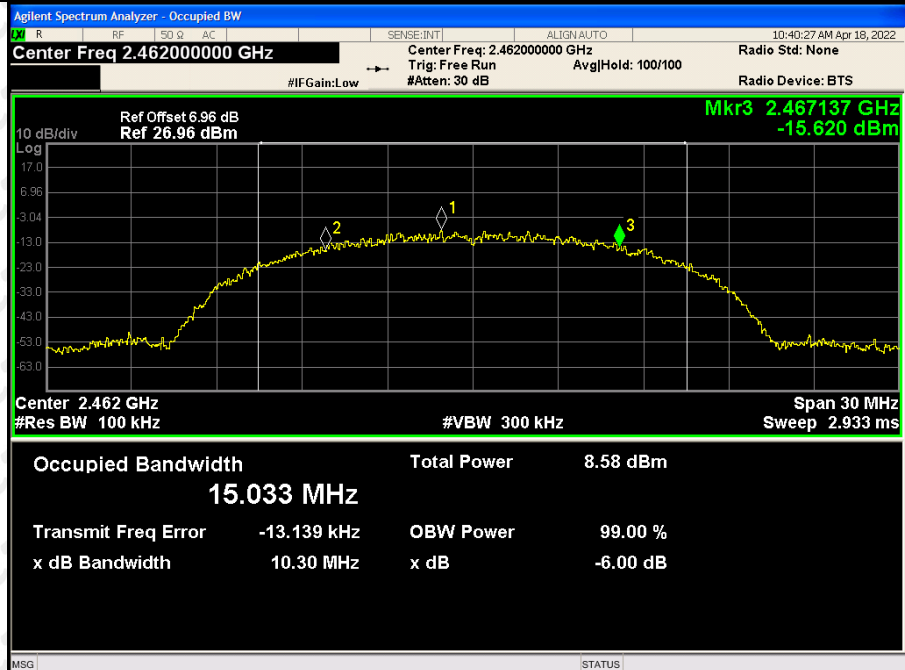
802.11b/HCH



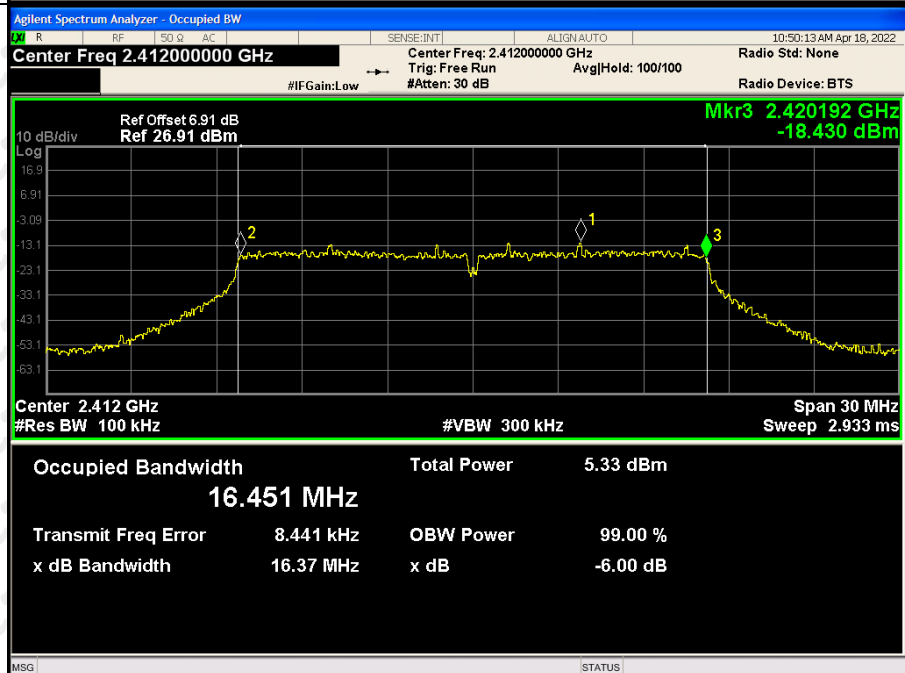
802.11g/LCH






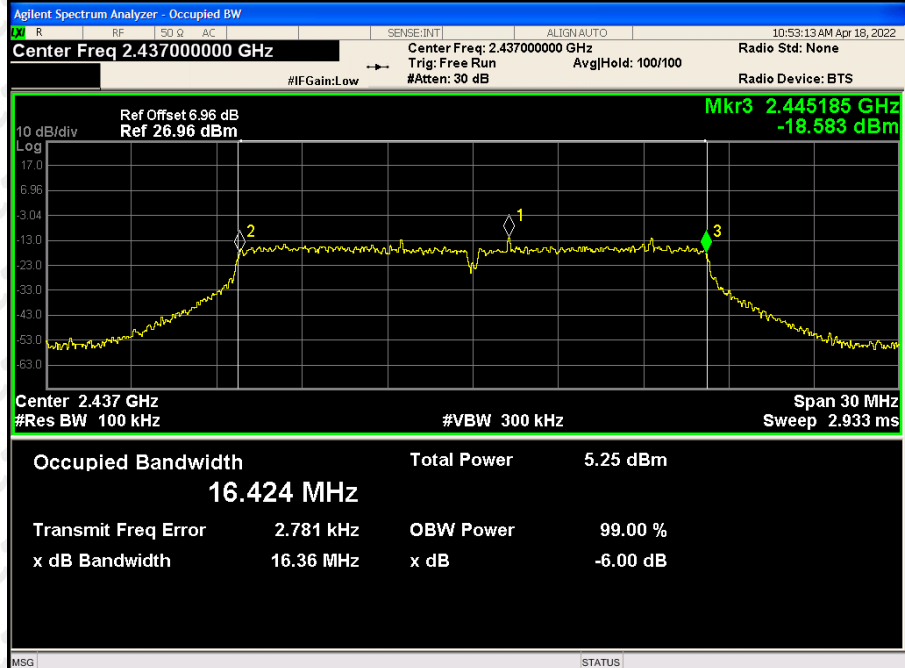
802.11g/MCH





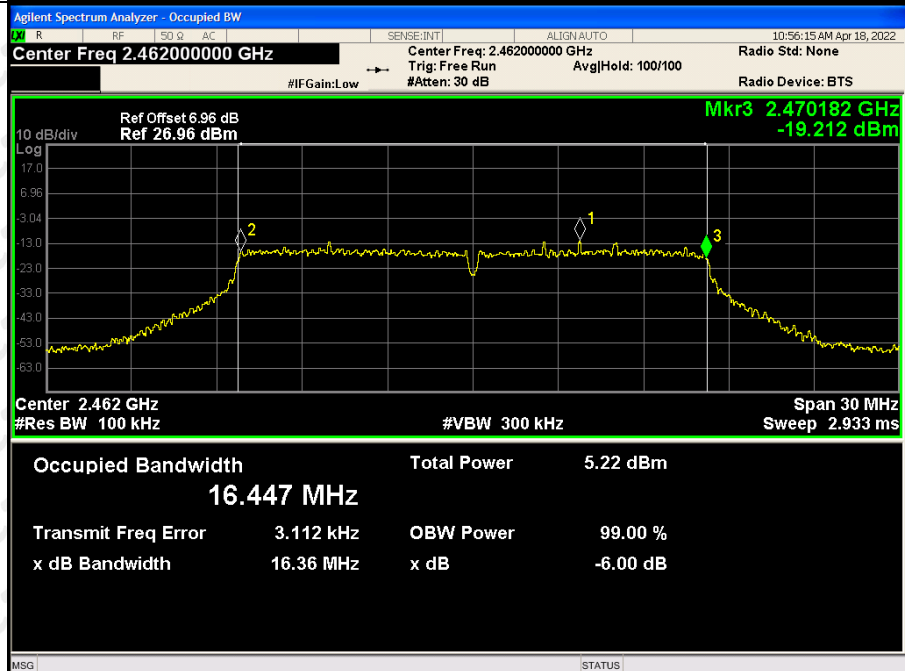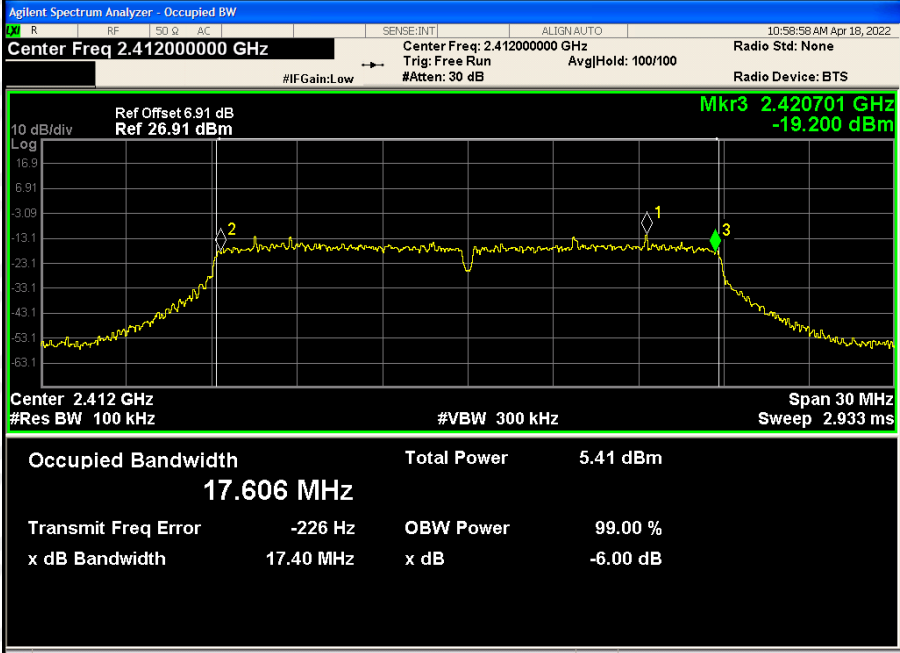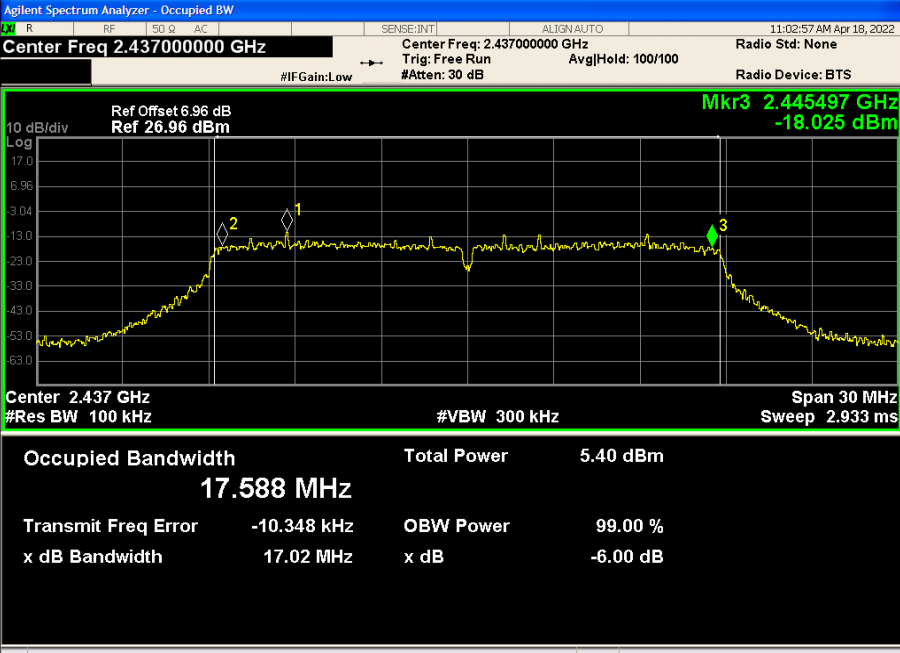802.11g/HCH




802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.420701 GHz -19.200 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.606 MHz Total Power 5.41 dBm Transmit Freq Error -226 Hz OBW Power 99.00 % x dB Bandwidth 17.40 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.445497 GHz -18.025 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.588 MHz Total Power 5.40 dBm Transmit Freq Error -10.348 kHz OBW Power 99.00 % x dB Bandwidth 17.02 MHz x dB -6.00 dB

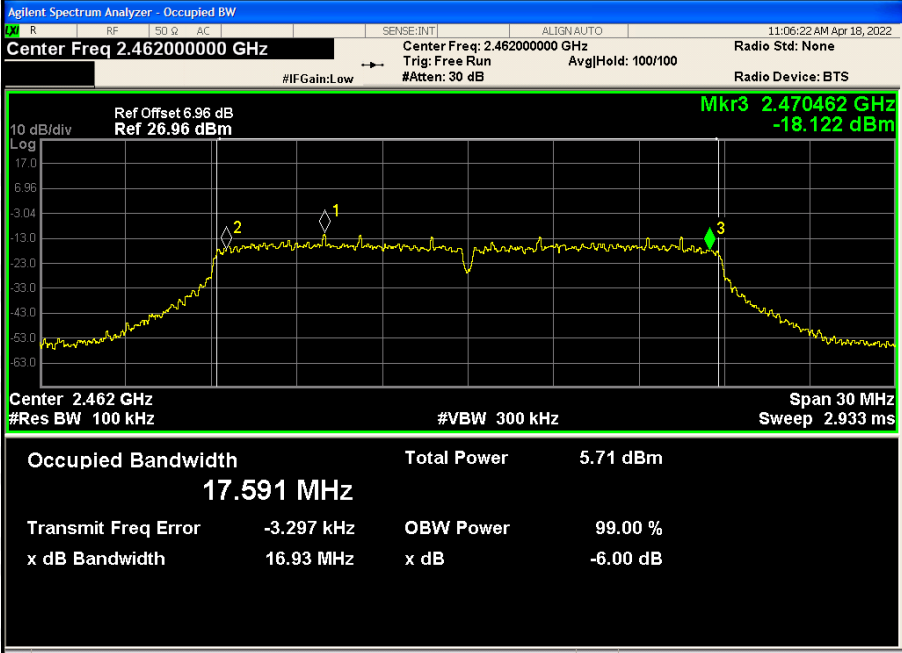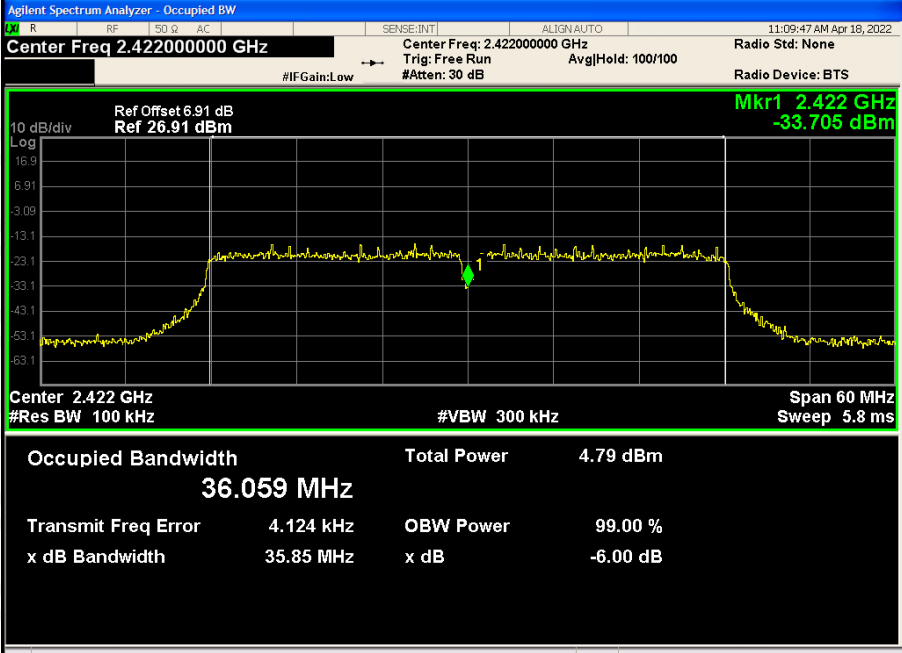802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470462 GHz -18.122 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.591 MHz Total Power 5.71 dBm Transmit Freq Error -3.297 kHz OBW Power 99.00 % x dB Bandwidth 16.93 MHz x dB -6.00 dB
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.91 dB Ref 26.91 dBm Mkr1 2.422 GHz -33.705 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.059 MHz Total Power 4.79 dBm Transmit Freq Error 4.124 kHz OBW Power 99.00 % x dB Bandwidth 35.85 MHz x dB -6.00 dB

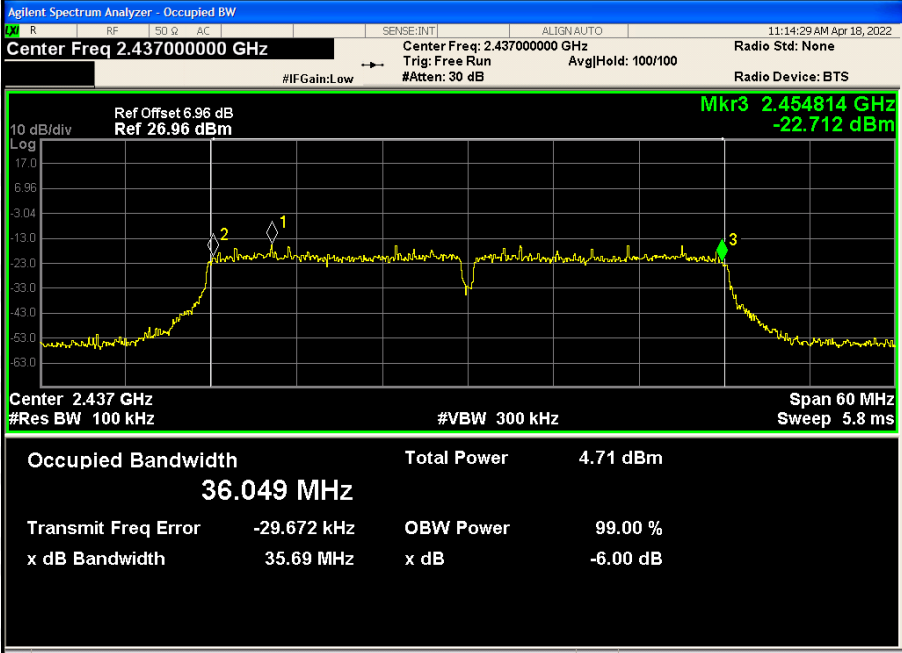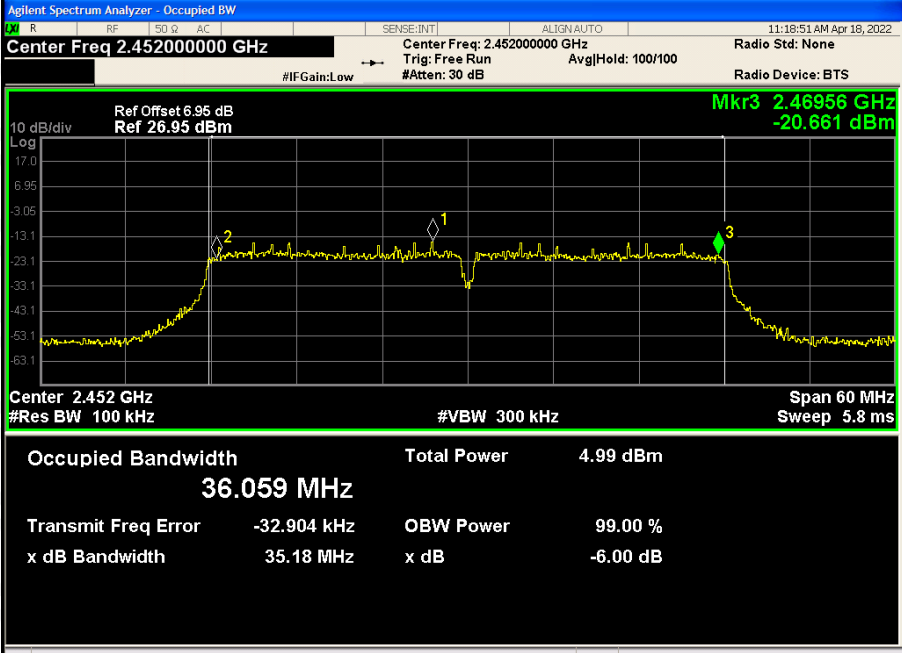802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.454814 GHz -22.712 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.049 MHz Total Power 4.71 dBm Transmit Freq Error -29.672 kHz OBW Power 99.00 % x dB Bandwidth 35.69 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.46956 GHz -20.661 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.059 MHz Total Power 4.99 dBm Transmit Freq Error -32.904 kHz OBW Power 99.00 % x dB Bandwidth 35.18 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

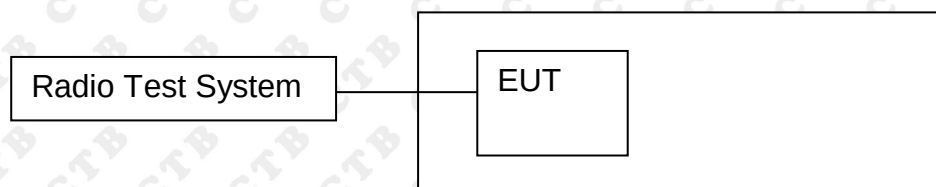11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = RMS.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.006	8	PASS
	MCH	-21.495	8	PASS
	HCH	-21.088	8	PASS
802.11g	LCH	-25.809	8	PASS
	MCH	-25.225	8	PASS
	HCH	-26.758	8	PASS
802.11n(H)	LCH	-25.497	8	PASS

T20)	MCH	-25.105	8	PASS
	HCH	-25.607	8	PASS
802.11n(H T40)	LCH	-26.398	8	PASS
	MCH	-26.93	8	PASS
	HCH	-26.94	8	PASS

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] ANT 3	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-20.391	-22.073	/	8
	MCH	-21.001	-22.512	/	8
	HCH	-20.746	-22.653	/	8
802.11g	LCH	-25.872	-25.363	/	8
	MCH	-26.055	-25.462	/	8
	HCH	-25.883	-25.509	/	8
802.11n(H T20)	LCH	-25.275	-25.889	-22.56	8
	MCH	-25.24	-26.091	-22.63	8
	HCH	-25.561	-25.734	-22.64	8
802.11n(H T40)	LCH	-26.41	-29.724	-24.75	8
	MCH	-26.64	-30.144	-25.04	8
	HCH	-26.651	-30.172	-25.05	8

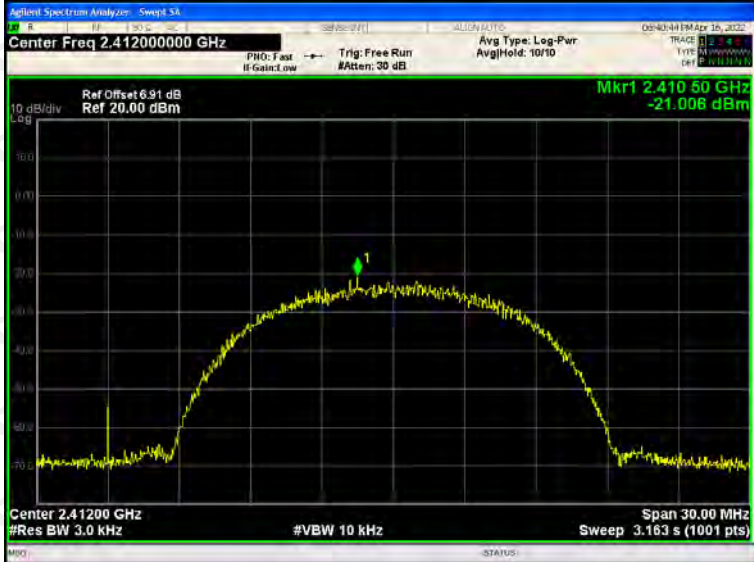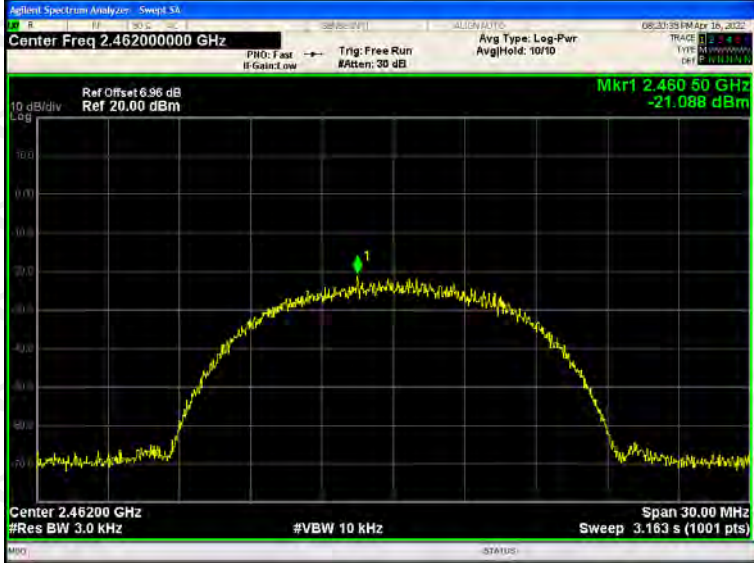ANT1: Test Graph

Graphs		
802.11b /LCH		 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.460 50 GHz -21.120 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b /MCH		 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.410 50 GHz -21.008 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b/HCH		 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.460 50 GHz -21.088 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

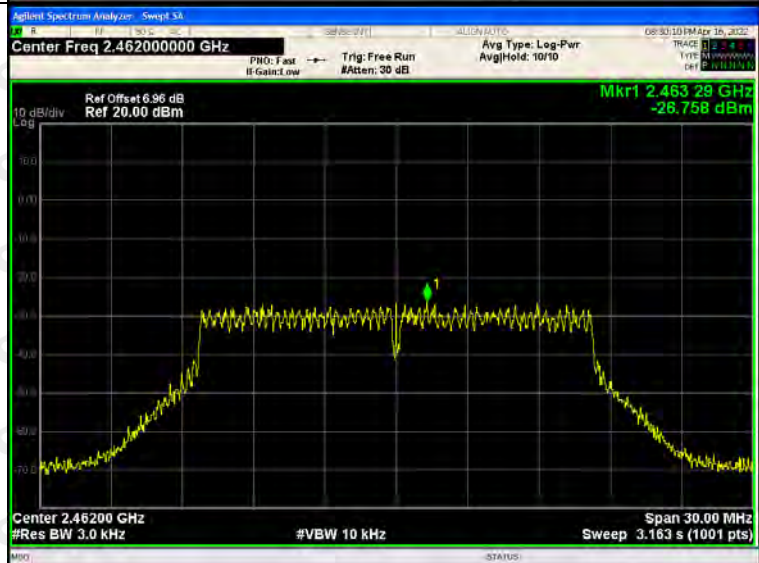
802.11g/LCH

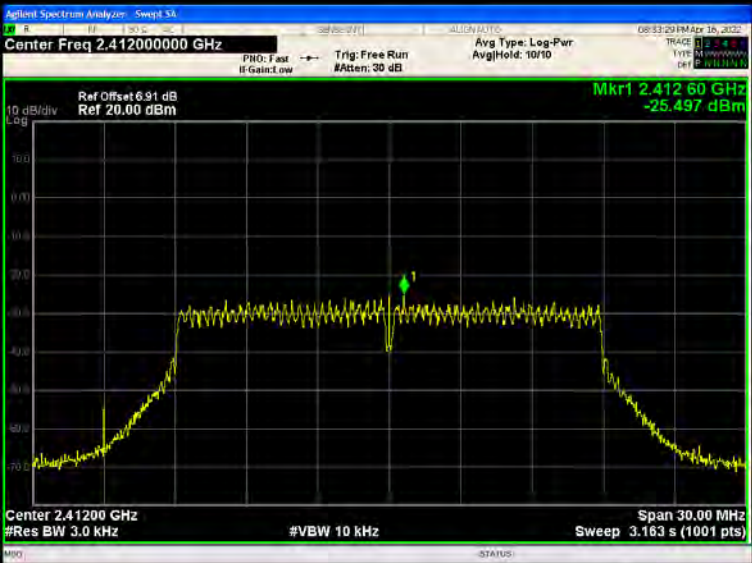
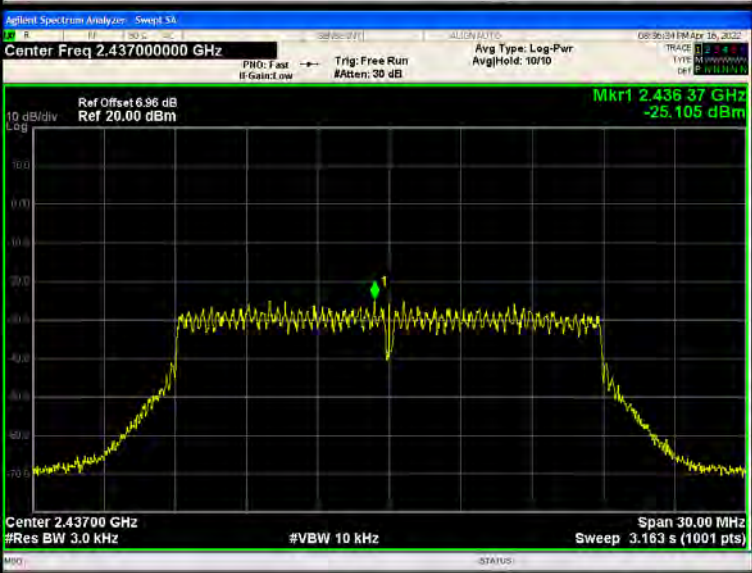
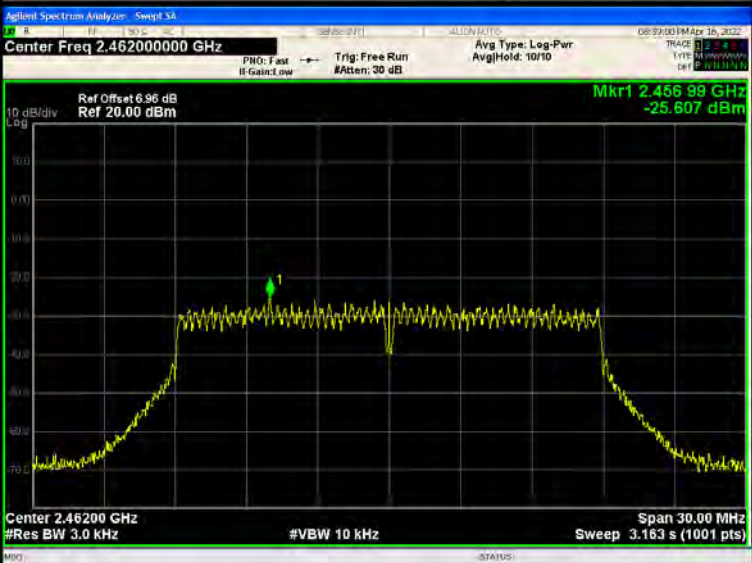




802.11g/MCH




802.11g/HCH



802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

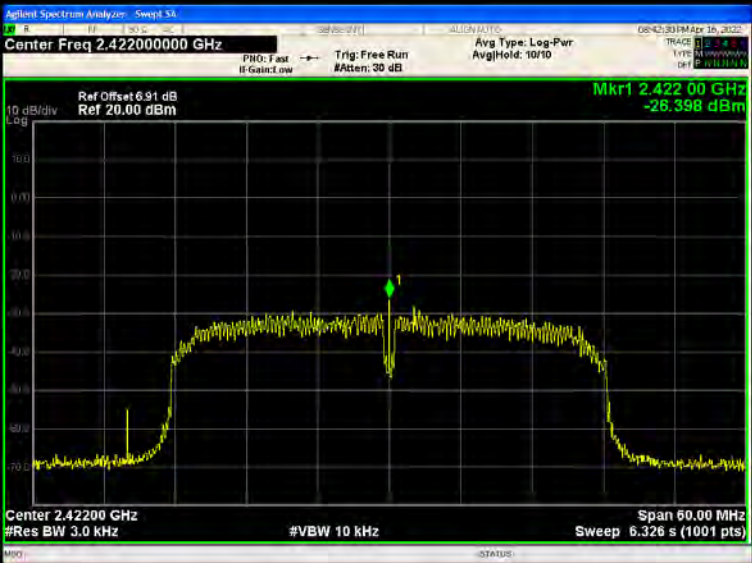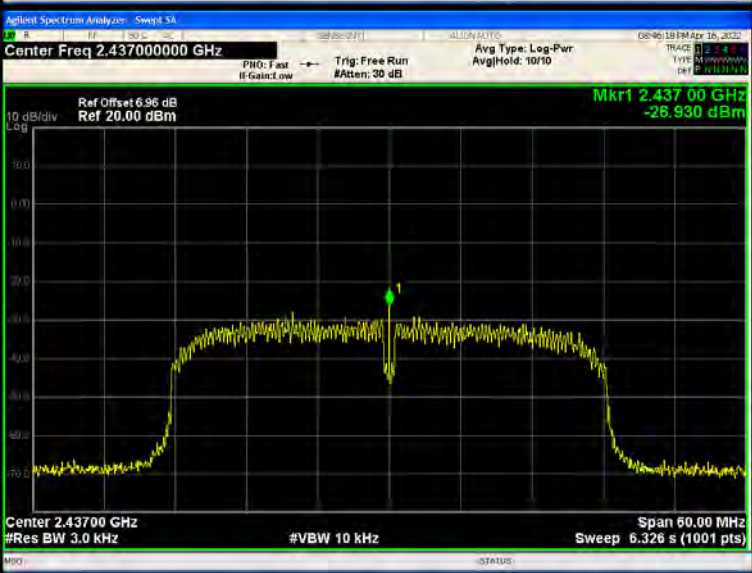802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.422 00 GHz -26.398 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.437 00 GHz -26.930 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.452 00 GHz -26.940 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

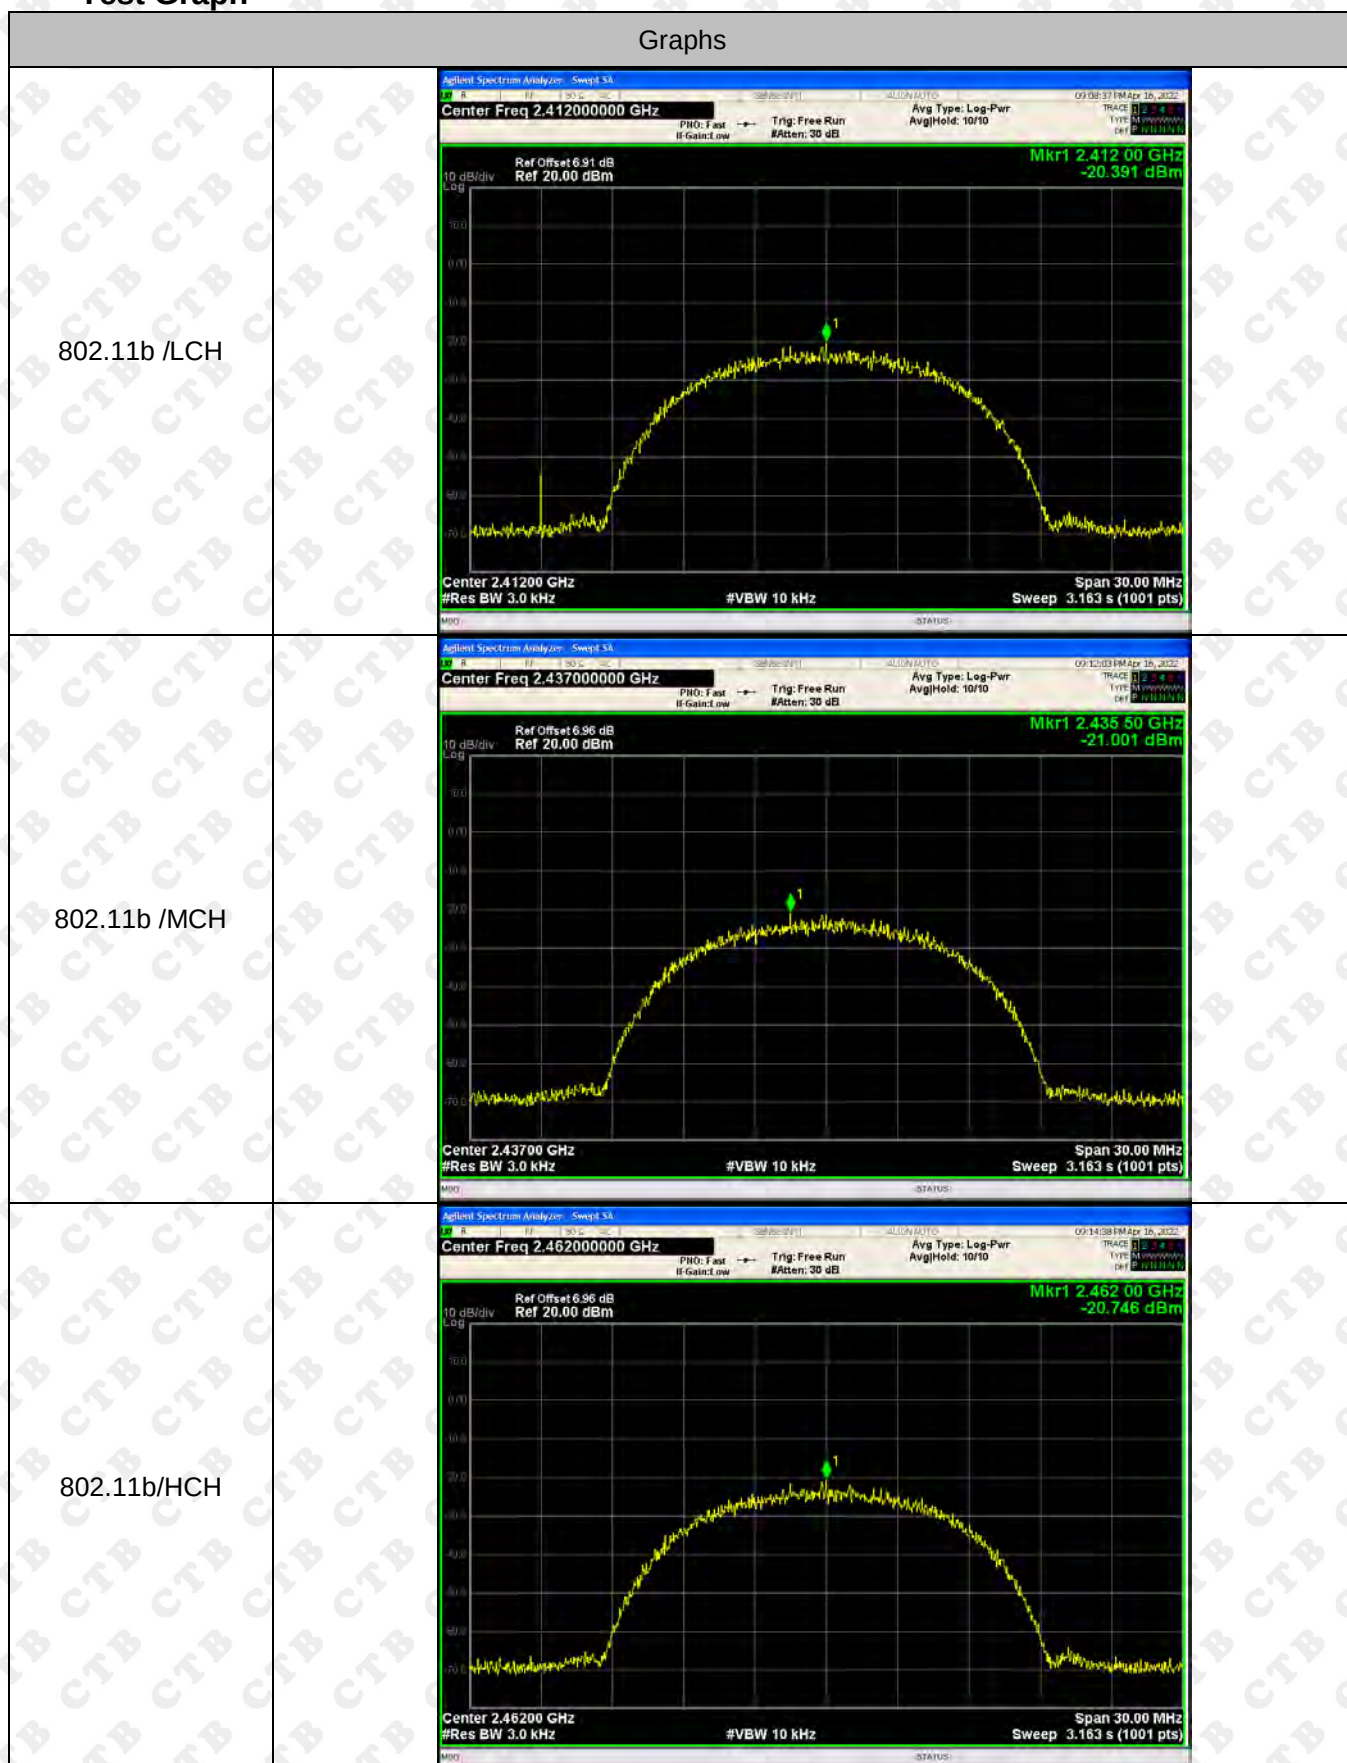
ANT 2: Test Graph




802.11g/LCH





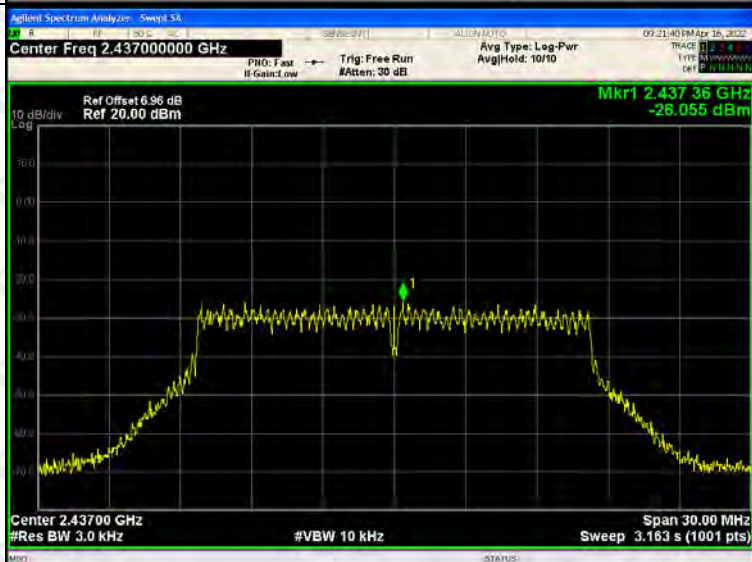802.11g/MCH



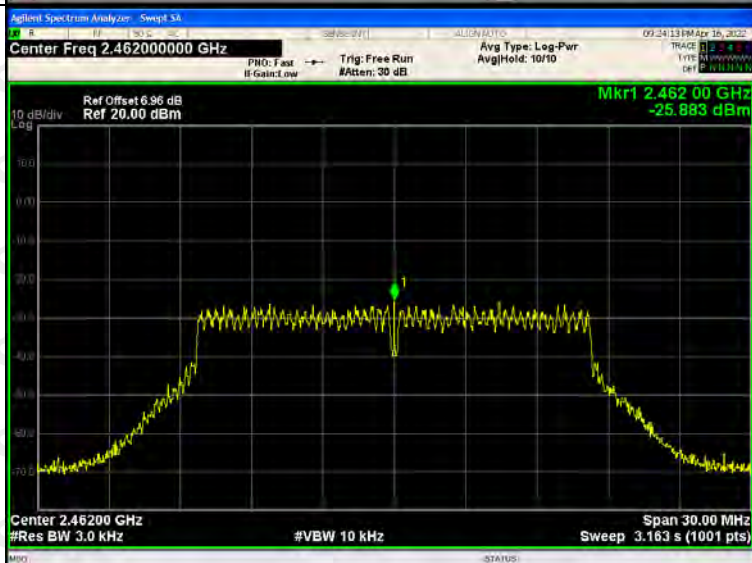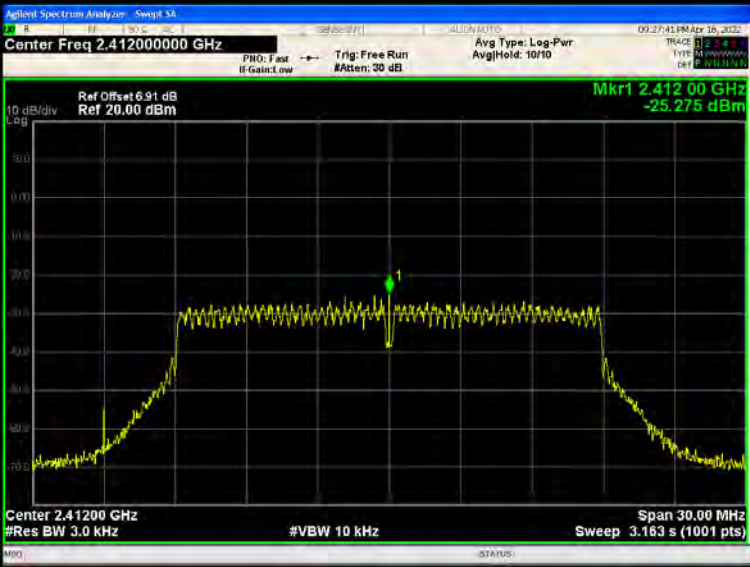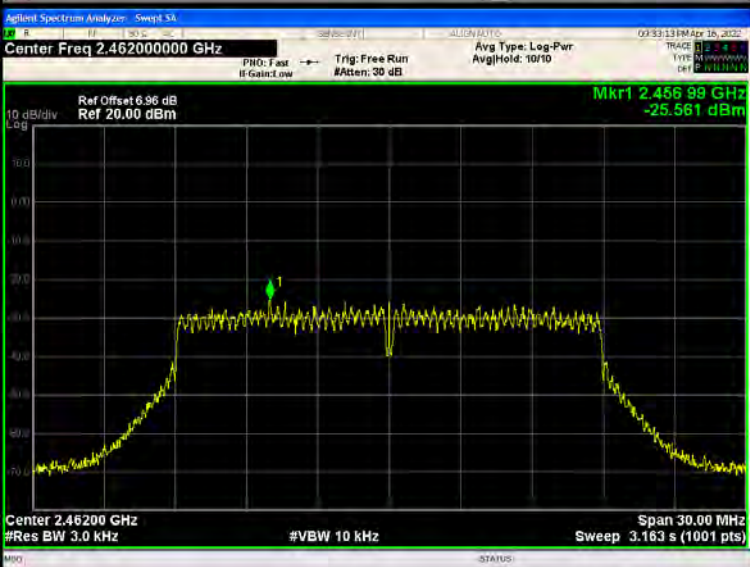
802.11g/HCH




802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.412 00 GHz -25.275 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.437 60 GHz -25.240 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.462 99 GHz -25.561 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.422 00 GHz -26.410 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.437 00 GHz -26.640 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.452 00 GHz -26.651 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

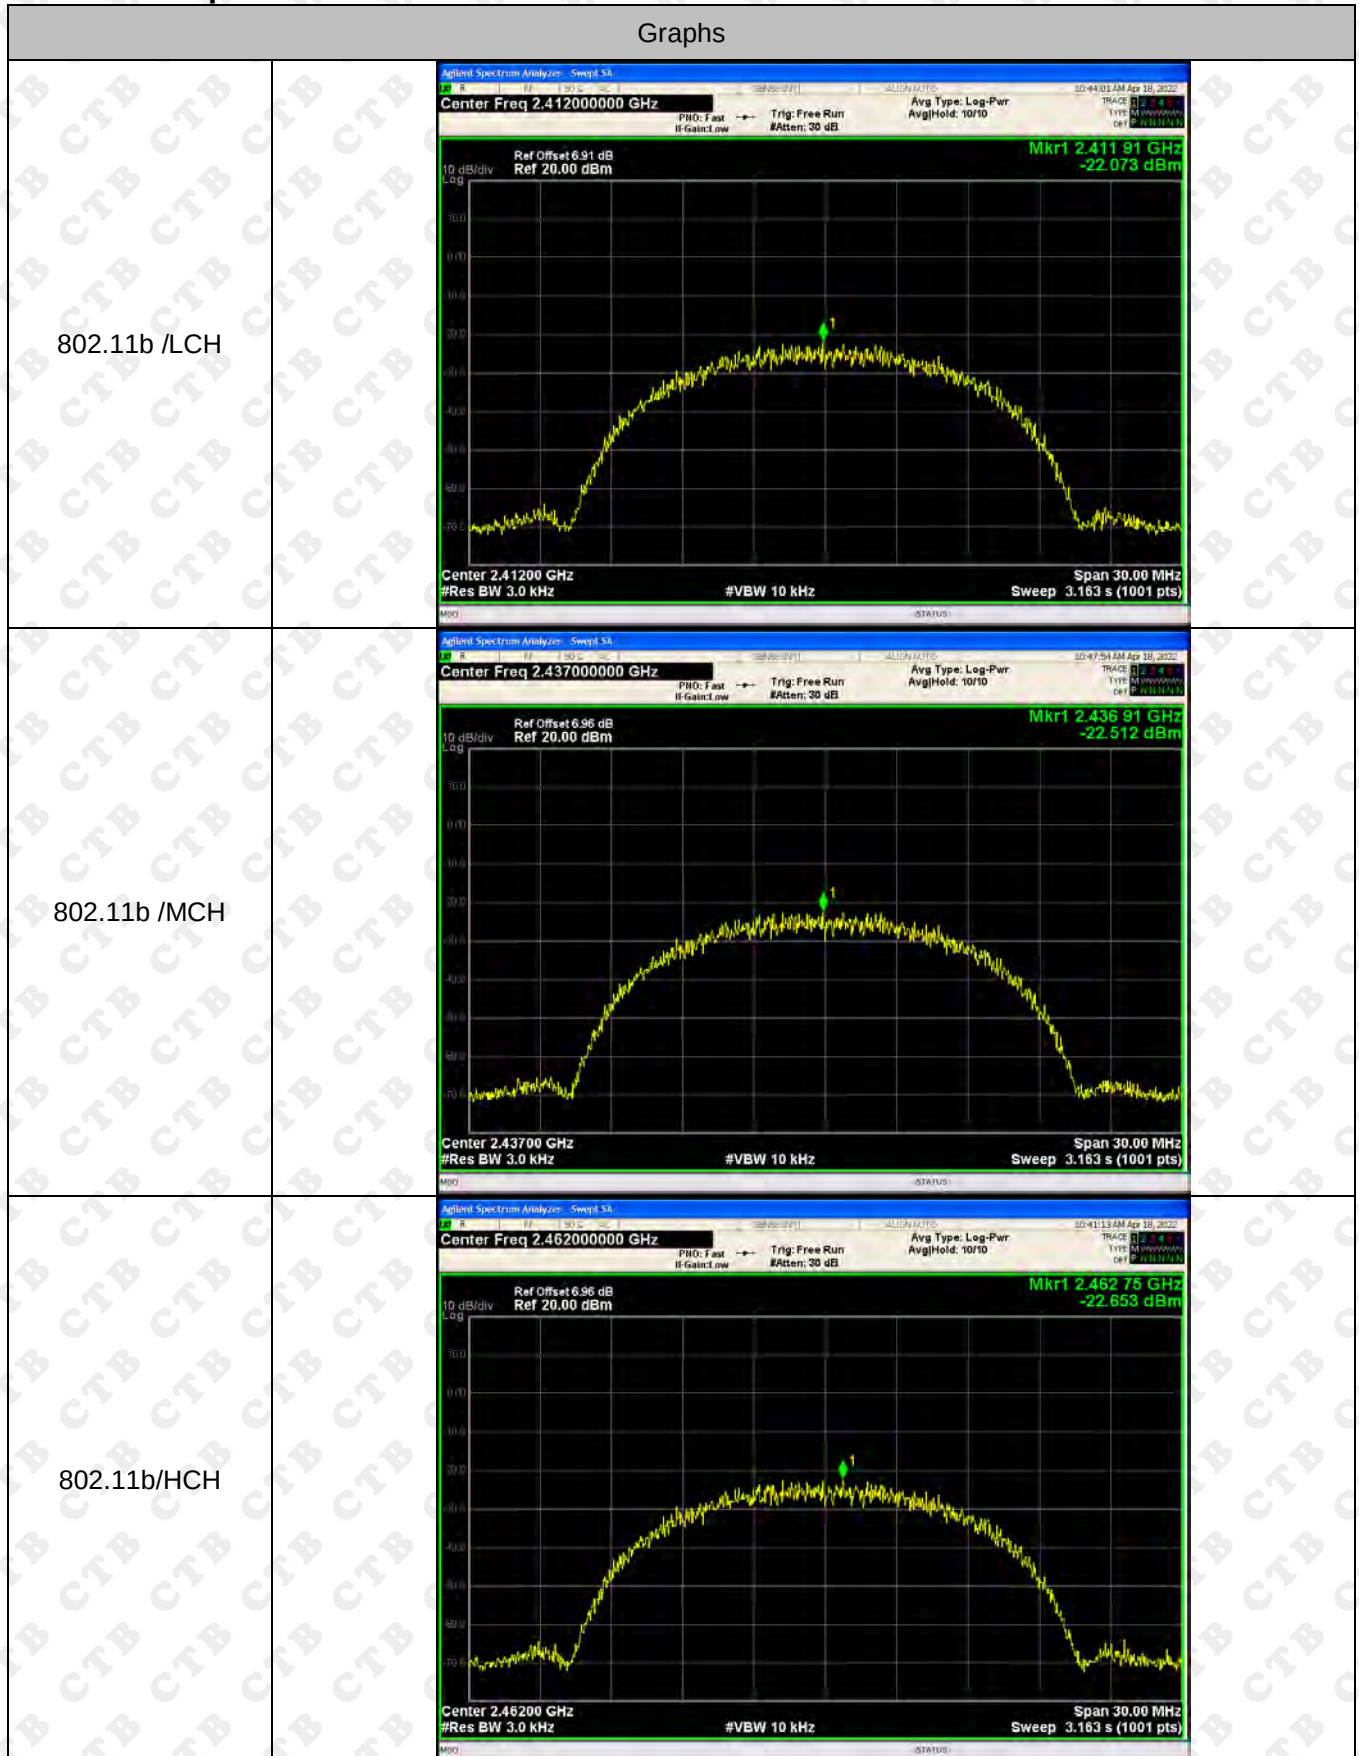ANT 3: Test Graph



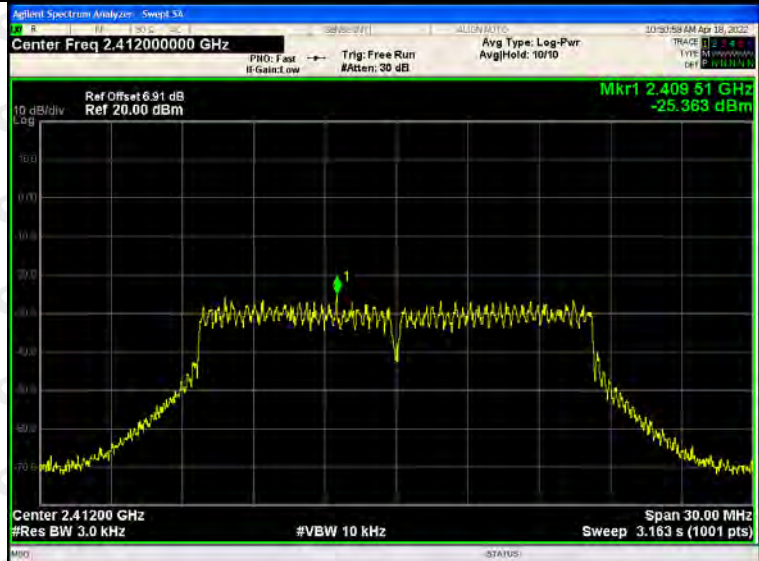802.11g/LCH







802.11g/MCH



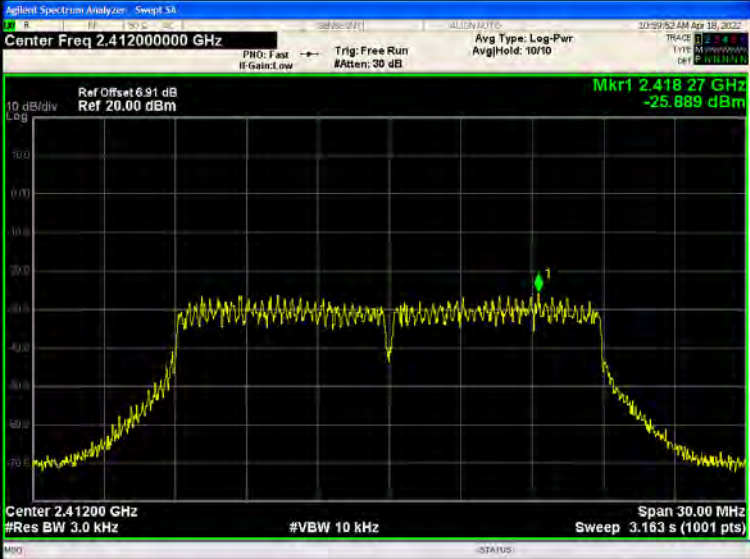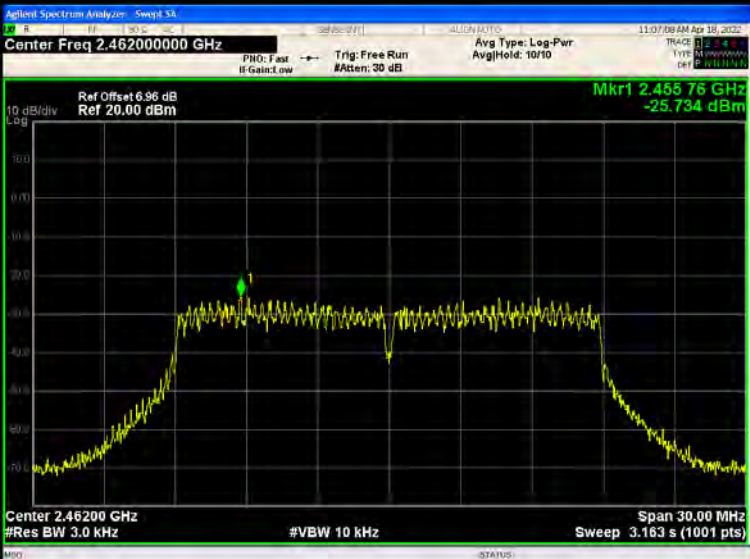802.11g/HCH



802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.418 27 GHz -25.889 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.443 27 GHz -28.091 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.455 76 GHz -25.734 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

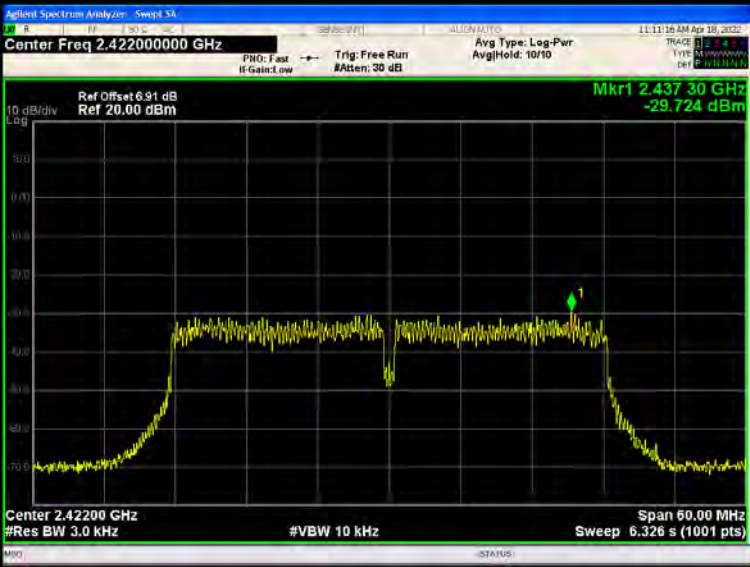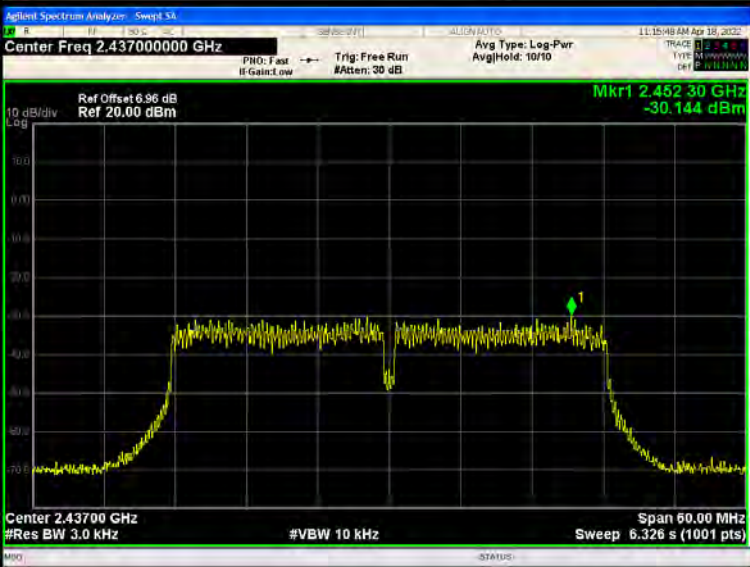802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.43730 GHz -29.724 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.45230 GHz -30.144 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.45044 GHz -30.172 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.9dBi.

13. EUT PHOTOGRAPHS

External Photos EUT Photo 1

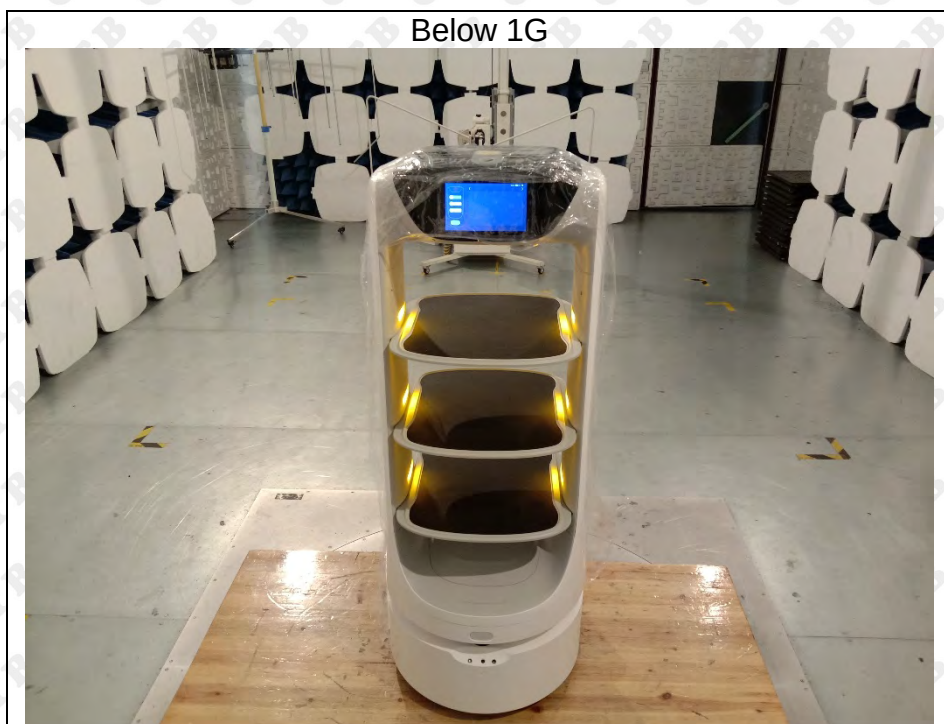


EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission



Conducted Emission



***** END OF REPORT *****