

Shenzhen Maya Communication Equipment Co., Ltd.



Product Performance and Specifications

Maya Antenna R&D Department

Material name: _____

Sample color: _____

Sample type: FPC

Customer model: _____

Mold sample other

Supplier: Shenzhen Maya Communication Equipment Co., Ltd.

Draft	structure	品质	quality	Sample delivery date

client:

department	confirm	date	state	Signature and seal
electronic				
structure				
quality				
project				

1、**Confidentiality requirements** : Shenzhen Maya Communication Equipment Co., Ltd. already owns the proprietary technology of this product and is not allowed to disclose it to any company or

Shenzhen Maya Communication

Equipment Co., Ltd.



individual without the written consent of Shenzhen Maya Communication Equipment Co., Ltd.

2. Special reminder : Before signing this document, all parties must carefully read the "Special Terms" and the contents of the catalog. After the representatives of both parties sign, it is deemed that they have reached an agreement on the contents of this document and have no objection, and both parties are willing to abide by it together.

Special Terms

1. About performance and structure confirmation

★Please confirm the appearance and performance of the product before signing the confirmation letter.

★Please provide the final trial production machine to us or bring it back to us for verification before mass production.

★Since the product in this acknowledgment is a highly sensitive object, please be sure to keep the test gold machine for subsequent tracing.

★Since this product is a customized item and has a highly targeted use, when customers replace materials or use it for non-specified projects, please be sure to send the changed materials or machines for non-specified projects back to our company to verify the RF performance. Otherwise, it may cause serious hidden dangers that the usage status is inconsistent with the design status. We will perform functional confirmation on our sealed and debugged prototypes to ensure that our debugged samples are fully functional and prevent antenna performance errors caused by abnormal functions.

2. About product storage issues

★Due to the printing ink on the surface of this product, the adhesive on the back and the electroplated objects, please make sure that the temperature is between 23°C -27°C, the relative humidity is below 60% during storage or transportation, and it is stored or transported in an environment without strong acid, sulfur or oxygen.

★Since the adhesive backing of this product has strict requirements on the environment, please be sure to assemble the product within the optimal use period after receiving it to ensure the reliability of the product.

3. Product Usage Agreement

★Due to the special structure of this product, please make sure to fully contact with the object to be adhered when using this product, and there must be no residual chemical agents (release agents, etc.) on the object to be adhered, or try not to use raw materials with release agents. To ensure the product's usable condition, please clean the surface of the object to be adhered before using this product to ensure that there is no chemical residue on the surface of the object to be adhered.

4. Quality statement of this product

★ Due to the influence of the above-mentioned factors, the optimal usage period

Shenzhen Maya Communication

Equipment Co., Ltd.



of this product is recommended to be within 1 to 2 months . Exceeding the period will affect the product's use effect. Our company provides lifelong consulting and paid replacement services for this product.

★This product is a special customized device. Please be sure to inspect the product appearance, quantity, performance, etc. within 7 days after receiving the product in accordance with the agreed standards of this "Product Performance and Specification Acknowledgement". If you fail to do so within the deadline, the quality of this product will be deemed to meet the agreed standards of both parties.

★Verification method: Compare with the project seal sample of the letter of acknowledgment.

Shenzhen Maya Communication Equipment Co., Ltd.



Table of contents

1. Customer antenna debugging design requirements frequency band	5
2. Mobile phone and antenna Figure	5
3. Electrical performance	6
3.1 Test method description and	6
3.2 Passive Test Report	6
3.3 Active Test Report	7
3.4 Active OTA TRP/TIS	9
3.5 Passive Test Data	8
4. Matching circuit description	9
5. GPS NFC test report	20
6. Environmental treatment	20
7. Structural drawings	12
8. Antenna frequency band distribution	13

Shenzhen Maya Communication

Equipment Co., Ltd.



1. Customer antenna debugging and design required frequency band

frequency	Frequency band
2G	850/900/1800/1900
3G	WCDMA - 1 2 5 8
4G	LTE-1/2/3/4/5/7/8/12/17 / 19/ 20/26/28/38/40/41/66
5G	NR-1/2/3/5/7/8/20/26/28/38/40/41/66/77/78
other	GPS WIFI BT NFC

2. Mobile phone and antenna diagram



Mobile phone



ANT1 antenna



ANT 2 antenna



ANT 3/4 antenna



ANT 5/6/WGB antenna



ANT 7/8 antenna



NFC antenna

Shenzhen Maya Communication

Equipment Co., Ltd.



3. Electrical properties

3.1 Test method description and data

Device Name	use
Vector Network Analyzer	S11/Impedance/ Passive Test
Agilent 8960 SP6010 R&S CMU200	Mobile communication equipment testing including GSM, GPRS, EDGE, CDMA2000, 1xEV-DO, TD-SCDMA, WCDMA, HSDPA
R&S CMW500 MT8820C	Including TD-SCDMA, WCDMA, Mobile communication equipment testing for HSDPA, LTE, WIFI, and GPS
SP9500E	Including 5G, SA, NSA
Agilent E4438C	Testing Active GPS
MVG Chamber	Passive Test / OTA active Test / Efficiency/Gain


3.2 Passive Test Report

Test equipment: Network analyzer

Test method: Use a 50 -ohm CABLE cable to export from the instrument test port, calibrate it with a calibration piece, and then connect it to the SMA connector of the mobile phone tool . Record the return loss or standing wave ratio data corresponding to the relevant frequency points.

Shenzhen Maya Communication

Equipment Co., Ltd.

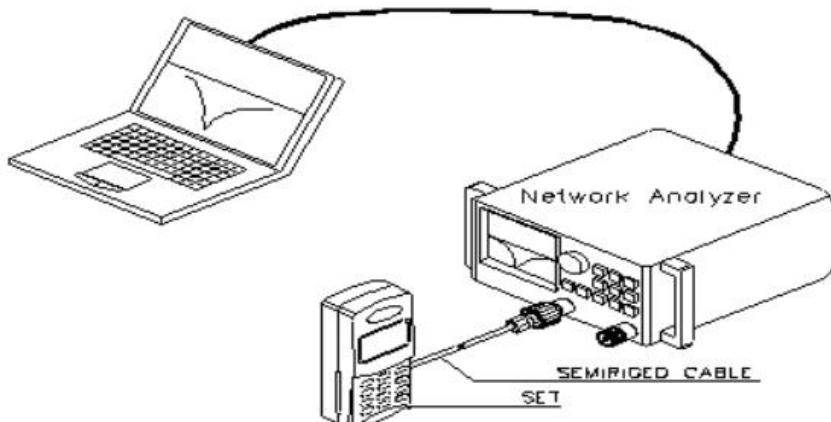

测试示意图

3.3 Active Test Report

TRP/TIS

Test tools: comprehensive tester, network analyzer, full radio wave far-field ETS , French MVG SG24LT (Satmio) near-field 3D microwave darkroom, high-precision positioning system and its controller and computer with automatic test program Test environment : temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $60\% \pm 15\%$



Test method: Use EST or Satimo 24LT system software TRP test method and calculation When conducting TRP test, DUT (Device Under Test) is in the maximum transmission power state, select high, medium and low channels for testing, and control the position of DUT through the positioning system . In steps of 15 degrees, Measure the effective radiated power (EIRP) of each point in three-dimensional space , and calculate the average value on the sphere by integration. The calculation formula is as follows:

$$TRP \cong \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [EiRP_{\theta}(\theta_i, \phi_j) + EiRP(\theta_i, \phi_j)] \sin(\theta_i)$$

performing TIS testing, the DUT is in the maximum transmit power state. Select three channels, high, medium and low, for testing. By controlling the position of the DUT , With a step length of 30 degrees, Measure the receiving sensitivity of each point in three-dimensional space, The average value on the sphere is calculated by integration, and the calculation formula is as follows:

$$TIS \cong \frac{2NM}{\pi \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} \left[\frac{1}{EIS_{\theta}(\theta_i, \phi_j)} + \frac{1}{EIS_{\phi}(\theta_i, \phi_j)} \right] \sin(\theta_i)}$$

Shenzhen Maya Communication Equipment Co., Ltd.

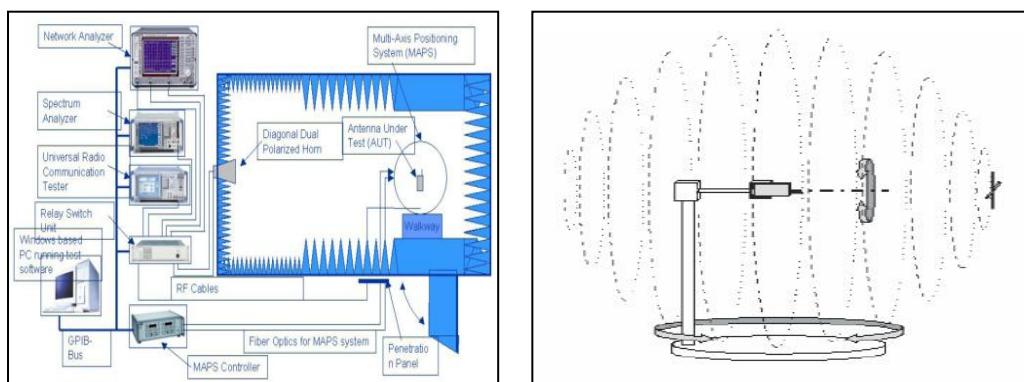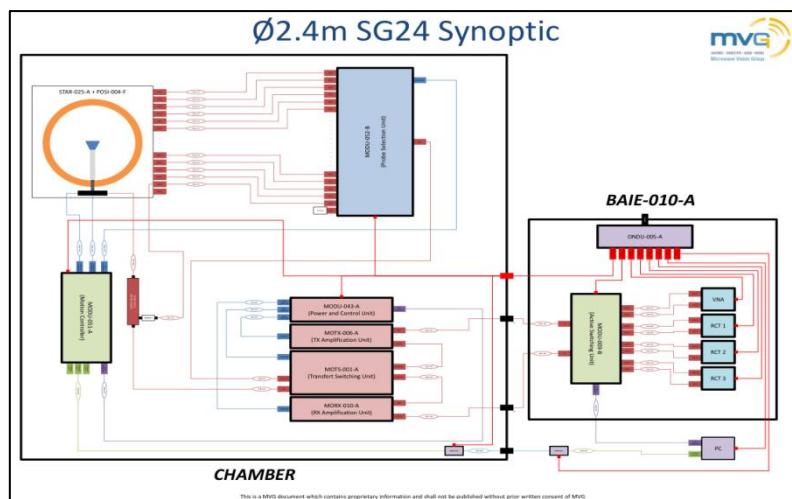

Shenzhen Maya Communication

Equipment Co., Ltd.



3.4 Active OTA TRP/TIS Data

GSM	TRP	TIS	WCDMA	TRP	TIS
GSM900	25.46		W1	17.51	
	25.87			17.12	
	25.62	-101.48		16.93	-102.81
GSM850	25.81		W2	17.88	
	25.88			17.62	
	25.67	-101.24		17.54	-105.29
DCS1800	26.15		W5	16.22	
	26.26			16.62	
	26.26	-103.52		16.64	-102.54
PCS1900	26.26		W8	15.8	
	26.45			16.52	
	26.06	-103.4		16.68	-102.19

LTE	TRP	TIS
B1 (10M)	18.02	
	18.34	
	17.62	-93.16
B2 (10M)	18.75	
	18.37	
	18.62	-92.7
B3 (10M)	17.04	
	18.48	
	18.8	-91.34
B4 (10M)	17.19	
	17.94	
	18.53	-90.13
B5 (10M)	15.86	
	16.4	
	16.38	-90.08
B7 (10M)	16.93	
	17.19	
	17.56	-89.55
B8 (10M)	15.56	
	16.41	
	16.44	-90.32

LTE	TRP	TIS
B12 (10M)	15.86	
	16.13	
	16.28	-92.4
B17 (10M)	15.54	
	15.82	
	15.95	-92.6
B19 (10M)	15.96	
	15.84	
	15.86	-90.74
B20 (10M)	16.22	
	16.02	
	16.16	-91.08
B26 (10M)	15.54	
	16.16	
	16.25	-89.83
B28 (10M)	15.62	
	16.1	
	16.07	-92.54
B38 (20M)	19.72	
	19.95	
	19.87	-89.3

LTE	TRP	TIS
B40 (20M)	19.03	
	19.43	
	19.88	-88.07
B41 (20M)	20.08	
	20.28	
	20.01	-89.24
B66 (10M)	17.24	
	17.54	
	17.56	-90.29

NR	TRP	TIS
N1 (20M)	19.12	
	19.42	
	19.65	-93.02
N2 (20M)	19.78	
	19.62	
	19.24	-90.15
N3 (20M)	20.33	
	19.99	
	20.8	-91.73
N5 (20M)	17.01	
	17.25	
	17.54	-88.53
N7 (20M)	19.26	
	20.15	
	20.24	-90.18
N8 (20M)	16.75	
	17.23	
	17.62	-87.63
N20 (20M)	18.05	
	18.12	
	18.24	-86.01

NR	TRP	TIS
N26 (20M)	17.35	
	17.7	
	18.8	-85.5
N28 (20M)	17.12	
	17.20	
	17.43	-89.45
N38 (20M)	22.49	
	22.85	
	22.2	-91.14
N40 (20M)	15.87	
	16.04	
	16.48	-85.2
N41 (100M)	22.27	
	22.51	
	22.27	-83.67
N66 (20M)	18.15	
	18.37	
	18.63	-91.17

NR	TRP	TIS
N77 (100M)	19.88	
	22.28	
	19.95	-85.32
N78 (100M)	19.63	
	21.28	
	21.92	-87.05

WIFI	TRP	TIS
B	13.54	
	11.72	
	12.13	-81.57
A	12.01	
	11.53	
	11.49	-70.24
GPS	CN-38.9	-152.2

Shenzhen Maya Communication

Equipment Co., Ltd.



3.5 Passive Test Data

Efficiency Gain

	Frequency (MHz)	Efficiency (%)	Gain . dBi
2G			
GSM850	824–894	15. 94	-1. 77
GSM900	880–960	16. 11	-2. 82
DCS1800	1710–1880	28. 76	0. 77
PCS1900	1850–1990	31. 64	0. 62
3G			
W1	1920–2170	31. 68	0. 66
W2	1850–1990	31. 64	0. 62
W5	824–894	15. 94	-1. 77
W8	880–960	16. 11	-2. 82
4G			
LTE-B1	1920–2170	31. 68	0. 66
LTE-B2	1850–1990	31. 64	0. 62
LTE-B3	1710–1880	28. 76	0. 77
LTE-B4	1710–2155	28. 76	0. 77
LTE-B5	824–894	15. 94	-1. 77
LTE-B7	2500–2690	32. 41	2. 33
LTE-B8	880–960	16. 11	-2. 82
LTE-B12	698–746	16. 05	-3. 16
LTE-B17	704–746	16. 05	-3. 16
LTE-B19	835–885	15. 94	-1. 77
LTE-B20	824–894	15. 94	-1. 77
LTE-B26	824–894	15. 94	-1. 77
LTE-B28	708–798	16. 04	-3. 18
LTE-B38	2500–2690	32. 41	2. 33
LTE-B40	2300–2400	37. 24	1. 78
LTE-B41	2500–2690	32. 41	2. 33
LTE-B66	1710–2170	28. 76	0. 77
5G			
N1	1920–2170	31. 68	0. 66
N2	1850–1990	31. 64	0. 62
N3	1710–1880	28. 76	0. 77
N5	824–894	15. 94	-1. 77
N7	2500–2690	32. 41	2. 33
N8	880–960	16. 11	-2. 82
N20	824–894	15. 94	-1. 77
N26	824–894	15. 94	-1. 77

Shenzhen Maya Communication

Equipment Co., Ltd.




N28	708-798	16. 04	-3. 18
N38	2500-2690	32. 41	2. 33
N40	2300-2400	37. 24	1. 78
N41	2500-2690	32. 41	2. 33
N66	1710-2170	28. 76	0. 77
N77	3300-4200	24. 15	-0. 72
N78	3300-3800	30. 29	0. 82
2. 4G-WIFI	2400-2500	32. 09	0. 99
5. 8G-WIFI	5100-5800	46. 24	1. 62
BT	2400-2500	32. 09	0. 99
GPS	1570-1580	32. 75	-0. 55
NFC	13. 56	/	/

Shenzhen Maya Communication Equipment Co., Ltd.




Passive pattern

698–800MHz

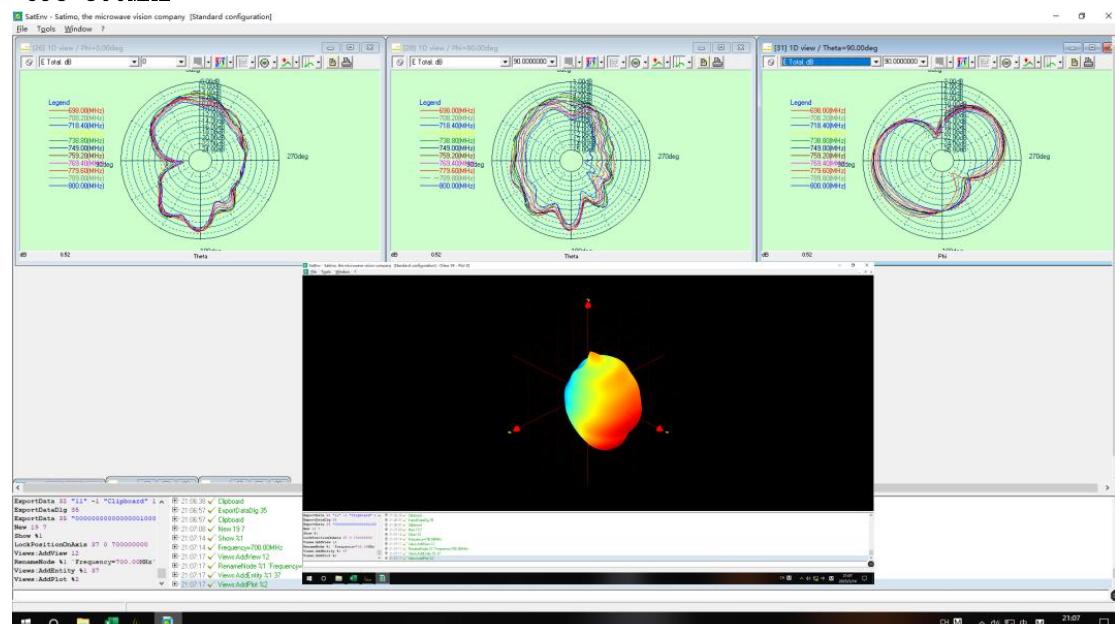


824–894MHz

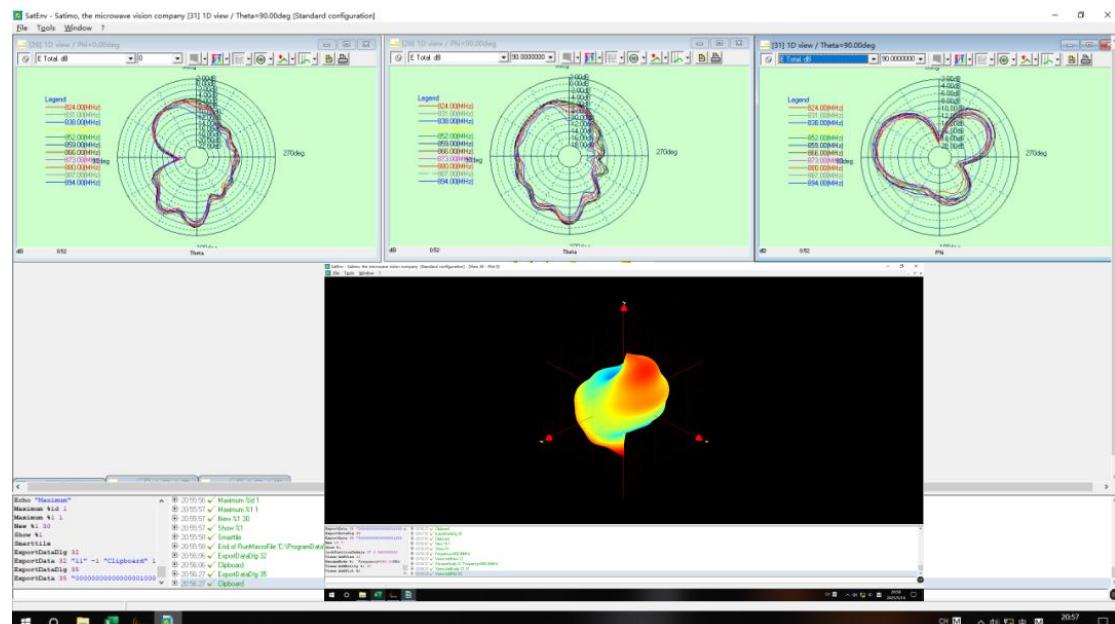


880–960MHz

Shenzhen Maya Communication Equipment Co., Ltd.

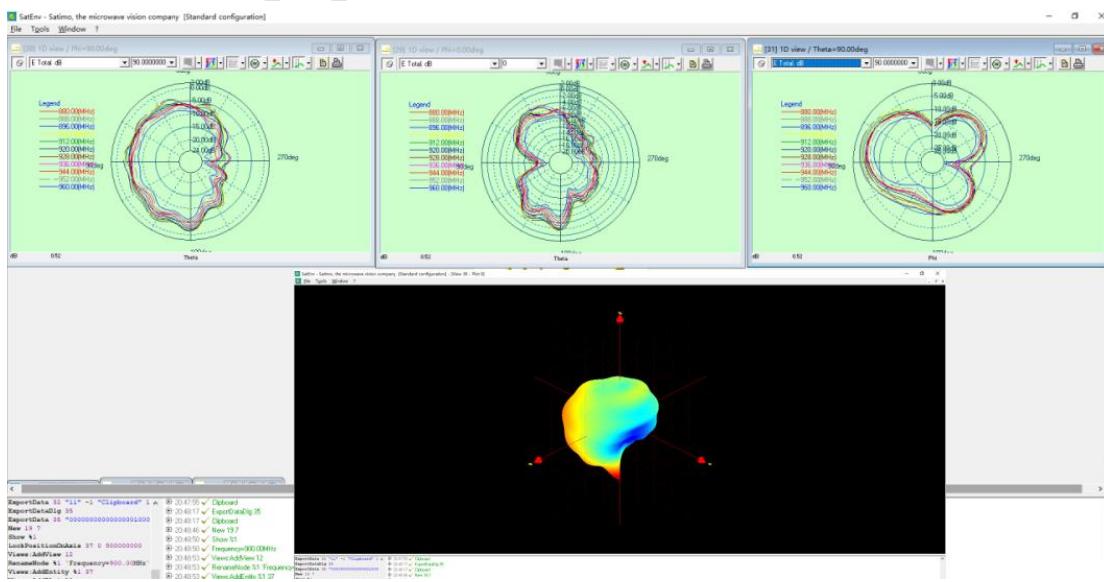


1710–1880MHz

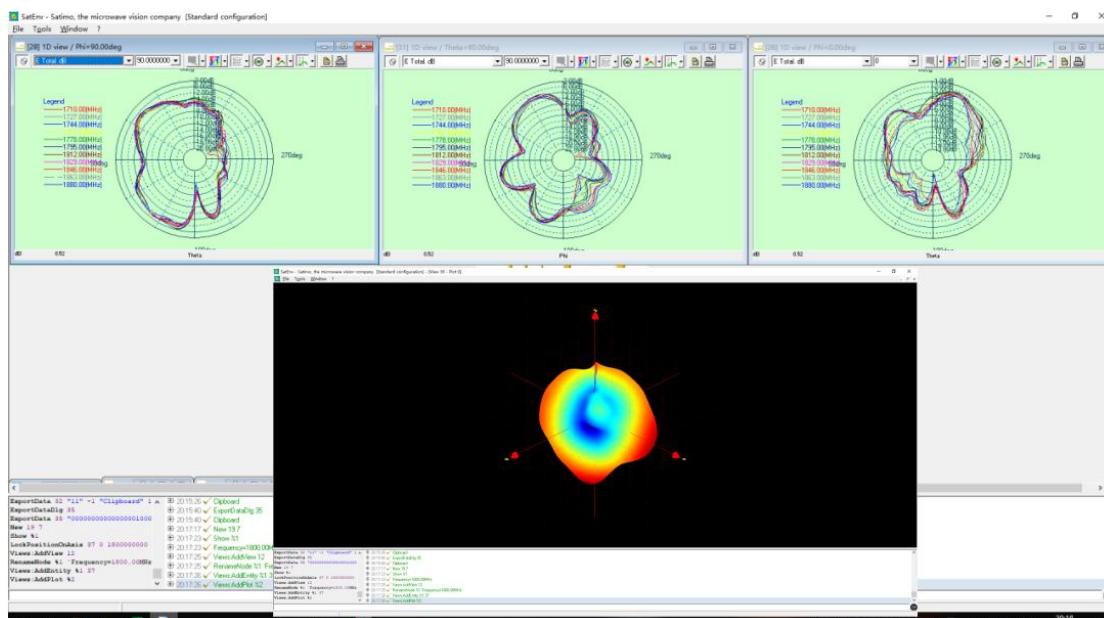


1850–2170MHz

Shenzhen Maya Communication

Equipment Co., Ltd.

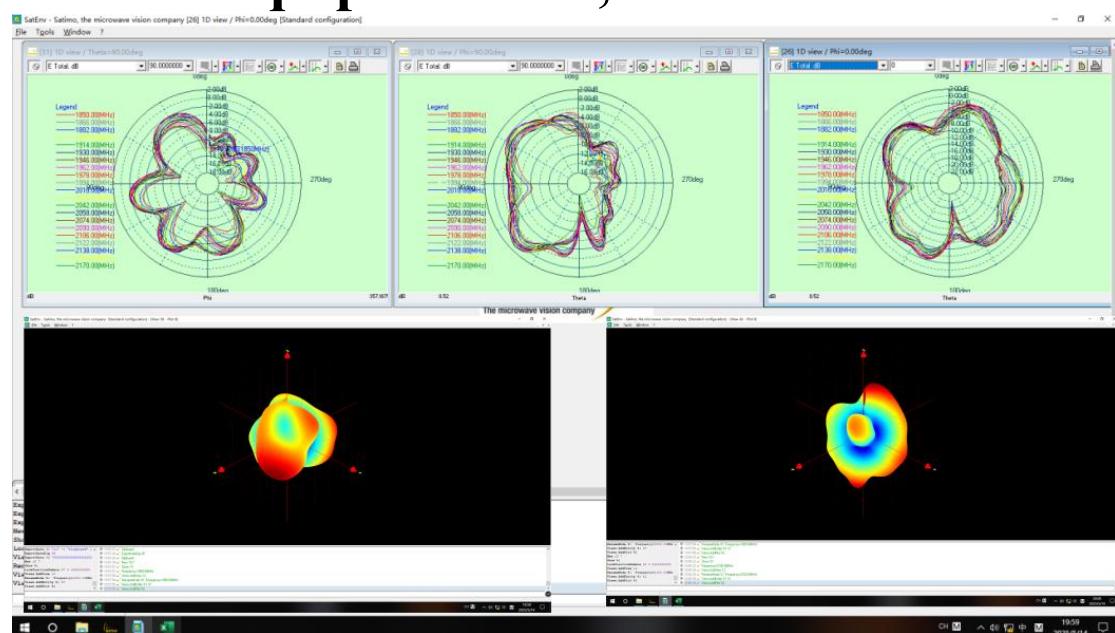


2300-2400MHz

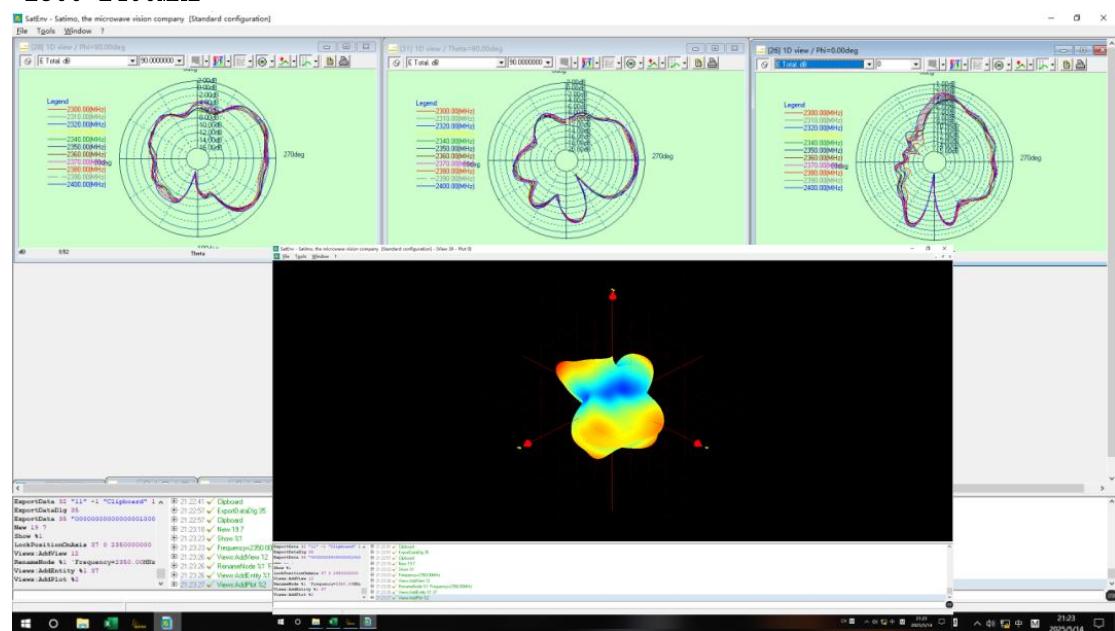


2500-2700MHz

Shenzhen Maya Communication Equipment Co., Ltd.

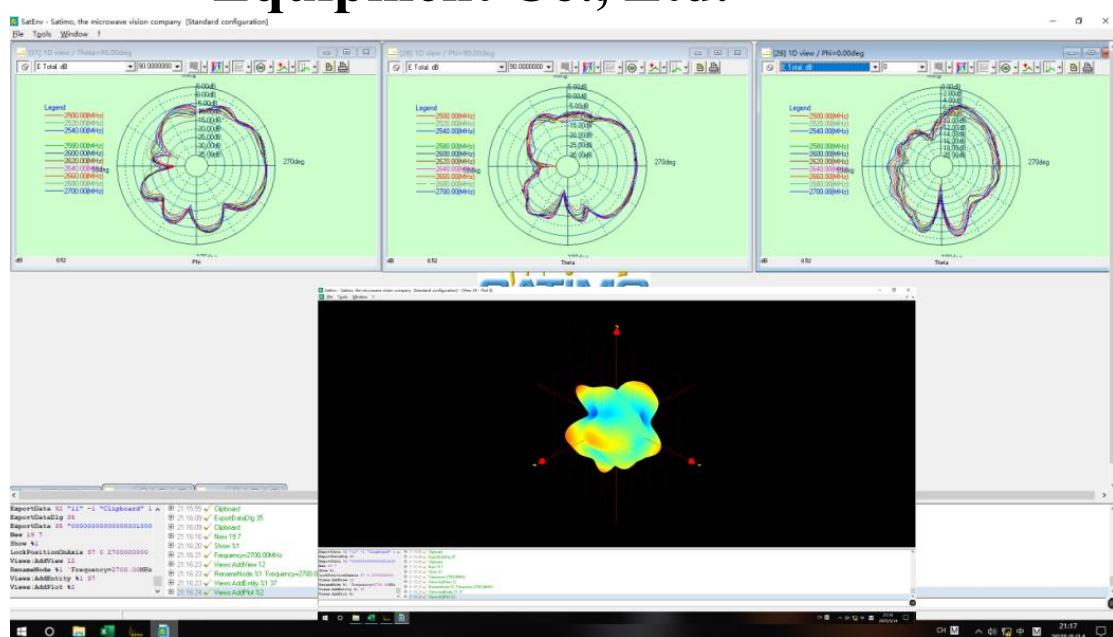


3300-4200MHz

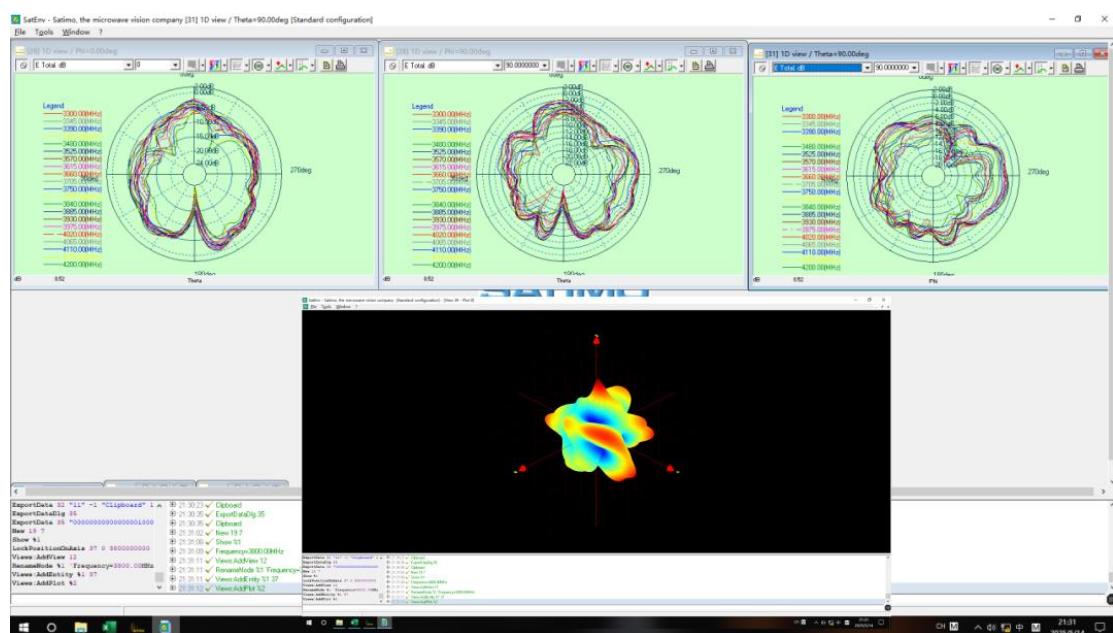


WIFI-5.8G

Shenzhen Maya Communication Equipment Co., Ltd.

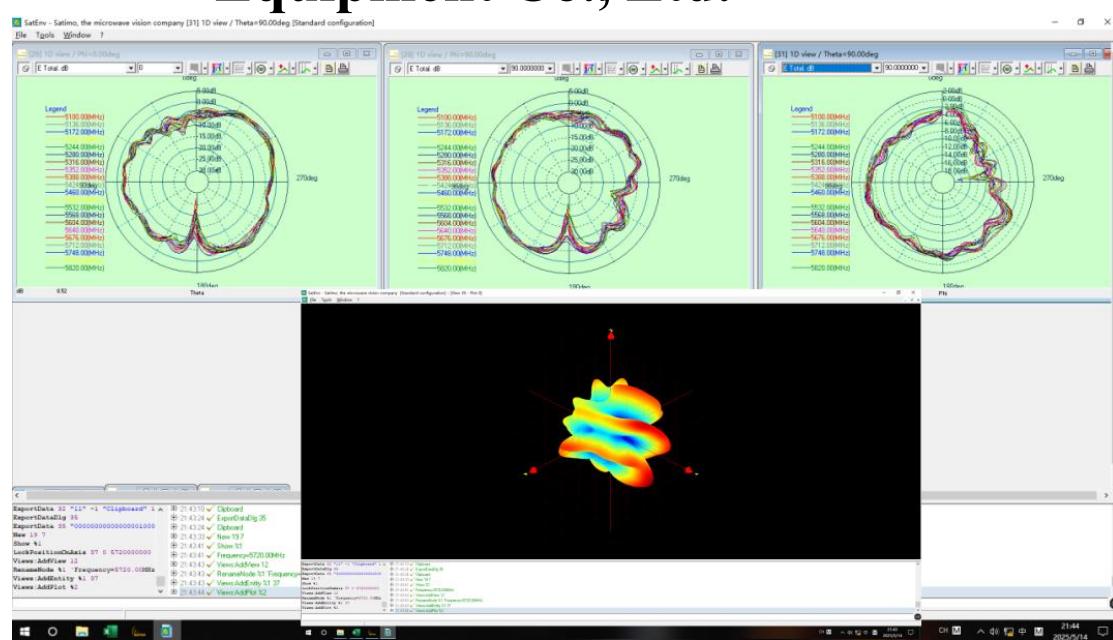


WIFI-2.4G/BT

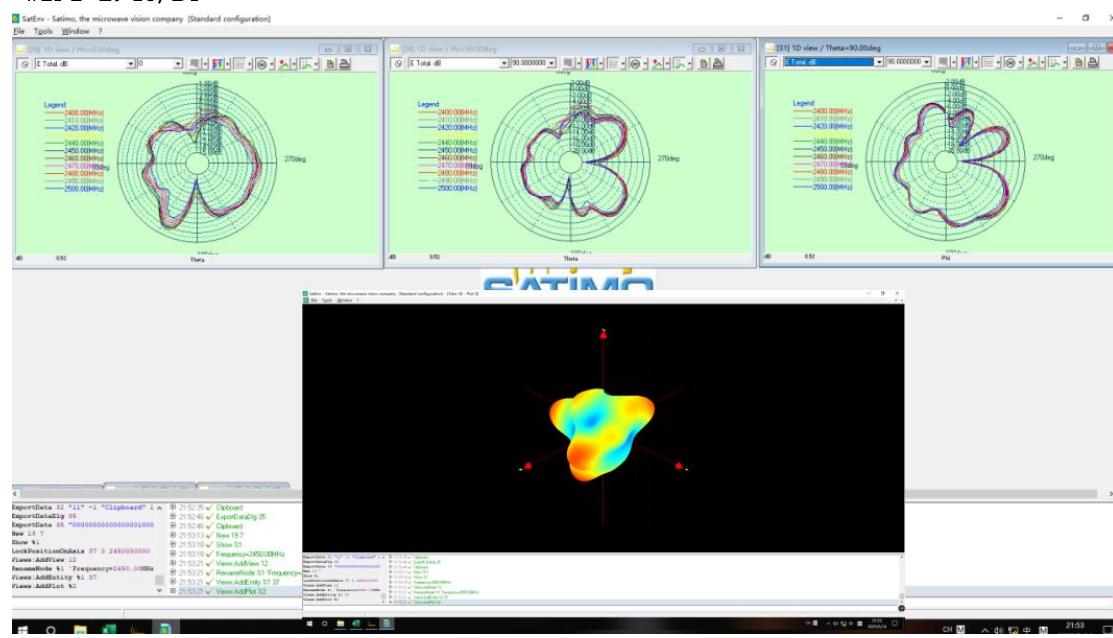

GPS-1575MHz

Shenzhen Maya Communication Equipment Co., Ltd.

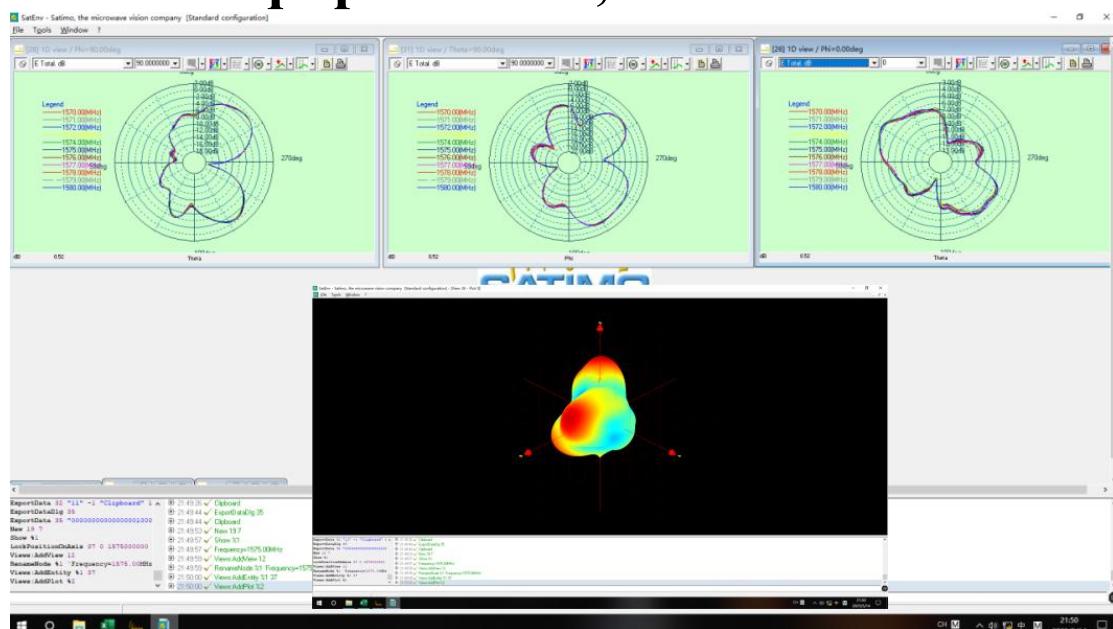


Shenzhen Maya Communication

Equipment Co., Ltd.




4. Matching circuit description

ANT1天线匹配电路有更改。
主路L103-8.2nH。
R104-3.9nH, R102-0欧, R103-18nH, R105-5.6nH

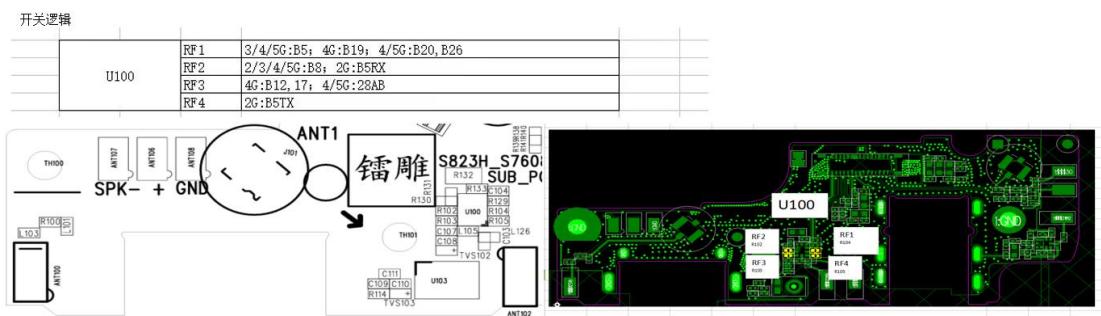

ANT5天线匹配电路有更改。
C2504-0.75pF, C2505-6.8nH。
R2579-0欧, L2599-NC, R2580-18nH, L2584-1.0pF.

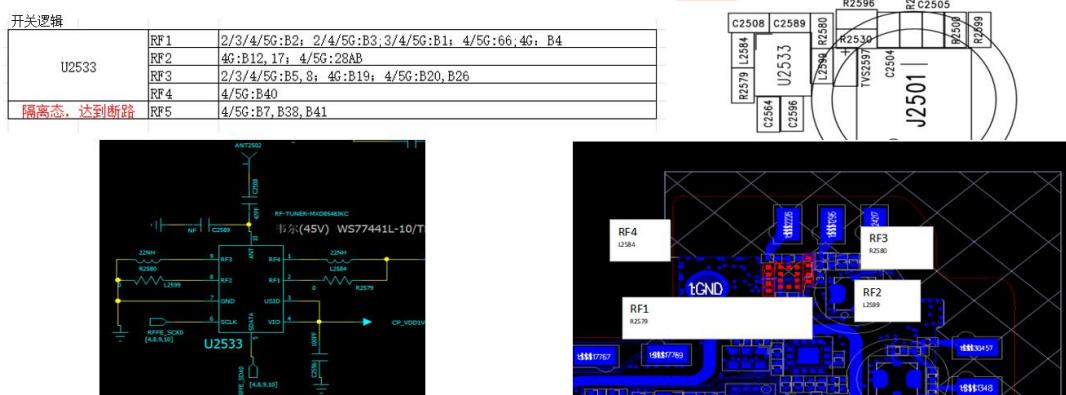


Shenzhen Maya Communication Equipment Co., Ltd.



NFC匹配电路


元件 Element	更改前	更改后
C6413(0402):	82pF	68pF
C6414(0402):	82pF	68pF
C6415(0201):	82pF	39pF
C6416(0201):	15pF	NC

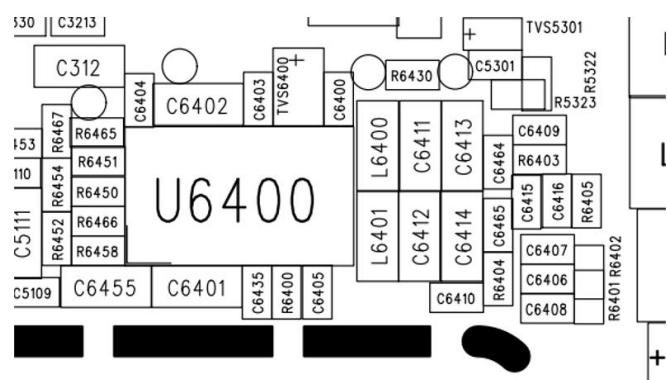

Shenzhen Maya Communication Equipment Co., Ltd.



5. GPS NFC Test Report

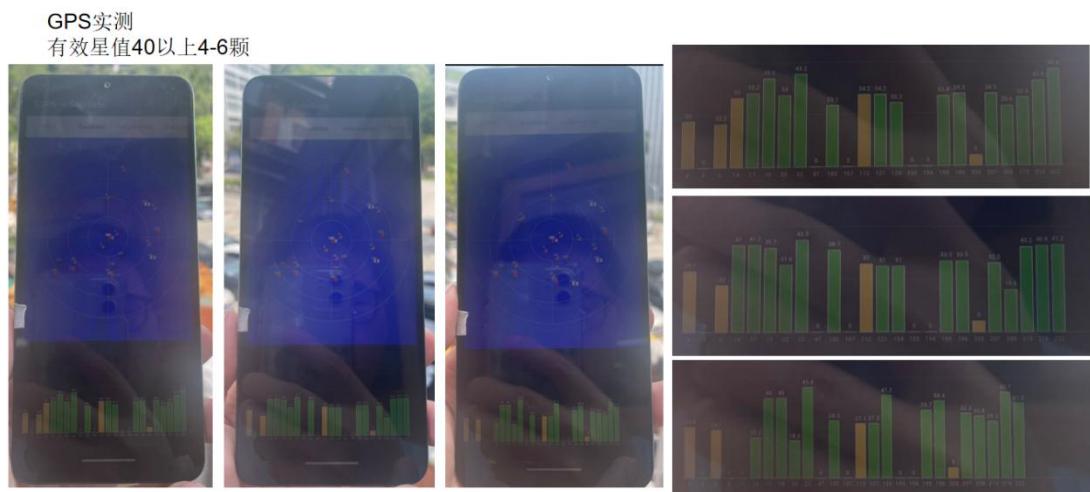

NFC通讯距离

	距离
Type1	4.5cm
Type2	4.0cm
Type3	3.5cm
Type4	2.0cm
Type5	5.0cm

测试距离用的垫片





Shenzhen Maya Communication

Equipment Co., Ltd.



6. Environmental treatment

备注：红框示意前后摄像头、听筒、喇叭、马达预留接地。
主板贴导电海绵与中框接地。

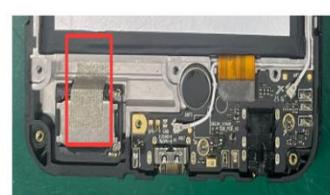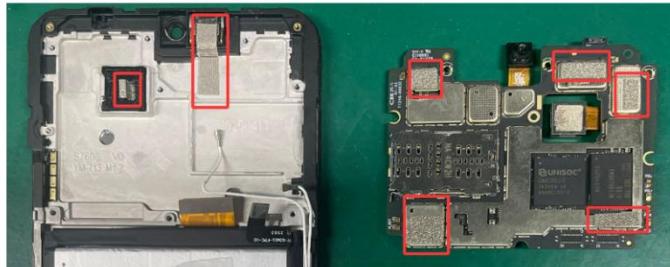

Antenna location





Shenzhen Maya Communication

Equipment Co., Ltd.





7. Structural drawings

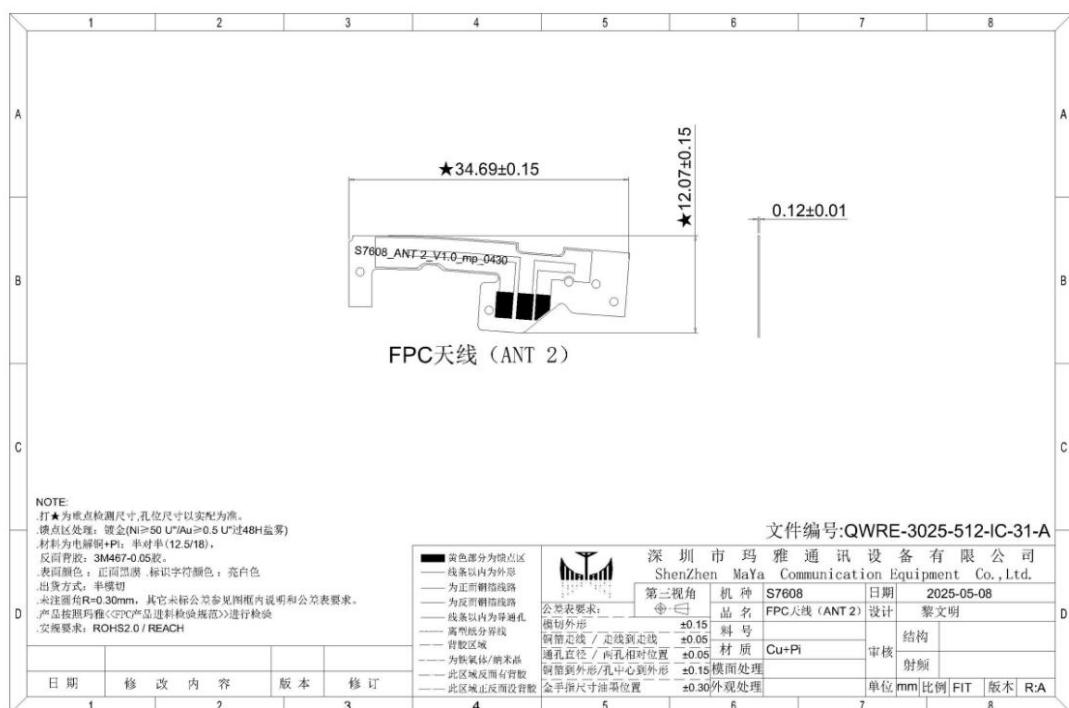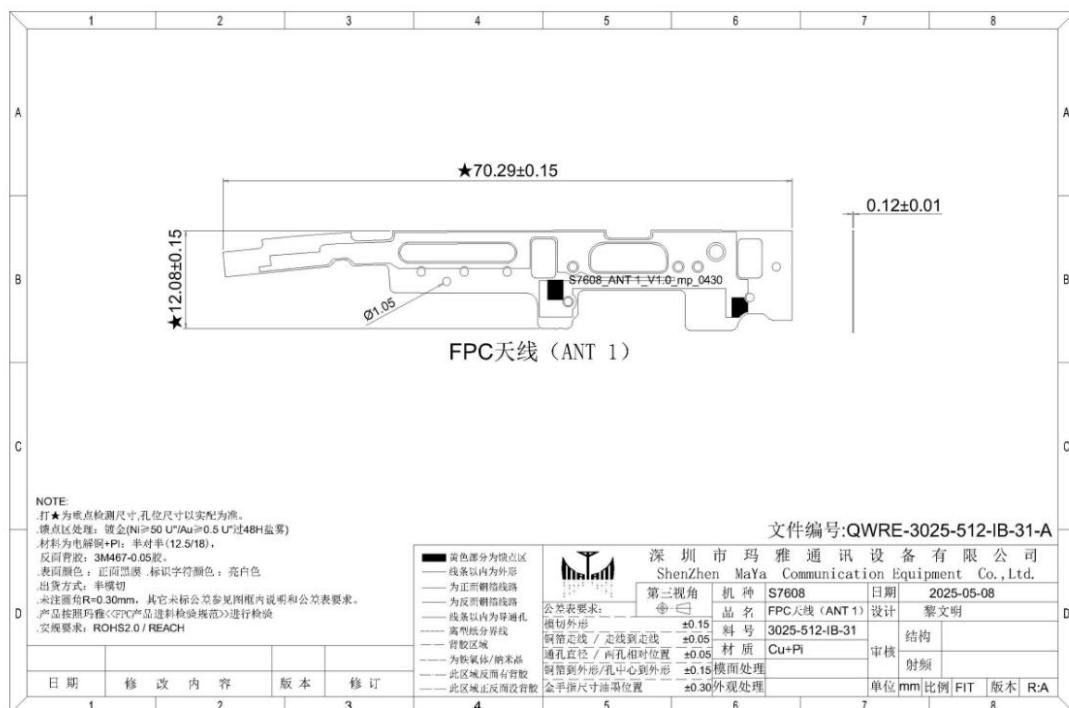



Shenzhen Maya Communication

Equipment Co., Ltd.

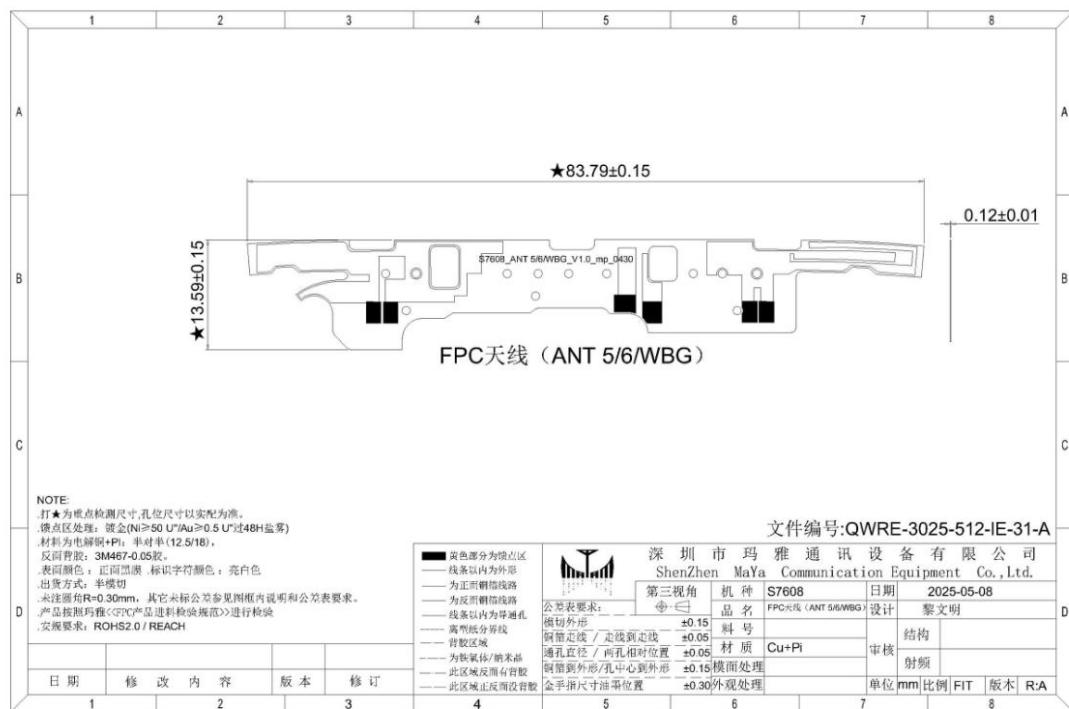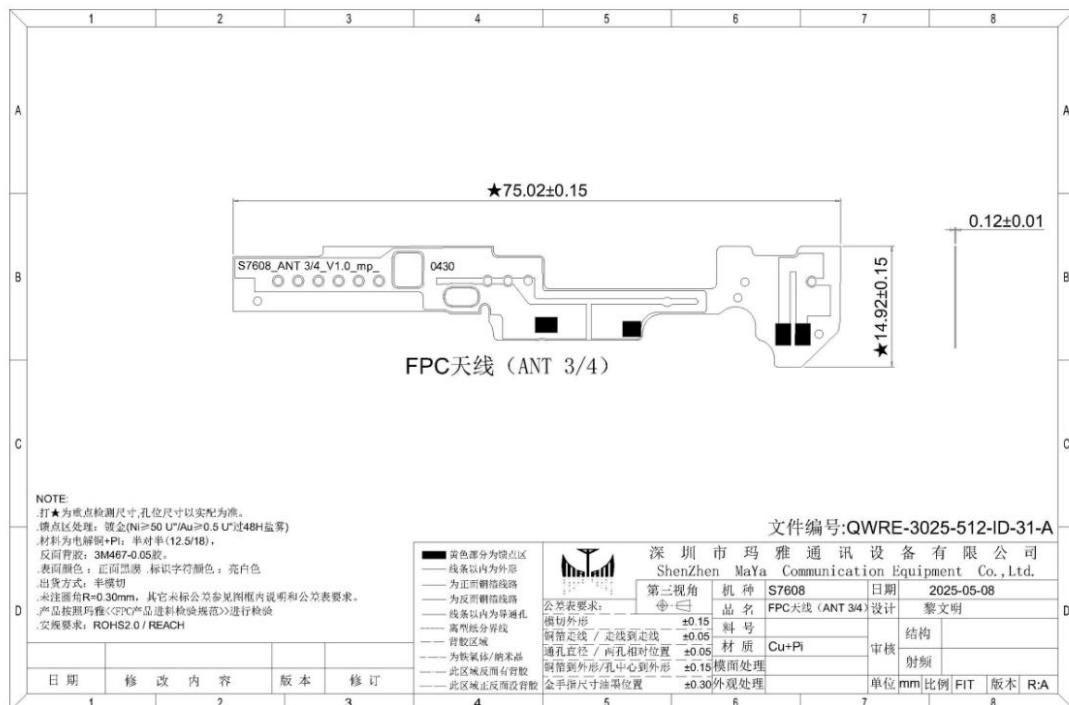

Shenzhen Maya Communication

Equipment Co., Ltd.

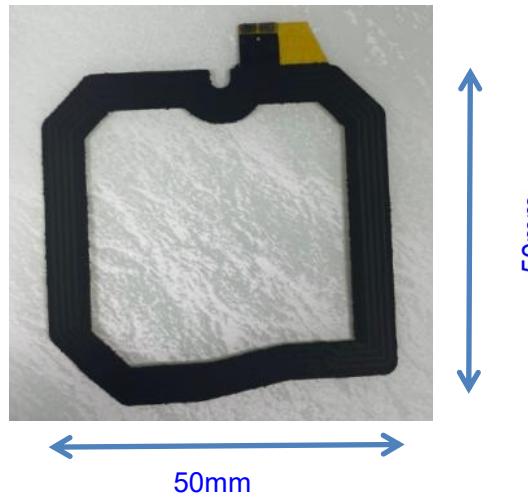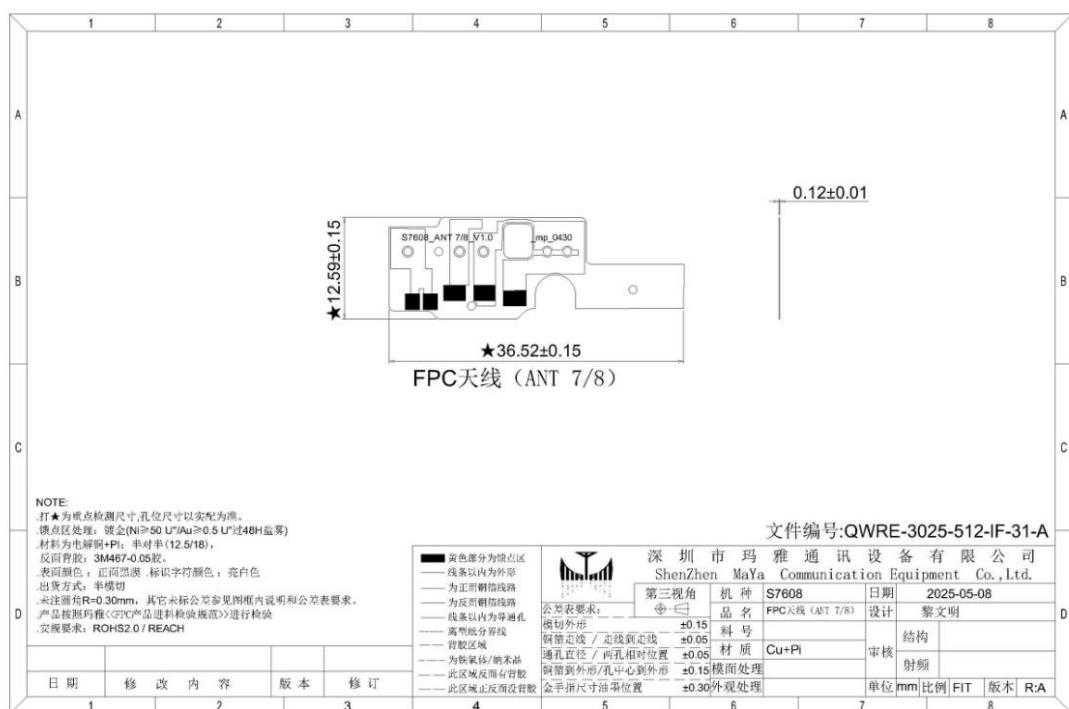

Shenzhen Maya Communication

Equipment Co., Ltd.



PTRX RX0为
主发

