



Appendix E

RF Test Data for 5.8GWIFI(Conducted Measurement)

Product Name: Tablet

Trade Mark: Blackview

Test Model: Tab 70 WiFi

Environmental Conditions

Temperature:	25.8℃
Relative Humidity:	52.3%
ATM Pressure:	101Kpa
Test Engineer:	Simba Huang
Supervised by:	Seal Chen



Contents

Page

COVER PAGE

1	Duty Cycle	3
1.1	Test Result.....	3
1.2	Test Graphs.....	4
2	Maximum Conducted Output Power	14
2.1	Test Result.....	14
3	-6dB Bandwidth	15
3.1	Test Result.....	15
3.2	Test Graphs.....	16
4	Occupied Channel Bandwidth	26
4.1	Test Result.....	26
4.2	Test Graphs.....	27
5	Maximum Power Spectral Density Level.....	37
5.1	Test Result.....	37
5.2	Test Graphs.....	38
6	Frequency Stability.....	48
6.1	Test Result.....	48
7	Conducted RF Spurious Emission	53
7.1	Test Result.....	53
7.2	Test Graphs.....	54
8	Restrict Band.....	64
8.1	Test Result.....	64
8.2	Test Graphs.....	68




1 Duty Cycle

1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
a	5745	Ant1	94.03	0.27	0.2
a	5785	Ant1	93.54	0.29	0.2
a	5825	Ant1	93.75	0.28	0.2
n20	5745	Ant1	84.88	0.71	0.21
n20	5785	Ant1	93.33	0.3	0.21
n20	5825	Ant1	92.61	0.33	0.21
n40	5755	Ant1	91.02	0.41	0.22
n40	5795	Ant1	91.34	0.39	0.22
ac20	5745	Ant1	86.48	0.63	0.21
ac20	5785	Ant1	92.95	0.32	0.21
ac20	5825	Ant1	87.12	0.6	0.21
ac40	5755	Ant1	92.03	0.36	0.22
ac40	5795	Ant1	88.42	0.53	0.33
ac80	5775	Ant1	86.99	0.61	0.19
ax20	5745	Ant1	86.59	0.63	0.28
ax20	5785	Ant1	87.38	0.59	0.28
ax20	5825	Ant1	91.6	0.38	0.28
ax40	5755	Ant1	85.11	0.7	0.24
ax40	5795	Ant1	79.82	0.98	0.24
ax80	5775	Ant1	78.72	1.04	0.22




1.2 Test Graphs

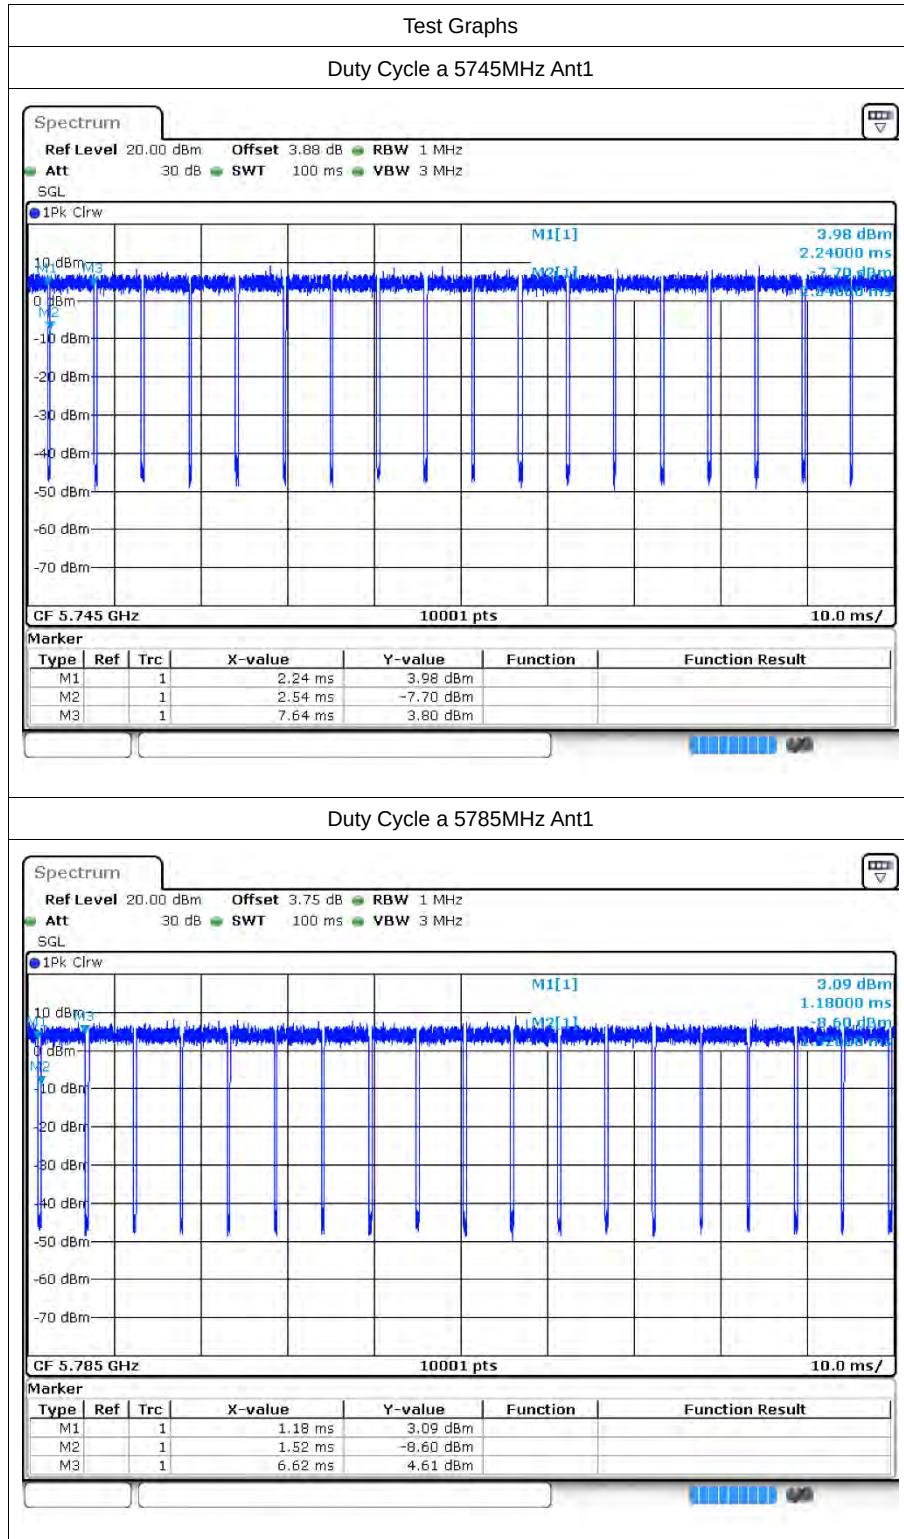


Duty Cycle a 5825MHz Ant1

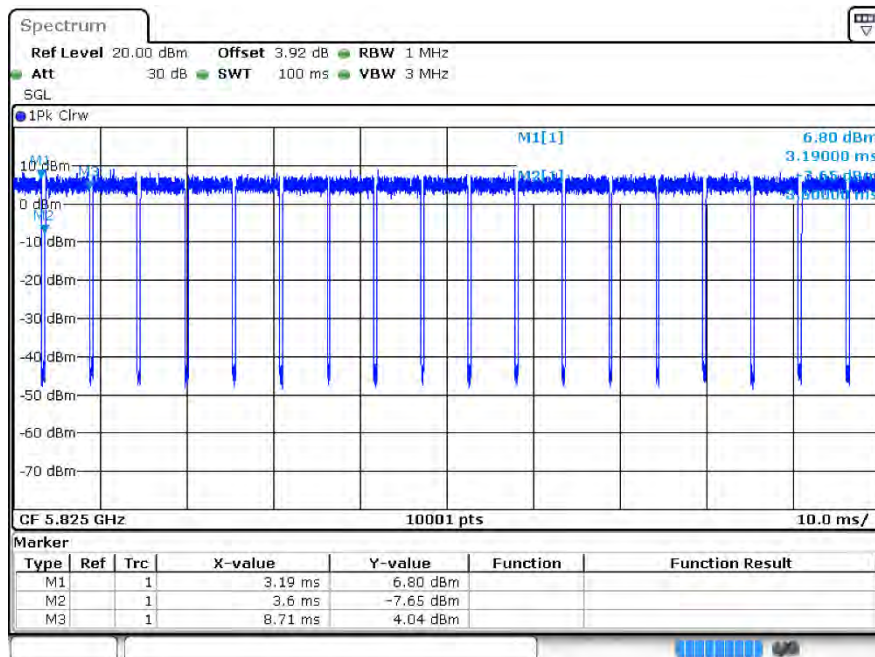


Duty Cycle n20 5745MHz Ant1

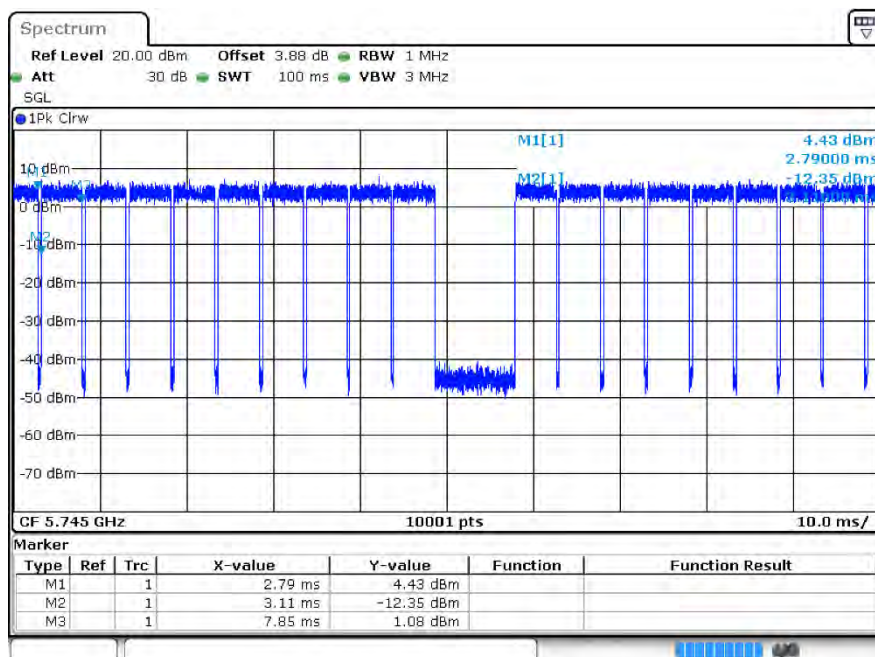

Duty Cycle n20 5785MHz Ant1

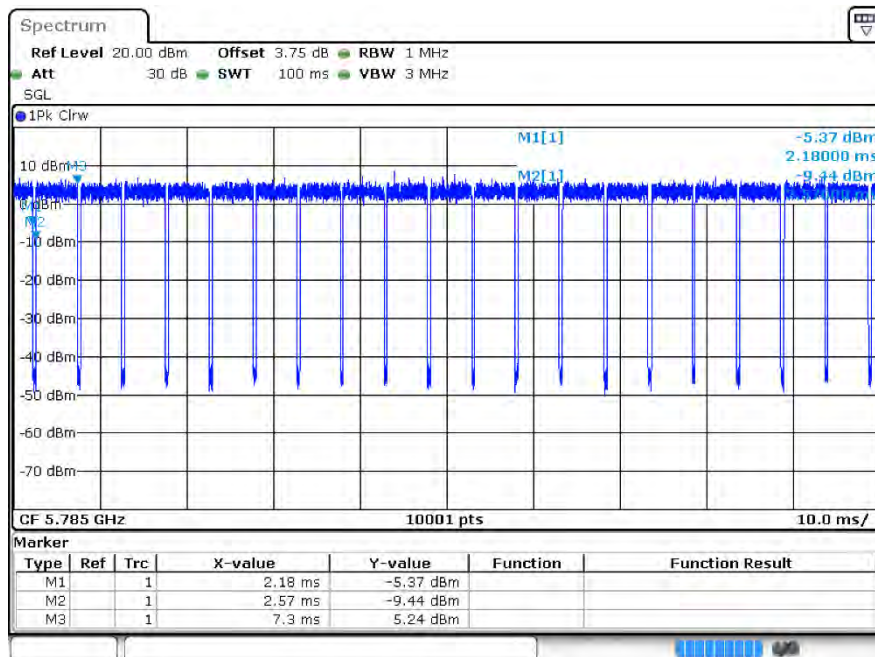


Duty Cycle n20 5825MHz Ant1

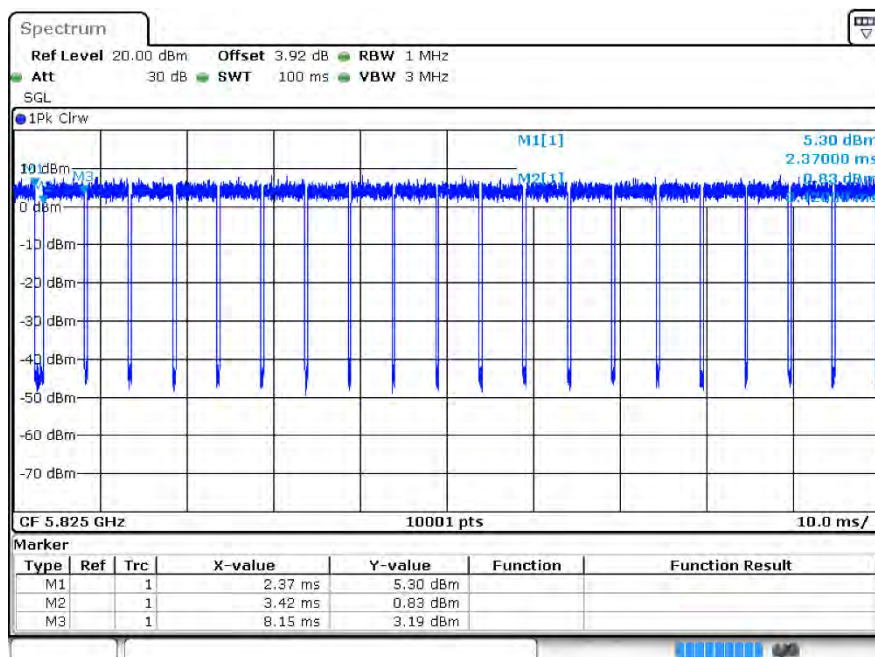


Duty Cycle n40 5755MHz Ant1



Duty Cycle n40 5795MHz Ant1

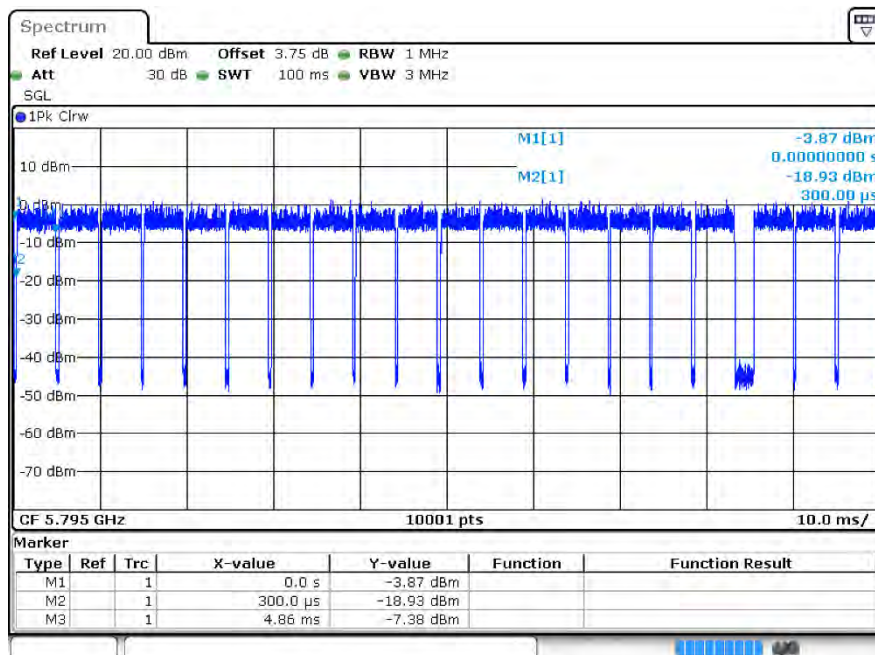


Duty Cycle ac20 5745MHz Ant1

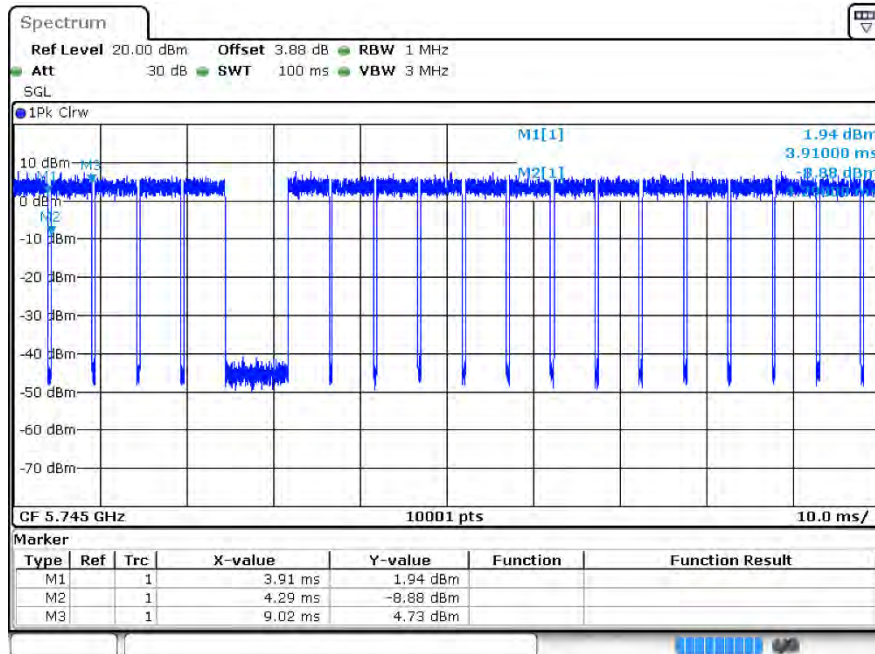


Duty Cycle ac20 5785MHz Ant1




Duty Cycle ac20 5825MHz Ant1

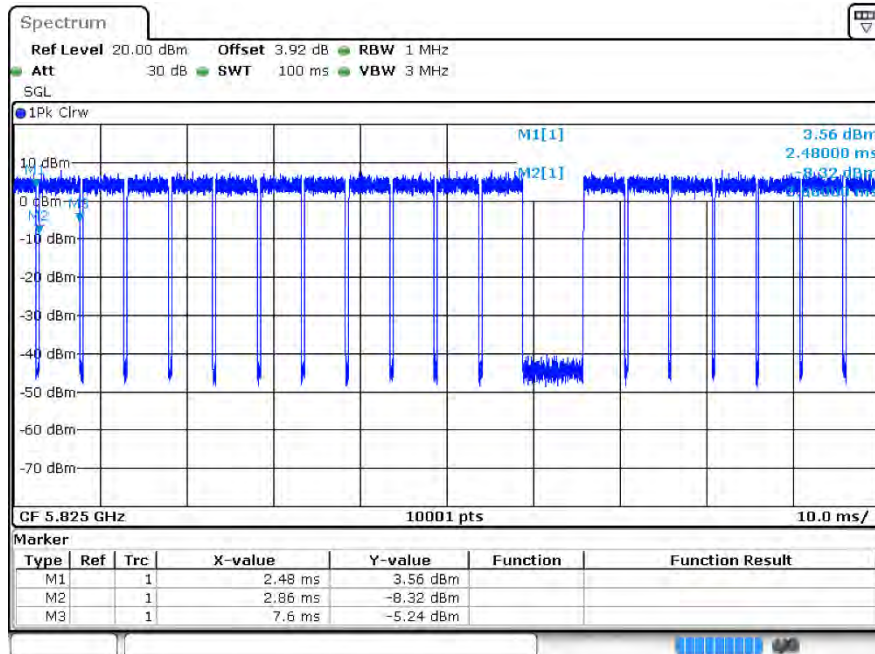


Duty Cycle ac40 5755MHz Ant1

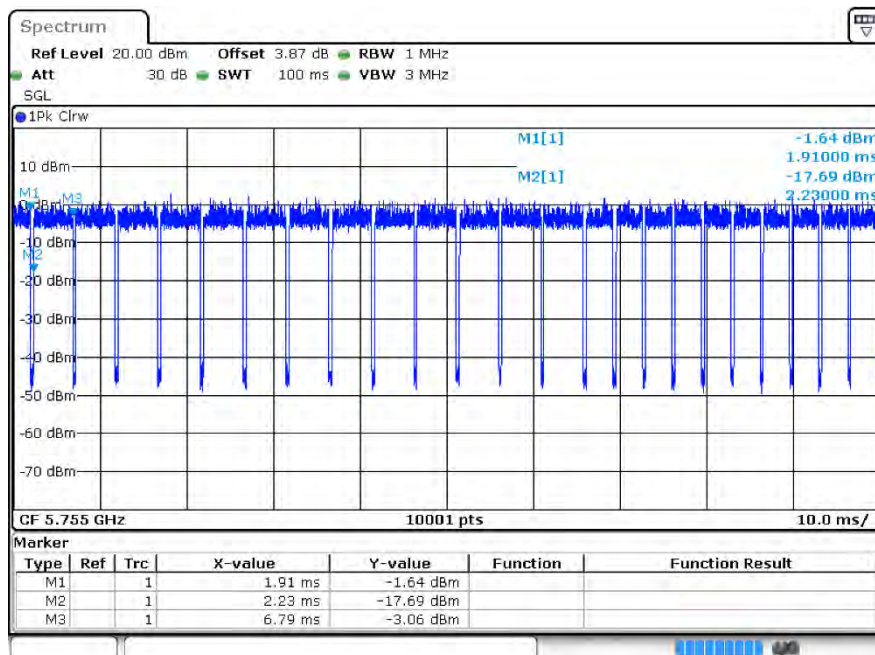

Duty Cycle ac40 5795MHz Ant1

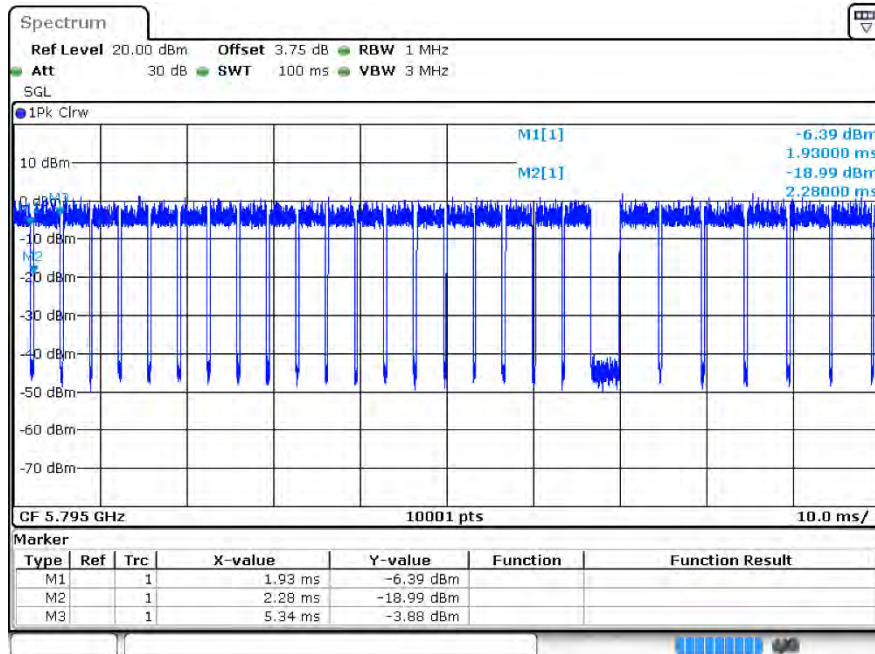


Duty Cycle ac80 5775MHz Ant1

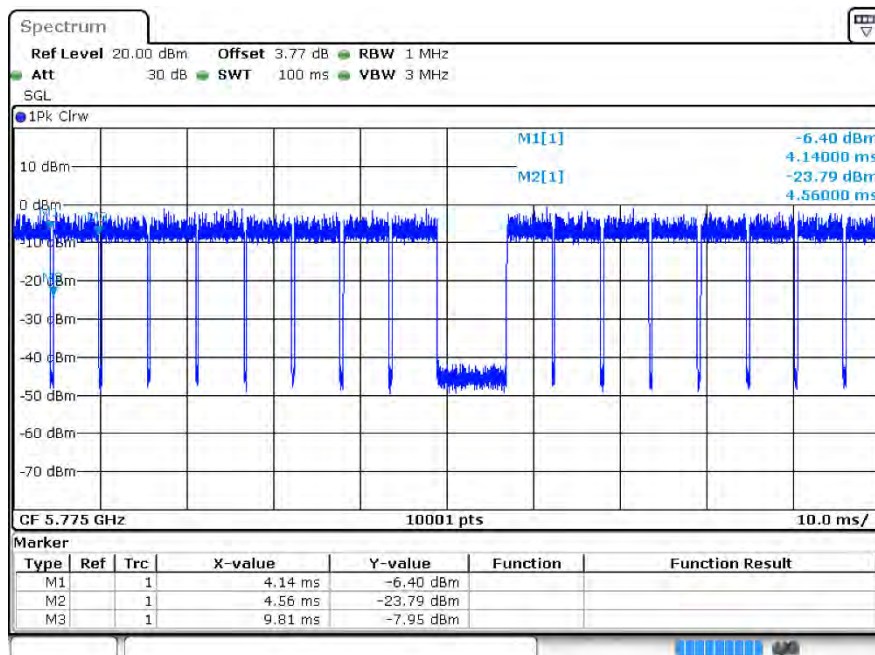


Duty Cycle ax20 5745MHz Ant1




Duty Cycle ax20 5785MHz Ant1

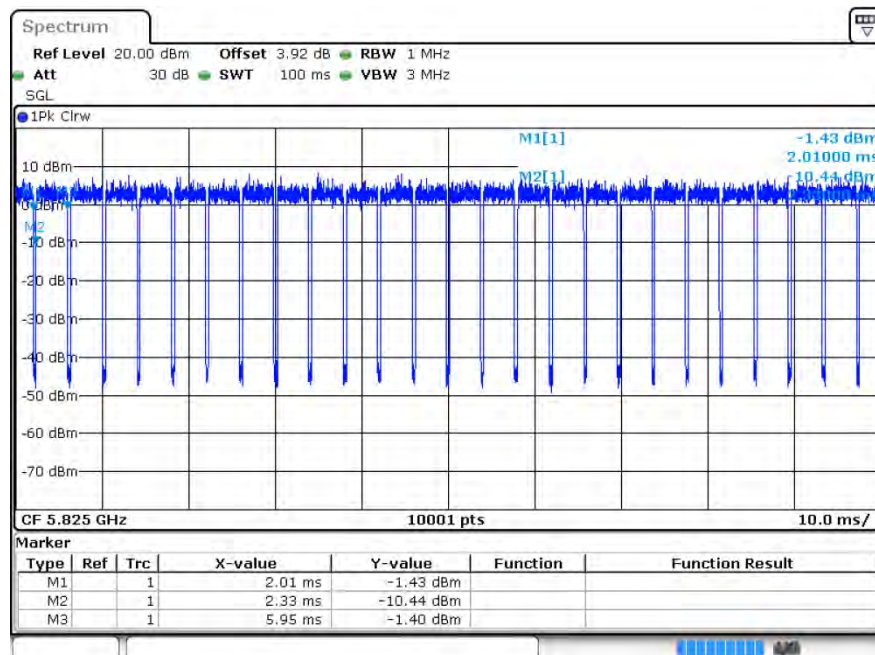


Duty Cycle ax20 5825MHz Ant1

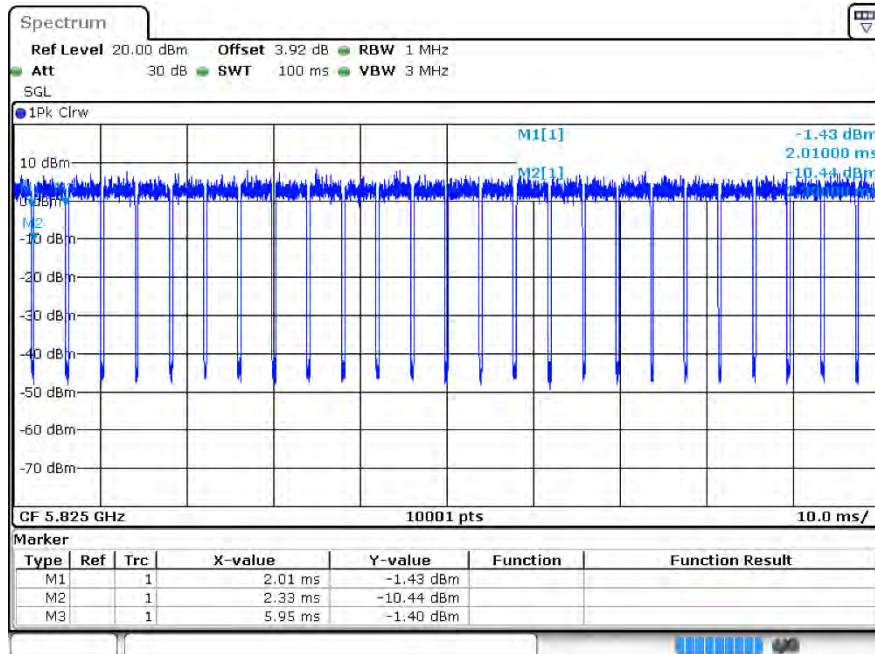


Duty Cycle ax40 5755MHz Ant1

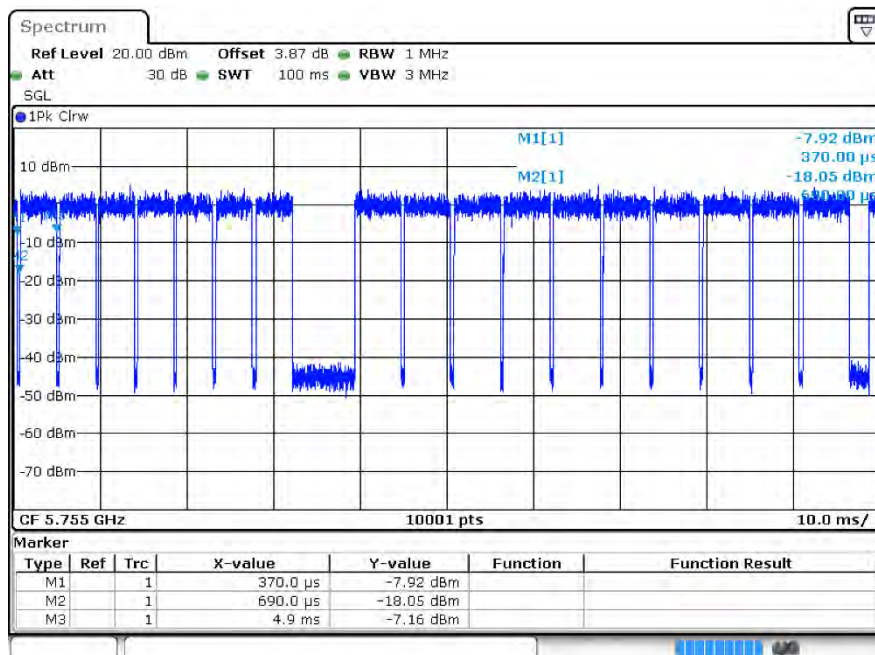

Duty Cycle ax40 5795MHz Ant1

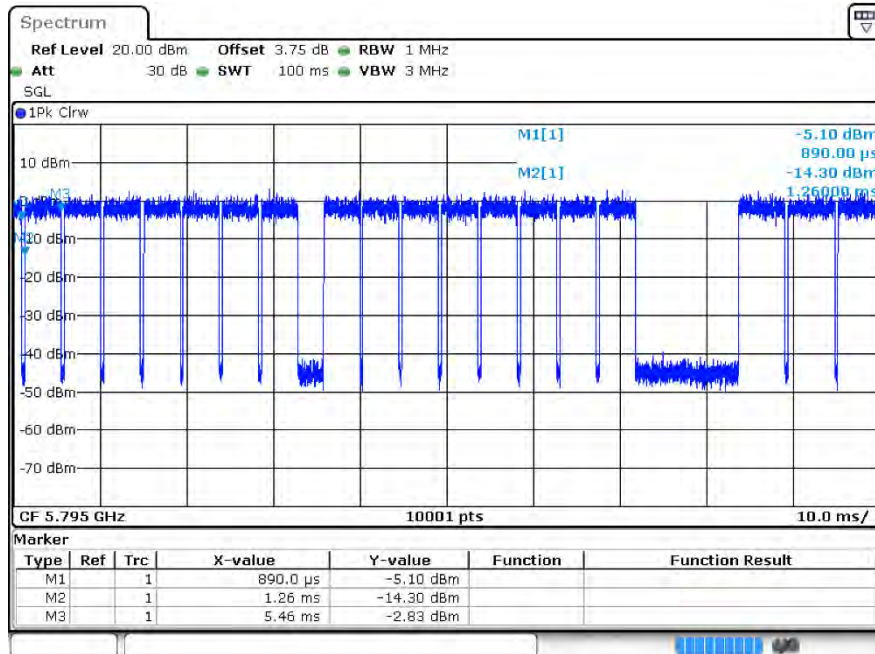

Duty Cycle ax80 5775MHz Ant1

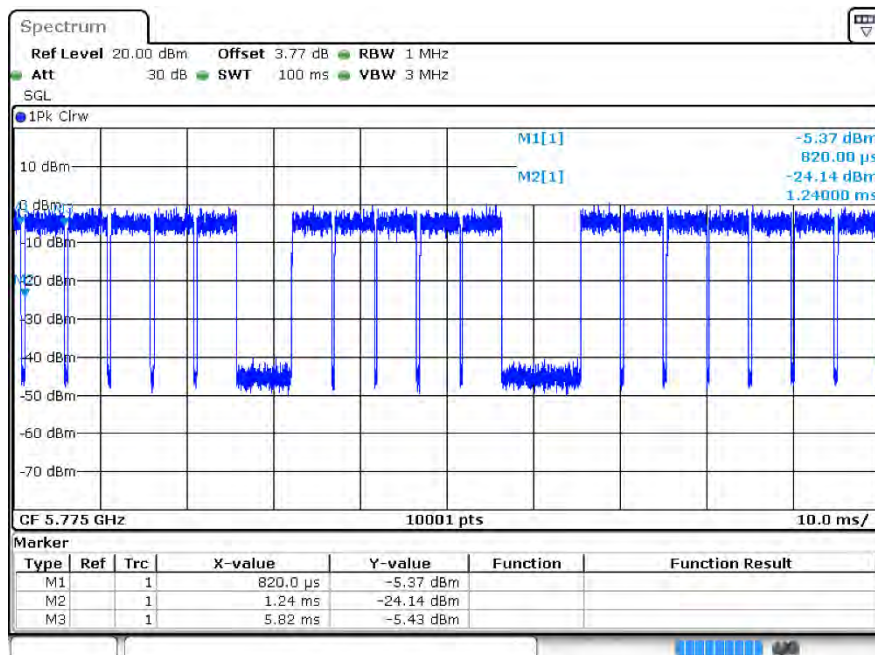

2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
a	5745	Ant1	15.13	30	Pass
a	5785	Ant1	14.71	30	Pass
a	5825	Ant1	15.6	30	Pass
n20	5745	Ant1	14.59	30	Pass
n20	5785	Ant1	14.29	30	Pass
n20	5825	Ant1	15.07	30	Pass
n40	5755	Ant1	13.96	30	Pass
n40	5795	Ant1	13.48	30	Pass
ac20	5745	Ant1	14.55	30	Pass
ac20	5785	Ant1	14.2	30	Pass
ac20	5825	Ant1	15.13	30	Pass
ac40	5755	Ant1	14.05	30	Pass
ac40	5795	Ant1	13.46	30	Pass
ac80	5775	Ant1	13.68	30	Pass
ax20	5745	Ant1	14.21	30	Pass
ax20	5785	Ant1	13.52	30	Pass
ax20	5825	Ant1	14.81	30	Pass
ax40	5755	Ant1	14.69	30	Pass
ax40	5795	Ant1	13.26	30	Pass
ax80	5775	Ant1	13.89	30	Pass

Note: The duty factor is compensated in the graph.




3 -6dB Bandwidth


3.1 Test Result

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
a	5745	Ant1	16.551	0.5	Pass
a	5785	Ant1	16.587	0.5	Pass
a	5825	Ant1	16.587	0.5	Pass
n20	5745	Ant1	17.823	0.5	Pass
n20	5785	Ant1	17.613	0.5	Pass
n20	5825	Ant1	17.799	0.5	Pass
n40	5755	Ant1	36.324	0.5	Pass
n40	5795	Ant1	36.432	0.5	Pass
ac20	5745	Ant1	17.817	0.5	Pass
ac20	5785	Ant1	17.571	0.5	Pass
ac20	5825	Ant1	17.592	0.5	Pass
ac40	5755	Ant1	36.36	0.5	Pass
ac40	5795	Ant1	36.468	0.5	Pass
ac80	5775	Ant1	76.356	0.5	Pass
ax20	5745	Ant1	19.116	0.5	Pass
ax20	5785	Ant1	18.873	0.5	Pass
ax20	5825	Ant1	18.801	0.5	Pass
ax40	5755	Ant1	37.938	0.5	Pass
ax40	5795	Ant1	37.83	0.5	Pass
ax80	5775	Ant1	76.728	0.5	Pass


3.2 Test Graphs

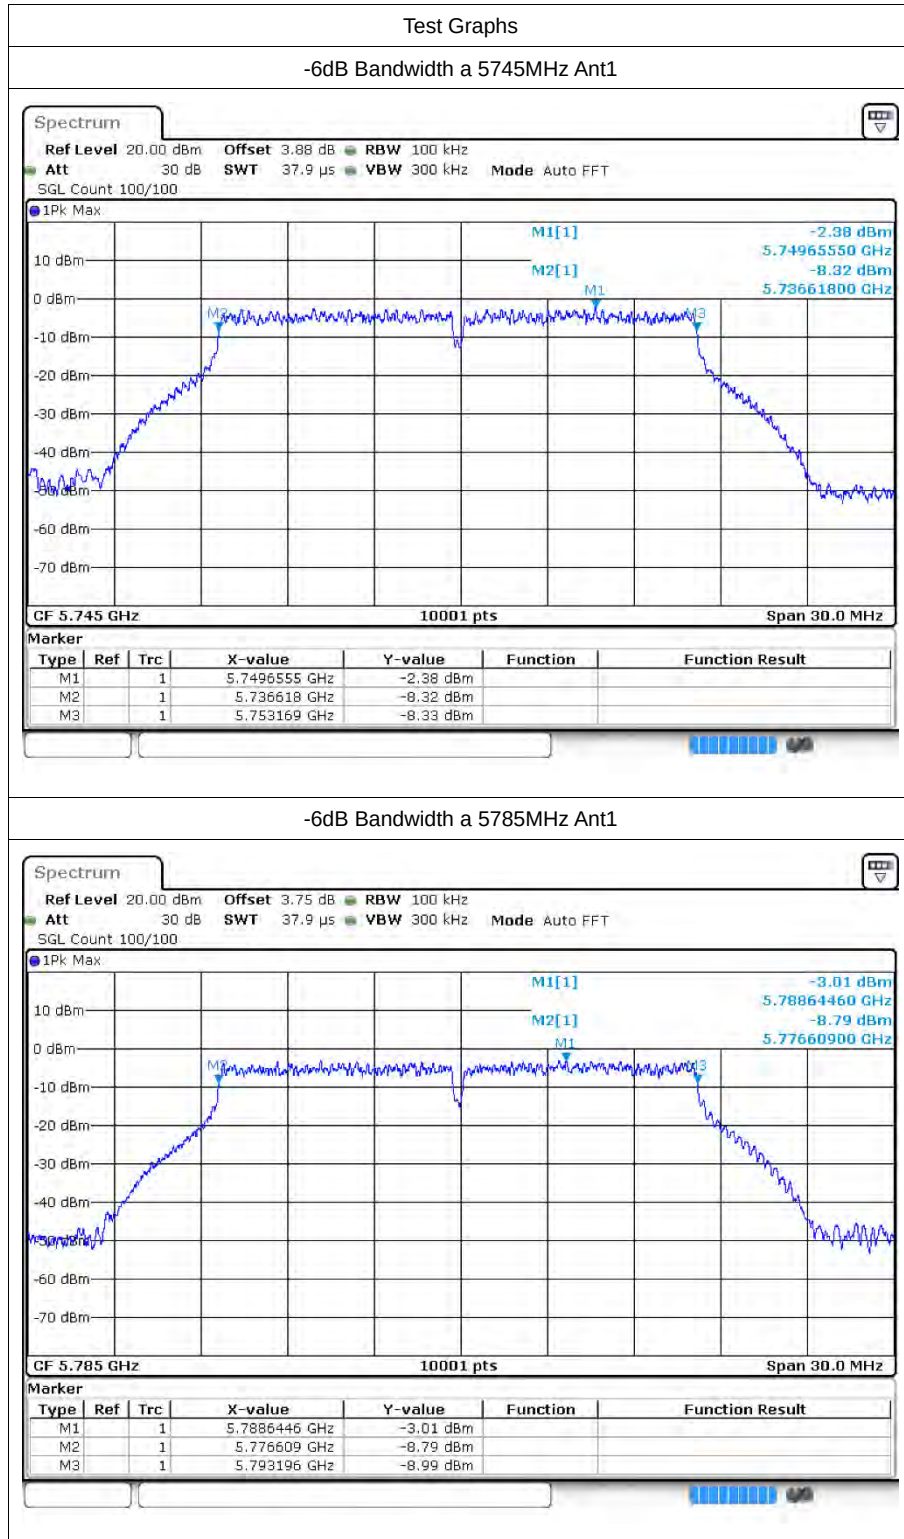


-6dB Bandwidth a 5825MHz Ant1

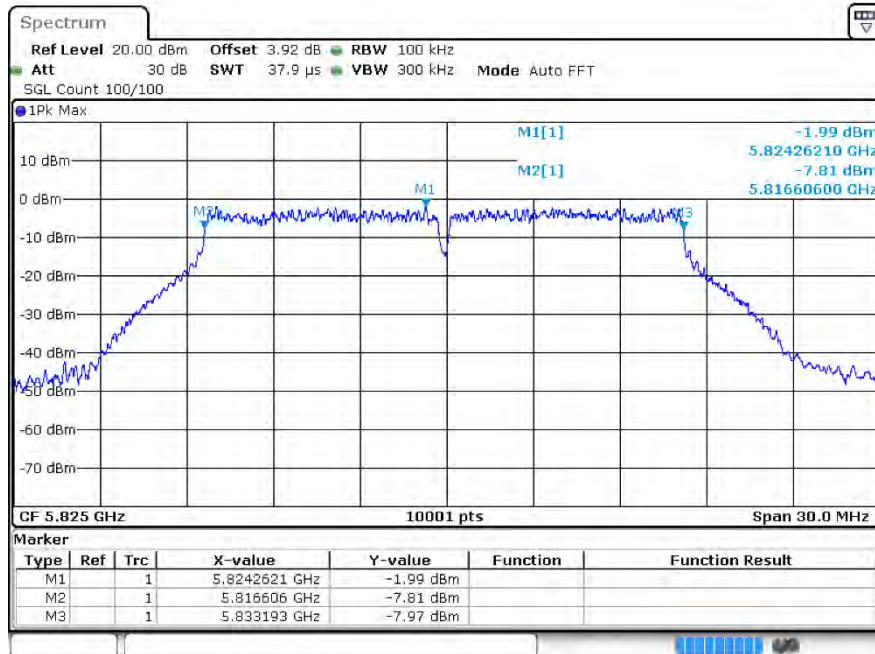


-6dB Bandwidth n20 5745MHz Ant1

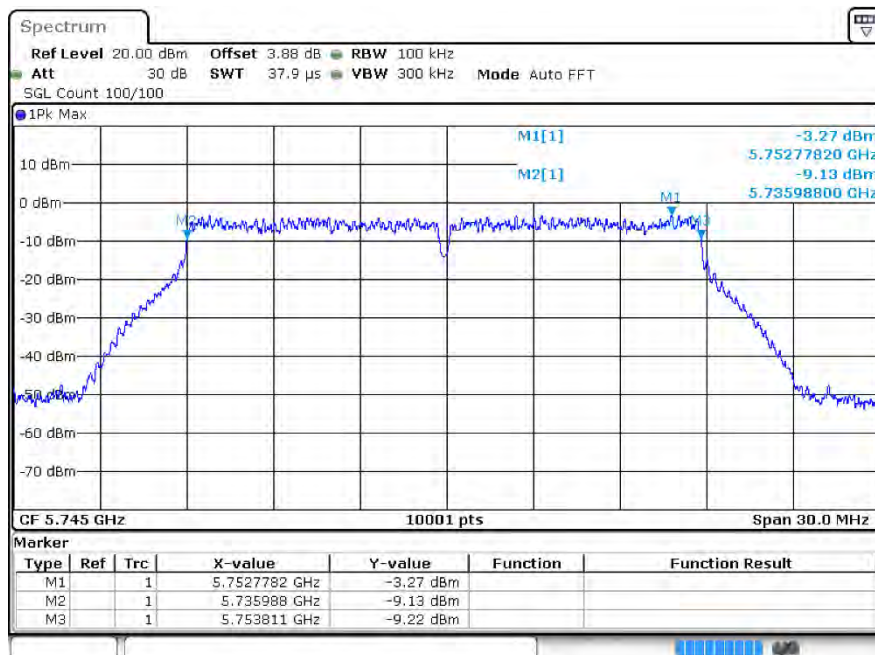


-6dB Bandwidth n20 5785MHz Ant1

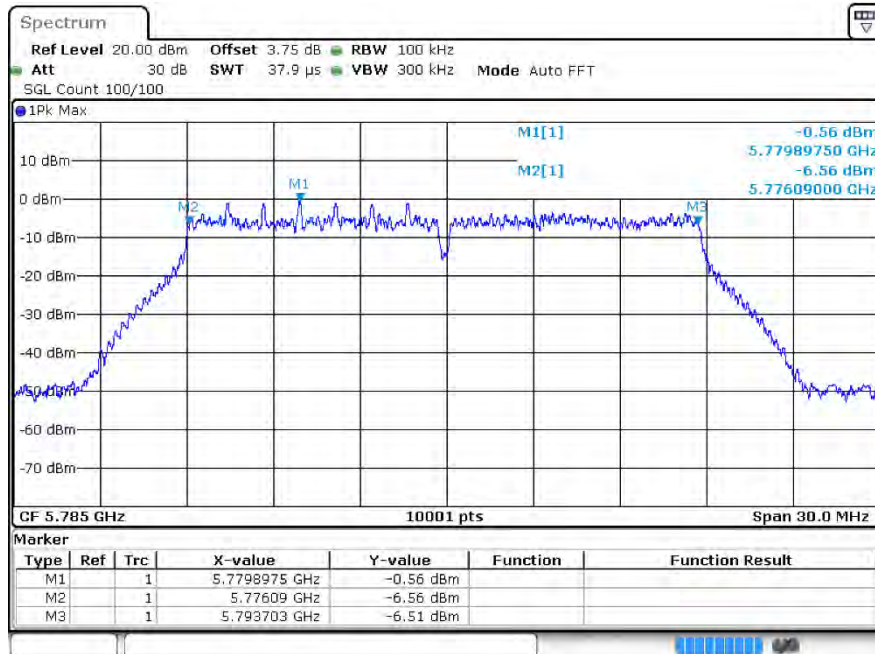


-6dB Bandwidth n20 5825MHz Ant1

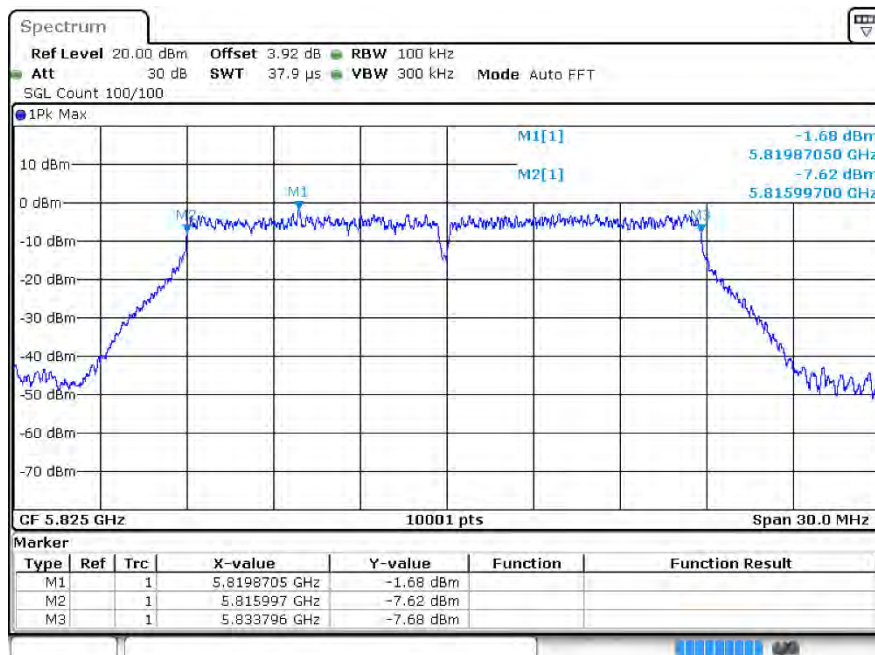


-6dB Bandwidth n40 5755MHz Ant1

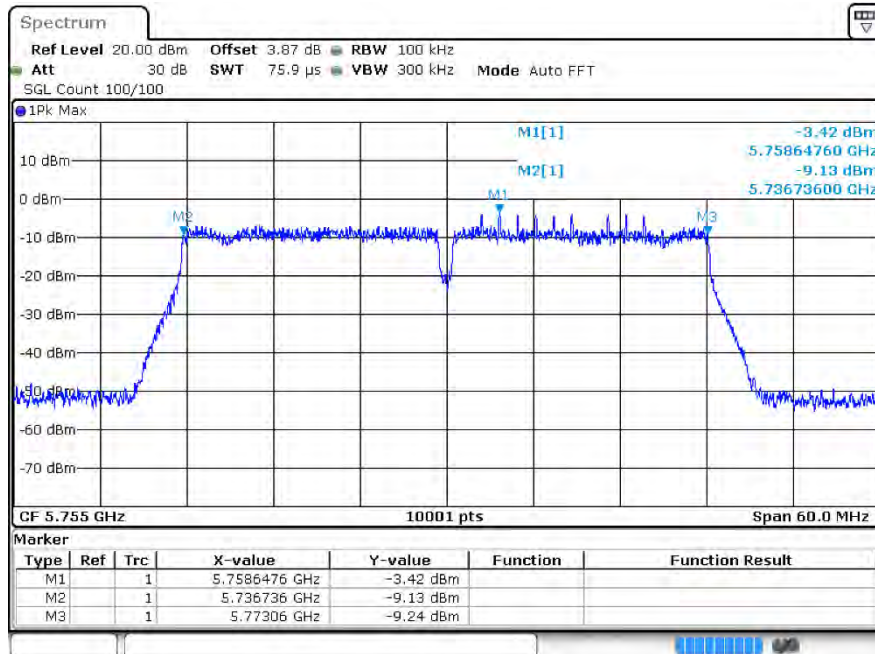


-6dB Bandwidth n40 5795MHz Ant1

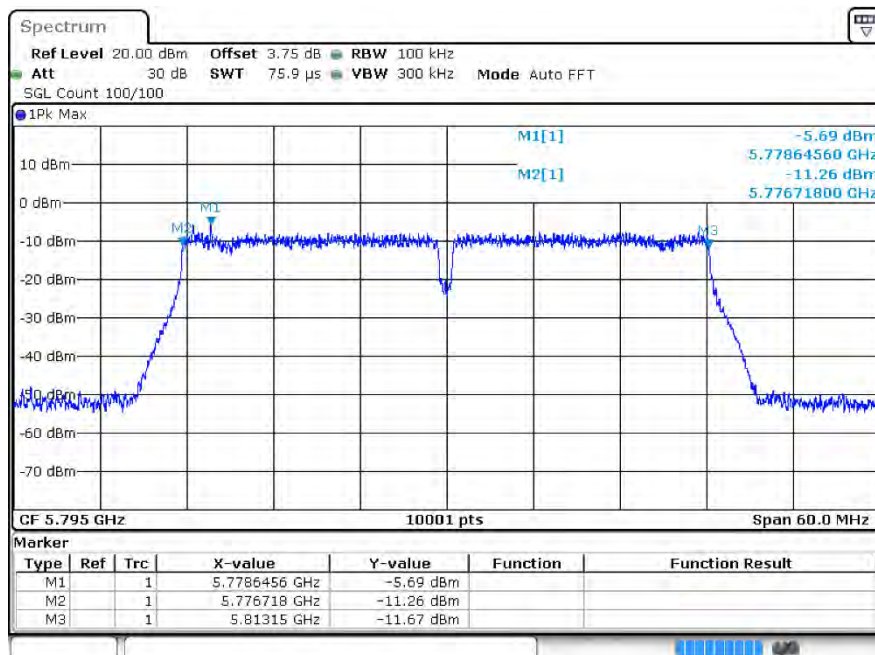


-6dB Bandwidth ac20 5745MHz Ant1

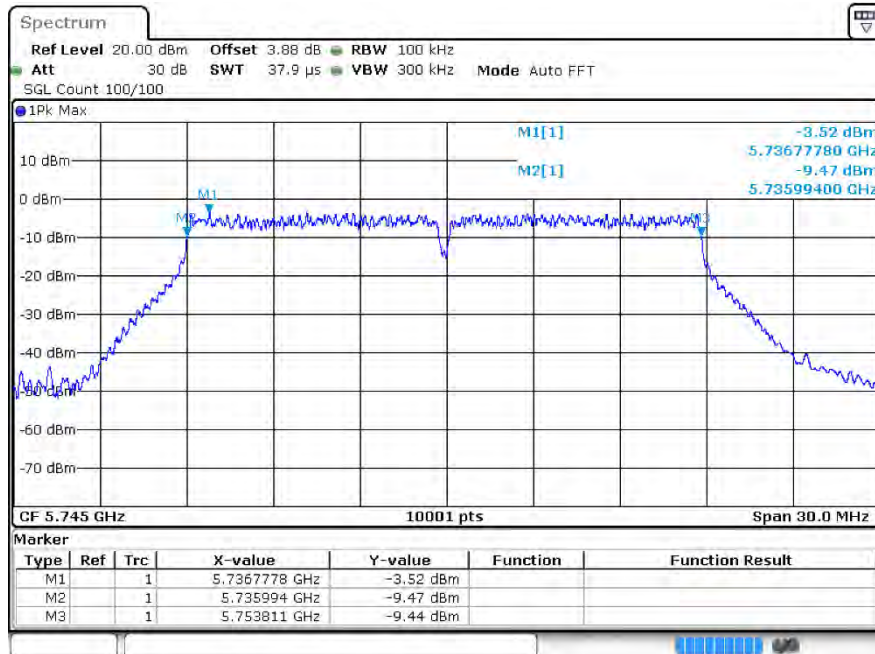


-6dB Bandwidth ac20 5785MHz Ant1

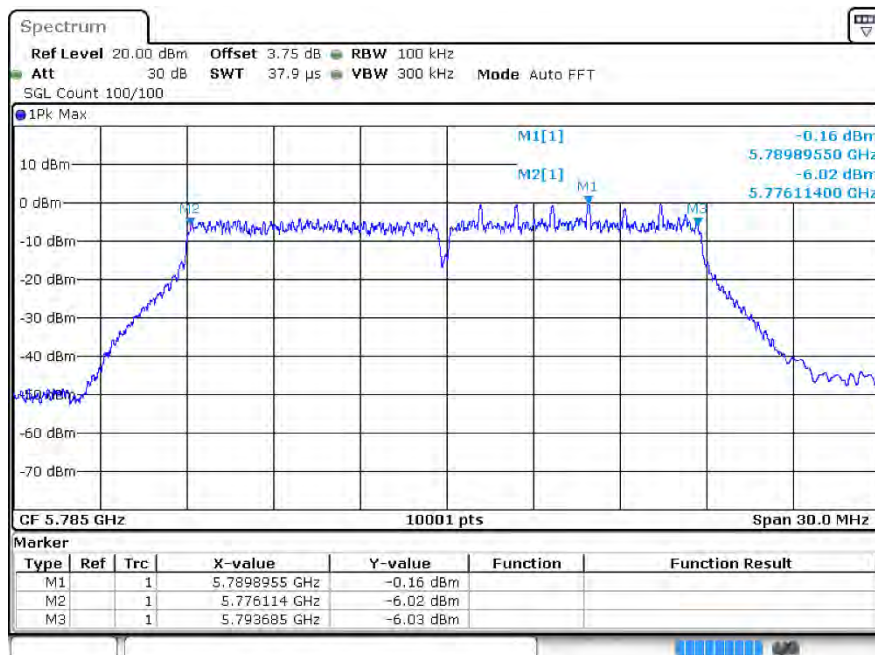


-6dB Bandwidth ac20 5825MHz Ant1

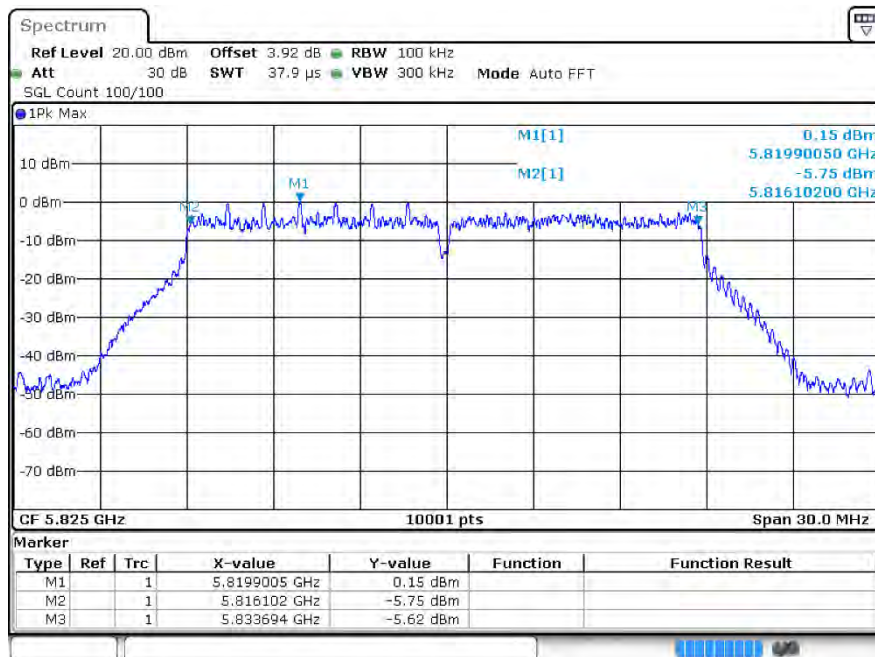


-6dB Bandwidth ac40 5755MHz Ant1

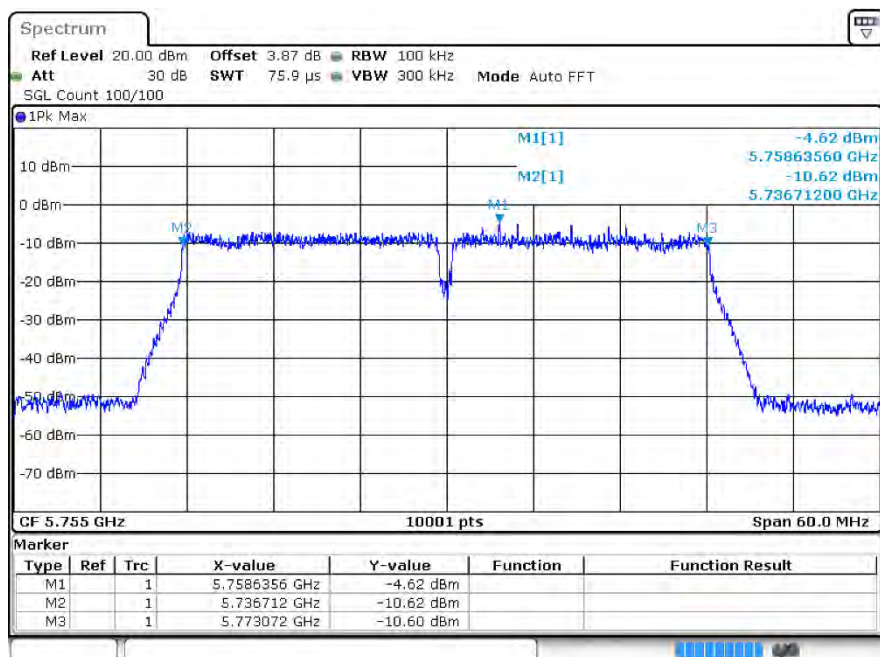


-6dB Bandwidth ac40 5795MHz Ant1

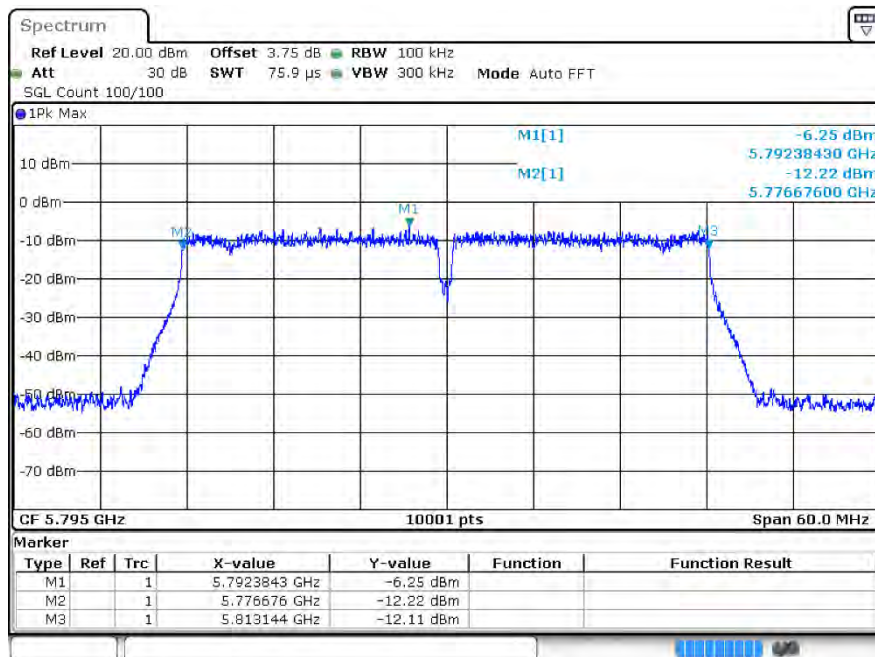


-6dB Bandwidth ac80 5775MHz Ant1

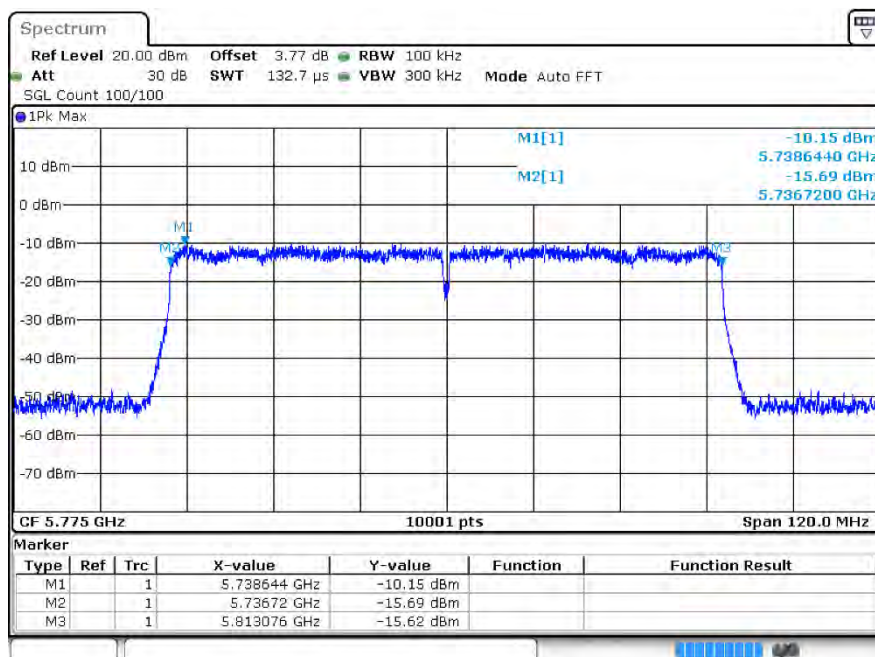


-6dB Bandwidth ax20 5745MHz Ant1

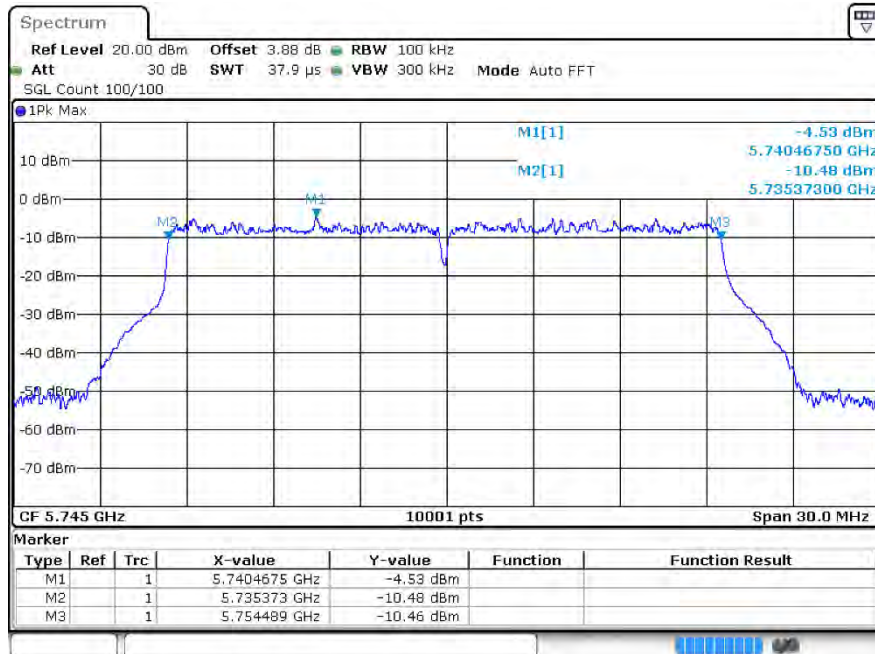


-6dB Bandwidth ax20 5785MHz Ant1

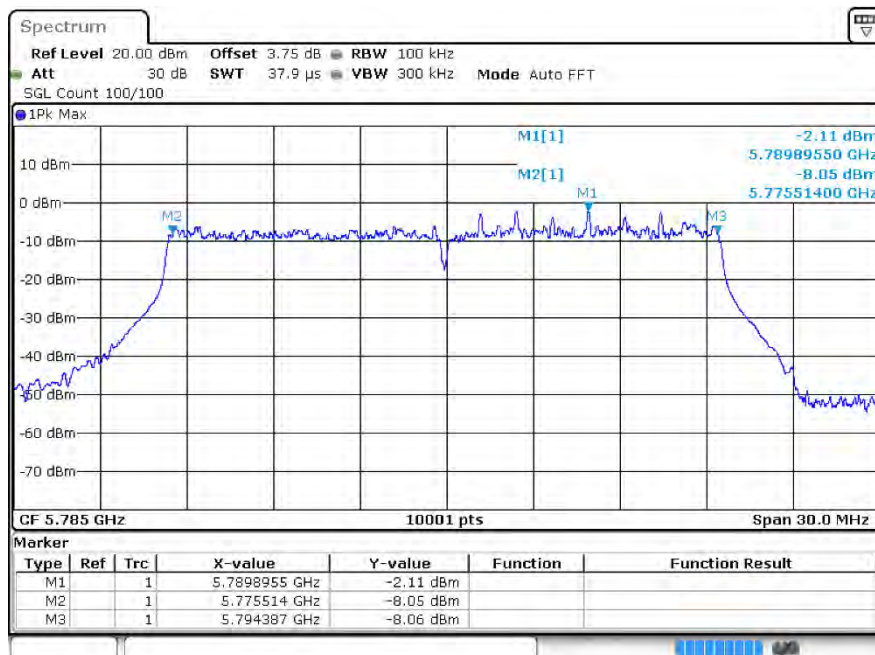


-6dB Bandwidth ax20 5825MHz Ant1

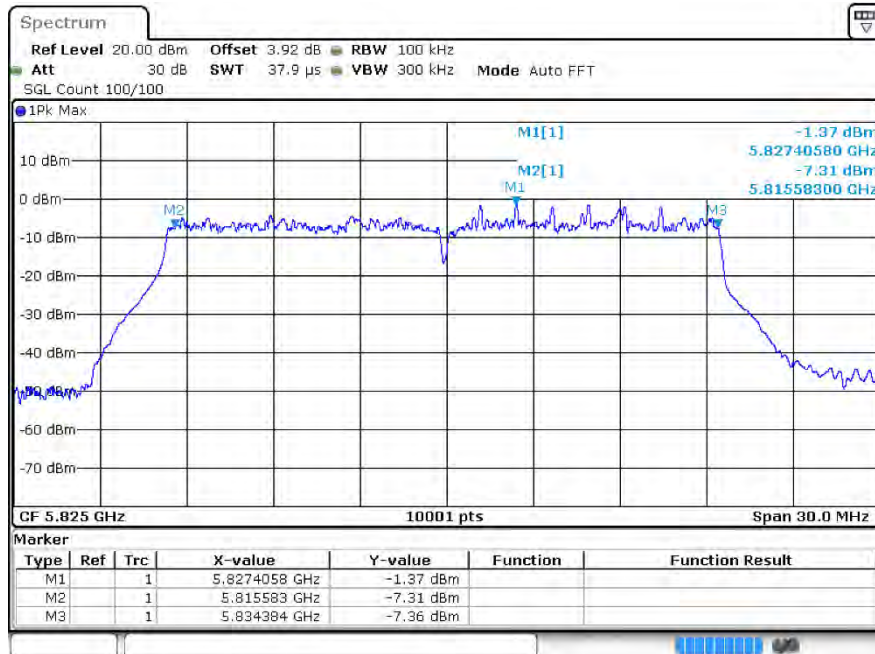


-6dB Bandwidth ax40 5755MHz Ant1

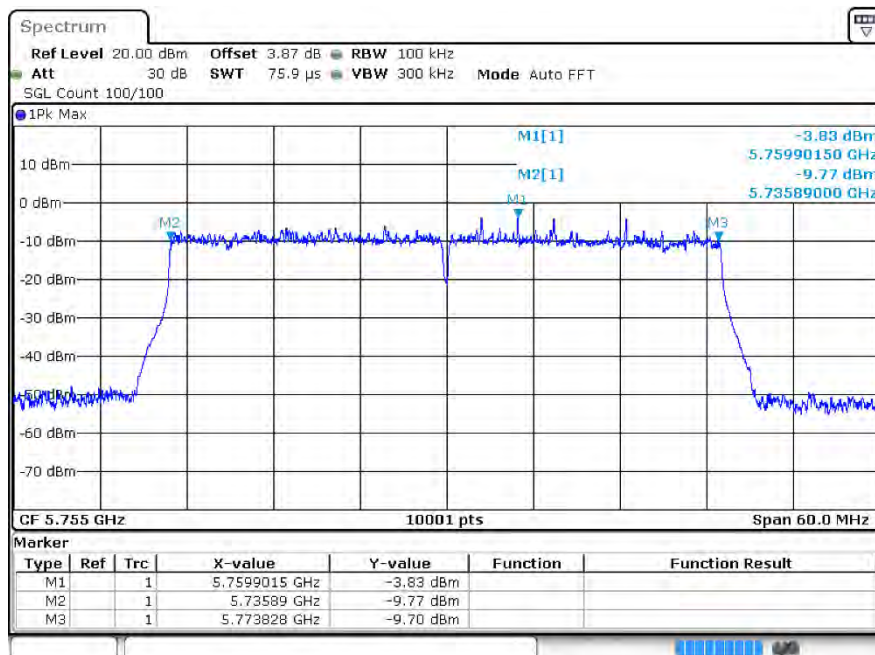

-6dB Bandwidth ax40 5795MHz Ant1

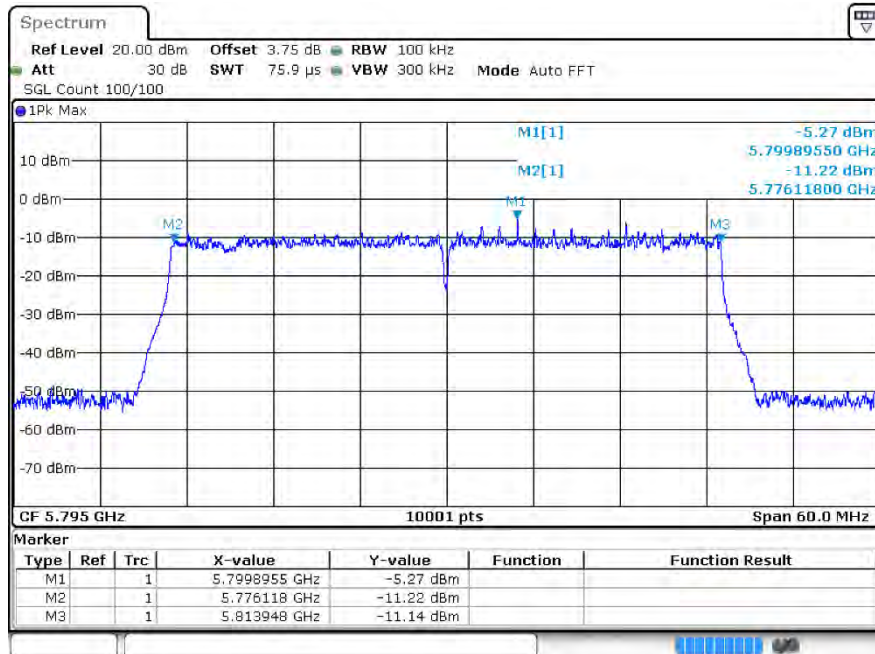

-6dB Bandwidth ax80 5775MHz Ant1

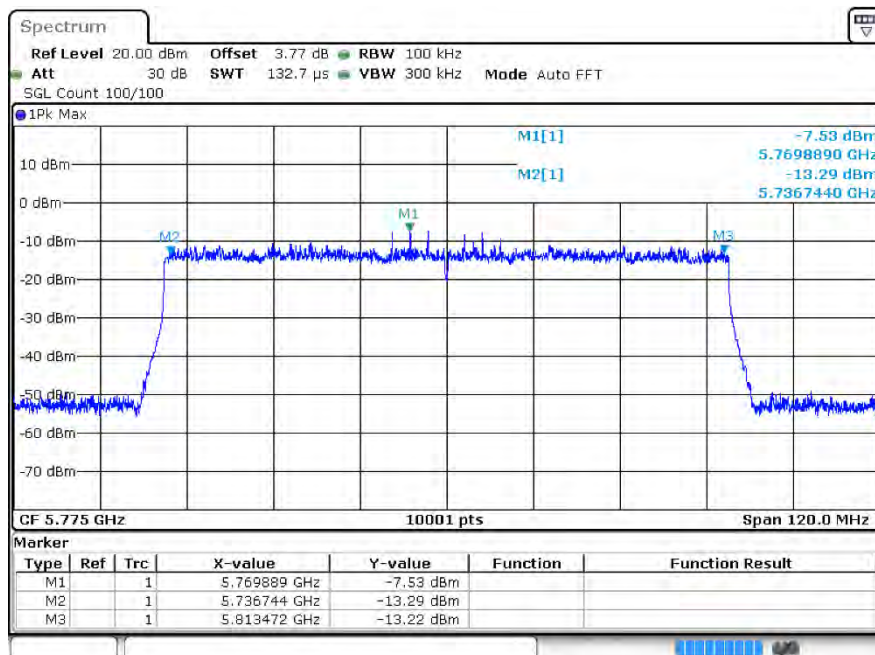




4 Occupied Channel Bandwidth


4.1 Test Result

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
a	5745	Ant1	17.125
a	5785	Ant1	16.768
a	5825	Ant1	16.867
n20	5745	Ant1	17.953
n20	5785	Ant1	17.875
n20	5825	Ant1	17.833
n40	5755	Ant1	36.416
n40	5795	Ant1	36.458
ac20	5745	Ant1	17.77
ac20	5785	Ant1	17.827
ac20	5825	Ant1	17.71
ac40	5755	Ant1	36.308
ac40	5795	Ant1	36.314
ac80	5775	Ant1	75.544
ax20	5745	Ant1	19.153
ax20	5785	Ant1	19.105
ax20	5825	Ant1	19.045
ax40	5755	Ant1	37.874
ax40	5795	Ant1	37.76
ax80	5775	Ant1	77.584


4.2 Test Graphs

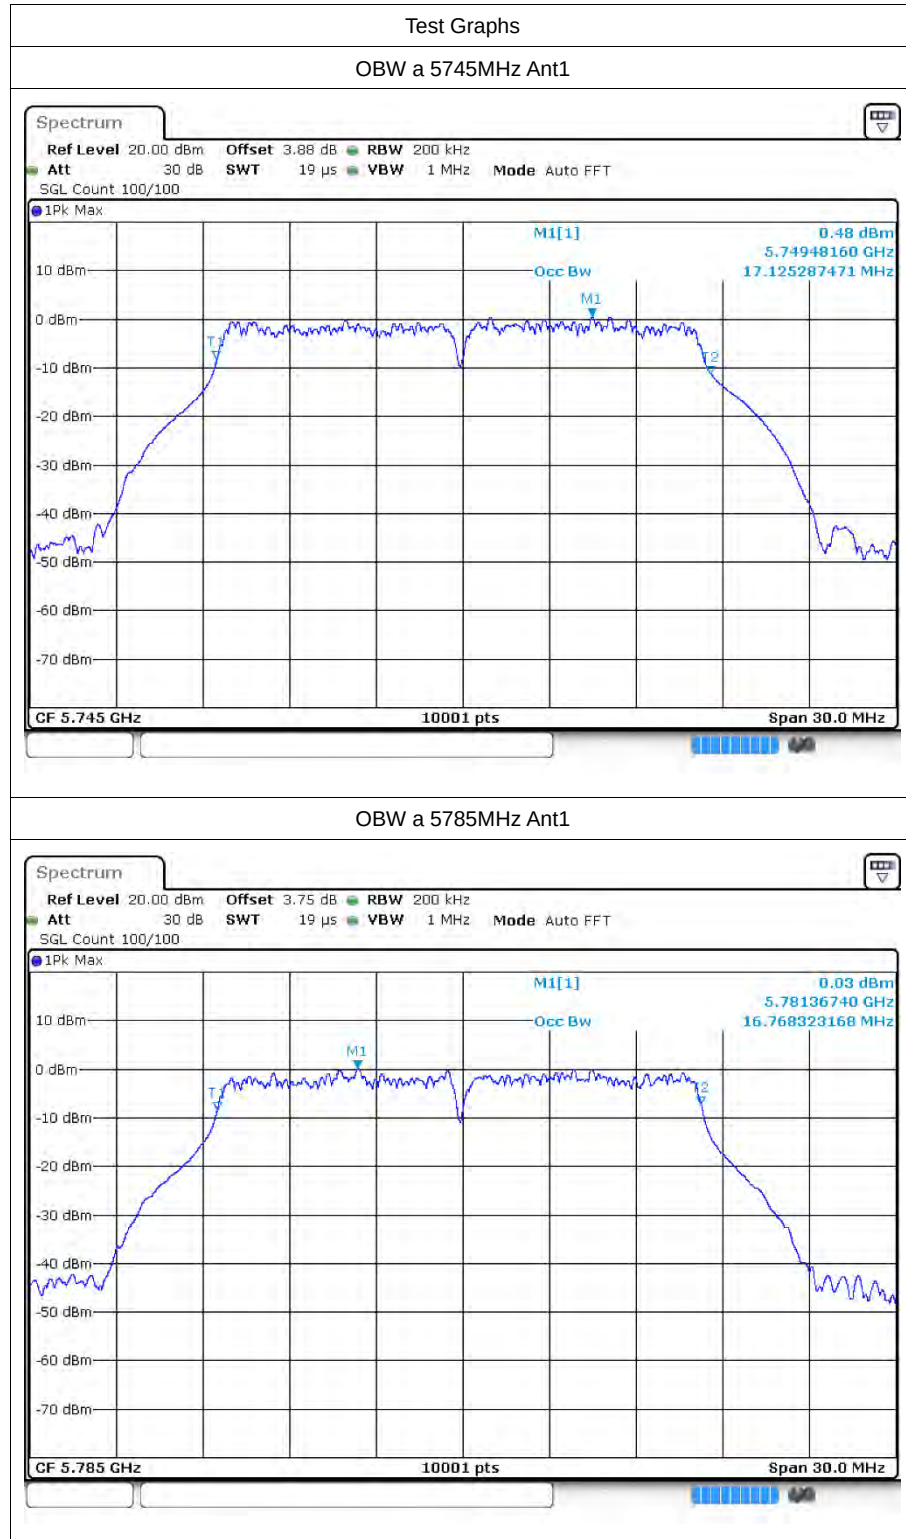


OBW a 5825MHz Ant1

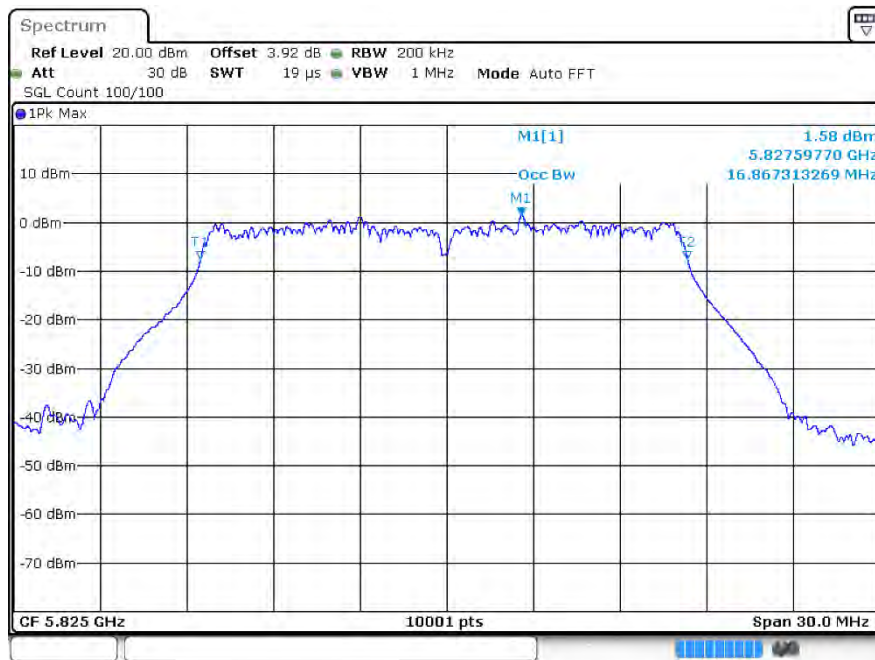


OBW n20 5745MHz Ant1

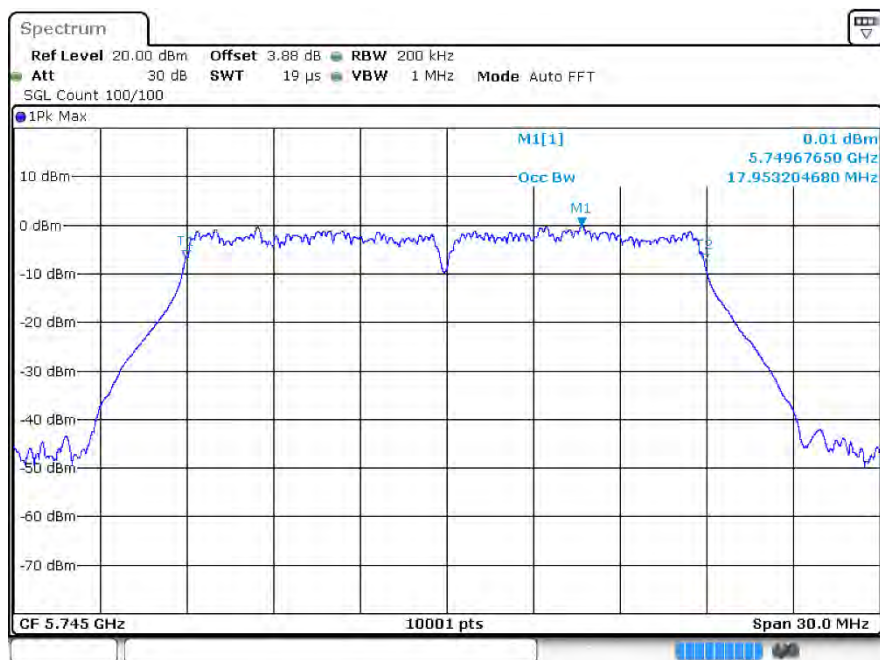


OBW n20 5785MHz Ant1

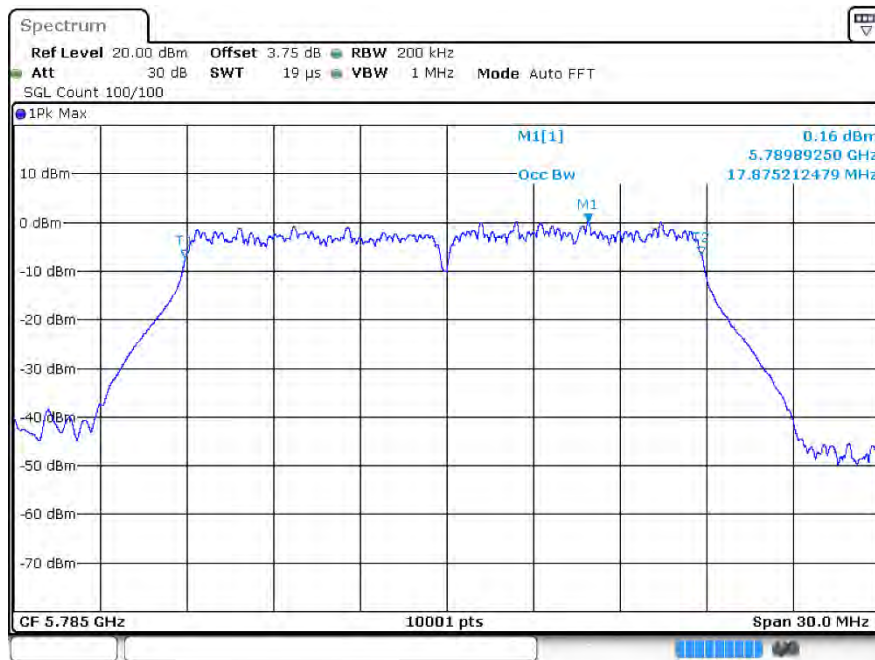


OBW n20 5825MHz Ant1

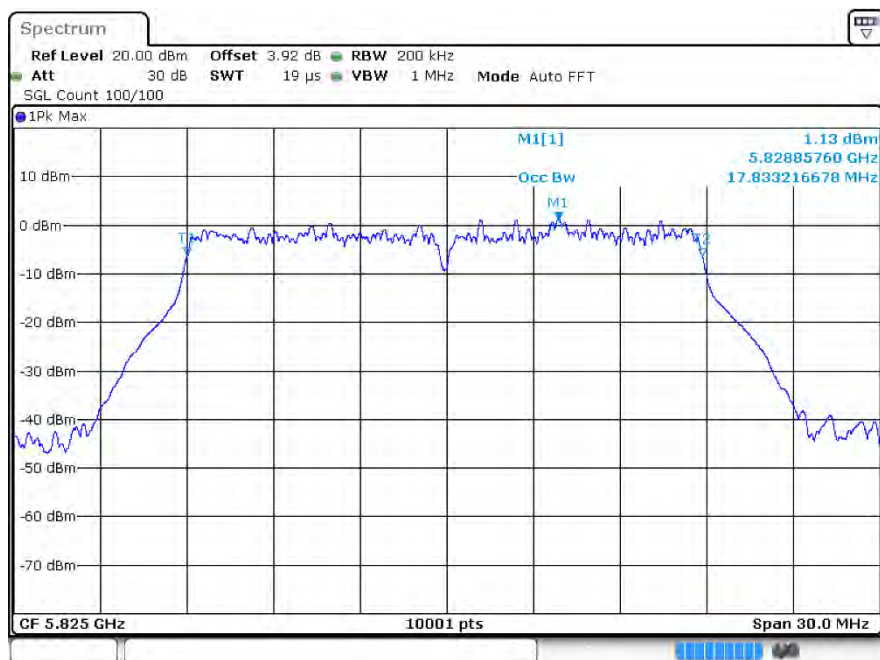


OBW n40 5755MHz Ant1

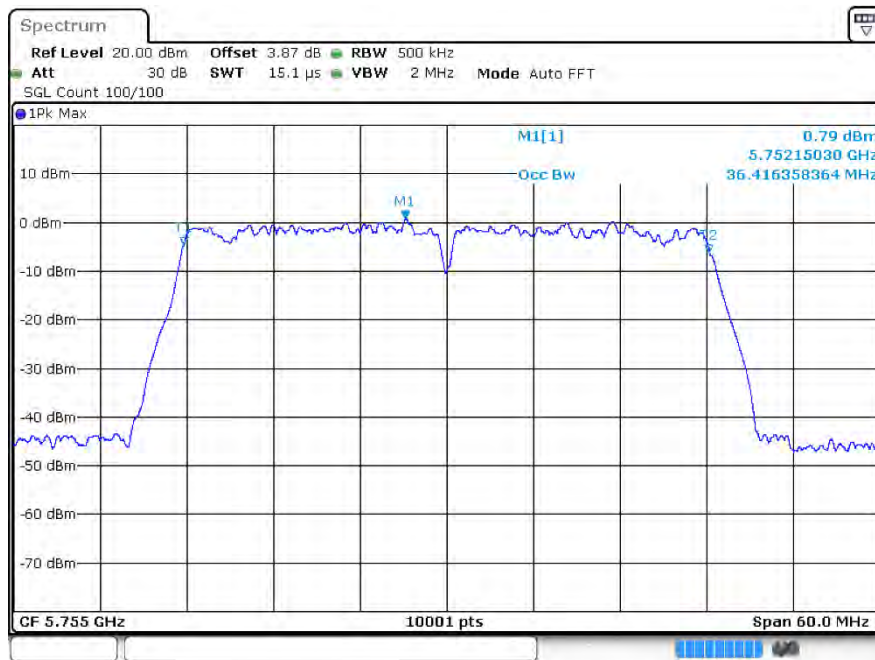


OBW n40 5795MHz Ant1

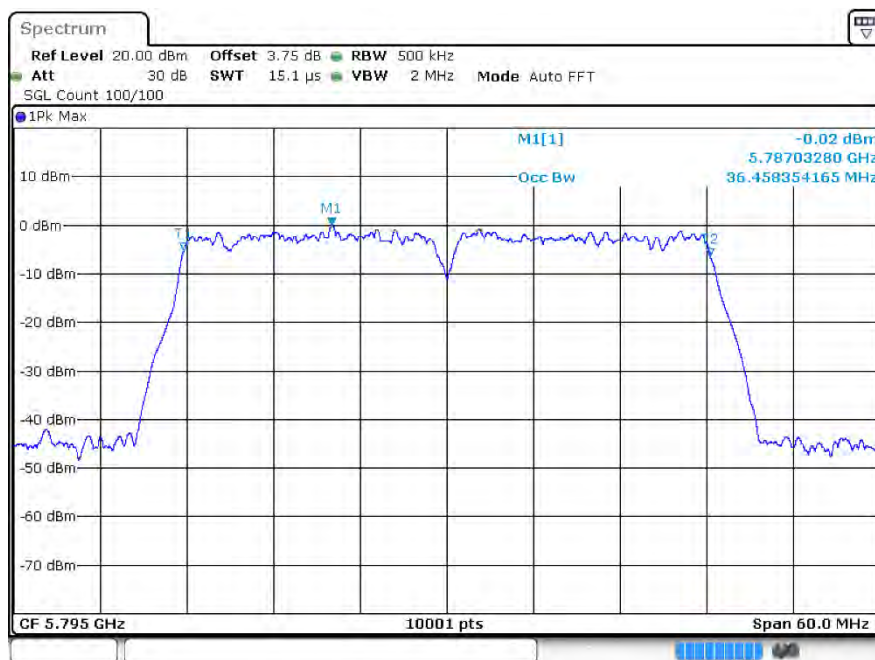


OBW ac20 5745MHz Ant1

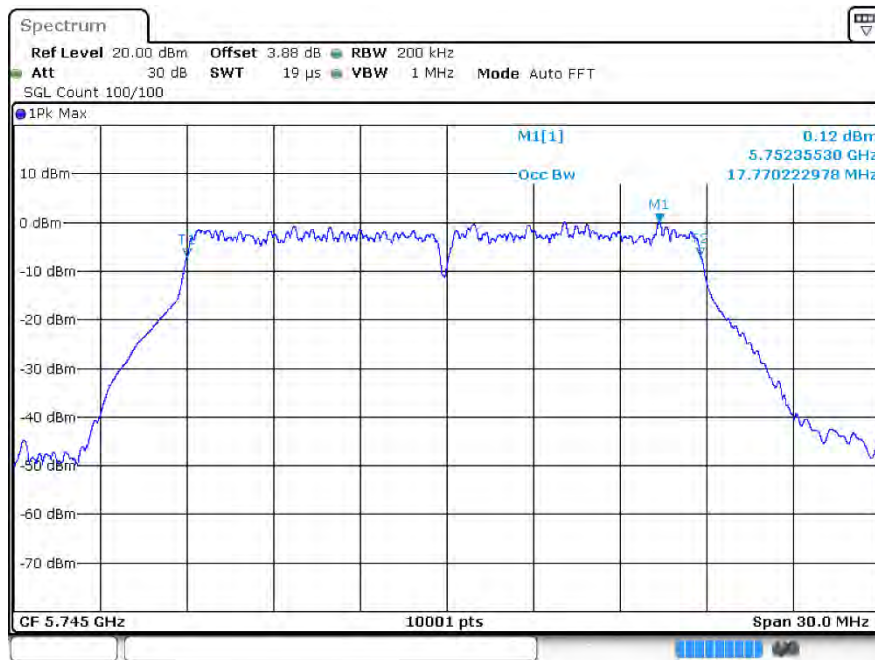


OBW ac20 5785MHz Ant1

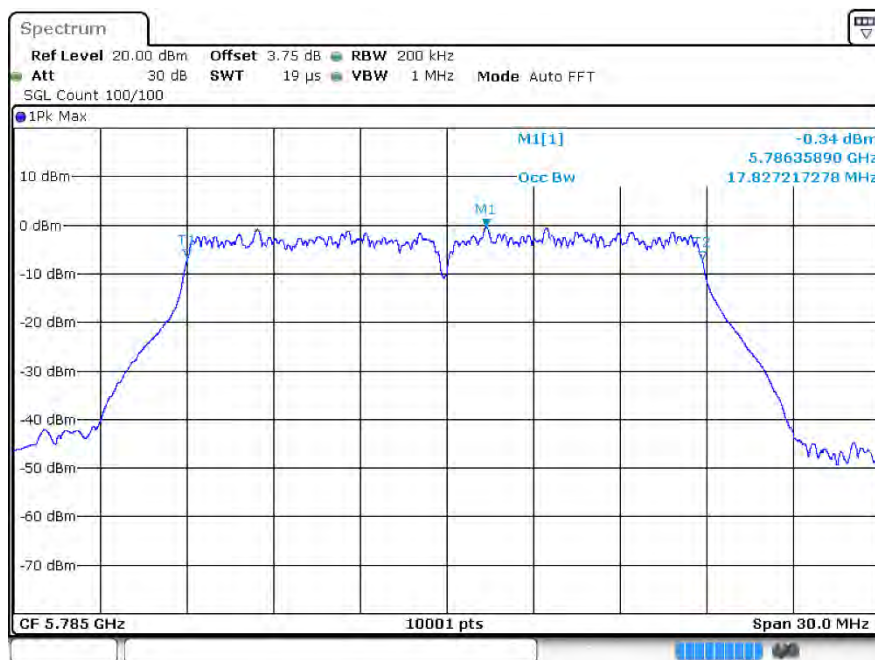


OBW ac20 5825MHz Ant1

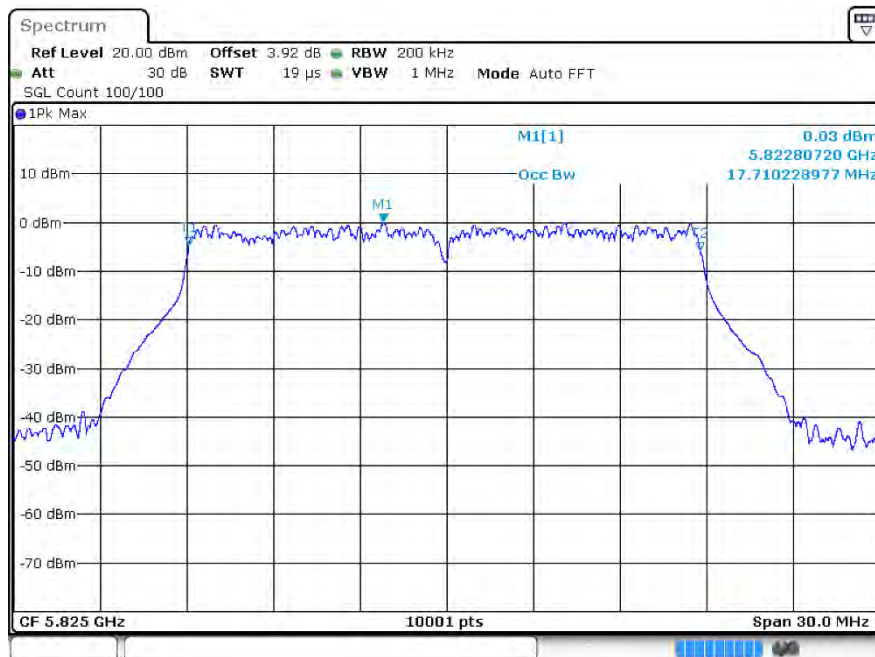


OBW ac40 5755MHz Ant1

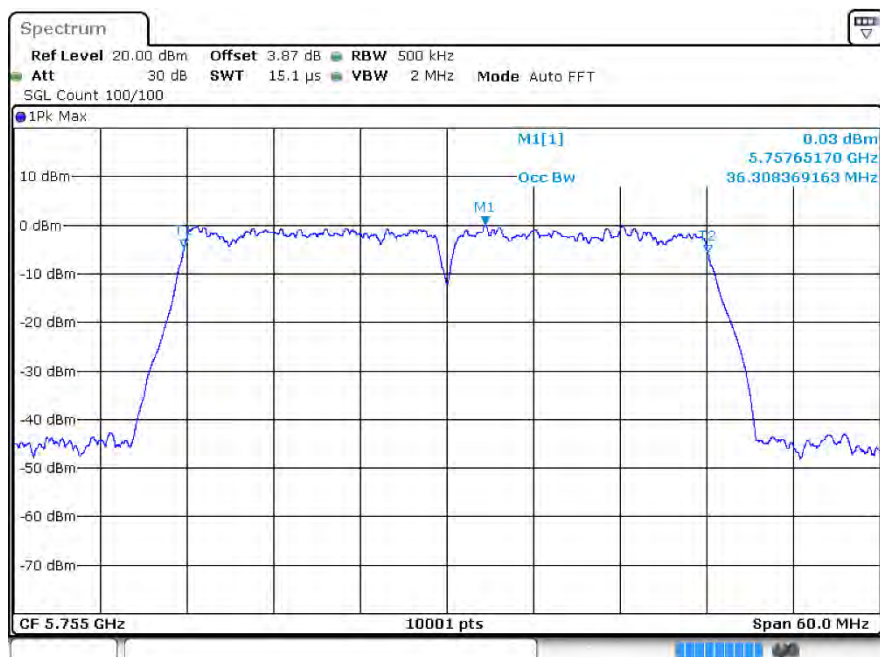


OBW ac40 5795MHz Ant1

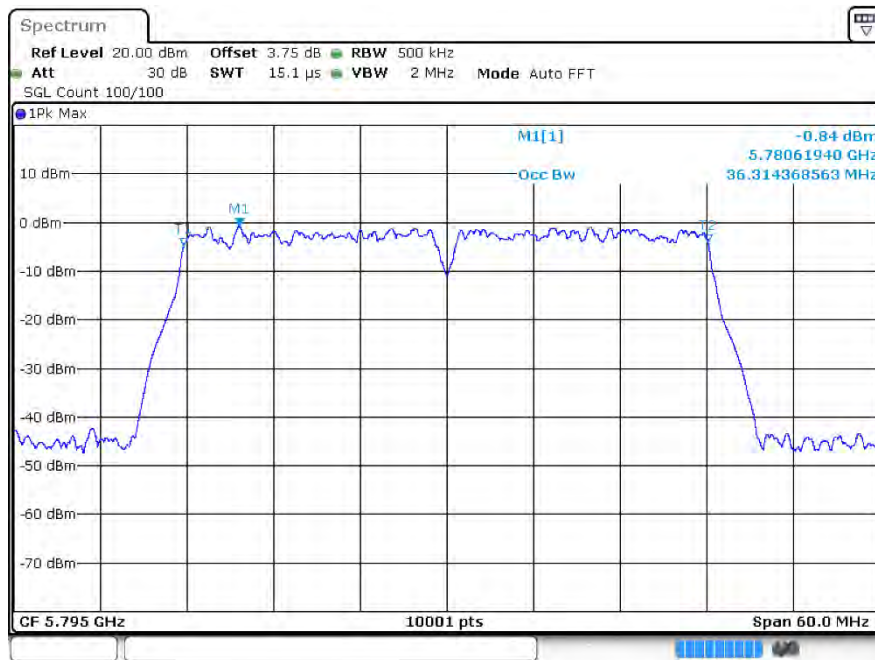


OBW ac80 5775MHz Ant1

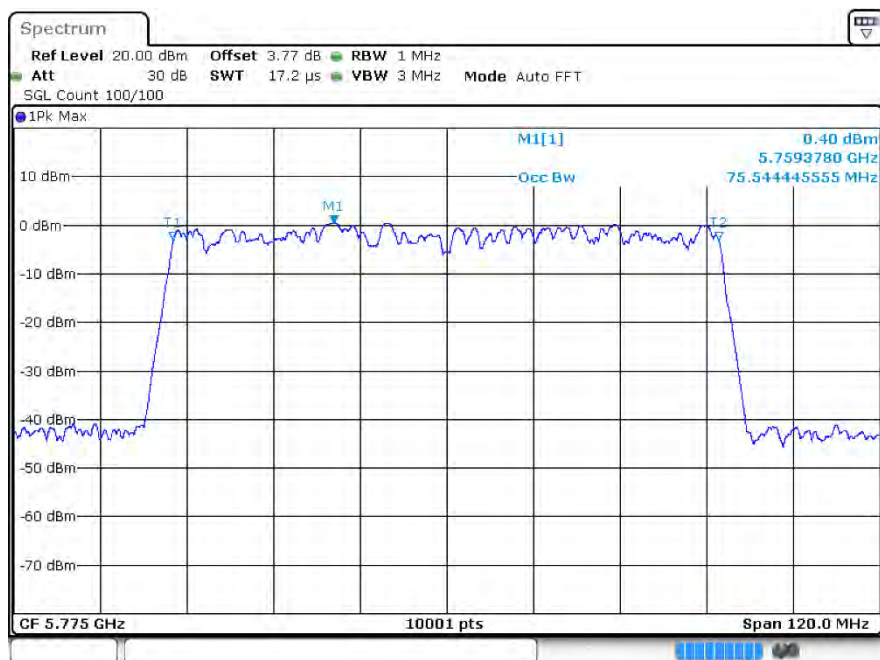


OBW ax20 5745MHz Ant1

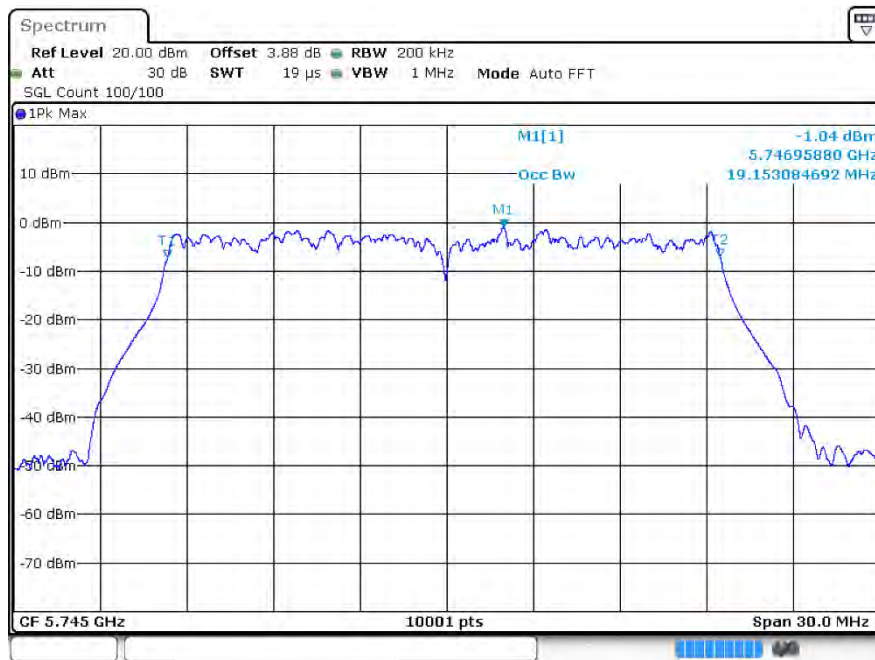


OBW ax20 5785MHz Ant1

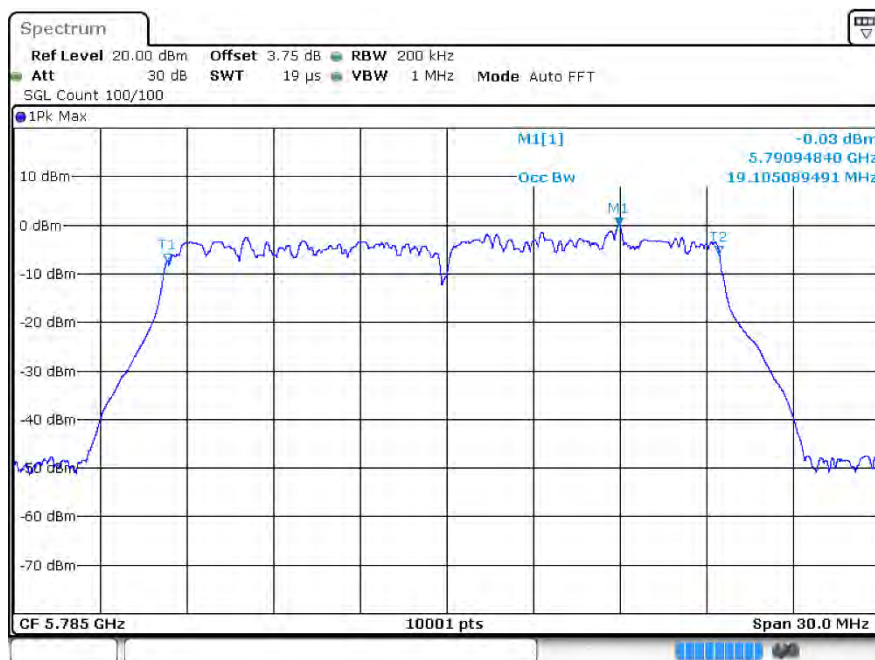


OBW ax20 5825MHz Ant1

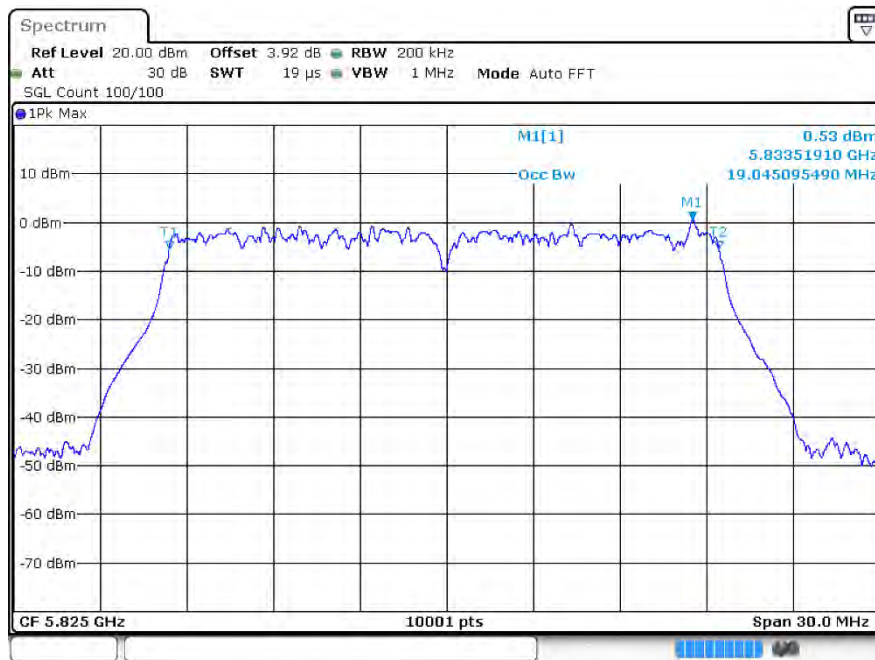


OBW ax40 5755MHz Ant1

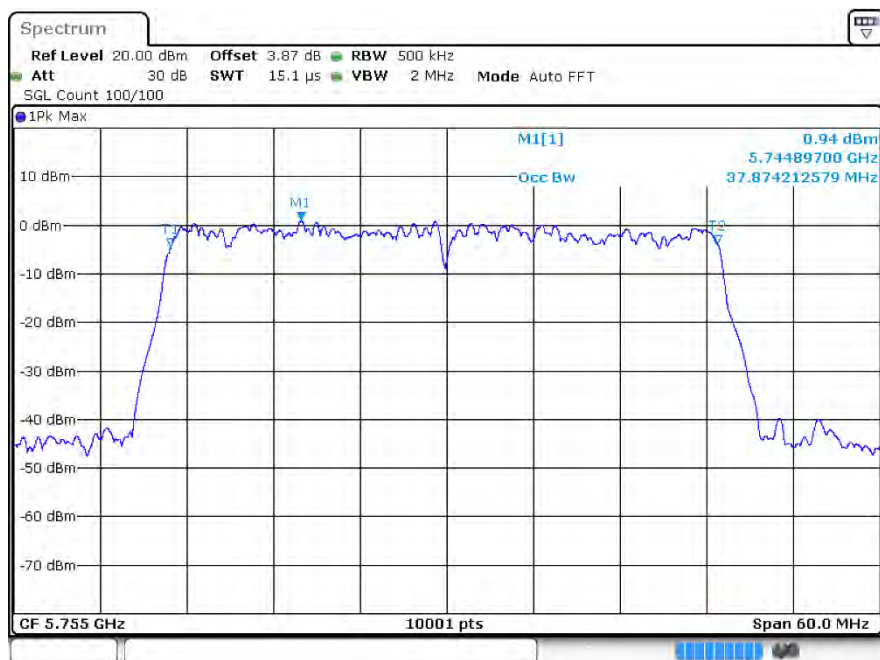

OBW ax40 5795MHz Ant1

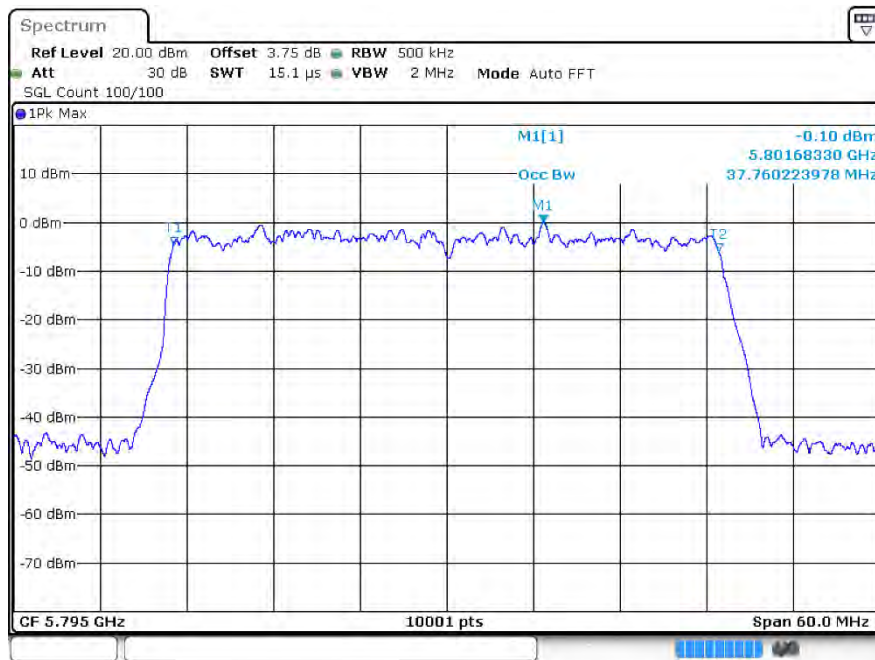

OBW ax80 5775MHz Ant1

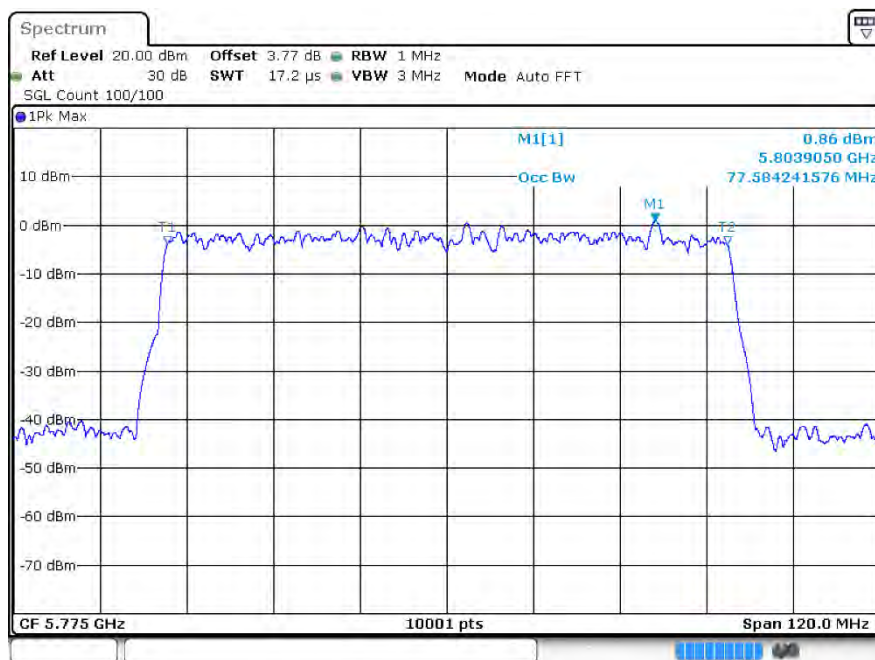




5 Maximum Power Spectral Density Level


5.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
a	5745	Ant1	-1.86	0.27	-1.59	30	Pass
a	5785	Ant1	-2.97	0.29	-2.68	30	Pass
a	5825	Ant1	-2.48	0.28	-2.2	30	Pass
n20	5745	Ant1	-2.76	0.71	-2.05	30	Pass
n20	5785	Ant1	-3.7	0.3	-3.4	30	Pass
n20	5825	Ant1	-2.32	0.33	-1.99	30	Pass
n40	5755	Ant1	-6.63	0.41	-6.22	30	Pass
n40	5795	Ant1	-7.43	0.39	-7.04	30	Pass
ac20	5745	Ant1	-3.51	0.63	-2.88	30	Pass
ac20	5785	Ant1	-3.58	0.32	-3.26	30	Pass
ac20	5825	Ant1	-3.24	0.6	-2.64	30	Pass
ac40	5755	Ant1	-6.52	0.36	-6.16	30	Pass
ac40	5795	Ant1	-7.24	0.53	-6.71	30	Pass
ac80	5775	Ant1	-10.72	0.61	-10.11	30	Pass
ax20	5745	Ant1	-5.67	0.63	-5.04	30	Pass
ax20	5785	Ant1	-5.35	0.59	-4.76	30	Pass
ax20	5825	Ant1	-4.54	0.38	-4.16	30	Pass
ax40	5755	Ant1	-7.34	0.7	-6.64	30	Pass
ax40	5795	Ant1	-9.02	0.98	-8.04	30	Pass
ax80	5775	Ant1	-11.35	1.04	-10.31	30	Pass

5.2 Test Graphs

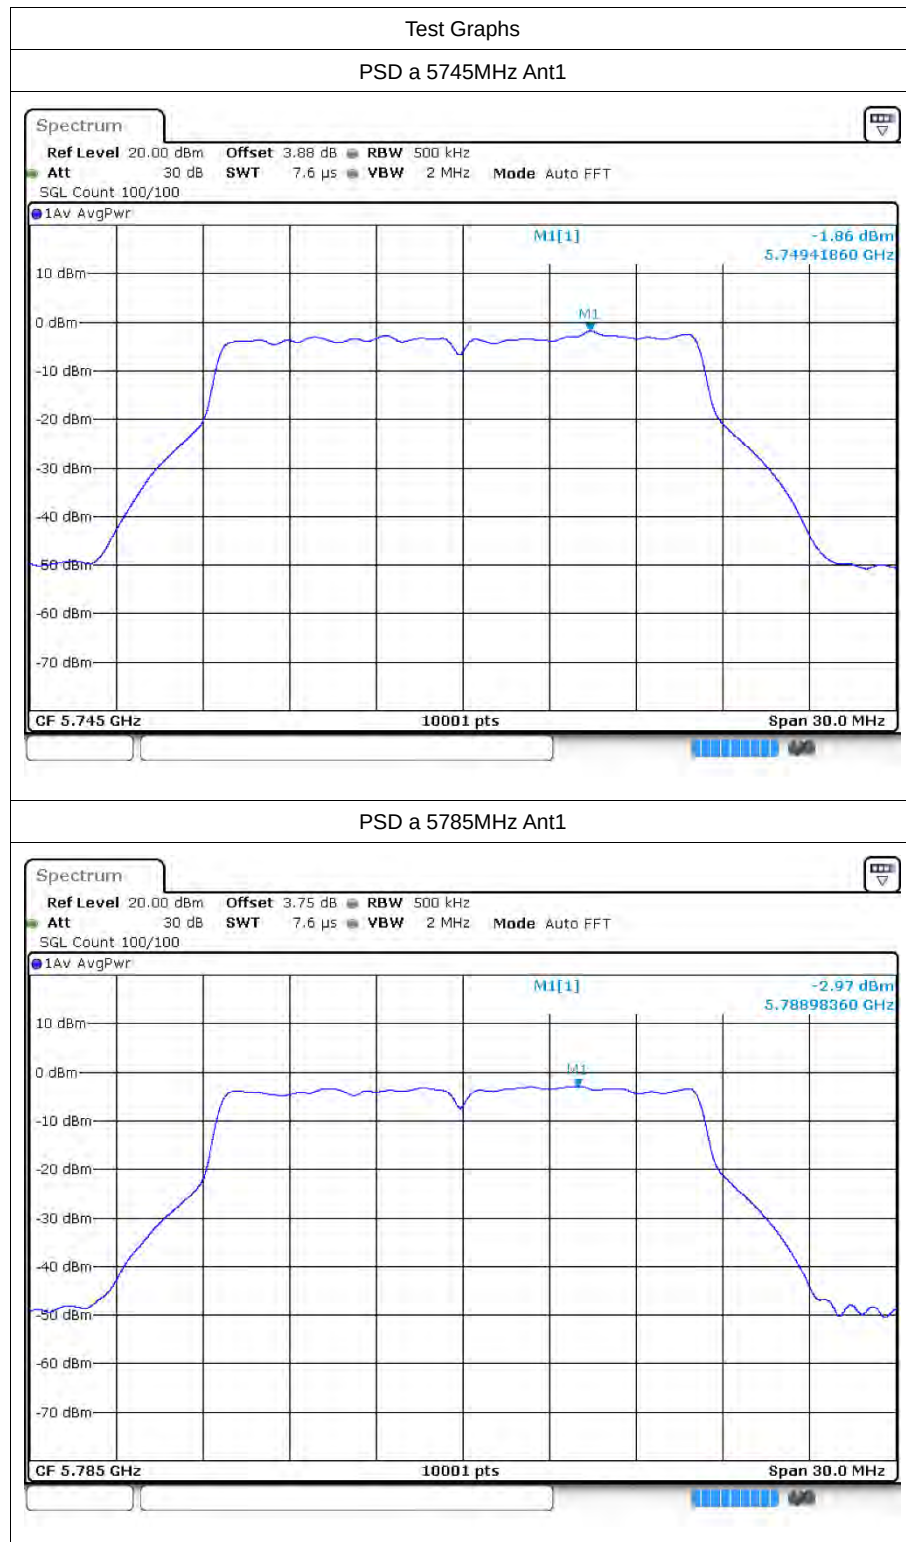


PSD a 5825MHz Ant1

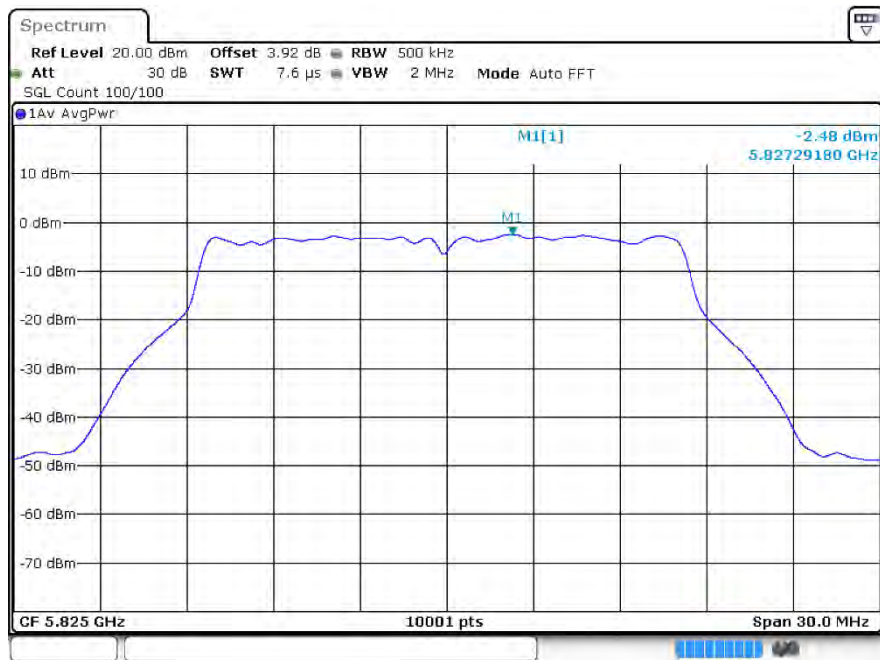


PSD n20 5745MHz Ant1




PSD n20 5785MHz Ant1

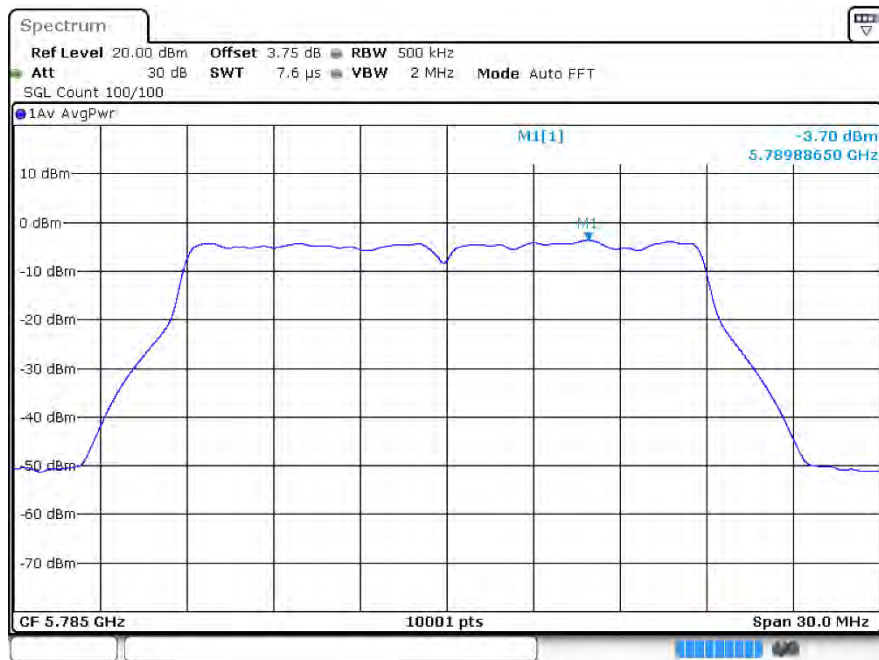


PSD n20 5825MHz Ant1

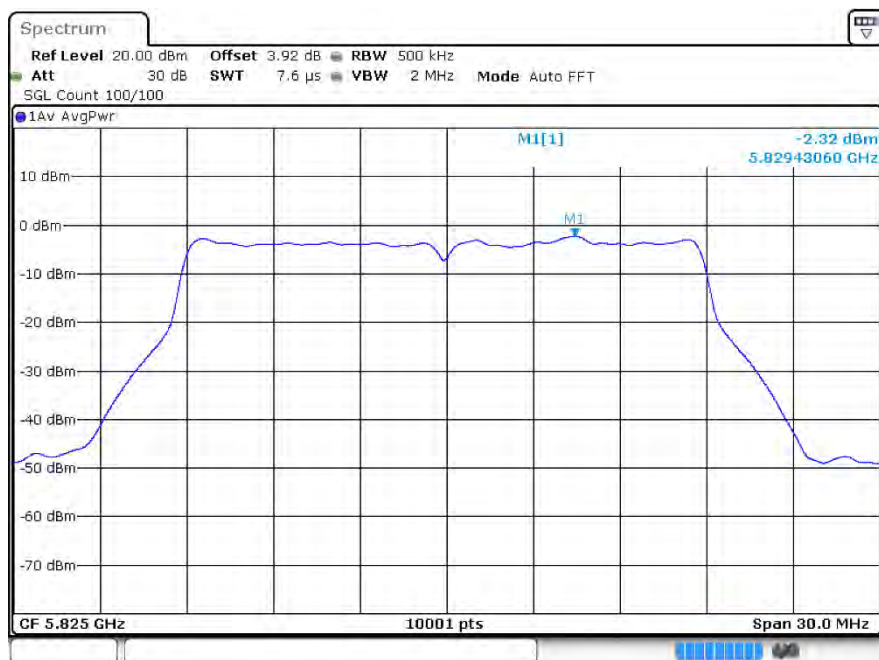


PSD n40 5755MHz Ant1

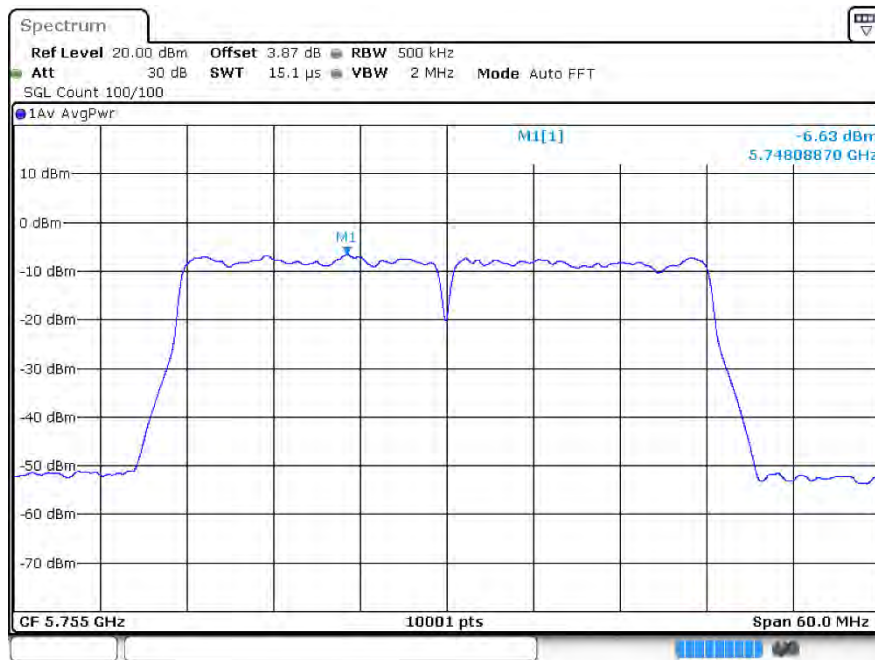

PSD n40 5795MHz Ant1

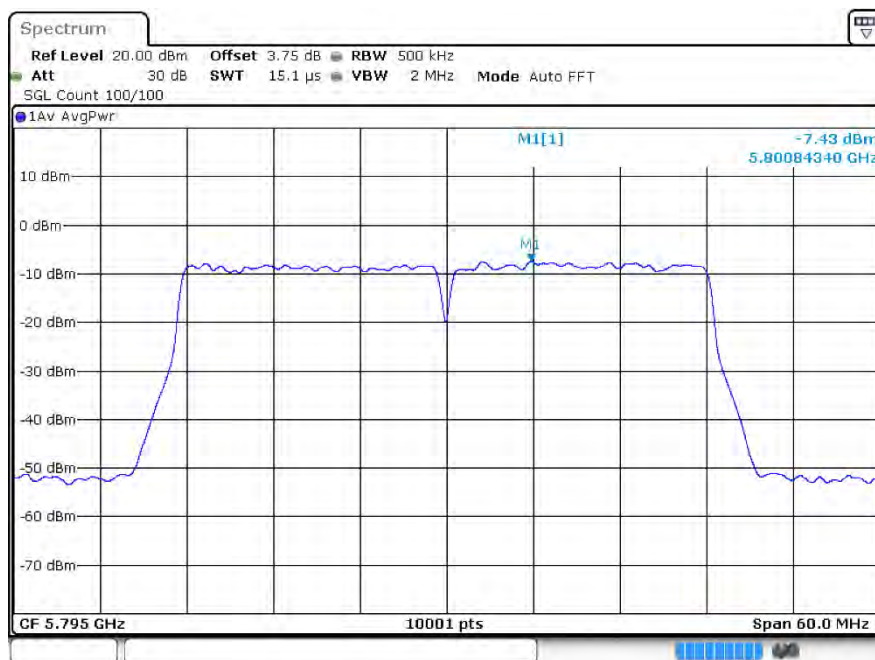


PSD ac20 5745MHz Ant1

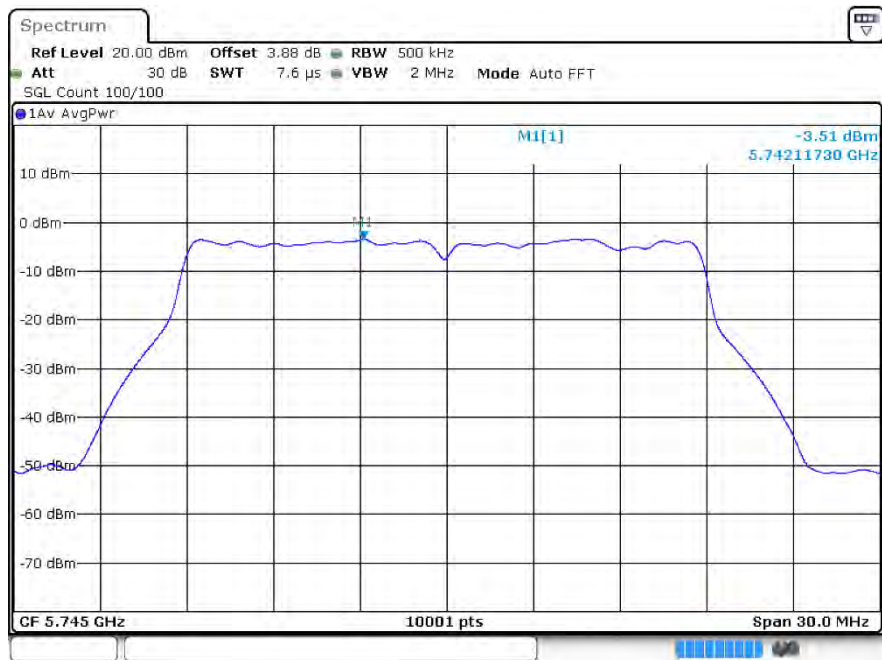


PSD ac20 5785MHz Ant1




PSD ac20 5825MHz Ant1

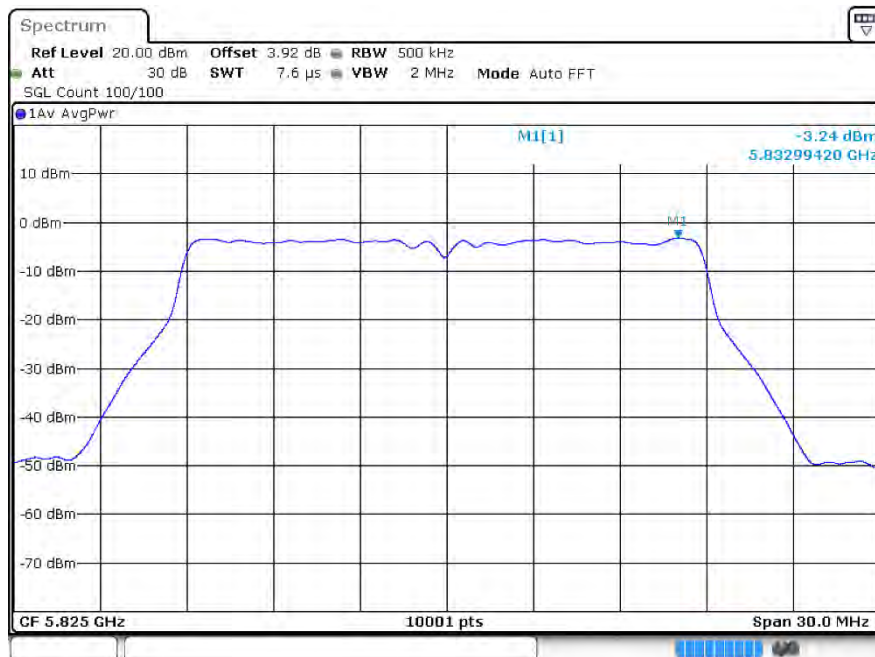


PSD ac40 5755MHz Ant1

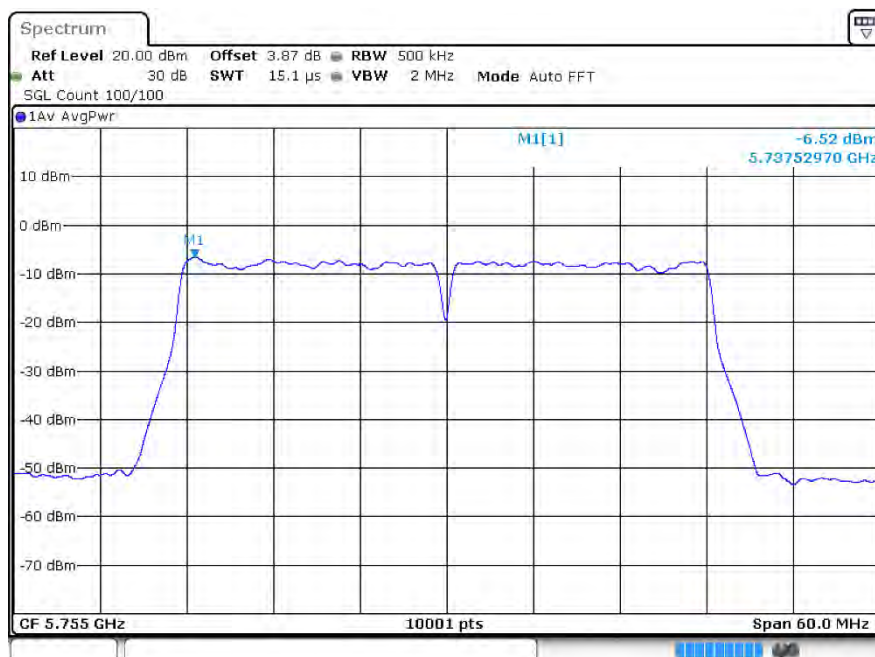


PSD ac40 5795MHz Ant1

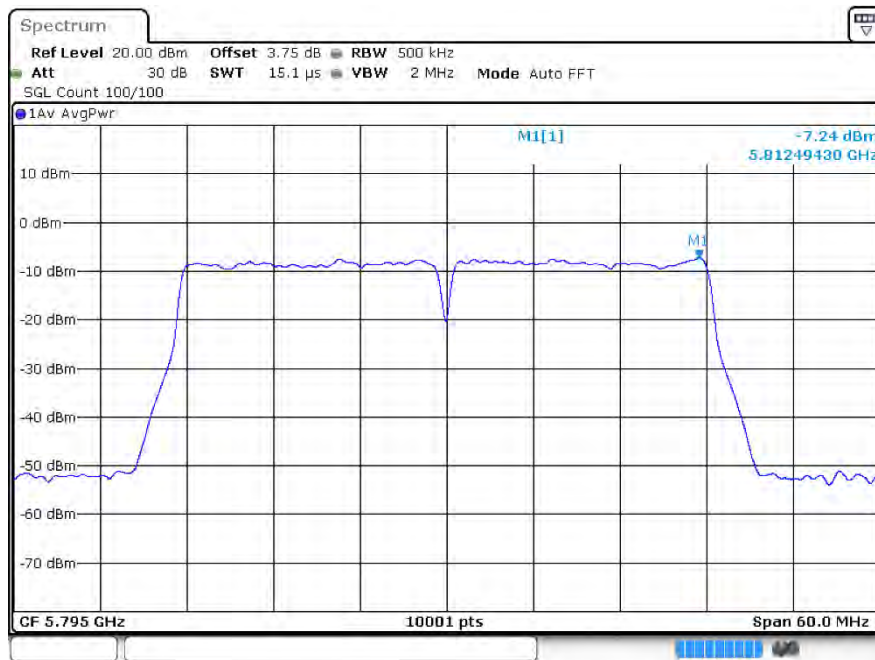


PSD ac80 5775MHz Ant1

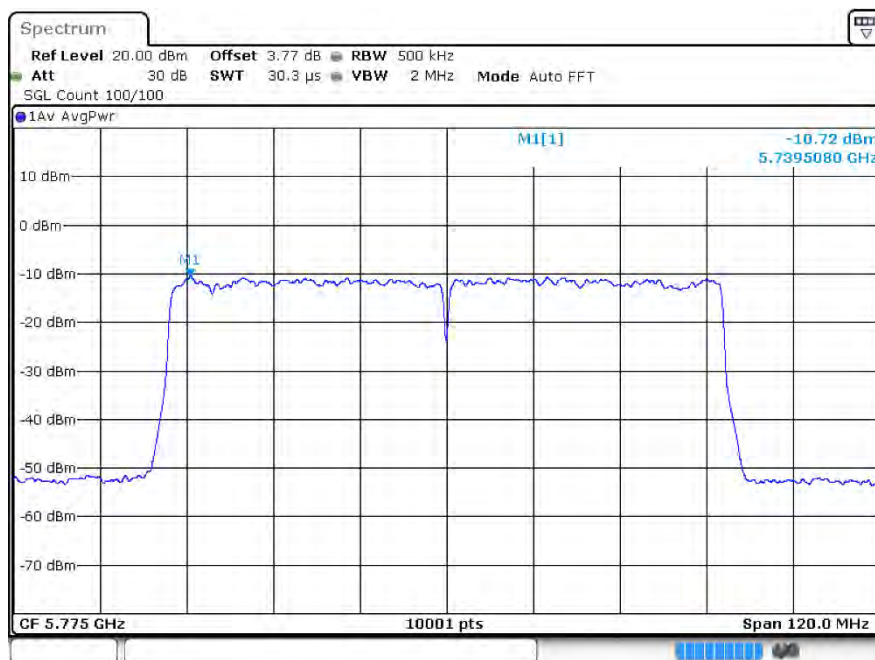


PSD ax20 5745MHz Ant1

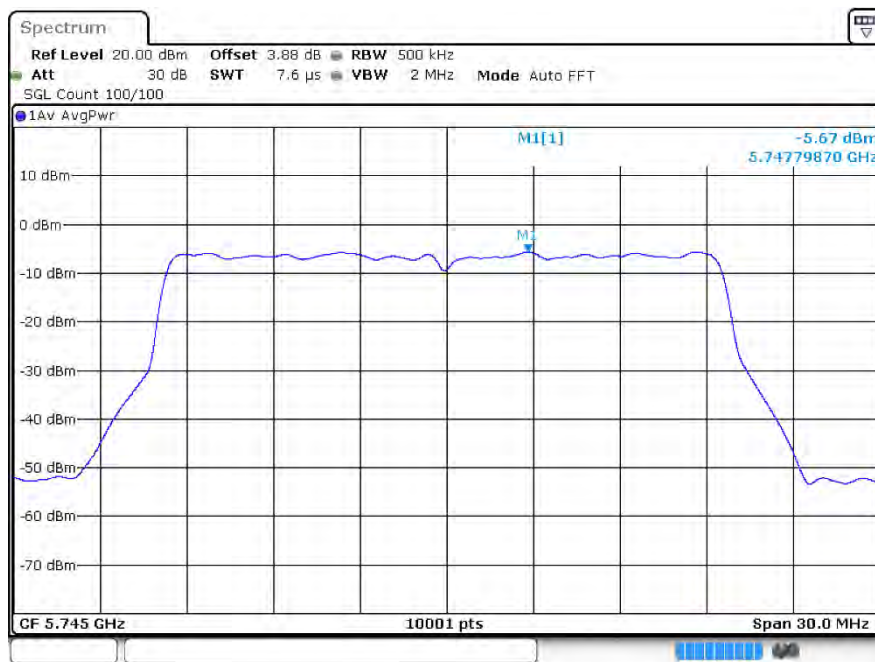


PSD ax20 5785MHz Ant1

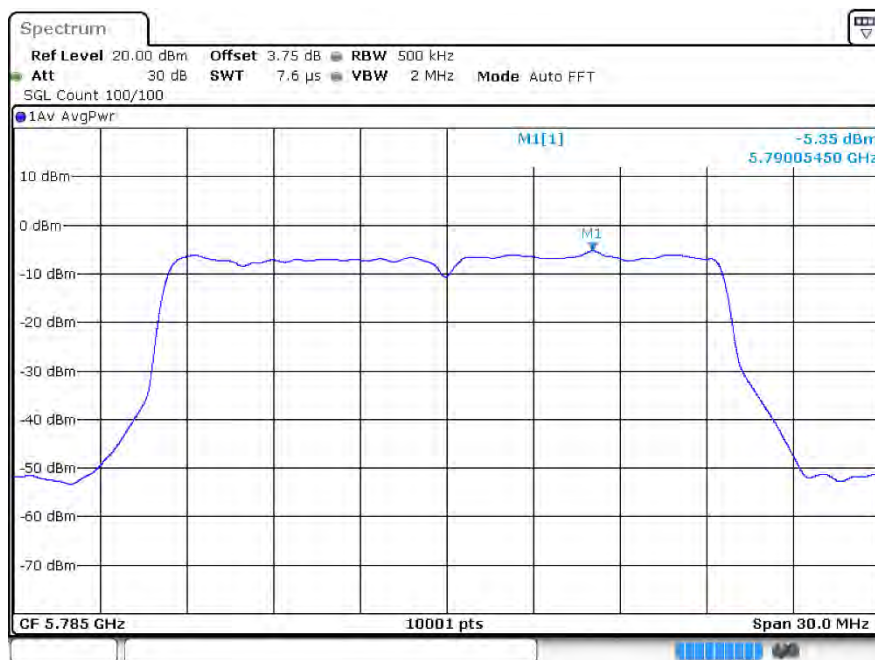


PSD ax20 5825MHz Ant1

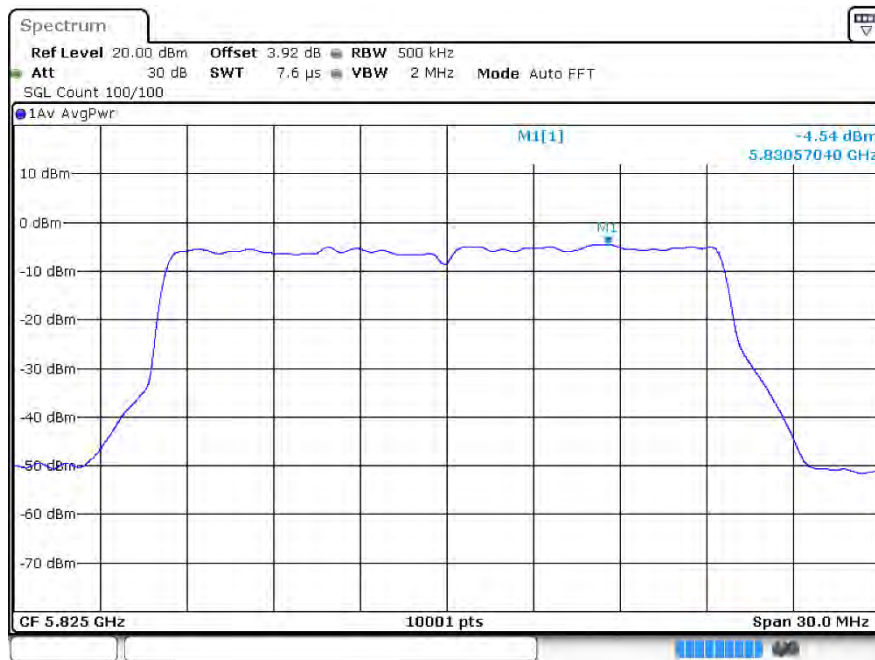


PSD ax40 5755MHz Ant1

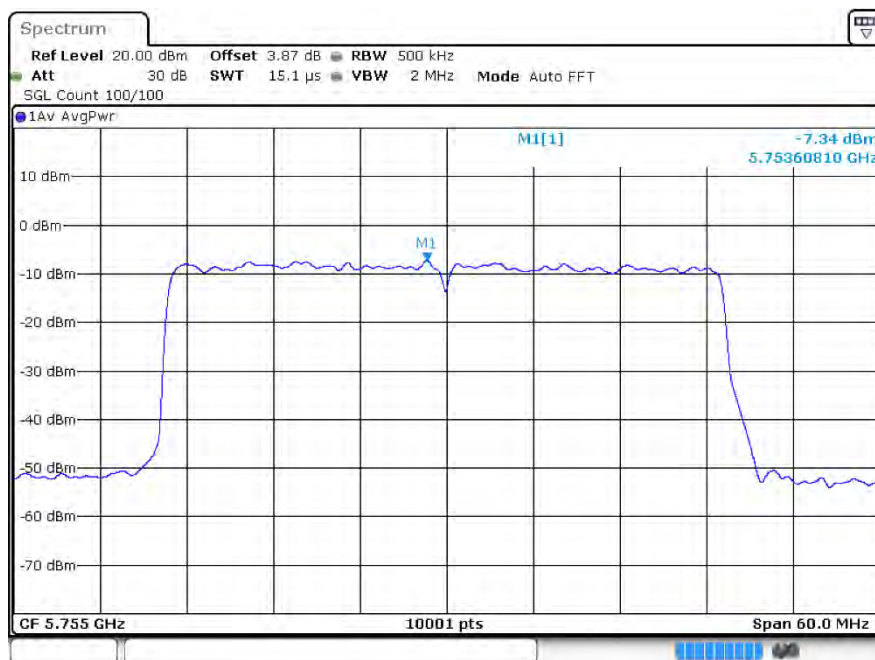

PSD ax40 5795MHz Ant1

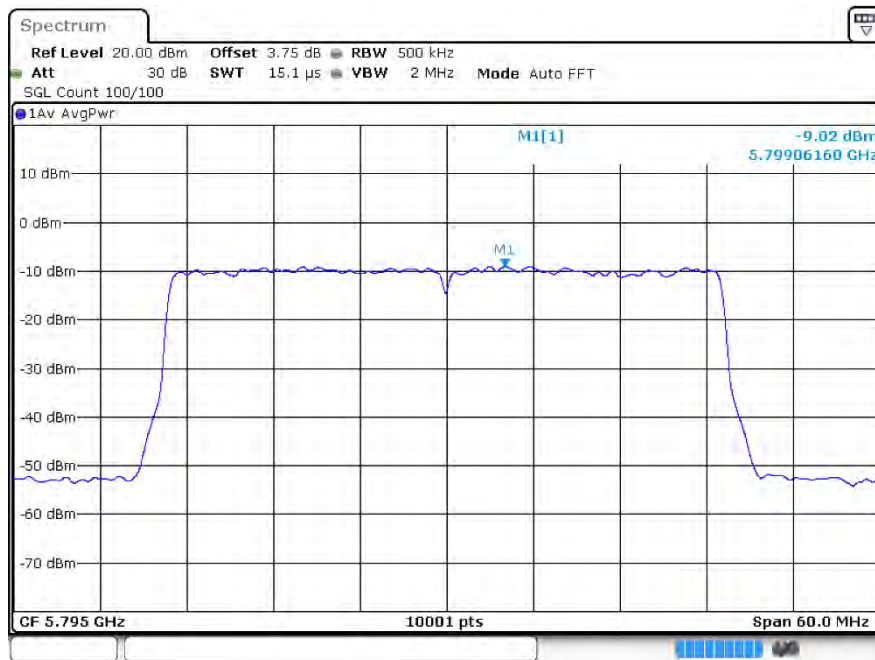

PSD ax80 5775MHz Ant1

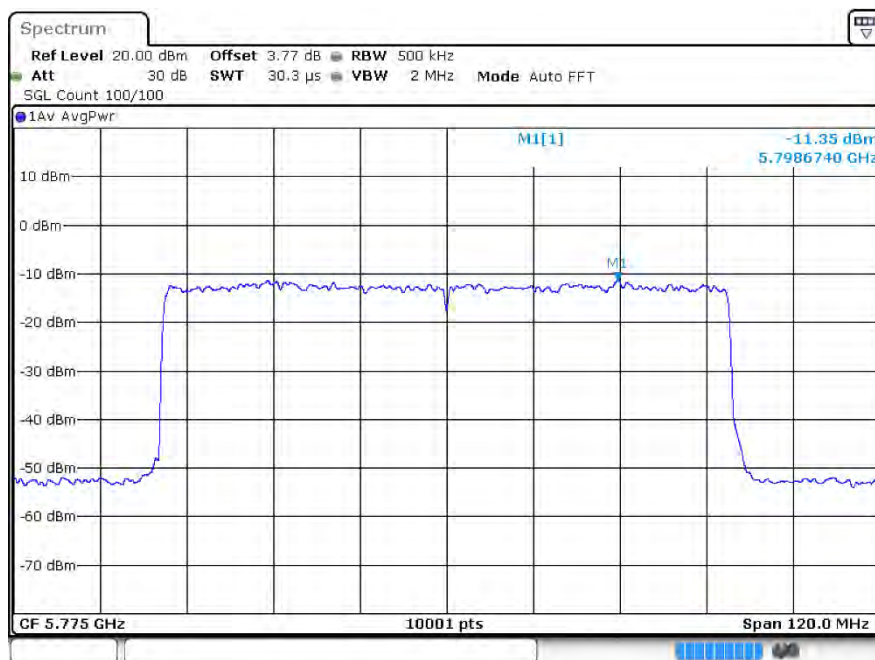



6 Frequency Stability

6.1 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 102V	a	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 120V	a	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 138V	a	5745	Ant1	5744.92	-80000	-13.93	25	Pass
-20C 120V	a	5745	Ant1	5744.9	-100000	-17.41	25	Pass
-10C 120V	a	5745	Ant1	5744.88	-120000	-20.89	25	Pass
0C 120V	a	5745	Ant1	5744.9	-100000	-17.41	25	Pass
10C 120V	a	5745	Ant1	5744.9	-100000	-17.41	25	Pass
30C 120V	a	5745	Ant1	5744.88	-120000	-20.89	25	Pass
40C 120V	a	5745	Ant1	5744.88	-120000	-20.89	25	Pass
50C 120V	a	5745	Ant1	5744.88	-120000	-20.89	25	Pass
20C 102V	a	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 120V	a	5785	Ant1	5784.88	-120000	-20.74	25	Pass
20C 138V	a	5785	Ant1	5784.9	-100000	-17.29	25	Pass
-20C 120V	a	5785	Ant1	5784.9	-100000	-17.29	25	Pass
-10C 120V	a	5785	Ant1	5784.9	-100000	-17.29	25	Pass
0C 120V	a	5785	Ant1	5784.88	-120000	-20.74	25	Pass
10C 120V	a	5785	Ant1	5784.86	-140000	-24.2	25	Pass
30C 120V	a	5785	Ant1	5784.88	-120000	-20.74	25	Pass
40C 120V	a	5785	Ant1	5785	0	0	25	Pass
50C 120V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 102V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 120V	a	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 138V	a	5825	Ant1	5824.88	-120000	-20.6	25	Pass
-20C 120V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
-10C 120V	a	5825	Ant1	5824.9	-100000	-17.17	25	Pass
0C 120V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
10C 120V	a	5825	Ant1	5824.88	-120000	-20.6	25	Pass
30C 120V	a	5825	Ant1	5824.9	-100000	-17.17	25	Pass
40C 120V	a	5825	Ant1	5824.9	-100000	-17.17	25	Pass
50C 120V	a	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 102V	n20	5745	Ant1	5744.88	-120000	-20.89	25	Pass
20C 120V	n20	5745	Ant1	5744.88	-120000	-20.89	25	Pass
20C 138V	n20	5745	Ant1	5744.92	-80000	-13.93	25	Pass
-20C 120V	n20	5745	Ant1	5744.92	-80000	-13.93	25	Pass



-10C 120V	n20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
0C 120V	n20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
10C 120V	n20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
30C 120V	n20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
40C 120V	n20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
50C 120V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 102V	n20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 120V	n20	5785	Ant1	5784.88	-120000	-20.74	25	Pass
20C 138V	n20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
-20C 120V	n20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
-10C 120V	n20	5785	Ant1	5784.88	-120000	-20.74	25	Pass
0C 120V	n20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
10C 120V	n20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
30C 120V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
40C 120V	n20	5785	Ant1	5784.88	-120000	-20.74	25	Pass
50C 120V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 102V	n20	5825	Ant1	5824.88	-120000	-20.6	25	Pass
20C 120V	n20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 138V	n20	5825	Ant1	5824.88	-120000	-20.6	25	Pass
-20C 120V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
-10C 120V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
0C 120V	n20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
10C 120V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
30C 120V	n20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
40C 120V	n20	5825	Ant1	5824.88	-120000	-20.6	25	Pass
50C 120V	n20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 102V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
20C 120V	n40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
20C 138V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
-20C 120V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
-10C 120V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
0C 120V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
10C 120V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
30C 120V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
40C 120V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
50C 120V	n40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
20C 102V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
20C 138V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
-20C 120V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
-10C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
0C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
10C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass



30C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
40C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
50C 120V	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
20C 102V	ac20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 120V	ac20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 138V	ac20	5745	Ant1	5744.92	-80000	-13.93	25	Pass
-20C 120V	ac20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
-10C 120V	ac20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
0C 120V	ac20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
10C 120V	ac20	5745	Ant1	5744.92	-80000	-13.93	25	Pass
30C 120V	ac20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
40C 120V	ac20	5745	Ant1	5744.88	-120000	-20.89	25	Pass
50C 120V	ac20	5745	Ant1	5744.92	-80000	-13.93	25	Pass
20C 102V	ac20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 120V	ac20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 138V	ac20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
-20C 120V	ac20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
-10C 120V	ac20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
0C 120V	ac20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
10C 120V	ac20	5785	Ant1	5784.88	-120000	-20.74	25	Pass
30C 120V	ac20	5785	Ant1	5784.88	-120000	-20.74	25	Pass
40C 120V	ac20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
50C 120V	ac20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 102V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 120V	ac20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 138V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
-20C 120V	ac20	5825	Ant1	5824.88	-120000	-20.6	25	Pass
-10C 120V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
0C 120V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
10C 120V	ac20	5825	Ant1	5824.88	-120000	-20.6	25	Pass
30C 120V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
40C 120V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
50C 120V	ac20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 102V	ac40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
20C 120V	ac40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
20C 138V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
-20C 120V	ac40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
-10C 120V	ac40	5755	Ant1	5754.88	-120000	-20.85	25	Pass
0C 120V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
10C 120V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
30C 120V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
40C 120V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
50C 120V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass



20C 102V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
20C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
20C 138V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
-20C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
-10C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
0C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
10C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
30C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
40C 120V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
50C 120V	ac40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
20C 102V	ac80	5775	Ant1	5775	0	0	25	Pass
20C 120V	ac80	5775	Ant1	5774.84	-160000	-27.71	25	Pass
20C 138V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
-20C 120V	ac80	5775	Ant1	5774.84	-160000	-27.71	25	Pass
-10C 120V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
0C 120V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
10C 120V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
30C 120V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
40C 120V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
50C 120V	ac80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
20C 102V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 138V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
-20C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
-10C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
0C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
10C 120V	ax20	5745	Ant1	5744.92	-80000	-13.93	25	Pass
30C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
40C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
50C 120V	ax20	5745	Ant1	5744.9	-100000	-17.41	25	Pass
20C 102V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 138V	ax20	5785	Ant1	5784.88	-120000	-20.74	25	Pass
-20C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
-10C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
0C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
10C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
30C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
40C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
50C 120V	ax20	5785	Ant1	5784.9	-100000	-17.29	25	Pass
20C 102V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 138V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass



-20C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
-10C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
0C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
10C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
30C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
40C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
50C 120V	ax20	5825	Ant1	5824.9	-100000	-17.17	25	Pass
20C 102V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 138V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
-20C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
-10C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
0C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
10C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
30C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
40C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
50C 120V	ax40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 102V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 138V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
-20C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
-10C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
0C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
10C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
30C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
40C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
50C 120V	ax40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 102V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
20C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
20C 138V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
-20C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
-10C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
0C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
10C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
30C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
40C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass
50C 120V	ax80	5775	Ant1	5774.92	-80000	-13.85	25	Pass




7 Conducted RF Spurious Emission


7.1 Test Result

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
a	5745	Ant1	-36.4	-27	Pass
a	5785	Ant1	-35.45	-27	Pass
a	5825	Ant1	-36.02	-27	Pass
n20	5745	Ant1	-36.49	-27	Pass
n20	5785	Ant1	-36.44	-27	Pass
n20	5825	Ant1	-36.07	-27	Pass
n40	5755	Ant1	-35.6	-27	Pass
n40	5795	Ant1	-36.62	-27	Pass
ac20	5745	Ant1	-36.43	-27	Pass
ac20	5785	Ant1	-36.33	-27	Pass
ac20	5825	Ant1	-36.22	-27	Pass
ac40	5755	Ant1	-36.44	-27	Pass
ac40	5795	Ant1	-36.07	-27	Pass
ac80	5775	Ant1	-35.5	-27	Pass
ax20	5745	Ant1	-35.41	-27	Pass
ax20	5785	Ant1	-35.9	-27	Pass
ax20	5825	Ant1	-35.76	-27	Pass
ax40	5755	Ant1	-36.13	-27	Pass
ax40	5795	Ant1	-36.69	-27	Pass
ax80	5775	Ant1	-36.18	-27	Pass


7.2 Test Graphs

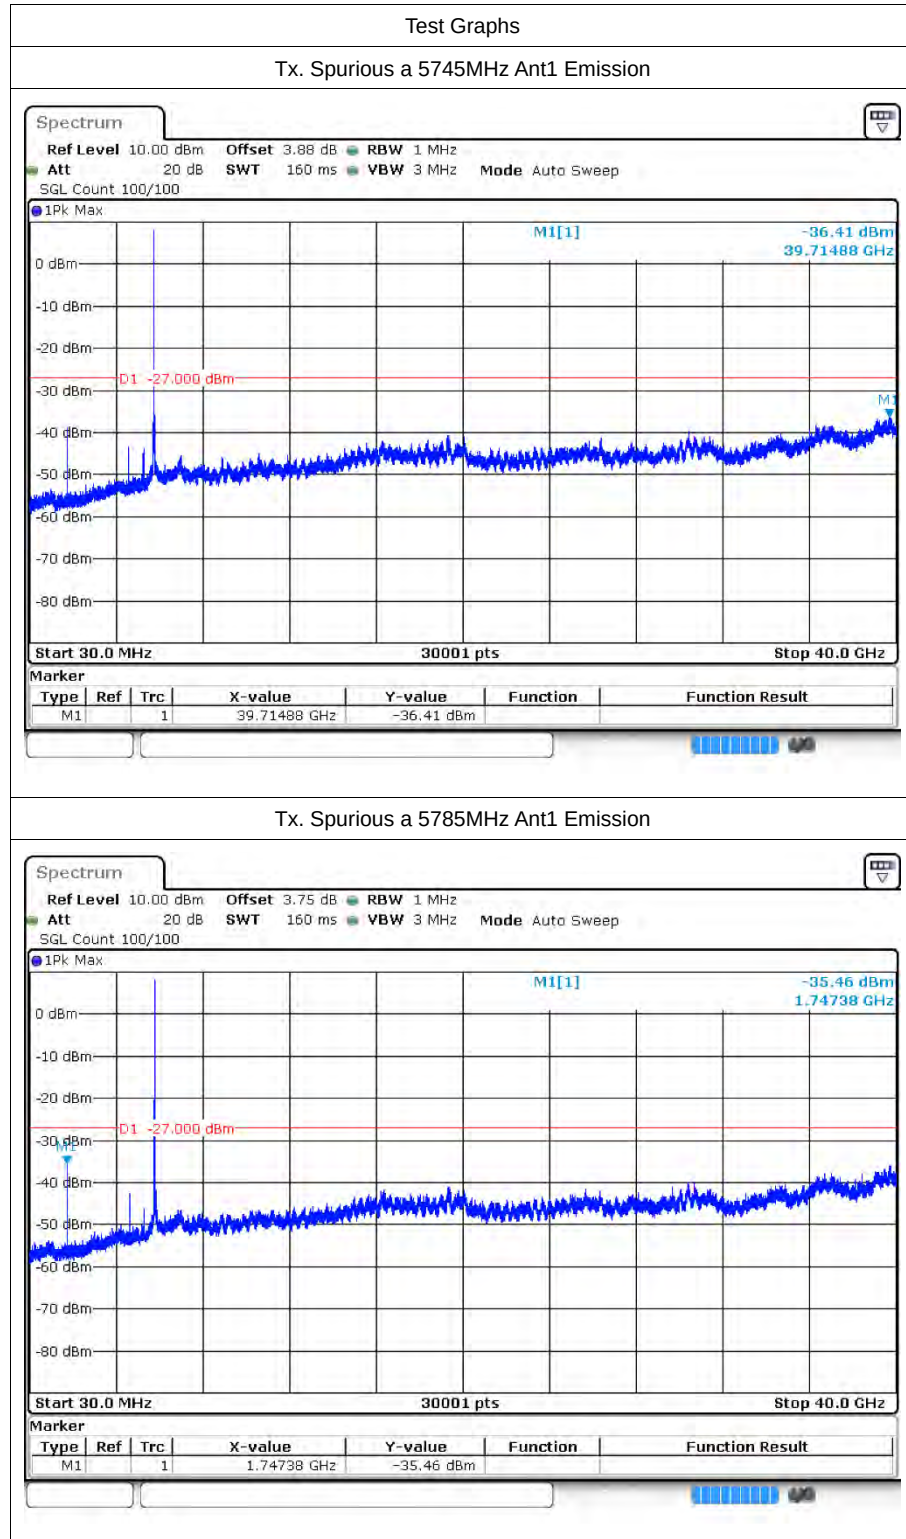


Tx. Spurious a 5825MHz Ant1 Emission

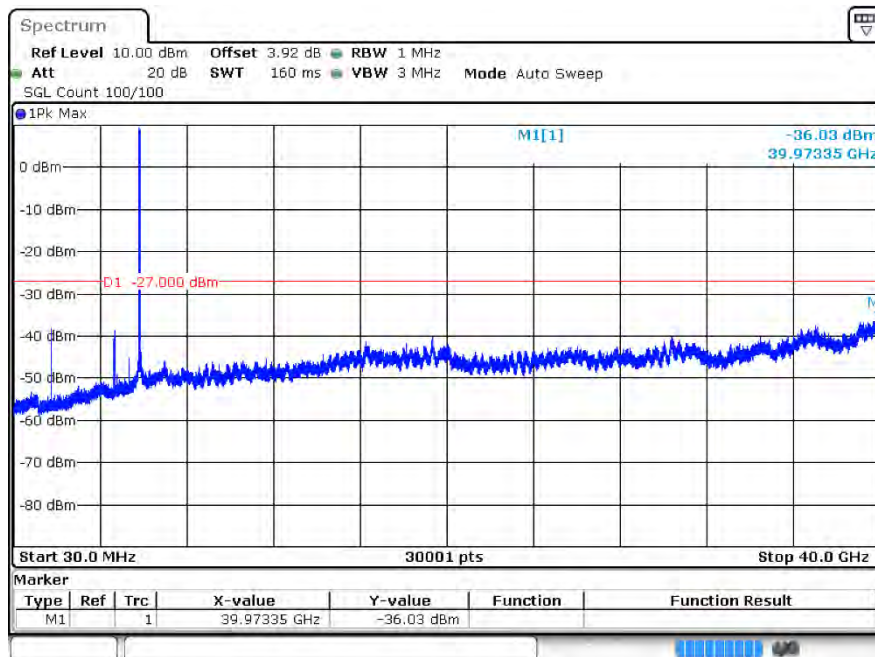


Tx. Spurious n20 5745MHz Ant1 Emission

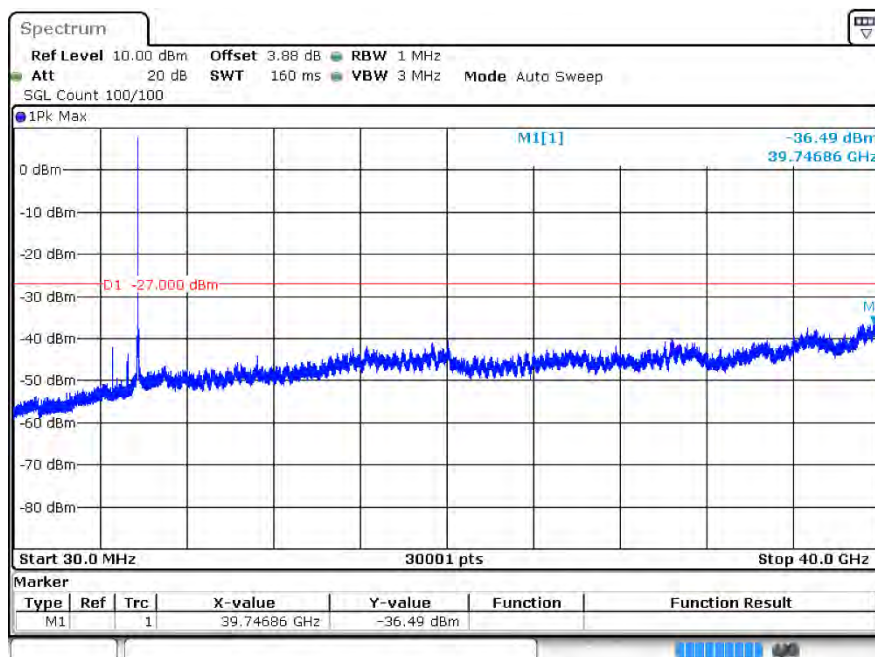


Tx. Spurious n20 5785MHz Ant1 Emission

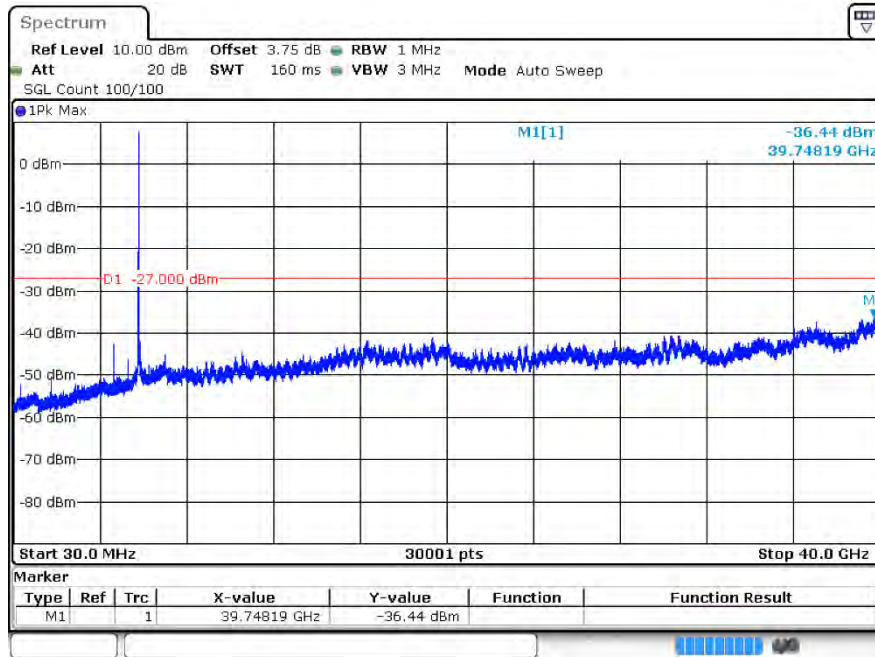


Tx. Spurious n20 5825MHz Ant1 Emission

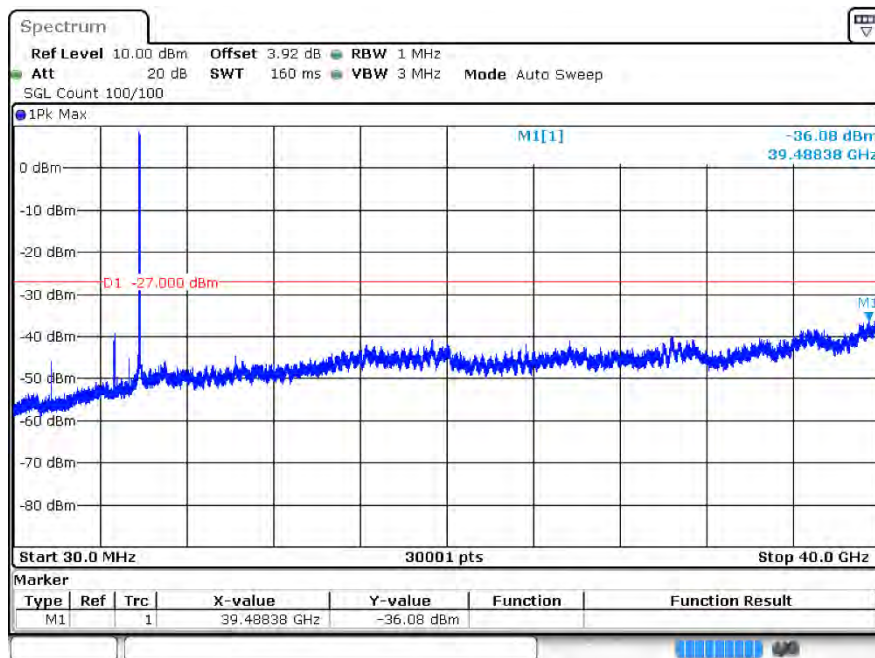


Tx. Spurious n40 5755MHz Ant1 Emission

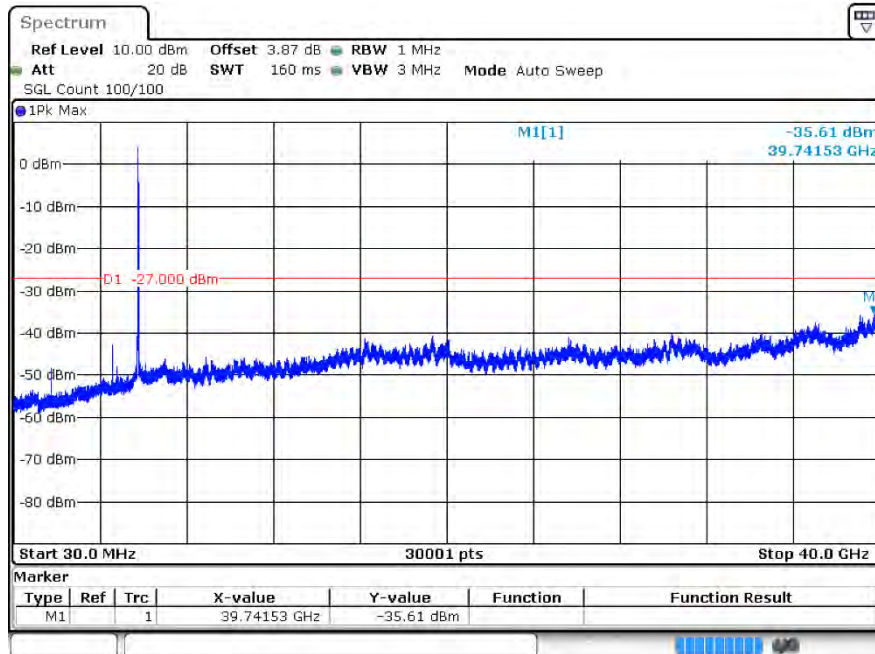


Tx. Spurious n40 5795MHz Ant1 Emission

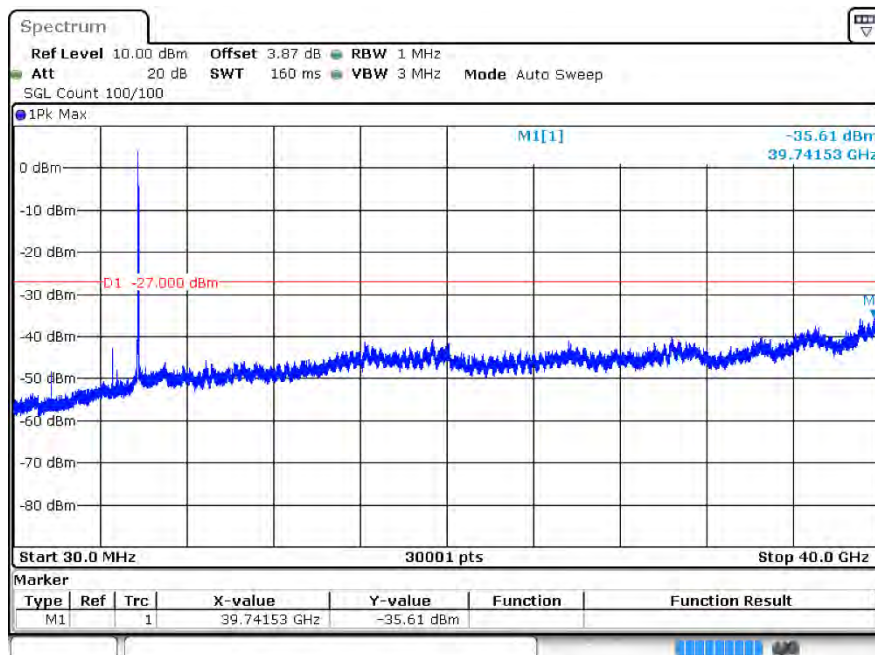


Tx. Spurious ac20 5745MHz Ant1 Emission

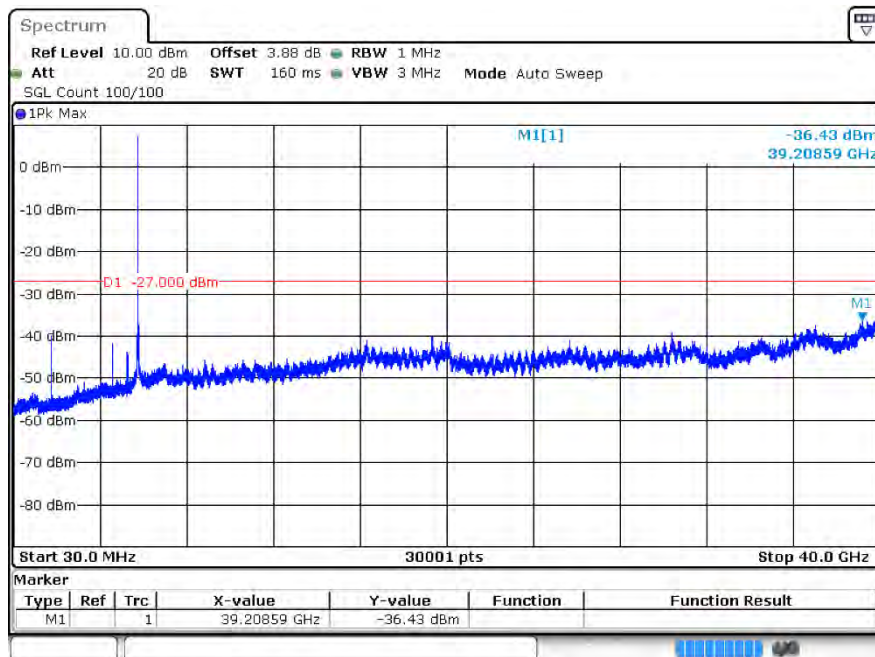


Tx. Spurious ac20 5785MHz Ant1 Emission

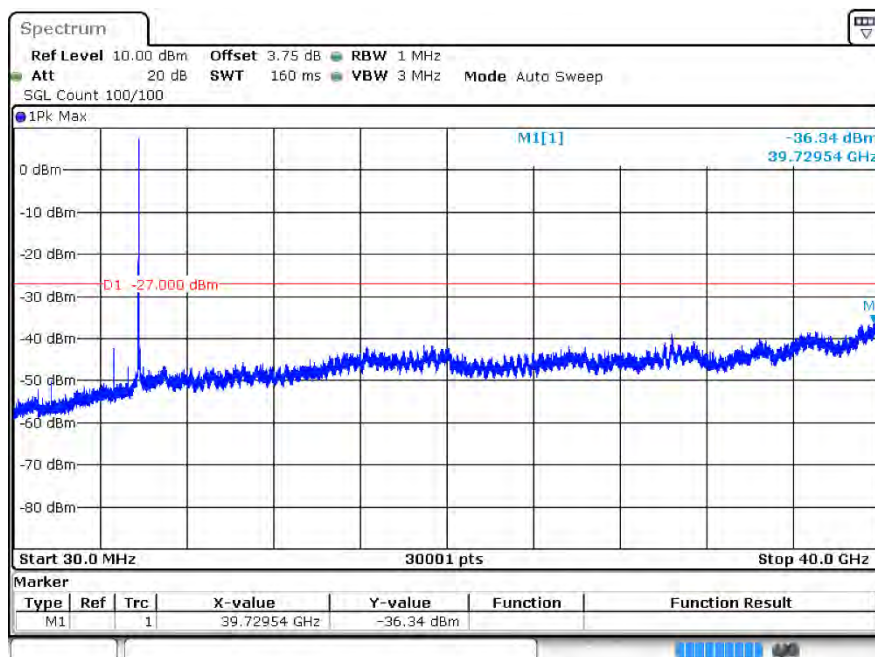


Tx. Spurious ac20 5825MHz Ant1 Emission

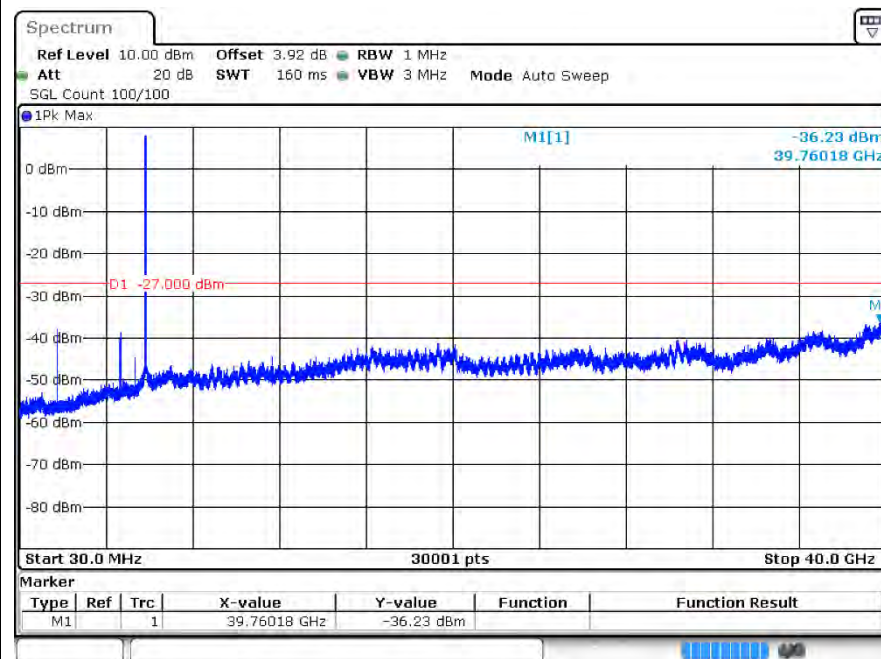


Tx. Spurious ac40 5755MHz Ant1 Emission

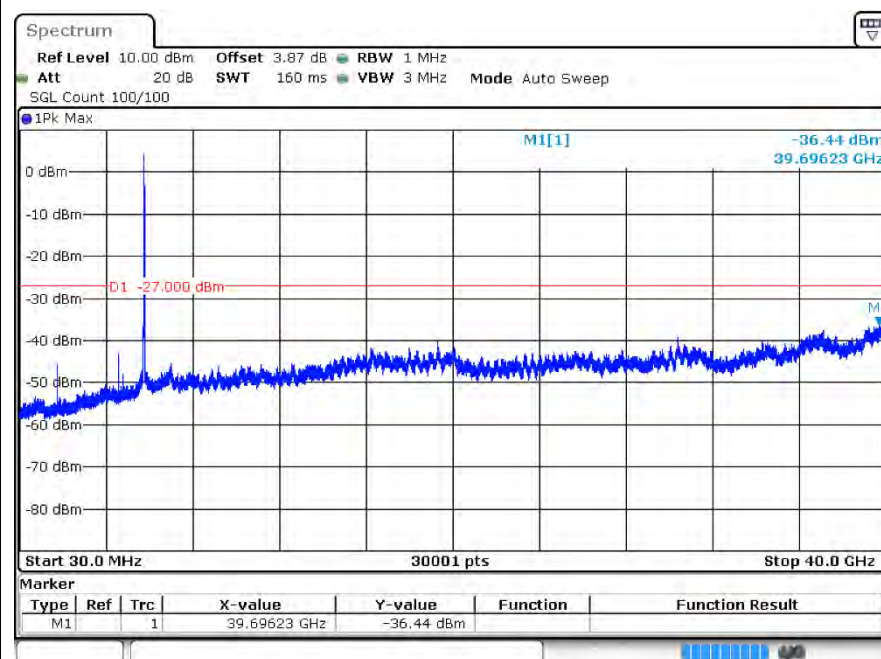


Tx. Spurious ac40 5795MHz Ant1 Emission

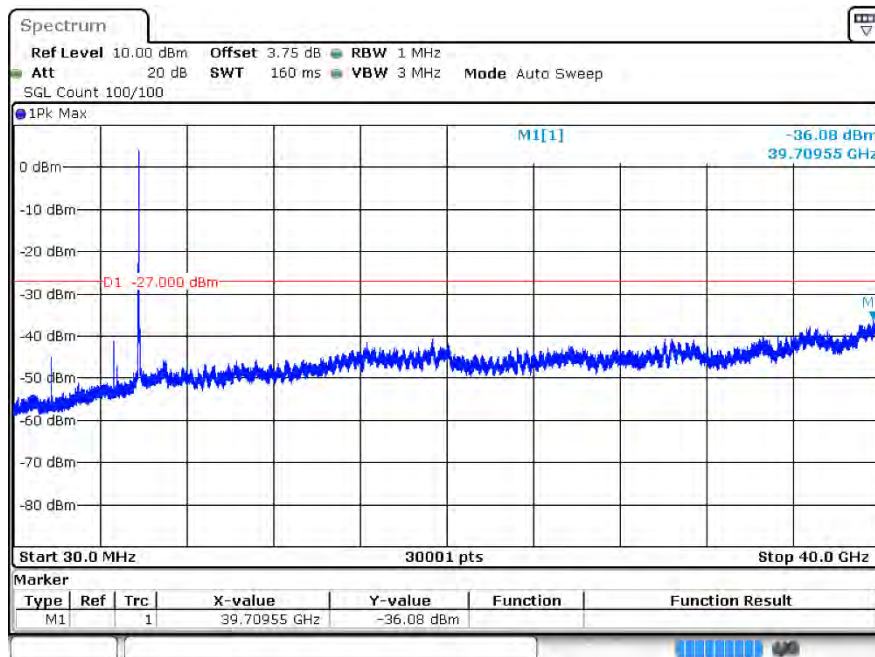


Tx. Spurious ac80 5775MHz Ant1 Emission

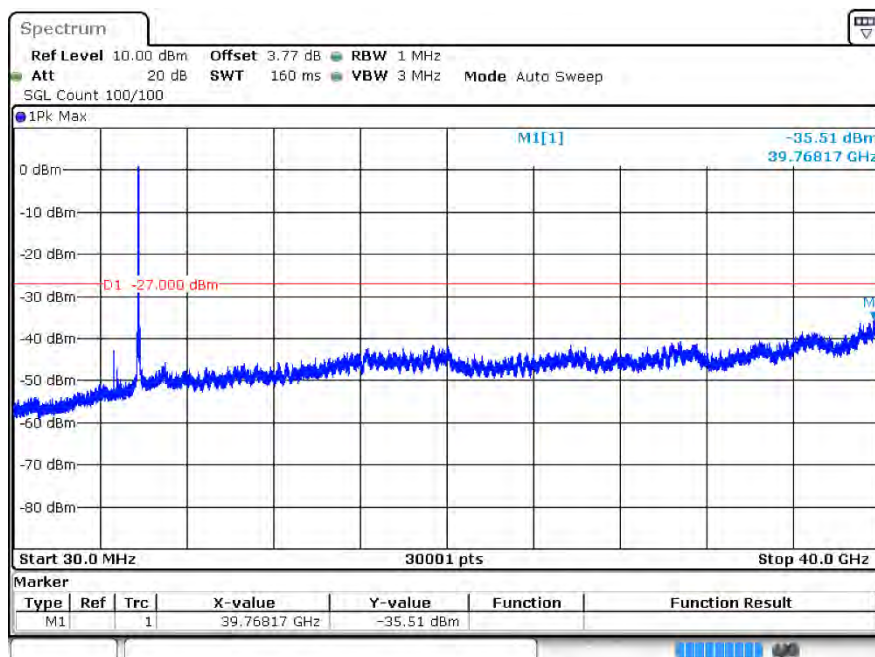


Tx. Spurious ax20 5745MHz Ant1 Emission

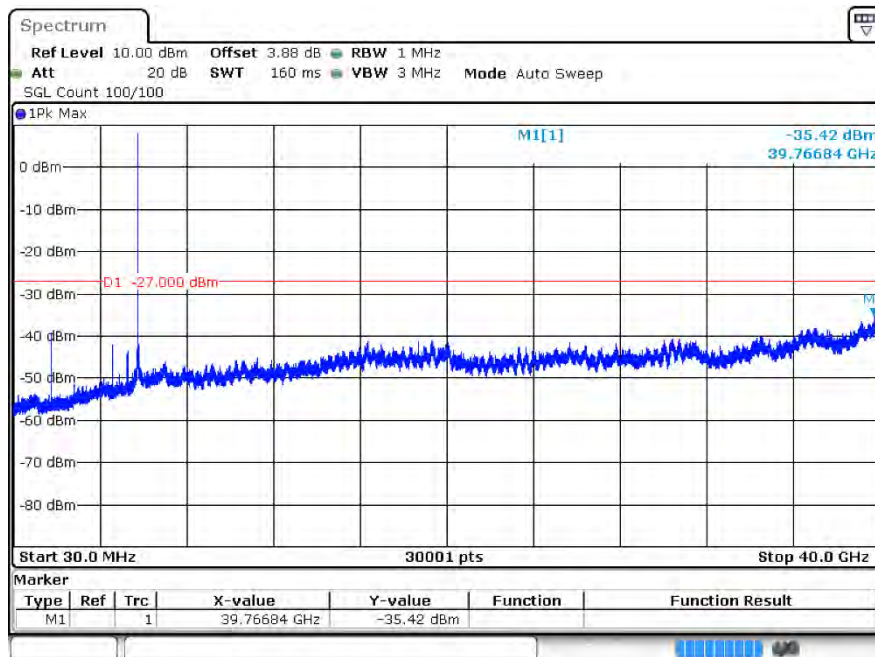


Tx. Spurious ax20 5785MHz Ant1 Emission

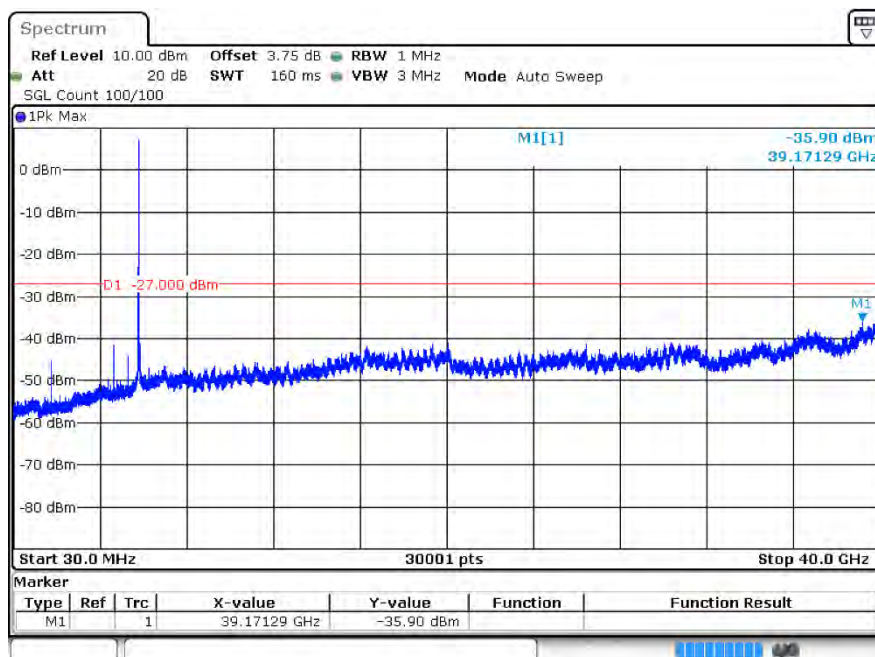


Tx. Spurious ax20 5825MHz Ant1 Emission

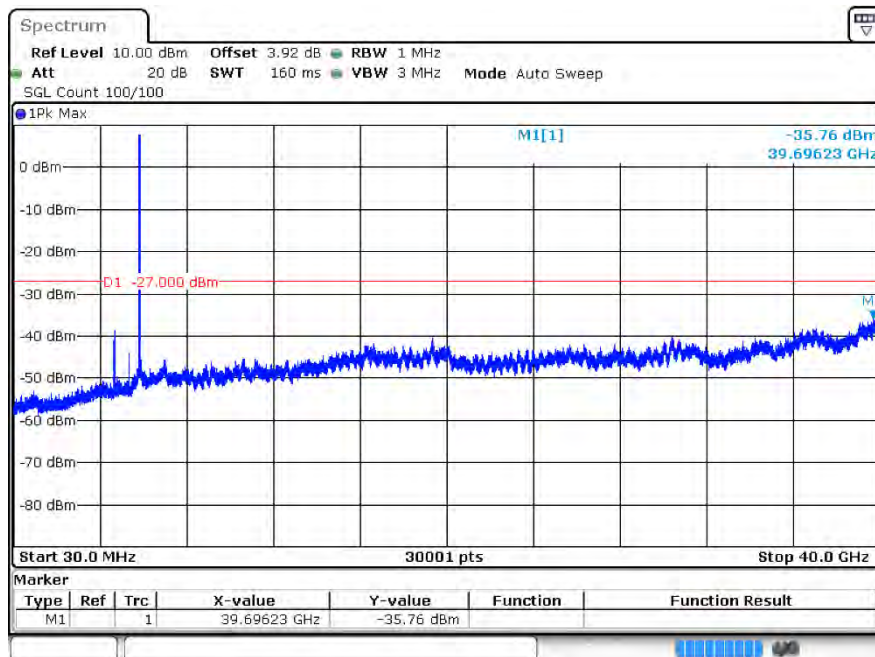


Tx. Spurious ax40 5755MHz Ant1 Emission

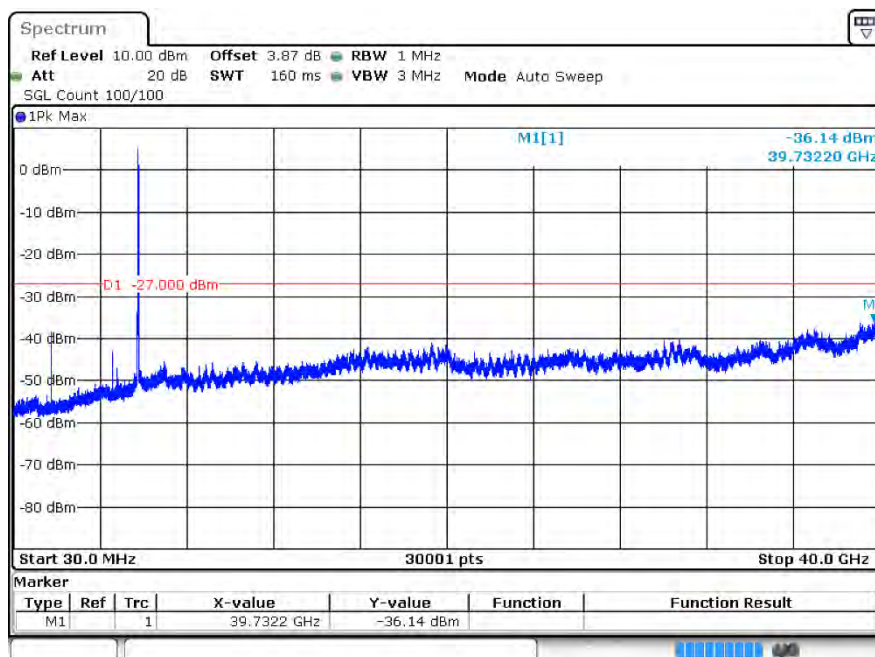

Tx. Spurious ax40 5795MHz Ant1 Emission

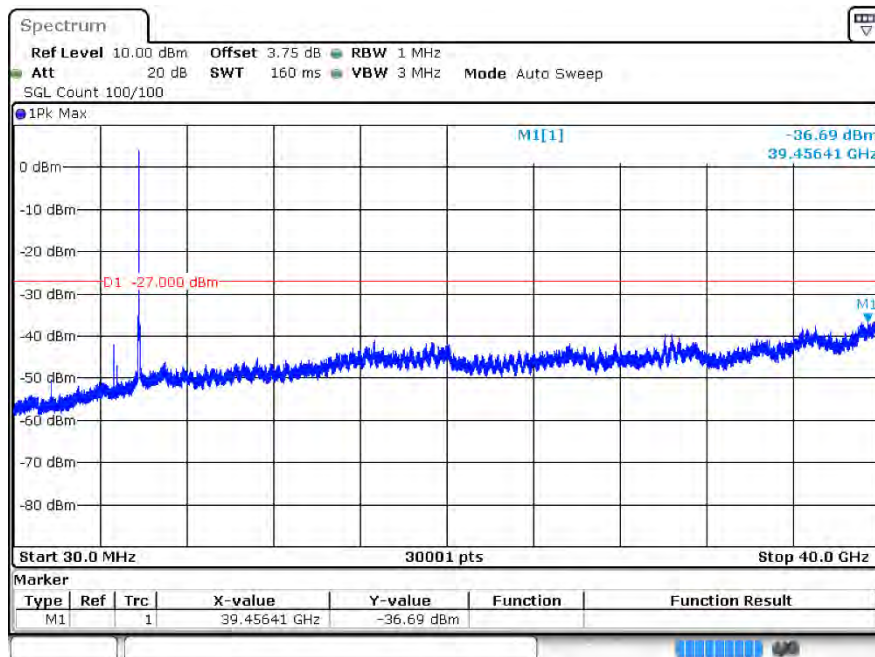

Tx. Spurious ax80 5775MHz Ant1 Emission

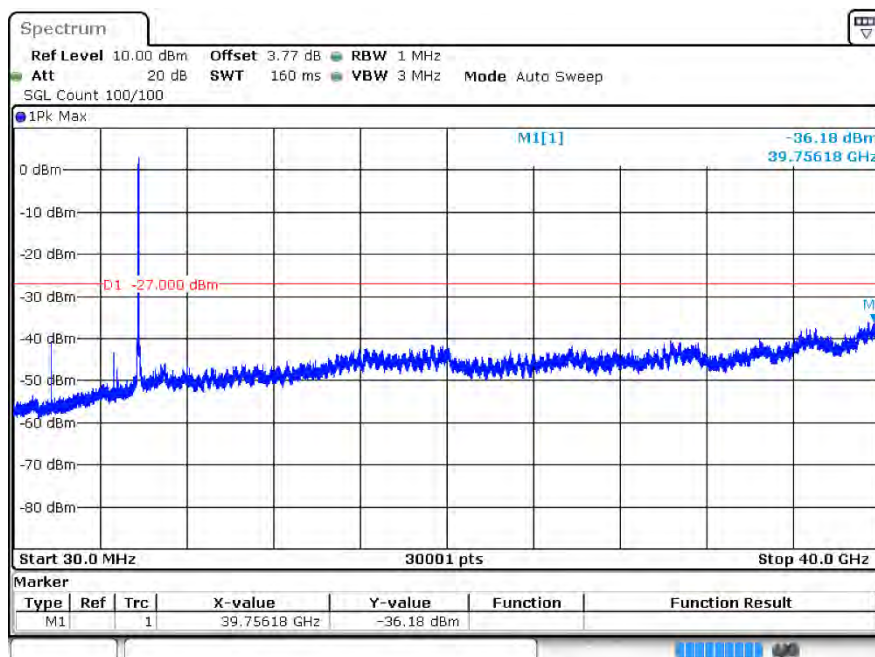



8 Restrict Band

8.1 Test Result

Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
a	5745	Ant1	5650	-43.59	2	-41.59	Peak	-27	Pass
a	5745	Ant1	5650	-52.57	2	-50.57	Average	-27	Pass
a	5745	Ant1	5700	-43.18	2	-41.18	Peak	10	Pass
a	5745	Ant1	5700	-52.19	2	-50.19	Average	10	Pass
a	5745	Ant1	5720	-42.33	2	-40.33	Peak	15.6	Pass
a	5745	Ant1	5720	-51.99	2	-49.99	Average	15.6	Pass
a	5745	Ant1	5725	-41.25	2	-39.25	Peak	27	Pass
a	5745	Ant1	5725	-51.28	2	-49.28	Average	27	Pass
a	5825	Ant1	5850	-41.65	2	-39.65	Peak	27	Pass
a	5825	Ant1	5850	-51.12	2	-49.12	Average	27	Pass
a	5825	Ant1	5855	-41.79	2	-39.79	Peak	15.6	Pass
a	5825	Ant1	5855	-51.35	2	-49.35	Average	15.6	Pass
a	5825	Ant1	5875	-41.05	2	-39.05	Peak	10	Pass
a	5825	Ant1	5875	-51.46	2	-49.46	Average	10	Pass
a	5825	Ant1	5925	-42.86	2	-40.86	Peak	-27	Pass
a	5825	Ant1	5925	-51.99	2	-49.99	Average	-27	Pass
n20	5745	Ant1	5650	-44.13	2	-42.13	Peak	-27	Pass
n20	5745	Ant1	5650	-52.52	2	-50.52	Average	-27	Pass
n20	5745	Ant1	5700	-42.47	2	-40.47	Peak	10	Pass
n20	5745	Ant1	5700	-52.17	2	-50.17	Average	10	Pass
n20	5745	Ant1	5720	-41.43	2	-39.43	Peak	15.6	Pass
n20	5745	Ant1	5720	-51.89	2	-49.89	Average	15.6	Pass
n20	5745	Ant1	5725	-40.73	2	-38.73	Peak	27	Pass
n20	5745	Ant1	5725	-51.29	2	-49.29	Average	27	Pass
n20	5825	Ant1	5850	-41.82	2	-39.82	Peak	27	Pass
n20	5825	Ant1	5850	-51.13	2	-49.13	Average	27	Pass
n20	5825	Ant1	5855	-40.84	2	-38.84	Peak	15.6	Pass
n20	5825	Ant1	5855	-51.42	2	-49.42	Average	15.6	Pass
n20	5825	Ant1	5875	-43.17	2	-41.17	Peak	10	Pass
n20	5825	Ant1	5875	-51.53	2	-49.53	Average	10	Pass
n20	5825	Ant1	5925	-42.07	2	-40.07	Peak	-27	Pass
n20	5825	Ant1	5925	-51.64	2	-49.64	Average	-27	Pass
n40	5755	Ant1	5650	-42.34	2	-40.34	Peak	-27	Pass
n40	5755	Ant1	5650	-52.31	2	-50.31	Average	-27	Pass
n40	5755	Ant1	5700	-44.02	2	-42.02	Peak	10	Pass
n40	5755	Ant1	5700	-52.24	2	-50.24	Average	10	Pass



n40	5755	Ant1	5720	-42.46	2	-40.46	Peak	15.6	Pass
n40	5755	Ant1	5720	-51.49	2	-49.49	Average	15.6	Pass
n40	5755	Ant1	5725	-40.9	2	-38.9	Peak	27	Pass
n40	5755	Ant1	5725	-51.06	2	-49.06	Average	27	Pass
n40	5795	Ant1	5850	-40.15	2	-38.15	Peak	27	Pass
n40	5795	Ant1	5850	-51.96	2	-49.96	Average	27	Pass
n40	5795	Ant1	5855	-42.98	2	-40.98	Peak	15.6	Pass
n40	5795	Ant1	5855	-51.61	2	-49.61	Average	15.6	Pass
n40	5795	Ant1	5875	-42.01	2	-40.01	Peak	10	Pass
n40	5795	Ant1	5875	-51.77	2	-49.77	Average	10	Pass
n40	5795	Ant1	5925	-43.48	2	-41.48	Peak	-27	Pass
n40	5795	Ant1	5925	-52.03	2	-50.03	Average	-27	Pass
ac20	5745	Ant1	5650	-44.26	2	-42.26	Peak	-27	Pass
ac20	5745	Ant1	5650	-52.46	2	-50.46	Average	-27	Pass
ac20	5745	Ant1	5700	-44.43	2	-42.43	Peak	10	Pass
ac20	5745	Ant1	5700	-51.99	2	-49.99	Average	10	Pass
ac20	5745	Ant1	5720	-43.4	2	-41.4	Peak	15.6	Pass
ac20	5745	Ant1	5720	-51.94	2	-49.94	Average	15.6	Pass
ac20	5745	Ant1	5725	-42.64	2	-40.64	Peak	27	Pass
ac20	5745	Ant1	5725	-51.44	2	-49.44	Average	27	Pass
ac20	5825	Ant1	5850	-42.06	2	-40.06	Peak	27	Pass
ac20	5825	Ant1	5850	-51	2	-49	Average	27	Pass
ac20	5825	Ant1	5855	-41.26	2	-39.26	Peak	15.6	Pass
ac20	5825	Ant1	5855	-51.28	2	-49.28	Average	15.6	Pass
ac20	5825	Ant1	5875	-42.11	2	-40.11	Peak	10	Pass
ac20	5825	Ant1	5875	-51.3	2	-49.3	Average	10	Pass
ac20	5825	Ant1	5925	-42.42	2	-40.42	Peak	-27	Pass
ac20	5825	Ant1	5925	-51.83	2	-49.83	Average	-27	Pass
ac40	5755	Ant1	5650	-43.88	2	-41.88	Peak	-27	Pass
ac40	5755	Ant1	5650	-52.31	2	-50.31	Average	-27	Pass
ac40	5755	Ant1	5700	-44.14	2	-42.14	Peak	10	Pass
ac40	5755	Ant1	5700	-52.23	2	-50.23	Average	10	Pass
ac40	5755	Ant1	5720	-40.08	2	-38.08	Peak	15.6	Pass
ac40	5755	Ant1	5720	-51.55	2	-49.55	Average	15.6	Pass
ac40	5755	Ant1	5725	-40.78	2	-38.78	Peak	27	Pass
ac40	5755	Ant1	5725	-50.99	2	-48.99	Average	27	Pass
ac40	5795	Ant1	5850	-44.53	2	-42.53	Peak	27	Pass
ac40	5795	Ant1	5850	-51.79	2	-49.79	Average	27	Pass
ac40	5795	Ant1	5855	-42.75	2	-40.75	Peak	15.6	Pass
ac40	5795	Ant1	5855	-51.34	2	-49.34	Average	15.6	Pass
ac40	5795	Ant1	5875	-42.65	2	-40.65	Peak	10	Pass
ac40	5795	Ant1	5875	-51.64	2	-49.64	Average	10	Pass
ac40	5795	Ant1	5925	-42.07	2	-40.07	Peak	-27	Pass




ac40	5795	Ant1	5925	-51.7	2	-49.7	Average	-27	Pass
ac80	5775	Ant1	5650	-43.23	2	-41.23	Peak	-27	Pass
ac80	5775	Ant1	5650	-52.49	2	-50.49	Average	-27	Pass
ac80	5775	Ant1	5700	-43.42	2	-41.42	Peak	10	Pass
ac80	5775	Ant1	5700	-52.29	2	-50.29	Average	10	Pass
ac80	5775	Ant1	5720	-40.68	2	-38.68	Peak	15.6	Pass
ac80	5775	Ant1	5720	-51.62	2	-49.62	Average	15.6	Pass
ac80	5775	Ant1	5725	-41.47	2	-39.47	Peak	27	Pass
ac80	5775	Ant1	5725	-51.51	2	-49.51	Average	27	Pass
ac80	5775	Ant1	5850	-41.99	2	-39.99	Peak	27	ac80
ac80	5775	Ant1	5850	-51.71	2	-49.71	Average	27	ac80
ac80	5775	Ant1	5855	-40.9	2	-38.9	Peak	15.6	ac80
ac80	5775	Ant1	5855	-51.86	2	-49.86	Average	15.6	ac80
ac80	5775	Ant1	5875	-41.02	2	-39.02	Peak	10	ac80
ac80	5775	Ant1	5875	-51.82	2	-49.82	Average	10	ac80
ac80	5775	Ant1	5925	-43.56	2	-41.56	Peak	-27	ac80
ac80	5775	Ant1	5925	-52.12	2	-50.12	Average	-27	ac80
ax20	5745	Ant1	5650	-42.65	2	-40.65	Peak	-27	Pass
ax20	5745	Ant1	5650	-52.51	2	-50.51	Average	-27	Pass
ax20	5745	Ant1	5700	-43.94	2	-41.94	Peak	10	Pass
ax20	5745	Ant1	5700	-52.29	2	-50.29	Average	10	Pass
ax20	5745	Ant1	5720	-43.24	2	-41.24	Peak	15.6	Pass
ax20	5745	Ant1	5720	-52.23	2	-50.23	Average	15.6	Pass
ax20	5745	Ant1	5725	-42.67	2	-40.67	Peak	27	Pass
ax20	5745	Ant1	5725	-51.89	2	-49.89	Average	27	Pass
ax20	5825	Ant1	5850	-42.07	2	-40.07	Peak	27	Pass
ax20	5825	Ant1	5850	-51.27	2	-49.27	Average	27	Pass
ax20	5825	Ant1	5855	-39.08	2	-37.08	Peak	15.6	Pass
ax20	5825	Ant1	5855	-51.25	2	-49.25	Average	15.6	Pass
ax20	5825	Ant1	5875	-43.11	2	-41.11	Peak	10	Pass
ax20	5825	Ant1	5875	-51.58	2	-49.58	Average	10	Pass
ax20	5825	Ant1	5925	-42.29	2	-40.29	Peak	-27	Pass
ax20	5825	Ant1	5925	-51.87	2	-49.87	Average	-27	Pass
ax40	5755	Ant1	5650	-42.53	2	-40.53	Peak	-27	Pass
ax40	5755	Ant1	5650	-52.35	2	-50.35	Average	-27	Pass
ax40	5755	Ant1	5700	-43.62	2	-41.62	Peak	10	Pass
ax40	5755	Ant1	5700	-52.33	2	-50.33	Average	10	Pass
ax40	5755	Ant1	5720	-38.62	2	-36.62	Peak	15.6	Pass
ax40	5755	Ant1	5720	-51.32	2	-49.32	Average	15.6	Pass
ax40	5755	Ant1	5725	-39.83	2	-37.83	Peak	27	Pass
ax40	5755	Ant1	5725	-50.89	2	-48.89	Average	27	Pass
ax40	5795	Ant1	5850	-43.24	2	-41.24	Peak	27	Pass
ax40	5795	Ant1	5850	-52.07	2	-50.07	Average	27	Pass




ax40	5795	Ant1	5855	-40.91	2	-38.91	Peak	15.6	Pass
ax40	5795	Ant1	5855	-51.74	2	-49.74	Average	15.6	Pass
ax40	5795	Ant1	5875	-42.81	2	-40.81	Peak	10	Pass
ax40	5795	Ant1	5875	-51.83	2	-49.83	Average	10	Pass
ax40	5795	Ant1	5925	-43.87	2	-41.87	Peak	-27	Pass
ax40	5795	Ant1	5925	-51.86	2	-49.86	Average	-27	Pass
ax80	5775	Ant1	5650	-43.64	2	-41.64	Peak	-27	Pass
ax80	5775	Ant1	5650	-52.34	2	-50.34	Average	-27	Pass
ax80	5775	Ant1	5700	-43.7	2	-41.7	Peak	10	Pass
ax80	5775	Ant1	5700	-52.12	2	-50.12	Average	10	Pass
ax80	5775	Ant1	5720	-44.23	2	-42.23	Peak	15.6	Pass
ax80	5775	Ant1	5720	-51.88	2	-49.88	Average	15.6	Pass
ax80	5775	Ant1	5725	-44.72	2	-42.72	Peak	27	Pass
ax80	5775	Ant1	5725	-51.81	2	-49.81	Average	27	Pass
ax80	5775	Ant1	5850	-42.73	2	-40.73	Peak	27	Pass
ax80	5775	Ant1	5850	-51.91	2	-49.91	Average	27	Pass
ax80	5775	Ant1	5855	-43.02	2	-41.02	Peak	15.6	Pass
ax80	5775	Ant1	5855	-51.93	2	-49.93	Average	15.6	Pass
ax80	5775	Ant1	5875	-42.11	2	-40.11	Peak	10	Pass
ax80	5775	Ant1	5875	-51.7	2	-49.7	Average	10	Pass
ax80	5775	Ant1	5925	-41.83	2	-39.83	Peak	-27	Pass
ax80	5775	Ant1	5925	-52.08	2	-50.08	Average	-27	Pass


8.2 Test Graphs

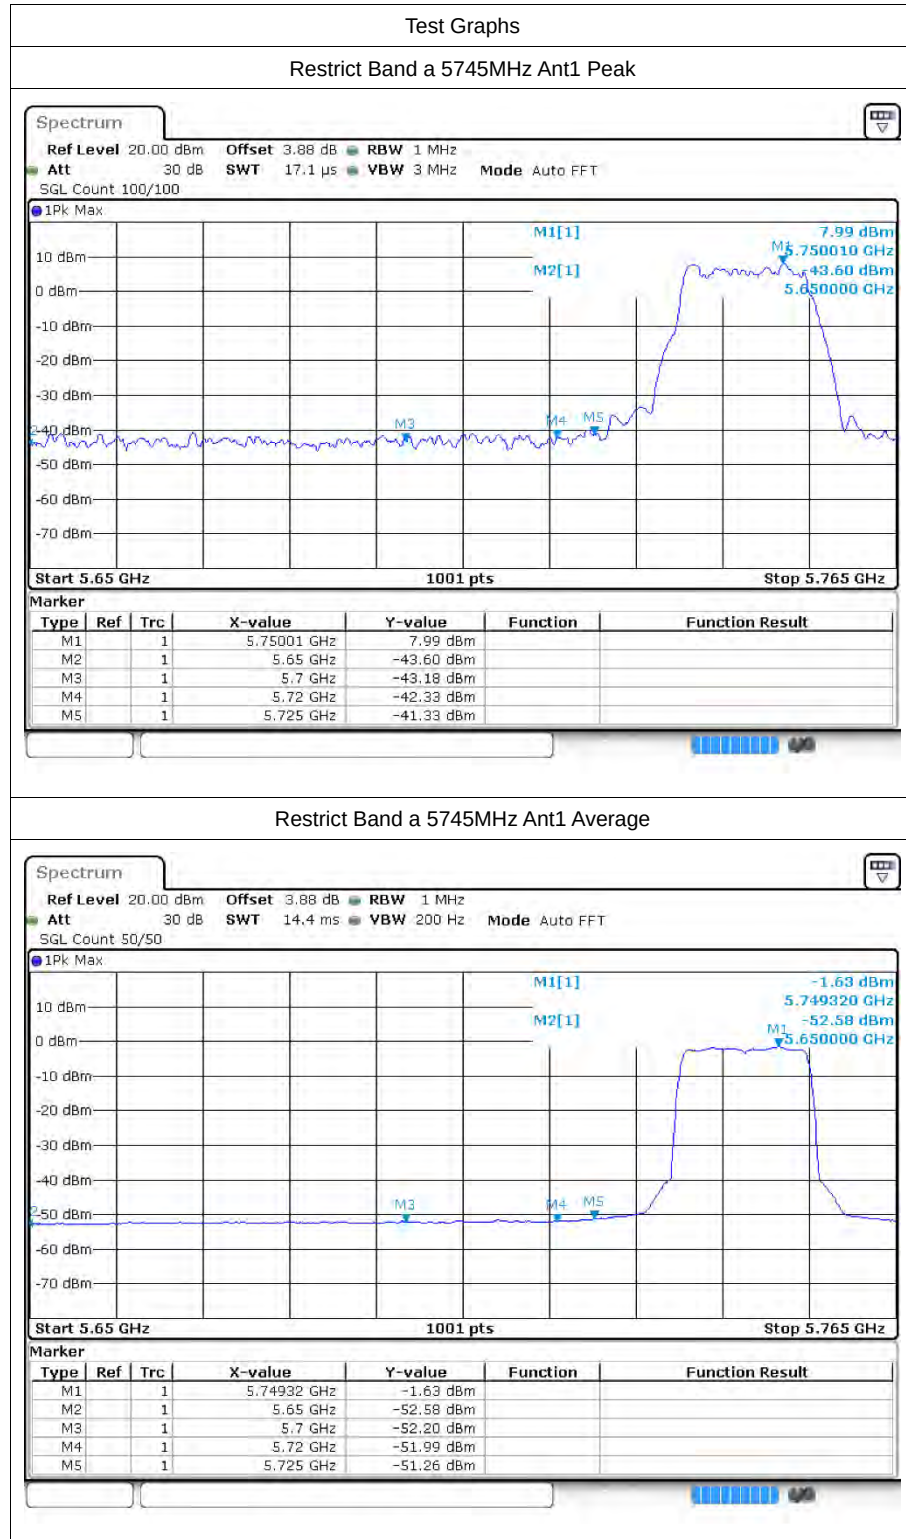


Restrict Band a 5825MHz Ant1 Peak

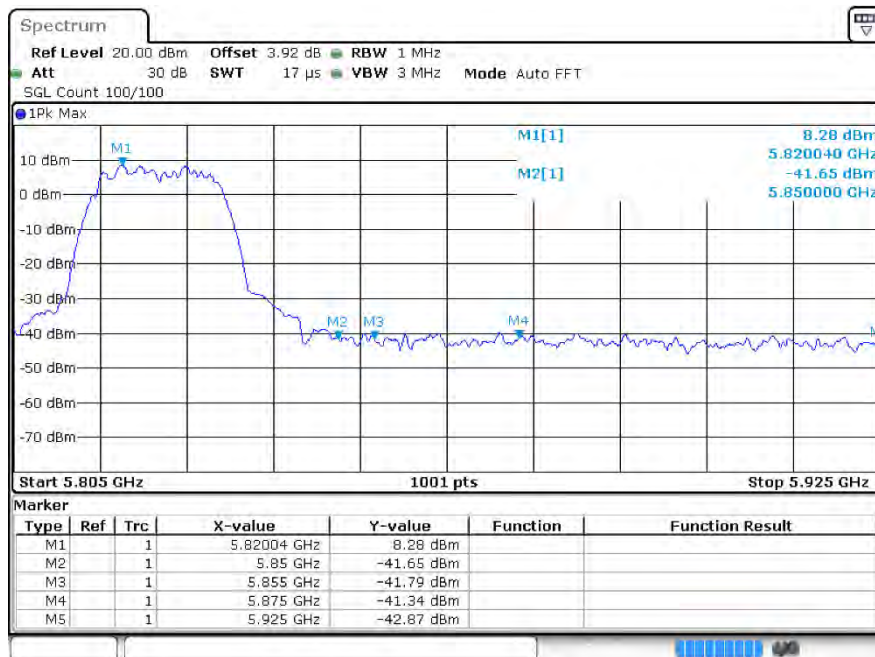


Restrict Band a 5825MHz Ant1 Average

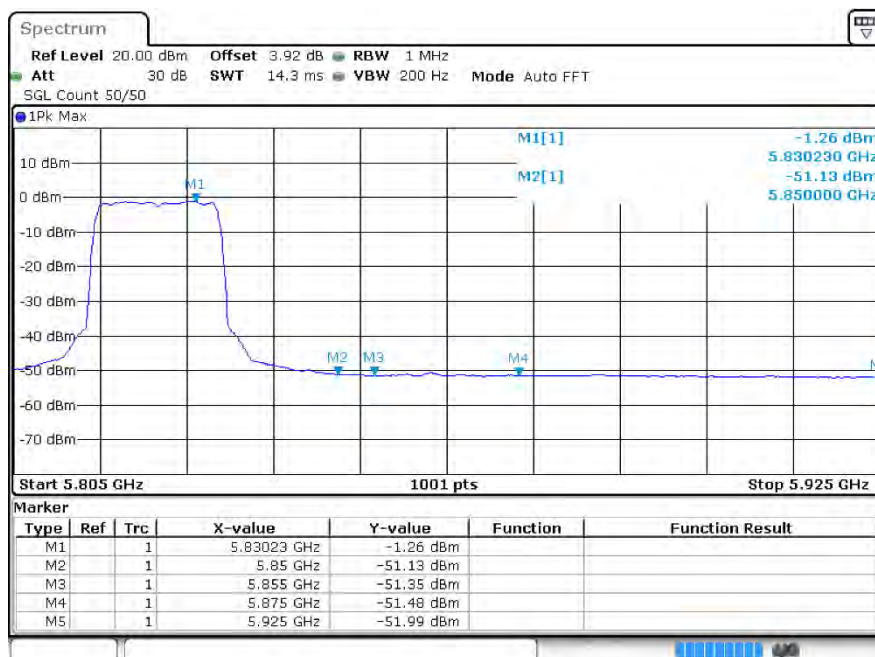


Restrict Band n20 5745MHz Ant1 Peak

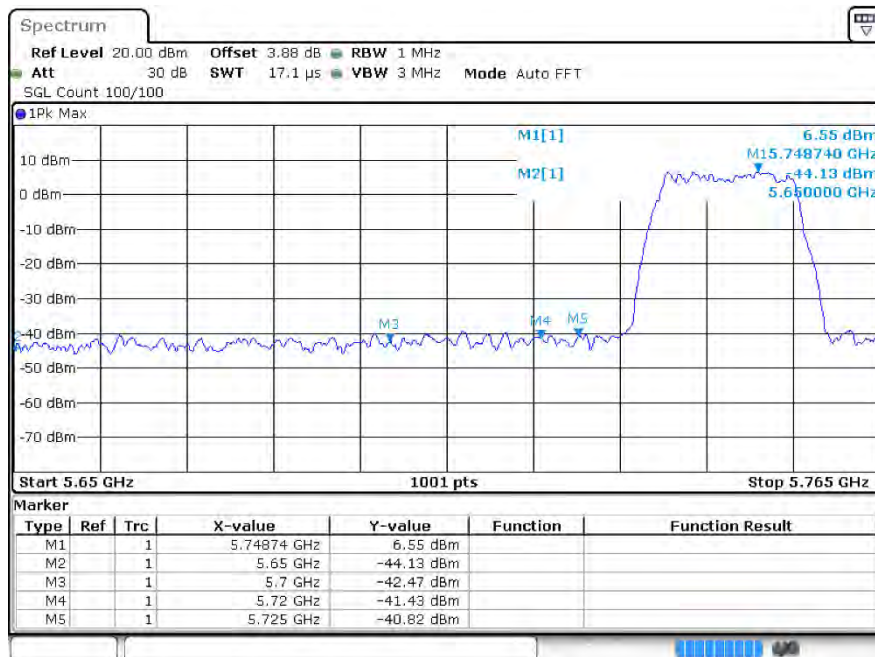


Restrict Band n20 5745MHz Ant1 Average

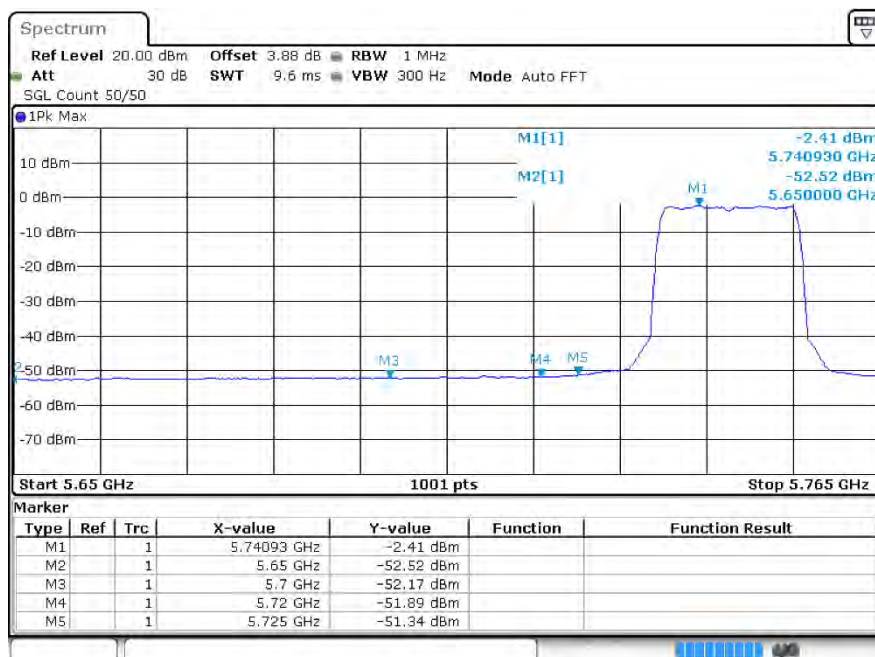


Restrict Band n20 5825MHz Ant1 Peak

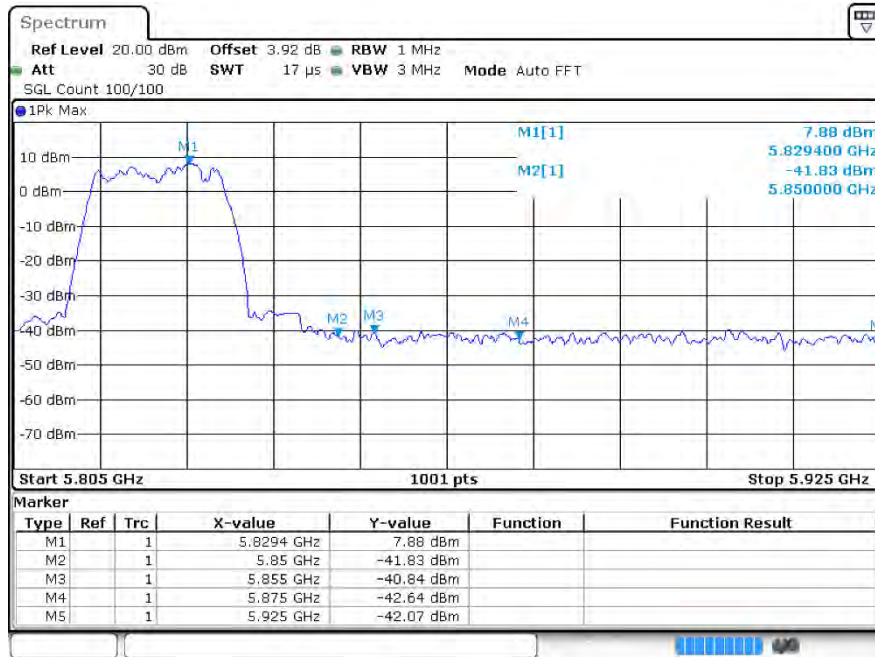


Restrict Band n20 5825MHz Ant1 Average

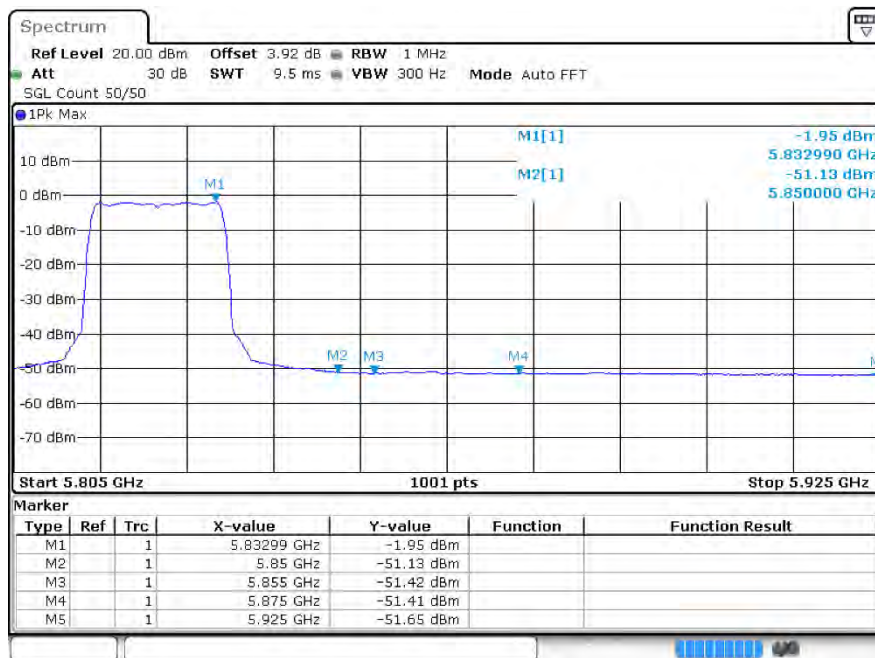


Restrict Band n40 5755MHz Ant1 Peak

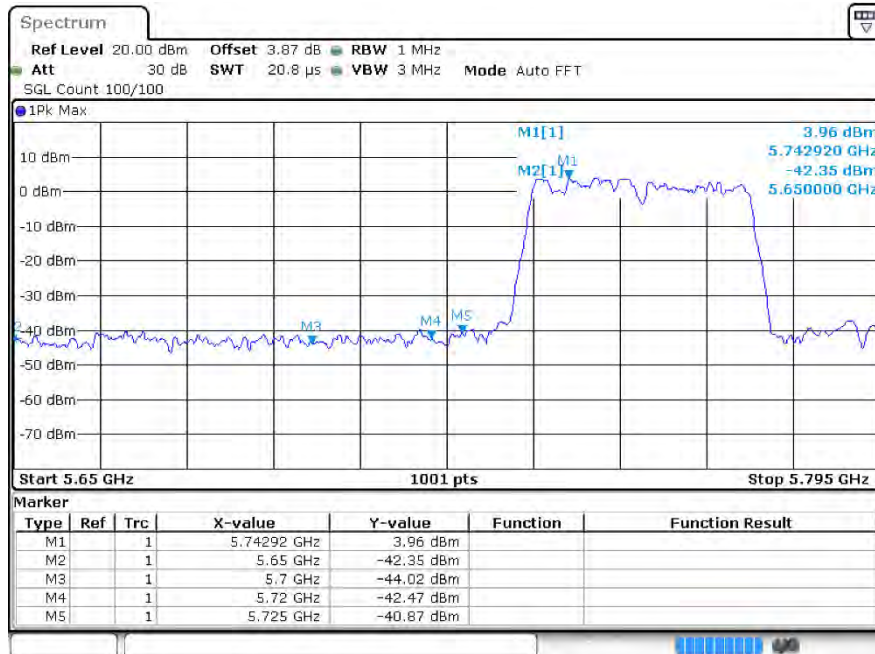


Restrict Band n40 5755MHz Ant1 Average

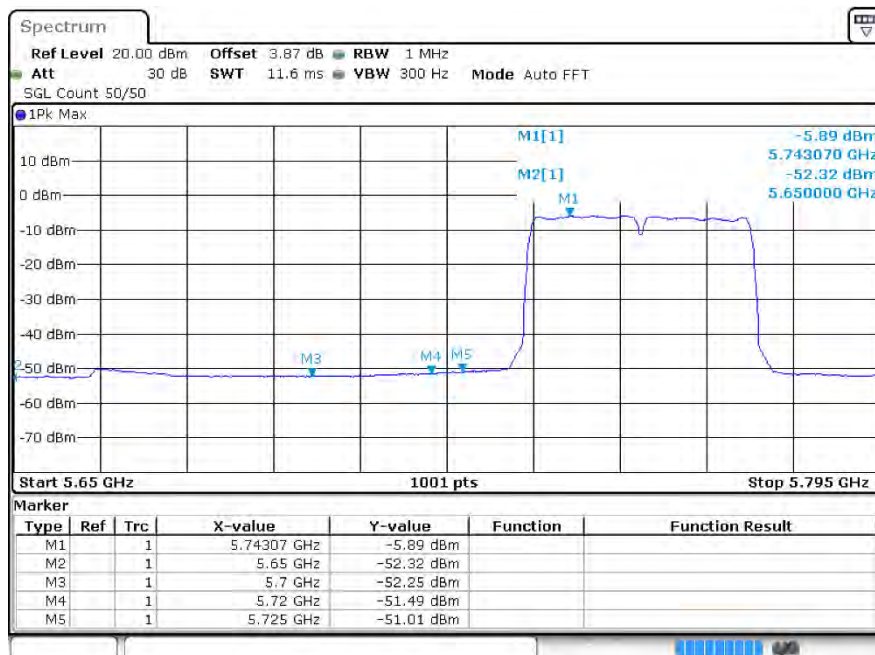


Restrict Band n40 5795MHz Ant1 Peak

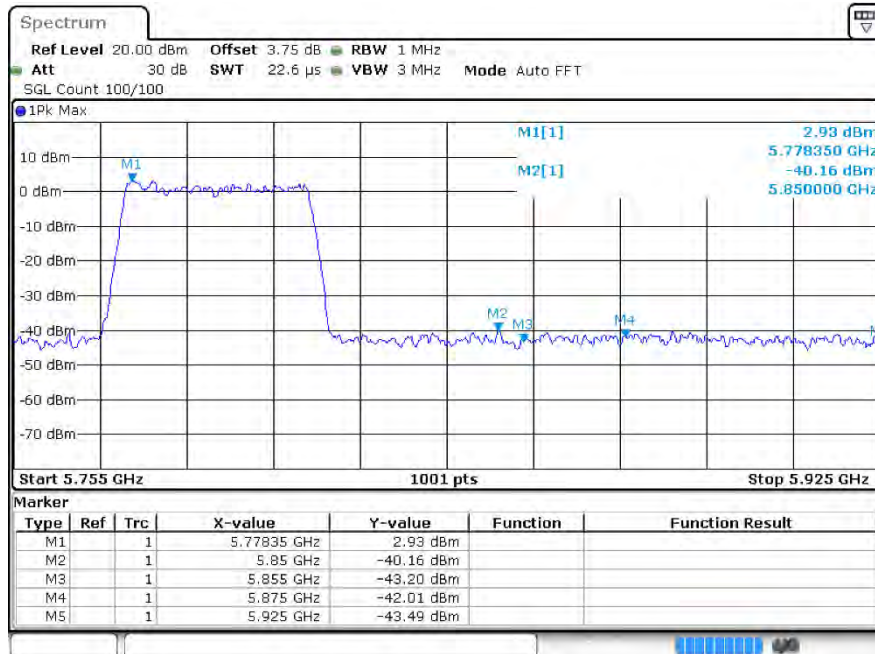


Restrict Band n40 5795MHz Ant1 Average

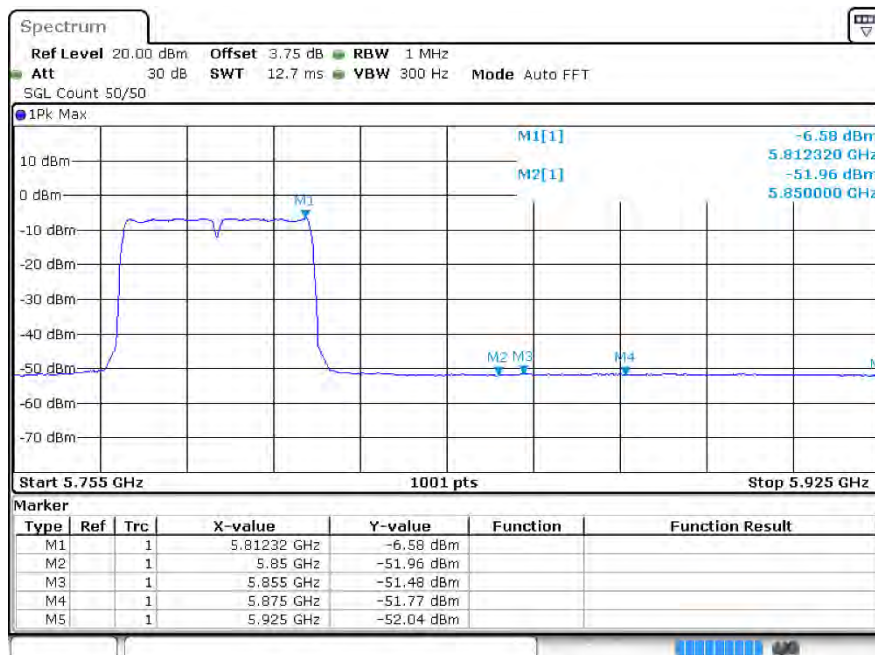


Restrict Band ac20 5745MHz Ant1 Peak

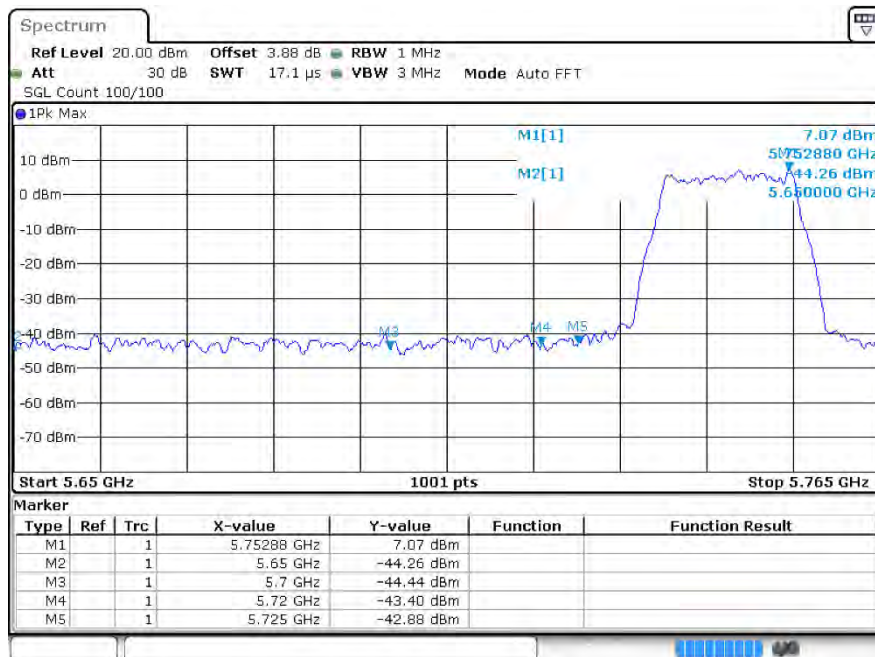


Restrict Band ac20 5745MHz Ant1 Average

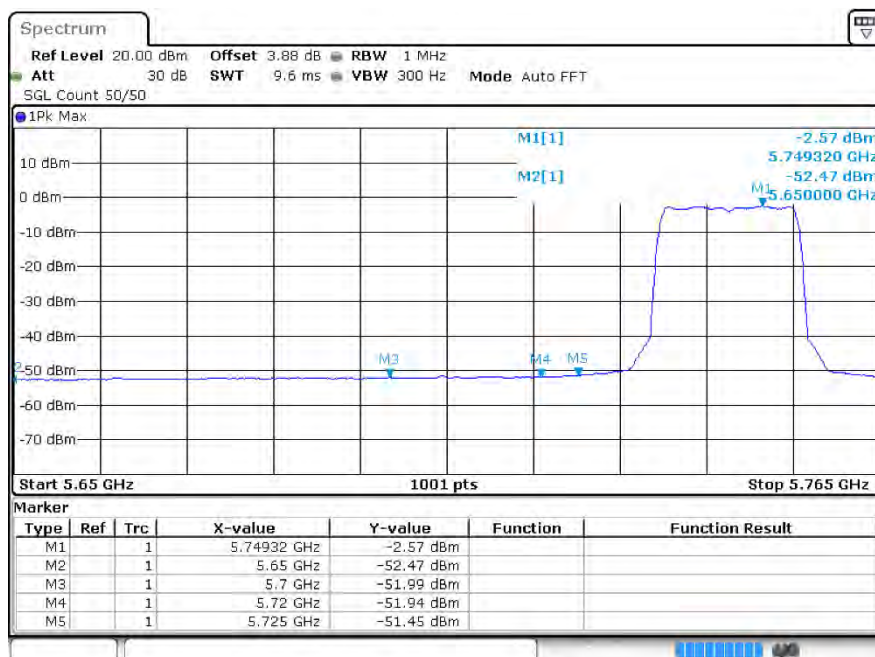


Restrict Band ac20 5825MHz Ant1 Peak

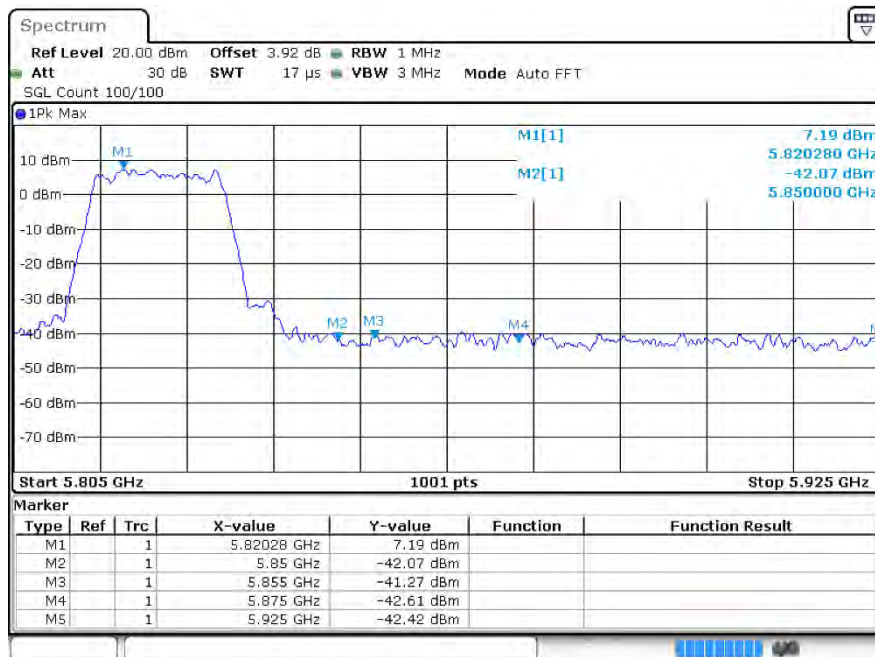


Restrict Band ac20 5825MHz Ant1 Average

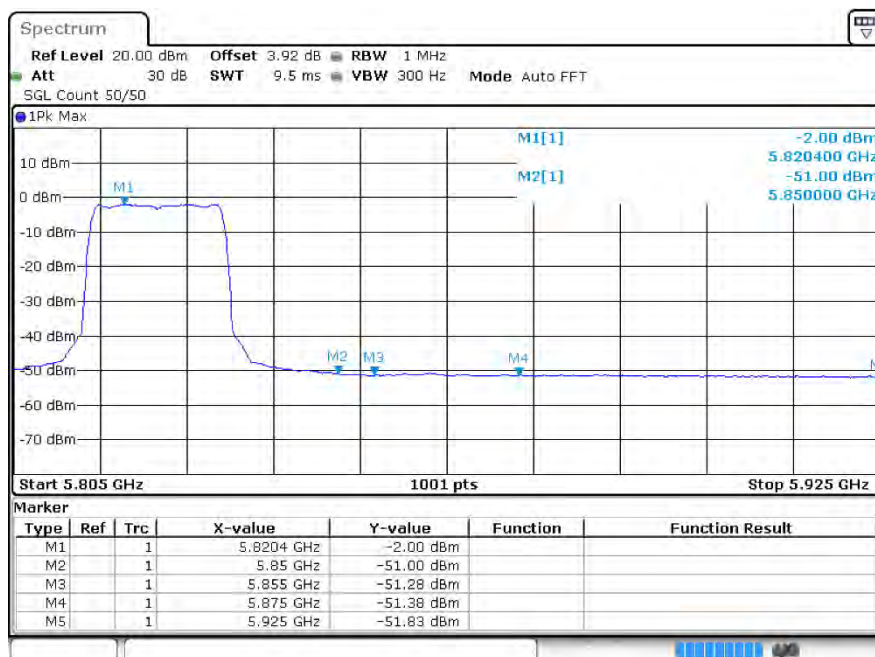

Restrict Band ac40 5755MHz Ant1 Peak

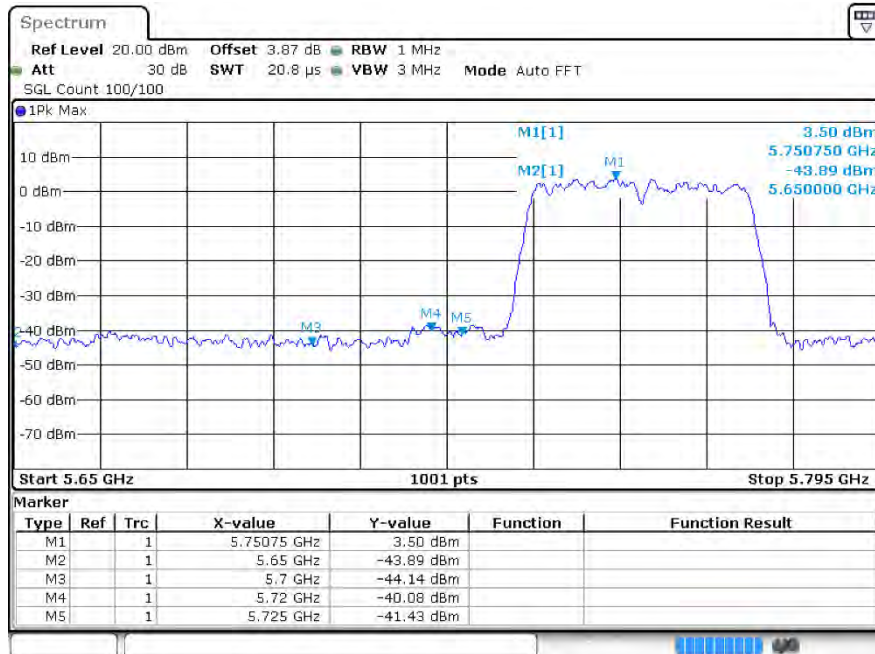


Restrict Band ac40 5755MHz Ant1 Average

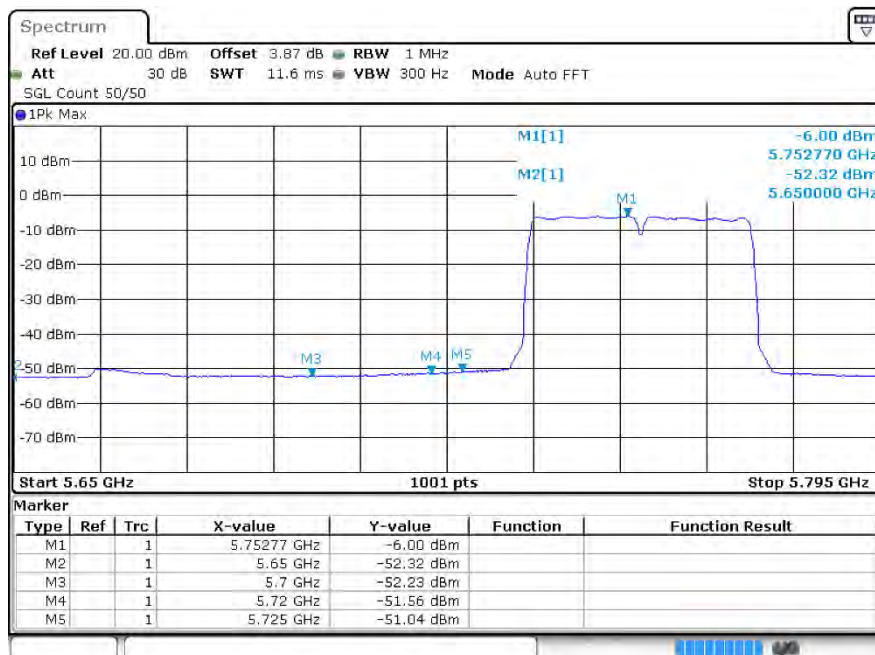





Restrict Band ac40 5795MHz Ant1 Peak

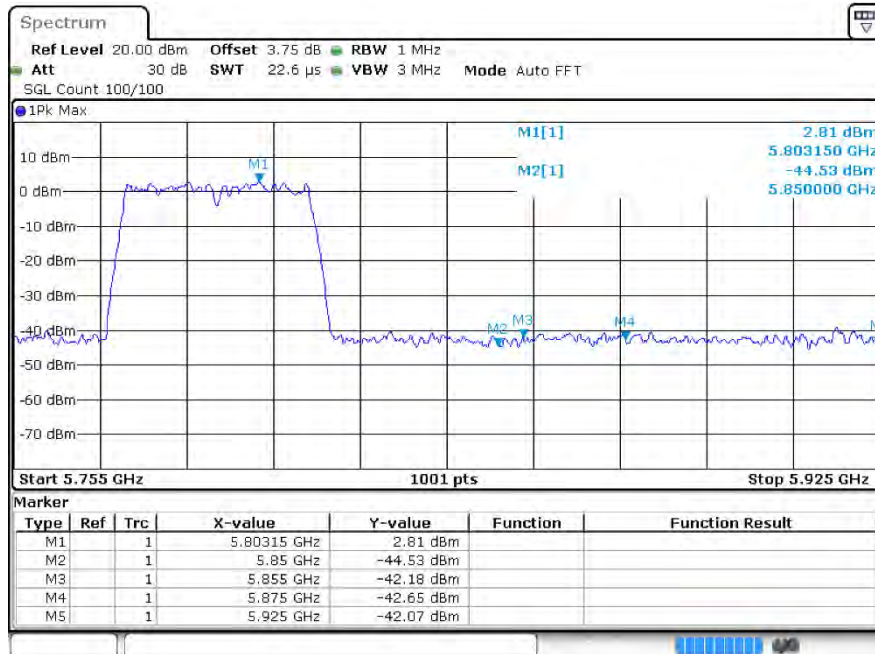


Restrict Band ac40 5795MHz Ant1 Average

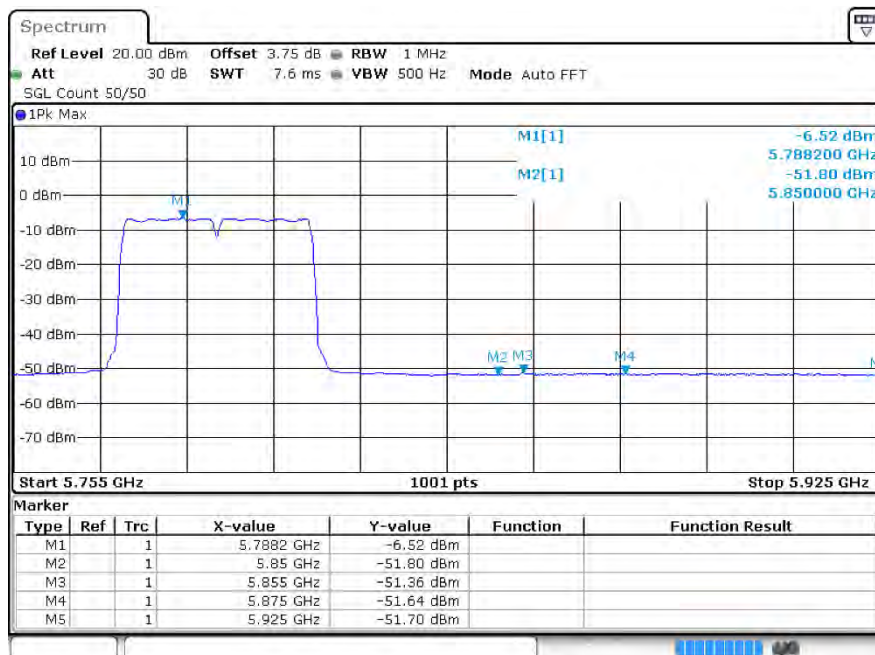


Restrict Band ac80 5775MHz Ant1 Peak

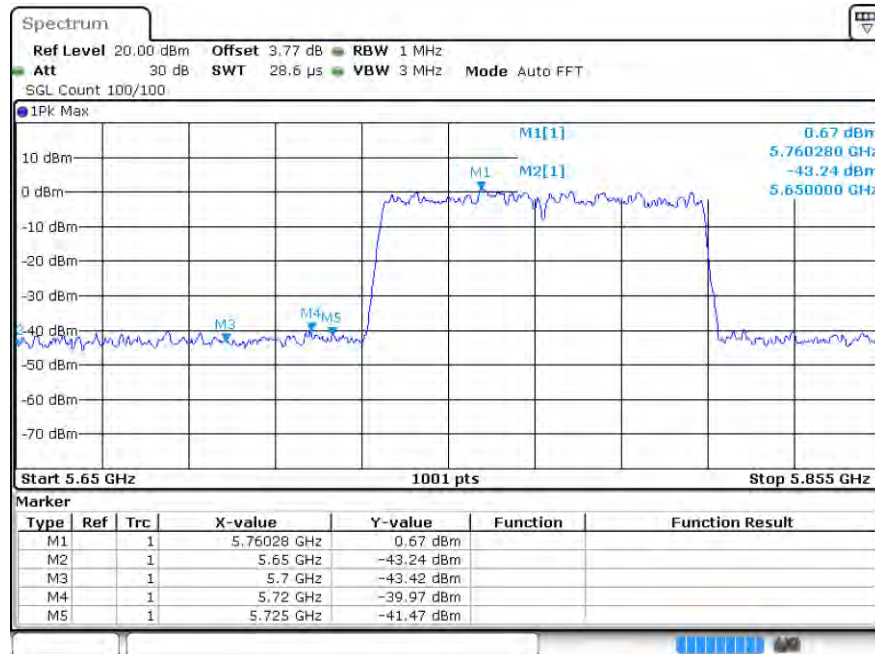


Restrict Band ac80 5775MHz Ant1 Average

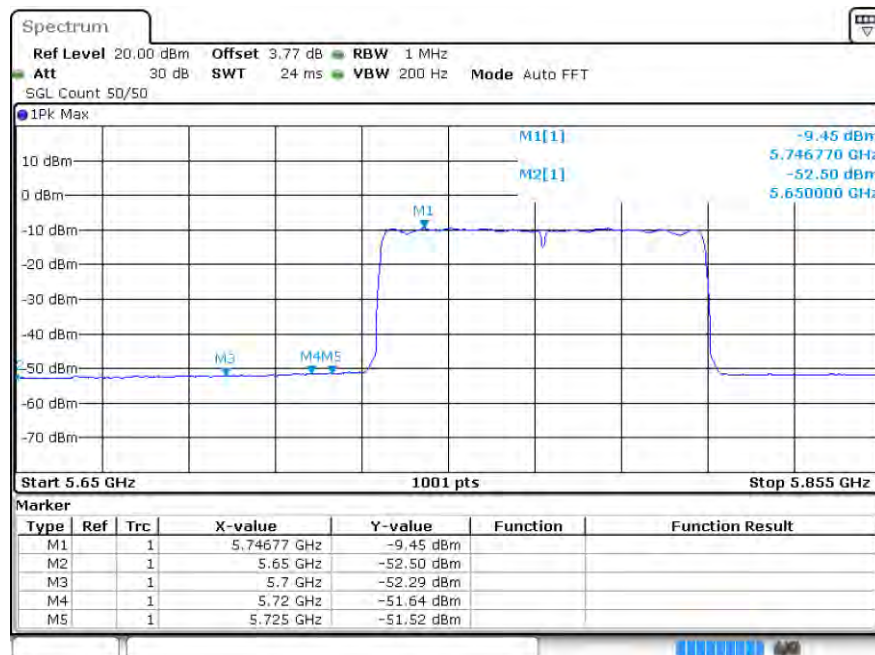


Restrict Band ac80 5775MHz Ant1 Peak

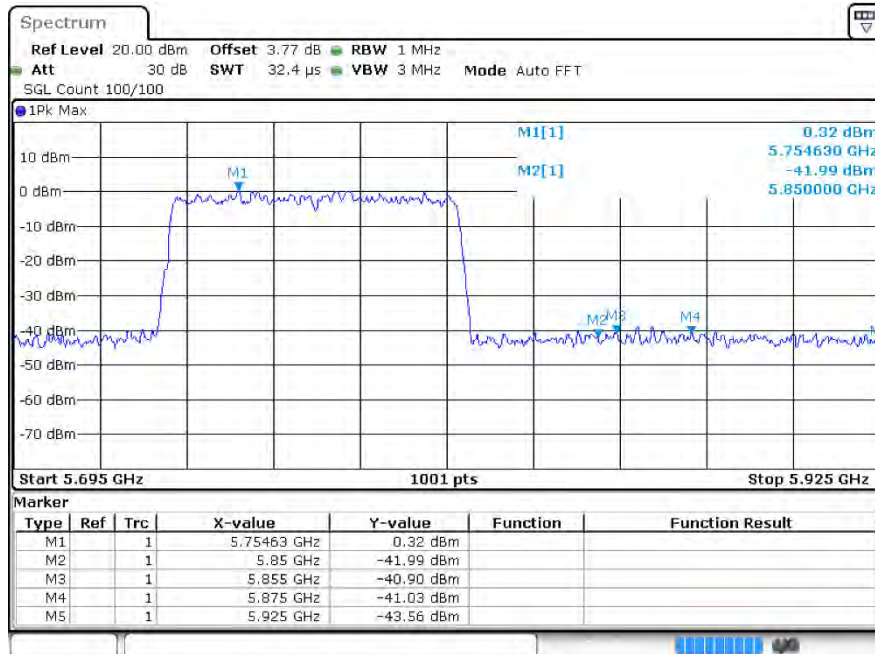


Restrict Band ac80 5775MHz Ant1 Average

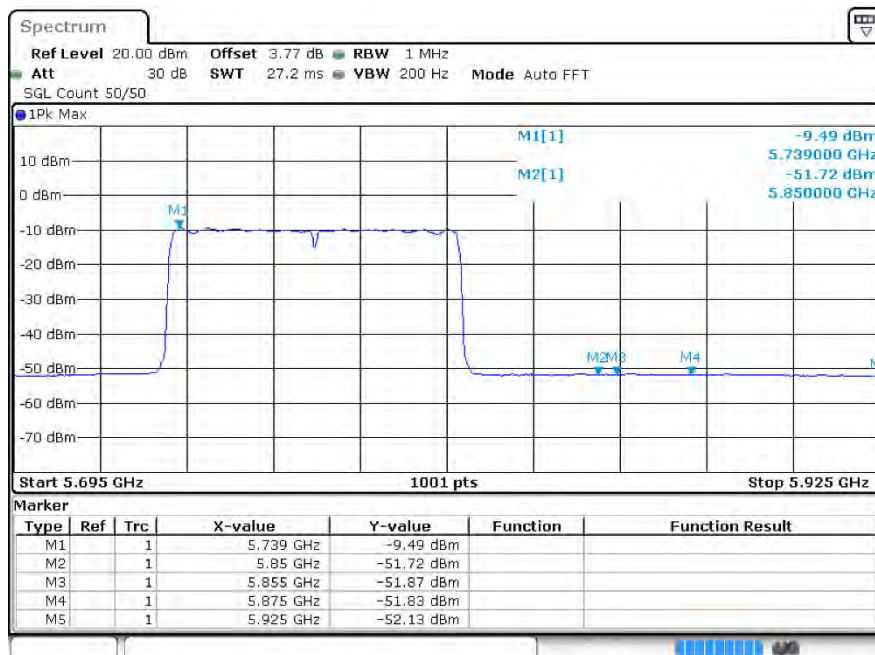


Restrict Band ax20 5745MHz Ant1 Peak

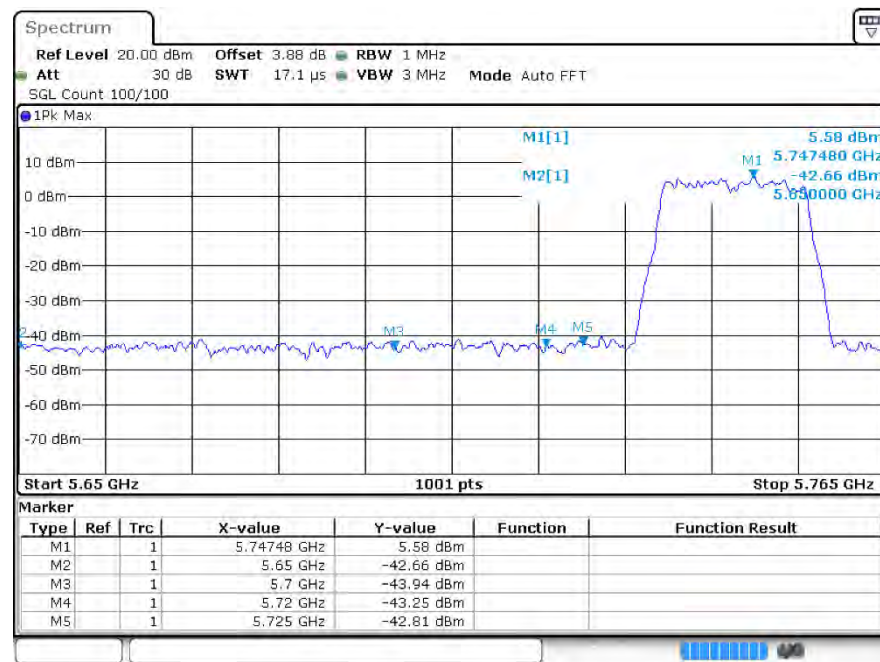


Restrict Band ax20 5745MHz Ant1 Average

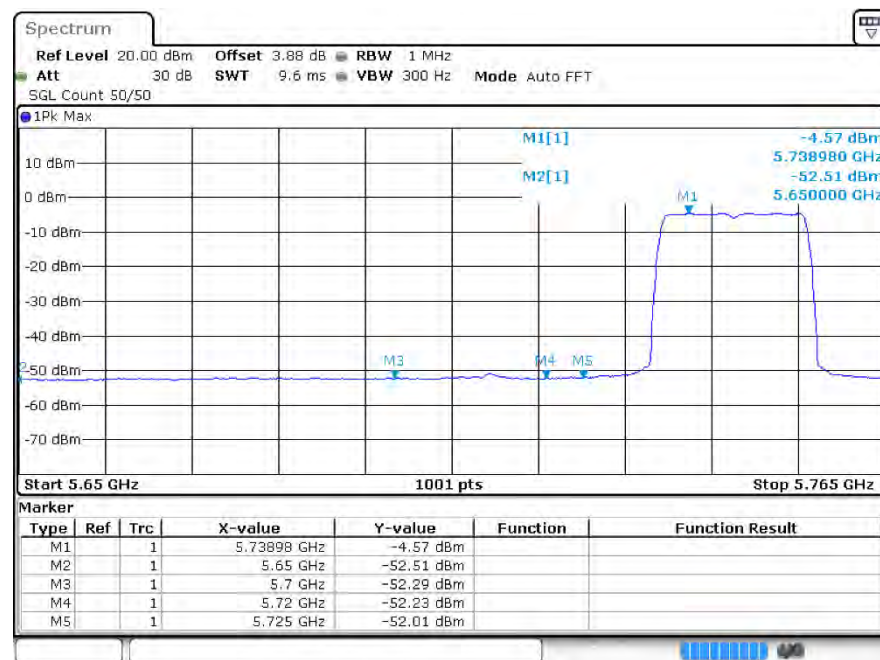


Restrict Band ax20 5825MHz Ant1 Peak

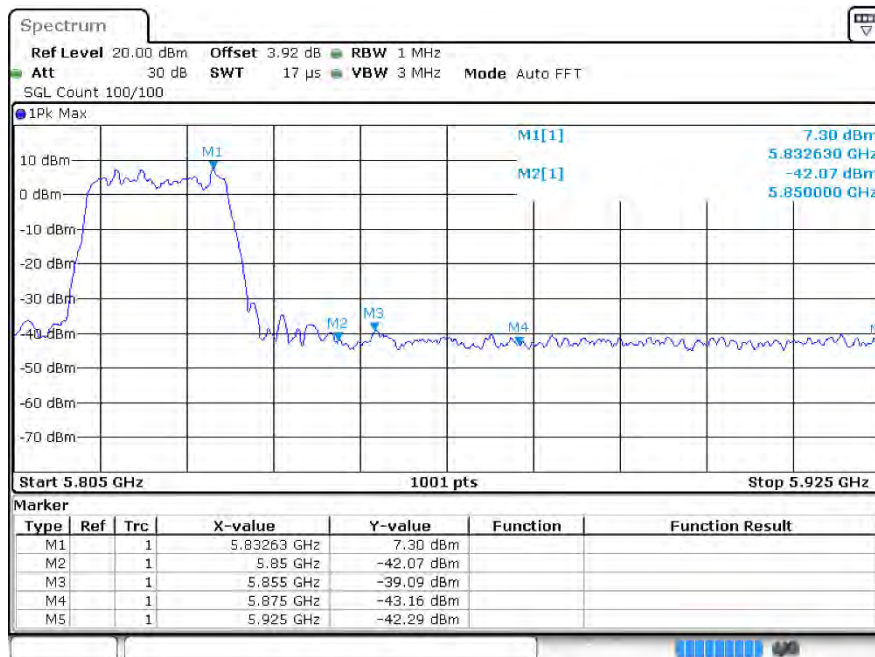


Restrict Band ax20 5825MHz Ant1 Average

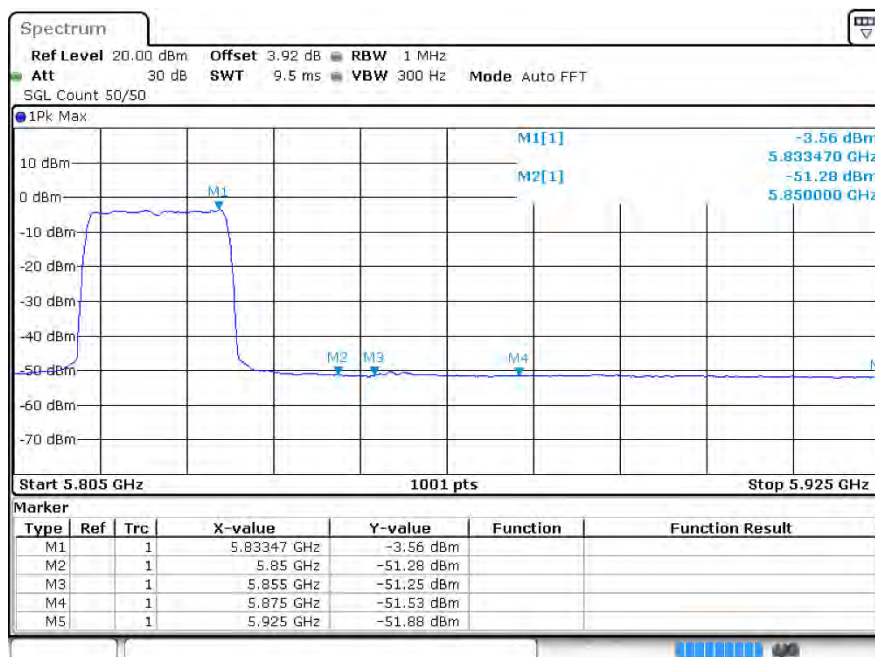


Restrict Band ax40 5755MHz Ant1 Peak

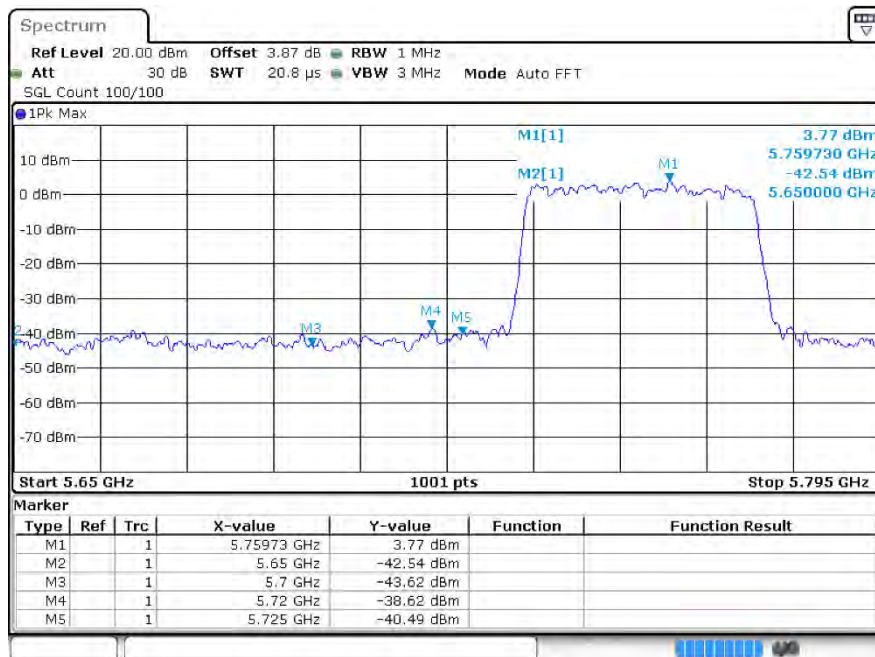


Restrict Band ax40 5755MHz Ant1 Average

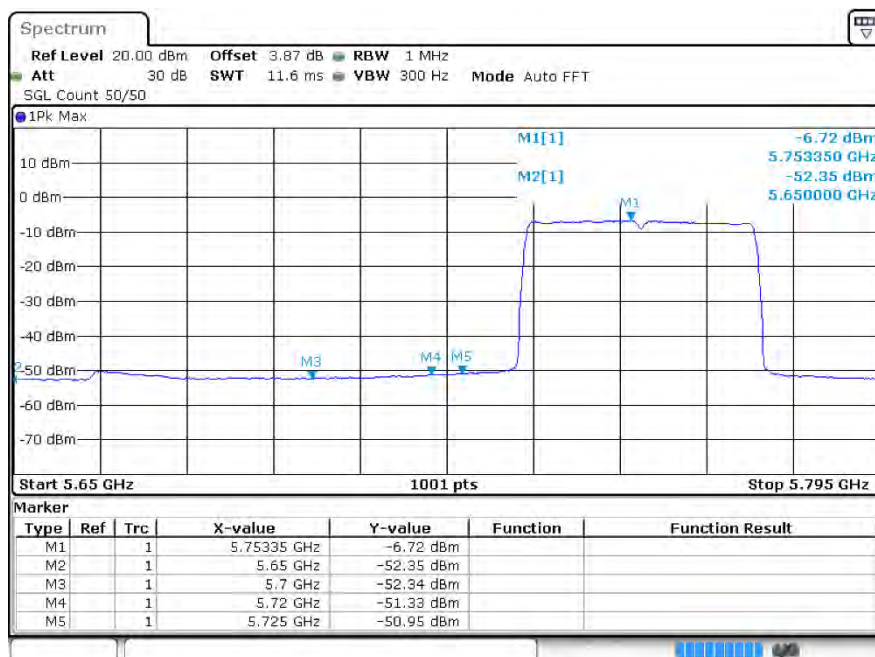


Restrict Band ax40 5795MHz Ant1 Peak

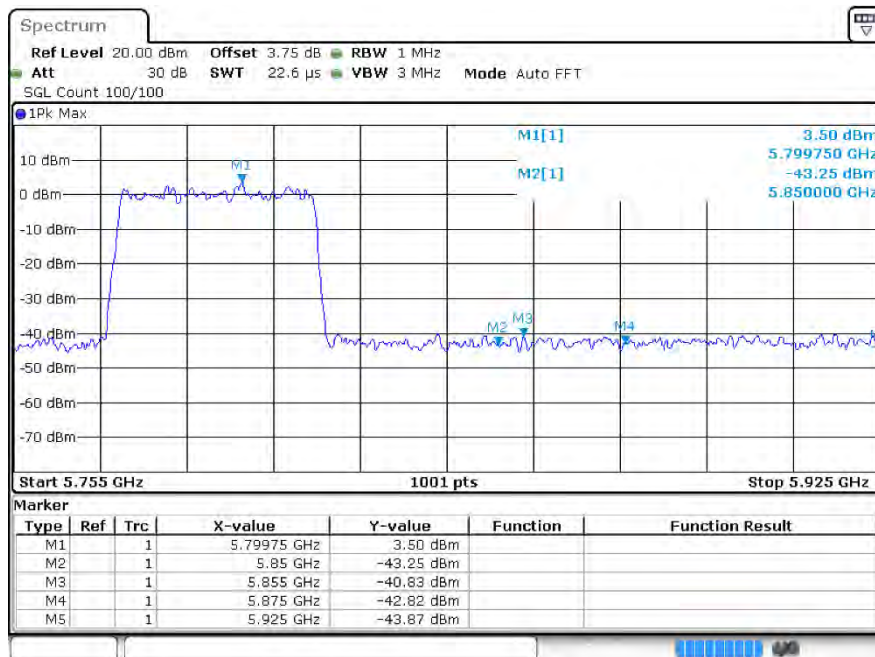


Restrict Band ax40 5795MHz Ant1 Average

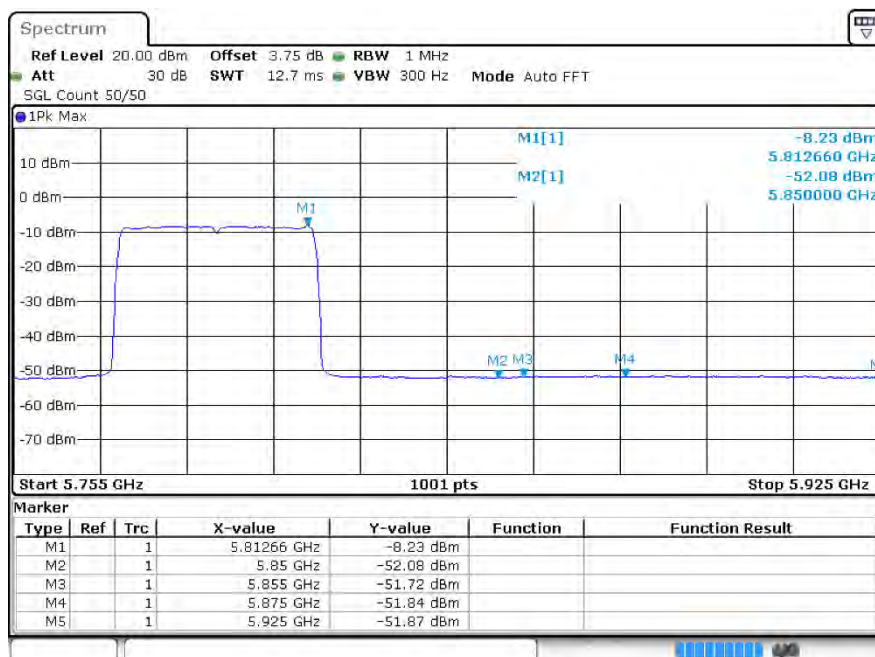

Restrict Band ax80 5775MHz Ant1 Peak

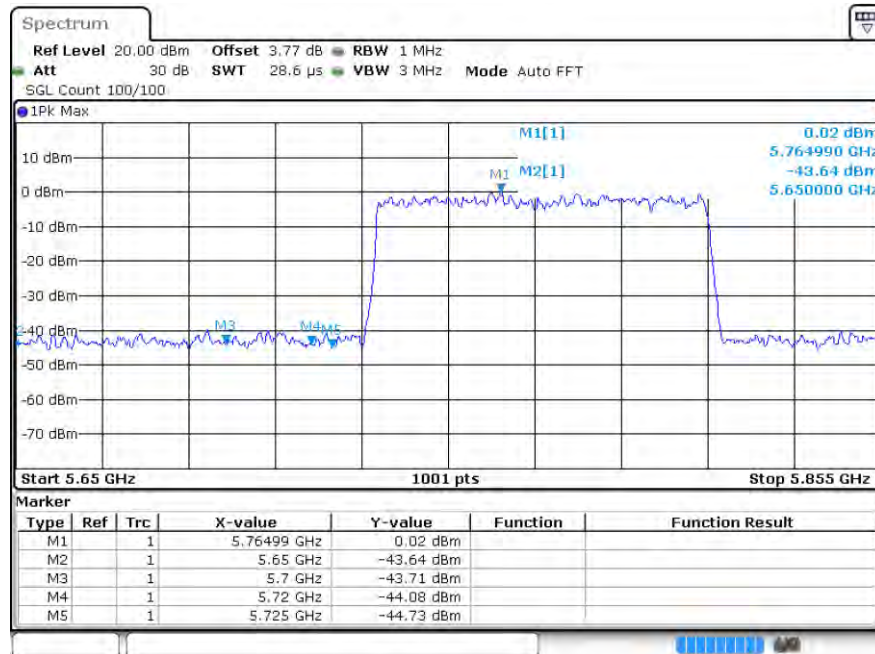


Restrict Band ax80 5775MHz Ant1 Average

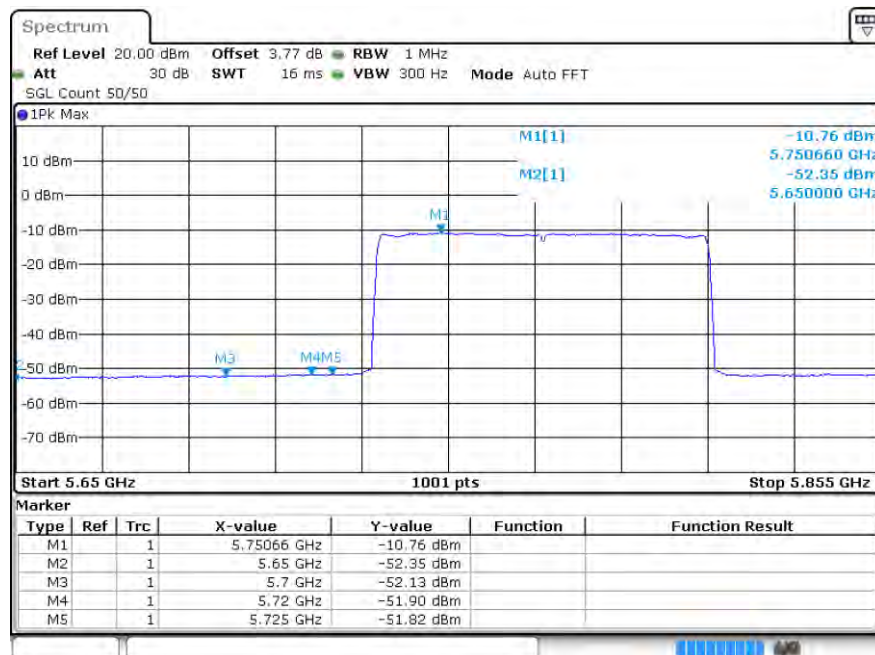




Restrict Band ax80 5775MHz Ant1 Peak

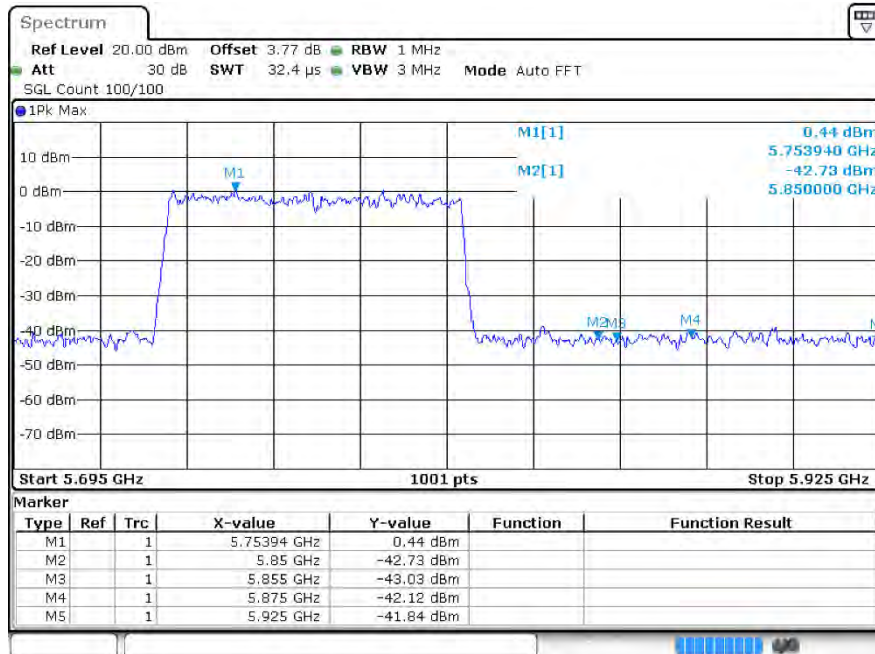

Restrict Band ax80 5775MHz Ant1 Average

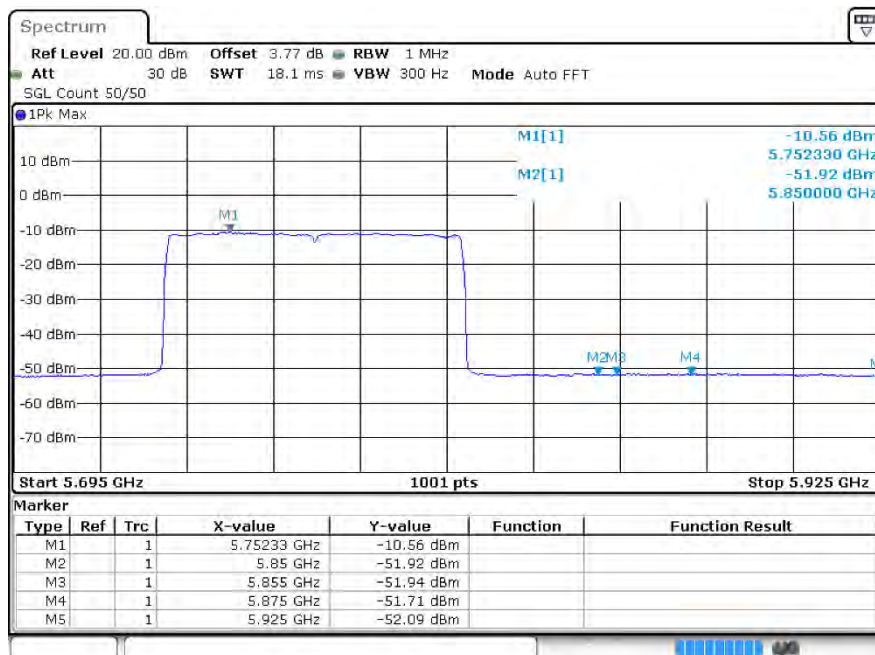

---The End---