





11N40SISO_Ant2_2437



11N40SISO_Ant1_2452

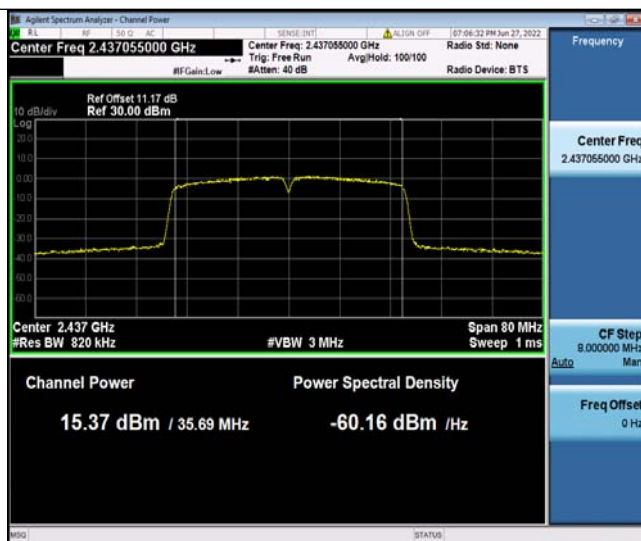

11N40SISO_Ant2_2452

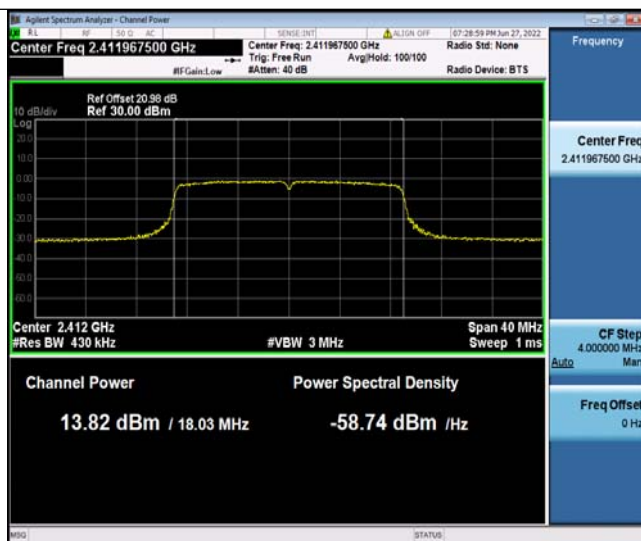


11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412



11N20MIMO_Ant1_2437

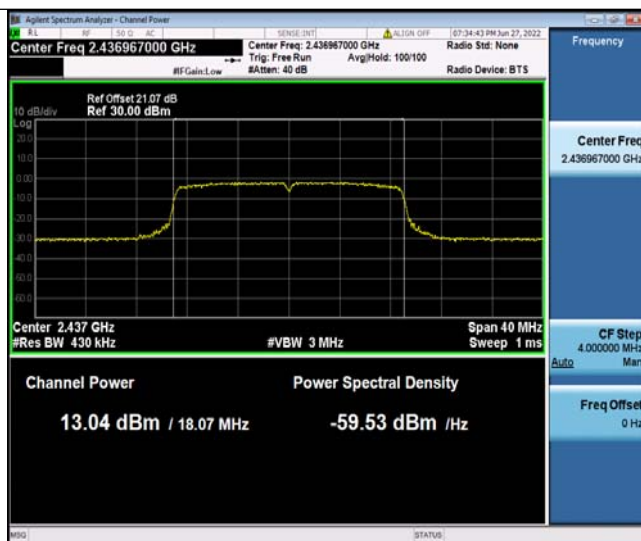


11N20MIMO_Ant2_2437



11N20MIMO_Ant1_2462



11N20MIMO_Ant2_2462

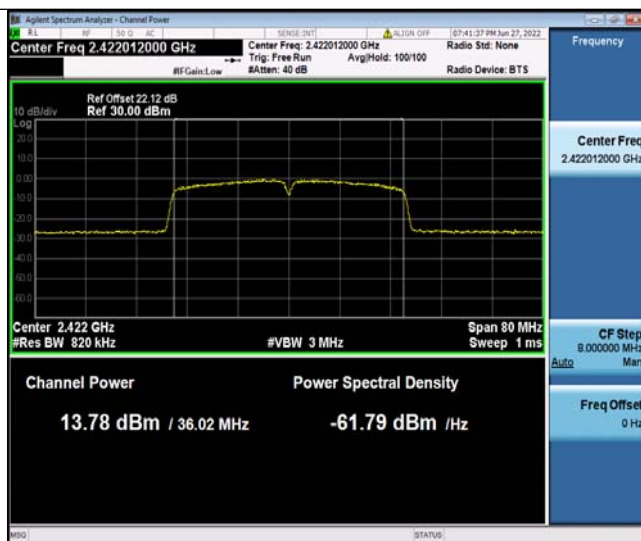

11N40MIMO_Ant1_2422



11N40MIMO_Ant2_2422



11N40MIMO_Ant1_2437



11N40MIMO_Ant2_2437



11N40MIMO_Ant1_2452



11N40MIMO_Ant2_2452

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

8.3.5 Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.15	≤8.00	PASS
	Ant2	2412	-18.78	≤8.00	PASS
	Ant1	2437	-16.87	≤8.00	PASS
	Ant2	2437	-19.5	≤8.00	PASS
	Ant1	2462	-17.09	≤8.00	PASS
	Ant2	2462	-18.66	≤8.00	PASS
11G	Ant1	2412	-13.42	≤8.00	PASS
	Ant2	2412	-20.07	≤8.00	PASS
	Ant1	2437	-18.4	≤8.00	PASS
	Ant2	2437	-18.74	≤8.00	PASS
	Ant1	2462	-18.28	≤8.00	PASS
	Ant2	2462	-19.79	≤8.00	PASS
11N20SISO	Ant1	2412	-18.54	≤8.00	PASS
	Ant2	2412	-19.02	≤8.00	PASS
	Ant1	2437	-18.83	≤8.00	PASS
	Ant2	2437	-18.47	≤8.00	PASS
	Ant1	2462	-17.88	≤8.00	PASS
	Ant2	2462	-18.41	≤8.00	PASS
11N40SISO	Ant1	2422	-21.52	≤8.00	PASS
	Ant2	2422	-21.52	≤8.00	PASS
	Ant1	2437	-21.35	≤8.00	PASS
	Ant2	2437	-21.28	≤8.00	PASS
	Ant1	2452	-20.88	≤8.00	PASS
	Ant2	2452	-20.19	≤8.00	PASS
11N20MIMO		2412	-15.76	≤8.00	PASS
		2437	-15.64	≤8.00	PASS
		2462	-15.13	≤8.00	PASS
11N40MIMO		2422	-18.51	≤8.00	PASS
		2437	-18.30	≤8.00	PASS
		2452	-17.51	≤8.00	PASS



11B_Ant1_2412



11B_Ant2_2412



11B_Ant1_2437




11B_Ant2_2437




11B_Ant1_2462




11B_Ant2_2462

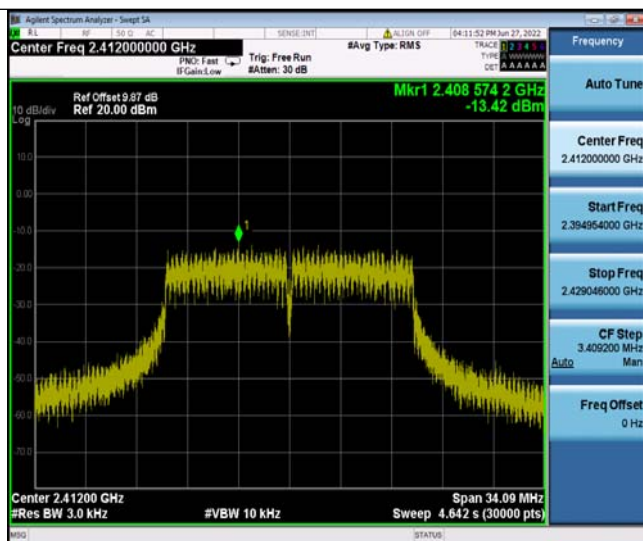


11G_Ant1_2412

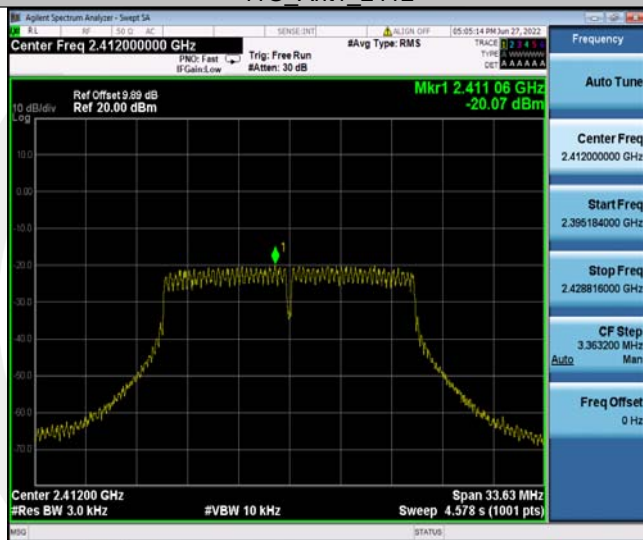


11G_Ant2_2412

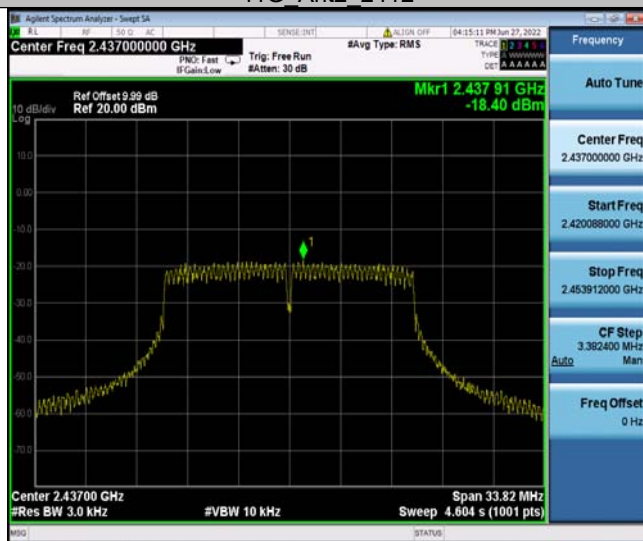


11G_Ant1_2437

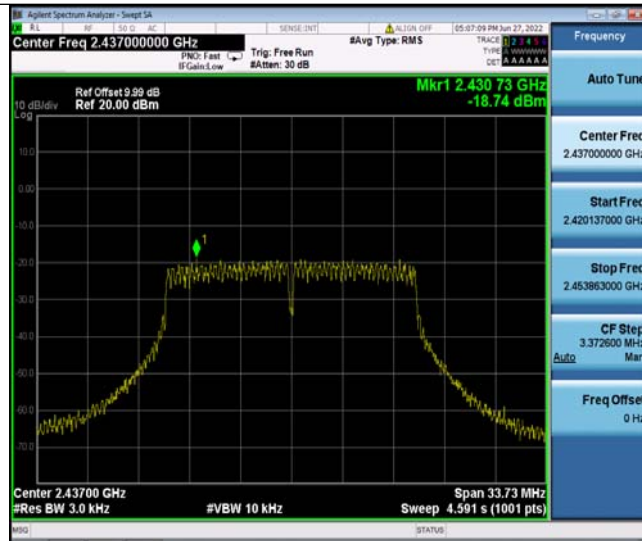


11G_Ant2_2437

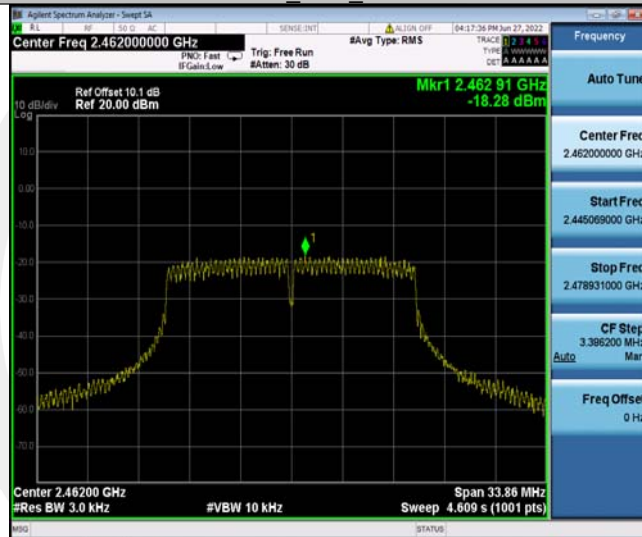


11G_Ant1_2462

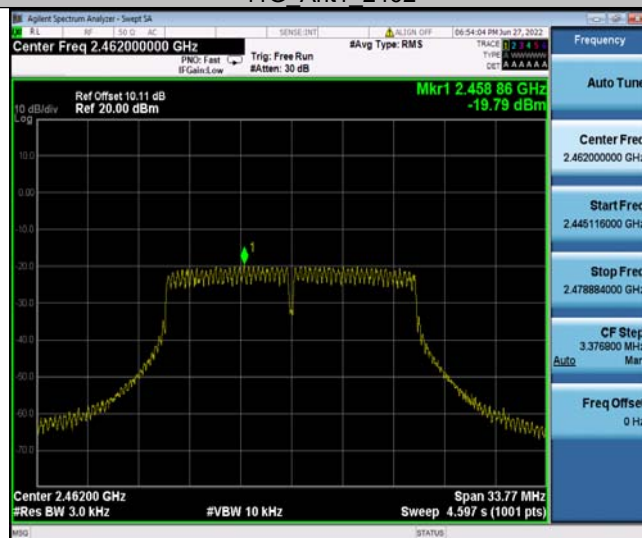


11G_Ant2_2462

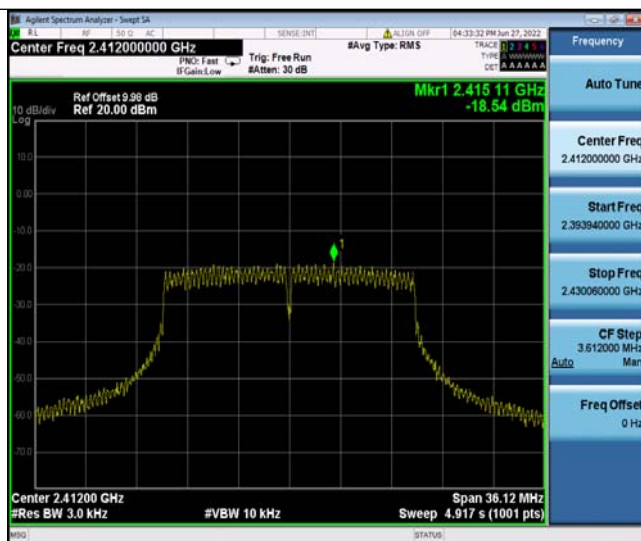


11N20SISO Ant1 2412

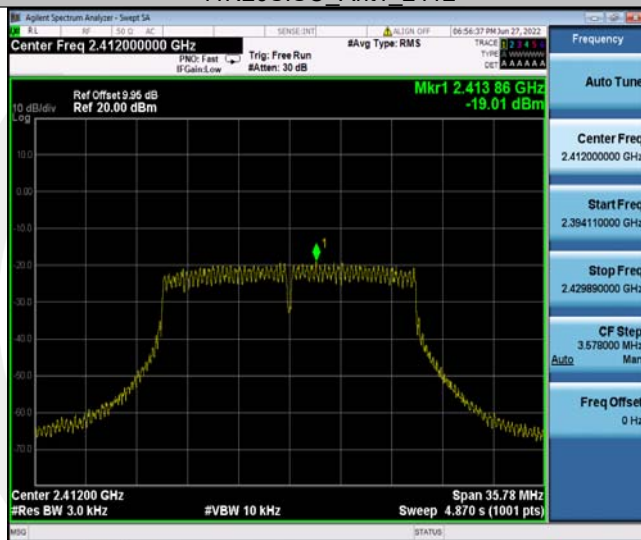


11N20SISO Ant2 2412

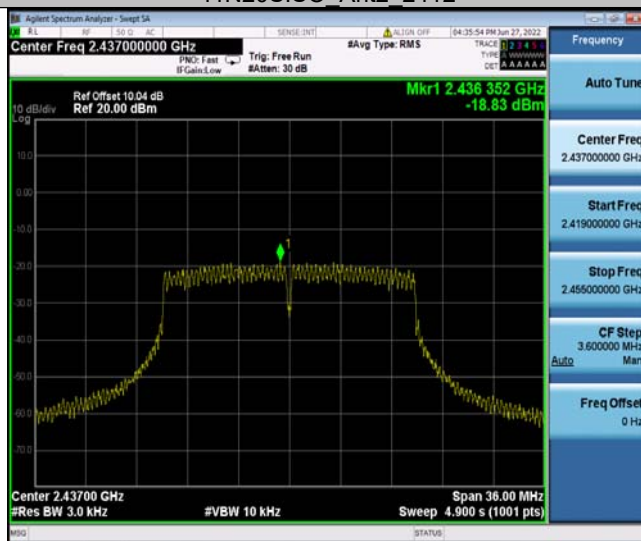

11N20SISO Ant1 2437

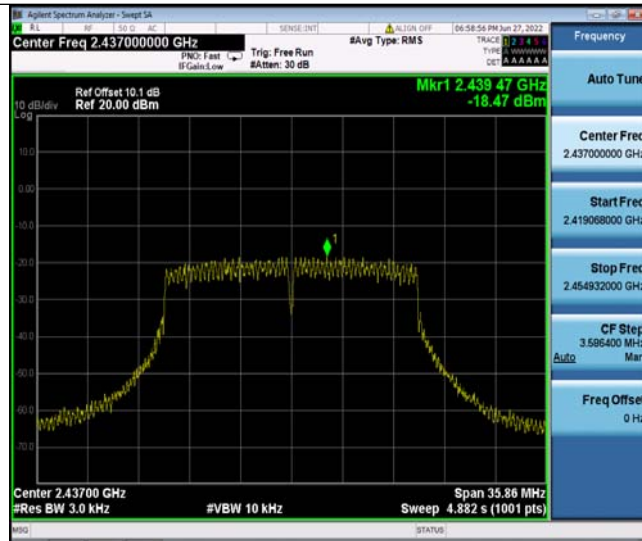


11N20SISO_Ant2_2437

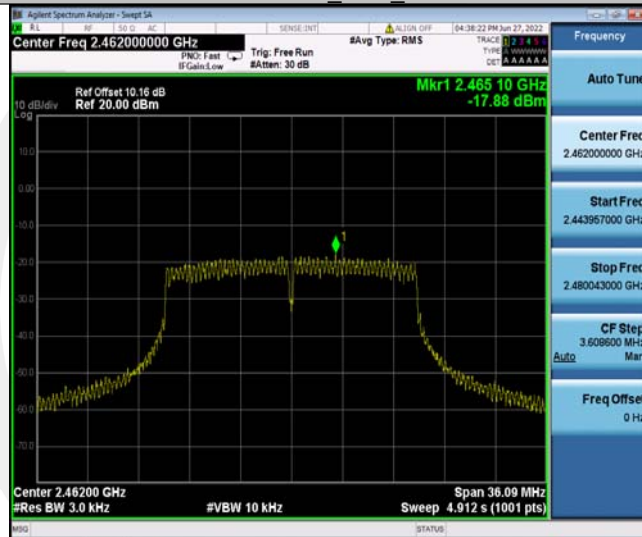


11N20SISO_Ant1_2462




11N20SISO_Ant2_2462

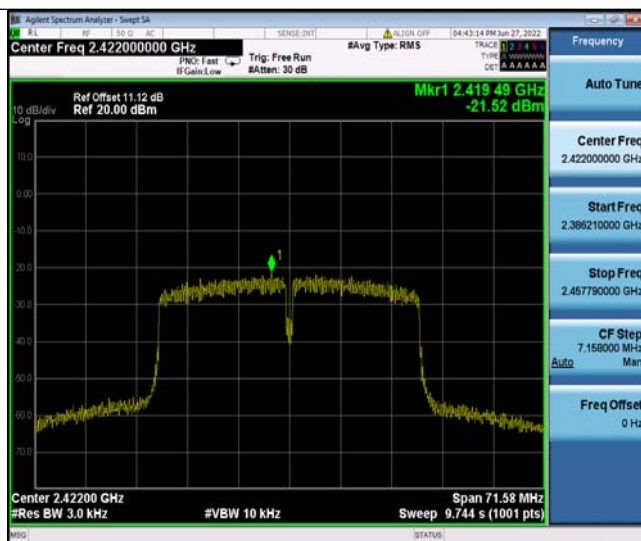




11N40SISO Ant1 2422

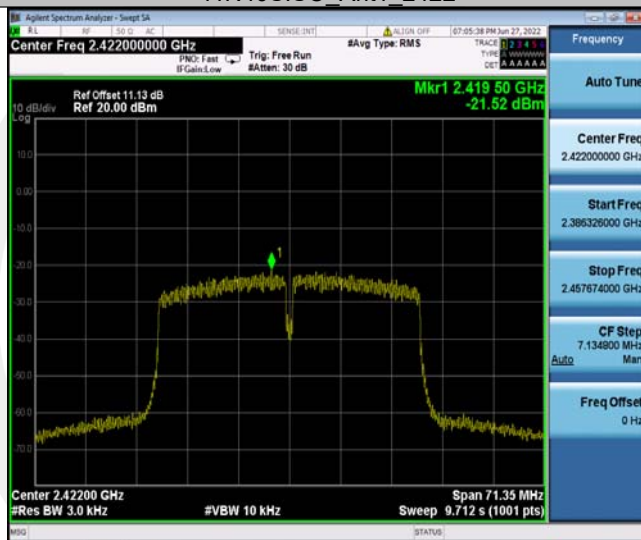

11N40SISO Ant2 2422

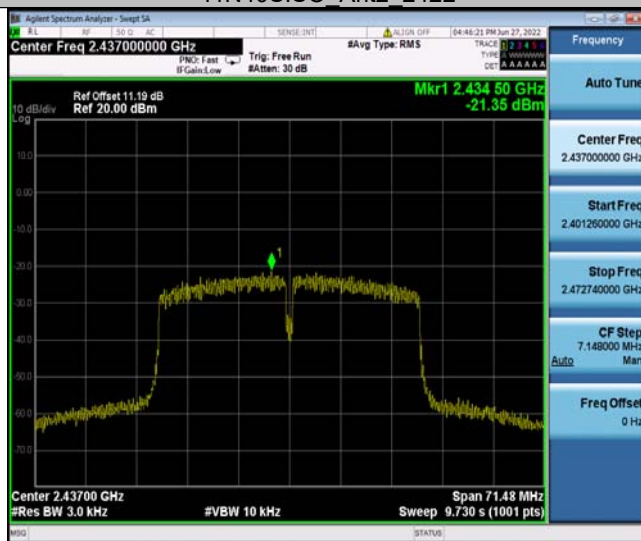

11N40SISO Ant1 2437

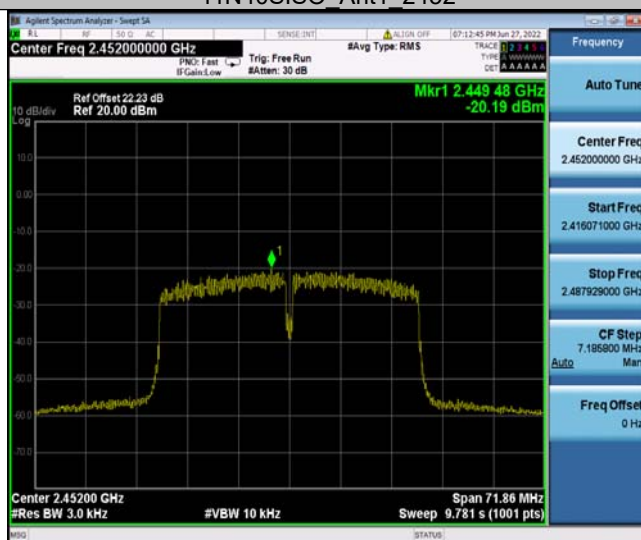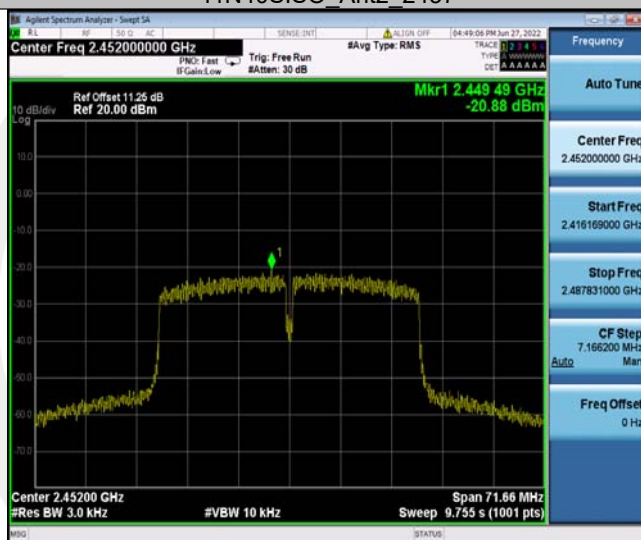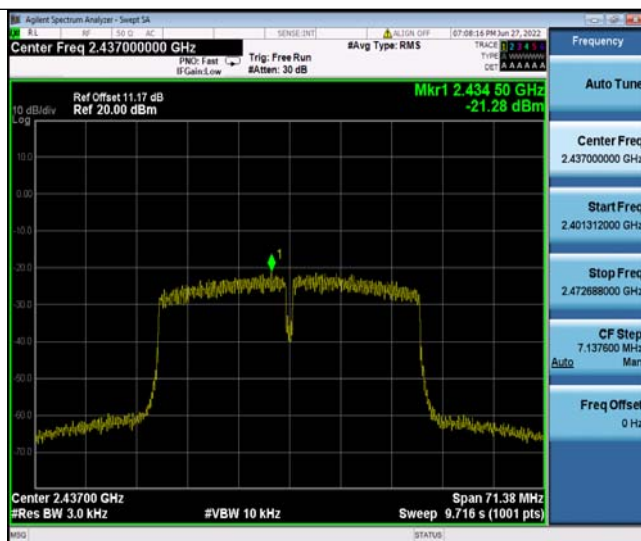

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.88	6.88	---	PASS
			30~1000	6.88	-55.75	≤-23.12	PASS
			1000~26500	6.88	-40.37	≤-23.12	PASS
	Ant2	2412	Reference	5.40	5.40	---	PASS
			30~1000	5.40	-45.15	≤-24.6	PASS
			1000~26500	5.40	-29.79	≤-24.6	PASS
	Ant1	2437	Reference	7.08	7.08	---	PASS
			30~1000	7.08	-44.86	≤-22.92	PASS
			1000~26500	7.08	-30.3	≤-22.92	PASS
	Ant2	2437	Reference	5.02	5.02	---	PASS
			30~1000	5.02	-45	≤-24.98	PASS
			1000~26500	5.02	-29.86	≤-24.98	PASS
	Ant1	2462	Reference	7.31	7.31	---	PASS
			30~1000	7.31	-44.71	≤-22.69	PASS
			1000~26500	7.31	-29.44	≤-22.69	PASS
	Ant2	2462	Reference	5.51	5.51	---	PASS
			30~1000	5.51	-45.48	≤-24.49	PASS
			1000~26500	5.51	-29.12	≤-24.49	PASS
11G	Ant1	2412	Reference	6.84	6.84	---	PASS
			30~1000	6.84	-46.04	≤-23.16	PASS
			1000~26500	6.84	-30.24	≤-23.16	PASS
	Ant2	2412	Reference	4.37	4.37	---	PASS
			30~1000	4.37	-45.58	≤-25.63	PASS
			1000~26500	4.37	-30.34	≤-25.63	PASS
	Ant1	2437	Reference	7.00	7.00	---	PASS
			30~1000	7.00	-45.72	≤-23	PASS
			1000~26500	7.00	-29.5	≤-23	PASS
	Ant2	2437	Reference	3.58	3.58	---	PASS
			30~1000	3.58	-44.73	≤-26.42	PASS
			1000~26500	3.58	-29.65	≤-26.42	PASS
	Ant1	2462	Reference	7.40	7.40	---	PASS
			30~1000	7.40	-45.32	≤-22.6	PASS
			1000~26500	7.40	-30.1	≤-22.6	PASS
	Ant2	2462	Reference	4.22	4.22	---	PASS
			30~1000	4.22	-44.67	≤-25.78	PASS
			1000~26500	4.22	-29.87	≤-25.78	PASS
11N20SISO	Ant1	2412	Reference	5.64	5.64	---	PASS
			30~1000	5.64	-45.29	≤-24.36	PASS
			1000~26500	5.64	-30.6	≤-24.36	PASS
	Ant2	2412	Reference	2.92	2.92	---	PASS
			30~1000	2.92	-45.57	≤-27.08	PASS
			1000~26500	2.92	-29.69	≤-27.08	PASS
	Ant1	2437	Reference	5.46	5.46	---	PASS
			30~1000	5.46	-39.99	≤-24.54	PASS
			1000~26500	5.46	-30.42	≤-24.54	PASS
	Ant2	2437	Reference	3.67	3.67	---	PASS
			30~1000	3.67	-45.48	≤-26.33	PASS
			1000~26500	3.67	-30.16	≤-26.33	PASS
	Ant1	2462	Reference	6.50	6.50	---	PASS
			30~1000	6.50	-44.9	≤-23.5	PASS
			1000~26500	6.50	-30.22	≤-23.5	PASS
	Ant2	2462	Reference	4.58	4.58	---	PASS
			30~1000	4.58	-44.83	≤-25.42	PASS
			1000~26500	4.58	-29.47	≤-25.42	PASS
11N40SISO	Ant1	2422	Reference	2.96	2.96	---	PASS
			30~1000	2.96	-45.5	≤-27.04	PASS
			1000~26500	2.96	-29.9	≤-27.04	PASS
	Ant2	2422	Reference	0.69	0.69	---	PASS
			30~1000	0.69	-45.21	≤-29.31	PASS
			1000~26500	0.69	-29.93	≤-29.31	PASS

	Ant1	2437	Reference	3.02	3.02	---	PASS
			30~1000	3.02	-45.36	≤ -26.98	PASS
			1000~26500	3.02	-30.12	≤ -26.98	PASS
	Ant2	2437	Reference	2.95	2.95	---	PASS
			30~1000	2.95	-45.29	≤ -27.05	PASS
			1000~26500	2.95	-29.77	≤ -27.05	PASS
	Ant1	2452	Reference	3.54	3.54	---	PASS
			30~1000	3.54	-45.2	≤ -26.46	PASS
			1000~26500	3.54	-29.91	≤ -26.46	PASS
	Ant2	2452	Reference	2.95	2.95	---	PASS
			30~1000	2.95	-45.48	≤ -27.05	PASS
			1000~26500	2.95	-29.23	≤ -27.05	PASS
11N20MIMO	Ant1	2412	Reference	3.41	3.41	---	PASS
			30~1000	3.41	-45.31	≤ -26.59	PASS
			1000~26500	3.41	-30.1	≤ -26.59	PASS
	Ant2	2412	Reference	2.33	2.33	---	PASS
			30~1000	2.33	-44.8	≤ -27.67	PASS
			1000~26500	2.33	-29.22	≤ -27.67	PASS
	Ant1	2437	Reference	3.38	3.38	---	PASS
			30~1000	3.38	-45.31	≤ -26.62	PASS
			1000~26500	3.38	-30.29	≤ -26.62	PASS
	Ant2	2437	Reference	2.41	2.41	---	PASS
			30~1000	2.41	-45.55	≤ -27.59	PASS
			1000~26500	2.41	-30.01	≤ -27.59	PASS
	Ant1	2462	Reference	3.19	3.19	---	PASS
			30~1000	3.19	-44.76	≤ -26.81	PASS
			1000~26500	3.19	-29.81	≤ -26.81	PASS
	Ant2	2462	Reference	3.26	3.26	---	PASS
			30~1000	3.26	-45.41	≤ -26.74	PASS
			1000~26500	3.26	-29.76	≤ -26.74	PASS
11N40MIMO	Ant1	2422	Reference	0.44	0.44	---	PASS
			30~1000	0.44	-45.41	≤ -29.56	PASS
			1000~26500	0.44	-30.15	≤ -29.56	PASS
	Ant2	2422	Reference	-0.57	-0.57	---	PASS
			30~1000	-0.57	-49.42	≤ -30.57	PASS
			1000~26500	-0.57	-39.17	≤ -30.57	PASS
	Ant1	2437	Reference	0.53	0.53	---	PASS
			30~1000	0.53	-44.74	≤ -29.47	PASS
			1000~26500	0.53	-29.96	≤ -29.47	PASS
	Ant2	2437	Reference	-0.17	-0.17	---	PASS
			30~1000	-0.17	-45.58	≤ -30.17	PASS
			1000~26500	-0.17	-39.8	≤ -30.17	PASS
	Ant1	2452	Reference	0.56	0.56	---	PASS
			30~1000	0.56	-51.54	≤ -29.44	PASS
			1000~26500	0.56	-39.69	≤ -29.44	PASS
	Ant2	2452	Reference	0.65	0.65	---	PASS
			30~1000	0.65	-49.29	≤ -29.35	PASS
			1000~26500	0.65	-39.97	≤ -29.35	PASS



11B_Ant1_2412_0~Reference




11B_Ant1_2412_30~1000



11B_Ant1_2412_1000~26500



11B_Ant2_2412_0~Reference

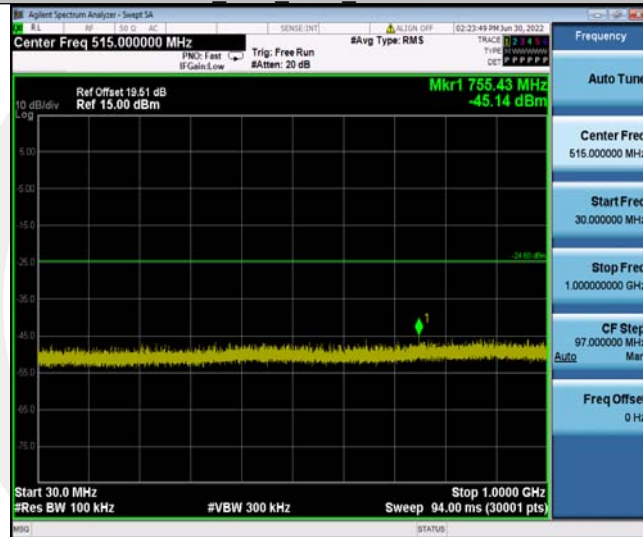


11B_Ant2_2412_30~1000



11B_Ant2_2412_1000~26500




11B_Ant1_2437_0~Reference

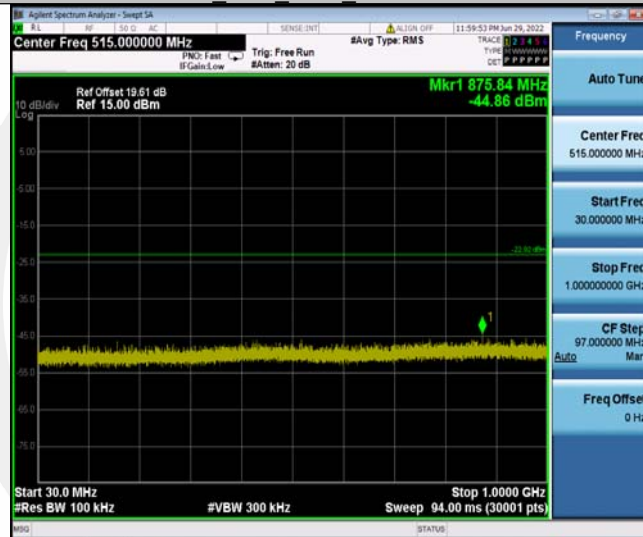


11B_Ant1_2437_30~1000



11B_Ant1_2437_1000~26500

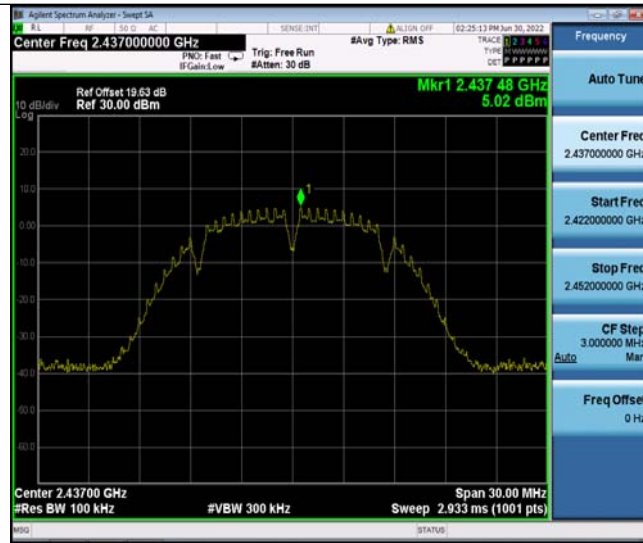

11B_Ant2_2437_0~Reference

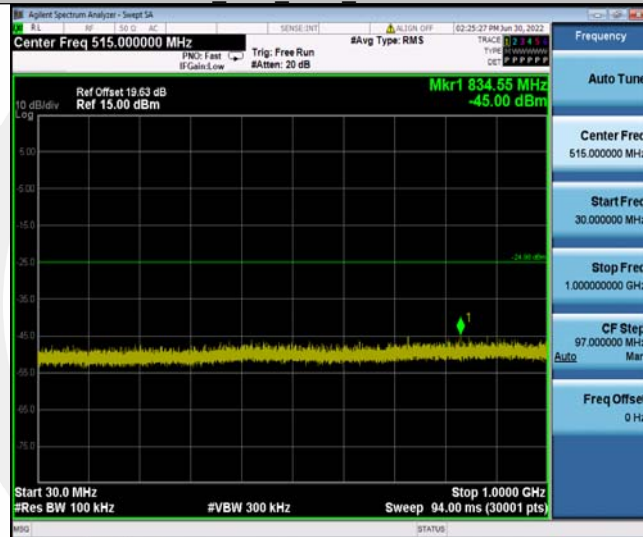

11B_Ant2_2437_30~1000



11B_Ant2_2437_1000~26500



11B_Ant1_2462_0~Reference



11B_Ant1_2462_30~1000



11B_Ant1_2462_1000~26500



11B_Ant2_2462_0~Reference




11B_Ant2_2462_30~1000



11B_Ant2_2462_1000~26500



11G_Ant1_2412_0~Reference

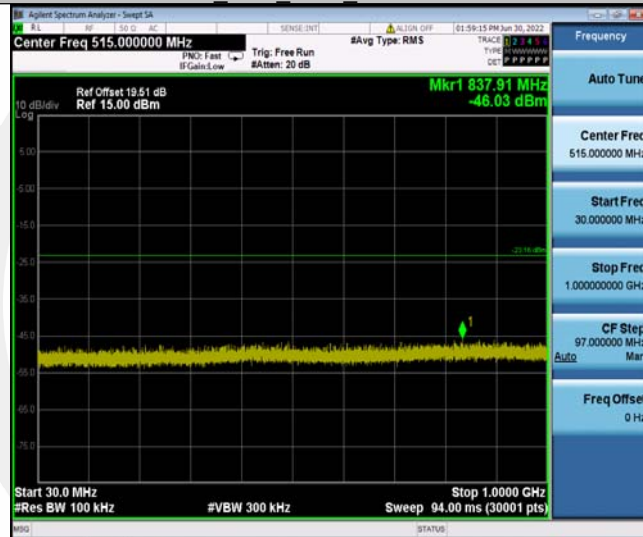


11G_Ant1_2412_30~1000



11G_Ant1_2412_1000~26500



11G_Ant2_2412_0~Reference

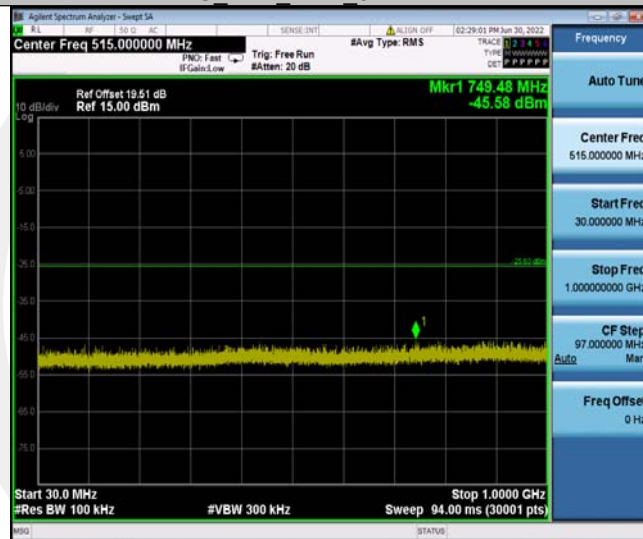


11G_Ant2_2412_30~1000



11G_Ant2_2412_1000~26500



11G_Ant1_2437_0~Reference

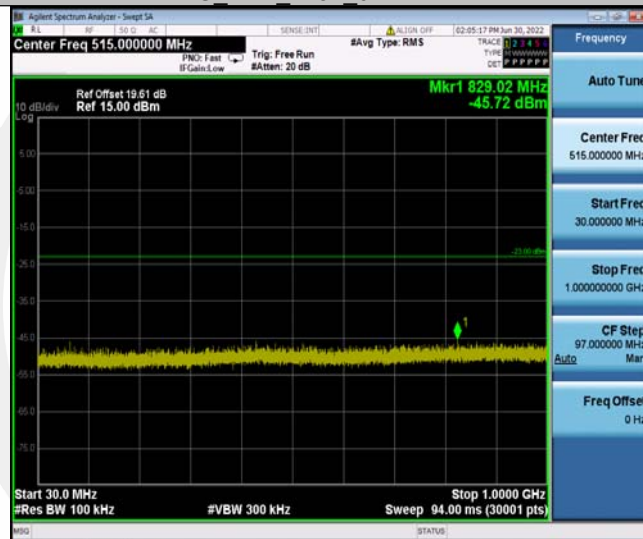


11G_Ant1_2437_30~1000



11G_Ant1_2437_1000~26500



11G_Ant2_2437_0~Reference

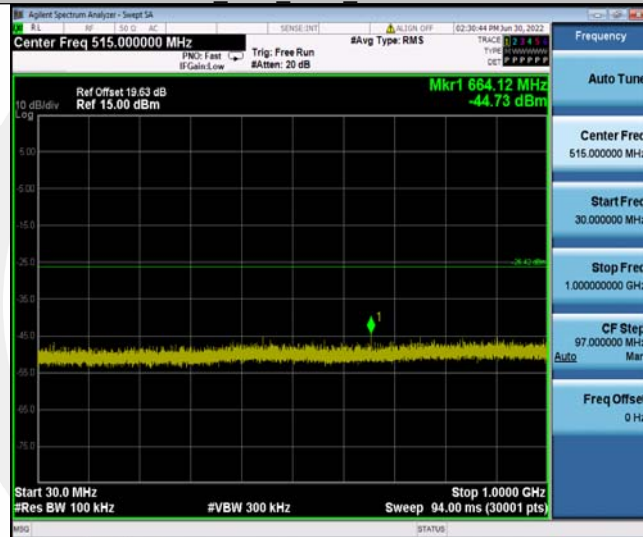


11G_Ant2_2437_30~1000



11G_Ant2_2437_1000~26500



11G_Ant1_2462_0~Reference

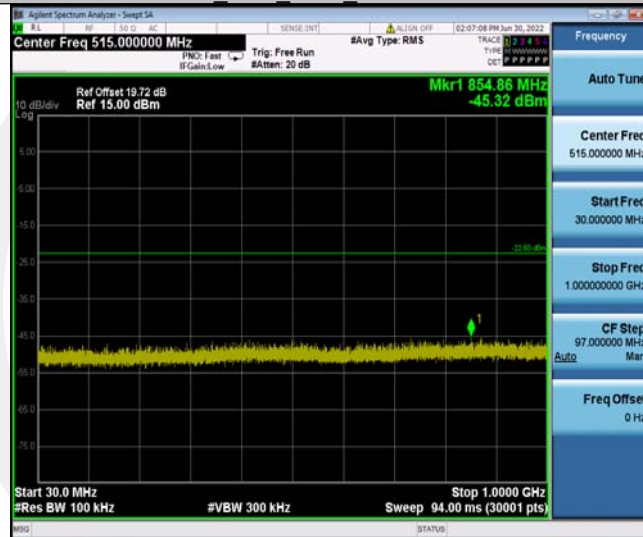


11G_Ant1_2462_30~1000



11G_Ant1_2462_1000~26500



11G_Ant2_2462_0~Reference

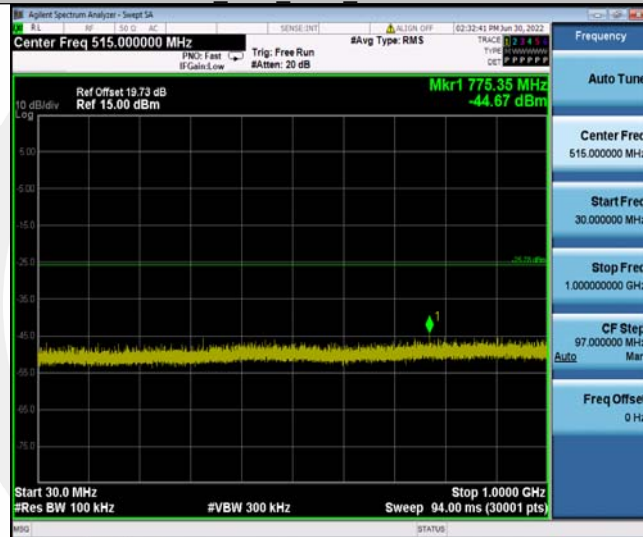

11G_Ant2_2462_30~1000



11G_Ant2_2462_1000~26500