


5. 6dB Bandwidth

5.1. Block diagram of test setup

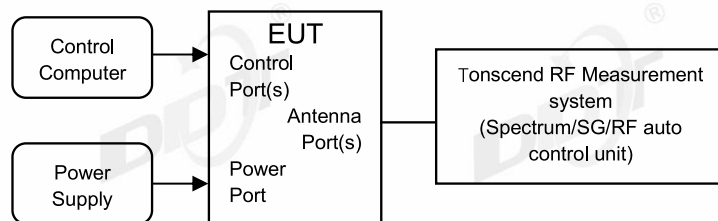

5.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


5.4. Test result B4

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	25.8℃,55.9%RH	Test Date:	2024.06.12-2024.08.18
Test Power Supply:	AC120V/60Hz	Sample Number:	S24051516-001


Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.32	5736.84	5753.16	0.5	PASS
	Ant2	5745	16.32	5736.84	5753.16	0.5	PASS
	Ant1	5785	16.32	5776.84	5793.16	0.5	PASS
	Ant2	5785	16.28	5776.88	5793.16	0.5	PASS
	Ant1	5825	16.32	5816.84	5833.16	0.5	PASS
	Ant2	5825	16.32	5816.84	5833.16	0.5	PASS
11N20MIMO	Ant1	5745	17.12	5736.52	5753.64	0.5	PASS
	Ant2	5745	17.12	5736.64	5753.76	0.5	PASS
	Ant1	5785	16.84	5776.80	5793.64	0.5	PASS
	Ant2	5785	17.00	5776.64	5793.64	0.5	PASS
	Ant1	5825	17.24	5816.40	5833.64	0.5	PASS
	Ant2	5825	16.72	5816.52	5833.24	0.5	PASS
11N40MIMO	Ant1	5755	35.68	5737.24	5772.92	0.5	PASS
	Ant2	5755	35.84	5737.16	5773.00	0.5	PASS
	Ant1	5795	35.36	5777.48	5812.84	0.5	PASS
	Ant2	5795	35.60	5777.16	5812.76	0.5	PASS
11AC20MIMO	Ant1	5745	17.40	5736.24	5753.64	0.5	PASS
	Ant2	5745	17.00	5736.64	5753.64	0.5	PASS
	Ant1	5785	17.12	5776.52	5793.64	0.5	PASS
	Ant2	5785	17.12	5776.52	5793.64	0.5	PASS
	Ant1	5825	17.24	5816.40	5833.64	0.5	PASS
	Ant2	5825	17.08	5816.52	5833.60	0.5	PASS
11AC40MIMO	Ant1	5755	35.84	5737.16	5773.00	0.5	PASS
	Ant2	5755	35.68	5737.16	5772.84	0.5	PASS
	Ant1	5795	35.76	5777.24	5813.00	0.5	PASS
	Ant2	5795	35.68	5777.16	5812.84	0.5	PASS
11AC80MIMO	Ant1	5775	73.76	5739.16	5812.92	0.5	PASS
	Ant2	5775	73.92	5738.68	5812.60	0.5	PASS
11AX20MIMO	Ant1	5745	18.44	5736.00	5754.44	0.5	PASS
	Ant2	5745	18.40	5736.04	5754.44	0.5	PASS
	Ant1	5785	18.72	5775.72	5794.44	0.5	PASS
	Ant2	5785	18.08	5776.04	5794.12	0.5	PASS
	Ant1	5825	18.56	5815.88	5834.44	0.5	PASS
	Ant2	5825	18.32	5815.76	5834.08	0.5	PASS
11AX40MIMO	Ant1	5755	37.52	5736.44	5773.96	0.5	PASS
	Ant2	5755	37.44	5736.28	5773.72	0.5	PASS
	Ant1	5795	37.52	5776.44	5813.96	0.5	PASS
	Ant2	5795	37.44	5776.28	5813.72	0.5	PASS
11AX80MIMO	Ant1	5775	74.72	5736.44	5811.16	0.5	PASS
	Ant2	5775	75.20	5737.40	5812.60	0.5	PASS

5.5. Test graphs B4

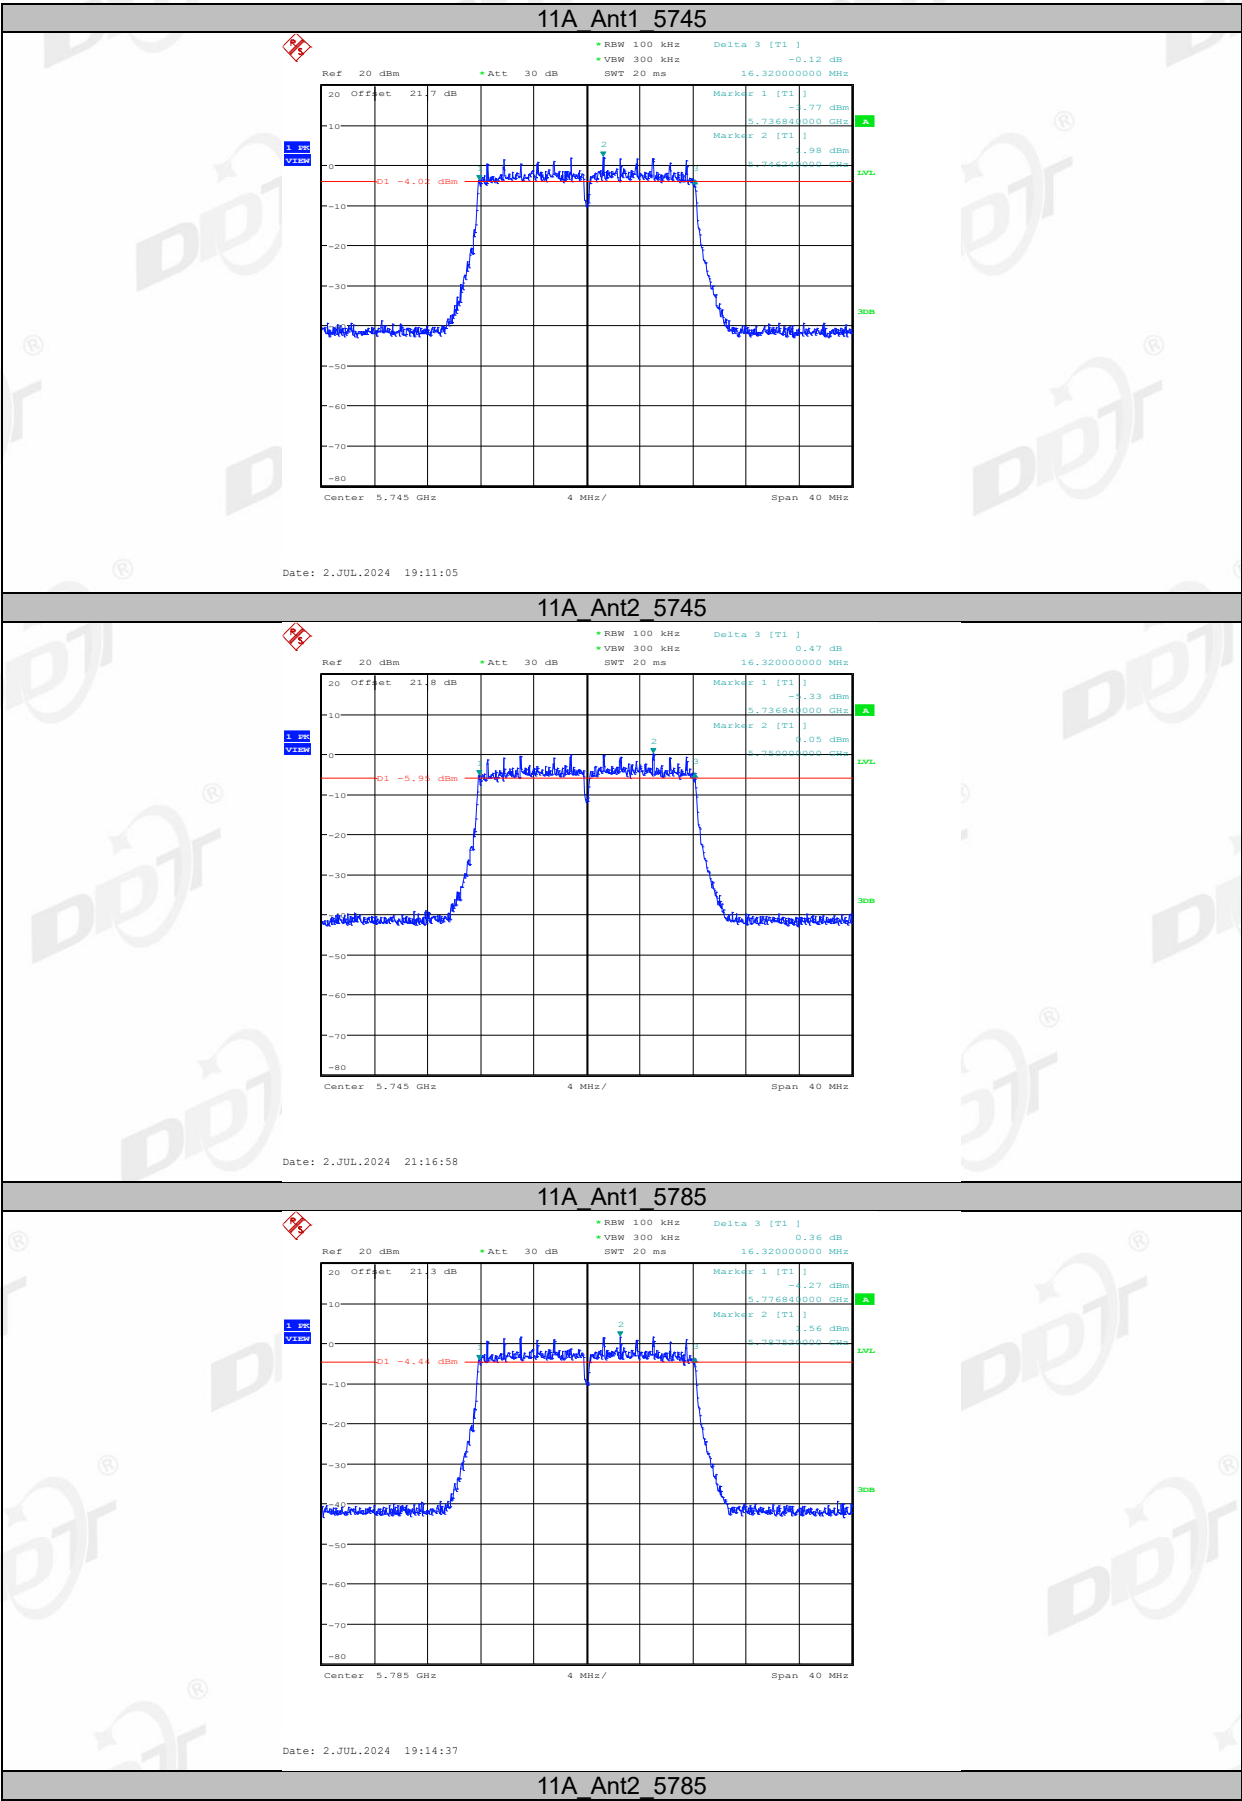


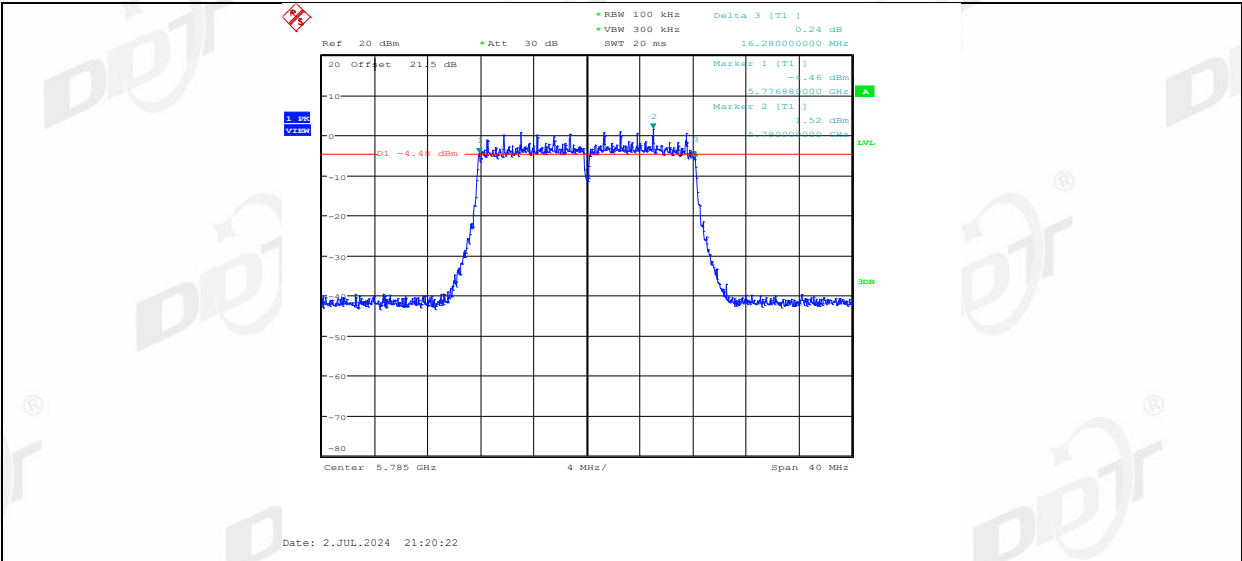




11A_Ant1_5825

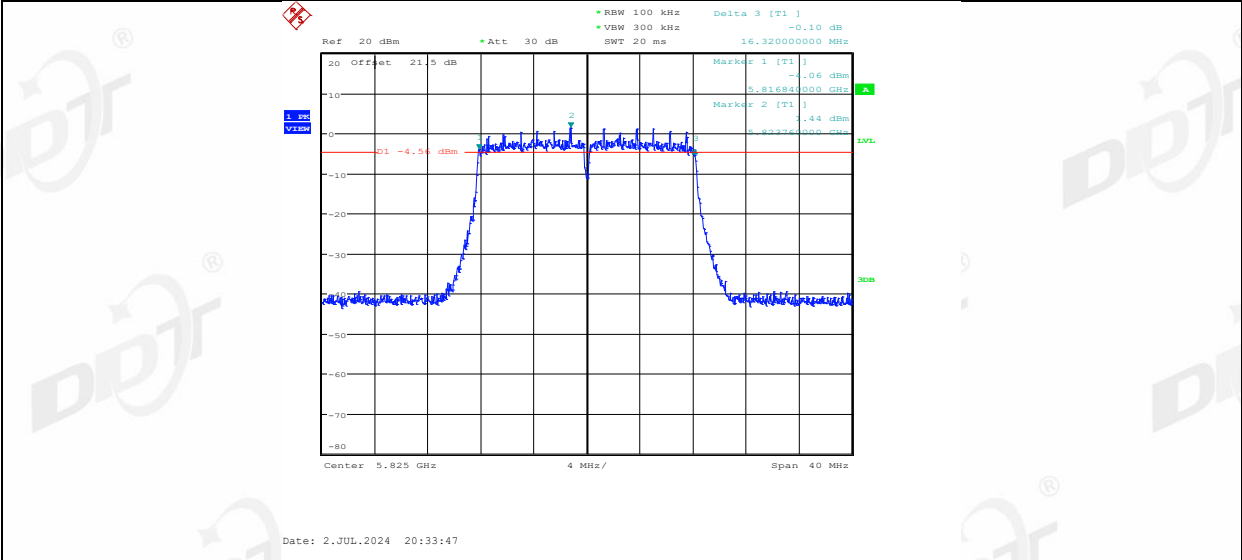


11A_Ant2_5825

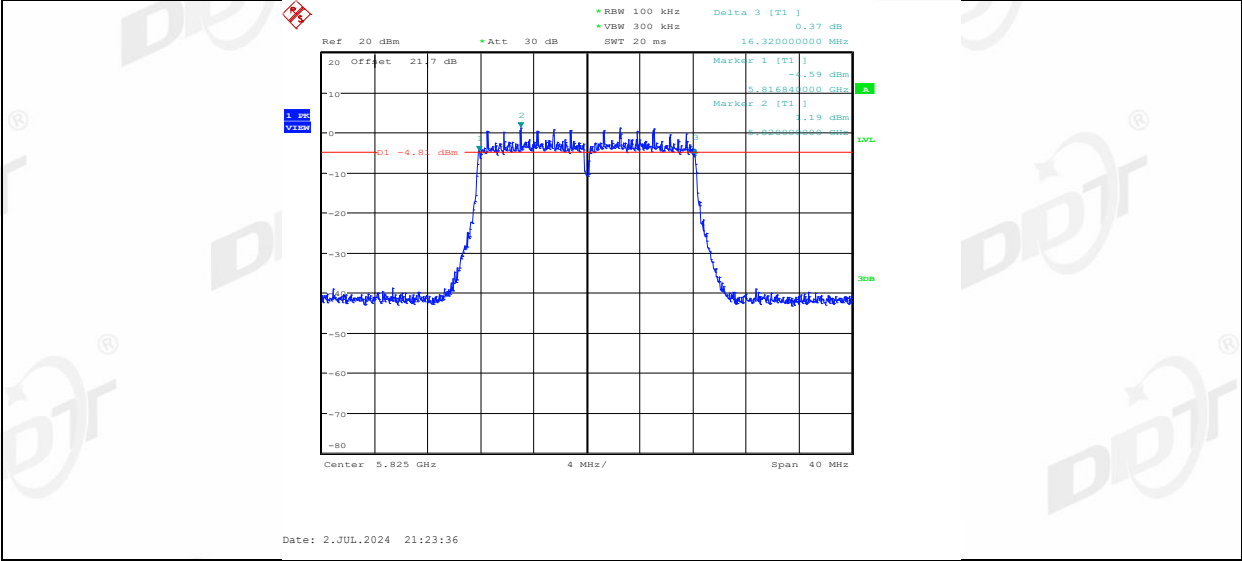


11N20MIMO_Ant1_5745

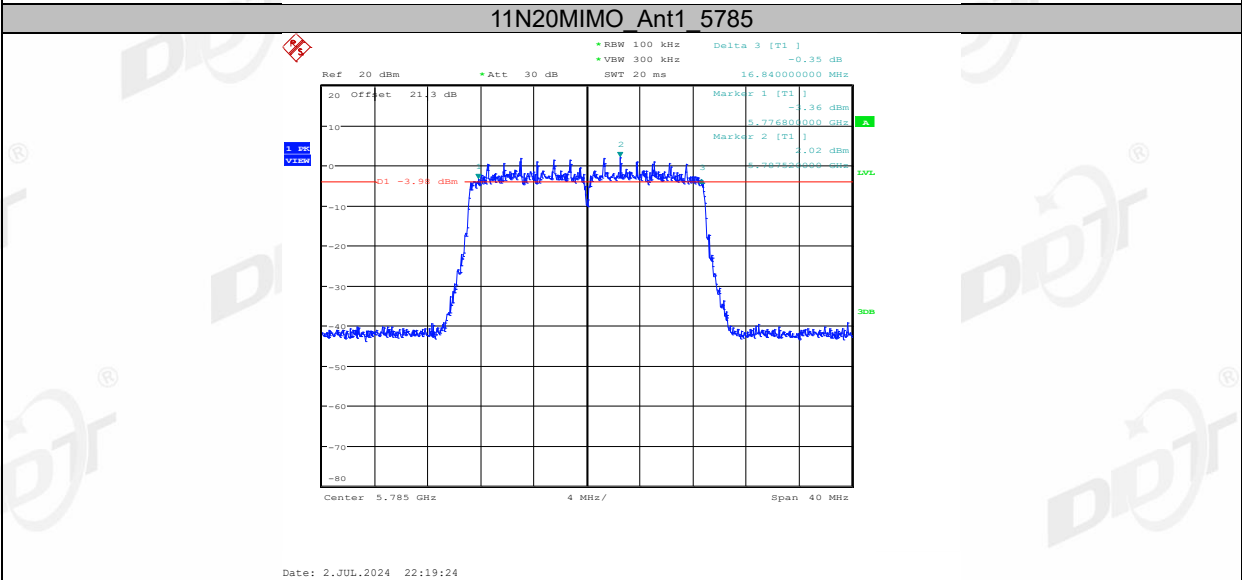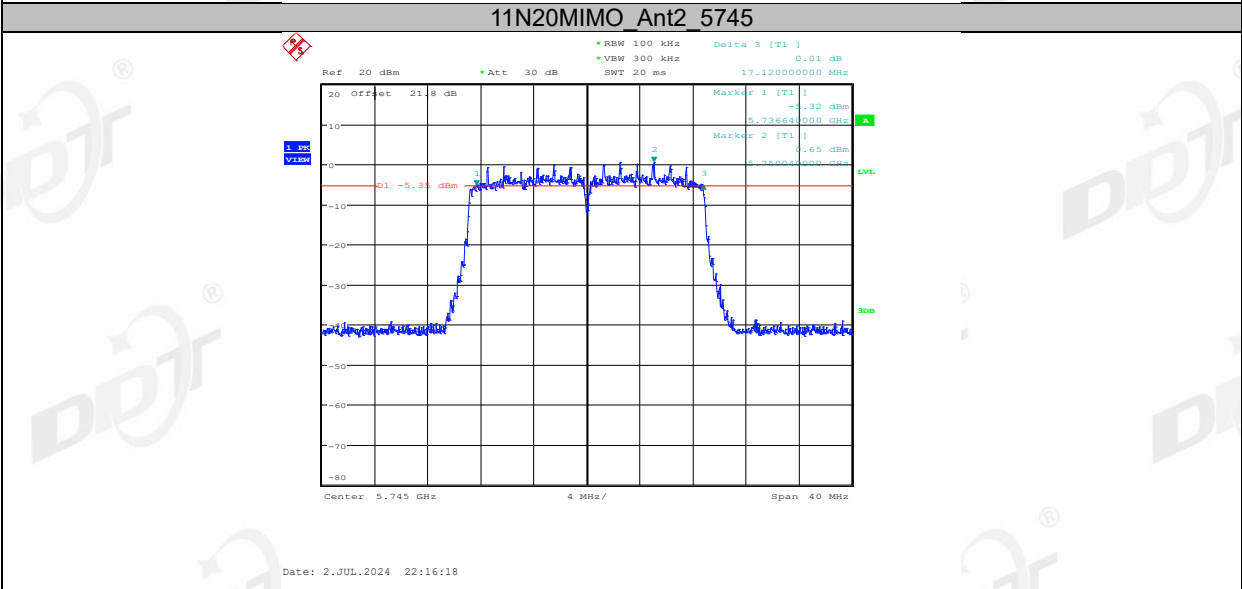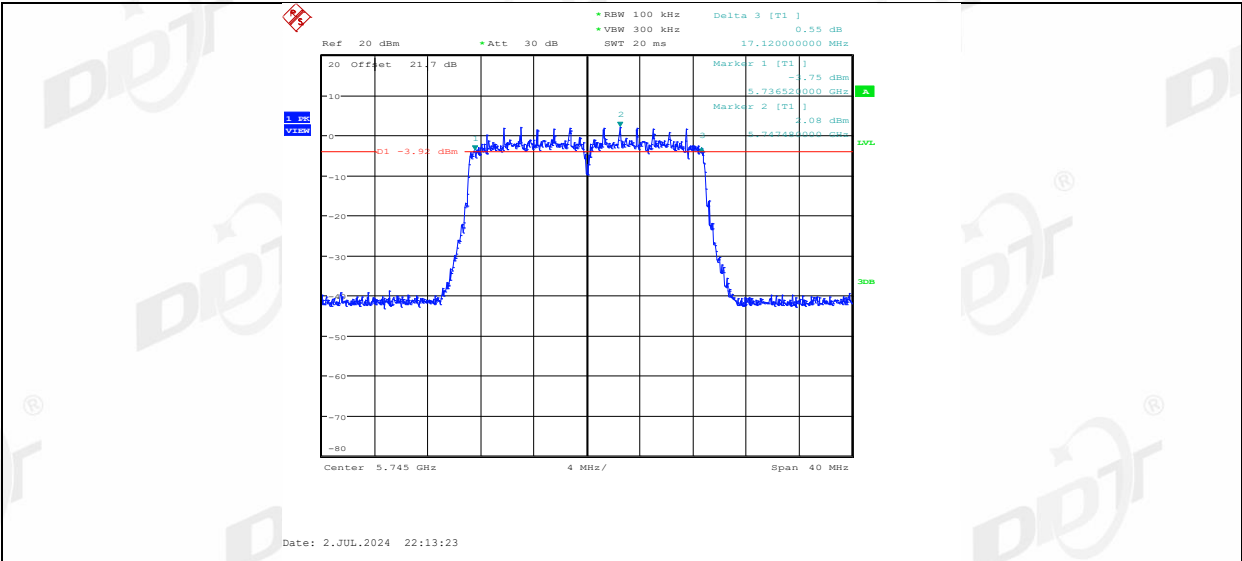


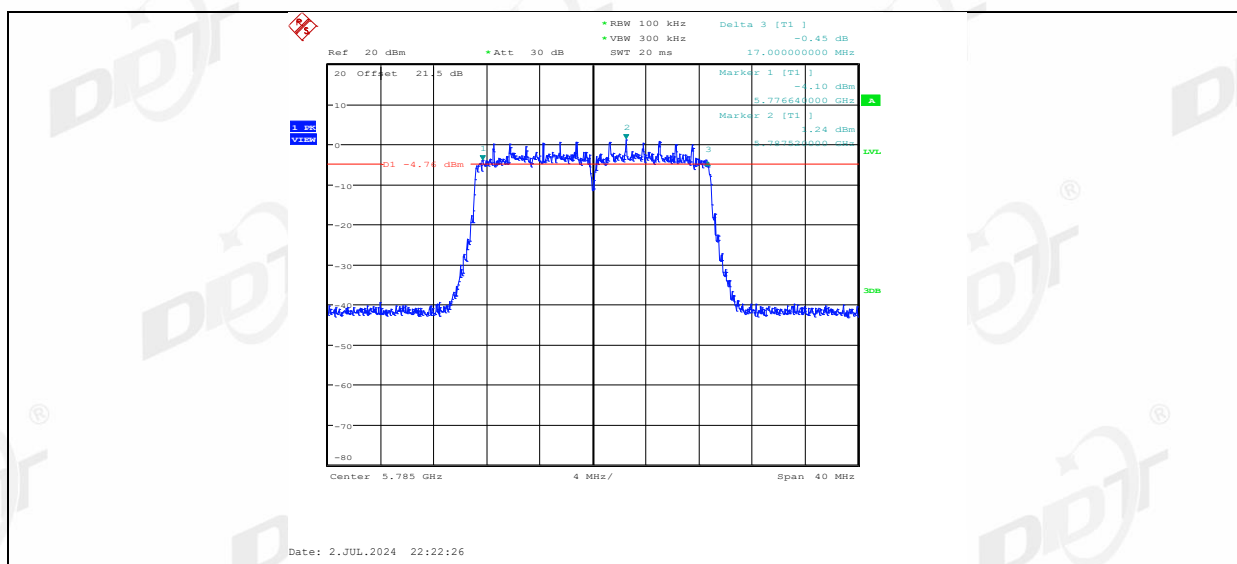


11N20MIMO Ant1 5825

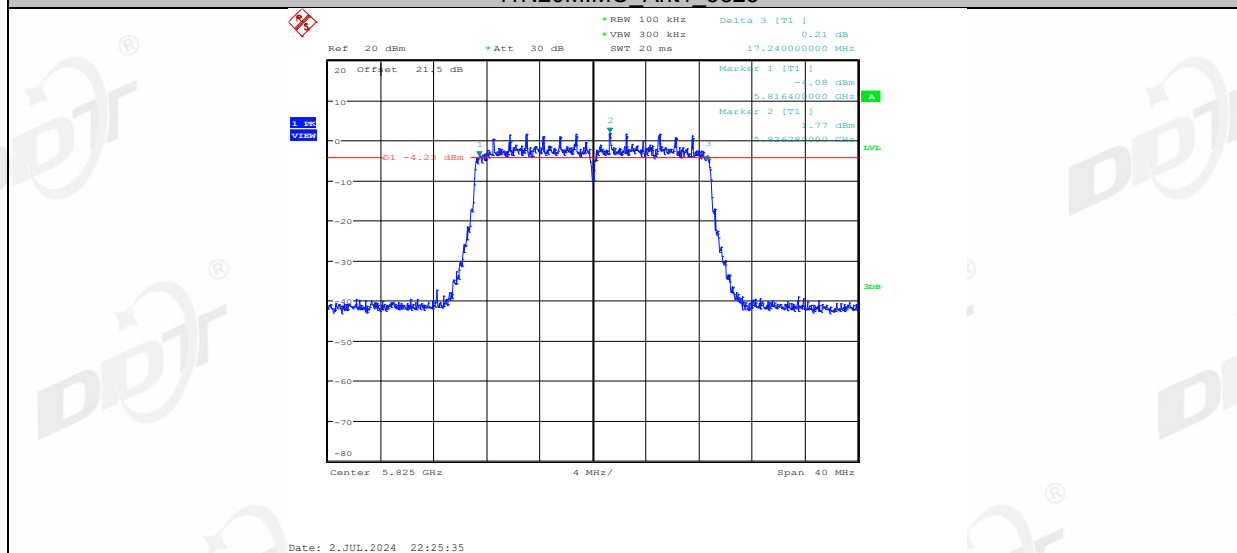


11N20MIMO Ant2 5825

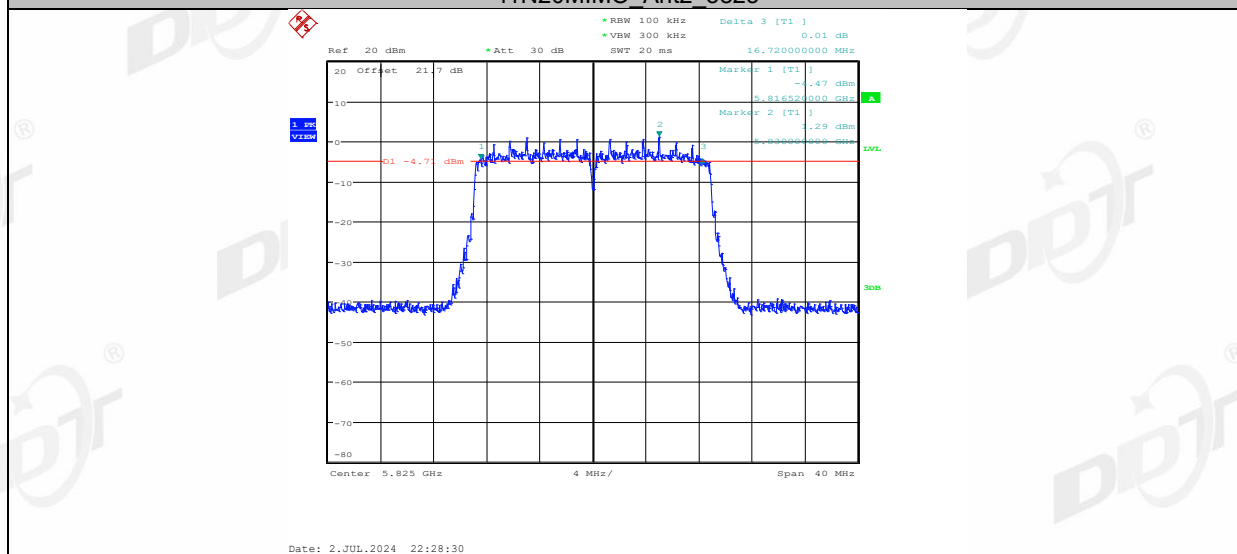


11N40MIMO Ant1 5755

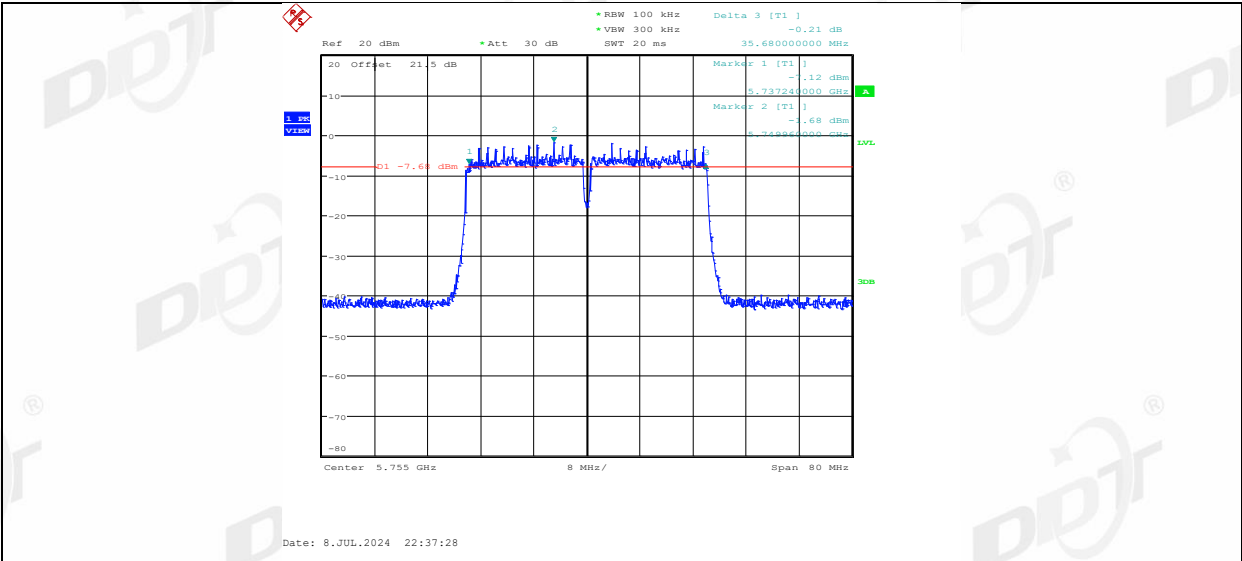


11N40MIMO_Ant2_5755

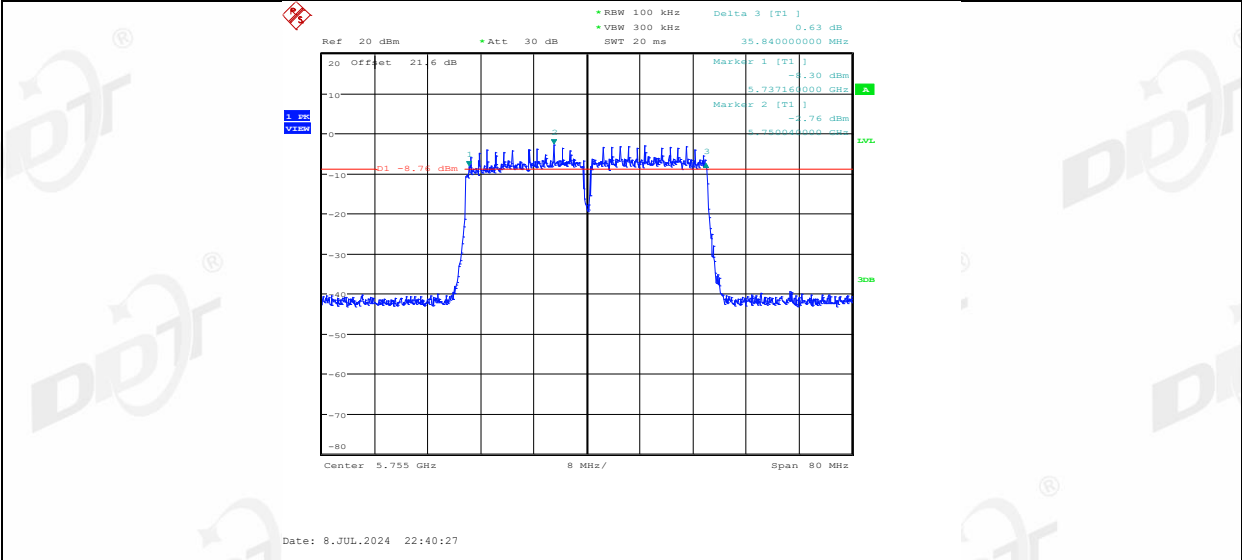


11N40MIMO_Ant1_5795

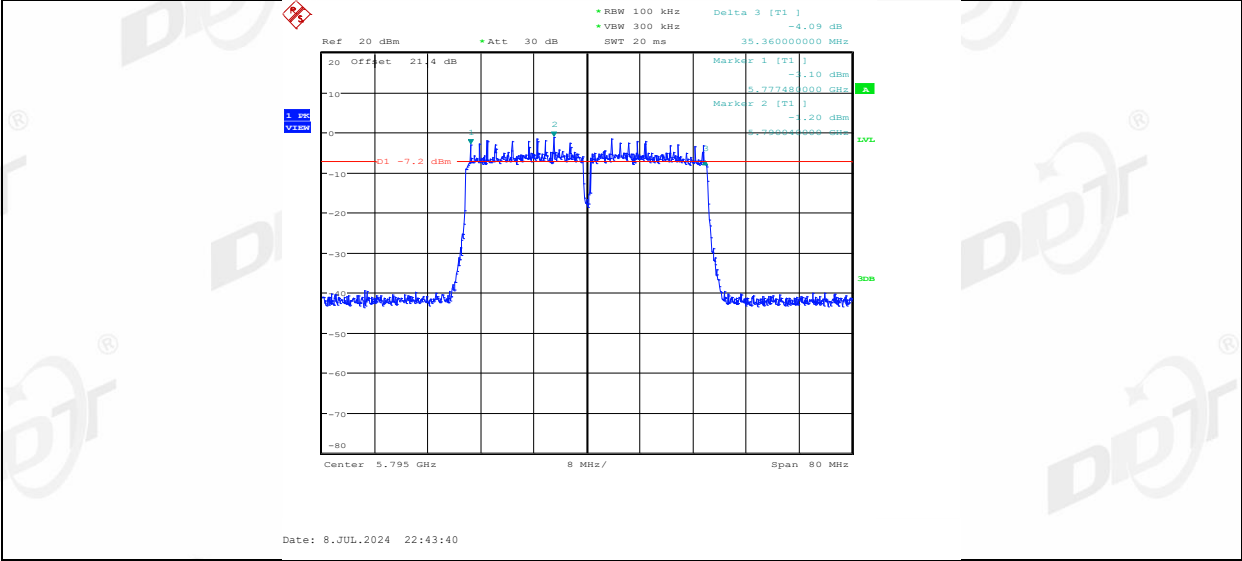


11N40MIMO_Ant2_5795

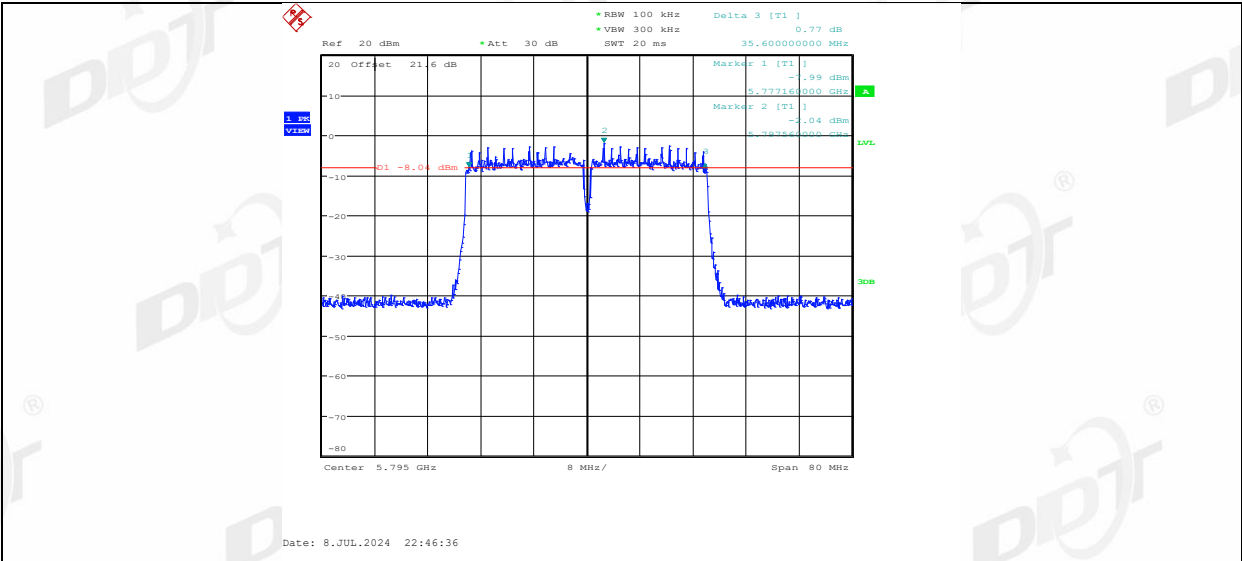


11AC20MIMO_Ant1_5745

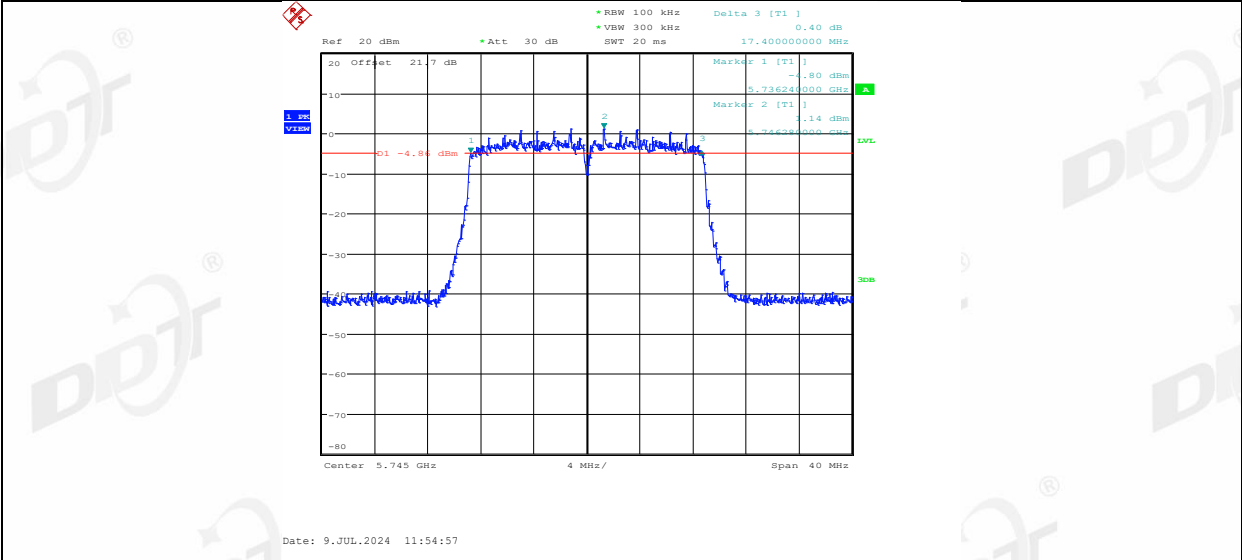


11AC20MIMO_Ant2_5745

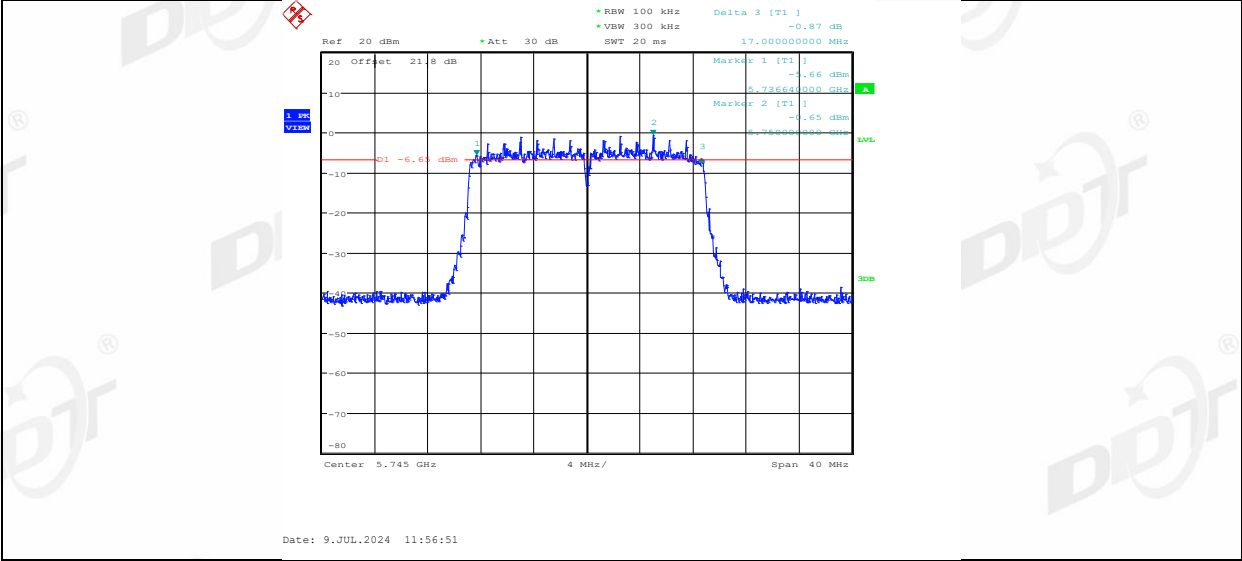


11AC20MIMO_Ant1_5785

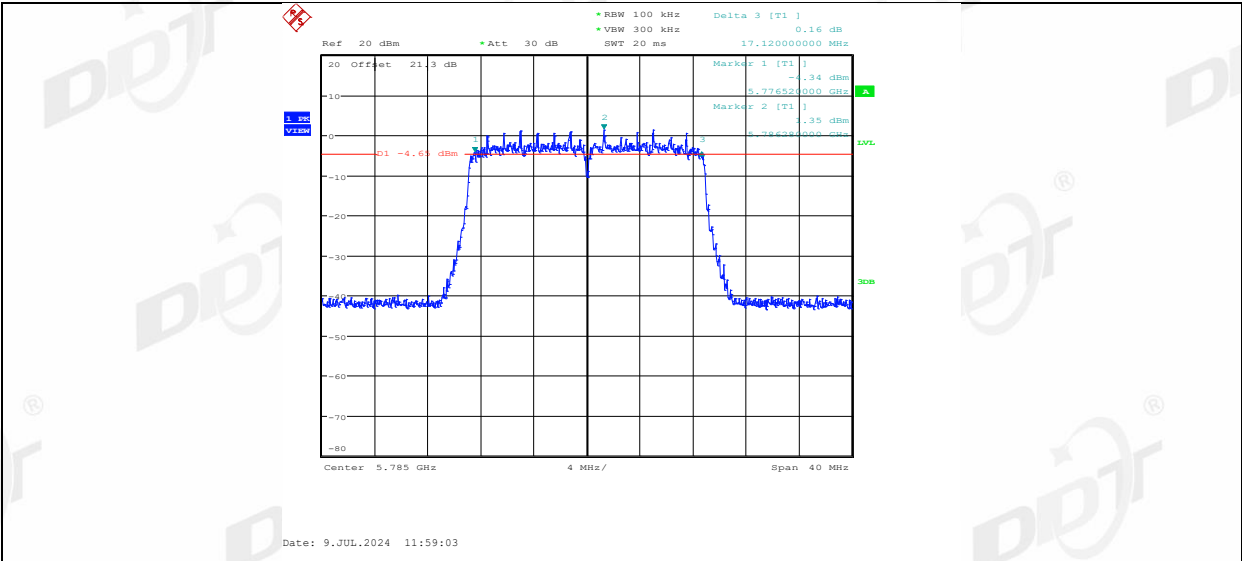




11AC20MIMO_Ant2_5785

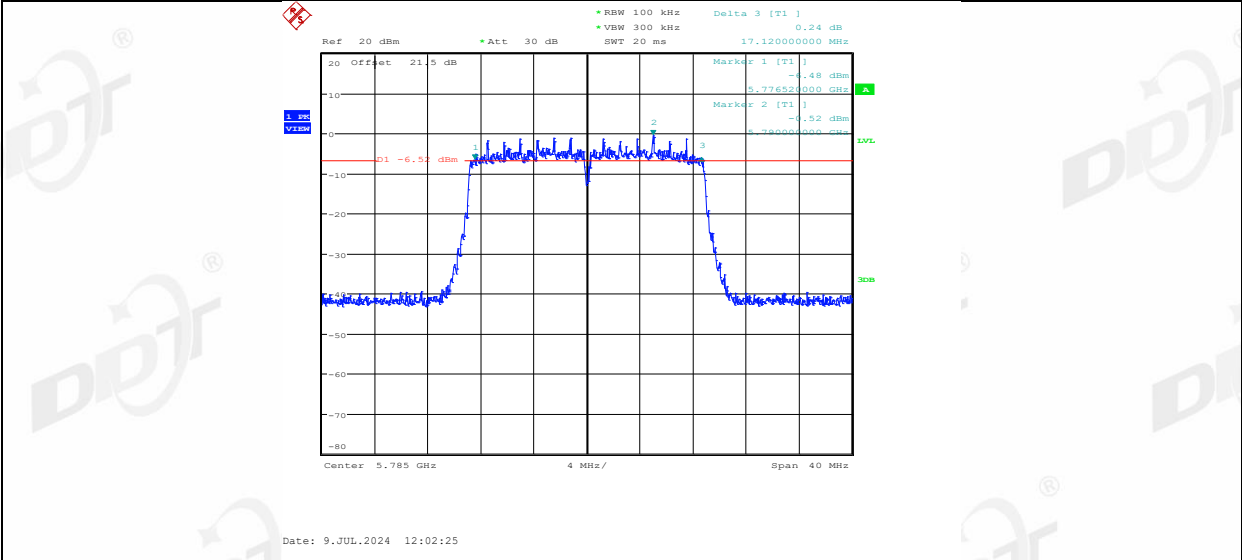


11AC20MIMO_Ant1_5825

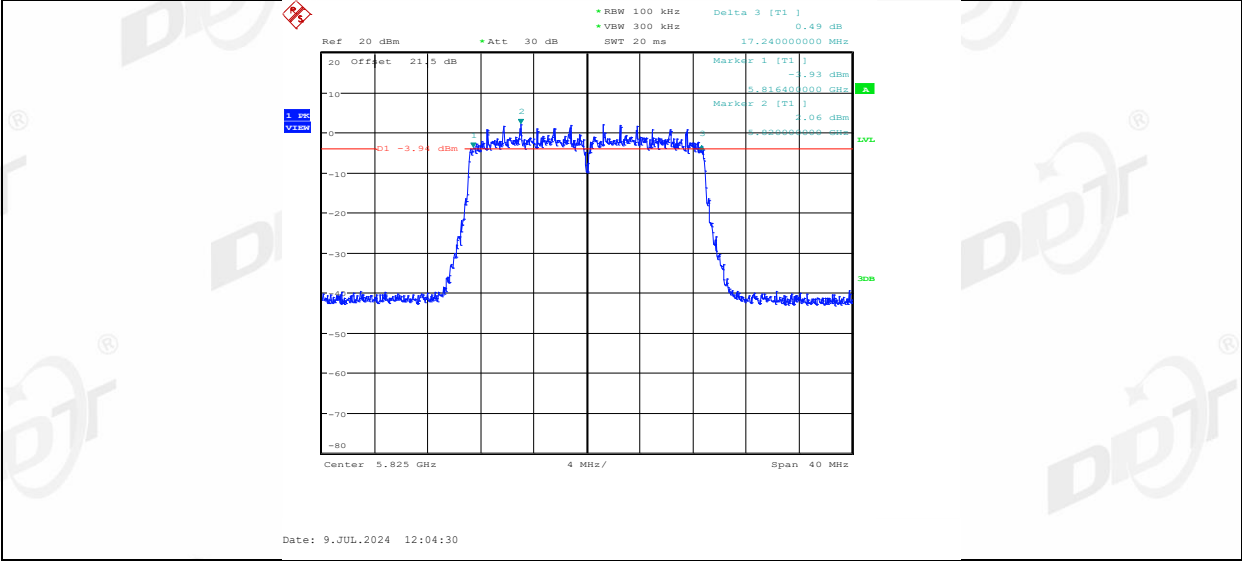


11AC20MIMO_Ant2_5825

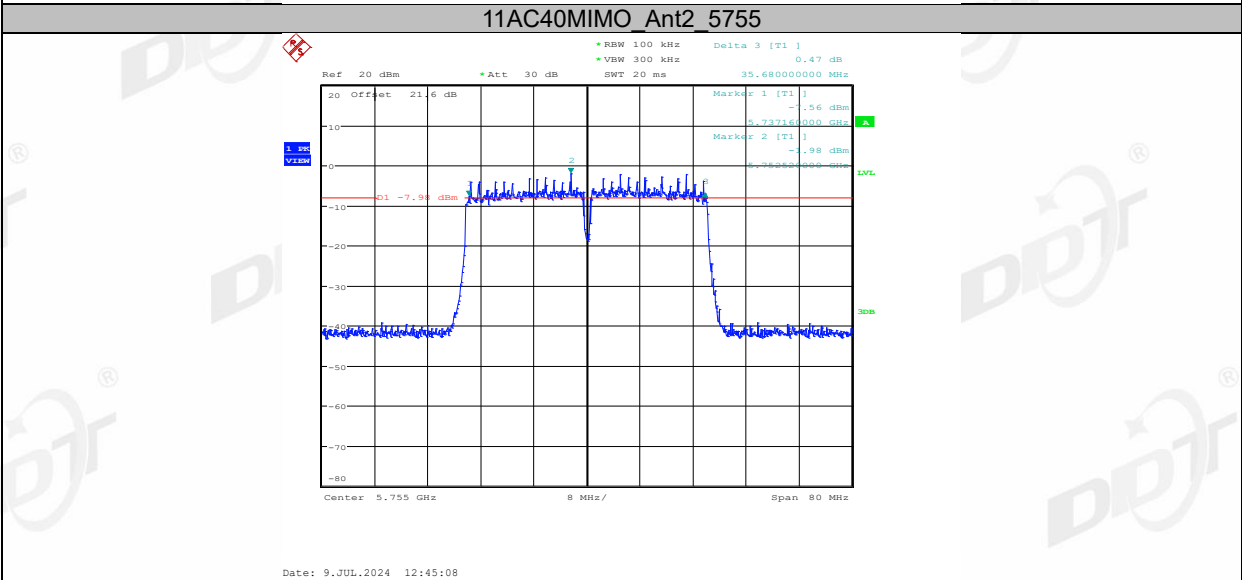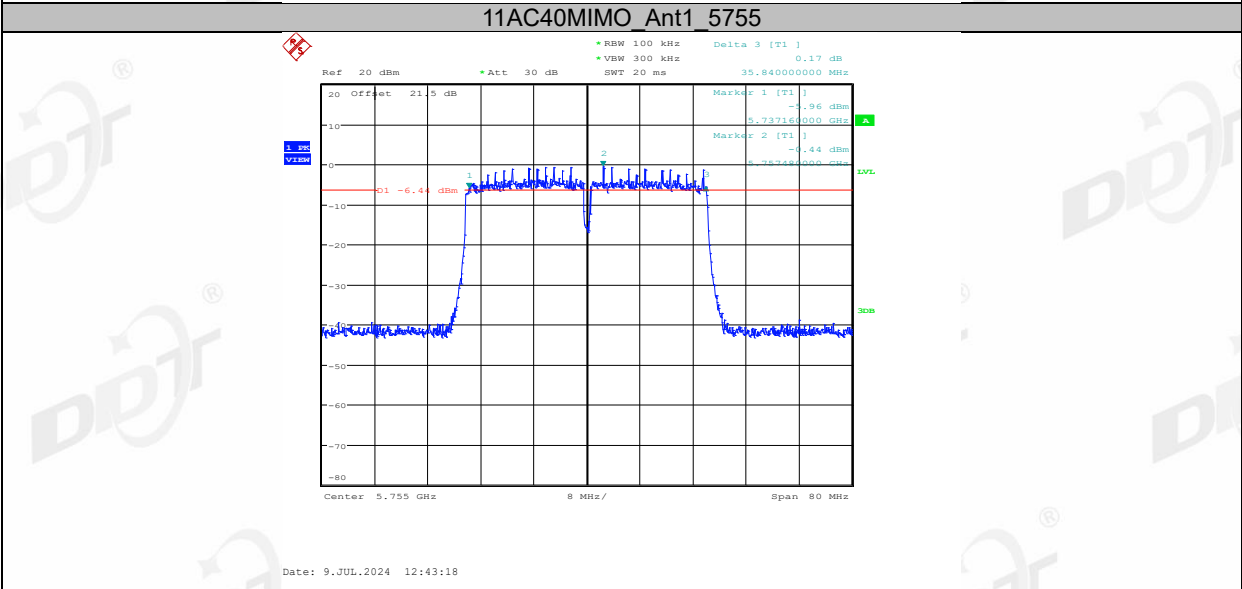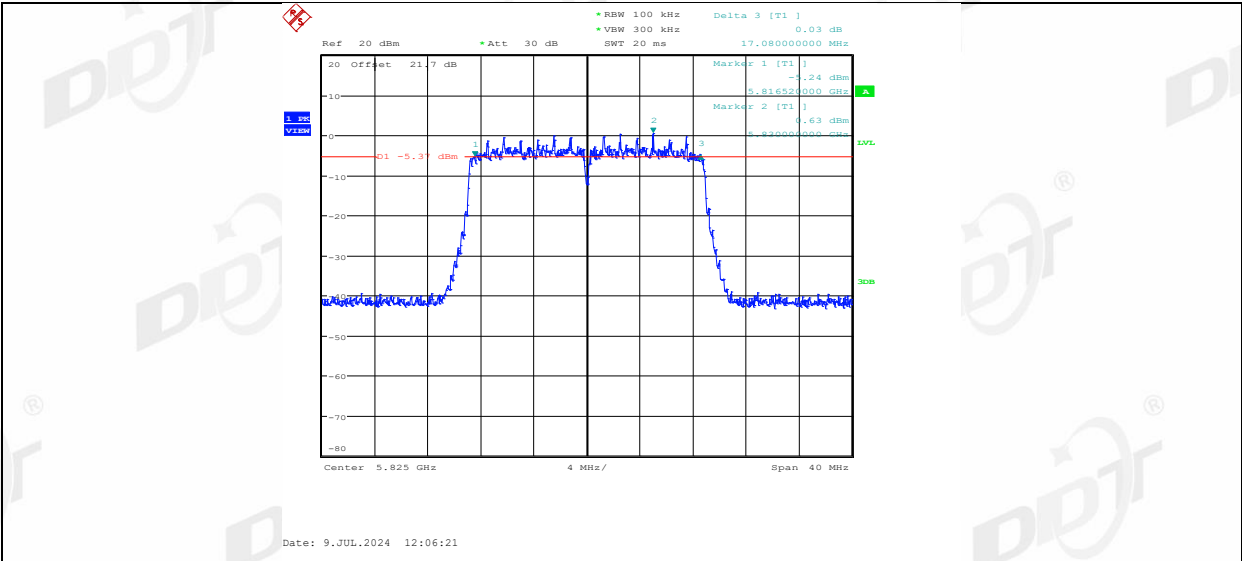


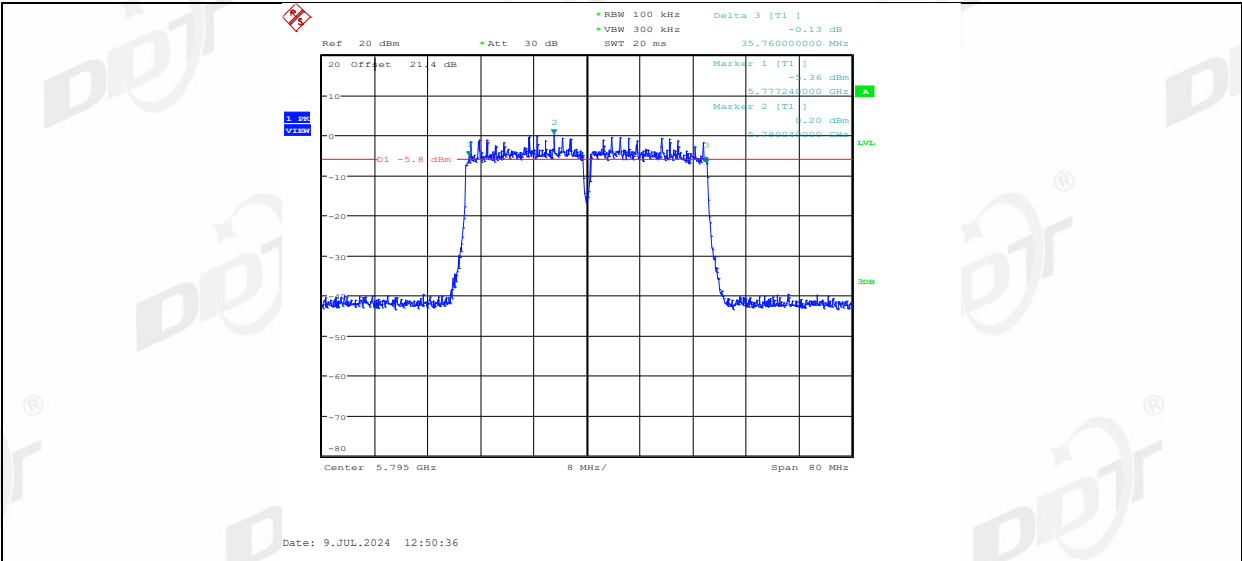


11AC40MIMO_Ant2_5795

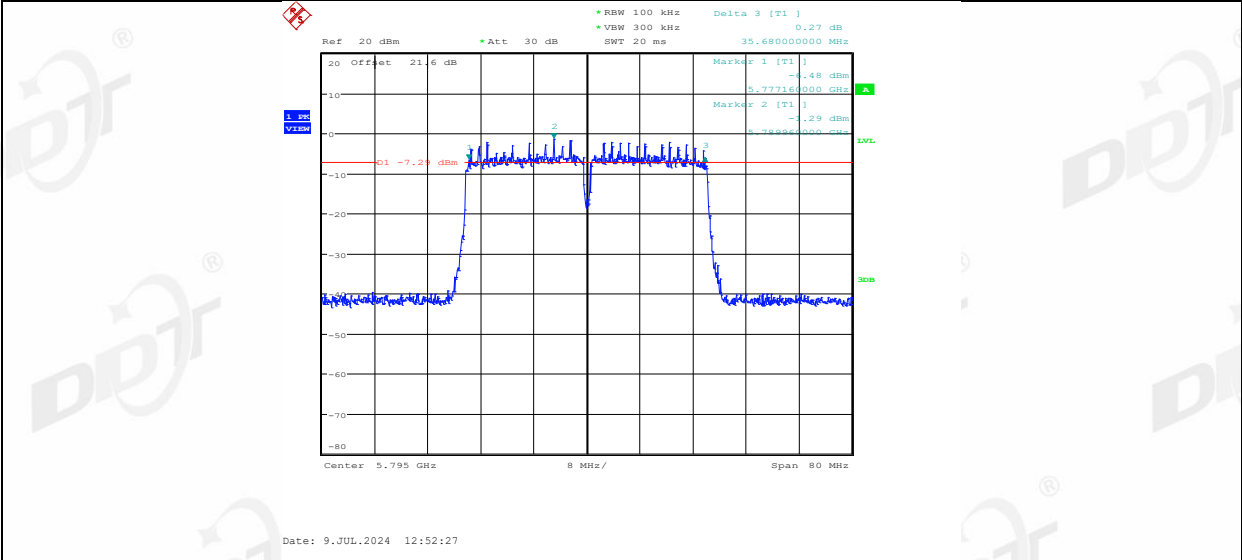


11AC80MIMO_Ant1_5775

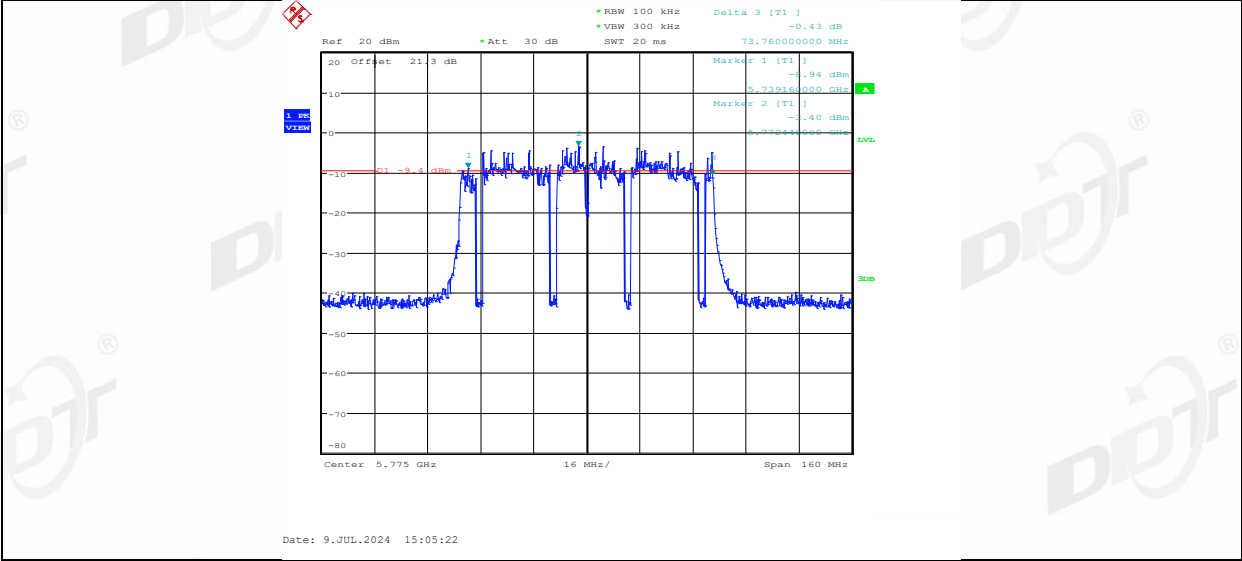


11AC80MIMO_Ant2_5775

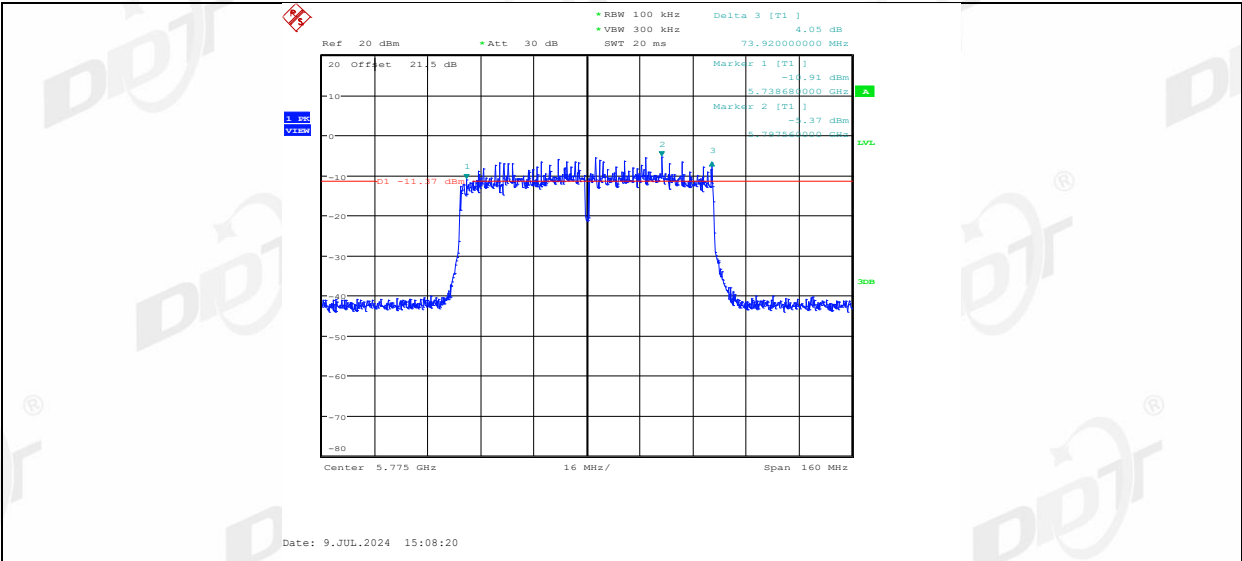


11AX20MIMO_Ant1_5745

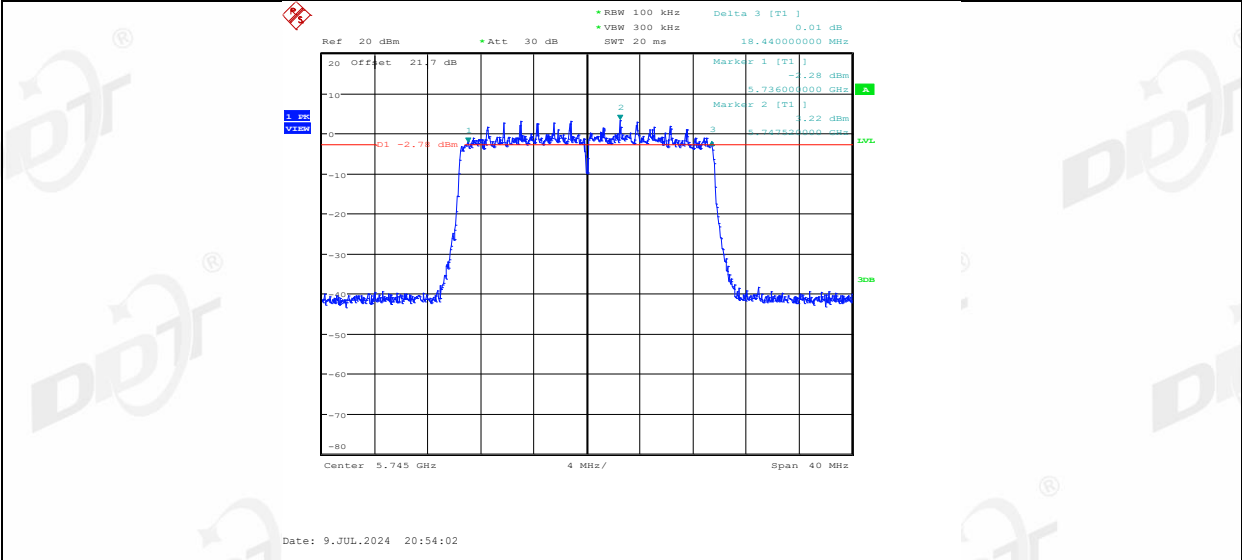


11AX20MIMO_Ant2_5745

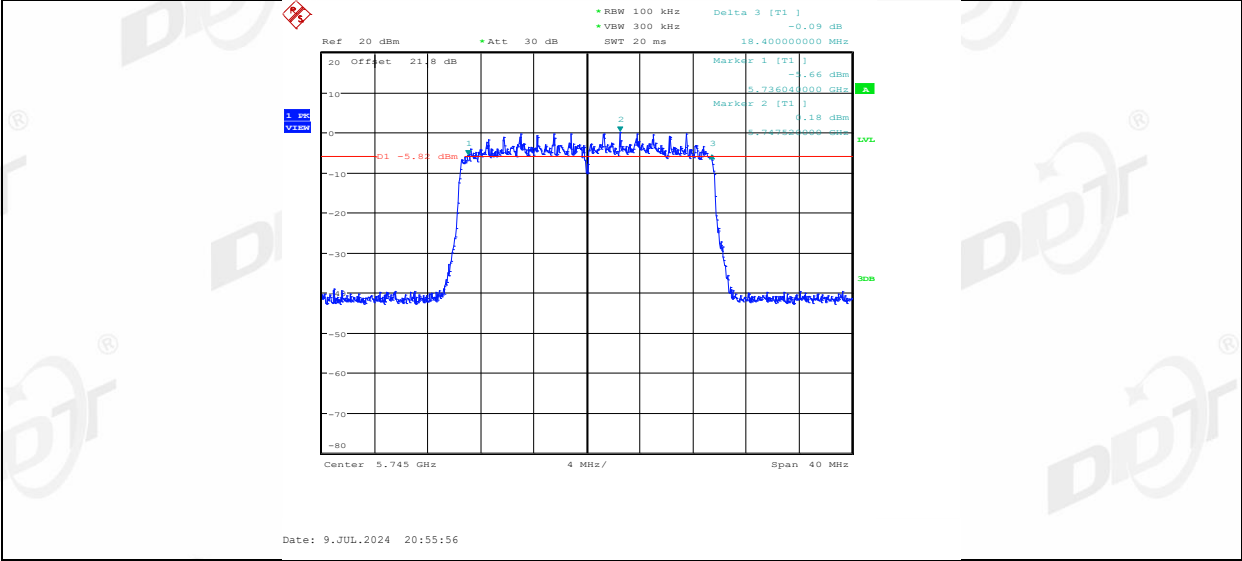


11AX20MIMO_Ant1_5785

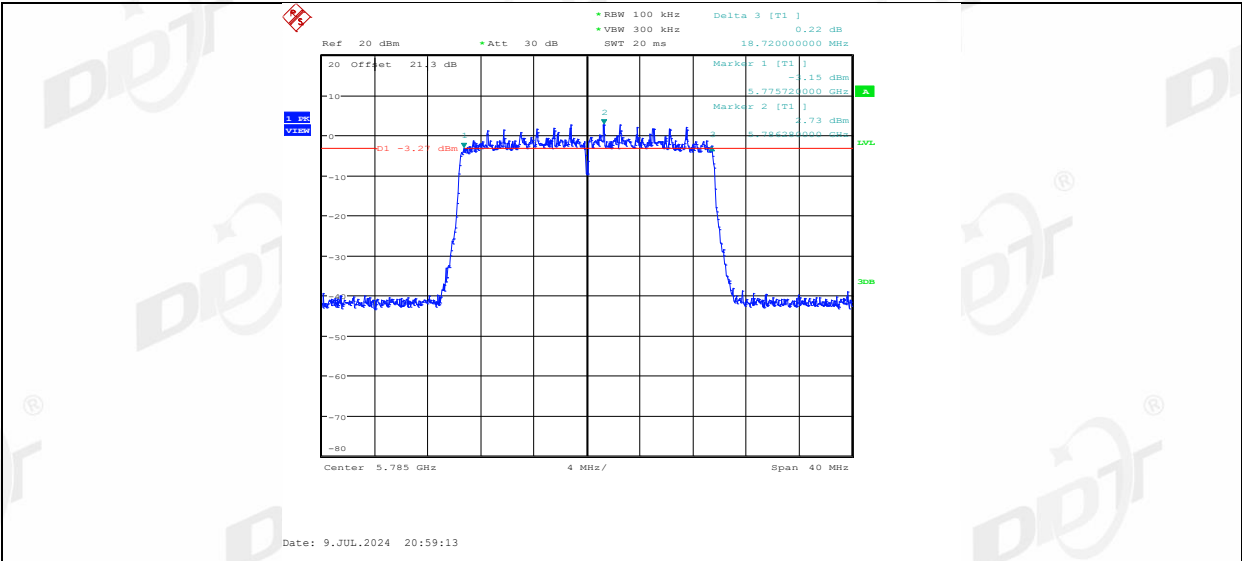


11AX20MIMO_Ant2_5785

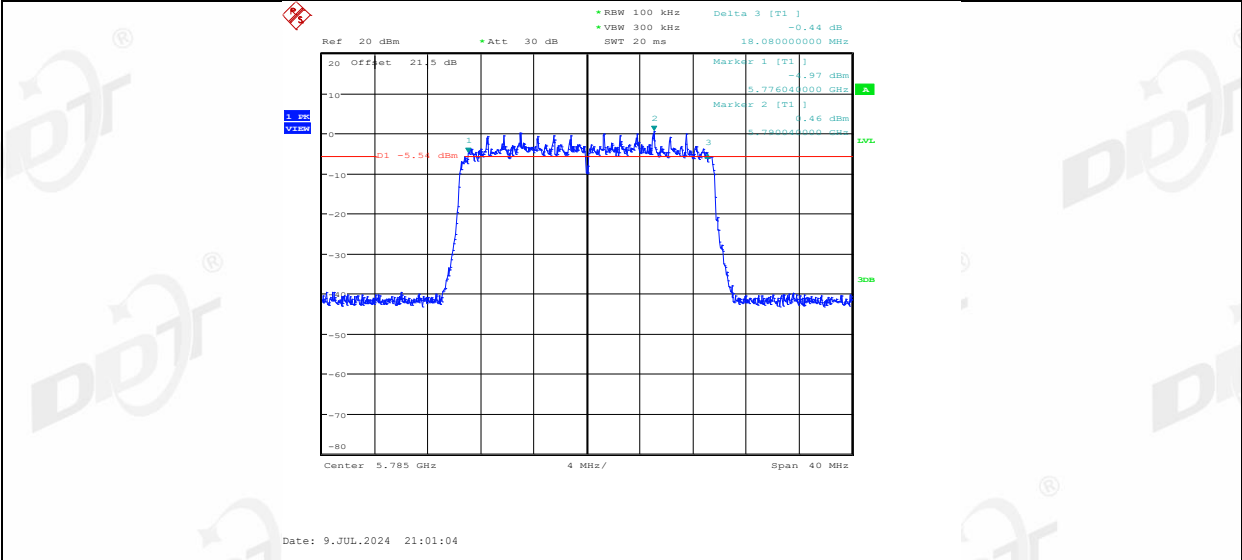


11AX20MIMO_Ant1_5825

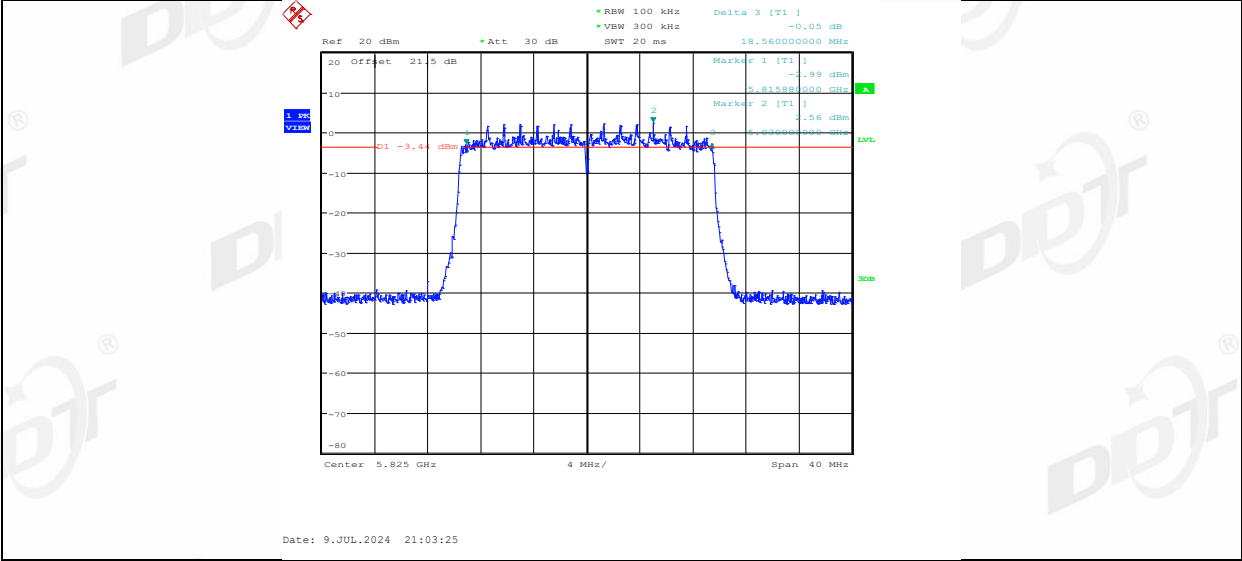


11AX20MIMO_Ant2_5825

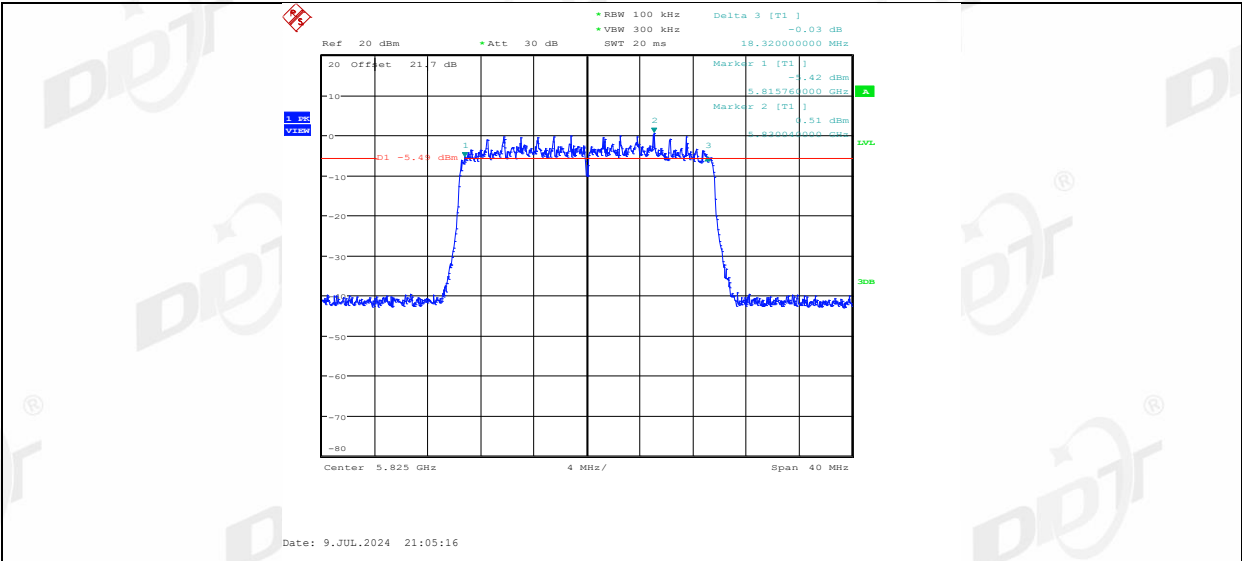


11AX40MIMO_Ant1_5755

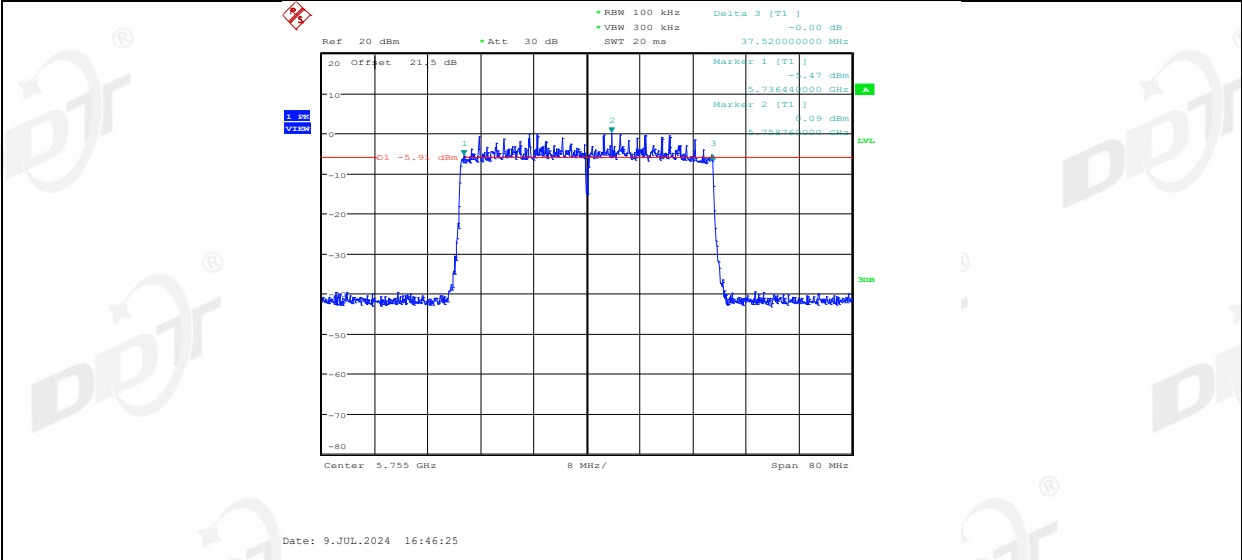


11AX40MIMO_Ant2_5755

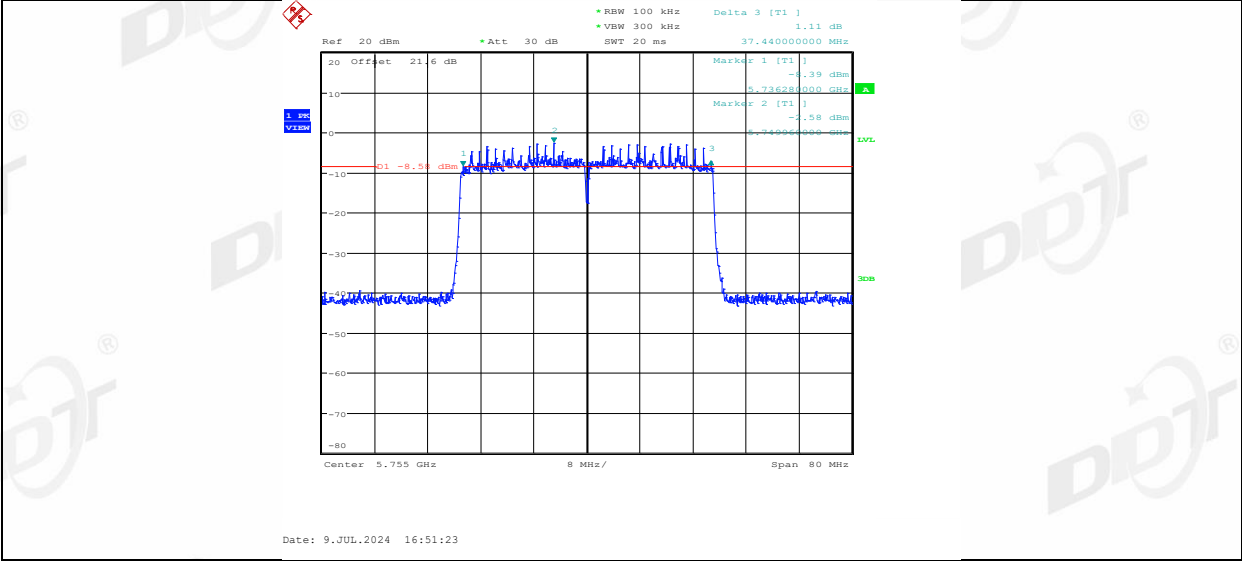


11AX40MIMO_Ant1_5795

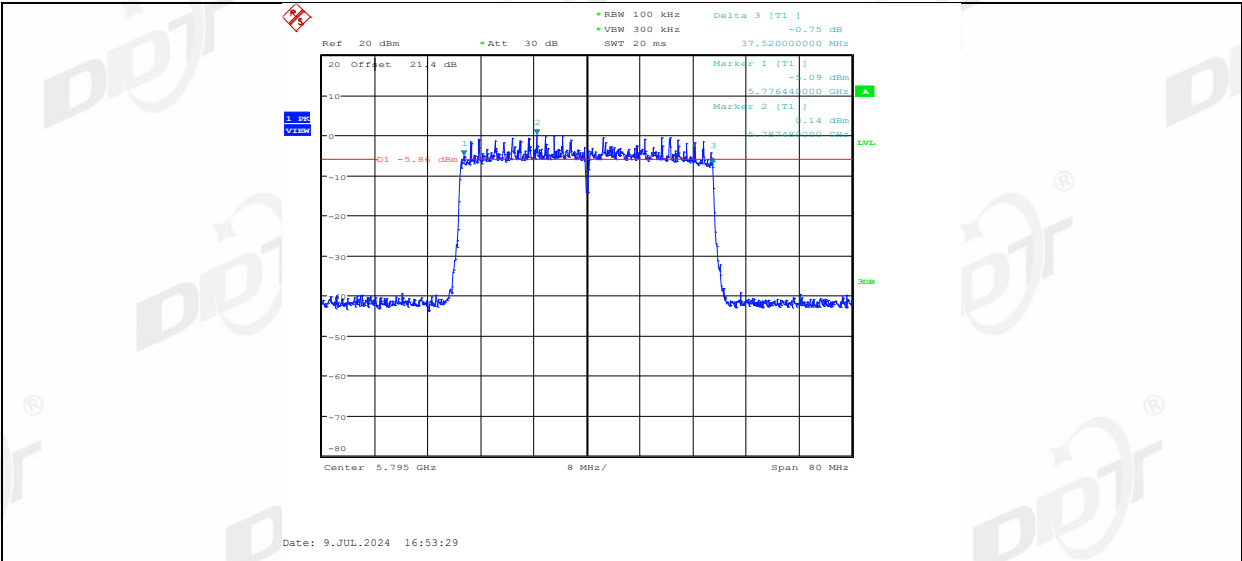


11AX40MIMO_Ant2_5795

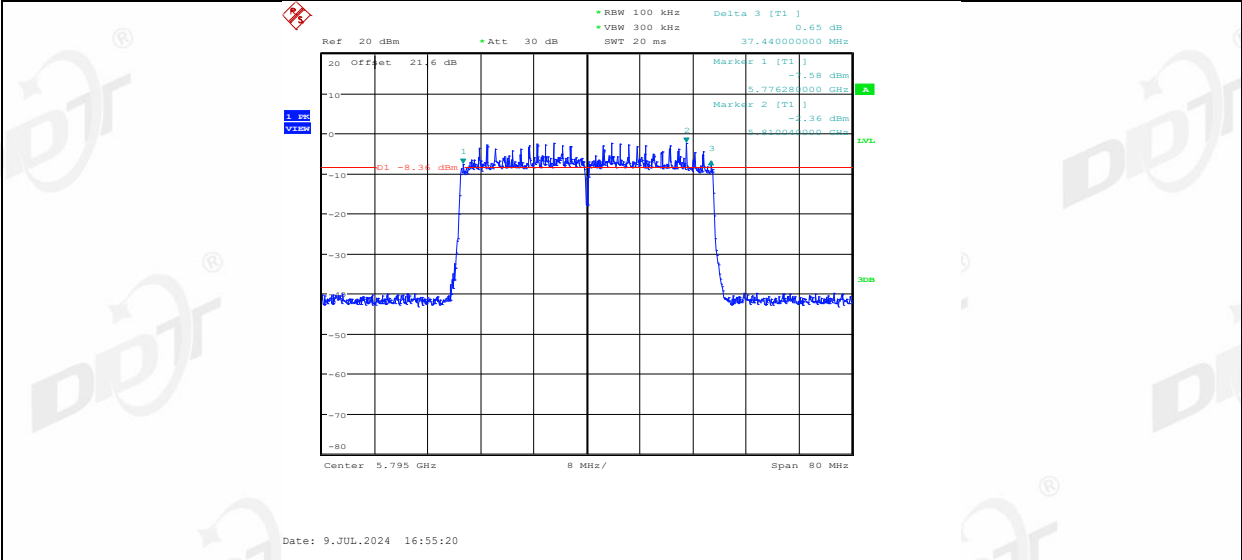

11AX80MIMO_Ant1_5775

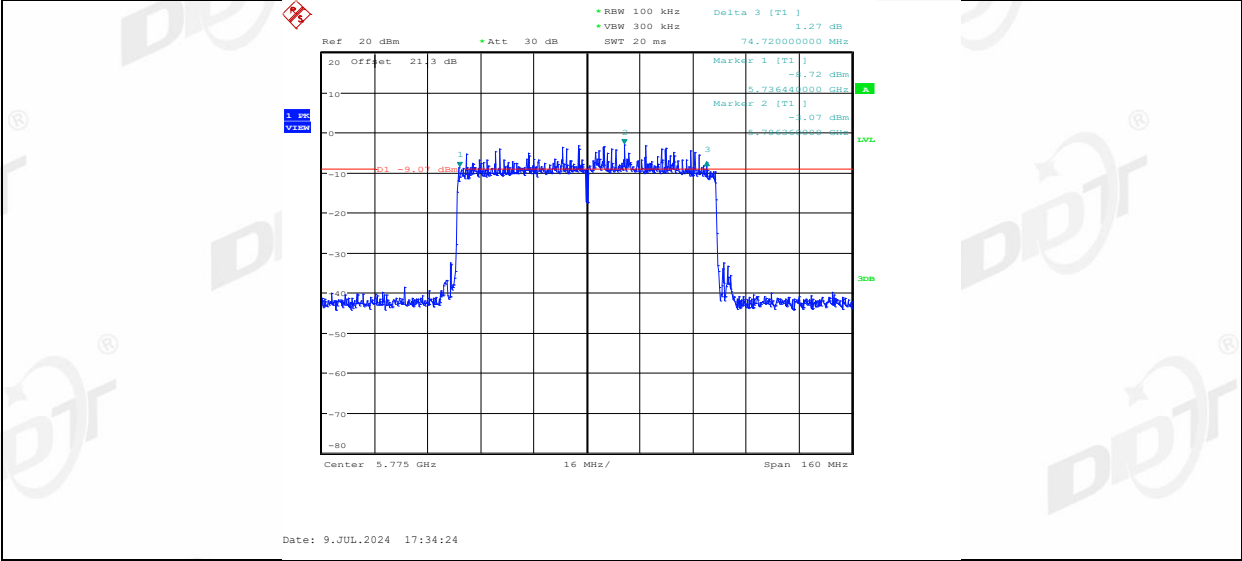


11AX80MIMO_Ant2_5775

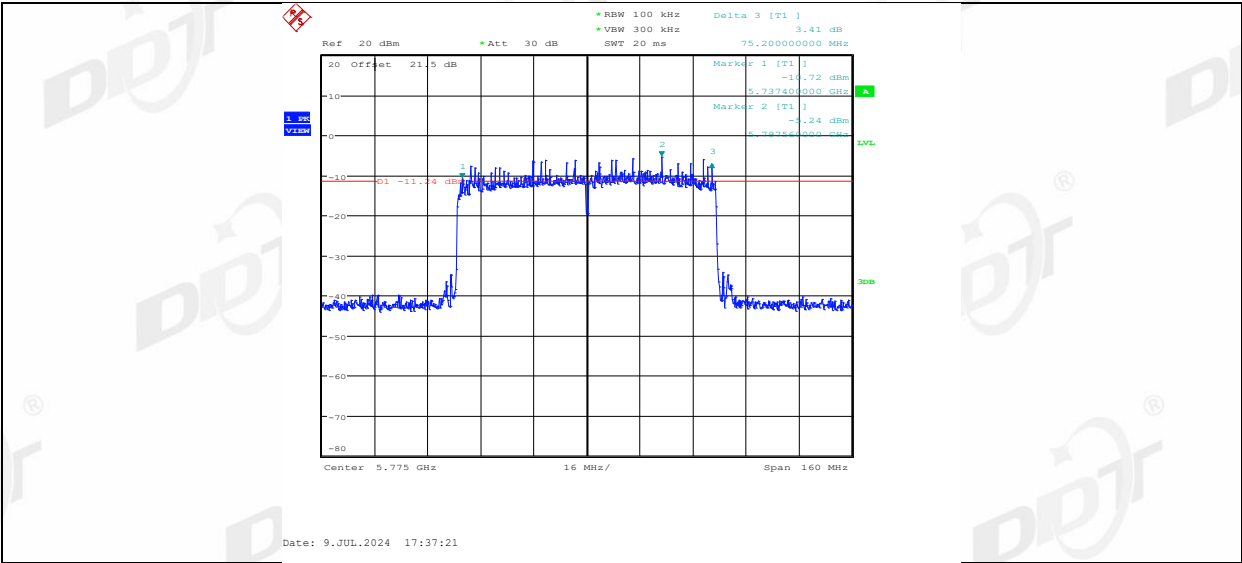

6. 99% Bandwidth

6.1. Block diagram of test setup

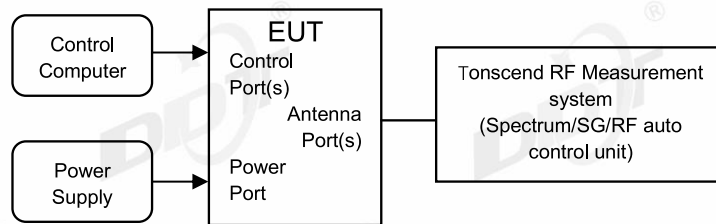

6.2. Limits

Just for Report.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Trace	Max hold

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

6.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	25.8℃,55.9%RH	Test Date:	2024.06.12-2024.08.18
Test Power Supply:	AC120V/60Hz	Sample Number:	S24051516-001


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.52	5171.7200	5188.2400	---	---
	Ant2	5180	16.52	5171.7200	5188.2400	---	---
	Ant1	5200	16.52	5191.7200	5208.2400	---	---
	Ant2	5200	16.48	5191.7200	5208.2000	---	---
	Ant1	5240	16.52	5231.7200	5248.2400	---	---
	Ant2	5240	16.52	5231.7200	5248.2400	---	---
	Ant1	5260	16.52	5251.7200	5268.2400	---	---
	Ant2	5260	16.52	5251.7200	5268.2400	---	---
	Ant1	5280	16.56	5271.6800	5288.2400	---	---
	Ant2	5280	16.52	5271.7200	5288.2400	---	---
	Ant1	5320	16.56	5311.6800	5328.2400	---	---
	Ant2	5320	16.52	5311.7200	5328.2400	---	---
	Ant1	5500	16.52	5491.7200	5508.2400	---	---
	Ant2	5500	16.52	5491.7200	5508.2400	---	---
	Ant1	5580	16.56	5571.7200	5588.2800	---	---
	Ant2	5580	16.52	5571.7200	5588.2400	---	---
	Ant1	5700	16.56	5691.6800	5708.2400	---	---
	Ant2	5700	16.52	5691.7200	5708.2400	---	---
	Ant1	5720	16.56	5711.7200	5728.2800	---	---
	Ant2	5720	16.52	5711.7200	5728.2400	---	---
	Ant1	5720 UNII-2C	13.28	5711.7200	5725	---	---
	Ant2	5720 UNII-2C	13.28	5711.7200	5725	---	---
	Ant1	5720 UNII-3	3.28	5725	5728.2800	---	---
	Ant2	5720 UNII-3	3.24	5725	5728.2400	---	---
	Ant1	5745	16.56	5736.7200	5753.2800	---	---
	Ant2	5745	16.56	5736.6800	5753.2400	---	---
	Ant1	5785	16.52	5776.7200	5793.2400	---	---
	Ant2	5785	16.52	5776.7200	5793.2400	---	---
	Ant1	5825	16.52	5816.7200	5833.2400	---	---
	Ant2	5825	16.52	5816.7200	5833.2400	---	---
11N20MIMO	Ant1	5180	17.64	5171.1600	5188.8000	---	---
	Ant2	5180	17.64	5171.1600	5188.8000	---	---
	Ant1	5200	17.68	5191.1200	5208.8000	---	---
	Ant2	5200	17.64	5191.1600	5208.8000	---	---
	Ant1	5240	17.64	5231.1600	5248.8000	---	---
	Ant2	5240	17.64	5231.1600	5248.8000	---	---
	Ant1	5260	17.64	5251.1600	5268.8000	---	---
	Ant2	5260	17.64	5251.1600	5268.8000	---	---
	Ant1	5280	17.68	5271.1200	5288.8000	---	---
	Ant2	5280	17.64	5271.1600	5288.8000	---	---
	Ant1	5320	17.68	5311.1200	5328.8000	---	---
	Ant2	5320	17.68	5311.1200	5328.8000	---	---
	Ant1	5500	17.68	5491.1200	5508.8000	---	---
	Ant2	5500	17.64	5491.1600	5508.8000	---	---
	Ant1	5580	17.68	5571.1600	5588.8400	---	---
	Ant2	5580	17.64	5571.1600	5588.8000	---	---
	Ant1	5700	17.72	5691.1200	5708.8400	---	---
	Ant2	5700	17.68	5691.1600	5708.8400	---	---
	Ant1	5720	17.64	5711.1600	5728.8000	---	---
	Ant2	5720	17.64	5711.1600	5728.8000	---	---
	Ant1	5720 UNII-2C	13.84	5711.1600	5725	---	---
	Ant2	5720 UNII-2C	13.84	5711.1600	5725	---	---
	Ant1	5720 UNII-3	3.8	5725	5728.8000	---	---
	Ant2	5720 UNII-3	3.8	5725	5728.8000	---	---
	Ant1	5745	17.68	5736.1600	5753.8400	---	---
	Ant2	5745	17.6	5736.2000	5753.8000	---	---


	Ant1	5785	17.64	5776.1600	5793.8000	---	---
	Ant2	5785	17.64	5776.1600	5793.8000	---	---
	Ant1	5825	17.68	5816.1200	5833.8000	---	---
	Ant2	5825	17.64	5816.1600	5833.8000	---	---
11N40MIMO	Ant1	5190	36.4	5171.7600	5208.1600	---	---
	Ant2	5190	36.4	5171.7600	5208.1600	---	---
	Ant1	5230	36.32	5211.7600	5248.0800	---	---
	Ant2	5230	36.32	5211.8400	5248.1600	---	---
	Ant1	5270	36.32	5251.7600	5288.0800	---	---
	Ant2	5270	36.32	5251.8400	5288.1600	---	---
	Ant1	5310	36.32	5291.7600	5328.0800	---	---
	Ant2	5310	36.4	5291.7600	5328.1600	---	---
	Ant1	5510	36.4	5491.8400	5528.2400	---	---
	Ant2	5510	36.4	5491.7600	5528.1600	---	---
	Ant1	5550	36.32	5531.9200	5568.2400	---	---
	Ant2	5550	36.4	5531.8400	5568.2400	---	---
	Ant1	5670	36.4	5651.7600	5688.1600	---	---
	Ant2	5670	36.32	5651.8400	5688.1600	---	---
	Ant1	5710	36.4	5691.7600	5728.1600	---	---
	Ant2	5710	36.32	5691.7600	5728.0800	---	---
	Ant1	5710 UNII-2C	33.24	5691.7600	5725	---	---
	Ant2	5710 UNII-2C	33.24	5691.7600	5725	---	---
	Ant1	5710 UNII-3	3.16	5725	5728.1600	---	---
	Ant2	5710 UNII-3	3.08	5725	5728.0800	---	---
	Ant1	5755	36.4	5736.7600	5773.1600	---	---
	Ant2	5755	36.4	5736.8400	5773.2400	---	---
	Ant1	5795	36.32	5776.8400	5813.1600	---	---
	Ant2	5795	36.32	5776.8400	5813.1600	---	---
11AC20MIMO	Ant1	5180	17.68	5171.1600	5188.8400	---	---
	Ant2	5180	17.6	5171.2000	5188.8000	---	---
	Ant1	5200	17.64	5191.1600	5208.8000	---	---
	Ant2	5200	17.6	5191.2000	5208.8000	---	---
	Ant1	5240	17.64	5231.1600	5248.8000	---	---
	Ant2	5240	17.64	5231.1600	5248.8000	---	---
	Ant1	5260	17.64	5251.1600	5268.8000	---	---
	Ant2	5260	17.64	5251.1600	5268.8000	---	---
	Ant1	5280	17.64	5271.1600	5288.8000	---	---
	Ant2	5280	17.6	5271.2000	5288.8000	---	---
	Ant1	5320	17.68	5311.1200	5328.8000	---	---
	Ant2	5320	17.64	5311.1600	5328.8000	---	---
	Ant1	5500	17.68	5491.1600	5508.8400	---	---
	Ant2	5500	17.68	5491.1600	5508.8400	---	---
	Ant1	5580	17.64	5571.2000	5588.8400	---	---
	Ant2	5580	17.64	5571.1600	5588.8000	---	---
	Ant1	5700	17.64	5691.1600	5708.8000	---	---
	Ant2	5700	17.64	5691.1600	5708.8000	---	---
	Ant1	5720	17.68	5711.1200	5728.8000	---	---
	Ant2	5720	17.64	5711.1600	5728.8000	---	---
	Ant1	5720 UNII-2C	13.88	5711.1200	5725	---	---
	Ant2	5720 UNII-2C	13.84	5711.1600	5725	---	---
	Ant1	5720 UNII-3	3.8	5725	5728.8000	---	---
	Ant2	5720 UNII-3	3.8	5725	5728.8000	---	---
	Ant1	5745	17.64	5736.2000	5753.8400	---	---
	Ant2	5745	17.6	5736.2000	5753.8000	---	---
	Ant1	5785	17.6	5776.2000	5793.8000	---	---
	Ant2	5785	17.6	5776.2000	5793.8000	---	---
	Ant1	5825	17.64	5816.2000	5833.8400	---	---
	Ant2	5825	17.6	5816.2000	5833.8000	---	---
11AC40MIMO	Ant1	5190	36.4	5171.7600	5208.1600	---	---
	Ant2	5190	36.32	5171.8400	5208.1600	---	---
	Ant1	5230	36.4	5211.7600	5248.1600	---	---
	Ant2	5230	36.32	5211.8400	5248.1600	---	---
	Ant1	5270	36.4	5251.7600	5288.1600	---	---
	Ant2	5270	36.4	5251.7600	5288.1600	---	---

	Ant1	5310	36.4	5291.6800	5328.0800	---	---
	Ant2	5310	36.32	5291.7600	5328.0800	---	---
	Ant1	5510	36.48	5491.7600	5528.2400	---	---
	Ant2	5510	36.4	5491.7600	5528.1600	---	---
	Ant1	5550	36.24	5531.9200	5568.1600	---	---
	Ant2	5550	36.4	5531.7600	5568.1600	---	---
	Ant1	5670	36.32	5651.8400	5688.1600	---	---
	Ant2	5670	36.4	5651.7600	5688.1600	---	---
	Ant1	5710	36.32	5691.7600	5728.0800	---	---
	Ant2	5710	36.4	5691.7600	5728.1600	---	---
	Ant1	5710 UNII-2C	33.24	5691.7600	5725	---	---
	Ant2	5710 UNII-2C	33.24	5691.7600	5725	---	---
	Ant1	5710 UNII-3	3.08	5725	5728.0800	---	---
	Ant2	5710 UNII-3	3.16	5725	5728.1600	---	---
	Ant1	5755	36.4	5736.8400	5773.2400	---	---
	Ant2	5755	36.4	5736.8400	5773.2400	---	---
	Ant1	5795	36.24	5776.8400	5813.0800	---	---
	Ant2	5795	36.48	5776.7600	5813.2400	---	---
11AC80MIMO	Ant1	5210	76	5171.9200	5247.9200	---	---
	Ant2	5210	76.16	5171.9200	5248.0800	---	---
	Ant1	5290	75.84	5251.7600	5327.6000	---	---
	Ant2	5290	76.16	5251.7600	5327.9200	---	---
	Ant1	5530	76.32	5491.9200	5568.2400	---	---
	Ant2	5530	76.32	5491.7600	5568.0800	---	---
	Ant1	5610	75.84	5572.0800	5647.9200	---	---
	Ant2	5610	76.32	5571.7600	5648.0800	---	---
	Ant1	5690	76.16	5651.7600	5727.9200	---	---
	Ant2	5690	76.32	5651.7600	5728.0800	---	---
	Ant1	5690 UNII-2C	73.24	5651.7600	5725	---	---
	Ant2	5690 UNII-2C	73.24	5651.7600	5725	---	---
	Ant1	5690 UNII-3	2.92	5725	5727.9200	---	---
	Ant2	5690 UNII-3	3.08	5725	5728.0800	---	---
	Ant1	5775	75.84	5737.0800	5812.9200	---	---
	Ant2	5775	76.32	5736.7600	5813.0800	---	---
11AX20MIMO	Ant1	5180	19	5170.4800	5189.4800	---	---
	Ant2	5180	19.04	5170.4800	5189.5200	---	---
	Ant1	5200	19	5190.4800	5209.4800	---	---
	Ant2	5200	19.08	5190.4400	5209.5200	---	---
	Ant1	5240	19.04	5230.4400	5249.4800	---	---
	Ant2	5240	19	5230.4800	5249.4800	---	---
	Ant1	5260	19	5250.4800	5269.4800	---	---
	Ant2	5260	18.96	5250.5200	5269.4800	---	---
	Ant1	5280	19.04	5270.4400	5289.4800	---	---
	Ant2	5280	19.04	5270.4400	5289.4800	---	---
	Ant1	5320	19	5310.4800	5329.4800	---	---
	Ant2	5320	19	5310.4400	5329.4400	---	---
	Ant1	5500	19	5490.4800	5509.4800	---	---
	Ant2	5500	19.04	5490.4400	5509.4800	---	---
	Ant1	5580	19	5570.4800	5589.4800	---	---
	Ant2	5580	19.04	5570.4800	5589.5200	---	---
	Ant1	5700	19	5690.4800	5709.4800	---	---
	Ant2	5700	18.96	5690.5200	5709.4800	---	---
	Ant1	5720	18.96	5710.5200	5729.4800	---	---
	Ant2	5720	18.96	5710.5200	5729.4800	---	---
	Ant1	5720 UNII-2C	14.48	5710.5200	5725	---	---
	Ant2	5720 UNII-2C	14.48	5710.5200	5725	---	---
	Ant1	5720 UNII-3	4.48	5725	5729.4800	---	---
	Ant2	5720 UNII-3	4.48	5725	5729.4800	---	---
	Ant1	5745	18.92	5735.5600	5754.4800	---	---
	Ant2	5745	18.88	5735.5600	5754.4400	---	---
	Ant1	5785	18.96	5775.5200	5794.4800	---	---
	Ant2	5785	18.96	5775.5200	5794.4800	---	---
	Ant1	5825	18.96	5815.5200	5834.4800	---	---
	Ant2	5825	18.92	5815.5200	5834.4400	---	---


11AX40MIMO	Ant1	5190	36.32	5171.8400	5208.1600	---	---
	Ant2	5190	36.32	5171.8400	5208.1600	---	---
	Ant1	5230	36.4	5211.7600	5248.1600	---	---
	Ant2	5230	36.32	5211.8400	5248.1600	---	---
	Ant1	5270	36.32	5251.8400	5288.1600	---	---
	Ant2	5270	36.32	5251.8400	5288.1600	---	---
	Ant1	5310	36.4	5291.7600	5328.1600	---	---
	Ant2	5310	36.4	5291.7600	5328.1600	---	---
	Ant1	5510	38	5490.9600	5528.9600	---	---
	Ant2	5510	38	5490.9600	5528.9600	---	---
	Ant1	5550	37.92	5531.0400	5568.9600	---	---
	Ant2	5550	37.84	5531.0400	5568.8800	---	---
	Ant1	5670	38	5650.9600	5688.9600	---	---
	Ant2	5670	38	5650.9600	5688.9600	---	---
	Ant1	5710	38	5690.8800	5728.8800	---	---
	Ant2	5710	38	5690.9600	5728.9600	---	---
	Ant1	5710 UNII-2C	34.12	5690.8800	5725	---	---
	Ant2	5710 UNII-2C	34.04	5690.9600	5725	---	---
	Ant1	5710 UNII-3	3.88	5725	5728.8800	---	---
	Ant2	5710 UNII-3	3.96	5725	5728.9600	---	---
	Ant1	5755	37.92	5736.0400	5773.9600	---	---
	Ant2	5755	37.84	5736.1200	5773.9600	---	---
	Ant1	5795	38	5775.9600	5813.9600	---	---
	Ant2	5795	37.84	5776.0400	5813.8800	---	---
11AX80MIMO	Ant1	5210	77.28	5171.2800	5248.5600	---	---
	Ant2	5210	77.44	5171.2800	5248.7200	---	---
	Ant1	5290	77.28	5251.2800	5328.5600	---	---
	Ant2	5290	77.44	5251.1200	5328.5600	---	---
	Ant1	5530	77.6	5491.2800	5568.8800	---	---
	Ant2	5530	77.76	5490.9600	5568.7200	---	---
	Ant1	5610	77.28	5571.4400	5648.7200	---	---
	Ant2	5610	77.28	5571.2800	5648.5600	---	---
	Ant1	5690	77.44	5651.1200	5728.5600	---	---
	Ant2	5690	77.12	5651.2800	5728.4000	---	---
	Ant1	5690 UNII-2C	73.88	5651.1200	5725	---	---
	Ant2	5690 UNII-2C	73.72	5651.2800	5725	---	---
	Ant1	5690 UNII-3	3.56	5725	5728.5600	---	---
	Ant2	5690 UNII-3	3.4	5725	5728.4000	---	---
	Ant1	5775	77.44	5736.2800	5813.7200	---	---
	Ant2	5775	77.12	5736.4400	5813.5600	---	---

6.5. Test graphs

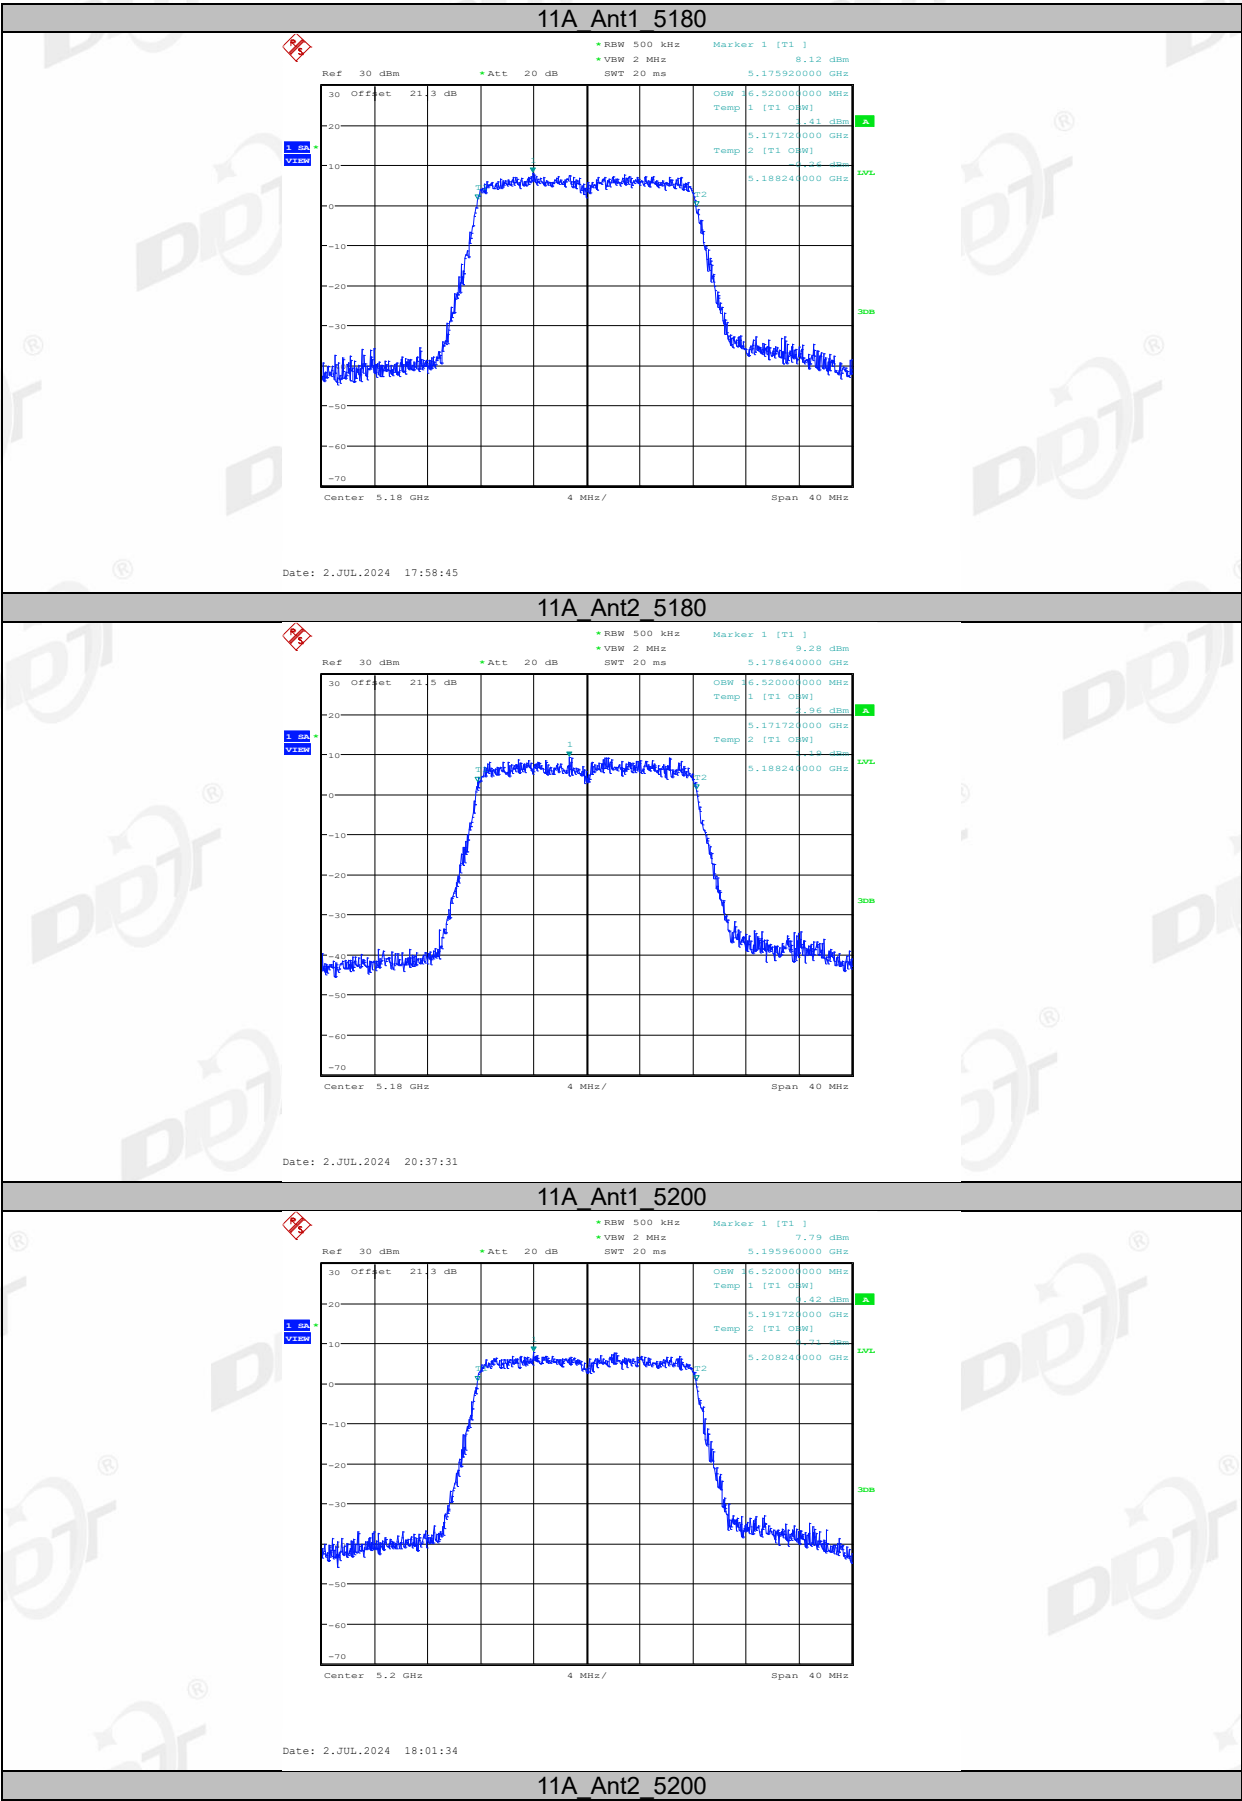


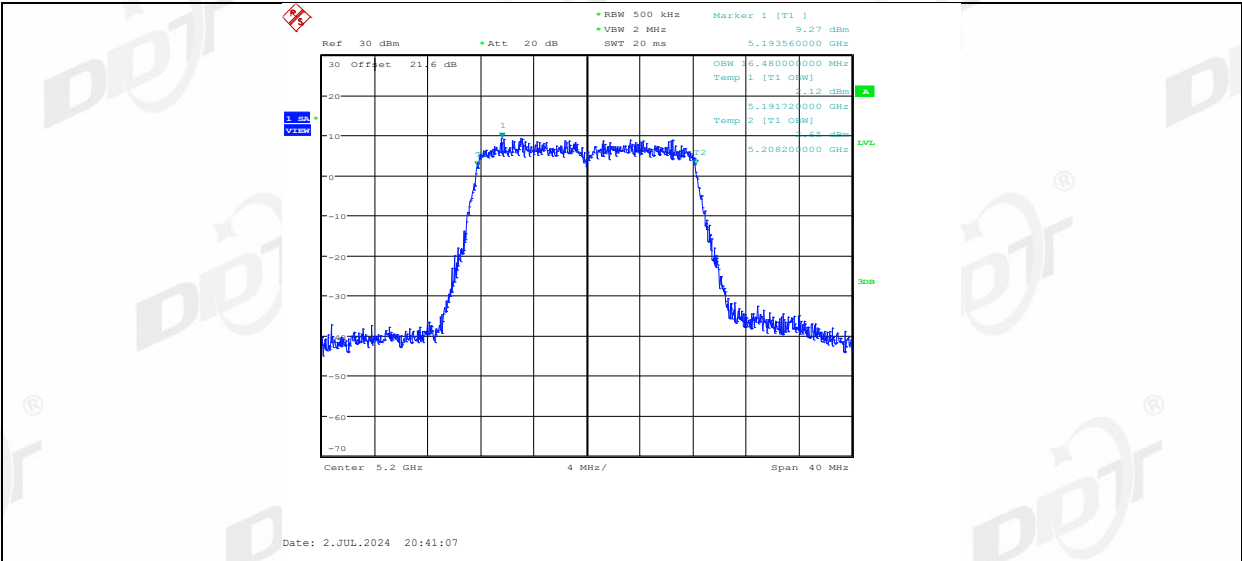


11A_Ant1_5240

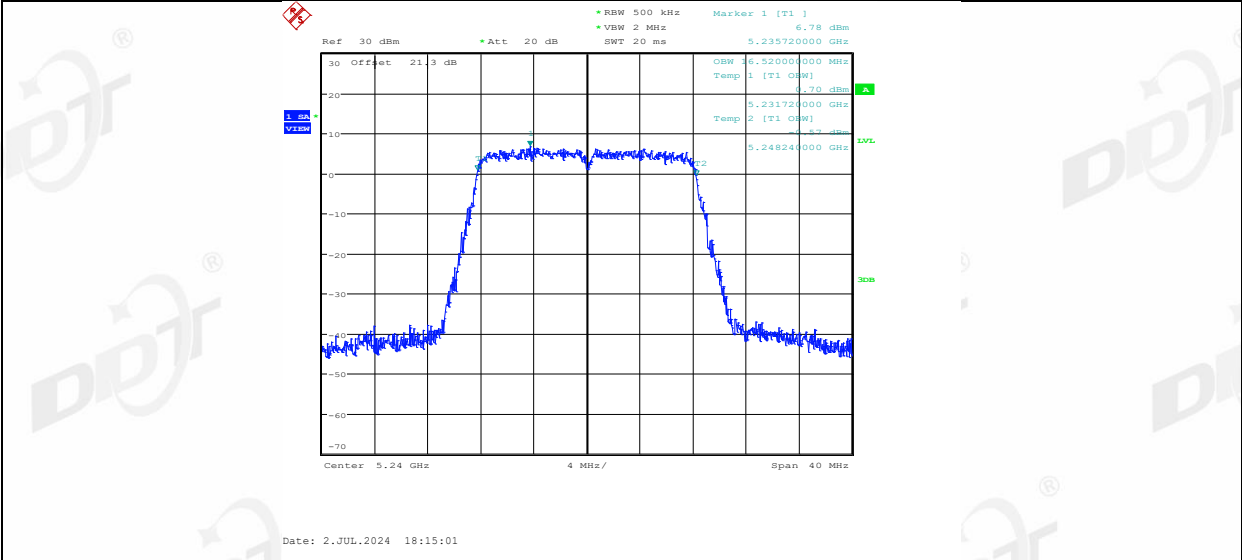


11A_Ant2_5240

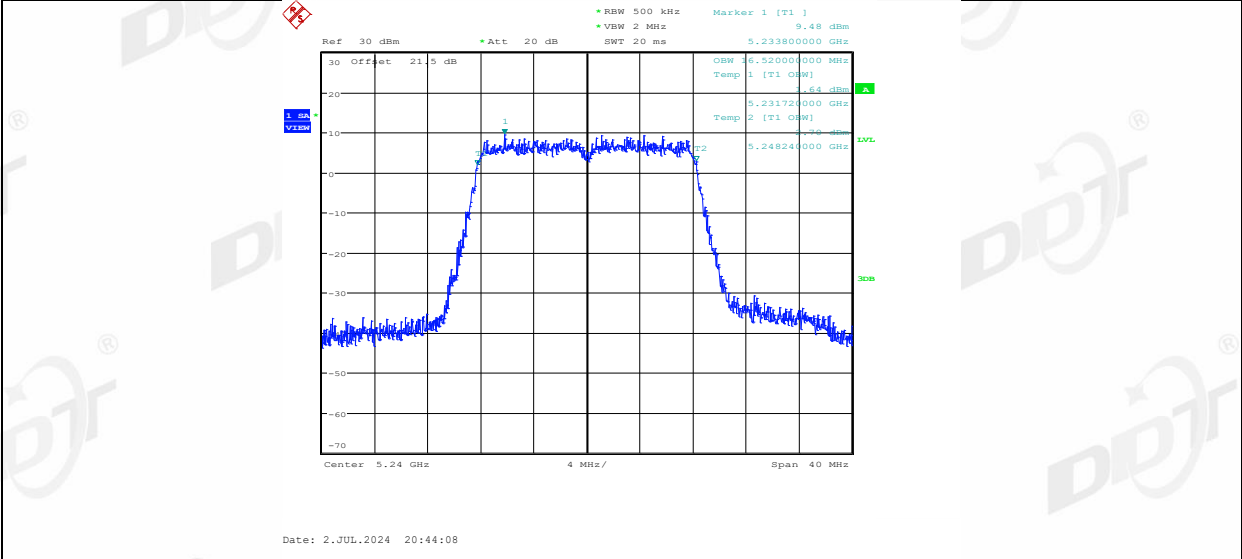


11A_Ant1_5260

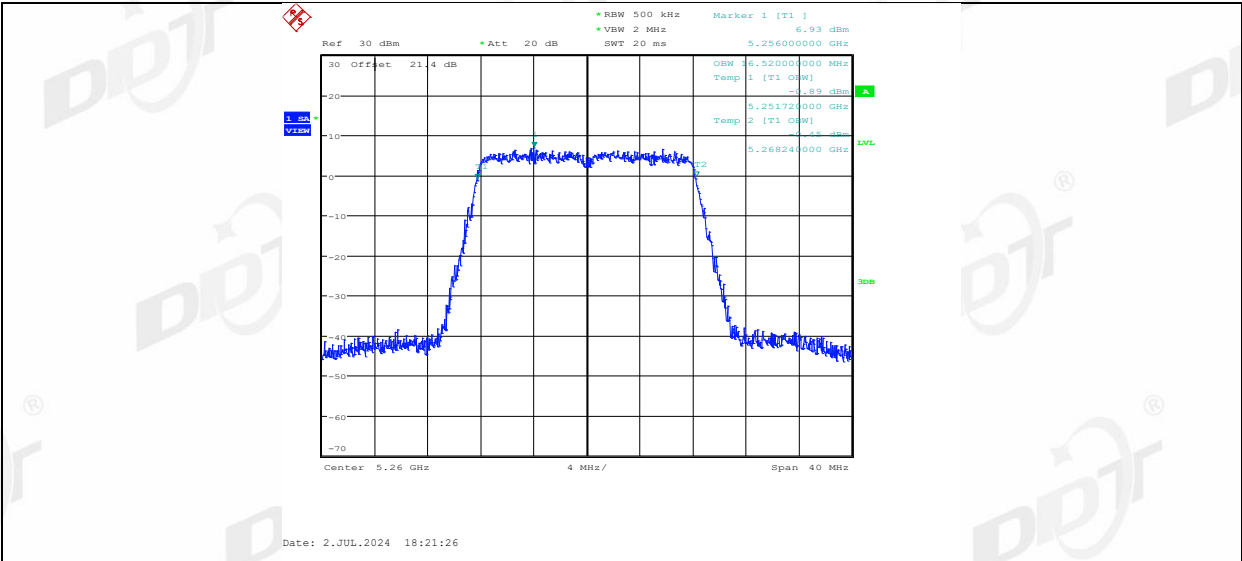




11A_Ant2_5260

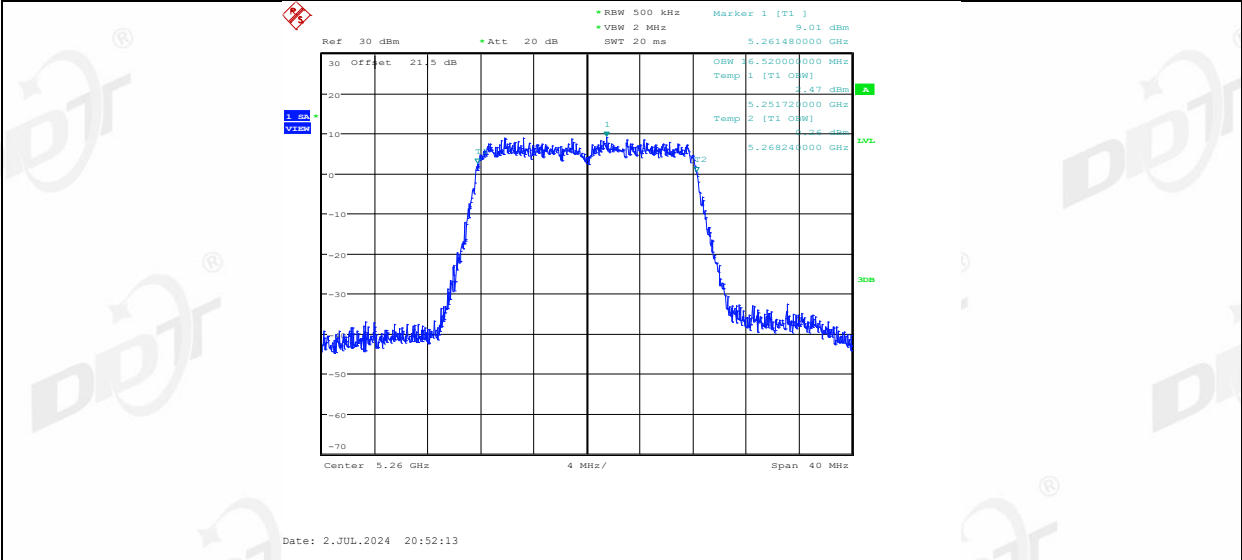


11A_Ant1_5280

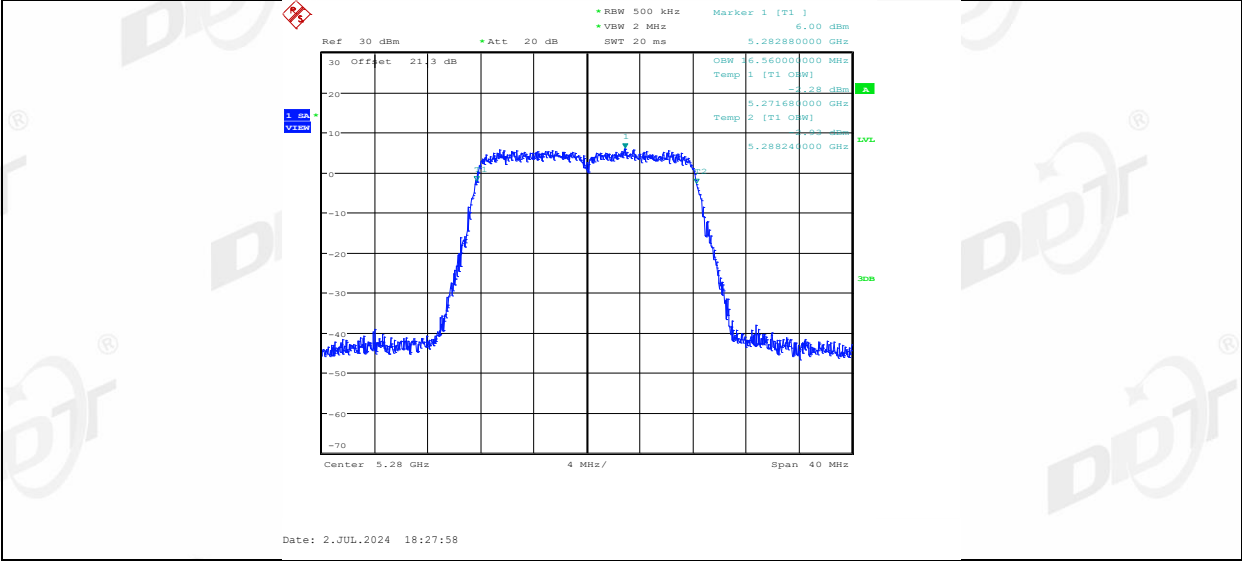


11A_Ant2_5280

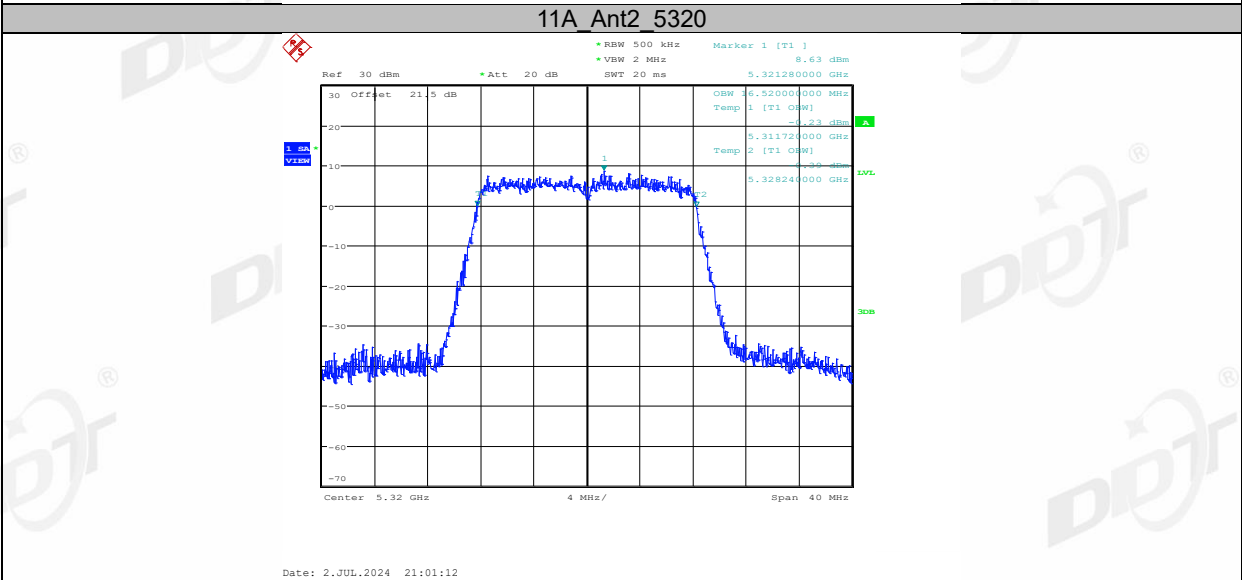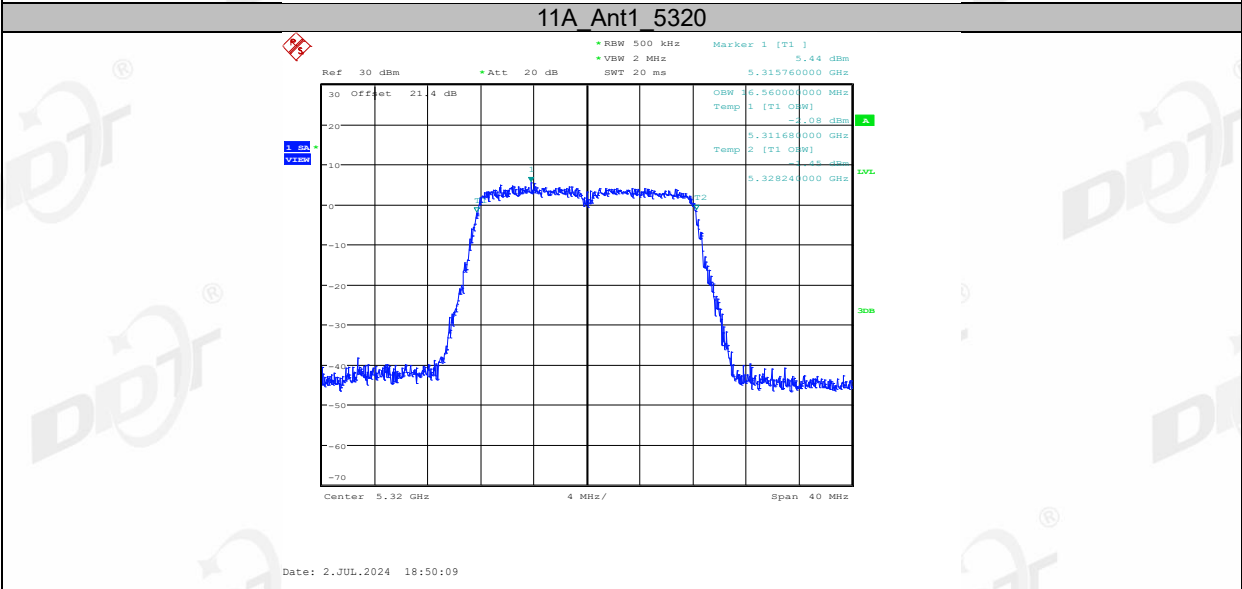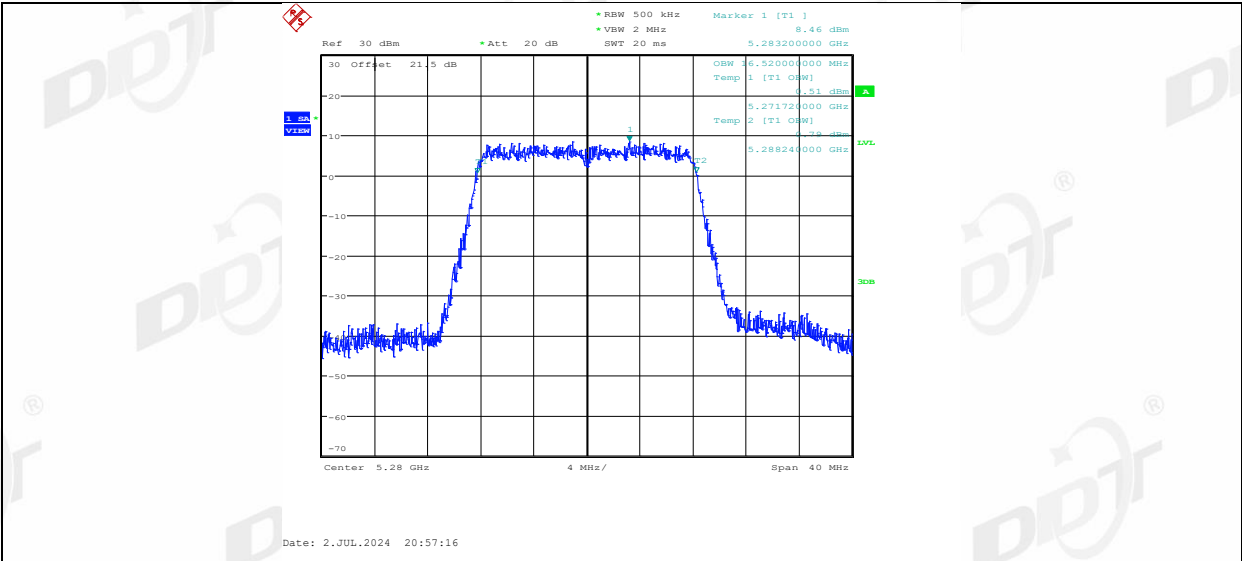


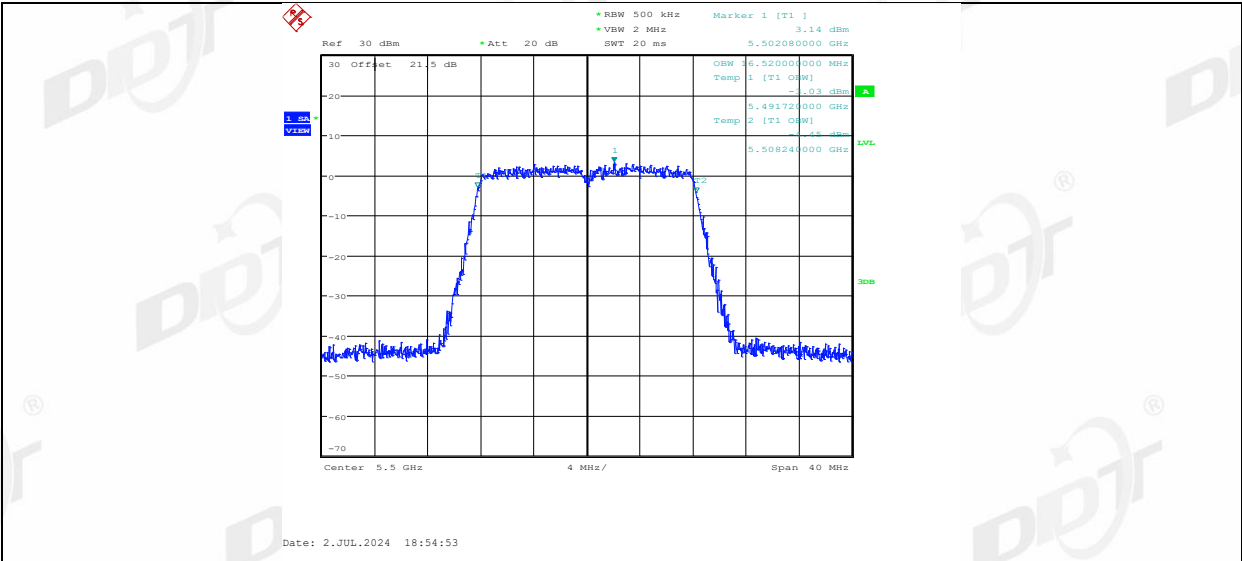


11A_Ant2_5500

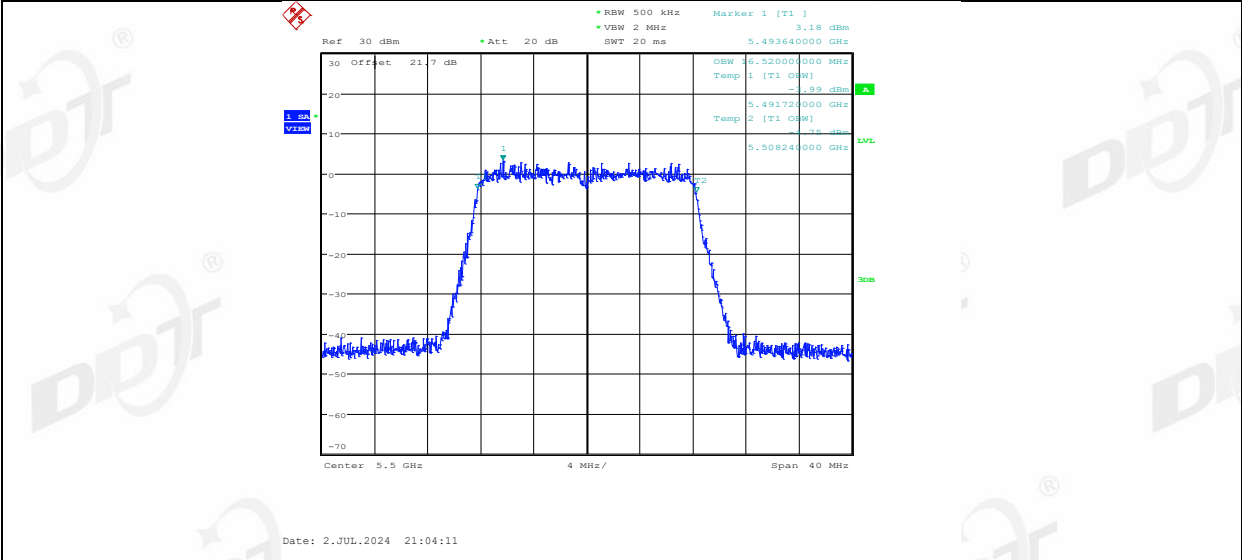


11A_Ant1_5580

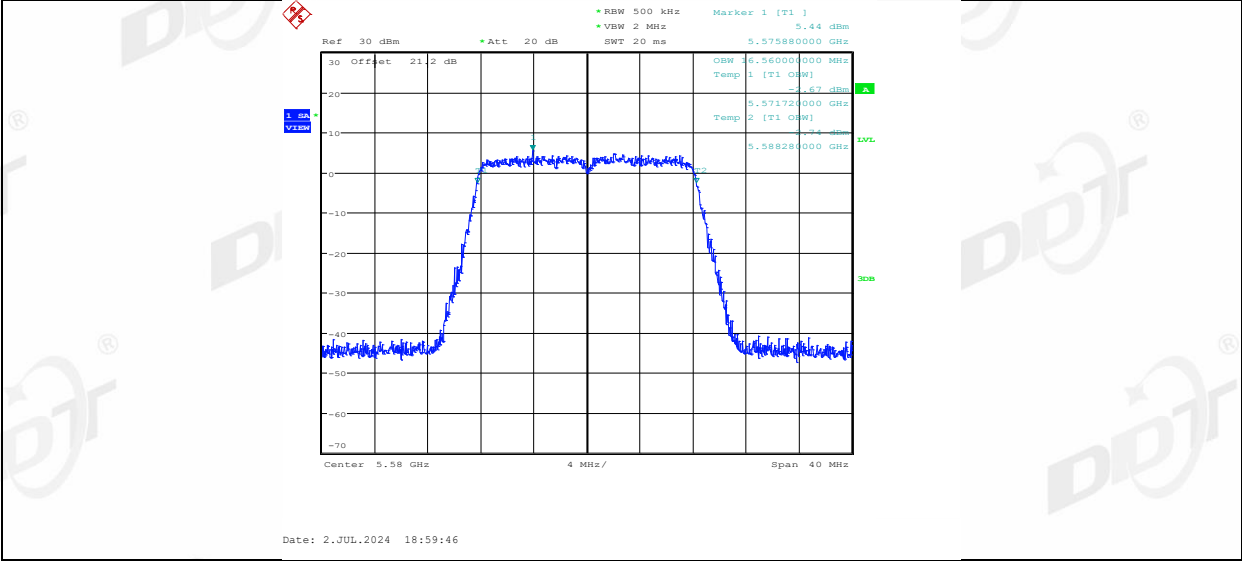


11A_Ant2_5580

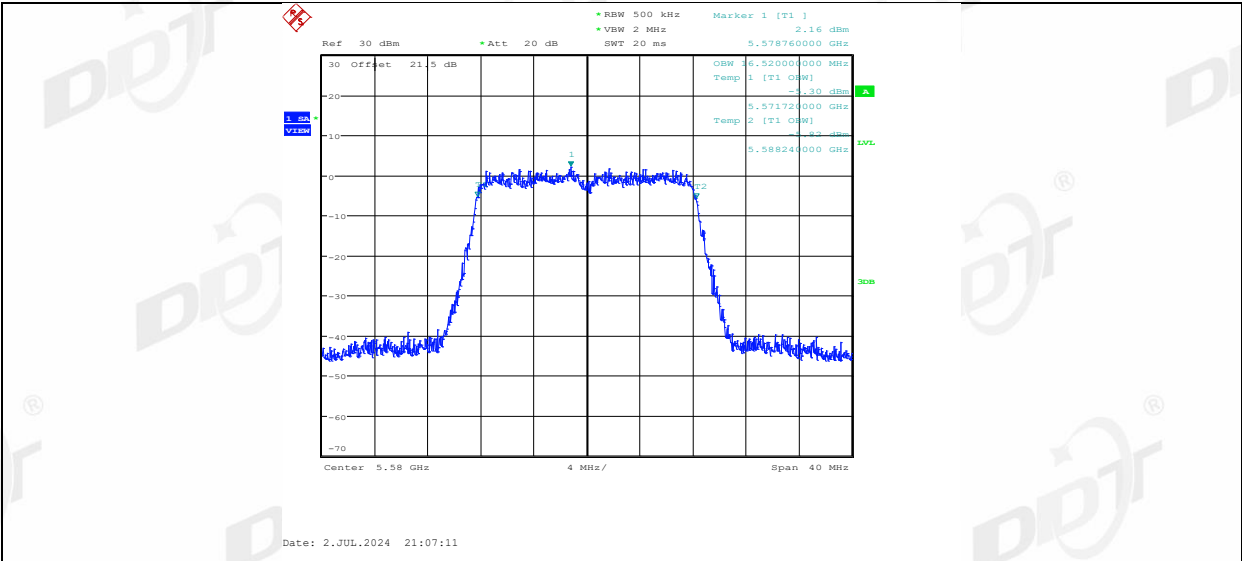




11A_Ant1_5700

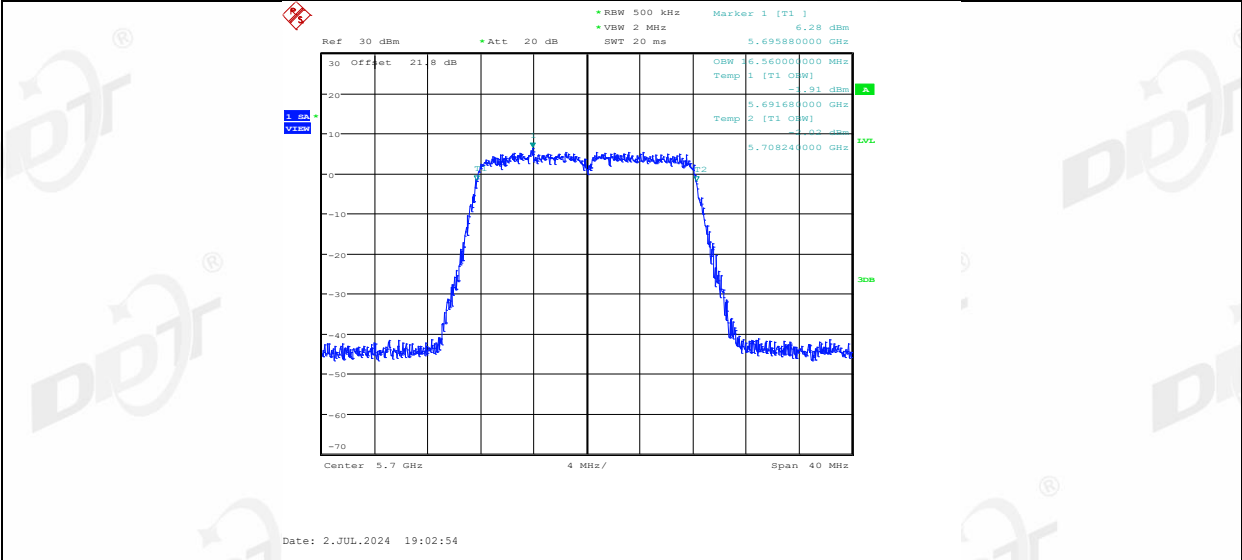


11A_Ant2_5700

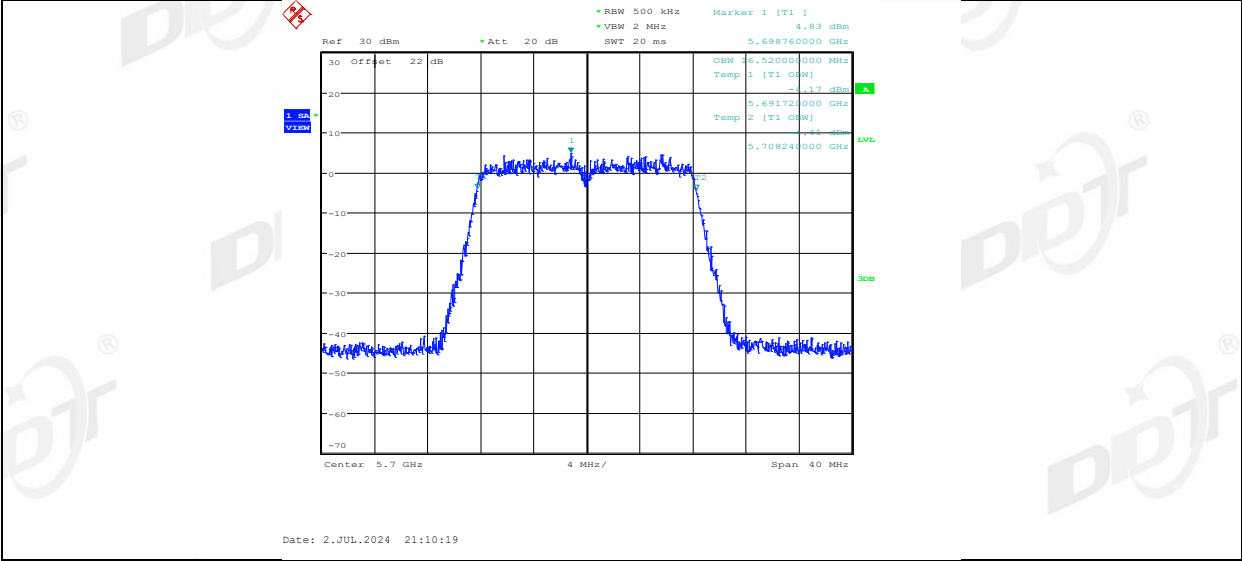


11A_Ant1_5720

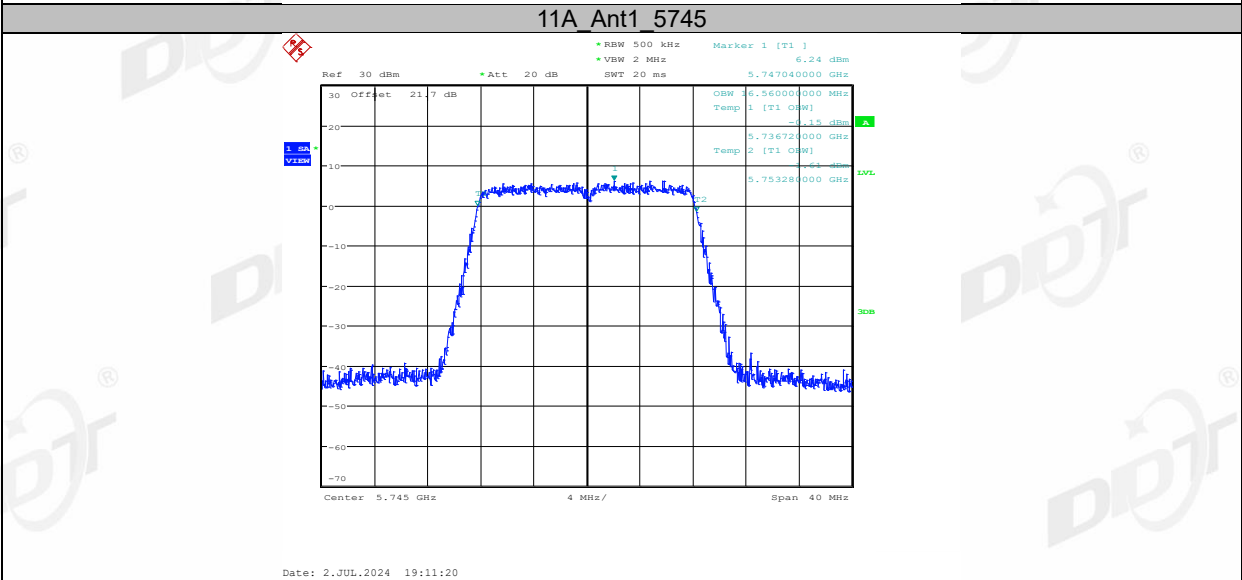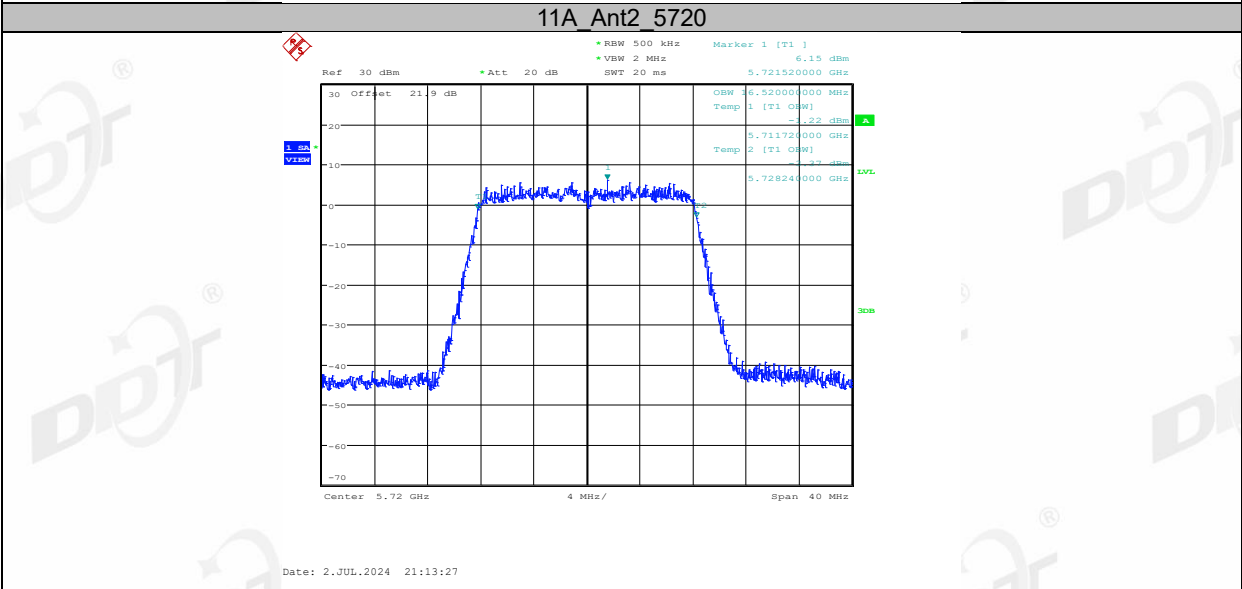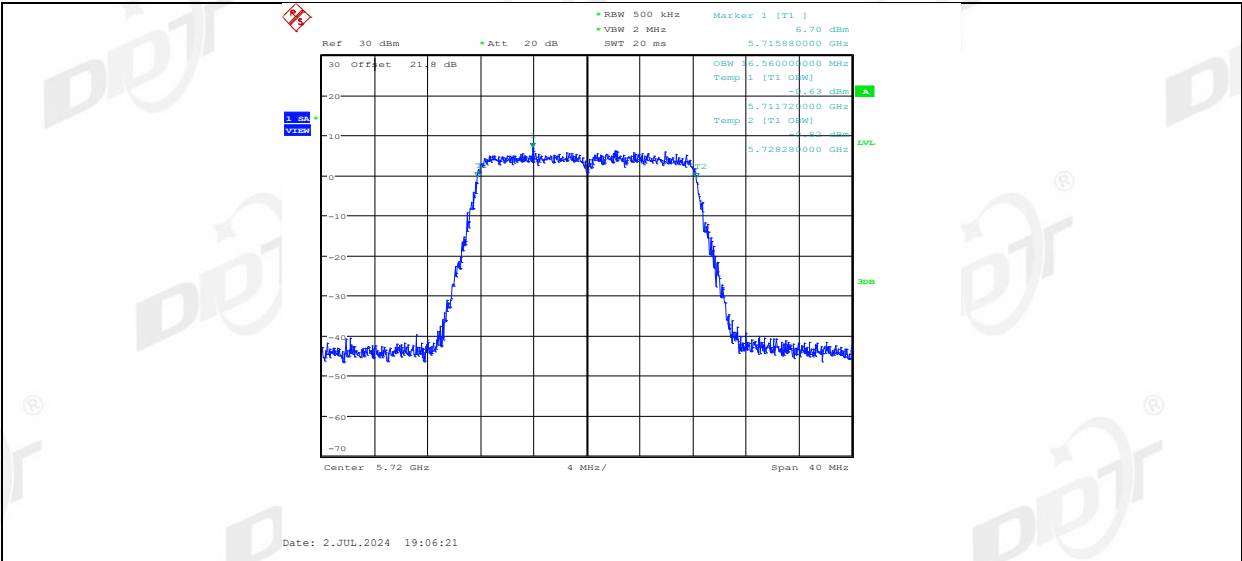


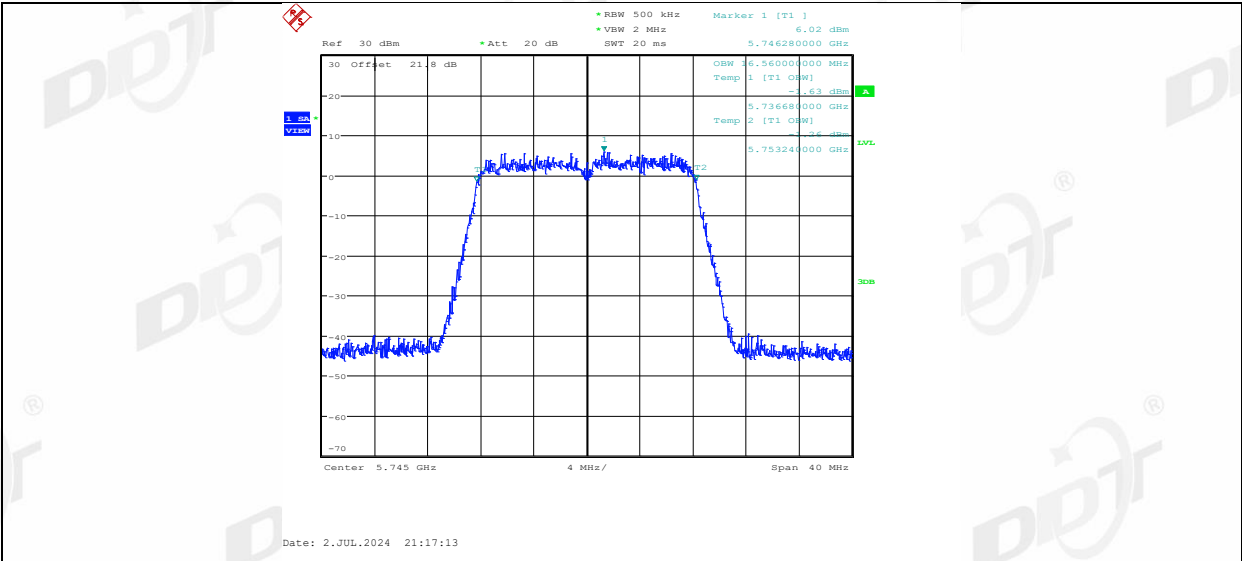




11A_Ant1_5785

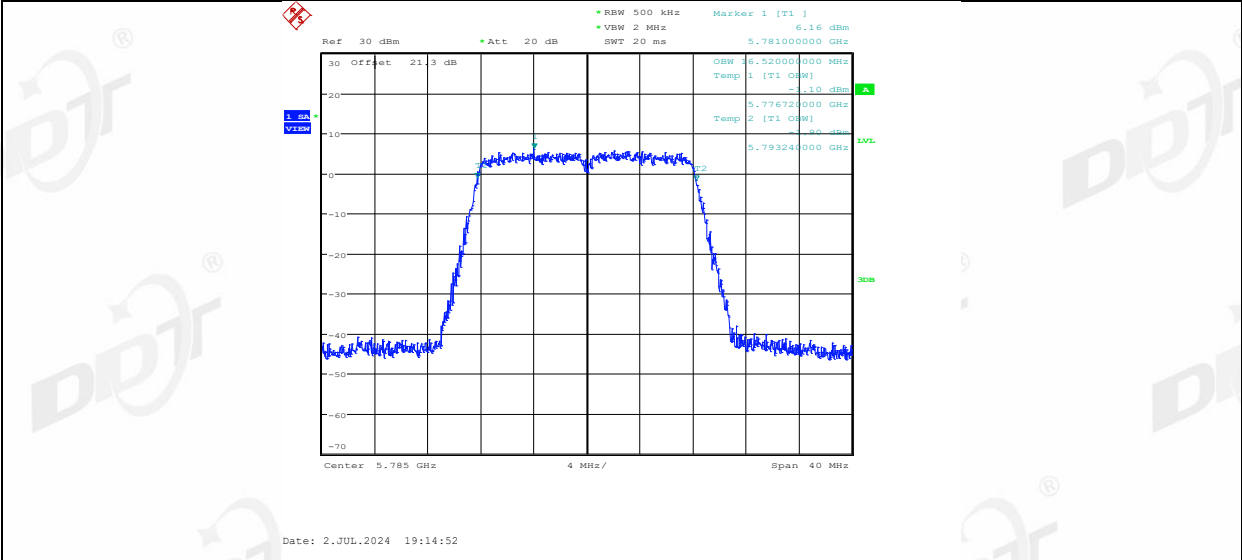


11A_Ant2_5785

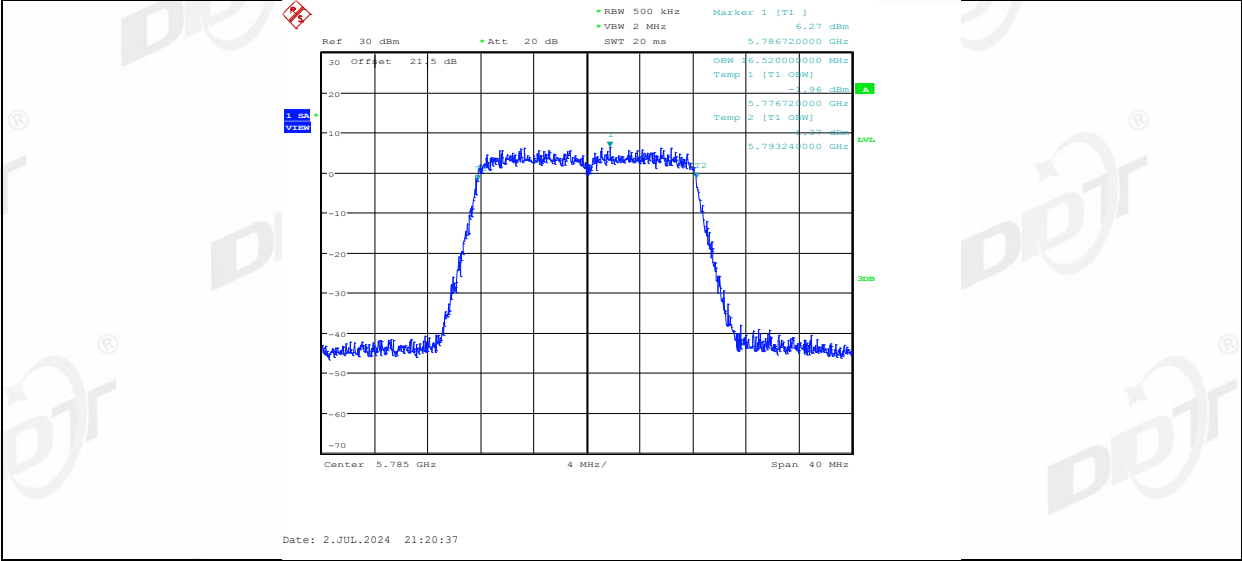


11A_Ant1_5825

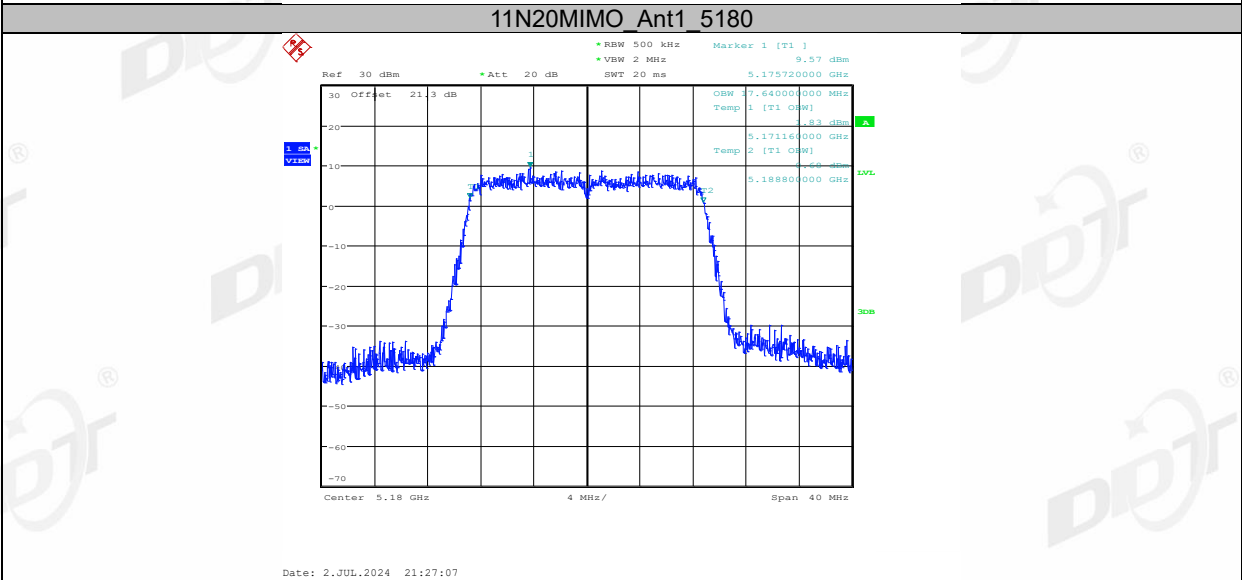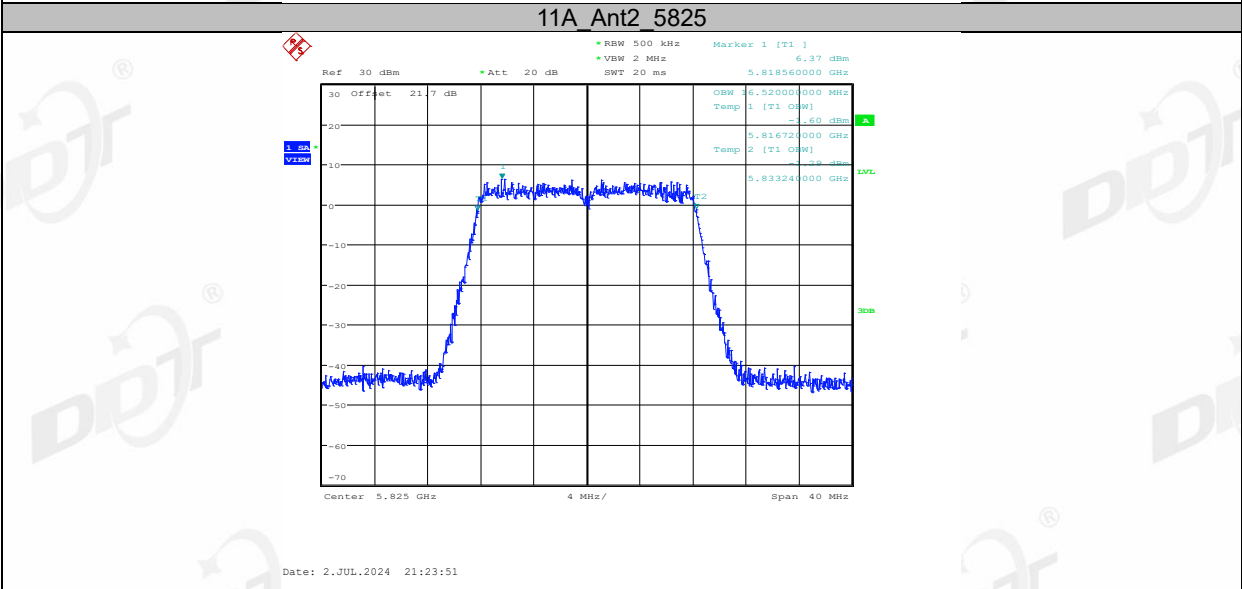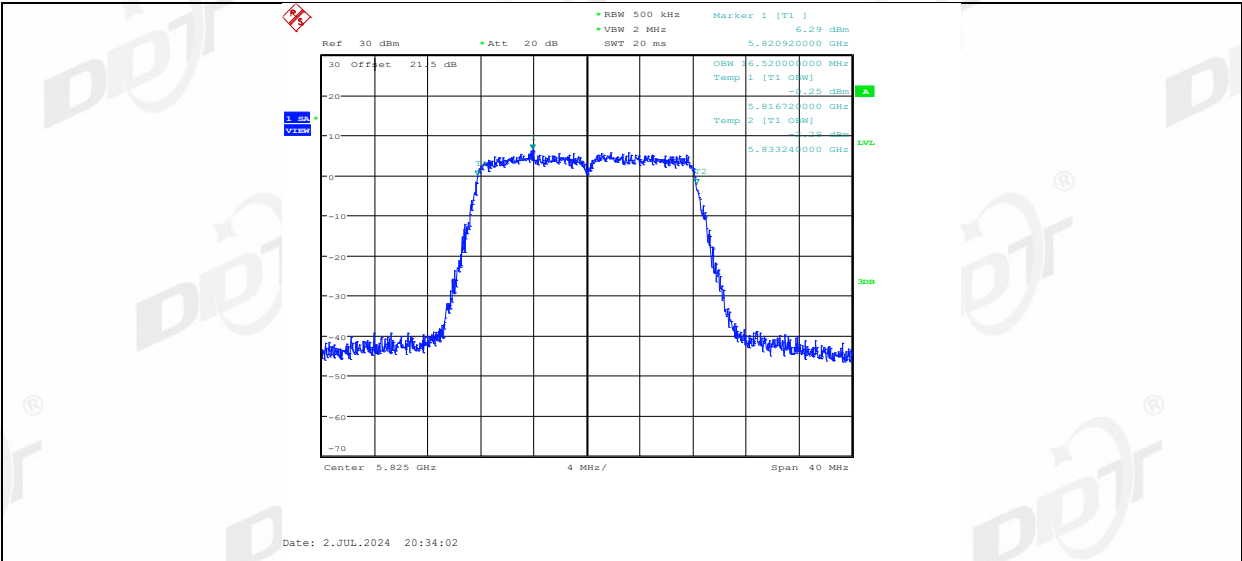


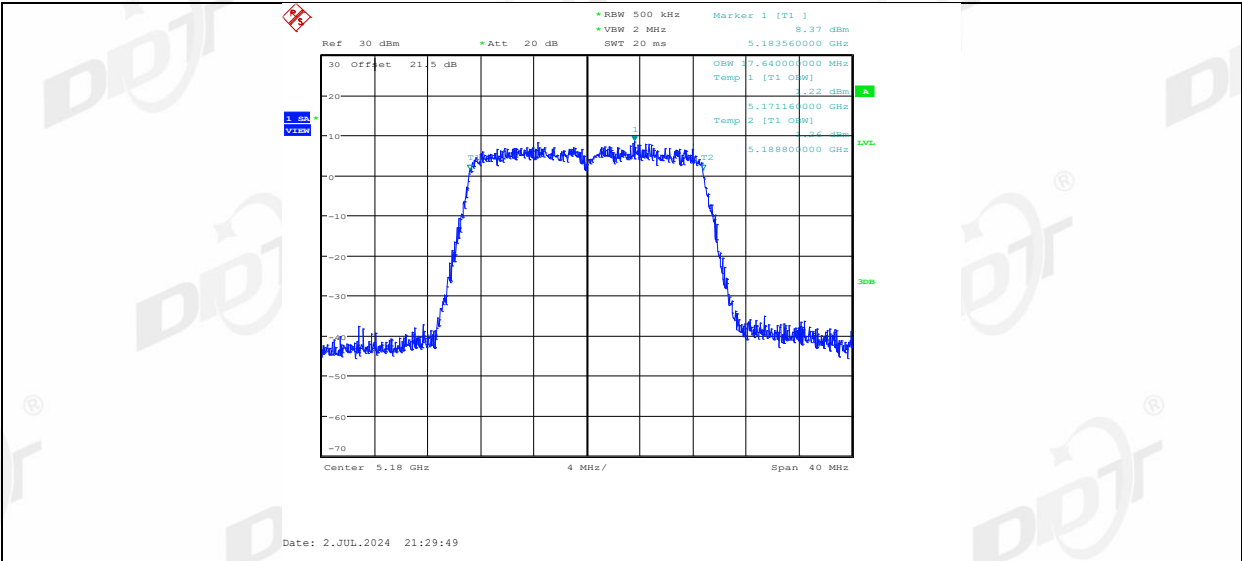


11N20MIMO_Ant1_5200

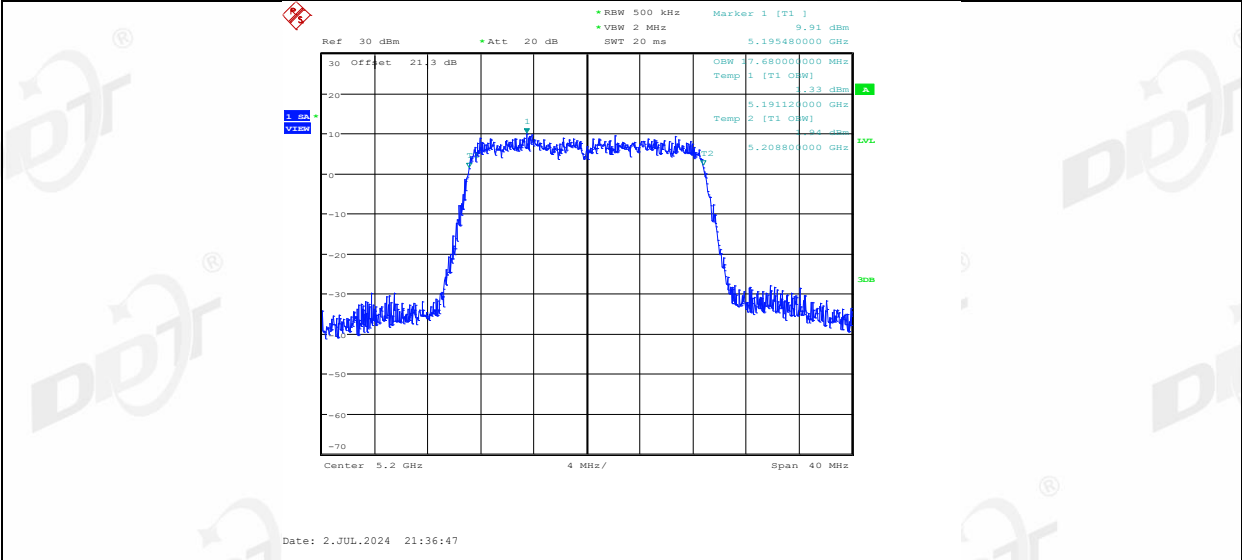


11N20MIMO_Ant2_5200

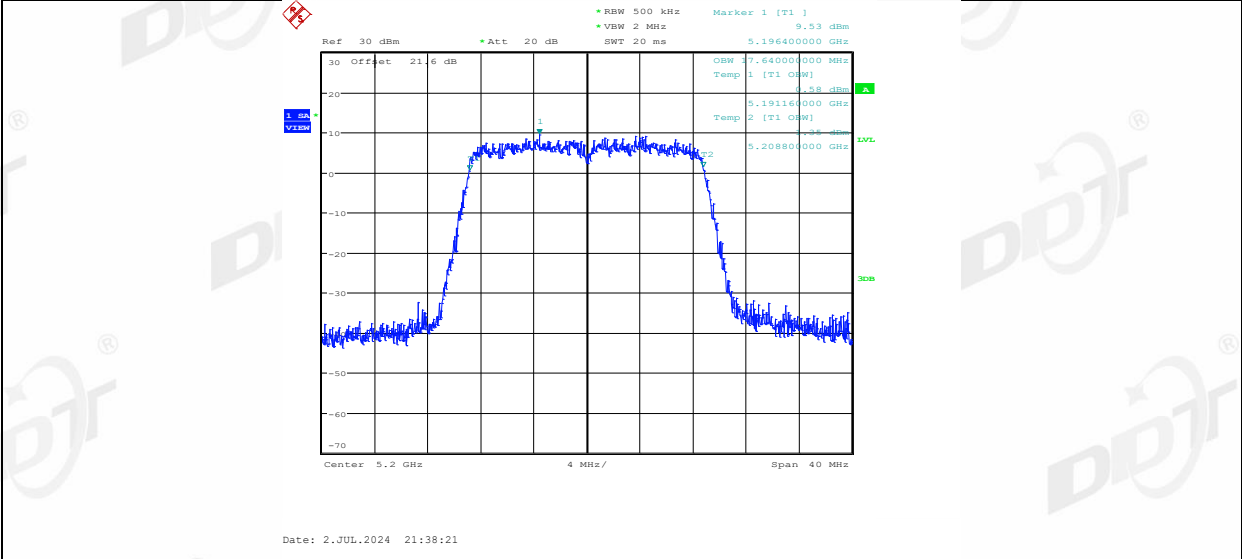


11N20MIMO_Ant1_5240

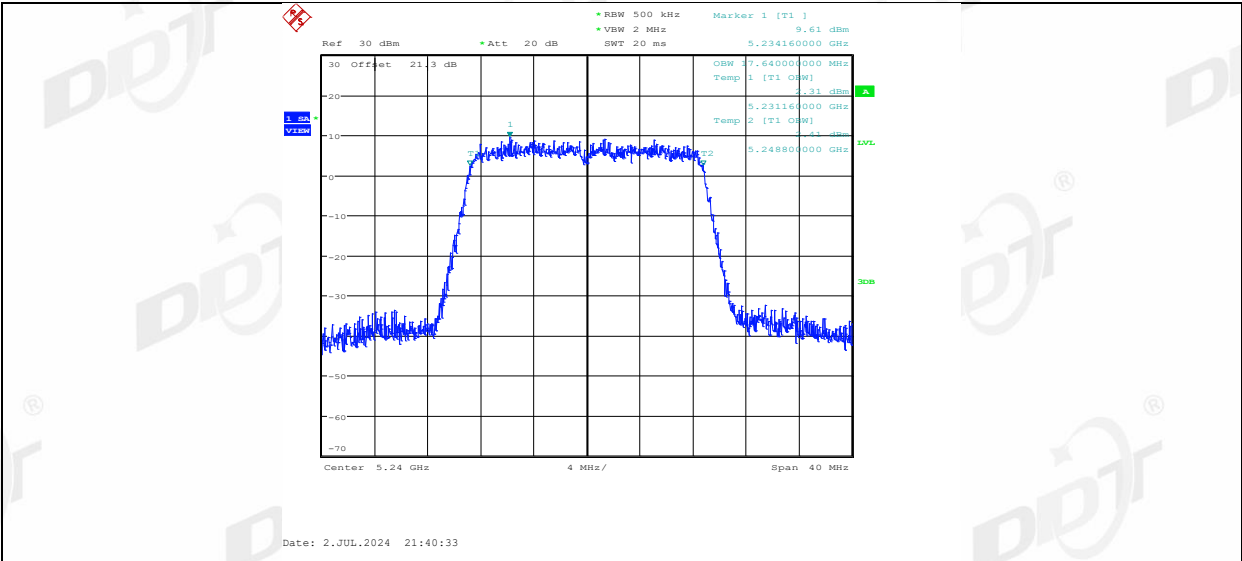


11N20MIMO_Ant2_5240

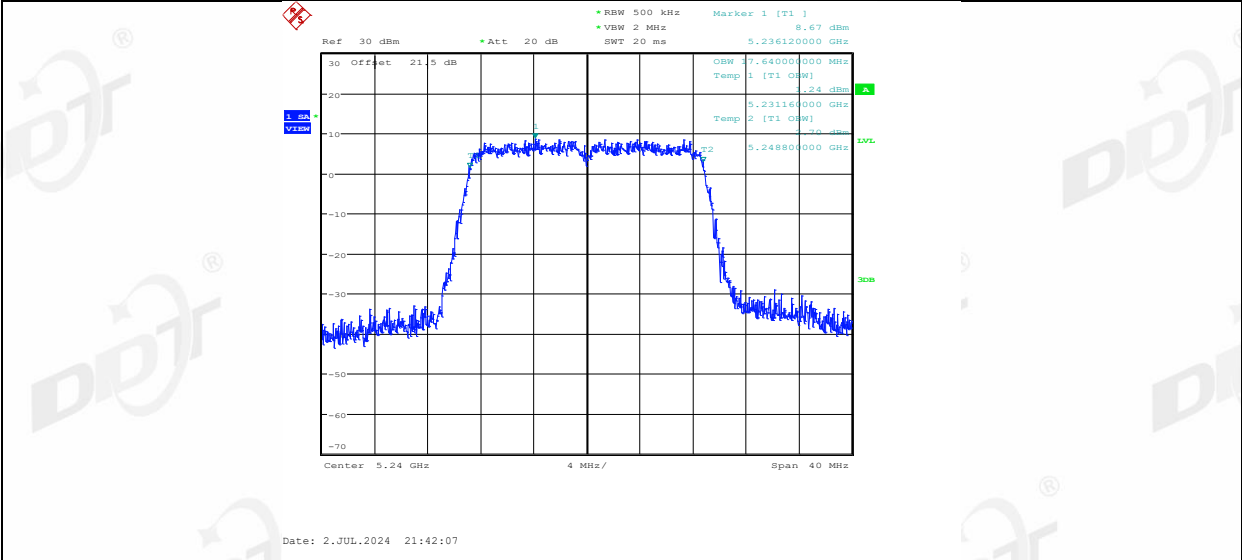


11N20MIMO_Ant1_5260

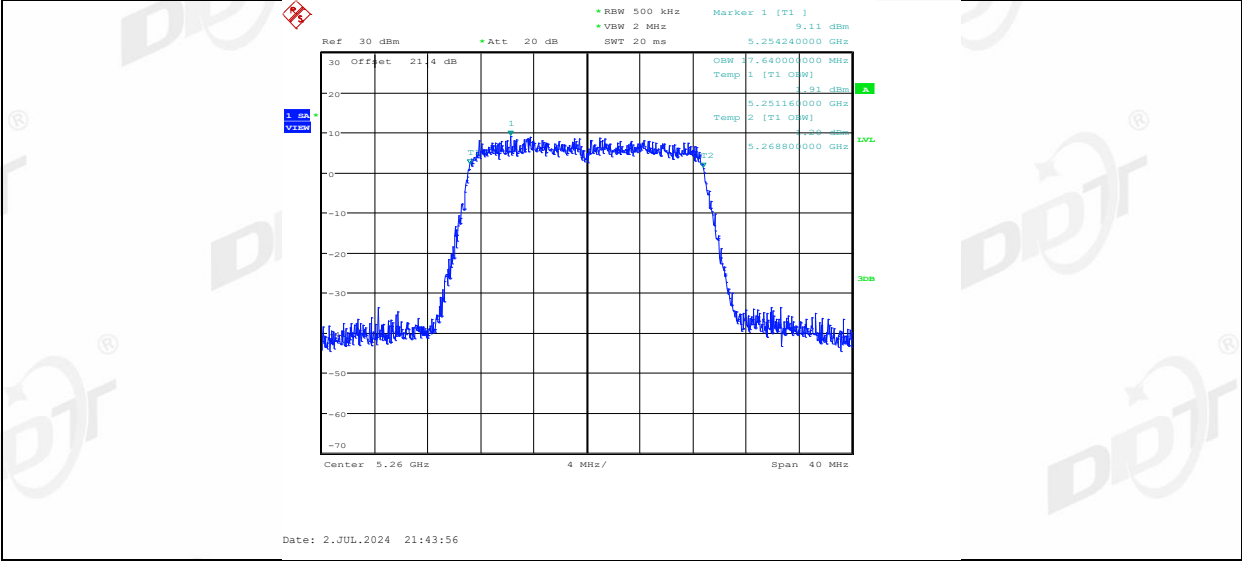


11N20MIMO_Ant2_5260

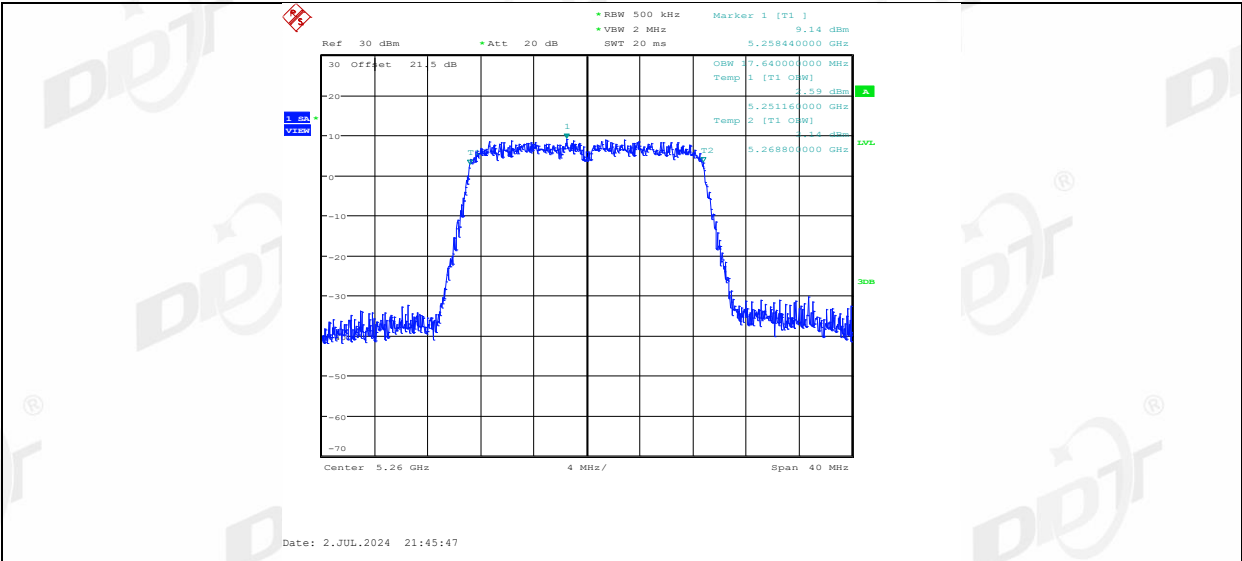




11N20MIMO_Ant1_5280

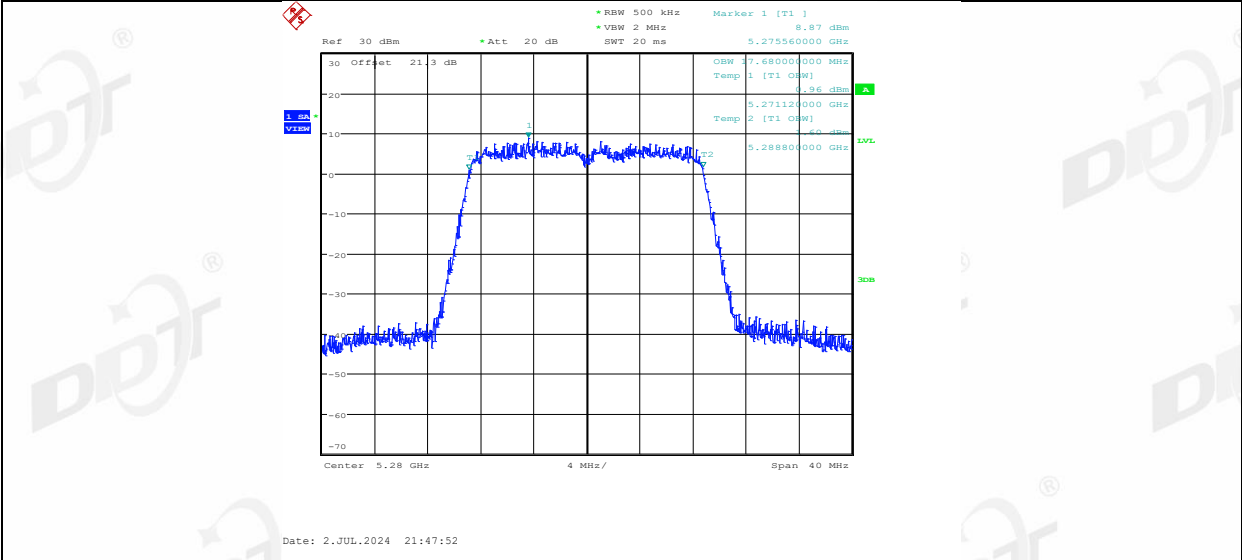


11N20MIMO_Ant2_5280

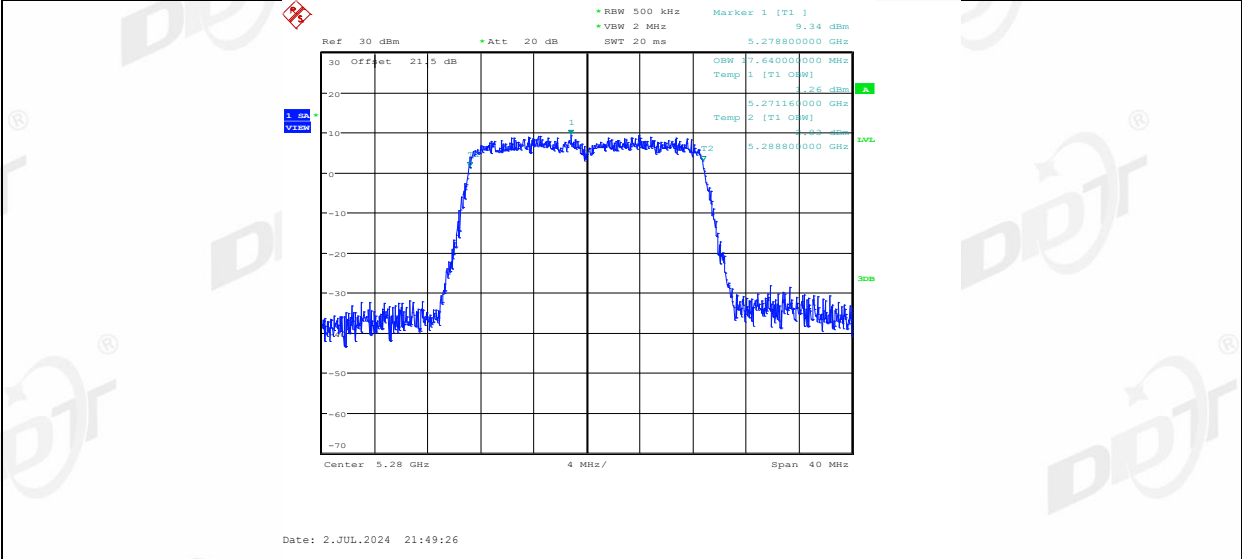


11N20MIMO_Ant1_5320

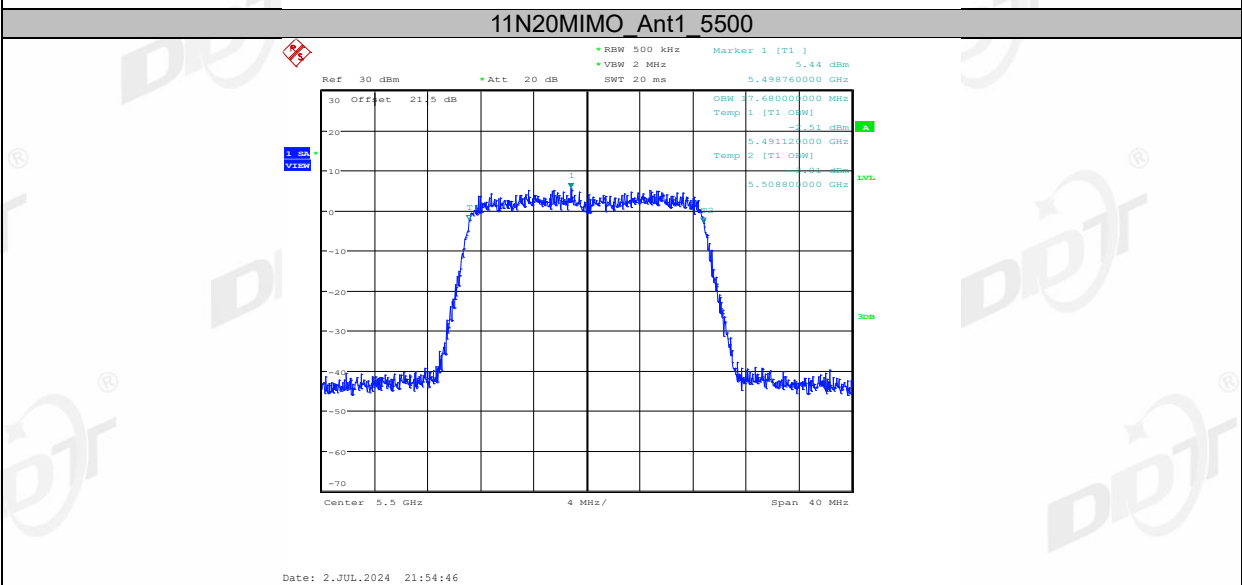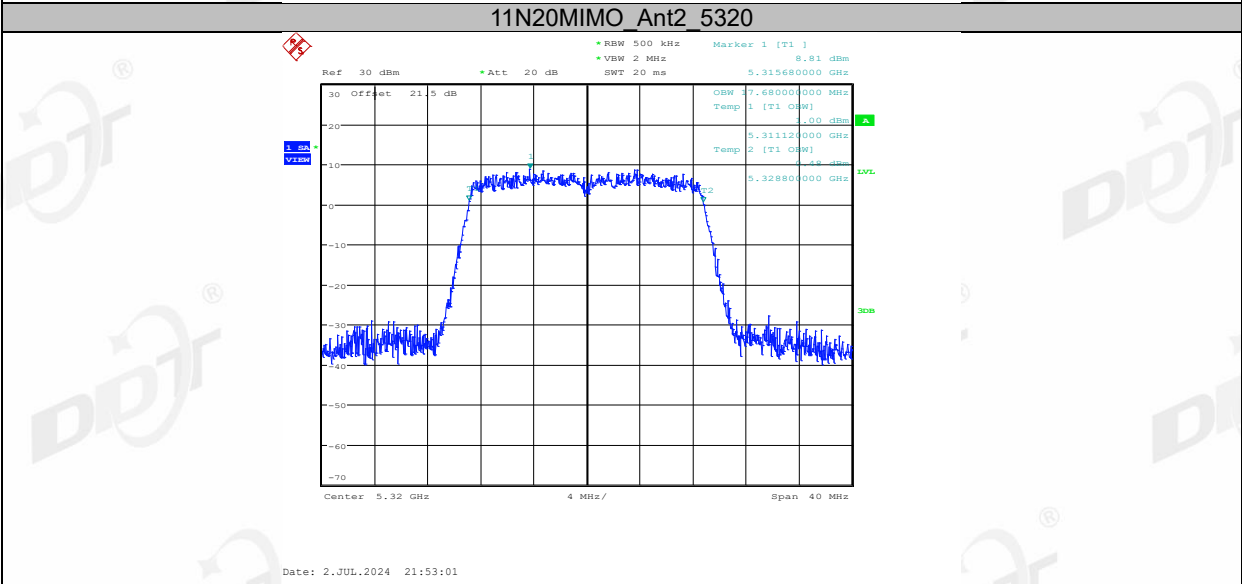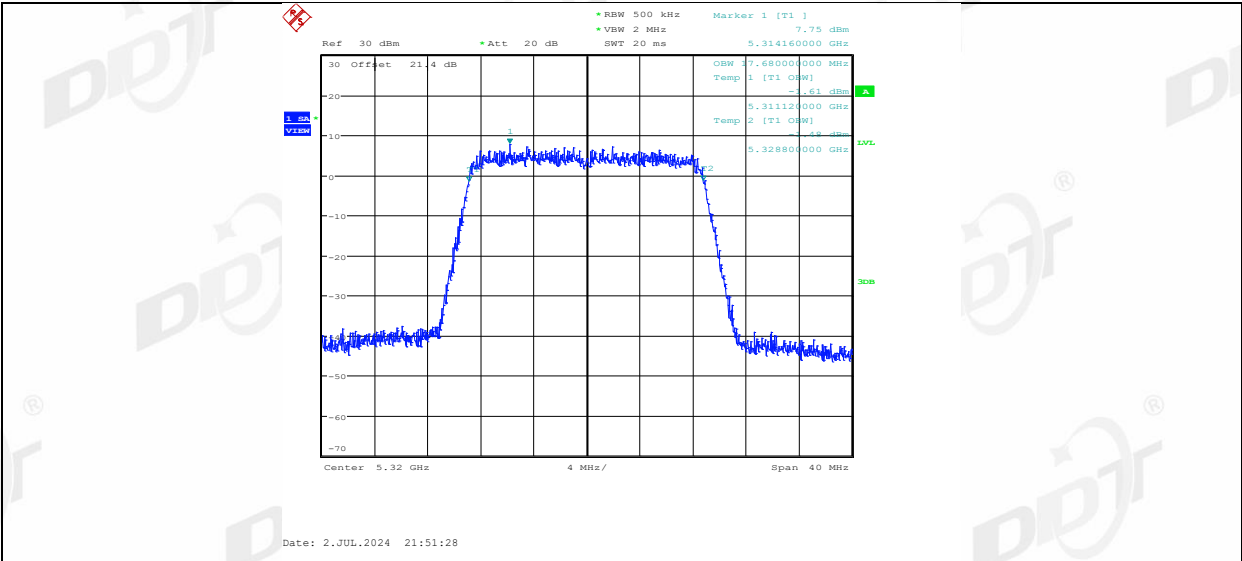


11N20MIMO_Ant2_5500

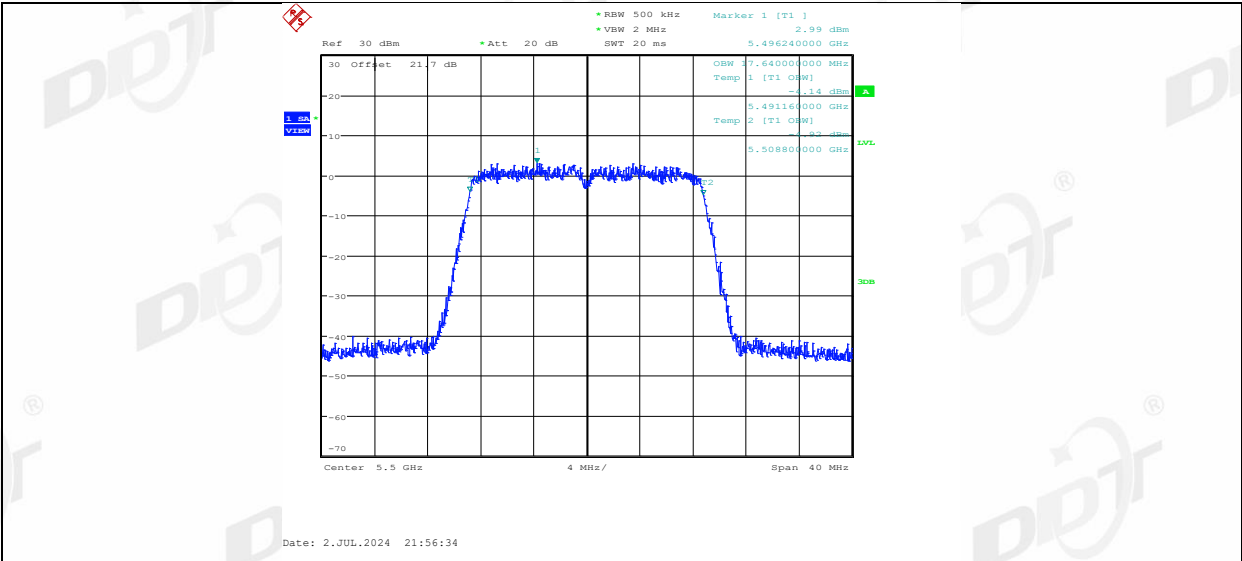


11N20MIMO_Ant1_5580

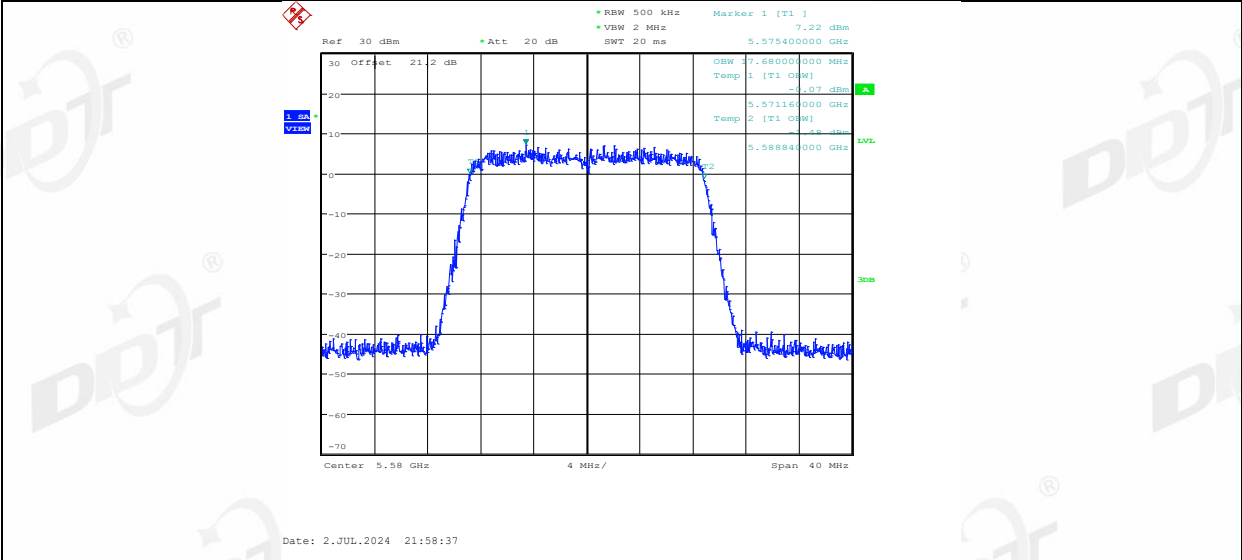


11N20MIMO_Ant2_5580

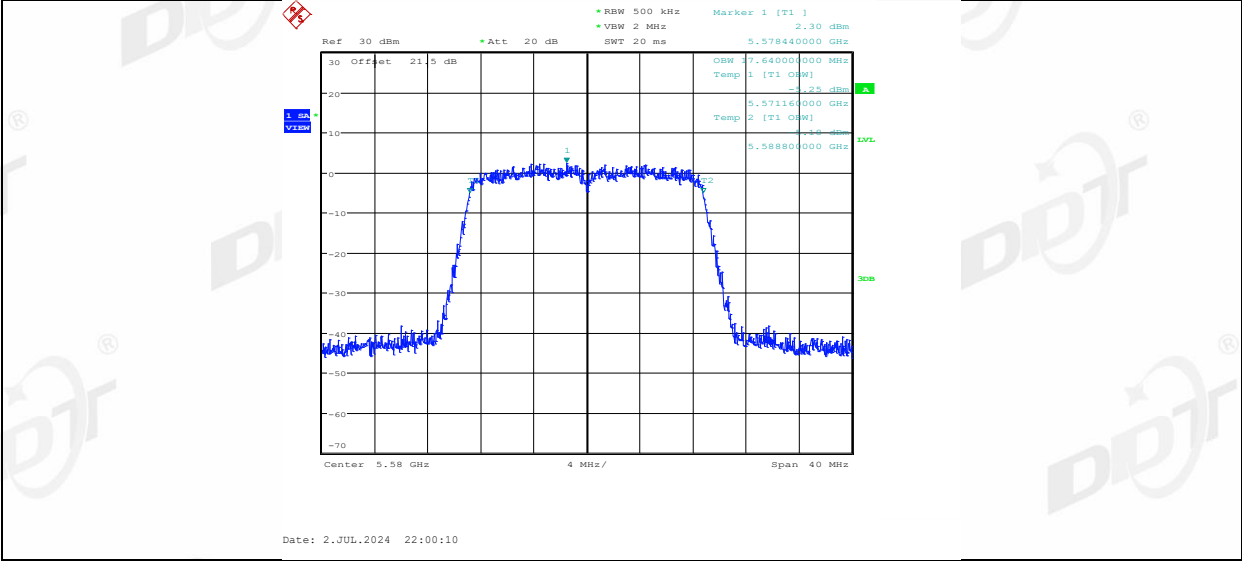


11N20MIMO_Ant1_5700

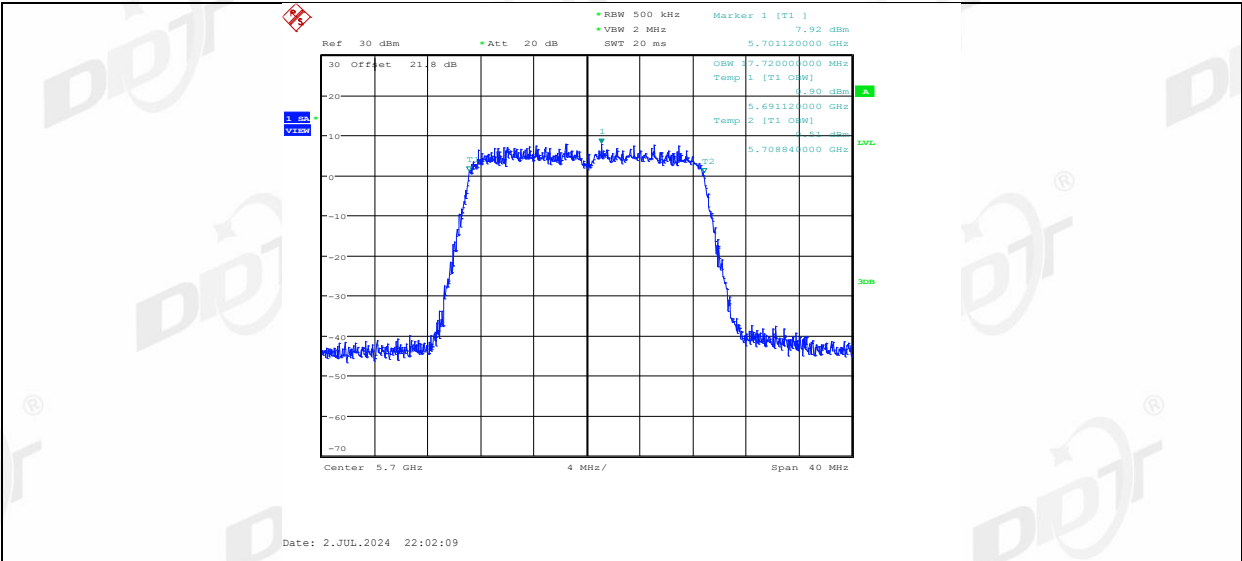





11N20MIMO_Ant2_5700

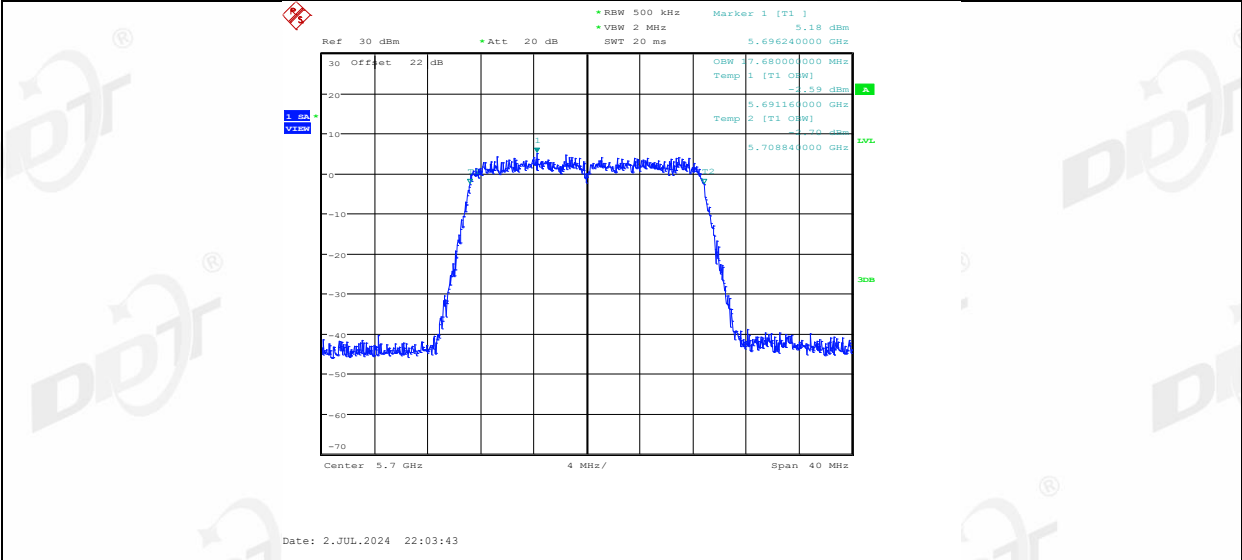


11N20MIMO_Ant1_5720

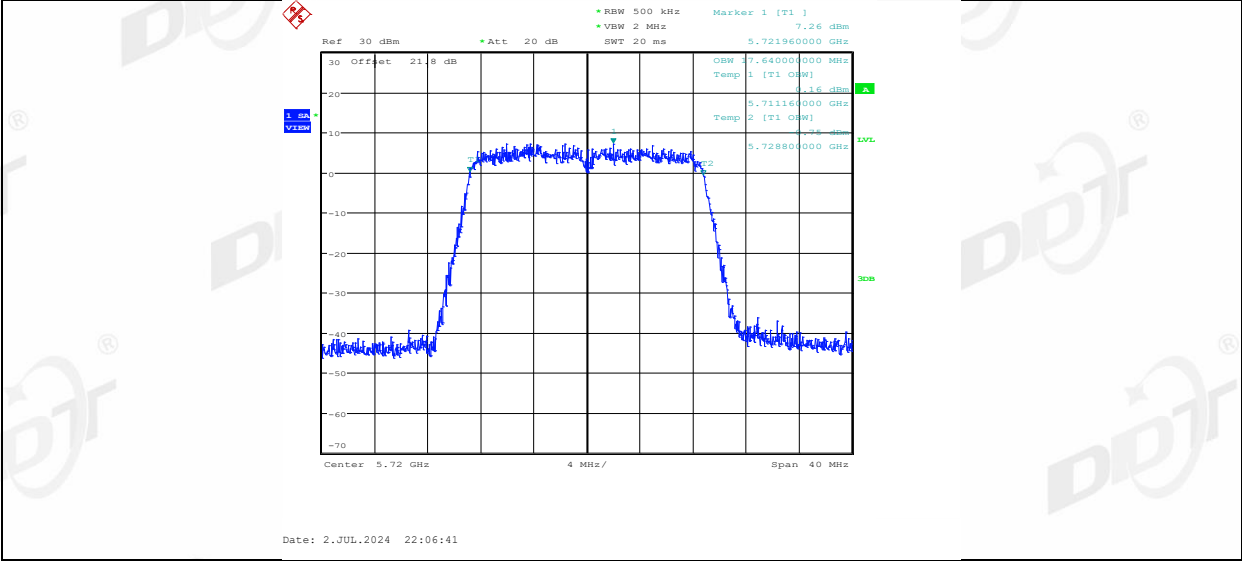


11N20MIMO_Ant2_5720

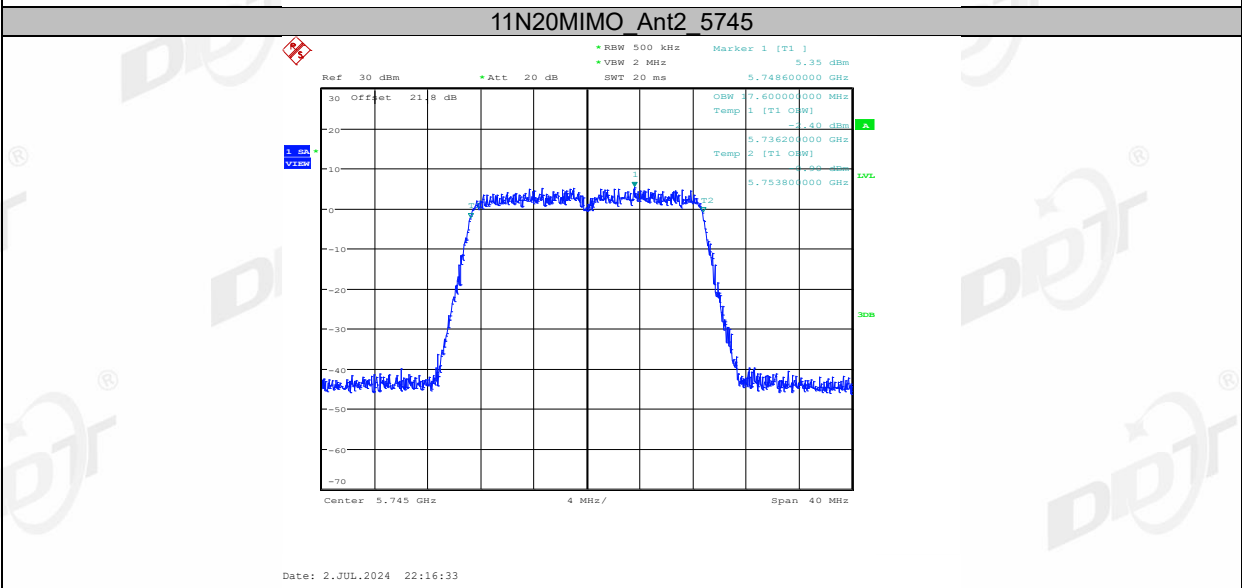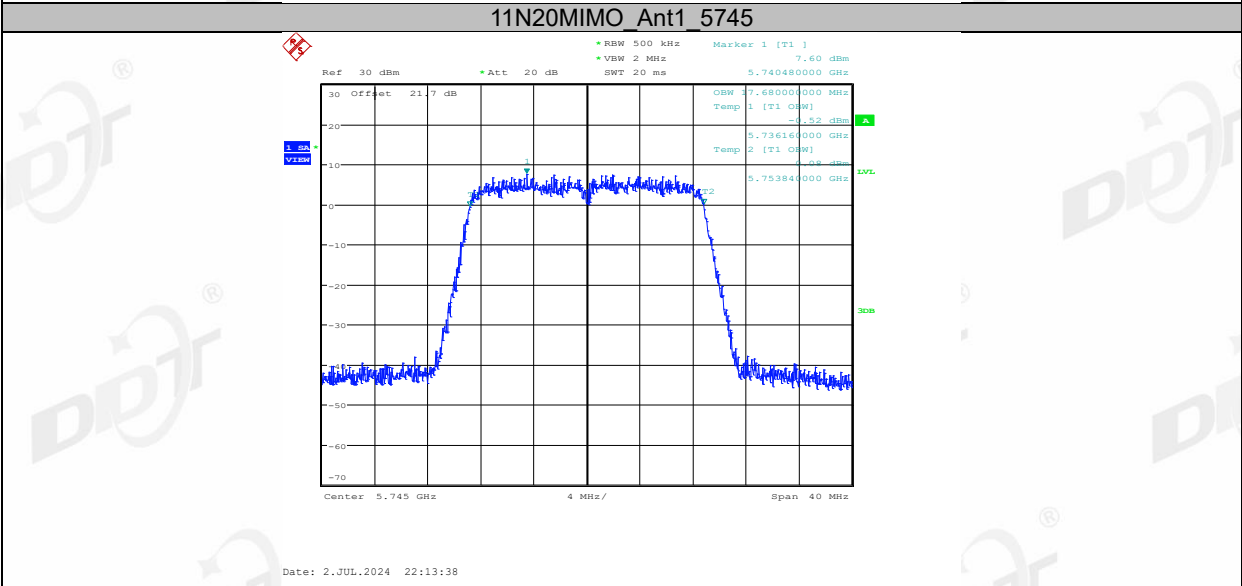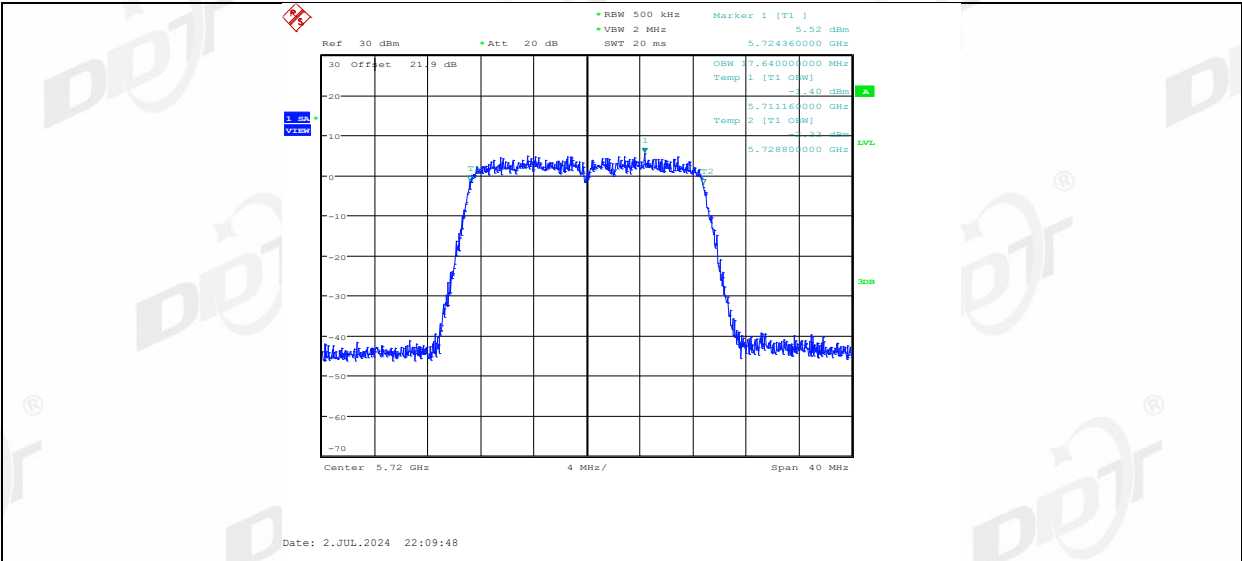


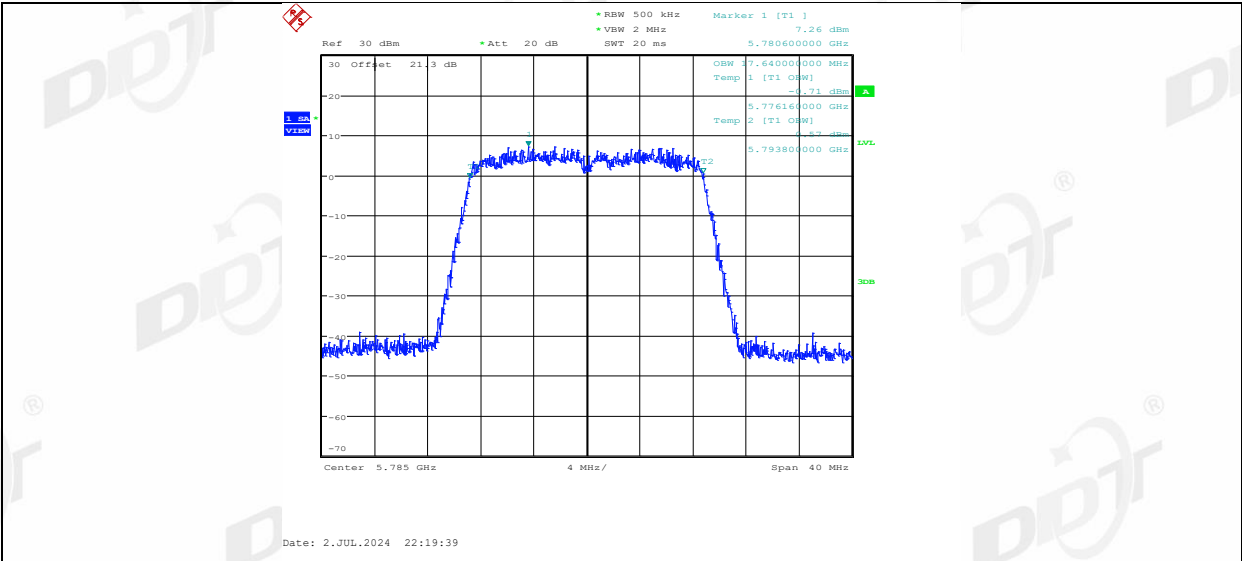




11N20MIMO_Ant2_5785

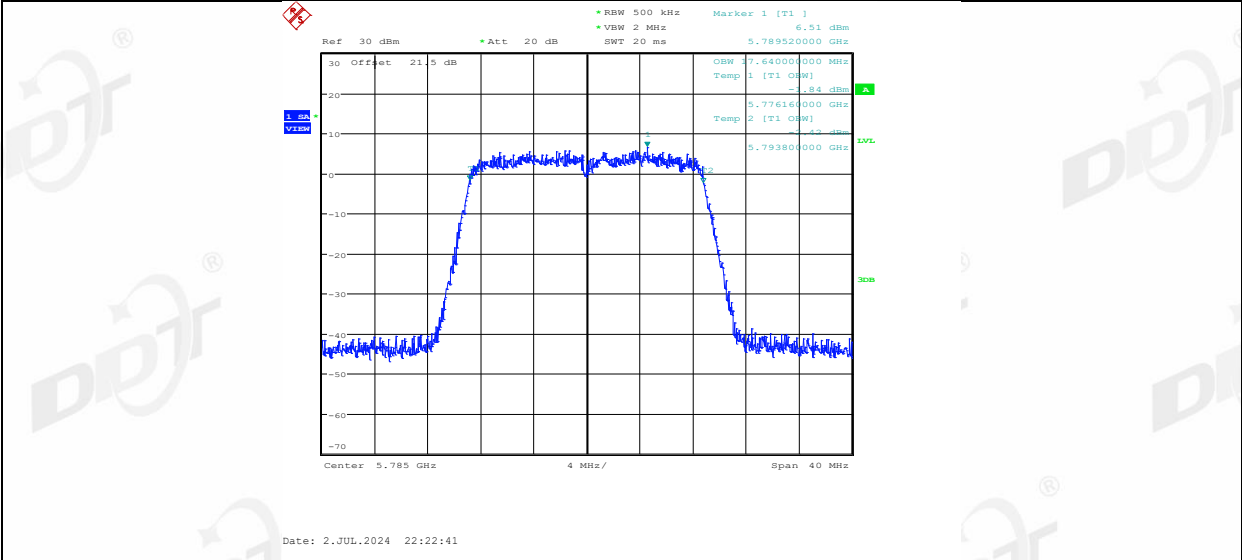


11N20MIMO_Ant1_5825

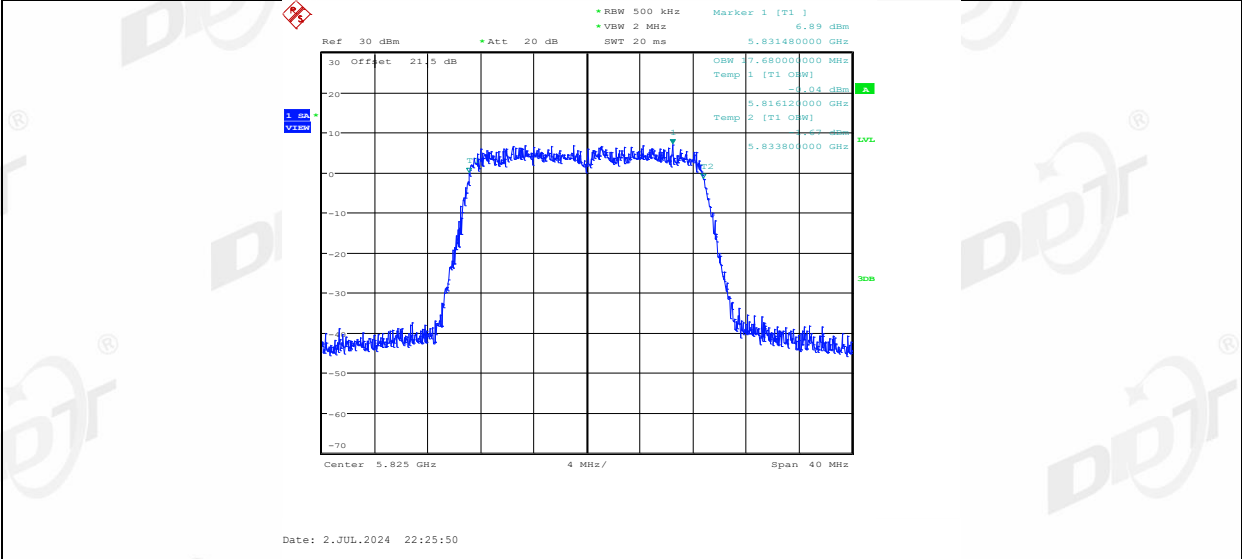


11N20MIMO_Ant2_5825

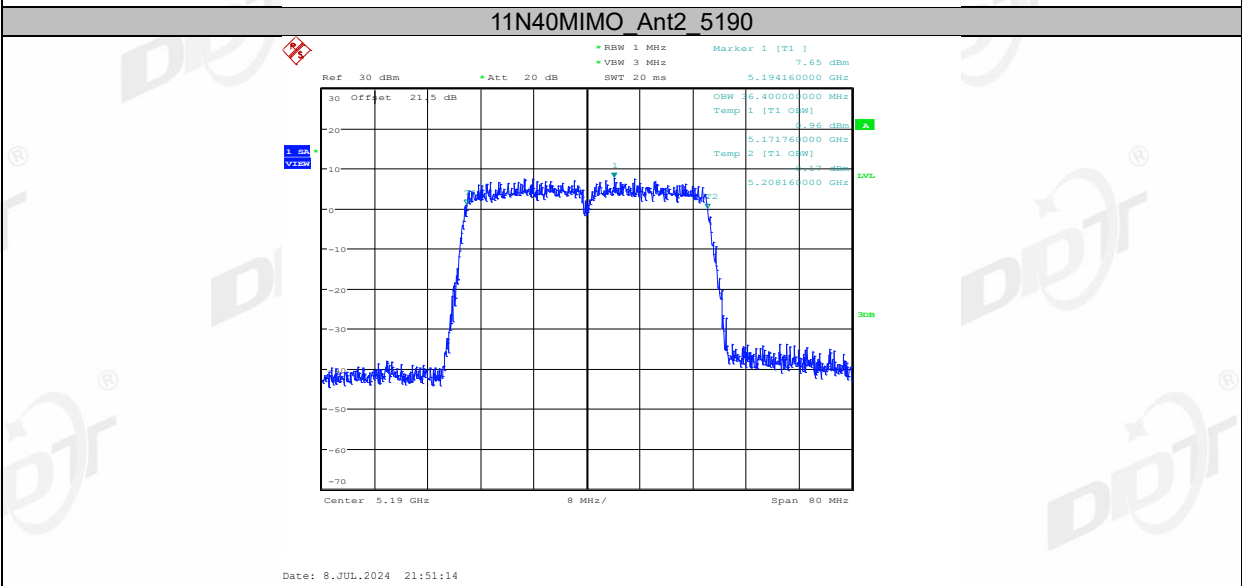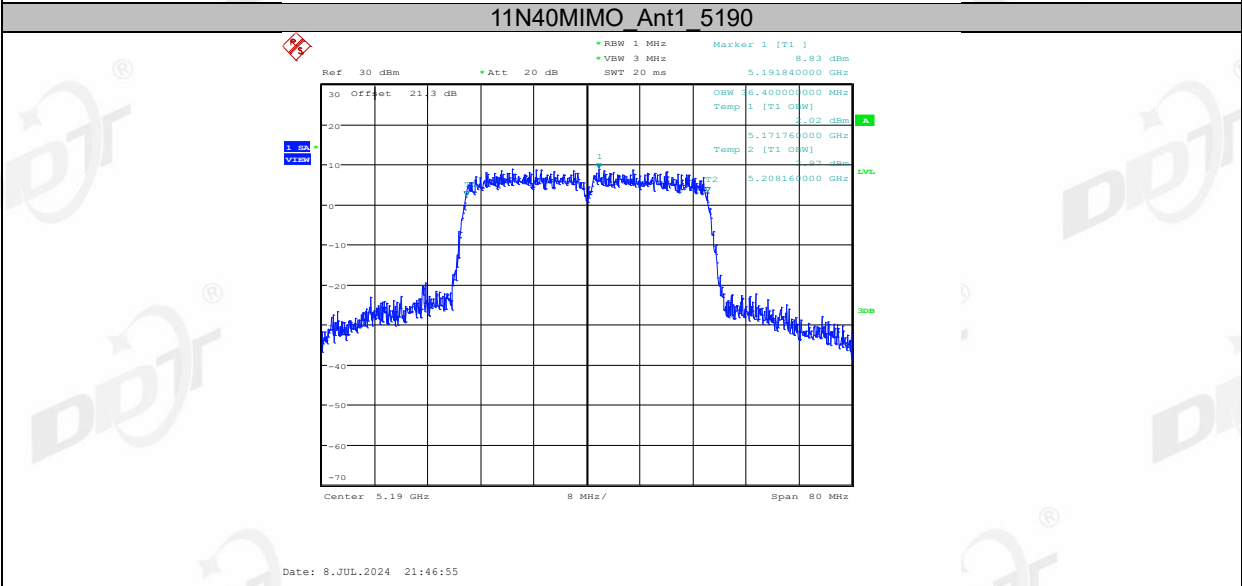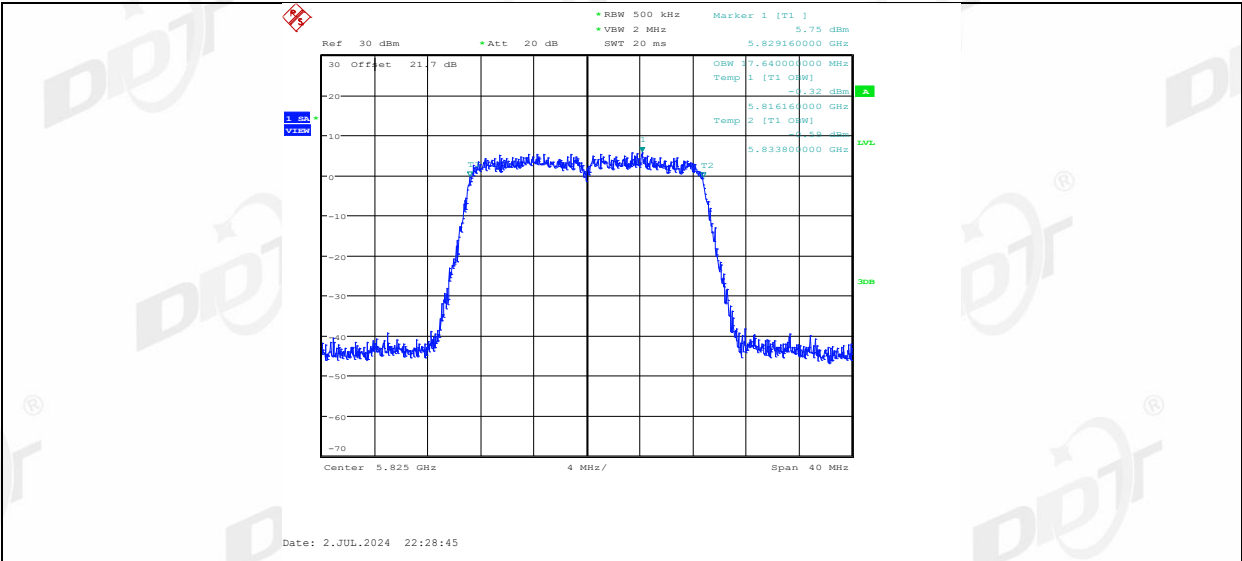


11N40MIMO_Ant1_5230

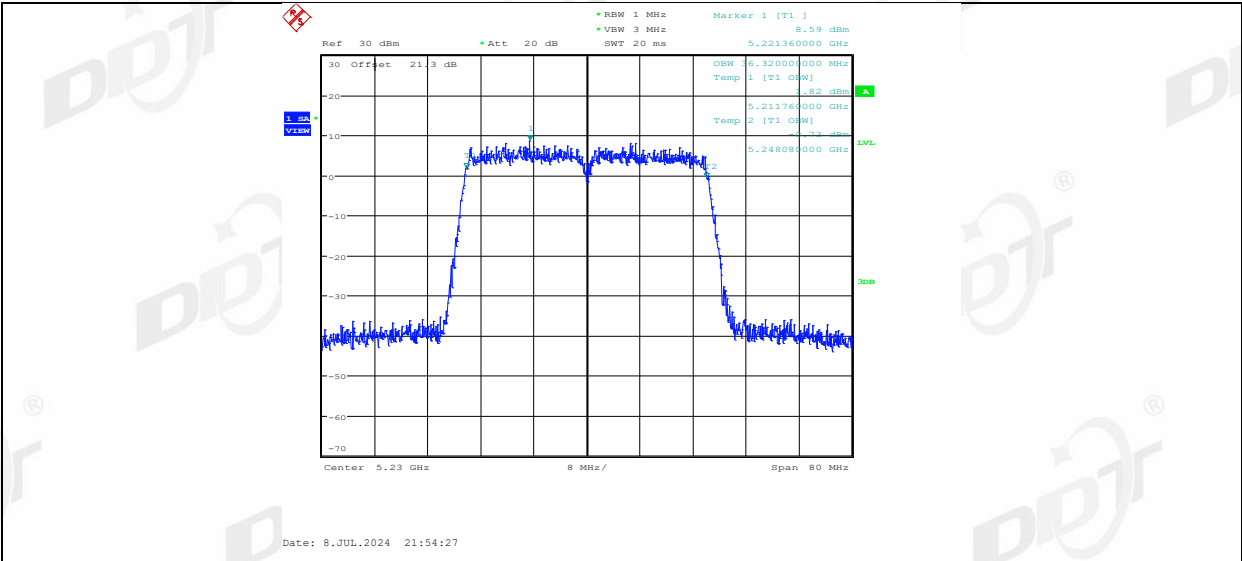




11N40MIMO_Ant2_5230

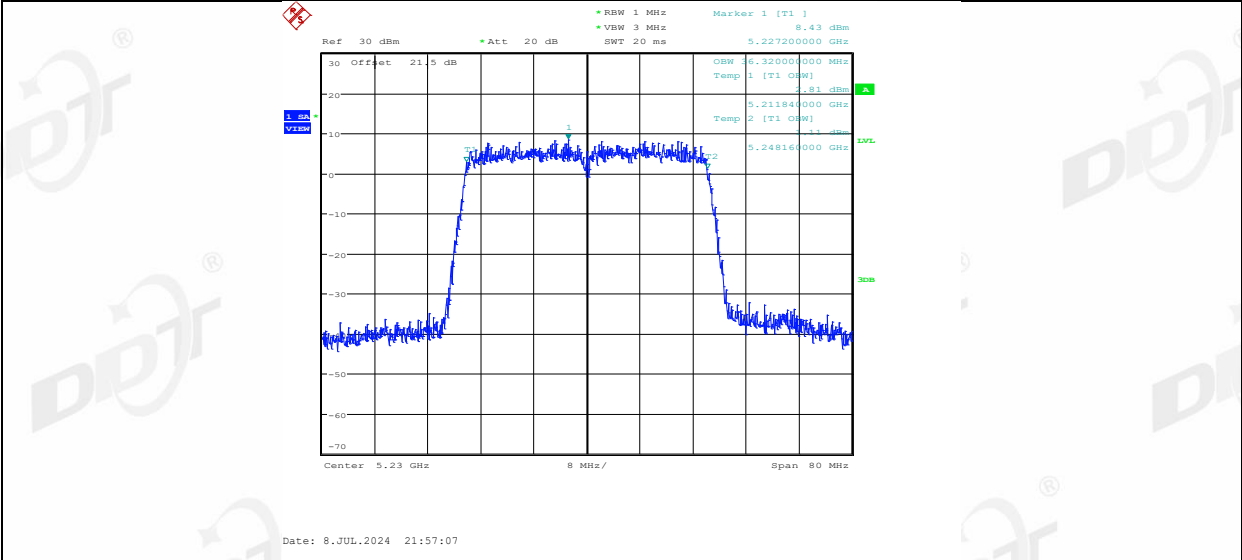


11N40MIMO_Ant1_5270

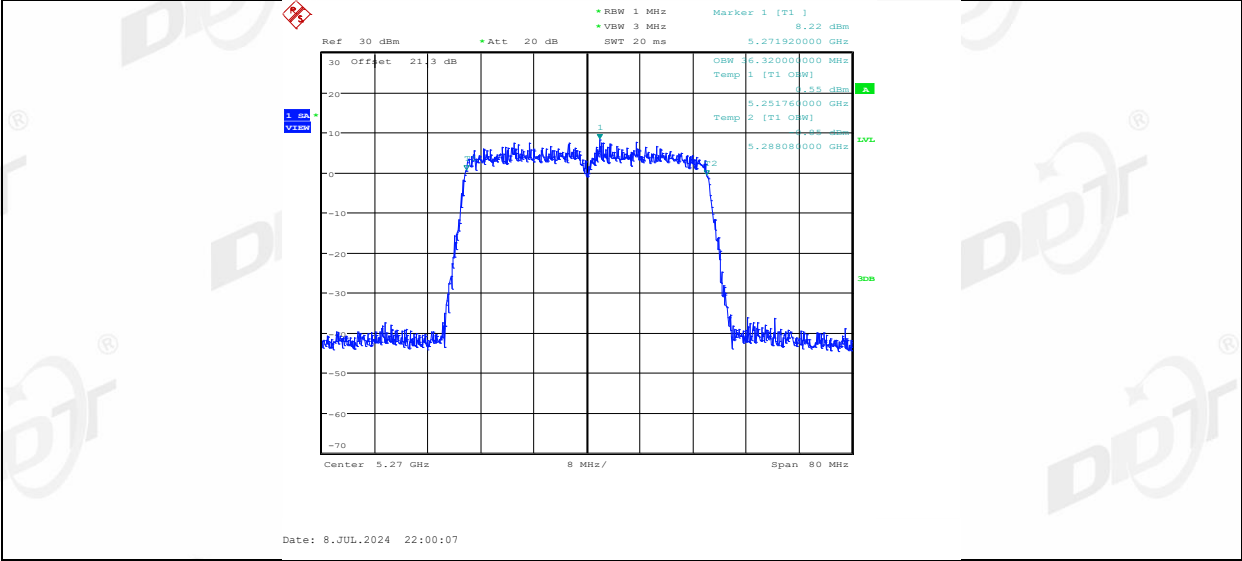


11N40MIMO_Ant2_5270

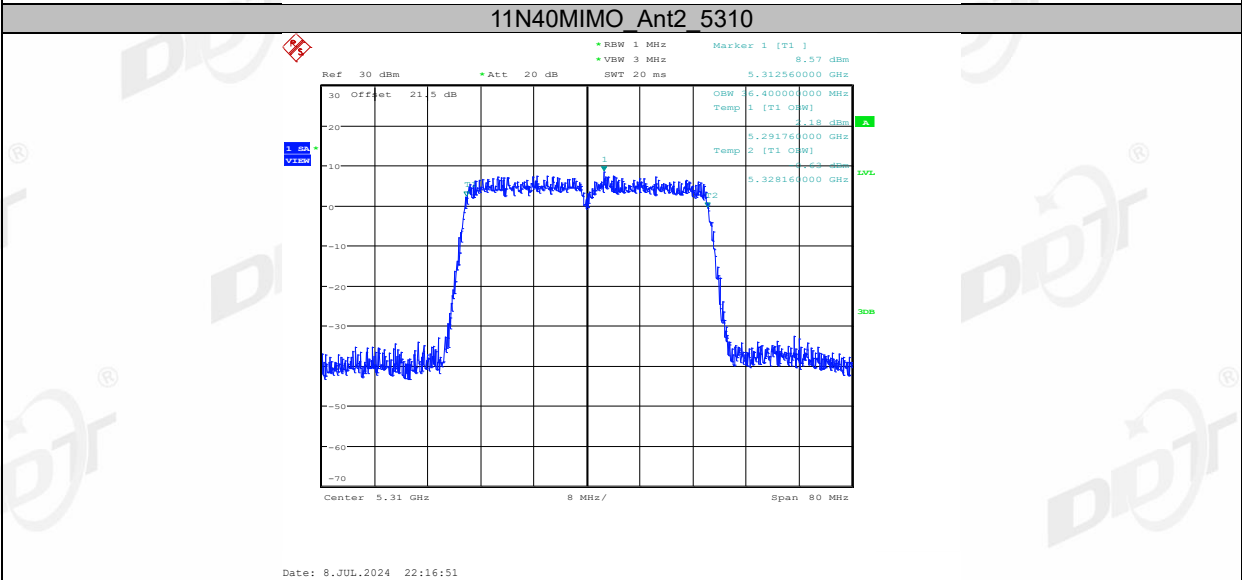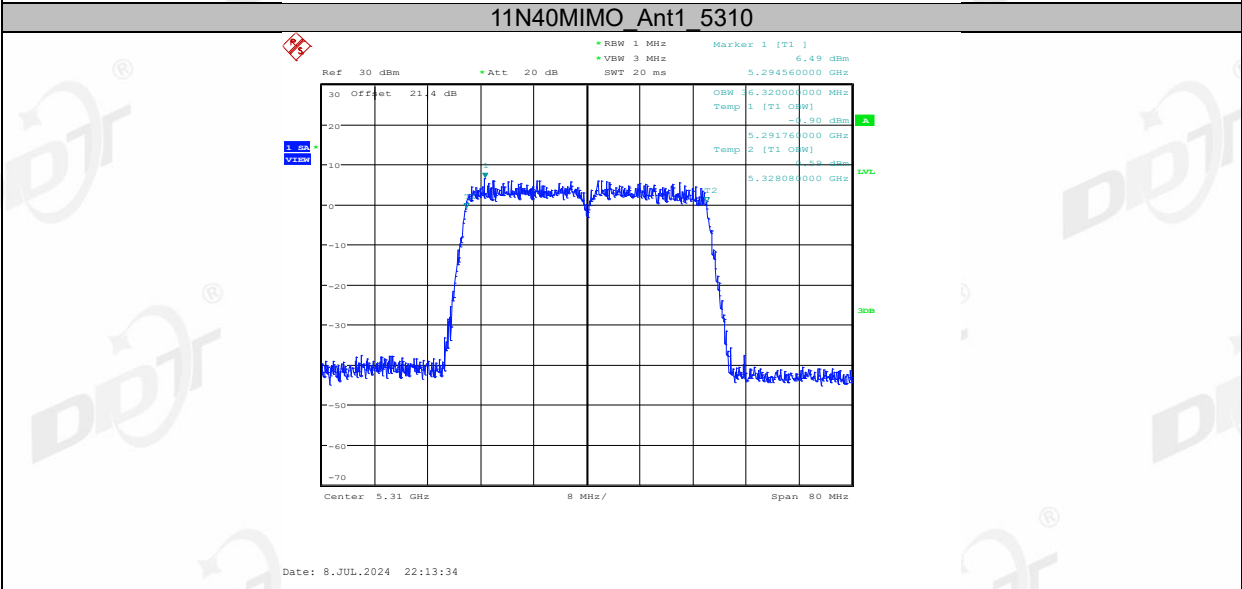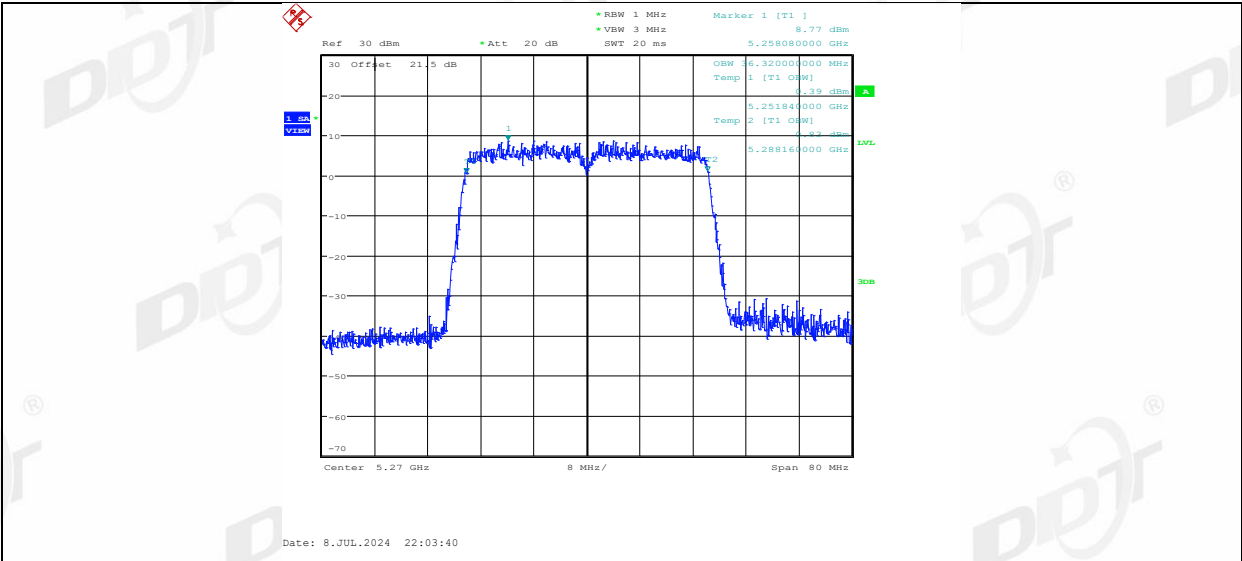


11N40MIMO_Ant1_5510

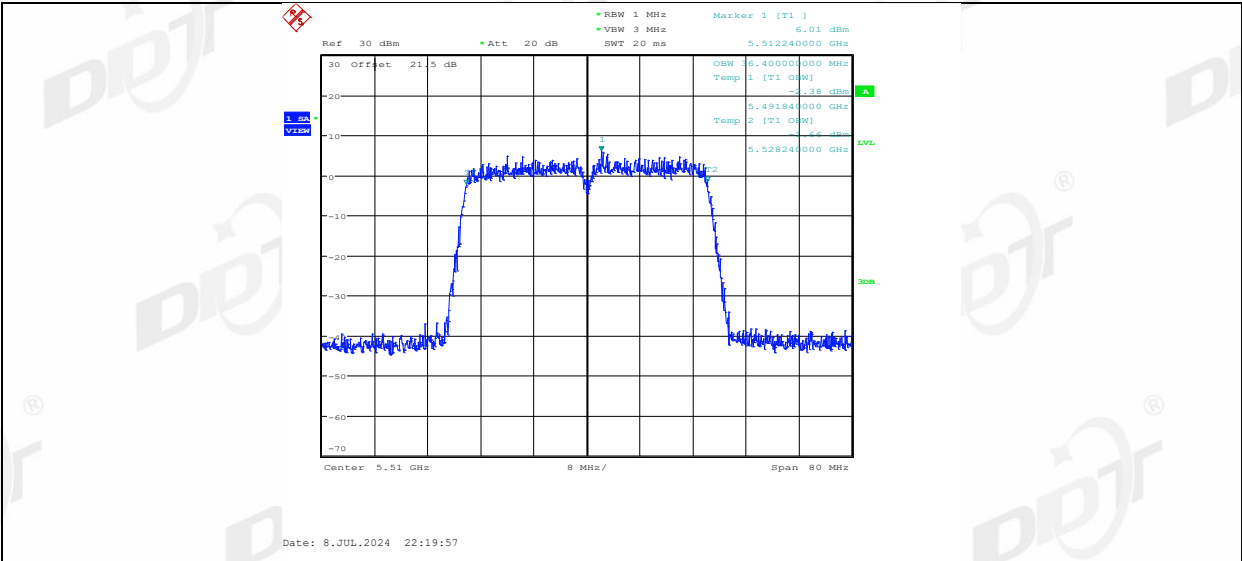


11N40MIMO_Ant2_5510

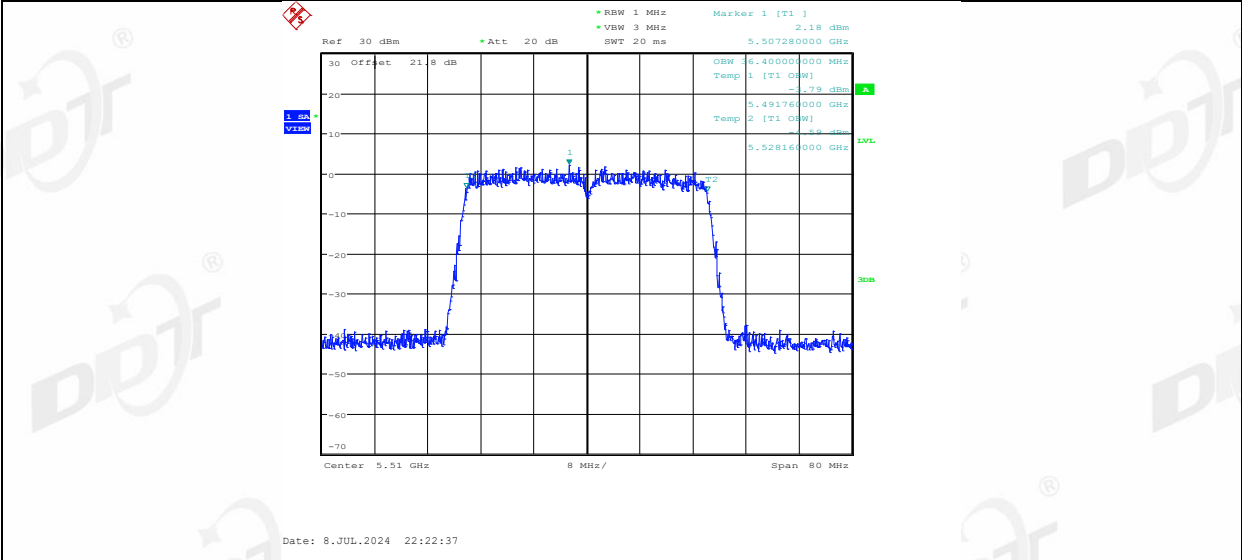


11N40MIMO_Ant1_5550

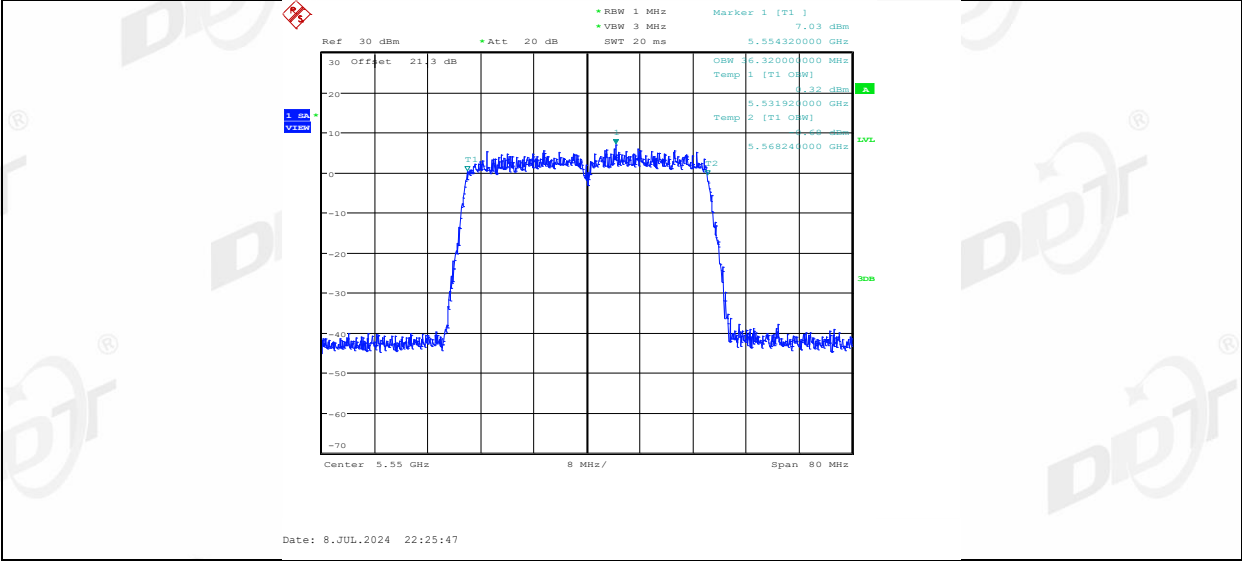


11N40MIMO_Ant2_5550

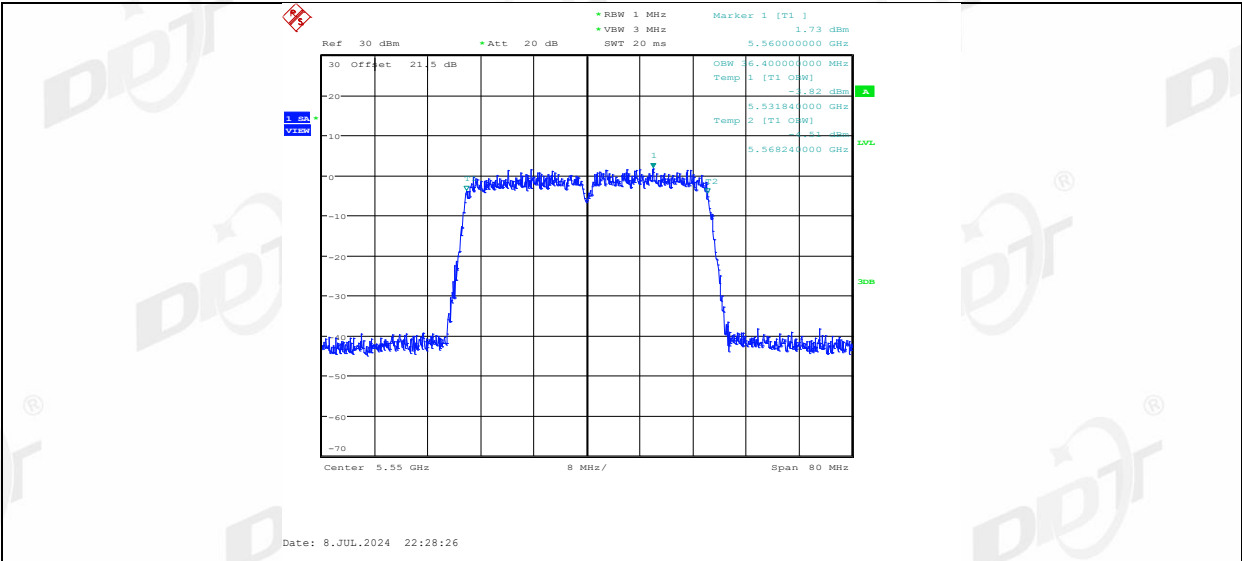


11N40MIMO_Ant1_5670

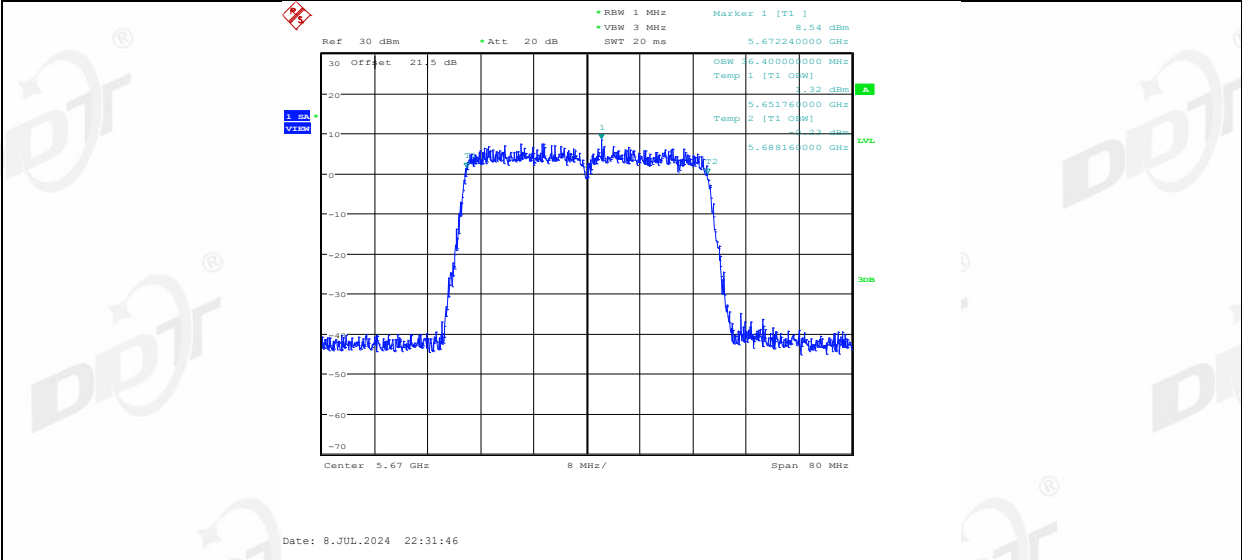


11N40MIMO_Ant2_5670

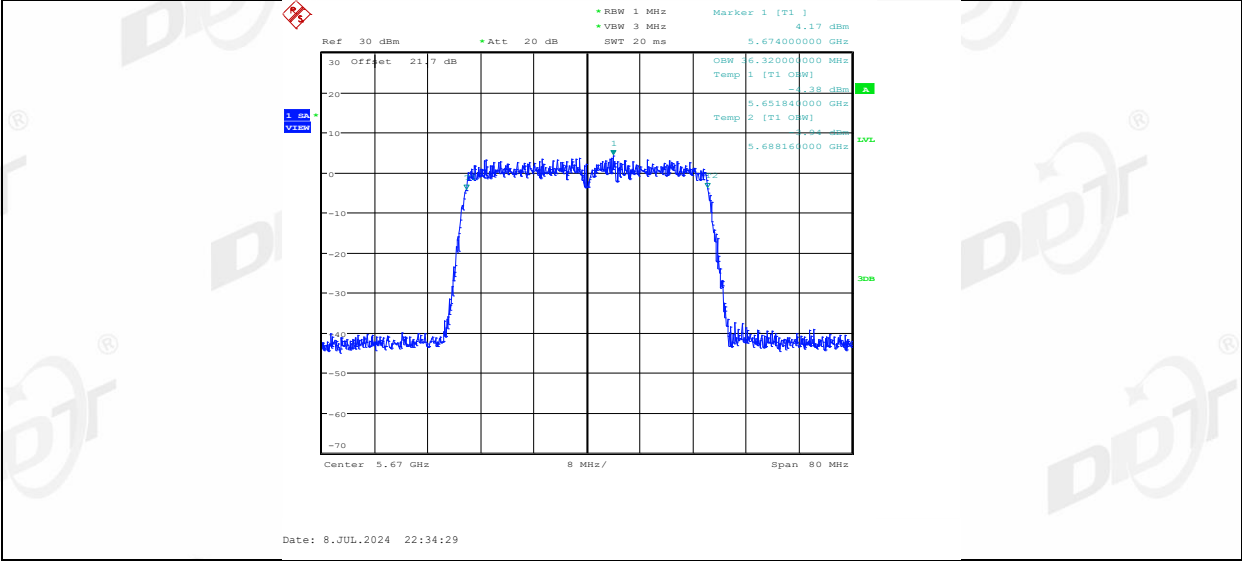


11N40MIMO_Ant1_5710

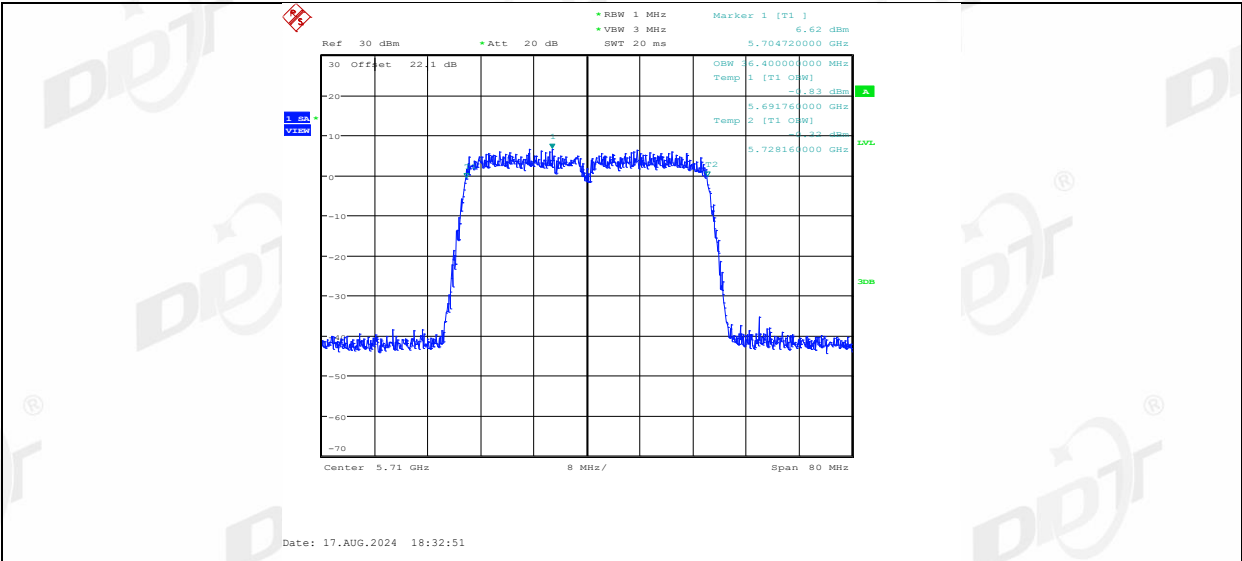


11N40MIMO_Ant2_5710

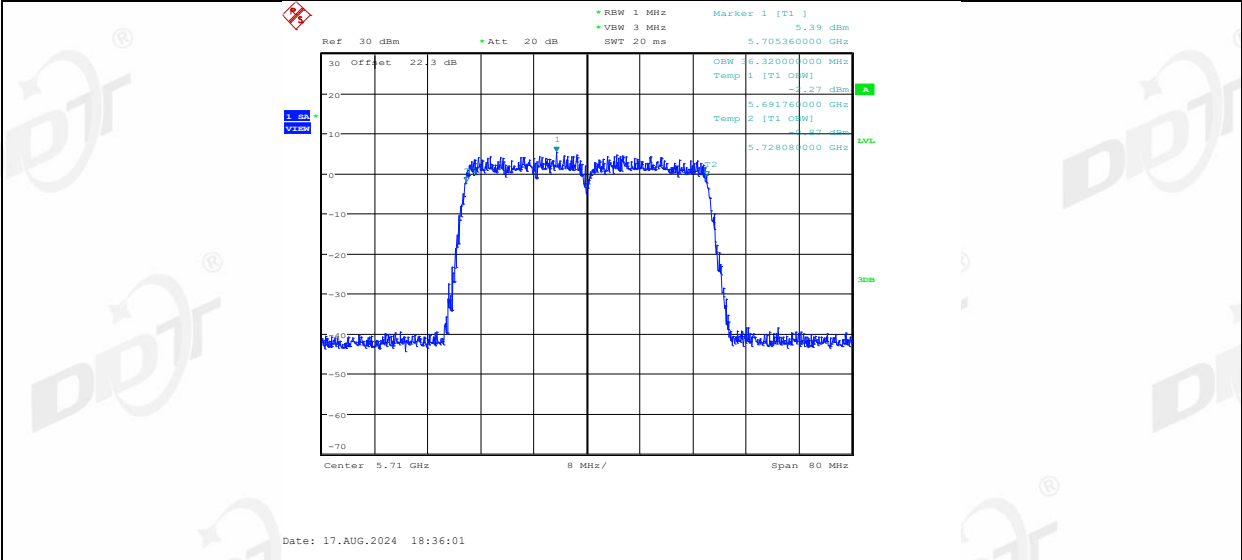


11N40MIMO_Ant1_5755

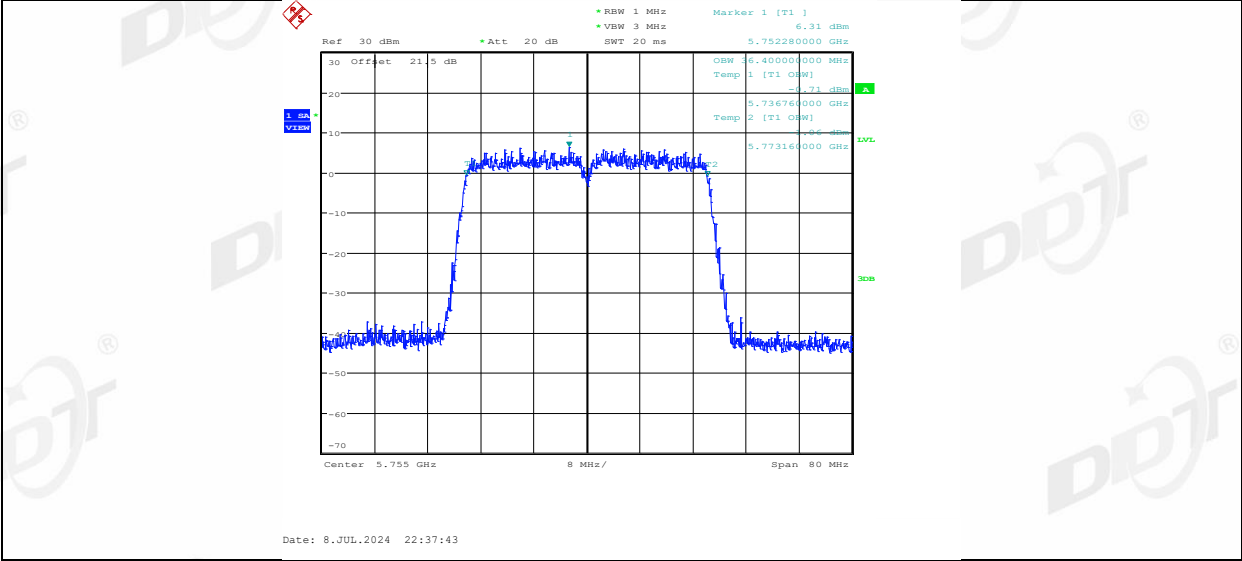


11N40MIMO_Ant2_5755

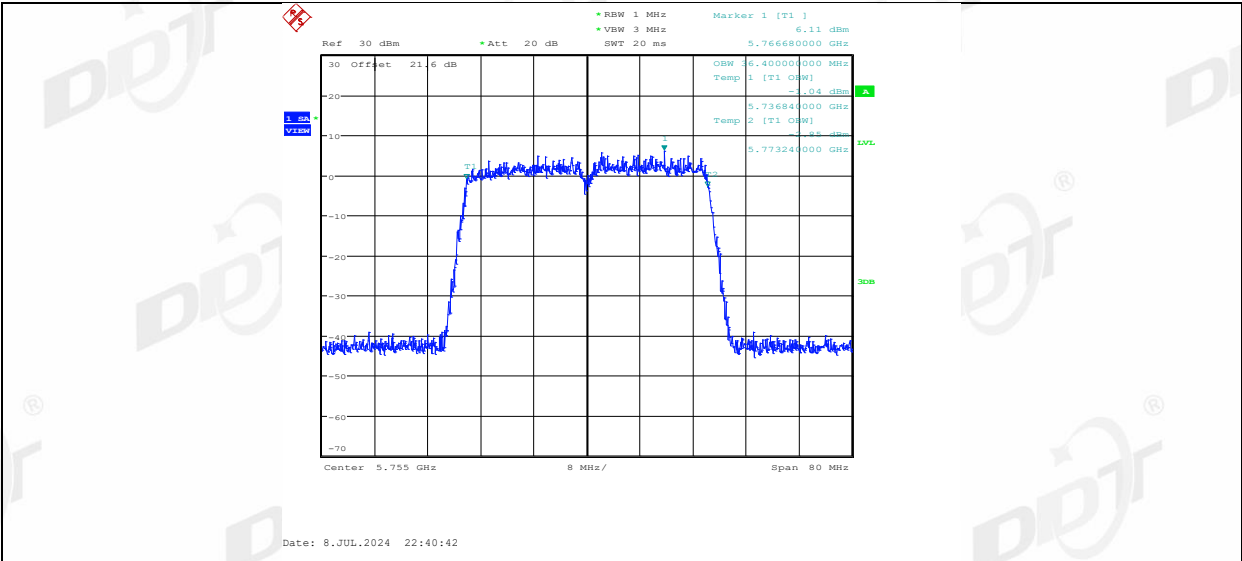


11N40MIMO_Ant1_5795

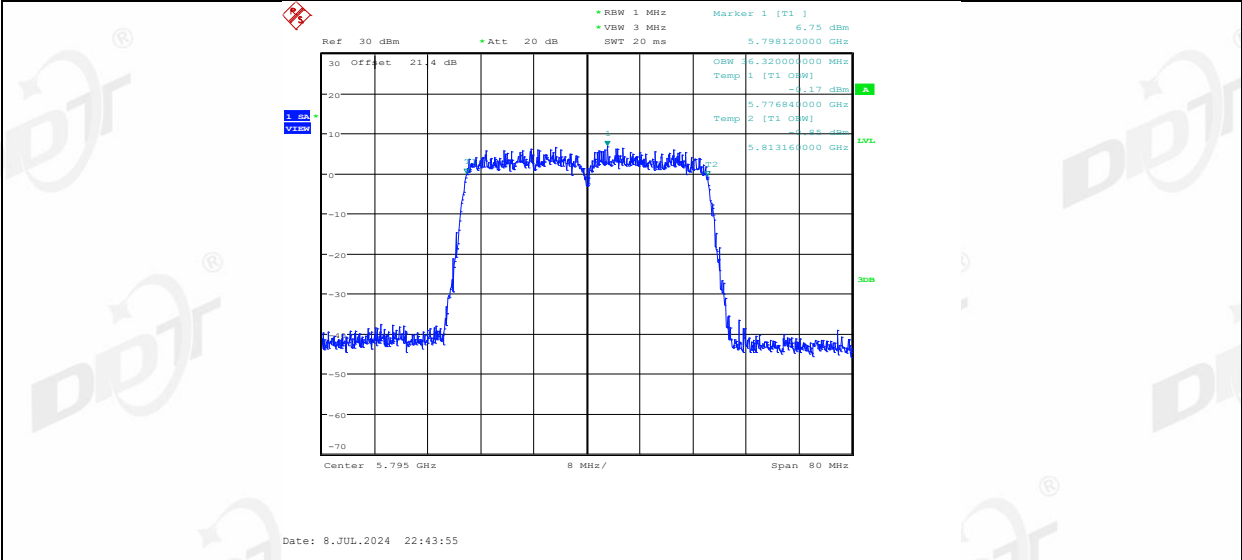


11N40MIMO_Ant2_5795

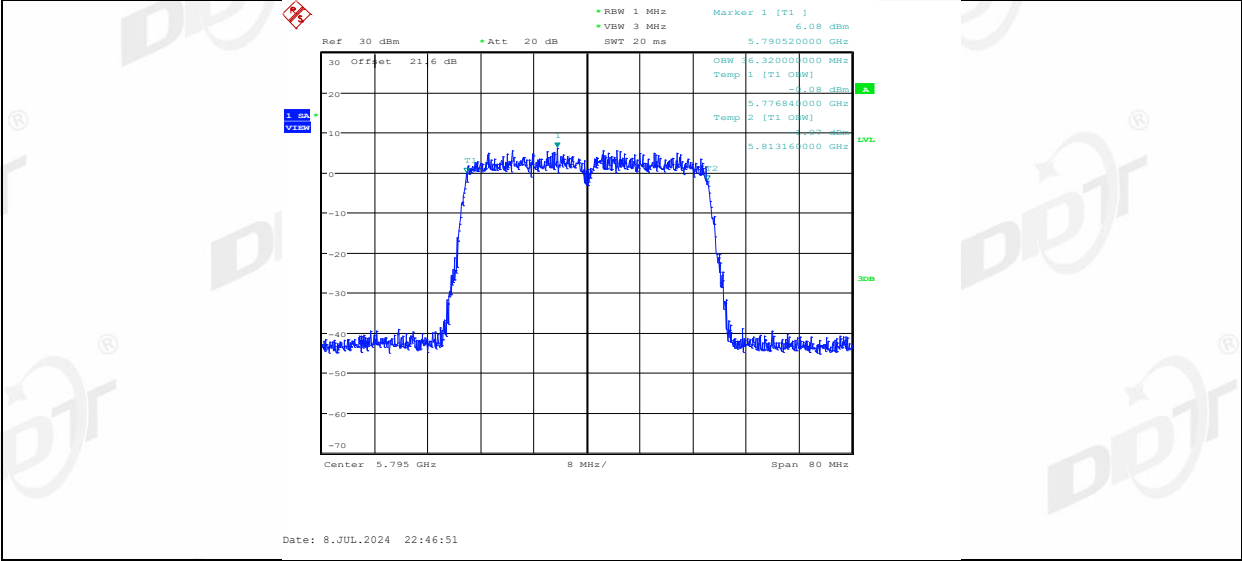


11AC20MIMO_Ant1_5180

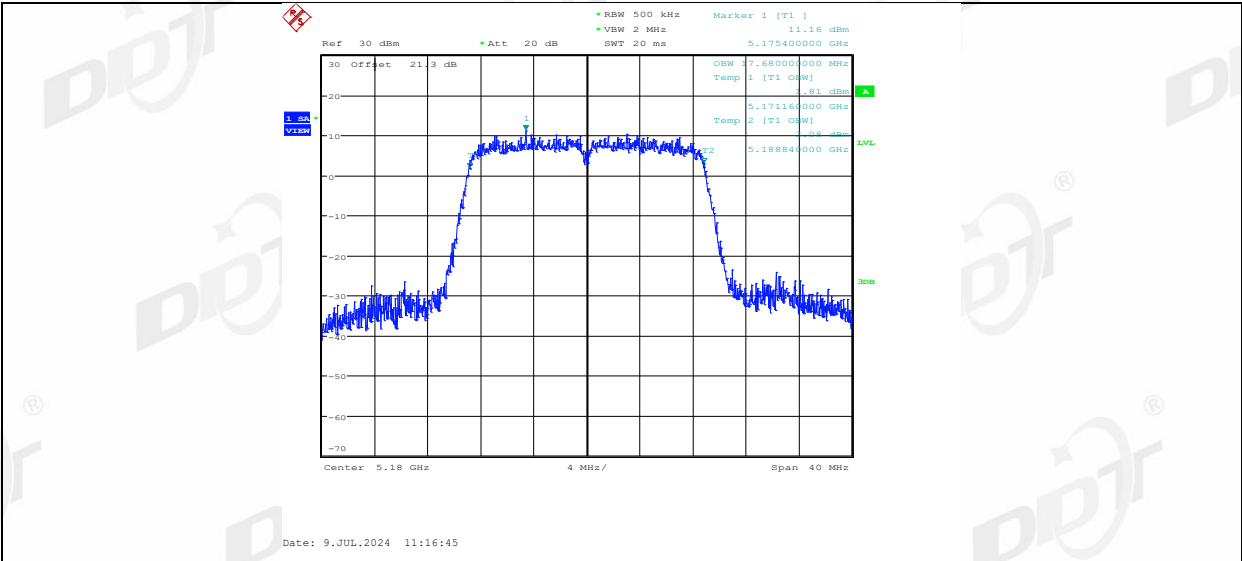


11AC20MIMO_Ant2_5180

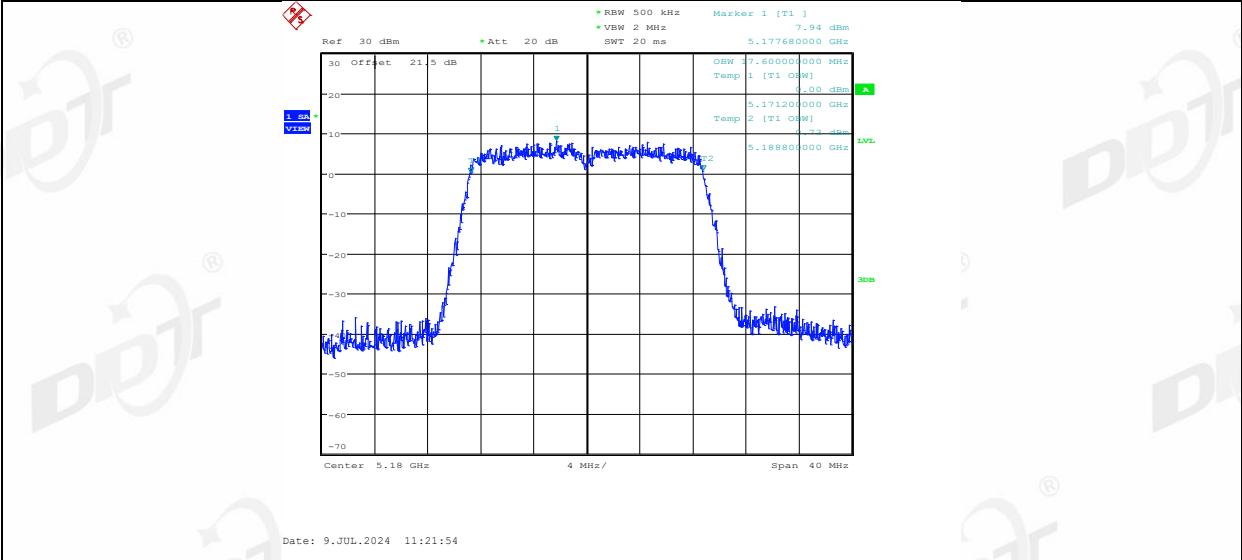


11AC20MIMO_Ant1_5200

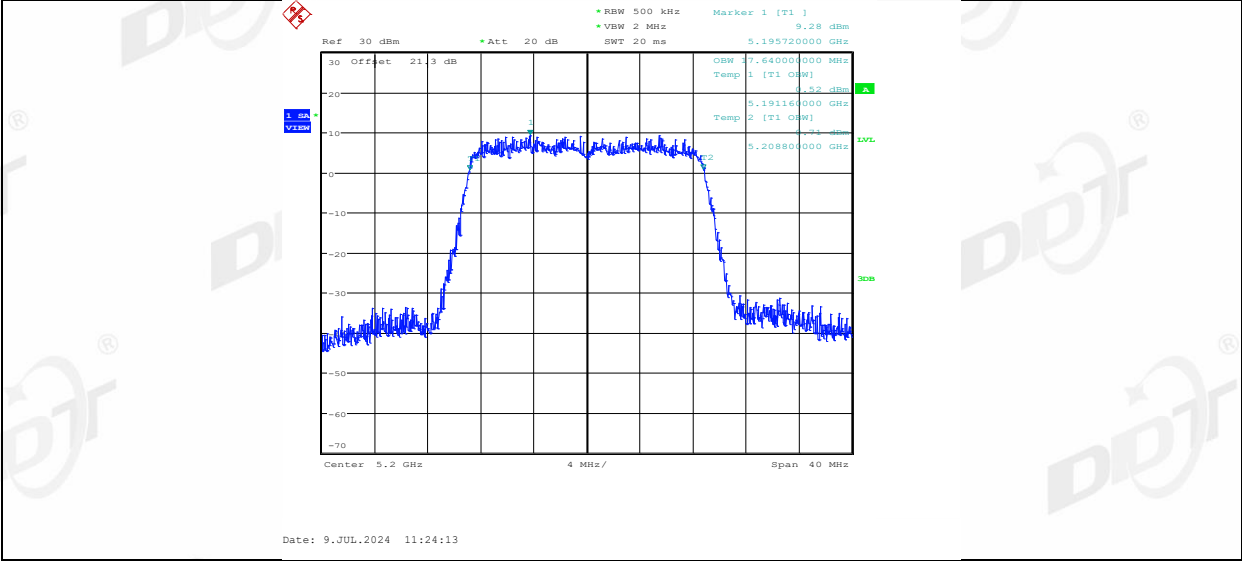


11AC20MIMO_Ant2_5200

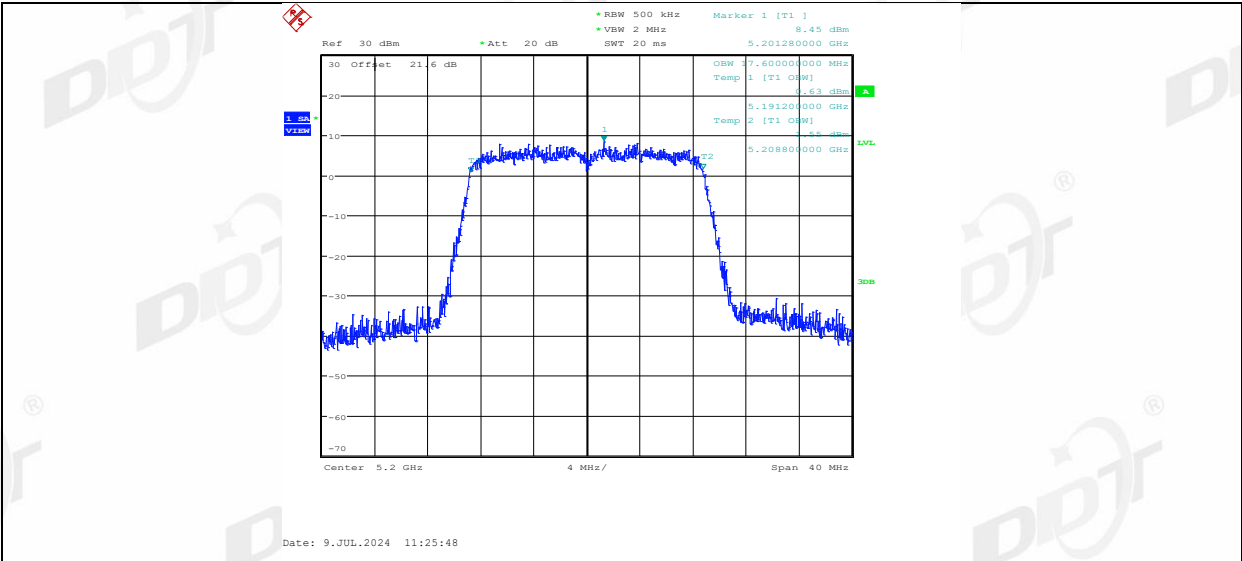


11AC20MIMO_Ant1_5240

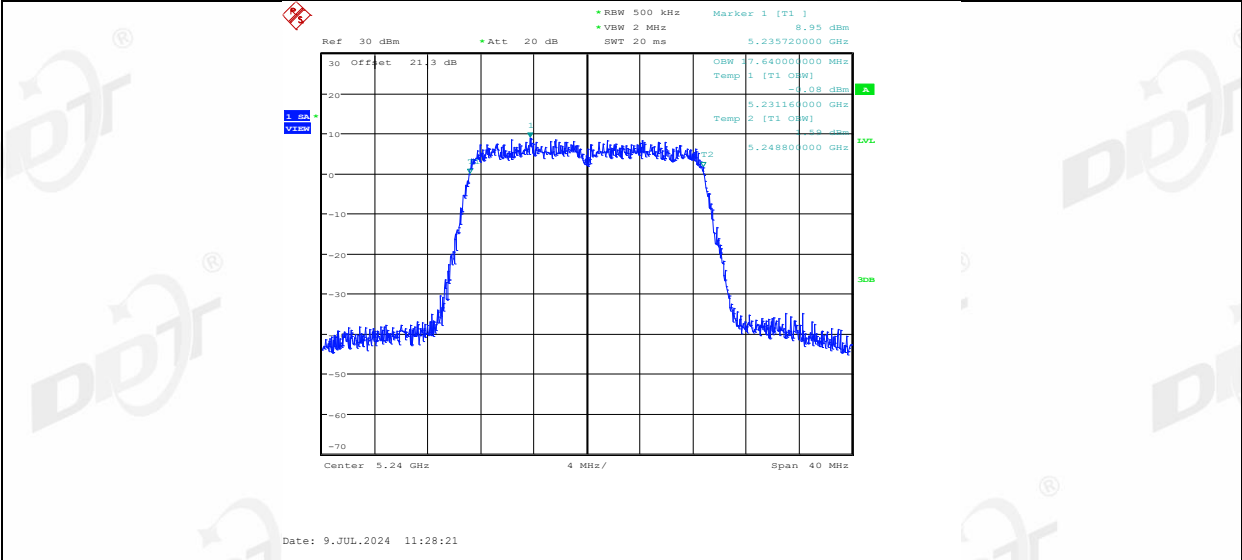


11AC20MIMO_Ant2_5240

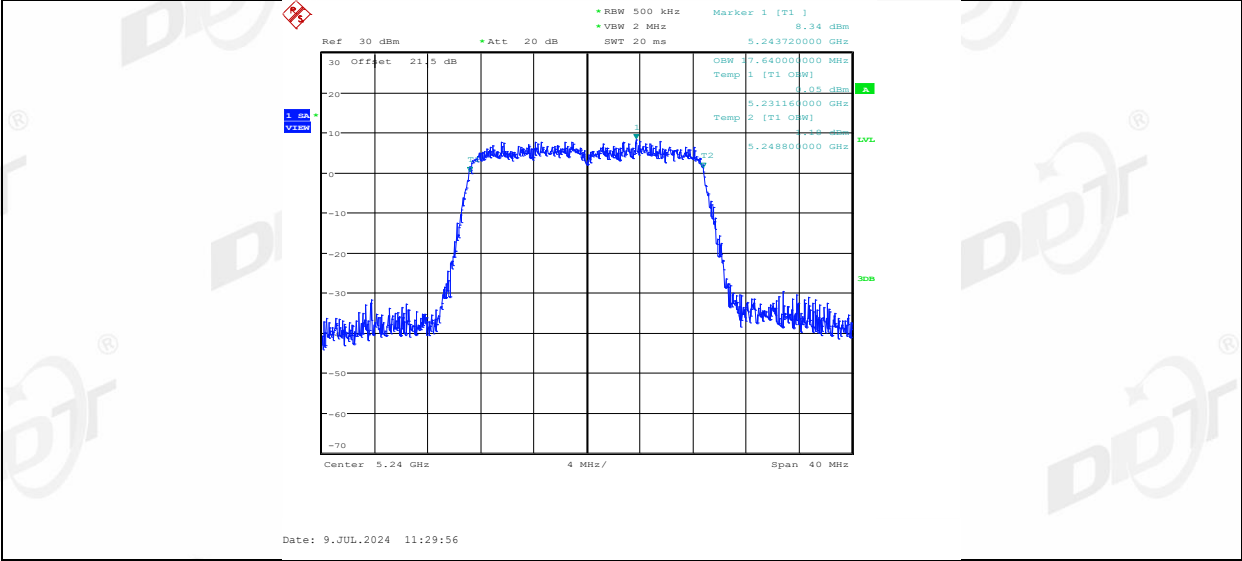


11AC20MIMO_Ant1_5260

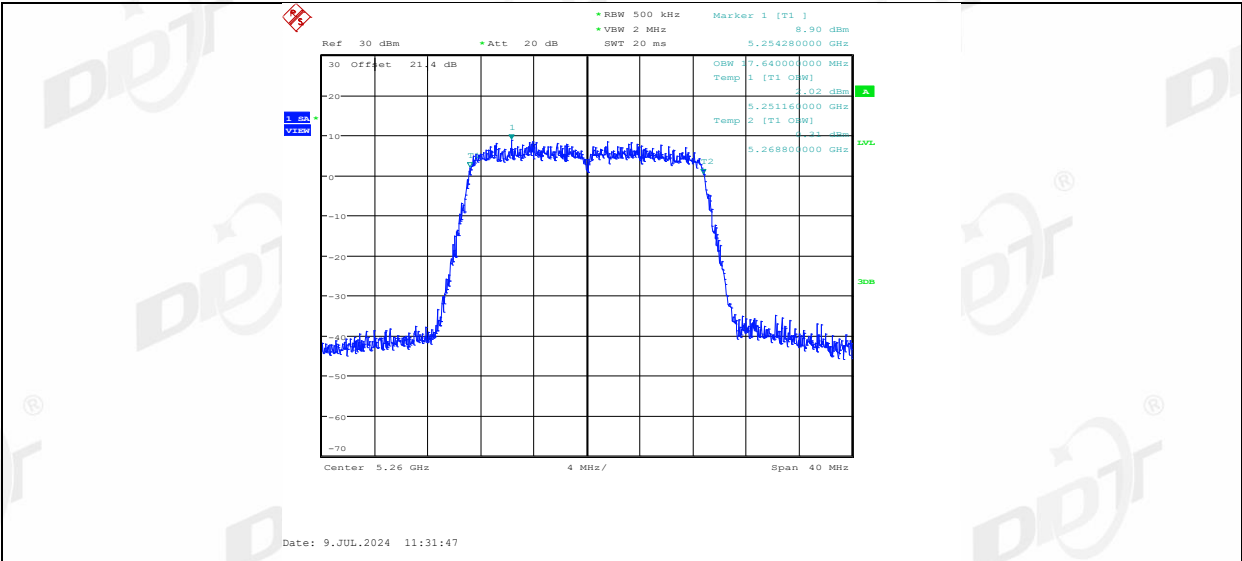


11AC20MIMO_Ant2_5260

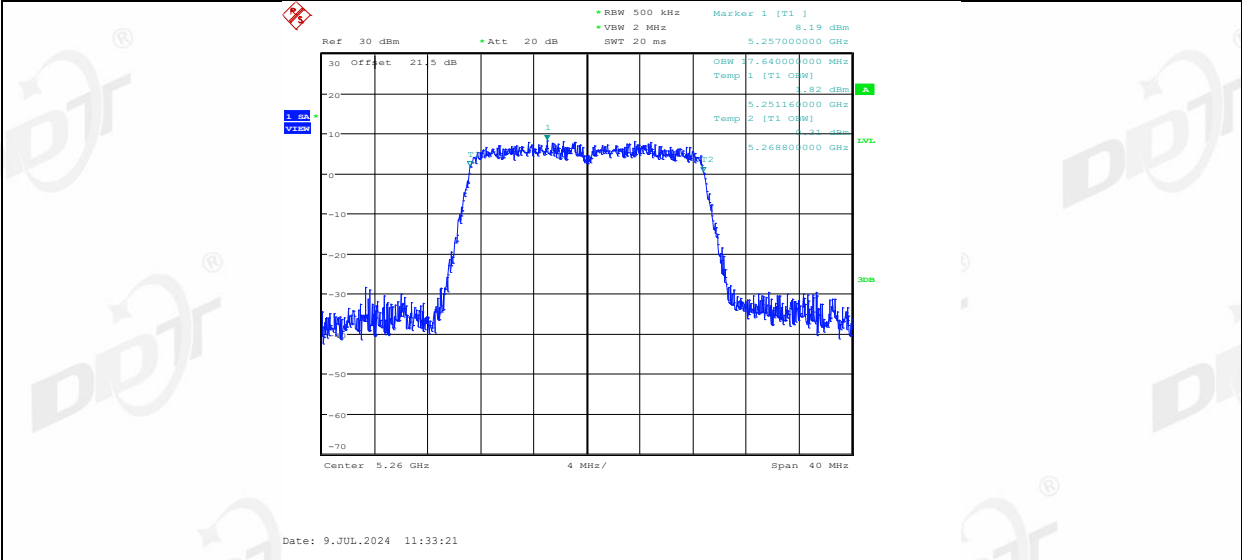


11AC20MIMO_Ant1_5280

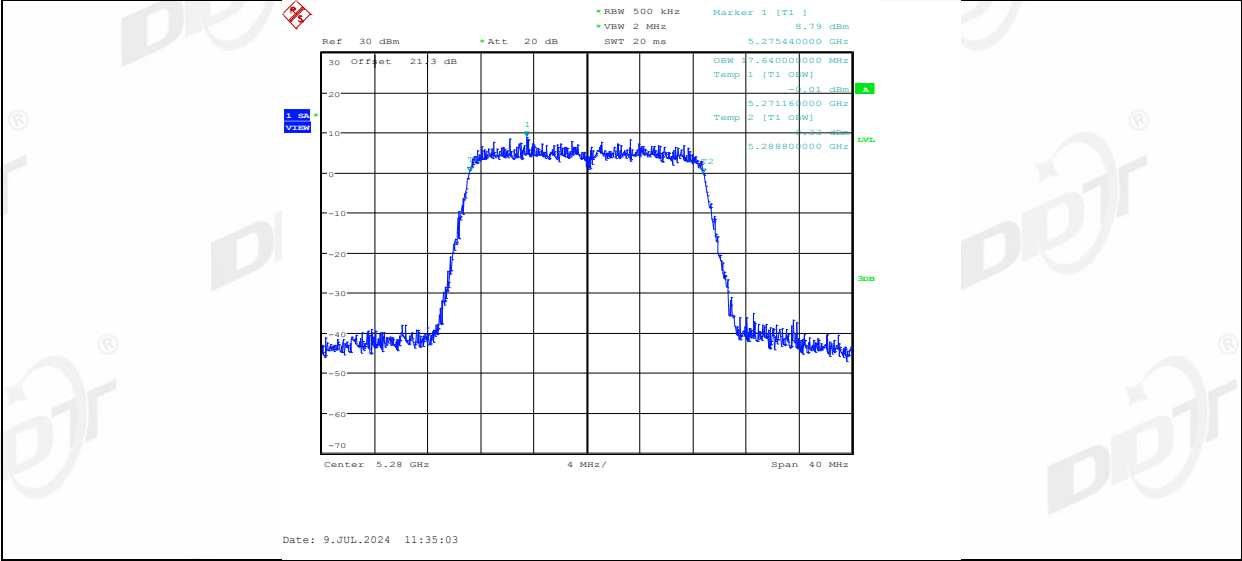


11AC20MIMO_Ant2_5280

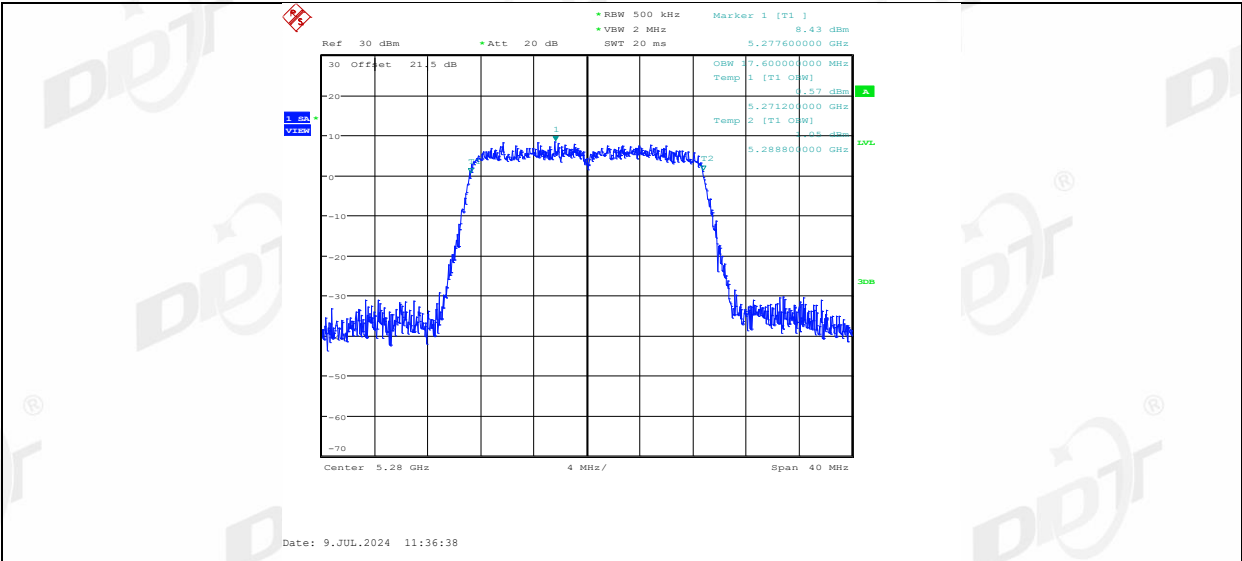


11AC20MIMO_Ant1_5320

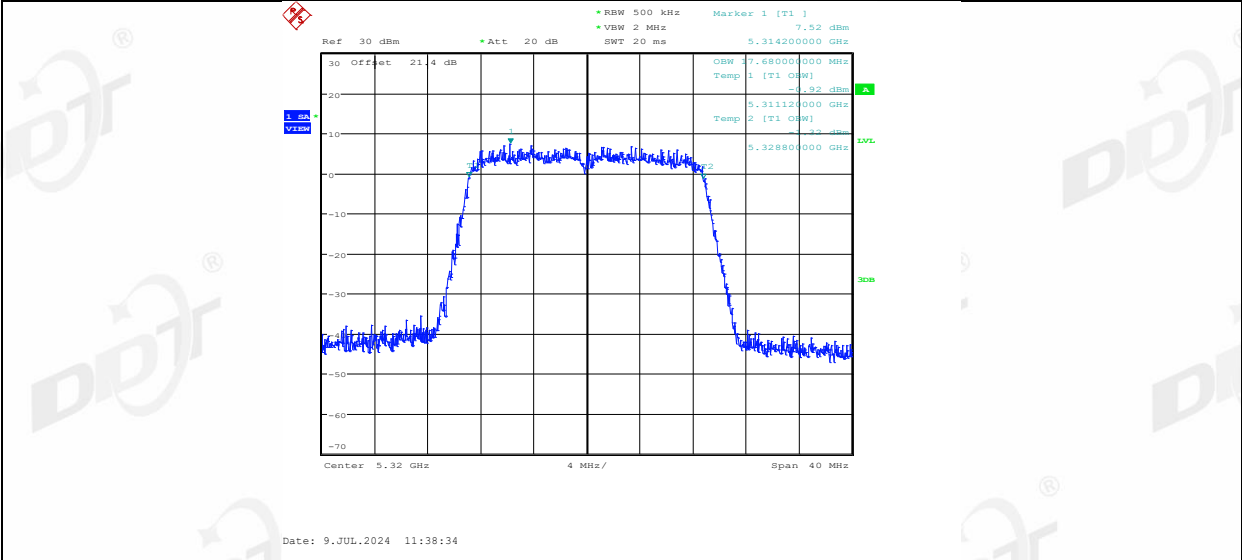


11AC20MIMO_Ant2_5320

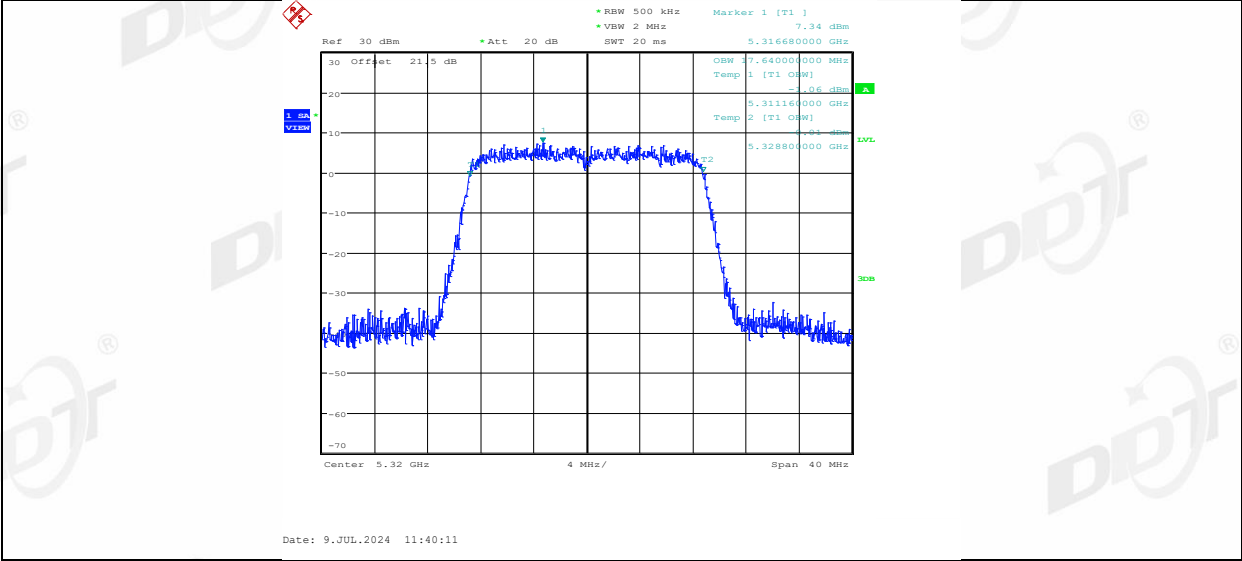


11AC20MIMO_Ant1_5500

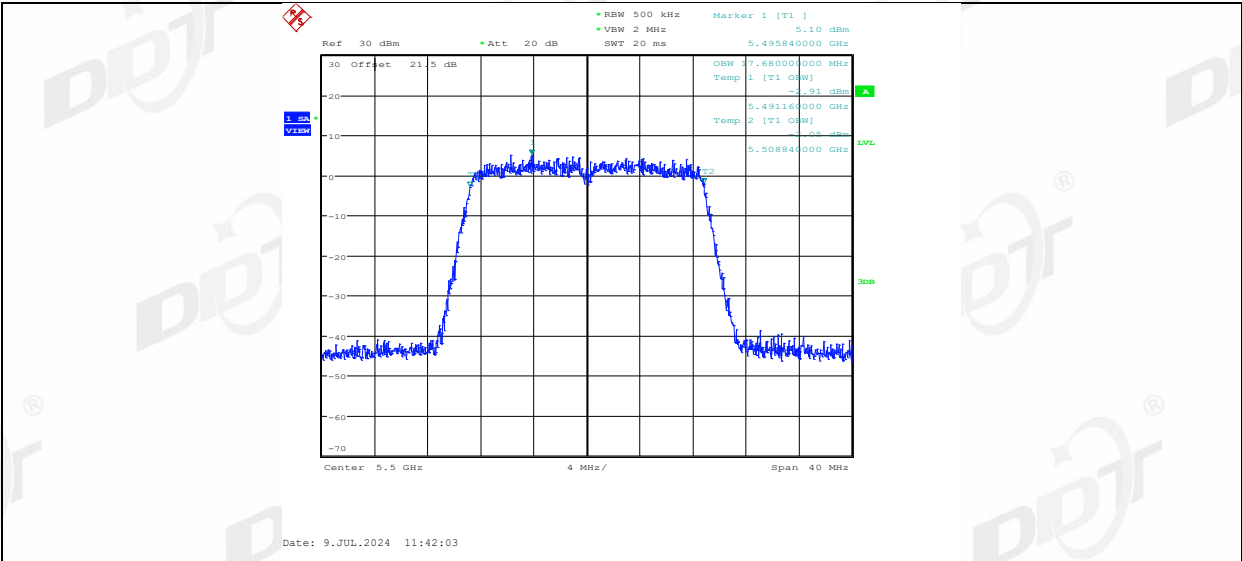




11AC20MIMO_Ant2_5500

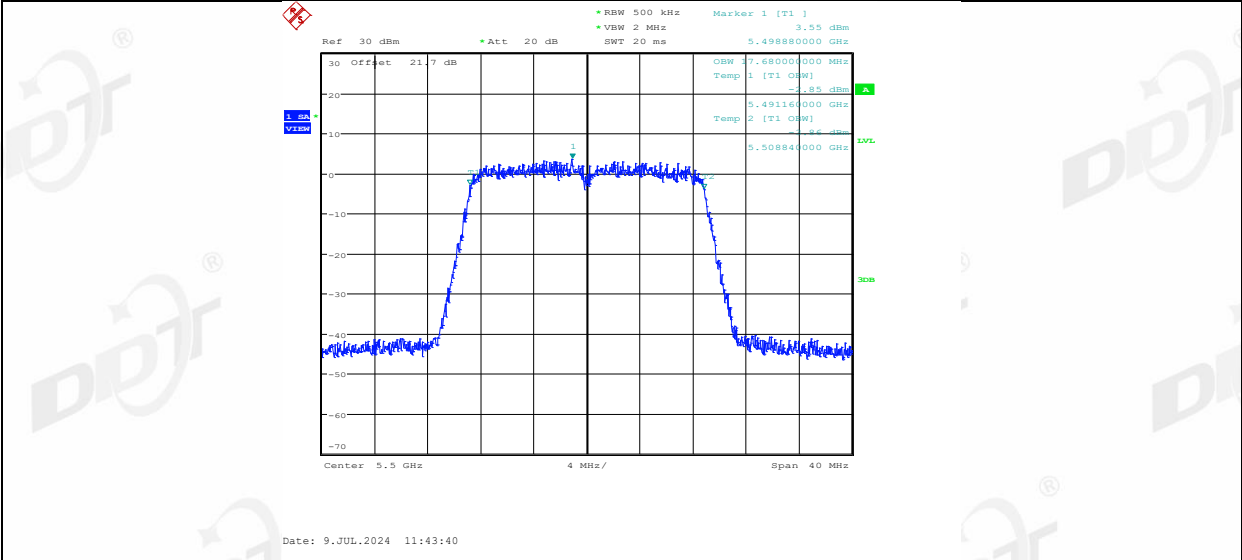


11AC20MIMO_Ant1_5580

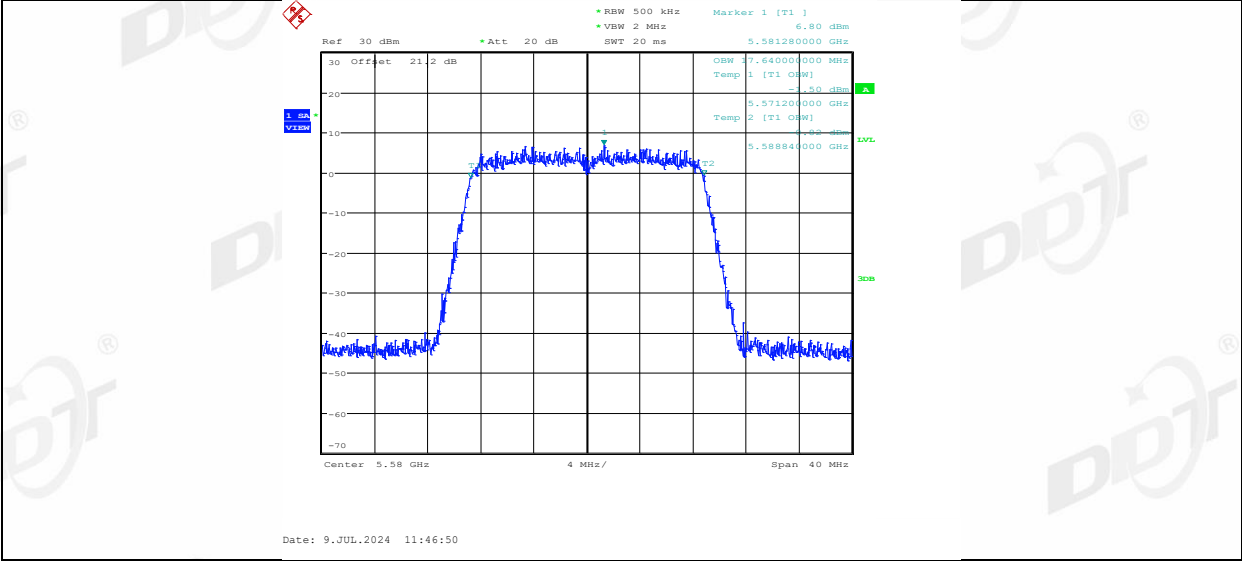


11AC20MIMO_Ant2_5580

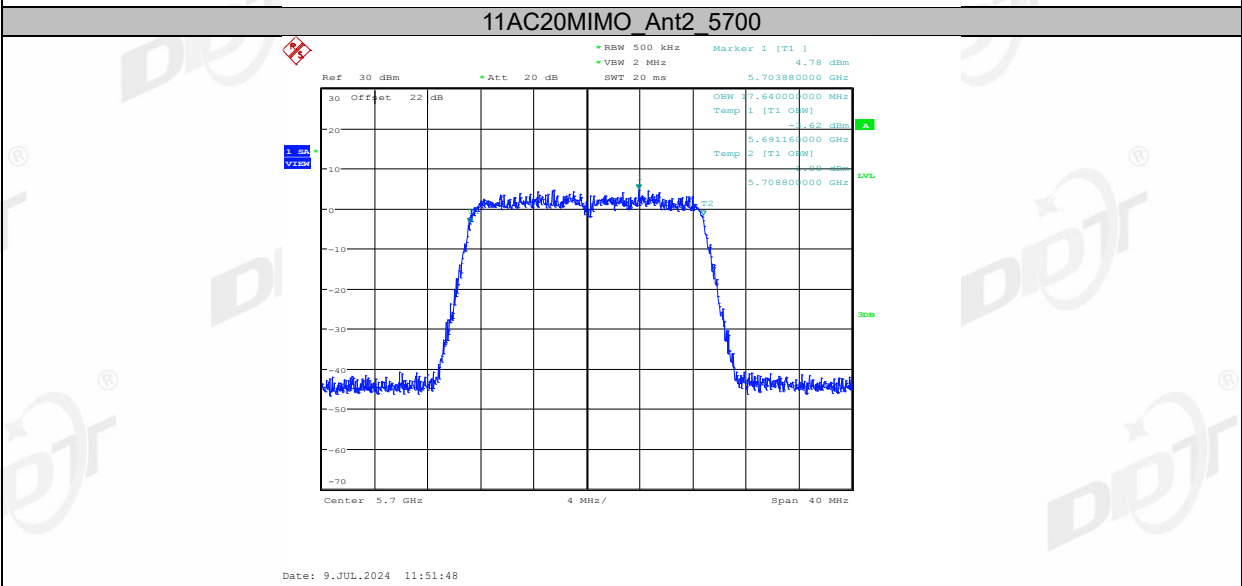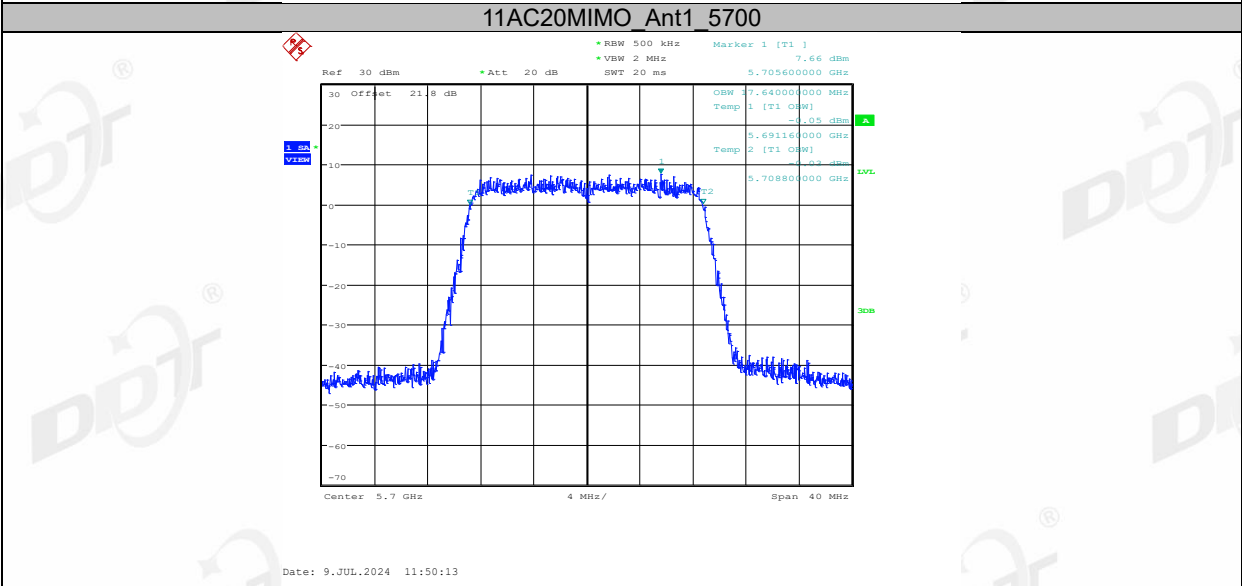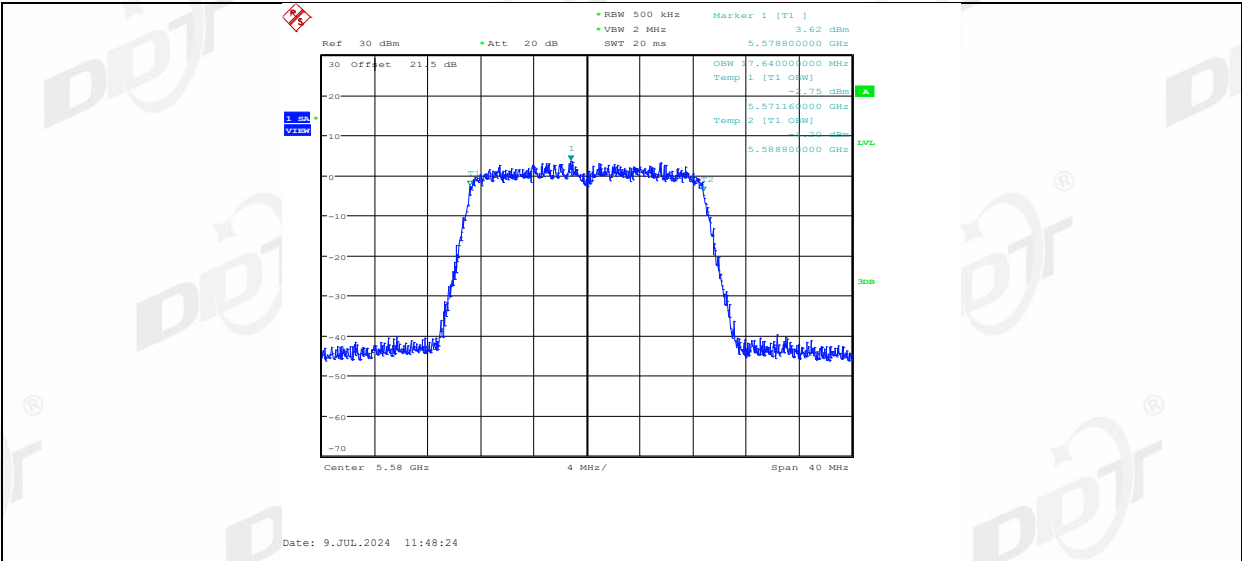


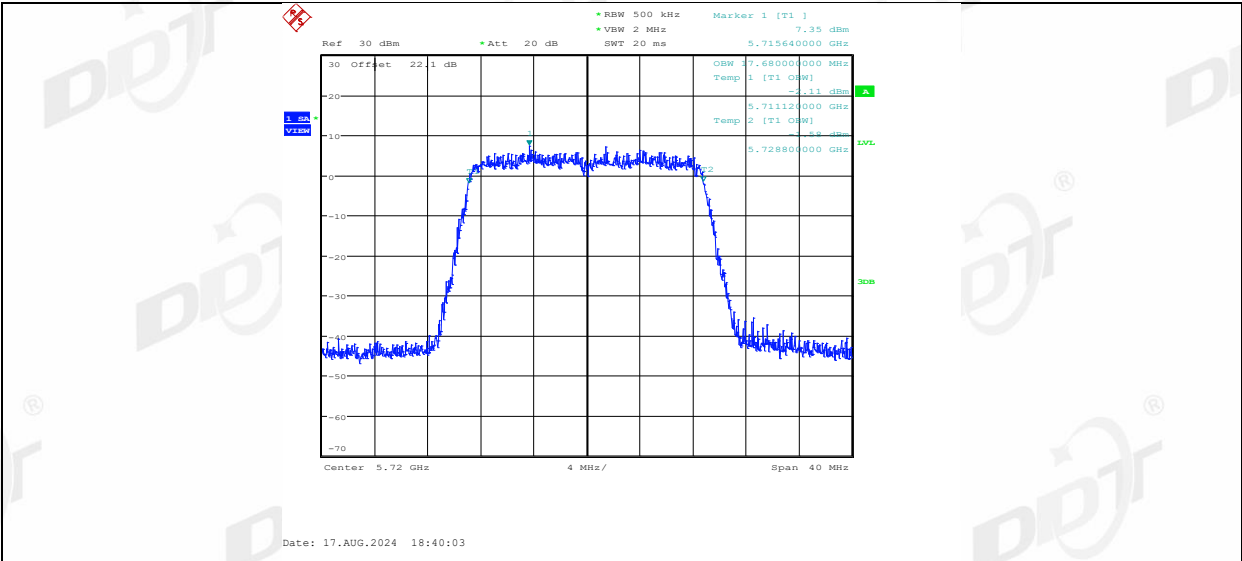


11AC20MIMO_Ant2_5720

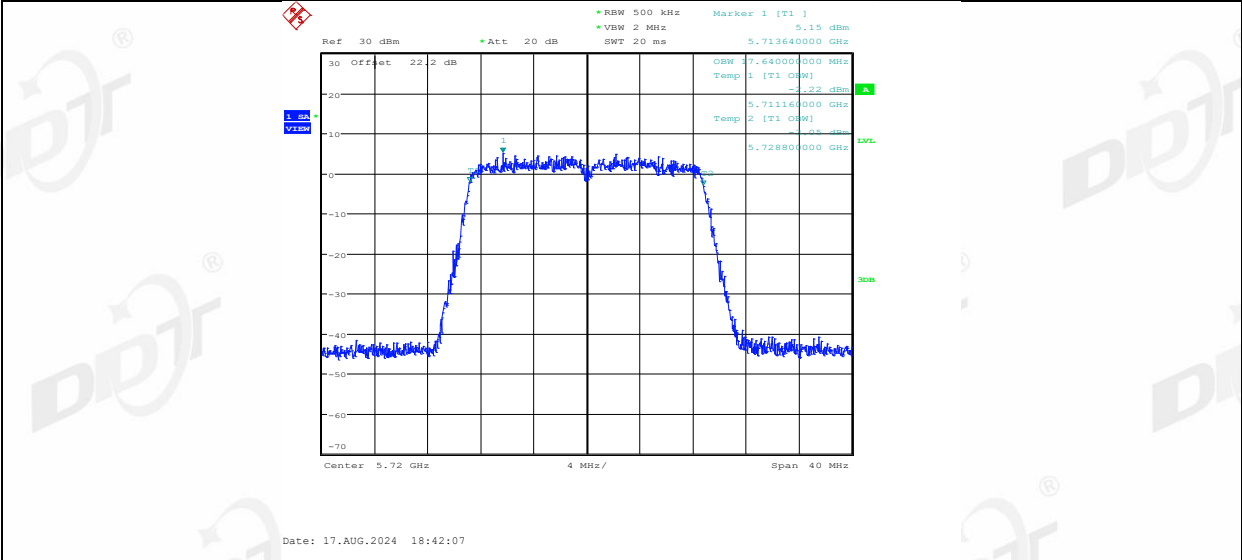


11AC20MIMO_Ant1_5745

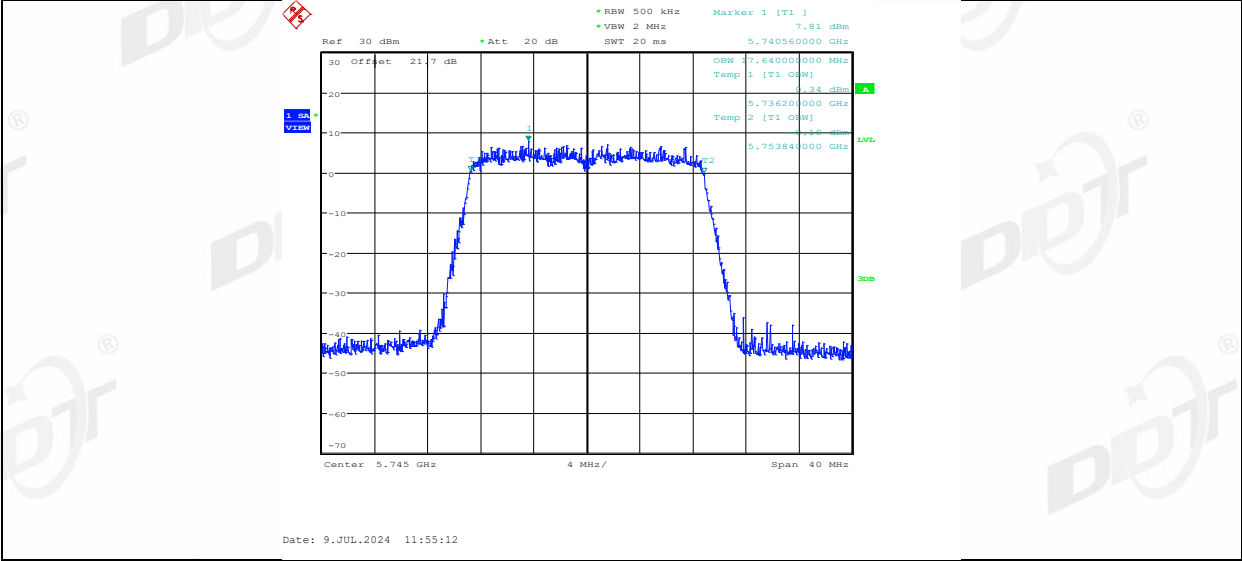


11AC20MIMO_Ant2_5745

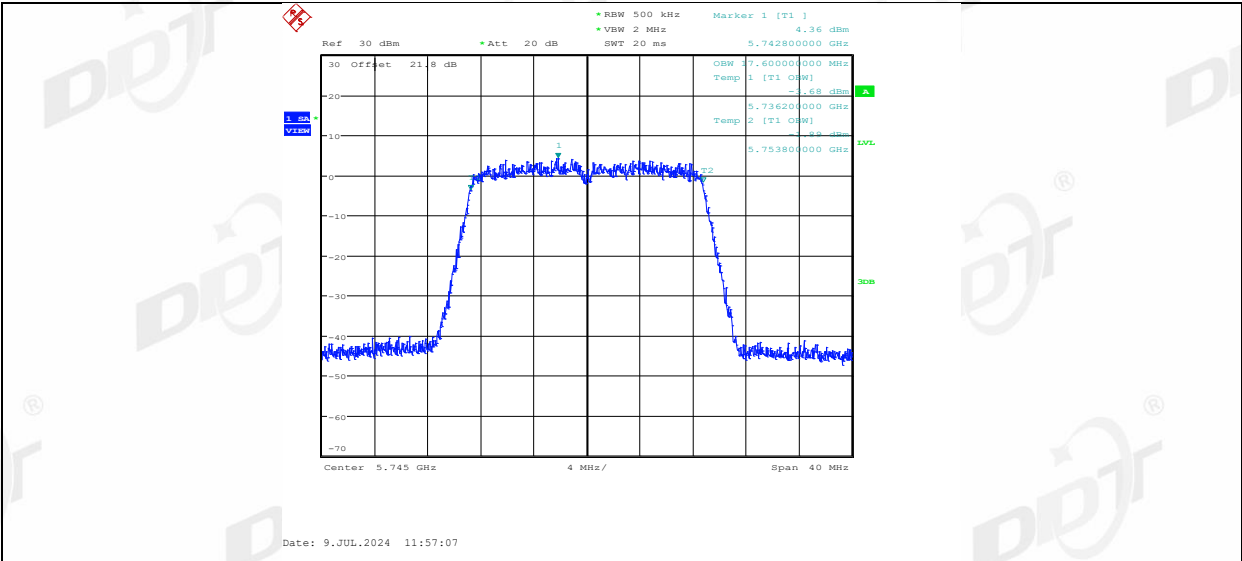




11AC20MIMO_Ant1_5785

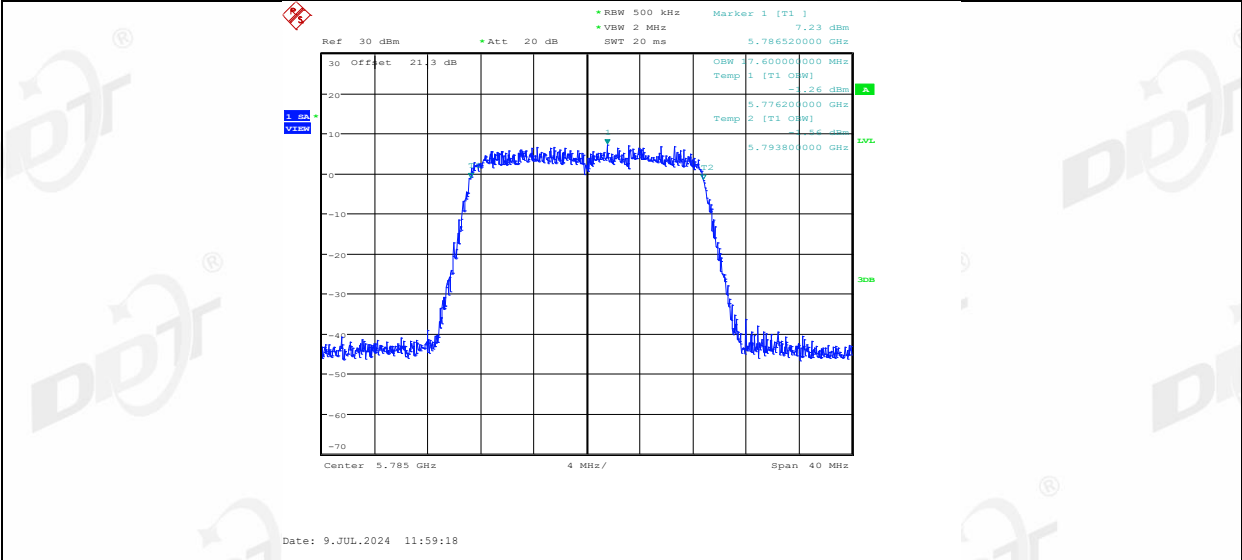


11AC20MIMO_Ant2_5785

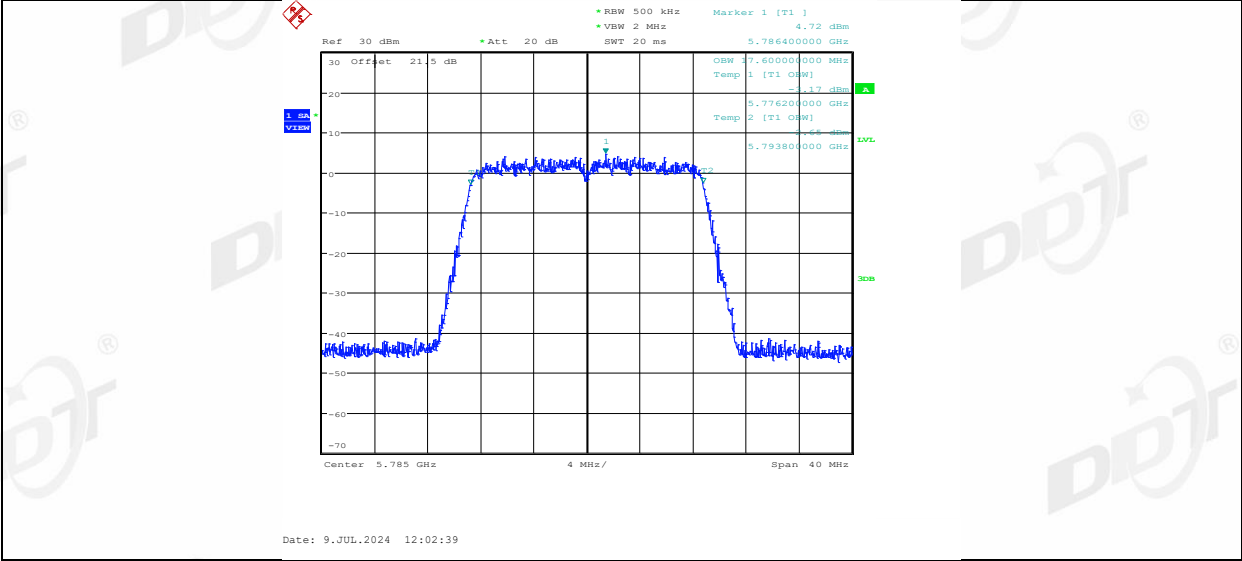


11AC20MIMO_Ant1_5825

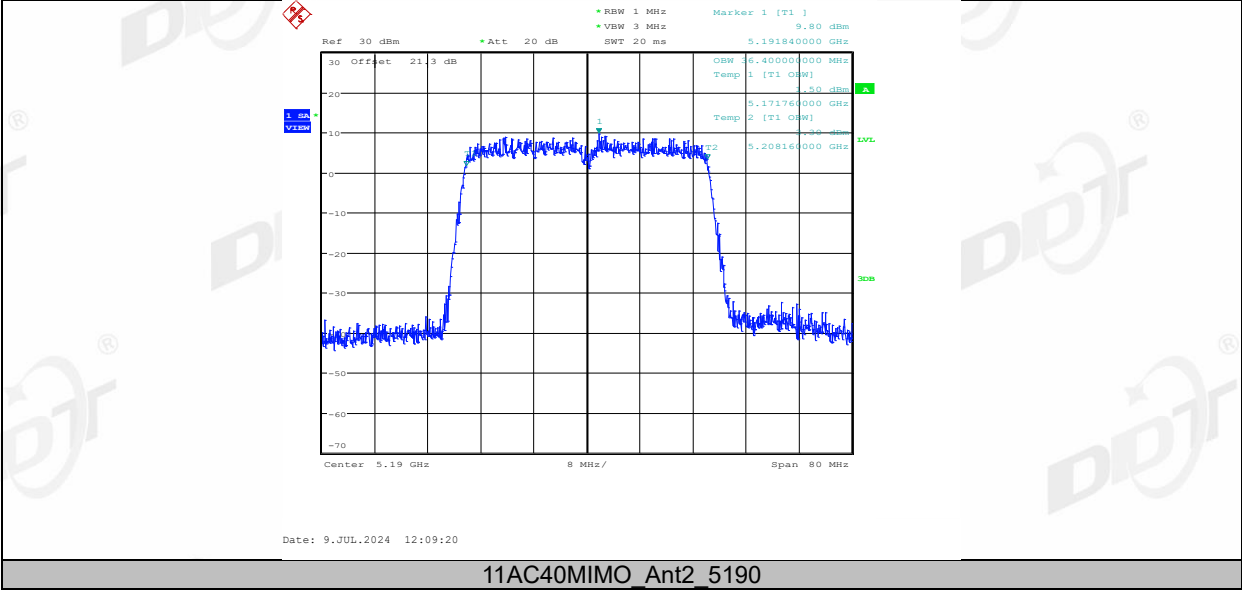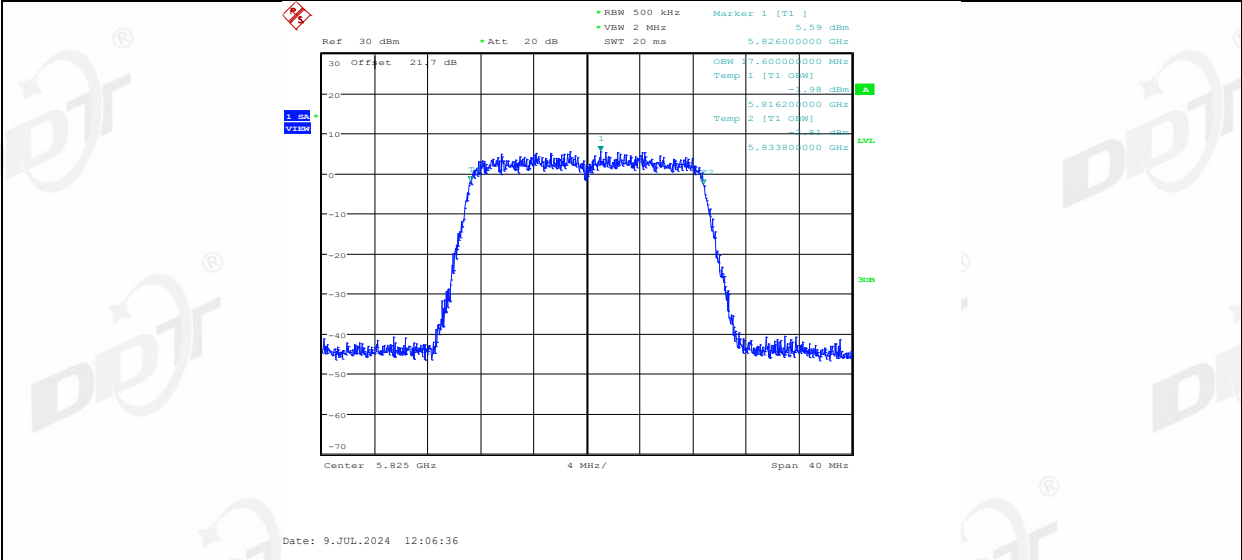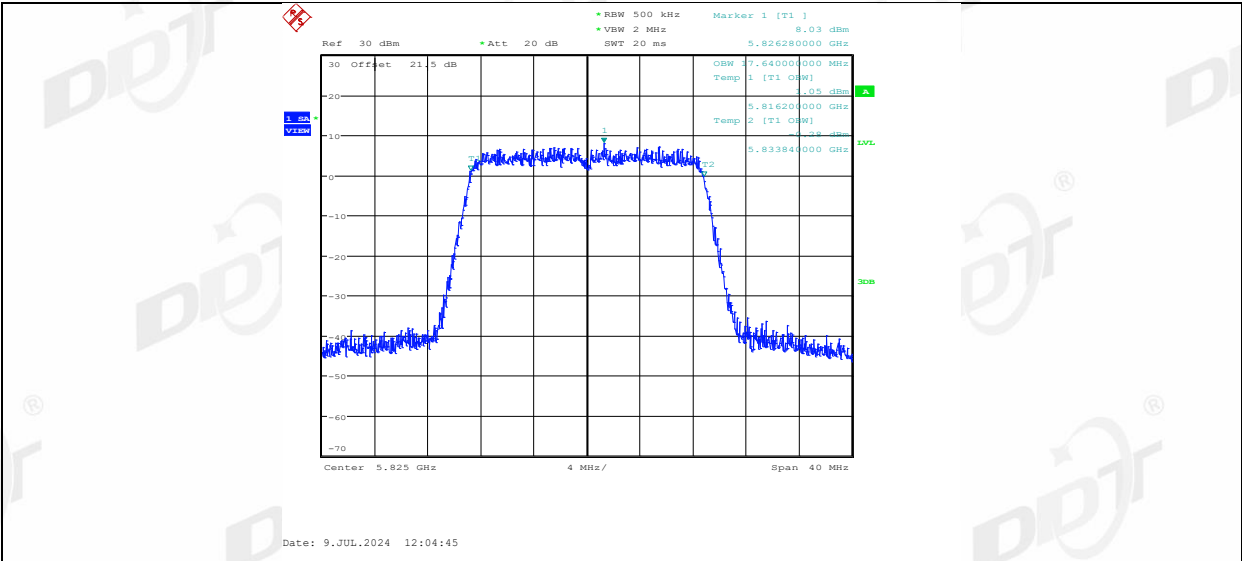


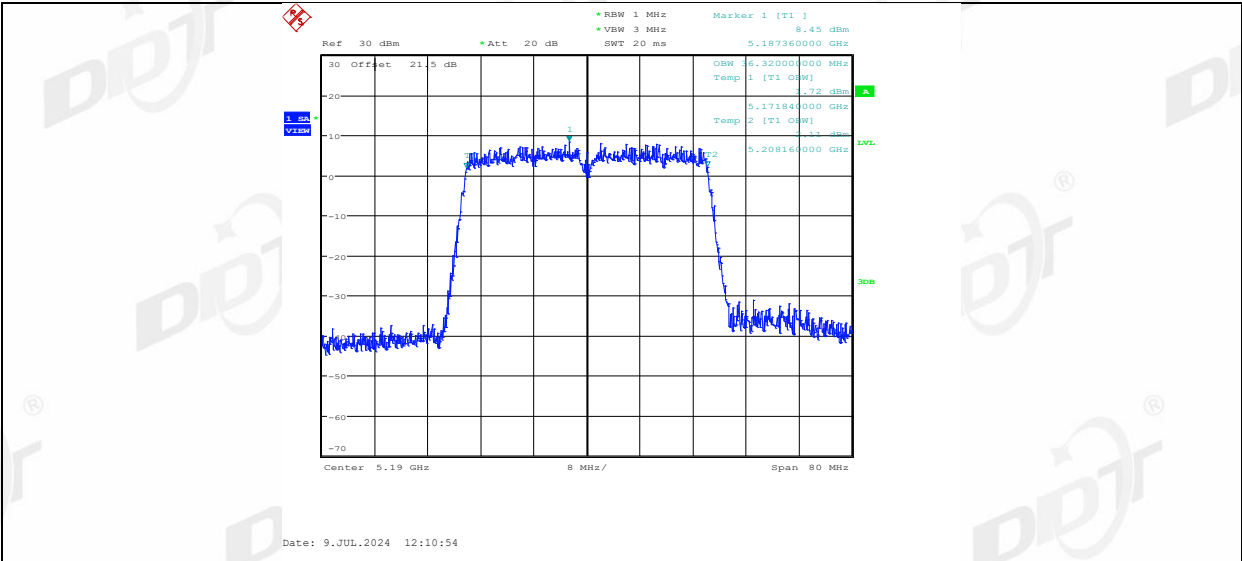


11AC40MIMO_Ant1_5230

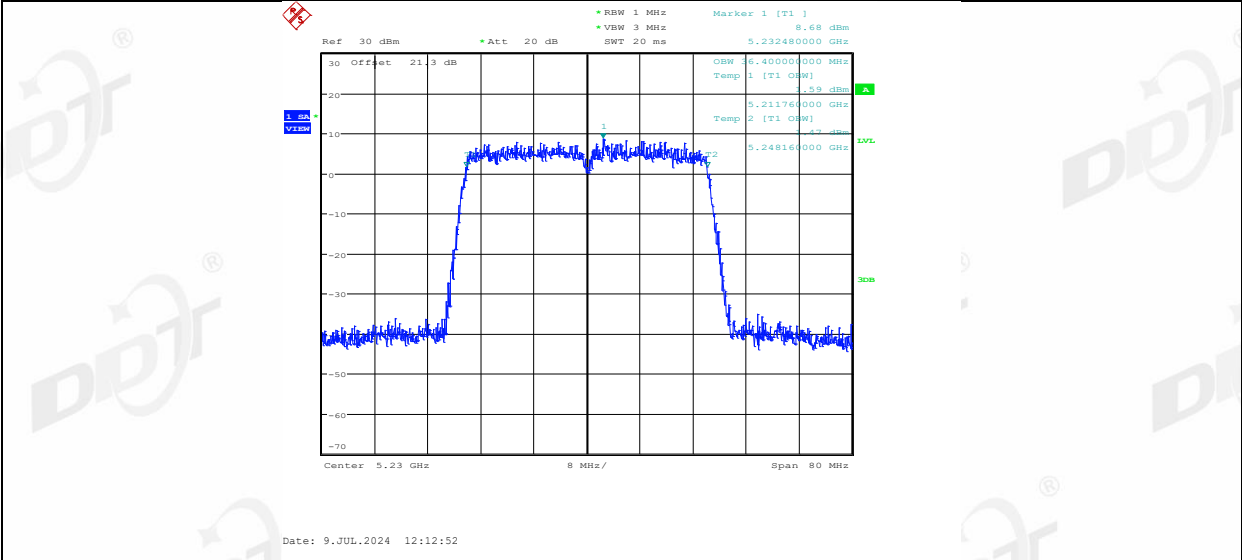


11AC40MIMO_Ant2_5230

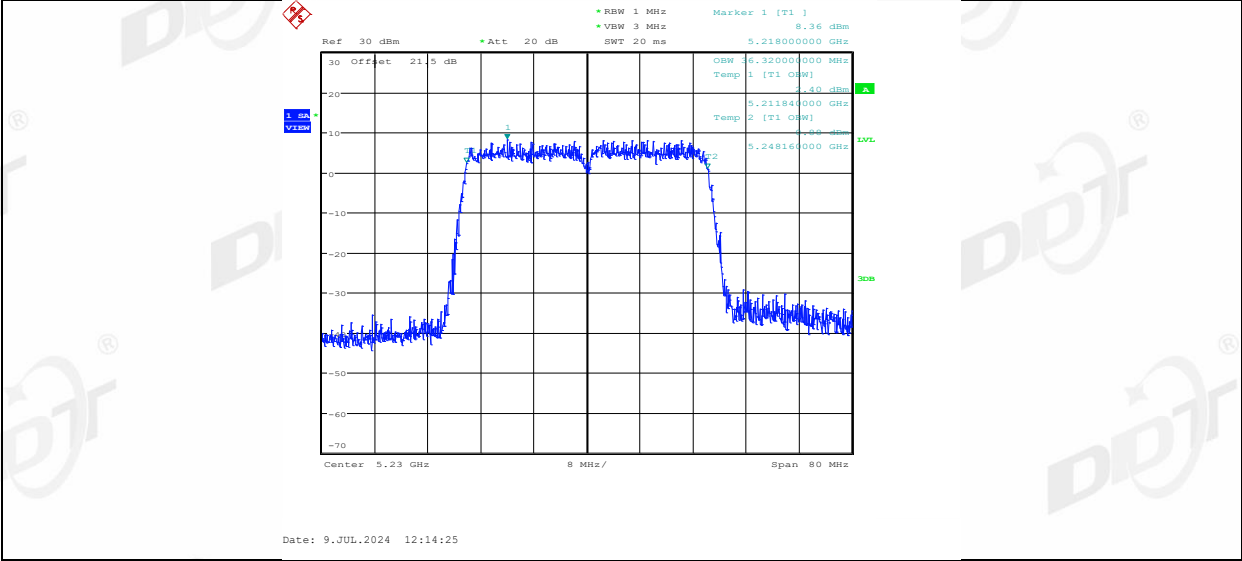


11AC40MIMO_Ant1_5270

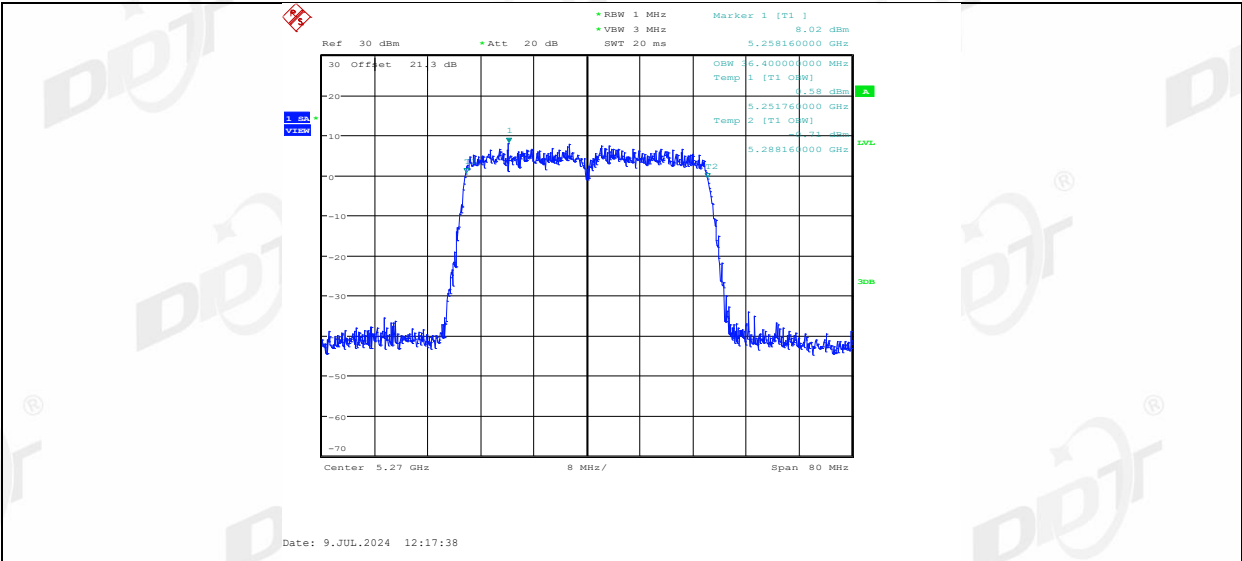


11AC40MIMO_Ant2_5270

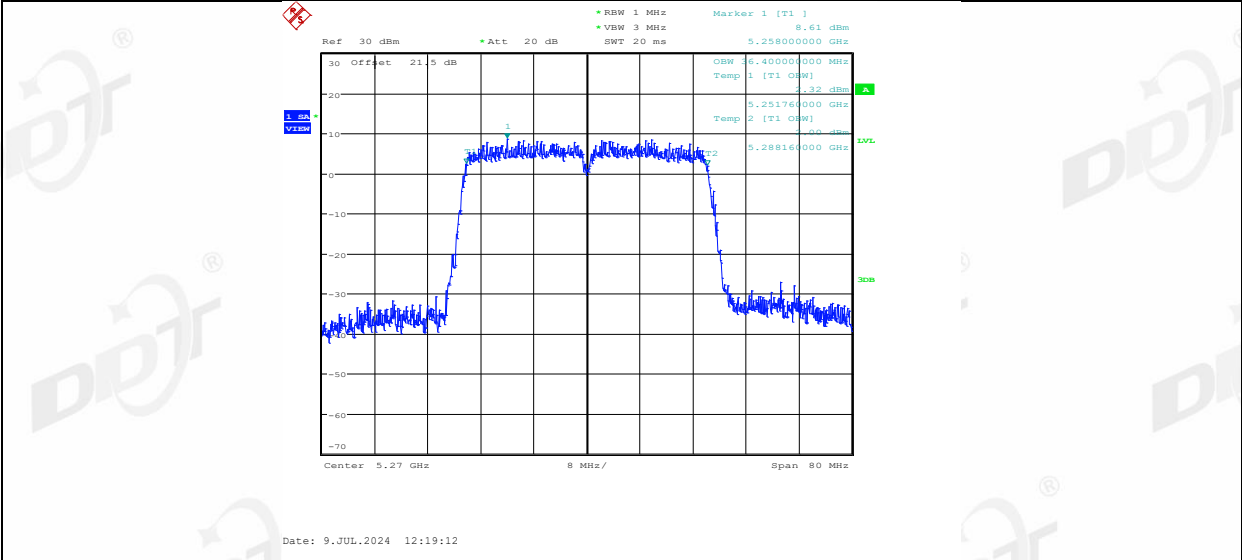


11AC40MIMO_Ant1_5310

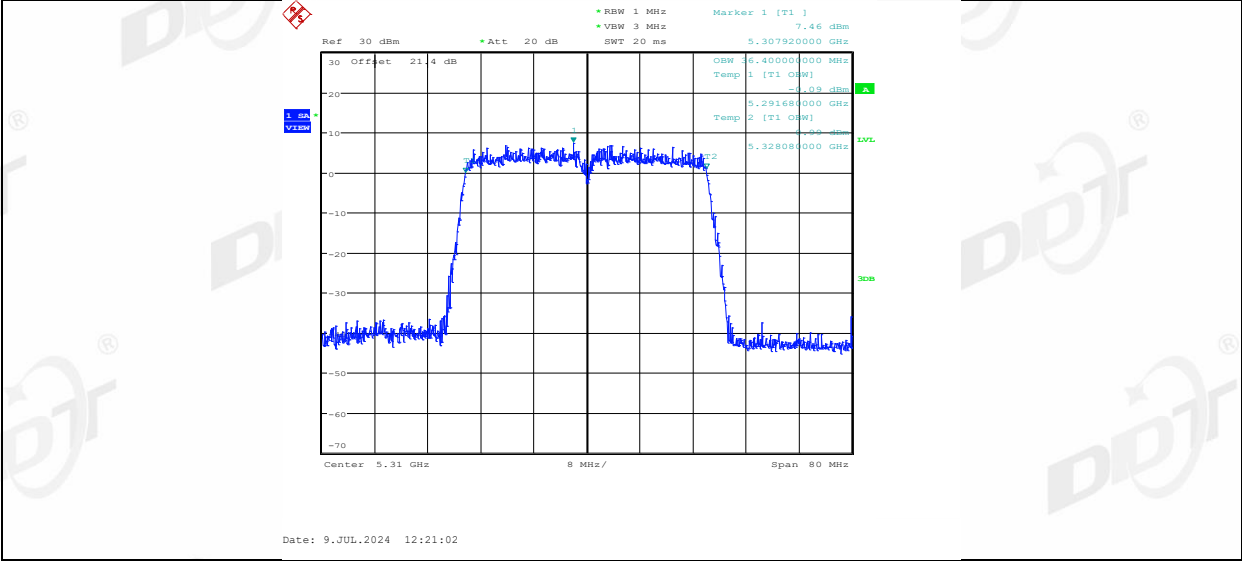


11AC40MIMO_Ant2_5310

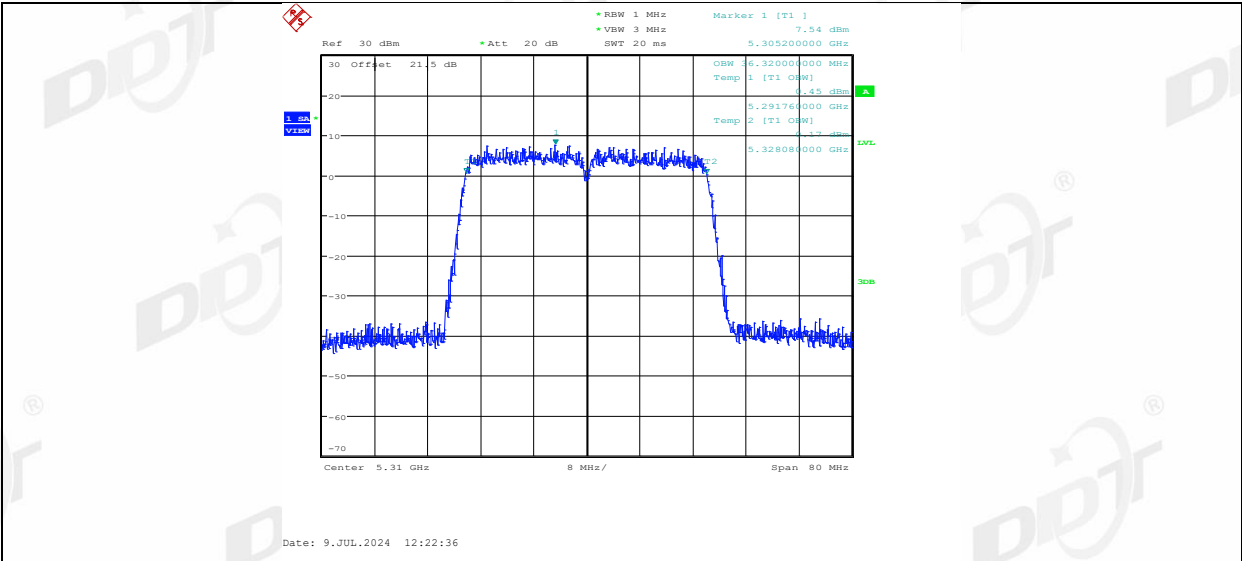


11AC40MIMO_Ant1_5510

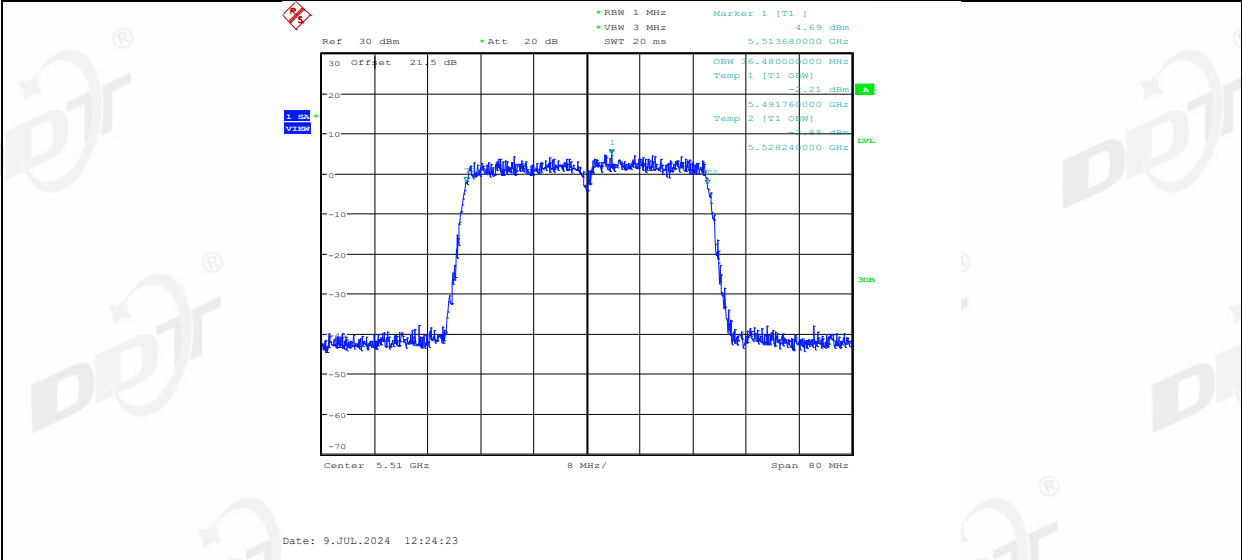


11AC40MIMO_Ant2_5510

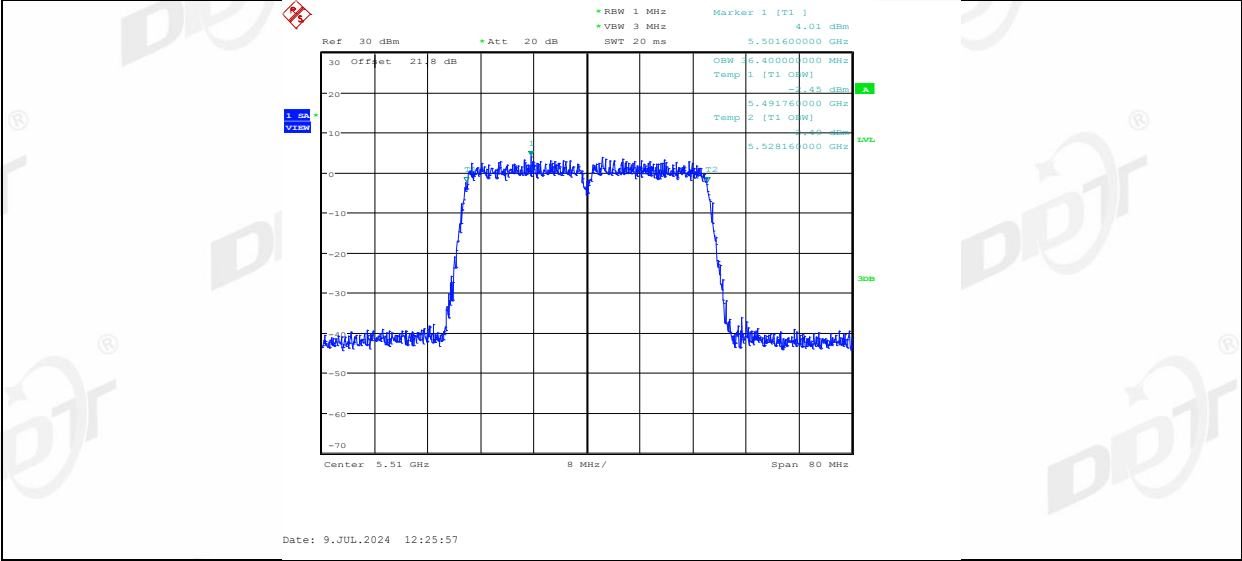


11AC40MIMO_Ant1_5550

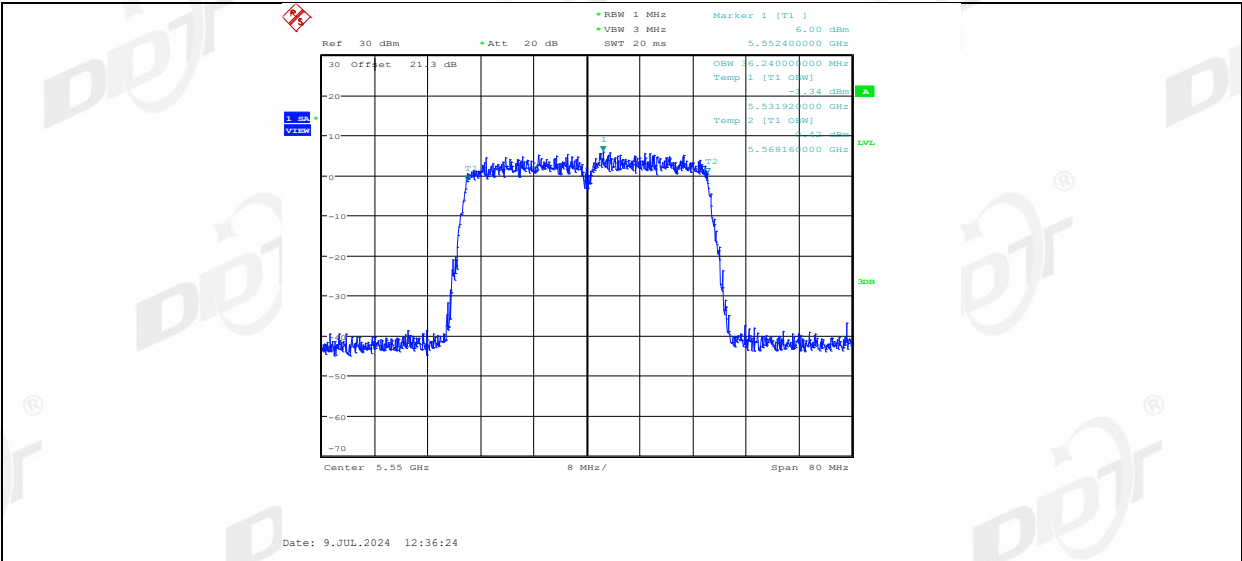


11AC40MIMO_Ant2_5550

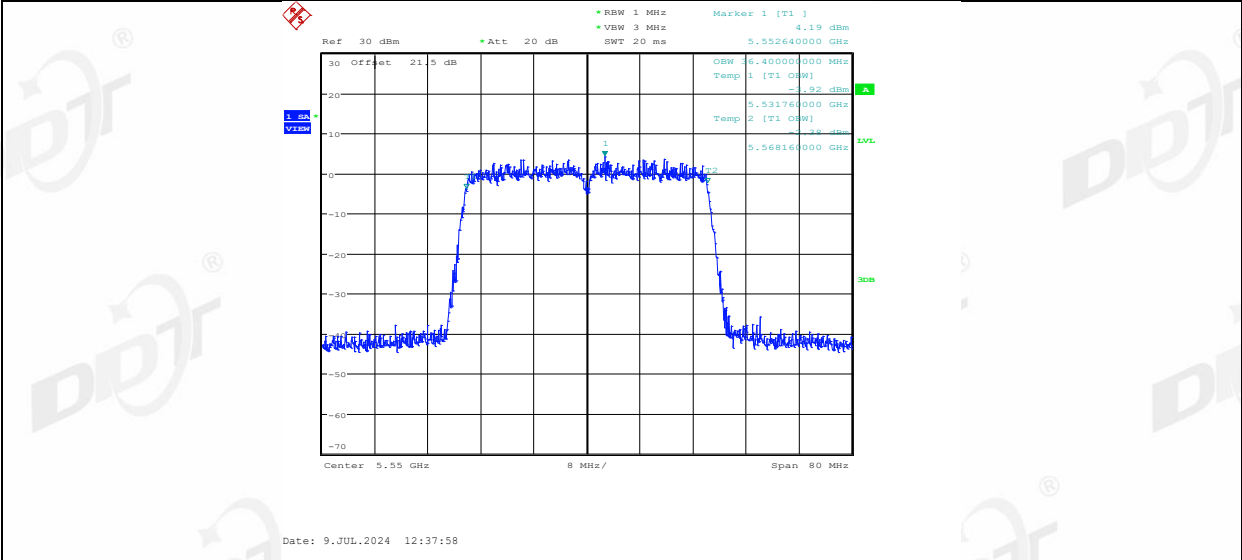


11AC40MIMO_Ant1_5670

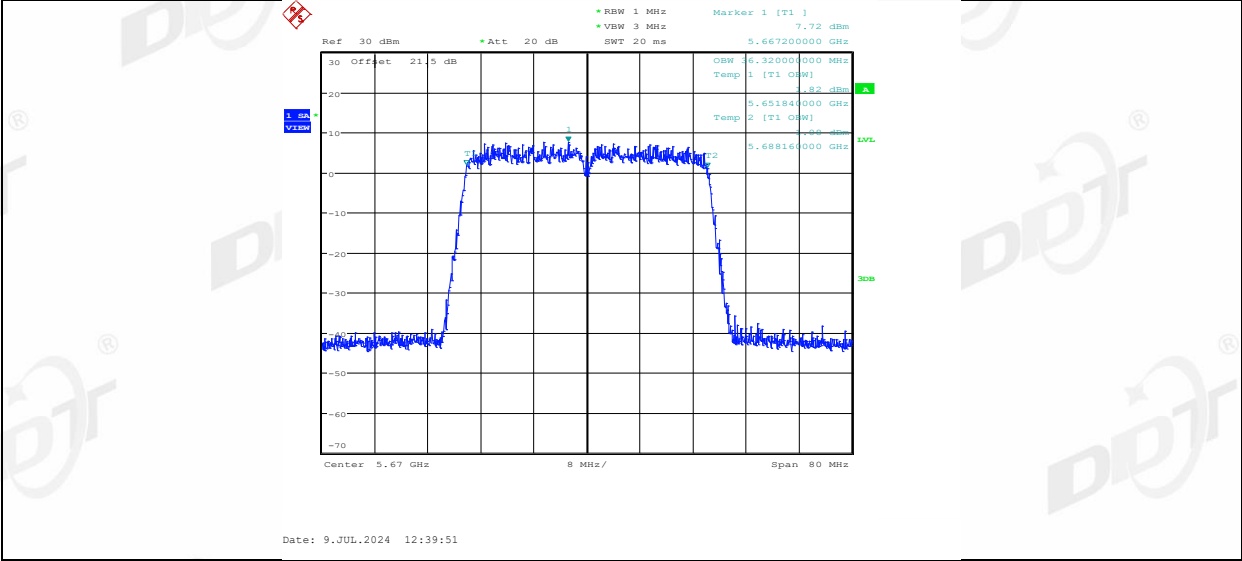


11AC40MIMO_Ant2_5670

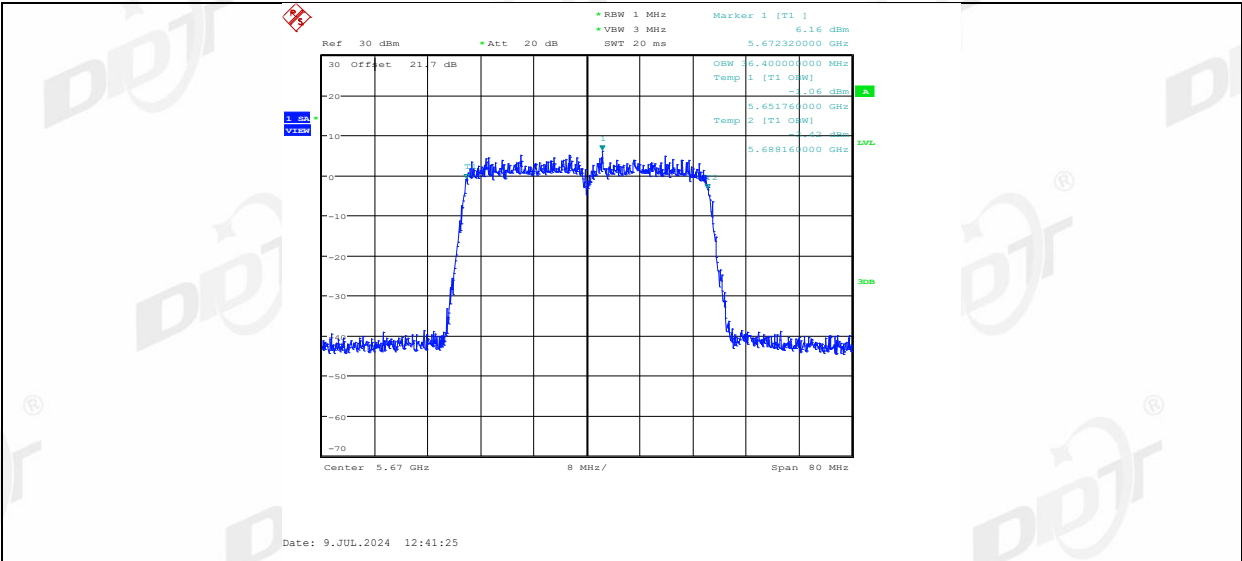




11AC40MIMO_Ant1_5710

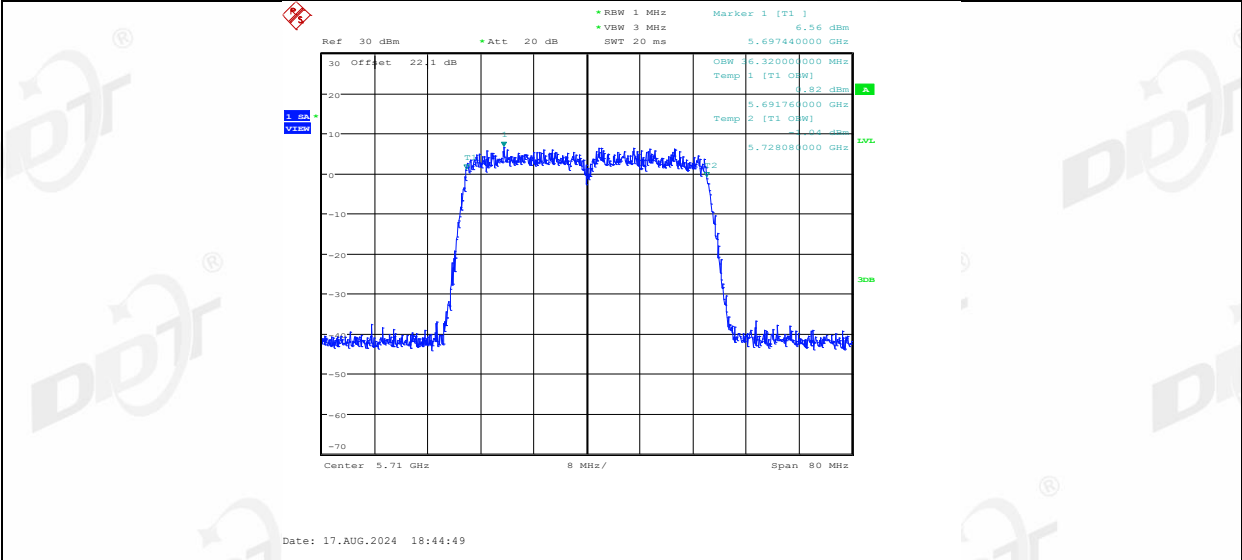


11AC40MIMO_Ant2_5710

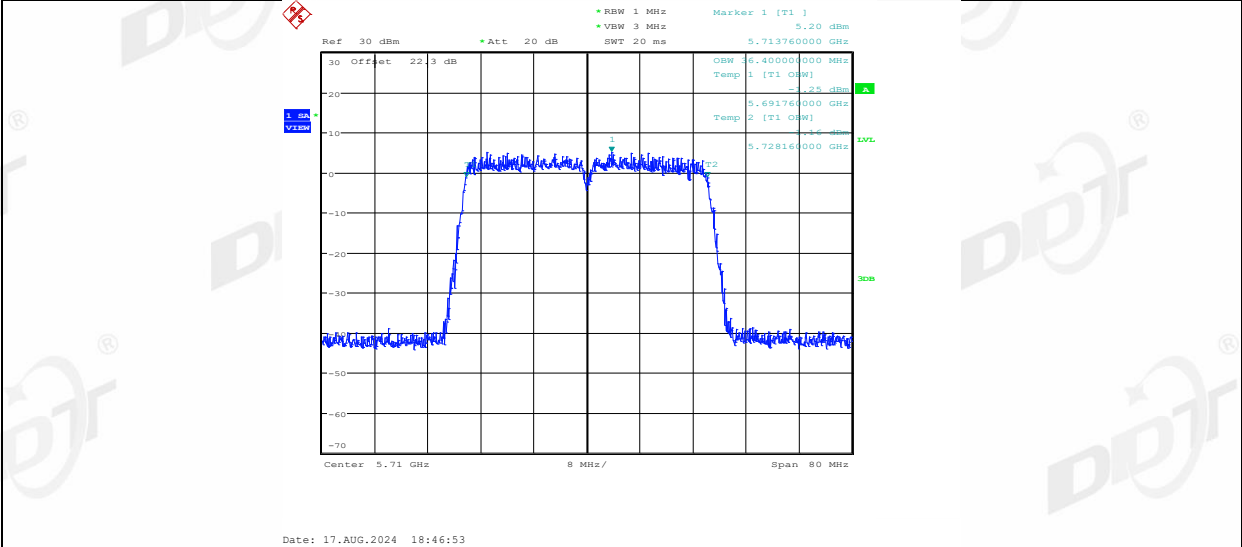


11AC40MIMO_Ant1_5755

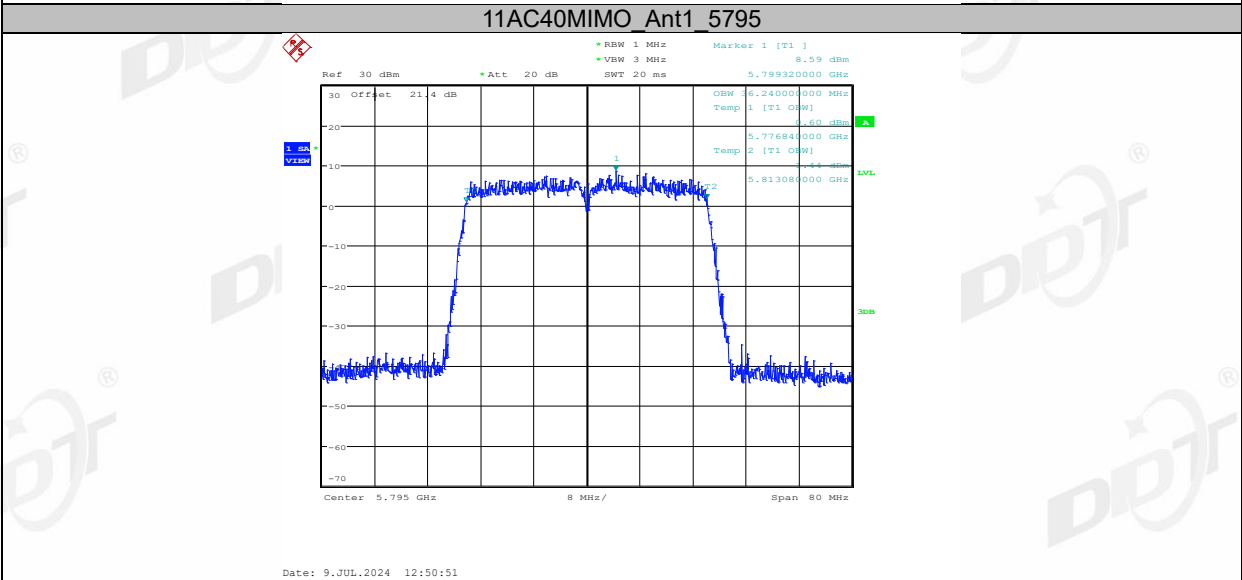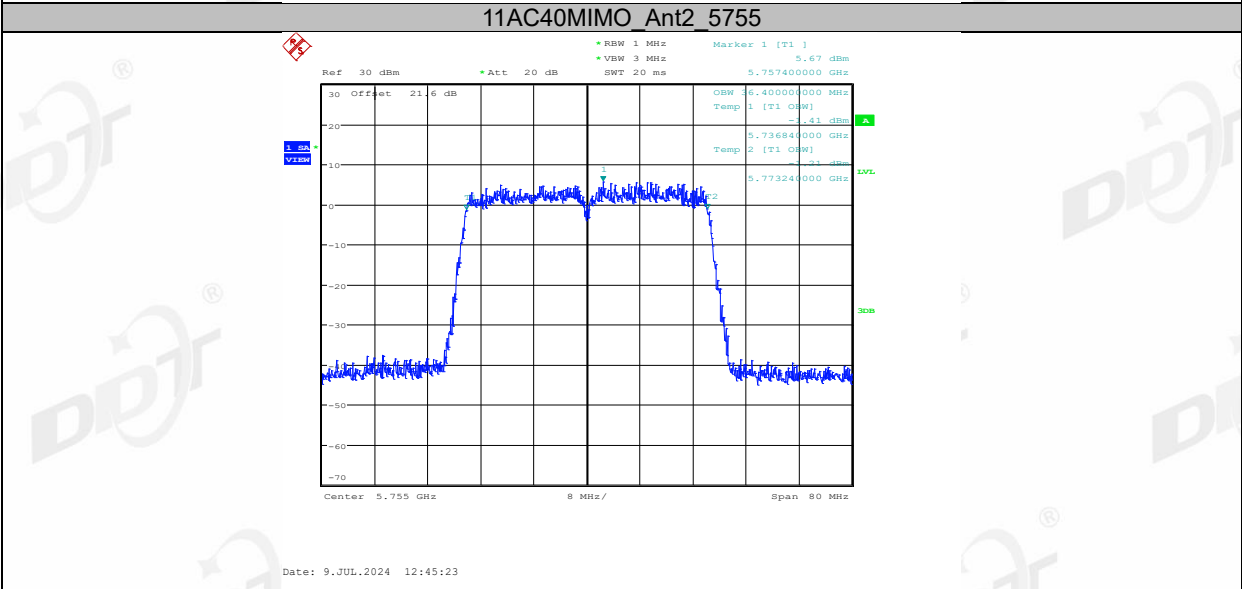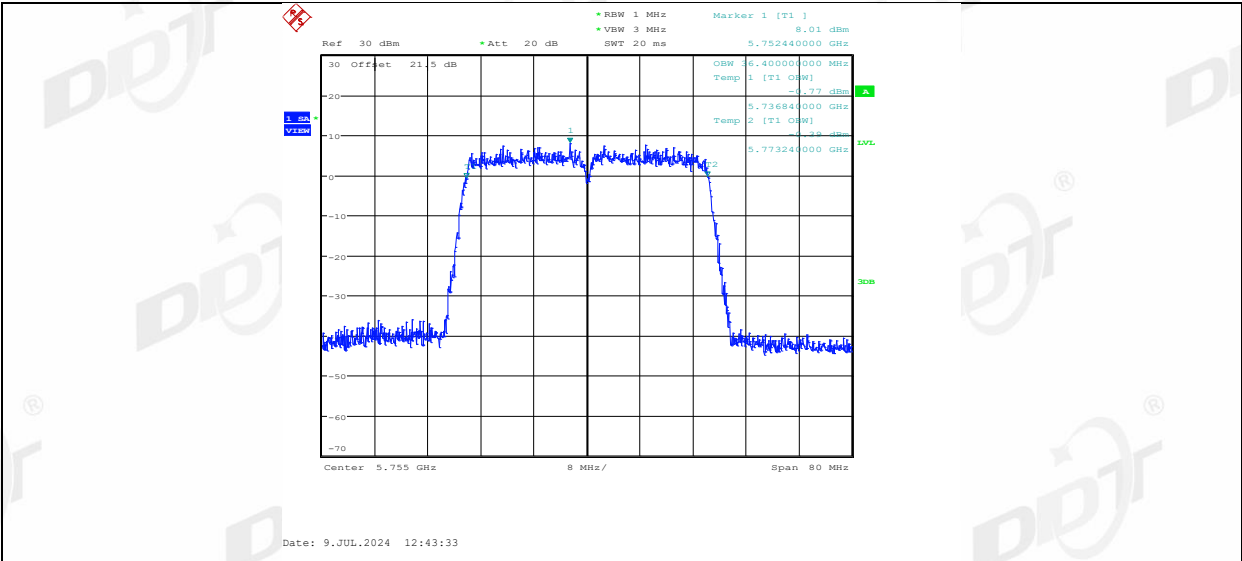


11AC40MIMO_Ant2_5795

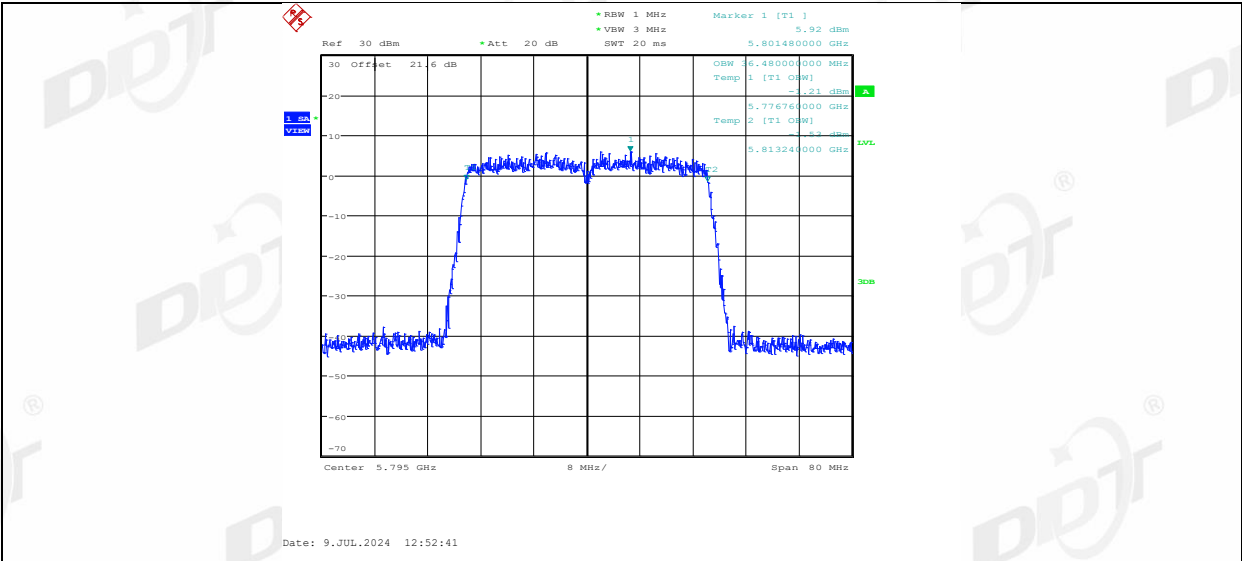


11AC80MIMO_Ant1_5210

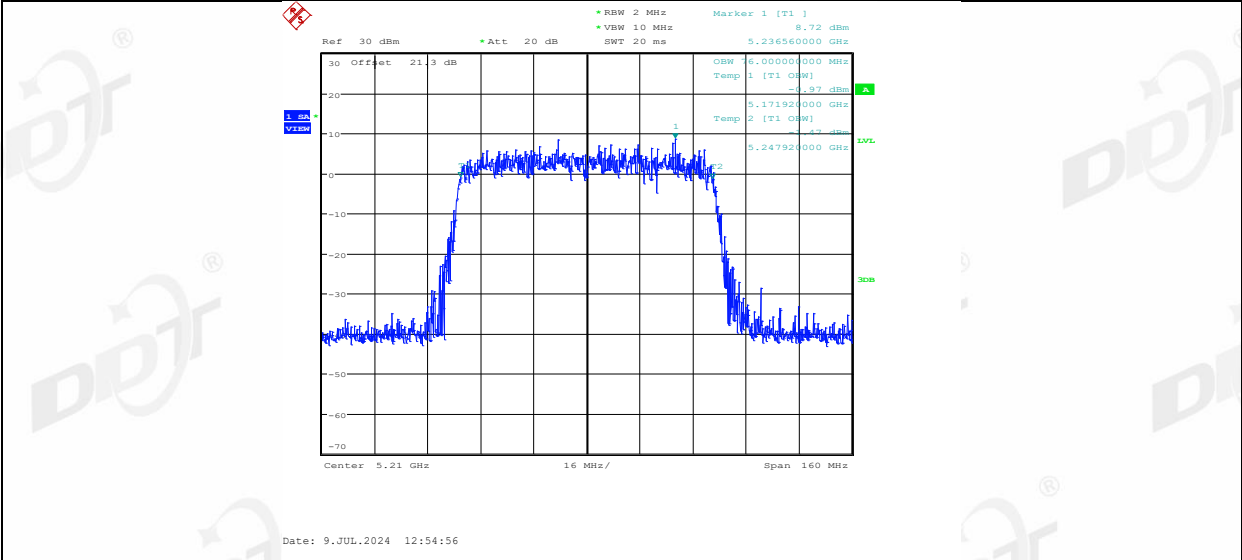


11AC80MIMO_Ant2_5210

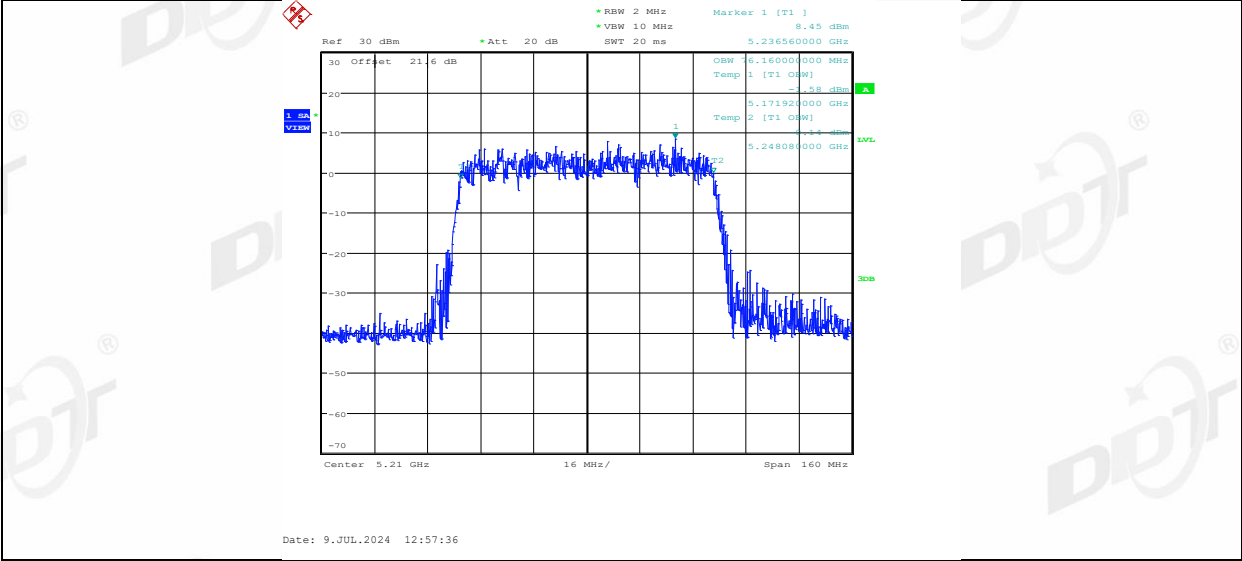


11AC80MIMO_Ant1_5290

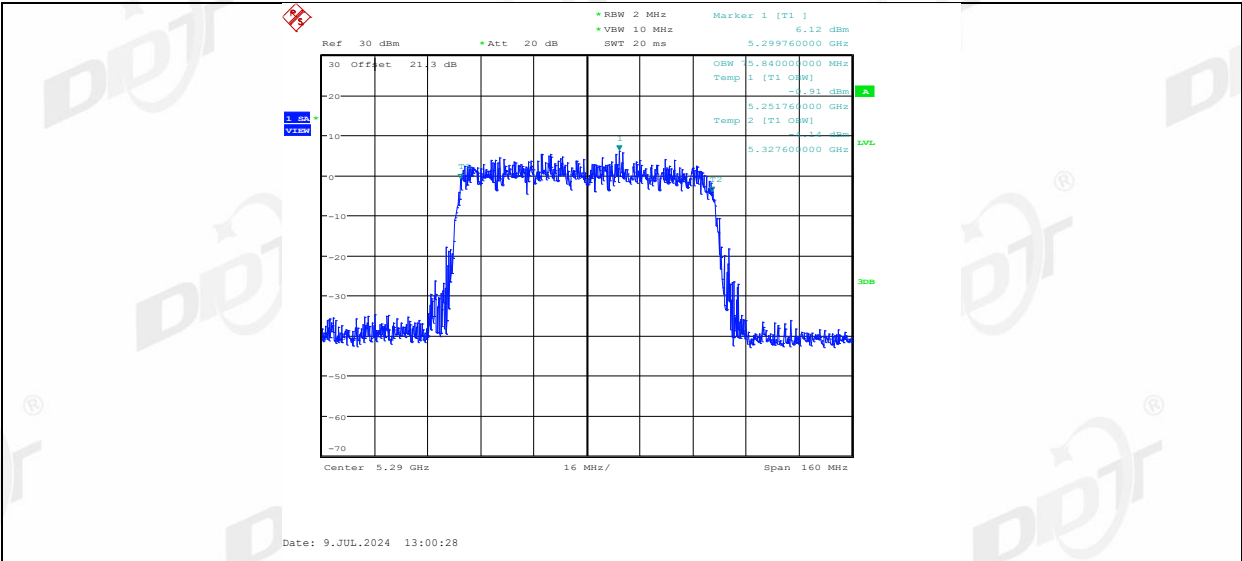


11AC80MIMO_Ant2_5290

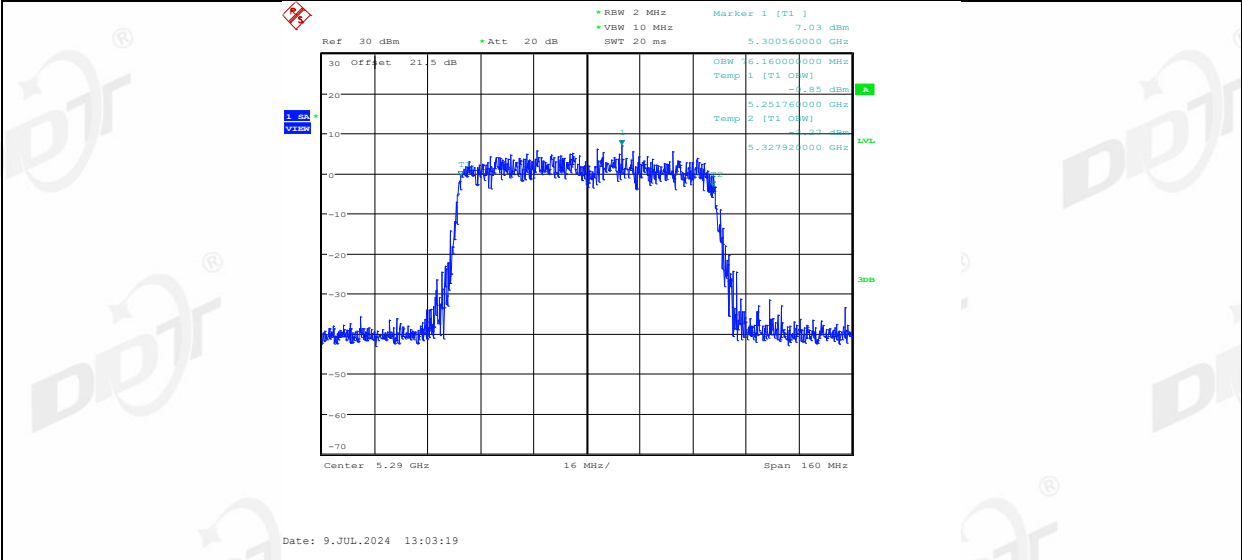


11AC80MIMO_Ant1_5530

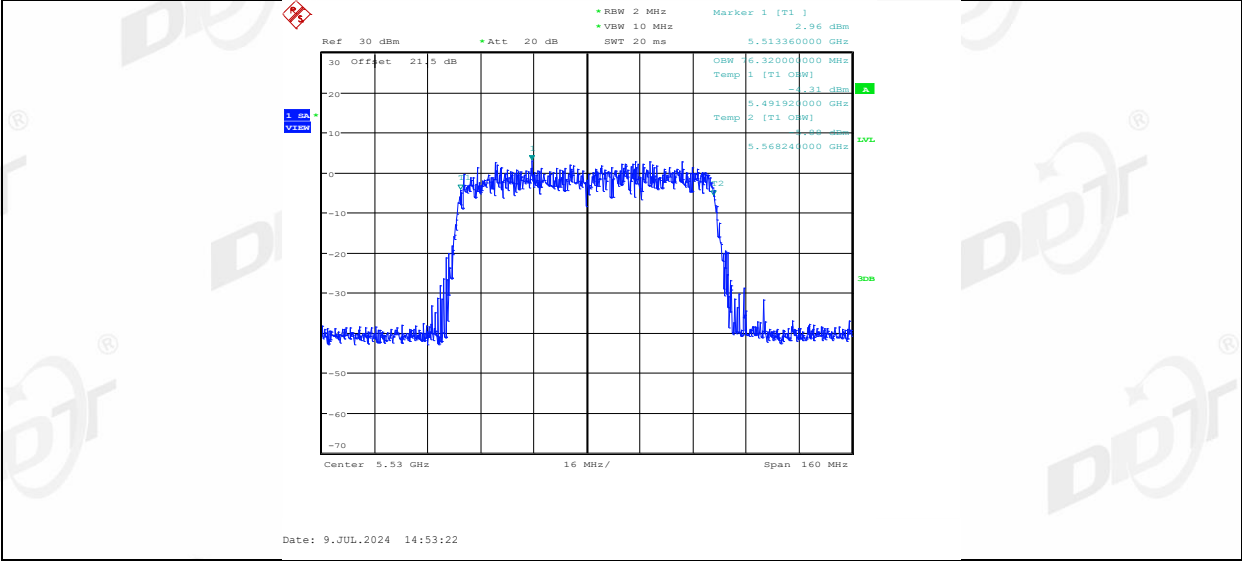


11AC80MIMO_Ant2_5530

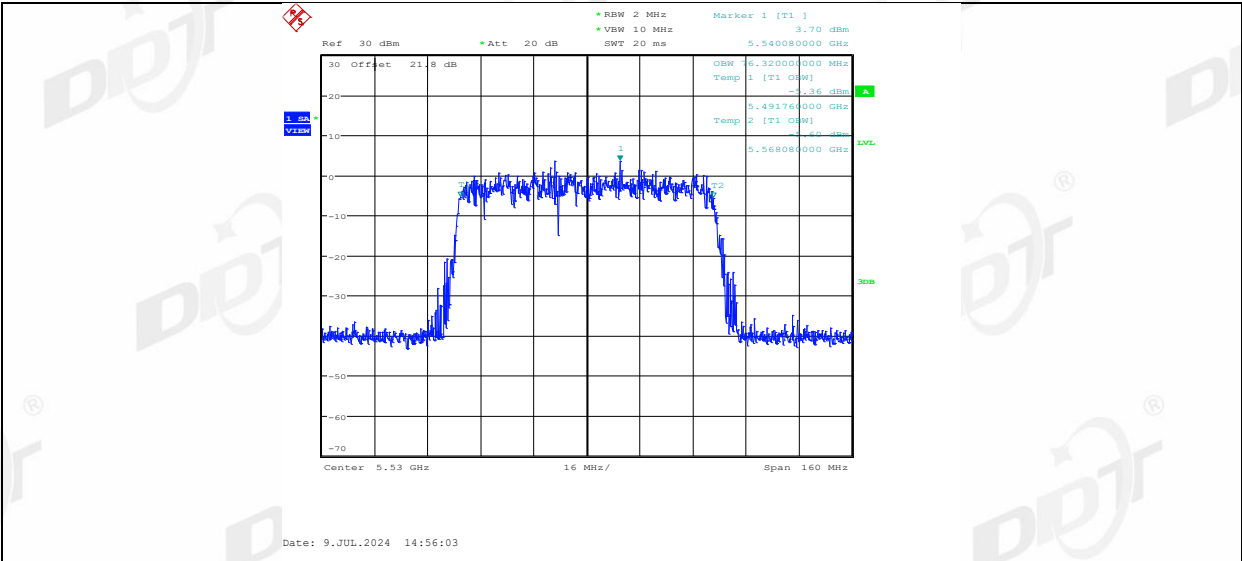


11AC80MIMO_Ant1_5610

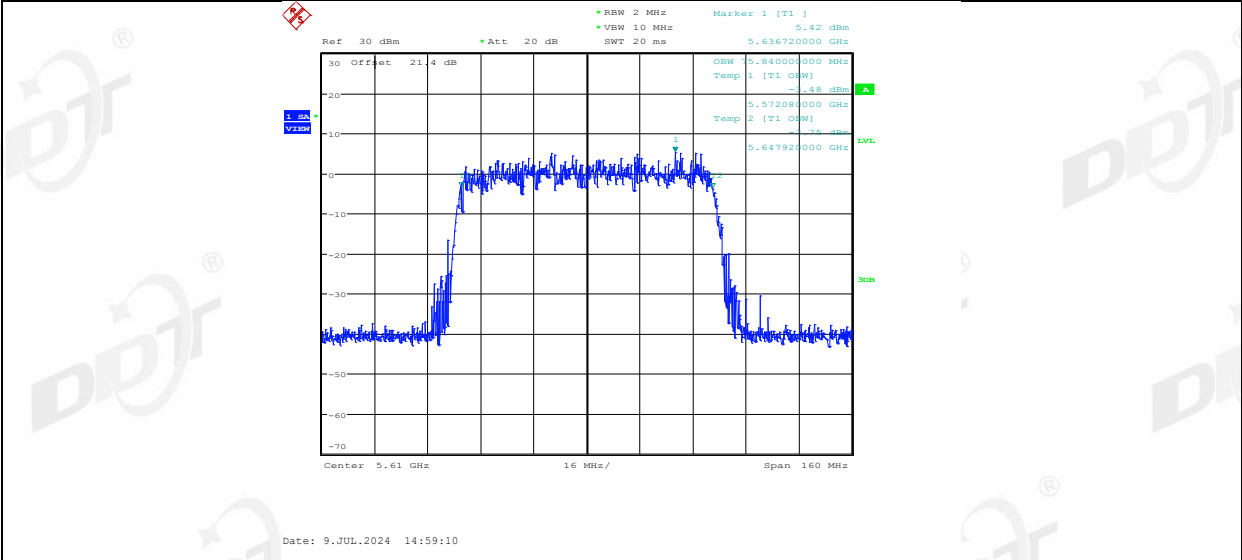


11AC80MIMO_Ant2_5610

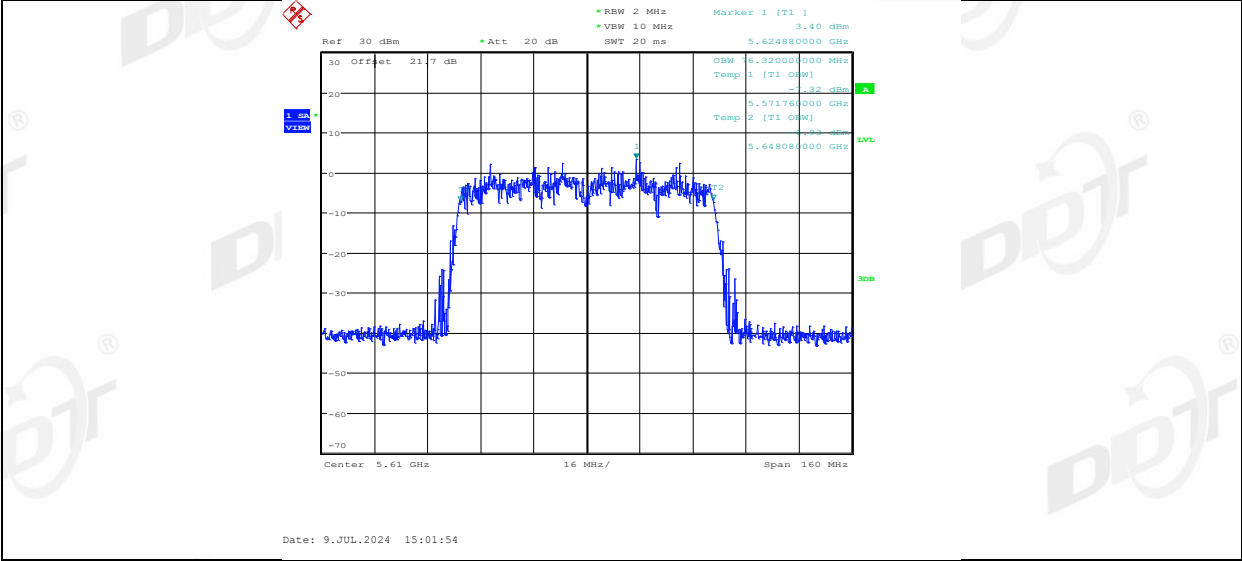


11AC80MIMO_Ant1_5690

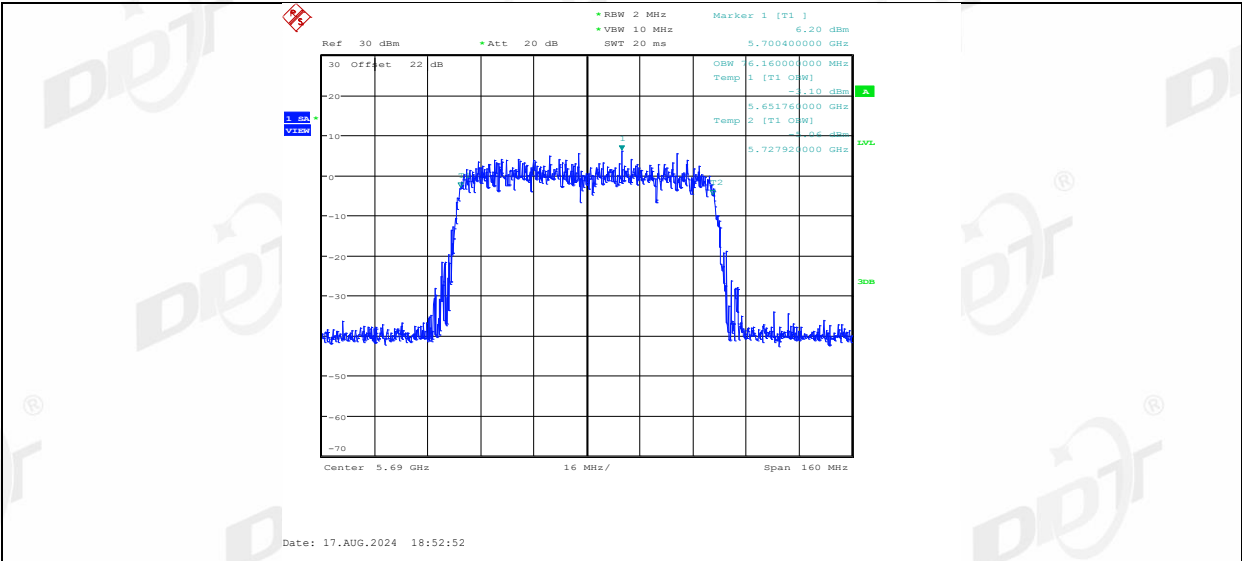


11AC80MIMO_Ant2_5690

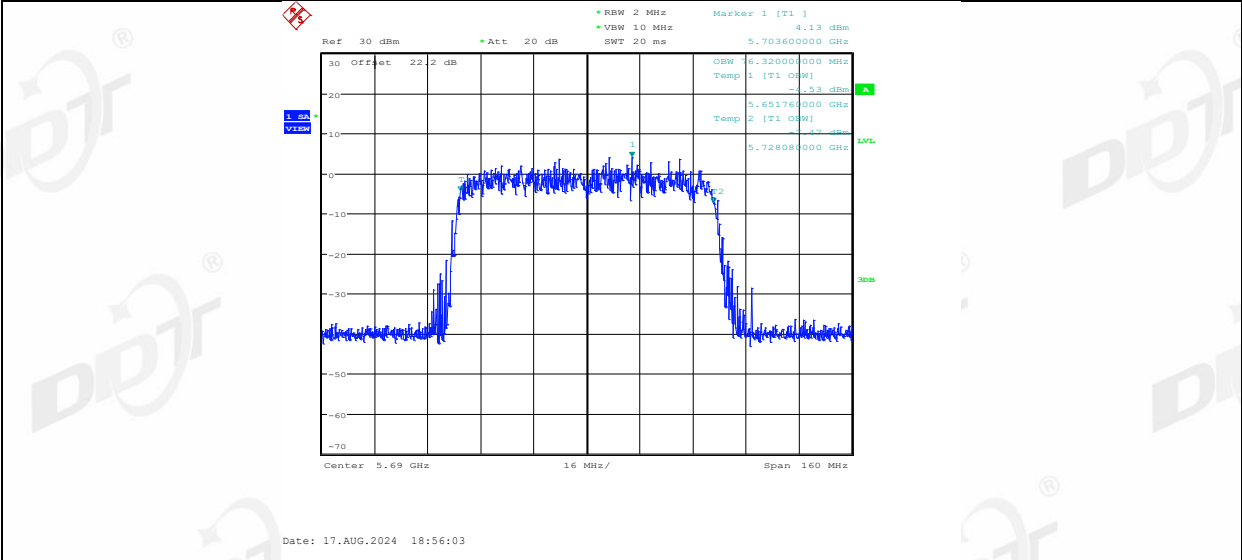


11AC80MIMO_Ant1_5775

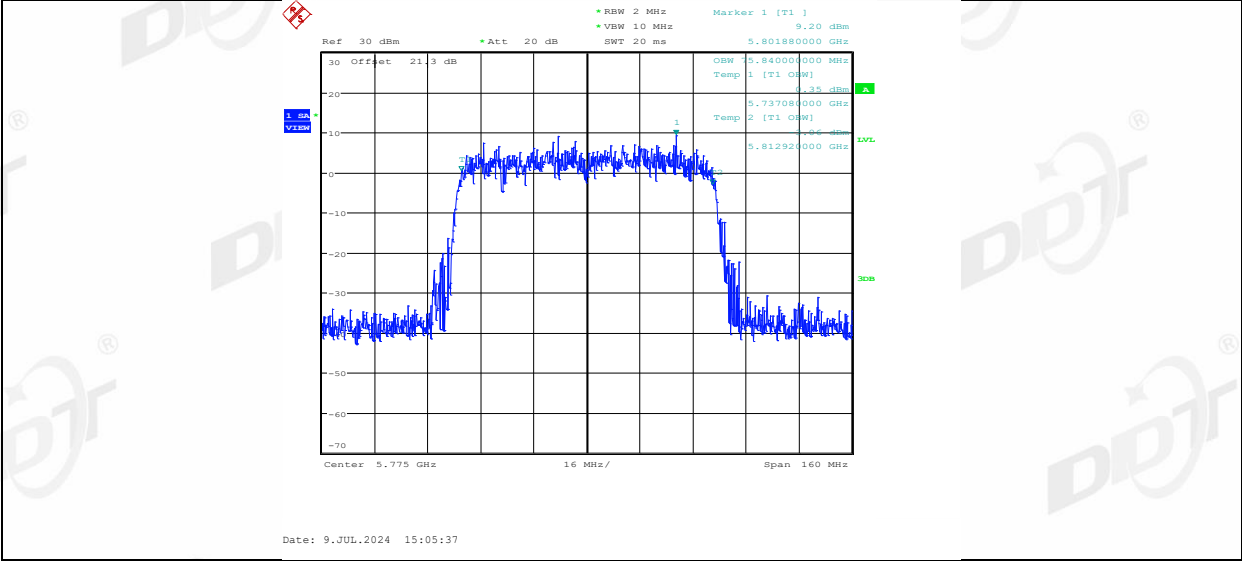


11AC80MIMO_Ant2_5775

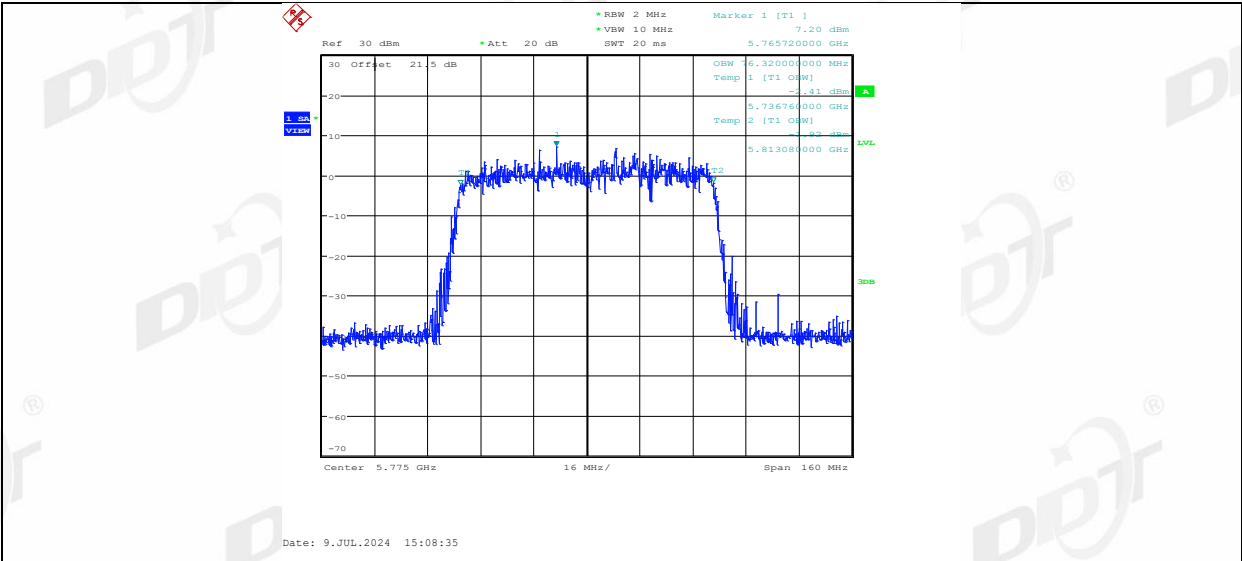




11AX20MIMO_Ant1_5180

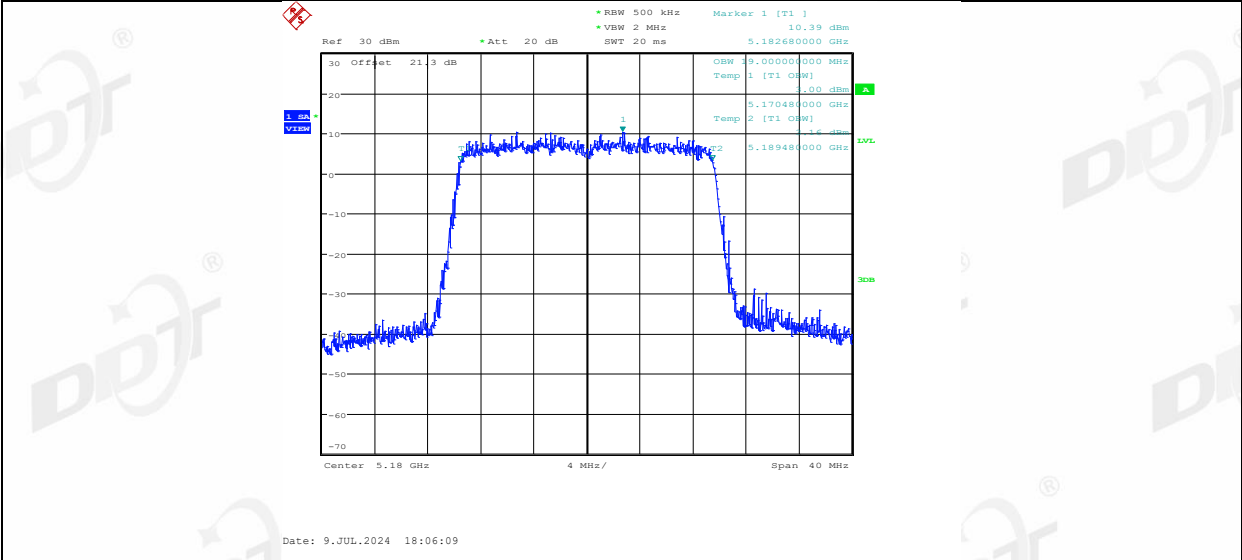


11AX20MIMO_Ant2_5180

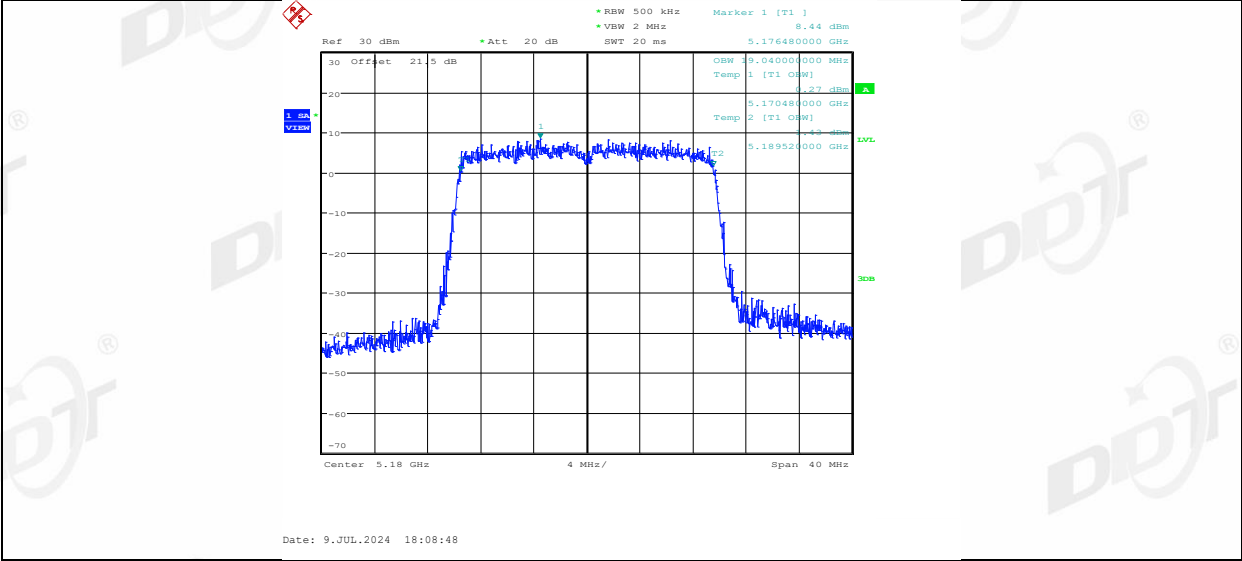


11AX20MIMO_Ant1_5200

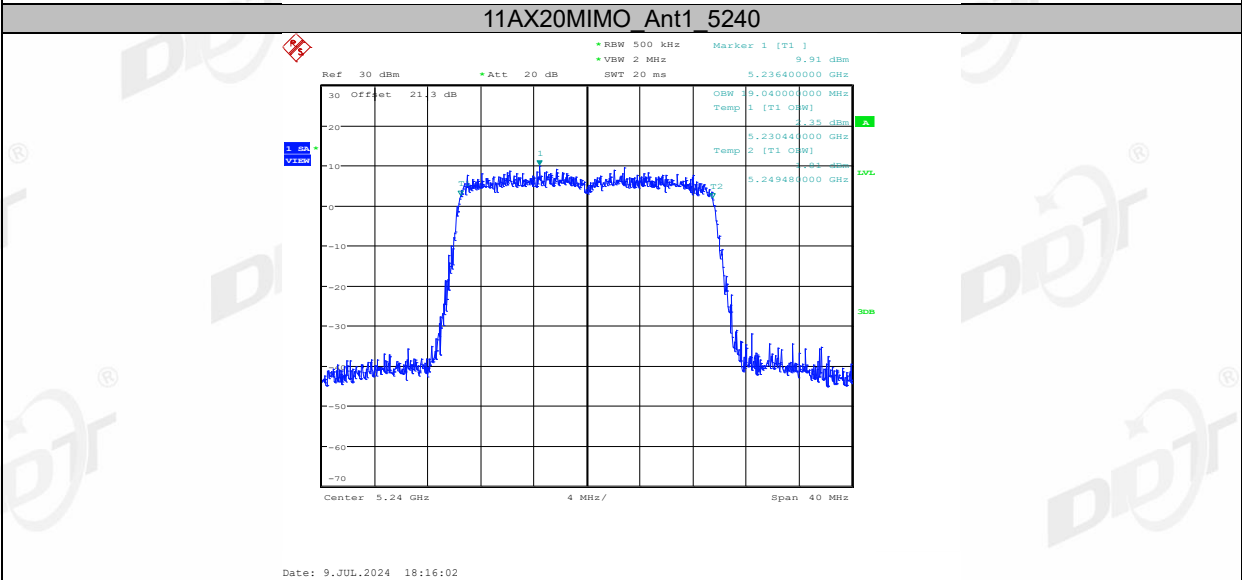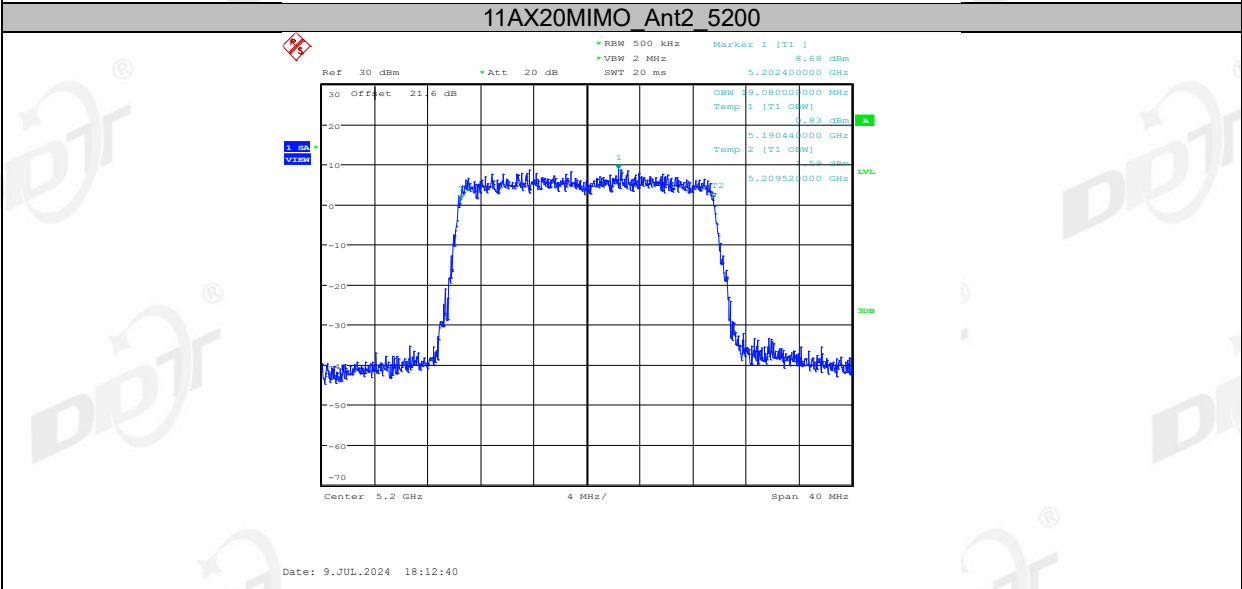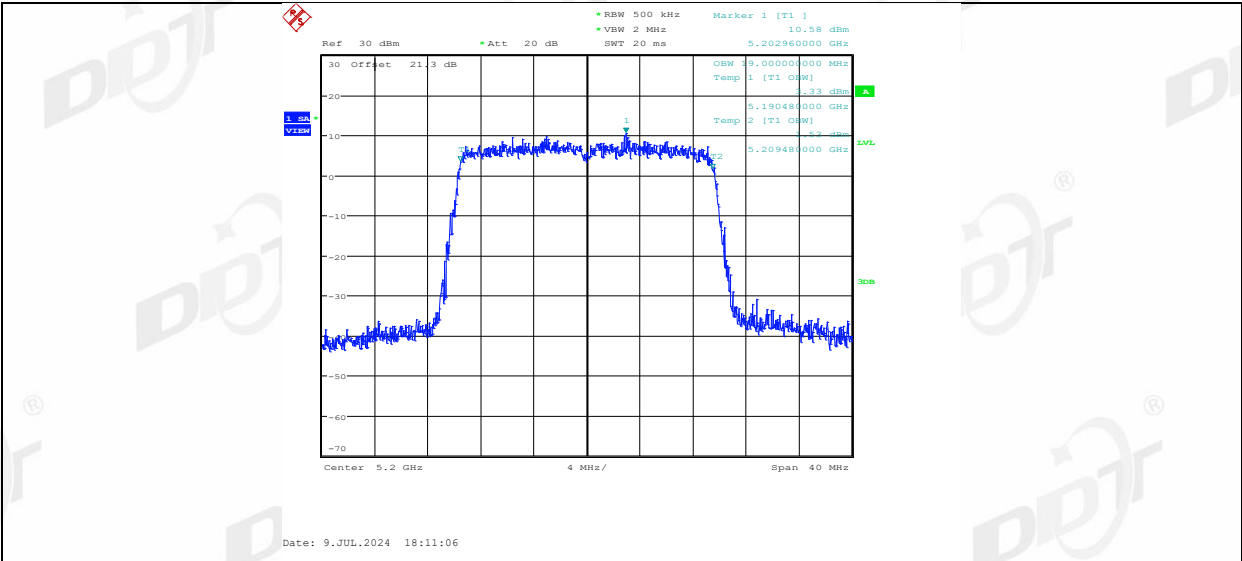


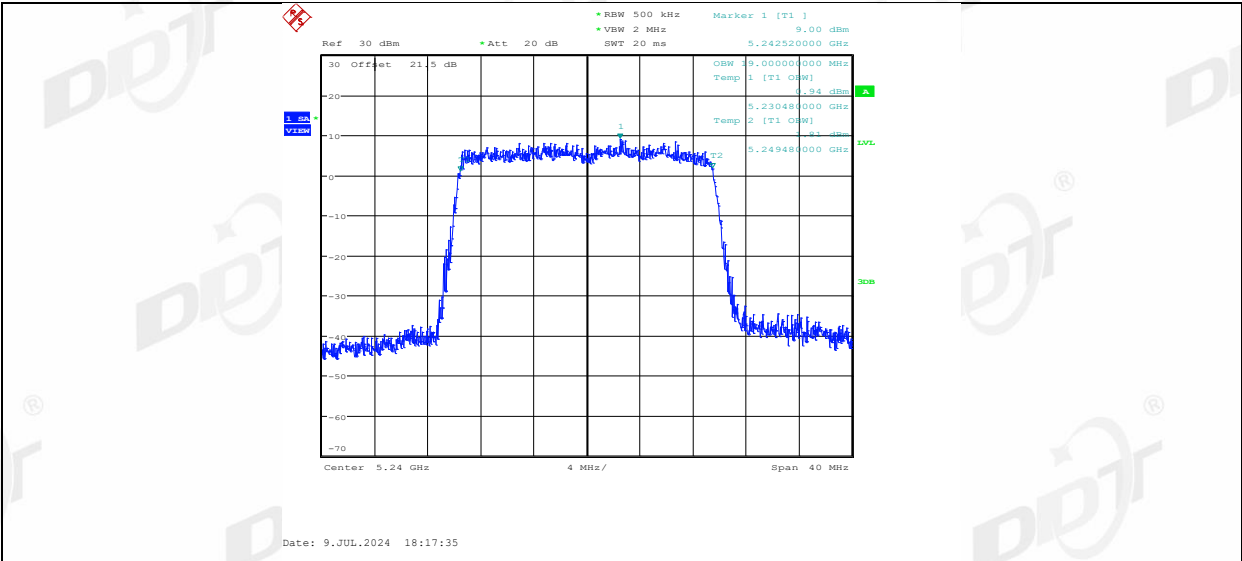


11AX20MIMO_Ant1_5260

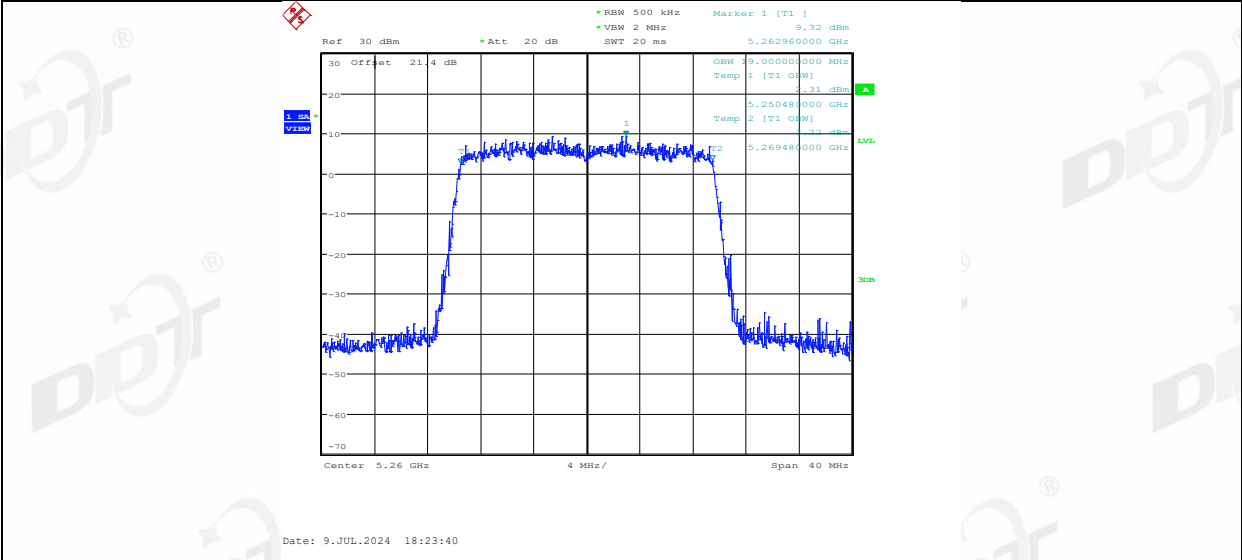


11AX20MIMO_Ant2_5260

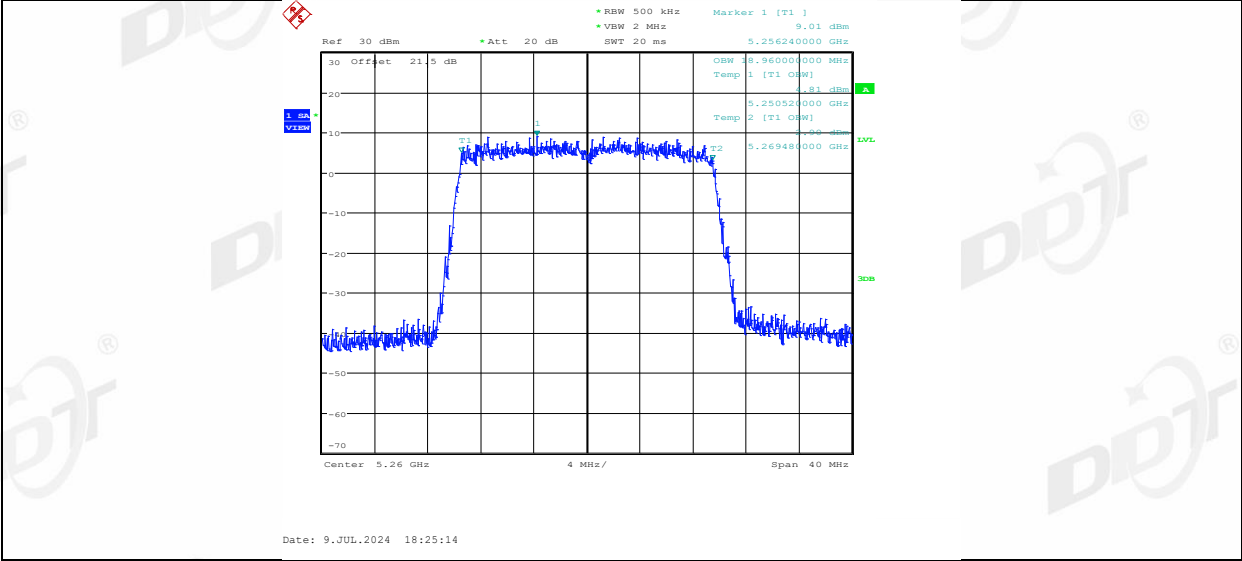


11AX20MIMO_Ant1_5280

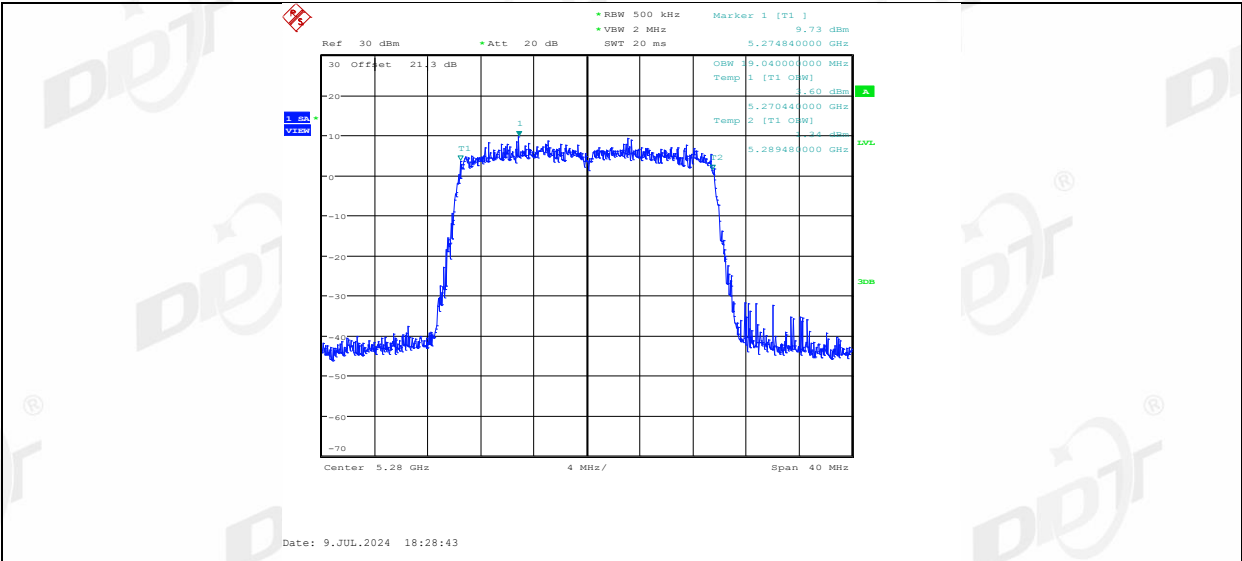


11AX20MIMO_Ant2_5280

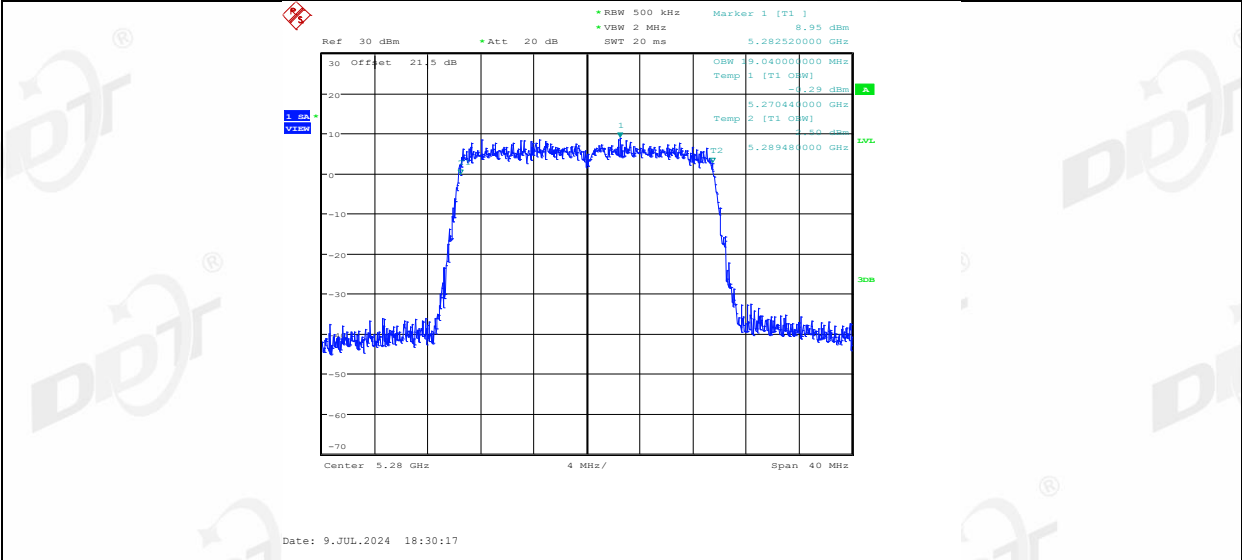


11AX20MIMO_Ant1_5320

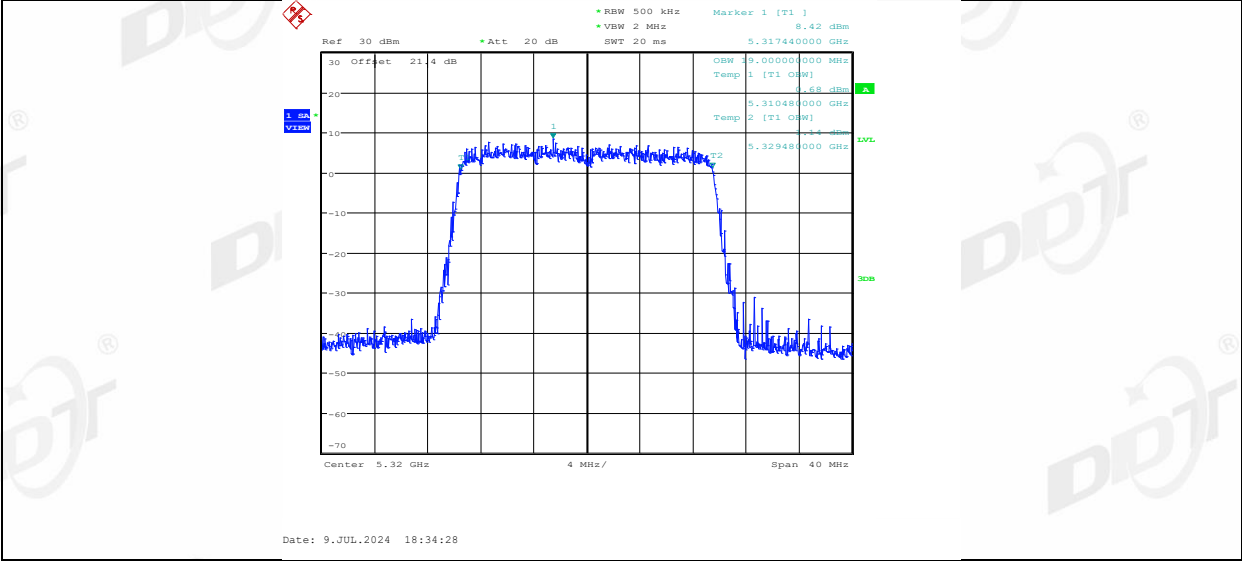


11AX20MIMO_Ant2_5320

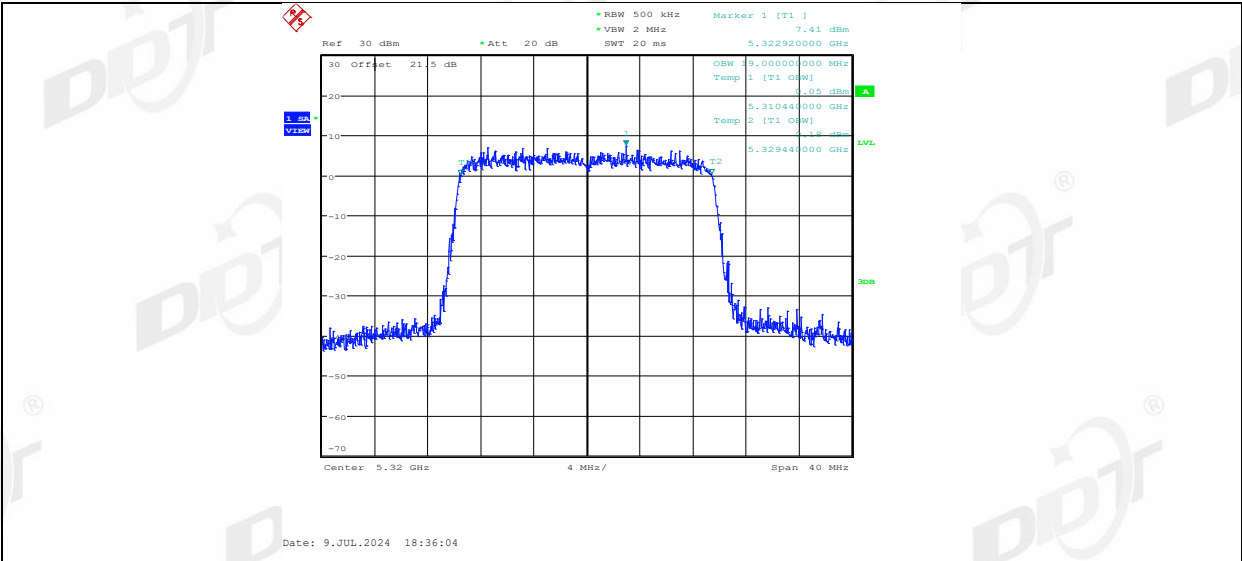


11AX20MIMO_Ant1_5500

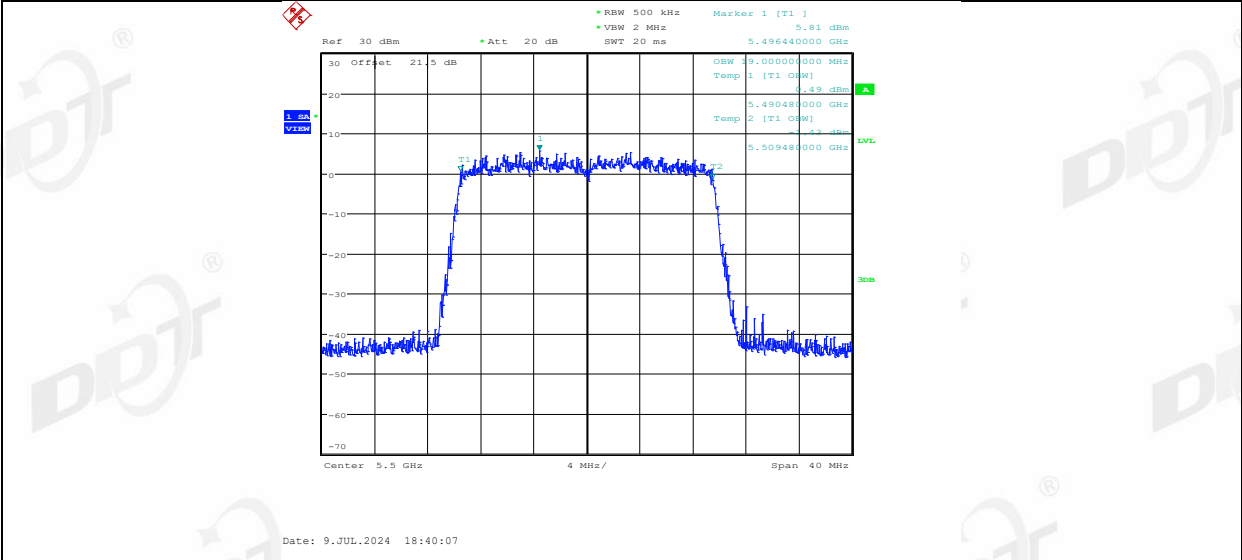


11AX20MIMO_Ant2_5500

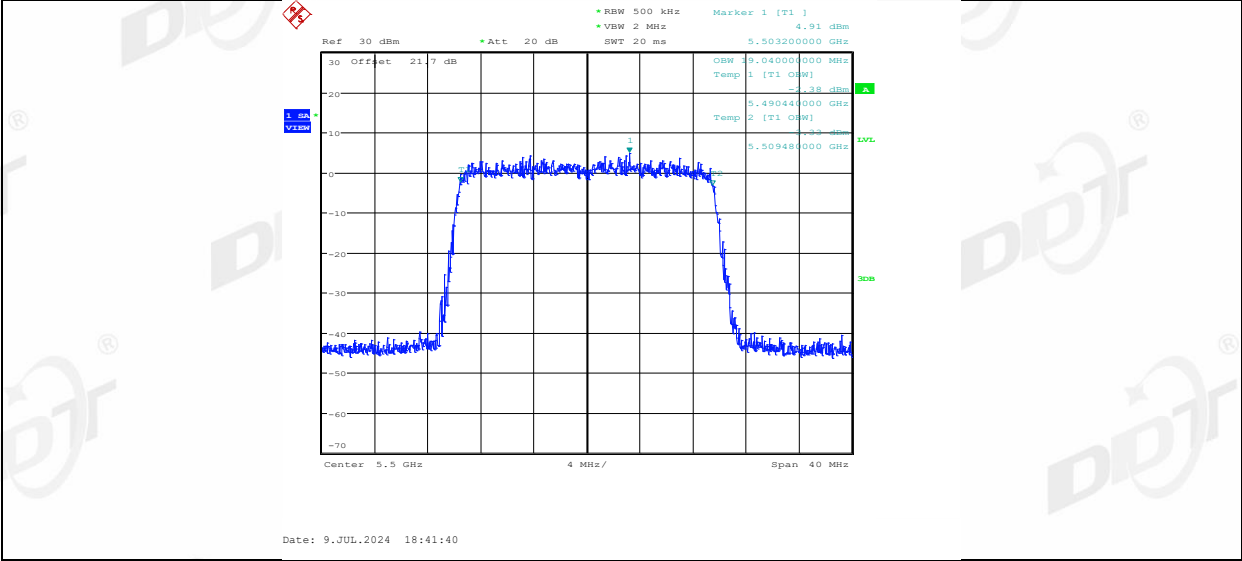


11AX20MIMO_Ant1_5580

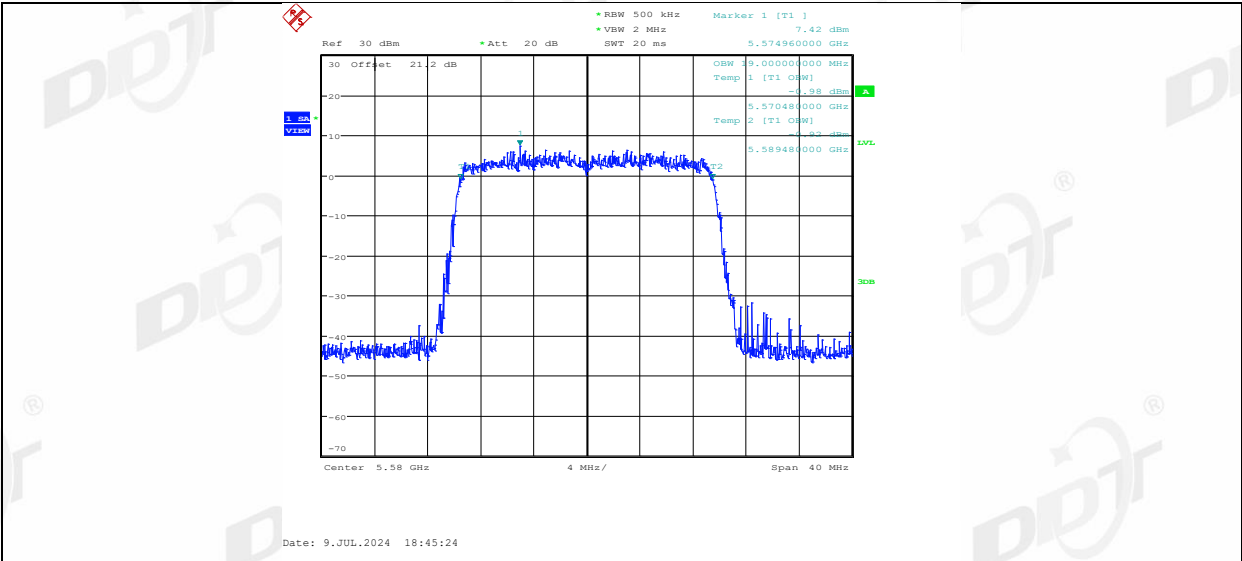


11AX20MIMO_Ant2_5580

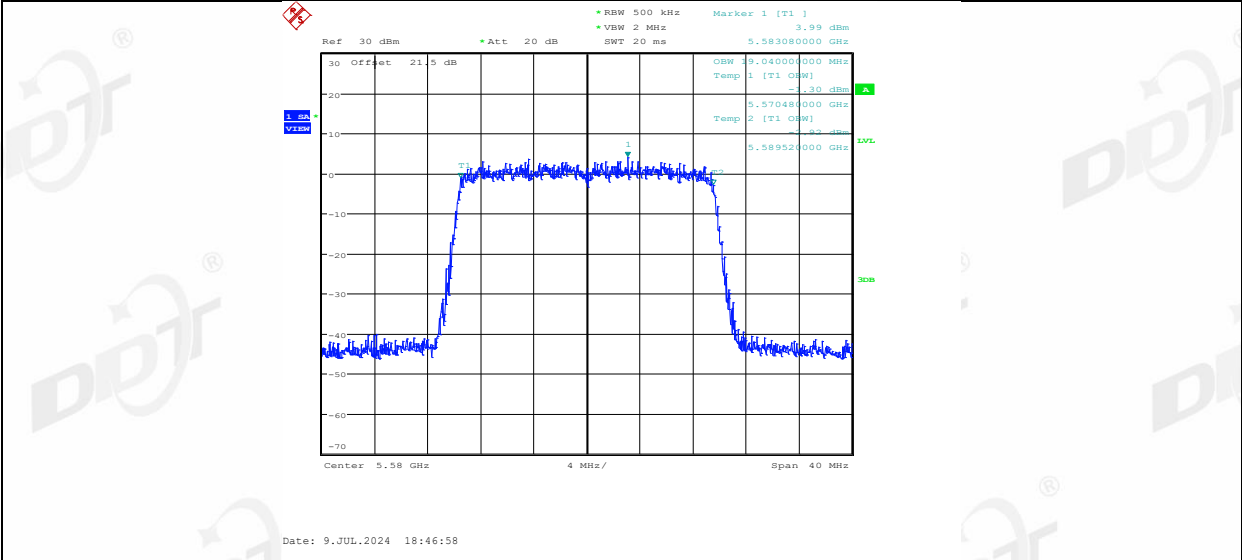


11AX20MIMO_Ant1_5700

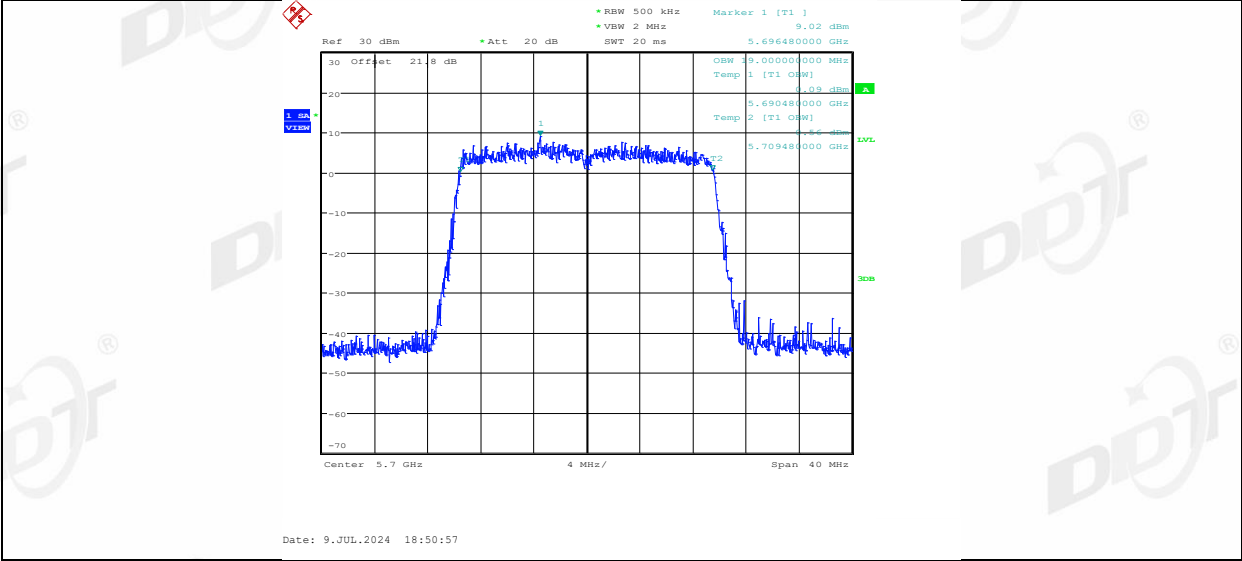


11AX20MIMO_Ant2_5700

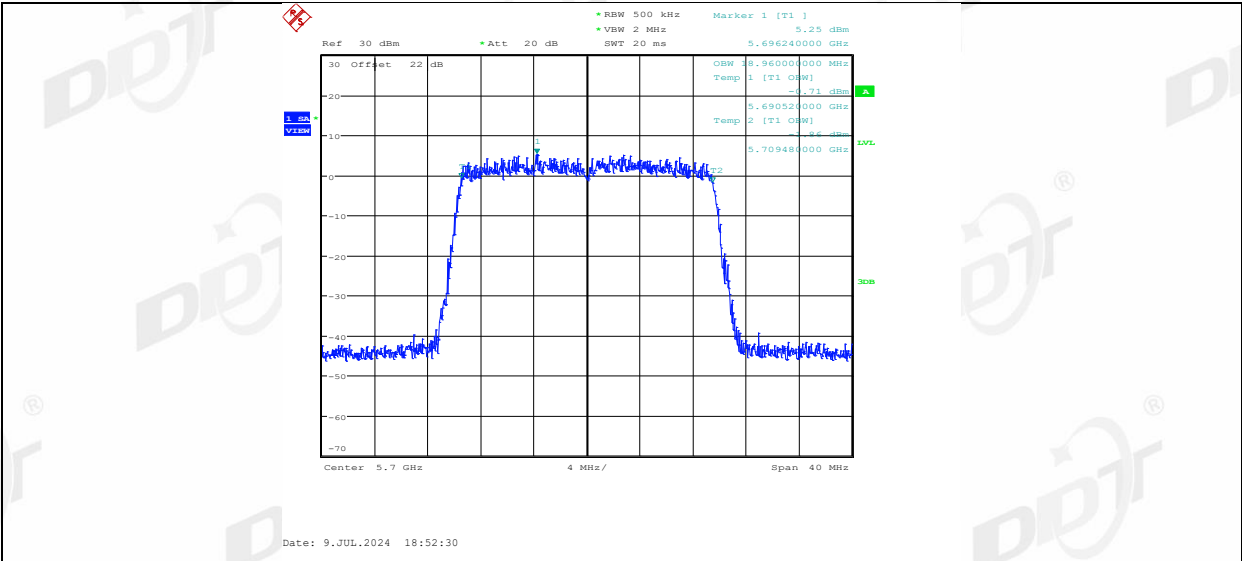


11AX20MIMO_Ant1_5720

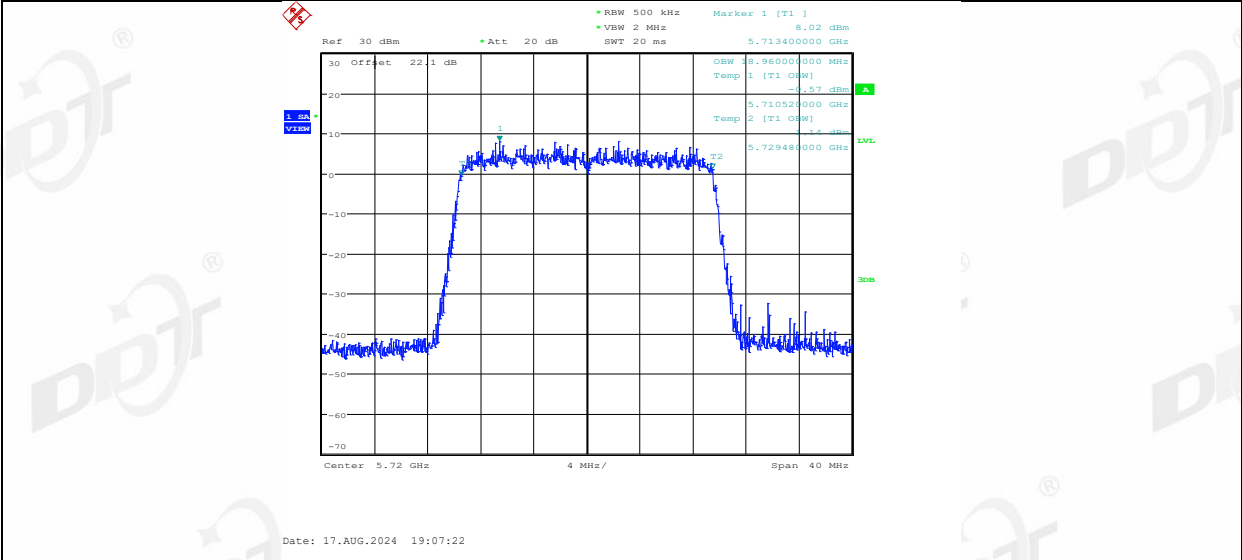


11AX20MIMO_Ant2_5720

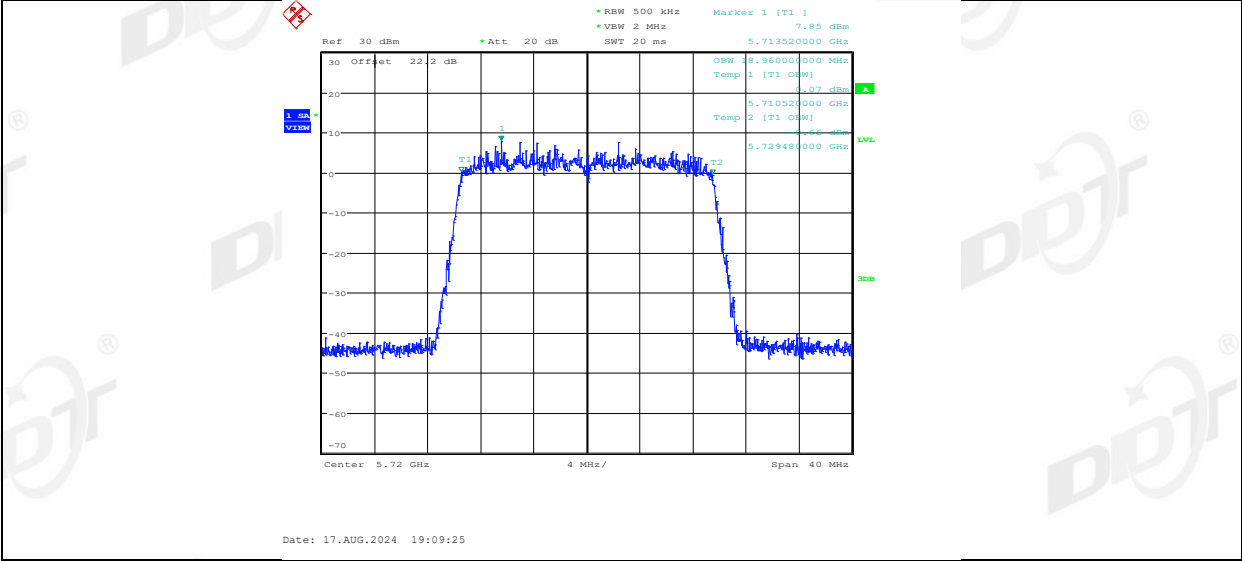


11AX20MIMO_Ant1_5745

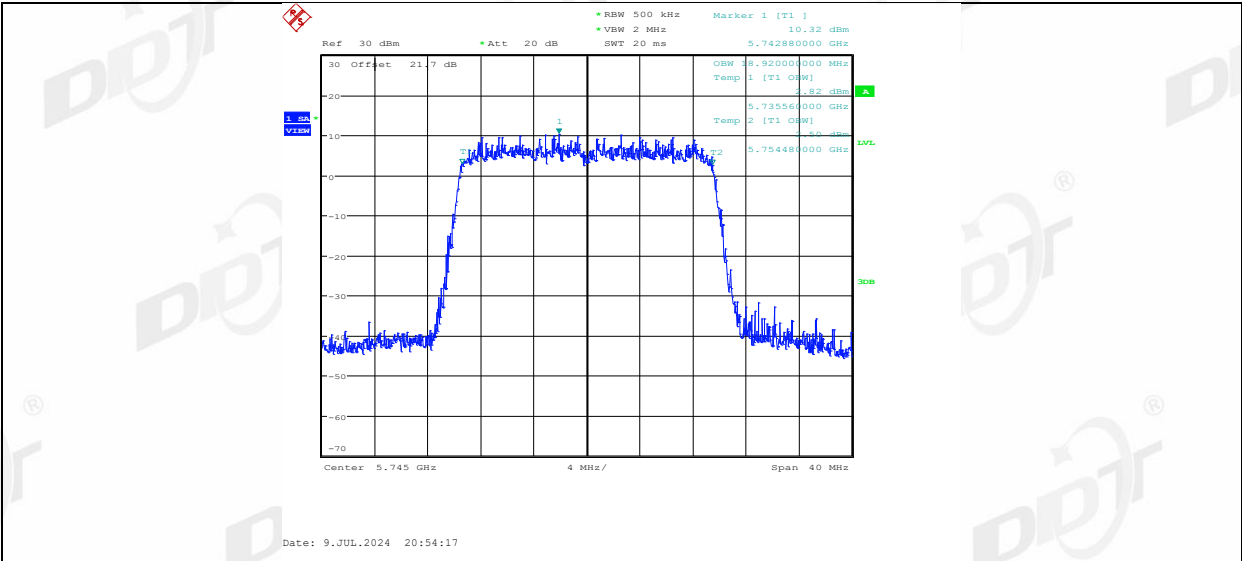


11AX20MIMO_Ant2_5745

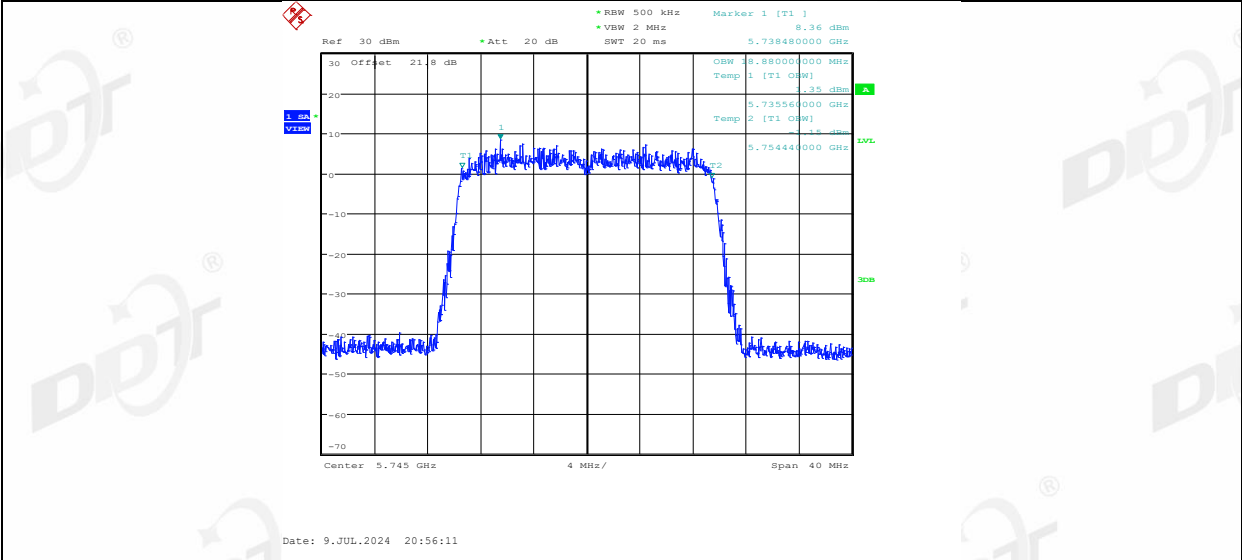


11AX20MIMO_Ant1_5785

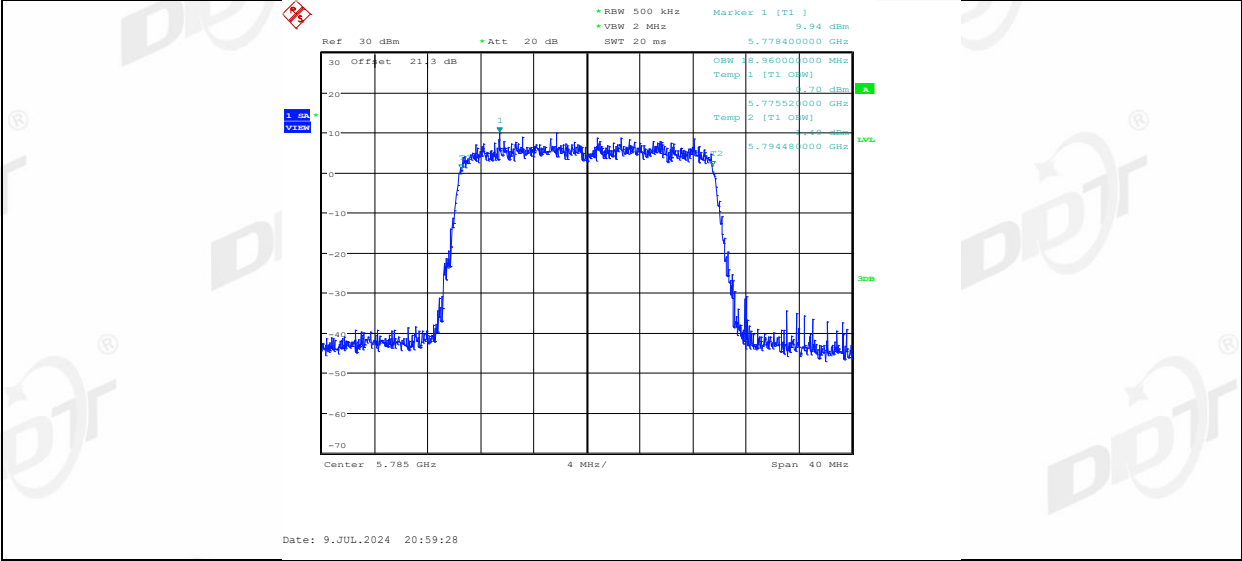


11AX20MIMO_Ant2_5785

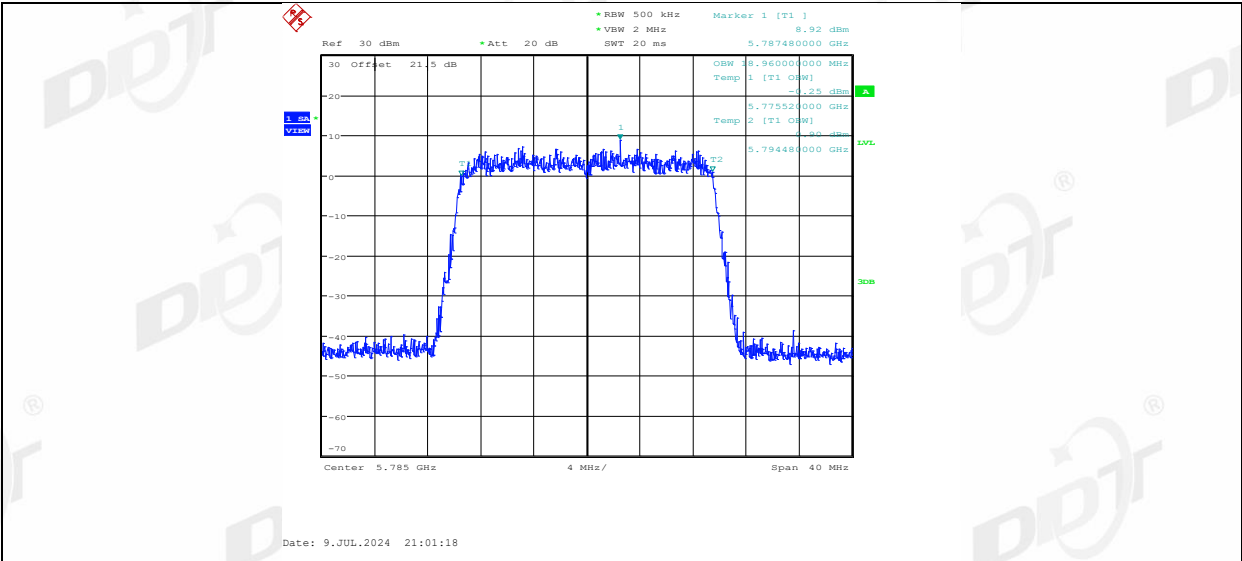


11AX20MIMO_Ant1_5825

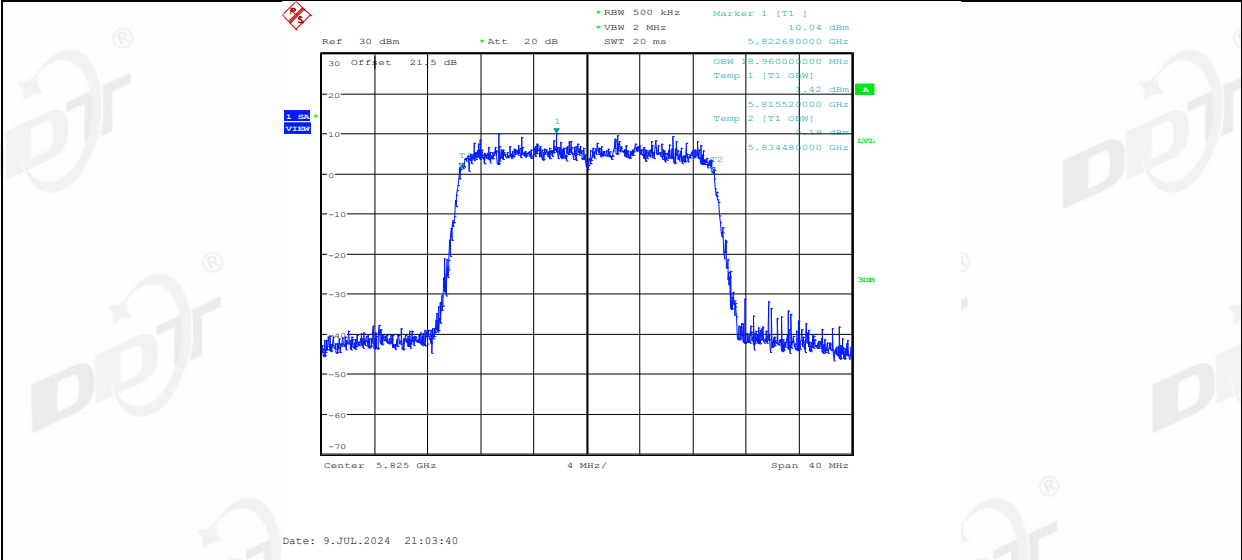


11AX20MIMO_Ant2_5825

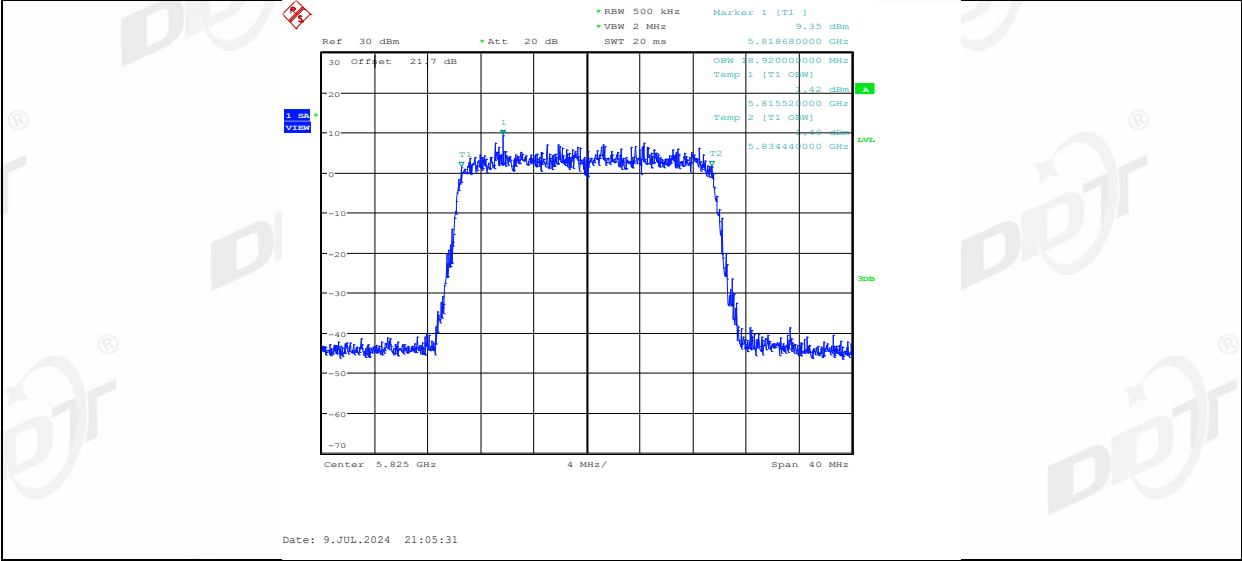


11AX40MIMO_Ant1_5190

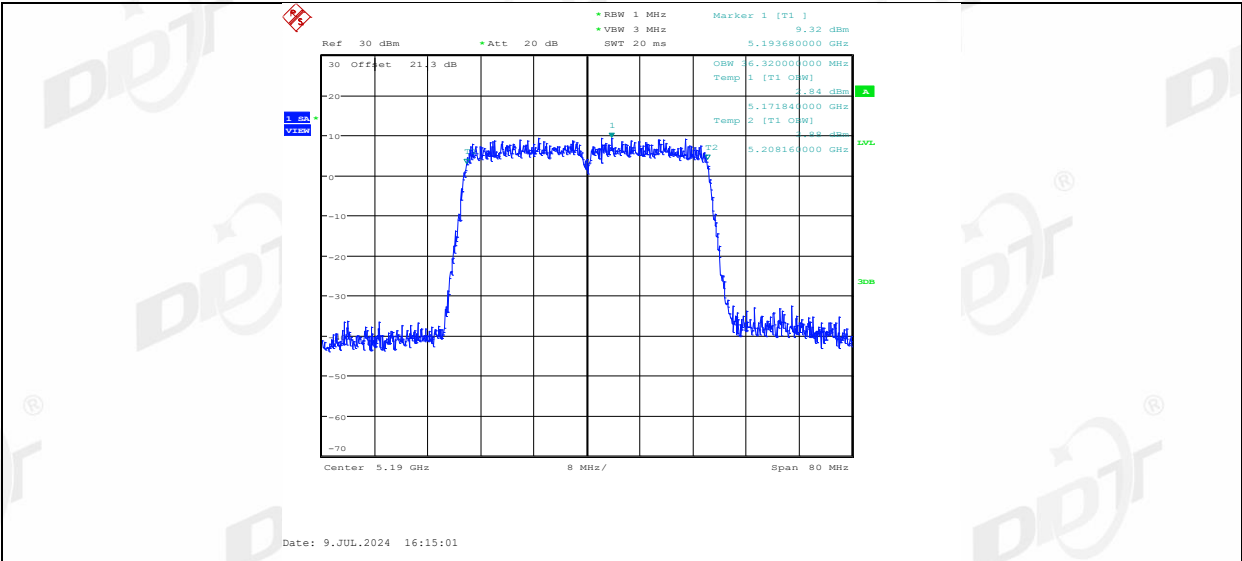




11AX40MIMO_Ant2_5190

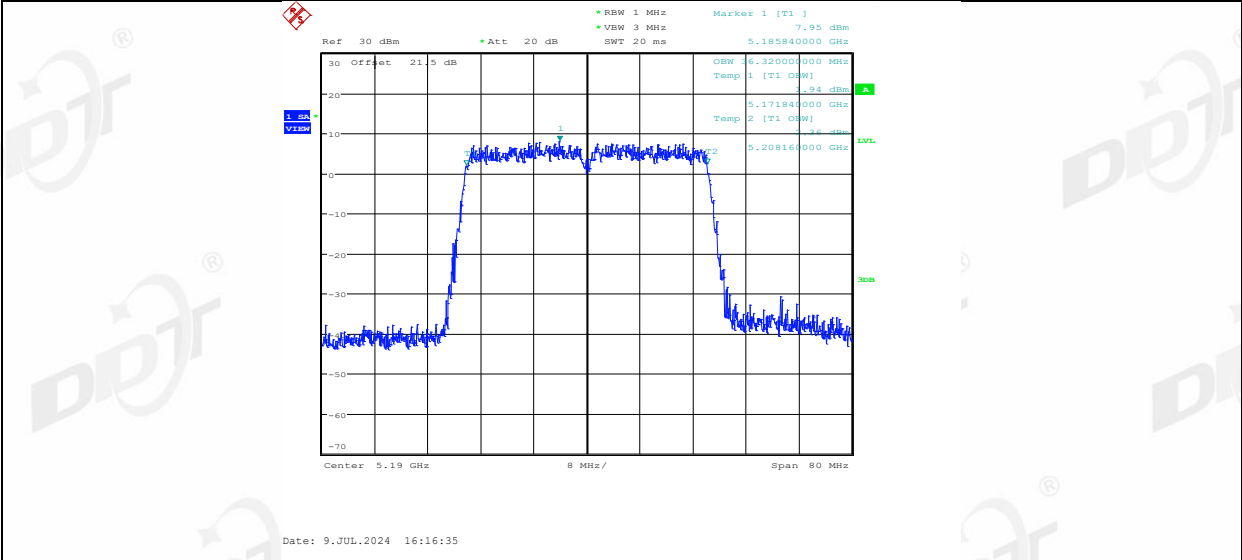


11AX40MIMO_Ant1_5230

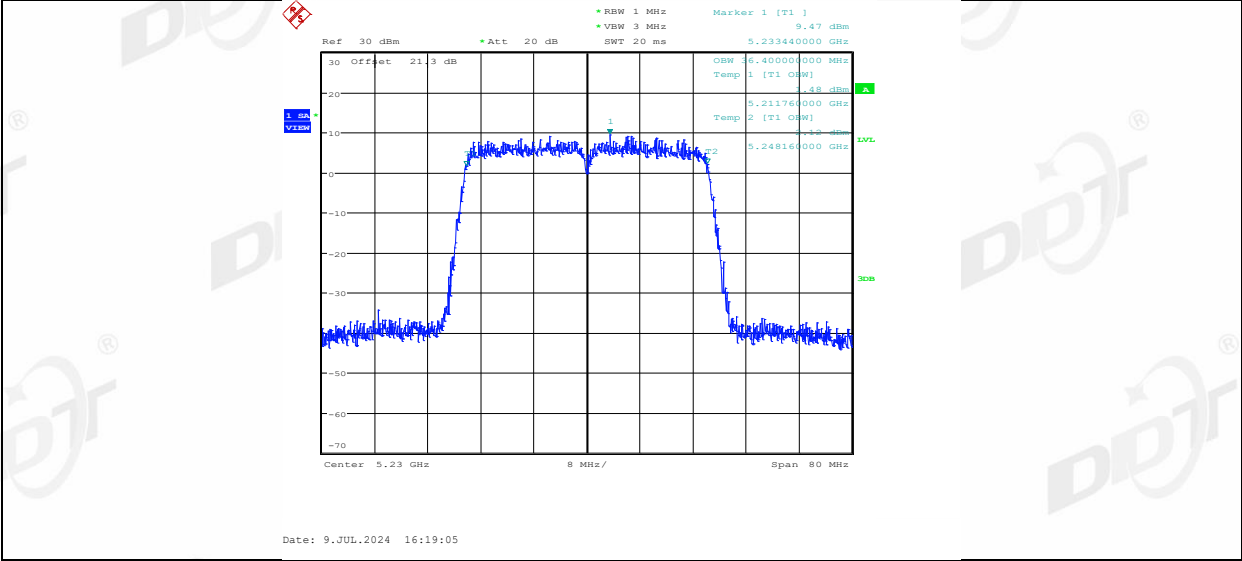


11AX40MIMO_Ant2_5230

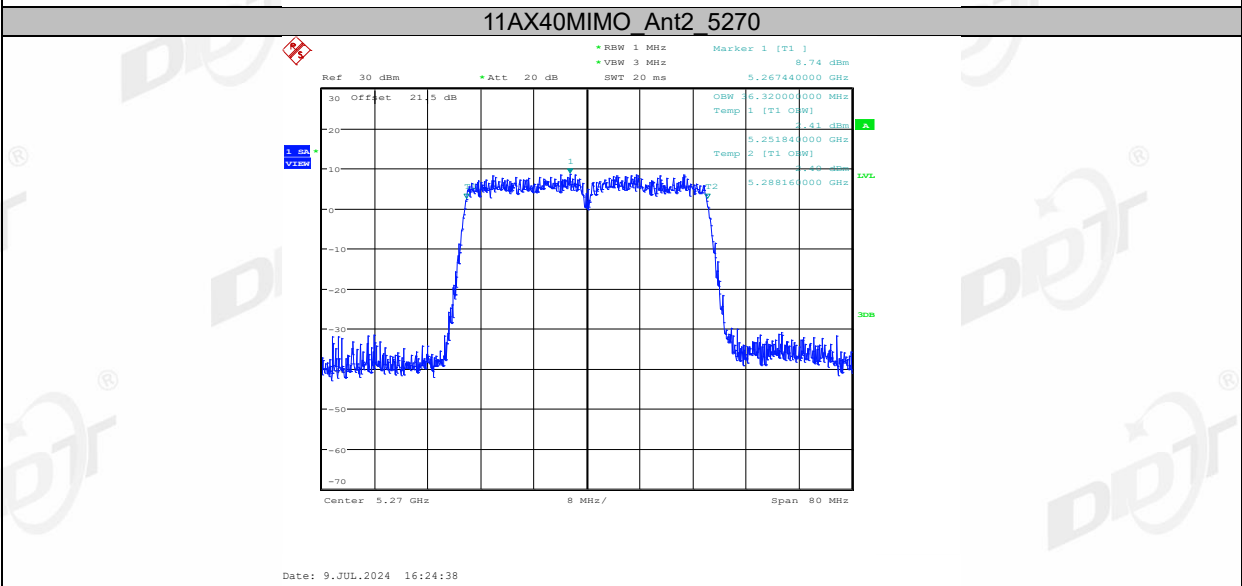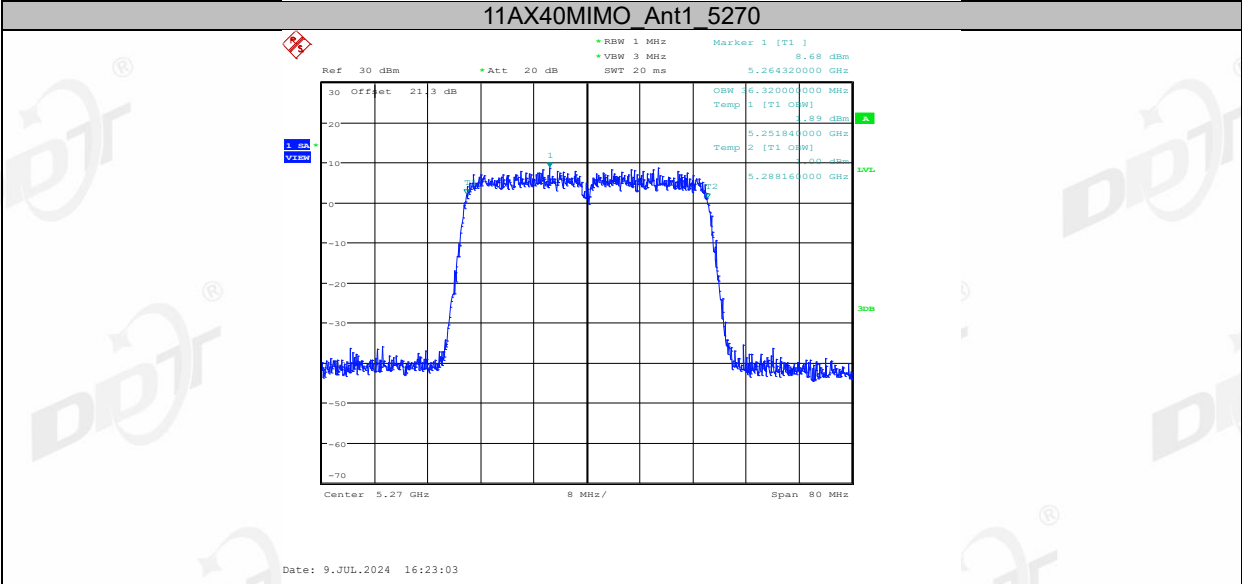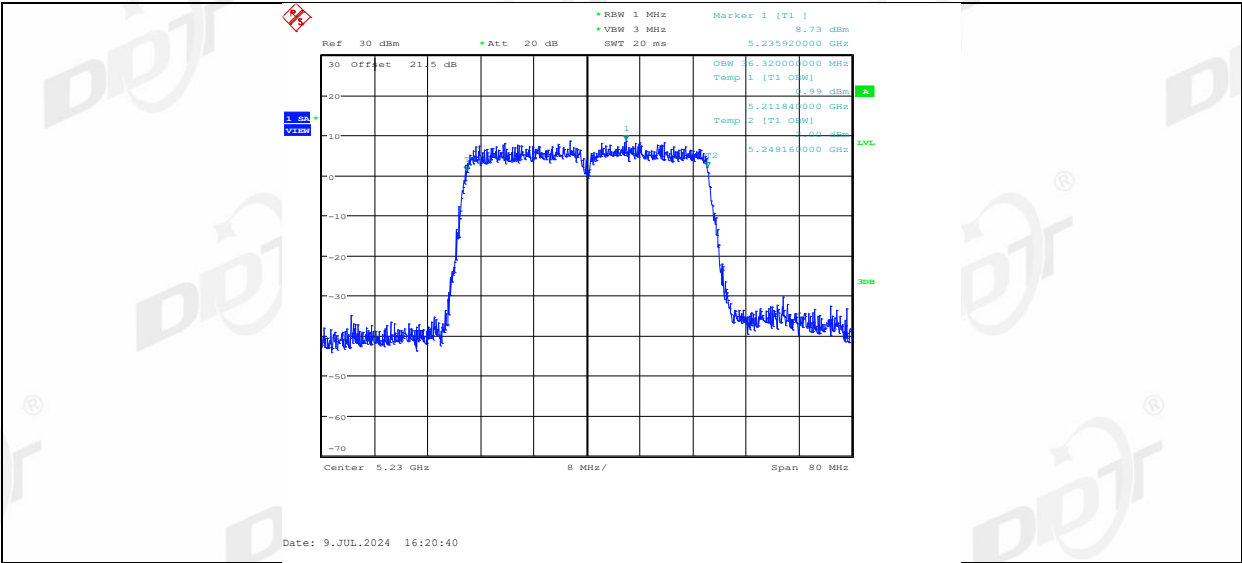


11AX40MIMO_Ant1_5310

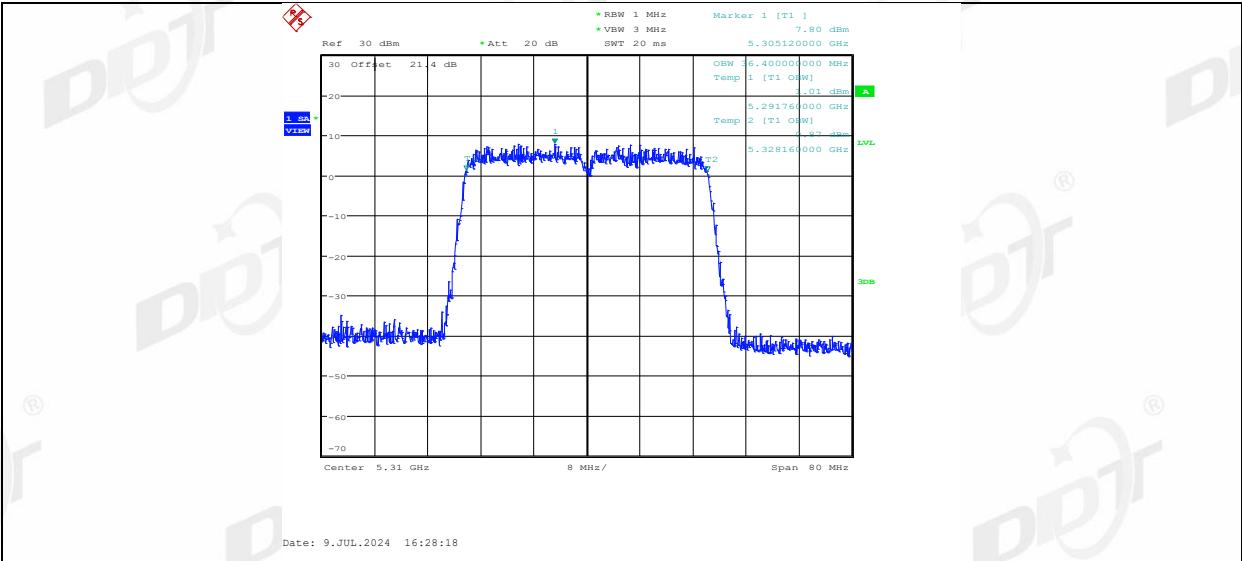


11AX40MIMO_Ant2_5310

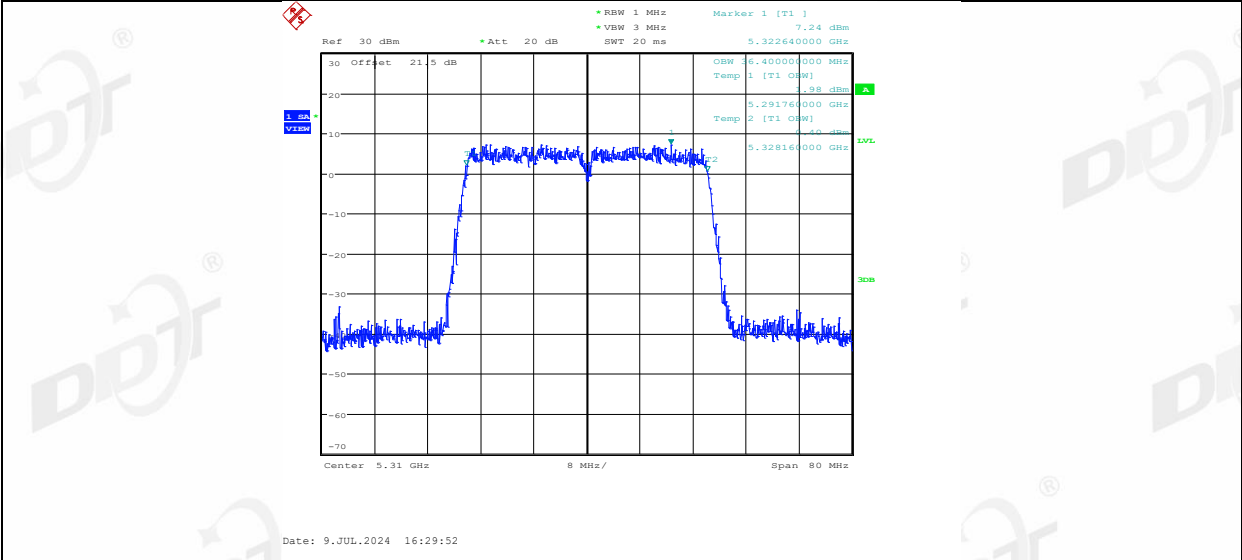


11AX40MIMO_Ant1_5510

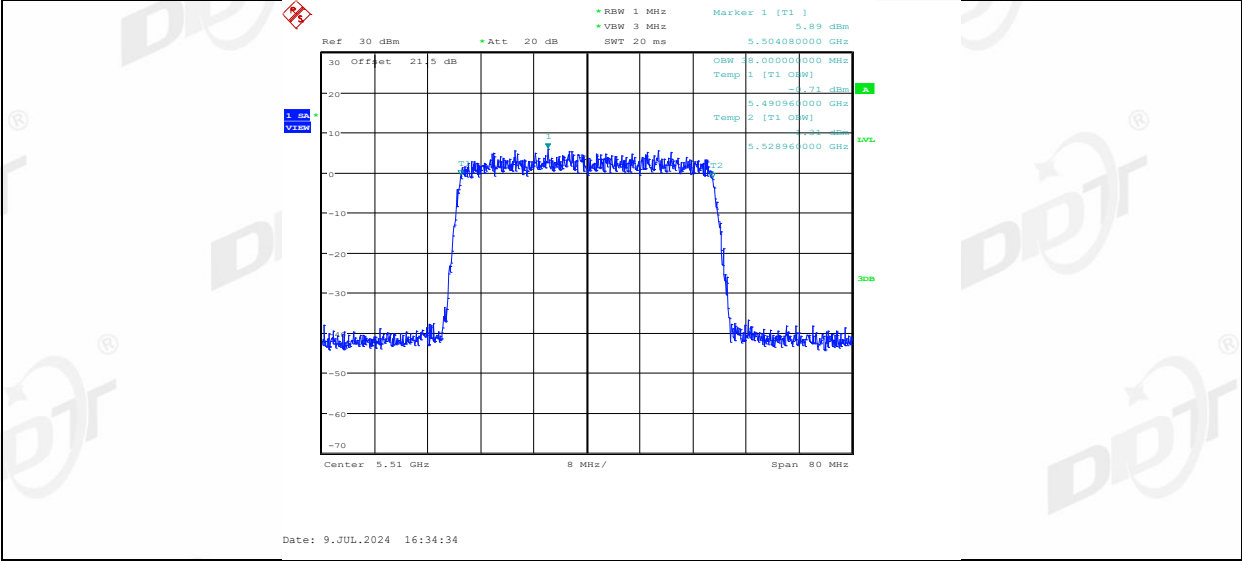


11AX40MIMO_Ant2_5510

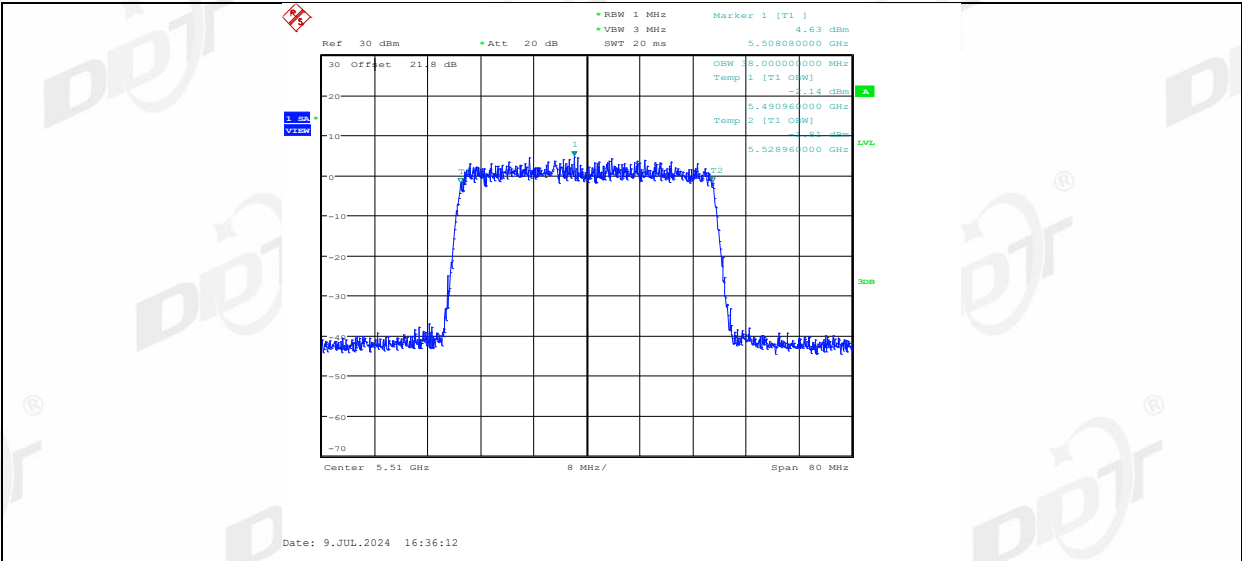


11AX40MIMO_Ant1_5550

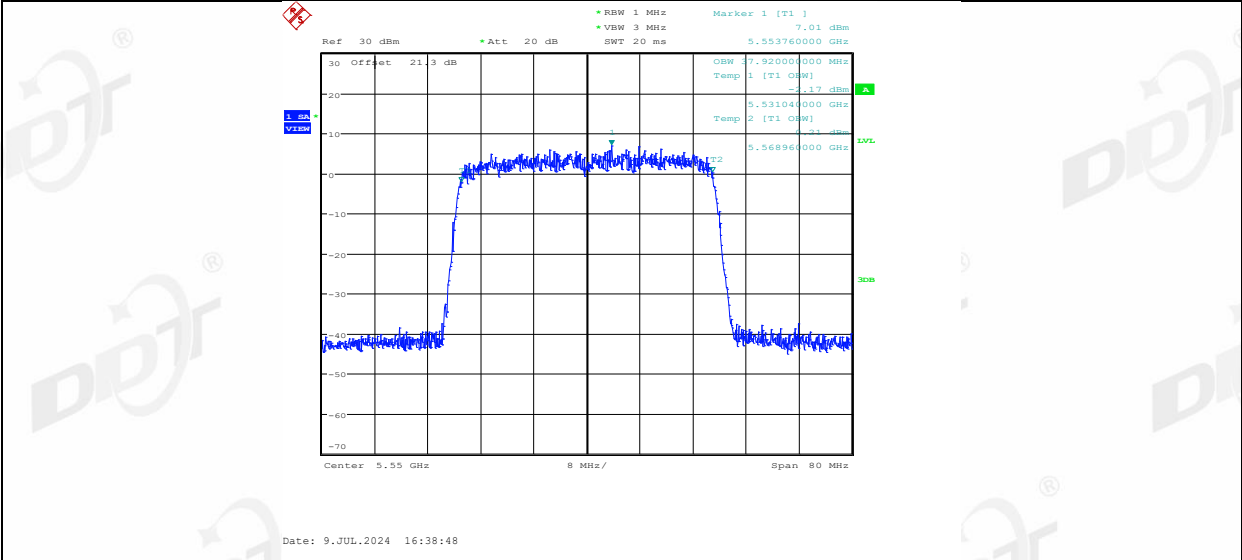


11AX40MIMO_Ant2_5550

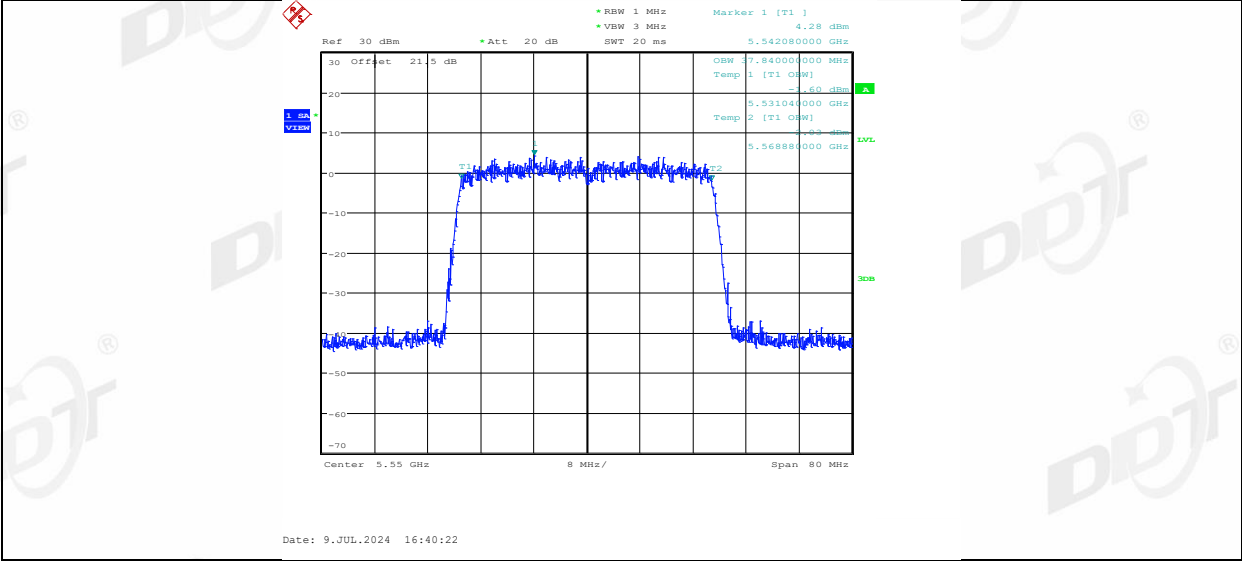


11AX40MIMO_Ant1_5670

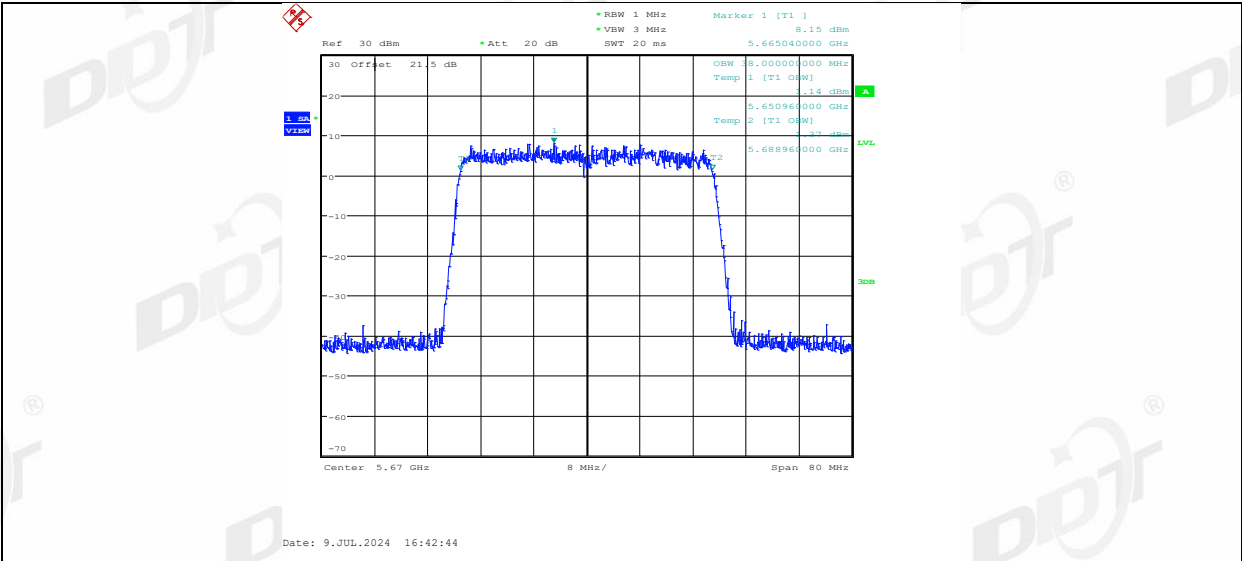




11AX40MIMO_Ant2_5670

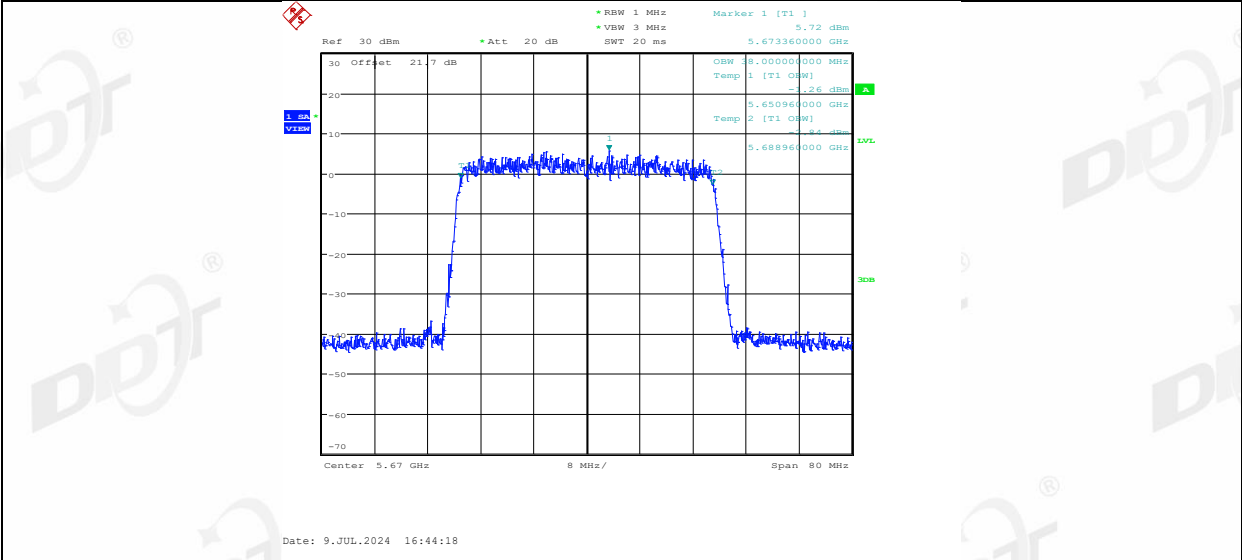


11AX40MIMO_Ant1_5710

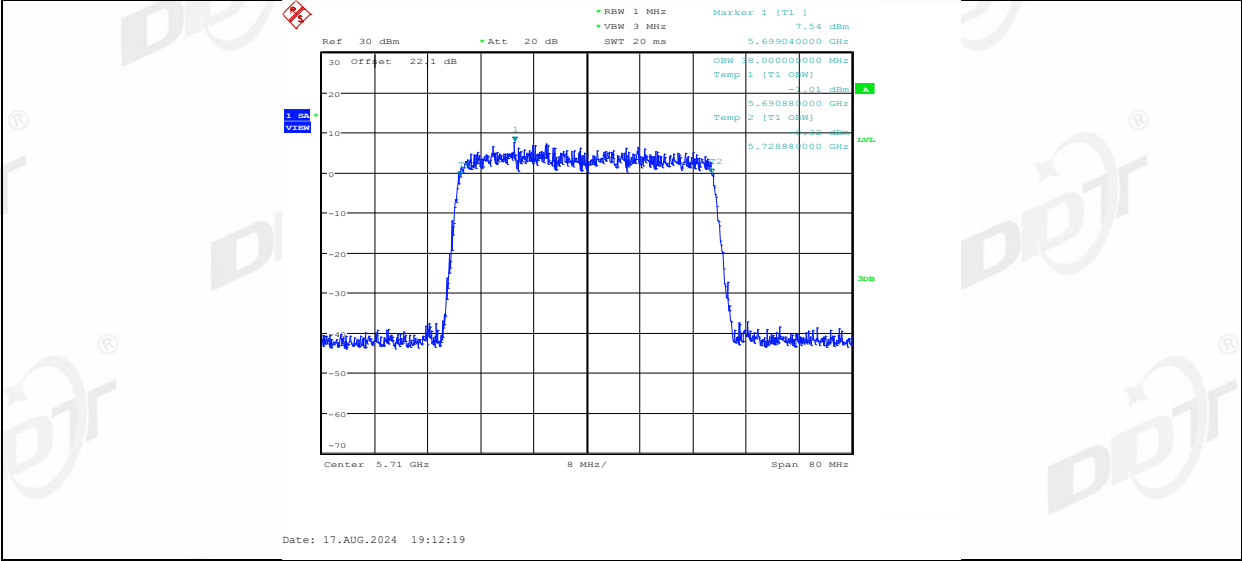


11AX40MIMO_Ant2_5710

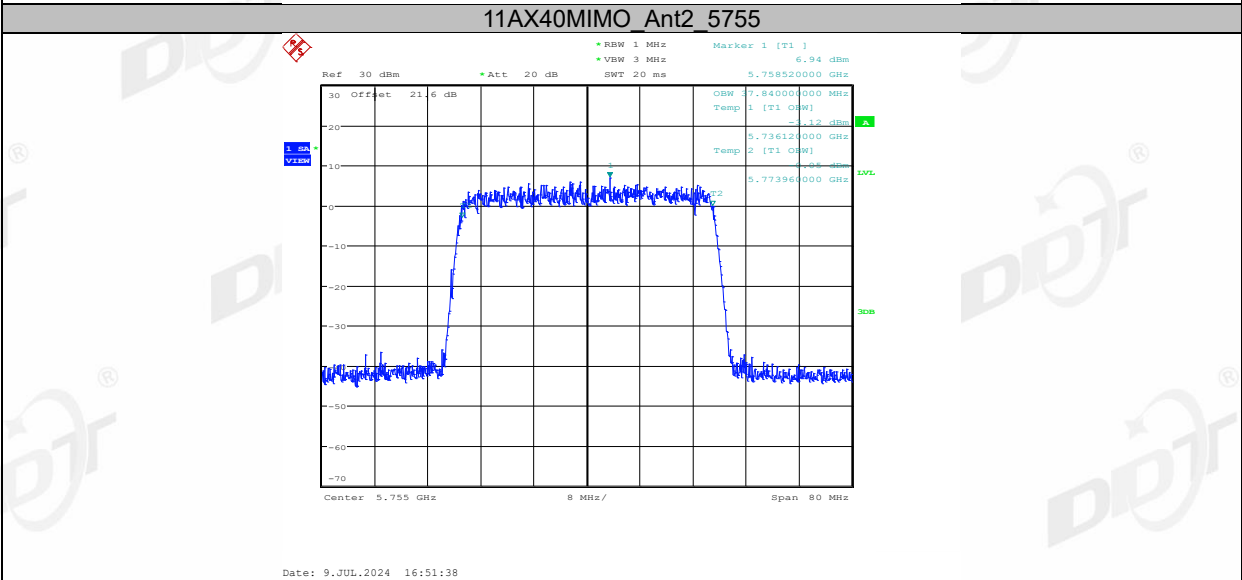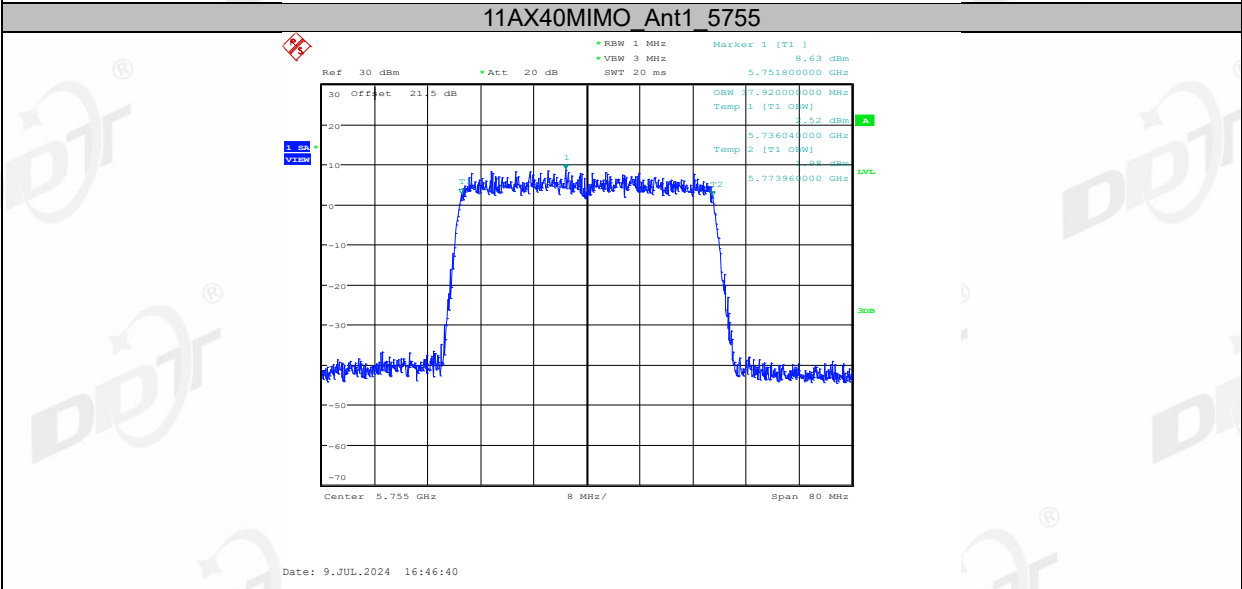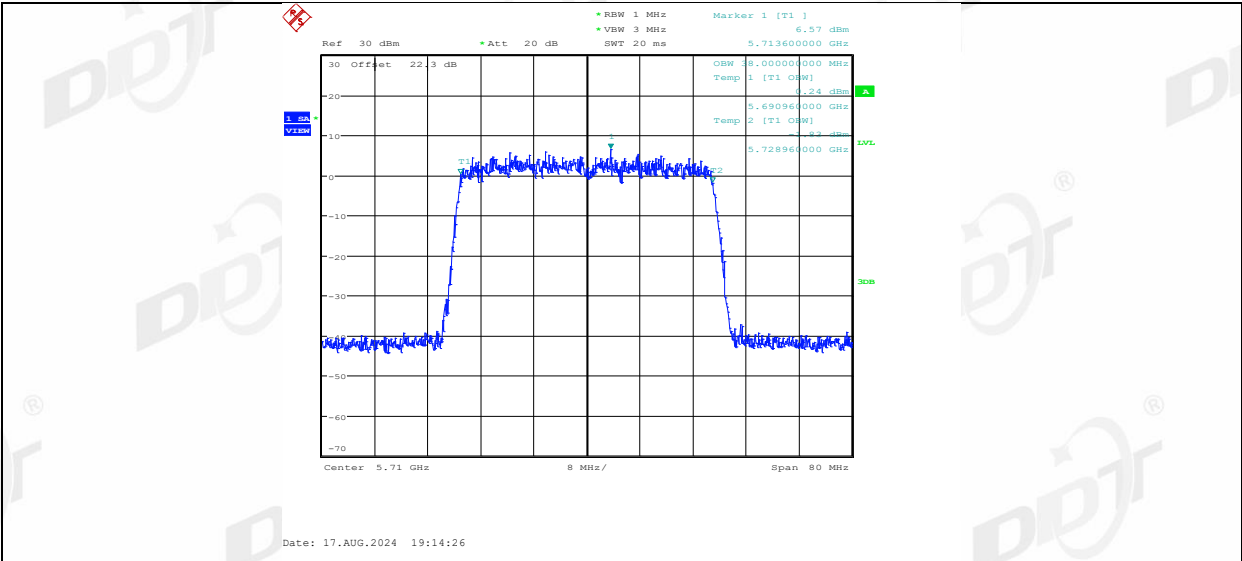


11AX40MIMO_Ant1_5795

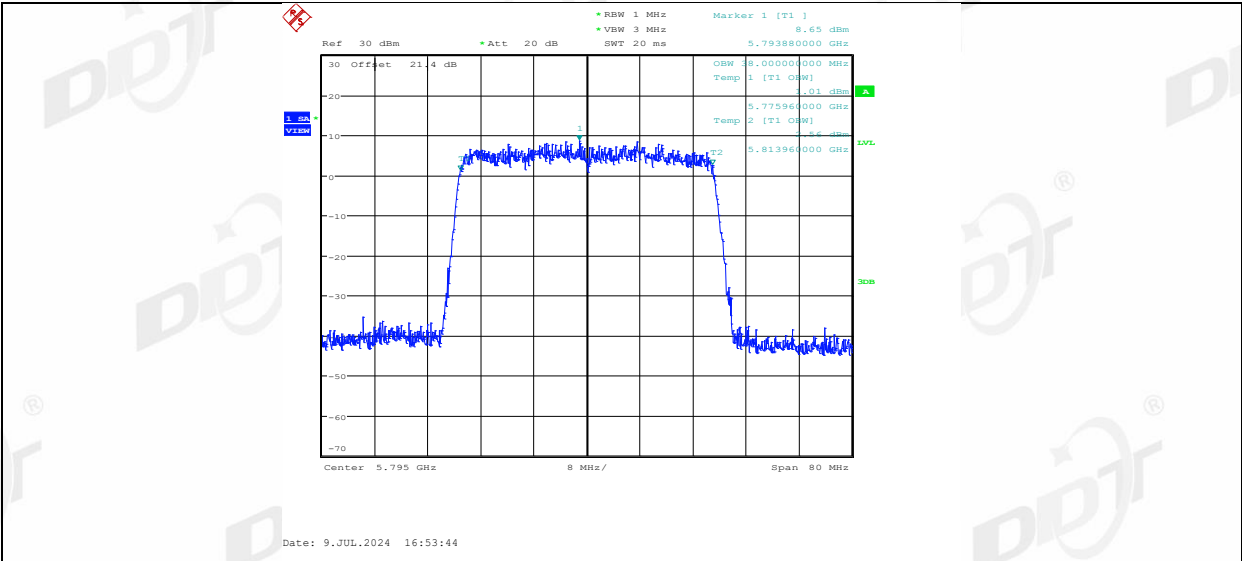


11AX40MIMO_Ant2_5795

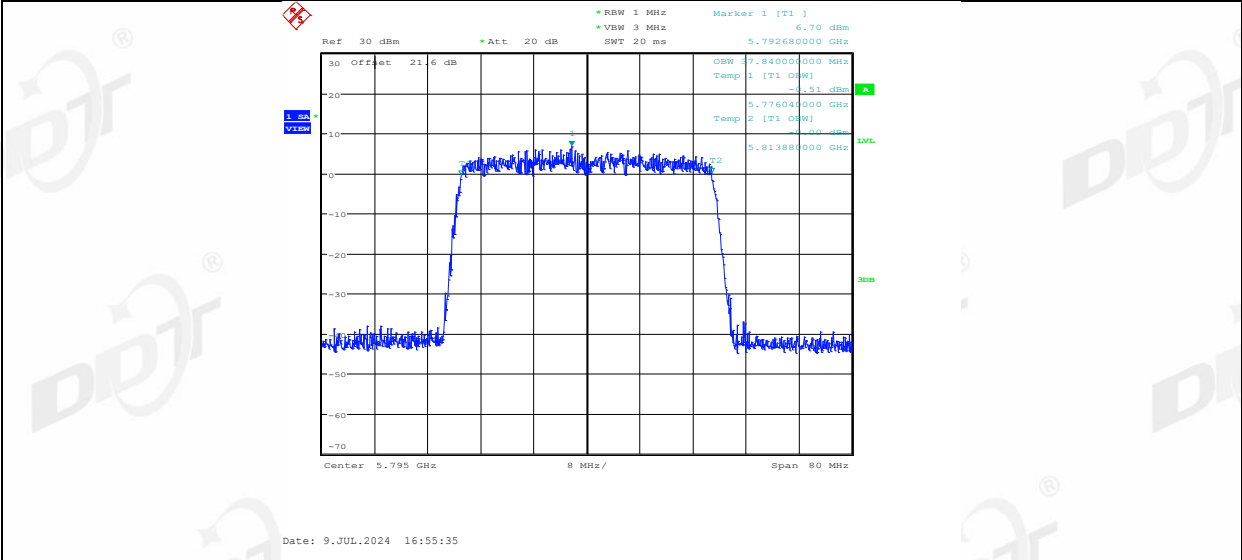


11AX80MIMO_Ant1_5210

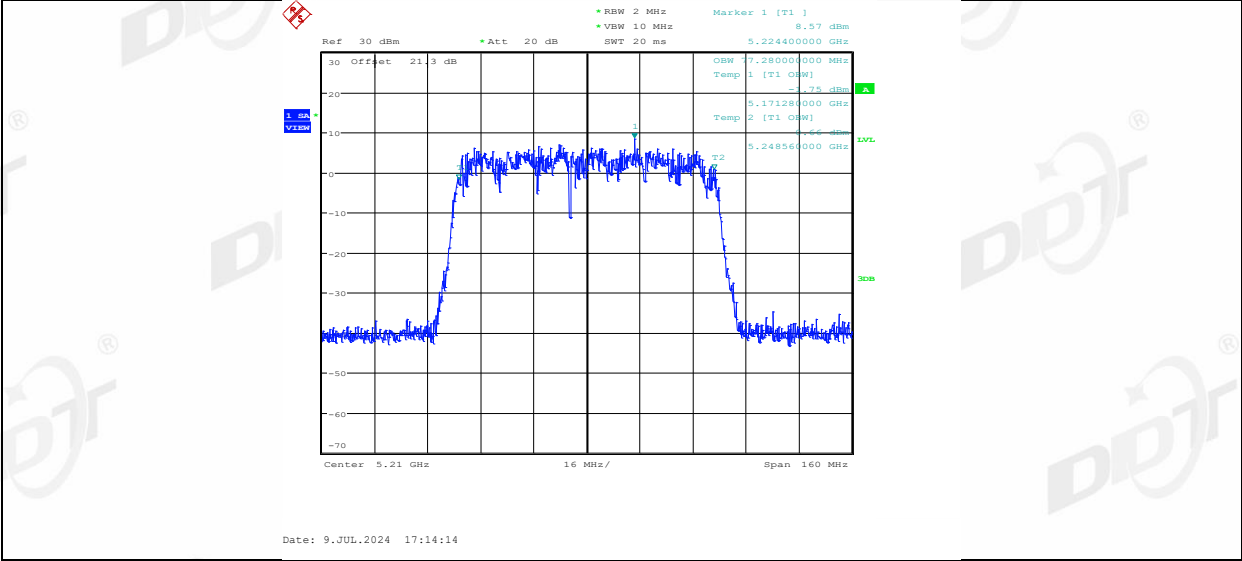


11AX80MIMO_Ant2_5210

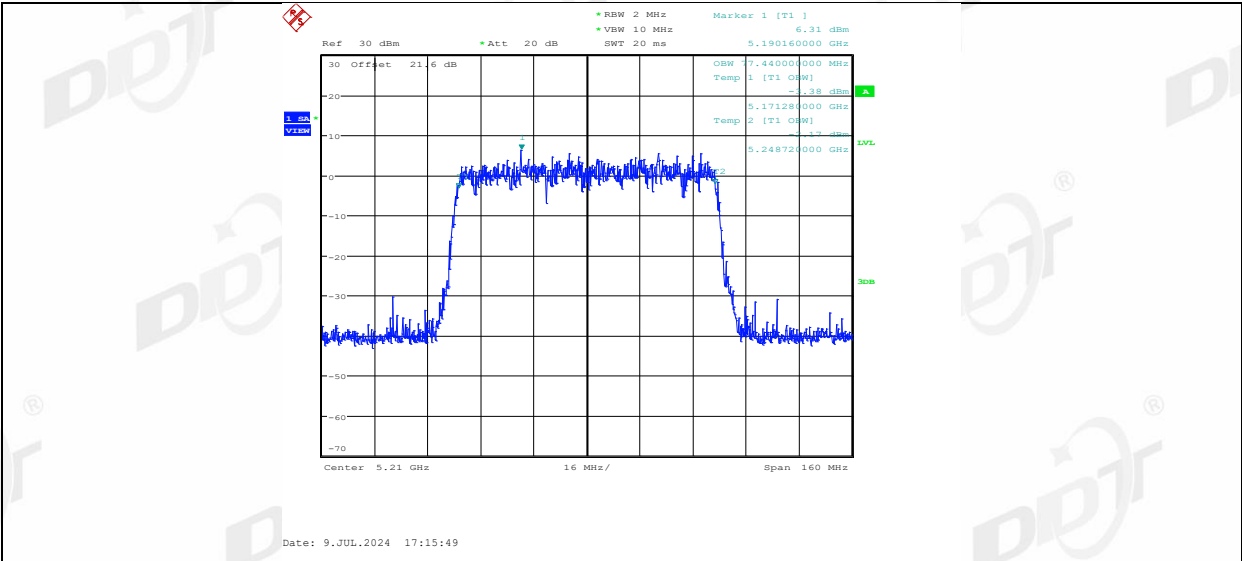


11AX80MIMO_Ant1_5290

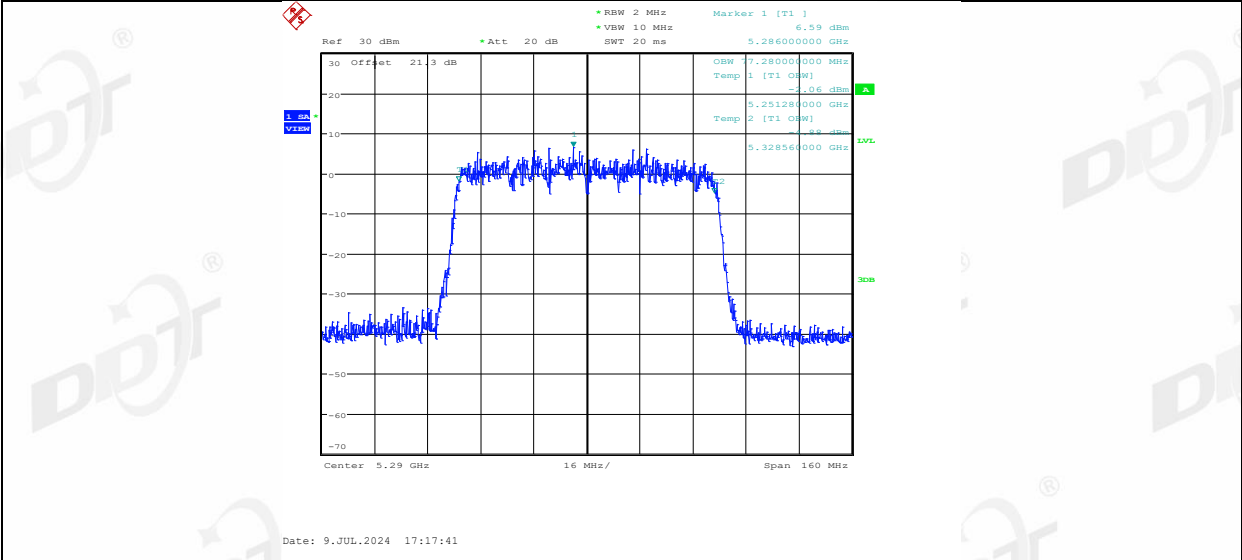


11AX80MIMO_Ant2_5290

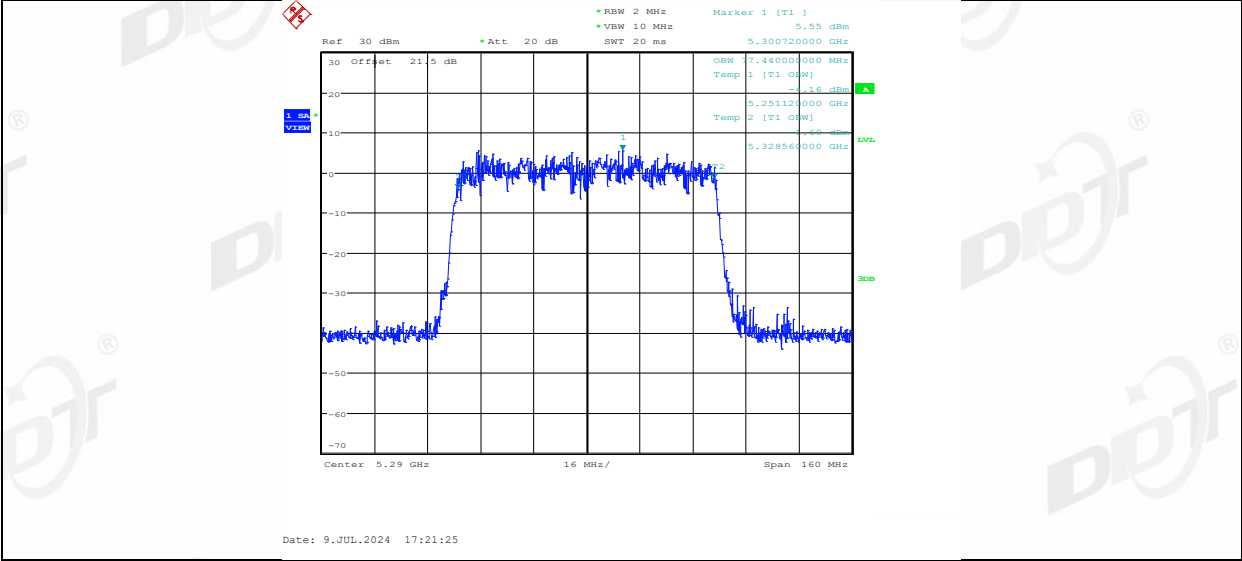


11AX80MIMO_Ant1_5530

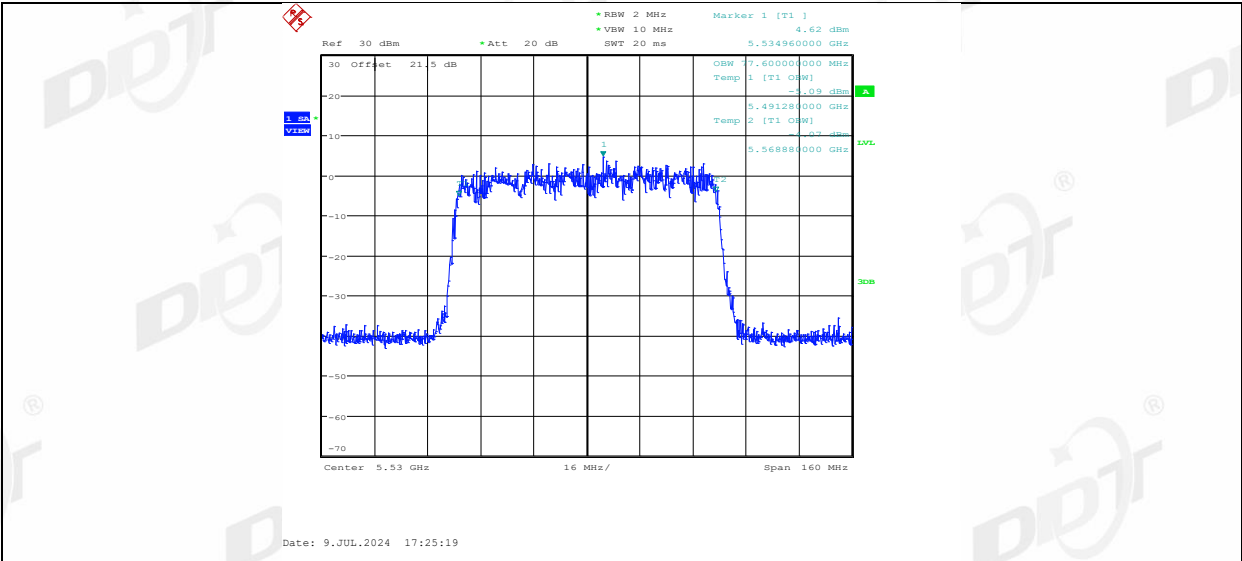


11AX80MIMO_Ant2_5530

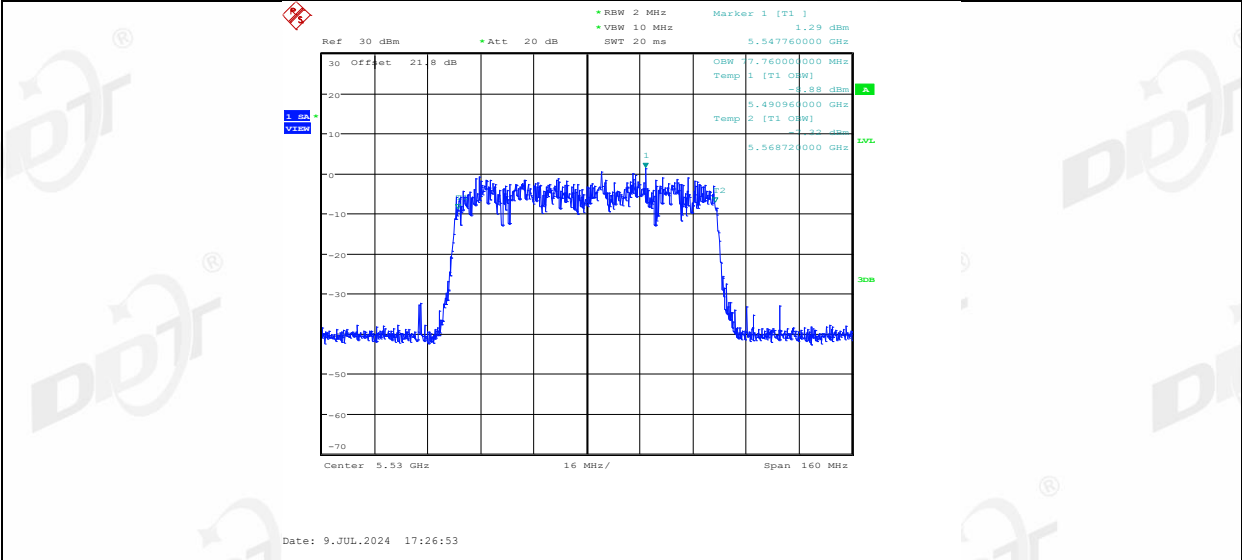


11AX80MIMO_Ant1_5610

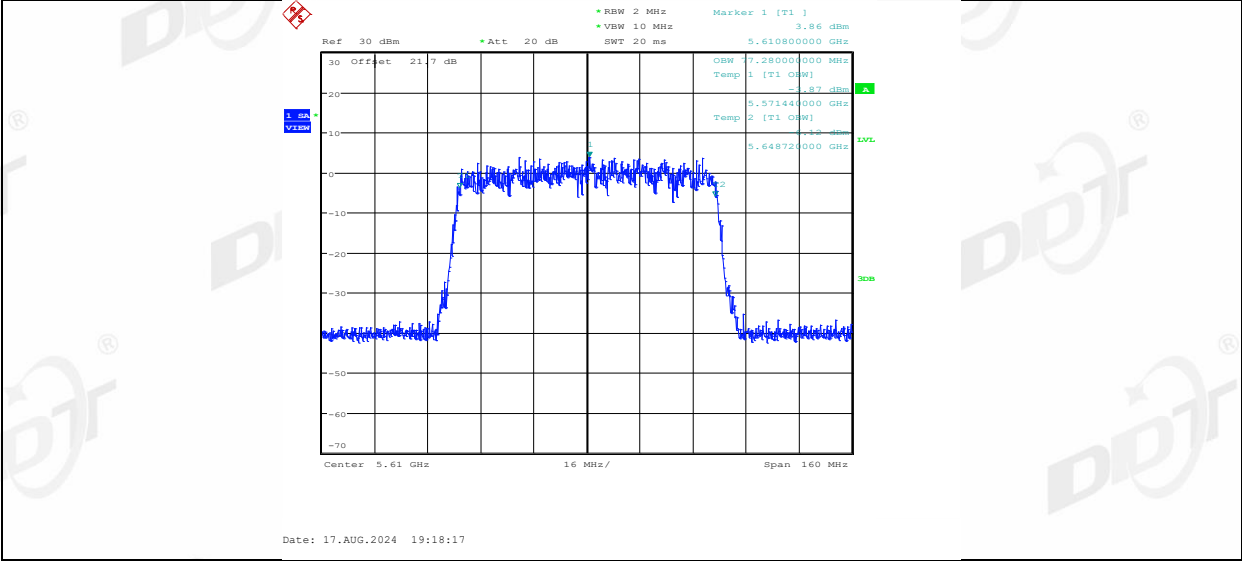


11AX80MIMO_Ant2_5610

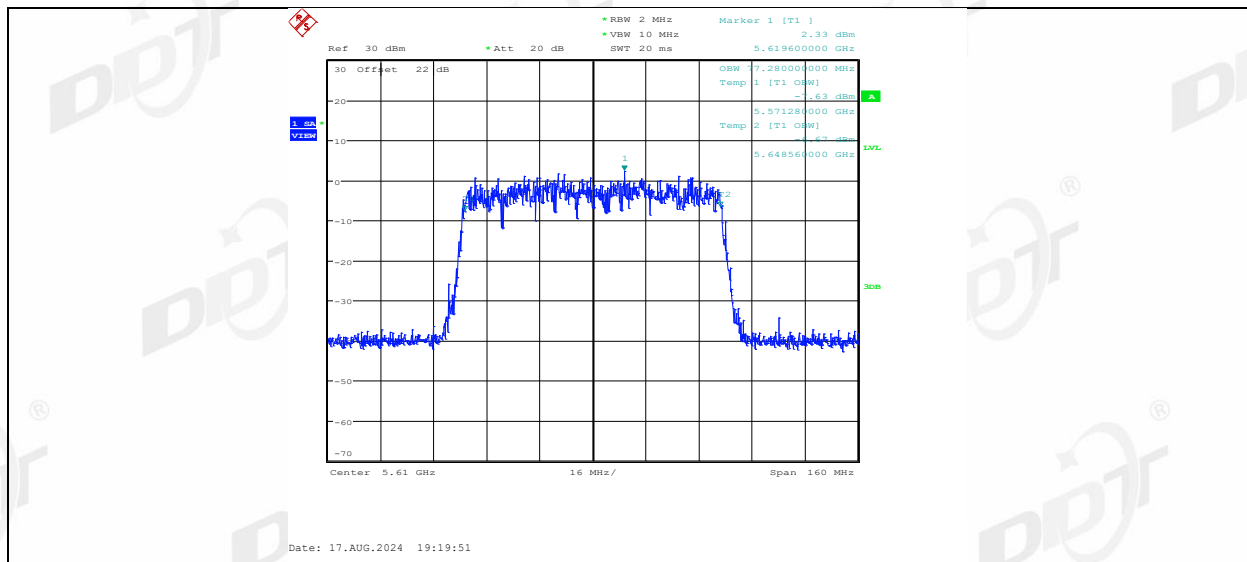


11AX80MIMO_Ant1_5690

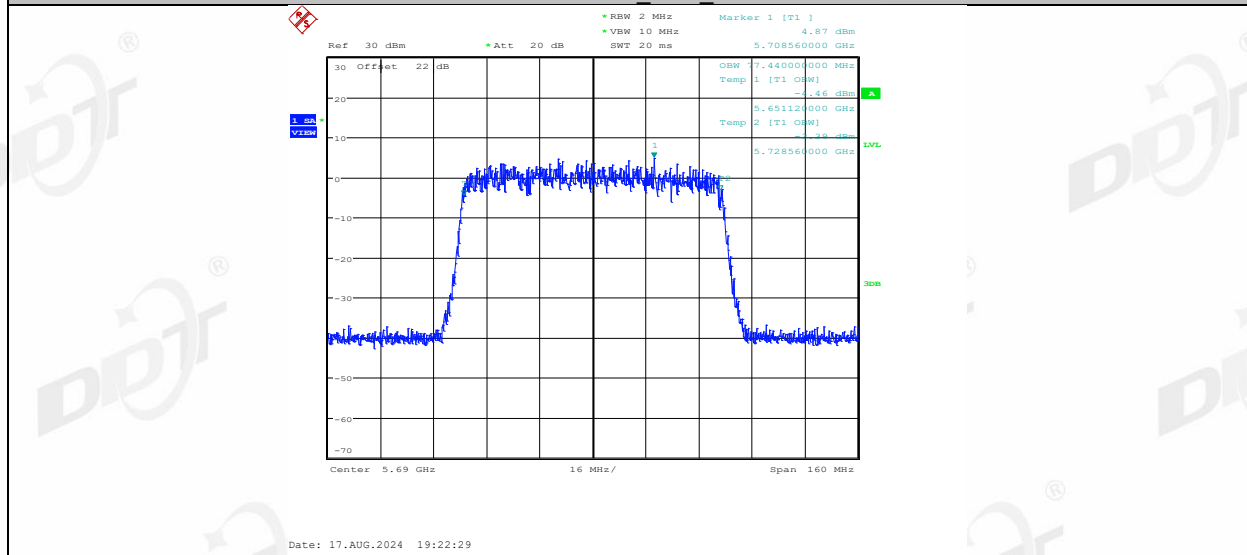

11AX80MIMO_Ant2_5690

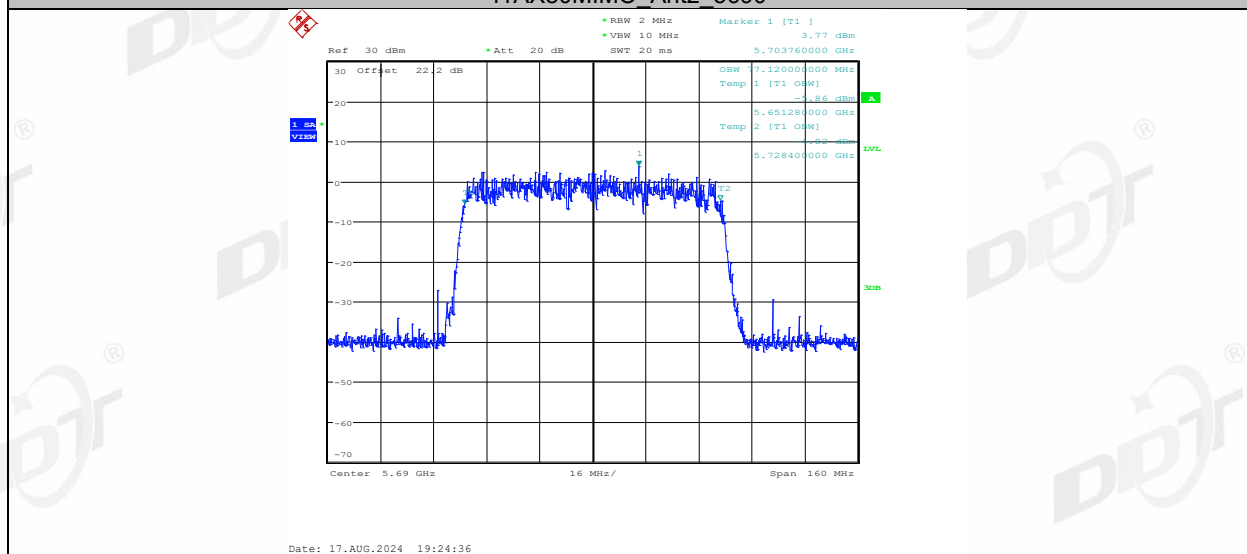

11AX80MIMO_Ant1_5775

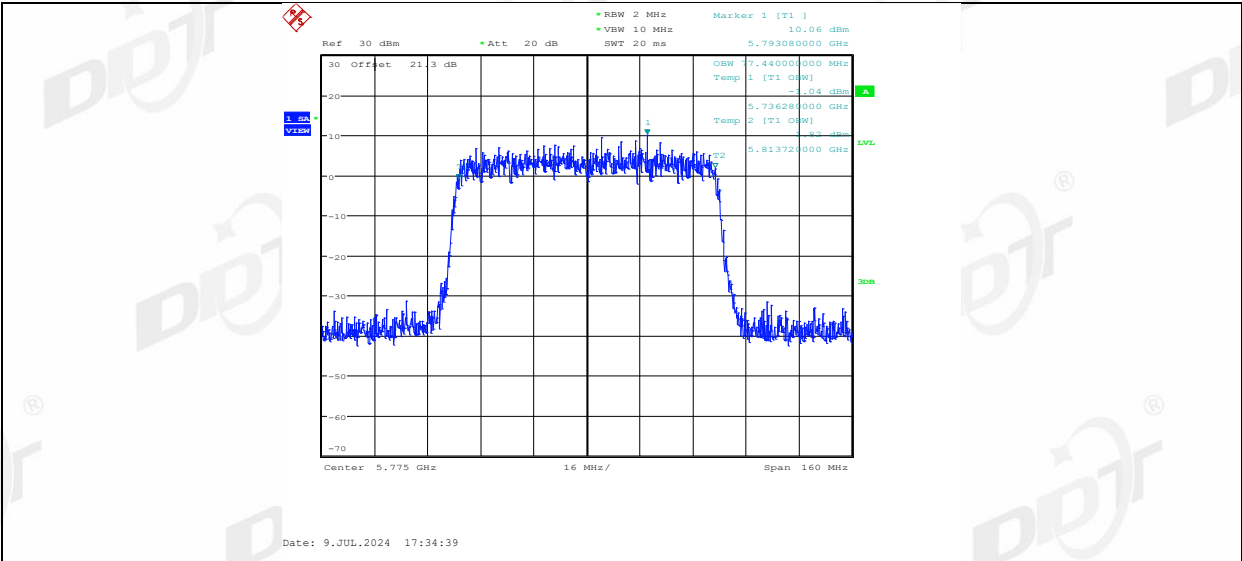

11AX80MIMO_Ant2_5775

