


TEST REPORT

Product Name: 4G Industrial Router
FCC ID: 2A7GC-AR350
Trademark: 
Model Number: 织云物联
AR350, AR300, AR500, AR520, AR550, AR580, S200, S300,
S500, AR590, AR600, AR650, AR680, sy20, sy30, sy50, D10, D20,
D30, D40
Prepared For: Shenzhen Zhiyun Technology Co., Ltd.
Address: Room 407, No. 1 Zerun, Zhonghao 2nd Road, Bantian Street,
Longgang District, Shenzhen, China.
Manufacturer: Shenzhen Zhiyun Technology Co., Ltd.
Address: Room 407, No. 1 Zerun, Zhonghao 2nd Road, Bantian Street,
Longgang District, Shenzhen, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community,
Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: May. 05, 2022
Sample tested Date: May. 05, 2022 to May. 28, 2022
Issue Date: May. 28, 2022
Report No.: CTB220527021RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY.....	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP.....	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment.....	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION.....	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit.....	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION.....	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit.....	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	50
8.1 Block Diagram Of Test Setup	50
8.2 Limit.....	50
8.3 Test procedure	50
8.4 Test Result.....	51
9. CONDUCTED OUTPUT POWER.....	67
9.1 Block Diagram Of Test Setup	67
9.2 Limit.....	67

9.3	Test procedure	67
9.4	Test Result	68
10.	6DB OCCUPIED BANDWIDTH.....	69
10.1	Block Diagram Of Test Setup	69
10.2	Limit.....	69
10.3	Test procedure	69
10.4	Test Result	70
11.	POWER SPECTRAL DENSITY	83
11.1	Block Diagram Of Test Setup	83
11.2	Limit.....	83
11.3	Test procedure	83
11.4	Test Result	84
12.	ANTENNA REQUIREMENT	93
13.	EUT PHOTOGRAPHS.....	94
14.	EUT TEST SETUP PHOTOGRAPHS	95

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220527021RF	May. 28, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	AR350, AR300, AR500, AR520, AR550, AR580, S200, S300, S500, AR590, AR600, AR650, AR680, sy20, sy30, sy50, D10, D20, D30, D40
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: AR350
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 9.521dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : 1dBi
Ratings:	AC 120V/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Dutycycle>98%

Test mode	rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

EUT has two Internal Antenna with Max Antenna Gain 1.0dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,
Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,
Array Gain=10log(NANT/NSS)dB=10log(2/1)=0dB,

So the directional gain for PSD is 1.0dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.0dBi

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

	Automatic test software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/


Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

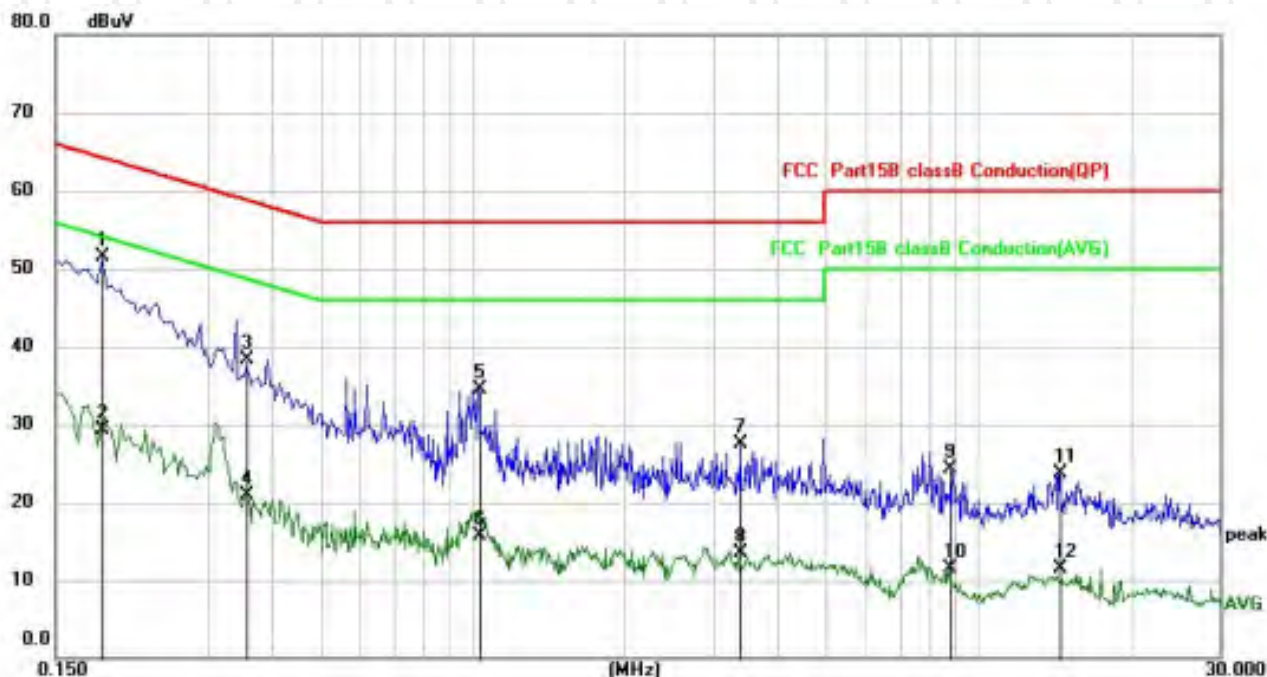


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1	*	0.1860	40.71	10.70	51.41	64.21	-12.80	QP
2		0.1860	18.56	10.70	29.26	54.21	-24.95	AVG
3		0.3580	27.71	10.60	38.31	58.77	-20.46	QP
4		0.3580	10.27	10.60	20.87	48.77	-27.90	AVG
5		1.0300	23.88	10.62	34.50	56.00	-21.50	QP
6		1.0300	5.00	10.62	15.62	46.00	-30.38	AVG
7		3.3900	16.80	10.64	27.44	56.00	-28.56	QP
8		3.3900	2.82	10.64	13.46	46.00	-32.54	AVG
9		8.7299	13.58	10.78	24.36	60.00	-35.64	QP
10		8.7299	0.79	10.78	11.57	50.00	-38.43	AVG
11		14.5060	12.90	10.90	23.80	60.00	-36.20	QP
12		14.5060	0.62	10.90	11.52	50.00	-38.48	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

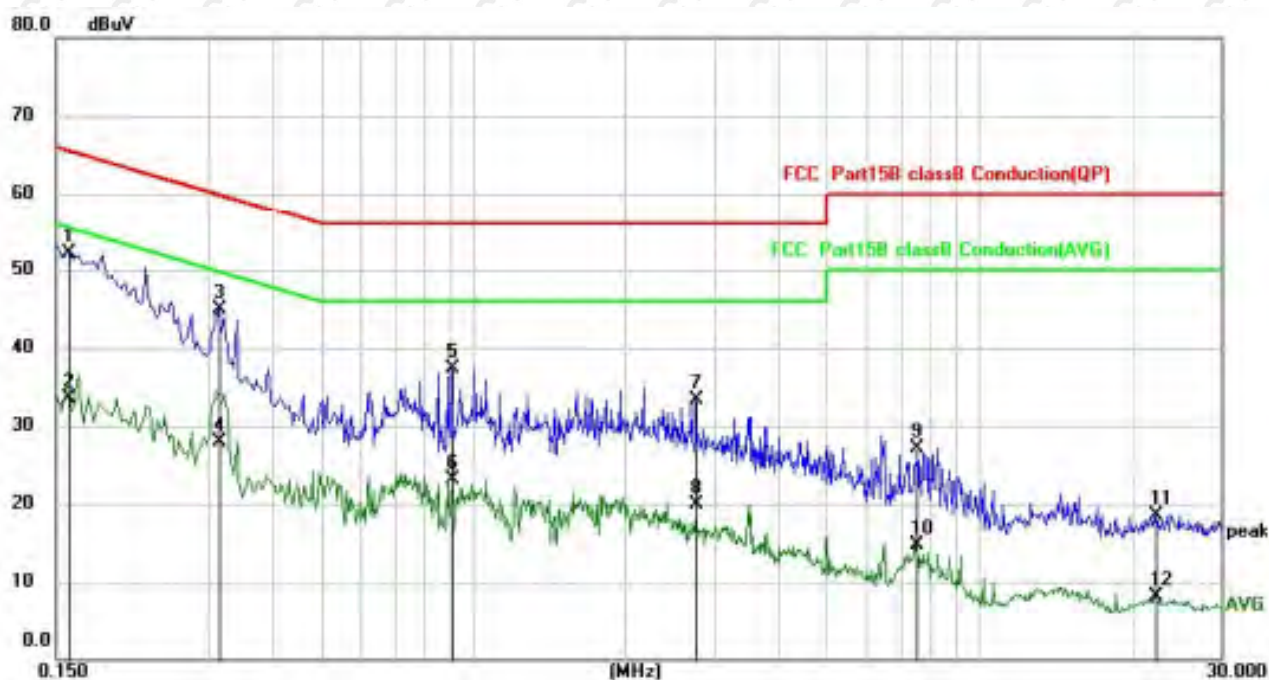

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1590	41.30	10.71	52.01	65.52	-13.51	QP
2		0.1590	22.89	10.71	33.60	55.52	-21.92	AVG
3		0.3140	34.29	10.63	44.92	59.86	-14.94	QP
4		0.3140	17.19	10.63	27.82	49.86	-22.04	AVG
5		0.9060	26.72	10.60	37.32	56.00	-18.68	QP
6		0.9060	12.49	10.60	23.09	46.00	-22.91	AVG
7		2.7540	22.59	10.63	33.22	56.00	-22.78	QP
8		2.7540	9.32	10.63	19.95	46.00	-26.05	AVG
9		7.5180	16.40	10.74	27.14	60.00	-32.86	QP
10		7.5180	3.91	10.74	14.65	50.00	-35.35	AVG
11		22.2780	7.48	11.00	18.48	60.00	-41.52	QP
12		22.2780	-2.94	11.00	8.06	50.00	-41.94	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

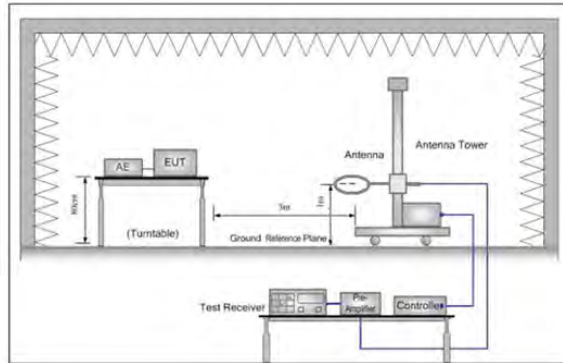


Figure 1. Below 30MHz

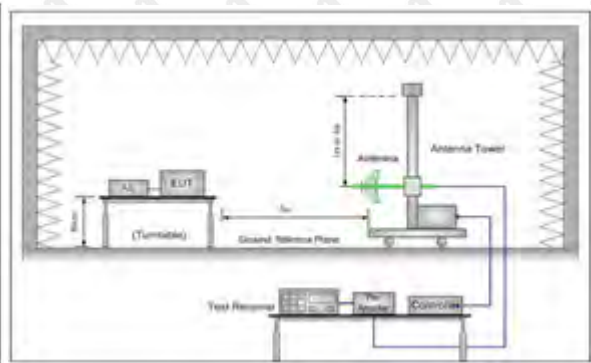


Figure 2. 30MHz to 1GHz

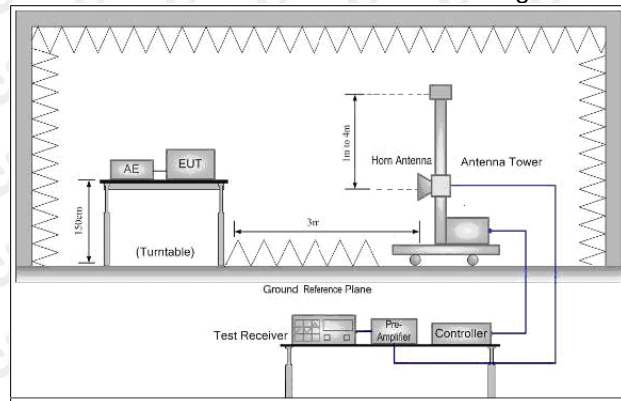


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	38.6837	41.02	-5.59	35.43	40.00	-4.57	QP
2	*	64.8864	42.93	-7.03	35.90	40.00	-4.10	QP
3		94.5939	45.49	-9.23	36.26	43.50	-7.24	QP
4	!	142.8242	44.12	-5.46	38.66	43.50	-4.84	QP
5		273.2339	38.91	-5.48	33.43	46.00	-12.57	QP
6		580.7025	30.96	2.21	33.17	46.00	-12.83	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	43.7351	41.13	-5.41	35.72	40.00	-4.28	QP
2	!	66.0341	41.83	-7.23	34.60	40.00	-5.40	QP
3		94.5939	45.99	-9.23	36.76	43.50	-6.74	QP
4		142.8242	42.00	-5.46	36.54	43.50	-6.96	QP
5		483.0616	36.73	0.30	37.03	46.00	-8.97	QP
6		580.7025	33.93	2.21	36.14	46.00	-9.86	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: TM1 (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: TM1 (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: TM1 (the worst)

Above 1 GHz Test Results:

ANT 1

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.68	-3.64	61.04	74	-12.96	peak
4824	49.97	-3.64	46.33	54	-7.67	AVG
7236	58.68	-0.95	57.73	74	-16.27	peak
7236	44.79	-0.95	43.84	54	-10.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.55	-3.64	61.91	74	-12.09	peak
4824	49.22	-3.64	45.58	54	-8.42	AVG
7236	58.08	-0.95	57.13	74	-16.87	peak
7236	44.53	-0.95	43.58	54	-10.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.50	-3.51	60.99	74	-13.01	peak
4874	48.89	-3.51	45.38	54	-8.62	AVG
7311	59.62	-0.82	58.80	74	-15.20	peak
7311	45.86	-0.82	45.04	54	-8.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.65	-3.51	61.14	74	-12.86	peak
4874	48.32	-3.51	44.81	54	-9.19	AVG
7311	57.82	-0.82	57.00	74	-17.00	peak
7311	44.23	-0.82	43.41	54	-10.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.87	-3.43	59.44	74	-14.56	peak
4924	46.87	-3.43	43.44	54	-10.56	AVG
7386	57.74	-0.75	56.99	74	-17.01	peak
7386	44.46	-0.75	43.71	54	-10.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.38	-3.43	61.95	74	-12.05	peak
4924	47.33	-3.43	43.90	54	-10.10	AVG
7386	57.54	-0.75	56.79	74	-17.21	peak
7386	42.01	-0.75	41.26	54	-12.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.42	-3.64	59.78	74	-14.22	peak
4824	48.32	-3.64	44.68	54	-9.32	AVG
7236	58.76	-0.95	57.81	74	-16.19	peak
7236	45.83	-0.95	44.88	54	-9.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.45	-3.64	60.81	74	-13.19	peak
4824	48.90	-3.64	45.26	54	-8.74	AVG
7236	57.67	-0.95	56.72	74	-17.28	peak
7236	45.25	-0.95	44.30	54	-9.70	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.54	-3.51	60.03	74	-13.97	peak
4874	49.01	-3.51	45.50	54	-8.50	AVG
7311	57.66	-0.82	56.84	74	-17.16	peak
7311	43.10	-0.82	42.28	54	-11.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.69	-3.51	60.18	74	-13.82	peak
4874	48.04	-3.51	44.53	54	-9.47	AVG
7311	56.78	-0.82	55.96	74	-18.04	peak
7311	42.47	-0.82	41.65	54	-12.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.56	-3.43	60.13	74	-13.87	peak
4924	50.11	-3.43	46.68	54	-7.32	AVG
7386	57.80	-0.75	57.05	74	-16.95	peak
7386	43.52	-0.75	42.77	54	-11.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.84	-3.43	58.41	74	-15.59	peak
4924	47.60	-3.43	44.17	54	-9.83	AVG
7386	56.83	-0.75	56.08	74	-17.92	peak
7386	41.97	-0.75	41.22	54	-12.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT 2
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.62	-3.64	60.98	74	-13.02	peak
4824	50.57	-3.64	46.93	54	-7.07	AVG
7236	56.92	-0.95	55.97	74	-18.03	peak
7236	44.55	-0.95	43.60	54	-10.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.49	-3.64	60.85	74	-13.15	peak
4824	48.83	-3.64	45.19	54	-8.81	AVG
7236	58.57	-0.95	57.62	74	-16.38	peak
7236	45.85	-0.95	44.90	54	-9.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.23	-3.51	62.72	74	-11.28	peak
4874	50.53	-3.51	47.02	54	-6.98	AVG
7311	57.86	-0.82	57.04	74	-16.96	peak
7311	44.93	-0.82	44.11	54	-9.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.14	-3.51	61.63	74	-12.37	peak
4874	47.56	-3.51	44.05	54	-9.95	AVG
7311	57.54	-0.82	56.72	74	-17.28	peak
7311	44.88	-0.82	44.06	54	-9.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.35	-3.43	60.92	74	-13.08	peak
4924	48.56	-3.43	45.13	54	-8.87	AVG
7386	59.36	-0.75	58.61	74	-15.39	peak
7386	43.55	-0.75	42.80	54	-11.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.83	-3.43	59.40	74	-14.60	peak
4924	46.88	-3.43	43.45	54	-10.55	AVG
7386	57.51	-0.75	56.76	74	-17.24	peak
7386	41.33	-0.75	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.19	-3.64	62.55	74	-11.45	peak
4824	48.27	-3.64	44.63	54	-9.37	AVG
7236	58.51	-0.95	57.56	74	-16.44	peak
7236	45.99	-0.95	45.04	54	-8.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.11	-3.64	60.47	74	-13.53	peak
4824	47.74	-3.64	44.10	54	-9.90	AVG
7236	59.03	-0.95	58.08	74	-15.92	peak
7236	44.59	-0.95	43.64	54	-10.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.30	-3.51	60.79	74	-13.21	peak
4874	49.22	-3.51	45.71	54	-8.29	AVG
7311	60.00	-0.82	59.18	74	-14.82	peak
7311	45.52	-0.82	44.70	54	-9.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.10	-3.51	59.59	74	-14.41	peak
4874	47.79	-3.51	44.28	54	-9.72	AVG
7311	57.00	-0.82	56.18	74	-17.82	peak
7311	42.90	-0.82	42.08	54	-11.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.61	-3.43	61.18	74	-12.82	peak
4924	49.51	-3.43	46.08	54	-7.92	AVG
7386	55.97	-0.75	55.22	74	-18.78	peak
7386	42.68	-0.75	41.93	54	-12.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.31	-3.43	58.88	74	-15.12	peak
4924	48.38	-3.43	44.95	54	-9.05	AVG
7386	56.40	-0.75	55.65	74	-18.35	peak
7386	41.43	-0.75	40.68	54	-13.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 +ANT2
LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.91	-3.64	59.27	74	-14.73	peak
4824	48.89	-3.64	45.25	54	-8.75	AVG
7236	57.45	-0.95	56.50	74	-17.50	peak
7236	42.63	-0.95	41.68	54	-12.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.79	-3.64	59.15	74	-14.85	peak
4824	49.25	-3.64	45.61	54	-8.39	AVG
7236	61.10	-0.95	60.15	74	-13.85	peak
7236	43.75	-0.95	42.80	54	-11.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.72	-3.51	61.21	74.00	-12.79	peak
4874.00	48.67	-3.51	45.16	54.00	-8.84	AVG
7311.00	56.12	-0.82	55.30	74.00	-18.70	peak
7311.00	45.43	-0.82	44.61	54.00	-9.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	61.92	-3.51	58.41	74.00	-15.59	peak
4874.00	46.87	-3.51	43.36	54.00	-10.64	AVG
7311.00	58.63	-0.82	57.81	74.00	-16.19	peak
7311.00	42.55	-0.82	41.73	54.00	-12.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.88	-3.43	60.45	74	-13.55	peak
4924	48.42	-3.43	44.99	54	-9.01	AVG
7386	56.31	-0.75	55.56	74	-18.44	peak
7386	41.46	-0.75	40.71	54	-13.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.36	-3.43	59.93	74	-14.07	peak
4924	45.82	-3.43	42.39	54	-11.61	AVG
7386	58.17	-0.75	57.42	74	-16.58	peak
7386	42.60	-0.75	41.85	54	-12.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.38	-3.63	59.75	74	-14.25	peak
4844	48.74	-3.63	45.11	54	-8.89	AVG
7266	60.27	-0.94	59.33	74	-14.67	peak
7266	46.36	-0.94	45.42	54	-8.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.77	-3.63	61.14	74	-12.86	peak
4844	48.24	-3.63	44.61	54	-9.39	AVG
7266	58.06	-0.94	57.12	74	-16.88	peak
7266	44.51	-0.94	43.57	54	-10.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.26	-3.51	60.75	74	-13.25	peak
4874	48.02	-3.51	44.51	54	-9.49	AVG
7311	59.27	-0.82	58.45	74	-15.55	peak
7311	45.60	-0.82	44.78	54	-9.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.70	-0.82	55.88	74	-18.12	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.73	-3.43	59.30	74	-14.70	peak
4904	49.21	-3.43	45.78	54	-8.22	AVG
7356	57.26	-0.75	56.51	74	-17.49	peak
7356	41.03	-0.75	40.28	54	-13.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.20	-3.43	59.77	74	-14.23	peak
4904	47.62	-3.43	44.19	54	-9.81	AVG
7356	56.52	-0.75	55.77	74	-18.23	peak
7356	42.44	-0.75	41.69	54	-12.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.40	-5.81	51.59	74	-22.41	peak
2390	/	-5.81	/	54	/	AVG
2399	64.66	-5.84	58.82	74	-15.18	peak
2399	47.98	-5.84	42.14	54	-11.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.58	-5.81	51.77	74	-22.23	peak
2390	/	-5.81	/	54	/	AVG
2399	63.05	-5.84	57.21	74	-16.79	peak
2399	45.88	-5.84	40.04	54	-13.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT 1
802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.99	-5.65	50.34	74	-23.66	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.85	-5.65	50.20	74	-23.80	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.16	-5.81	53.35	74	-20.65	peak
2390	/	-5.81	/	54	/	AVG
2399	63.26	-5.84	57.42	74	-16.58	peak
2399	47.10	-5.84	41.26	54	-12.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	61.42	-5.84	55.58	74	-18.42	peak
2399	46.99	-5.84	41.15	54	-12.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.34	-5.65	50.69	74	-23.31	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.26	-5.65	51.61	74	-22.39	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

ANT 2

802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.10	-5.65	51.45	74	-22.55	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.48	-5.81	53.67	74	-20.33	peak
2390	/	-5.81	/	54	/	AVG
2399	63.09	-5.84	57.25	74	-16.75	peak
2399	46.13	-5.84	40.29	54	-13.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.15	-5.81	51.34	74	-22.66	peak
2390	/	-5.81	/	54	/	AVG
2399	62.34	-5.84	56.50	74	-17.50	peak
2399	46.49	-5.84	40.65	54	-13.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.63	-5.65	51.98	74	-22.02	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.89	-5.65	51.24	74	-22.76	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

ANT 1+ANT 2

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.24	-5.81	51.43	74	-22.57	peak
2390	/	-5.81	/	54	/	AVG
2399	63.38	-5.84	57.54	74	-16.46	peak
2399	48.10	-5.84	42.26	54	-11.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.43	-5.81	51.62	74	-22.38	peak
2390	/	-5.81	/	54	/	AVG
2399	60.41	-5.84	54.57	74	-19.43	peak
2399	47.20	-5.84	41.36	54	-12.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.67	-5.65	50.02	74	-23.98	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.01	-5.65	50.36	74	-23.64	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.52	-5.81	52.71	74	-21.29	peak
2390	/	-5.81	/	54	/	AVG
2399	62.16	-5.84	56.32	74	-17.68	peak
2399	46.91	-5.84	41.07	54	-12.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.63	-5.81	51.82	74	-22.18	peak
2390	/	-5.81	/	54	/	AVG
2399	61.99	-5.84	56.15	74	-17.85	peak
2399	45.63	-5.84	39.79	54	-14.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.53	-5.65	50.88	74	-23.12	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.26	-5.65	50.61	74	-23.39	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

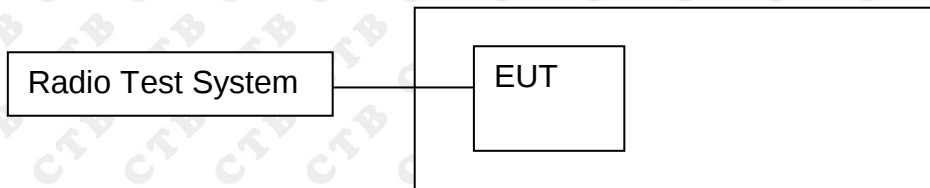

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Blow 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:

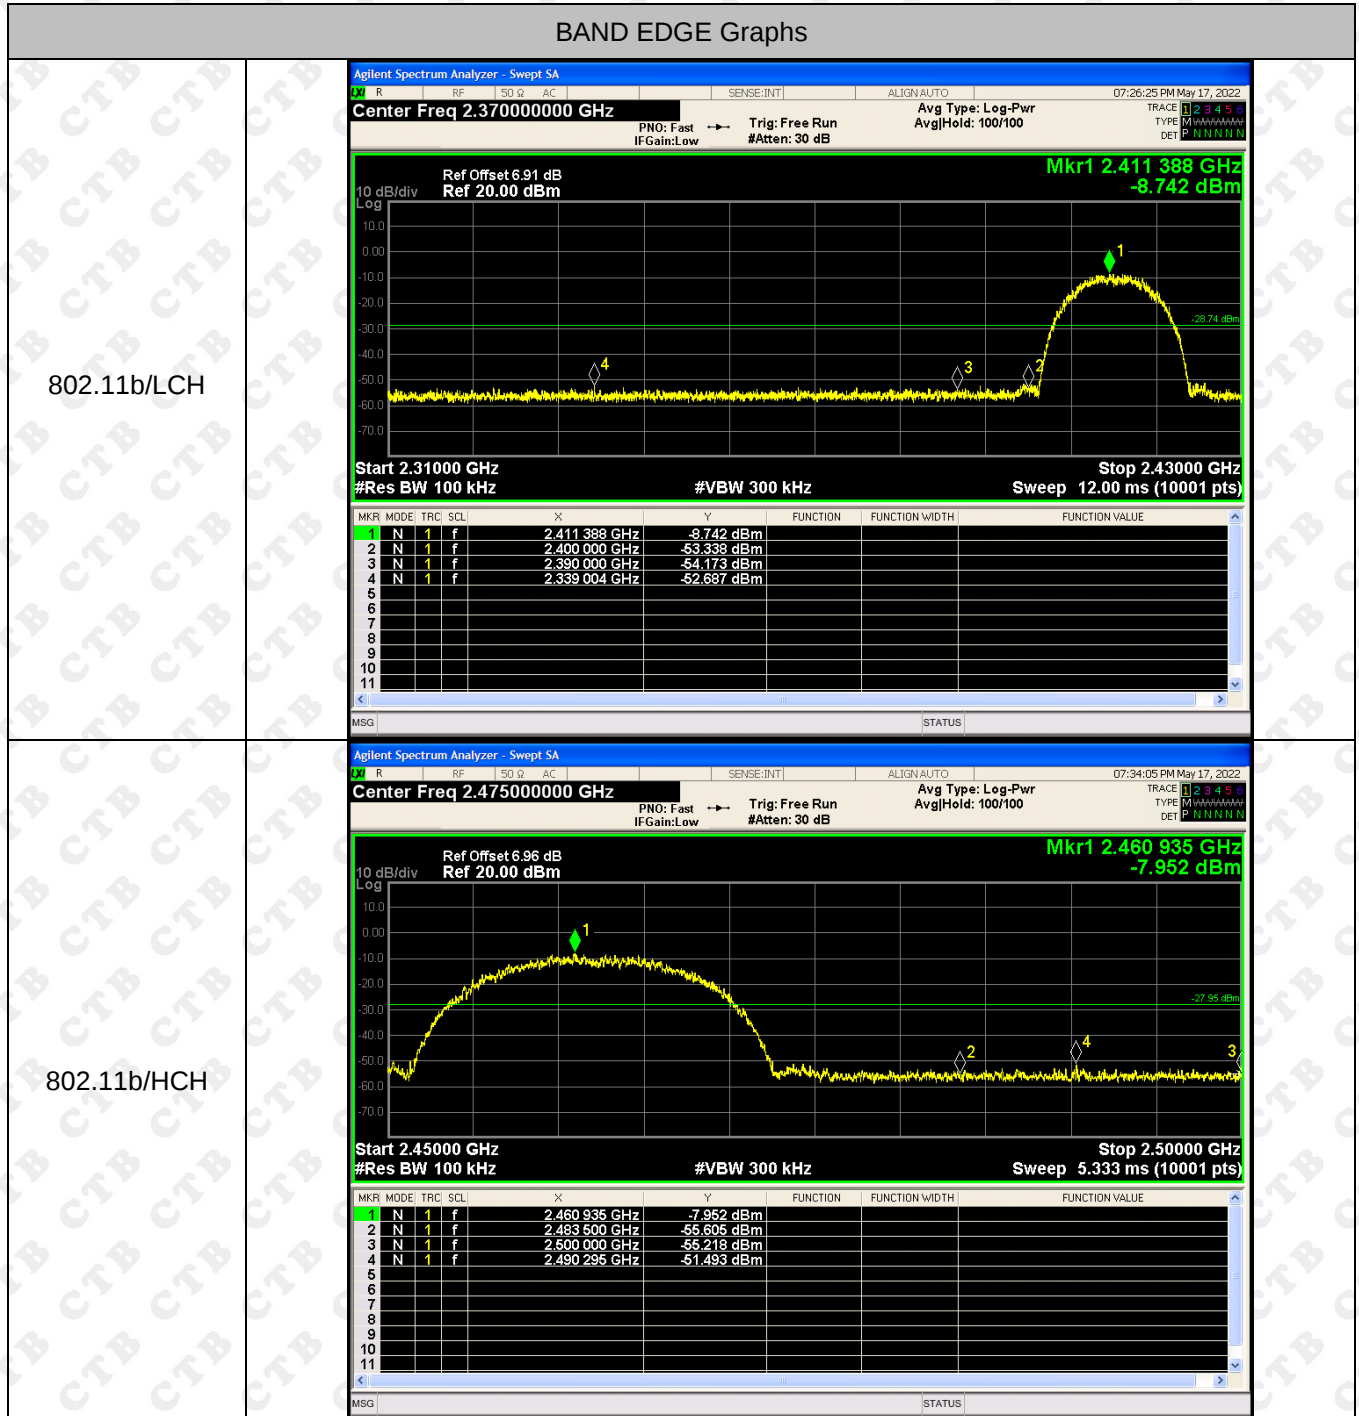




BAND EDGE Graphs



802.11g/LCH

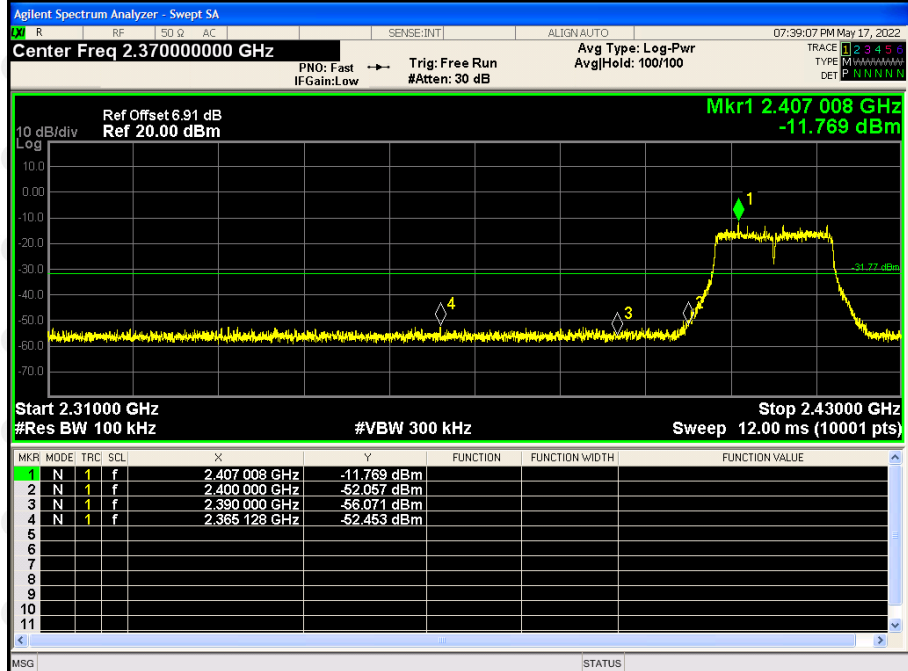




802.11g/HCH

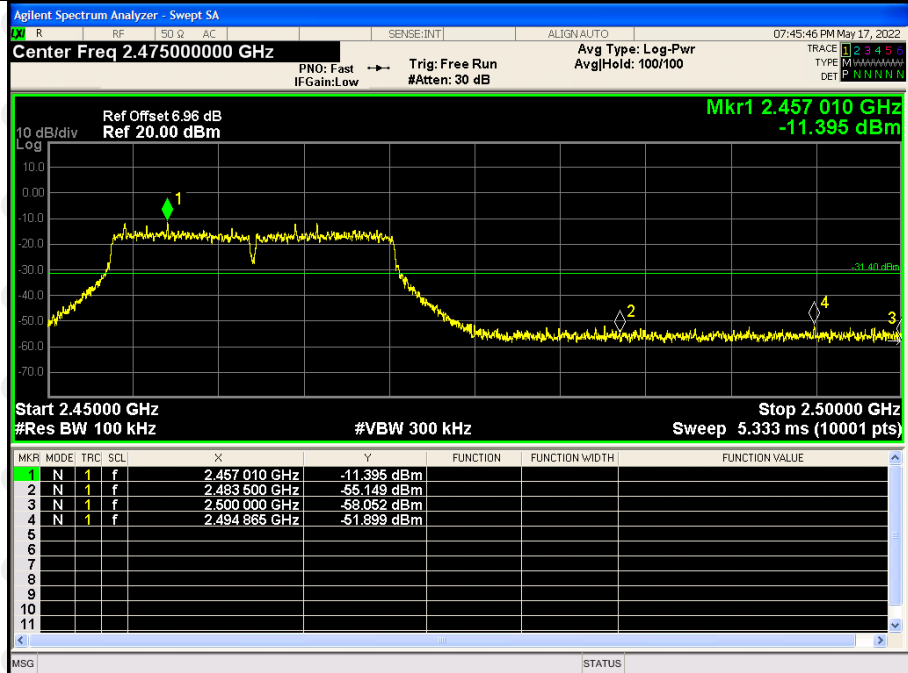


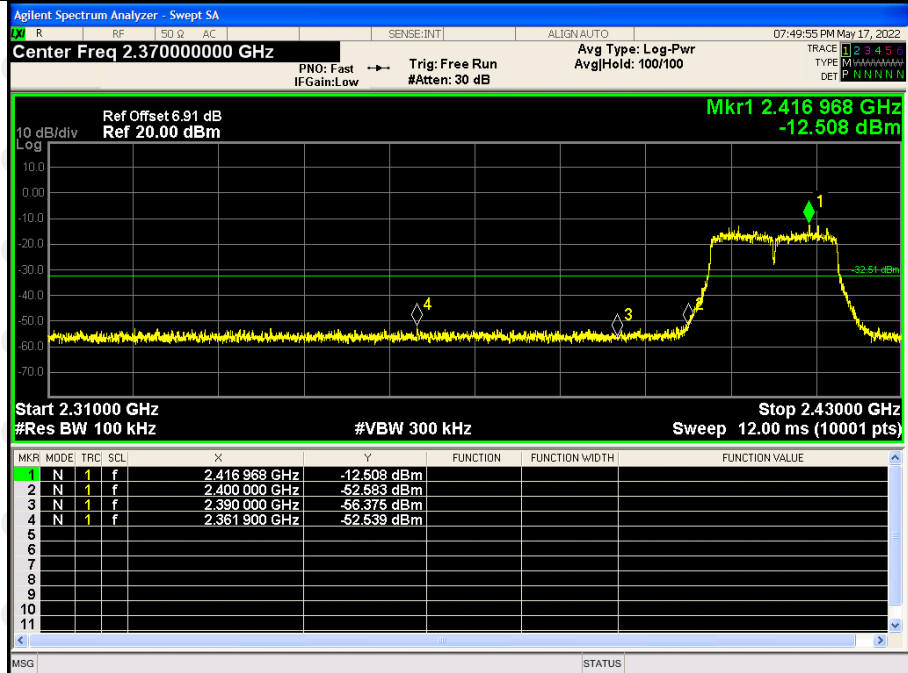
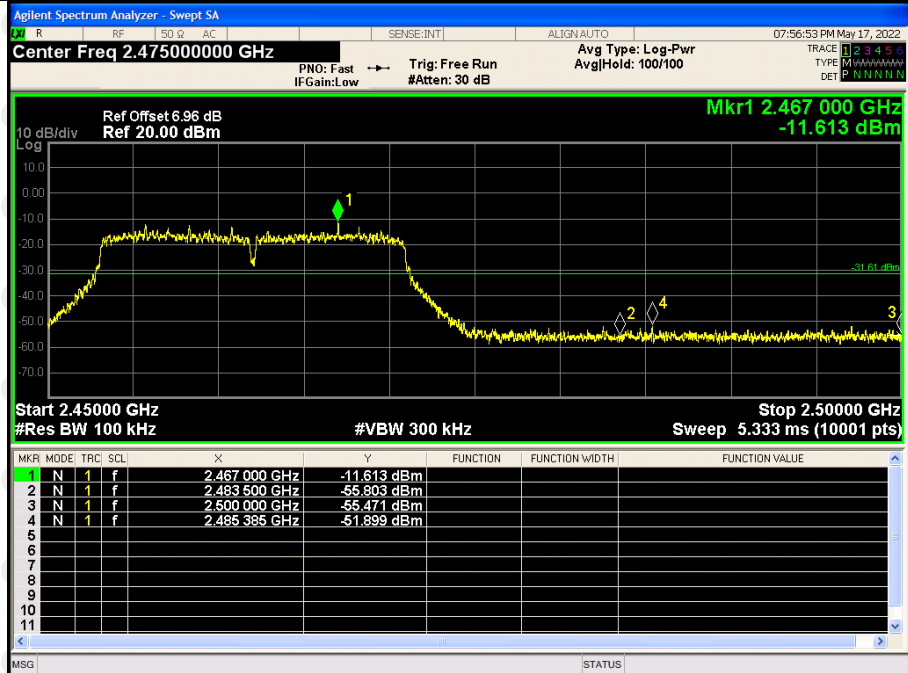
802.11n(HT20)/
LCH

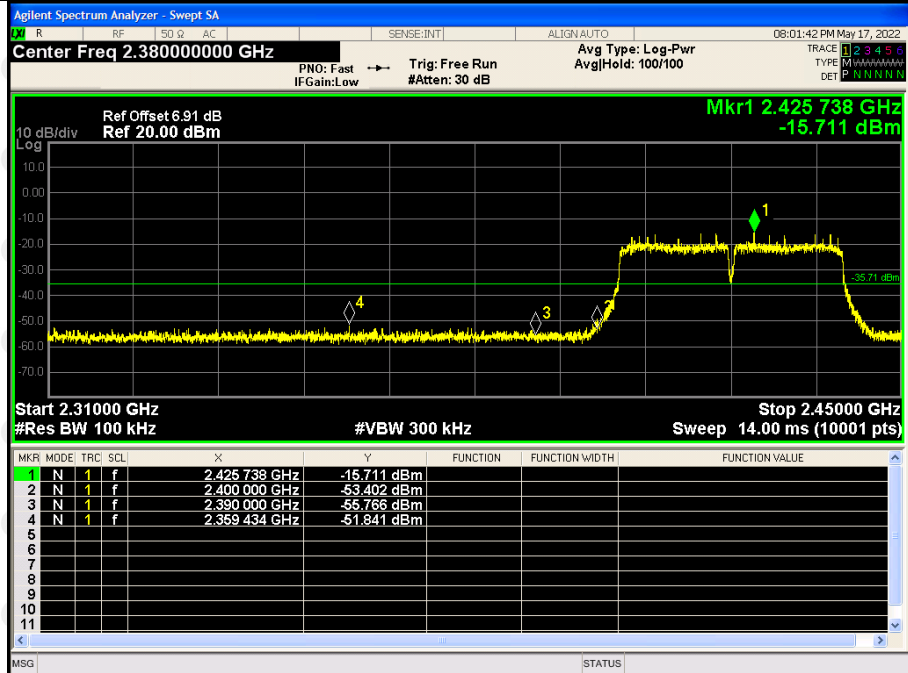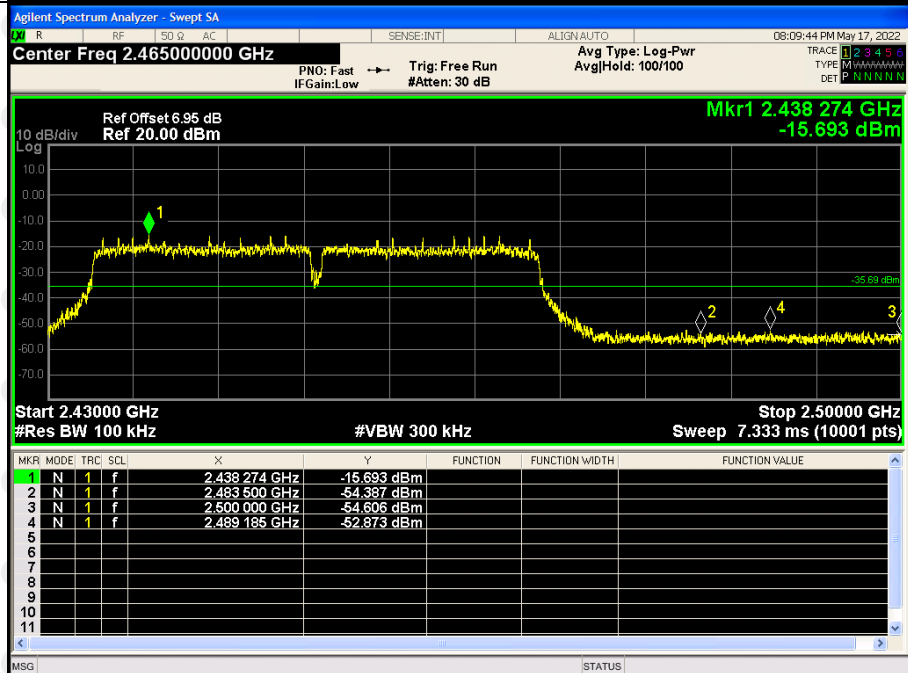802.11n(HT20)/
HCH


802.11n(HT40)/
LCH

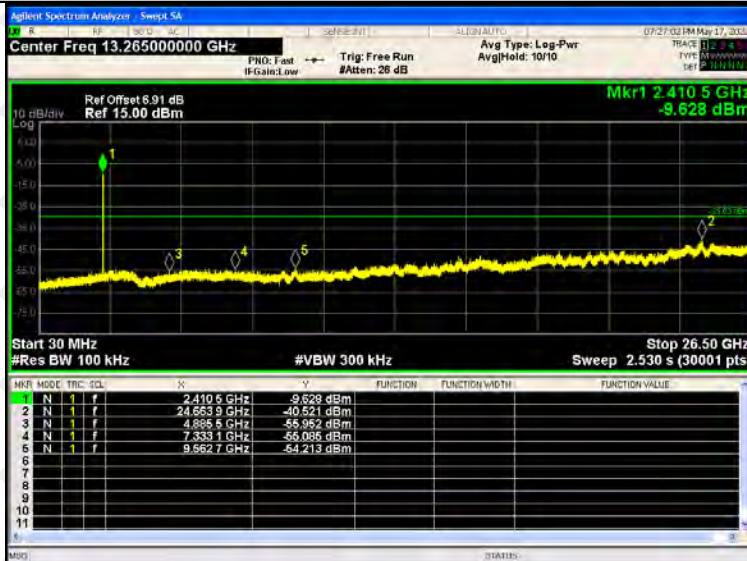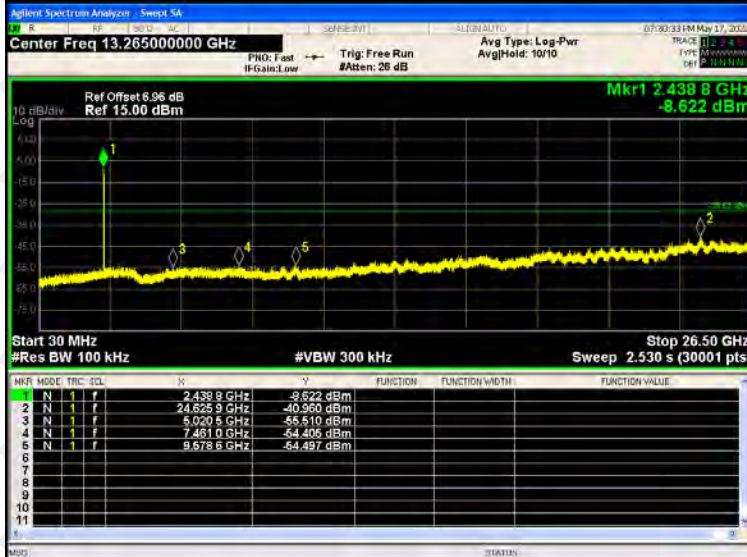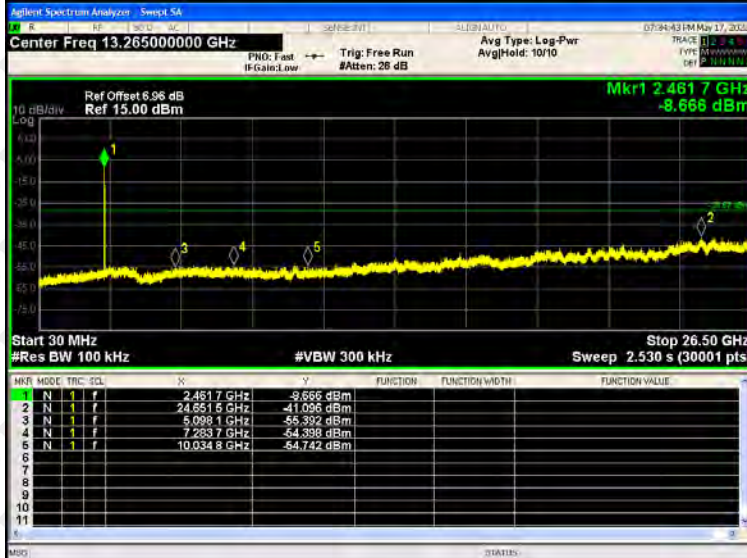802.11n(HT40)/
HCH


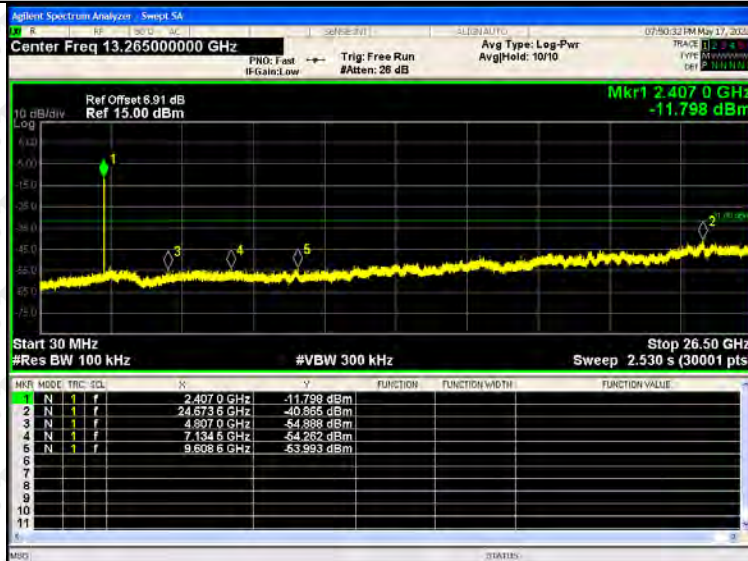
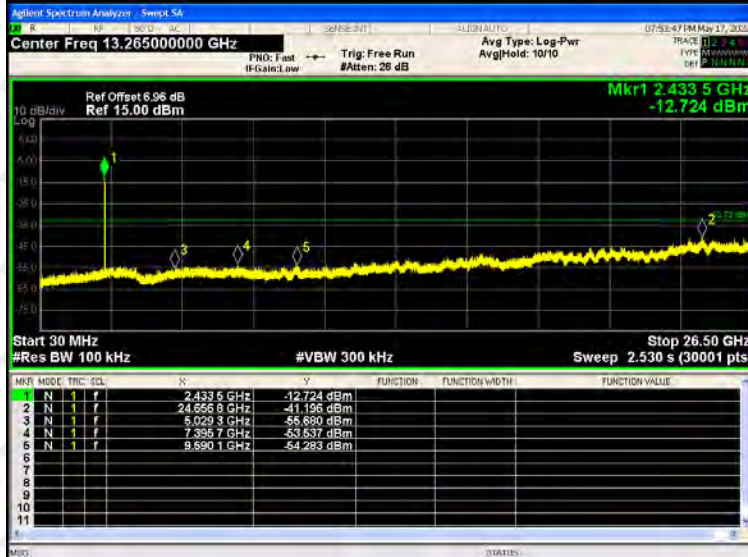
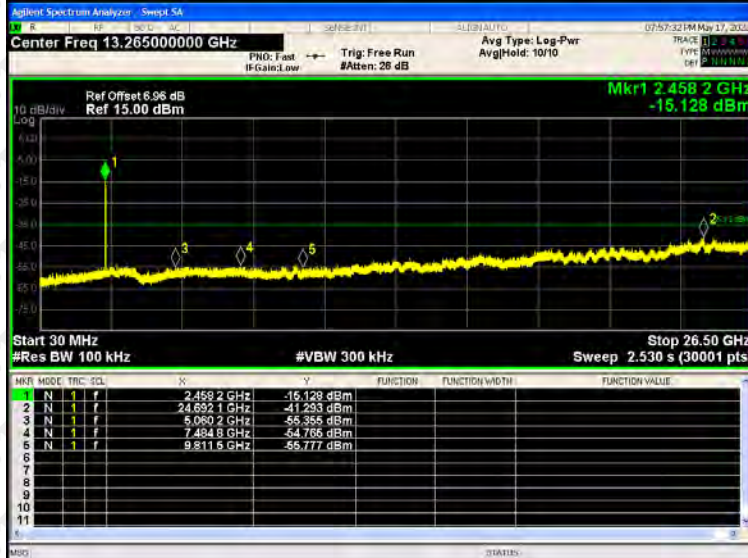
RF Conducted Spurious Emissions Graphs

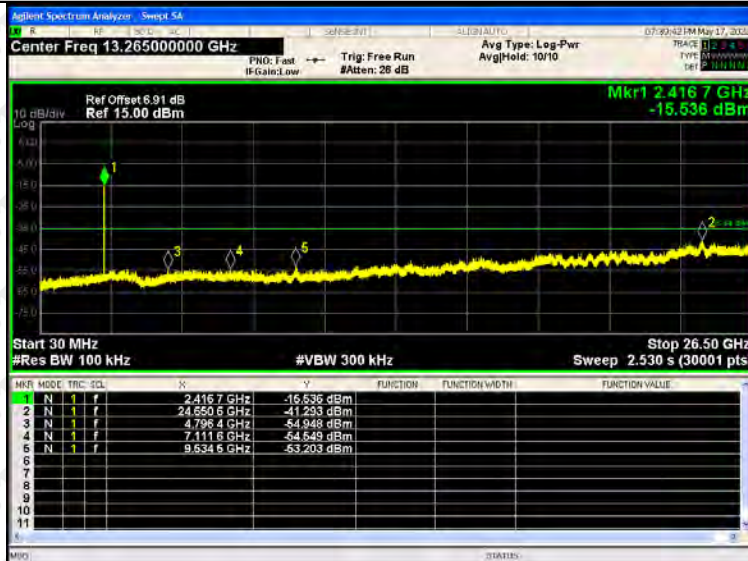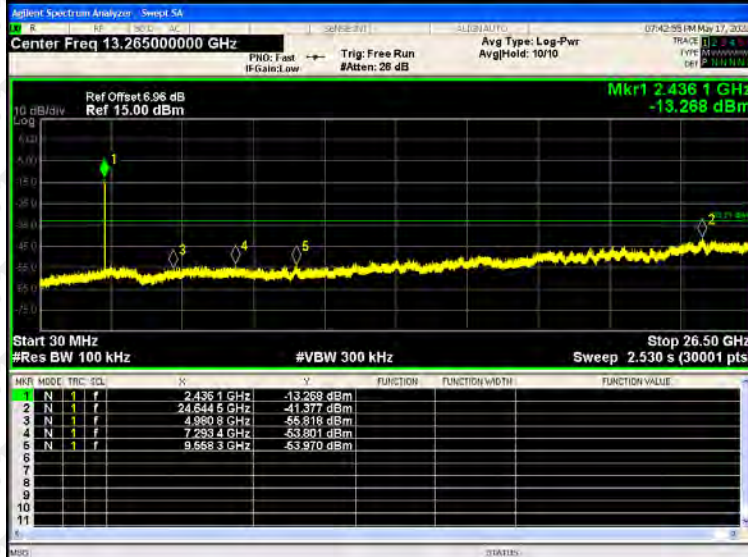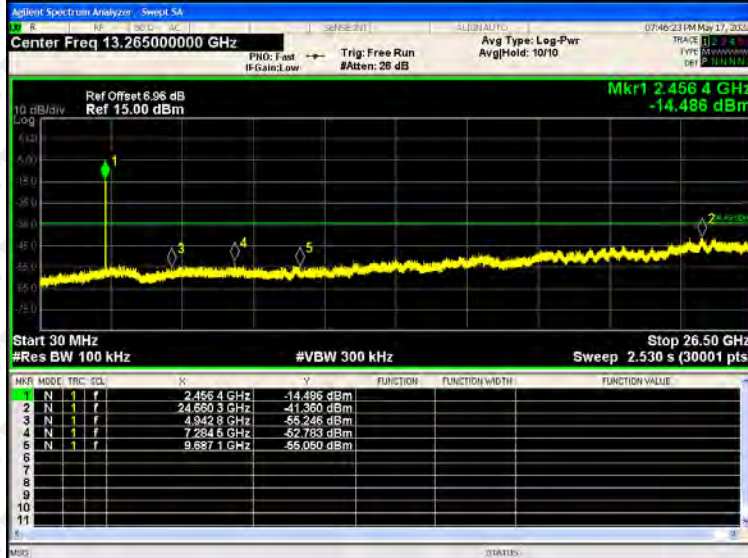
802.11b
/LCH

802.11b
/MCH

802.11b
/HCH


RF Conducted Spurious Emissions Graphs

802.11g
/LCH

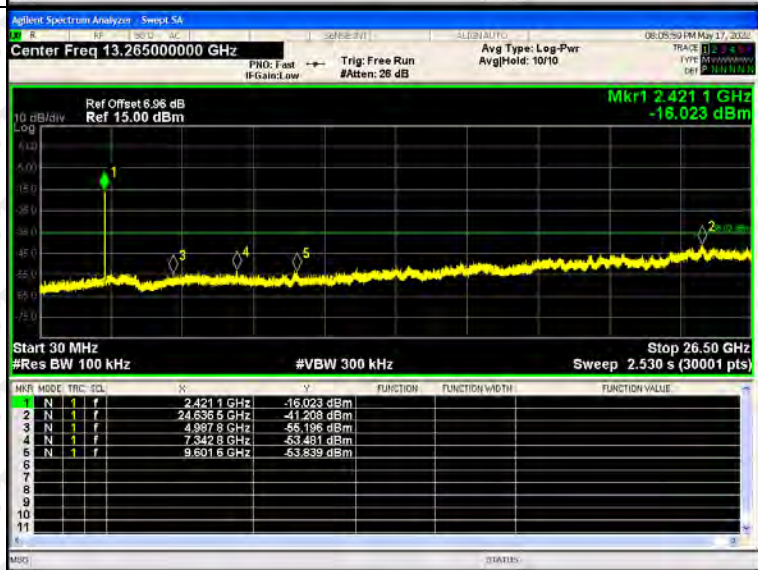802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


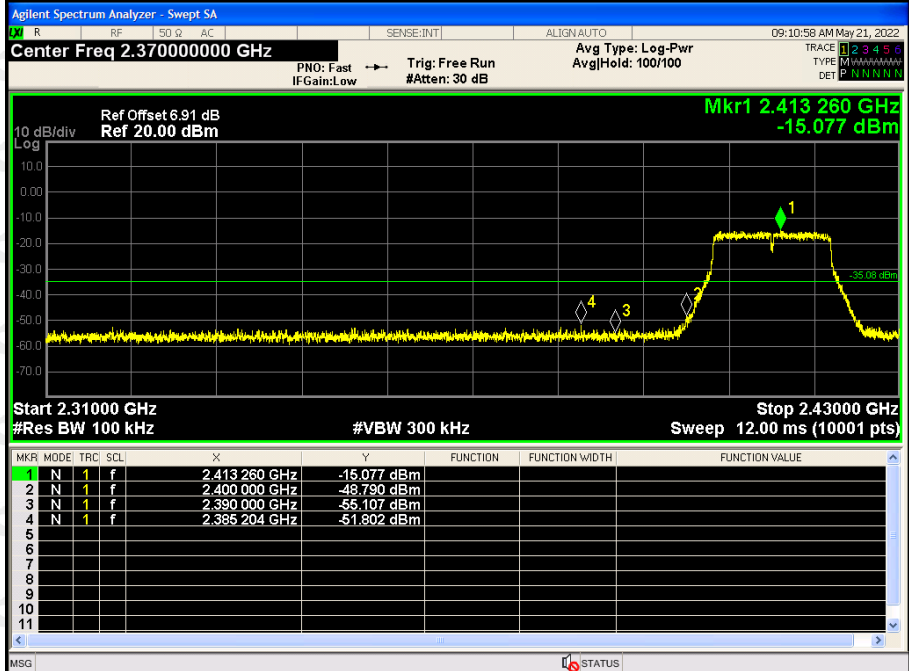
802.11n (HT40)/ LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 6.91 dB Ref 15.00 dBm Mkr1 2.413 2 GHz -16.274 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>COL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.413 2 GHz</td><td>-16.274 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.617 1 GHz</td><td>-41.195 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.879 3 GHz</td><td>-55.109 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.237 8 GHz</td><td>-54.728 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.543 3 GHz</td><td>-53.724 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	COL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 2 GHz	-16.274 dBm				2	N	1	f	24.617 1 GHz	-41.195 dBm				3	N	1	f	4.879 3 GHz	-55.109 dBm				4	N	1	f	7.237 8 GHz	-54.728 dBm				5	N	1	f	9.543 3 GHz	-53.724 dBm			
MNR	MODE	TRC	COL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.413 2 GHz	-16.274 dBm																																																		
2	N	1	f	24.617 1 GHz	-41.195 dBm																																																		
3	N	1	f	4.879 3 GHz	-55.109 dBm																																																		
4	N	1	f	7.237 8 GHz	-54.728 dBm																																																		
5	N	1	f	9.543 3 GHz	-53.724 dBm																																																		
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.421 1 GHz -16.023 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>COL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.421 1 GHz</td><td>-16.023 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.636 5 GHz</td><td>-41.208 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.897 8 GHz</td><td>-55.195 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.342 8 GHz</td><td>-53.481 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.601 6 GHz</td><td>-53.839 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	COL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421 1 GHz	-16.023 dBm				2	N	1	f	24.636 5 GHz	-41.208 dBm				3	N	1	f	4.897 8 GHz	-55.195 dBm				4	N	1	f	7.342 8 GHz	-53.481 dBm				5	N	1	f	9.601 6 GHz	-53.839 dBm			
MNR	MODE	TRC	COL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.421 1 GHz	-16.023 dBm																																																		
2	N	1	f	24.636 5 GHz	-41.208 dBm																																																		
3	N	1	f	4.897 8 GHz	-55.195 dBm																																																		
4	N	1	f	7.342 8 GHz	-53.481 dBm																																																		
5	N	1	f	9.601 6 GHz	-53.839 dBm																																																		
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 6.95 dB Ref 15.00 dBm Mkr1 2.454 7 GHz -18.973 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>COL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.454 7 GHz</td><td>-18.973 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.123 6 GHz</td><td>-41.363 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.799 9 GHz</td><td>-55.017 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.211 3 GHz</td><td>-53.364 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.847 7 GHz</td><td>-54.926 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	COL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.454 7 GHz	-18.973 dBm				2	N	1	f	25.123 6 GHz	-41.363 dBm				3	N	1	f	4.799 9 GHz	-55.017 dBm				4	N	1	f	7.211 3 GHz	-53.364 dBm				5	N	1	f	9.847 7 GHz	-54.926 dBm			
MNR	MODE	TRC	COL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.454 7 GHz	-18.973 dBm																																																		
2	N	1	f	25.123 6 GHz	-41.363 dBm																																																		
3	N	1	f	4.799 9 GHz	-55.017 dBm																																																		
4	N	1	f	7.211 3 GHz	-53.364 dBm																																																		
5	N	1	f	9.847 7 GHz	-54.926 dBm																																																		

ANT2:




BAND EDGE Graphs

802.11g/LCH




802.11g/HCH

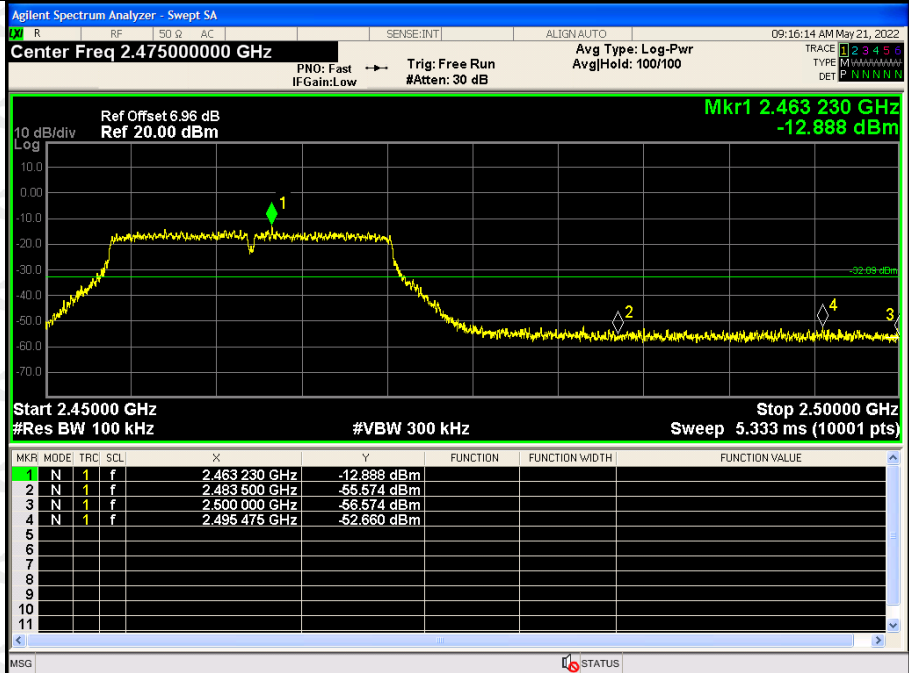


BAND EDGE Graphs

802.11n(HT20)/
LCH

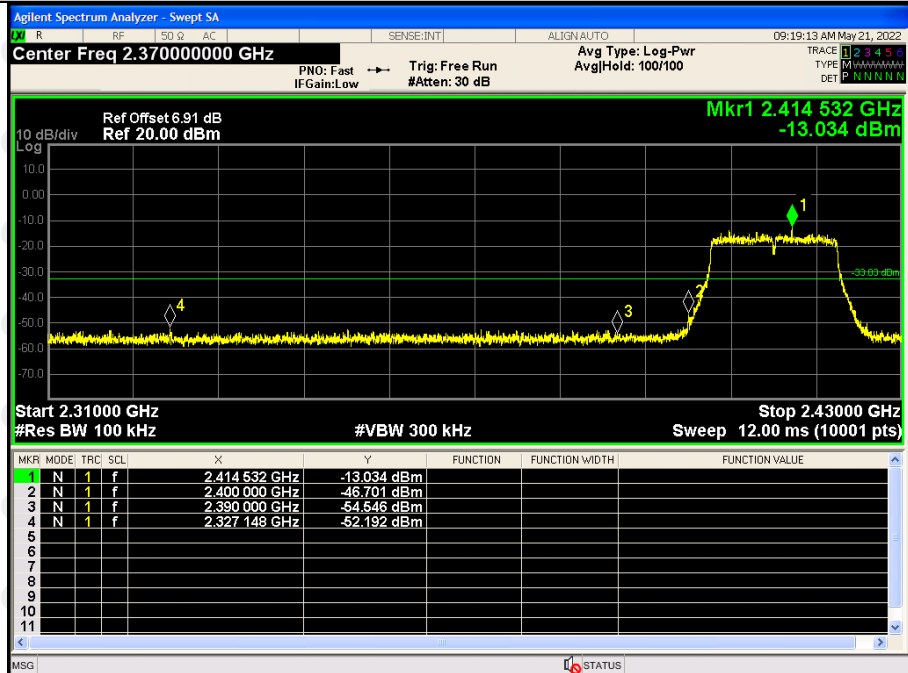


802.11n(HT20)/
HCH

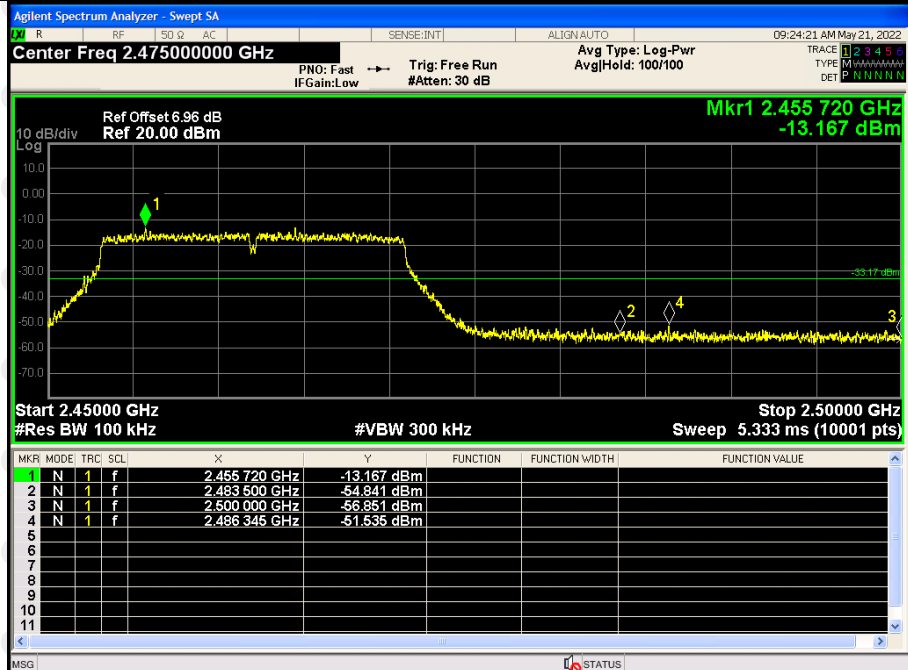


BAND EDGE Graphs




802.11n(HT40)/
LCH

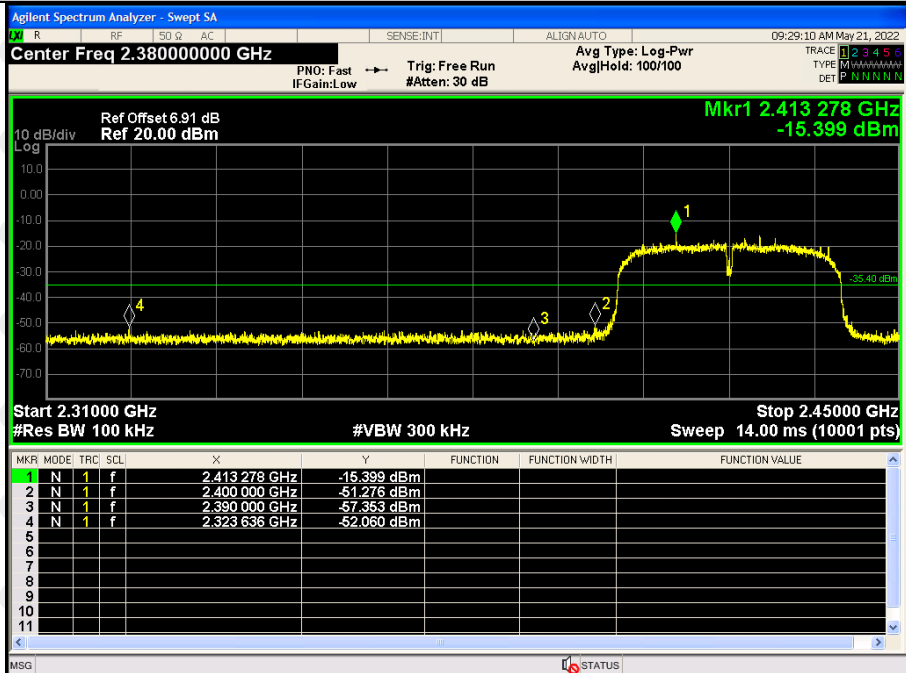

802.11n(HT40)/
HCH

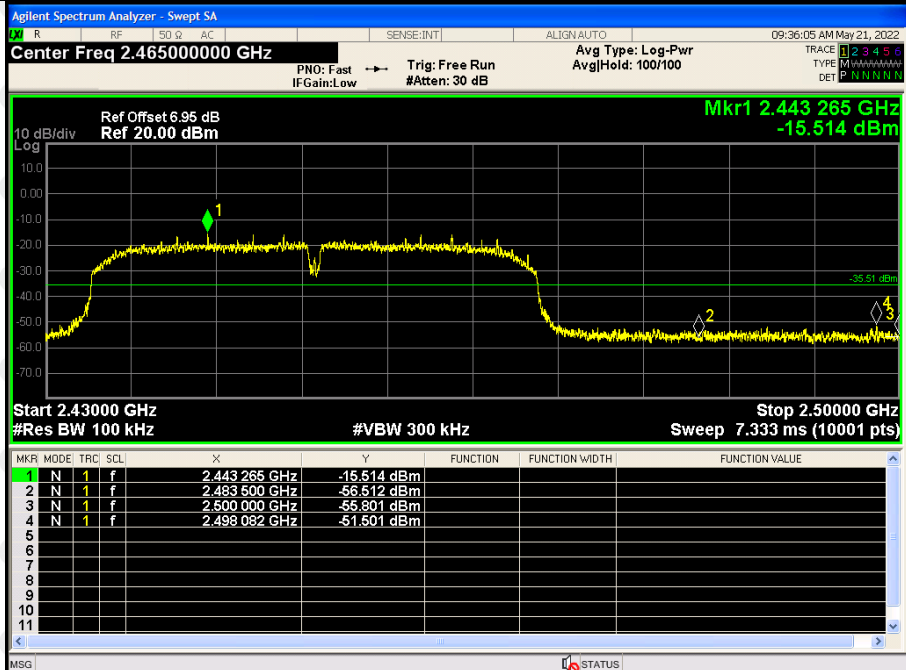


RF Conducted Spurious Emissions Graphs

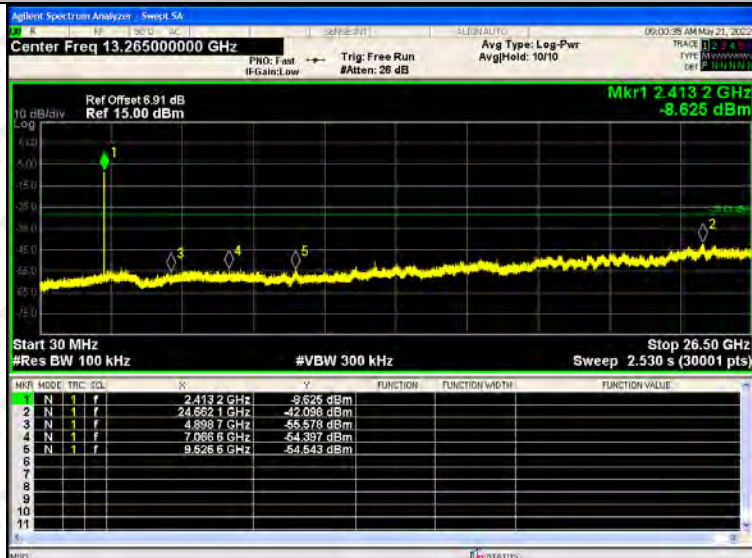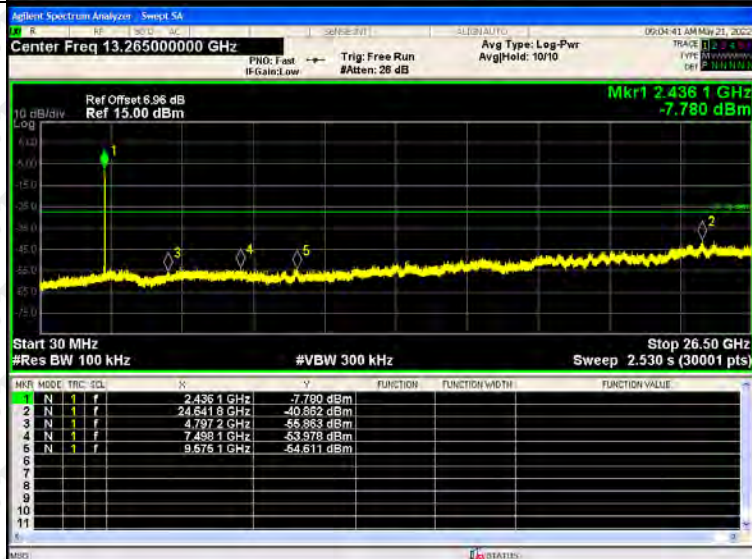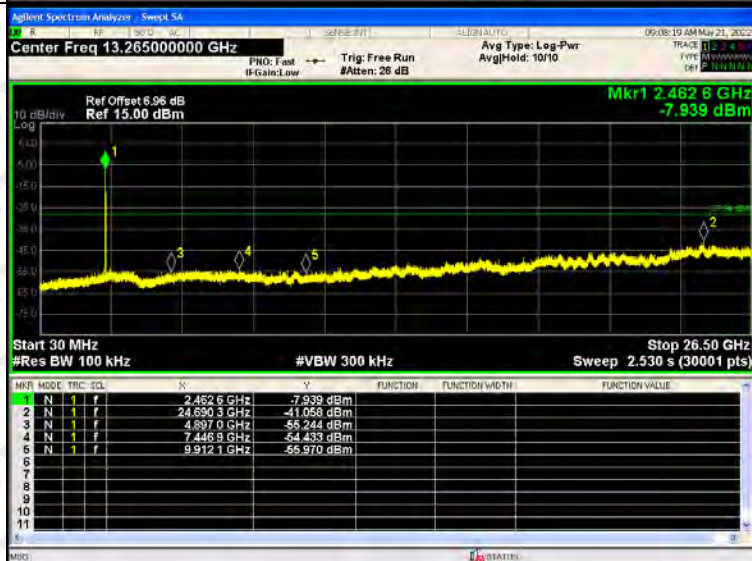
802.11b
/LCH

802.11b
/MCH

802.11b
/HCH

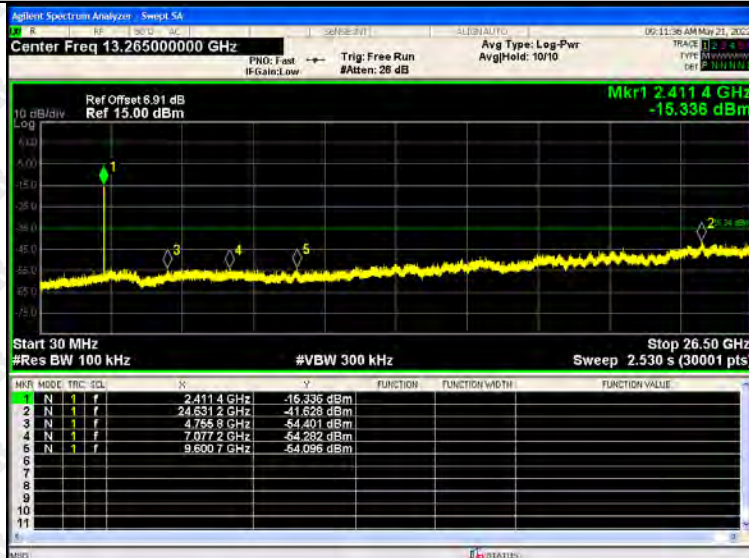
RF Conducted Spurious Emissions Graphs


802.11g/LCH

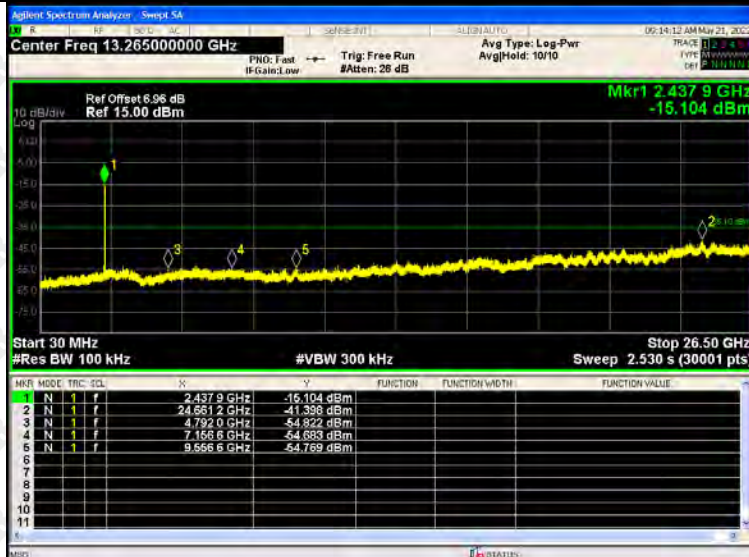




802.11g/MCH






802.11g/HCH

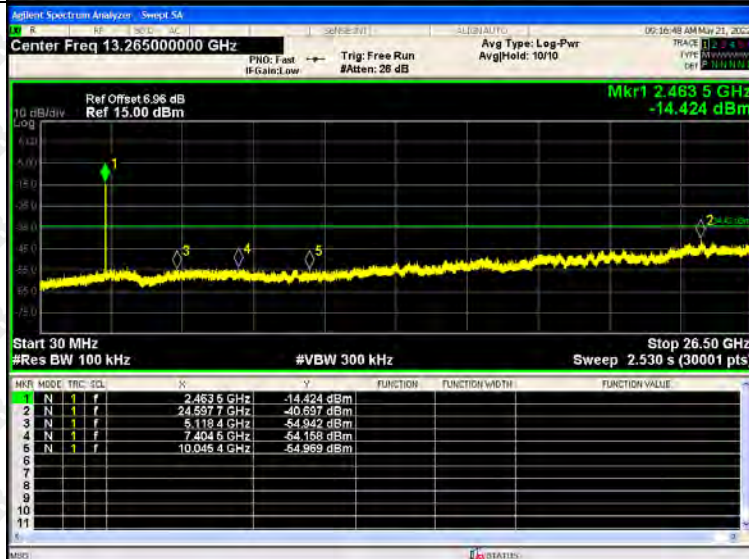

RF Conducted Spurious Emissions Graphs

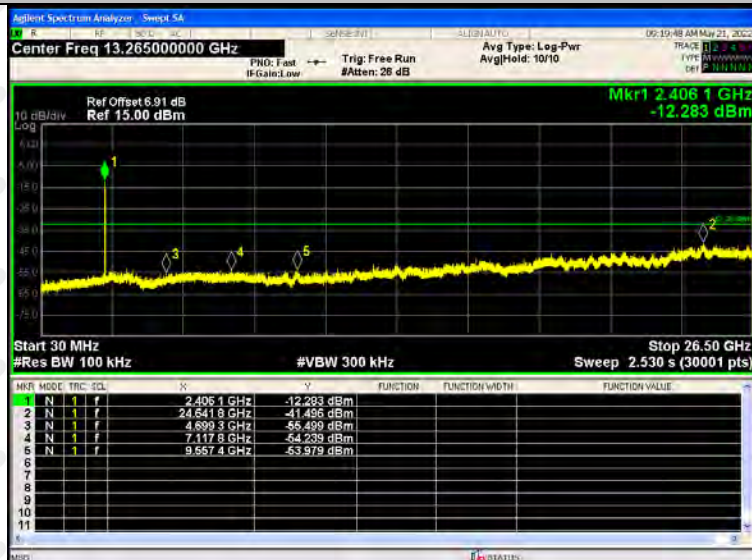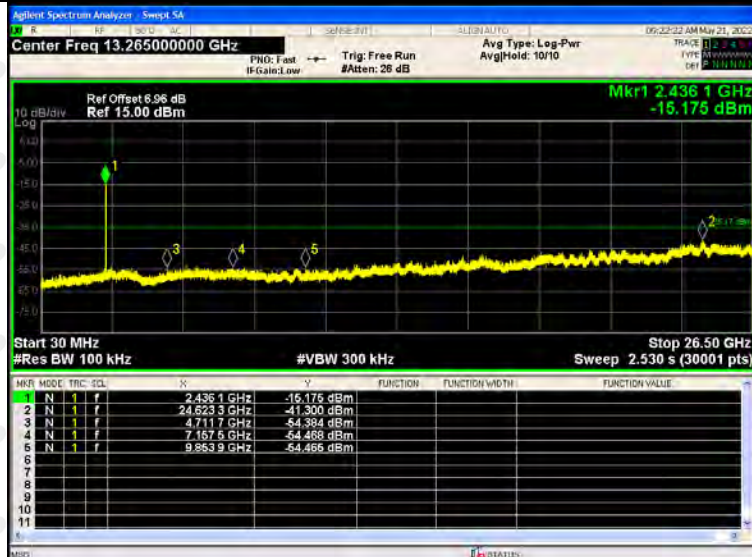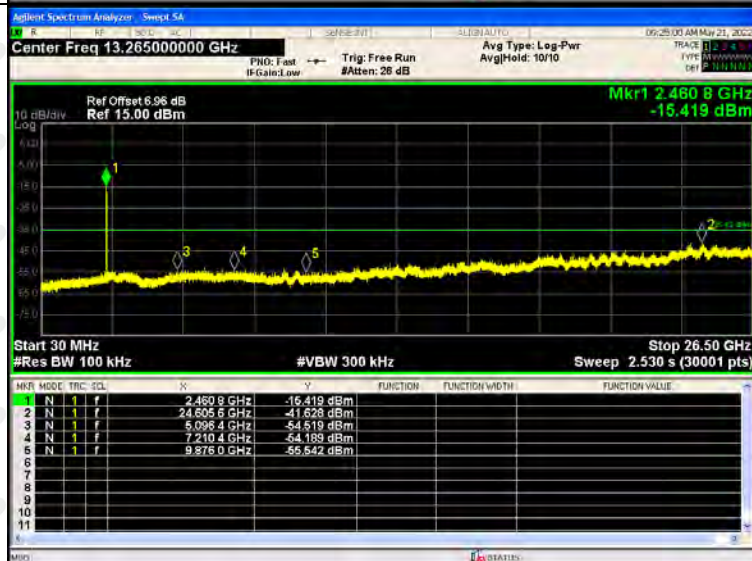802.11n(HT20)/
LCH

802.11
n(HT20)/MCH

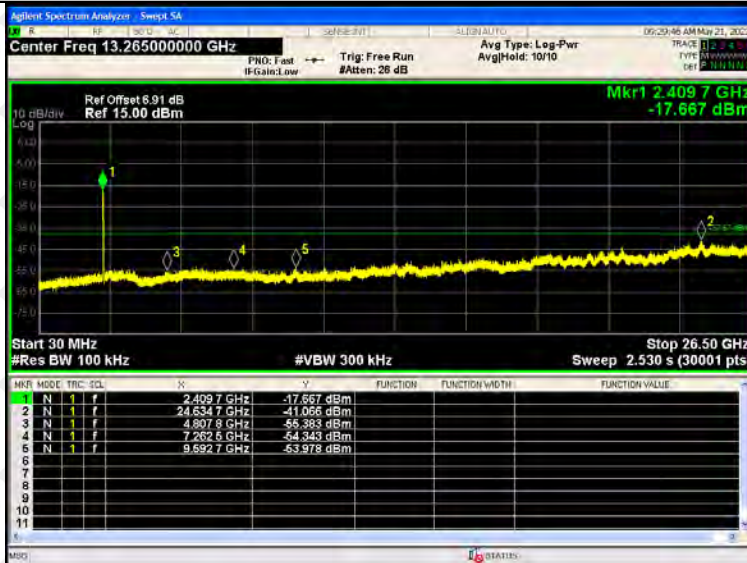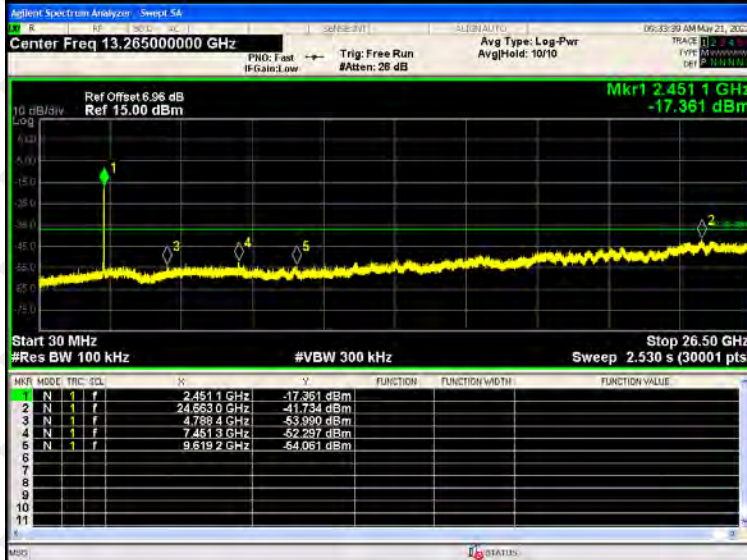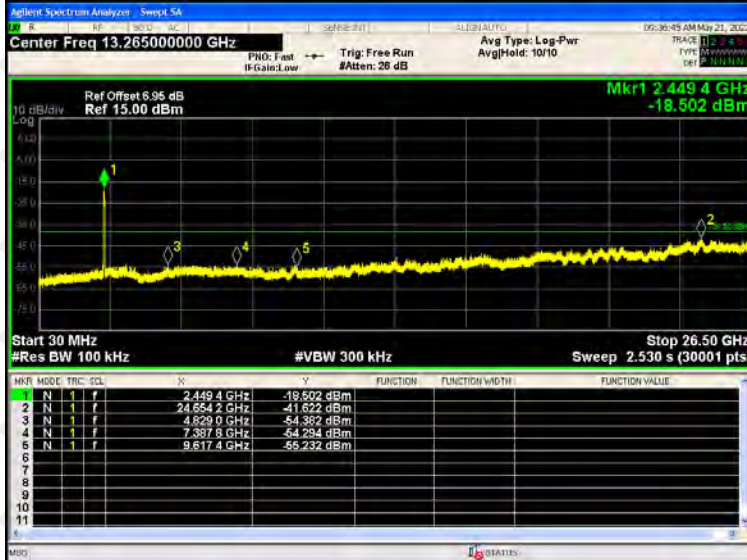802.11
n(HT20)/HCH


RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH


9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]	Verdict
802.11b	LCH	7.764	7.566	/	30	PASS
	MCH	7.439	7.504	/	30	PASS
	HCH	7.618	7.644	/	30	PASS
802.11g	LCH	6.387	6.549	/	30	PASS
	MCH	6.393	6.327	/	30	PASS
	HCH	6.694	6.657	/	30	PASS
802.11n(HT20)	LCH	6.258	6.234	9.256	30	PASS
	MCH	6.26	6.393	9.337	30	PASS
	HCH	6.483	6.539	9.521	30	PASS
802.11n(HT40)	LCH	5.274	5.547	8.423	30	PASS
	MCH	5.115	5.602	8.376	30	PASS
	HCH	5.417	5.292	8.365	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

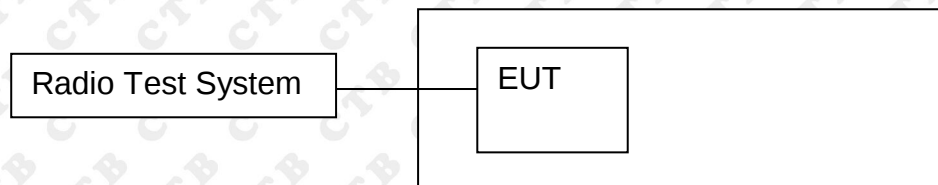

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.824	500	PASS
	MCH	10.281	500	PASS
	HCH	10.644	500	PASS
802.11g	LCH	16.342	500	PASS
	MCH	16.366	500	PASS
	HCH	16.342	500	PASS
802.11n(HT20)	LCH	17.4	500	PASS
	MCH	17.536	500	PASS
	HCH	17.334	500	PASS
802.11n(HT40)	LCH	35.614	500	PASS
	MCH	35.69	500	PASS
	HCH	35.382	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.535	500	PASS
	MCH	9.387	500	PASS
	HCH	8.986	500	PASS
802.11g	LCH	16.389	500	PASS
	MCH	16.393	500	PASS
	HCH	16.348	500	PASS
802.11n(HT20)	LCH	17.588	500	PASS
	MCH	17.642	500	PASS
	HCH	17.82	500	PASS
802.11n(HT40)	LCH	30.477	500	PASS
	MCH	31.115	500	PASS
	HCH	32.018	500	PASS

ANT1:


Test Graph:

Graphs


802.11b /LCH

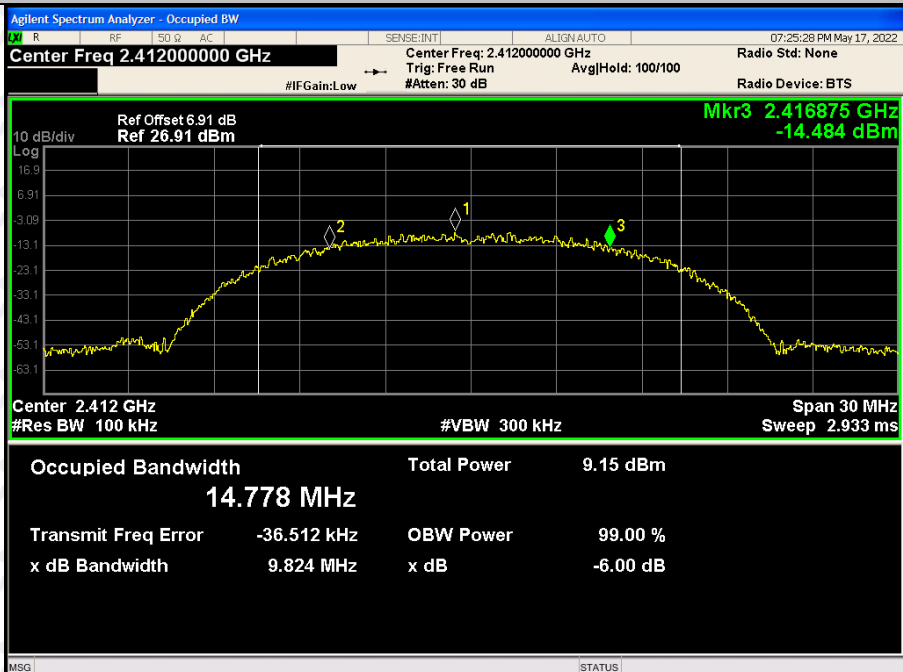


802.11b /MCH

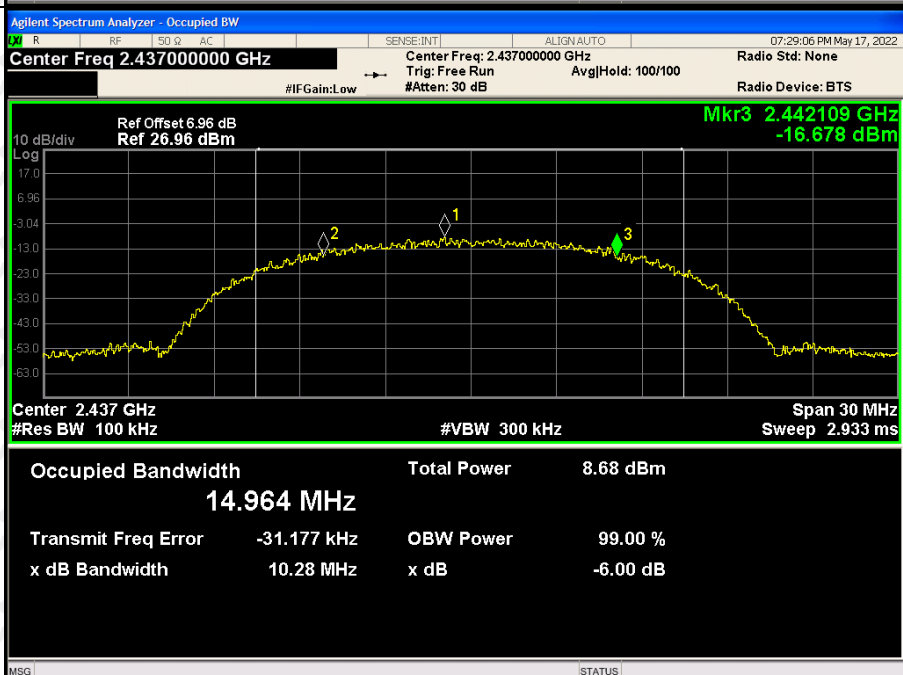


802.11b/HCH

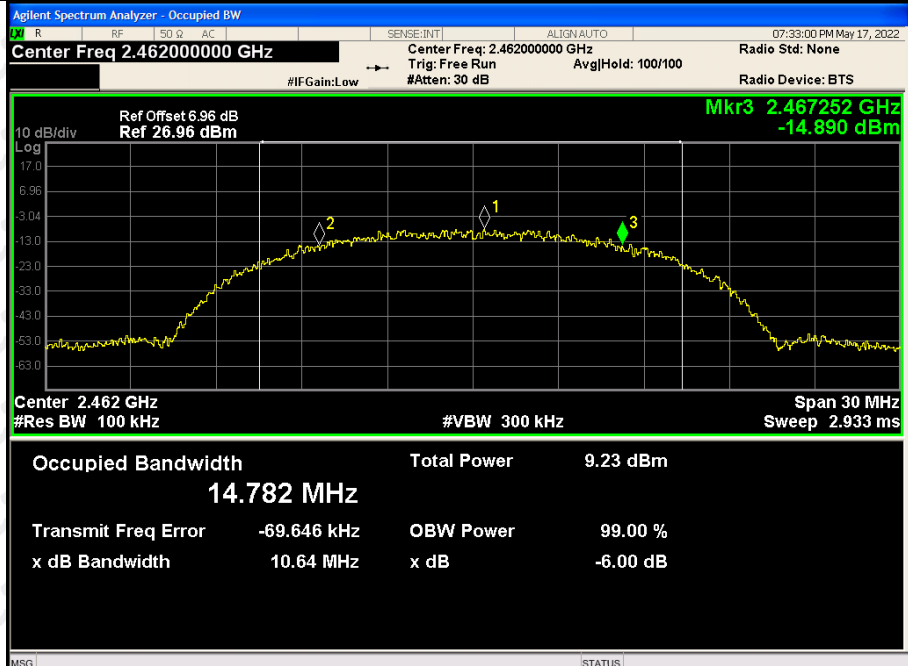


802.11g/LCH


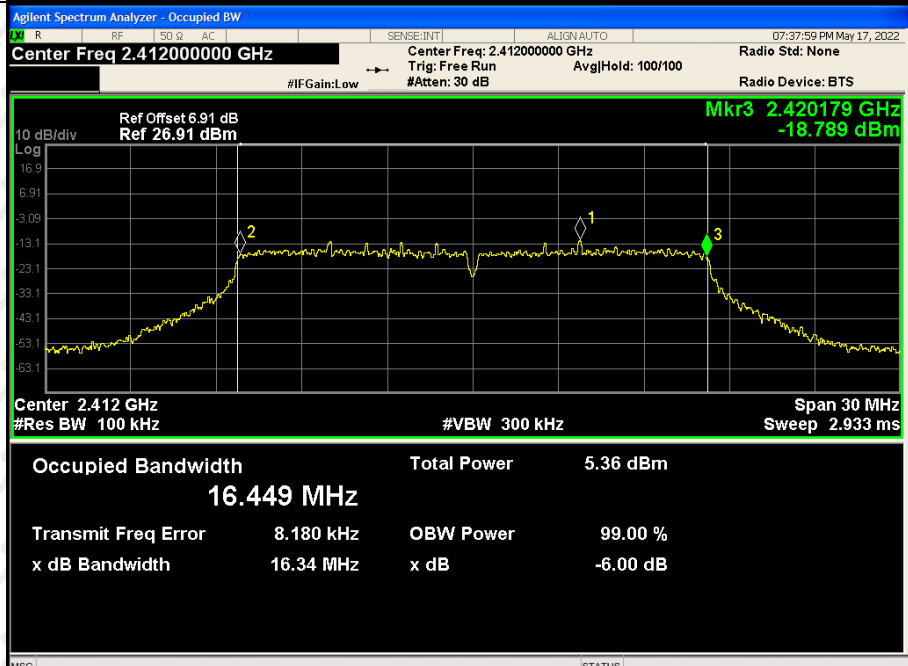




802.11g/MCH


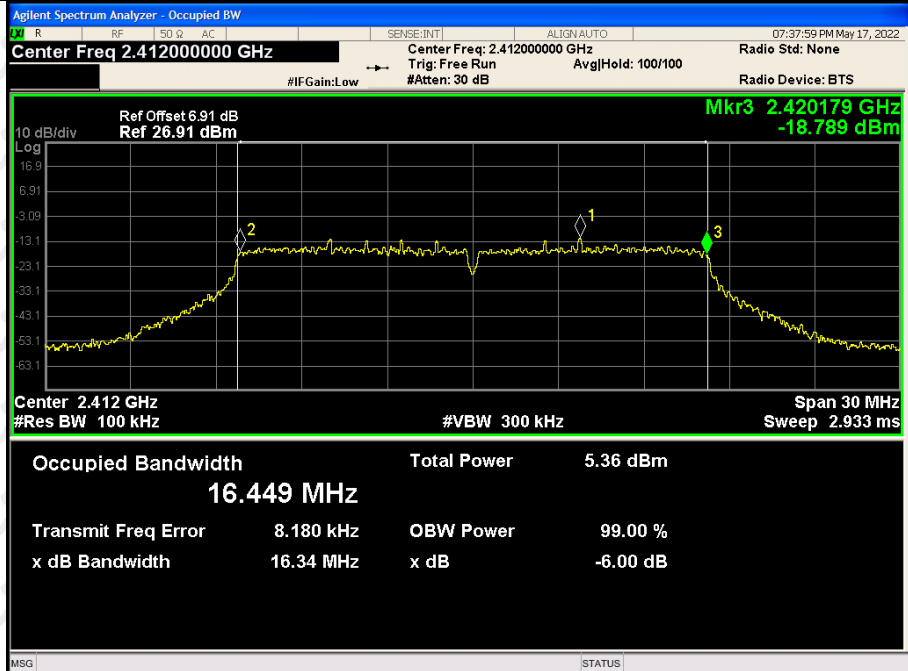


802.11g/HCH

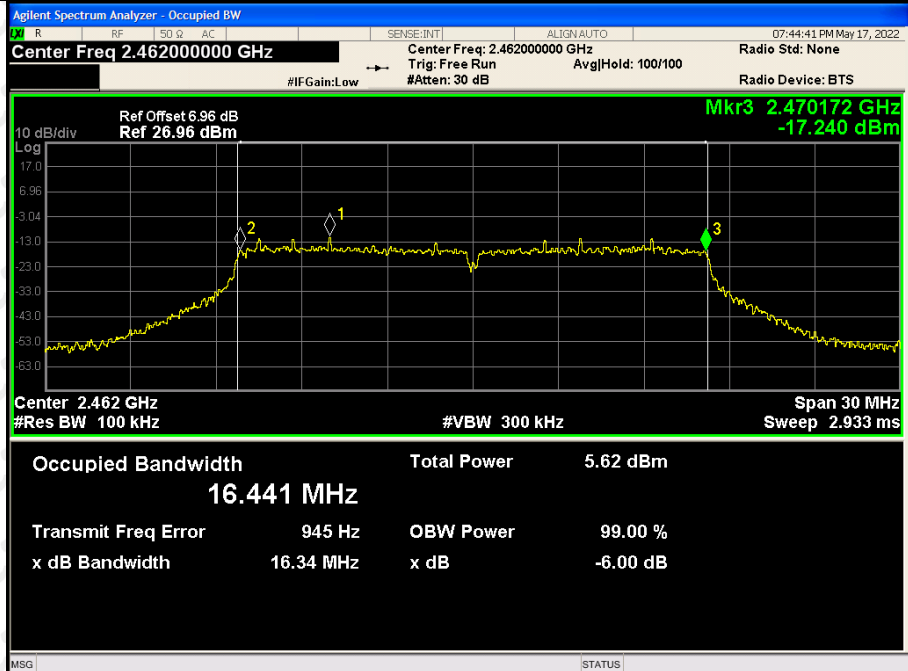

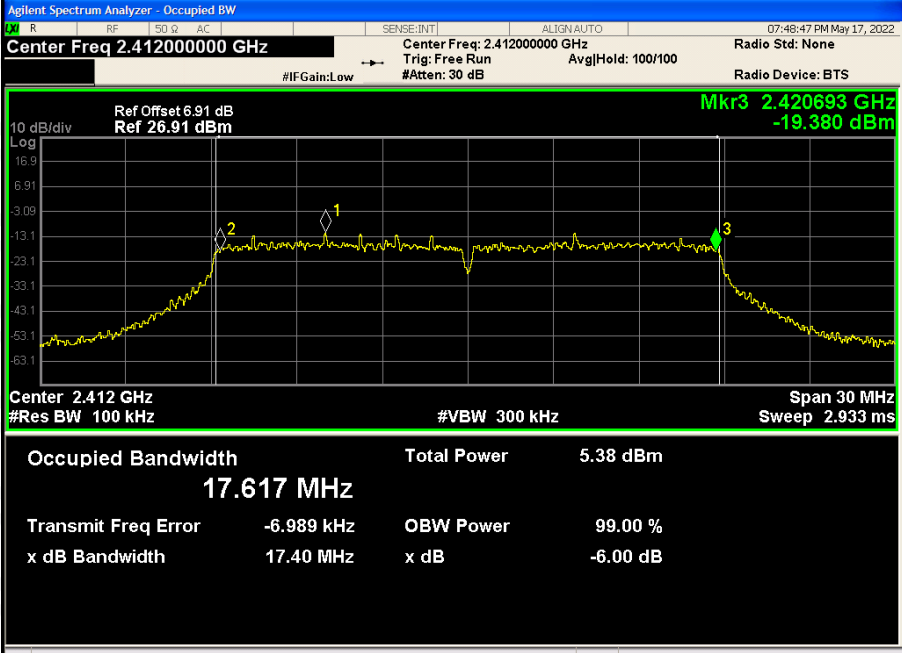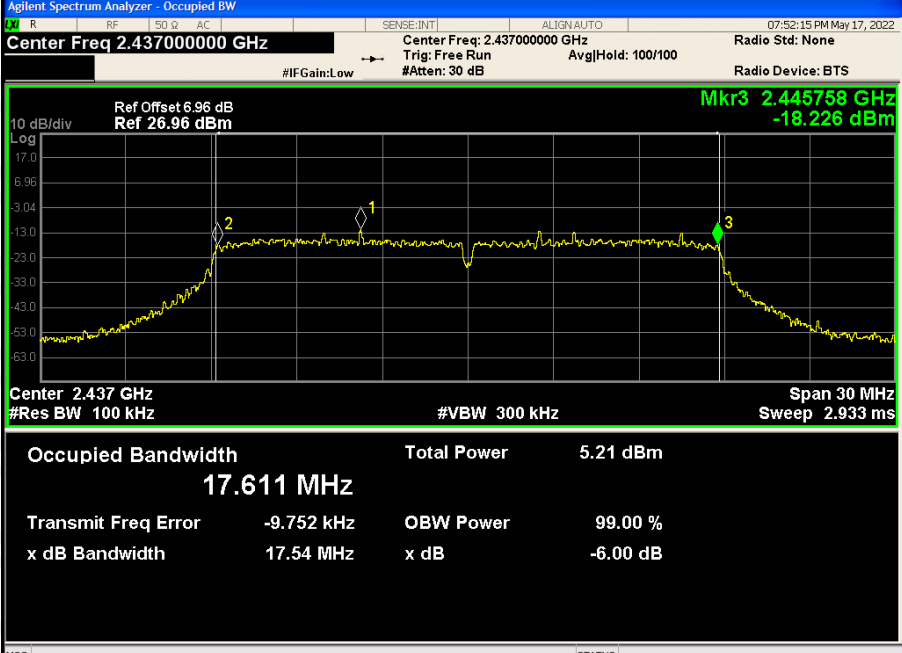802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.420693 GHz -19.380 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.617 MHz Total Power 5.38 dBm Transmit Freq Error -6.989 kHz OBW Power 99.00 % x dB Bandwidth 17.40 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.445758 GHz -18.226 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.611 MHz Total Power 5.21 dBm Transmit Freq Error -9.752 kHz OBW Power 99.00 % x dB Bandwidth 17.54 MHz x dB -6.00 dB

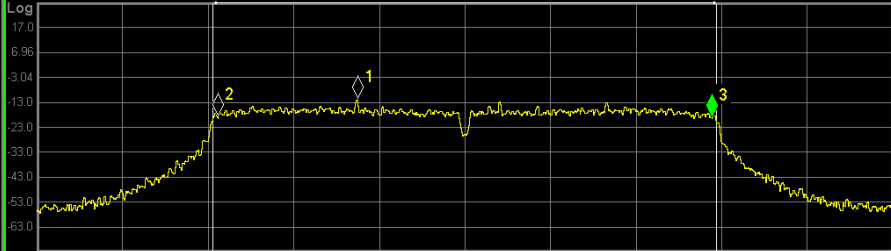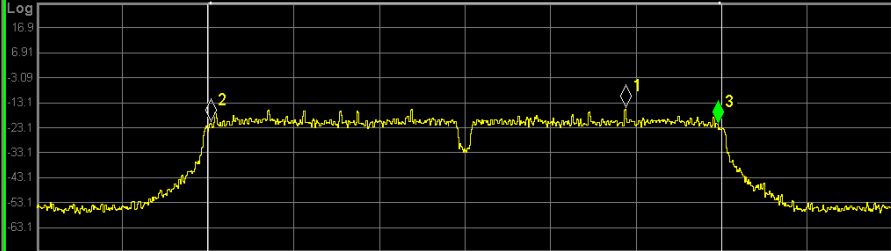802.11n(HT20)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB #IFGain:Low ALIGN AUTO Radio Std: None Radio Device: BTS 07:55:51 PM May 17, 2022 Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470662 GHz -19.477 dBm  Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.604 MHz Total Power 5.48 dBm Transmit Freq Error -5.149 kHz OBW Power 99.00 % x dB Bandwidth 17.33 MHz x dB -6.00 dB MSG STATUS
802.11n(HT40)/LC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run #Atten: 30 dB #IFGain:Low ALIGN AUTO Radio Std: None Radio Device: BTS 08:00:11 PM May 17, 2022 Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.439789 GHz -21.779 dBm  Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.048 MHz Total Power 4.71 dBm Transmit Freq Error -17.615 kHz OBW Power 99.00 % x dB Bandwidth 35.61 MHz x dB -6.00 dB MSG STATUS

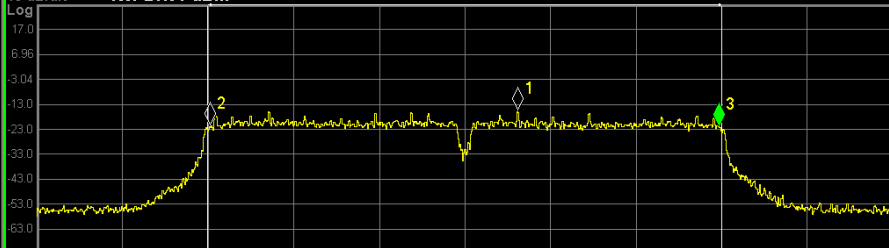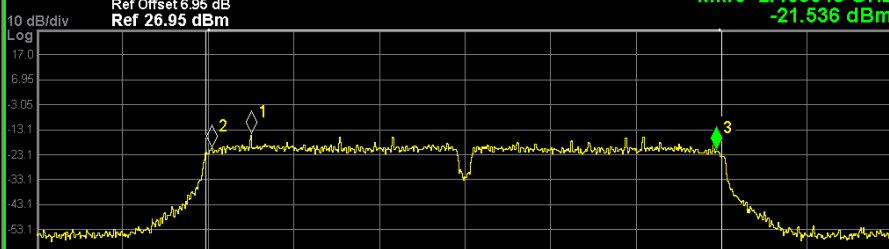
802.11n(HT40)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB ALIGN AUTO AvgHld: 100/100 08:04:00 PM May 17, 2022 Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.454824 GHz -22.032 dBm 10 dB/div Log  Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth Total Power 4.62 dBm 36.054 MHz Transmit Freq Error -20.651 kHz OBW Power 99.00 % x dB Bandwidth 35.69 MHz x dB -6.00 dB MSG STATUS
802.11n(HT40)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 30 dB ALIGN AUTO AvgHld: 100/100 08:06:10 PM May 17, 2022 Radio Std: None Radio Device: BTS Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.469648 GHz -21.536 dBm 10 dB/div Log  Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth Total Power 4.74 dBm 36.067 MHz Transmit Freq Error -42.650 kHz OBW Power 99.00 % x dB Bandwidth 35.38 MHz x dB -6.00 dB MSG STATUS

ANT2:


Test Graph:

Graphs


802.11b /LCH

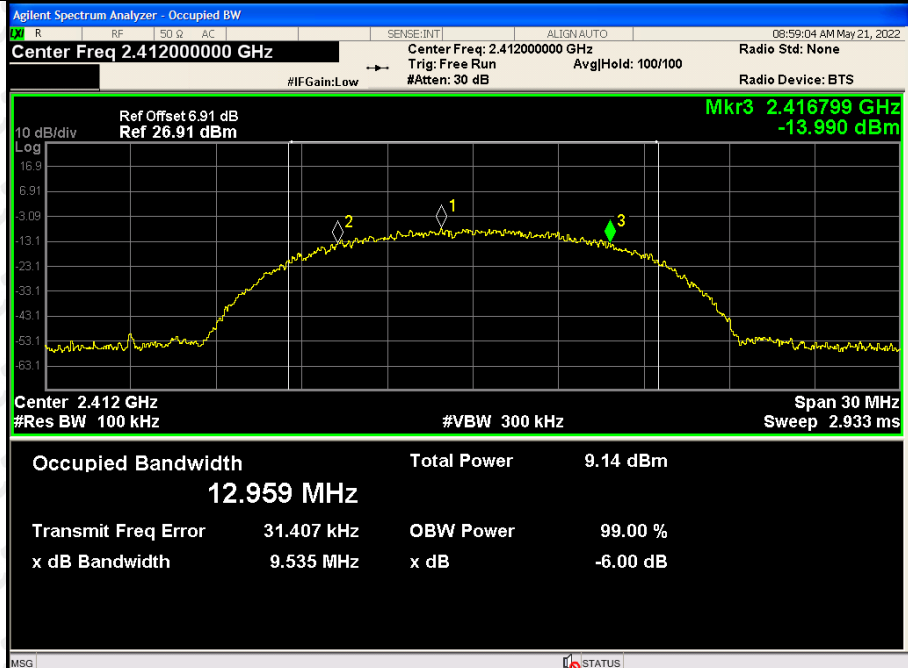


802.11b /MCH

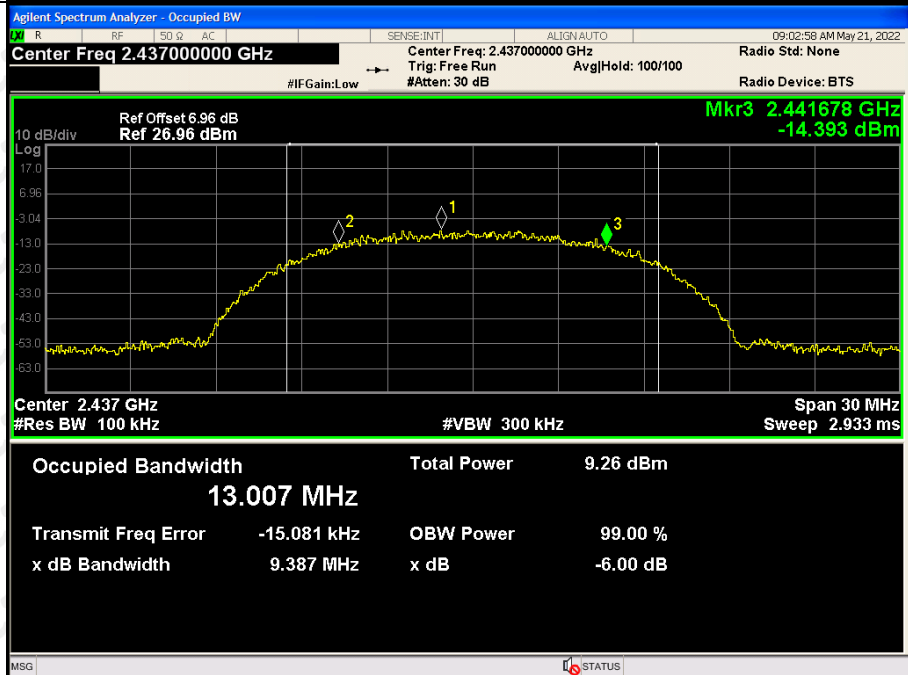


802.11b/HCH

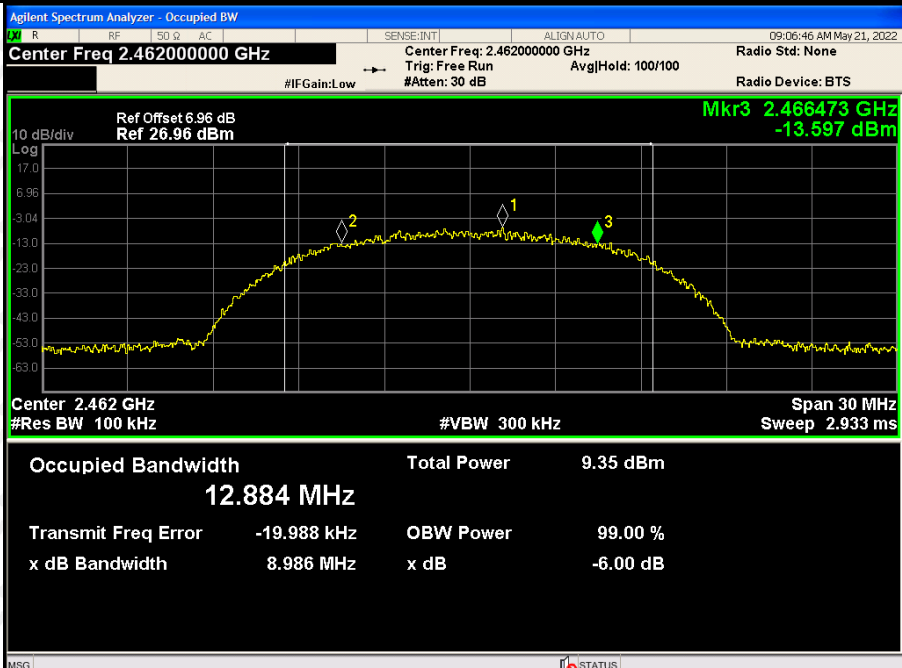


802.11g/LCH

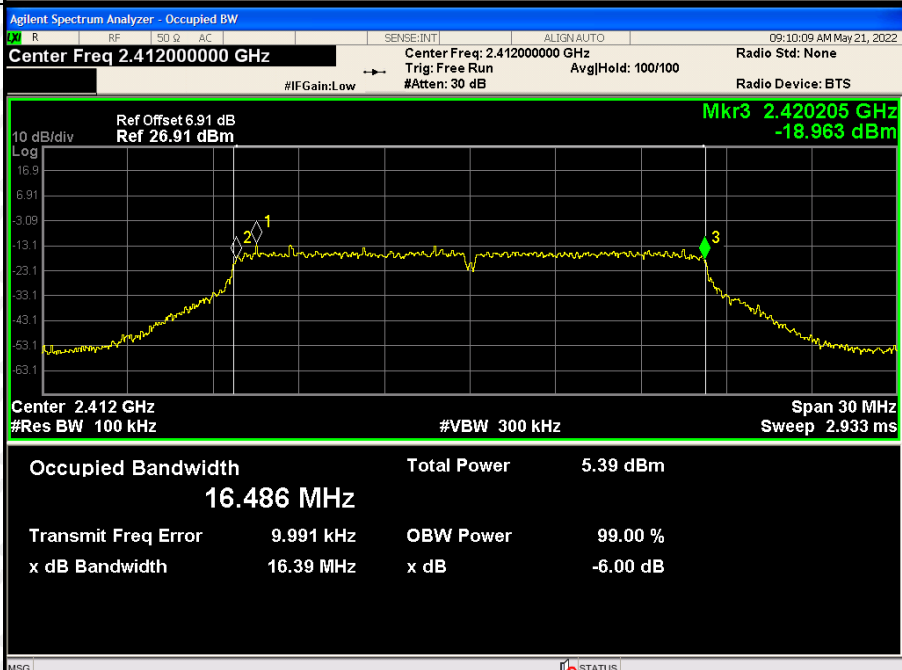


802.11g/MCH


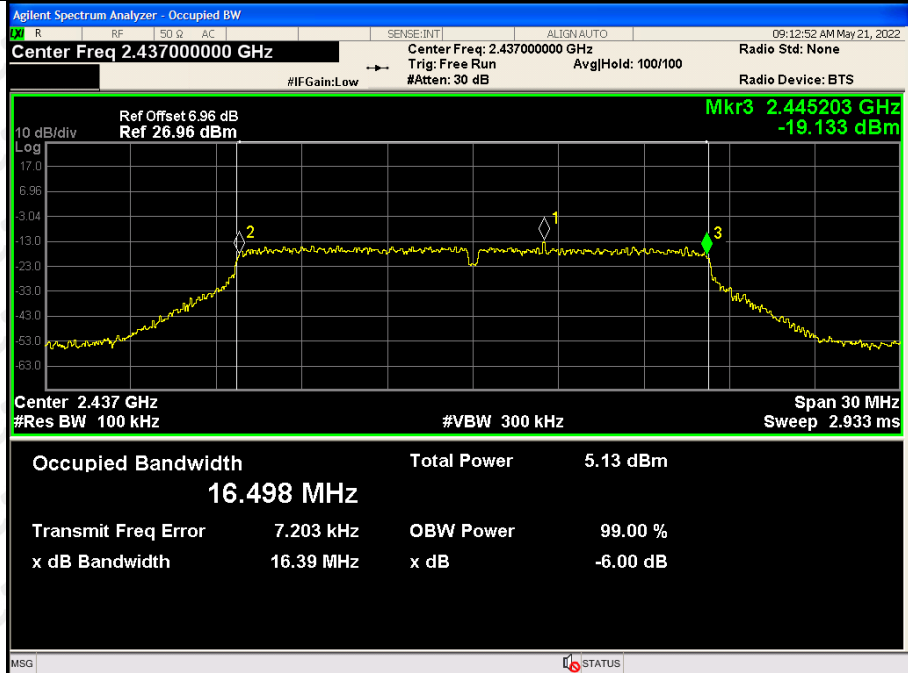


802.11g/HCH

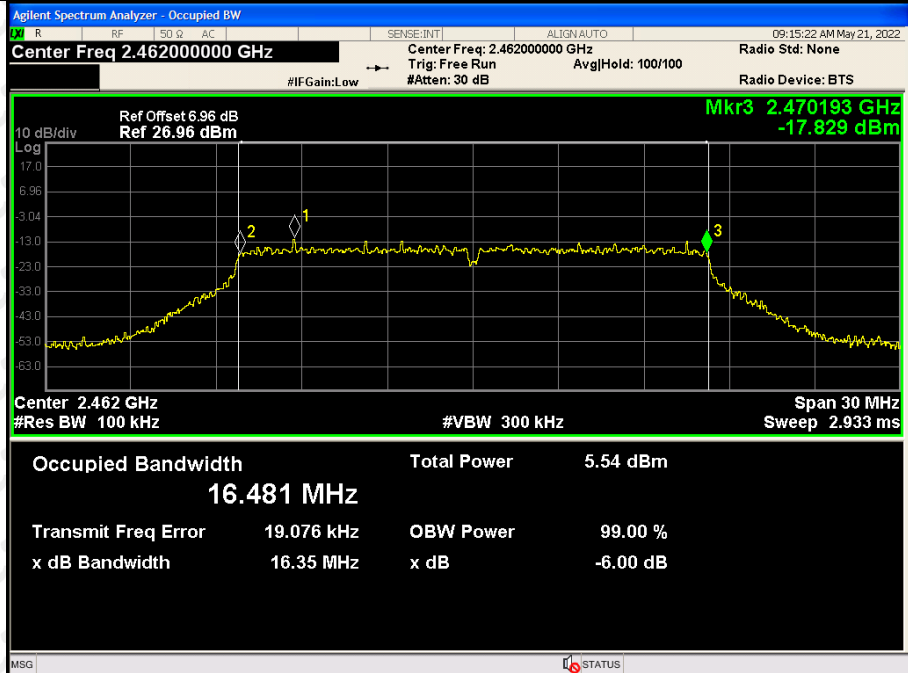

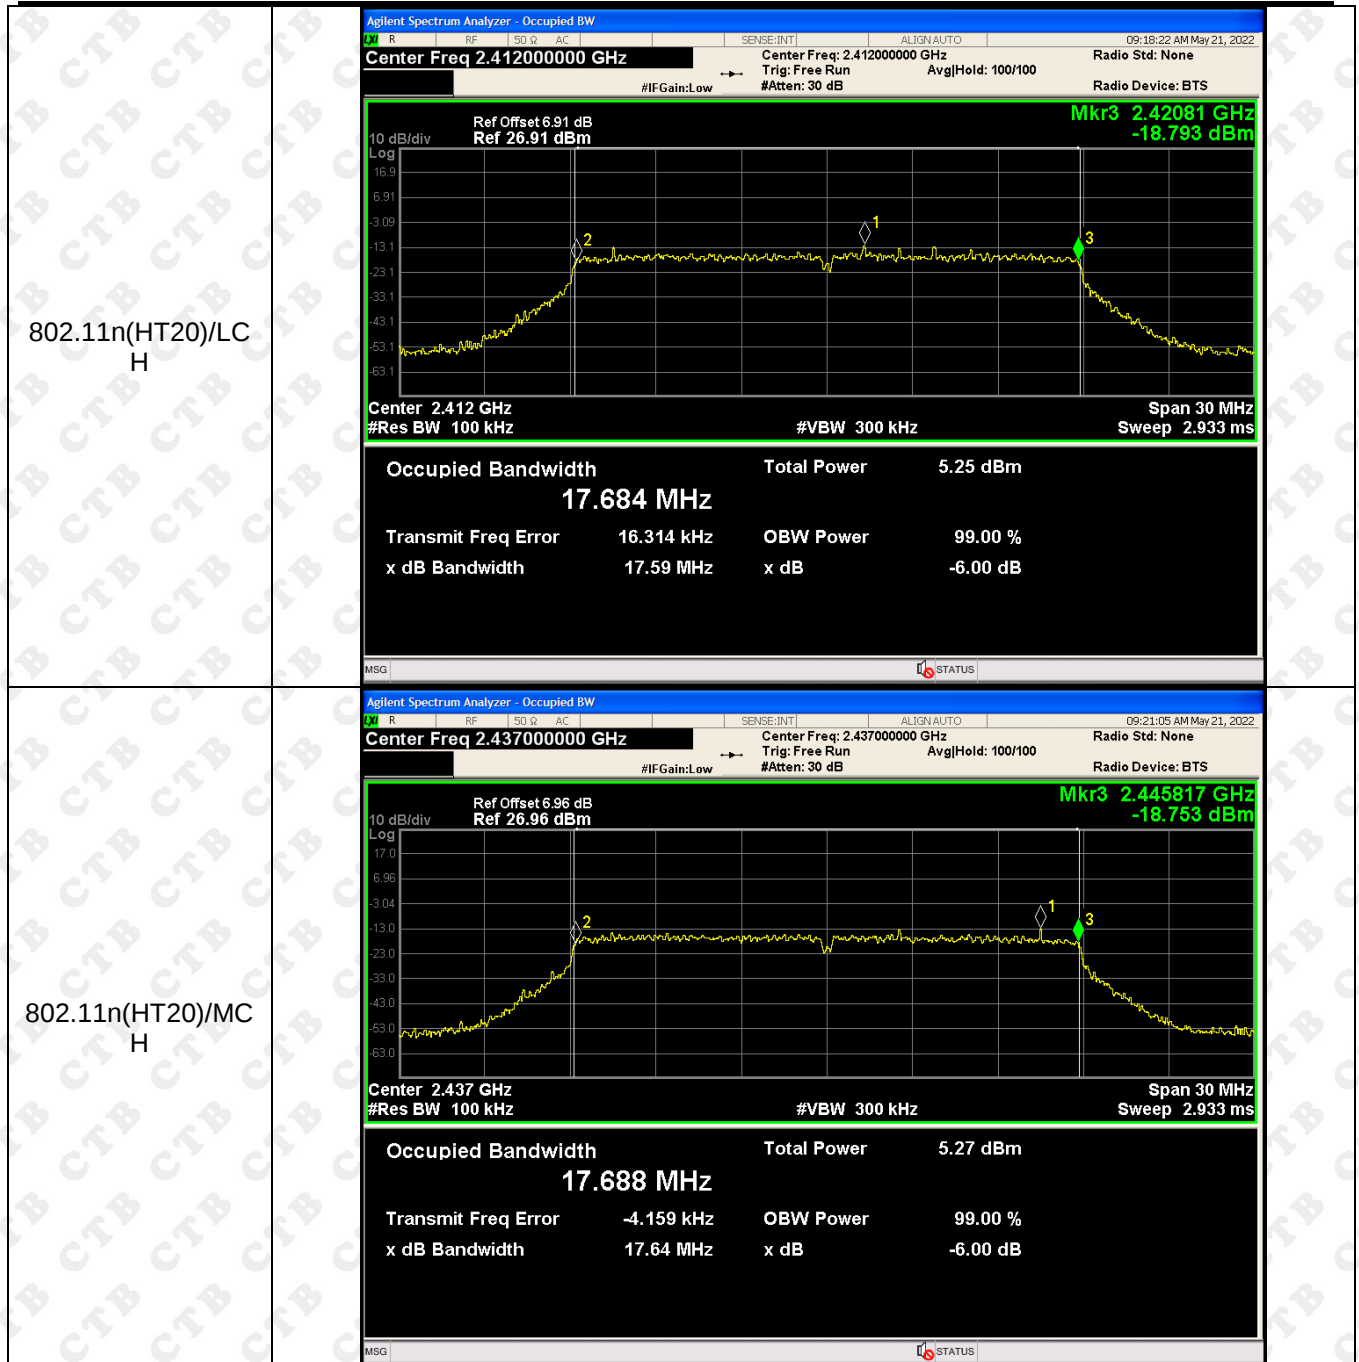


802.11n(HT20)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470919 GHz -20.385 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.694 MHz Total Power 5.60 dBm Transmit Freq Error 8.954 kHz OBW Power 99.00 % x dB Bandwidth 17.82 MHz x dB -6.00 dB
802.11n(HT40)/LC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run #Atten: 30 dB Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.437124 GHz -23.736 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 34.534 MHz Total Power 4.60 dBm Transmit Freq Error -114.41 kHz OBW Power 99.00 % x dB Bandwidth 30.48 MHz x dB -6.00 dB

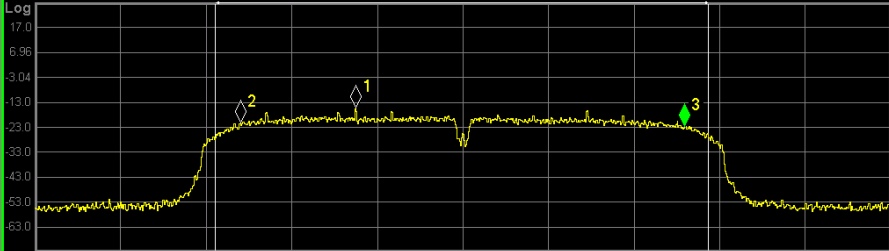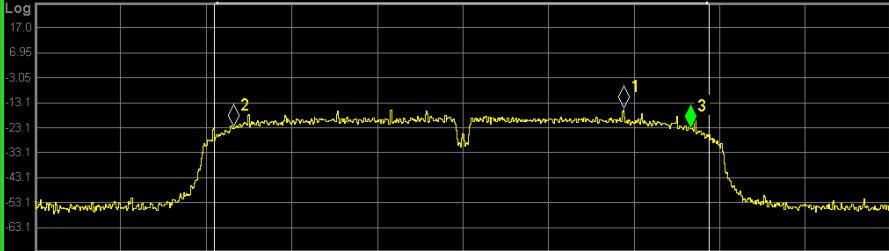802.11n(HT40)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.452513 GHz -23.361 dBm  Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.61 dBm</td></tr><tr><td>34.486 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>-44.818 kHz</td><td>OBW Power</td></tr><tr><td>x dB Bandwidth</td><td>31.11 MHz</td><td>x dB</td></tr><tr><td></td><td></td><td>-6.00 dB</td></tr></table> MSG STATUS	Occupied Bandwidth	Total Power	4.61 dBm	34.486 MHz			Transmit Freq Error	-44.818 kHz	OBW Power	x dB Bandwidth	31.11 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	4.61 dBm														
34.486 MHz																
Transmit Freq Error	-44.818 kHz	OBW Power														
x dB Bandwidth	31.11 MHz	x dB														
		-6.00 dB														
802.11n(HT40)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.46793 GHz -23.519 dBm  Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.67 dBm</td></tr><tr><td>34.645 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>-79.629 kHz</td><td>OBW Power</td></tr><tr><td>x dB Bandwidth</td><td>32.02 MHz</td><td>x dB</td></tr><tr><td></td><td></td><td>-6.00 dB</td></tr></table> MSG STATUS	Occupied Bandwidth	Total Power	4.67 dBm	34.645 MHz			Transmit Freq Error	-79.629 kHz	OBW Power	x dB Bandwidth	32.02 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	4.67 dBm														
34.645 MHz																
Transmit Freq Error	-79.629 kHz	OBW Power														
x dB Bandwidth	32.02 MHz	x dB														
		-6.00 dB														

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

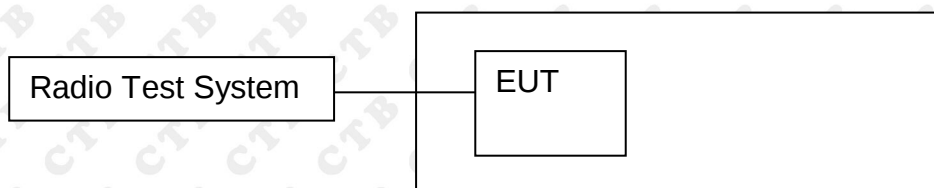

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.982	-21.371	/	8	PASS
	MCH	-22.386	-20.985	/	8	PASS
	HCH	-21.946	-20.698	/	8	PASS
802.11g	LCH	-26.34	-26.32	/	8	PASS
	MCH	-26.056	-26.009	/	8	PASS
	HCH	-25.154	-25.903	/	8	PASS
802.11n(H T20)	LCH	-26.192	-25.848	-23.006	8	PASS
	MCH	-26.201	-25.401	-22.772	8	PASS
	HCH	-26.101	-25.023	-22.518	8	PASS
802.11n(H T40)	LCH	-29.775	-28.552	-26.110	8	PASS
	MCH	-30.397	-28.96	-26.609	8	PASS
	HCH	-30.286	-28.534	-26.312	8	PASS

ANT1: Test Graph

Graphs

802.11b /LCH



802.11b /MCH




802.11b/HCH




802.11g/LCH








802.11g/MCH

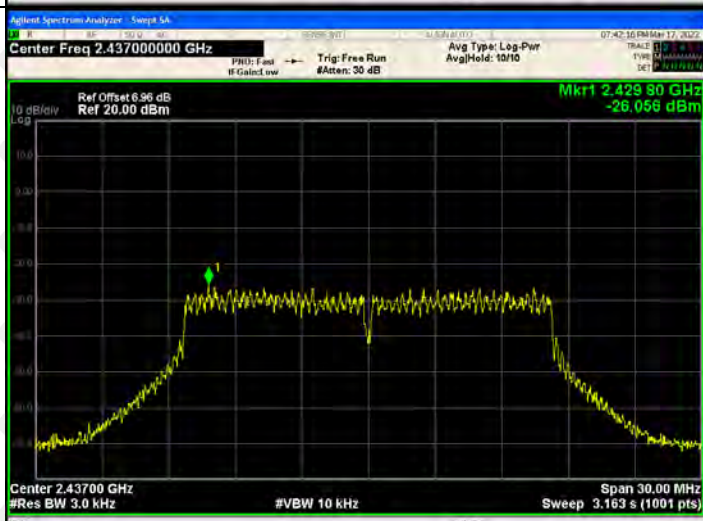

802.11g/HCH

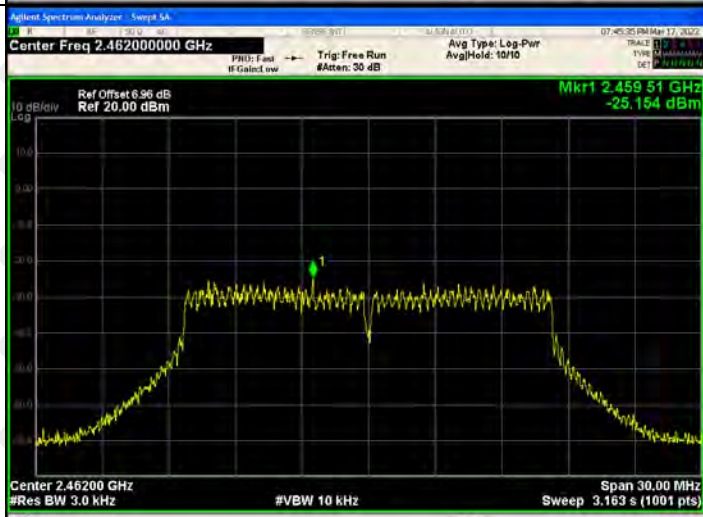

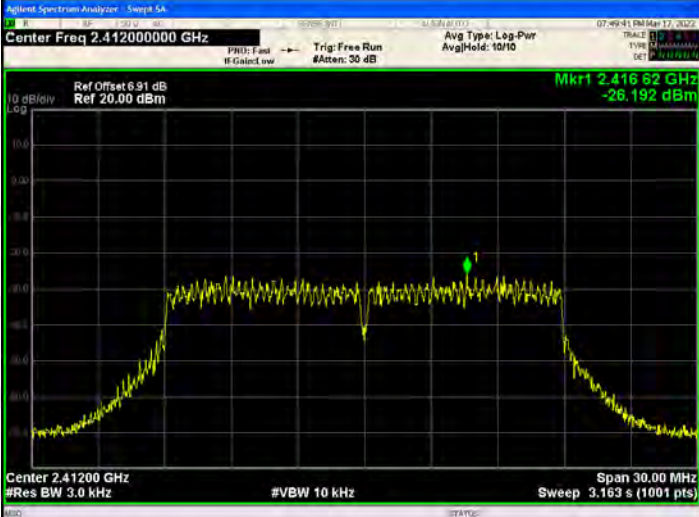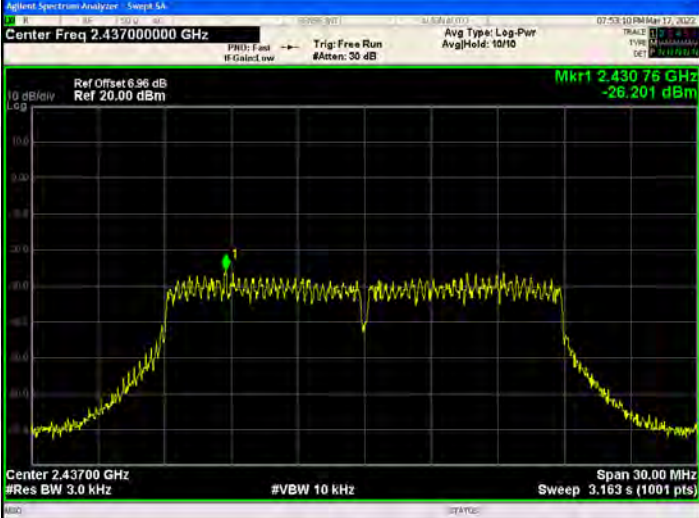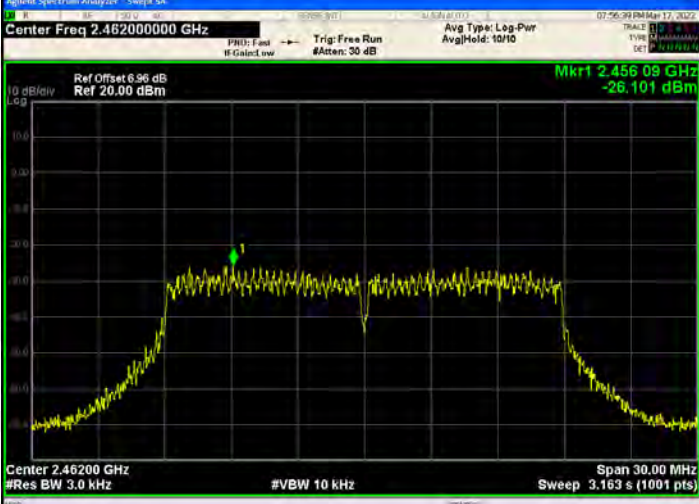802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

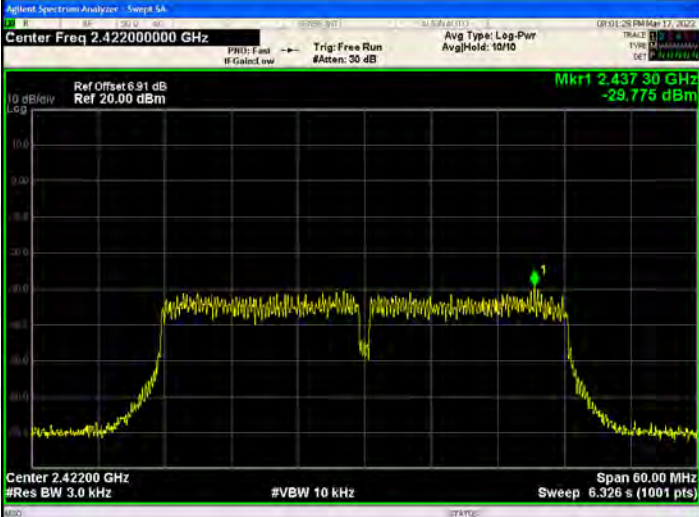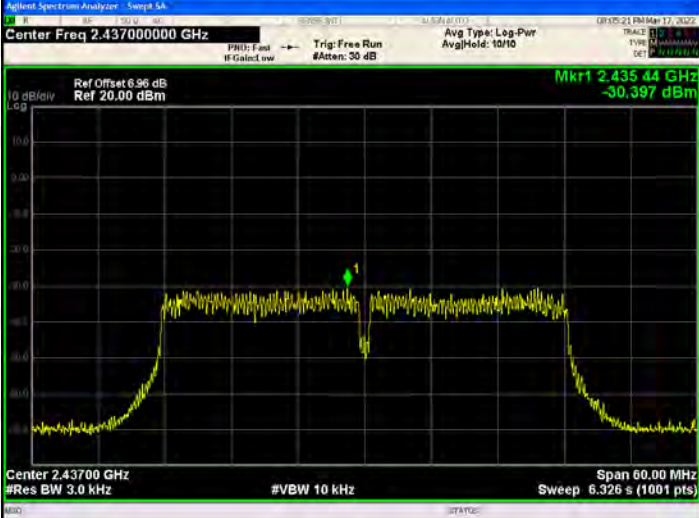802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT2: Test Graph

Graphs

802.11b /LCH



802.11b /MCH



802.11b/HCH



802.11g/LCH






802.11g/MCH



802.11g/HCH

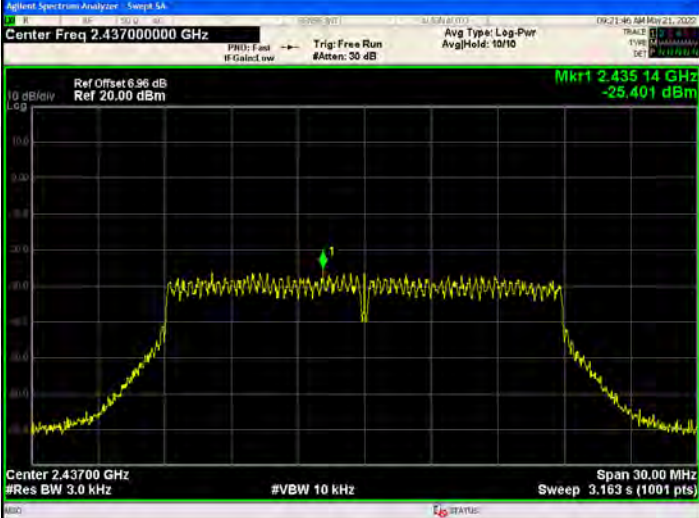

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

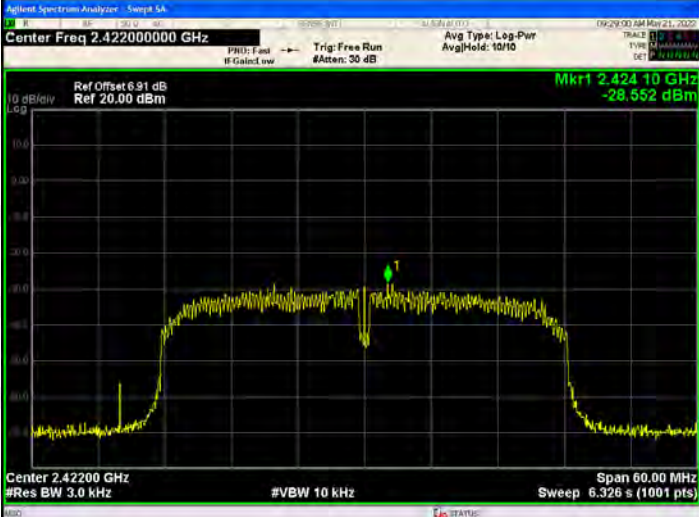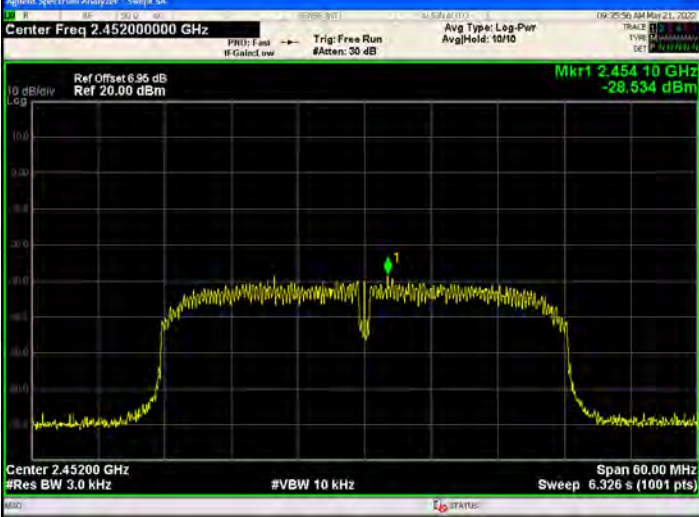802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2

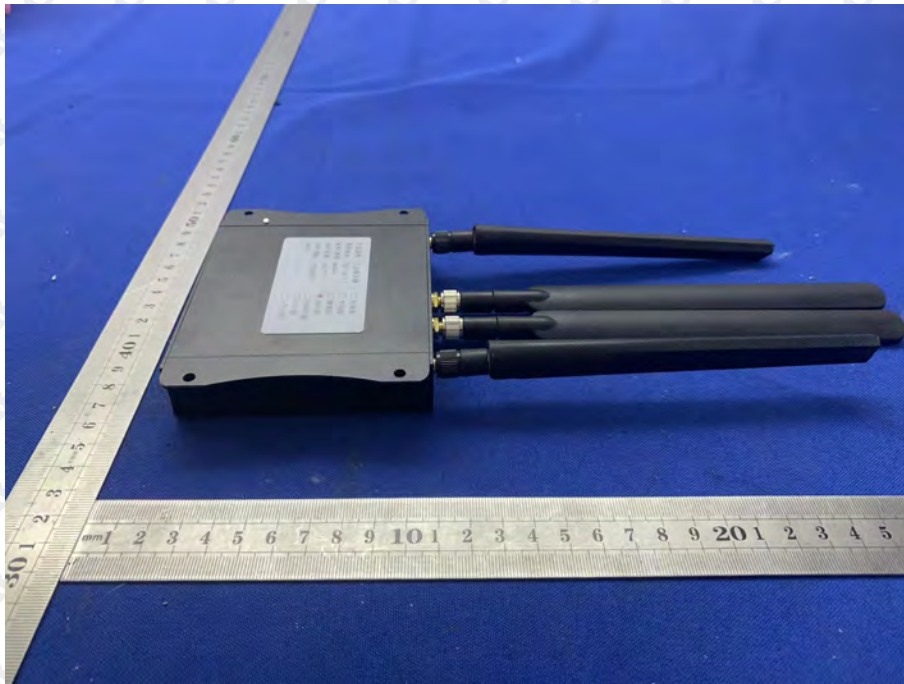

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

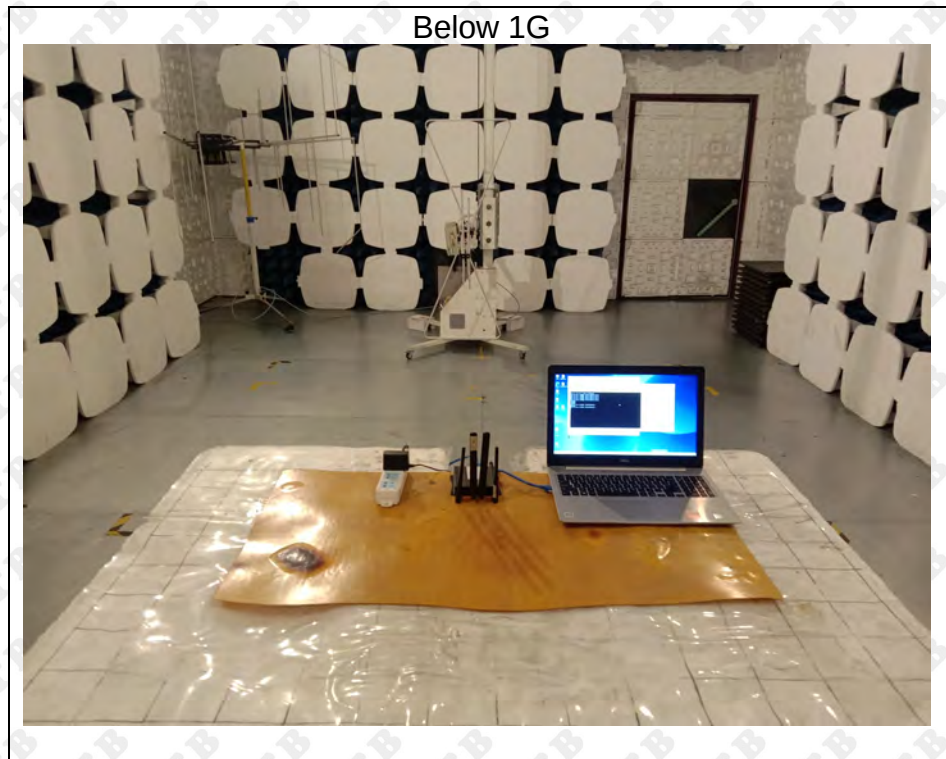

Conducted Emission



***** END OF REPORT *****