



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,  
Bao'an District, Shenzhen, China

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

Report Reference No. .... : CTA25031100202

FCC ID. .... : 2A35W-H96MAXPJ-X6

Compiled by

( position+printed name+signature) . : File administrators Joan Wu

Supervised by

( position+printed name+signature) . : Project Engineer Zoey Cao

Approved by

( position+printed name+signature) . : RF Manager Eric Wang

Date of issue ..... : Mar. 17, 2025

Testing Laboratory Name..... : Shenzhen CTA Testing Technology Co., Ltd.

Address ..... : Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,  
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name ..... : Shenzhen Haochuangyi Technology Co.,Ltd

Address ..... : 1101, Building 6, Changyi Industrial Plant, No.1 Lirong Road, Xinshi  
Community, Dalang Street, Longhua District, Shenzhen, China

Test specification .....

Standard..... : FCC Part 15.247

TRF Originator ..... : Shenzhen CTA Testing Technology Co., Ltd.

**Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description ..... : H96Max PJ-X6

Trade Mark..... : H96 Max

Manufacturer ..... : Shenzhen Haochuangyi Technology Co.,Ltd

Model/Type reference ..... : H96Max PJ-X6

Listed Models ..... : N/A

Modulation Type..... : CCK/DSSS/OFDM

Operation Frequency ..... : From 2412 - 2462MHz

Rating..... : AC 100-240V, 50/60Hz

Result ..... : PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

## TEST REPORT

Equipment under Test : H96Max PJ-X6

Model /Type : H96Max PJ-X6

Listed Models : N/A

**Applicant** : **Shenzhen Haochuangyi Technology Co.,Ltd**

Address : 1101, Building 6, Changyi Industrial Plant, No.1 Lirong Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen, China

**Manufacturer** : **Shenzhen Haochuangyi Technology Co.,Ltd**

Address : 1101, Building 6, Changyi Industrial Plant, No.1 Lirong Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|          |                                                             |                  |
|----------|-------------------------------------------------------------|------------------|
| <b>1</b> | <b><u>TEST STANDARDS .....</u></b>                          | <b><u>4</u></b>  |
| <b>2</b> | <b><u>SUMMARY .....</u></b>                                 | <b><u>5</u></b>  |
| 2.1      | General Remarks                                             | 5                |
| 2.2      | Product Description                                         | 5                |
| 2.3      | Equipment Under Test                                        | 5                |
| 2.4      | Short description of the Equipment under Test (EUT)         | 5                |
| 2.5      | EUT configuration                                           | 5                |
| 2.6      | EUT operation mode                                          | 6                |
| 2.7      | Block Diagram of Test Setup                                 | 6                |
| 2.8      | Related Submittal(s) / Grant (s)                            | 6                |
| 2.9      | Modifications                                               | 6                |
| <b>3</b> | <b><u>TEST ENVIRONMENT .....</u></b>                        | <b><u>7</u></b>  |
| 3.1      | Address of the test laboratory                              | 7                |
| 3.2      | Test Facility                                               | 7                |
| 3.3      | Environmental conditions                                    | 7                |
| 3.4      | Test Description                                            | 8                |
| 3.5      | Statement of the measurement uncertainty                    | 8                |
| 3.6      | Equipments Used during the Test                             | 9                |
| <b>4</b> | <b><u>TEST CONDITIONS AND RESULTS.....</u></b>              | <b><u>10</u></b> |
| 4.1      | AC Power Conducted Emission                                 | 10               |
| 4.2      | Radiated Emission                                           | 13               |
| 4.3      | Maximum Peak Conducted Output Power                         | 20               |
| 4.4      | Power Spectral Density                                      | 21               |
| 4.5      | 6dB Bandwidth                                               | 26               |
| 4.6      | Out-of-band Emissions                                       | 30               |
| 4.7      | Antenna Requirement                                         | 43               |
| <b>5</b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>            | <b><u>44</u></b> |
| <b>6</b> | <b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b> | <b><u>45</u></b> |

## 1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Mar. 11, 2025 |
| Testing commenced on           | : | Mar. 11, 2025 |
| Testing concluded on           | : | Mar. 17, 2025 |

### 2.2 Product Description

|                       |                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------|
| Product Description:  | H96Max PJ-X6                                                                                               |
| Model/Type reference: | H96Max PJ-X6                                                                                               |
| Power supply:         | AC 100-240V, 50/60Hz                                                                                       |
| Hardware version:     | V1.0                                                                                                       |
| Software version:     | V1.0                                                                                                       |
| testing sample ID:    | CTA250311002-1# (Engineer sample)<br>CTA250311002-2# (Normal sample)                                       |
| <b>WIFI :</b>         |                                                                                                            |
| Supported type:       | 802.11b/802.11g/802.11n(H20)/ 802.11n(H40)/802.11ax(H20)/ 802.11ax(H40)                                    |
| Modulation:           | 802.11b: DSSS<br>802.11g/802.11n(H20)/ 802.11n(H40)/802.11ax(H20)/ 802.11ax(H40): OFDM                     |
| Operation frequency:  | 802.11b/802.11g/802.11n(H20)/802.11ax(H20): 2412MHz~2462MHz<br>802.11n(H40)/802.11ax(H40): 2422MHz~2452MHz |
| Channel number:       | 802.11b/802.11g/802.11n(H20)/802.11ax(H20): 11<br>802.11n(H40)/802.11ax(H40):7                             |
| Channel separation:   | 5MHz                                                                                                       |
| Antenna type:         | PIFA antenna                                                                                               |
| Antenna gain:         | 2.16 dBi                                                                                                   |

### 2.3 Equipment Under Test

#### Power supply system utilised

|                      |   |                                                        |                                              |
|----------------------|---|--------------------------------------------------------|----------------------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                     | <input checked="" type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12V DC                           | <input type="radio"/> 24V DC                 |
|                      |   | <input type="radio"/> Other (specified in blank below) |                                              |

/

### 2.4 Short description of the Equipment under Test (EUT)

This is a H96Max PJ-X6.

For more details, refer to the user's manual of the EUT.

### 2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

- - supplied by the manufacturer
- - supplied by the lab

|   |  |  |
|---|--|--|
| / |  |  |
|---|--|--|


## 2.6 EUT operation mode

The application provider specific test software(AT command) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1       | 2412           | 8       | 2447           |
| 2       | 2417           | 9       | 2452           |
| 3       | 2422           | 10      | 2457           |
| 4       | 2427           | 11      | 2462           |
| 5       | 2432           |         |                |
| 6       | 2437           |         |                |
| 7       | 2442           |         |                |

## 2.7 Block Diagram of Test Setup

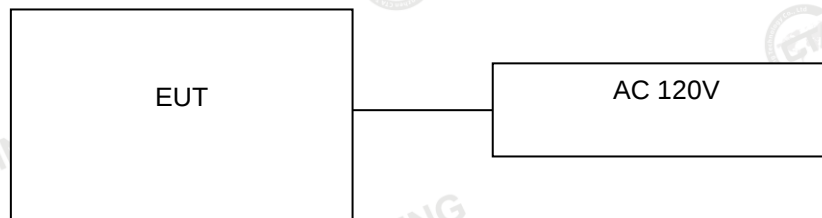

## 2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.9 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 517856 Designation Number: CN1318**

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6534.01**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

**ISED#: 27890 CAB identifier: CN0127**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
|                       |              |
| Humidity:             | 44 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

AC Power Conducted Emission

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 44 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

### 3.4 Test Description

|                                 |                                     |      |
|---------------------------------|-------------------------------------|------|
| FCC PART 15.247                 |                                     |      |
| FCC Part 15.207                 | AC Power Conducted Emission         | PASS |
| FCC Part 15.247(a)(2)           | 6dB Bandwidth                       | PASS |
| FCC Part 15.247(d)              | Spurious RF Conducted Emission      | PASS |
| FCC Part 15.247(b)              | Maximum Peak Conducted Output Power | PASS |
| FCC Part 15.247(e)              | Power Spectral Density              | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions                  | PASS |
| FCC Part 15.247(d)              | Band Edge                           | PASS |
| FCC Part 15.203/15.247 (b)      | Antenna Requirement                 | PASS |

#### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                                                                                                                                                                                           | Mode                        | Data Rate | Channel |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------|---------|
| Maximum Peak Conducted Output Power<br>Power Spectral Density<br>6dB Bandwidth<br>Spurious RF conducted emission<br>Radiated Emission 9KHz~1GHz&<br>Radiated Emission 1GHz~10 <sup>th</sup> Harmonic | 11b/DSSS                    | 1 Mbps    | 1/6/11  |
|                                                                                                                                                                                                      | 11g/OFDM                    | 6 Mbps    | 1/6/11  |
|                                                                                                                                                                                                      | 11n(20MHz)/11ax(20MHz)/OFDM | MCS0      | 1/6/11  |
|                                                                                                                                                                                                      | 11n(40MHz)/11ax(40MHz)/OFDM | MCS0      | 3/6/9   |
| Band Edge                                                                                                                                                                                            | 11b/DSSS                    | 1 Mbps    | 1/11    |
|                                                                                                                                                                                                      | 11g/OFDM                    | 6 Mbps    | 1/11    |
|                                                                                                                                                                                                      | 11n(20MHz)/11ax(20MHz)/OFDM | MCS0      | 1/11    |
|                                                                                                                                                                                                      | 11n(40MHz)/11ax(40MHz)/OFDM | MCS0      | 3/9     |

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

| Test                   | Range       | Measurement Uncertainty | Notes |
|------------------------|-------------|-------------------------|-------|
| Radiated Emission      | 9KHz~30MHz  | 3.02 dB                 | (1)   |
| Radiated Emission      | 30~1000MHz  | 4.06 dB                 | (1)   |
| Radiated Emission      | 1~18GHz     | 5.14 dB                 | (1)   |
| Radiated Emission      | 18-40GHz    | 5.38 dB                 | (1)   |
| Conducted Disturbance  | 0.15~30MHz  | 2.14 dB                 | (1)   |
| Output Peak power      | 30MHz~18GHz | 0.55 dB                 | (1)   |
| Power spectral density | /           | 0.57 dB                 | (1)   |
| Spectrum bandwidth     | /           | 1.1%                    | (1)   |

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

|                                          |            |         |     |
|------------------------------------------|------------|---------|-----|
| Radiated spurious emission (30MHz-1GHz)  | 30~1000MHz | 4.10 dB | (1) |
| Radiated spurious emission (1GHz-18GHz)  | 1~18GHz    | 4.32 dB | (1) |
| Radiated spurious emission (18GHz-40GHz) | 18-40GHz   | 5.54 dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.6 Equipments Used during the Test

| Test Equipment                      | Manufacturer   | Model No.       | Equipment No. | Calibration Date | Calibration Due Date |
|-------------------------------------|----------------|-----------------|---------------|------------------|----------------------|
| LISN                                | R&S            | ENV216          | CTA-308       | 2024/08/03       | 2025/08/02           |
| LISN                                | R&S            | ENV216          | CTA-314       | 2024/08/03       | 2025/08/02           |
| EMI Test Receiver                   | R&S            | ESPI            | CTA-307       | 2024/08/03       | 2025/08/02           |
| EMI Test Receiver                   | R&S            | ESCI            | CTA-306       | 2024/08/03       | 2025/08/02           |
| Spectrum Analyzer                   | Agilent        | N9020A          | CTA-301       | 2024/08/03       | 2025/08/02           |
| Spectrum Analyzer                   | R&S            | FSU             | CTA-337       | 2024/08/03       | 2025/08/02           |
| Vector Signal generator             | Agilent        | N5182A          | CTA-305       | 2024/08/03       | 2025/08/02           |
| Analog Signal Generator             | R&S            | SML03           | CTA-304       | 2024/08/03       | 2025/08/02           |
| WIDEBAND RADIO COMMUNICATION TESTER | CMW500         | R&S             | CTA-302       | 2024/08/03       | 2025/08/02           |
| Temperature and humidity meter      | Chigo          | ZG-7020         | CTA-326       | 2024/08/03       | 2025/08/02           |
| Ultra-Broadband Antenna             | Schwarzbeck    | VULB9163        | CTA-310       | 2023/10/17       | 2026/10/16           |
| Horn Antenna                        | Schwarzbeck    | BBHA 9120D      | CTA-309       | 2023/10/13       | 2026/10/12           |
| Loop Antenna                        | Zhinan         | ZN30900C        | CTA-311       | 2023/10/17       | 2026/10/16           |
| Broadband Horn Antenna              | A-INFOMW       | LB-180500H-2.4F | CTA-336       | 2023/09/13       | 2026/09/12           |
| Amplifier                           | Schwarzbeck    | BBV 9745        | CTA-312       | 2024/08/03       | 2025/08/02           |
| Amplifier                           | Taiwan chengyi | EMC051845B      | CTA-313       | 2024/08/03       | 2025/08/02           |
| Directional coupler                 | NARDA          | 4226-10         | CTA-303       | 2024/08/03       | 2025/08/02           |
| High-Pass Filter                    | XingBo         | XBLBQ-GTA18     | CTA-402       | 2024/08/03       | 2025/08/02           |
| High-Pass Filter                    | XingBo         | XBLBQ-GTA27     | CTA-403       | 2024/08/03       | 2025/08/02           |
| Automated filter bank               | Tonscend       | JS0806-F        | CTA-404       | 2024/08/03       | 2025/08/02           |
| Power Sensor                        | Agilent        | U2021XA         | CTA-405       | 2024/08/03       | 2025/08/02           |
| Amplifier                           | Schwarzbeck    | BBV9719         | CTA-406       | 2024/08/03       | 2025/08/02           |

| Test Equipment    | Manufacturer | Model No.   | Version number | Calibration Date | Calibration Due Date |
|-------------------|--------------|-------------|----------------|------------------|----------------------|
| EMI Test Software | Tonscend     | TS@JS32-RE  | 5.0.0.2        | N/A              | N/A                  |
| EMI Test Software | Tonscend     | TS@JS32-CE  | 5.0.0.1        | N/A              | N/A                  |
| RF Test Software  | Tonscend     | TS@JS1120-3 | 3.1.65         | N/A              | N/A                  |
| RF Test Software  | Tonscend     | TS@JS1120   | 3.1.46         | N/A              | N/A                  |


Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

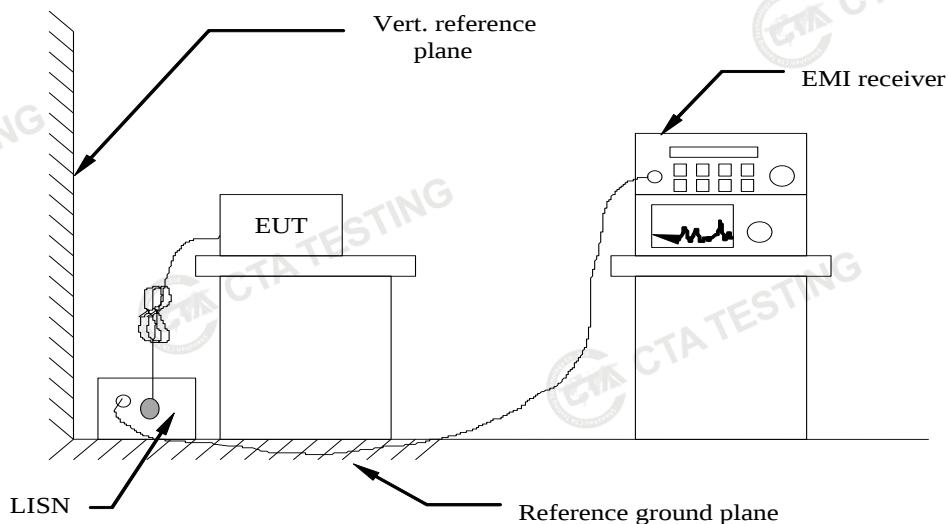

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Remark:

1. All modes of 802.11b/g/n/ax were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:

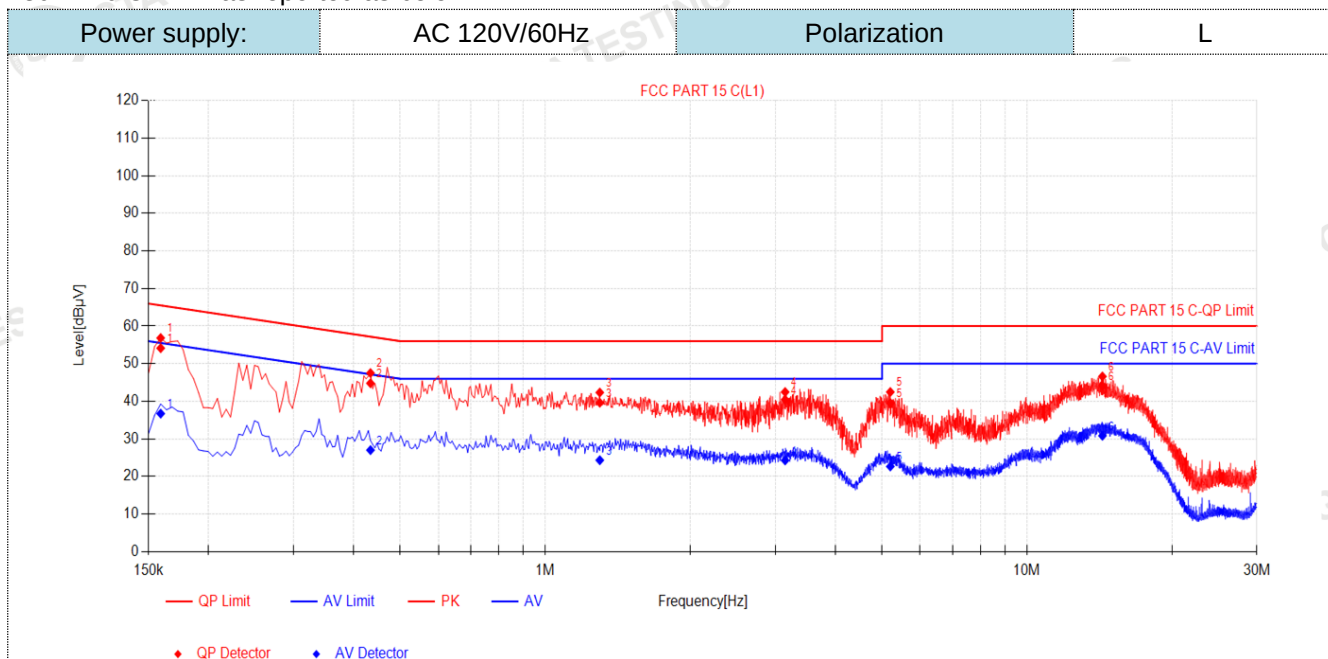

### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Reading[dB μV] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict |
|-----|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|---------|
| 1   | 0.159       | 9.91        | 44.22             | 54.13           | 65.52           | 11.39          | 26.81             | 36.72           | 55.52           | 18.80          | PASS    |
| 2   | 0.4335      | 9.92        | 34.88             | 44.80           | 57.19           | 12.39          | 17.10             | 27.02           | 47.19           | 20.17          | PASS    |
| 3   | 1.2975      | 9.90        | 29.73             | 39.63           | 56.00           | 16.37          | 14.43             | 24.33           | 46.00           | 21.67          | PASS    |
| 4   | 3.147       | 10.00       | 30.45             | 40.45           | 56.00           | 15.55          | 14.28             | 24.28           | 46.00           | 21.72          | PASS    |
| 5   | 5.2035      | 10.02       | 29.52             | 39.54           | 60.00           | 20.46          | 12.65             | 22.67           | 50.00           | 27.33          | PASS    |
| 6   | 14.343      | 10.30       | 33.87             | 44.17           | 60.00           | 15.83          | 20.53             | 30.83           | 50.00           | 19.17          | PASS    |


Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

|               |              |              |   |
|---------------|--------------|--------------|---|
| Power supply: | AC 120V/60Hz | Polarization | N |
|---------------|--------------|--------------|---|

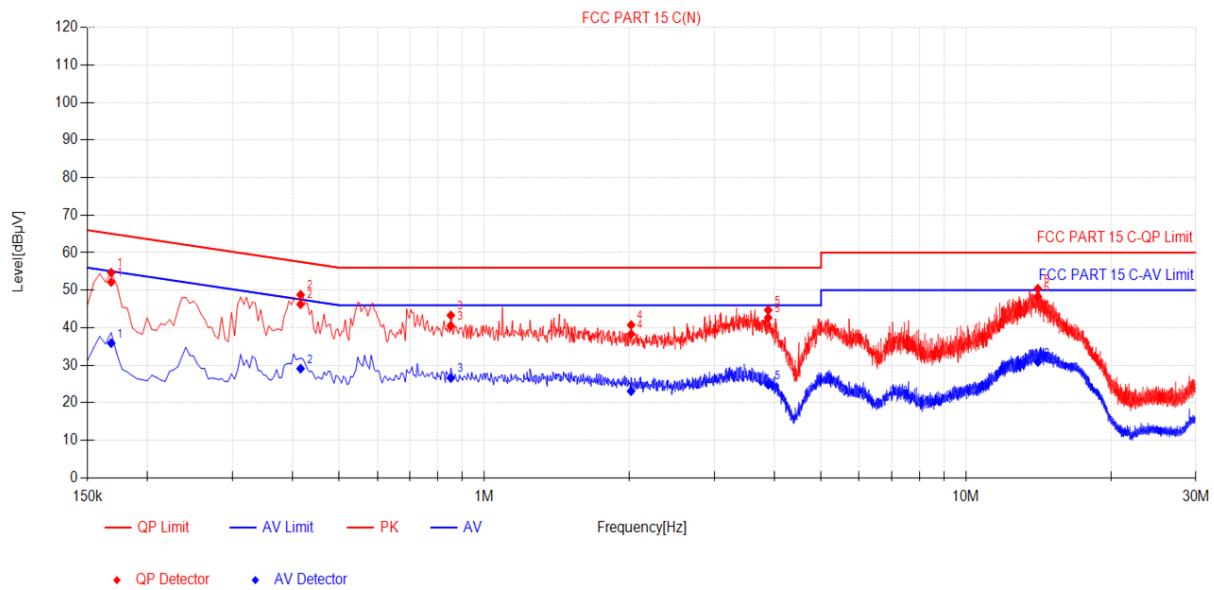

### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Reading[dB μV] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict |
|-----|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|---------|
| 1   | 0.168       | 10.08       | 42.09             | 52.17           | 65.06           | 12.89          | 25.82             | 35.90           | 55.06           | 19.16          | PASS    |
| 2   | 0.4155      | 9.95        | 36.31             | 46.26           | 57.54           | 11.28          | 19.16             | 29.11           | 47.54           | 18.43          | PASS    |
| 3   | 0.852       | 10.13       | 30.35             | 40.48           | 56.00           | 15.52          | 16.48             | 26.61           | 46.00           | 19.39          | PASS    |
| 4   | 2.0175      | 10.19       | 28.12             | 38.31           | 56.00           | 17.69          | 12.91             | 23.10           | 46.00           | 22.90          | PASS    |
| 5   | 3.885       | 10.13       | 32.54             | 42.67           | 56.00           | 13.33          | 14.71             | 24.84           | 46.00           | 21.16          | PASS    |
| 6   | 14.1        | 10.42       | 37.93             | 48.35           | 60.00           | 11.65          | 20.46             | 30.88           | 50.00           | 19.12          | PASS    |

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)


## 4.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

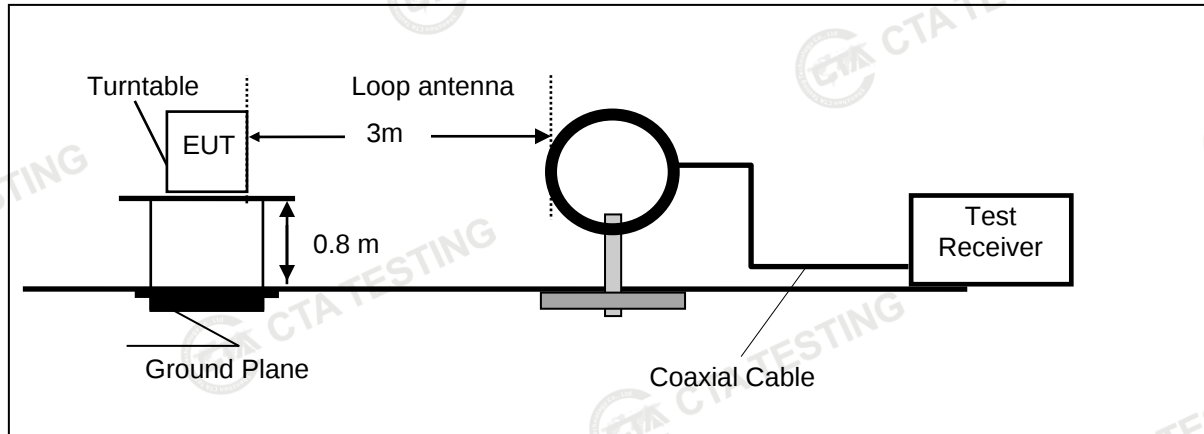


Frequency range 30MHz – 1000MHz

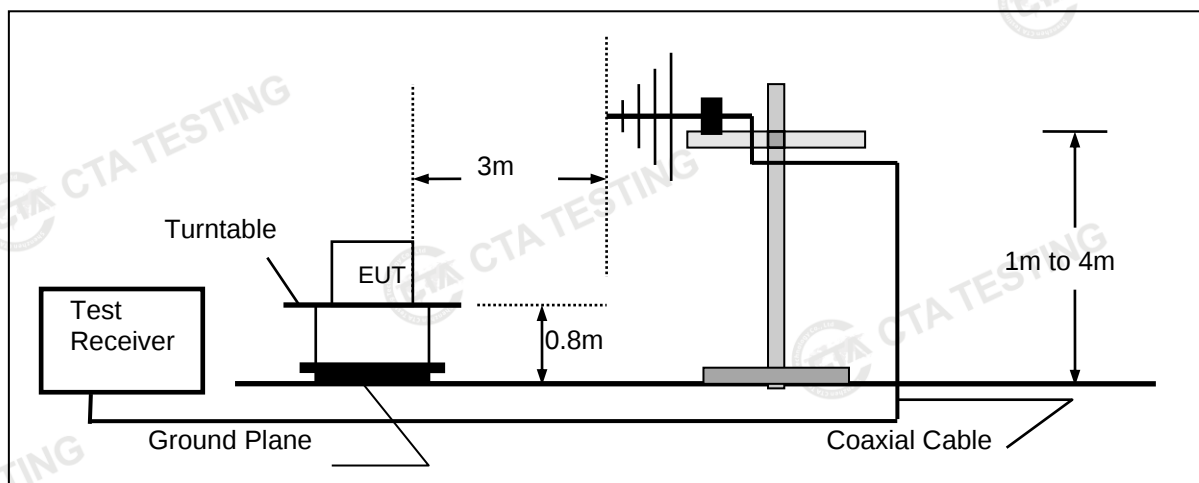

Frequency range above 1GHz-25GHz

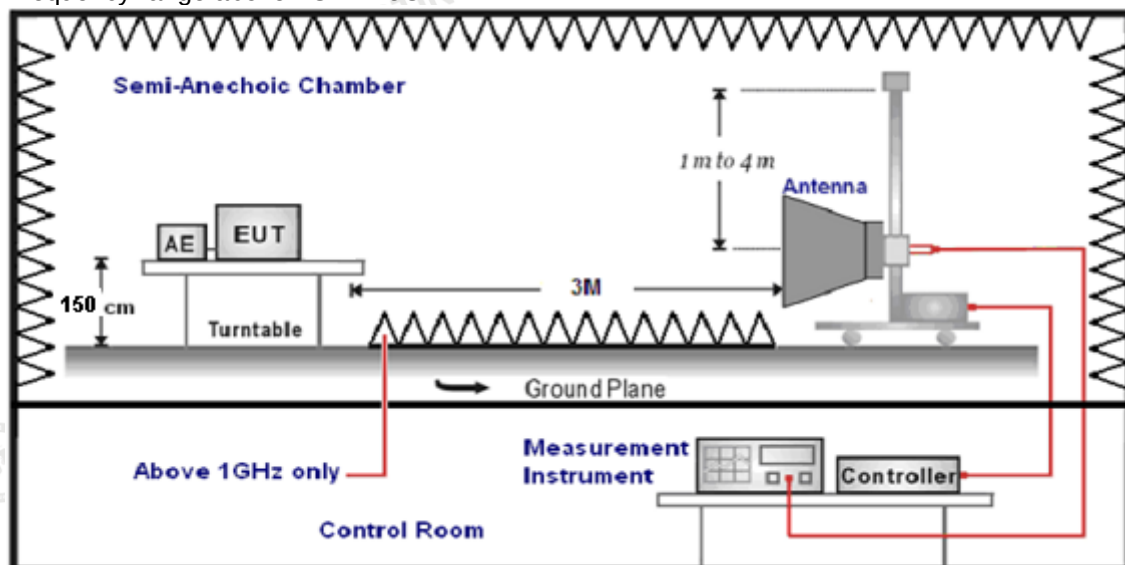

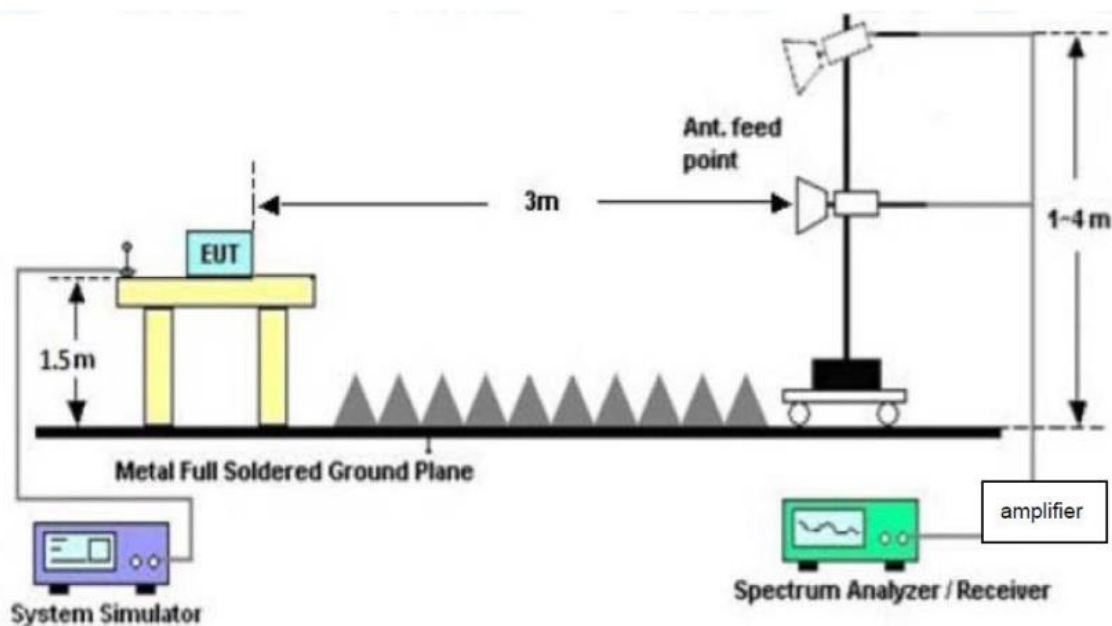

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz,Sweep time=Auto                                                                        | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz,Sweep time=Auto                                                                       | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz,Sweep time=Auto                                                                    | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |


**TEST RESULTS**

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

## For 30MHz-1GHz

## Horizontal

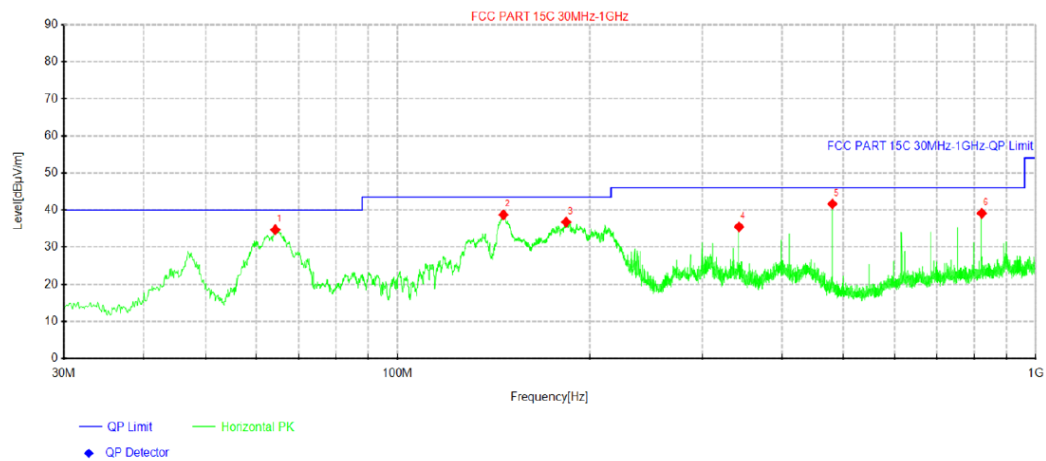

## Suspected Data List


| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Level<br>[dBμV/m] | Factor<br>[dB/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   |
|-----|----------------|-------------------|-------------------|------------------|-------------------|----------------|----------------|--------------|------------|
| 1   | 64.3138        | 48.50             | 34.69             | -13.81           | 40.00             | 5.31           | 100            | 333          | Horizontal |
| 2   | 146.521        | 54.24             | 38.73             | -15.51           | 43.50             | 4.77           | 100            | 149          | Horizontal |
| 3   | 183.745        | 51.09             | 36.77             | -14.32           | 43.50             | 6.73           | 200            | 114          | Horizontal |
| 4   | 342.825        | 46.22             | 35.47             | -10.75           | 46.00             | 10.53          | 100            | 79           | Horizontal |
| 5   | 480.08         | 50.98             | 41.66             | -9.32            | 46.00             | 4.34           | 100            | 149          | Horizontal |
| 6   | 822.975        | 43.42             | 39.12             | -4.30            | 46.00             | 6.88           | 200            | 137          | Horizontal |

Note:1). Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

## Vertical

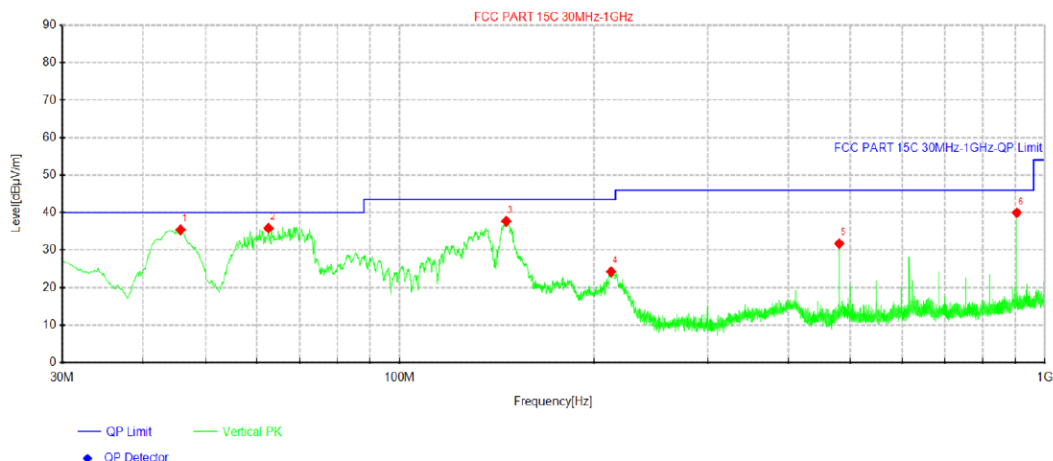

## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|----------|
| 1   | 45.7625     | 46.81          | 35.42          | -11.39        | 40.00          | 4.58        | 100         | 55        | Vertical |
| 2   | 62.6162     | 49.24          | 35.84          | -13.40        | 40.00          | 4.16        | 100         | 326       | Vertical |
| 3   | 146.278     | 53.21          | 37.70          | -15.51        | 43.50          | 5.80        | 200         | 349       | Vertical |
| 4   | 212.602     | 36.90          | 24.23          | -12.67        | 43.50          | 19.27       | 100         | 218       | Vertical |
| 5   | 479.958     | 41.06          | 31.74          | -9.32         | 46.00          | 14.26       | 100         | 114       | Vertical |
| 6   | 904.697     | 42.58          | 39.97          | -2.61         | 46.00          | 6.03        | 200         | 114       | Vertical |

Note:1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

**For 1GHz to 25GHz**

Note: 802.11b/802.11g/802.11n (H20)/802.11ax (H20)/ 802.11n (H40) / 802.11ax (H40) Mode all have been tested, only worse case 802.11b mode is reported

(above 1GHz)

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4824.00         | 61.80                   | PK | 74             | 12.20       | 66.16            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 4824.00         | 45.09                   | AV | 54             | 8.91        | 49.45            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 7236.00         | 54.07                   | PK | 74             | 19.93       | 54.70            | 36.58                 | 6.43              | 43.64              | -0.63                    |
| 7236.00         | 43.45                   | AV | 54             | 10.55       | 44.08            | 36.58                 | 6.43              | 43.64              | -0.63                    |

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4824.00         | 60.01                   | PK | 74             | 13.99       | 64.37            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 4824.00         | 43.17                   | AV | 54             | 10.83       | 47.53            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 7236.00         | 52.41                   | PK | 74             | 21.59       | 53.04            | 36.58                 | 6.43              | 43.64              | -0.63                    |
| 7236.00         | 41.70                   | AV | 54             | 12.30       | 42.33            | 36.58                 | 6.43              | 43.64              | -0.63                    |

| Frequency(MHz): |                         |    | 2437           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4874.00         | 61.27                   | PK | 74             | 12.73       | 65.22            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 4874.00         | 44.45                   | AV | 54             | 9.55        | 48.40            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 7311.00         | 53.51                   | PK | 74             | 20.49       | 53.87            | 36.54                 | 6.81              | 43.71              | -0.36                    |
| 7311.00         | 42.86                   | AV | 54             | 11.14       | 43.22            | 36.54                 | 6.81              | 43.71              | -0.36                    |

| Frequency(MHz): |                         |    | 2437           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4874.00         | 59.56                   | PK | 74             | 14.44       | 63.51            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 4874.00         | 42.57                   | AV | 54             | 11.43       | 46.52            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 7311.00         | 51.62                   | PK | 74             | 22.38       | 51.98            | 36.54                 | 6.81              | 43.71              | -0.36                    |
| 7311.00         | 40.99                   | AV | 54             | 13.01       | 41.35            | 36.54                 | 6.81              | 43.71              | -0.36                    |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4924.00         | 60.44                   | PK | 74             | 13.56       | 63.90            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 4924.00         | 43.68                   | AV | 54             | 10.32       | 47.14            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 7386.00         | 52.66                   | PK | 74             | 21.34       | 52.72            | 36.5                  | 7.23              | 43.79              | -0.06                    |
| 7386.00         | 42.15                   | AV | 54             | 11.85       | 42.21            | 36.5                  | 7.23              | 43.79              | -0.06                    |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4924.00         | 58.78                   | PK | 74             | 15.22       | 62.24            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 4924.00         | 41.75                   | AV | 54             | 12.25       | 45.21            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 7386.00         | 50.76                   | PK | 74             | 23.24       | 50.82            | 36.5                  | 7.23              | 43.79              | -0.06                    |
| 7386.00         | 40.54                   | AV | 54             | 13.46       | 40.60            | 36.5                  | 7.23              | 43.79              | -0.06                    |

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

#### Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n (H20)/802.11ax (H20)/ 802.11n (H40) / 802.11ax (H40) Mode all have been tested, only worse case 802.11b mode is reported

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 61.82                   | PK | 74             | 12.18       | 72.24            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| 2390.00         | 42.58                   | AV | 54             | 11.42       | 53.00            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 59.82                   | PK | 74             | 14.18       | 70.24            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| 2390.00         | 40.62                   | AV | 54             | 13.38       | 51.04            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 61.16                   | PK | 74             | 12.84       | 71.27            | 27.7                  | 4.47              | 42.28              | -10.11                   |
| 2483.50         | 41.91                   | AV | 54             | 12.09       | 52.02            | 27.7                  | 4.47              | 42.28              | -10.11                   |
| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 59.33                   | PK | 74             | 14.67       | 69.44            | 27.7                  | 4.47              | 42.28              | -10.11                   |
| 2483.50         | 40.32                   | AV | 54             | 13.68       | 50.43            | 27.7                  | 4.47              | 42.28              | -10.11                   |

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 4.3 Maximum Peak Conducted Output Power

#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

| Type           | Channel | Output power PK (dBm) | Limit (dBm) | Result |
|----------------|---------|-----------------------|-------------|--------|
| 802.11b        | 01      | 14.38                 | 30.00       | Pass   |
|                | 06      | 13.10                 |             |        |
|                | 11      | 13.75                 |             |        |
| 802.11g        | 01      | 12.46                 | 30.00       | Pass   |
|                | 06      | 12.78                 |             |        |
|                | 11      | 12.49                 |             |        |
| 802.11n(HT20)  | 01      | 12.94                 | 30.00       | Pass   |
|                | 06      | 12.49                 |             |        |
|                | 11      | 12.27                 |             |        |
| 802.11n(HT40)  | 03      | 12.20                 | 30.00       | Pass   |
|                | 06      | 11.90                 |             |        |
|                | 09      | 13.10                 |             |        |
| 802.11ax(HT20) | 01      | 12.71                 | 30.00       | Pass   |
|                | 06      | 12.68                 |             |        |
|                | 11      | 12.37                 |             |        |
| 802.11ax(HT40) | 03      | 12.12                 | 30.00       | Pass   |
|                | 06      | 11.90                 |             |        |
|                | 09      | 13.14                 |             |        |

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n/ax HT20; MCS0 at IEEE 802.11n/ax HT40;

#### 4.4 Power Spectral Density

##### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

##### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

##### Test Configuration



##### Test Results

| Type           | Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|----------------|---------|-----------------------------------|------------------|--------|
| 802.11b        | 01      | -11.70                            | 8.00             | Pass   |
|                | 06      | -11.53                            |                  |        |
|                | 11      | -11.36                            |                  |        |
| 802.11g        | 01      | -18.11                            | 8.00             | Pass   |
|                | 06      | -18.86                            |                  |        |
|                | 11      | -19.21                            |                  |        |
| 802.11n(HT20)  | 01      | -18.94                            | 8.00             | Pass   |
|                | 06      | -19.31                            |                  |        |
|                | 11      | -19.89                            |                  |        |
| 802.11n(HT40)  | 03      | -22.29                            | 8.00             | Pass   |
|                | 06      | -21.64                            |                  |        |
|                | 09      | -21.37                            |                  |        |
| 802.11ax(HT20) | 01      | -18.06                            | 8.00             | Pass   |
|                | 06      | -18.42                            |                  |        |
|                | 11      | -19.30                            |                  |        |
| 802.11ax(HT40) | 03      | -22.22                            | 8.00             | Pass   |
|                | 06      | -22.06                            |                  |        |
|                | 09      | -21.37                            |                  |        |

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn


- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n/ax HT20; MCS0 at IEEE 802.11n/ax HT40;

Please refer to following plots;


802.11b




802.11g

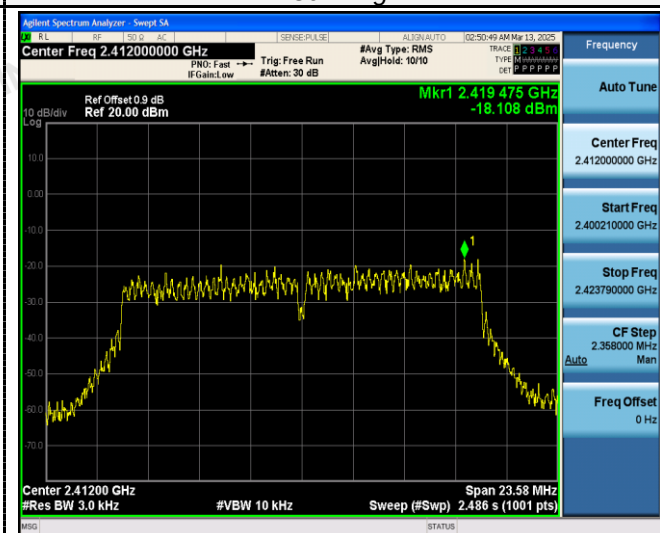


CH01

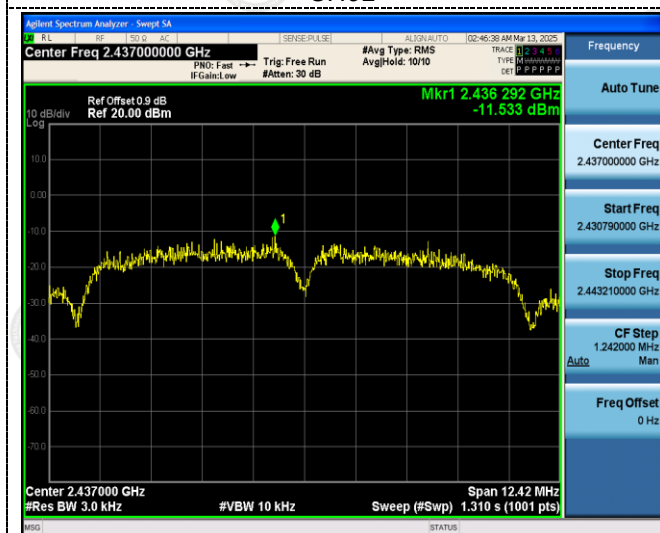


CH01

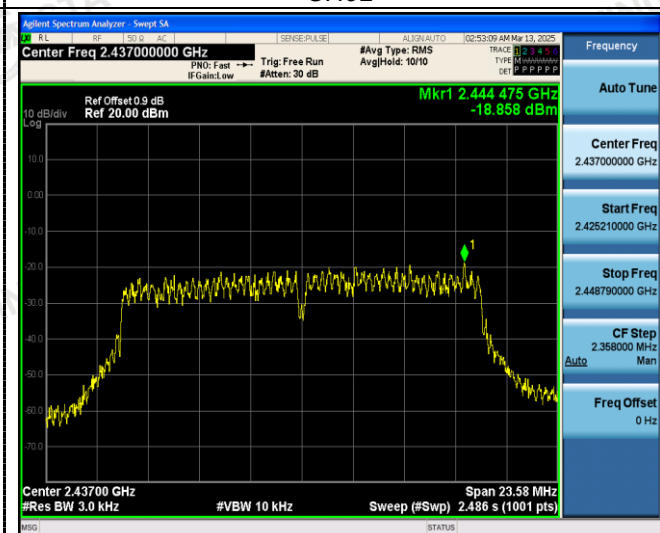

CH06

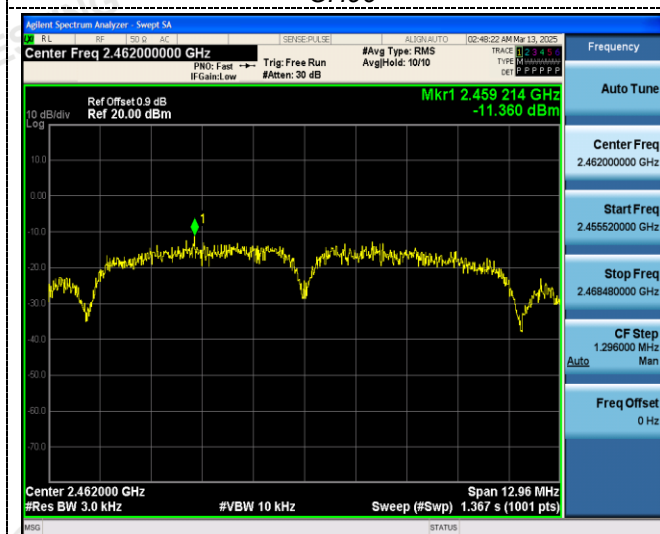

CH06

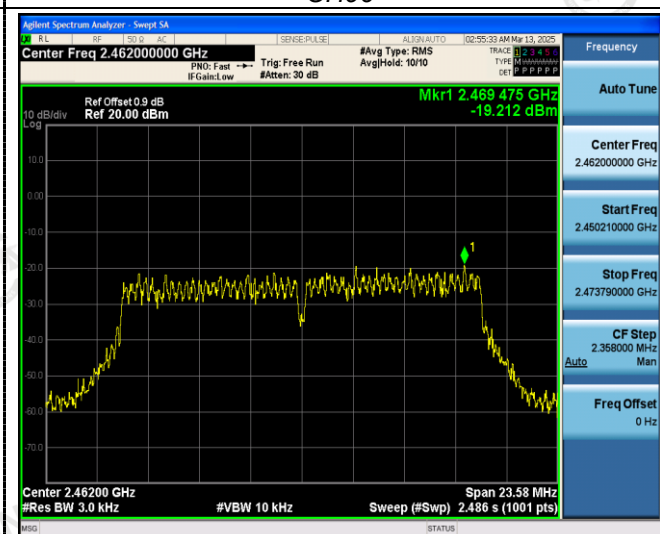


CH11




CH11




802.11n(HT20)

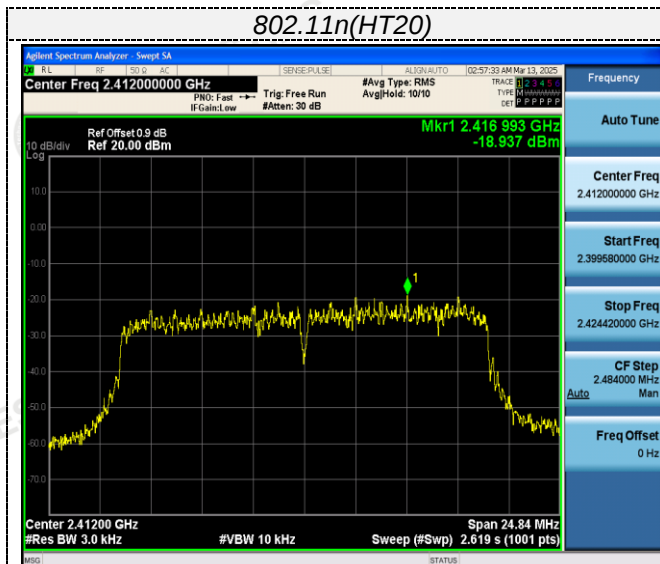


802.11n(HT40)

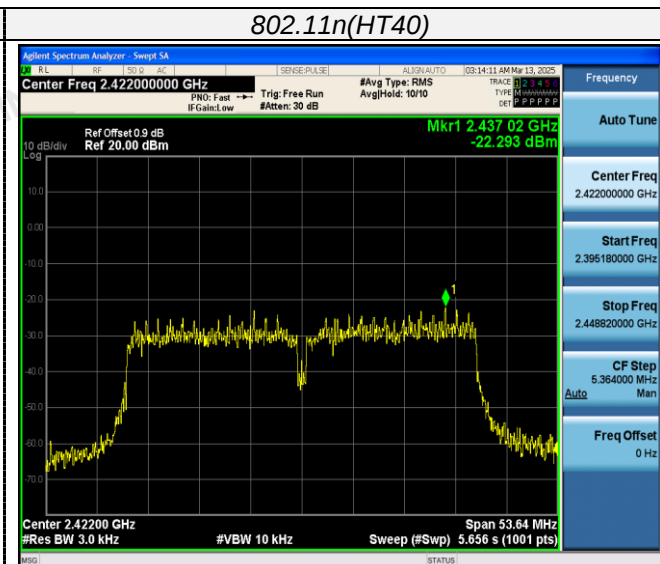


CH01

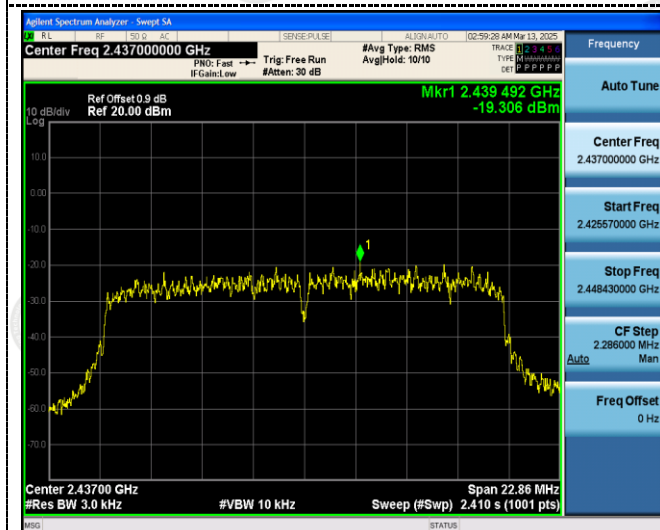


CH03

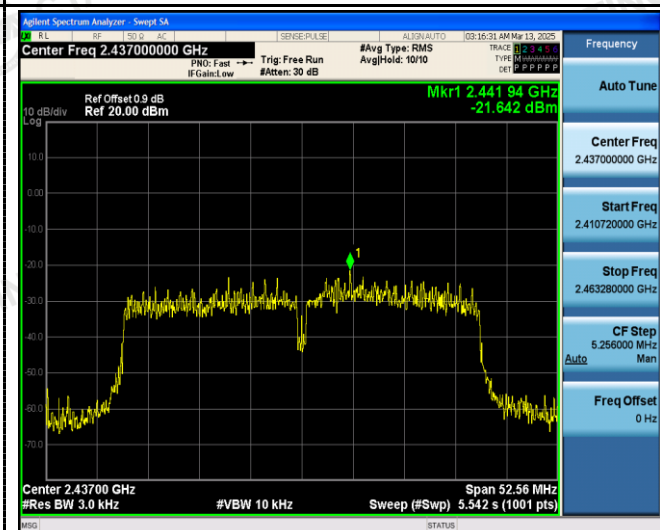

CH06

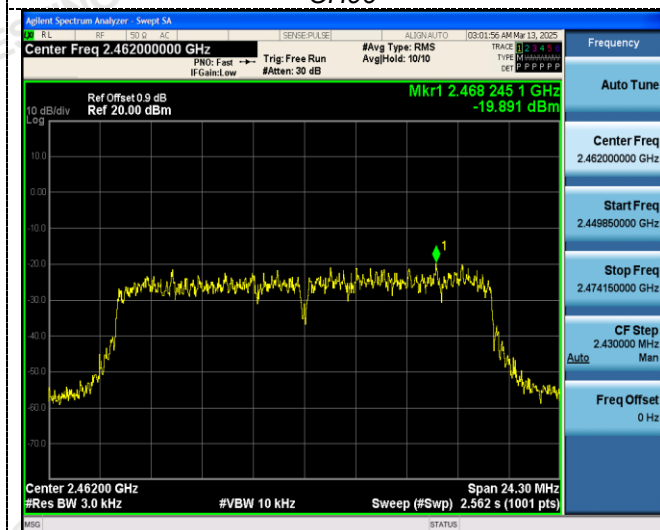

CH06

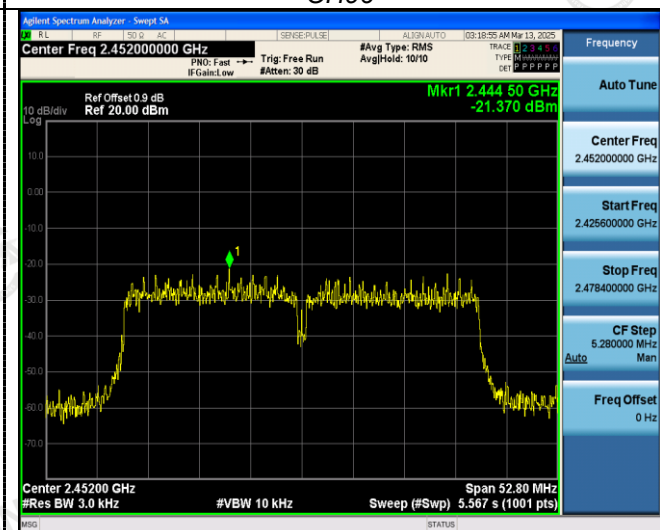


CH11




CH09




802.11ax(HT20)

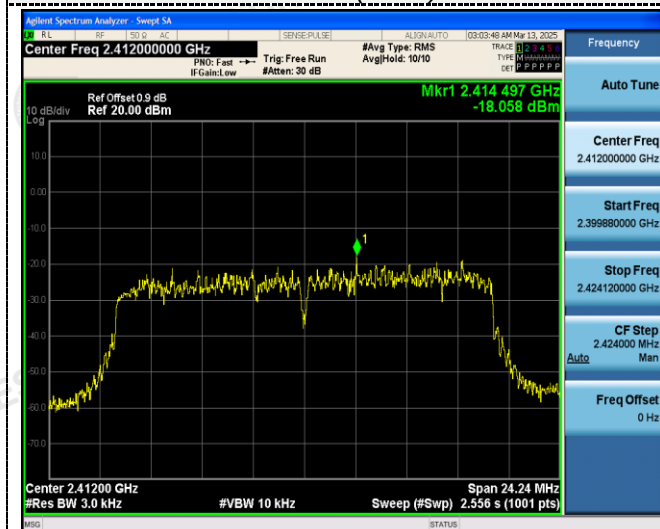


802.11ax(HT40)

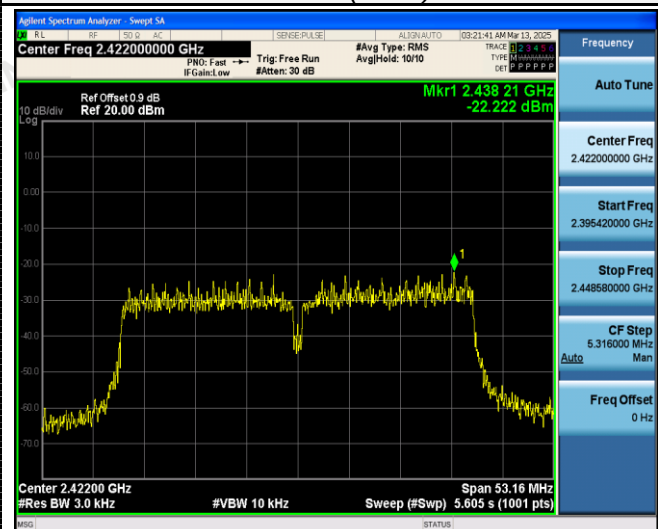


CH01

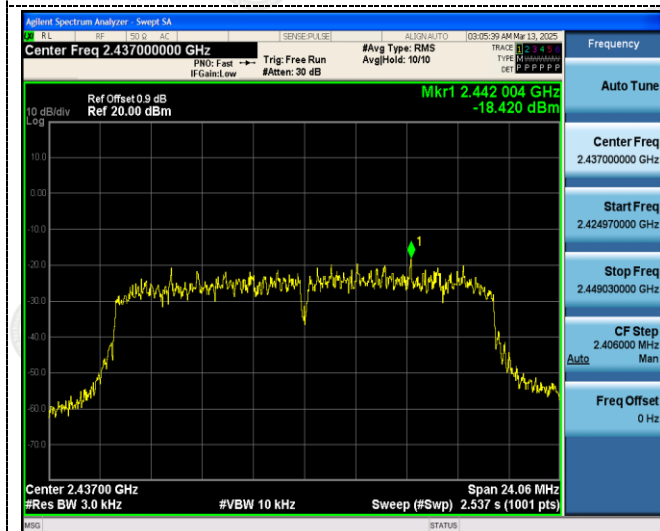


CH03

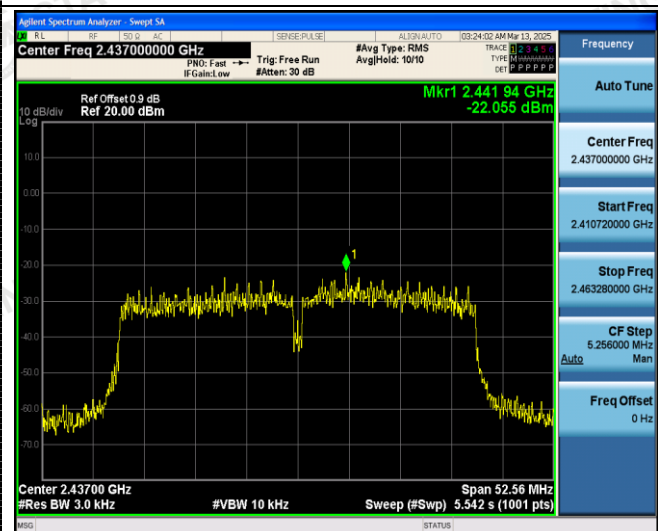

CH06

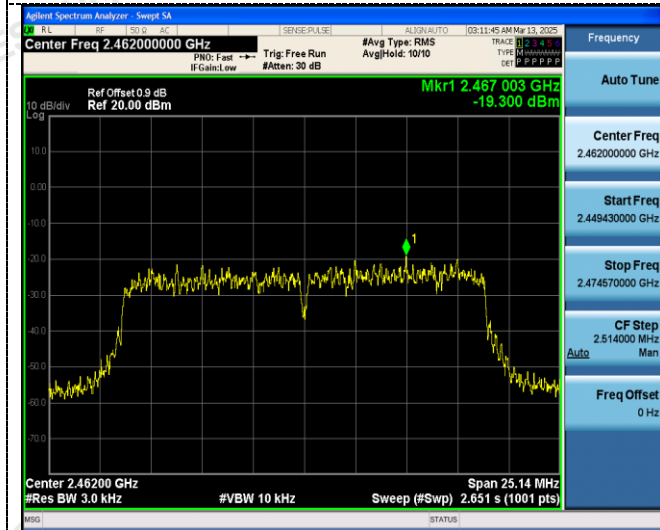

CH06

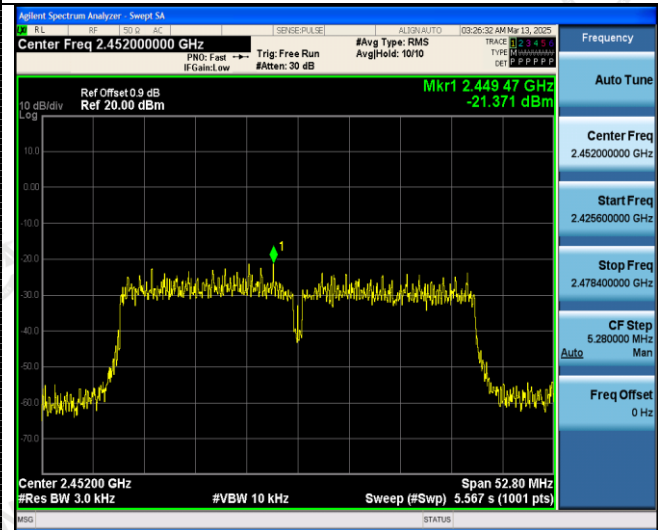

CH11



CH09



## 4.5 6dB Bandwidth

### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### Test Configuration



### Test Results

| Type           | Channel | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|----------------|---------|---------------------|-------------|--------|
| 802.11b        | 01      | 9.320               | ≥500        | Pass   |
|                | 06      | 8.280               |             |        |
|                | 11      | 8.640               |             |        |
| 802.11g        | 01      | 15.720              | ≥500        | Pass   |
|                | 06      | 15.720              |             |        |
|                | 11      | 15.720              |             |        |
| 802.11n(HT20)  | 01      | 16.560              | ≥500        | Pass   |
|                | 06      | 15.240              |             |        |
|                | 11      | 16.200              |             |        |
| 802.11n(HT40)  | 03      | 35.760              | ≥500        | Pass   |
|                | 06      | 35.040              |             |        |
|                | 09      | 35.200              |             |        |
| 802.11ax(HT20) | 01      | 16.160              | ≥500        | Pass   |
|                | 06      | 16.040              |             |        |
|                | 11      | 16.760              |             |        |
| 802.11ax(HT40) | 03      | 35.440              | ≥500        | Pass   |
|                | 06      | 35.040              |             |        |
|                | 09      | 35.200              |             |        |

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n/ax HT20; MCS0 at IEEE 802.11n/ax HT40;


Please refer to following plots;

802.11b



CH01

802.11g

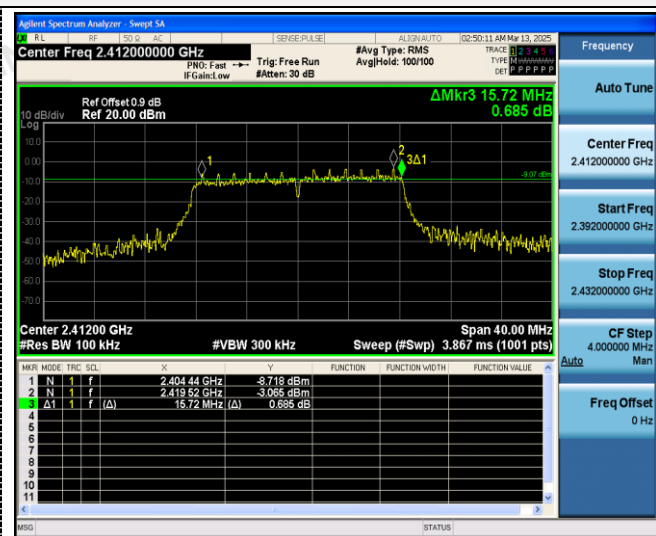

CH01




CH06



CH06



CH11

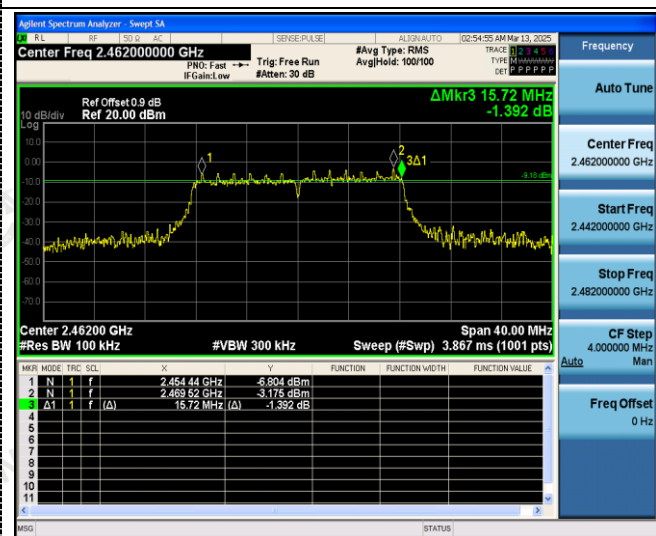

CH11

802.11n(HT20)



CH01




CH06




CH11


802.11n(HT40)

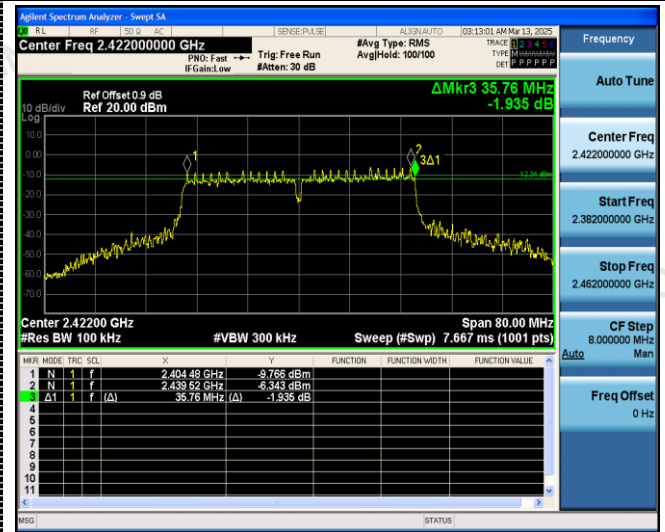

CH03

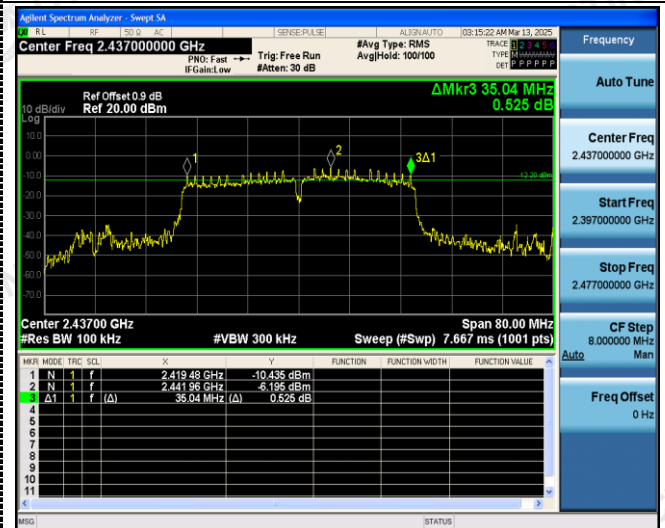

CH06

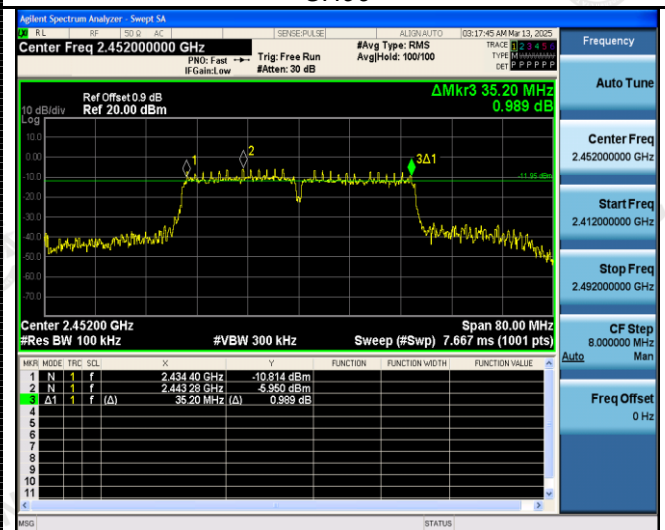


CH09


## 802.11ax(HT20)




## 802.11ax(HT40)

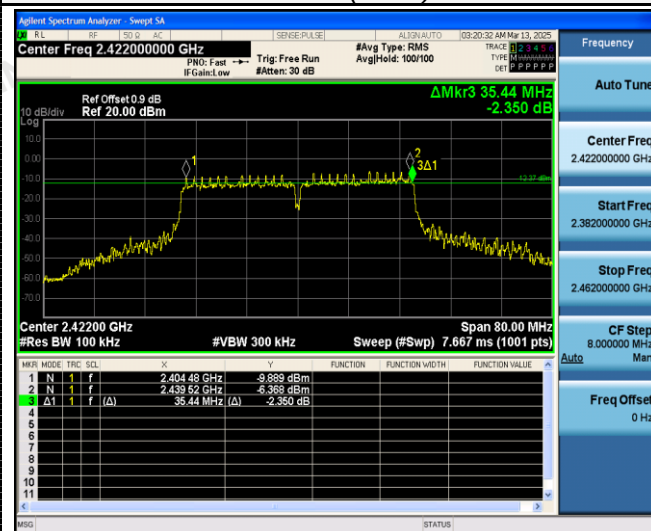

## CH01

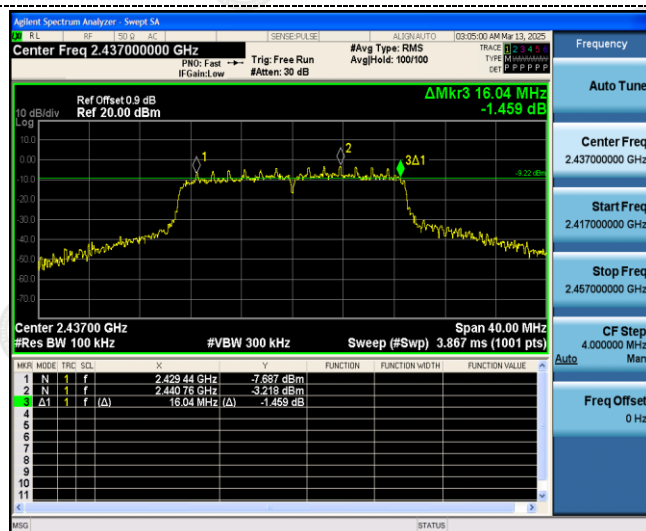


## CH03

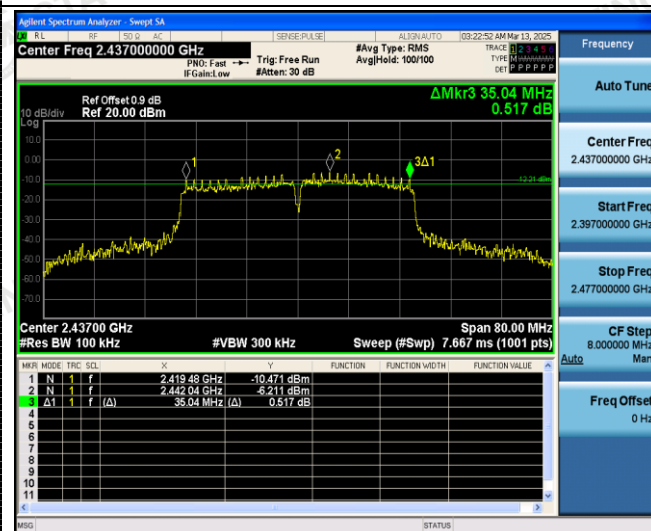

## CH06



## CH06

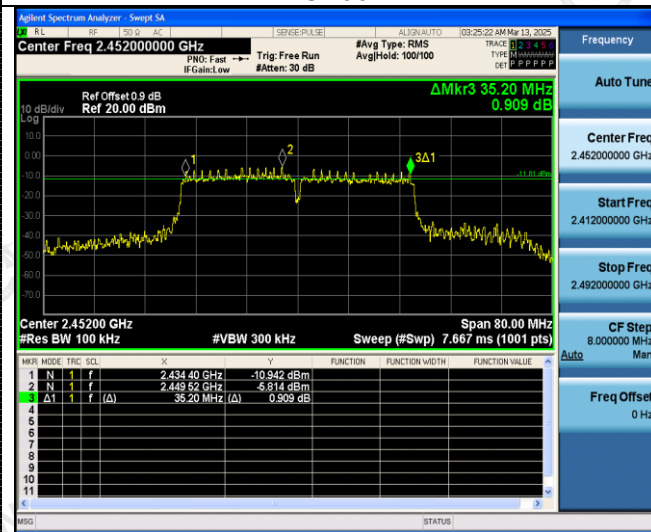

## CH11



## CH09



## 4.6 Out-of-band Emissions


### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

### Test Configuration



### Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data. And record the worst data in the report.

Test plot as follows: