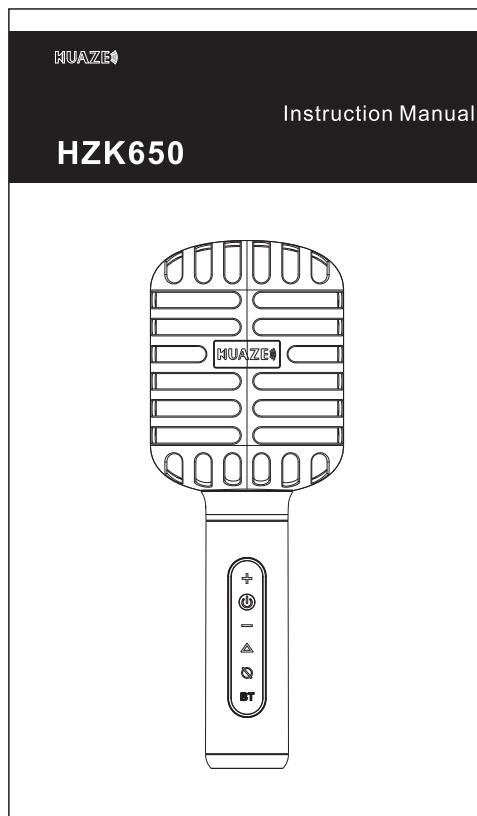
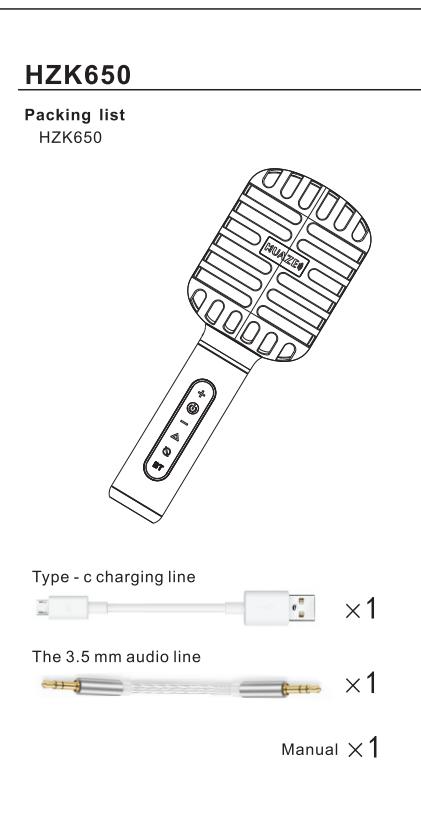
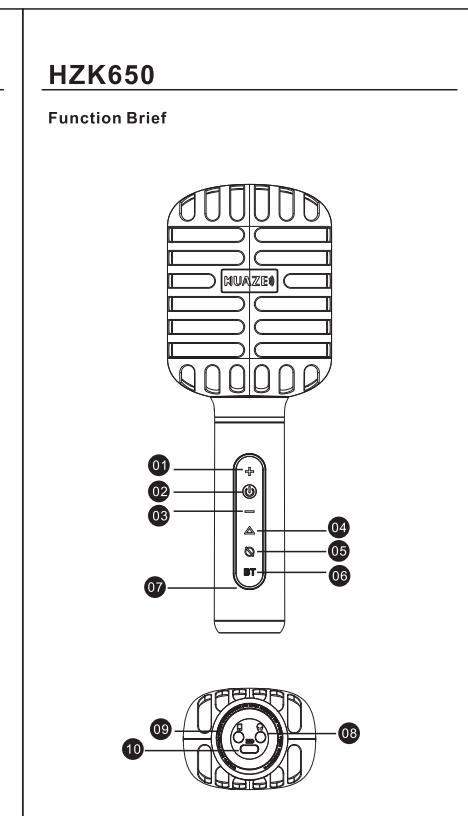
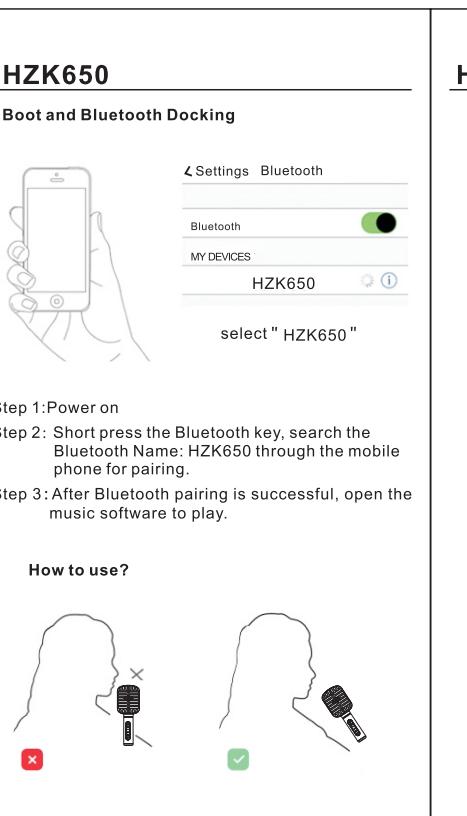
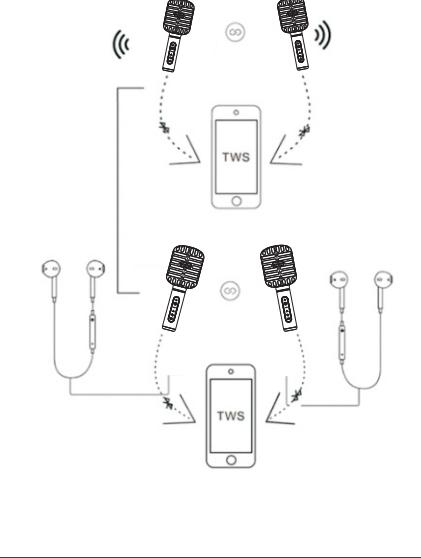


最终尺寸已105*60mm为准 上下左右各加3mm出血位

	HZK650 Packing list HZK650 	HZK650 Function Brief 	HZK650 <ul style="list-style-type: none"> 1. Volume +: Short press to increase the volume, long press to play previous song. 2. Power: Long press to switch the machine on and off. After power on, short press to switch between microphone volume and accompaniment volume adjustment. 3. Volume -: Short press to decrease the volume, long press to play next song. 4. Sound effect switch: Short press to broadcast the current sound effect. Short press again within 3 seconds to switch to the next sound effect. The switching sequence is: hall, opera, folk song, KTV, pop, monster, shouting, male to female, female to male, original sound. 5. Cancel tone key: short press to switch between cancel tone on and off. long press for 3 seconds to switch between Chinese and English. 6. Bluetooth button: Short press to exit the current bluetooth device connection and leave it in Bluetooth pairing standby state. Hold down for more than 10 seconds to search for other unpaired microphones; after the connection is successful, the two phones are in TWS mode 7. Working Indicator: Blinking slowly: Bluetooth is not connected. Breathing Status: It is charging. Steady on: Connected to Bluetooth or fully charged in charging state. 8. Earphone jack: Plug in the earphones, and the sound will be played from the external amplifier to the earphones. 9. Mobile phone live broadcast port: Connect the mobile phone through the four-segment audio cables that comes with the accessory box for recording and live broadcasting. 10. Charging port: Charge the product through the Type-C charging cable that comes with the accessory box. 	HZK650 Boot and Bluetooth Docking  <p>Step 1: Power on Step 2: Short press the Bluetooth key, search the Bluetooth Name: HZK650 through the mobile phone for pairing. Step 3: After Bluetooth pairing is successful, open the music software to play.</p>	HZK650 																																			
HZK650 <p>Main Features</p> <ol style="list-style-type: none"> 1. Using high-performance DSP, with clearer sound quality, stable signal, no delay, anti-howl and anti-interference. 2. Working range: Bluetooth range is 32 feet (10m). 3. Portable microphone, operate all functions on the handheld microphone. 4. Bluetooth 5.0 is available, search for Bluetooth "HZK650" in the Bluetooth device list and connect it. 5. 2 sets working together: Up to 2 microphones. 6. High-fidelity speaker 2x10W high-power audio output 7. Adjustable Volume : 5 levels in total 8. High quality material : PC+ABS + steel mesh <p>How to connect TWS mode:</p> <ol style="list-style-type: none"> 1. Set the first HZK650 that is turned on as the host and connect it to the mobile phone through Bluetooth. 2. Then turn on the other secondary handheld, press the BT button of the main machine for 3 seconds until the indicator blinks quickly, then the main machine and secondary machine will be paired automatically. After the pairing is successful, the indicators of the main machine and secondary machine will be (Note: if there is no response, press the BT button of the secondary machine short, and press the BT button of the main machine long for 3 seconds, and then pair again). 3. The volume keys of the mobile phone can control the volume of the host and the deputy, and the volume keys of the host and the deputy control their own volume. 4. Hold down the BT button for 3 seconds to exit TWS mode. 	HZK650 <p>Wireless karaoke Party Mode</p> <p>Two Bluetooth microphones can perform interactive duet in wireless party mode. Pairing mode: Long press the Bluetooth key on the main unit and short press the Bluetooth key on the auxiliary unit.</p> <p>External amplifying mode</p>  <p>Multi-scenes, ready to use</p> <p>Whether it's wireless karaoke, wired song recording, professional recording or live broadcasting, it can be realized by connecting the interface on the microphone, which is applicable to multiple scenarios, plug and play.</p> <p>Wireless karaoke single player mode</p> 	HZK650 <p>Wired recording and live broadcasting:</p> <p>For recording mode, you need to use the audio cable that comes with the accessory box or other suitable four-segment audio cable. At this time, the external amplifier is not available, and you can only use the monitor and only with the original sound.</p> <p>mobile phone</p>  <p>Specifications:</p> <table border="1"> <tr> <td>Model No.:</td> <td>HZK650</td> </tr> <tr> <td>Color:</td> <td>Grey, rose gold and black</td> </tr> <tr> <td>Wireless Frequency:</td> <td>Bluetooth 5.0</td> </tr> <tr> <td>Microphone Type:</td> <td>Capacitive mode</td> </tr> <tr> <td>Polar Pattern:</td> <td>Unidirectional</td> </tr> <tr> <td>Maximum SPL:</td> <td>91dB</td> </tr> <tr> <td>Battery:</td> <td>2600mAh</td> </tr> <tr> <td>S/N Ratio:</td> <td>74 dB</td> </tr> <tr> <td>Wireless Distance:</td> <td>>10 meters indoor environment</td> </tr> <tr> <td>Sound Signal:</td> <td>Digital sampling 48kHz</td> </tr> <tr> <td>Frequency Response:</td> <td>75Hz-18kHz</td> </tr> <tr> <td>Working Time:</td> <td>5 hours around</td> </tr> <tr> <td>Material:</td> <td>PC+ABS+Metal</td> </tr> <tr> <td>Product Weight:</td> <td>GW 1008g NW 638g</td> </tr> <tr> <td>Gift Box Size:</td> <td>30.5*13.2*11.2 cm</td> </tr> <tr> <td>Earphone Port:</td> <td>3.5 mm Jack</td> </tr> <tr> <td>Charging Port:</td> <td>USB Type-C</td> </tr> <tr> <td>Hardware Platform:</td> <td>PC, Smartphone</td> </tr> </table>	Model No.:	HZK650	Color:	Grey, rose gold and black	Wireless Frequency:	Bluetooth 5.0	Microphone Type:	Capacitive mode	Polar Pattern:	Unidirectional	Maximum SPL:	91dB	Battery:	2600mAh	S/N Ratio:	74 dB	Wireless Distance:	>10 meters indoor environment	Sound Signal:	Digital sampling 48kHz	Frequency Response:	75Hz-18kHz	Working Time:	5 hours around	Material:	PC+ABS+Metal	Product Weight:	GW 1008g NW 638g	Gift Box Size:	30.5*13.2*11.2 cm	Earphone Port:	3.5 mm Jack	Charging Port:	USB Type-C	Hardware Platform:	PC, Smartphone	HZK650 <p>Wireless microphone system with echo/treble/bass:</p> <p>The wireless karaoke microphone set has ten sound effects modes, you can choose different sound effects according to different songs. This wireless microphone can be used for karaoke, singing, recording, playing your favorite music through a Bluetooth connection (HZK 350). Ideal for karaoke, lectures, conferences, indoor or outdoor.</p> <p>Bluetooth wireless karaoke microphone system:</p> <p>Built-in high-sensitivity professional dynamic microphone. Bluetooth transmission distance 32 feet (10 meters), stable signal, no delay, no radiation, anti-howl, anti-interference and constant frequency.</p> <p>7.4V 2600 mAh battery</p> <p>The receiver of the wireless microphone has built-in 2600 mAh rechargeable lithium batteries in series, which can provide about 4.5 hours of working time and fully charge within 2 hours.</p> <p>Portable and professional dual dynamic microphone:</p> <p>Ready to use, no additional settings are required. You can adjust the MIC volume, accompaniment volume or ten sound effect settings on the handheld microphone. The microphone is portable and compact. It is widely used in indoor karaoke, conferences, speeches, online podcasts, family gatherings, promotion, etc.</p>	HZK650 <p>FCC Warning statement:</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to other devices. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to other equipment, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the FCC Rules (47 CFR Part 15) or an experienced radio/TV technician for help. FCC RF exposure statement: This equipment complies with FCC Radiation exposure limits set forth for an uncontrolled environment. This equipment may be used in uncontrolled environment without restriction.</p> <p></p>
Model No.:	HZK650																																							
Color:	Grey, rose gold and black																																							
Wireless Frequency:	Bluetooth 5.0																																							
Microphone Type:	Capacitive mode																																							
Polar Pattern:	Unidirectional																																							
Maximum SPL:	91dB																																							
Battery:	2600mAh																																							
S/N Ratio:	74 dB																																							
Wireless Distance:	>10 meters indoor environment																																							
Sound Signal:	Digital sampling 48kHz																																							
Frequency Response:	75Hz-18kHz																																							
Working Time:	5 hours around																																							
Material:	PC+ABS+Metal																																							
Product Weight:	GW 1008g NW 638g																																							
Gift Box Size:	30.5*13.2*11.2 cm																																							
Earphone Port:	3.5 mm Jack																																							
Charging Port:	USB Type-C																																							
Hardware Platform:	PC, Smartphone																																							