


# TEST REPORT

Product Name: projector  
FCC ID: 2A7PJ-S2  
Trademark: N/A  
Model Number: S2, the additional models refer to the next page  
Prepared For: Shenzhen Siying Technology Co., Ltd.  
Address: Room 1201, No. 5, Lingbei 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen  
Manufacturer: Shenzhen Siying Technology Co., Ltd.  
Address: Room 1201, No. 5, Lingbei 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.  
Sample Received Date: Jun. 21, 2022  
Sample tested Date: Jun. 21, 2022 to Jul. 01, 2022  
Issue Date: Jul. 01, 2022  
Report No.: CTB220701007RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.  
Compiled by: Reviewed by: Approved by:



Chen Zheng



Arron Liu



Bin Wang Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

The additional models as follows:

S2, S1, S3, S4, S5, S6, S7, S8, S9, H1, H2, H3, H4, H5, H6, H7, H8, H9, M1, M2, M3, M4, M5, M6, M7, M8, M9, S-450, S-451, S-452, S-453, S-454, S-455, S-211, S-212, S-213, S-214, S-215, S-210, S-310, S-311, S-312, S-313, S-314, S-315, S-510, S-511, S-512, S-513, S-514, S-515, HQ1, HQ2, HQ3, HQ4, HQ5, HQ6, HQ7, HQ8, HQ9, SY1, SY2, SY3, SY4, SY5, SY6, SY7, SY8, SY9, HP1, HP2, HP3, HP4, HP5, HP6, HP7, HP8, HP9, SP1, SP2, SP3, SP4, SP5, SP6, SP7, SP8, SP9, HS1, HS2, HS3, HS4, HS5, HS6, ZX1, ZX2, ZX3, ZX4, ZX5, Z1, Z2, Z3, Z4, Z5, A1, A2, A3, A4, A5, A6, D1, D2, D3, D4, D5, E1, E2, E3, E4, E5, E6, E7, E8, E9, SY-S1, SY-S2, SY-S3, SY-S4, SY-S5, S0001, S0002, S0003, S0004, S0005, S0006, S0007, S0008, S0009

**TABLE OF CONTENT**

| Test Report Declaration                                       | Page |
|---|------|
| <b>1. VERSION</b> .....                                       | 4    |
| <b>2. TEST SUMMARY</b> .....                                  | 5    |
| <b>3. MEASUREMENT UNCERTAINTY</b> .....                       | 6    |
| <b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....            | 7    |
| 4.1 Product Information .....                                 | 7    |
| 4.2 Test Setup Configuration .....                            | 8    |
| 4.3 Support Equipment .....                                   | 8    |
| 4.4 Channel List .....  | 8    |
| 4.5 Test Mode .....   | 8    |
| 4.6 Test Environment .....                                    | 9    |
| <b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....        | 10   |
| 5.1 Test Facility .....                                       | 10   |
| 5.2 Test Instrument Used .....                                | 10   |
| <b>6. AC POWER LINE CONDUCTED EMISSION</b> .....              | 12   |
| 6.1 Block Diagram Of Test Setup .....                         | 12   |
| 6.2 Limit .....   | 12   |
| 6.3 Test procedure .....                                      | 12   |
| 6.4 Test Result .....   | 14   |
| <b>7. RADIATED SPURIOUS EMISSION</b> .....                    | 16   |
| 7.1 Block Diagram Of Test Setup .....                         | 16   |
| 7.2 Limit .....   | 16   |
| 7.3 Test procedure .....                                      | 17   |
| 7.4 Test Result .....   | 18   |
| <b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> ..... | 40   |
| 8.1 Block Diagram Of Test Setup .....                         | 40   |
| 8.2 Limit .....   | 40   |
| 8.3 Test procedure .....                                      | 40   |
| 8.4 Test Result .....   | 41   |
| <b>9. CONDUCTED OUTPUT POWER</b> .....                        | 57   |
| 9.1 Block Diagram Of Test Setup .....                         | 57   |
| 9.2 Limit .....   | 57   |
| 9.3 Test procedure .....                                      | 57   |
| 9.4 Test Result .....   | 58   |
| <b>10. 6DB OCCUPIED BANDWIDTH</b> .....                       | 59   |
| 10.1 Block Diagram Of Test Setup .....                        | 59   |
| 10.2 Limit .....  | 59   |
| 10.3 Test procedure .....                                     | 59   |
| 10.4 Test Result .....  | 60   |
| <b>11. POWER SPECTRAL DENSITY</b> .....                       | 70   |
| 11.1 Block Diagram Of Test Setup .....                        | 70   |
| 11.2 Limit .....  | 70   |
| 11.3 Test procedure .....                                     | 70   |
| 11.4 Test Result .....  | 71   |
| <b>12. ANTENNA REQUIREMENT</b> .....                          | 80   |
| <b>13. EUT PHOTOGRAPHS</b> .....                              | 81   |
| <b>14. EUT TEST SETUP PHOTOGRAPHS</b> .....                   | 82   |

(Note: N/A means not applicable)





1. VERSION

| Report No.      | Issue Date    | Description | Approved |
|-----------------|---------------|-------------|----------|
| CTB220701007RFX | Jul. 01, 2022 | Original    | Valid    |

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

| Test Item  | Test Requirement  | Test method                                   | Result |
|--|---|---|--------|
| <b>AC Power Line Conducted Emission</b>              | 47 CFR Part 15 Subpart C Section 15.207                   | ANSI C63.10-2013                              | PASS   |
| <b>Radiated Spurious emissions</b>                   | 47 CFR Part 15 Subpart C Section 15.205/15.209            | ANSI C63.10-2013                              | PASS   |
| <b>Band edge and RF Conducted Spurious Emissions</b> | 47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)      | ANSI C63.10-2013                              | PASS   |
| <b>Conducted Peak Output Power</b>                   | 47 CFR Part 15 Subpart C Section 15.247 (b)(3)            | ANSI C63.10-2013                              | PASS   |
| <b>6dB Occupied Bandwidth</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (a)(2)            | ANSI C63.10-2013                              | PASS   |
| <b>Power Spectral Density</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (e)               | ANSI C63.10-2013/<br>KDB 558074 D01<br>v05r02 | PASS   |
| <b>Antenna Requirement</b>                           | 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)        | ANSI C63.10-2013                              | PASS   |
| <b>RF Exposure Evaluation</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (j)/1.1310/2.1091 | KDB447498D01v06                               | PASS   |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Item  | Uncertainty |
|---|-------------|
| Occupancy bandwidth                               | U=±54.3Hz   |
| Conducted output power Above 1G                   | U=±1.0dB    |
| Conducted output power below 1G                   | U=±0.9dB    |
| Power Spectral Density , Conduction               | U=±1.0dB    |
| Conduction spurious emissions                     | U=±2.8dB    |
| Out of band emission                              | U=±54Hz     |
| 3m chamber Radiated spurious emission(9KHz-30MHz) | U=±4.8dB    |
| 3m chamber Radiated spurious emission(30MHz-1GHz) | U=±4.3dB    |
| 3m chamber Radiated spurious emission(1GHz-18GHz) | U=±4.5dB    |
| 3m chamber Radiated spurious emission(1GHz-40GHz) | U=±4.8dB    |
| humidity uncertainty                              | U=±5.3%     |
| Temperature uncertainty                           | U=±0.59℃    |
| Supply voltages                                   | U=±3%       |
| Time  | U=±5%       |
| Conducted Emission (9KHz-30MHz)                   | 3.2 dB      |



#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

|                       |   |
|-----------------------|---|
| Model(s):             | S2, S1, S3, S4, S5, S6, S7, S8, S9, H1, H2, H3, H4, H5, H6, H7, H8, H9, M1, M2, M3, M4, M5, M6, M7, M8, M9, S-450, S-451, S-452, S-453, S-454, S-455, S-211, S-212, S-213, S-214, S-215, S-210, S-310, S-311, S-312, S-313, S-314, S-315, S-510, S-511, S-512, S-513, S-514, S-515, HQ1, HQ2, HQ3, HQ4, HQ5, HQ6, HQ7, HQ8, HQ9, SY1, SY2, SY3, SY4, SY5, SY6, SY7, SY8, SY9, HP1, HP2, HP3, HP4, HP5, HP6, HP7, HP8, HP9, SP1, SP2, SP3, SP4, SP5, SP6, SP7, SP8, SP9, HS1, HS2, HS3, HS4, HS5, HS6, ZX1, ZX2, ZX3, ZX4, ZX5, Z1, Z2, Z3, Z4, Z5, A1, A2, A3, A4, A5, A6, D1, D2, D3, D4, D5, E1, E2, E3, E4, E5, E6, E7, E8, E9, SY-S1, SY-S2, SY-S3, SY-S4, SY-S5, S0001, S0002, S0003, S0004, S0005, S0006, S0007, S0008, S0009 |
| Model Description:    | All the model are the same circuit and RF module, only for model name. Test sample model: S2  |
| Wi-Fi Specification:  | IEEE 802.11b/g/n  |
| Hardware Version:     | V1.0  |
| Software Version:     | V1.0  |
| Operation Frequency:  | WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel<br>IEEE 802.11n 40: 2422-2452MHz/ 7 channel   |
| Max. RF output power: | WiFi (2.4G) :9.763dBm   |
| Type of Modulation:   | WiFi: DSSS, OFDM  |
| Antenna installation: | WiFi: Internal Antenna  |
| MIMO:                 | Support   |
| Antenna Gain:         | WiFi (2.4G) ANT 1: 1.0dBi<br>WiFi (2.4G) ANT 2: 1.0dBi  |
| Ratings:              | AC 100~230V   |

#### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

#### 4.3 Support Equipment

N/A

#### 4.4 Channel List

| CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) |
|----|-----------------|----|-----------------|----|-----------------|----|-----------------|
| 1  | 2412            | 2  | 2417            | 3  | 2422            | 4  | 2427            |
| 5  | 2432            | 6  | 2437            | 7  | 2442            | 8  | 2447            |
| 9  | 2452            | 10 | 2457            | 11 | 2462            |    |                 |
|    |                 |    |                 |    |                 |    |                 |

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

| Test mode                   | Low channel | Middle channel | High channel |
|-----------------------------|-------------|----------------|--------------|
| Transmitting(802.11b/g/n20) | 2412MHz     | 2437MHz        | 2462MHz      |
| Transmitting(802.11n40)     | 2422MHz     | 2437MHz        | 2452MHz      |

MIMO(ANT 1+ANT 2)

| Test mode               | Low channel | Middle channel | High channel |
|-------------------------|-------------|----------------|--------------|
| Transmitting(802.11n20) | 2412MHz     | 2437MHz        | 2462MHz      |
| Transmitting(802.11n40) | 2422MHz     | 2437MHz        | 2452MHz      |

EUT has two Internal Antenna with Max Antenna Gain 1.0dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: DutyCycle>98%.

| Test mode  | Rate |
|------------|------|
| 802.11b    | 11M  |
| 802.11g    | 54M  |
| 802.11/n20 | 65M  |
| 802.11/n40 | 65M  |



## 4.6 Test Environment

|                            |     |
|----------------------------|-----|
| Humidity(%):               | 54  |
| Atmospheric Pressure(kPa): | 101 |
| Normal Voltage(AC):        | 120 |
| Normal Temperature(°C)     | 23  |
| Low Temperature(°C)        | 0   |
| High Temperature(°C)       | 50  |

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

| No. | Equipment                                 | Manufacturer | Model No.                 | Serial No.   | Calibrate date | Calibrated until |
|-----|---|--------------|---------------------------|--------------|----------------|------------------|
| 1   | Spectrum Analyzer                         | Agilent      | N9020A                    | MY52090073   | 2021.09.27     | 2022.08.05       |
| 2   | Power Sensor                              | Agilent      | U2021XA                   | MY56120032   | 2021.09.27     | 2022.08.05       |
| 3   | Power Sensor                              | Agilent      | U2021XA                   | MY56120034   | 2021.09.27     | 2022.08.05       |
| 4   | Communication test set                    | R&S          | CMW500                    | 108058       | 2021.09.27     | 2022.08.05       |
| 5   | Spectrum Analyzer                         | R&S          | FSP40                     | 100550       | 2021.09.27     | 2022.08.05       |
| 6   | Signal Generator                          | Agilent      | N5181A                    | MY49060920   | 2021.09.27     | 2022.08.16       |
| 7   | Signal Generator                          | Agilent      | N5182A                    | MY47420195   | 2021.09.27     | 2022.08.05       |
| 8   | Communication test set                    | Agilent      | E5515C                    | MY50102567   | 2021.09.27     | 2022.08.16       |
| 9   | band rejection filter                     | Shenxiang    | MSF2400-2483.5<br>MS-1154 | 20181015001  | 2021.09.27     | 2022.08.05       |
| 10  | band rejection filter                     | Shenxiang    | MSF5150-5850M<br>S-1155   | 20181015001  | 2021.09.27     | 2022.08.05       |
| 11  | band rejection filter                     | Xingbo       | XBLBQ-DZA120              | 190821-1-1   | 2021.09.27     | 2022.08.05       |
| 12  | BT&WI-FI Automatic test software          | Microwave    | MTS8310                   | Ver. 2.0.0.0 | 2021.09.27     | 2022.08.05       |
| 13  | Rohde & Schwarz SFU Broadcast Test System | R&S          | SFU                       | 101017       | 2021.09.27     | 2022.08.05       |
| 14  | Temperature humidity chamber              | Hongjing     | TH-80CH                   | DG-15174     | 2021.09.27     | 2022.08.05       |
| 15  | 234G Automatic test software              | Microwave    | MTS8200                   | Ver. 2.0.0.0 | 2021.09.27     | 2022.08.05       |
| 16  | 966 chamber                               | C.R.T.       | 966 Room                  | 966          | 2021.09.27     | 2024.08.11       |
| 17  | Receiver                                  | R&S          | ESPI                      | 100362       | 2021.09.27     | 2022.08.05       |
| 18  | Amplifier                                 | HP           | 8447E                     | 2945A02747   | 2021.09.27     | 2022.08.05       |
| 19  | Amplifier                                 | Agilent      | 8449B                     | 3008A01838   | 2021.09.27     | 2022.08.05       |
| 20  | TRILOG Broadband Antenna                  | Schwarzbeck  | VULB 9163                 | 869          | 2021.09.27     | 2022.08.07       |
| 21  | Horn Antenna                              | Schwarzbeck  | BBHA9120D                 | 1911         | 2021.09.27     | 2022.08.08       |
| 22  | Software                                  | Fala         | EZ-EMC                    | FA-03A2 RE   | 2021.09.27     | 2022.08.05       |

|    |                |            |          |          |            |            |
|----|----------------|------------|----------|----------|------------|------------|
| 23 | 3-Loop Antenna | Daze       | ZN30401  | 17014    | 2021.09.27 | 2022.08.05 |
| 24 | loop antenna   | ZHINAN     | ZN30900A | /        | 2021.09.27 | 2022.08.05 |
| 25 | Horn antenna   | A/H/System | SAS-574  | 588      | 2021.09.27 | 2022.08.05 |
| 26 | Amplifier      | AEROFLEX   | /        | S/N/ 097 | 2021.09.27 | 2022.08.05 |


| Continuous disturbance |                        |               |              |            |                 |                  |
|------------------------|------------------------|---------------|--------------|------------|-----------------|------------------|
| No.                    | Equipment              | Manufacturer  | Model No.    | Serial No. | Calibrated date | Calibrated until |
| 1                      | AMN                    | ROHDE&SCHWARZ | ESH3-Z5      | 831551852  | 2021.09.27      | 2022.08.05       |
| 2                      | Pulse limiter          | ROHDE&SCHWARZ | ESH3Z2       | 357881052  | 2021.09.27      | 2022.08.05       |
| 3                      | EMI TEST RECEIVER      | ROHDE&SCHWARZ | ESCS30       | 834115/006 | 2021.09.27      | 2022.08.05       |
| 4                      | Coaxial cable          | ZDECL         | Z302S        | 18091904   | 2021.09.27      | 2022.08.05       |
| 5                      | AAN                    | Schwarzbeck   | NTFM8158     | 183        | 2021.09.27      | 2022.08.05       |
| 6                      | Communication test set | Agilent       | E5515C       | MY50102567 | 2021.09.27      | 2022.08.16       |
| 7                      | Communication test set | R&S           | CMW500       | 108058     | 2021.09.27      | 2022.08.05       |
| 8                      | EZ-EMC                 | Frad          | EMC-con3A1.1 | /          | /               | /                |

| Radiated emission |                                      |               |                        |            |                 |                  |
|-------------------|--------------------------------------|---------------|------------------------|------------|-----------------|------------------|
| No.               | Equipment                            | Manufacturer  | Model No.              | Serial No. | Calibrated date | Calibrated until |
| 1                 | Double Ridged Broadband Horn Antenna | Schwarzbeck   | BBHA 9120D             | 1911       | 2021.11.01      | 2022.08.08       |
| 2                 | TRILOG Broadband Antenna             | Schwarzbeck   | VULB 9168              | 869        | 2021.11.01      | 2022.08.05       |
| 3                 | Amplifier                            | Agilent       | 8449B                  | 3008A01838 | 2021.09.27      | 2022.08.05       |
| 4                 | Amplifier                            | HP            | 8447E                  | 2945A02747 | 2021.09.27      | 2022.08.05       |
| 5                 | EMI TEST RECEIVER                    | ROHDE&SCHWARZ | ESPI7                  | 100362     | 2021.09.27      | 2022.08.05       |
| 6                 | Coaxial cable                        | ETS           | RFC-SNS-100-NMS-80 NI  | /          | 2021.09.27      | 2022.08.05       |
| 7                 | Coaxial cable                        | ETS           | RFC-SNS-100-NMS-20 NI  | /          | 2021.09.27      | 2022.08.05       |
| 8                 | Coaxial cable                        | ETS           | RFC-SNS-100-SMS-20 NI  | /          | 2021.09.27      | 2022.08.05       |
| 9                 | Coaxial cable                        | ETS           | RFC-NNS-100-NMS-300 NI | /          | 2021.09.27      | 2022.08.05       |
| 10                | Communication test set               | Agilent       | E5515C                 | MY50102567 | 2021.09.27      | 2022.08.16       |
| 11                | Communication test set               | R&S           | CMW500                 | 108058     | 2021.09.27      | 2022.08.05       |
| 12                | EZ-EMC                               | Frad          | EMC-con3A1.1           | /          | /               | /                |



## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

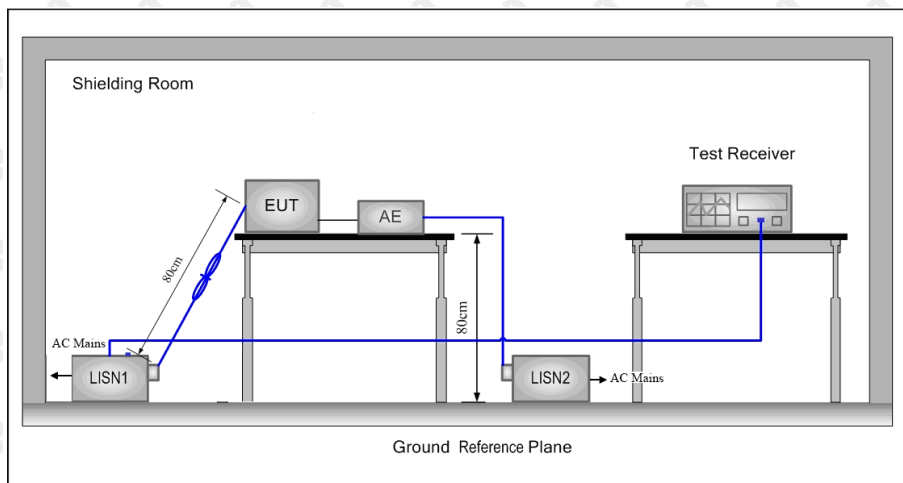

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

| Frequency (MHz) | Conducted limit (dB $\mu$ V) |                            |
|-----------------|------------------------------|----------------------------|
|                 | Quasi-peak                   | Average                    |
| 0.15 - 0.5      | 66 to 56 <sup>Note 1</sup>   | 56 to 46 <sup>Note 1</sup> |
| 0.5 - 5         | 56                           | 46                         |
| 5 - 30          | 60                           | 50                         |

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

### 6.4 Test Result

Test Specification: Line  
AC 120V 60Hz

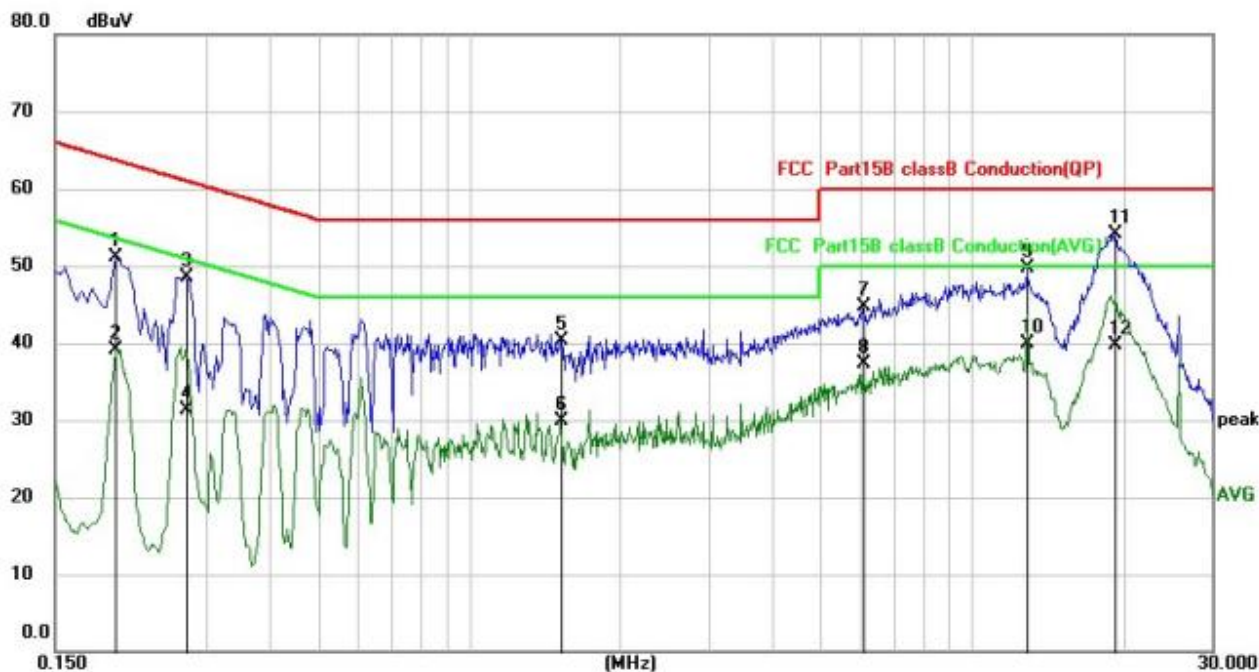


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|
| 1       | 0.1980       | 40.50                    | 10.69                   | 51.19                    | 63.69         | -12.50       | QP       |
| 2       | 0.1980       | 28.43                    | 10.69                   | 39.12                    | 53.69         | -14.57       | AVG      |
| 3       | 0.2740       | 37.85                    | 10.65                   | 48.50                    | 61.00         | -12.50       | QP       |
| 4       | 0.2740       | 20.68                    | 10.65                   | 31.33                    | 51.00         | -19.67       | AVG      |
| 5       | 1.5220       | 29.73                    | 10.62                   | 40.35                    | 56.00         | -15.65       | QP       |
| 6       | 1.5220       | 19.32                    | 10.62                   | 29.94                    | 46.00         | -16.06       | AVG      |
| 7       | 6.0579       | 33.94                    | 10.69                   | 44.63                    | 60.00         | -15.37       | QP       |
| 8       | 6.0579       | 26.61                    | 10.69                   | 37.30                    | 50.00         | -12.70       | AVG      |
| 9       | 12.9179      | 38.86                    | 10.87                   | 49.73                    | 60.00         | -10.27       | QP       |
| 10      | 12.9179      | 28.98                    | 10.87                   | 39.85                    | 50.00         | -10.15       | AVG      |
| 11 *    | 19.2859      | 43.10                    | 10.98                   | 54.08                    | 60.00         | -5.92        | QP       |
| 12      | 19.2859      | 28.82                    | 10.98                   | 39.80                    | 50.00         | -10.20       | AVG      |

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit



Test Specification: Neutral  
AC 120V 60Hz

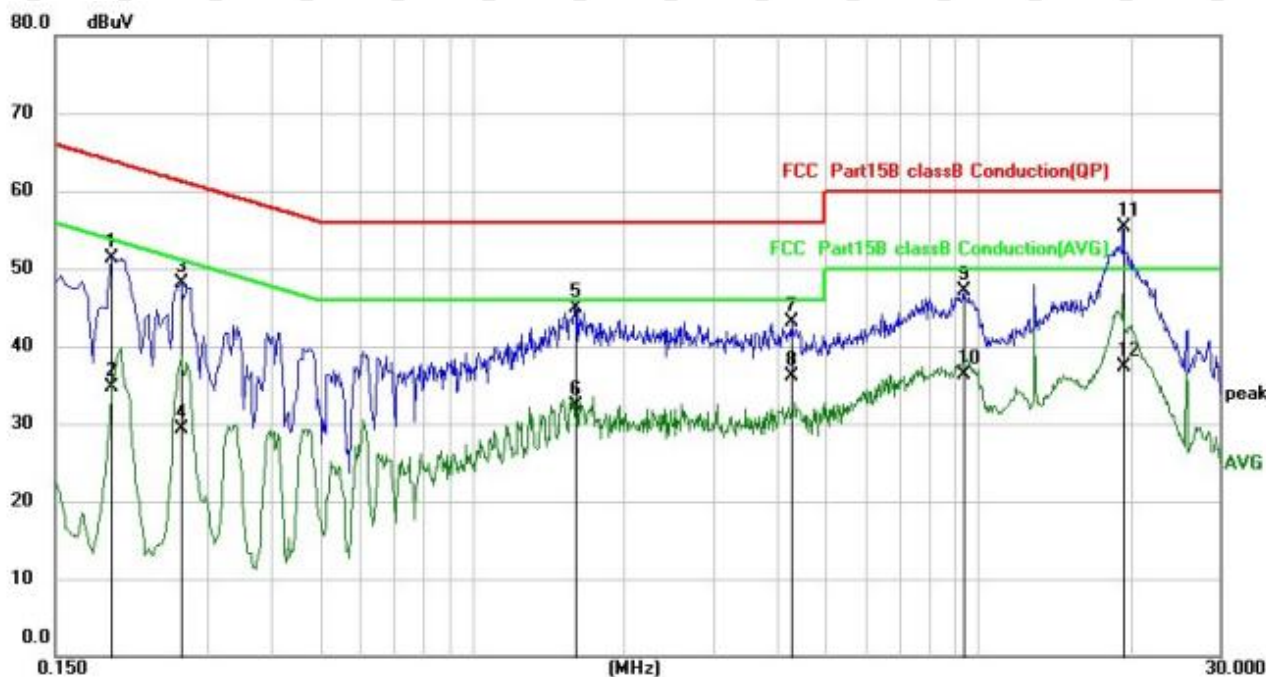

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|
| 1       | 0.1940       | 40.69                    | 10.69                   | 51.38                    | 63.86         | -12.48       | QP       |
| 2       | 0.1940       | 23.99                    | 10.69                   | 34.68                    | 53.86         | -19.18       | AVG      |
| 3       | 0.2660       | 37.40                    | 10.65                   | 48.05                    | 61.24         | -13.19       | QP       |
| 4       | 0.2660       | 18.72                    | 10.65                   | 29.37                    | 51.24         | -21.87       | AVG      |
| 5       | 1.5980       | 34.37                    | 10.62                   | 44.99                    | 56.00         | -11.01       | QP       |
| 6       | 1.5980       | 21.64                    | 10.62                   | 32.26                    | 46.00         | -13.74       | AVG      |
| 7       | 4.2819       | 32.46                    | 10.64                   | 43.10                    | 56.00         | -12.90       | QP       |
| 8       | 4.2819       | 25.56                    | 10.64                   | 36.20                    | 46.00         | -9.80        | AVG      |
| 9       | 9.3659       | 36.25                    | 10.80                   | 47.05                    | 60.00         | -12.95       | QP       |
| 10      | 9.3659       | 25.54                    | 10.80                   | 36.34                    | 50.00         | -13.66       | AVG      |
| 11 *    | 19.3979      | 44.24                    | 10.98                   | 55.22                    | 60.00         | -4.78        | QP       |
| 12      | 19.3979      | 26.40                    | 10.98                   | 37.38                    | 50.00         | -12.62       | AVG      |

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

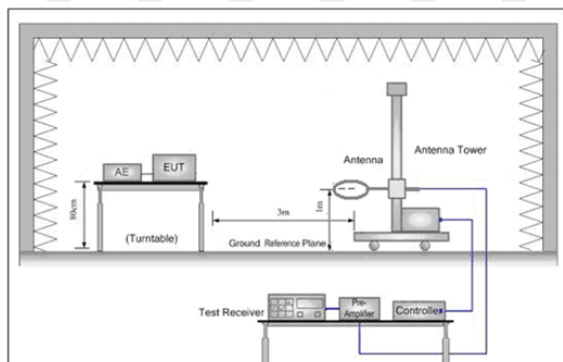


Figure 1. Below 30MHz

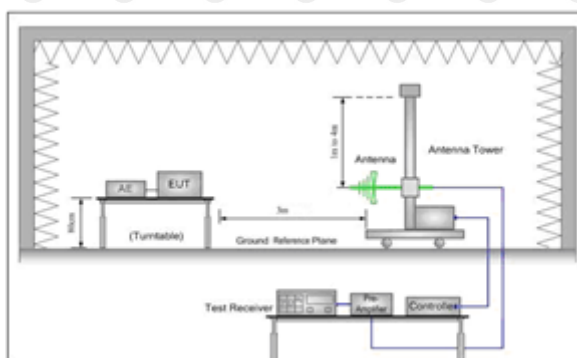


Figure 2. 30MHz to 1GHz

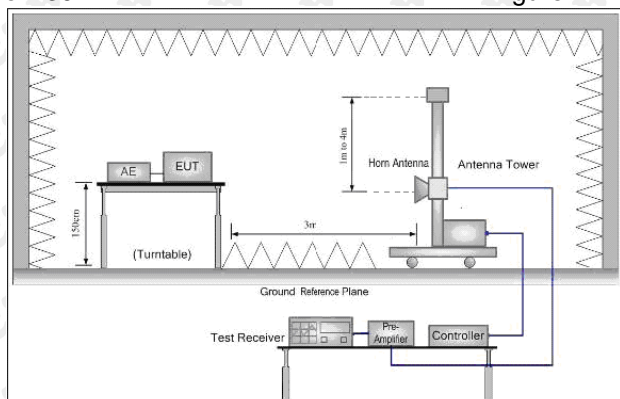


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

| Frequency         | Field strength (microvolt/meter) | Limit (dB $\mu$ V/m ) | Remark     | Measurement distance (m) |
|-------------------|----------------------------------|-----------------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F(kHz)                      | -                     | -          | 300                      |
| 0.490MHz-1.705MHz | 24000/F(kHz)                     | -                     | -          | 30                       |
| 1.705MHz-30MHz    | 30                               | -                     | -          | 30                       |
| 30MHz-88MHz       | 100                              | 40.0                  | Quasi-peak | 3                        |
| 88MHz-216MHz      | 150                              | 43.5                  | Quasi-peak | 3                        |
| 216MHz-960MHz     | 200                              | 46.0                  | Quasi-peak | 3                        |
| 960MHz-1GHz       | 500                              | 54.0                  | Quasi-peak | 3                        |
| Above 1GHz        | 500                              | 54.0                  | Average    | 3                        |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

| Frequency         | Detector   | RBW     | VBW    | Remark     |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak       | 10kHz   | 30KHz  | Peak       |
| 0.009MHz-0.090MHz | Average    | 10kHz   | 30KHz  | Average    |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz   | 30KHz  | Quasi-peak |
| 0.110MHz-0.490MHz | Peak       | 10kHz   | 30KHz  | Peak       |
| 0.110MHz-0.490MHz | Average    | 10kHz   | 30KHz  | Average    |
| 0.490MHz -30MHz   | Quasi-peak | 10kHz   | 30kHz  | Quasi-peak |
| 30MHz-1GHz        | Quasi-peak | 120 kHz | 300KHz | Quasi-peak |
| Above 1GHz        | Peak       | 1MHz    | 3MHz   | Peak       |
|                   | Peak       | 1MHz    | 10Hz   | Average    |

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.



### 7.4 Test Result

After pre-scanning three directions, the report recorded the worst case


Below 1GHz Test Results:  
Antenna polarity: H



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 40.0643      | 34.43                    | -5.27                   | 29.16                      | 40.00         | -10.84     | QP       |
| 2   |     | 53.9763      | 32.69                    | -5.85                   | 26.84                      | 40.00         | -13.16     | QP       |
| 3   |     | 219.4593     | 41.76                    | -6.73                   | 35.03                      | 43.50         | -8.47      | QP       |
| 4   |     | 273.2339     | 43.32                    | -5.48                   | 37.84                      | 46.00         | -8.16      | QP       |
| 5   | *   | 478.8455     | 41.01                    | 0.20                    | 41.21                      | 46.00         | -4.79      | QP       |
| 6   |     | 957.1145     | 28.11                    | 5.86                    | 33.97                      | 46.00         | -12.03     | QP       |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level

Antenna polarity: V

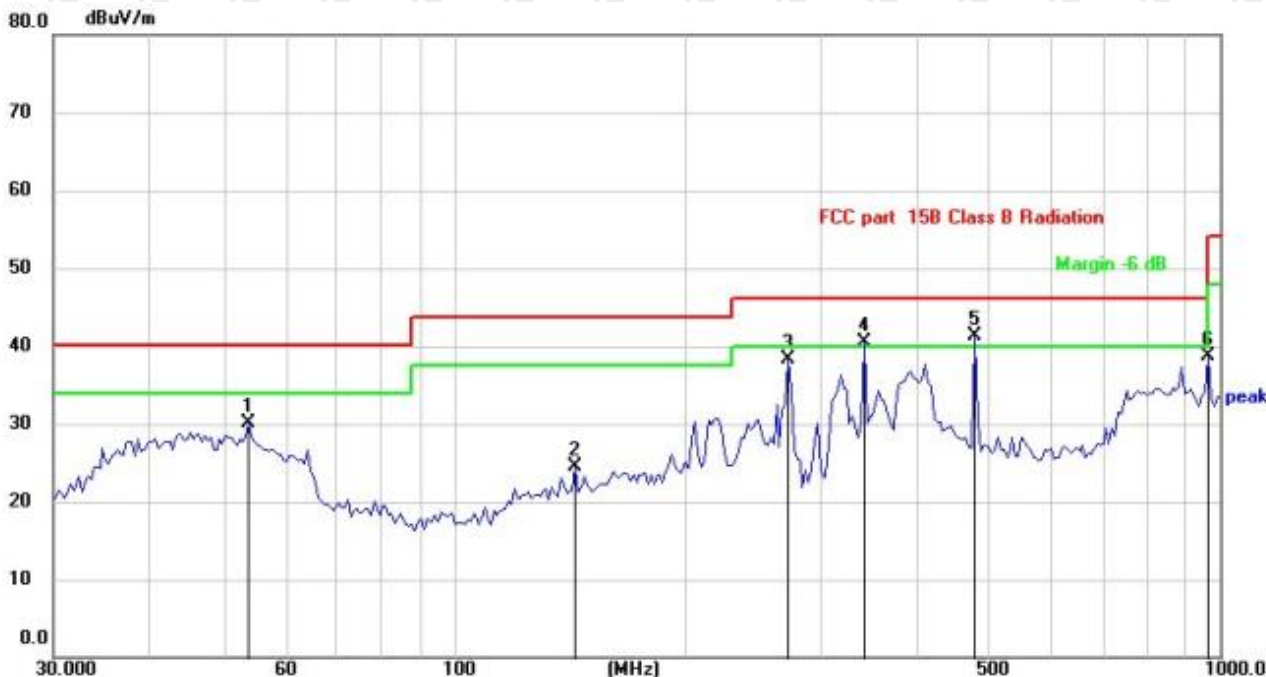

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 53.9763      | 35.87                    | -5.85                   | 30.02                      | 40.00         | -9.98      | QP       |
| 2   |     | 144.0817     | 29.93                    | -5.46                   | 24.47                      | 43.50         | -19.03     | QP       |
| 3   |     | 273.2339     | 43.80                    | -5.48                   | 38.32                      | 46.00         | -7.68      | QP       |
| 4   | !   | 343.1800     | 44.27                    | -3.69                   | 40.58                      | 46.00         | -5.42      | QP       |
| 5   | *   | 478.8455     | 41.04                    | 0.20                    | 41.24                      | 46.00         | -4.76      | QP       |
| 6   |     | 965.5420     | 32.91                    | 5.80                    | 38.71                      | 54.00         | -15.29     | QP       |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 64.09                   | -3.64          | 60.45                      | 74                 | -13.55         | peak          |
| 4824               | 48.37                   | -3.64          | 44.73                      | 54                 | -9.27          | AVG           |
| 7236               | 59.37                   | -0.95          | 58.42                      | 74                 | -15.58         | peak          |
| 7236               | 44.49                   | -0.95          | 43.54                      | 54                 | -10.46         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 64.77                   | -3.64          | 61.13                      | 74                 | -12.87         | peak          |
| 4824               | 49.41                   | -3.64          | 45.77                      | 54                 | -8.23          | AVG           |
| 7236               | 57.90                   | -0.95          | 56.95                      | 74                 | -17.05         | peak          |
| 7236               | 44.40                   | -0.95          | 43.45                      | 54                 | -10.55         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBµV) | Factor<br>(dB) | Emission Level<br>(dBµV/m) | Limits<br>(dBµV/m) | Margin<br>(dB) | Detecto<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|-----------------|
| 4874               | 64.23                   | -3.51          | 60.72                      | 74                 | -13.28         | peak            |
| 4874               | 50.02                   | -3.51          | 46.51                      | 54                 | -7.49          | AVG             |
| 7311               | 58.02                   | -0.82          | 57.20                      | 74                 | -16.80         | peak            |
| 7311               | 44.51                   | -0.82          | 43.69                      | 54                 | -10.31         | AVG             |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBµV) | Factor<br>(dB) | Emission Level<br>(dBµV/m) | Limits<br>(dBµV/m) | Margin<br>(dB) | Detecto<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|-----------------|
| 4874               | 64.14                   | -3.51          | 60.63                      | 74                 | -13.37         | peak            |
| 4874               | 47.88                   | -3.51          | 44.37                      | 54                 | -9.63          | AVG             |
| 7311               | 59.33                   | -0.82          | 58.51                      | 74                 | -15.49         | peak            |
| 7311               | 45.00                   | -0.82          | 44.18                      | 54                 | -9.82          | AVG             |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detected<br>Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 4924               | 63.13                         | -3.43          | 59.70                            | 74                       | -14.30         | peak             |
| 4924               | 48.25                         | -3.43          | 44.82                            | 54                       | -9.18          | AVG              |
| 7386               | 59.90                         | -0.75          | 59.15                            | 74                       | -14.85         | peak             |
| 7386               | 44.01                         | -0.75          | 43.26                            | 54                       | -10.74         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detected<br>Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 4924               | 64.38                         | -3.43          | 60.95                            | 74                       | -13.05         | peak             |
| 4924               | 47.47                         | -3.43          | 44.04                            | 54                       | -9.96          | AVG              |
| 7386               | 56.92                         | -0.75          | 56.17                            | 74                       | -17.83         | peak             |
| 7386               | 43.63                         | -0.75          | 42.88                            | 54                       | -11.12         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) &lt;93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) &lt;54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824               | 64.56                   | -3.64          | 60.92                      | 74                 | -13.08         | peak             |
| 4824               | 49.55                   | -3.64          | 45.91                      | 54                 | -8.09          | AVG              |
| 7236               | 59.78                   | -0.95          | 58.83                      | 74                 | -15.17         | peak             |
| 7236               | 46.69                   | -0.95          | 45.74                      | 54                 | -8.26          | AVG              |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824               | 63.67                   | -3.64          | 60.03                      | 74                 | -13.97         | peak             |
| 4824               | 48.67                   | -3.64          | 45.03                      | 54                 | -8.97          | AVG              |
| 7236               | 59.66                   | -0.95          | 58.71                      | 74                 | -15.29         | peak             |
| 7236               | 44.78                   | -0.95          | 43.83                      | 54                 | -10.17         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detecto<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|-----------------|
| 4874               | 63.62                   | -3.51          | 60.11                      | 74                 | -13.89         | peak            |
| 4874               | 47.86                   | -3.51          | 44.35                      | 54                 | -9.65          | AVG             |
| 7311               | 57.73                   | -0.82          | 56.91                      | 74                 | -17.09         | peak            |
| 7311               | 45.74                   | -0.82          | 44.92                      | 54                 | -9.08          | AVG             |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission le  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detecto<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|-----------------|
| 4874               | 63.64                   | -3.51          | 60.13                      | 74                 | -13.87         | peak            |
| 4874               | 46.81                   | -3.51          | 43.30                      | 54                 | -10.70         | AVG             |
| 7311               | 56.04                   | -0.82          | 55.22                      | 74                 | -18.78         | peak            |
| 7311               | 43.15                   | -0.82          | 42.33                      | 54                 | -11.67         | AVG             |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission le  
Margin = Emission level - Limits

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924      | 63.72         | -3.43  | 60.29          | 74       | -13.71 | peak          |
| 4924      | 48.28         | -3.43  | 44.85          | 54       | -9.15  | AVG           |
| 7386      | 57.87         | -0.75  | 57.12          | 74       | -16.88 | peak          |
| 7386      | 42.55         | -0.75  | 41.80          | 54       | -12.20 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

ANT2 HIGH CH11 (802.11g Mode)/2462

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924      | 63.96         | -3.43  | 60.53          | 74       | -13.47 | peak          |
| 4924      | 48.84         | -3.43  | 45.41          | 54       | -8.59  | AVG           |
| 7386      | 56.93         | -0.75  | 56.18          | 74       | -17.82 | peak          |
| 7386      | 41.99         | -0.75  | 41.24          | 54       | -12.76 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824               | 65.17                   | -3.64          | 61.53                      | 74                 | -12.47         | peak             |
| 4824               | 48.87                   | -3.64          | 45.23                      | 54                 | -8.77          | AVG              |
| 7236               | 59.45                   | -0.95          | 58.50                      | 74                 | -15.50         | peak             |
| 7236               | 43.49                   | -0.95          | 42.54                      | 54                 | -11.46         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824               | 65.73                   | -3.64          | 62.09                      | 74                 | -11.91         | peak             |
| 4824               | 48.56                   | -3.64          | 44.92                      | 54                 | -9.08          | AVG              |
| 7236               | 59.83                   | -0.95          | 58.88                      | 74                 | -15.12         | peak             |
| 7236               | 45.16                   | -0.95          | 44.21                      | 54                 | -9.79          | AVG              |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detecto<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|-----------------|
| 4874.00            | 63.92                   | -3.51          | 60.41                      | 74.00              | -13.59         | peak            |
| 4874.00            | 48.15                   | -3.51          | 44.64                      | 54.00              | -9.36          | AVG             |
| 7311.00            | 58.84                   | -0.82          | 58.02                      | 74.00              | -15.98         | peak            |
| 7311.00            | 45.87                   | -0.82          | 45.05                      | 54.00              | -8.95          | AVG             |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission le  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detecto<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|-----------------|
| 4874.00            | 62.48                   | -3.51          | 58.97                      | 74.00              | -15.03         | peak            |
| 4874.00            | 47.72                   | -3.51          | 44.21                      | 54.00              | -9.79          | AVG             |
| 7311.00            | 58.49                   | -0.82          | 57.67                      | 74.00              | -16.33         | peak            |
| 7311.00            | 41.61                   | -0.82          | 40.79                      | 54.00              | -13.21         | AVG             |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission le  
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 61.50                   | -3.43          | 58.07                      | 74                 | -15.93         | peak          |
| 4924               | 46.99                   | -3.43          | 43.56                      | 54                 | -10.44         | AVG           |
| 7386               | 56.28                   | -0.75          | 55.53                      | 74                 | -18.47         | peak          |
| 7386               | 42.44                   | -0.75          | 41.69                      | 54                 | -12.31         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 64.40                   | -3.43          | 60.97                      | 74                 | -13.03         | peak          |
| 4924               | 45.58                   | -3.43          | 42.15                      | 54                 | -11.85         | AVG           |
| 7386               | 56.49                   | -0.75          | 55.74                      | 74                 | -18.26         | peak          |
| 7386               | 43.38                   | -0.75          | 42.63                      | 54                 | -11.37         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4844               | 65.23                   | -3.63          | 61.60                      | 74                 | -12.40         | peak          |
| 4844               | 48.34                   | -3.63          | 44.71                      | 54                 | -9.29          | AVG           |
| 7266               | 57.89                   | -0.94          | 56.95                      | 74                 | -17.05         | peak          |
| 7266               | 44.54                   | -0.94          | 43.60                      | 54                 | -10.40         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Meter Reading + Factor  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4844               | 64.18                   | -3.63          | 60.55                      | 74                 | -13.45         | peak          |
| 4844               | 48.26                   | -3.63          | 44.63                      | 54                 | -9.37          | AVG           |
| 7266               | 59.64                   | -0.94          | 58.70                      | 74                 | -15.30         | peak          |
| 7266               | 45.79                   | -0.94          | 44.85                      | 54                 | -9.15          | AVG           |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector T |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------|
| 4874               | 63.49                         | -3.51          | 59.98                            | 74                       | -14.02         | peak       |
| 4874               | 47.89                         | -3.51          | 44.38                            | 54                       | -9.62          | AVG        |
| 7311               | 60.17                         | -0.82          | 59.35                            | 74                       | -14.65         | peak       |
| 7311               | 44.27                         | -0.82          | 43.45                            | 54                       | -10.55         | AVG        |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector T |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------|
| 4874               | 62.31                         | -3.51          | 58.80                            | 74                       | -15.20         | peak       |
| 4874               | 46.49                         | -3.51          | 42.98                            | 54                       | -11.02         | AVG        |
| 7311               | 56.62                         | -0.82          | 55.80                            | 74                       | -18.20         | peak       |
| 7311               | 43.31                         | -0.82          | 42.49                            | 54                       | -11.51         | AVG        |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Correction Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|---------------------------|----------------------------|--------------------|----------------|---------------|
| 4904               | 64.87                   | -3.43                     | 61.44                      | 74                 | -12.56         | peak          |
| 4904               | 49.41                   | -3.43                     | 45.98                      | 54                 | -8.02          | AVG           |
| 7356               | 56.54                   | -0.75                     | 55.79                      | 74                 | -18.21         | peak          |
| 7356               | 41.93                   | -0.75                     | 41.18                      | 54                 | -12.82         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Correction Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|---------------------------|----------------------------|--------------------|----------------|---------------|
| 4904               | 61.97                   | -3.43                     | 58.54                      | 74                 | -15.46         | peak          |
| 4904               | 45.92                   | -3.43                     | 42.49                      | 54                 | -11.51         | AVG           |
| 7356               | 57.25                   | -0.75                     | 56.50                      | 74                 | -17.50         | peak          |
| 7356               | 44.72                   | -0.75                     | 43.97                      | 54                 | -10.03         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level  
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Restricted bands around fundamental frequency (Radiated)**

Operation Mode:  
ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 58.23         | -5.81  | 52.42          | 74       | -21.58 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 64.37         | -5.84  | 58.53          | 74       | -15.47 | peak          |
| 2399      | 48.41         | -5.84  | 42.57          | 54       | -11.43 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.28         | -5.81  | 51.47          | 74       | -22.53 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 62.12         | -5.84  | 56.28          | 74       | -17.72 | peak          |
| 2399      | 45.94         | -5.84  | 40.10          | 54       | -13.90 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 2483.5    | 56.06         | -5.65  | 50.41          | 74             | -23.59 | peak          |
| 2483.5    | /             | -5.65  | /              | 54             | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 2483.5    | 55.95         | -5.65  | 50.30          | 74             | -23.70 | peak          |
| 2483.5    | /             | -5.65  | /              | 54             | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 59.45         | -5.81  | 53.64          | 74       | -20.36 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 61.49         | -5.84  | 55.65          | 74       | -18.35 | peak          |
| 2399      | 46.06         | -5.84  | 40.22          | 54       | -13.78 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 56.68         | -5.81  | 50.87          | 74       | -23.13 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 63.26         | -5.84  | 57.42          | 74       | -16.58 | peak          |
| 2399      | 47.13         | -5.84  | 41.29          | 54       | -12.71 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.13         | -5.65  | 51.48          | 74       | -22.52 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.31         | -5.65  | 51.66          | 74       | -22.34 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.10         | -5.81  | 51.29          | 74       | -22.71 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 63.19         | -5.84  | 57.35          | 74       | -16.65 | peak          |
| 2399      | 47.30         | -5.84  | 41.46          | 54       | -12.54 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 56.78         | -5.81  | 50.97          | 74       | -23.03 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 59.76         | -5.84  | 53.92          | 74       | -20.08 | peak          |
| 2399      | 48.16         | -5.84  | 42.32          | 54       | -11.68 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.10         | -5.65  | 51.45          | 74       | -22.55 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.50         | -5.65  | 50.85          | 74       | -23.15 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 58.69         | -5.81  | 52.88          | 74       | -21.12 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 62.59         | -5.84  | 56.75          | 74       | -17.25 | peak          |
| 2399      | 46.47         | -5.84  | 40.63          | 54       | -13.37 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.24         | -5.81  | 51.43          | 74       | -22.57 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 61.59         | -5.84  | 55.75          | 74       | -18.25 | peak          |
| 2399      | 47.09         | -5.84  | 41.25          | 54       | -12.75 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.40         | -5.65  | 50.75          | 74       | -23.25 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.93         | -5.65  | 52.28          | 74       | -21.72 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

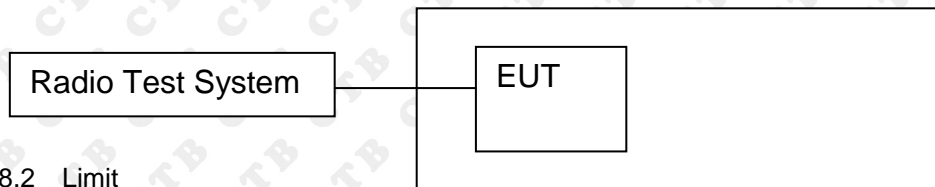

### 8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

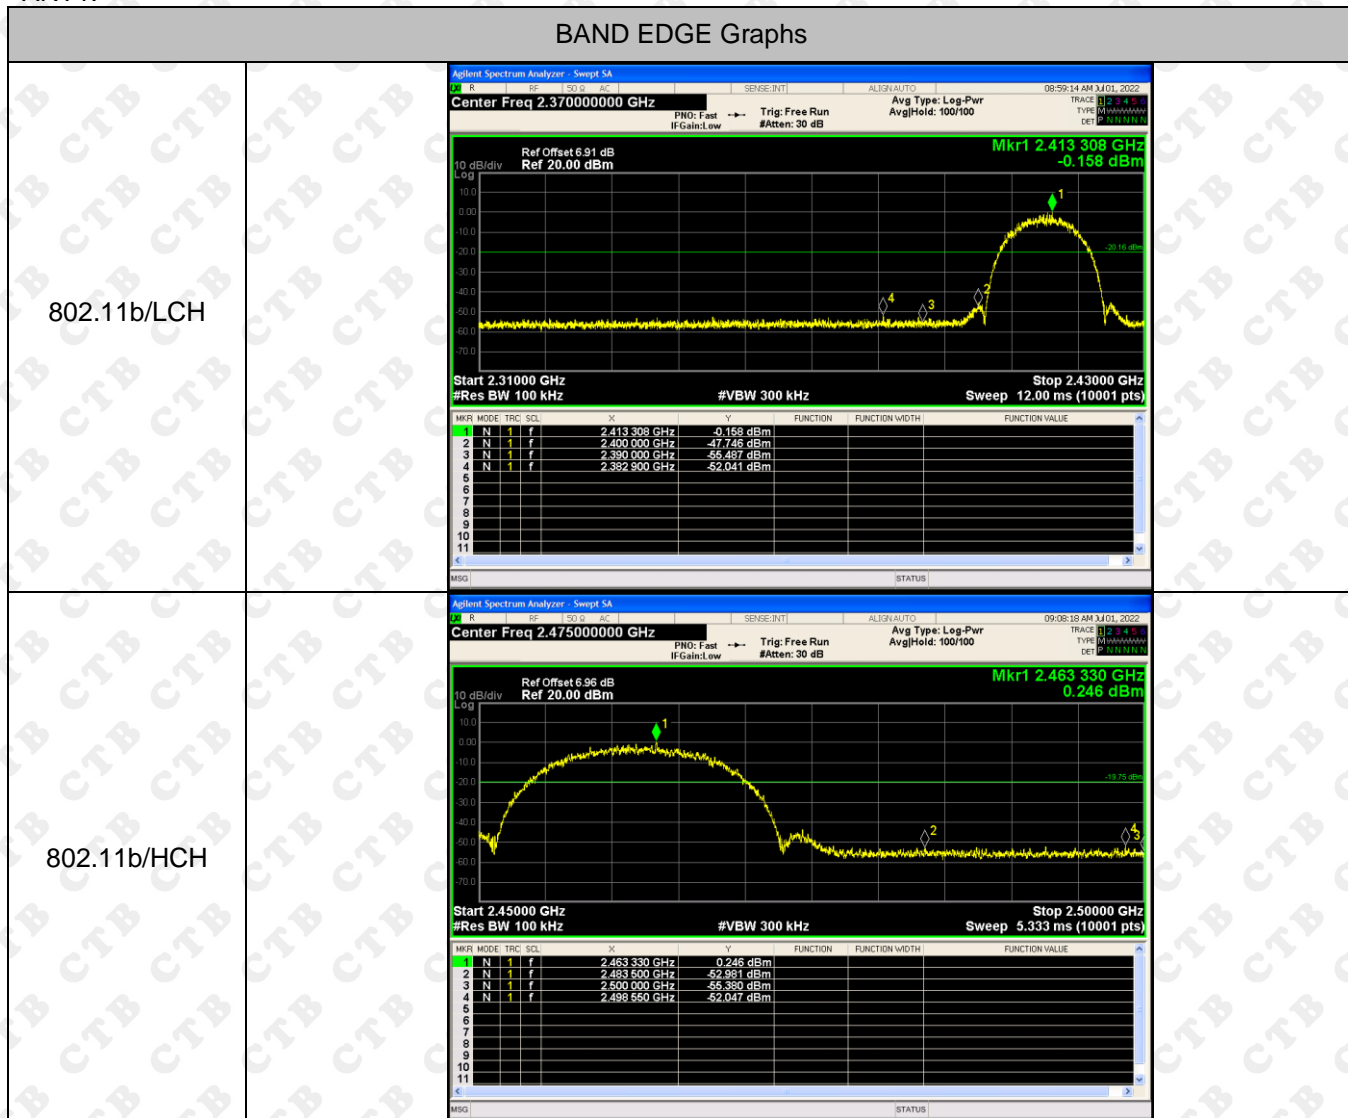




BAND EDGE Graphs

802.11g/LCH

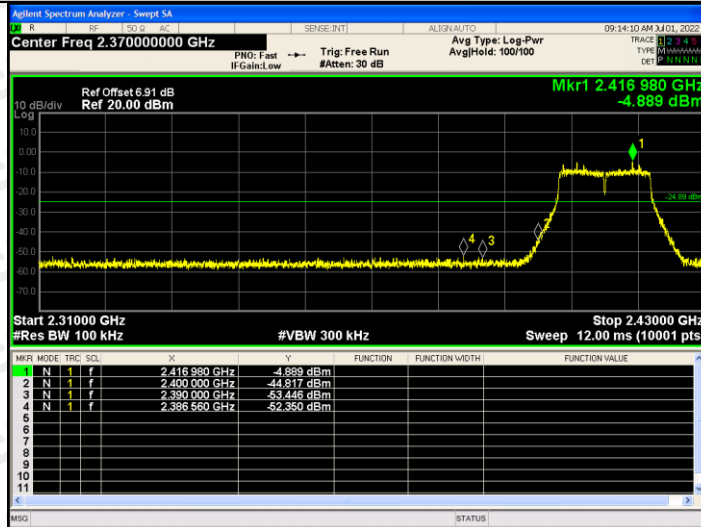


802.11g/HCH

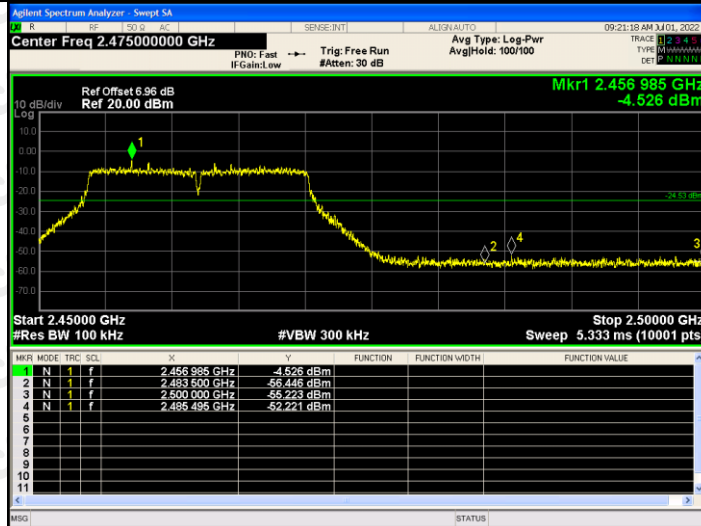


## BAND EDGE Graphs

802.11n(HT20)/L  
CH

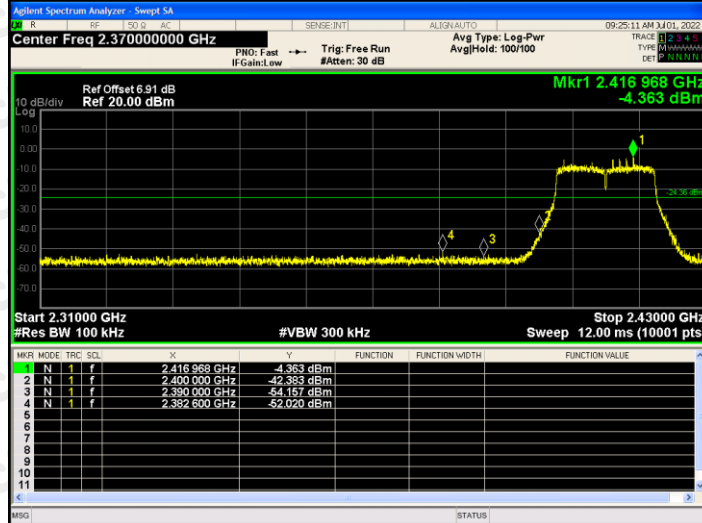


802.11n(HT20)/H  
CH

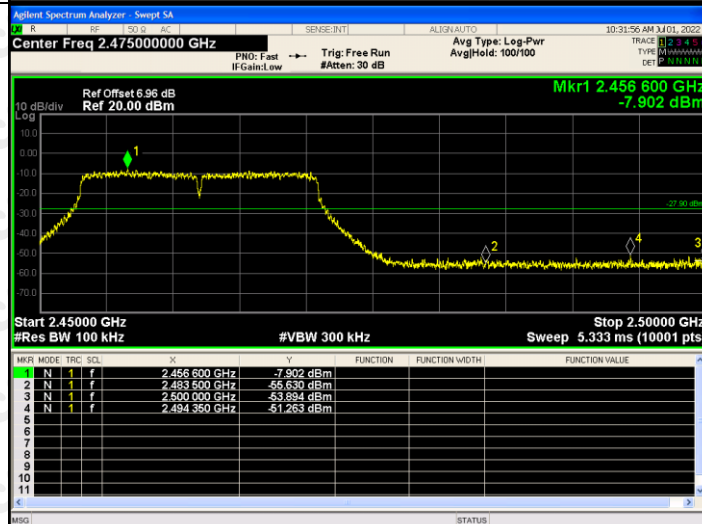


BAND EDGE Graphs

802.11n(HT40)/L  
CH

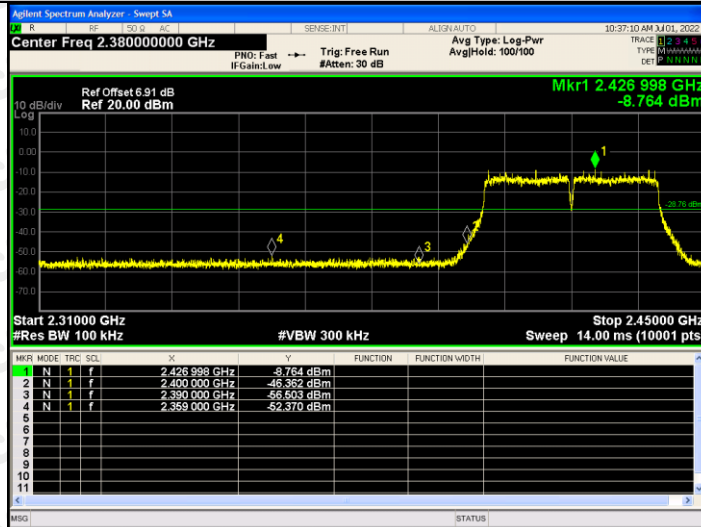

802.11n(HT40)/H  
CH

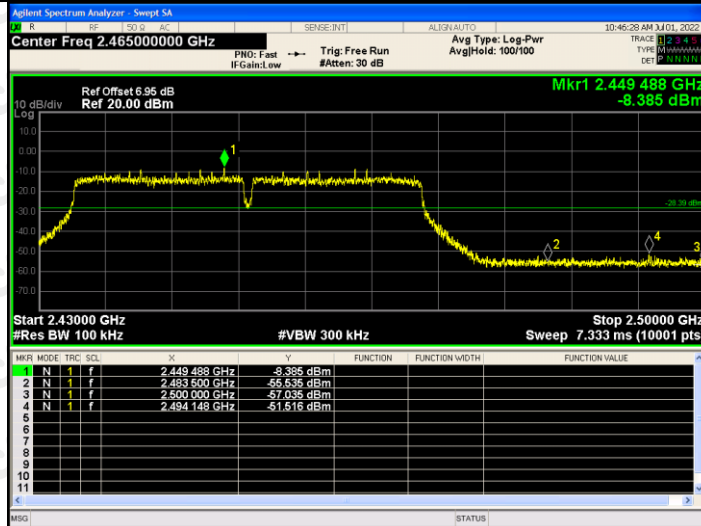




RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs




## RF Conducted Spurious Emissions Graphs

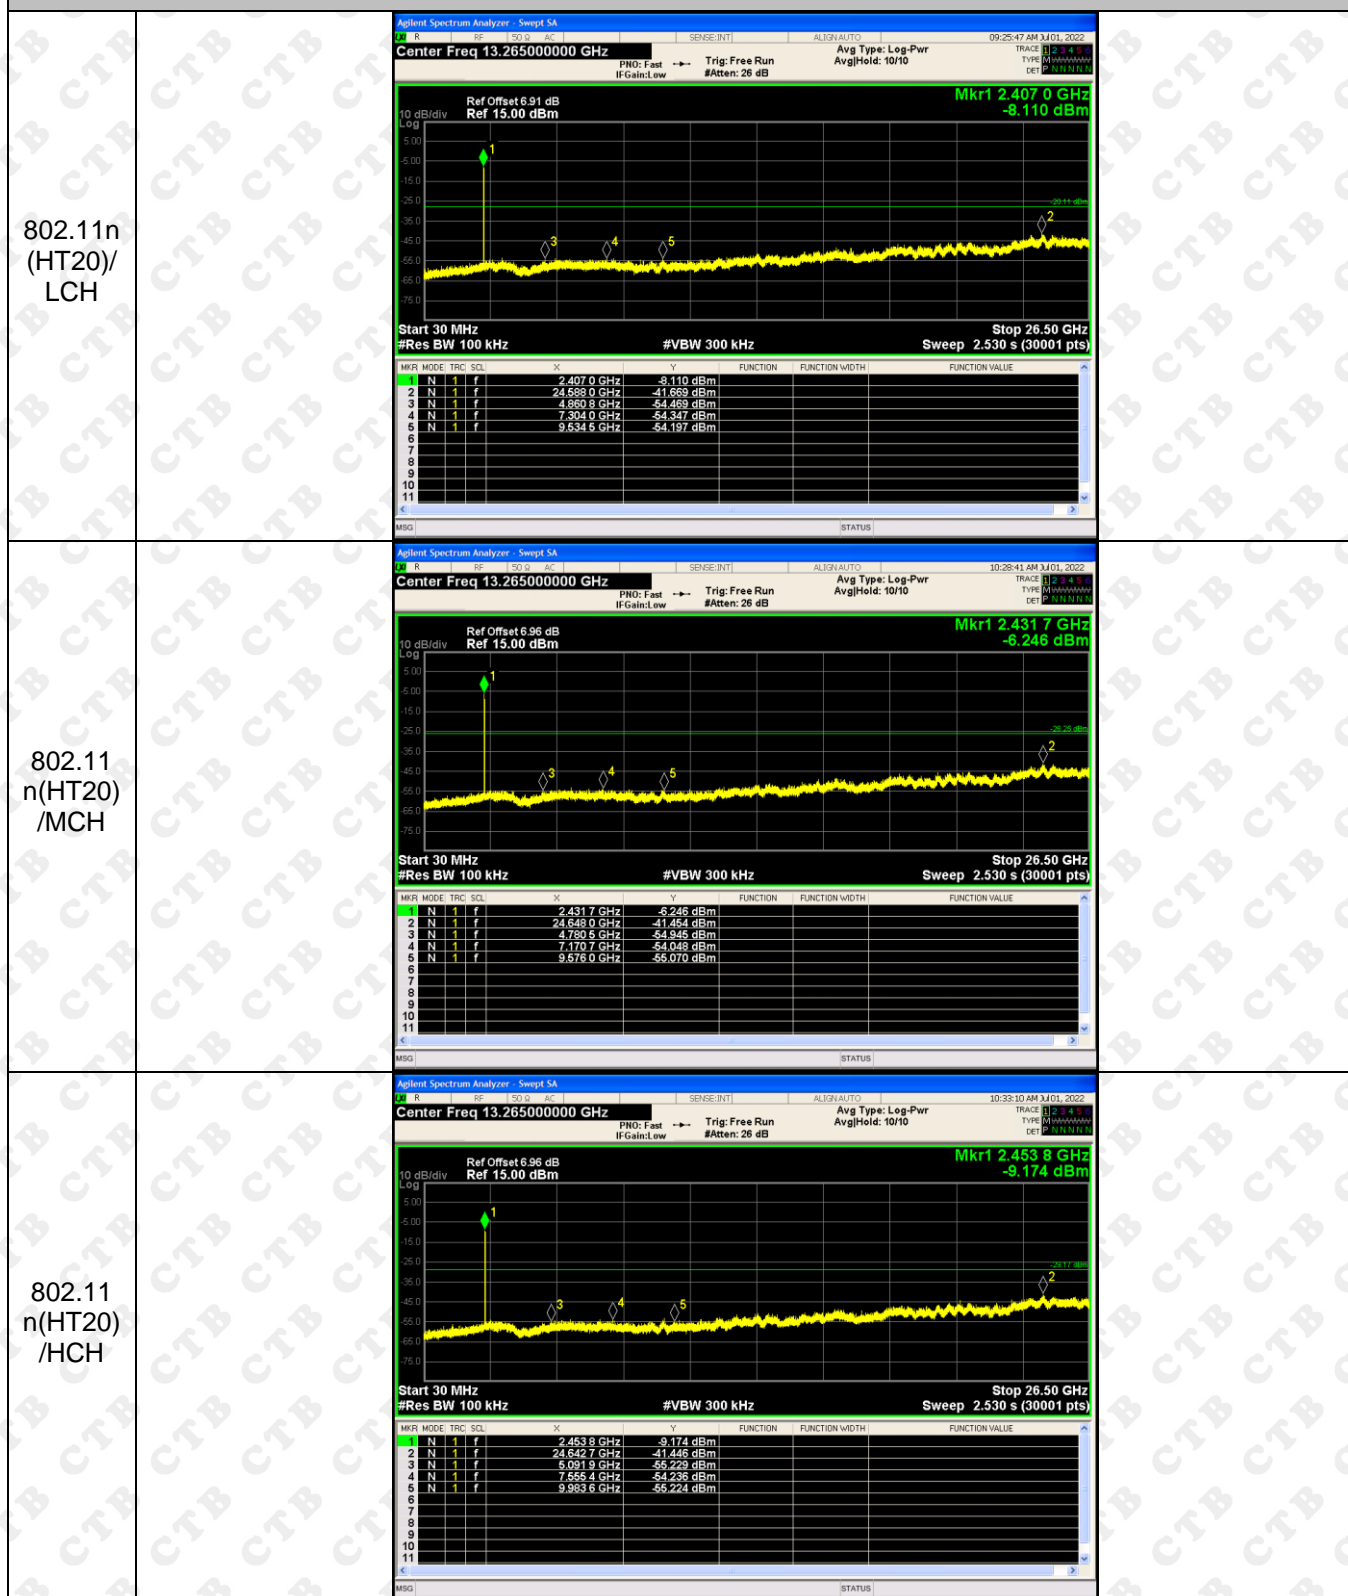

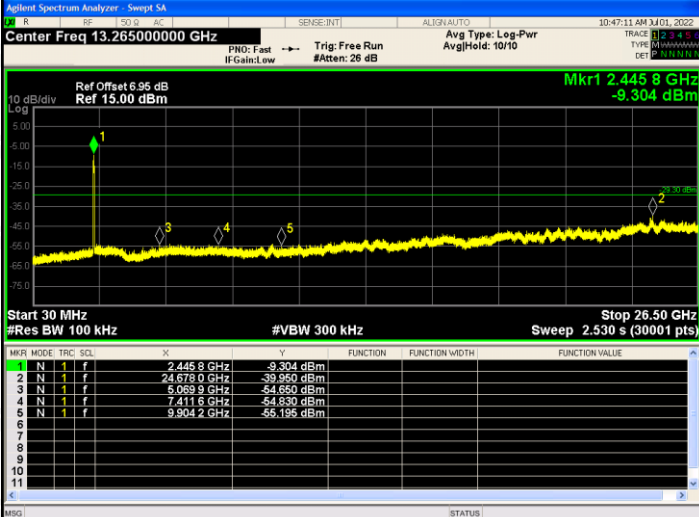


| <p>802.11n<br/>(HT40)/<br/>LCH</p> |  <table border="1" data-bbox="523 611 1225 779"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.425 5 GHz</td> <td>-12.153 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.678 7 GHz</td> <td>-41.461 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.928 6 GHz</td> <td>-55.920 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.078 1 GHz</td> <td>-54.712 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.642 4 GHz</td> <td>-53.634 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>    | MKR | MODE | TRC          | SOL         | X        | Y              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.425 5 GHz | -12.153 dBm |  |  |  | 2 | N | 1 | f | 24.678 7 GHz | -41.461 dBm |  |  |  | 3 | N | 1 | f | 4.928 6 GHz | -55.920 dBm |  |  |  | 4 | N | 1 | f | 7.078 1 GHz | -54.712 dBm |  |  |  | 5 | N | 1 | f | 9.642 4 GHz | -53.634 dBm |  |  |  |  |
|------------------------------------|--|-----|------|--------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|--------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|--|
| MKR                                | MODE   | TRC | SOL  | X            | Y           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 1                                  | N  | 1   | f    | 2.425 5 GHz  | -12.153 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 2                                  | N  | 1   | f    | 24.678 7 GHz | -41.461 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 3                                  | N  | 1   | f    | 4.928 6 GHz  | -55.920 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 4                                  | N  | 1   | f    | 7.078 1 GHz  | -54.712 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 5                                  | N  | 1   | f    | 9.642 4 GHz  | -53.634 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| <p>802.11n<br/>(HT40)/<br/>MCH</p> |  <table border="1" data-bbox="523 1144 1225 1312"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.452 9 GHz</td> <td>-9.532 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.101 5 GHz</td> <td>-40.242 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.801 7 GHz</td> <td>-55.358 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.808 5 GHz</td> <td>-54.326 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.680 4 GHz</td> <td>-53.353 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>  | MKR | MODE | TRC          | SOL         | X        | Y              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.452 9 GHz | -9.532 dBm  |  |  |  | 2 | N | 1 | f | 25.101 5 GHz | -40.242 dBm |  |  |  | 3 | N | 1 | f | 4.801 7 GHz | -55.358 dBm |  |  |  | 4 | N | 1 | f | 7.808 5 GHz | -54.326 dBm |  |  |  | 5 | N | 1 | f | 9.680 4 GHz | -53.353 dBm |  |  |  |  |
| MKR                                | MODE   | TRC | SOL  | X            | Y           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 1                                  | N  | 1   | f    | 2.452 9 GHz  | -9.532 dBm  |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 2                                  | N  | 1   | f    | 25.101 5 GHz | -40.242 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 3                                  | N  | 1   | f    | 4.801 7 GHz  | -55.358 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 4                                  | N  | 1   | f    | 7.808 5 GHz  | -54.326 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 5                                  | N  | 1   | f    | 9.680 4 GHz  | -53.353 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| <p>802.11n<br/>(HT40)/<br/>HCH</p> |  <table border="1" data-bbox="523 1673 1225 1841"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.445 8 GHz</td> <td>-9.304 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.678 0 GHz</td> <td>-39.950 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.068 9 GHz</td> <td>-54.660 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.411 6 GHz</td> <td>-54.830 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.904 2 GHz</td> <td>-55.196 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC          | SOL         | X        | Y              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.445 8 GHz | -9.304 dBm  |  |  |  | 2 | N | 1 | f | 24.678 0 GHz | -39.950 dBm |  |  |  | 3 | N | 1 | f | 5.068 9 GHz | -54.660 dBm |  |  |  | 4 | N | 1 | f | 7.411 6 GHz | -54.830 dBm |  |  |  | 5 | N | 1 | f | 9.904 2 GHz | -55.196 dBm |  |  |  |  |
| MKR                                | MODE   | TRC | SOL  | X            | Y           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 1                                  | N  | 1   | f    | 2.445 8 GHz  | -9.304 dBm  |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 2                                  | N  | 1   | f    | 24.678 0 GHz | -39.950 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 3                                  | N  | 1   | f    | 5.068 9 GHz  | -54.660 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 4                                  | N  | 1   | f    | 7.411 6 GHz  | -54.830 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |
| 5                                  | N  | 1   | f    | 9.904 2 GHz  | -55.196 dBm |          |                |                |                |                |   |   |   |   |             |             |  |  |  |   |   |   |   |              |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |   |   |   |   |             |             |  |  |  |  |

ANT2:

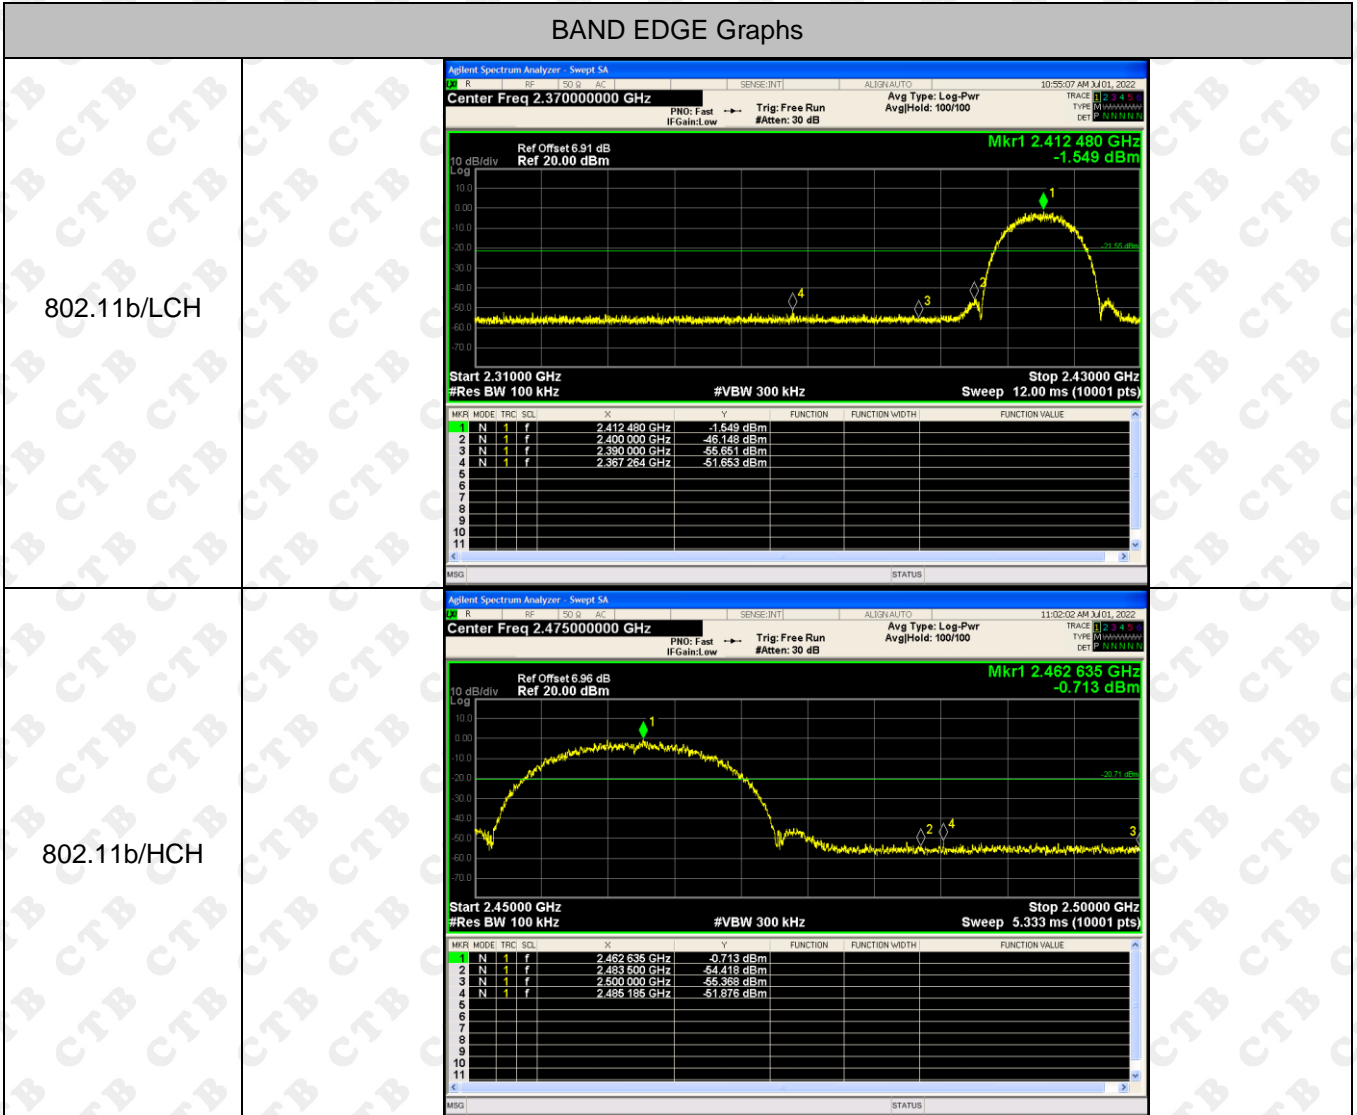


BAND EDGE Graphs

802.11g/LCH

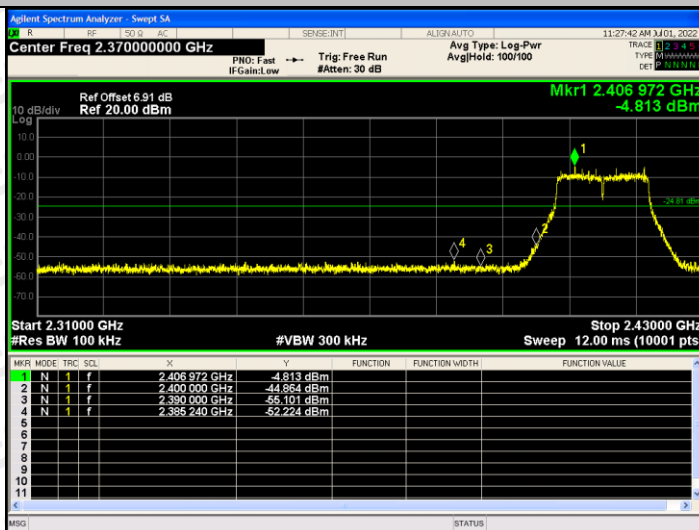


802.11g/HCH

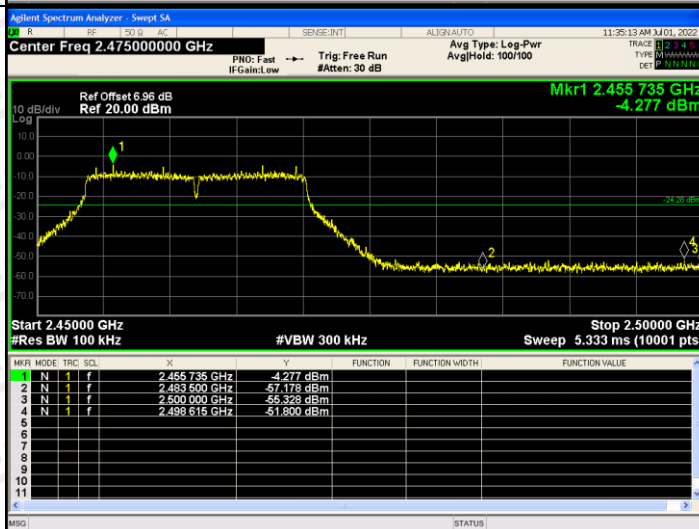




## BAND EDGE Graphs

802.11n(HT20)/L  
CH

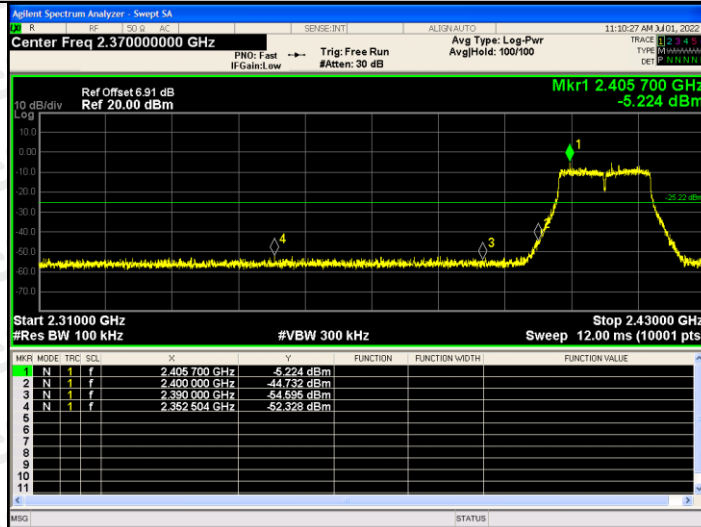


802.11n(HT20)/H  
CH

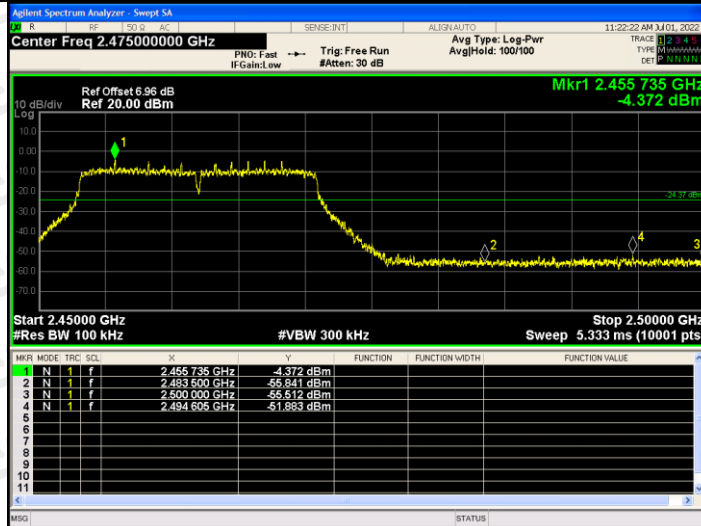


BAND EDGE Graphs

802.11n(HT40)/L  
CH

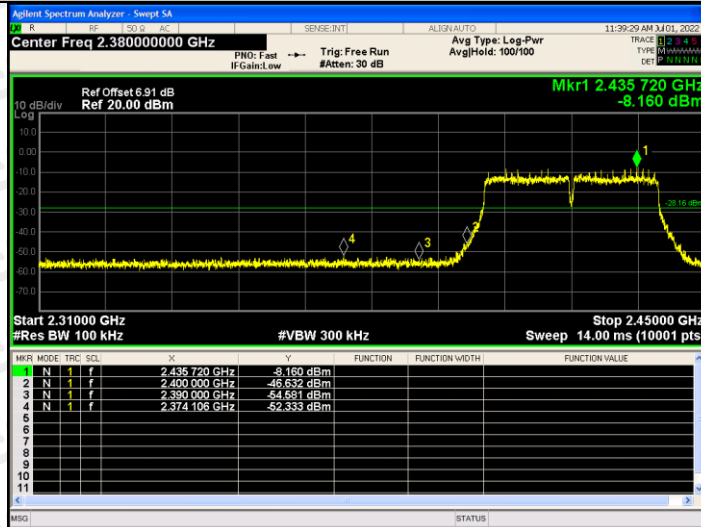

802.11n(HT40)/H  
CH

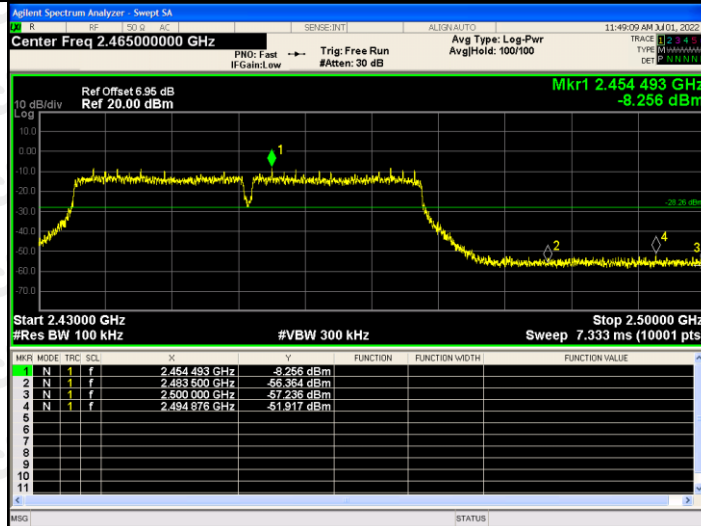

RF Conducted Spurious Emissions Graphs





RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs





### 9. COUDUCTED OUTPUT POWER

#### 9.1 Block Diagram Of Test Setup

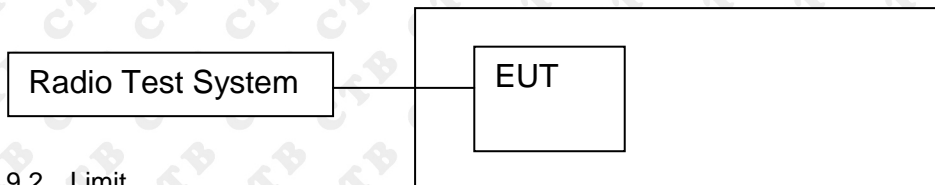

#### 9.2 Limit

| FCC Part15 (15.247) , Subpart C |                   |                 |                       |        |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                         | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

#### 9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

| Mode          | Channel. | Maximum Output Power [dBm] ant 1 | Maximum Output Power [dBm] ant 2 | Total Power Conducted Output Power(PK) | Limit[dBm] |
|---------------|----------|----------------------------------|----------------------------------|--|------------|
| 802.11b       | LCH      | 7.612                            | 7.46                             | /                                      | 30         |
|               | MCH      | 8.039                            | 7.816                            | /                                      | 30         |
|               | HCH      | 7.233                            | 7.106                            | /                                      | 30         |
| 802.11g       | LCH      | 6.314                            | 6.777                            | /                                      | 30         |
|               | MCH      | 6.916                            | 6.752                            | /                                      | 30         |
|               | HCH      | 6.283                            | 6.104                            | /                                      | 30         |
| 802.11n(HT20) | LCH      | 6.788                            | 6.718                            | 9.763                                  | 30         |
|               | MCH      | 6.834                            | 6.607                            | 9.732                                  | 30         |
|               | HCH      | 6.21                             | 6.075                            | 9.153                                  | 30         |
| 802.11n(HT40) | LCH      | 5.826                            | 5.793                            | 8.820                                  | 30         |
|               | MCH      | 5.585                            | 5.316                            | 8.463                                  | 30         |
|               | HCH      | 5.381                            | 5.334                            | 8.368                                  | 30         |

### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

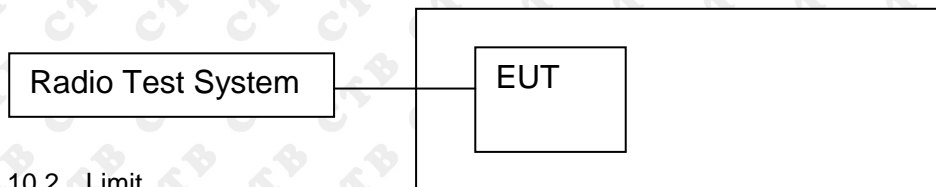

#### 10.2 Limit

| FCC Part15 (15.247) , Subpart C |           |                              |                       |        |
|---------------------------------|-----------|------------------------------|-----------------------|--------|
| Section                         | Test Item | Limit                        | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | >= 500KHz<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result

ANT1:

| Test Mode     | Frequency | 6dB Bandwidth (MHz) | Limit(kHz) | Result      |
|---------------|-----------|---------------------|------------|-------------|
| 802.11b       | LCH       | 8.424               | 500        | <b>PASS</b> |
|               | MCH       | 9.725               | 500        | <b>PASS</b> |
|               | HCH       | 9.948               | 500        | <b>PASS</b> |
| 802.11g       | LCH       | 16.357              | 500        | <b>PASS</b> |
|               | MCH       | 16.351              | 500        | <b>PASS</b> |
|               | HCH       | 16.387              | 500        | <b>PASS</b> |
| 802.11n(HT20) | LCH       | 17.529              | 500        | <b>PASS</b> |
|               | MCH       | 17.543              | 500        | <b>PASS</b> |
|               | HCH       | 17.695              | 500        | <b>PASS</b> |
| 802.11n(HT40) | LCH       | 35.732              | 500        | <b>PASS</b> |
|               | MCH       | 35.701              | 500        | <b>PASS</b> |
|               | HCH       | 35.721              | 500        | <b>PASS</b> |

ANT2:

| Test Mode     | Frequency | 6dB Bandwidth (MHz) | Limit(kHz) | Result      |
|---------------|-----------|---------------------|------------|-------------|
| 802.11b       | LCH       | 10.041              | 500        | <b>PASS</b> |
|               | MCH       | 9.452               | 500        | <b>PASS</b> |
|               | HCH       | 9.85                | 500        | <b>PASS</b> |
| 802.11g       | LCH       | 16.381              | 500        | <b>PASS</b> |
|               | MCH       | 16.391              | 500        | <b>PASS</b> |
|               | HCH       | 16.355              | 500        | <b>PASS</b> |
| 802.11n(HT20) | LCH       | 16.416              | 500        | <b>PASS</b> |
|               | MCH       | 16.308              | 500        | <b>PASS</b> |
|               | HCH       | 17.309              | 500        | <b>PASS</b> |
| 802.11n(HT40) | LCH       | 36.031              | 500        | <b>PASS</b> |
|               | MCH       | 35.504              | 500        | <b>PASS</b> |
|               | HCH       | 35.182              | 500        | <b>PASS</b> |

ANT1:  
Test Graph:

| Graphs              |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
|---------------------|--|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|-------------|--|--|----------------|------|----------|-----------|--|--|
| 802.11b /LCH        | <p>Agilent Spectrum Analyzer - Occupied BW<br/>Center Freq 2.412000000 GHz<br/>Center Freq: 2.412000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Avg/Hold: 100/100<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 6.91 dB<br/>Ref 26.91 dBm<br/>Mkr3 2.418213 GHz<br/>-6.2762 dBm</p> <p>Center 2.412 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 30 MHz<br/>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.4 dBm</td> </tr> <tr> <td>14.924 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>1.443 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>8.424 MHz</td> <td></td> <td></td> </tr> </table>   | Occupied Bandwidth | Total Power | 15.4 dBm | 14.924 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | 1.443 kHz   |  |  | x dB Bandwidth | x dB | -6.00 dB | 8.424 MHz |  |  |
| Occupied Bandwidth  | Total Power  | 15.4 dBm           |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 14.924 MHz          |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| Transmit Freq Error | OBW Power  | 99.00 %            |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 1.443 kHz           |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| x dB Bandwidth      | x dB   | -6.00 dB           |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 8.424 MHz           |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 802.11b /MCH        | <p>Agilent Spectrum Analyzer - Occupied BW<br/>Center Freq 2.437000000 GHz<br/>Center Freq: 2.437000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Avg/Hold: 100/100<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 6.96 dB<br/>Ref 26.96 dBm<br/>Mkr3 2.441757 GHz<br/>-6.8738 dBm</p> <p>Center 2.437 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 30 MHz<br/>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.0 dBm</td> </tr> <tr> <td>14.847 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-106.13 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>9.725 MHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 16.0 dBm | 14.847 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -106.13 kHz |  |  | x dB Bandwidth | x dB | -6.00 dB | 9.725 MHz |  |  |
| Occupied Bandwidth  | Total Power  | 16.0 dBm           |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 14.847 MHz          |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| Transmit Freq Error | OBW Power  | 99.00 %            |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| -106.13 kHz         |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| x dB Bandwidth      | x dB   | -6.00 dB           |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 9.725 MHz           |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 802.11b/HCH         | <p>Agilent Spectrum Analyzer - Occupied BW<br/>Center Freq 2.462000000 GHz<br/>Center Freq: 2.462000000 GHz<br/>Trig: Free Run<br/>#Atten: 30 dB<br/>Avg/Hold: 100/100<br/>Radio Std: None<br/>Radio Device: BTS</p> <p>Ref Offset 6.96 dB<br/>Ref 26.96 dBm<br/>Mkr3 2.466917 GHz<br/>-8.1445 dBm</p> <p>Center 2.462 GHz<br/>#Res BW 100 kHz<br/>#VBW 300 kHz<br/>Span 30 MHz<br/>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.1 dBm</td> </tr> <tr> <td>14.756 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-57.322 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>9.948 MHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 16.1 dBm | 14.756 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -57.322 kHz |  |  | x dB Bandwidth | x dB | -6.00 dB | 9.948 MHz |  |  |
| Occupied Bandwidth  | Total Power  | 16.1 dBm           |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 14.756 MHz          |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| Transmit Freq Error | OBW Power  | 99.00 %            |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| -57.322 kHz         |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| x dB Bandwidth      | x dB   | -6.00 dB           |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |
| 9.948 MHz           |  |                    |             |          |            |  |  |                     |           |         |             |  |  |                |      |          |           |  |  |