



FCC RADIO TEST REPORT

Applicant : Measurement Specialties (China), Ltd.

Address : No. 26 Langshan Road Shenzhen High-Tech Park
(North) Nanshan District Shenzhen 518057 China

Equipment : Wireless Vibration Sensor

Model No. : 8911N-NX-A, 8911N-EX-A, 8931N-NX-A, 8931N-EX-A

Trade Name : TE Connectivity

FCC ID : 2A85PA89X1N

Standard : FCC part 15 Subpart C §15.247

I HEREBY CERTIFY THAT :

The sample was received on Oct. 21,2022 and the testing was completed on Nov. 09,2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Leevin Li /Supervisor



Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.5 Description of Test System.....	9
2.6 General Information of Test.....	10
2.7 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests.....	11
4. Antenna Requirements.....	12
4.1 Standard Applicable	12
4.2 Antenna Construction and Directional Gain.....	12
5. Test of Conducted Emission.....	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data.....	14
6. Test of Spurious Emission (Radiated)	15
6.1 Test Limit	15
6.2 Test Procedures	15
6.3 Typical Test Setup	16
6.4 Test Result and Data (9kHz ~ 30MHz)	17
6.5 Test Result and Data (30MHz ~ 1GHz)	17
6.6 Test Result and Data (1GHz ~ 10GHz).....	19
6.7 Restricted Bands of Operation	31
7. Test of Spurious Emission (Conducted).....	44
7.1 Test Limit	44
7.2 Test Procedure	44
7.3 Test Setup Layout	44
7.4 Test Result and Data.....	44
8. On Time, Duty Cycle and Measurement methods	49
8.1 Test Limit	49
8.2 Test Procedure	49
8.3 Test Setup Layout	49
8.4 Test Result and Data.....	49
9. 20dB Bandwidth Measurement Data.....	51
9.1 Test Limit	51
9.2 Test Procedures	51
9.3 Test Setup Layout	51
9.4 Test Result and Data.....	51
10. Frequencies Separation	54
10.1 Test Limit	54
10.2 Test Procedures	54



10.3	Test Setup Layout	54
10.4	Test Result and Data.....	54
11.	Dwell Time on each channel	57
11.1	Test Limit	57
11.2	Test Procedures	57
11.3	Test Setup Layout	57
11.4	Test Result and Data.....	57
12.	Number of Hopping Channels	60
12.1	Test Limit	60
12.2	Test Procedures	60
12.3	Test Setup Layout	60
12.4	Test Result and Data.....	60
13.	Maximum Peak Output Power	62
13.1	Test Limit	62
13.2	Test Procedures	62
13.3	Test Setup Layout	62
13.4	Test Result and Data.....	62
14.	Power Spectral Density	63
14.1	Test Limit	63
14.2	Test Procedures	63
14.3	Test Setup Layout	63
14.4	Test Result and Data.....	63



History of this test report

■ Original.

☐ Additional attachment as following record:

Report No.	Issue Date	Description
DEFM2202046	Nov. 09, 2022	Initial Issue



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	N/A
15.209 15.205	Radiated Spurious Emission	PASS
15.247(a)(1)	Channel Carrier Frequencies Separation	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(1)	20dB Bandwidth Measurement	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(b)	Number of Hopping Channels	PASS
15.247(b)	Maximum Peak Output Power	PASS
15.247(f)	Power Spectral Density	PASS
15.247(d)	Band Edges Measurement Data	PASS
Note: Deviations Yes ☐ No ☒ N/A denotes test is not applicable in this Test Report. *The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.		



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Equipment	Wireless Vibration Sensor
Model Name	8911N-NX-A, 8911N-EX-A, 8931N-NX-A, 8931N-EX-A
Model Description	All models are identical except for Detection Angle (1 represents uniaxial and 3 represents triaxial) and explosion-proof performance (EX represents ATEX and NX represents Non-ATEX). Model 8911N-EX-A and 8931N-EX-A were chosen for final test.
Operation Frequency Range	902MHz~928MHz
Center Frequency Range	125KHz:902.3MHz~914.9MHz
Modulation Type	LoRa, Hybrid System
Antenna Gain.	0.3dBi
Antenna Type	monopole Antenna
Working Temperature	-40°C to +60°C
Operating Voltage	DC 3.6V from Battery

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 Carrier Frequency of Channels

125KHz (SF10/SF09/SF08/SF07)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	902.3	17	905.7	34	909.1	51	912.5
01	902.5	18	905.9	35	909.3	52	912.7
02	902.7	19	906.1	36	909.5	53	912.9
03	902.9	20	906.3	37	909.7	54	913.1
04	903.1	21	906.5	38	909.9	55	913.3
05	903.3	22	906.7	39	910.1	56	913.5
06	903.5	23	906.9	40	910.3	57	913.7
07	903.7	24	907.1	41	910.5	58	913.9
08	903.9	25	907.3	42	910.7	59	914.1
09	904.1	26	907.5	43	910.9	60	914.3
10	904.3	27	907.7	44	911.1	61	914.5
11	904.5	28	907.9	45	911.3	62	914.7
12	904.7	29	908.1	46	911.5	*63	914.9
13	904.9	30	908.3	47	911.7	---	---
14	905.1	*31	908.5	48	911.9		
15	905.3	32	908.7	49	912.1		
16	905.5	33	908.9	50	912.3		

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included Notebook, Dongle and EUT for RF test.
- Run the test software "Nrf Connect for Desktop.exe (Ver.: 3.12.0.0)" under Win 10 System was executed to transmit and receive data via Lora.
- The following test modes were performed for the test:

Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	Lora(125KHz) for SF10 with 8911N-NX-A
2	Lora(125KHz) for SF09 with 8911N-NX-A
3	Lora(125KHz) for SF08 with 8911N-NX-A
4	Lora(125KHz) for SF07 with 8911N-NX-A
5	Lora(125KHz) for SF07 with 8931N-NX-A
caused "Test Mode 1" generated the worst case, they were reported as the final data.	
Radiation Emissions (1GHz ~ 10GHz)	
Test Mode	Operating Description
1	Lora(125KHz) for SF10 with 8911N-NX-A
2	Lora(125KHz) for SF09 with 8911N-NX-A
3	Lora(125KHz) for SF08 with 8911N-NX-A
4	Lora(125KHz) for SF07 with 8911N-NX-A
caused "Test Mode 1,4" generated the worst case, they were reported as the final data.	


2.4 Power Parameter Value of the test software

Mode	Frequency (MHz)	Power Setting
Lora(125KHz)	902.3	8
	908.5	8
	914.9	8



2.5 Description of Test System

Product	Manufacturer	Model No.	Power Cord
1 Notebook	DELL	Dell Optile 380	Non-Shielded, 1.8m
2 Dongle	NORDIC	nRF52840-Dongle	N/A

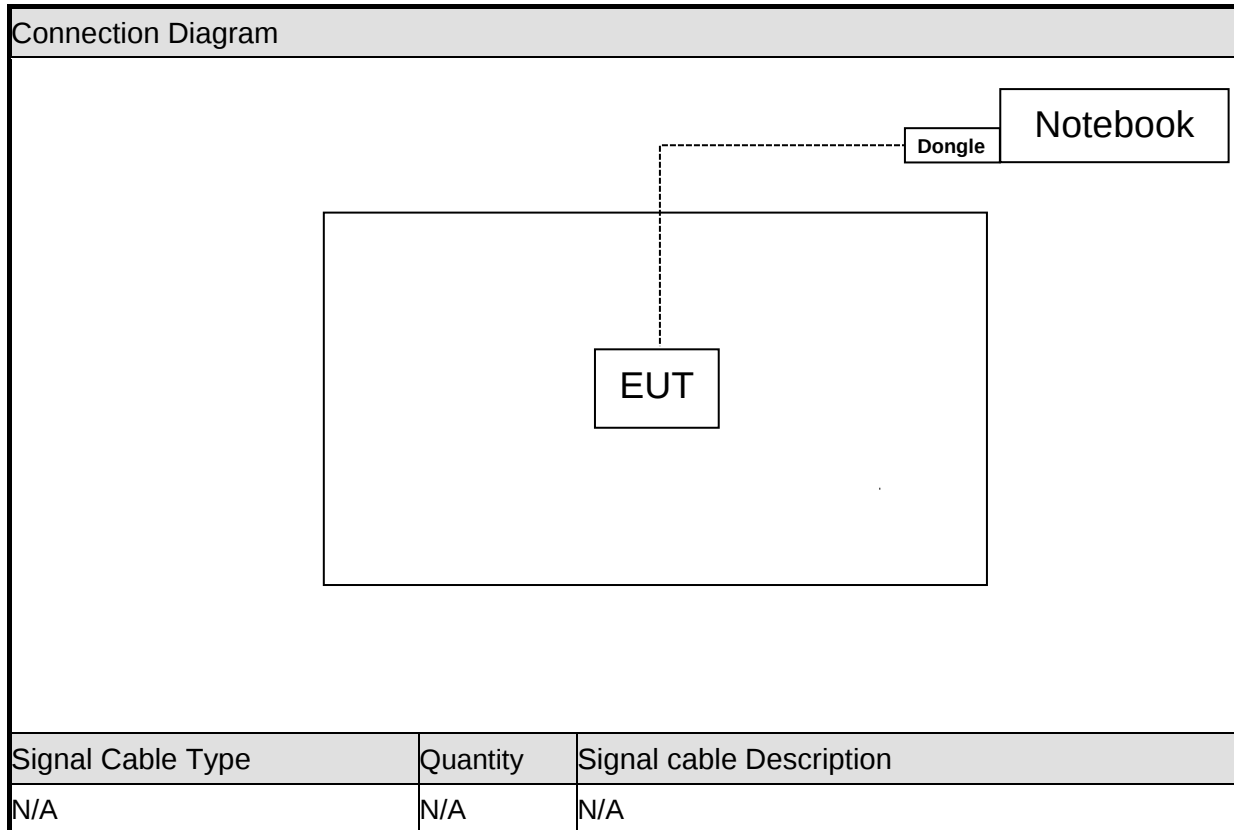



2.6 General Information of Test

Test Site	CerpPASS Technology Corporation(CerpPASS Laboratory) Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 10,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Radiated Emissions	3M01-DG	2022/10/25~2022/11/08	24~25℃ / 52~54%	Amos Zhang
RF Conducted	RFCON01-DG	2022/10/25~2022/11/09	23~25℃ / 53~55%	Amos Zhang

2.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.17dB
Radiated Spurious Emission(9KHz~30MHz)	±4.99dB
Radiated Spurious Emission(30MHz~1GHz)	±4.39dB
Radiated Spurious Emission(1GHz~18GHz)	±5.36dB
Radiated Spurious Emission(18GHz~40GHz)	±5.43dB
6dB Bandwidth&20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±0.57 dB
Power Spectral Density	±1.01 dB
Dwell Time / Deactivation Time	±1.1%



3. Test Equipment and Ancillaries Used for Tests

Radiated Emissions					
Test Site	3M01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100565	2022.05.07	2023.05.06
Amplifier	EMCI	EMC330	980082	2022.05.07	2023.05.06
Loop Antenna	R&S	HFH2-Z2	100150	2022.05.11	2024.05.10
Bilog Antenna	Sunol Science	JB1	A072414-2	2022.05.25	2024.05.24
Preamplifier	Agilent	8449B	3008A02342	2022.01.08	2023.01.07
Preamplifier	COM-POWER	PA-840	711885	2022.05.07	2023.05.06
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2022.05.22	2024.05.21
Standard Gain Horn Antenna	TRC	HA-2640	18050	2022.05.09	2024.05.08
Standard Gain Horn Antenna	TRC	HA-1726	18051	2022.05.09	2024.05.08
FSQ Signal Analyzer	R&S	FSQ40	200012	2022.05.07	2023.05.06
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2022.08.05	2023.08.04

RF Conducted					
Test Site	RFCON01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2022.05.07	2023.05.06
EXA Signal Analyzer	KEYSIGHT	N9010A	MY53400169	2022.05.07	2023.05.06
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2022.05.07	2023.05.06
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2022.05.07	2023.05.06
USB Wideband Power Sensor	Boonton	55006	9778	2022.01.08	2023.01.07
Temperature/ Humidity Meter	mingle	ETH529	N/A	2022.01.08	2023.01.07



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	monopole Antenna
Antenna Gain	0.3dBi



5. Test of Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.3 Typical Test Setup

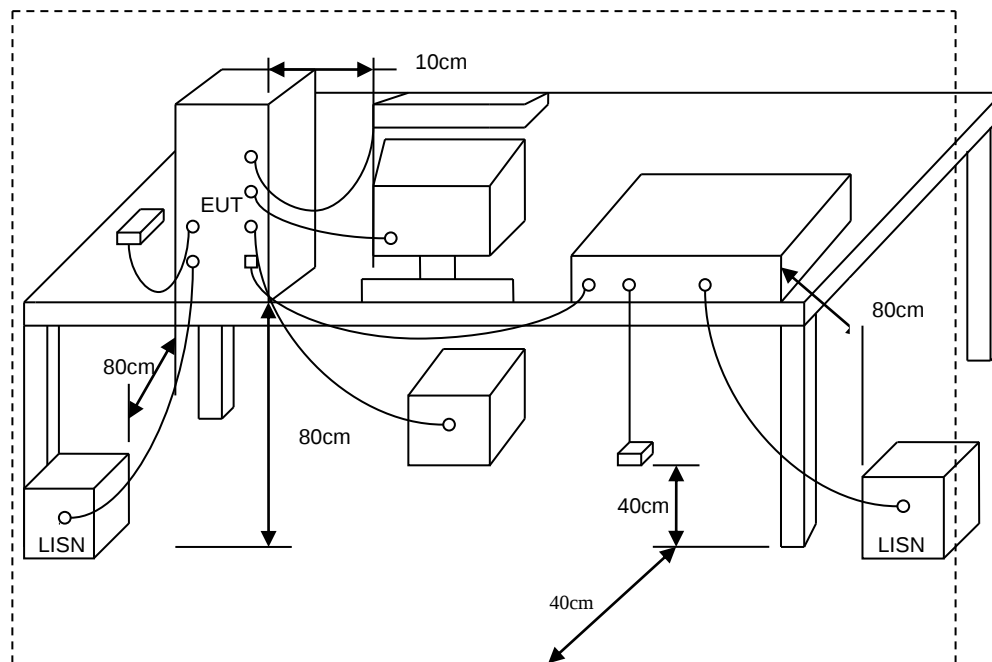

5.4 Test Result and Data

Not applicable, since the EUT supplied by battery.



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

6.2 Test Procedures


- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.(X AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

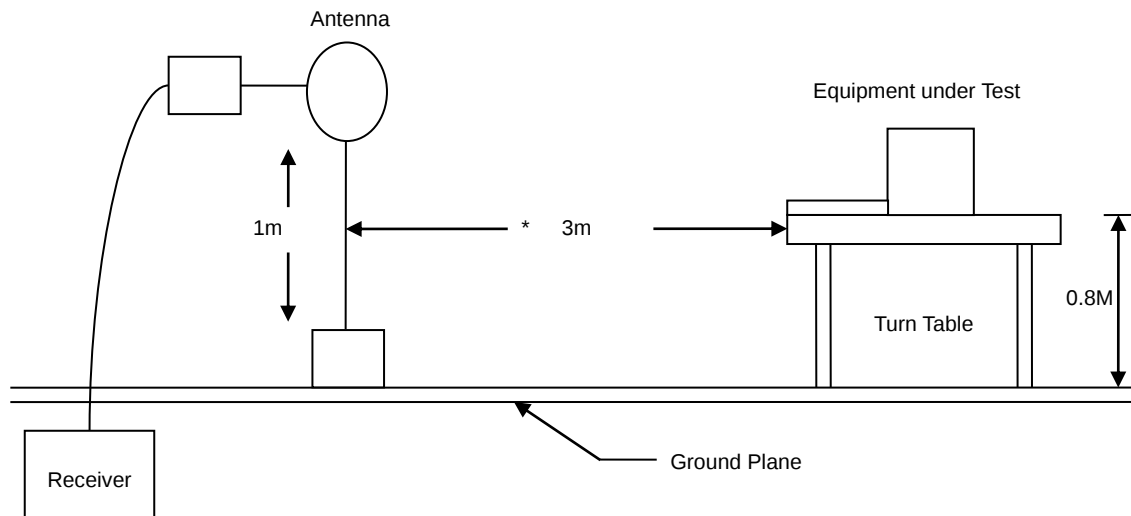

30MHz- 1GHz Test Setup

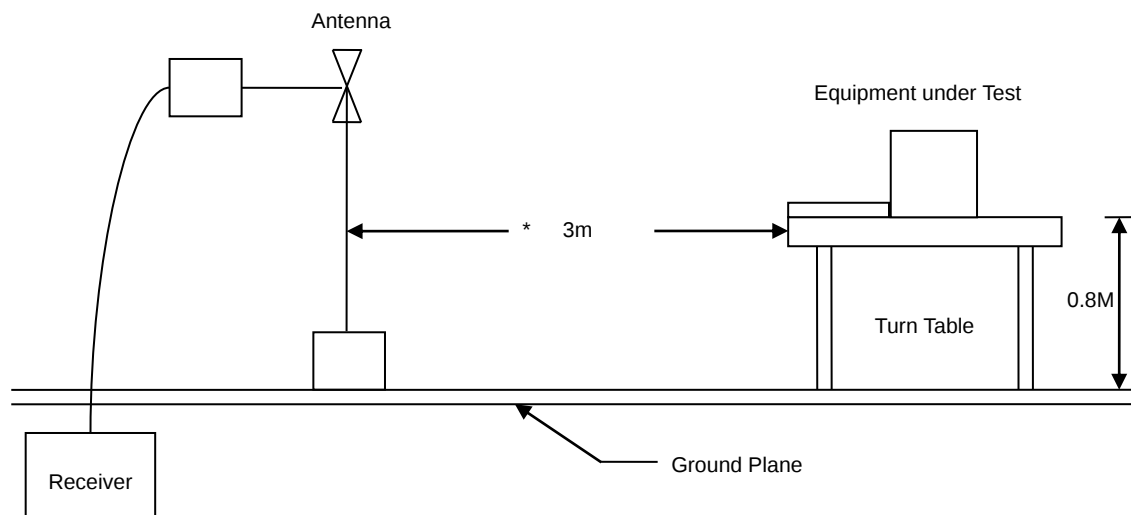

Above 1GHz Test Setup

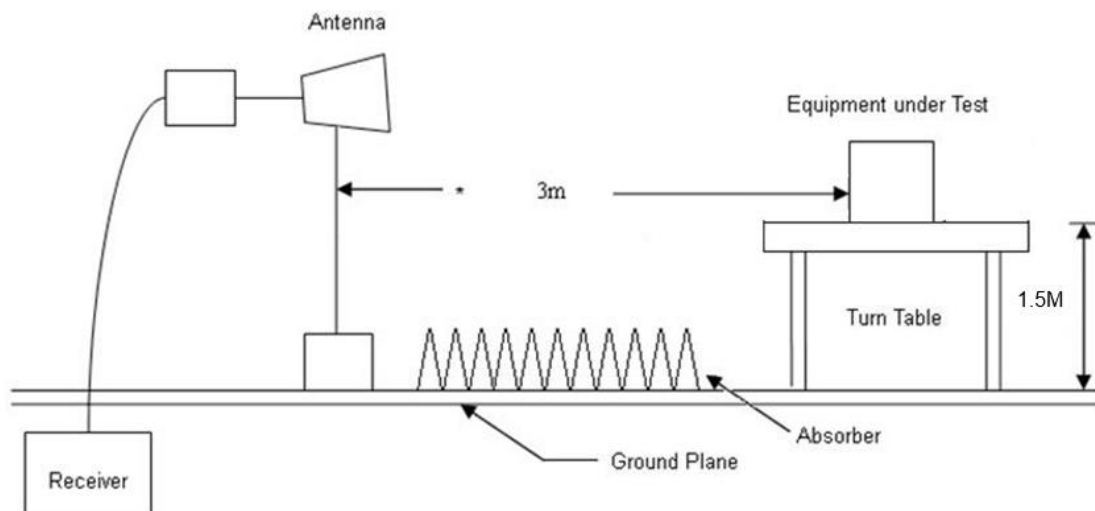





6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

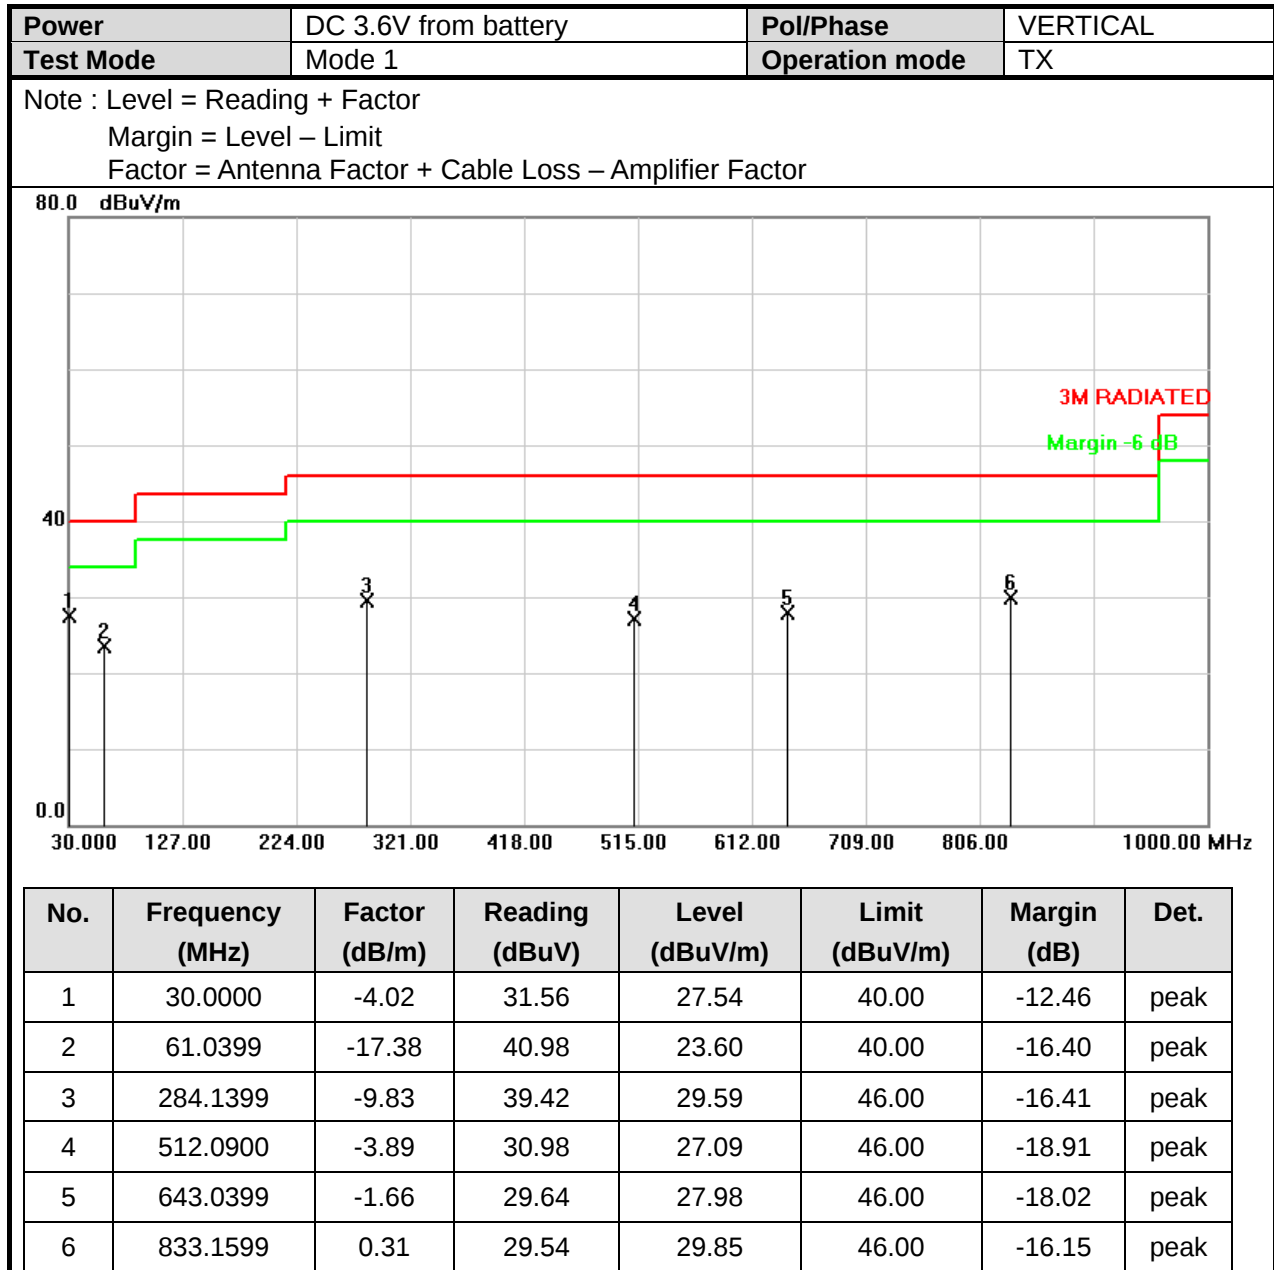

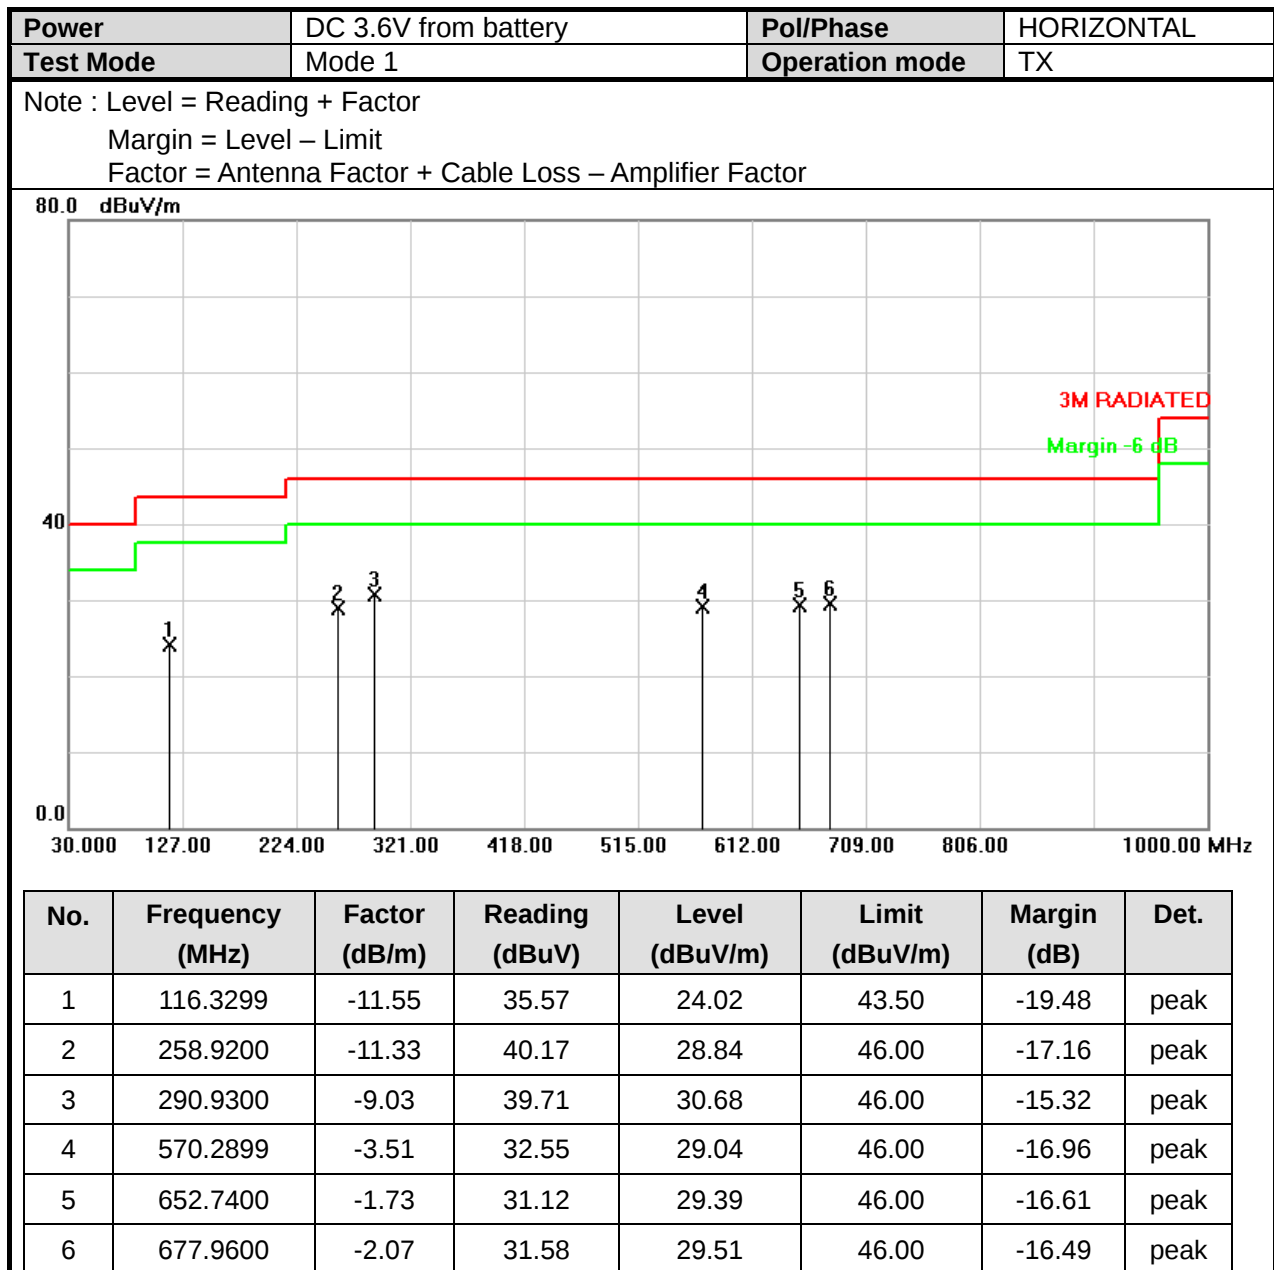




6.6 Test Result and Data (1GHz ~ 10GHz)

Power	DC 3.6V from battery	Pol/Phase	VERTICAL
Test Mode	Mode 1, 902.3MHz	Operation mode	TX


Note : Level = Reading + Factor


Margin = Level – Limit


Factor = Antenna Factor + Cable Loss – Amplifier Factor

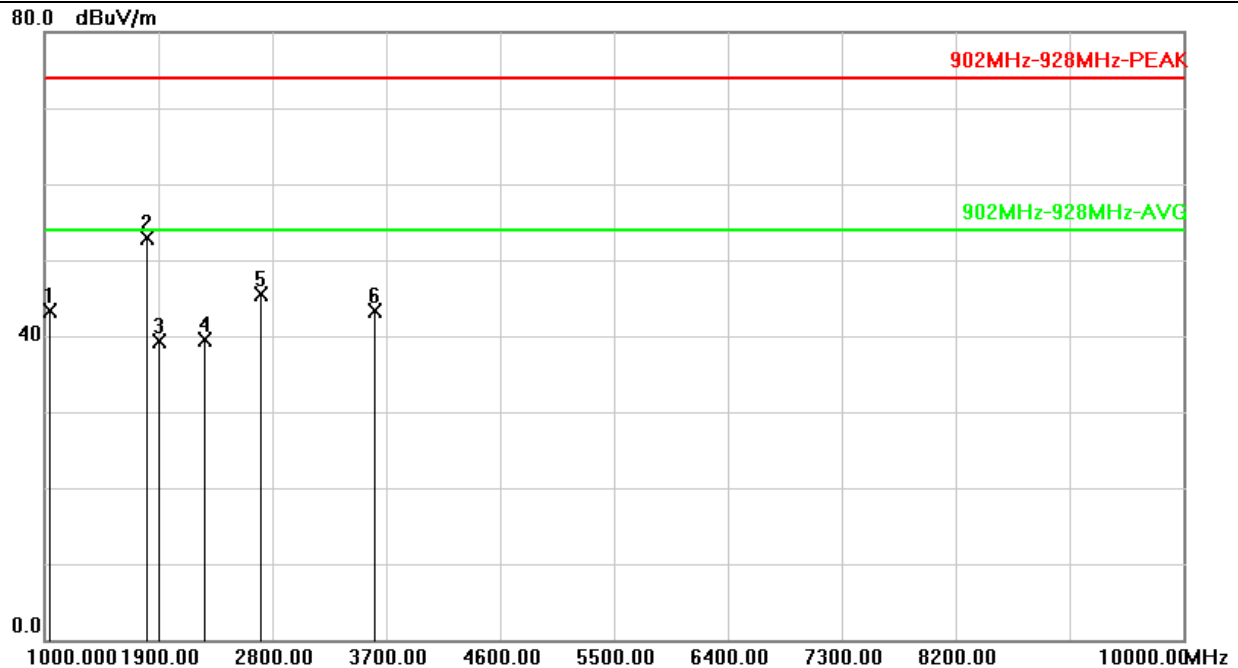



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1045.000	-10.96	54.33	43.37	74.00	-30.63	peak
2	1804.600	-10.02	62.92	52.90	74.00	-21.10	peak
3	1900.000	-9.28	48.65	39.37	74.00	-34.63	peak
4	2260.000	-7.69	47.22	39.53	74.00	-34.47	peak
5	2706.900	-6.68	52.12	45.44	74.00	-28.56	peak
6	3610.000	-5.26	48.56	43.30	74.00	-30.70	peak

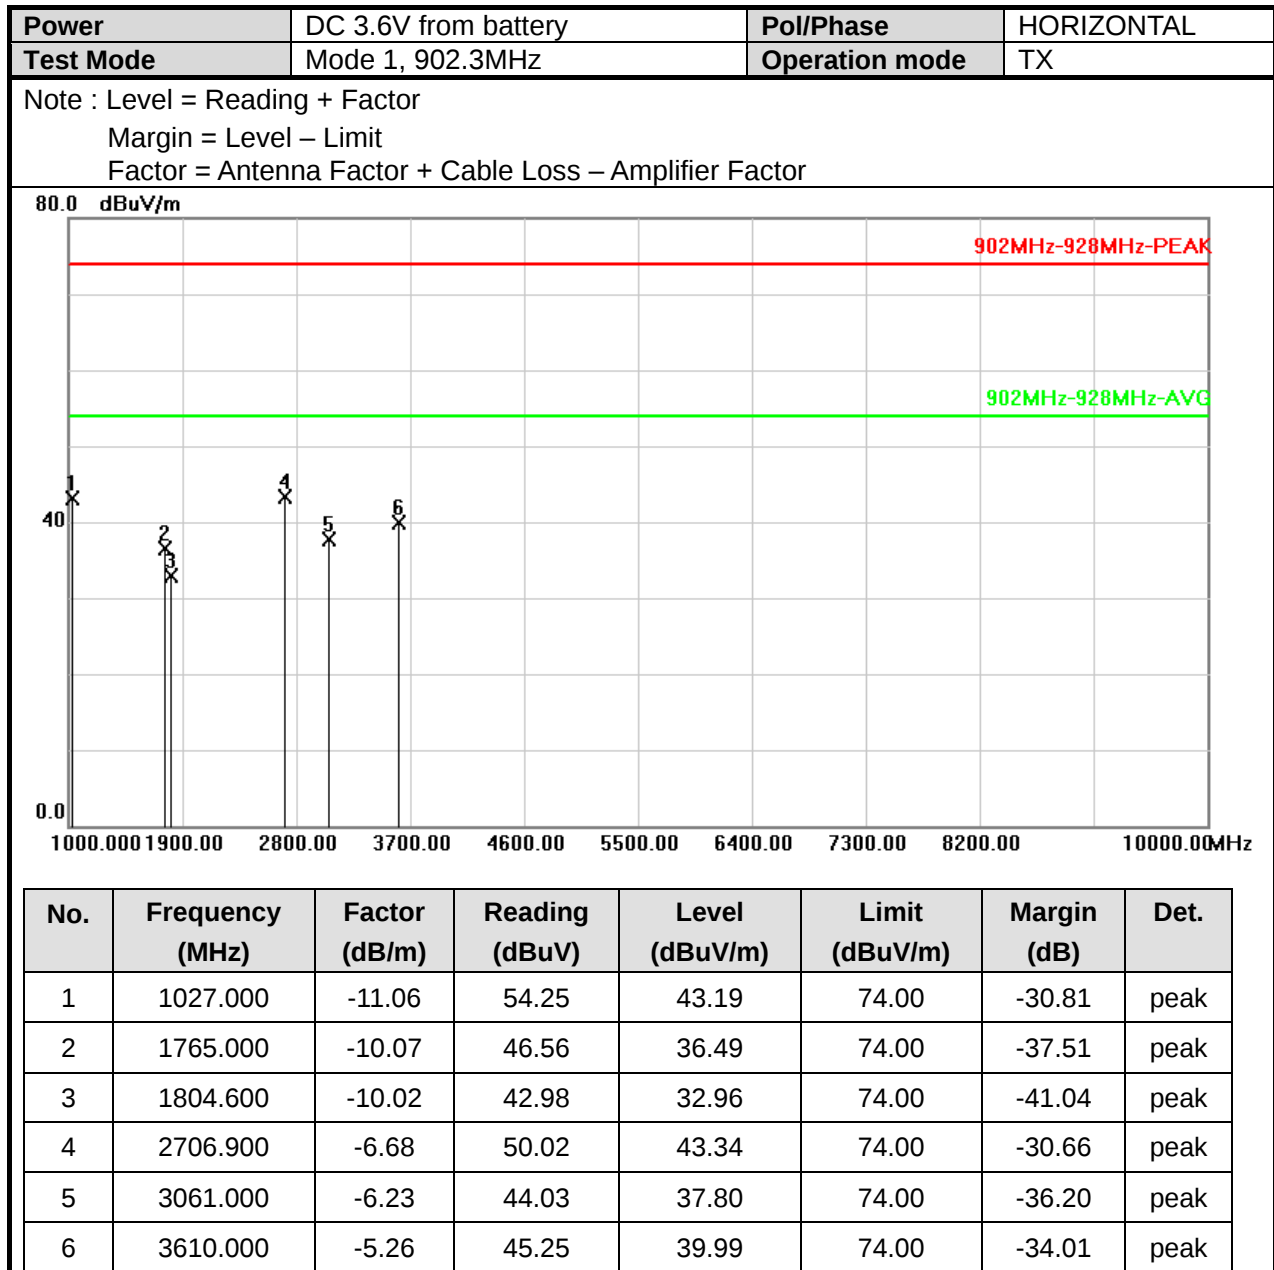


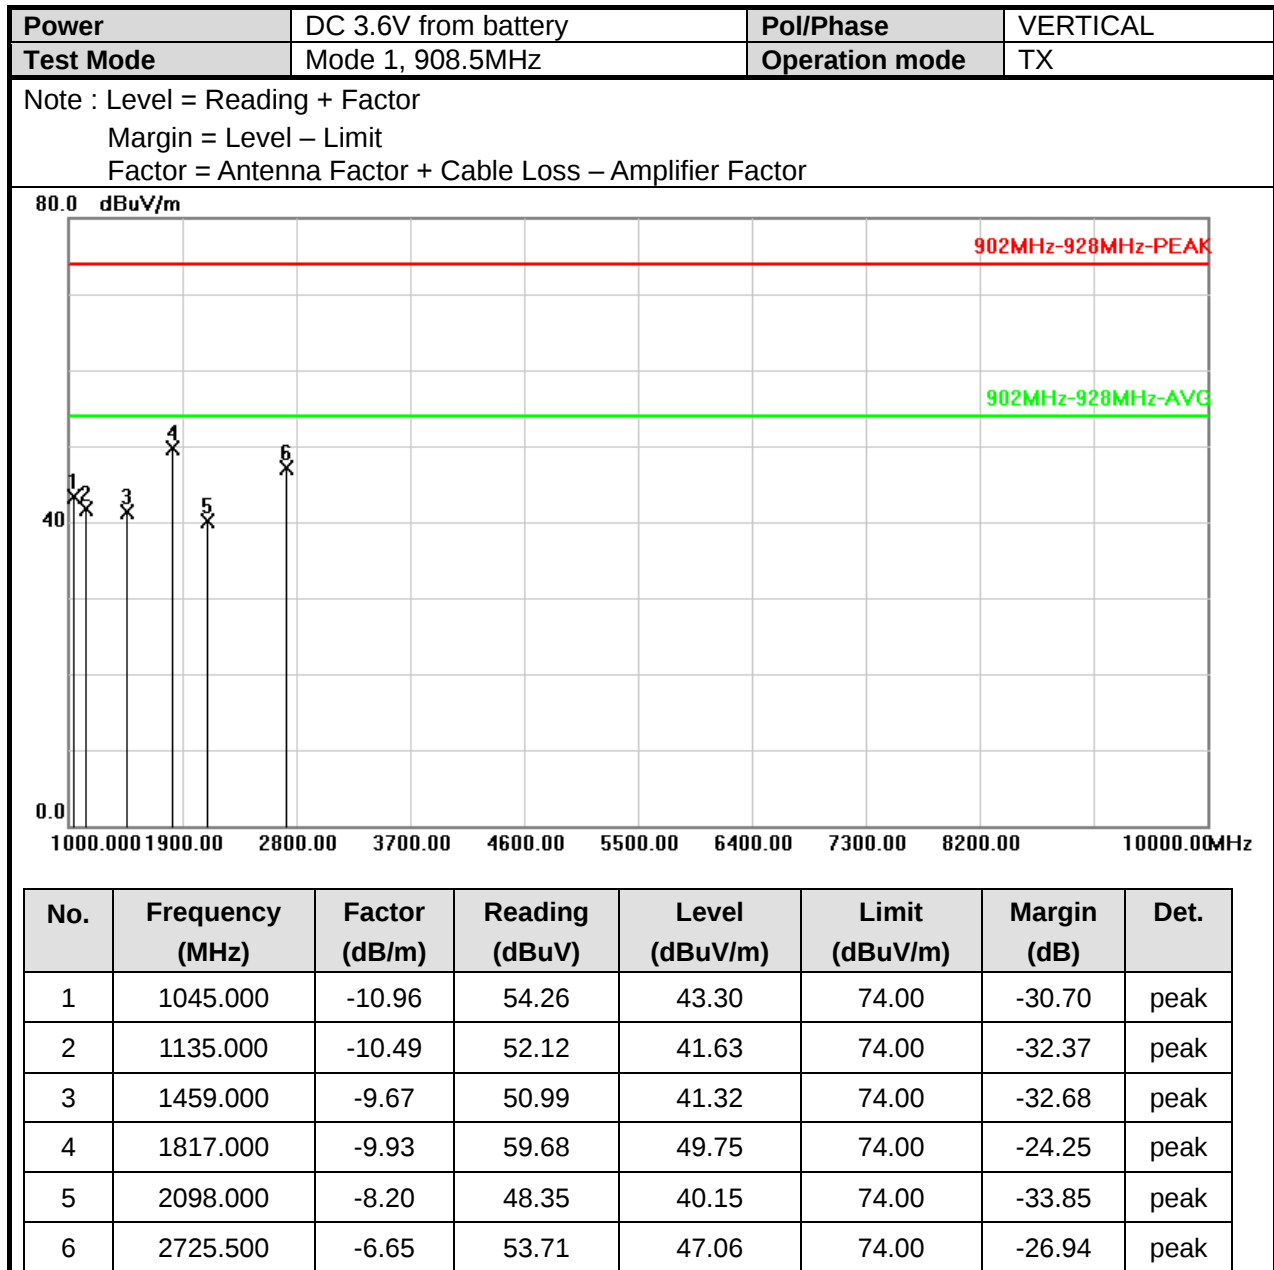


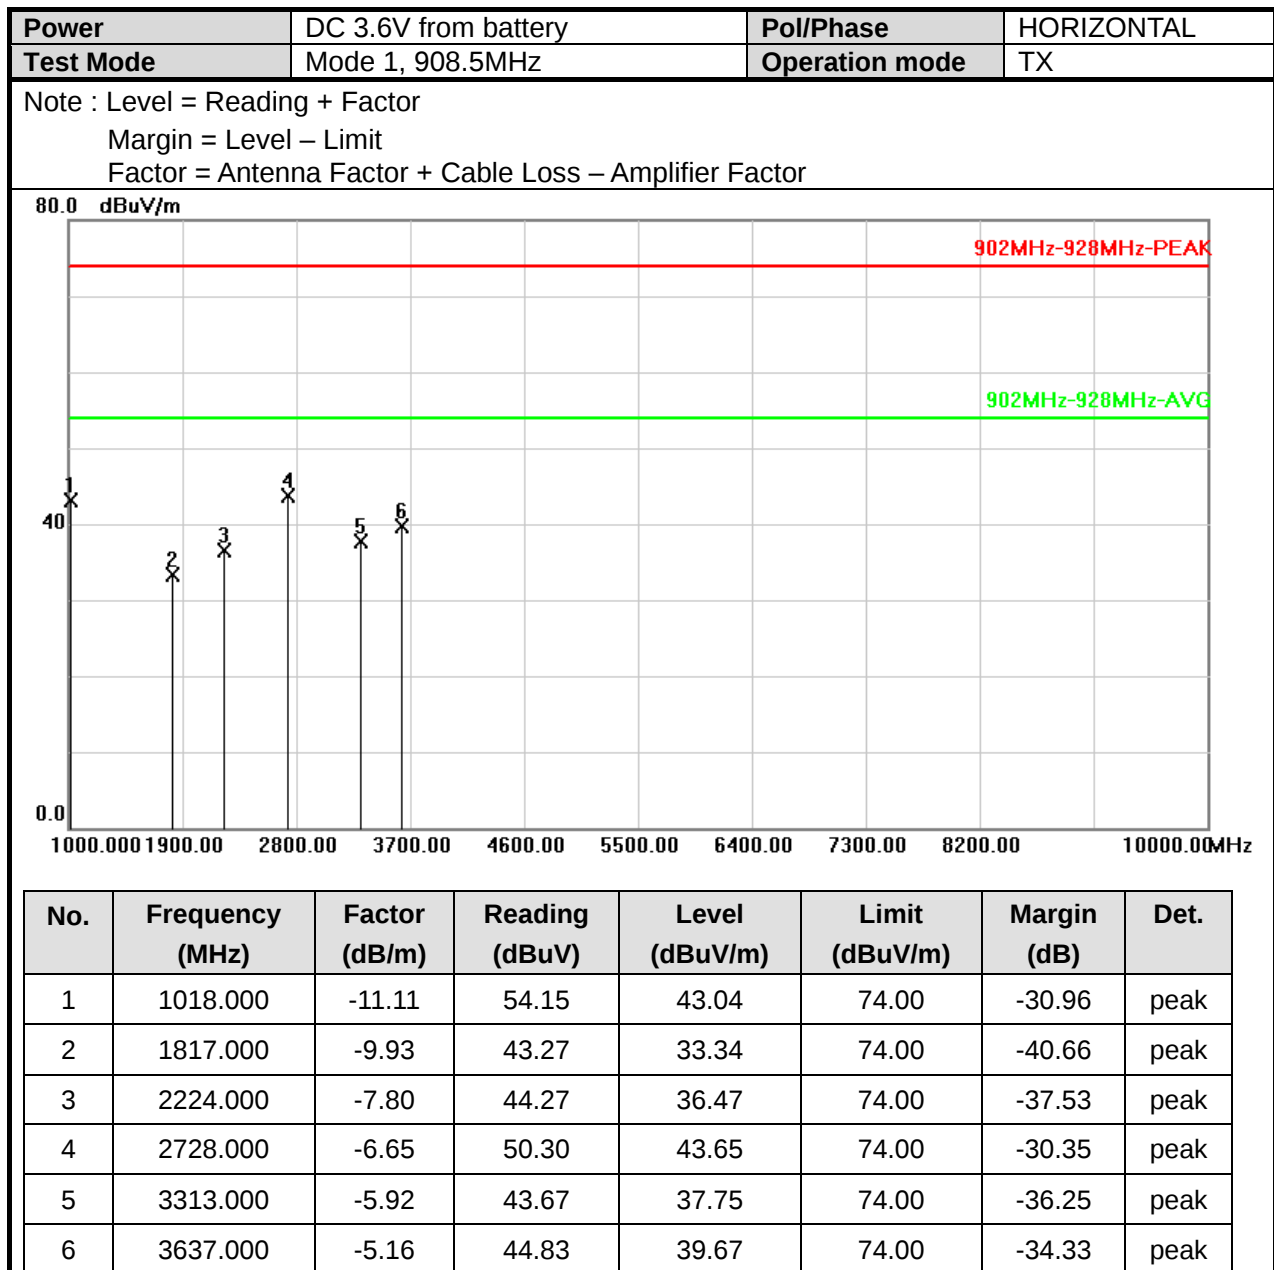


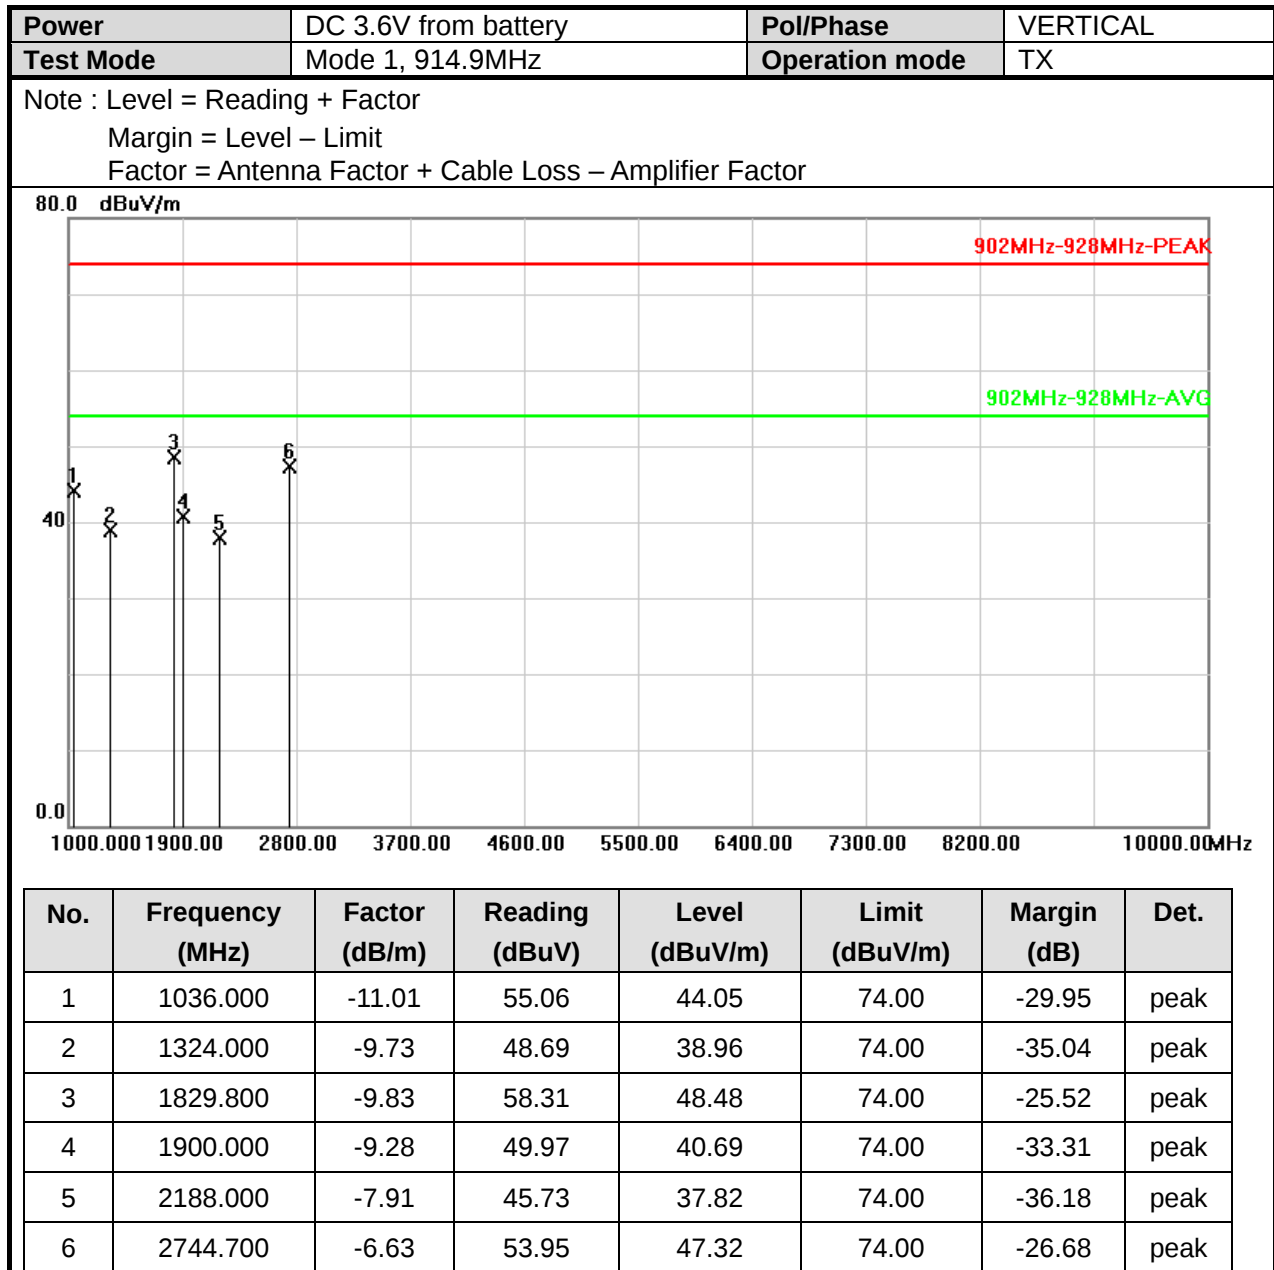


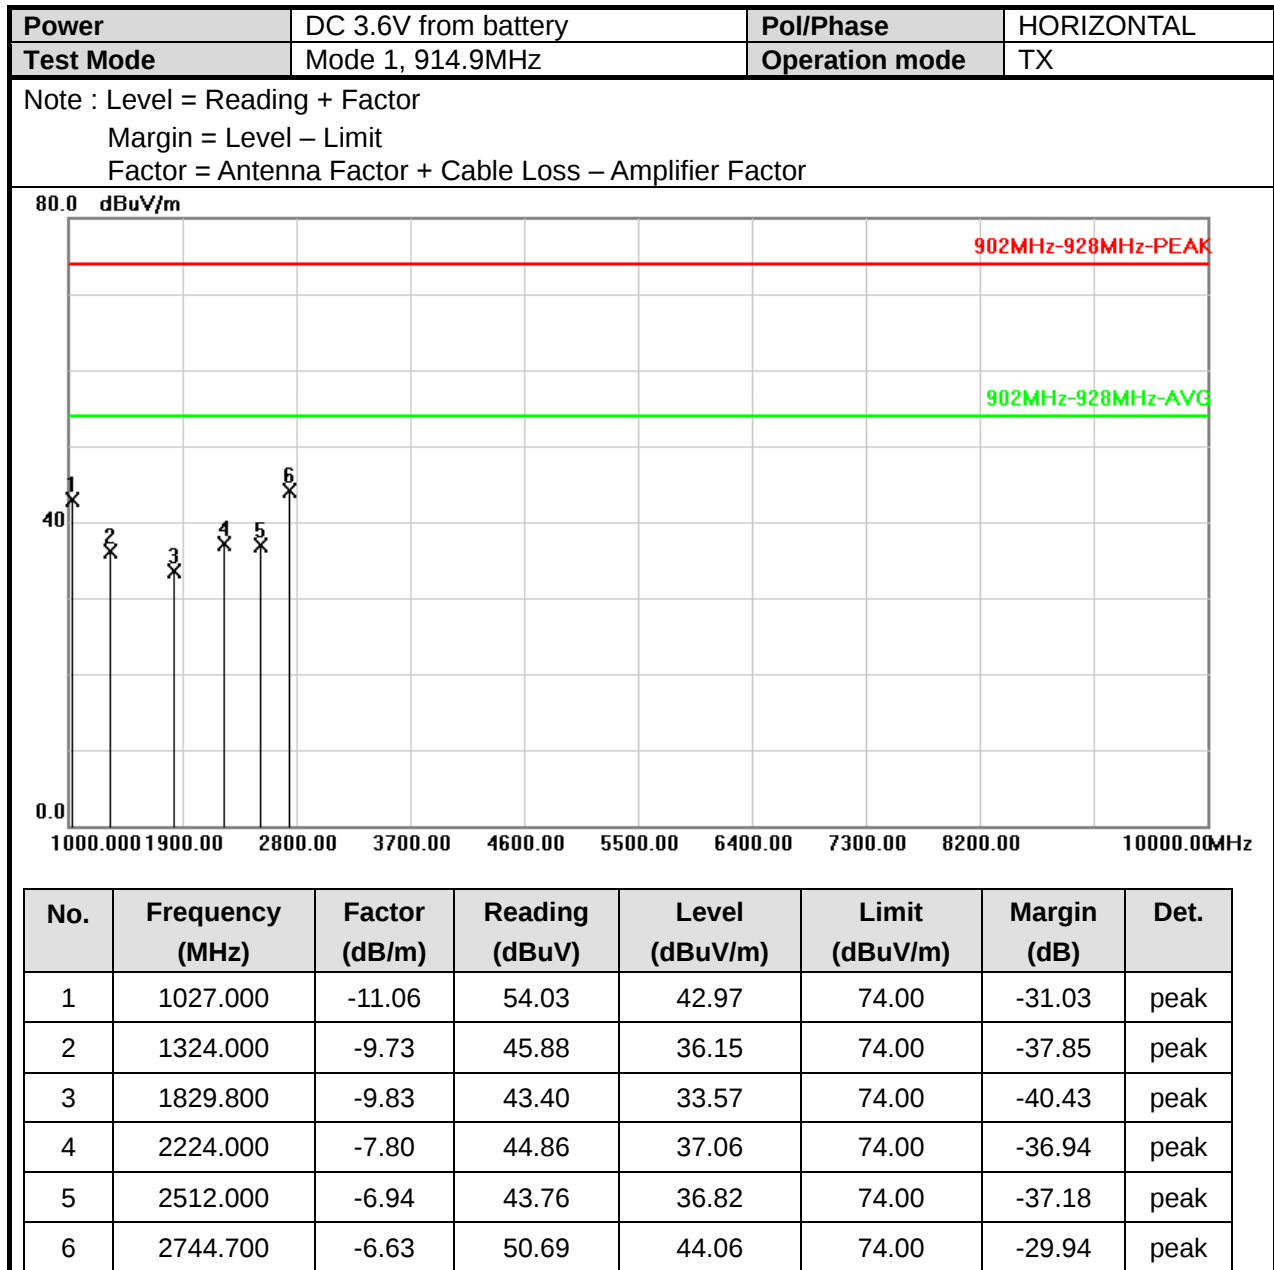


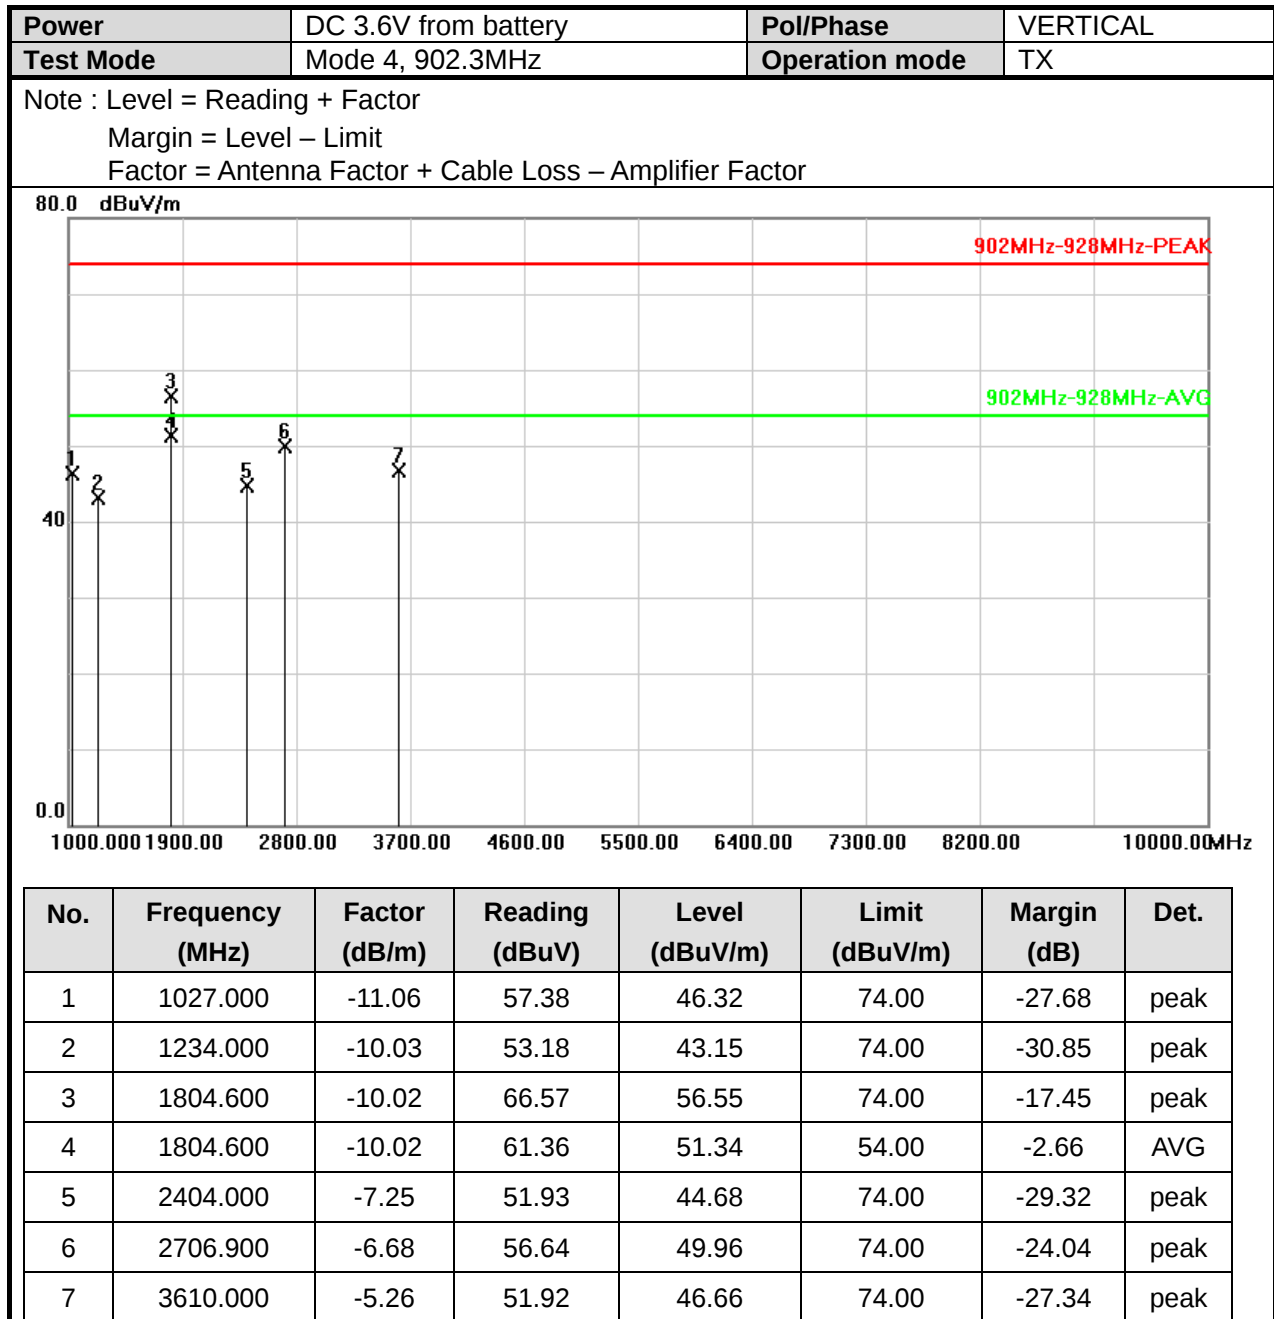


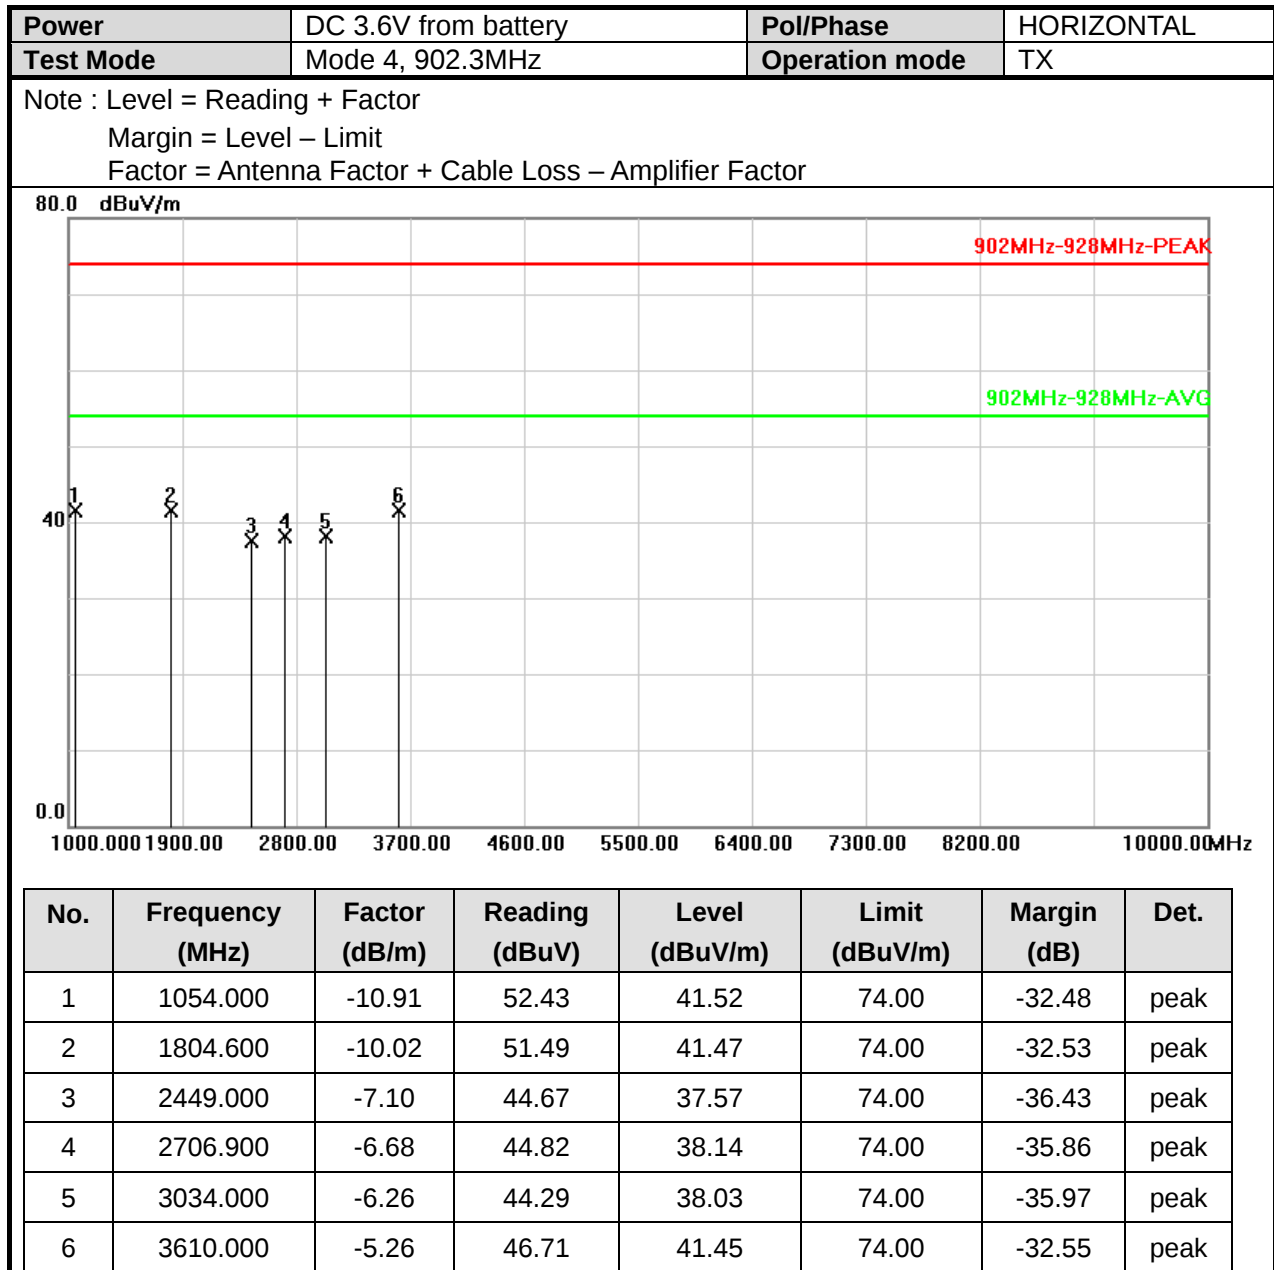

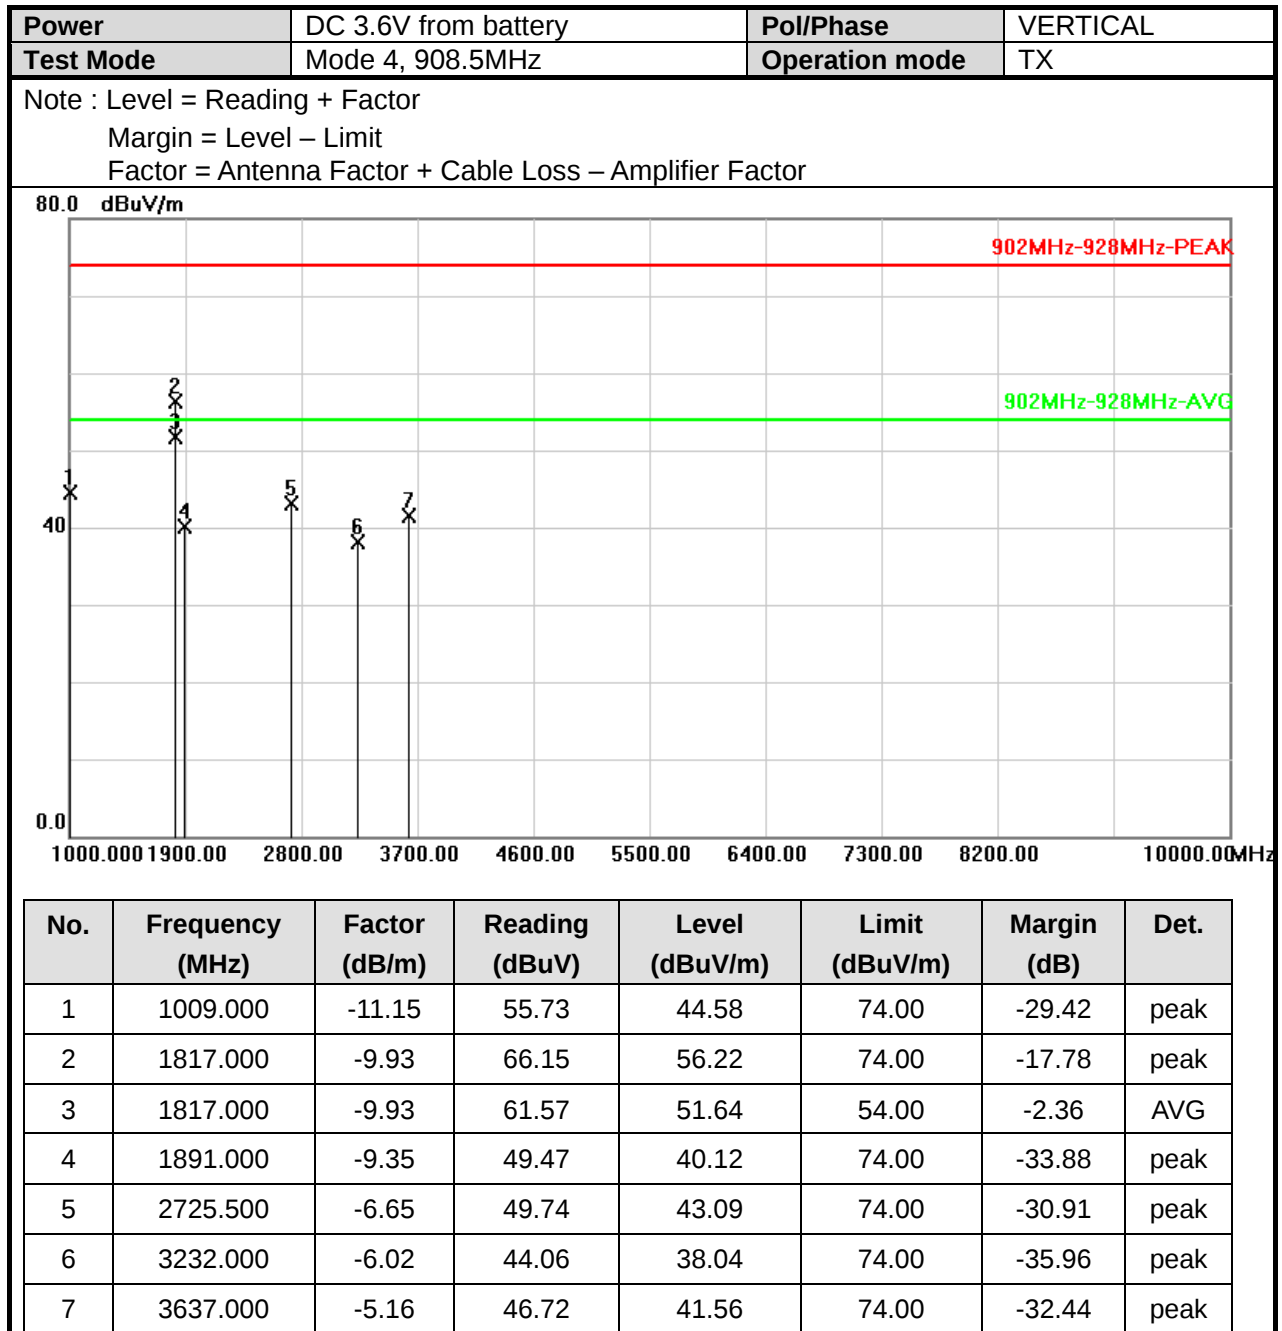

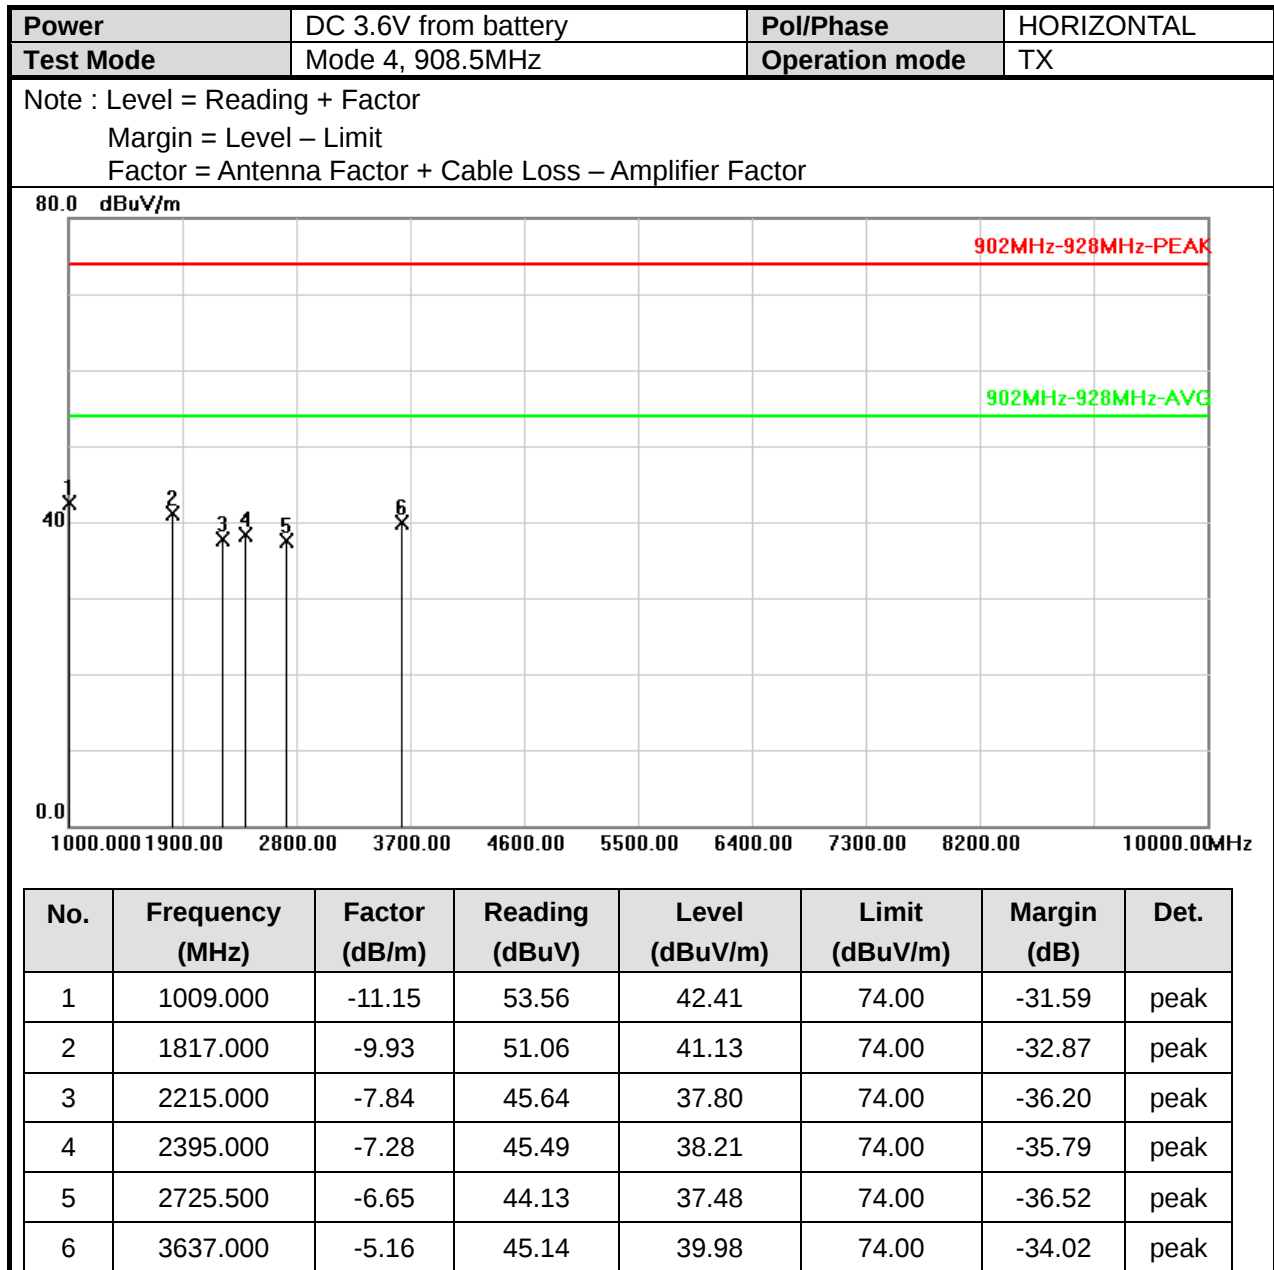

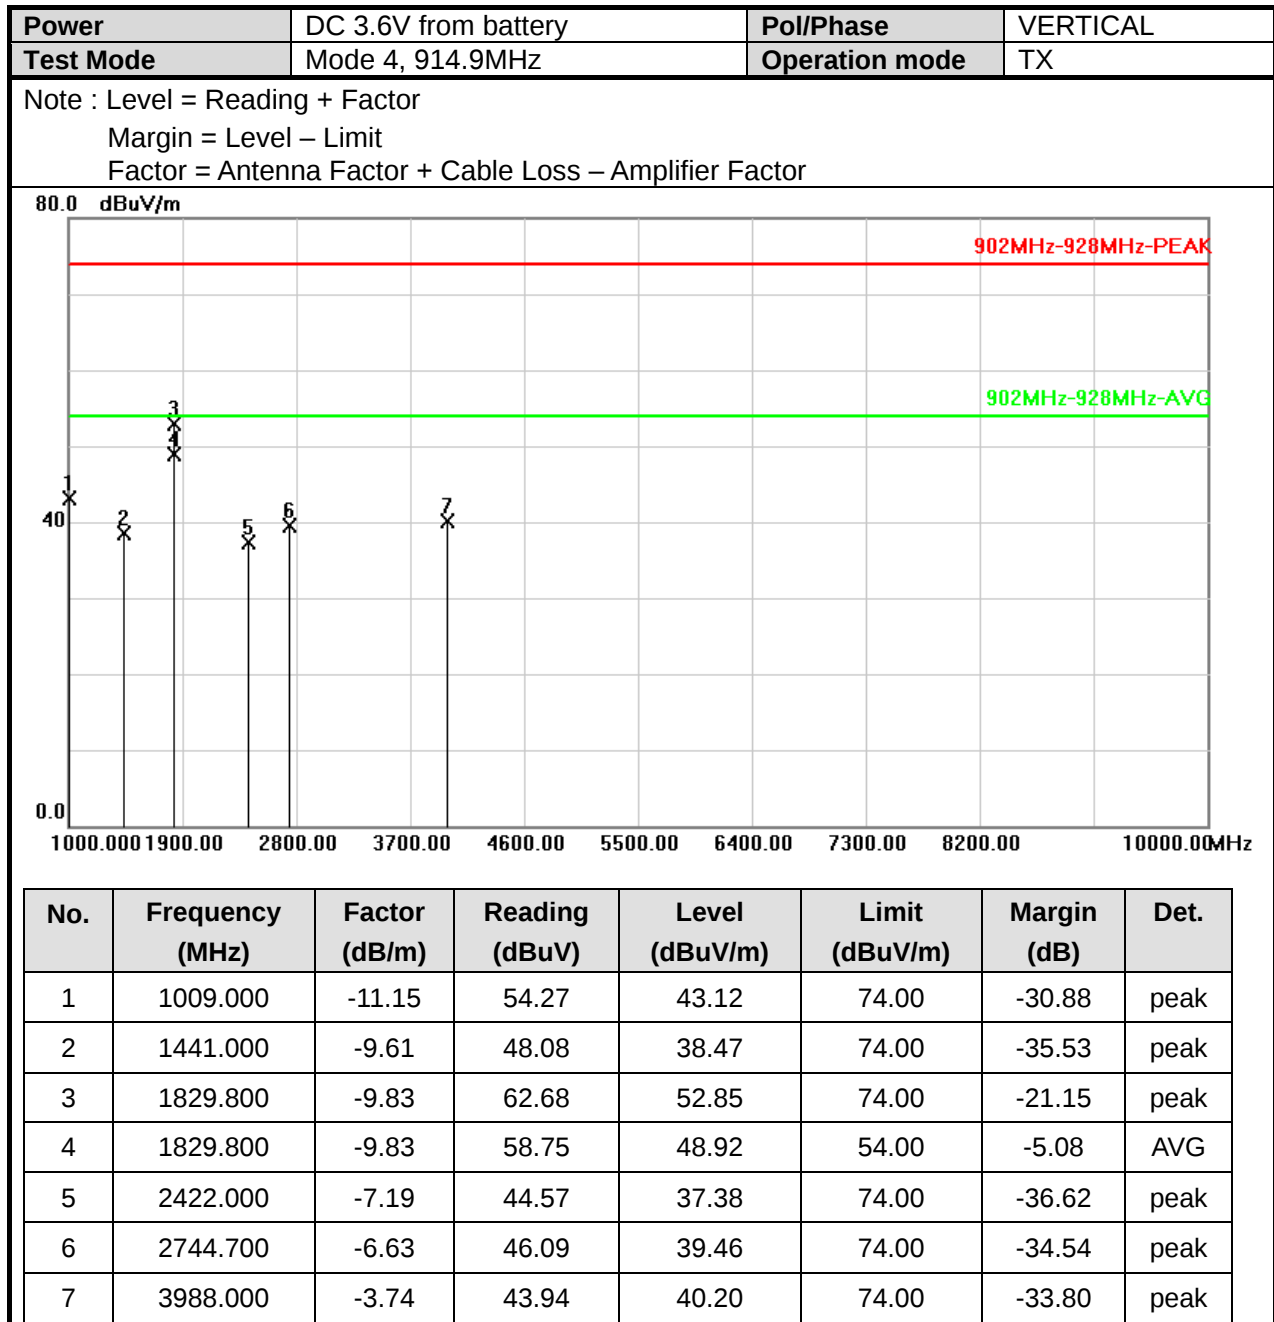

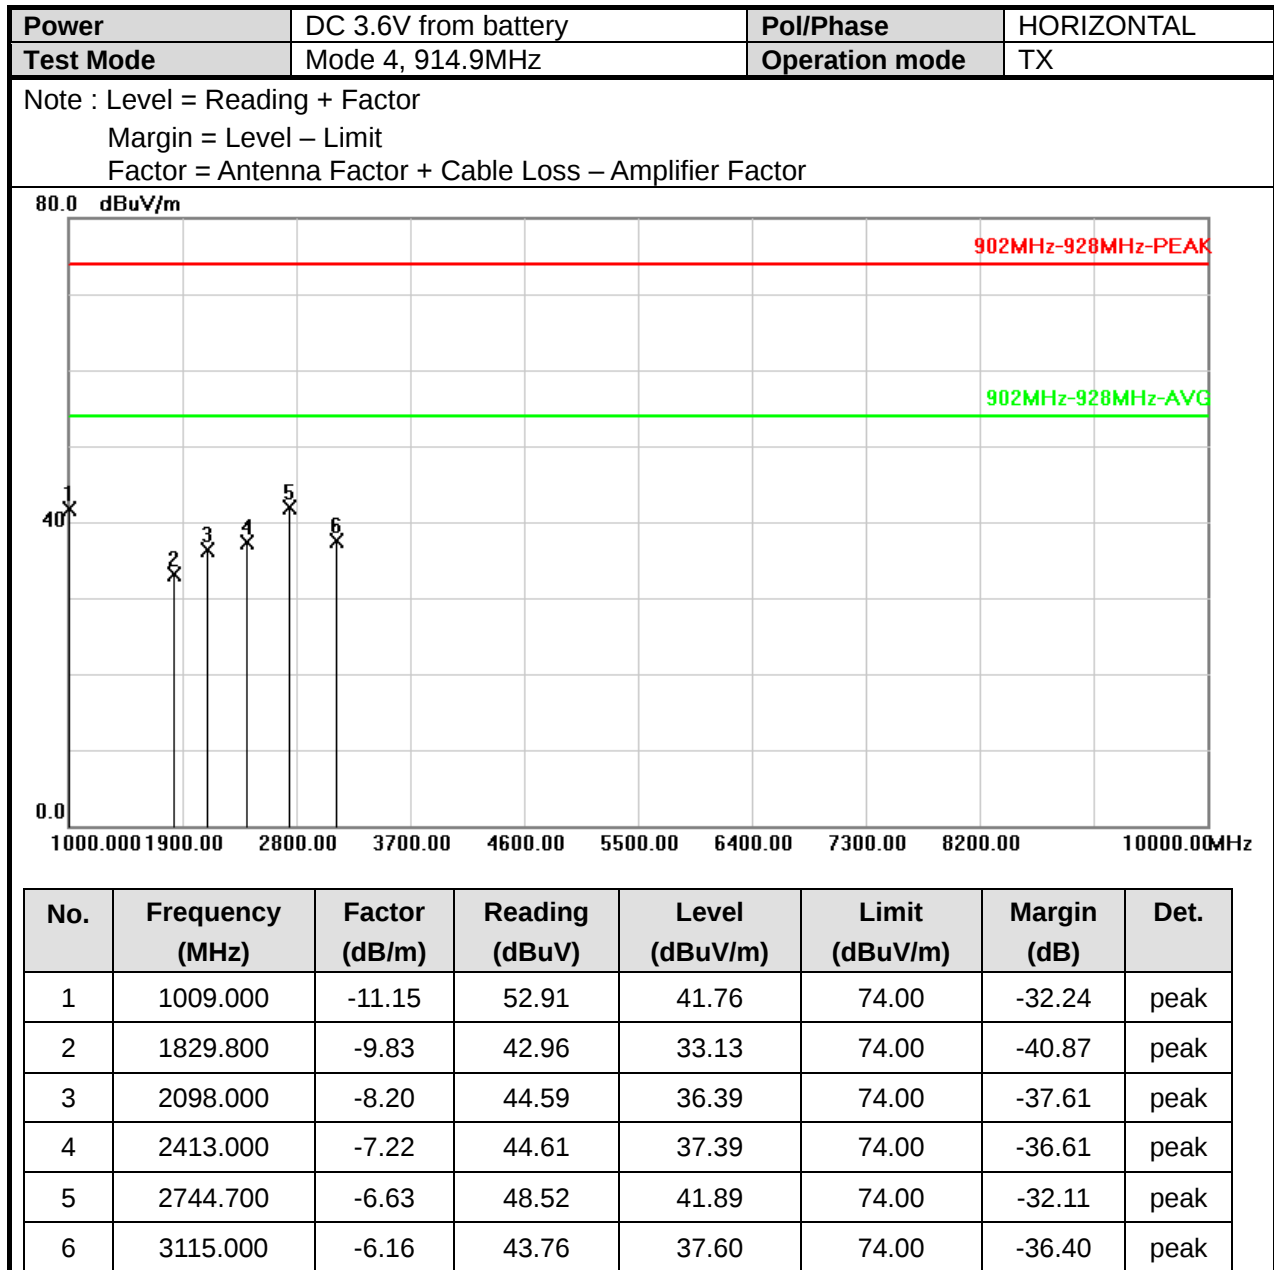





6.7 Restricted Bands of Operation


Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			


** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

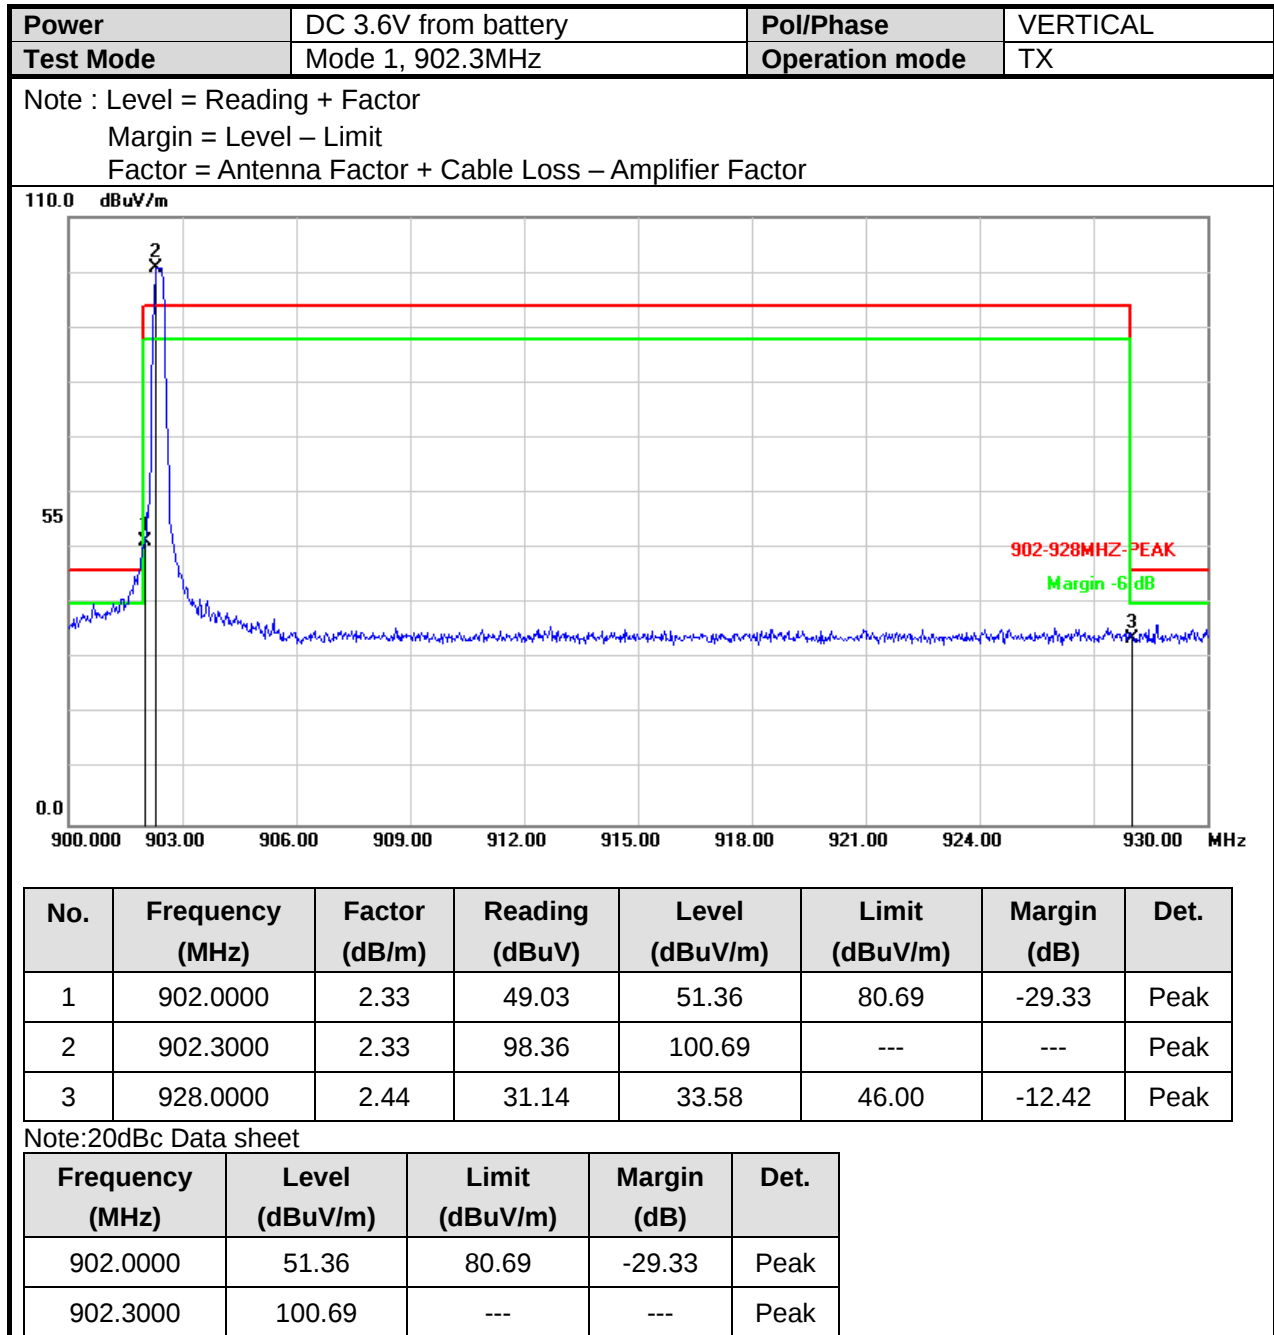


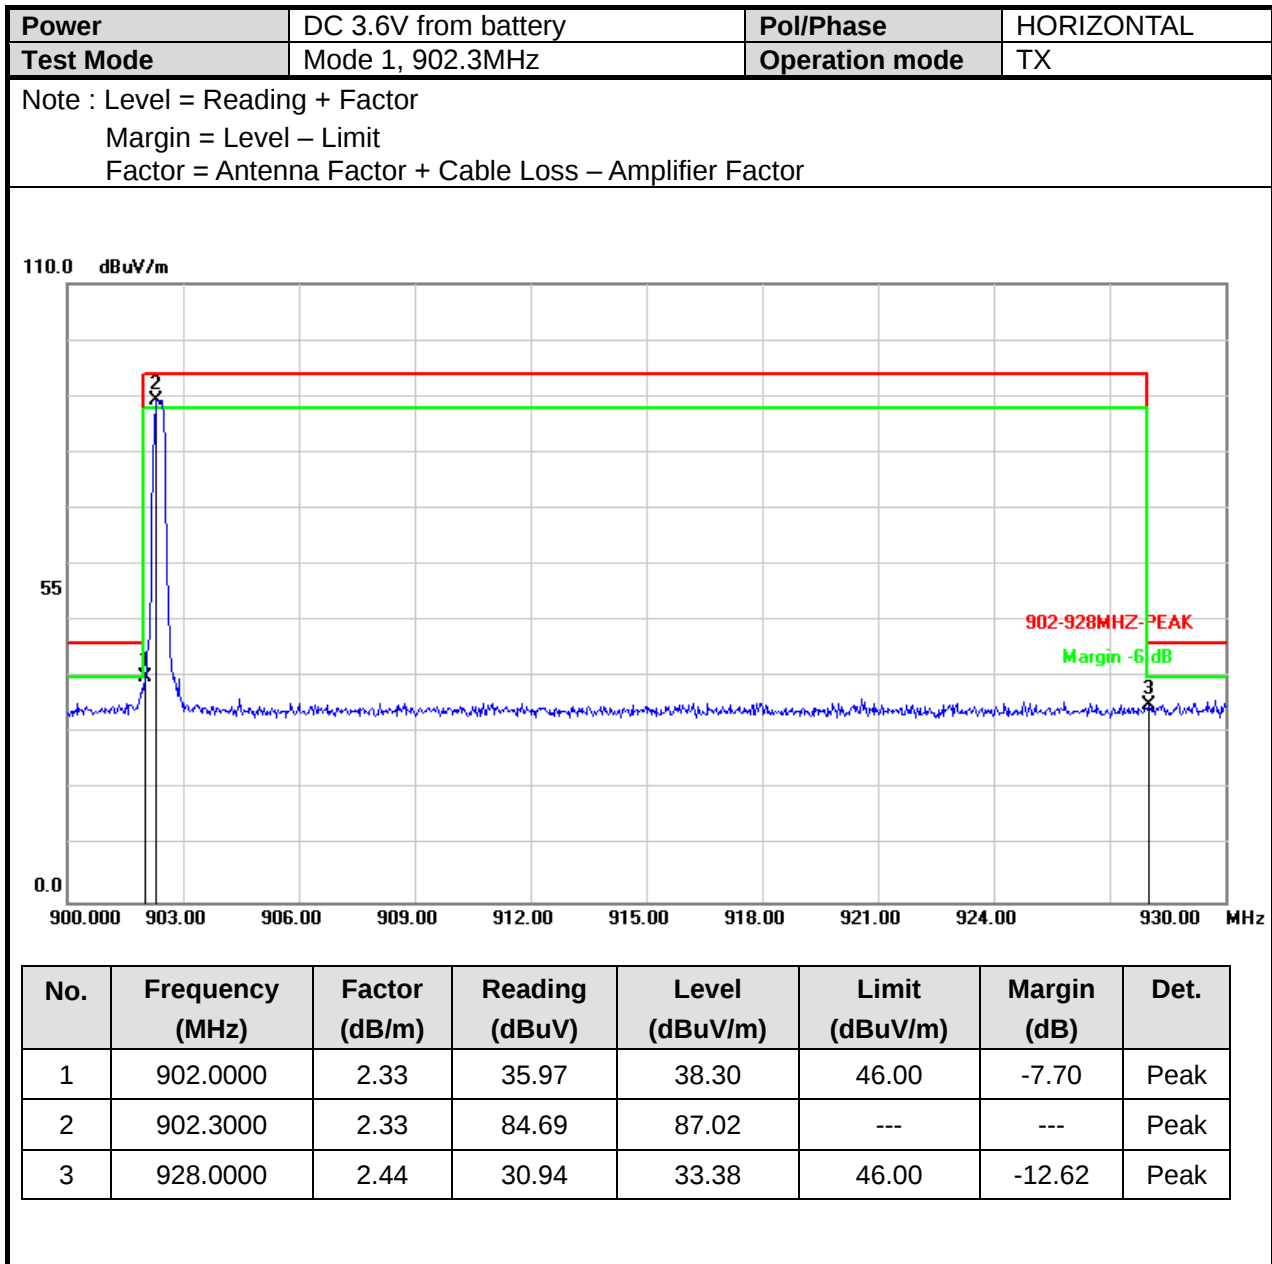


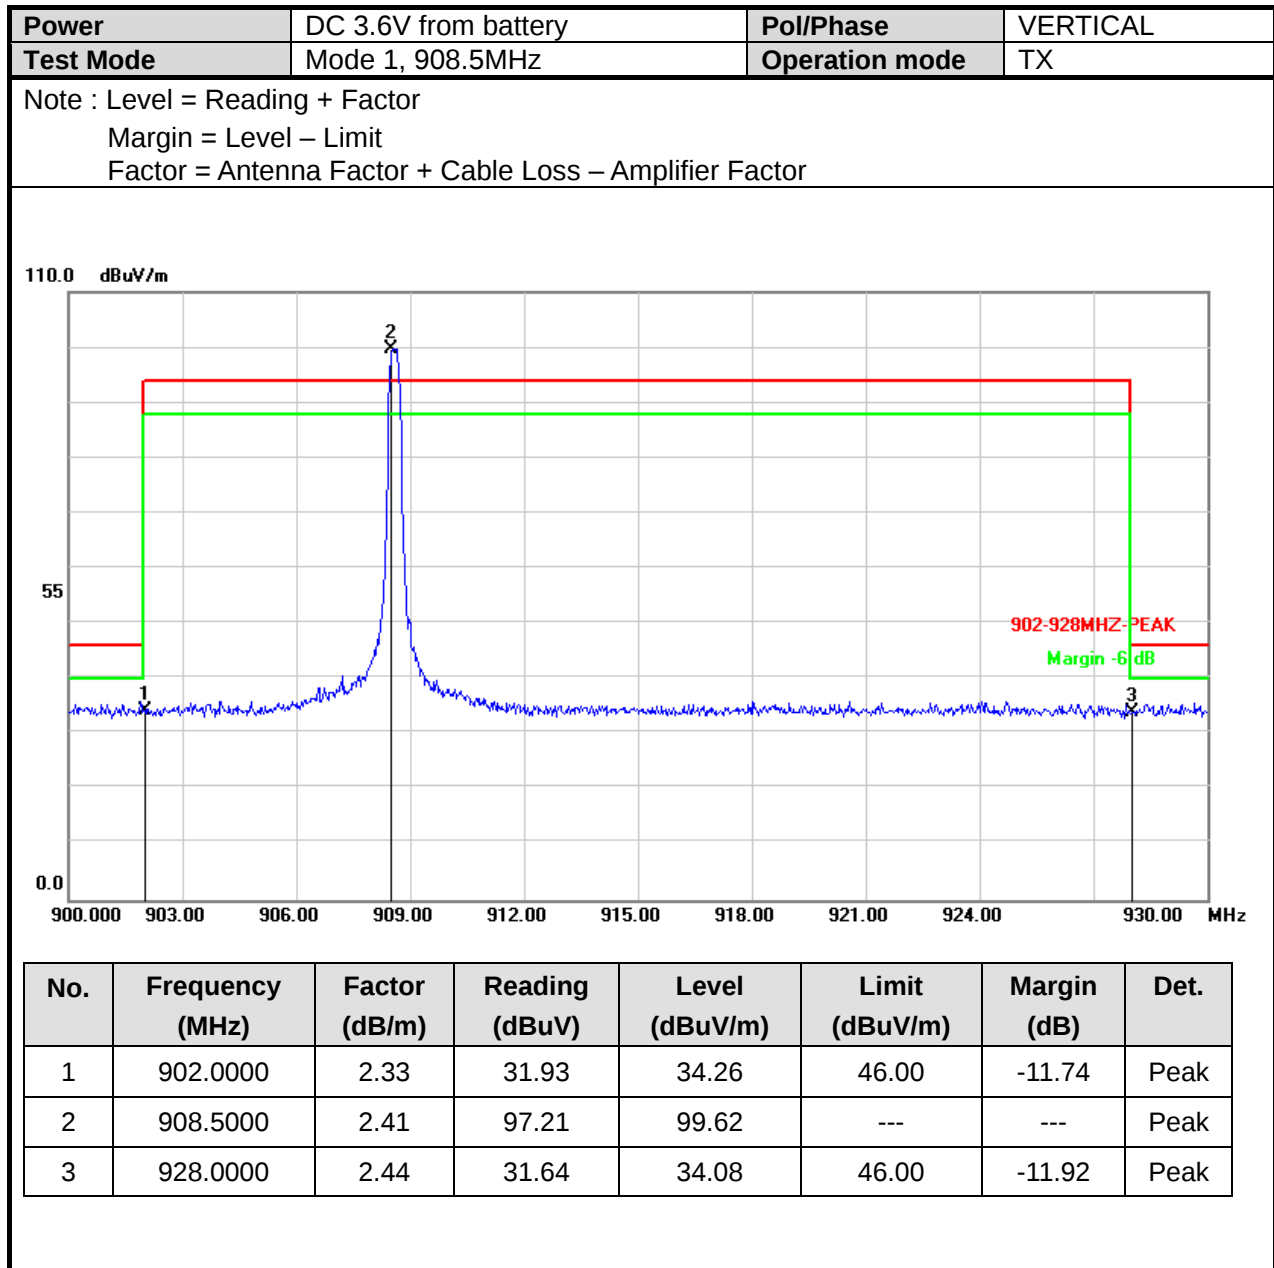


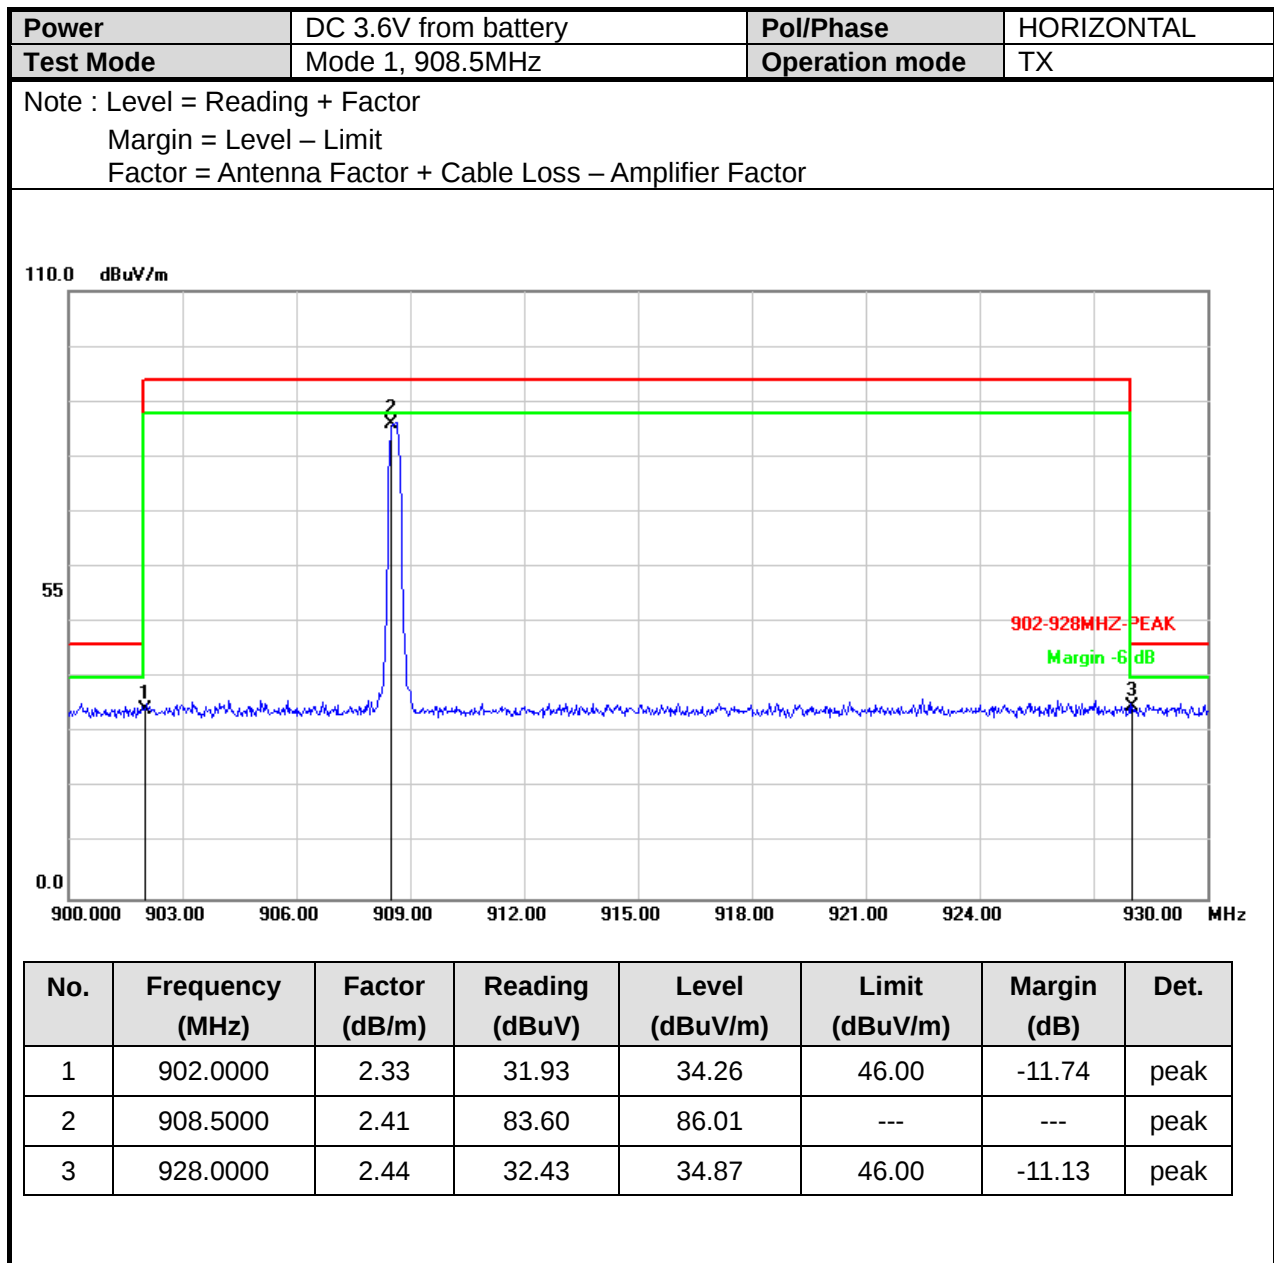


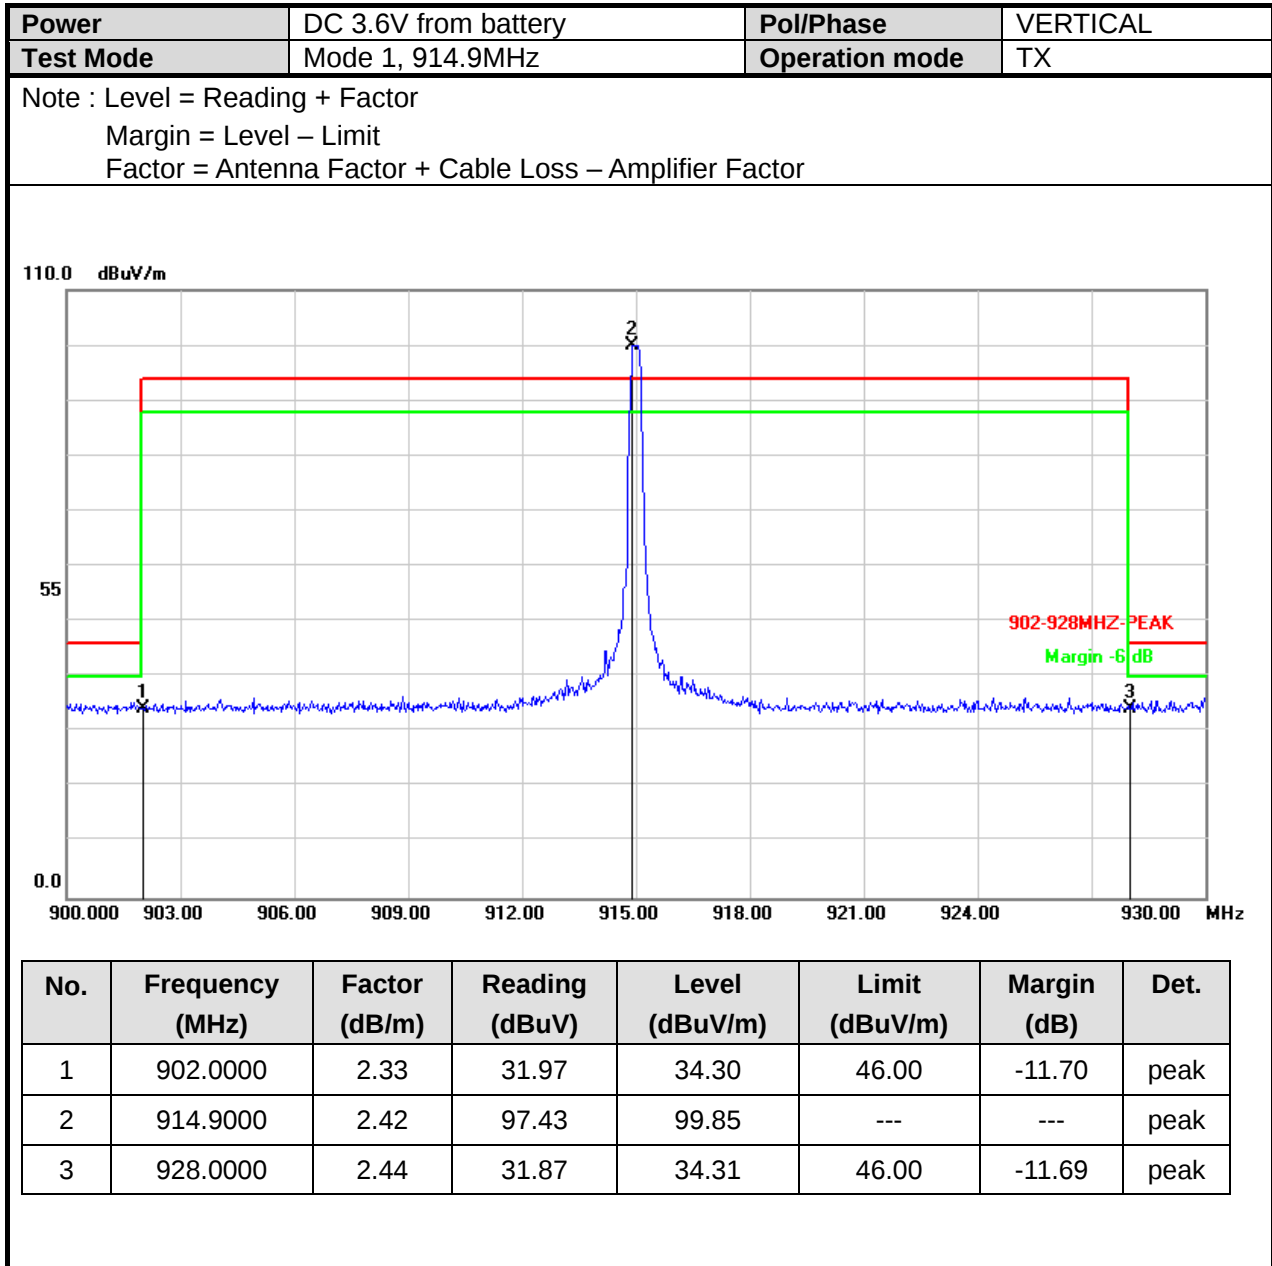


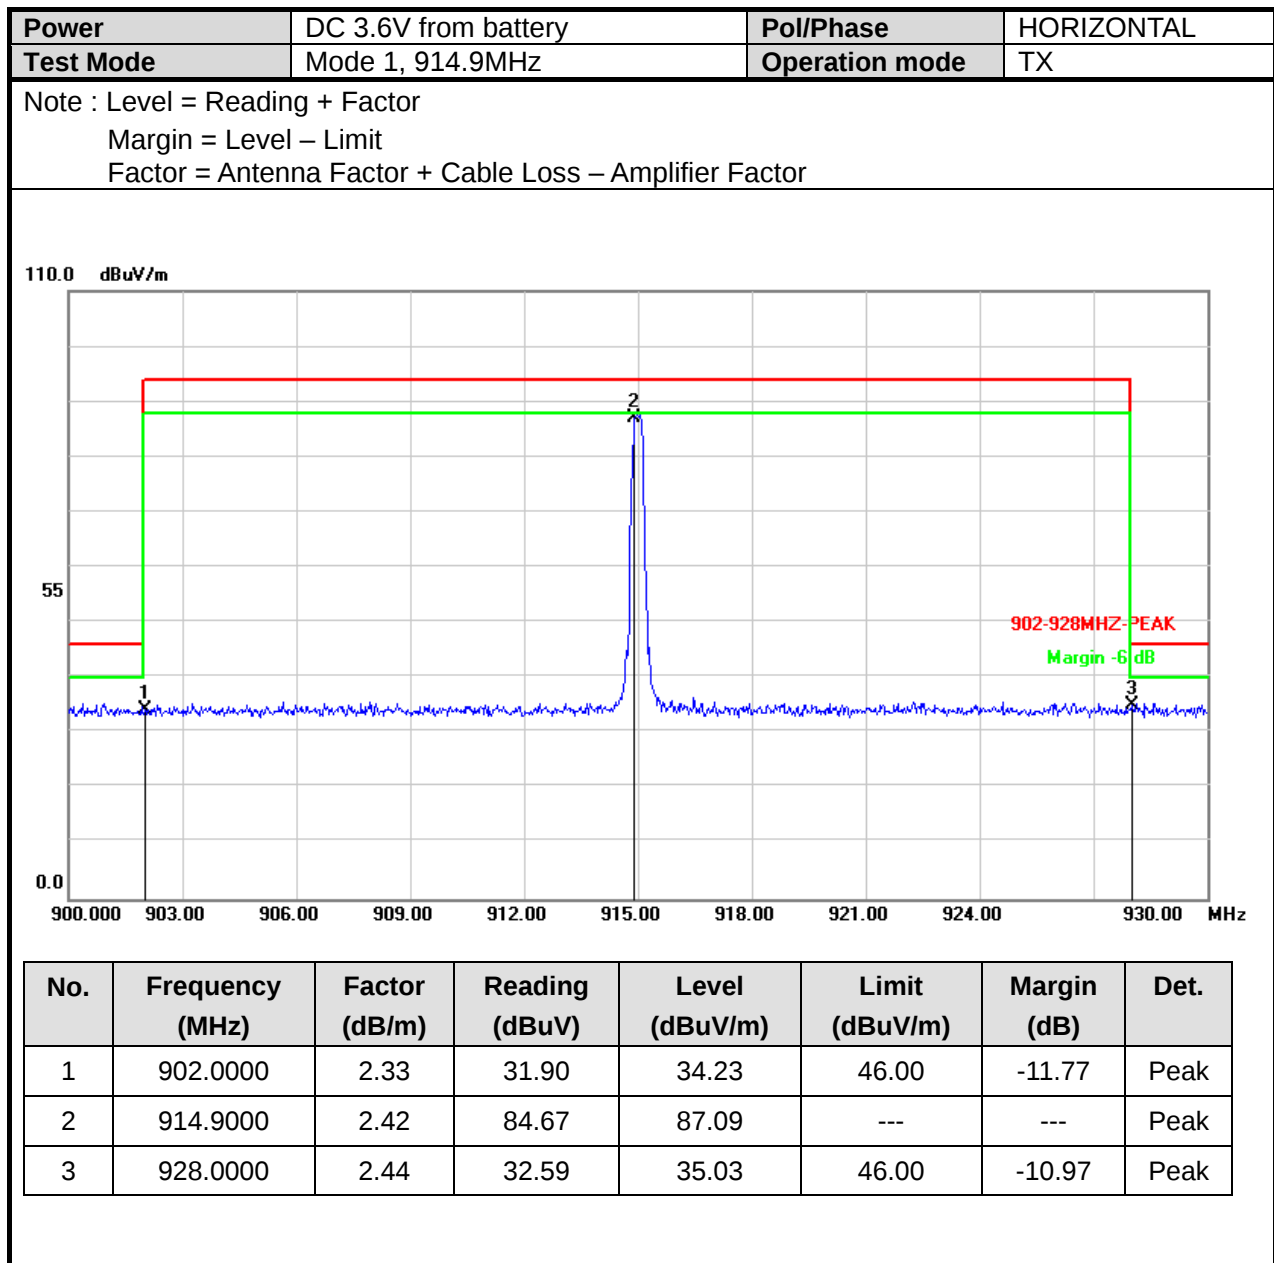


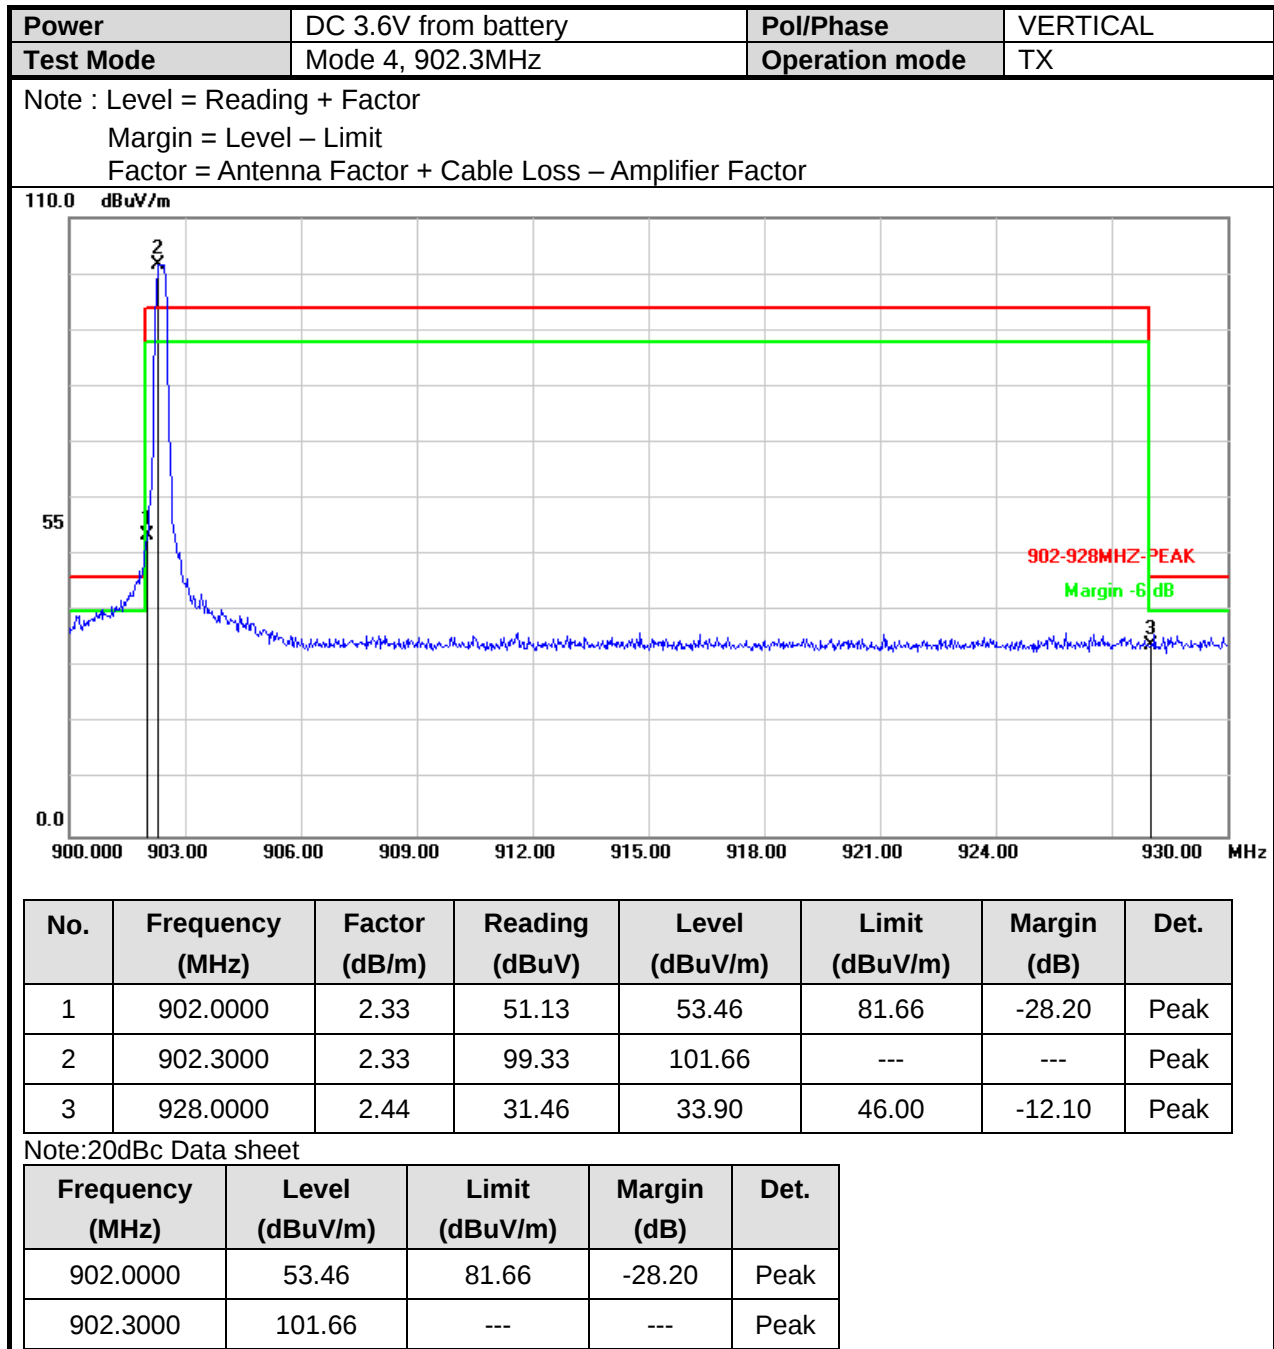


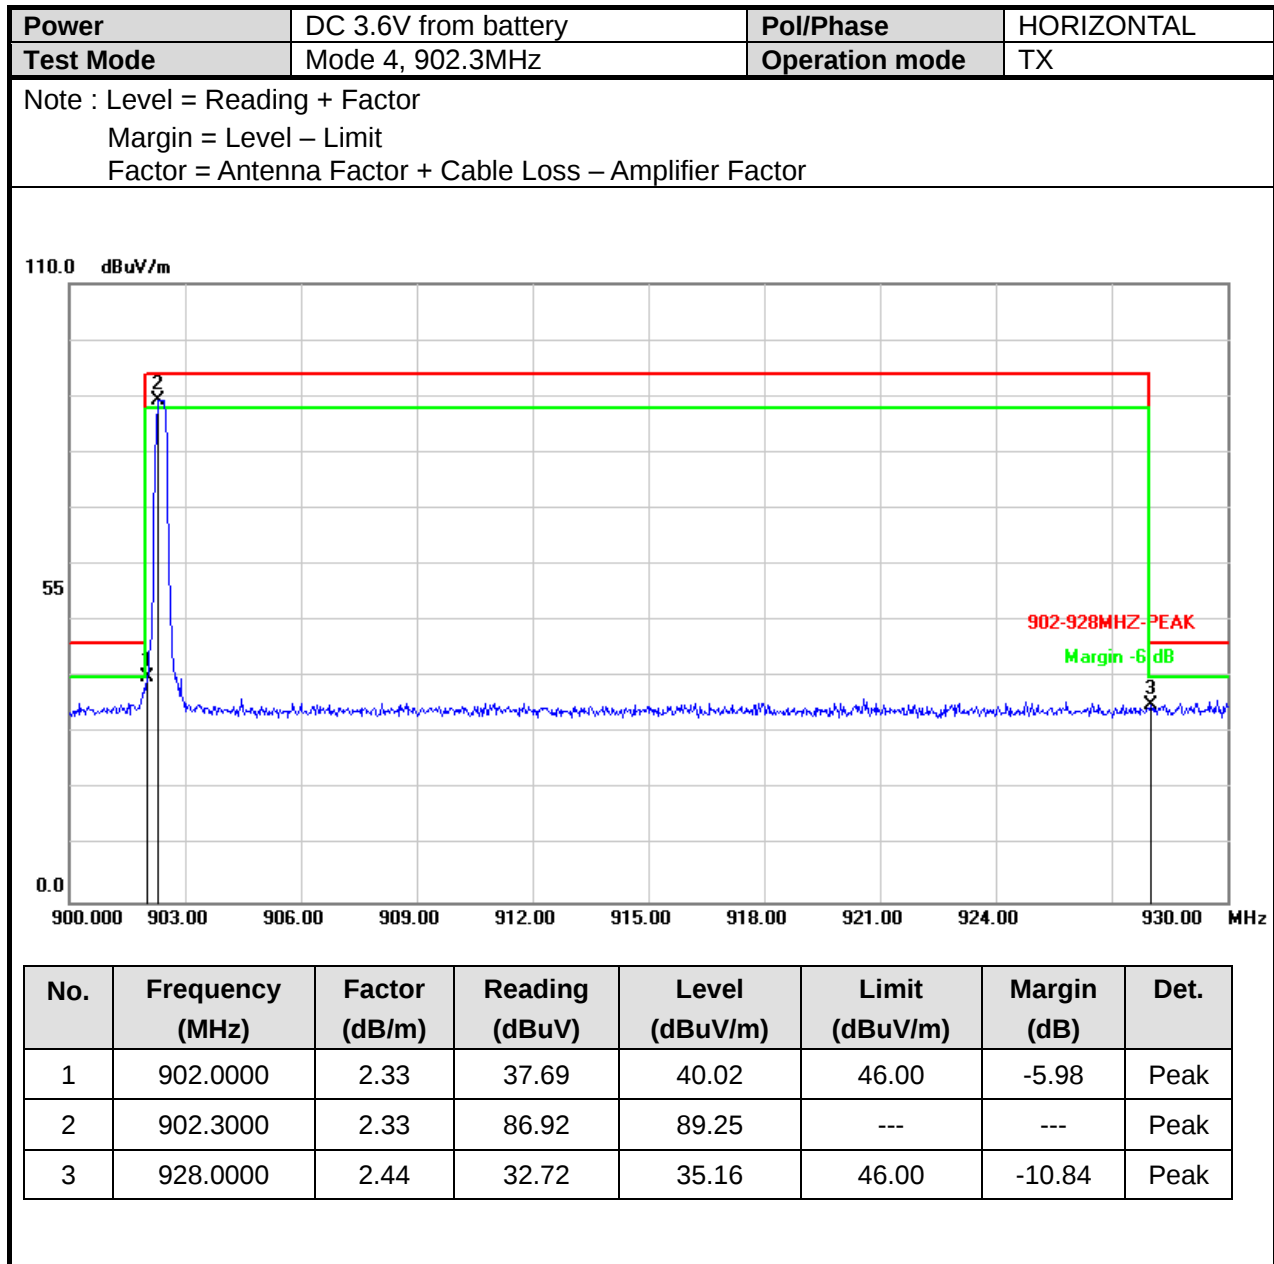

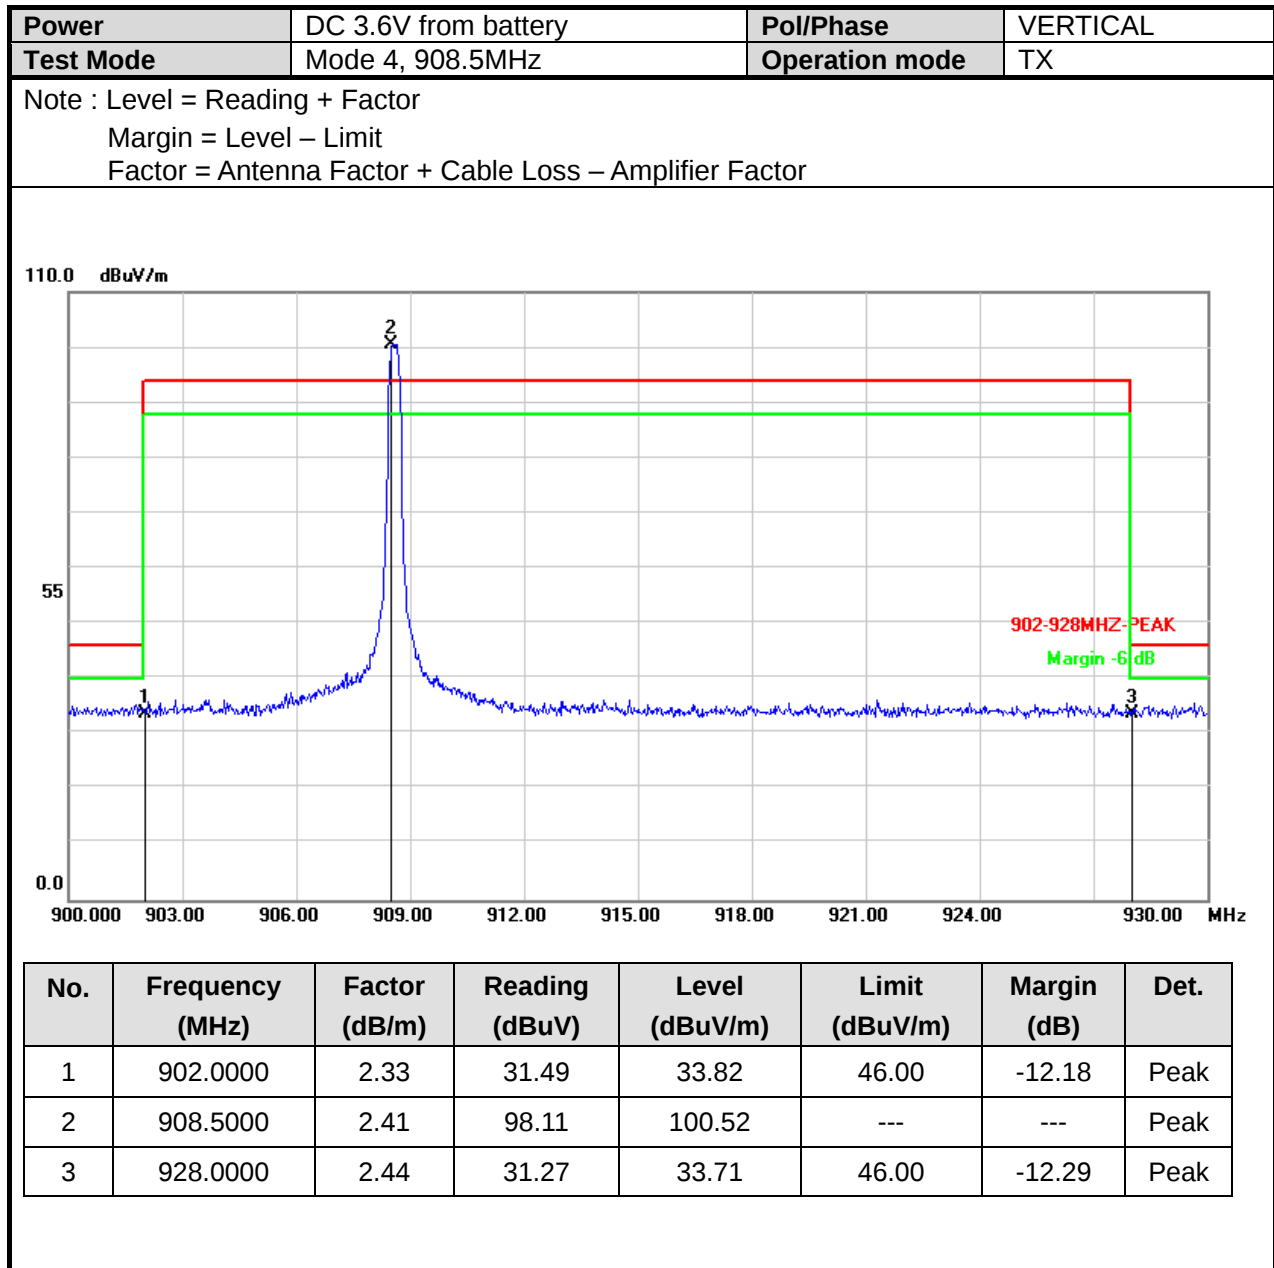

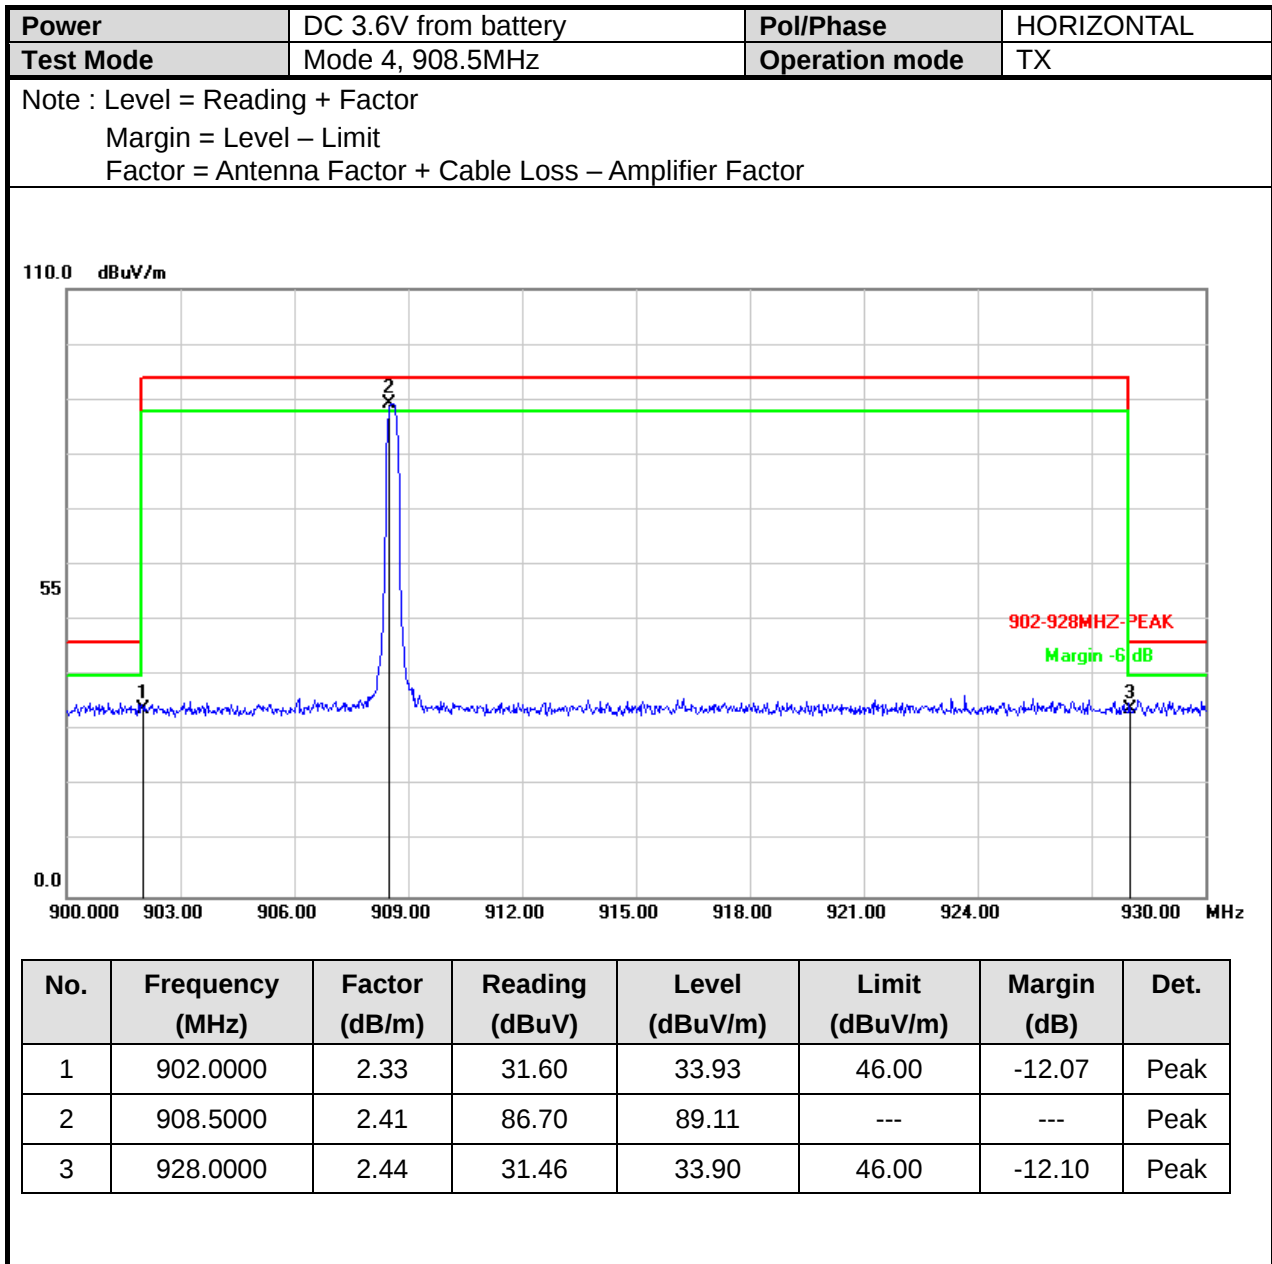

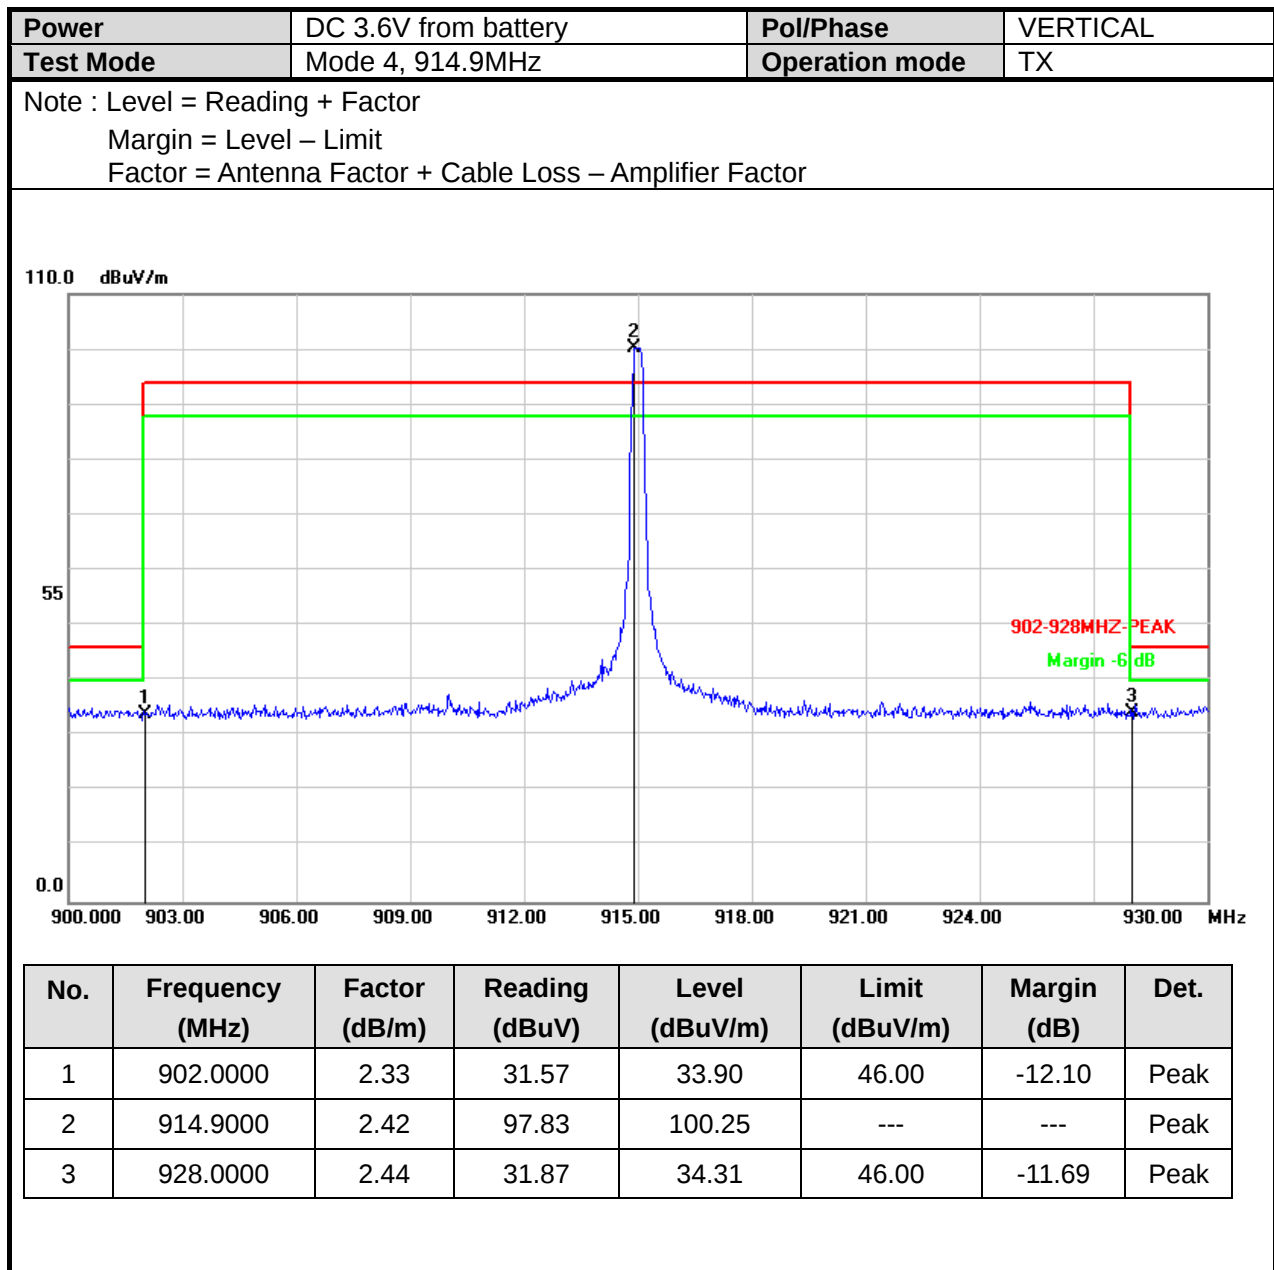

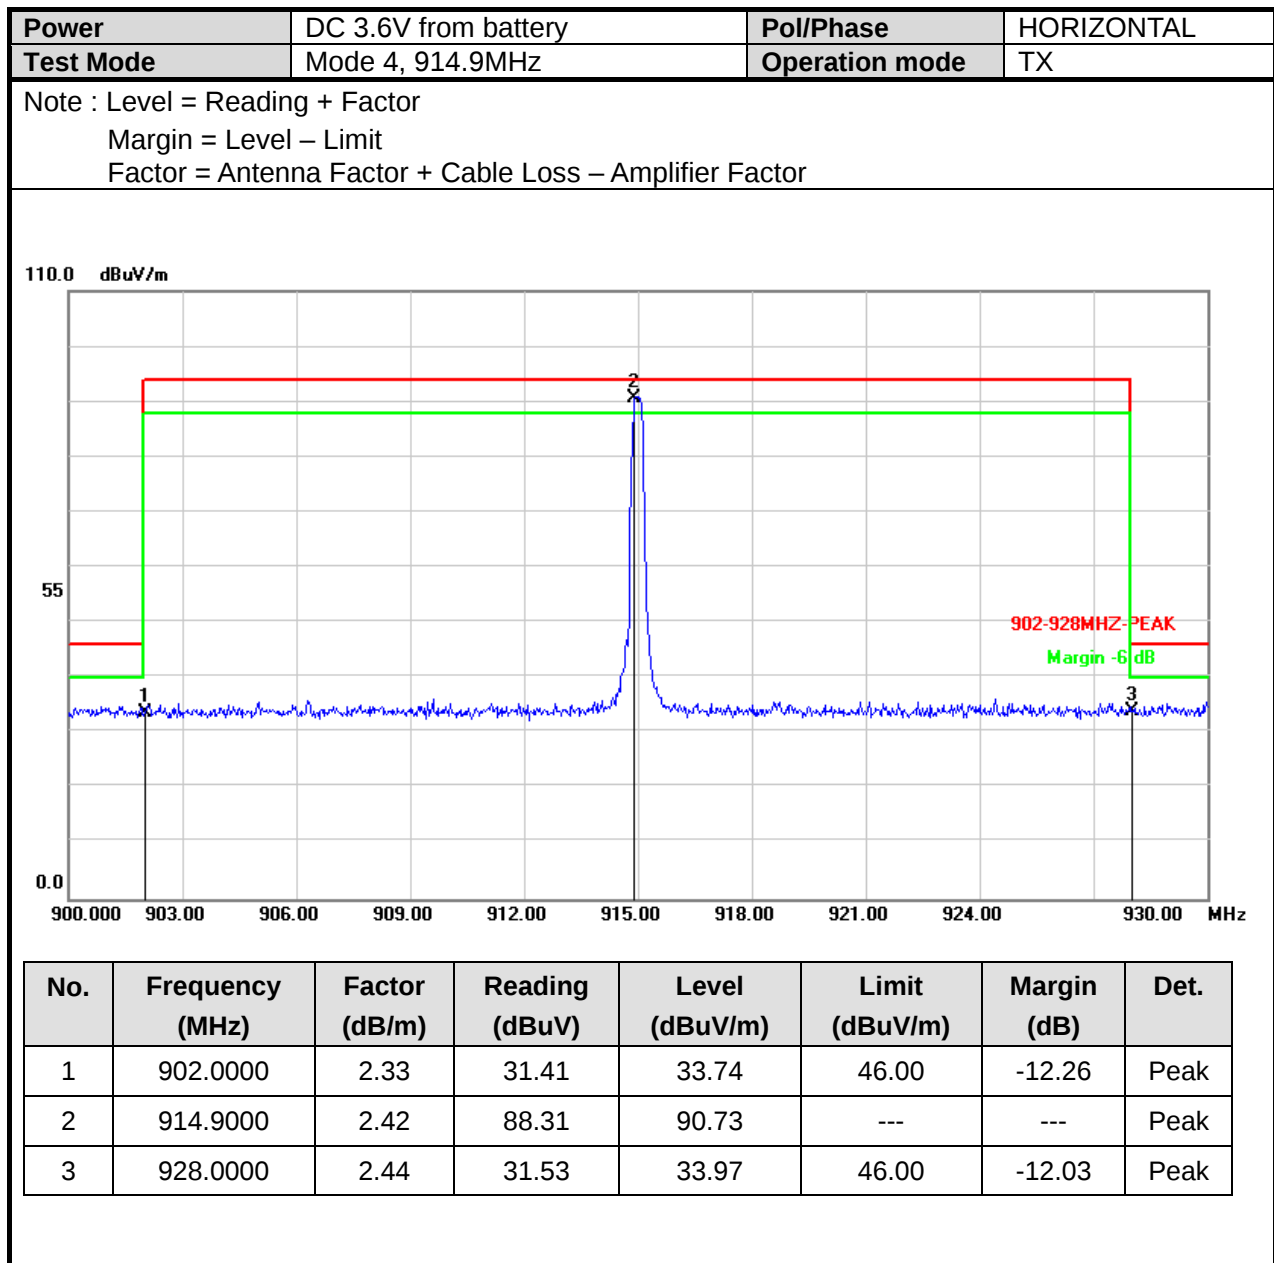



7. Test of Spurious Emission (Conducted)


7.1 Test Limit

Below –20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout





7.4 Test Result and Data



Note: Test plots refer to the following pages.





Lora 125KHz
SF07-902.3MHz





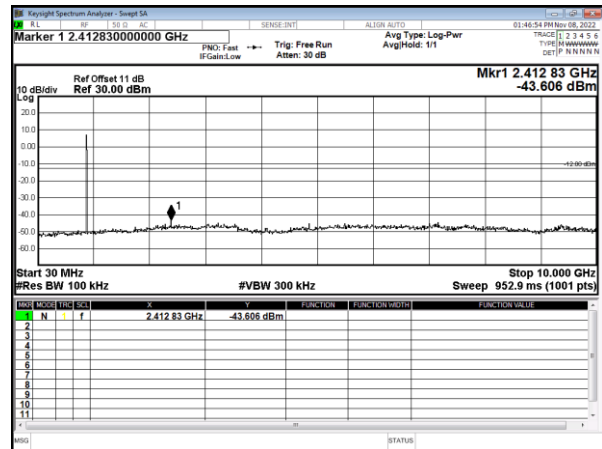
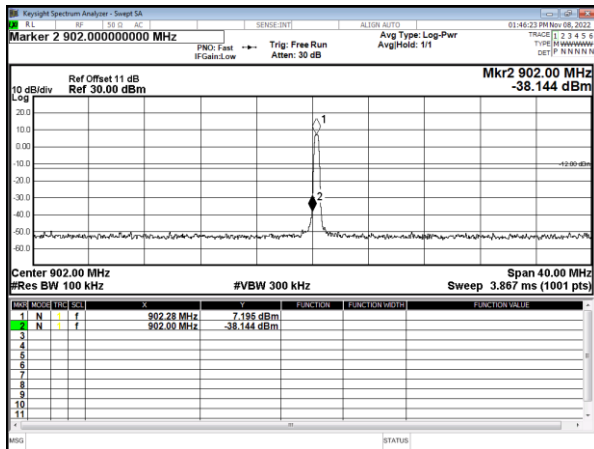








Lora 125KHz
SF07-908.5MHz

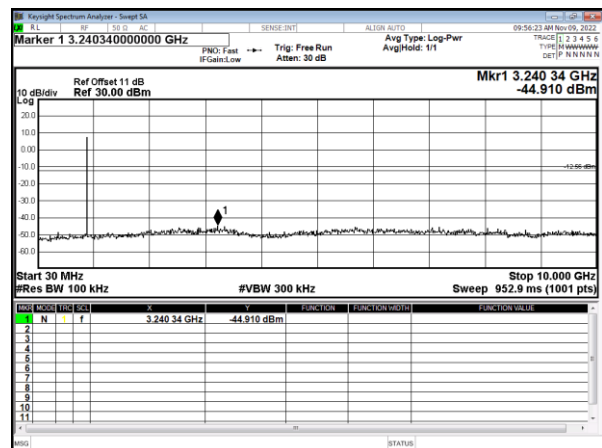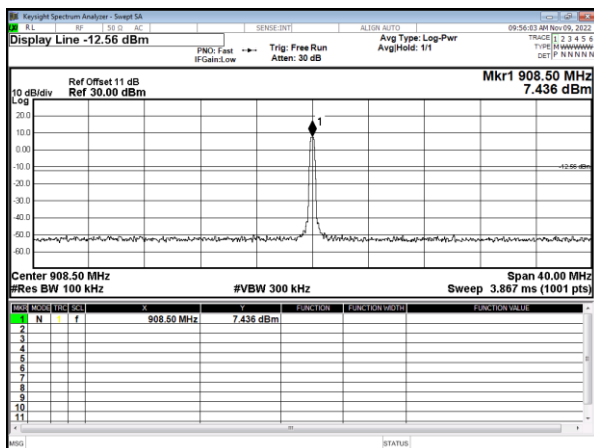

Lora 125KHz
SF07-914.9MHz

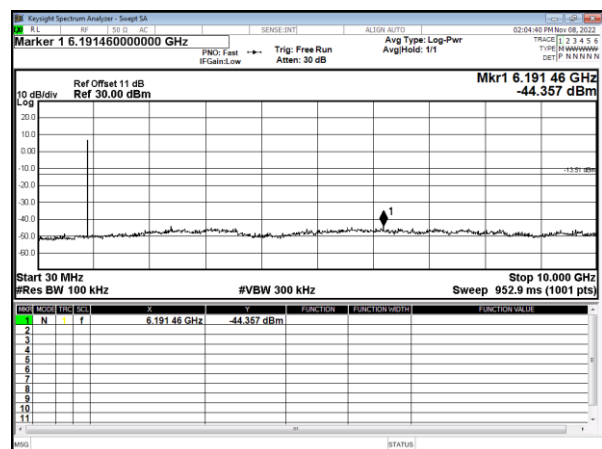
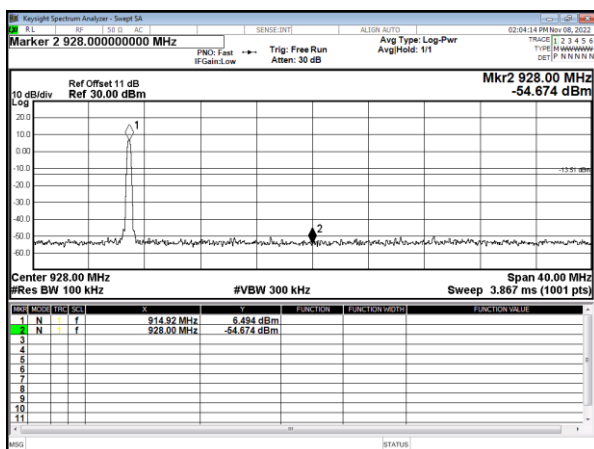


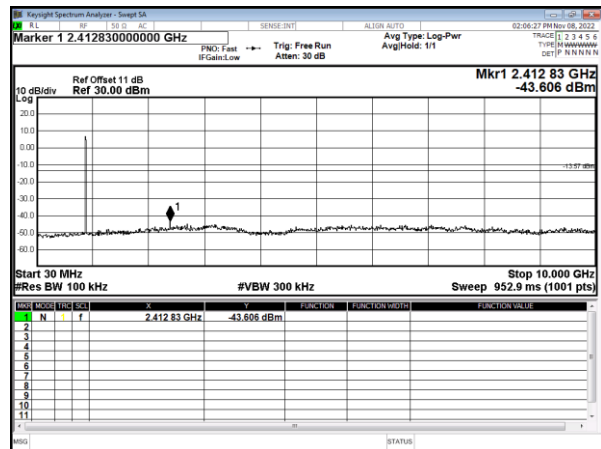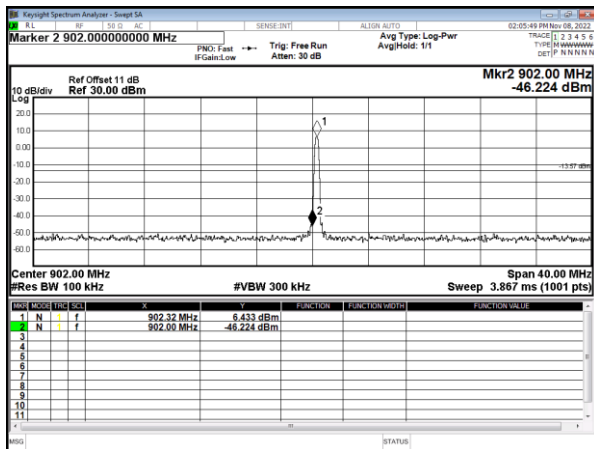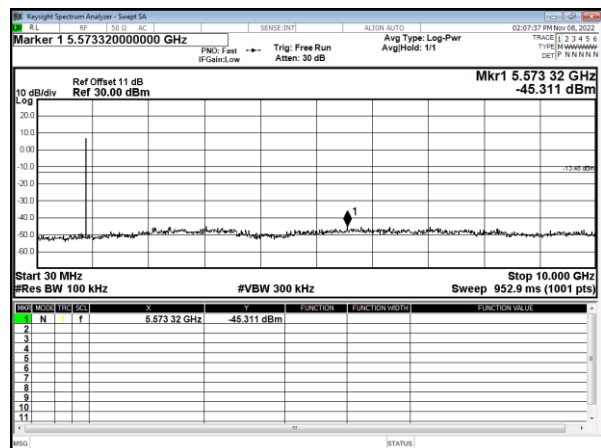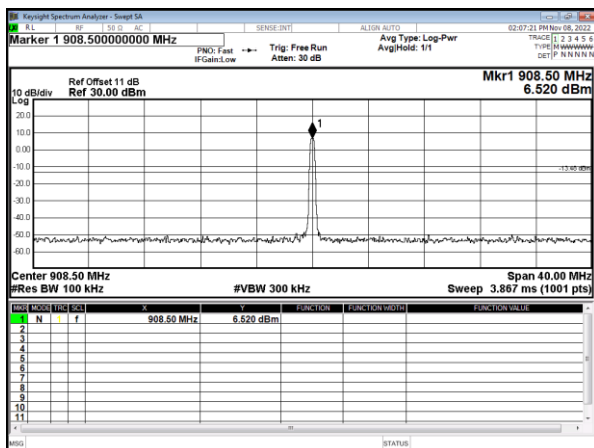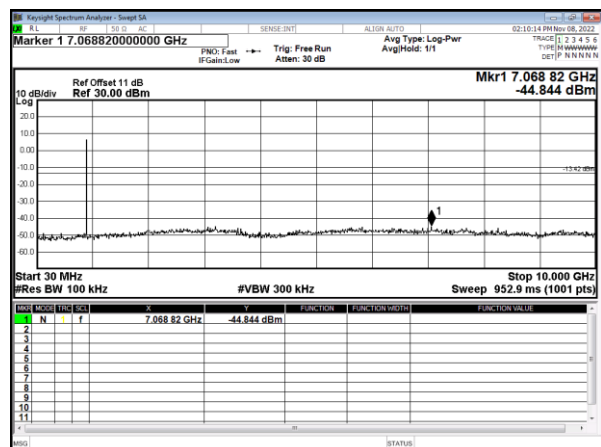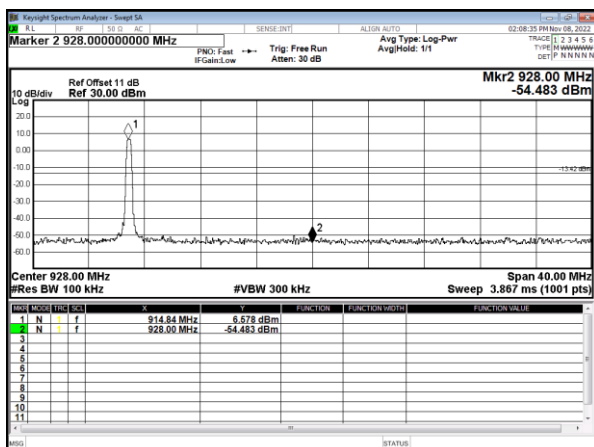Lora 125KHz
SF08-902.3MHzLora 125KHz
SF08-908.5MHzLora 125KHz
SF08-914.9MHz

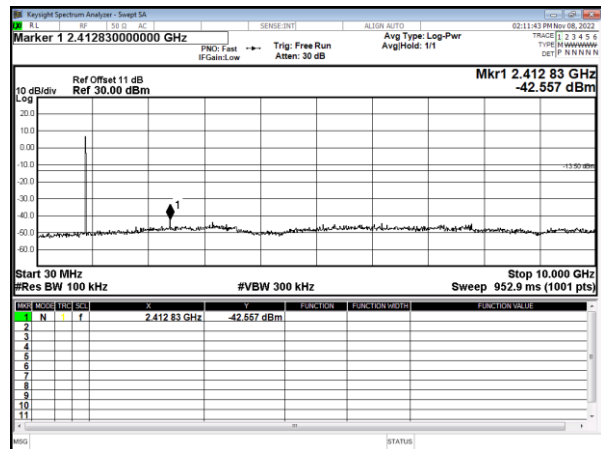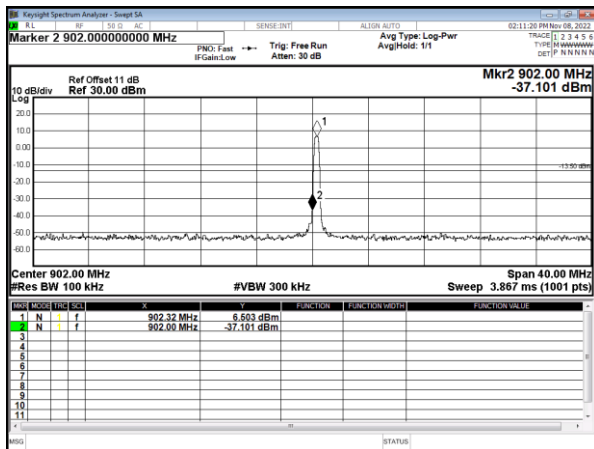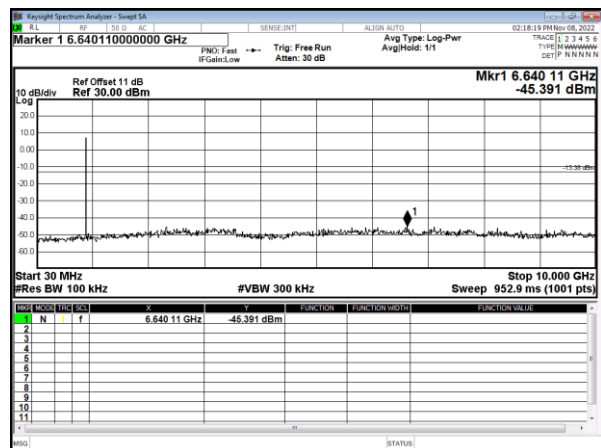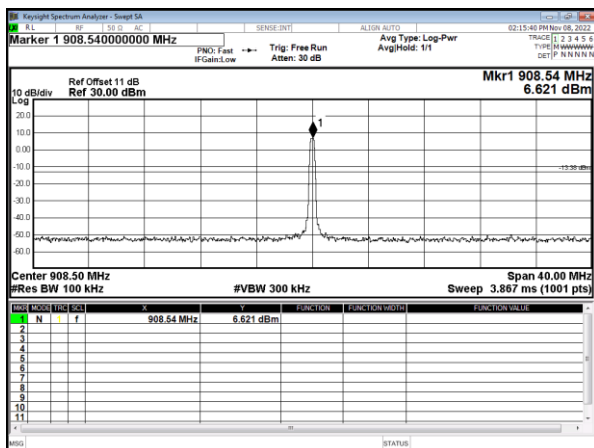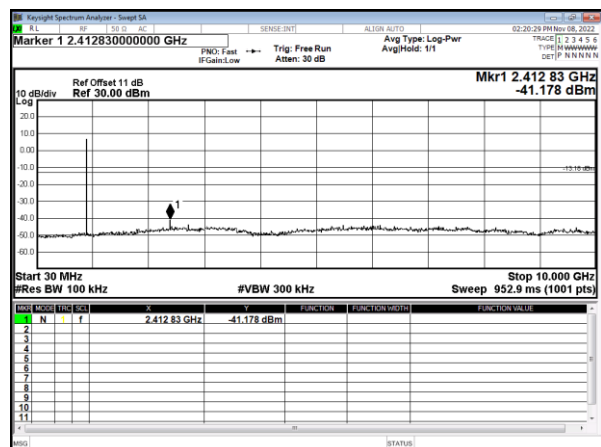
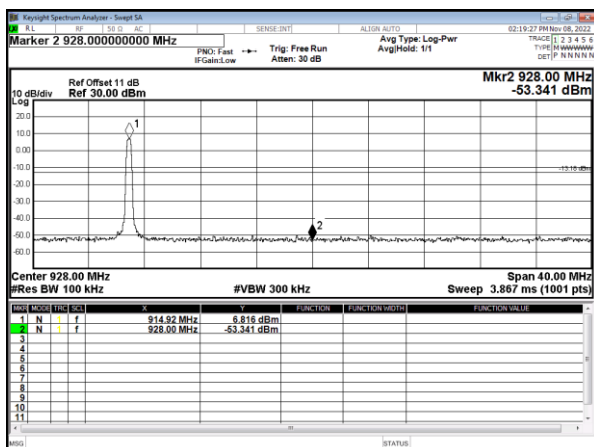
Lora 125KHz
SF09-902.3MHzLora 125KHz
SF09-908.5MHzLora 125KHz
SF09-914.9MHz





Lora 125KHz
SF10-902.3MHz

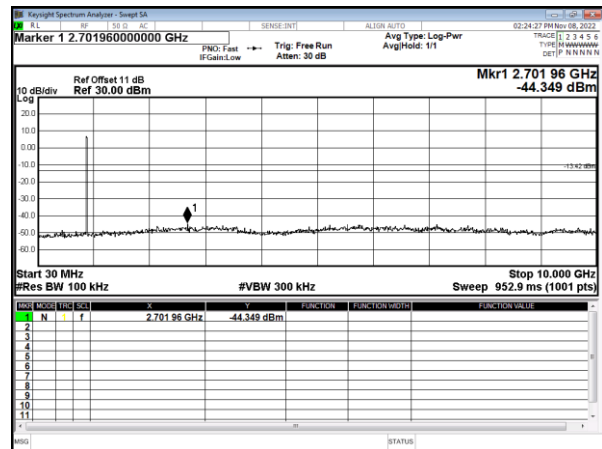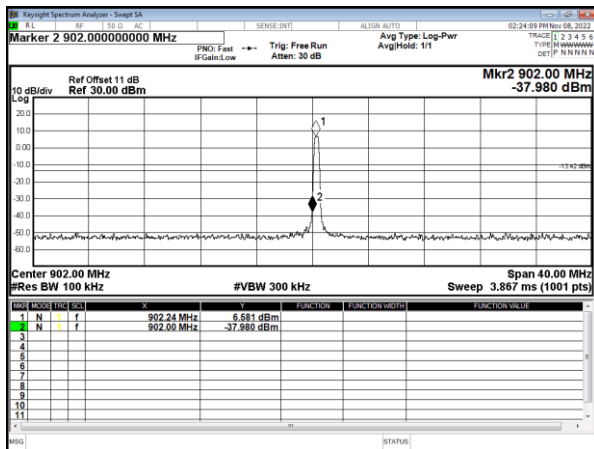

Lora 125KHz
SF10-908.5MHz

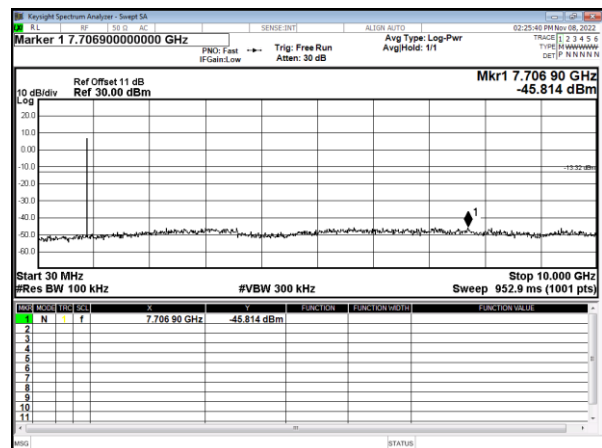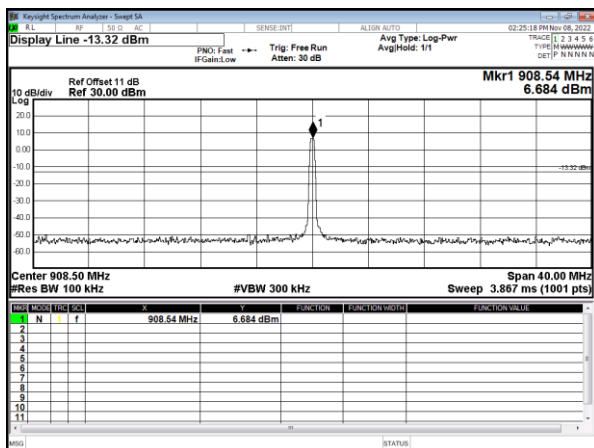

Lora 125KHz
SF10-914.9MHz

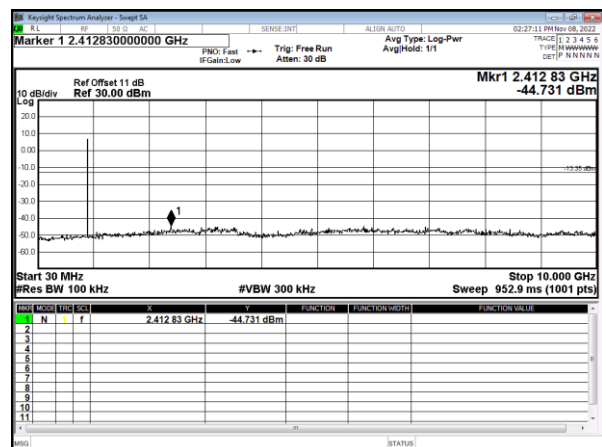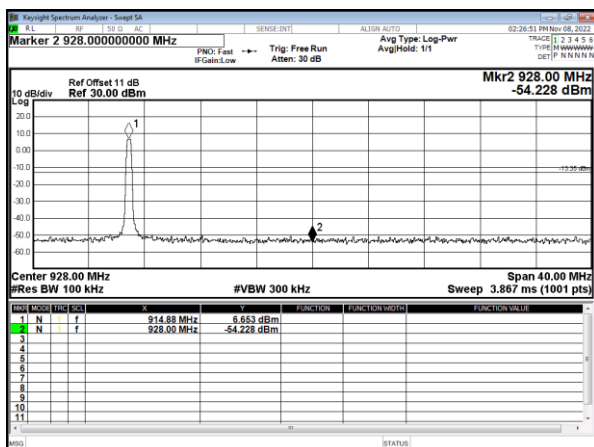



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
Lora 125KHz (SF07)	34.40	336.80	10.21%
Lora 125KHz (SF08)	64.00	368.80	17.35%
Lora 125KHz (SF09)	125.60	428.80	29.29%
Lora 125KHz (SF10)	252.80	555.20	45.53%




Lora 125KHz (SF07)

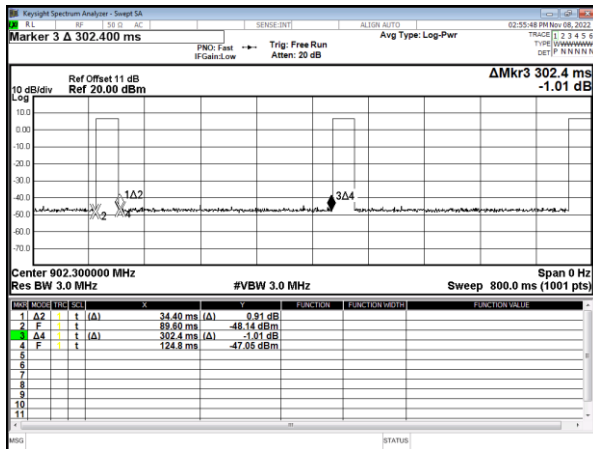


Lora 125KHz (SF08)

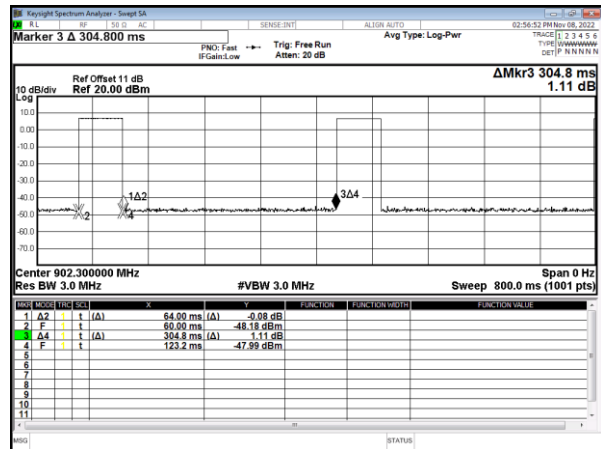

Lora 125KHz (SF09)

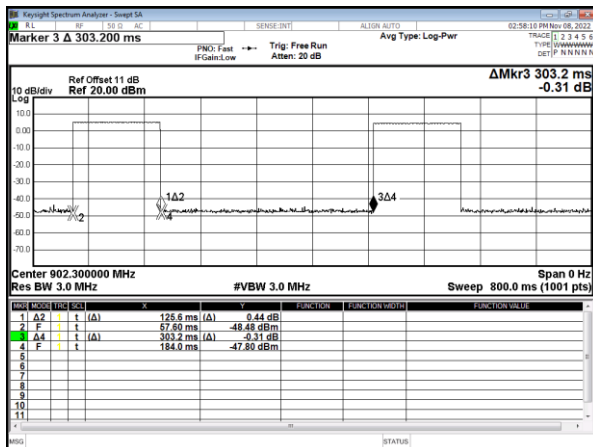

Lora 125KHz (SF10)

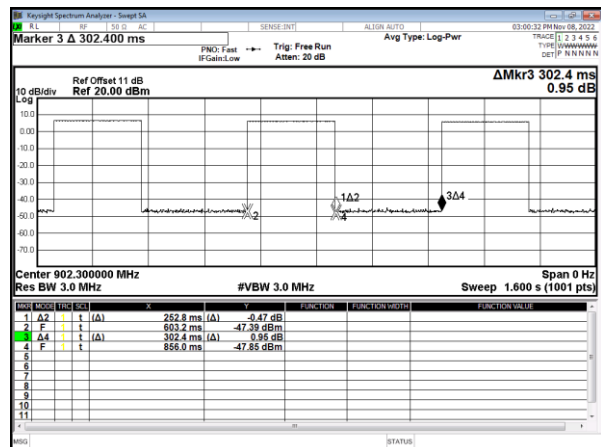



9. 20dB Bandwidth Measurement Data


9.1 Test Limit

For reference data.

9.2 Test Procedures







- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the 20dB bandwidth and VBW to approximately three time RBW.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.







9.3 Test Setup Layout



9.4 Test Result and Data

Modulation Type	Frequency (MHz)	20dB Bandwidth (KHz)
Lora 125KHz (SF07)	902.3	146.70
	908.5	146.60
	914.9	147.20
Lora 125KHz (SF08)	902.3	144.10
	908.5	145.10
	914.9	145.40
Lora 125KHz (SF09)	902.3	149.10
	908.5	144.40
	914.9	145.30
Lora 125KHz (SF10)	902.3	145.50
	908.5	146.10
	914.9	145.90

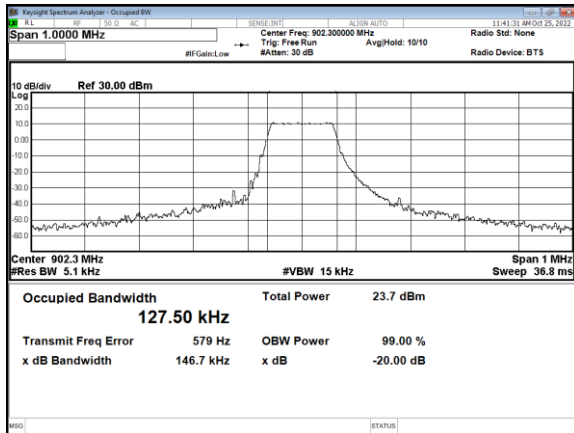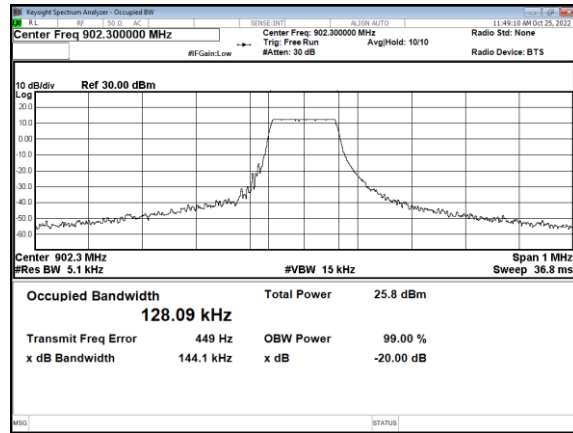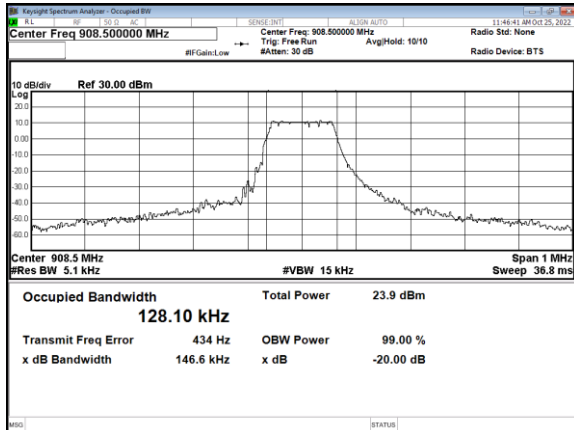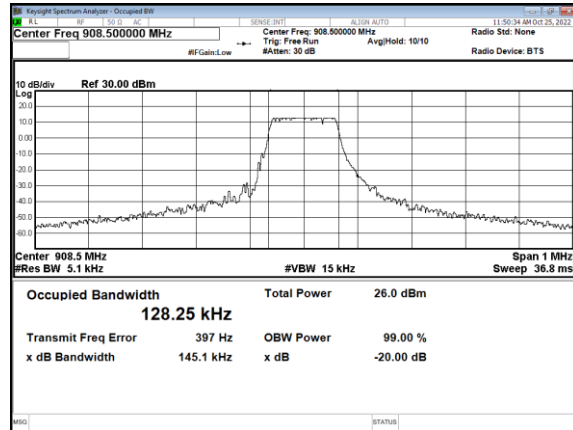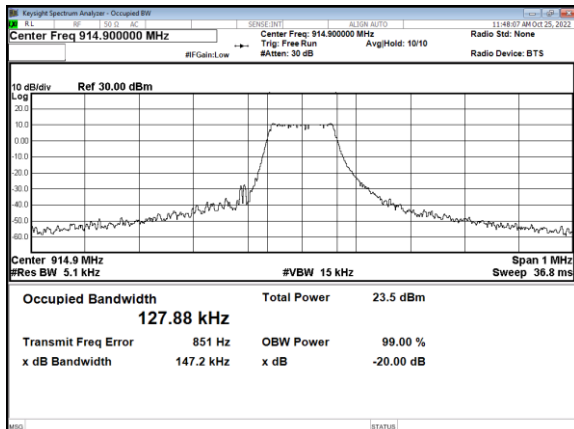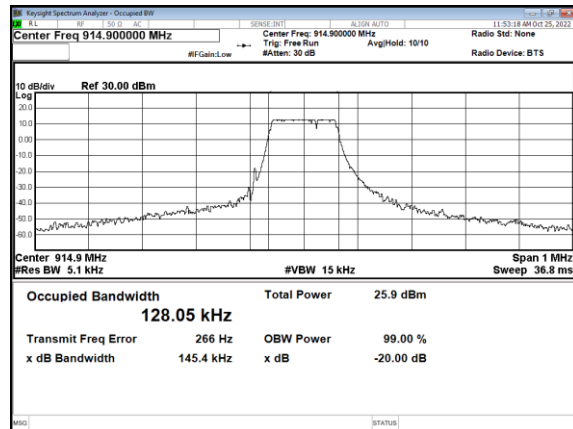Lora 125KHz(SF07)
902.3MHzLora 125KHz(SF08)
902.3MHzLora 125KHz(SF07)
908.5MHzLora 125KHz(SF08)
908.5MHzLora 125KHz(SF07)
914.9MHzLora 125KHz(SF08)
914.9MHz

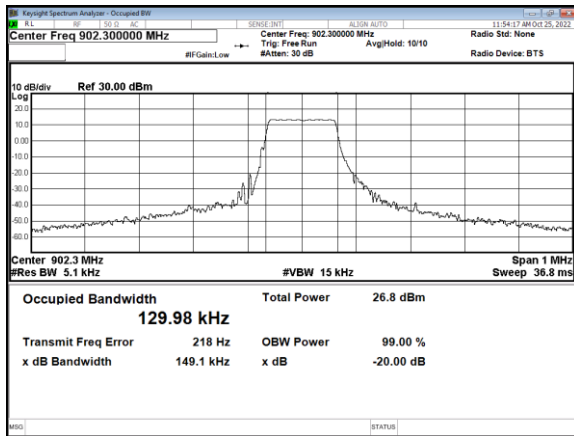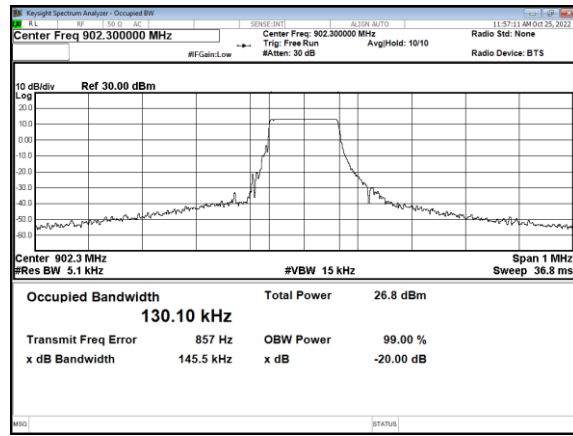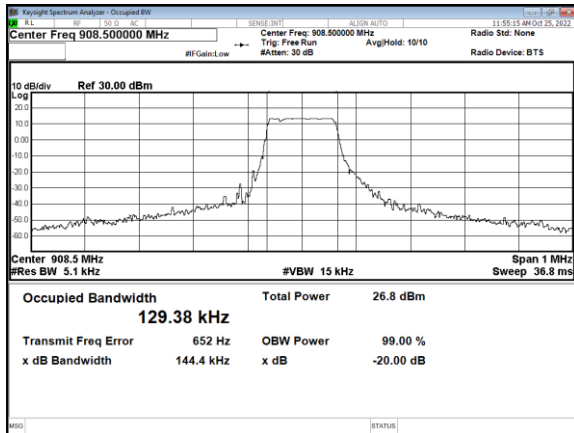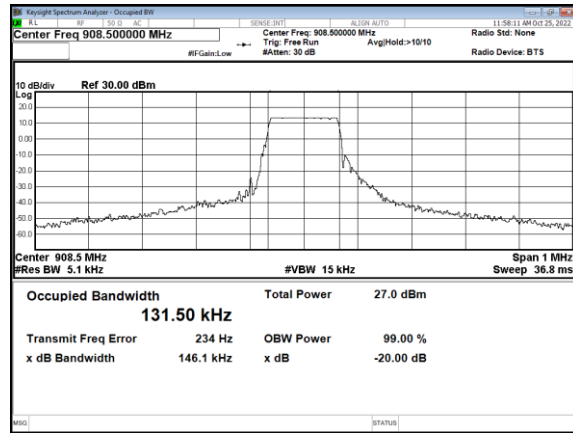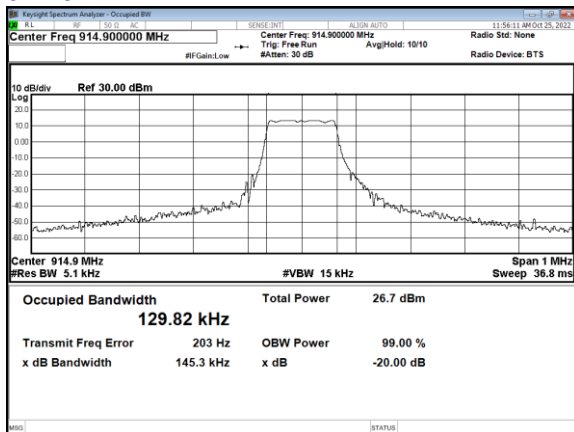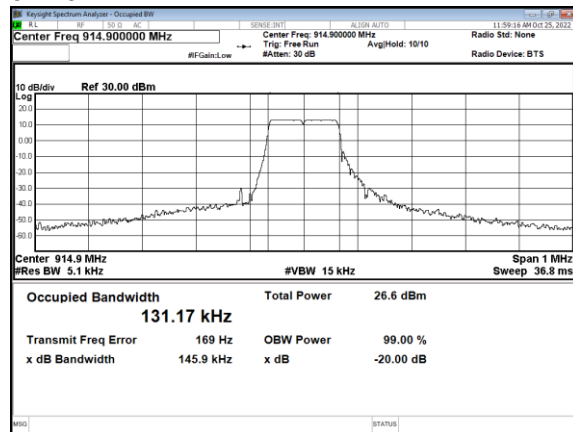Lora 125KHz(SF09)
902.3MHzLora 125KHz(SF10)
902.3MHzLora 125KHz(SF09)
908.5MHzLora 125KHz(SF10)
908.5MHzLora 125KHz(SF09)
914.9MHzLora 125KHz(SF10)
914.9MHz



10. Frequencies Separation


10.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

10.2 Test Procedures







- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.







10.3 Test Setup Layout



10.4 Test Result and Data

Modulation Type	Frequency (MHz)	Channel Separation (KHz)	Limit (KHz)
Lora 125KHz (SF07)	902.3	200	146.70
	908.5	200	146.60
	914.9	200	147.20
Lora 125KHz (SF08)	902.3	200	144.10
	908.5	200	145.10
	914.9	200	145.40
Lora 125KHz (SF09)	902.3	200	149.10
	908.5	200	144.40
	914.9	200	145.30
Lora 125KHz (SF10)	902.3	200	145.50
	908.5	200	146.10
	914.9	200	145.90

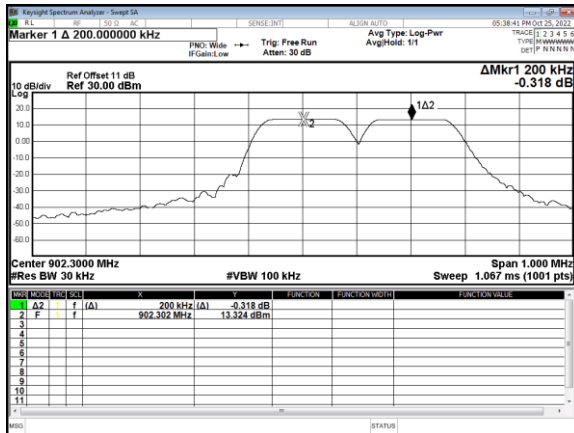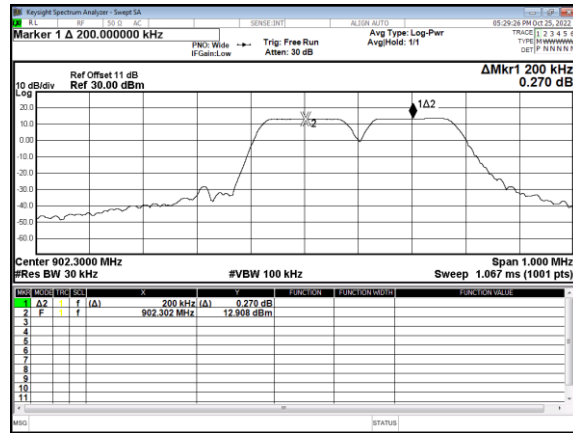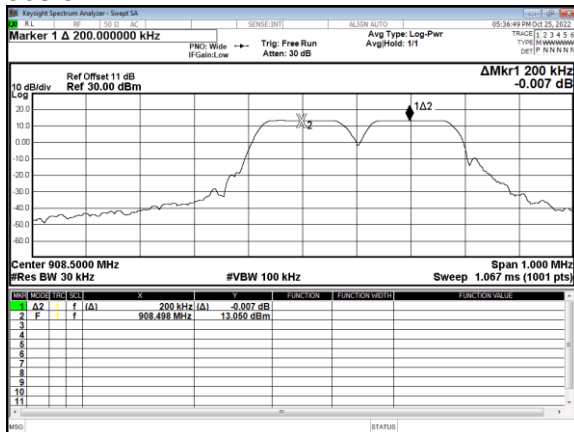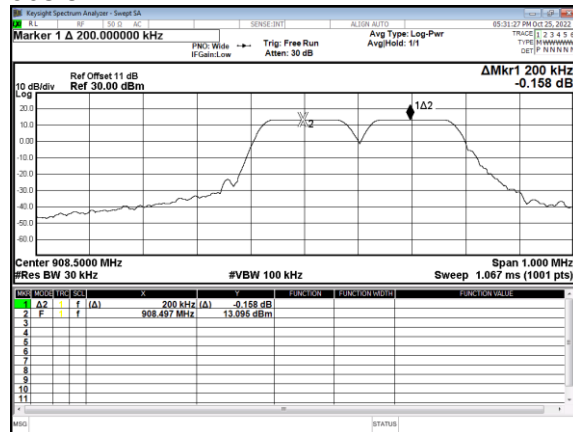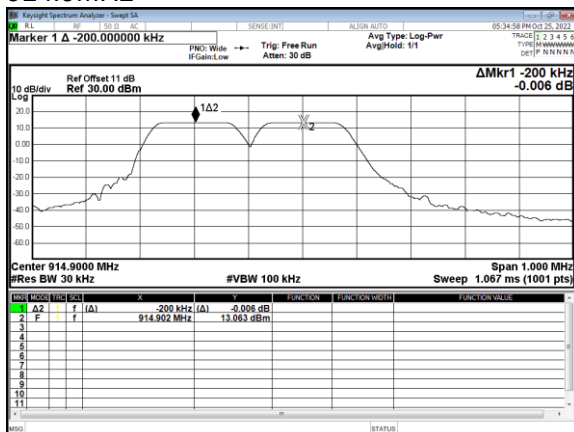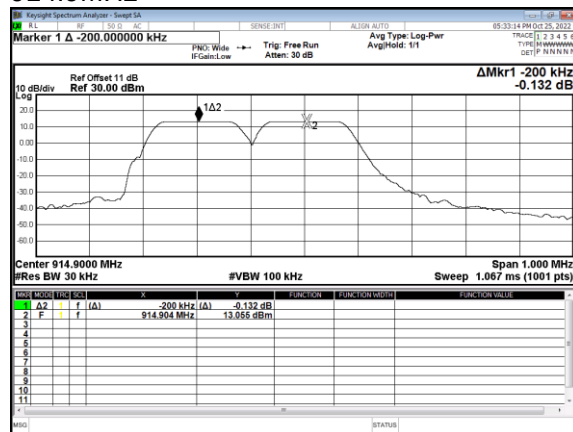Lora 125KHz(SF07)
902.3MHzLora 125KHz(SF08)
902.3MHzLora 125KHz(SF07)
908.5MHzLora 125KHz(SF08)
908.5MHzLora 125KHz(SF07)
914.9MHzLora 125KHz(SF08)
914.9MHz

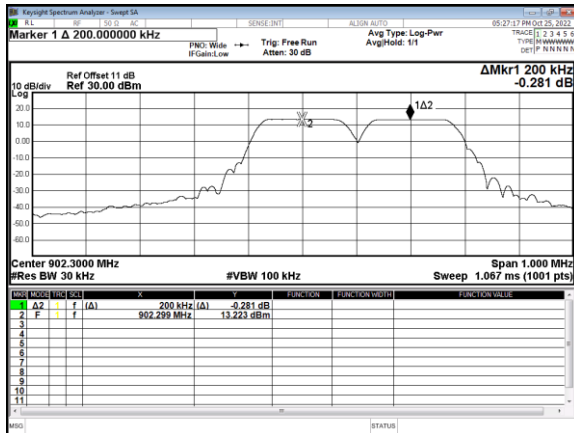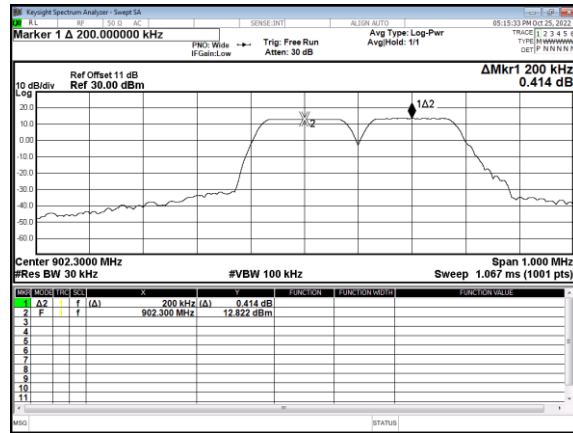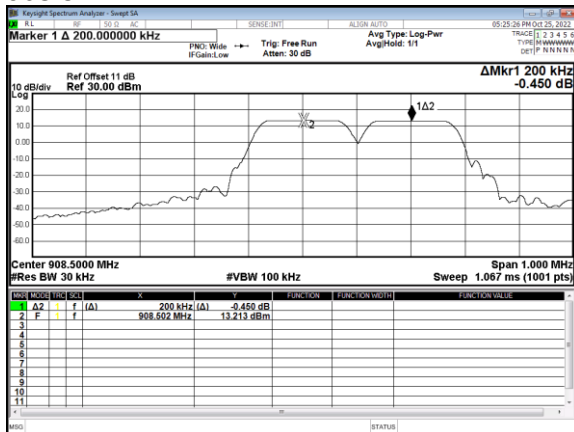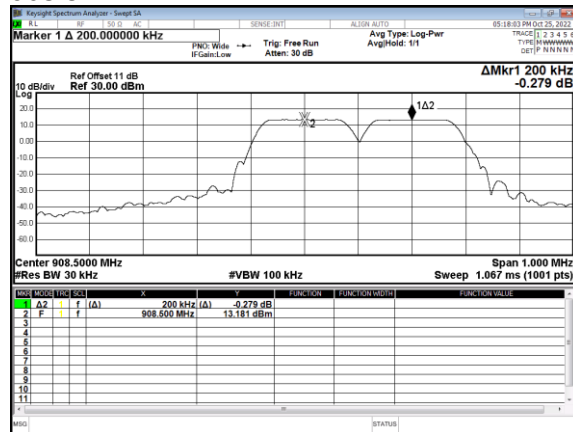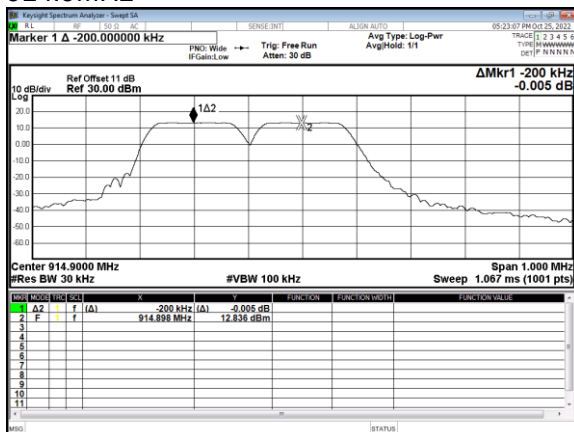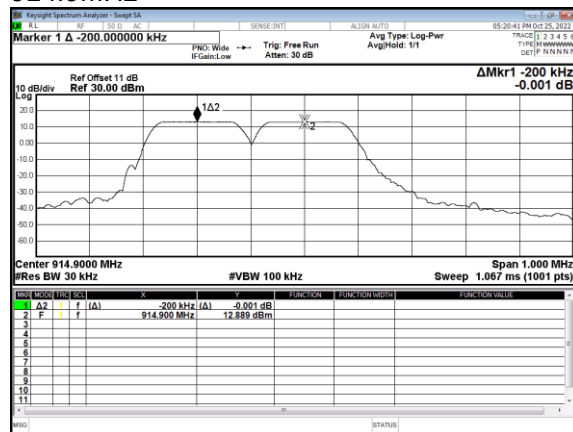Lora 125KHz(SF09)
902.3MHzLora 125KHz(SF10)
902.3MHzLora 125KHz(SF09)
908.5MHzLora 125KHz(SF10)
908.5MHzLora 125KHz(SF09)
914.9MHzLora 125KHz(SF10)
914.9MHz



11. Dwell Time on each channel


11.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

11.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
4. Measure the time duration of one transmission on the measured frequency.

11.3 Test Setup Layout




11.4 Test Result and Data

Test Period = 0.4 (second/ channel) x 64 Channel = 25.6 sec


Modulation Type	Length of transmission time (ms)	Number of transmission in a 25.6 (64 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
Lora 125KHz (SF07)	32.5	2	65.0	400
Lora 125KHz (SF08)	63.0	1	63.0	400
Lora 125KHz (SF09)	125.4	1	125.4	400
Lora 125KHz (SF10)	250.2	1	250.2	400




Lora 125KHz(SF07)
902.3MHz

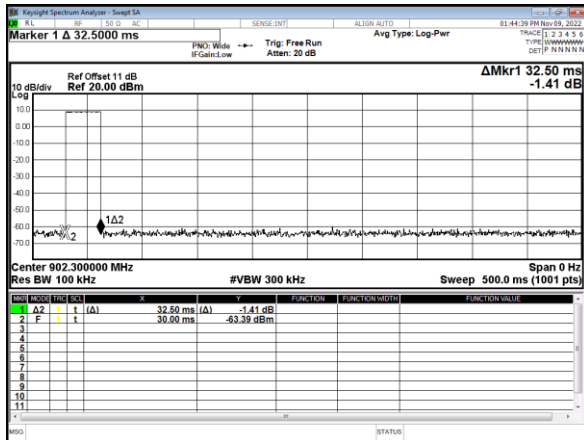


Lora 125KHz(SF07)
902.3MHz

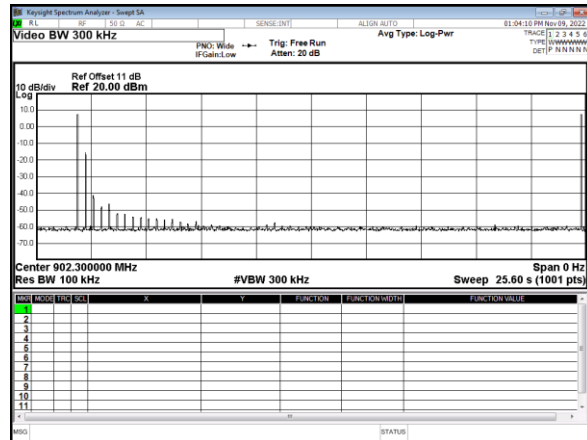


Lora 125KHz(SF08)
902.3MHz

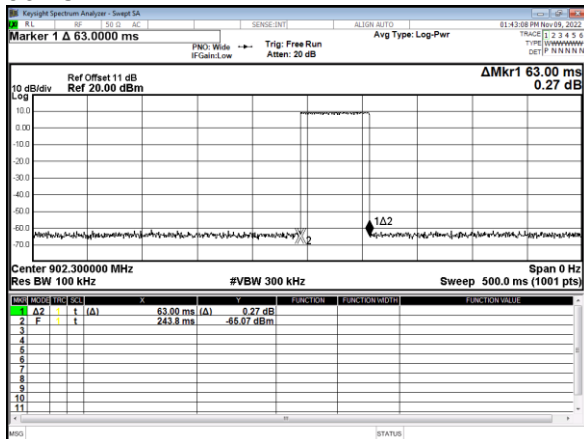


Lora 125KHz(SF08)
902.3MHz

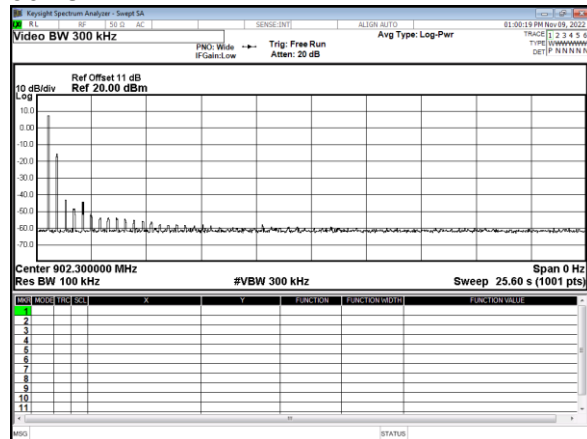

Lora 125KHz(SF09)
902.3MHz

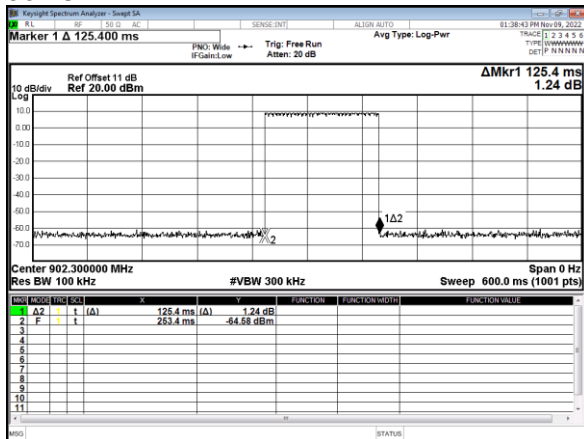


Lora 125KHz(SF09)
902.3MHz

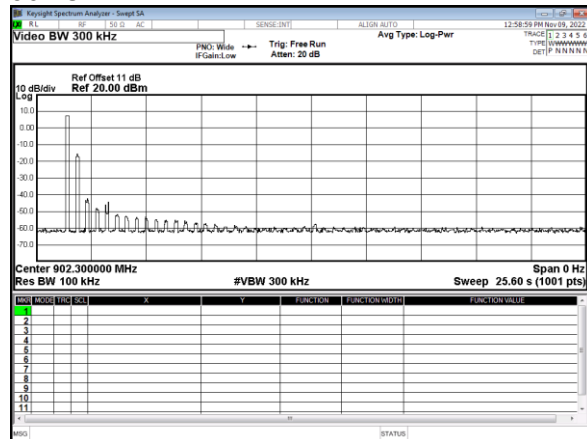




Lora 125KHz(SF10)
902.3MHz

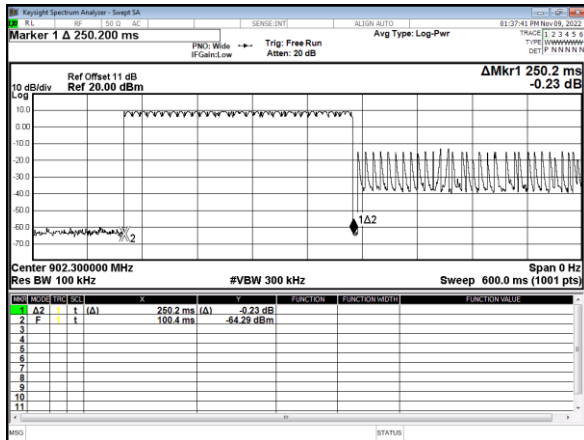

Lora 125KHz(SF10)
902.3MHz

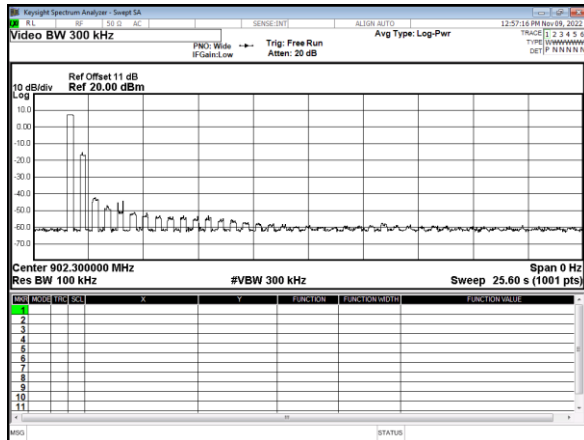



12. Number of Hopping Channels


12.1 Test Limit

No limit.

12.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 300 KHz and VBW to 300 KHz.
- Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

12.3 Test Setup Layout




12.4 Test Result and Data


Modulation Type	Hopping Channels
Lora 125KHz (SF07)	64
Lora 125KHz (SF08)	64
Lora 125KHz (SF09)	64
Lora 125KHz (SF10)	64




Lora 125KHz
(SF07)

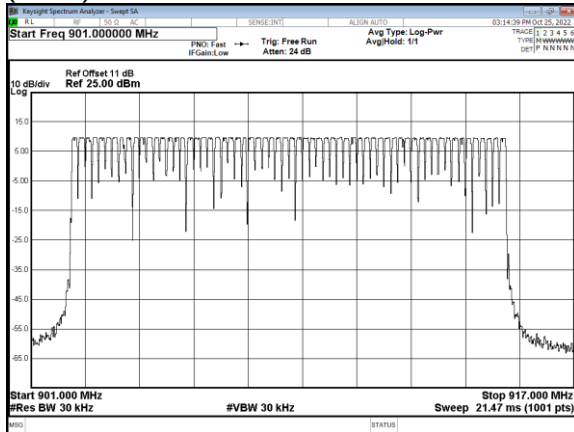


Lora 125KHz
(SF10)

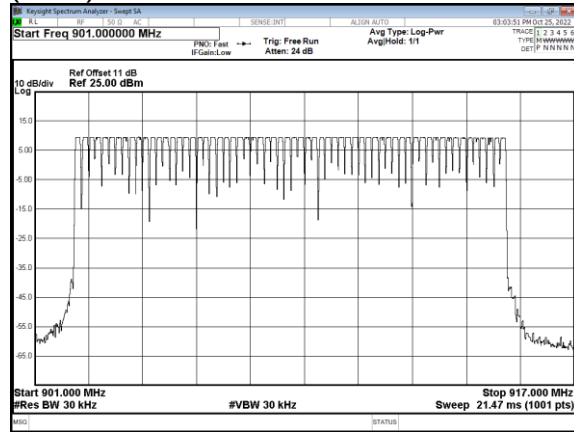

Lora 125KHz
(SF08)

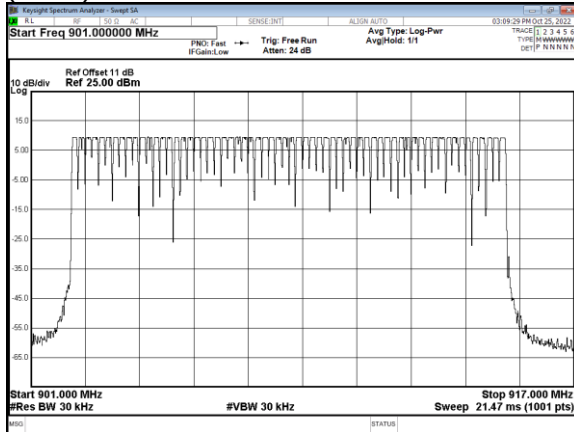

Lora 125KHz
(SF09)

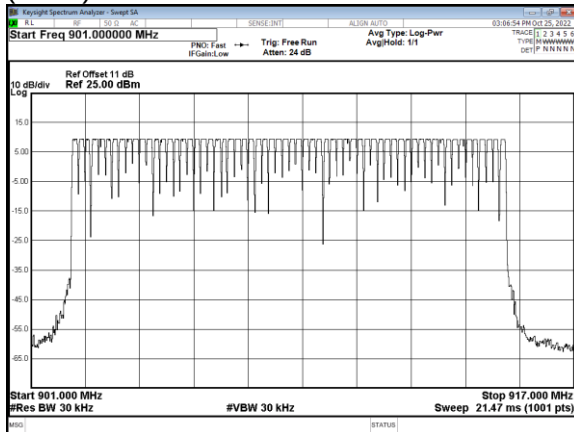



13. Maximum Peak Output Power


13.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

13.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

13.3 Test Setup Layout



13.4 Test Result and Data

Modulation Type	Frequency (MHz)	Power Output (dBm)	Peak Power Output (mW)
Lora 125KHz (SF07)	902.3	7.022	5.037
	908.5	6.785	4.770
	914.9	6.668	4.643
Lora 125KHz (SF08)	902.3	6.540	4.508
	908.5	6.666	4.641
	914.9	6.622	4.594
Lora 125KHz (SF09)	902.3	6.643	4.616
	908.5	6.768	4.751
	914.9	6.761	4.744
Lora 125KHz (SF10)	902.3	6.065	4.041
	908.5	6.440	4.406
	914.9	6.451	4.417



14. Power Spectral Density


14.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

14.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.







14.3 Test Setup Layout









14.4 Test Result and Data

Modulation Type	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	Limit (dBm)
Lora 125KHz (SF07)	902.3	0.801	8.00
	908.5	2.401	8.00
	914.9	0.717	8.00
Lora 125KHz (SF08)	902.3	3.401	8.00
	908.5	3.267	8.00
	914.9	3.258	8.00
Lora 125KHz (SF09)	902.3	5.296	8.00
	908.5	5.858	8.00
	914.9	5.622	8.00
Lora 125KHz (SF10)	902.3	6.722	8.00
	908.5	6.844	8.00
	914.9	7.042	8.00

Note: Test plots refer to the following pages.

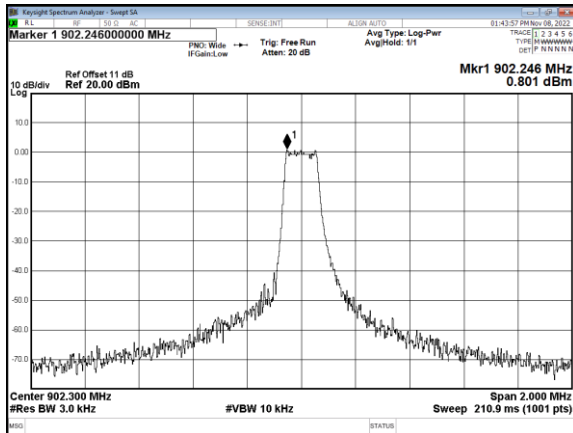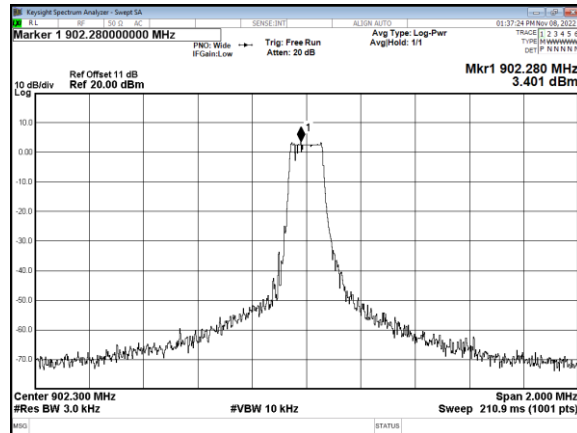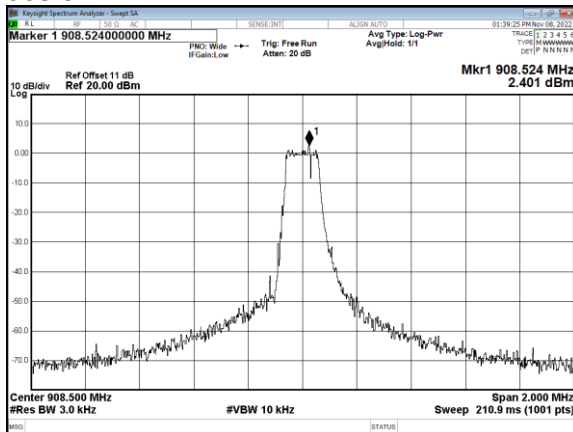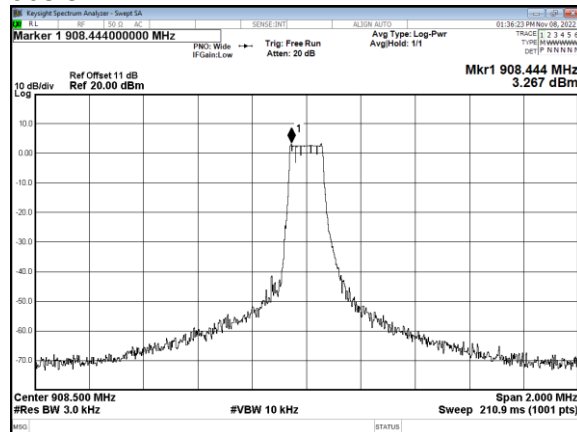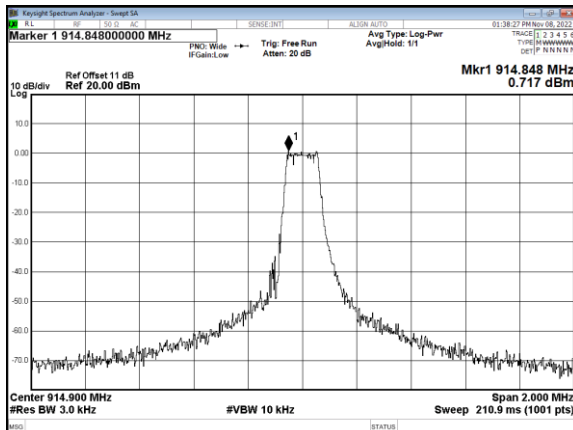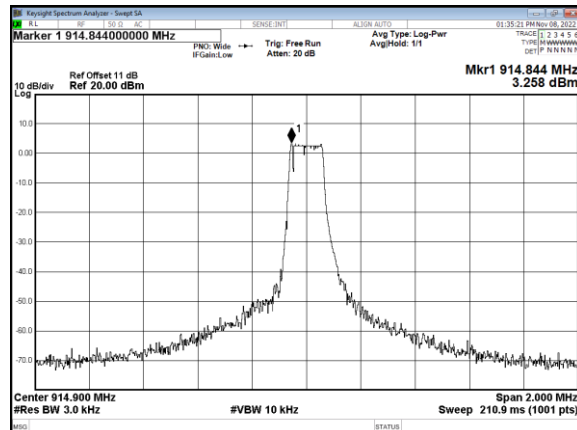Lora 125KHz(SF07)
902.3MHzLora 125KHz(SF08)
902.3MHzLora 125KHz(SF07)
908.5MHzLora 125KHz(SF08)
908.5MHzLora 125KHz(SF07)
914.9MHzLora 125KHz(SF08)
914.9MHz

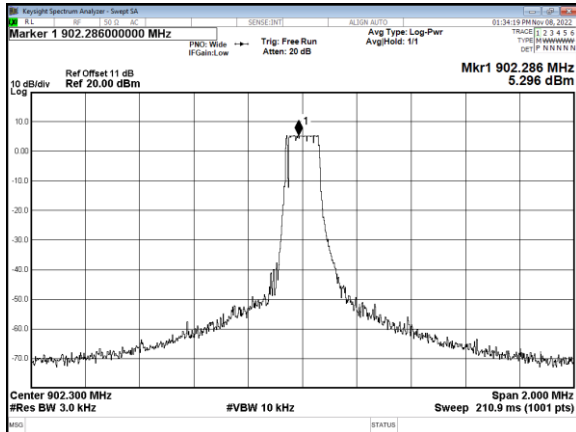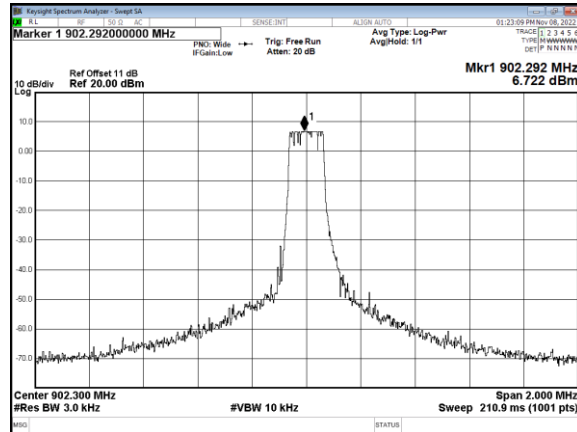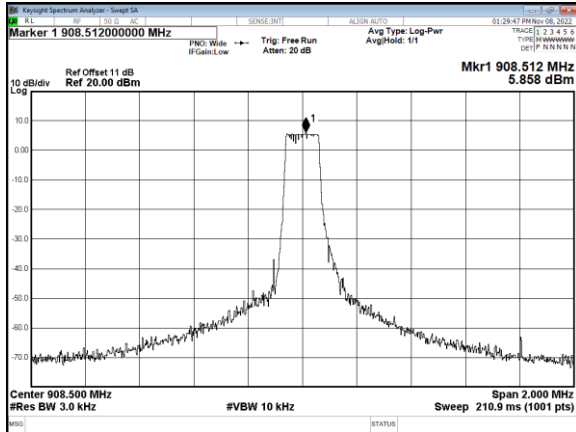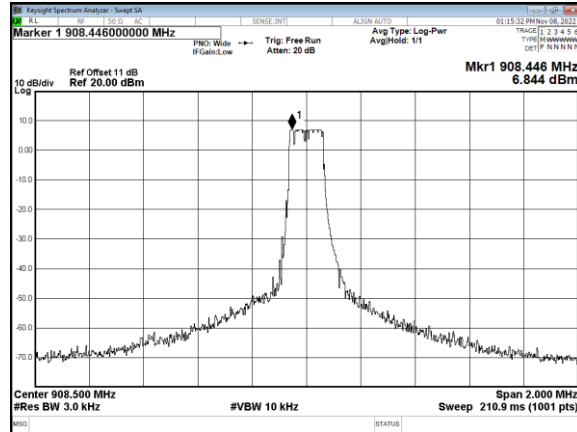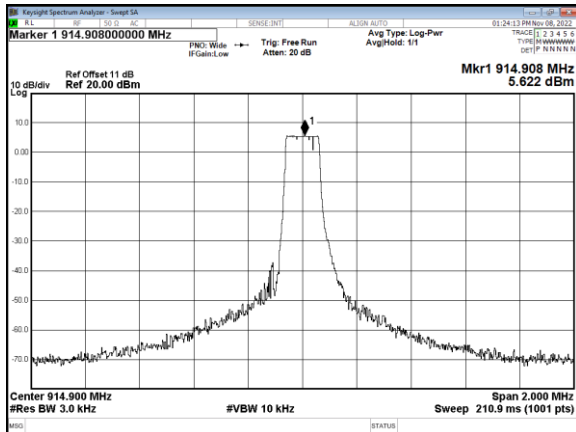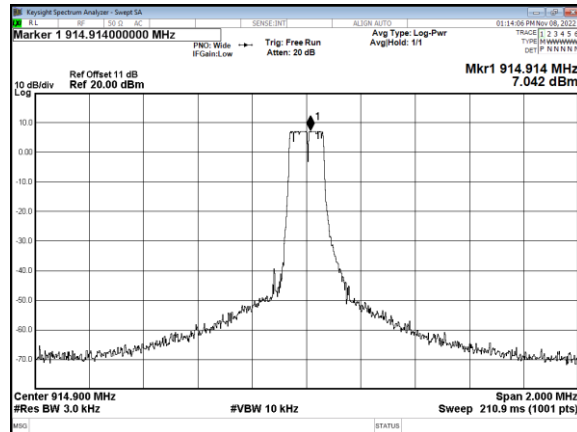Lora 125KHz(SF09)
902.3MHzLora 125KHz(SF10)
902.3MHzLora 125KHz(SF09)
908.5MHzLora 125KHz(SF10)
908.5MHzLora 125KHz(SF09)
914.9MHzLora 125KHz(SF10)
914.9MHz

----- End of the report -----