



## Appendix C

### RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: AAWireless Mini

Test Model: AMP

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 23.8° C    |
| Relative Humidity: | 52.1%      |
| ATM Pressure:      | 100.0 kPa  |
| Test Engineer:     | Paddi Chen |
| Supervised by:     | Nick Peng  |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## C.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | Ant1    | 8.55                  | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2437            | Ant1    | 8.531                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2462            | Ant1    | 8.592                 | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2412            | Ant1    | 15.882                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2437            | Ant1    | 16.29                 | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2462            | Ant1    | 16.305                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 17.262                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 17.27                 | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 17.035                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 35.475                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 35.842                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 35.911                | $\geq 0.5$                  | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1



-6dB Bandwidth NVNT b 2437MHz Ant1

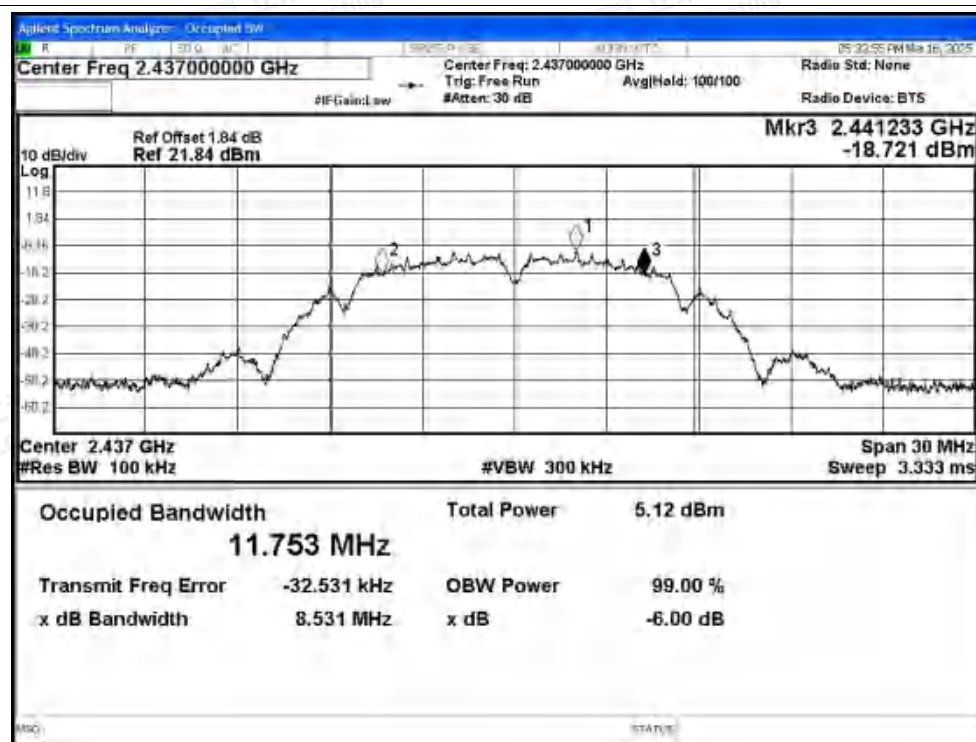




-6dB Bandwidth NVNT b 2462MHz Ant1




-6dB Bandwidth NVNT g 2412MHz Ant1

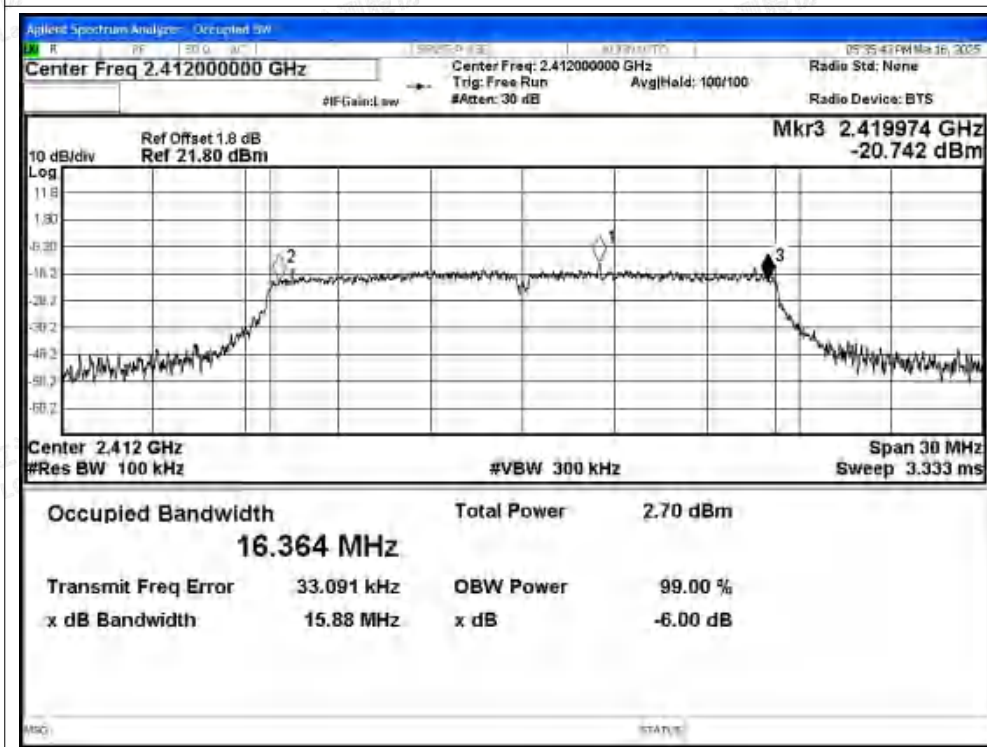






-6dB Bandwidth NVNT g 2437MHz Ant1

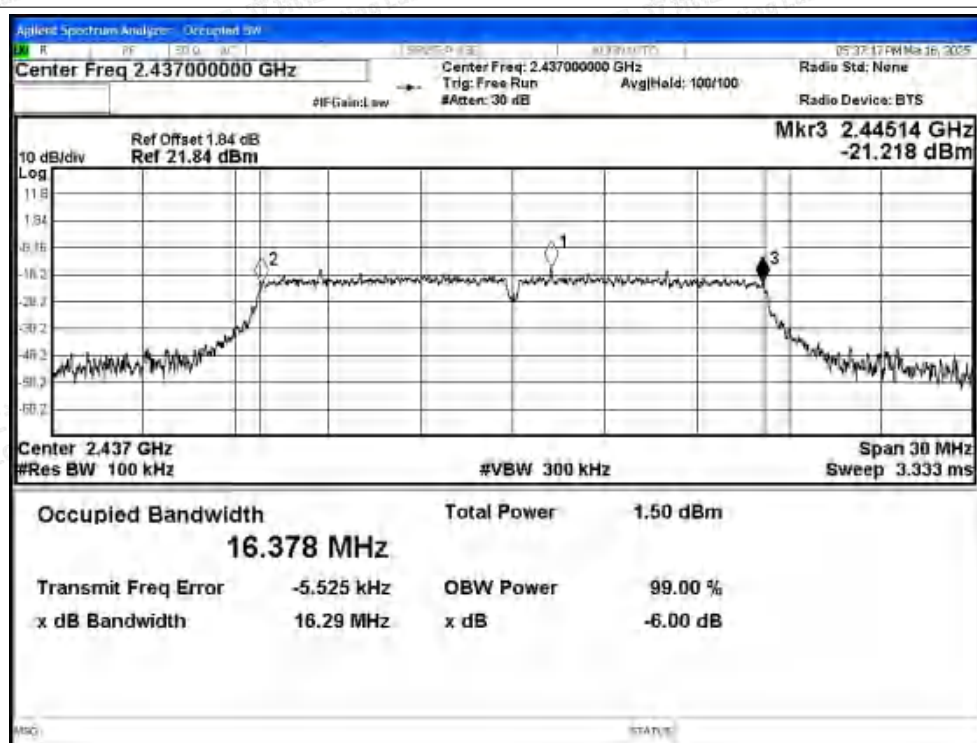


-6dB Bandwidth NVNT g 2462MHz Ant1

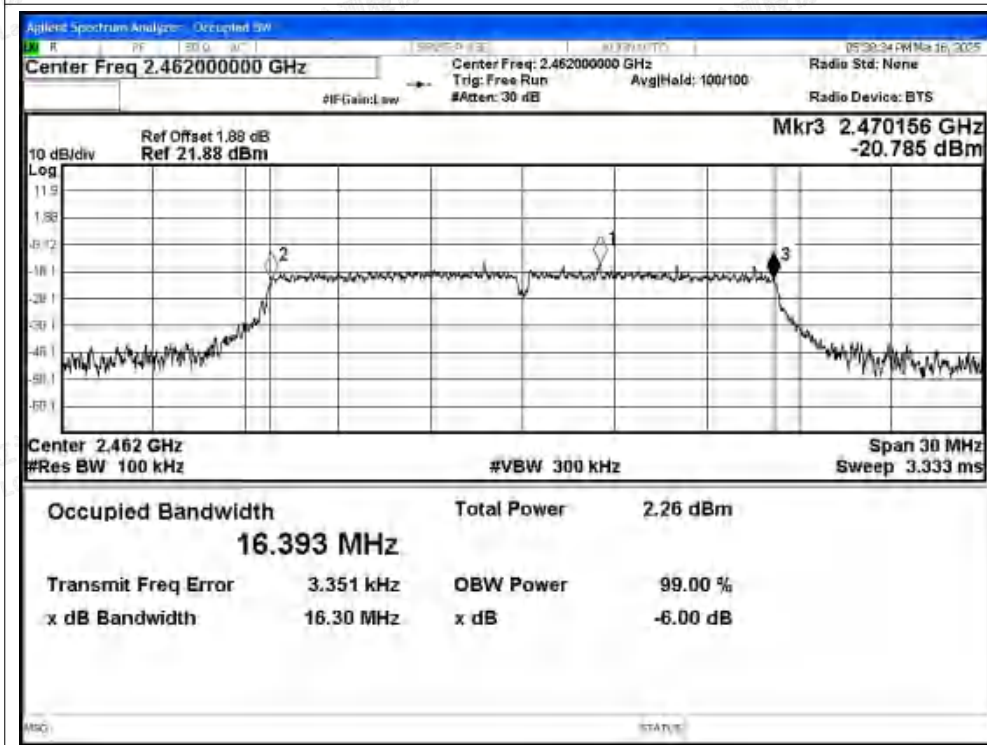




-6dB Bandwidth NVNT n20 2412MHz Ant1

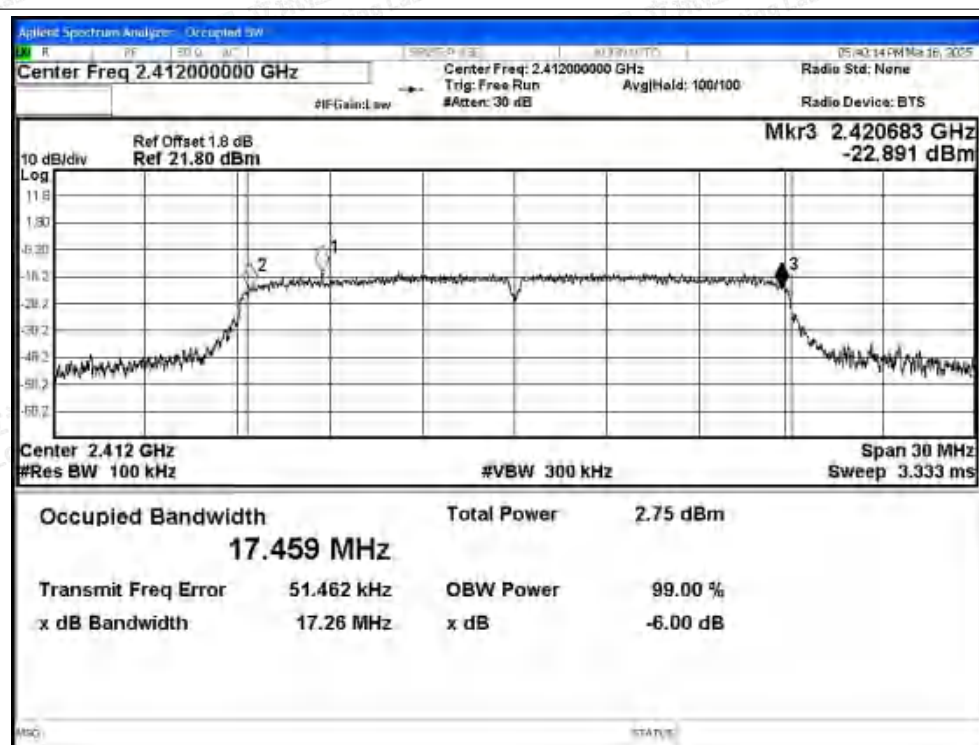


-6dB Bandwidth NVNT n20 2437MHz Ant1

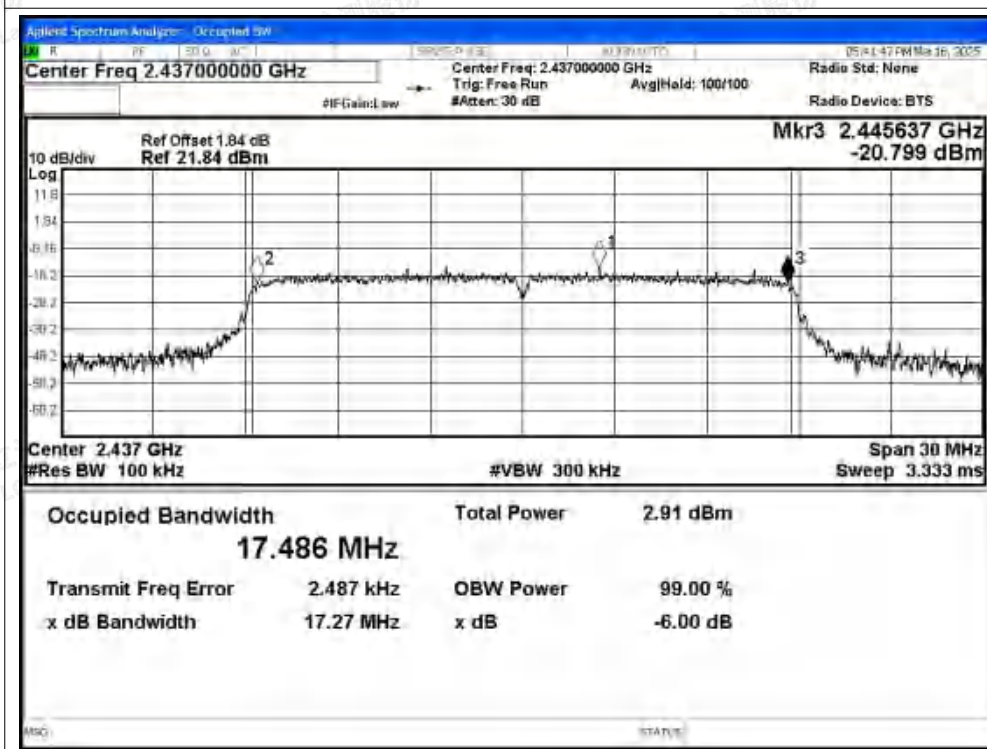




-6dB Bandwidth NVNT n20 2462MHz Ant1

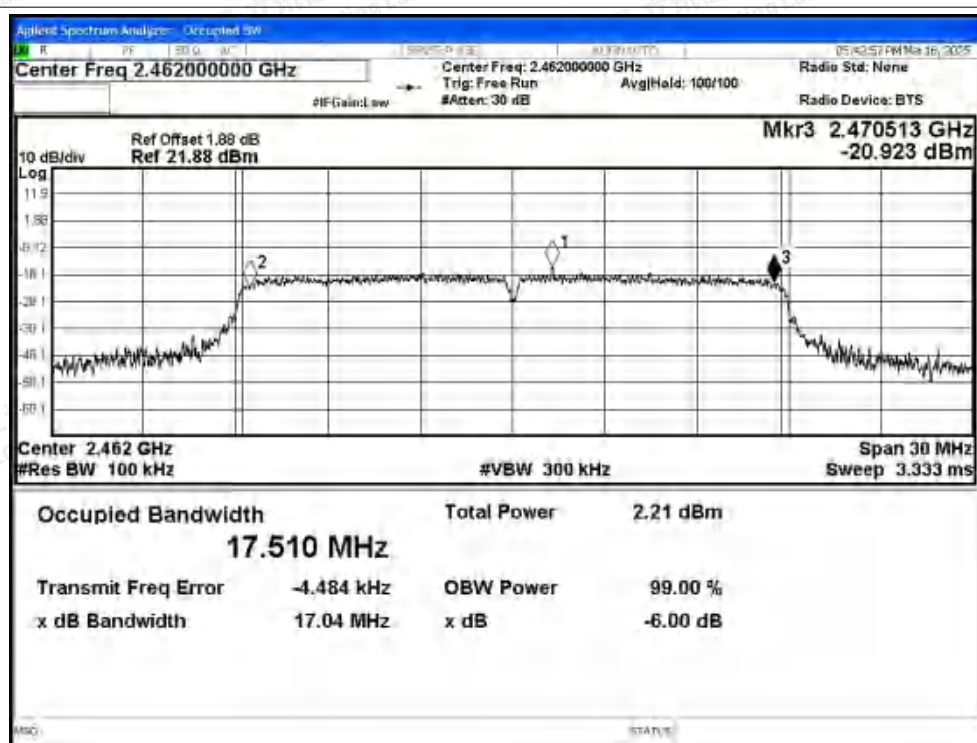


-6dB Bandwidth NVNT n40 2422MHz Ant1

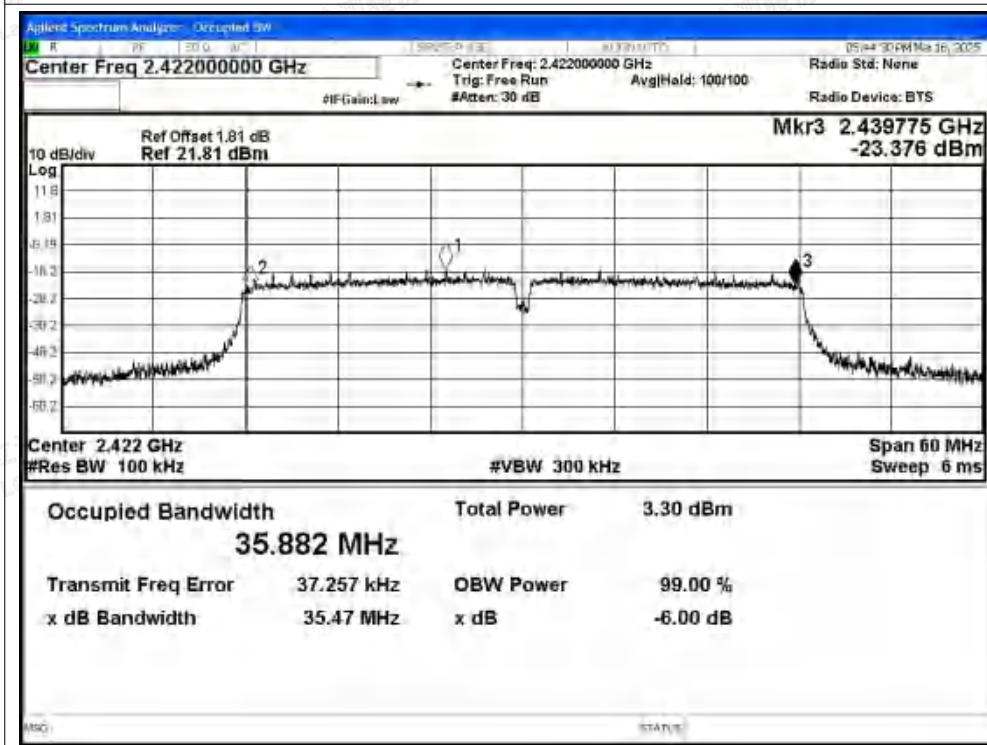






-6dB Bandwidth NVNT n40 2437MHz Ant1

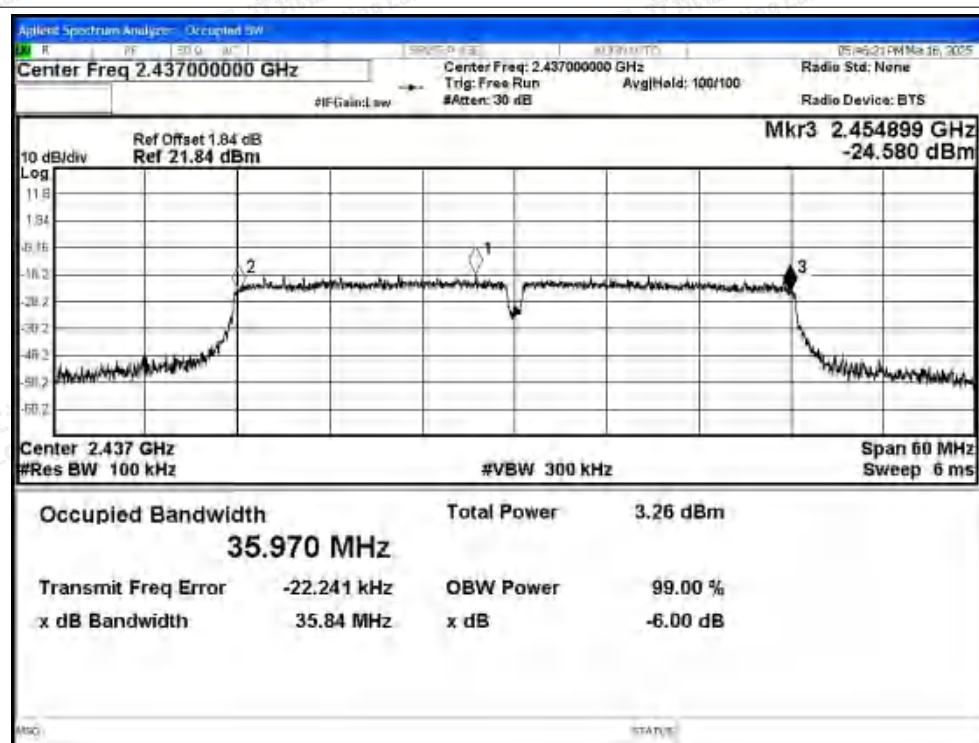

-6dB Bandwidth NVNT n40 2452MHz Ant1

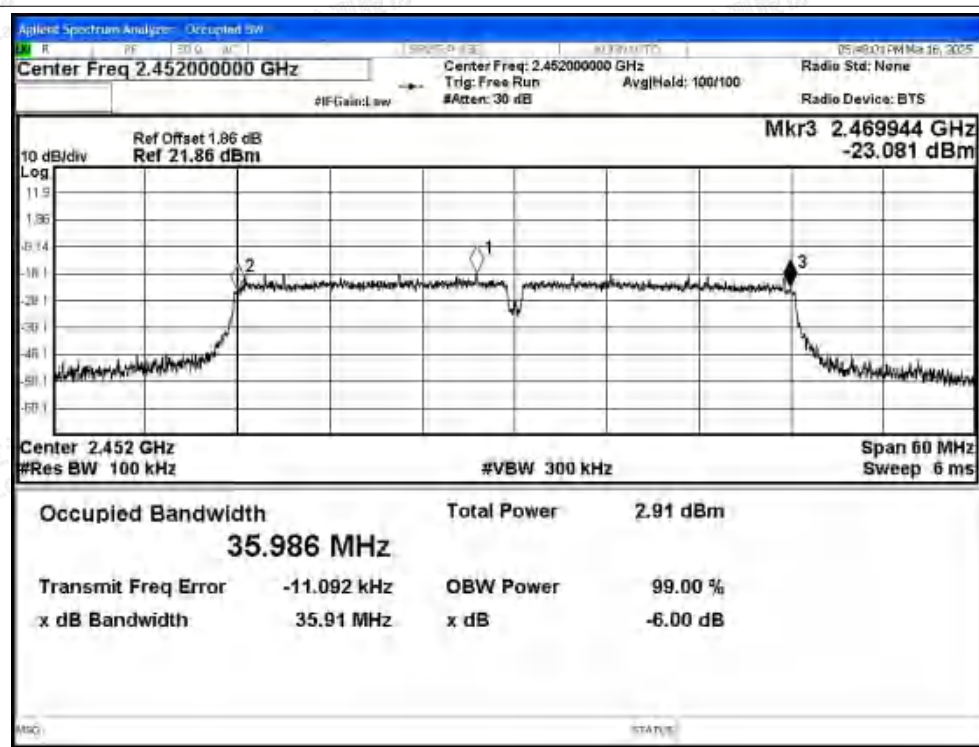





## C.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | 1.92                  | 30          | Pass    |
| NVNT      | b    | 2437            | Ant1    | 0.17                  | 30          | Pass    |
| NVNT      | b    | 2462            | Ant1    | 1.04                  | 30          | Pass    |
| NVNT      | g    | 2412            | Ant1    | 1.51                  | 30          | Pass    |
| NVNT      | g    | 2437            | Ant1    | 0.31                  | 30          | Pass    |
| NVNT      | g    | 2462            | Ant1    | 1                     | 30          | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 1.34                  | 30          | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 1.39                  | 30          | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 0.88                  | 30          | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 1.77                  | 30          | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 1.67                  | 30          | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 1.28                  | 30          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



### C.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -22.11                   | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -23.4                    | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -23.95                   | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -28.88                   | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -30.93                   | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -30.19                   | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -29.28                   | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -29.02                   | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -30.42                   | 8                | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -32.07                   | 8                | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -29.96                   | 8                | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -32.16                   | 8                | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

PSD NVNT b 2412MHz Ant1

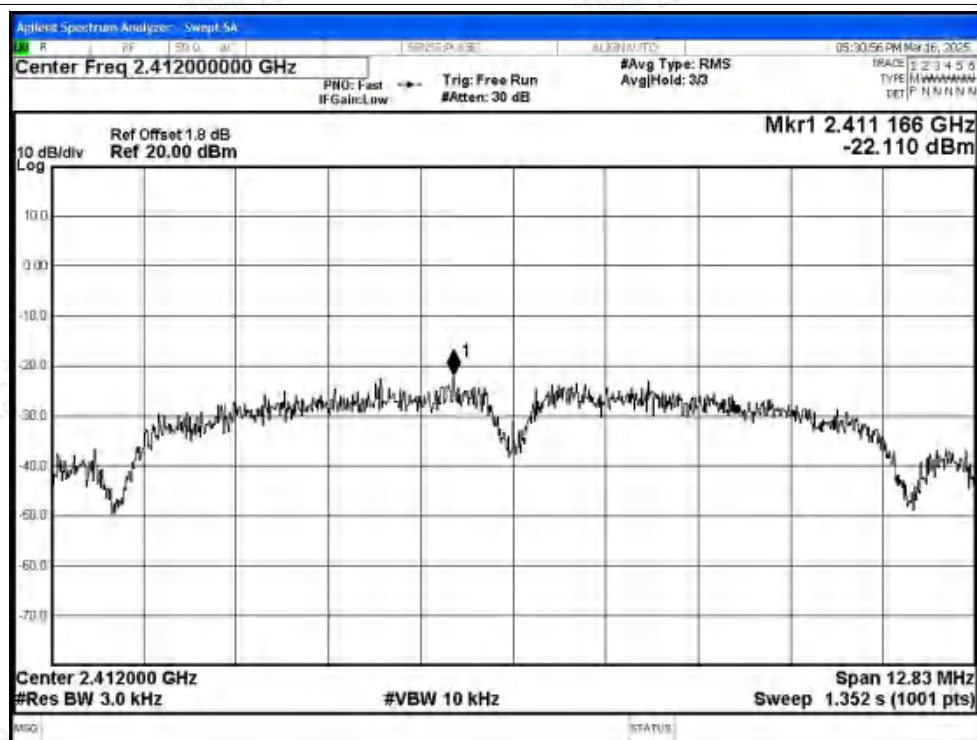


PSD NVNT b 2437MHz Ant1

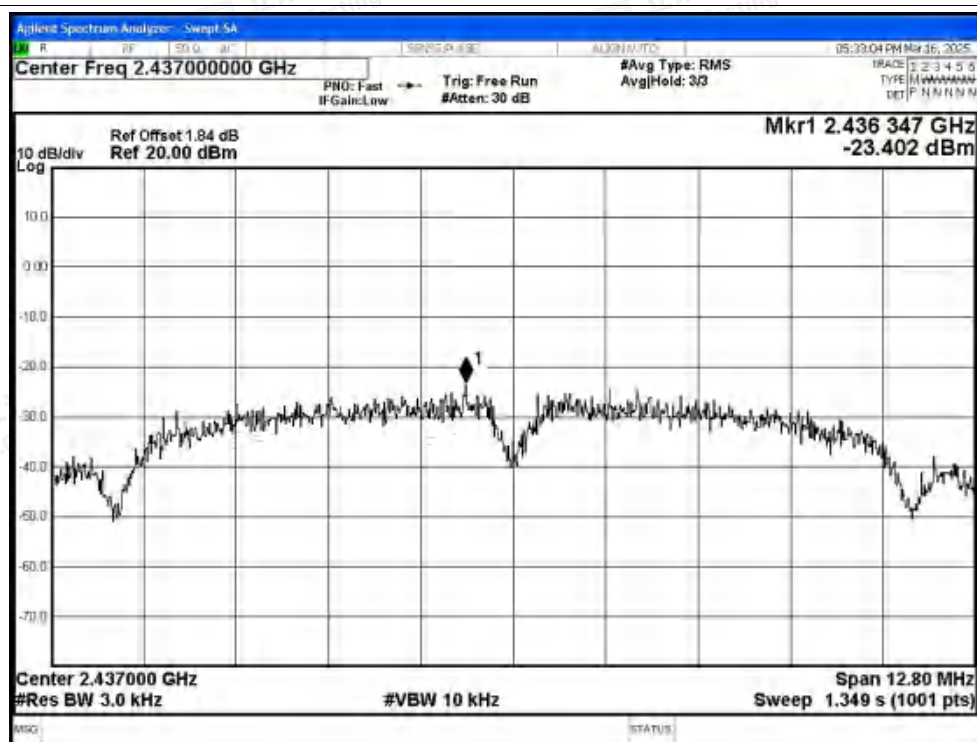


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



PSD NVNT b 2462MHz Ant1

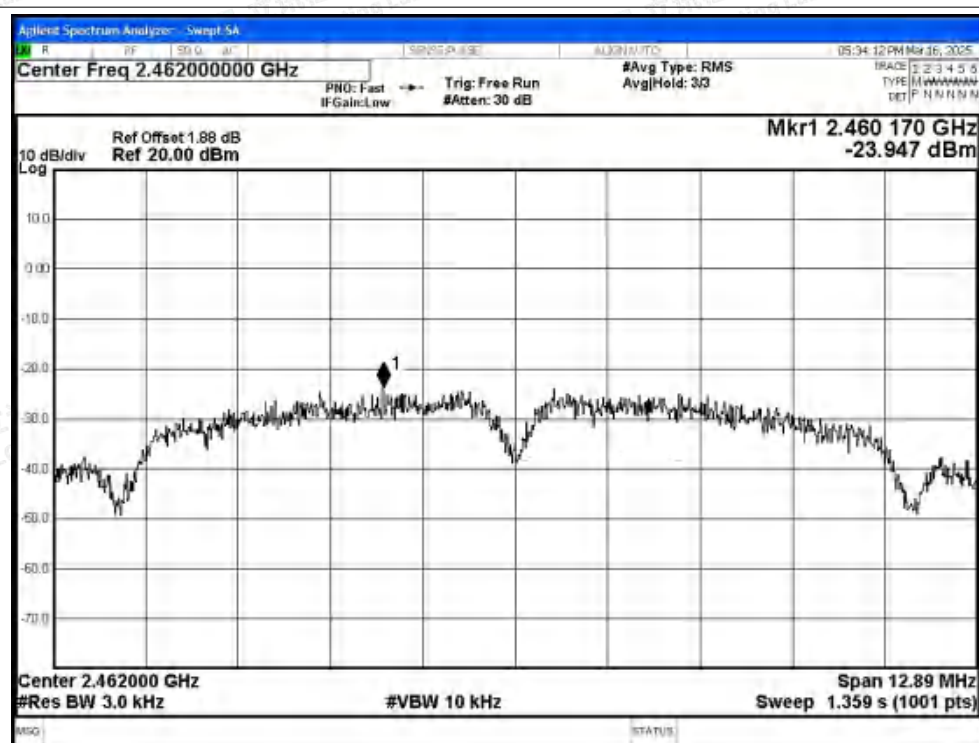


PSD NVNT g 2412MHz Ant1

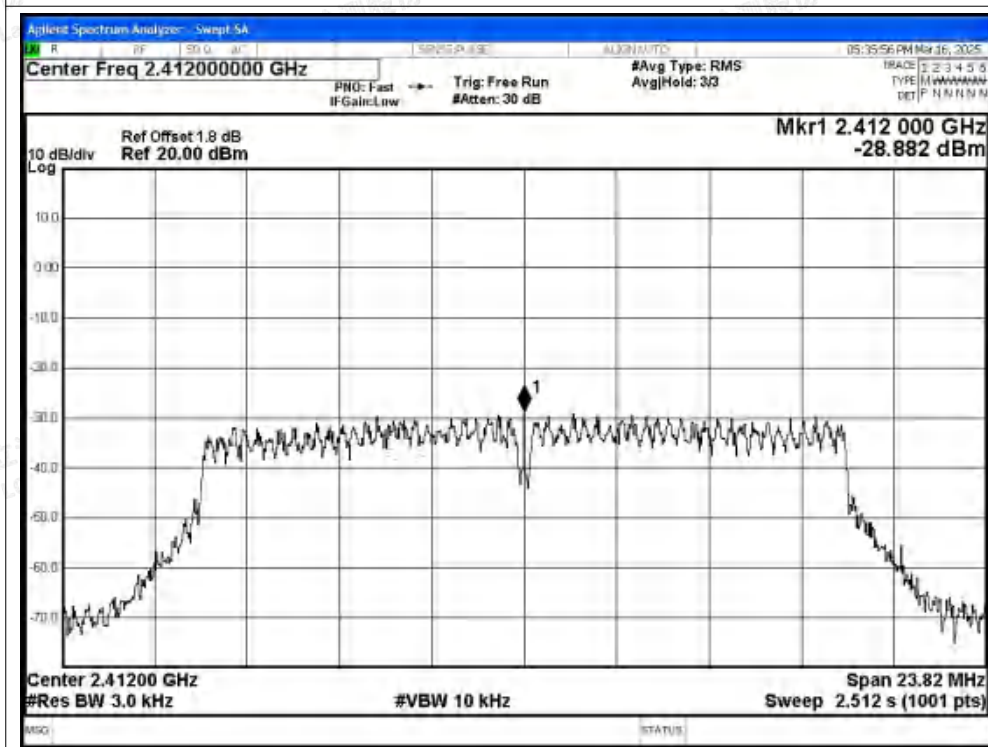






PSD NVNT g 2437MHz Ant1

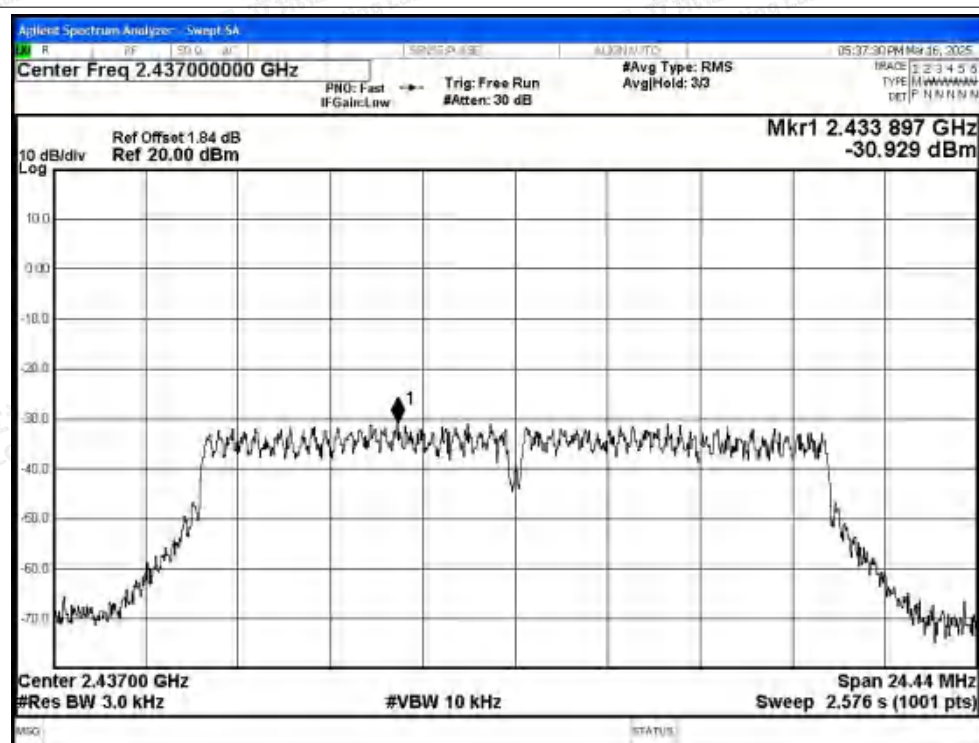


PSD NVNT g 2462MHz Ant1

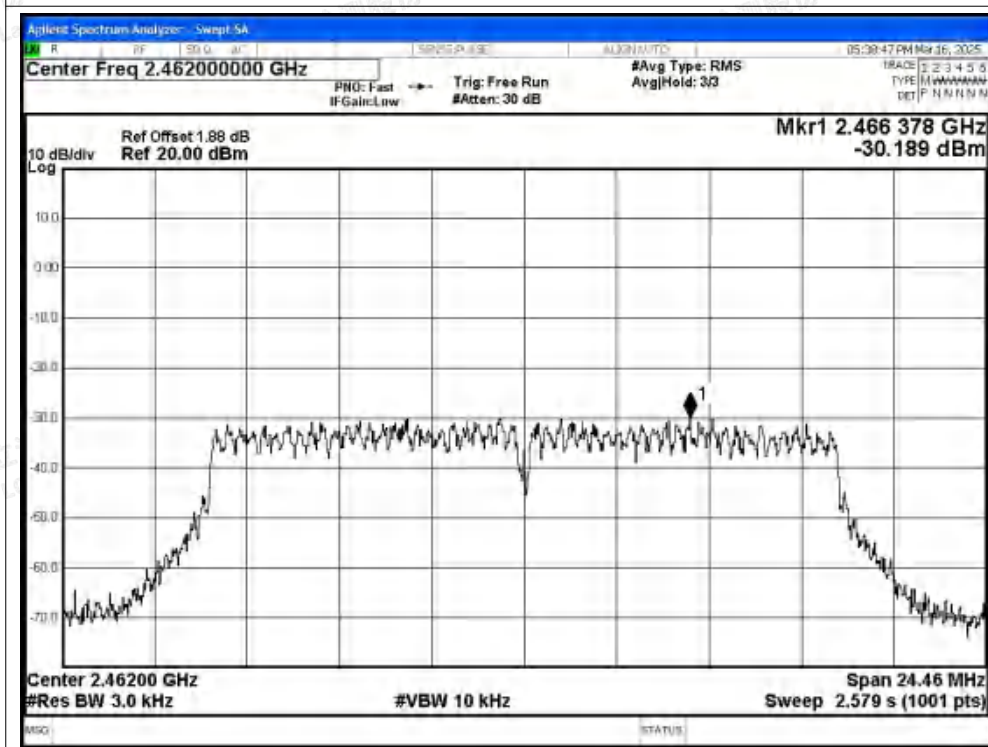




PSD NVNT n20 2412MHz Ant1

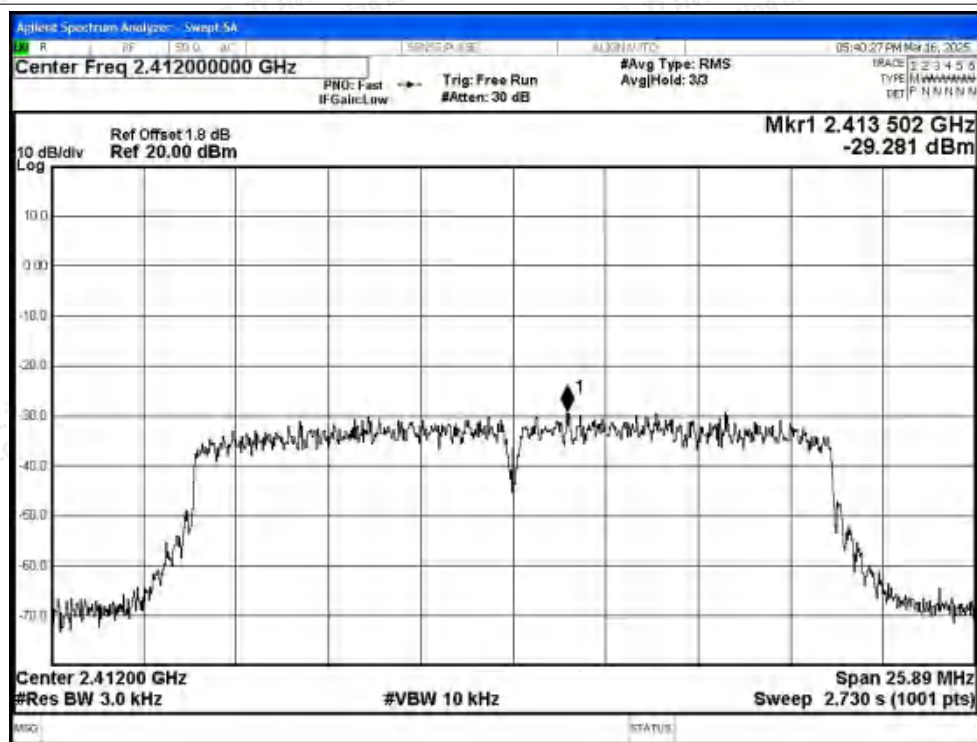


PSD NVNT n20 2437MHz Ant1

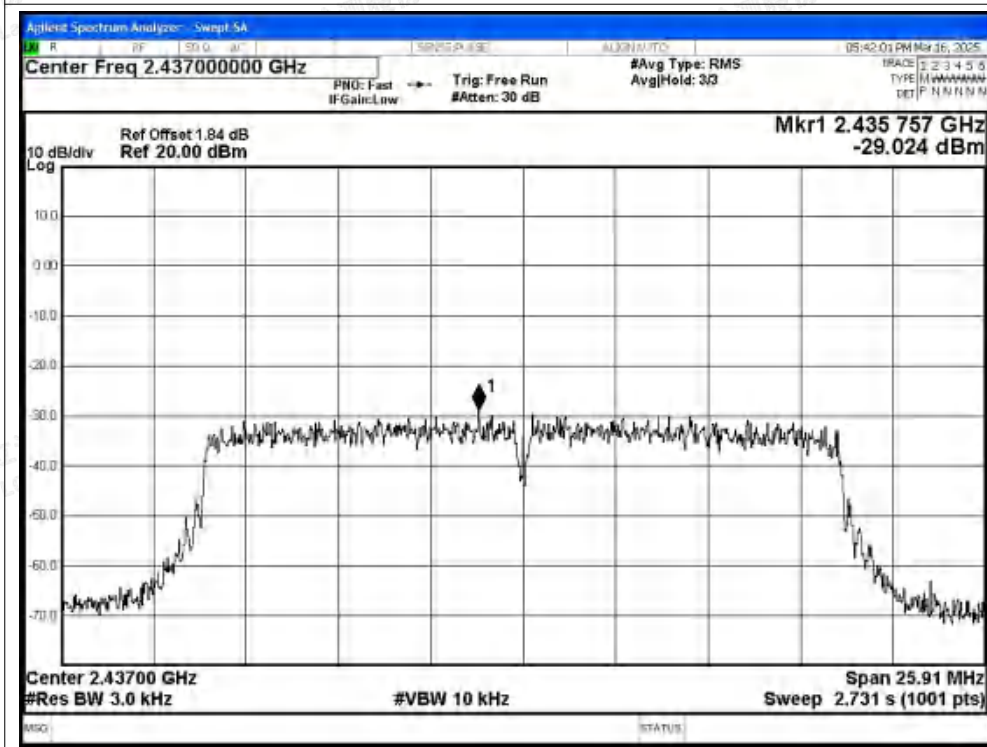




PSD NVNT n20 2462MHz Ant1

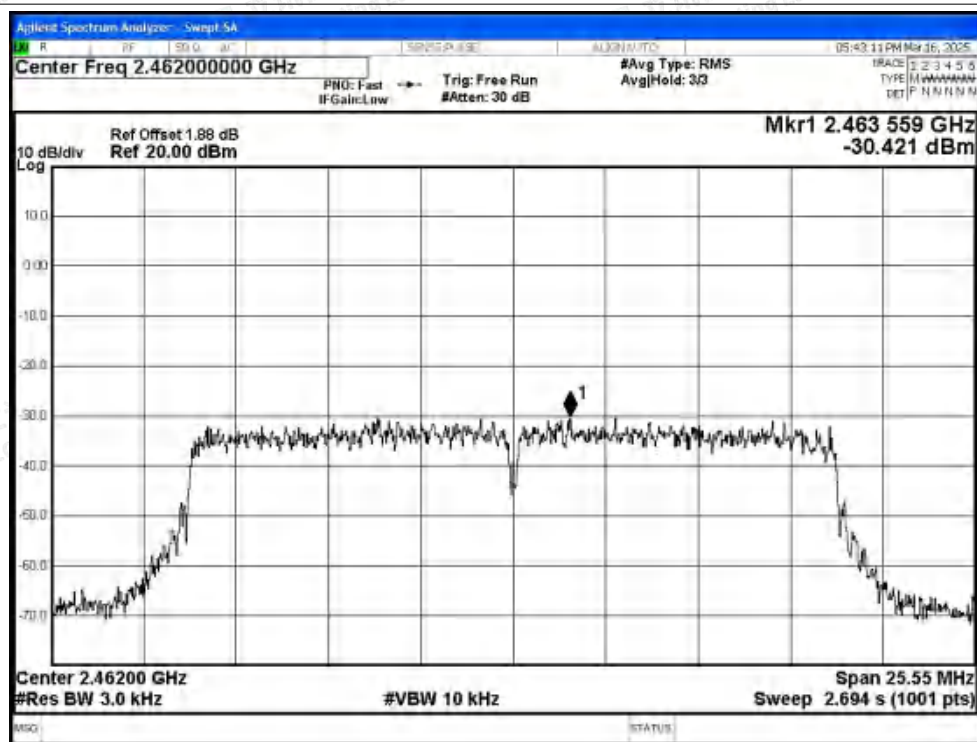


PSD NVNT n40 2422MHz Ant1

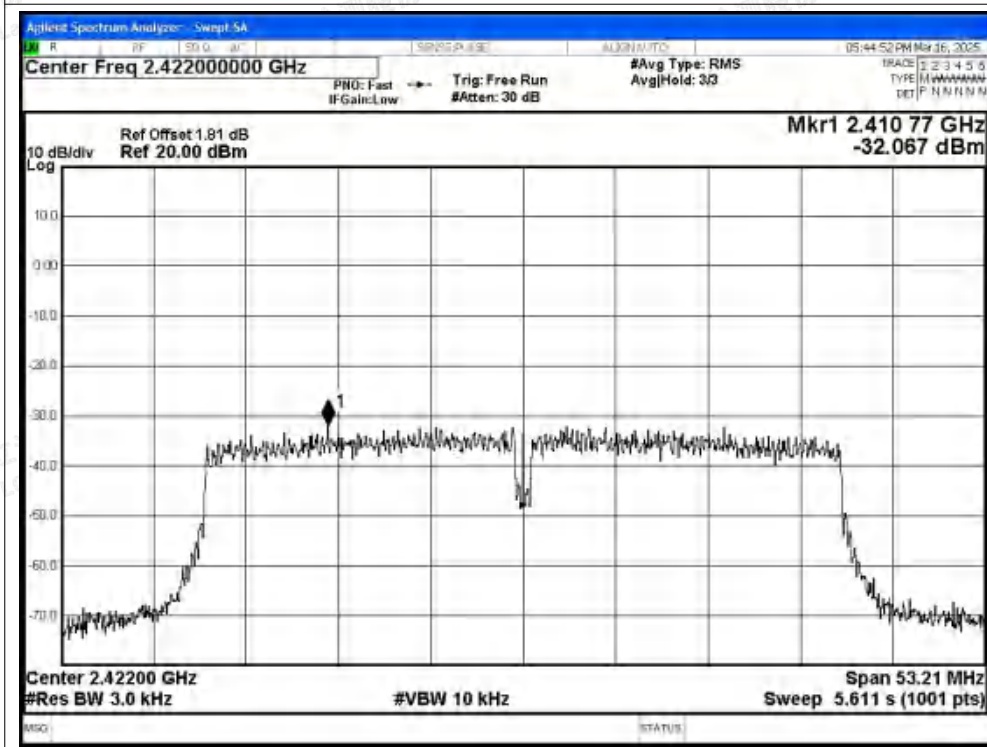




PSD NVNT n40 2437MHz Ant1

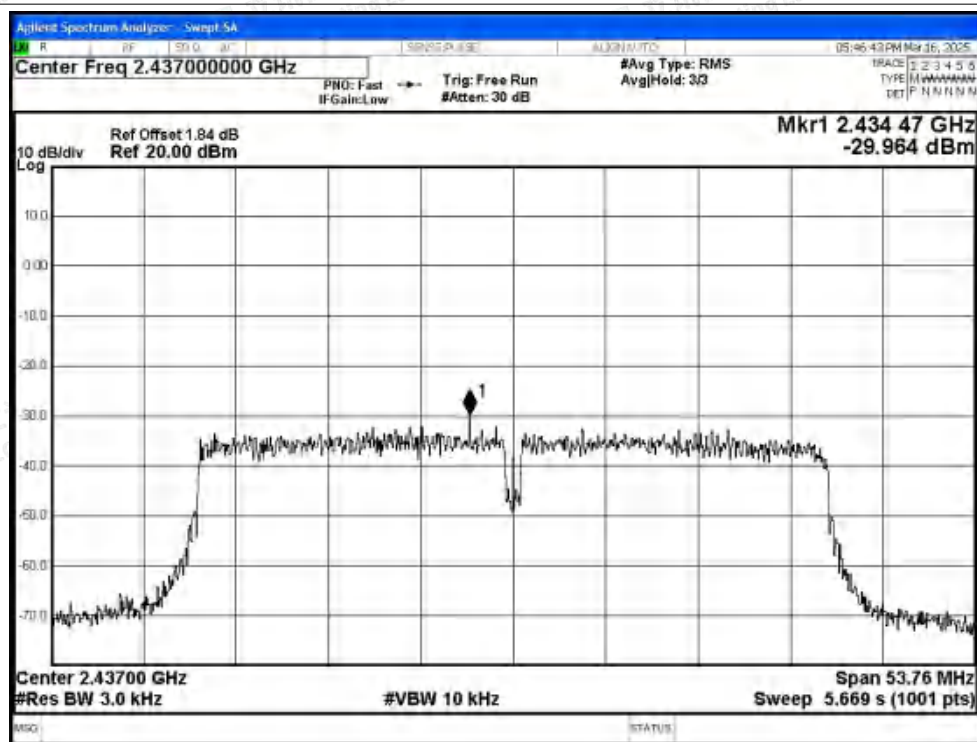

PSD NVNT n40 2452MHz Ant1

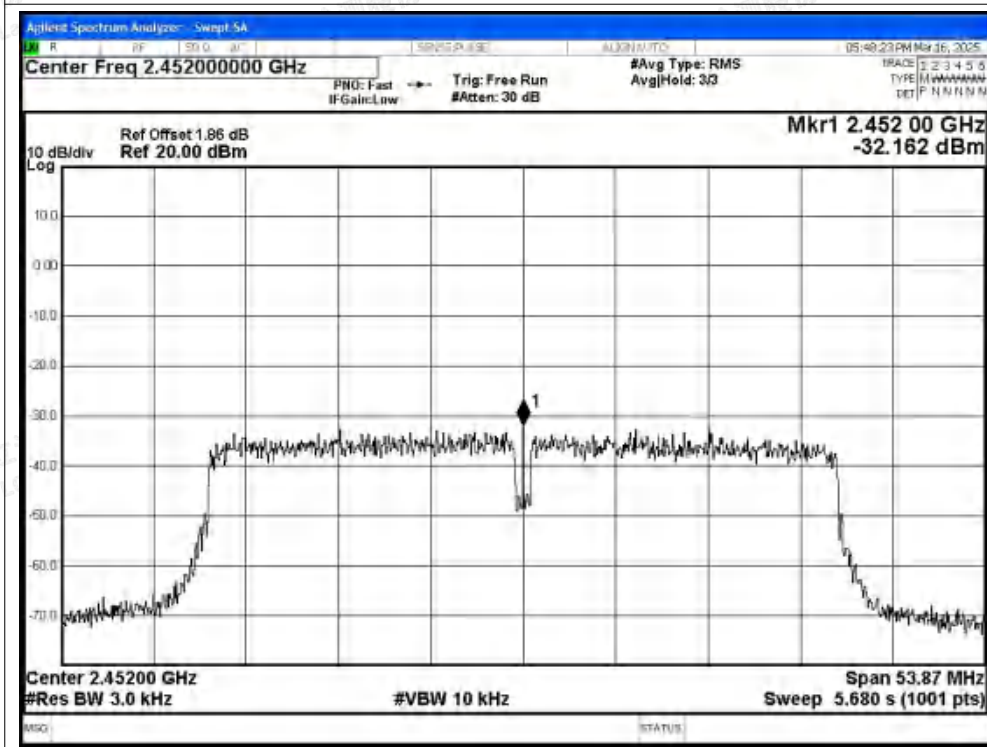






## C.4 Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -46.11          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -48.45          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -31.77          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -42.25          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -30.68          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -40.01          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -32.98          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -37.48          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Band Edge NVNT b 2412MHz Ant1 Ref

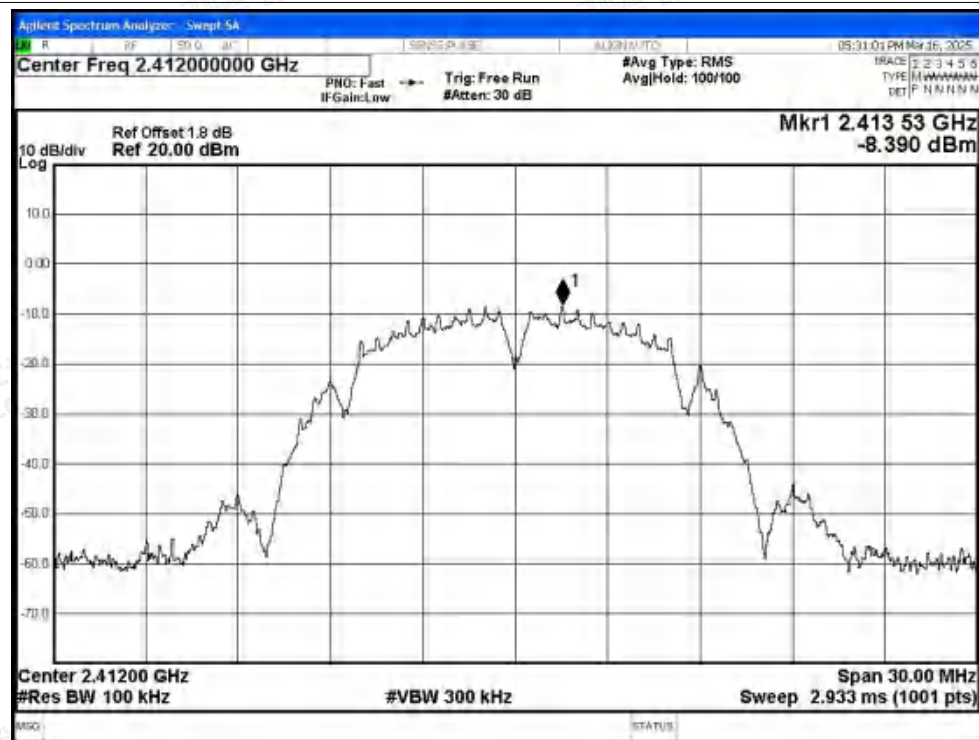


## Band Edge NVNT b 2412MHz Ant1 Emission

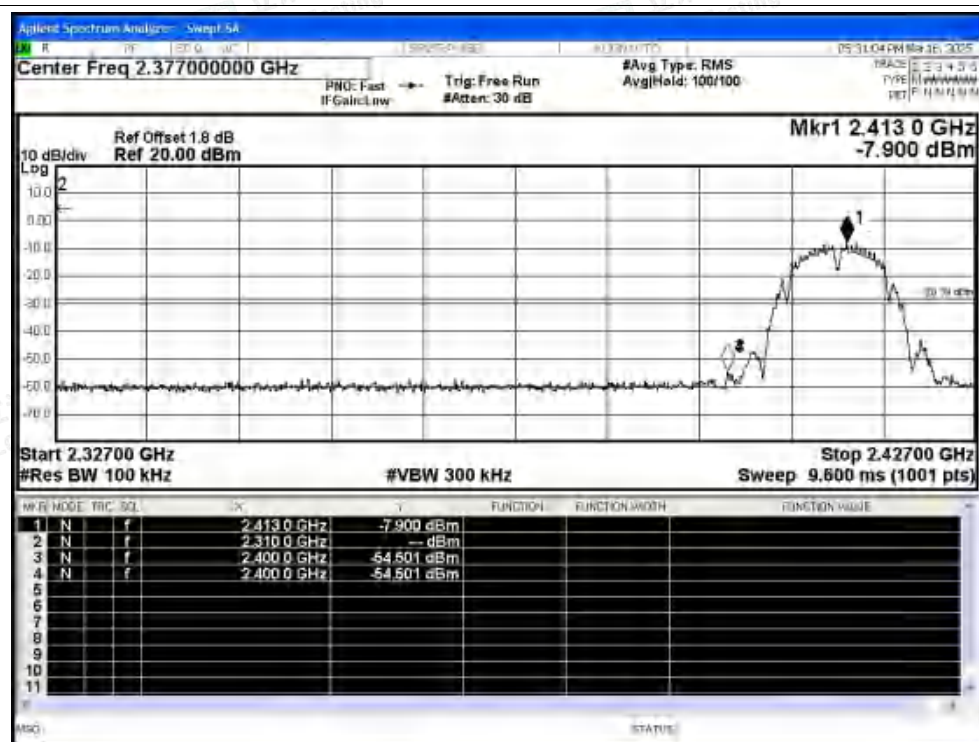





Band Edge NVNT b 2462MHz Ant1 Ref

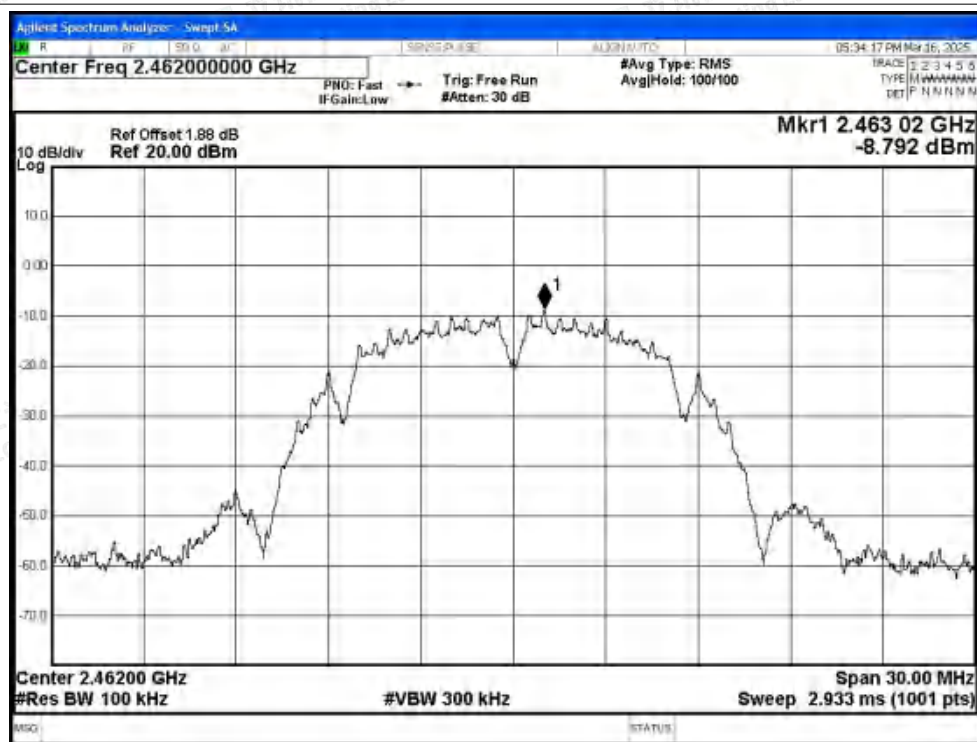


Band Edge NVNT b 2462MHz Ant1 Emission

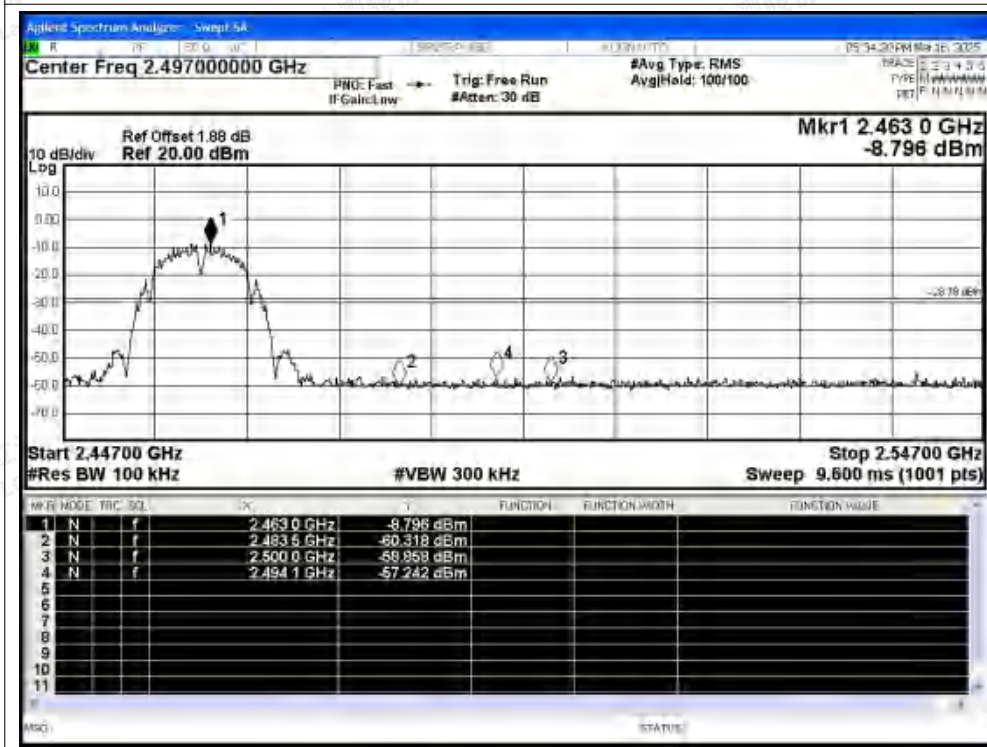



Band Edge NVNT g 2412MHz Ant1 Ref

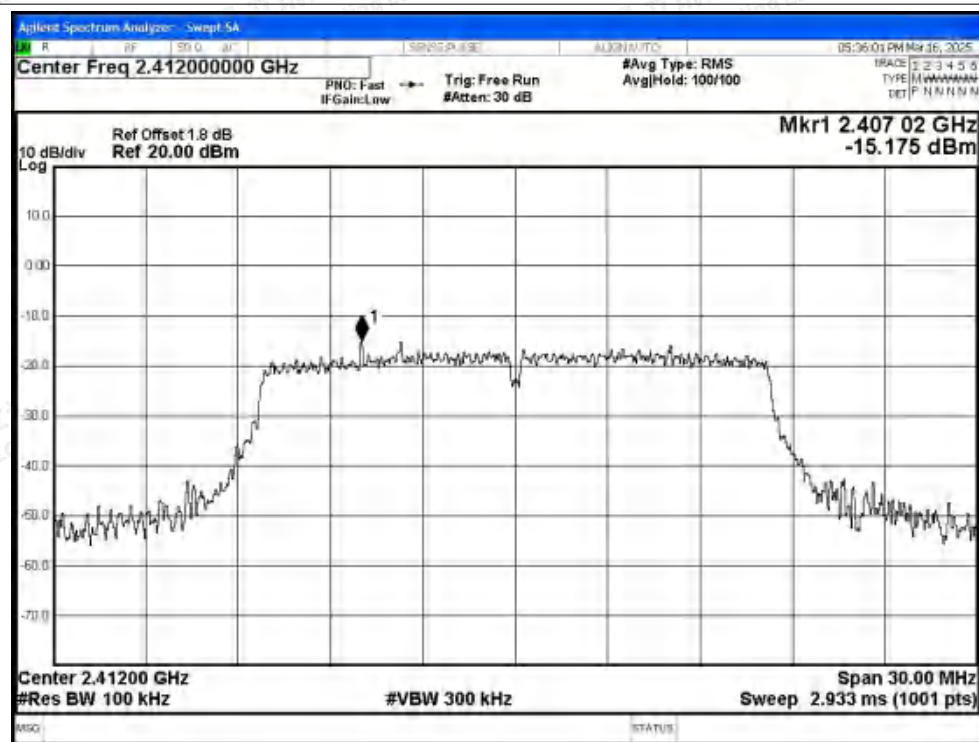


Band Edge NVNT g 2412MHz Ant1 Emission








Band Edge NVNT g 2462MHz Ant1 Ref

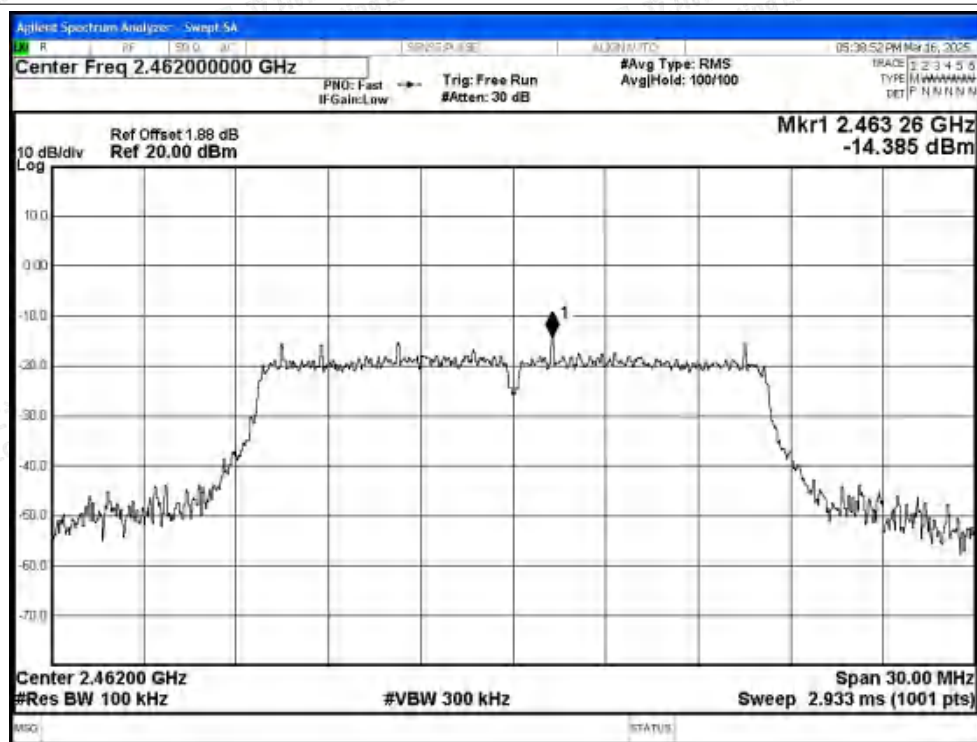


Band Edge NVNT g 2462MHz Ant1 Emission

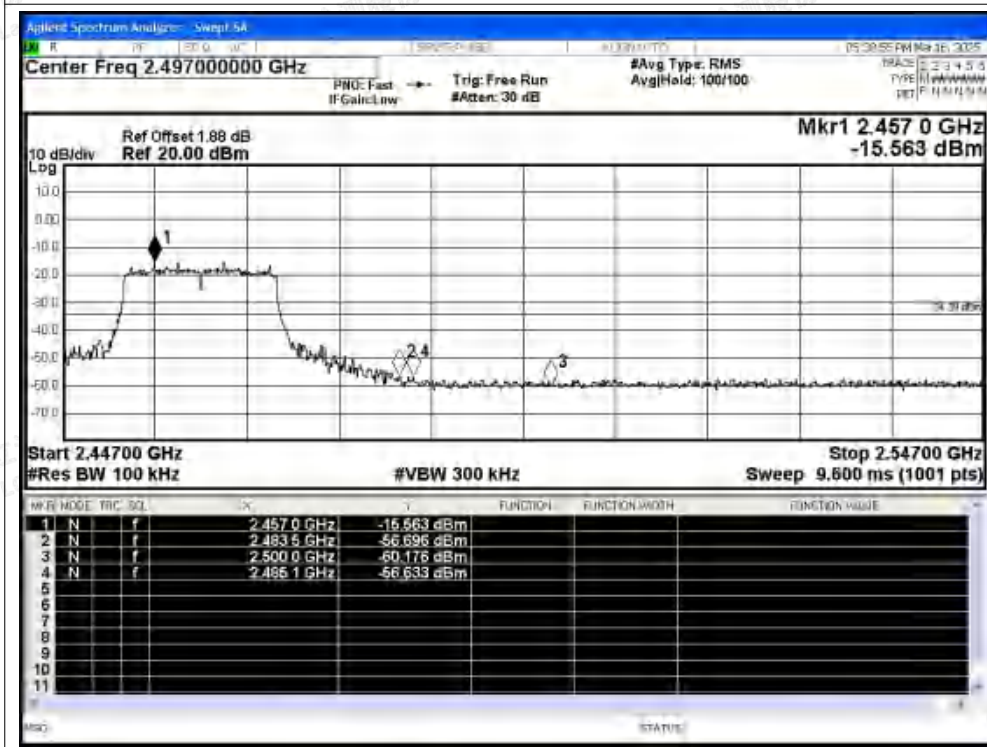



Band Edge NVNT n20 2412MHz Ant1 Ref

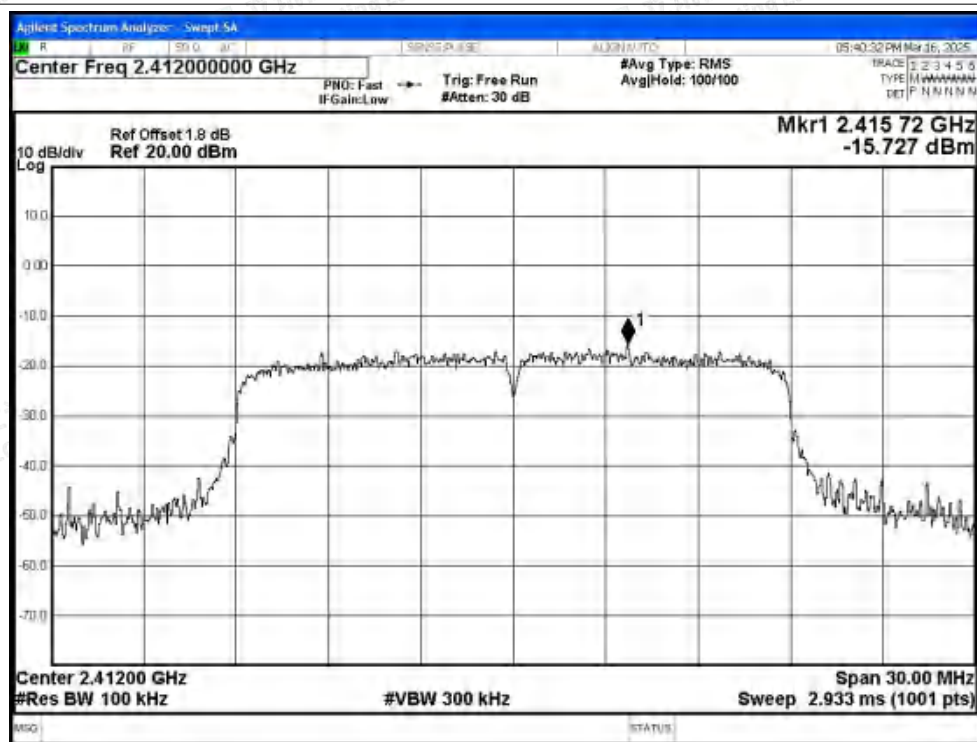


Band Edge NVNT n20 2412MHz Ant1 Emission






## Band Edge NVNT n20 2462MHz Ant1 Ref

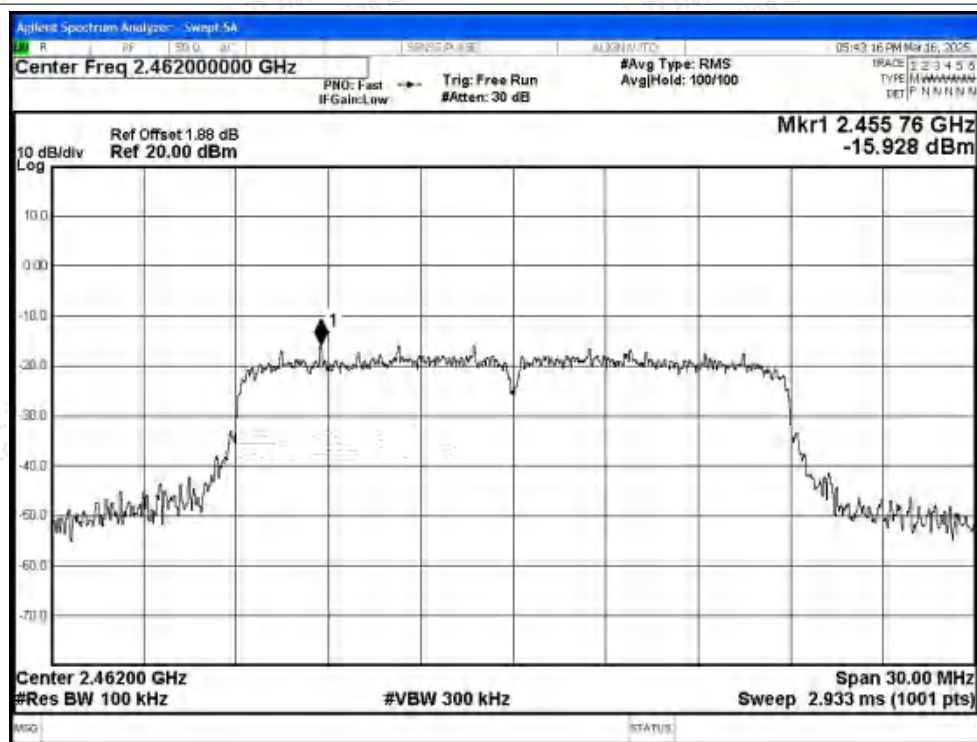


## Band Edge NVNT n20 2462MHz Ant1 Emission

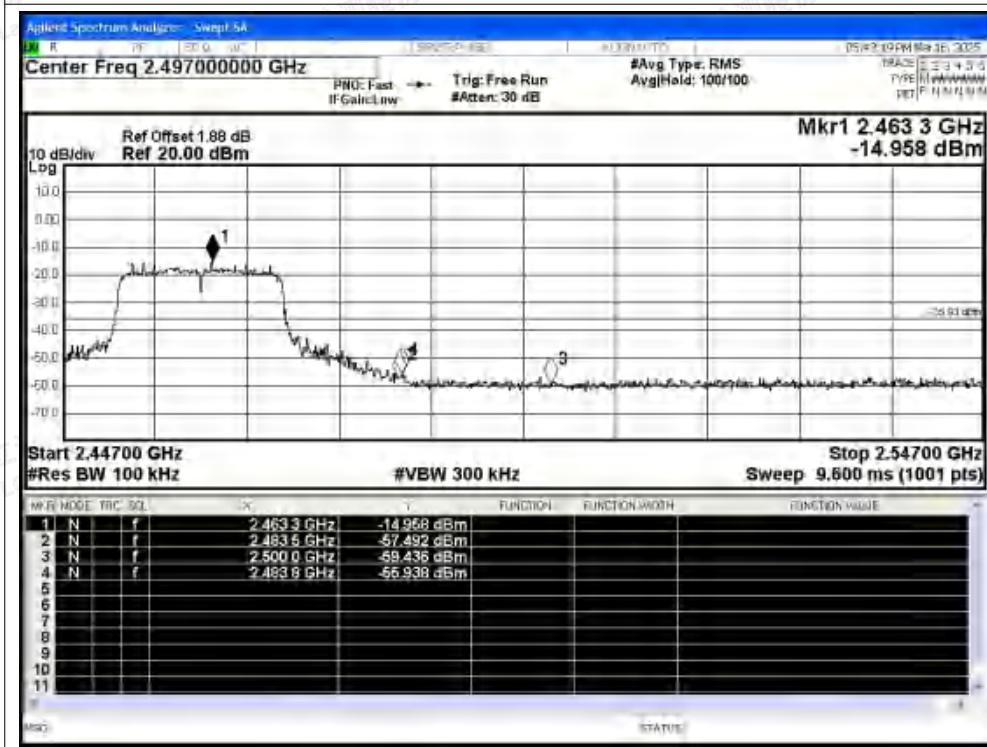




## Band Edge NVNT n40 2422MHz Ant1 Ref

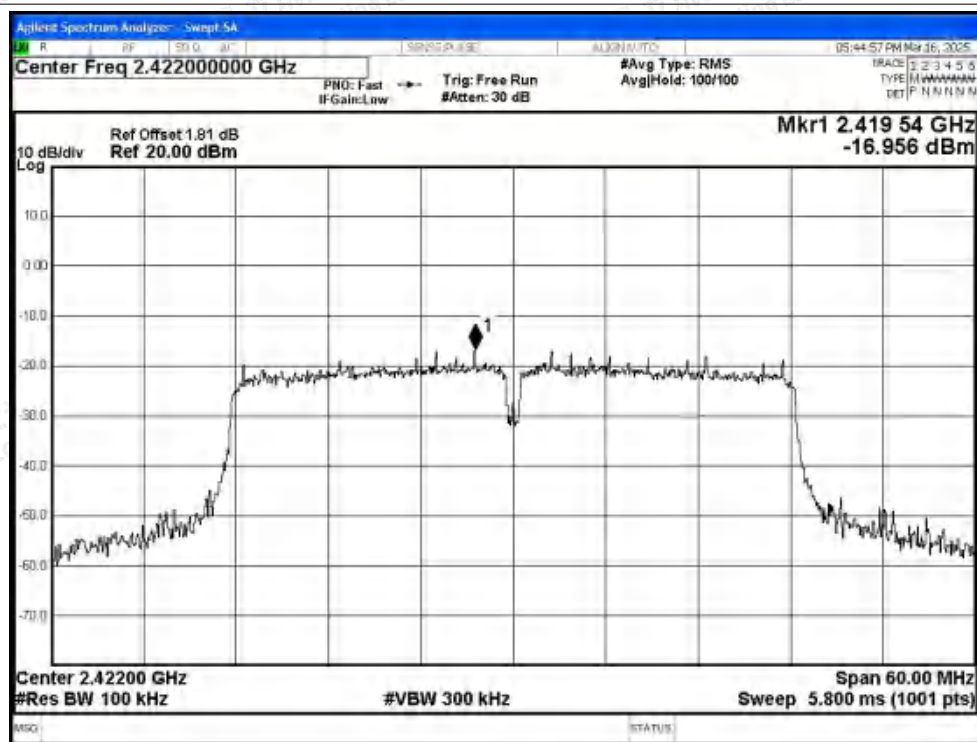


## Band Edge NVNT n40 2422MHz Ant1 Emission

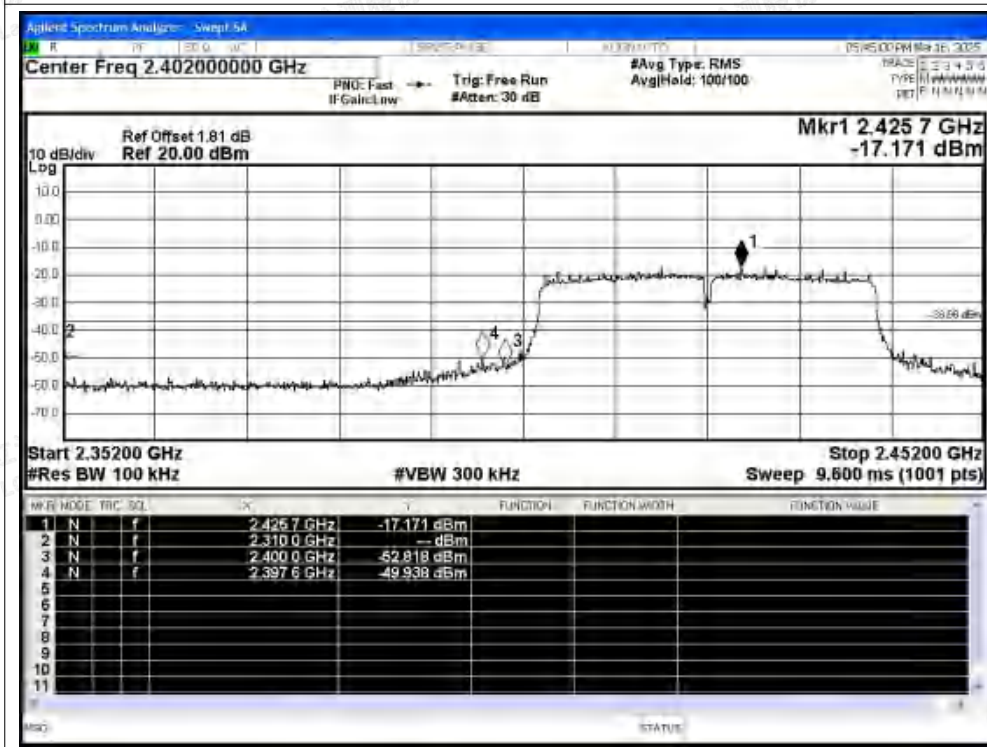






## Band Edge NVNT n40 2452MHz Ant1 Ref

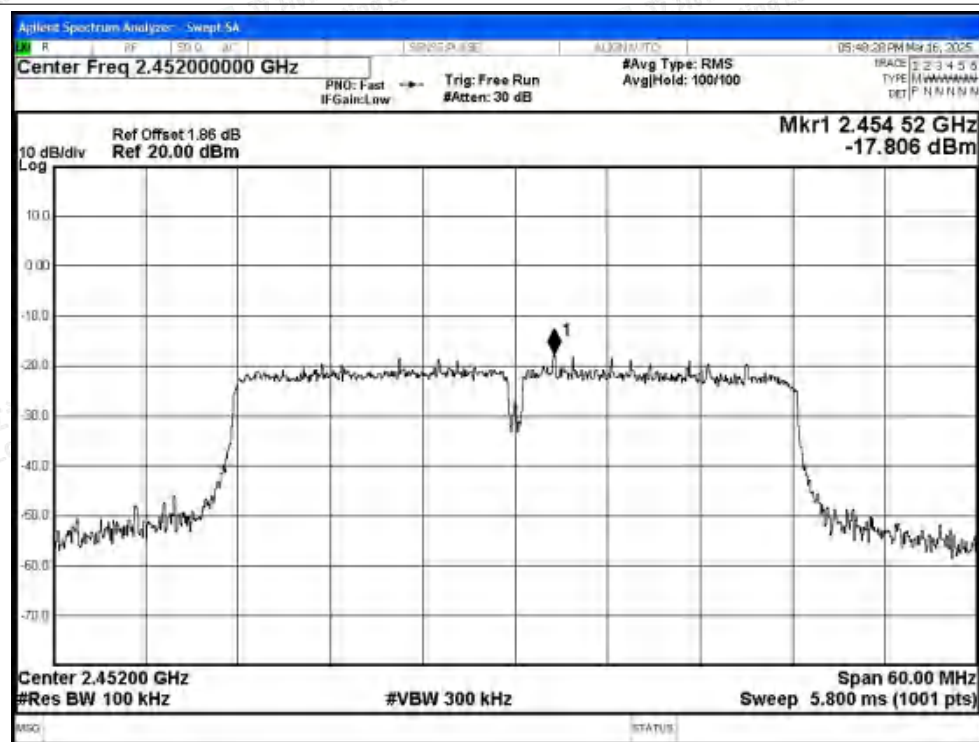

## Band Edge NVNT n40 2452MHz Ant1 Emission

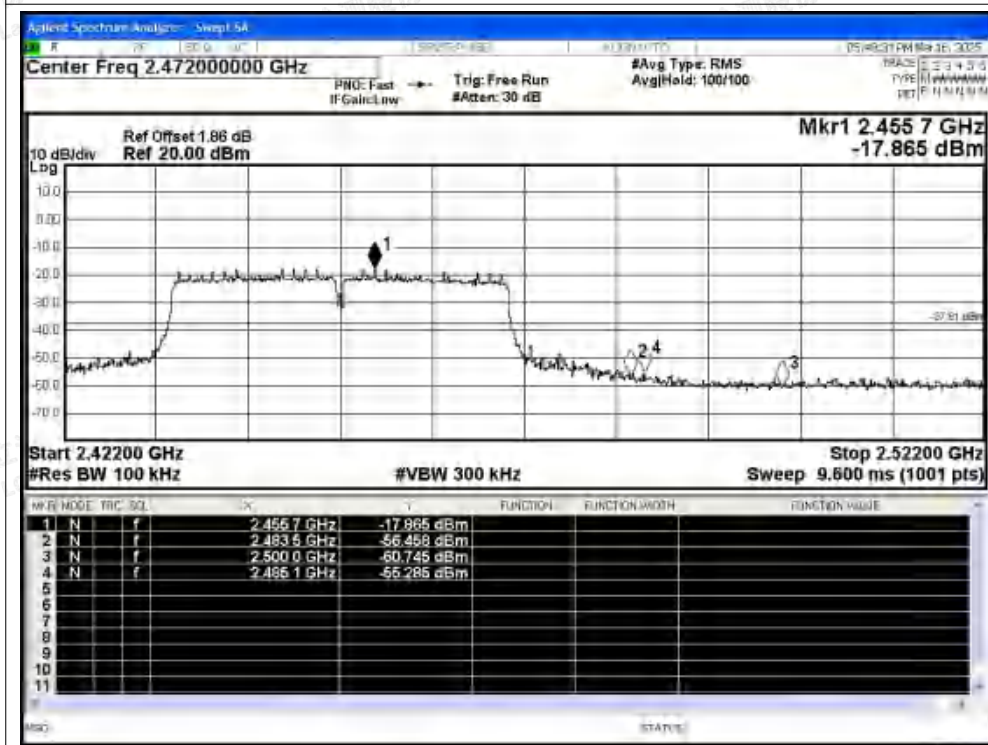



## C.5 Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -38.57          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -36.18          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -37.53          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -30.35          | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -30.5           | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -30.75          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -32.1           | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -32.08          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -30.84          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -28.62          | -20         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -29.1           | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -28.02          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

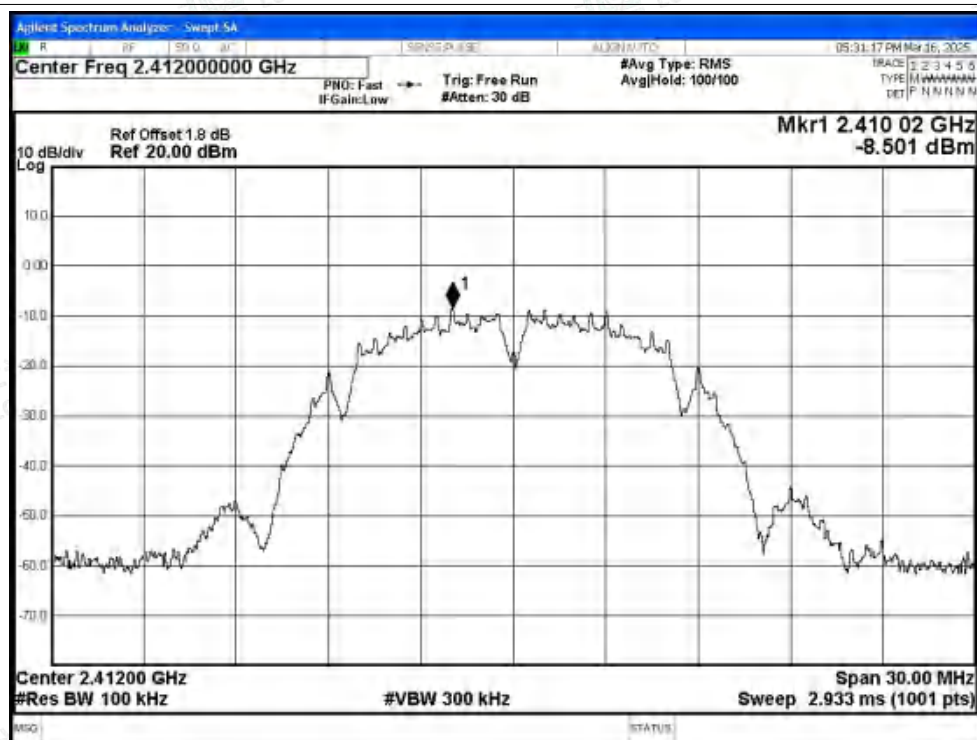


Tx. Spurious NVNT b 2412MHz Ant1 Emission

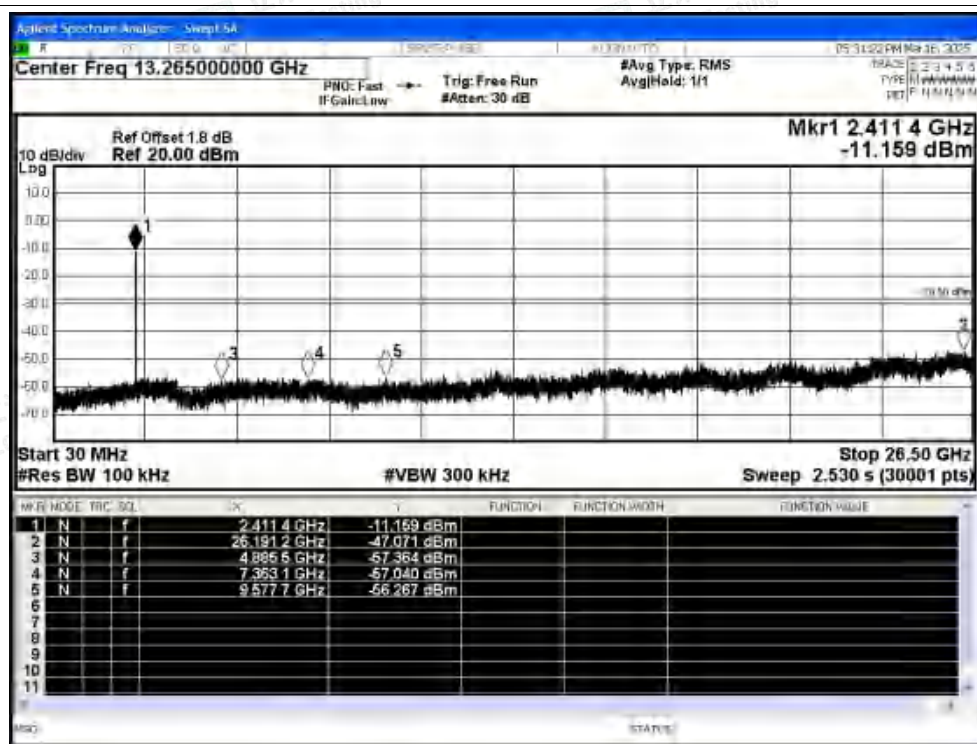




Tx. Spurious NVNT b 2437MHz Ant1 Ref

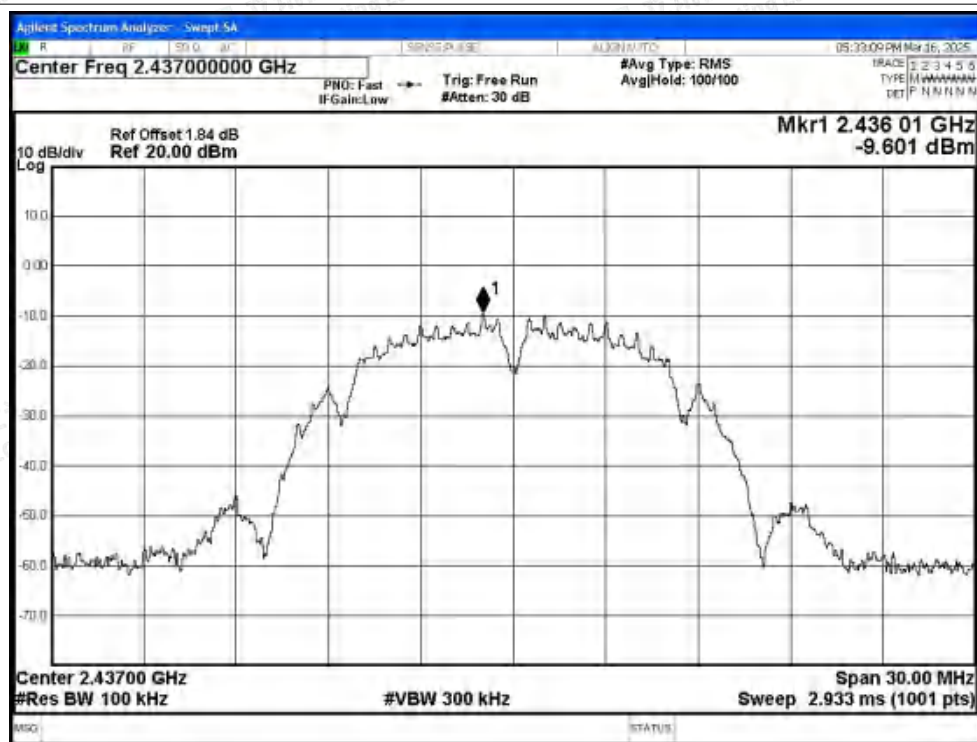


Tx. Spurious NVNT b 2437MHz Ant1 Emission

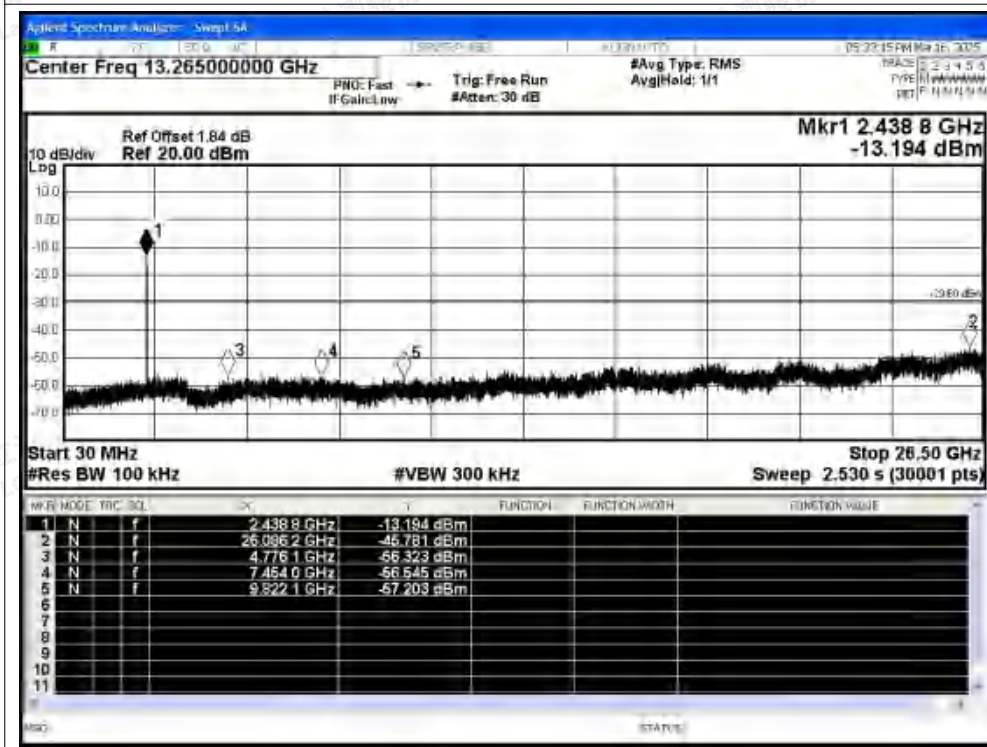


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity






Tx. Spurious NVNT b 2462MHz Ant1 Ref

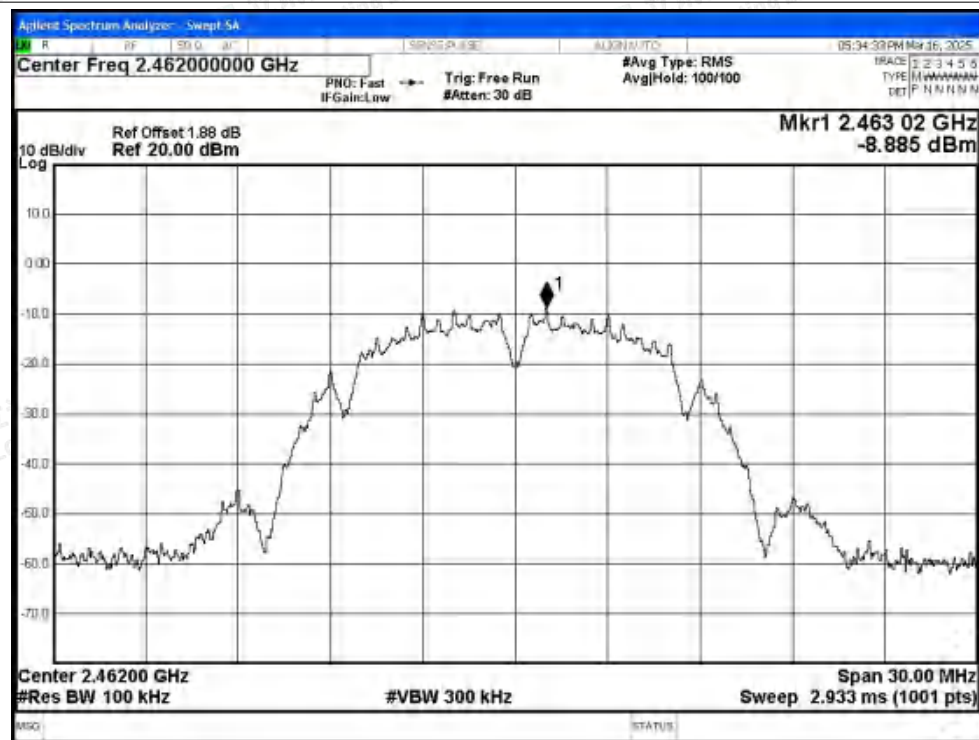


Tx. Spurious NVNT b 2462MHz Ant1 Emission

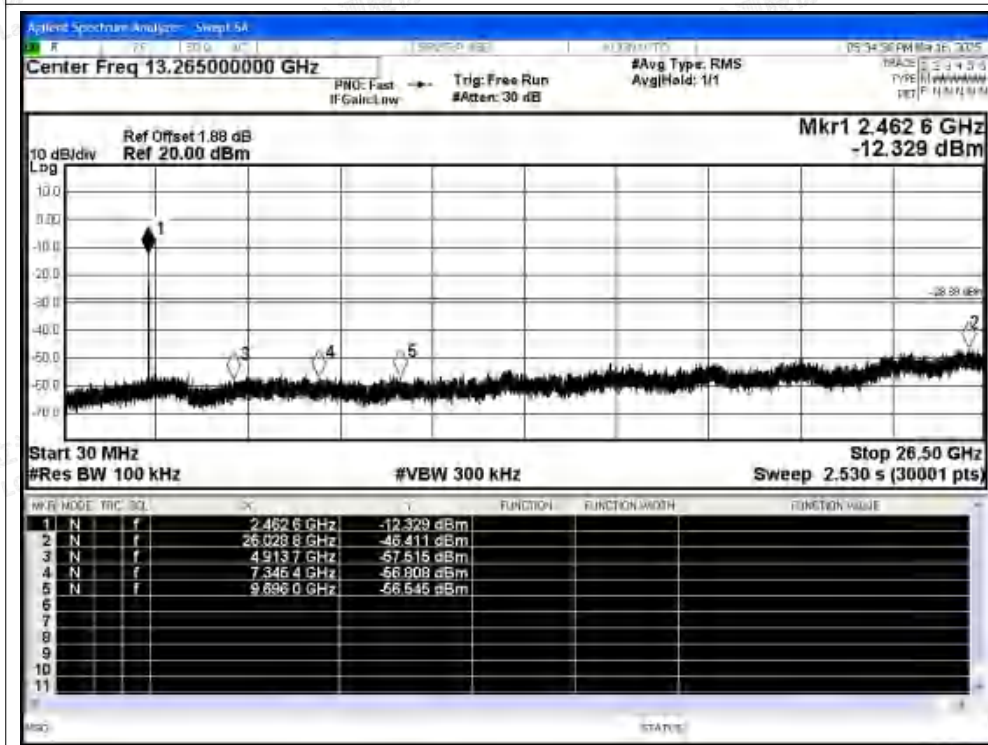


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




Tx. Spurious NVNT g 2412MHz Ant1 Ref

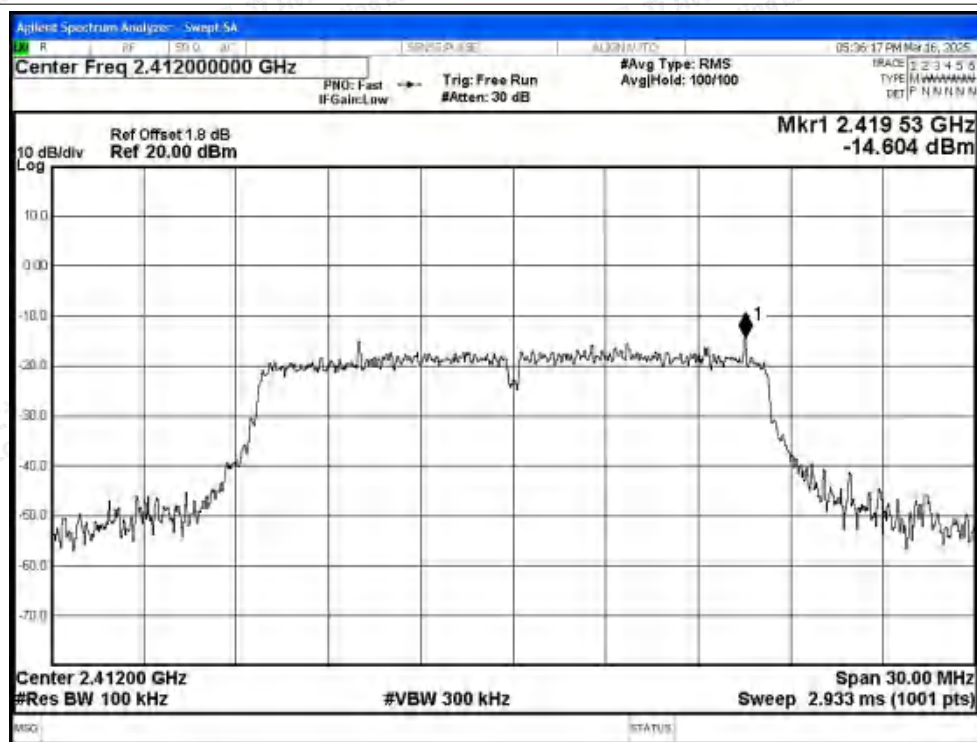


Tx. Spurious NVNT g 2412MHz Ant1 Emission

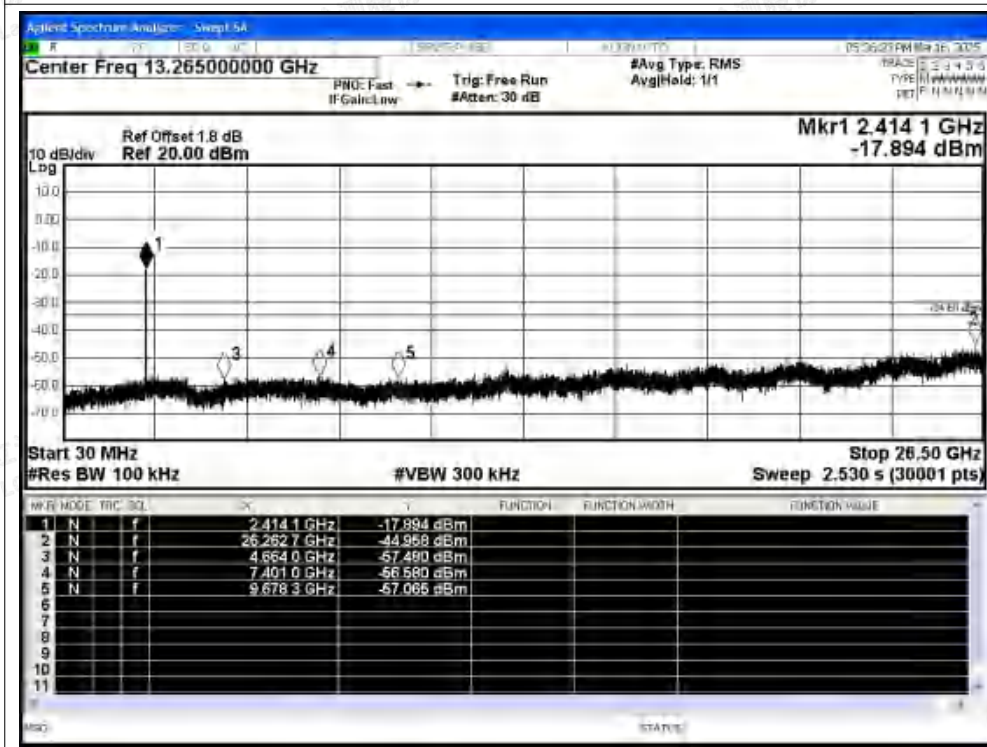


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Tx. Spurious NVNT g 2437MHz Ant1 Ref

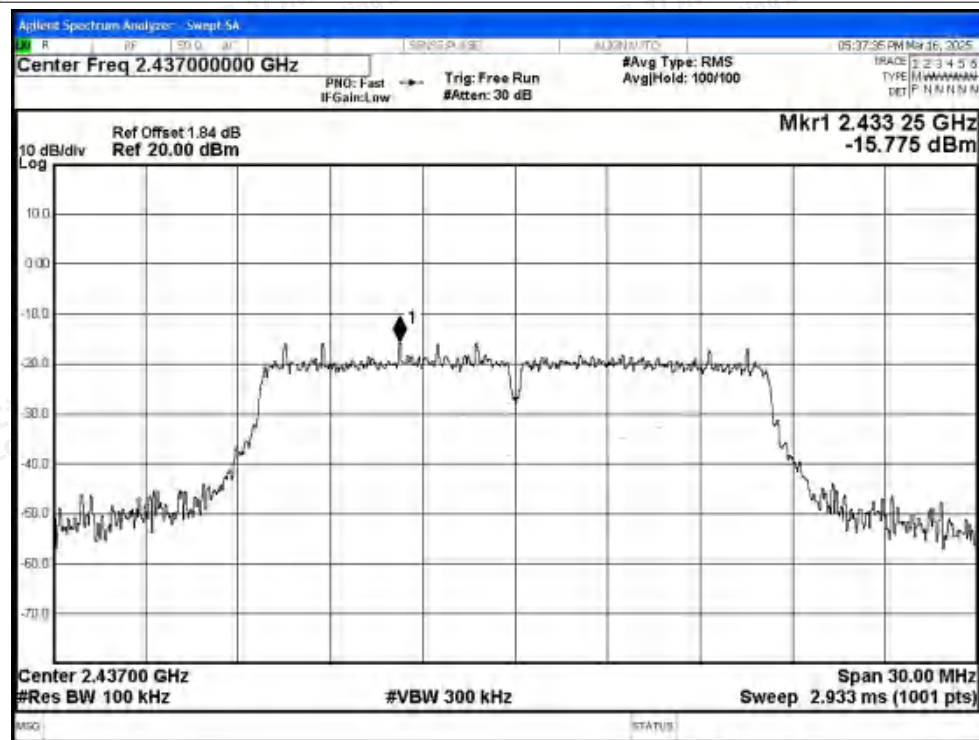

Tx. Spurious NVNT g 2437MHz Ant1 Emission

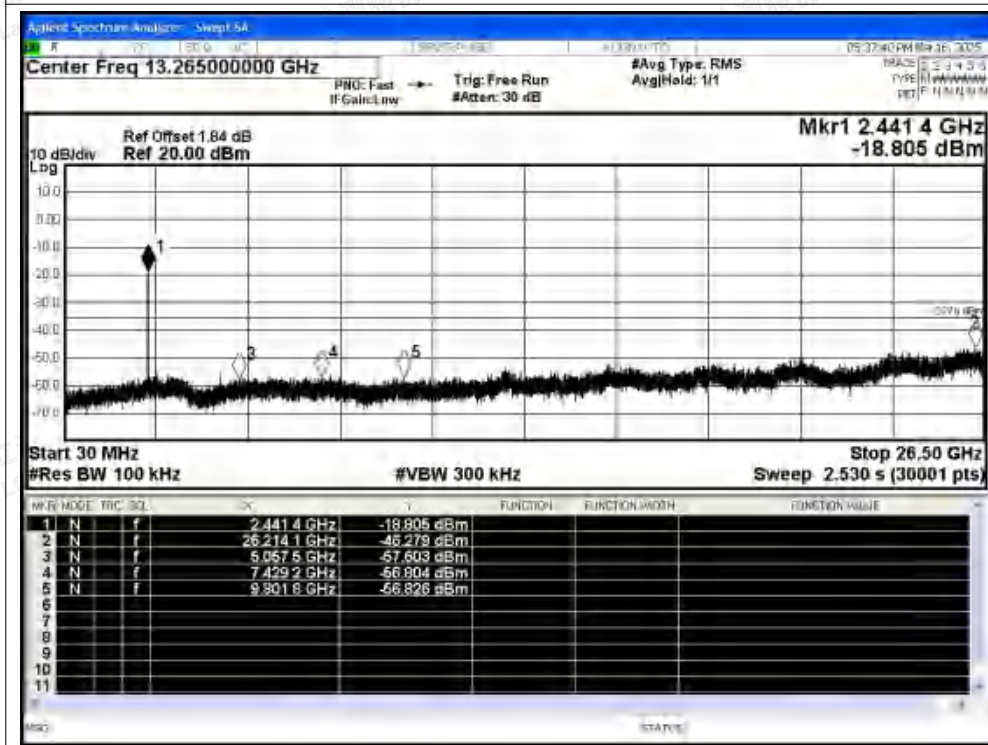


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity






Tx. Spurious NVNT g 2462MHz Ant1 Ref

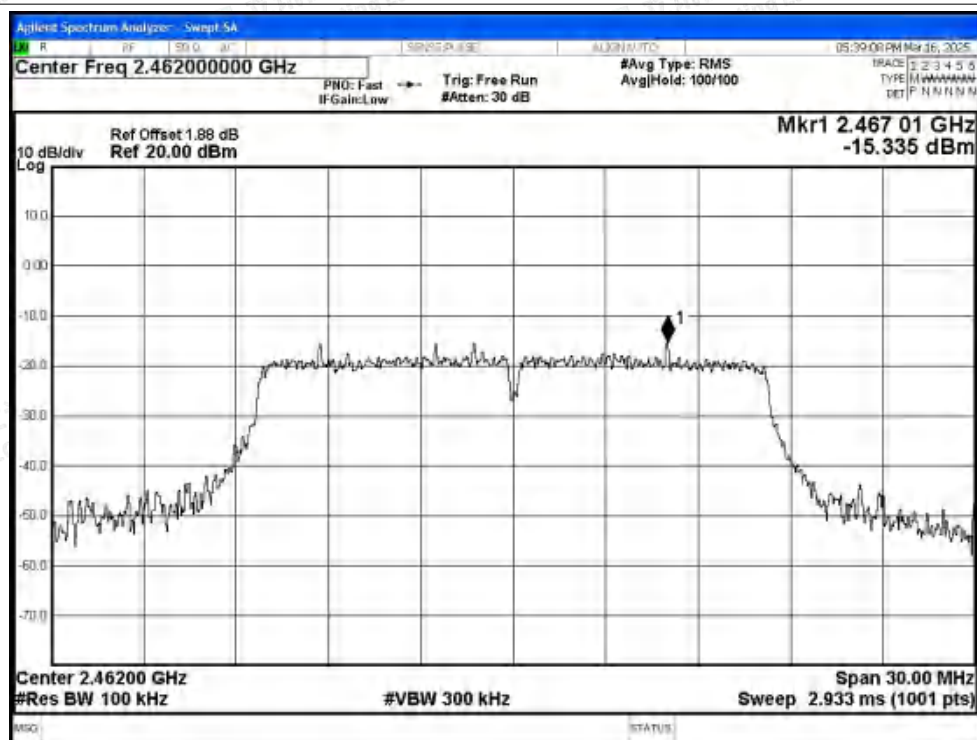


Tx. Spurious NVNT g 2462MHz Ant1 Emission

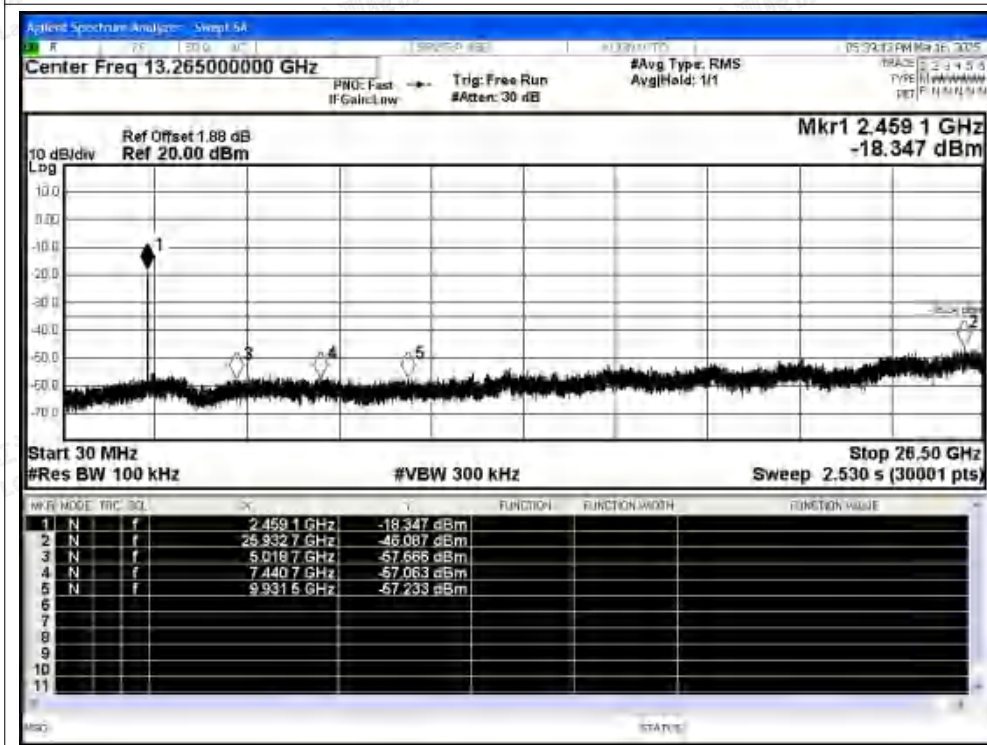






## Tx. Spurious NVNT n20 2412MHz Ant1 Ref

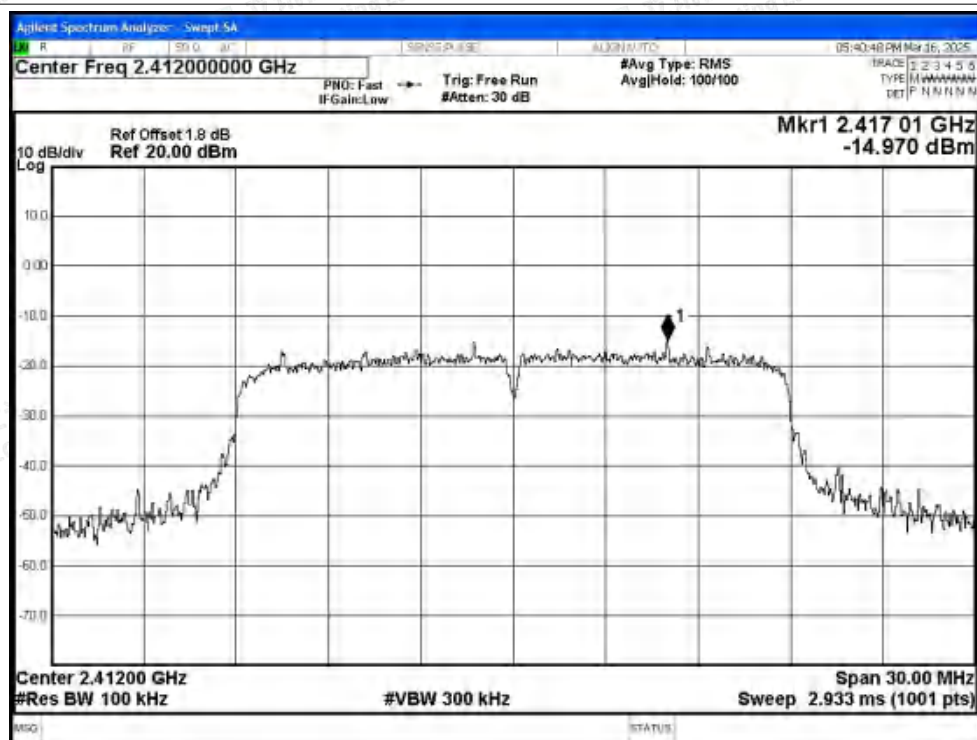


## Tx. Spurious NVNT n20 2412MHz Ant1 Emission

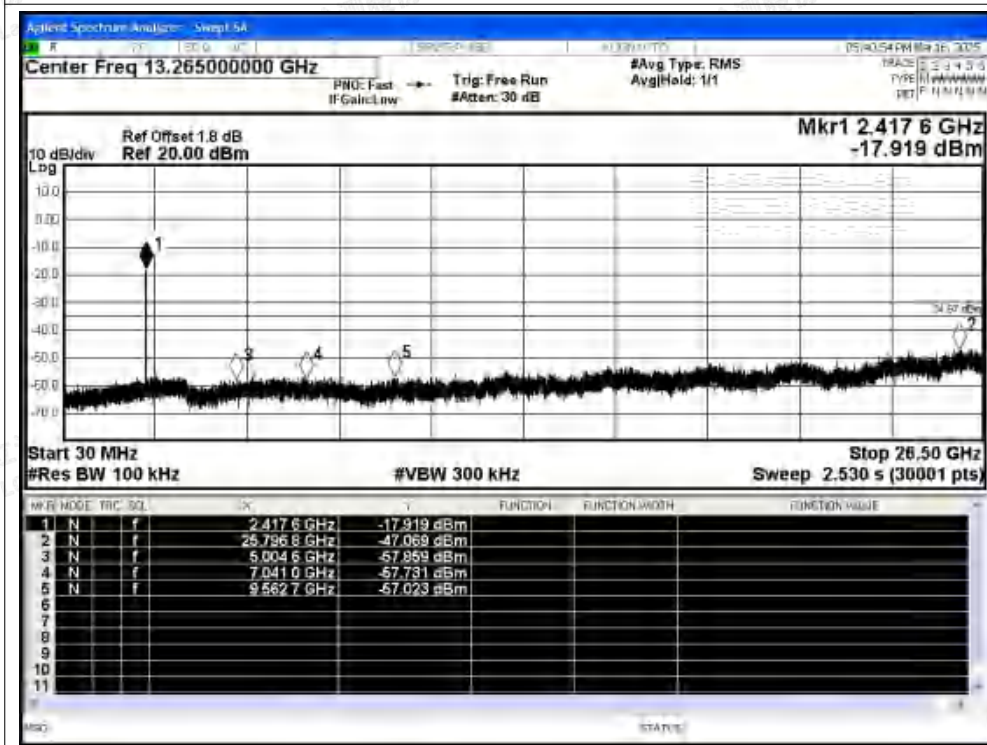




## Tx. Spurious NVNT n20 2437MHz Ant1 Ref

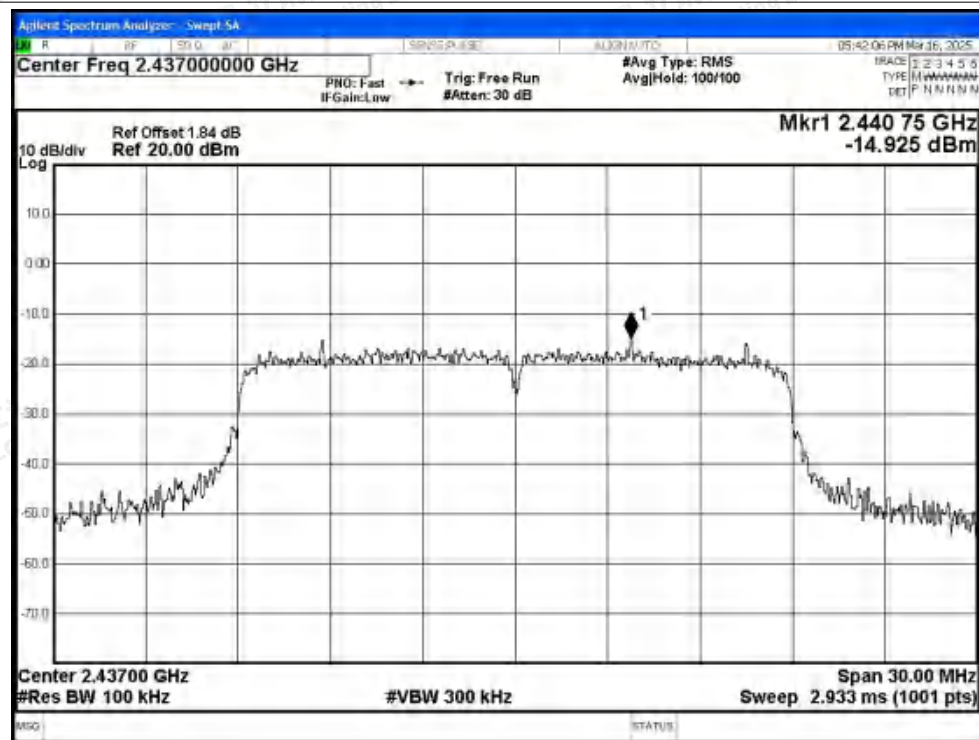


## Tx. Spurious NVNT n20 2437MHz Ant1 Emission

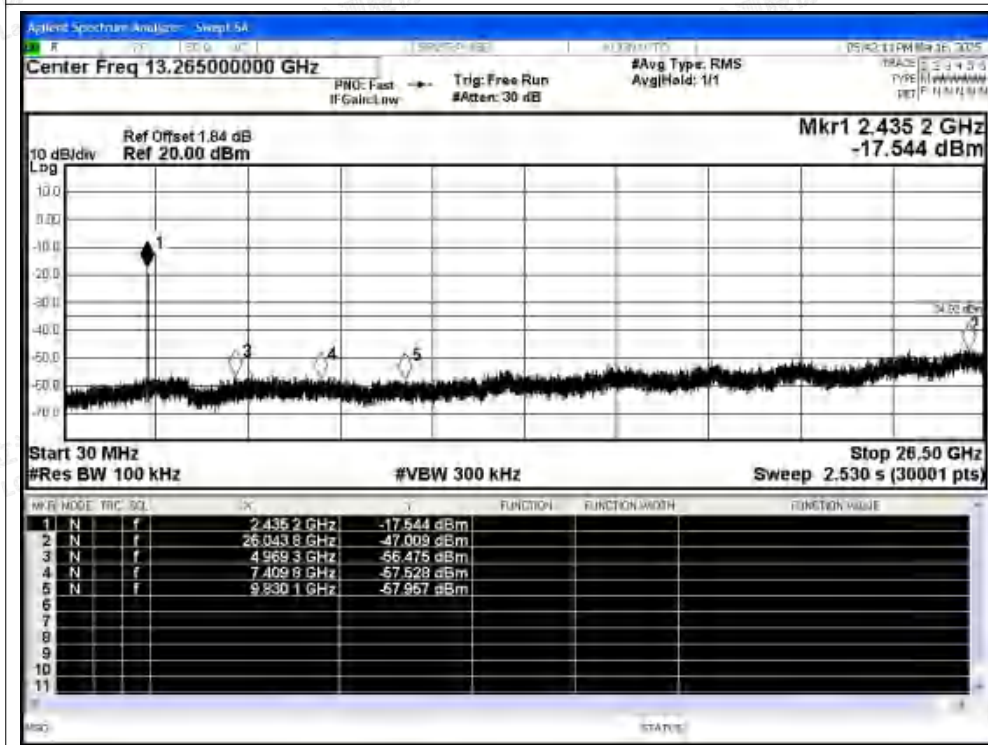




Tx. Spurious NVNT n20 2462MHz Ant1 Ref

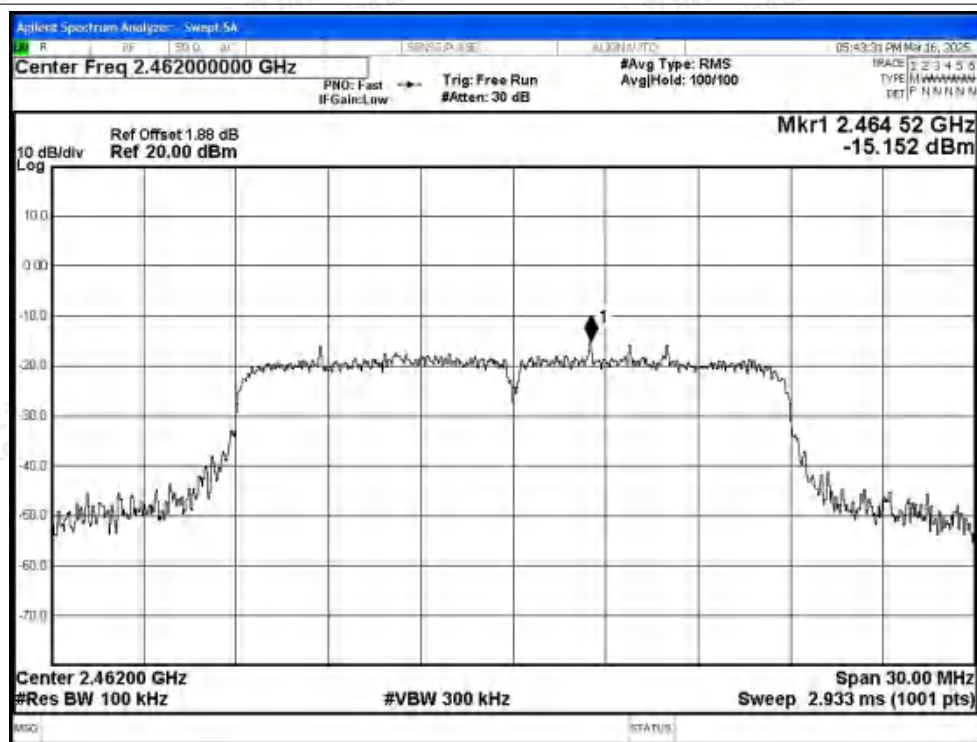

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

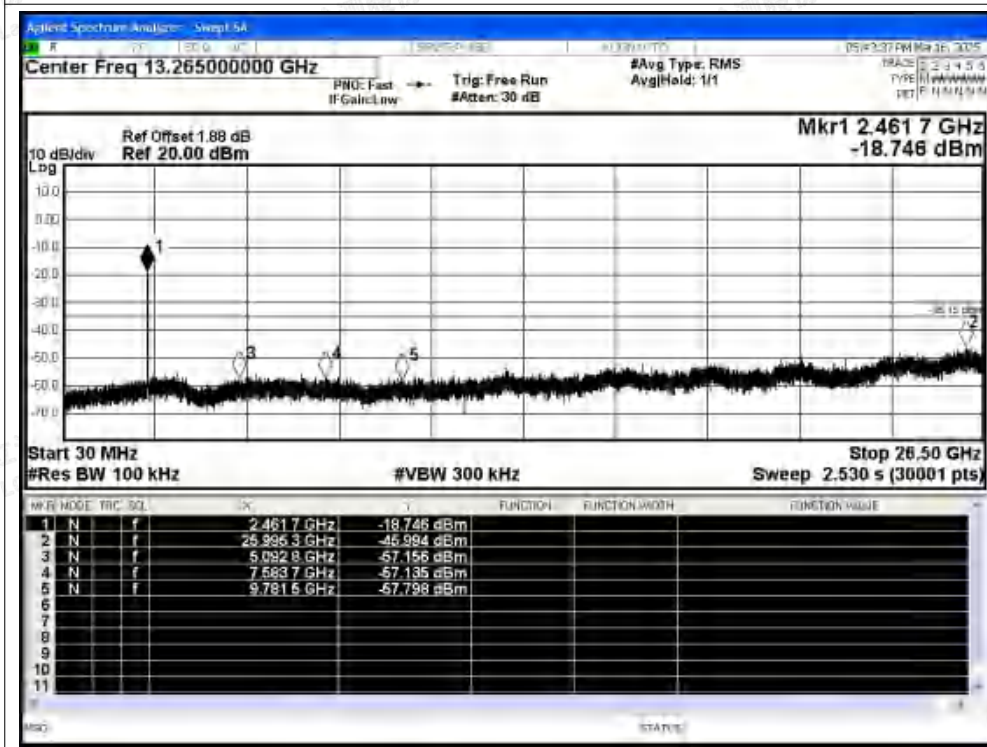


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity






Tx. Spurious NVNT n40 2422MHz Ant1 Ref

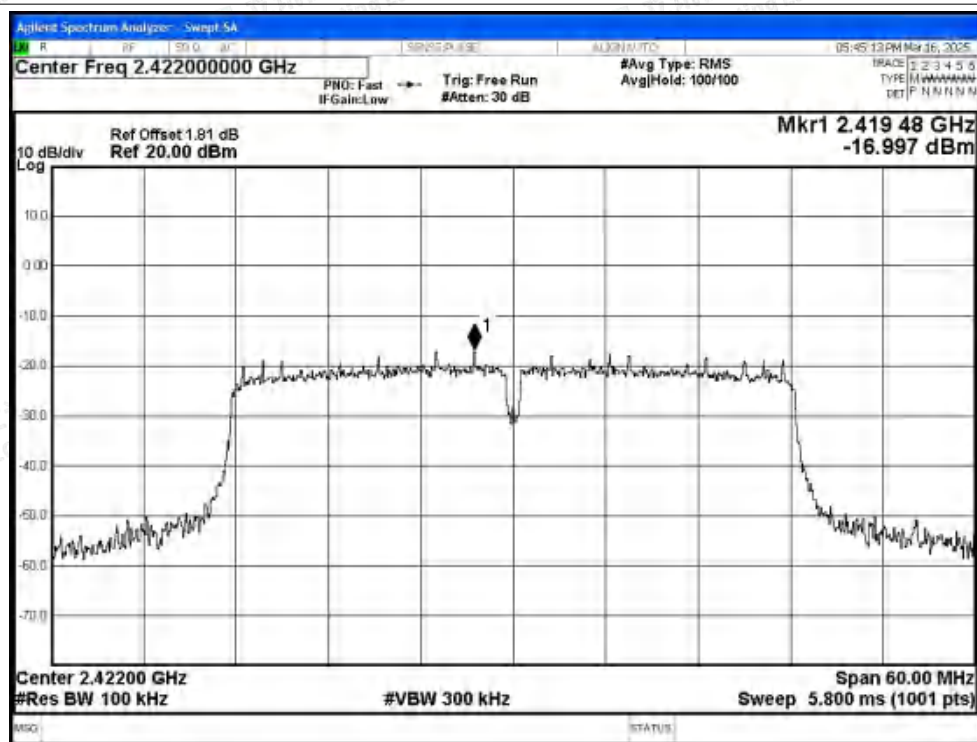


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

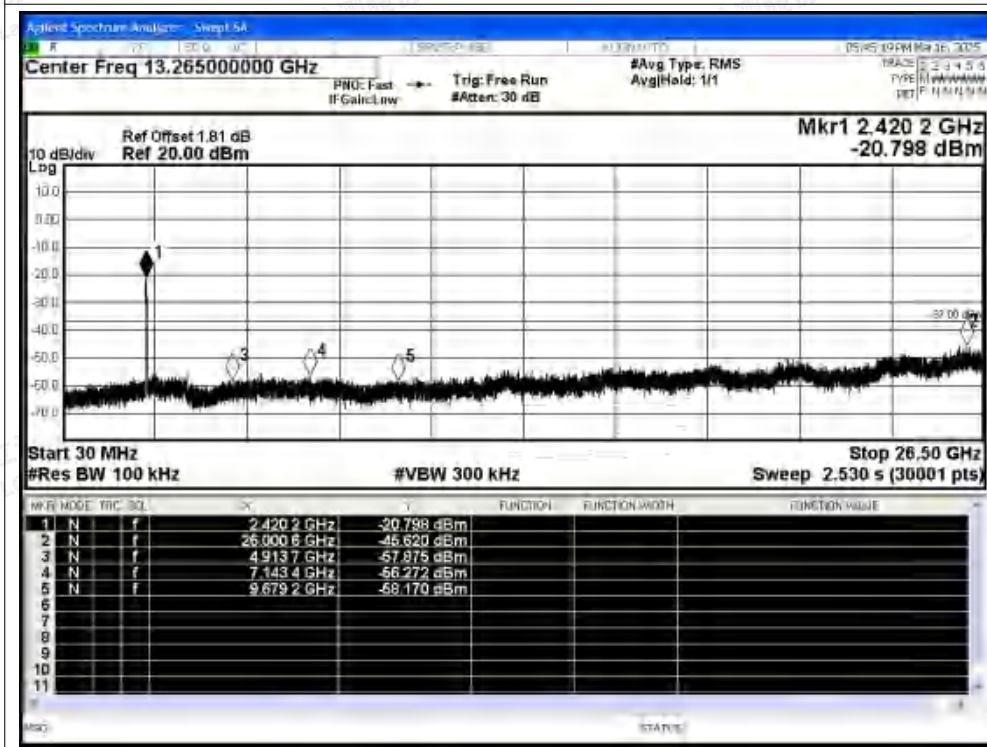


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity






Tx. Spurious NVNT n40 2437MHz Ant1 Ref

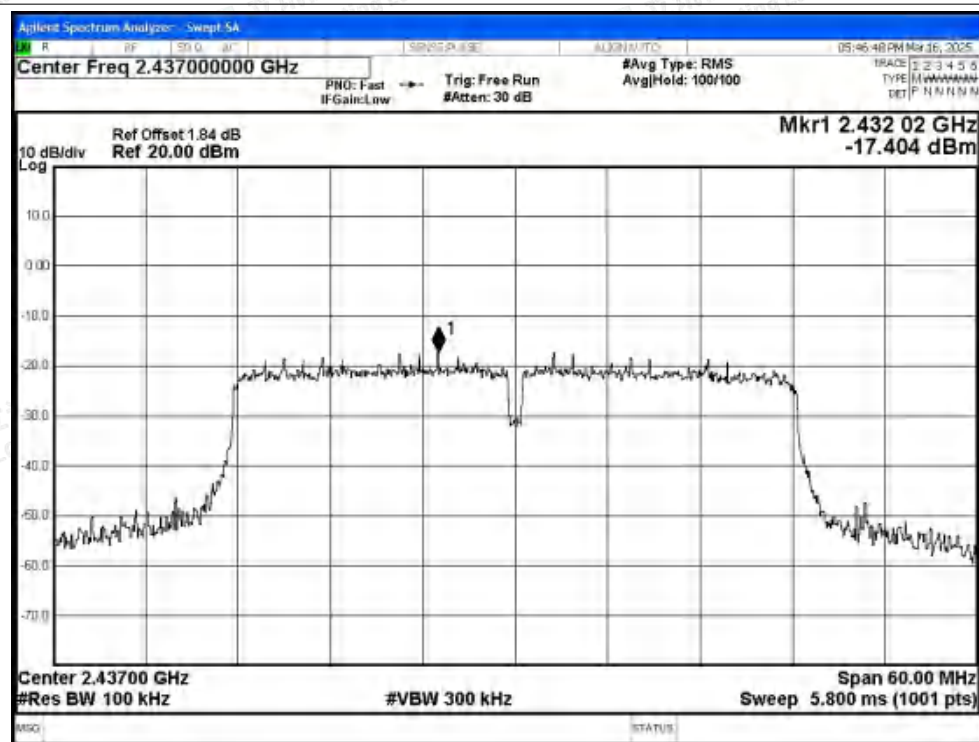


Tx. Spurious NVNT n40 2437MHz Ant1 Emission

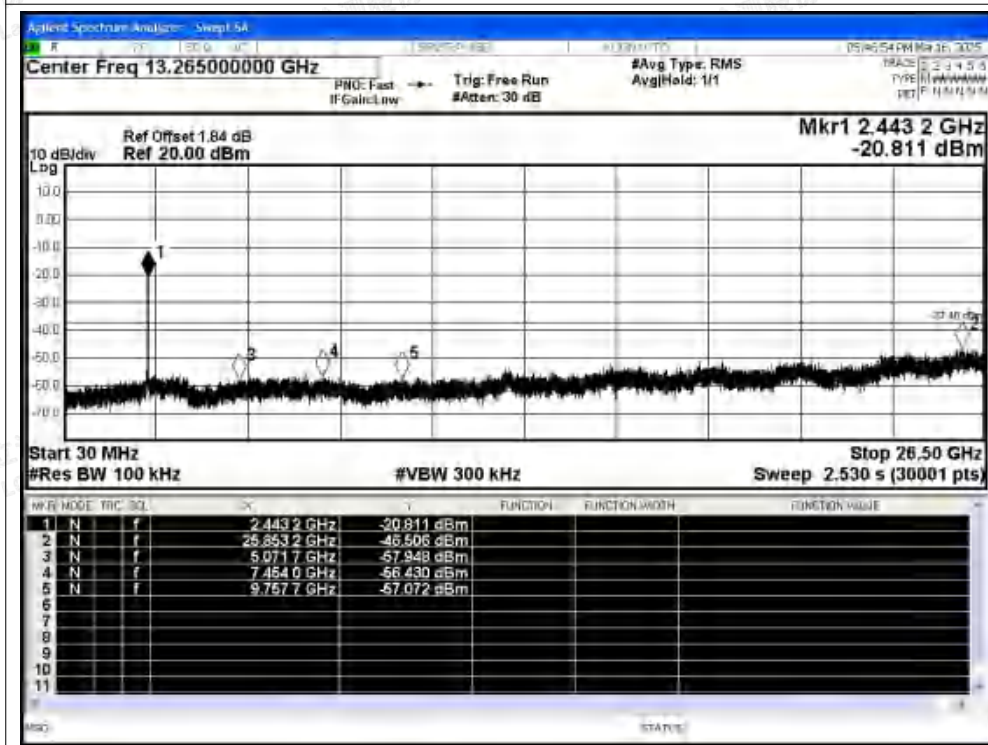




## Tx. Spurious NVNT n40 2452MHz Ant1 Ref

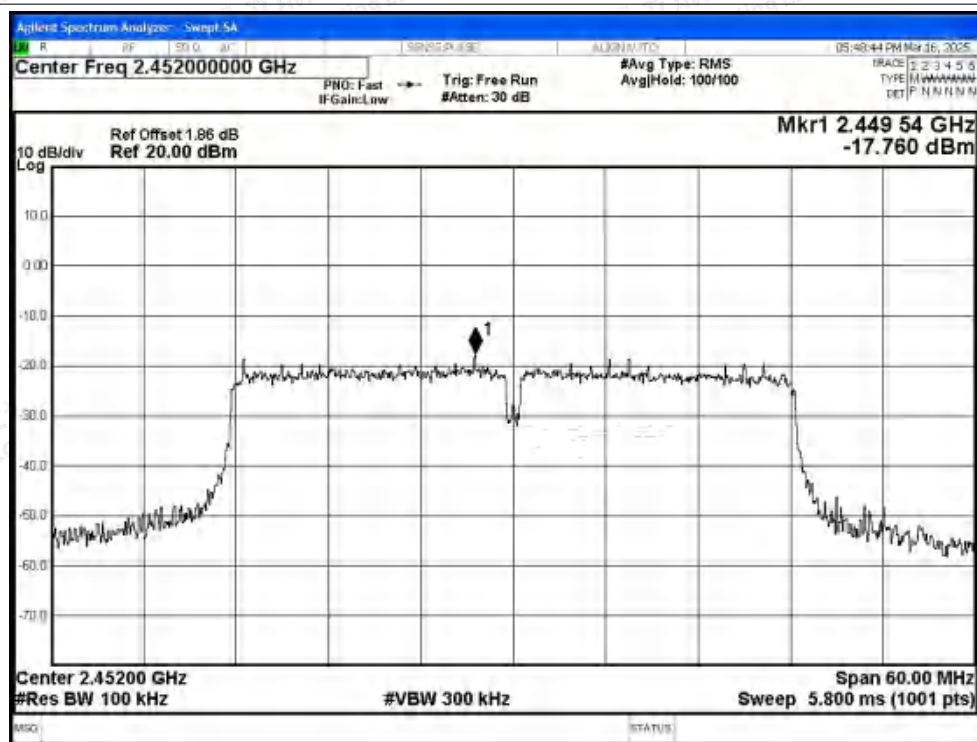

## Tx. Spurious NVNT n40 2452MHz Ant1 Emission

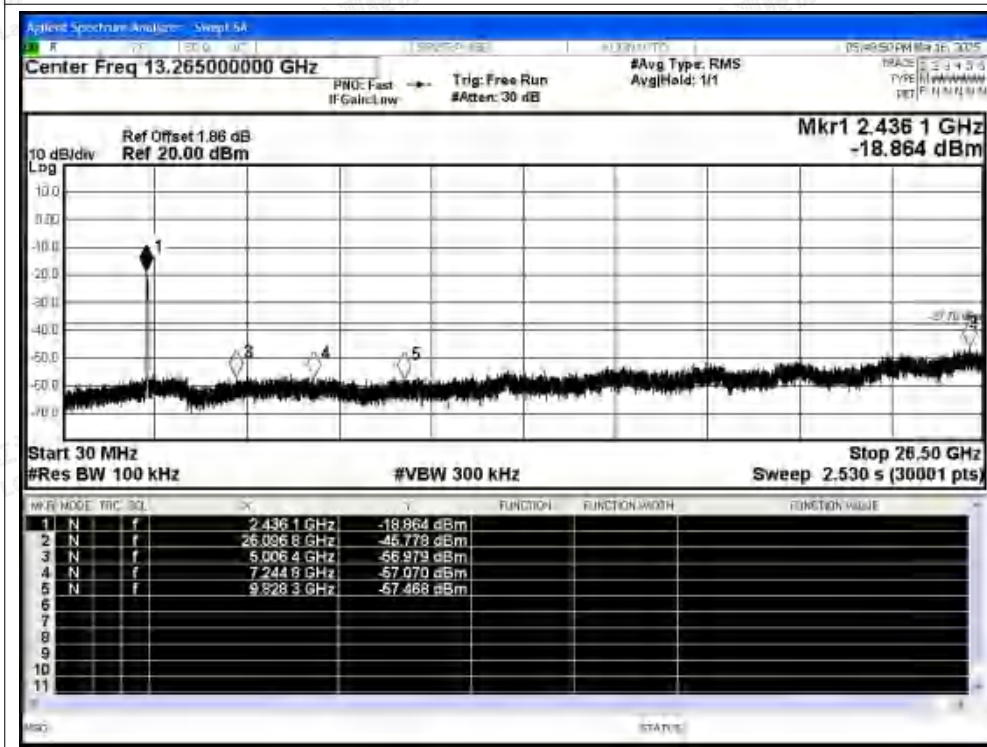




## C.6 Duty Cycle

| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | b    | 2412            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | b    | 2437            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | b    | 2462            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | g    | 2412            | Ant1    | 97.68          | 0.1                    | 0.37      |
| NVNT      | g    | 2437            | Ant1    | 97.68          | 0.1                    | 0.37      |
| NVNT      | g    | 2462            | Ant1    | 97.75          | 0.1                    | 0.37      |
| NVNT      | n20  | 2412            | Ant1    | 97.25          | 0.12                   | 0.44      |
| NVNT      | n20  | 2437            | Ant1    | 97.33          | 0.12                   | 0.44      |
| NVNT      | n20  | 2462            | Ant1    | 97.33          | 0.12                   | 0.44      |
| NVNT      | n40  | 2422            | Ant1    | 94.7           | 0.24                   | 0.9       |
| NVNT      | n40  | 2437            | Ant1    | 94.7           | 0.24                   | 0.9       |
| NVNT      | n40  | 2452            | Ant1    | 94.71          | 0.24                   | 0.9       |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Duty Cycle NVNT b 2412MHz Ant1

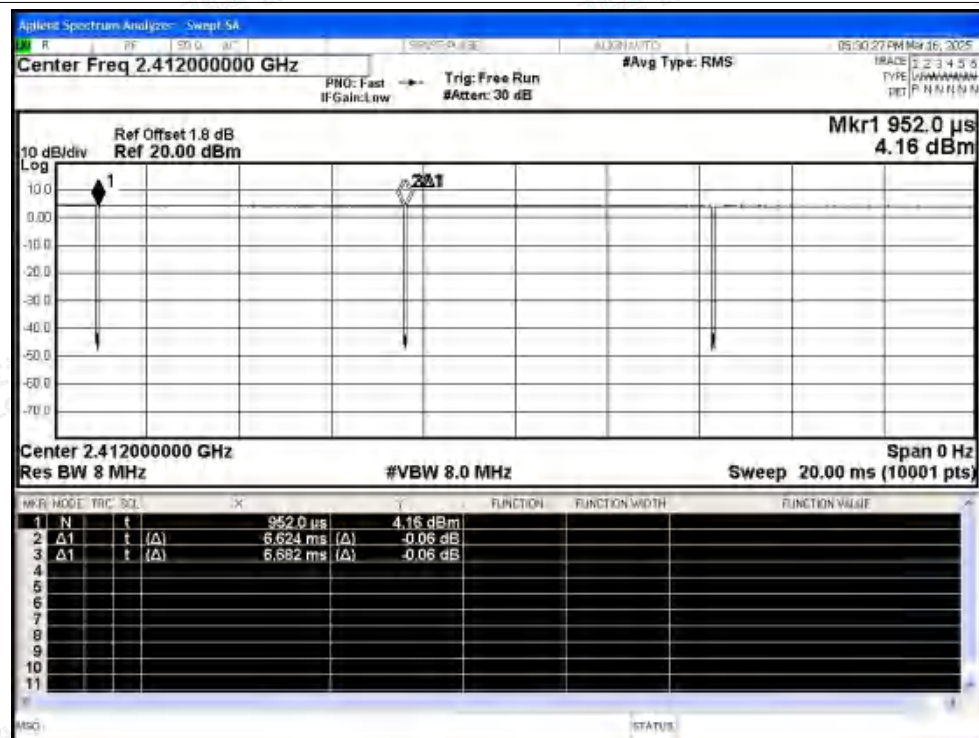


## Duty Cycle NVNT b 2437MHz Ant1

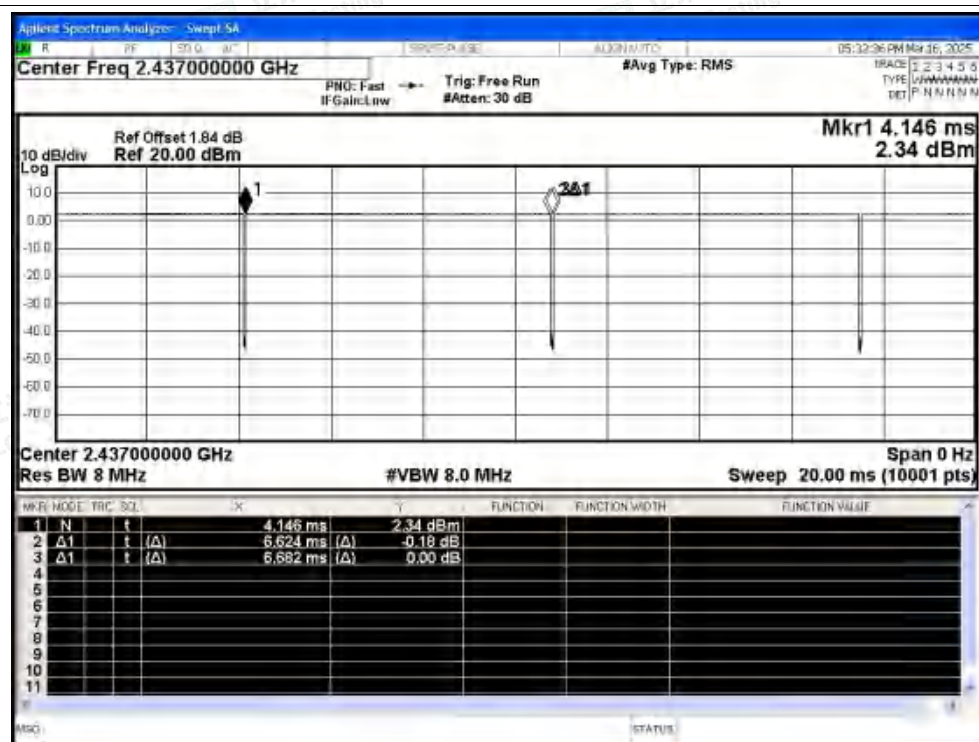






Duty Cycle NVNT b 2462MHz Ant1

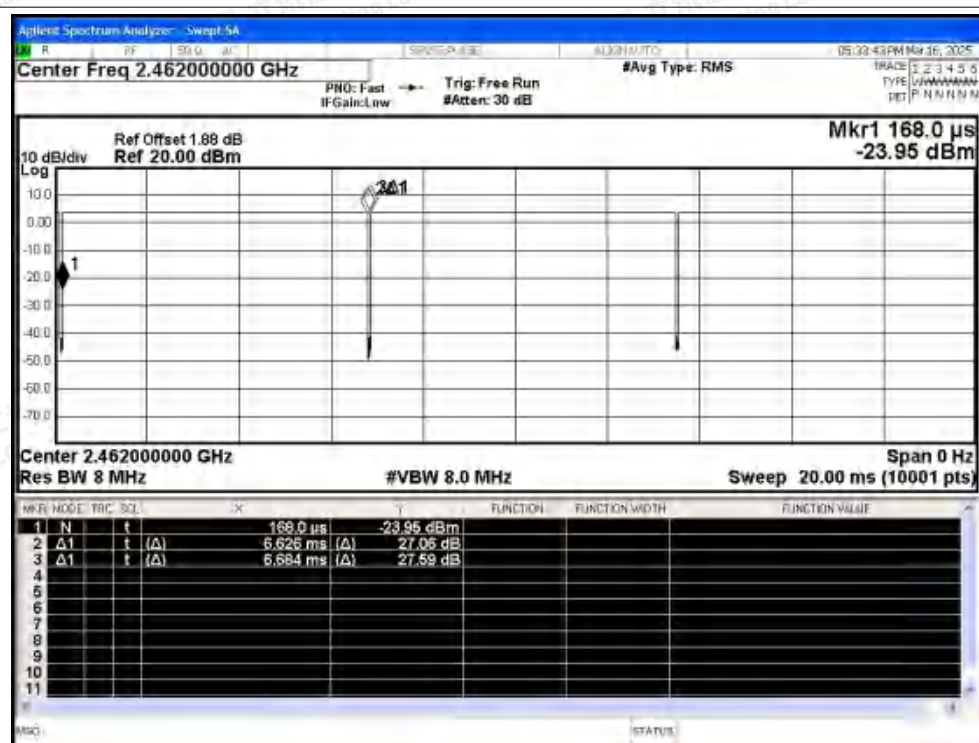


Duty Cycle NVNT g 2412MHz Ant1

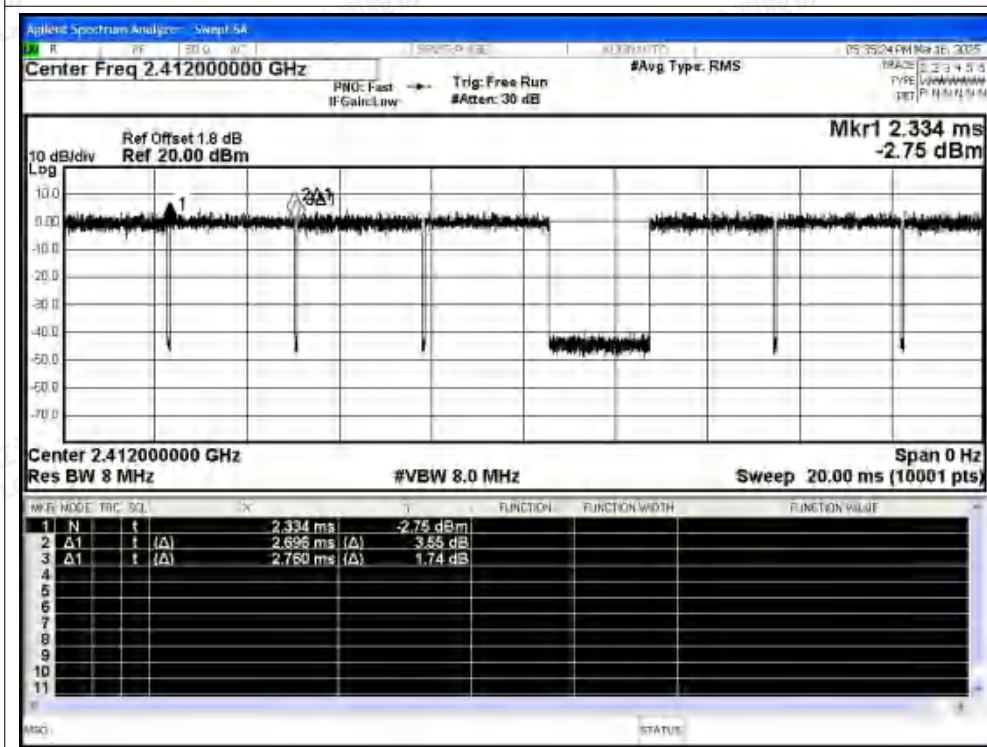




Duty Cycle NVNT g 2437MHz Ant1

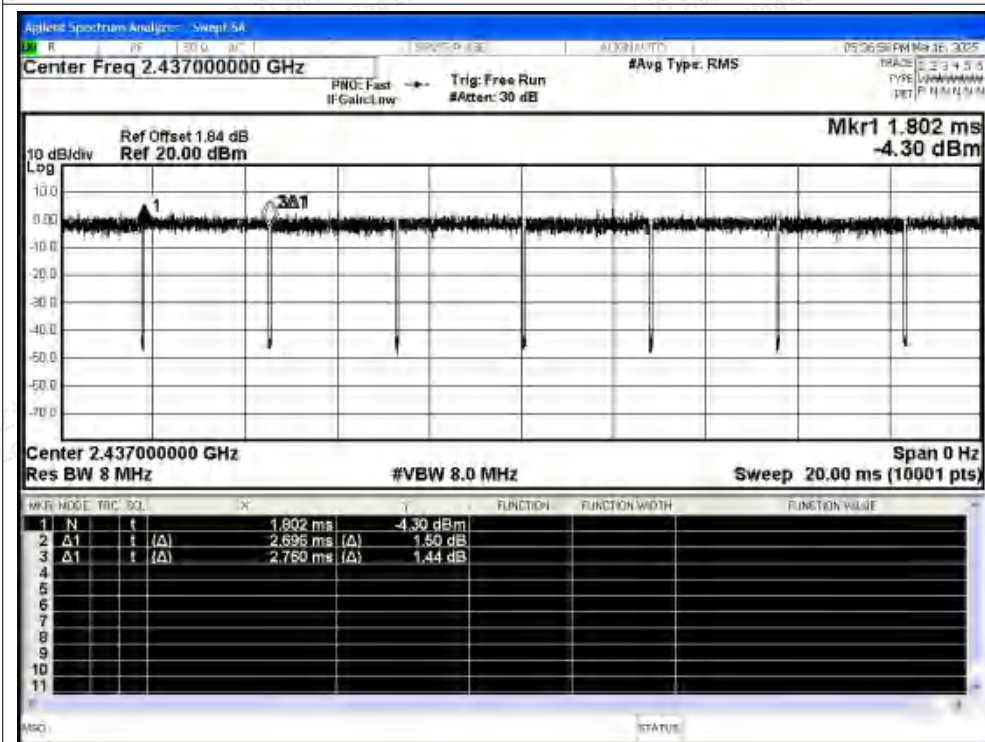


Duty Cycle NVNT g 2462MHz Ant1

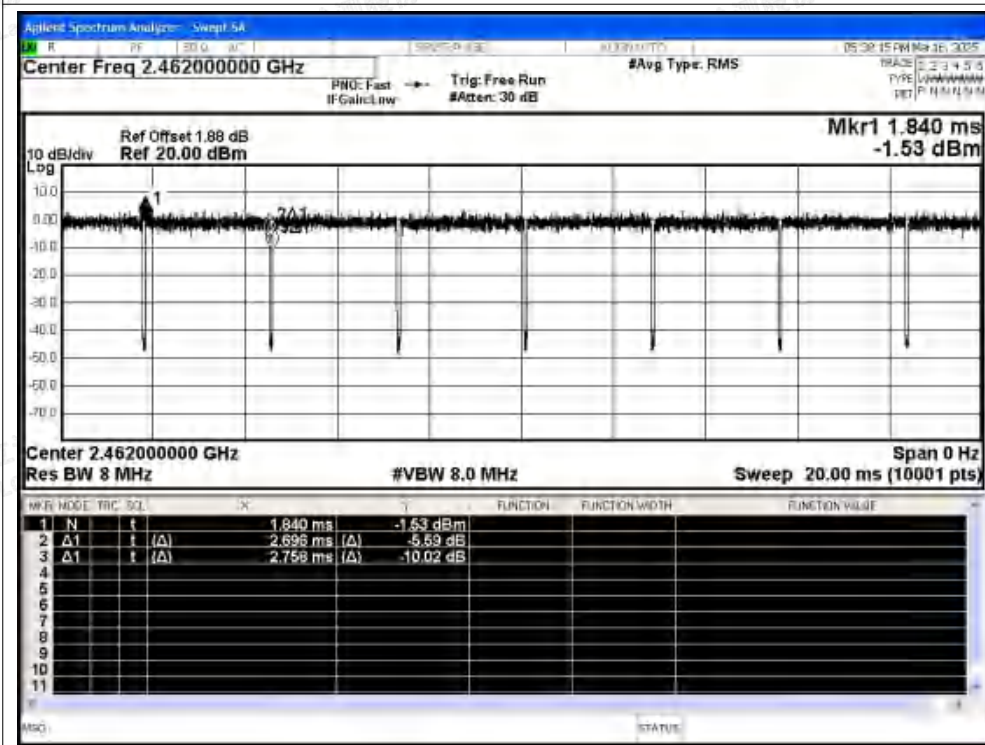




Duty Cycle NVNT n20 2412MHz Ant1

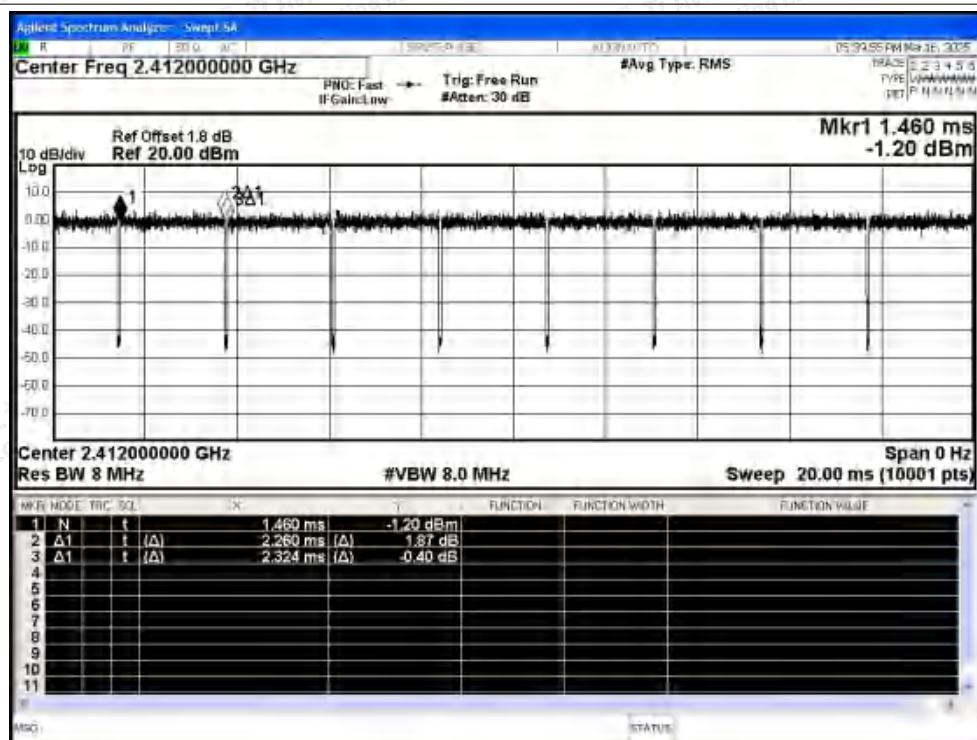


Duty Cycle NVNT n20 2437MHz Ant1

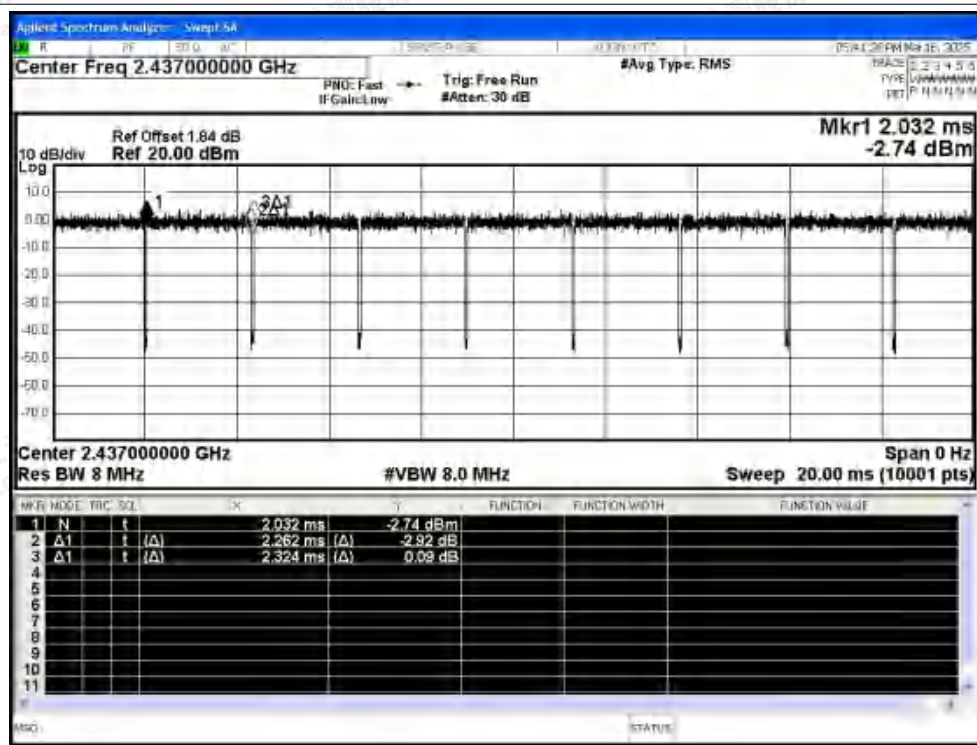






Duty Cycle NVNT n20 2462MHz Ant1

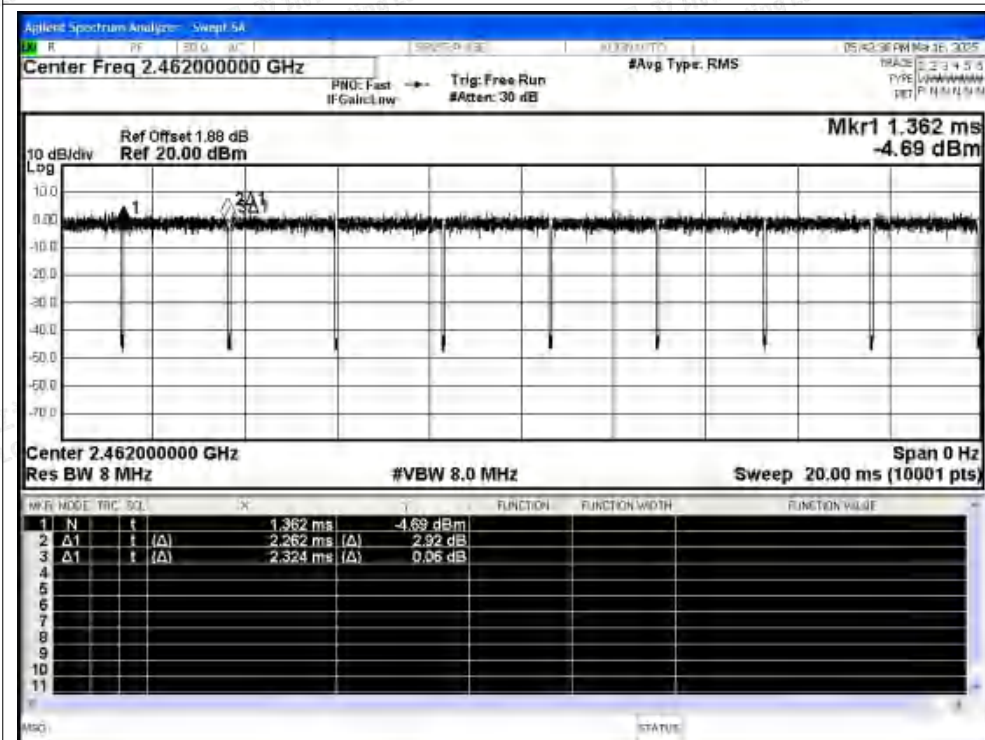


Duty Cycle NVNT n40 2422MHz Ant1

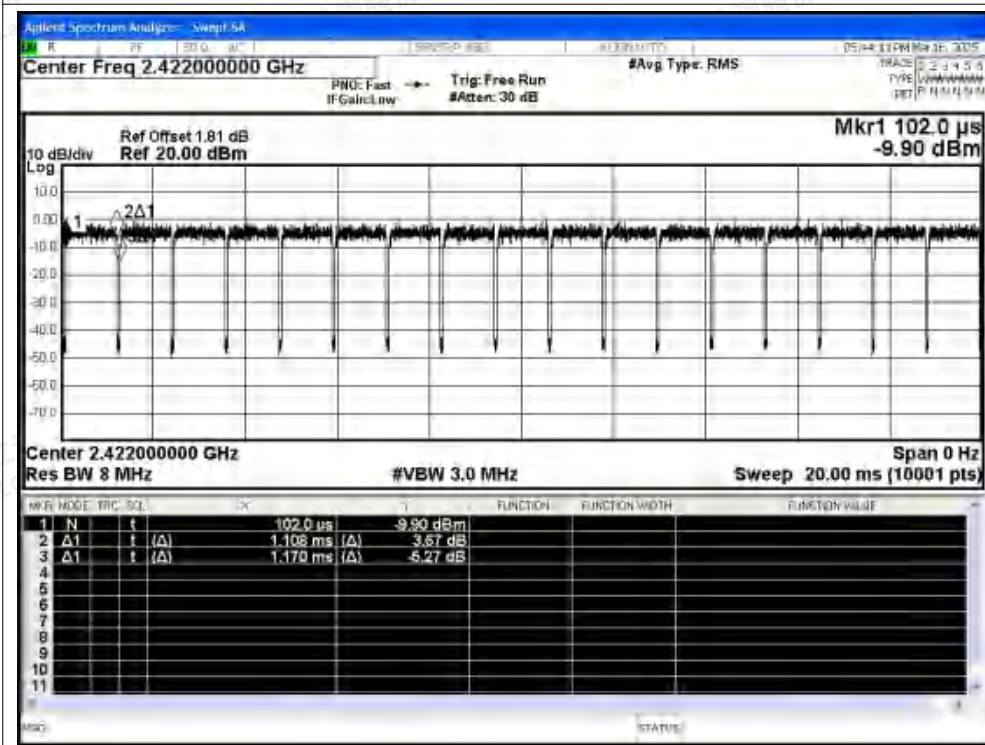






Duty Cycle NVNT n40 2437MHz Ant1

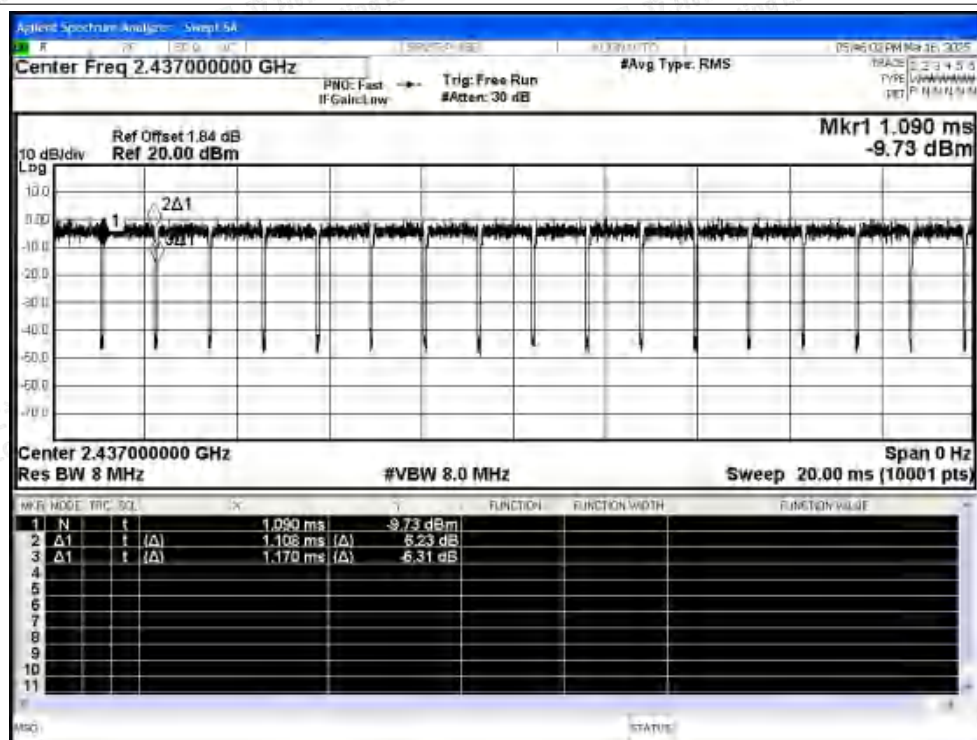

Duty Cycle NVNT n40 2452MHz Ant1

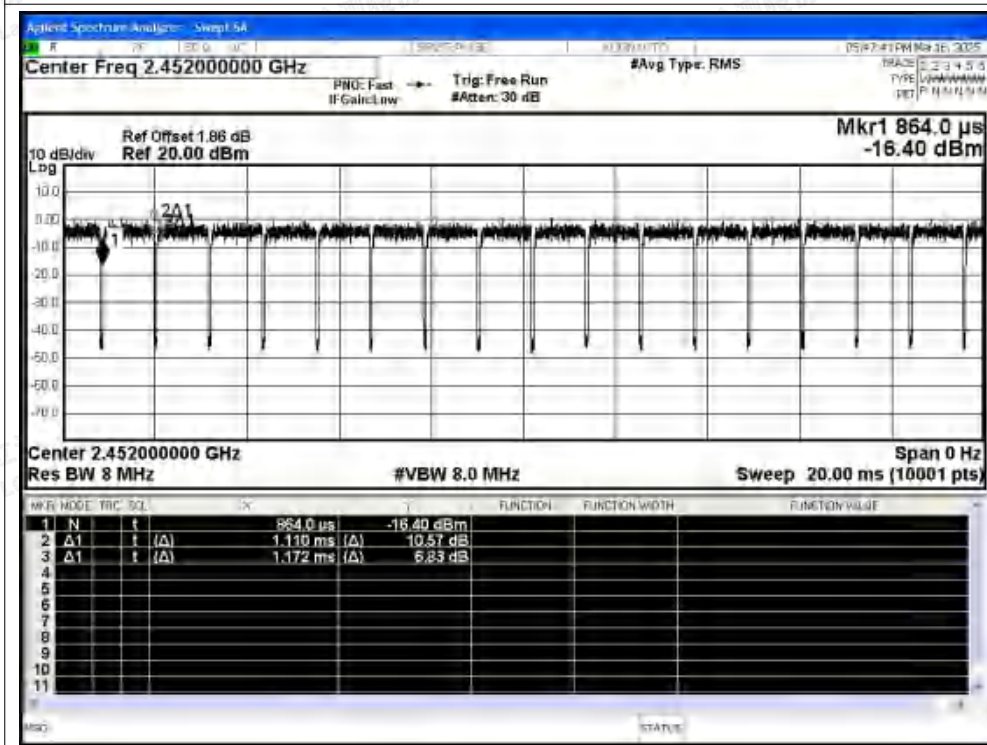



## C.7 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | b    | 2412            | Ant1    | 2310            | -47.86      | 2.70       | -                | 50.10      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2310            | -58.74      | 2.70       | 0                | 39.22      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2310            | -47.86      | 2.70       | -                | 50.10      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2389.209        | -57.85      | 2.70       | 0                | 40.11      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -51.77      | 2.70       | -                | 46.19      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -58.64      | 2.70       | 0                | 39.32      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -50.27      | 2.70       | -                | 47.69      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -57.82      | 2.70       | 0                | 40.14      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2493.057        | -47.54      | 2.70       | -                | 50.42      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2495.495        | -57.54      | 2.70       | 0                | 40.42      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -50.43      | 2.70       | -                | 47.53      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -58.21      | 2.70       | 0                | 39.75      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -50.2       | 2.70       | -                | 47.76      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -59.19      | 2.70       | 0.1              | 38.87      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2321.349        | -47.73      | 2.70       | -                | 50.23      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2367.096        | -57.62      | 2.70       | 0.1              | 40.44      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -48.46      | 2.70       | -                | 49.50      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -58.18      | 2.70       | 0.1              | 39.88      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -48.14      | 2.70       | -                | 49.82      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -57.84      | 2.70       | 0.1              | 40.22      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2484.312        | -41.95      | 2.70       | -                | 56.01      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2484.789        | -57.06      | 2.70       | 0.1              | 41.00      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -47.82      | 2.70       | -                | 50.14      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -58.47      | 2.70       | 0.1              | 39.59      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -51.87      | 2.70       | -                | 46.09      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -59.53      | 2.70       | 0.12             | 38.55      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2317.254        | -47.82      | 2.70       | -                | 50.14      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.794        | -56.64      | 2.70       | 0.12             | 41.44      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -48.5       | 2.70       | -                | 49.46      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -57.58      | 2.70       | 0.12             | 40.50      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -42.81      | 2.70       | -                | 55.15      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -56.96      | 2.70       | 0.12             | 41.12      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2484.63         | -42.68      | 2.70       | -                | 55.28      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.888        | -56.48      | 2.70       | 0.12             | 41.60      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -51.17      | 2.70       | -                | 46.79      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -58.36      | 2.70       | 0.12             | 39.72      | Average  | 54             | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



|      |     |      |      |          |        |      |      |       |         |    |      |
|------|-----|------|------|----------|--------|------|------|-------|---------|----|------|
| NVNT | n40 | 2422 | Ant1 | 2310     | -50.93 | 2.70 | -    | 47.03 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2310     | -58.52 | 2.70 | 0.24 | 39.68 | Average | 54 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2389.094 | -46.51 | 2.70 | -    | 51.45 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2389.52  | -56.44 | 2.70 | 0.24 | 41.76 | Average | 54 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2390     | -47.46 | 2.70 | -    | 50.50 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2390     | -57.09 | 2.70 | 0.24 | 41.11 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.5   | -44.22 | 2.70 | -    | 53.74 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.5   | -55.72 | 2.70 | 0.24 | 42.48 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.62  | -43.06 | 2.70 | -    | 54.90 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.776 | -55.94 | 2.70 | 0.24 | 42.26 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2500     | -49.37 | 2.70 | -    | 48.59 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2500     | -58.1  | 2.70 | 0.24 | 40.10 | Average | 54 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Restrict Band NVNT b 2412MHz Ant1 Peak

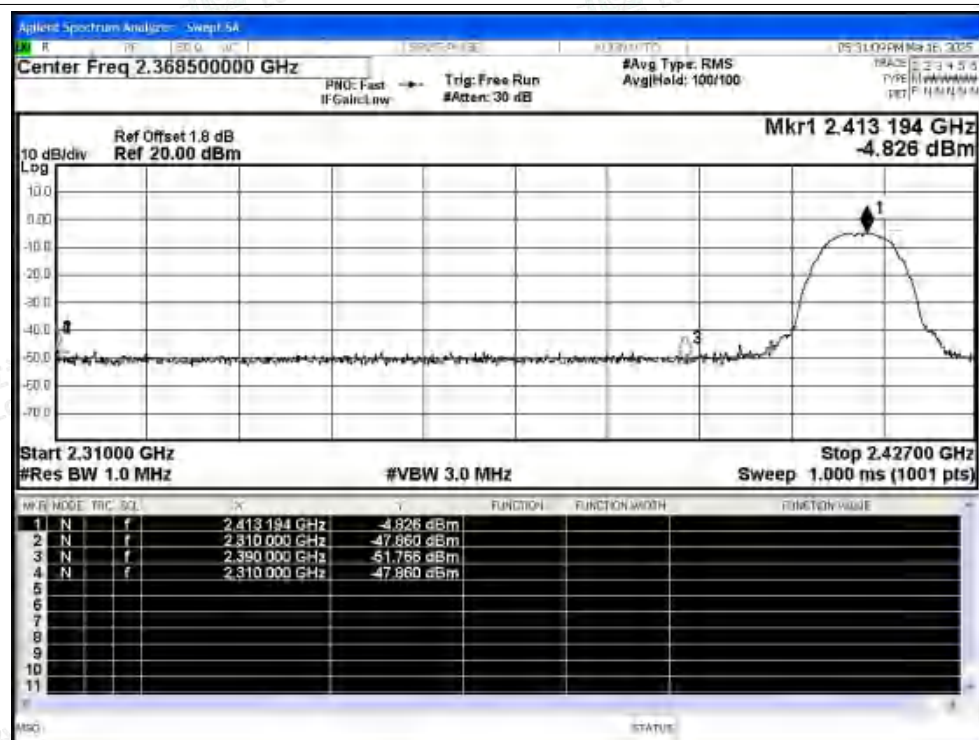

## Restrict Band NVNT b 2412MHz Ant1 Average

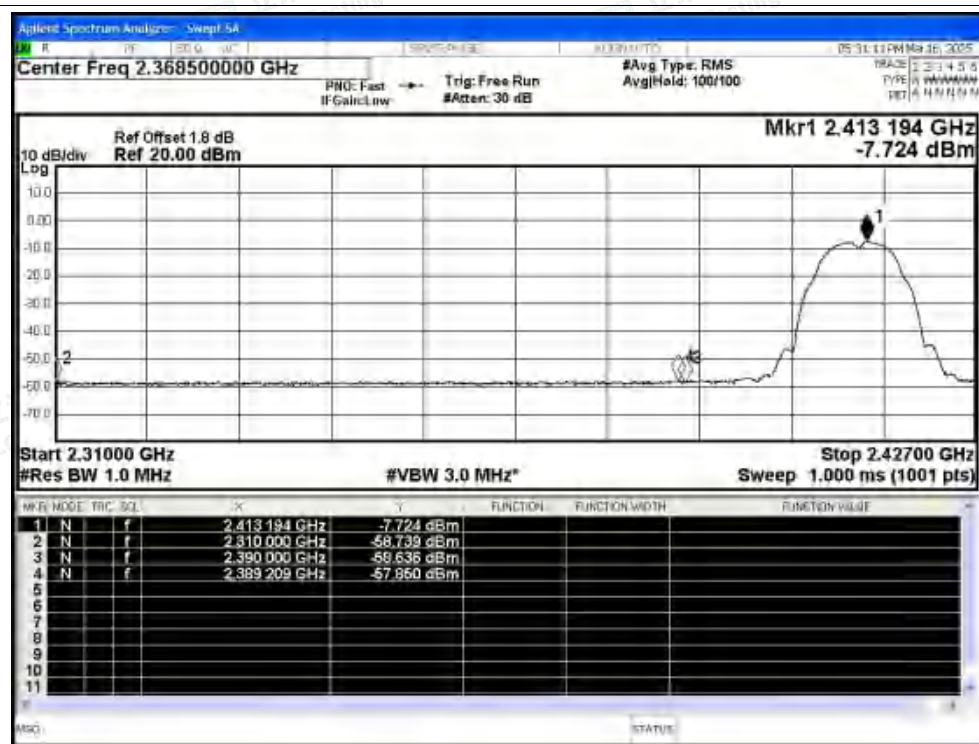


Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,  
Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity






## Restrict Band NVNT b 2462MHz Ant1 Peak

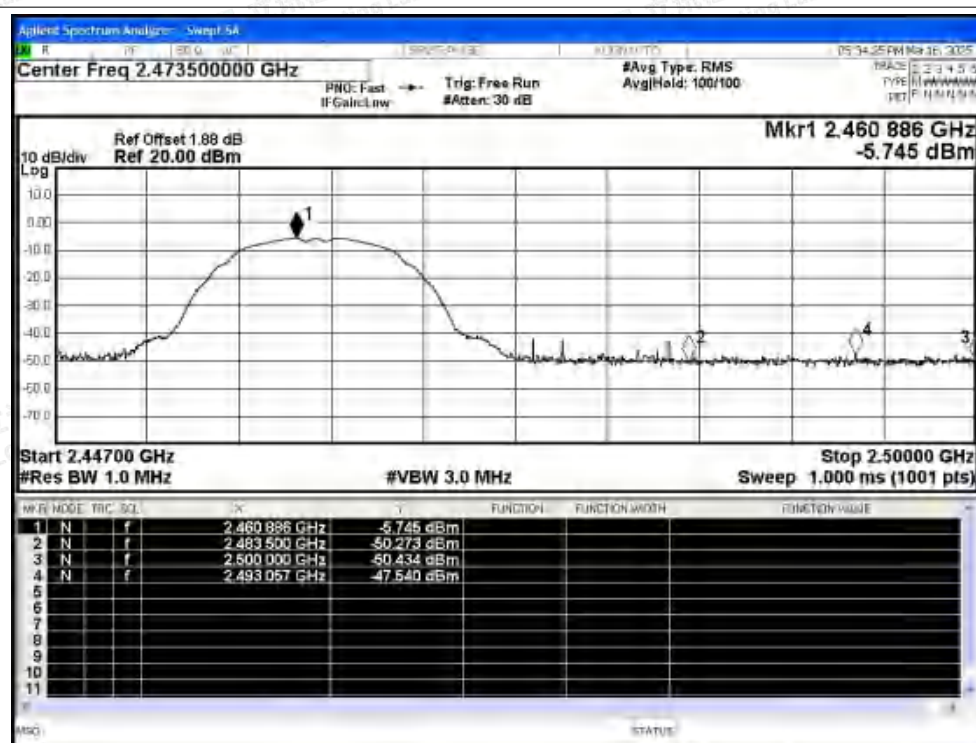


## Restrict Band NVNT b 2462MHz Ant1 Average

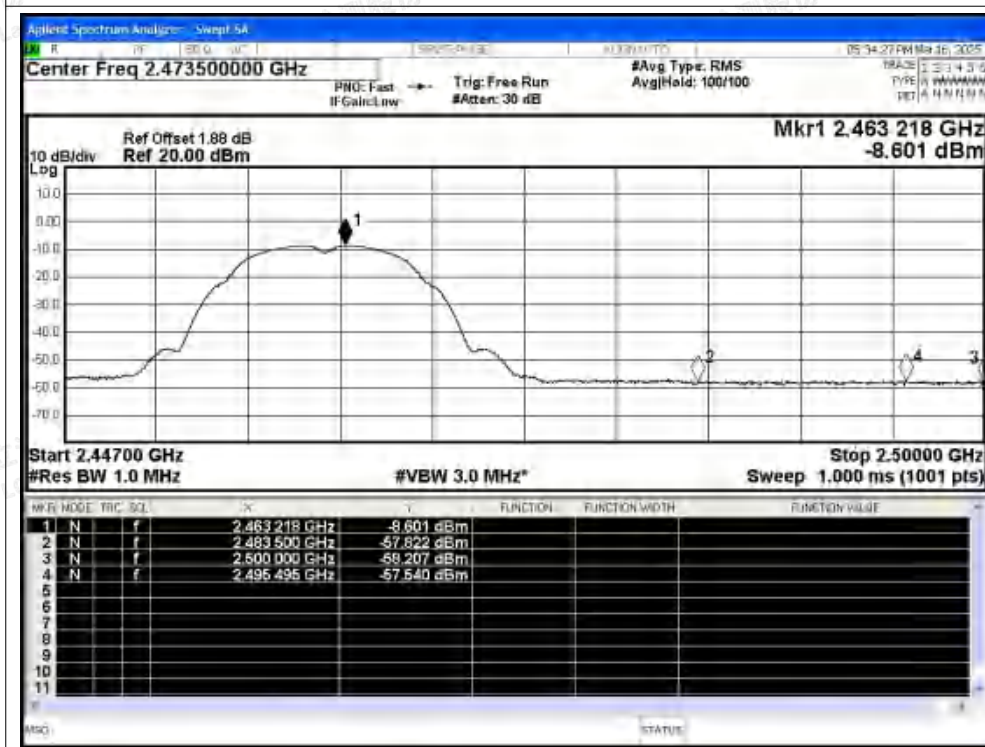




## Restrict Band NVNT g 2412MHz Ant1 Peak

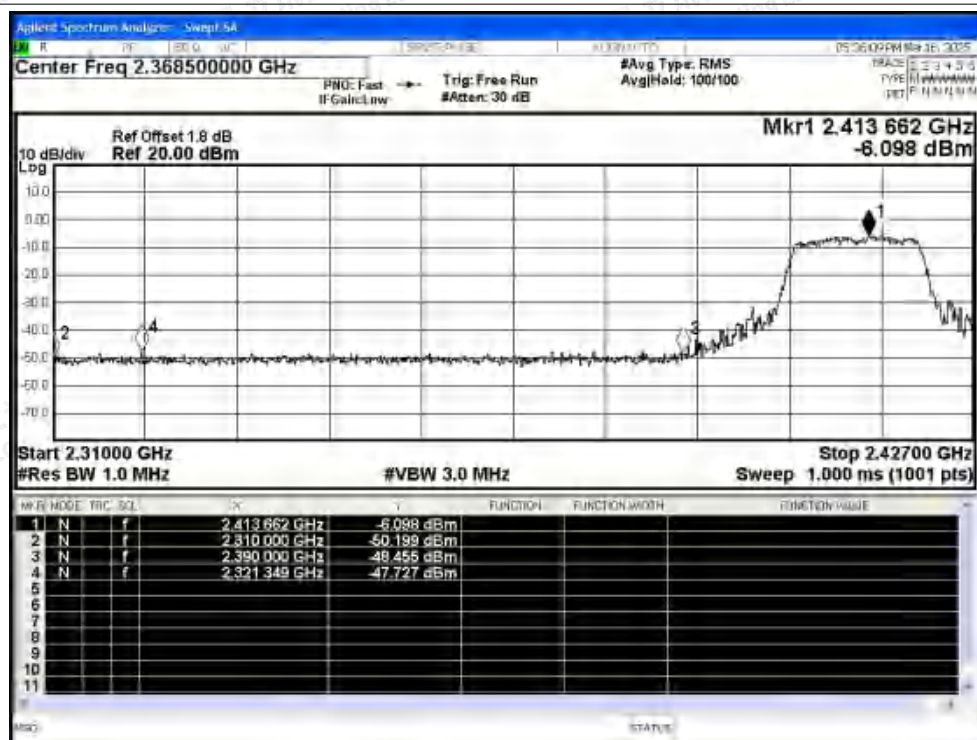


## Restrict Band NVNT g 2412MHz Ant1 Average

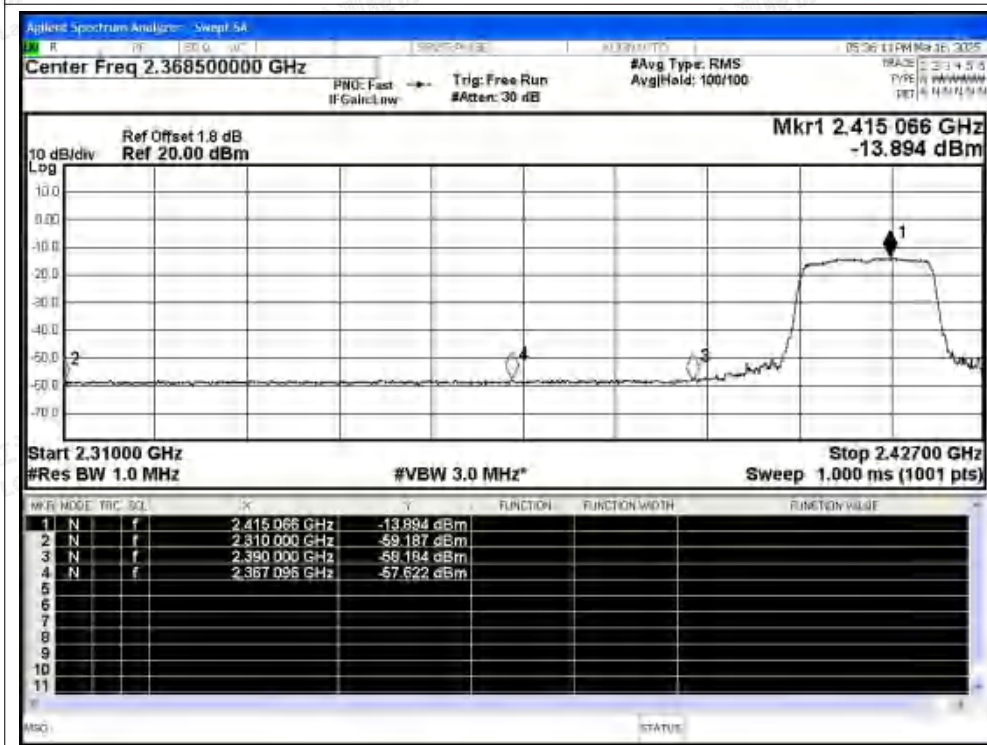




## Restrict Band NVNT g 2462MHz Ant1 Peak

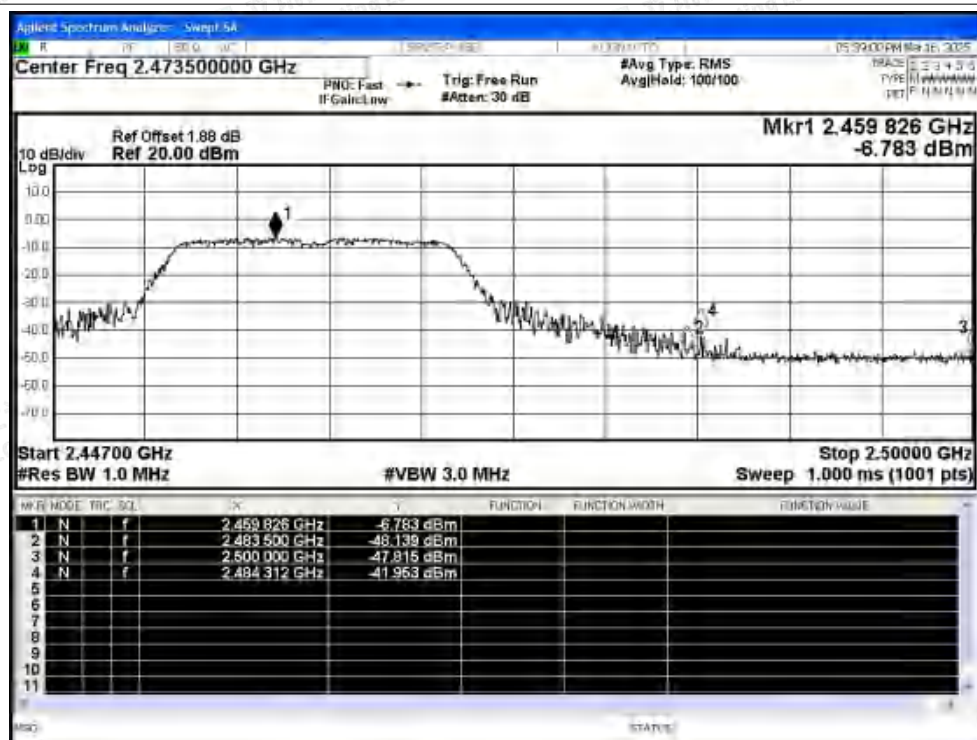


## Restrict Band NVNT g 2462MHz Ant1 Average

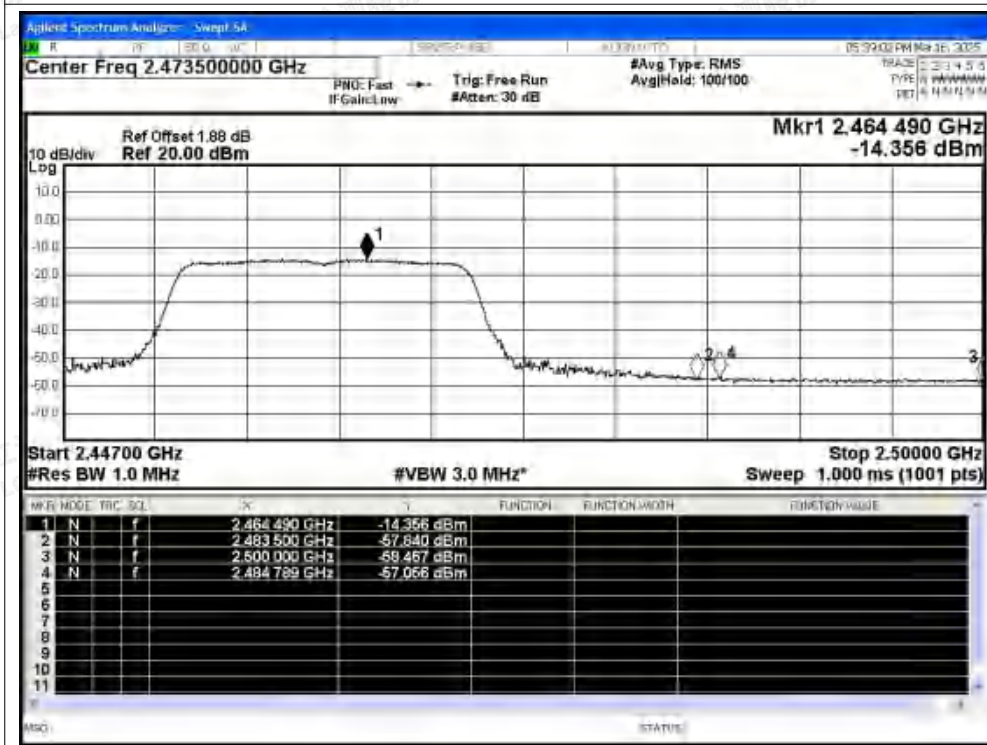






## Restrict Band NVNT n20 2412MHz Ant1 Peak

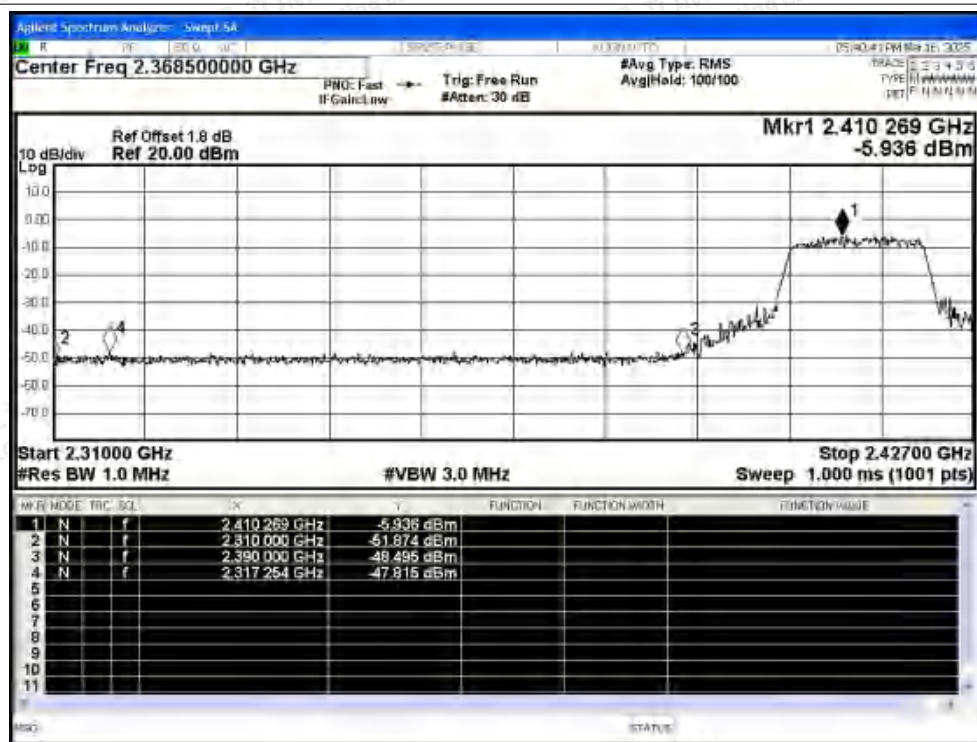


## Restrict Band NVNT n20 2412MHz Ant1 Average

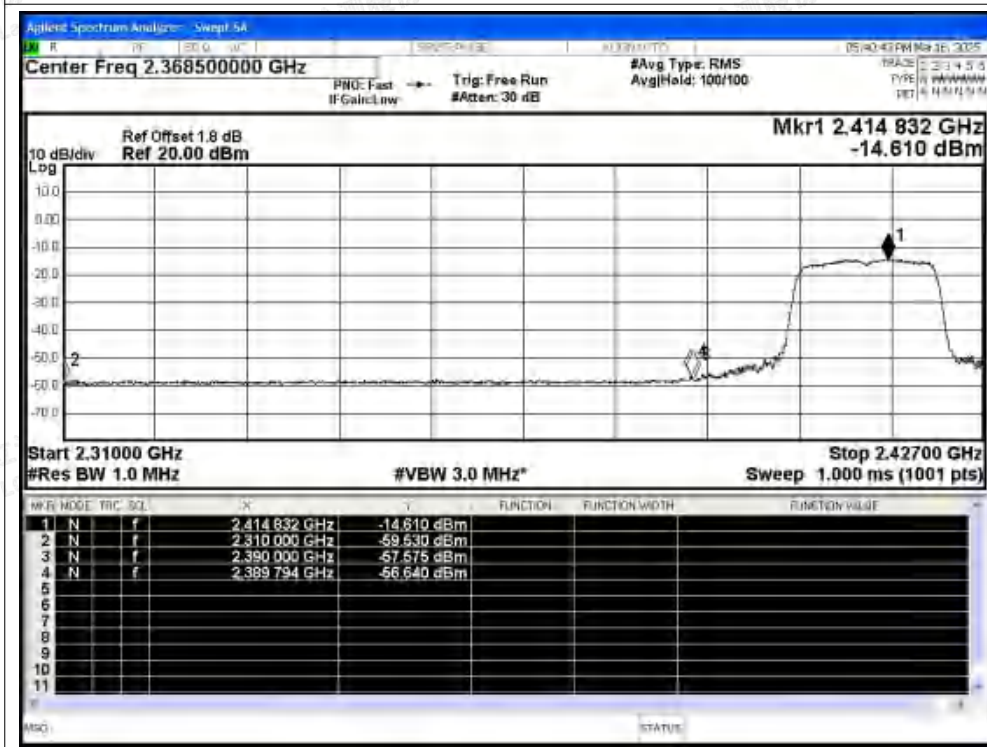






## Restrict Band NVNT n20 2462MHz Ant1 Peak

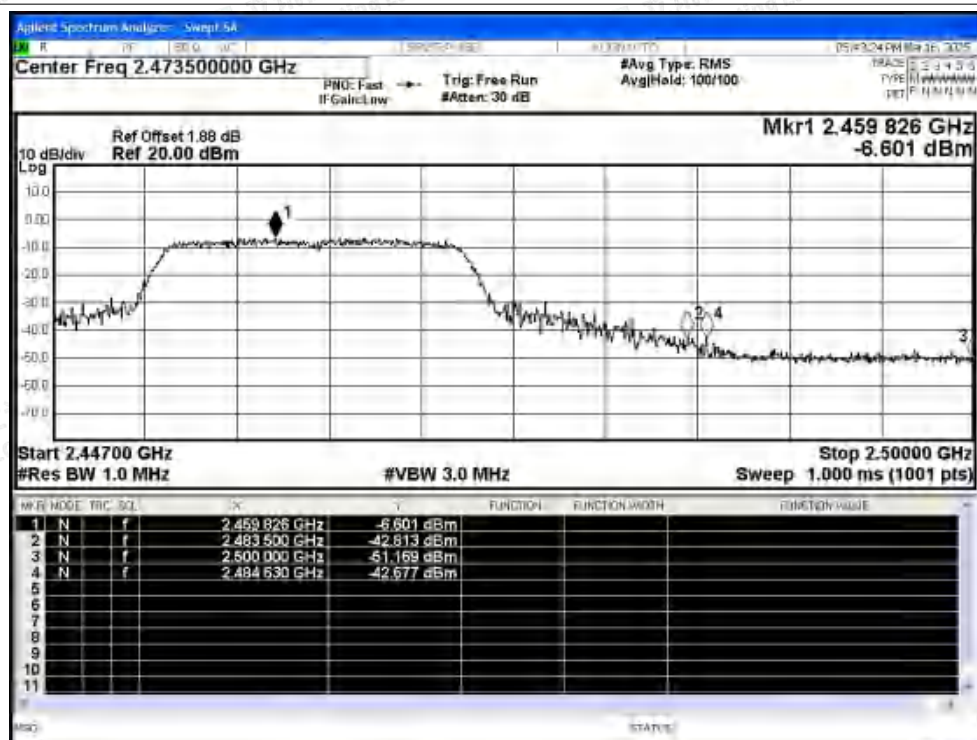

## Restrict Band NVNT n20 2462MHz Ant1 Average

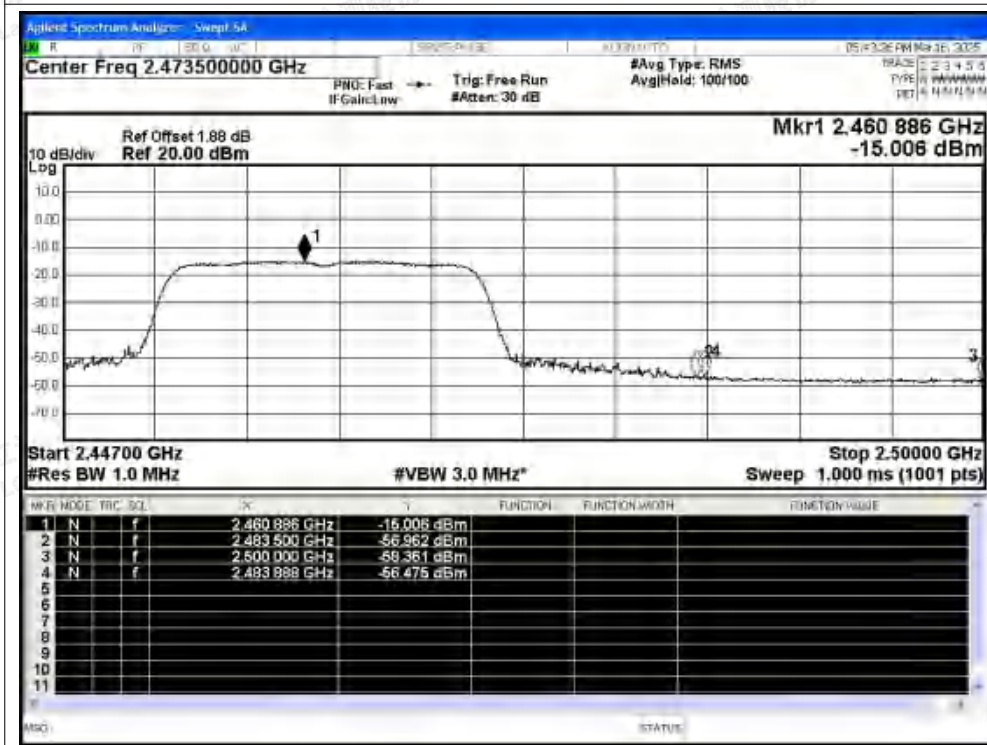




## Restrict Band NVNT n40 2422MHz Ant1 Peak




## Restrict Band NVNT n40 2422MHz Ant1 Average

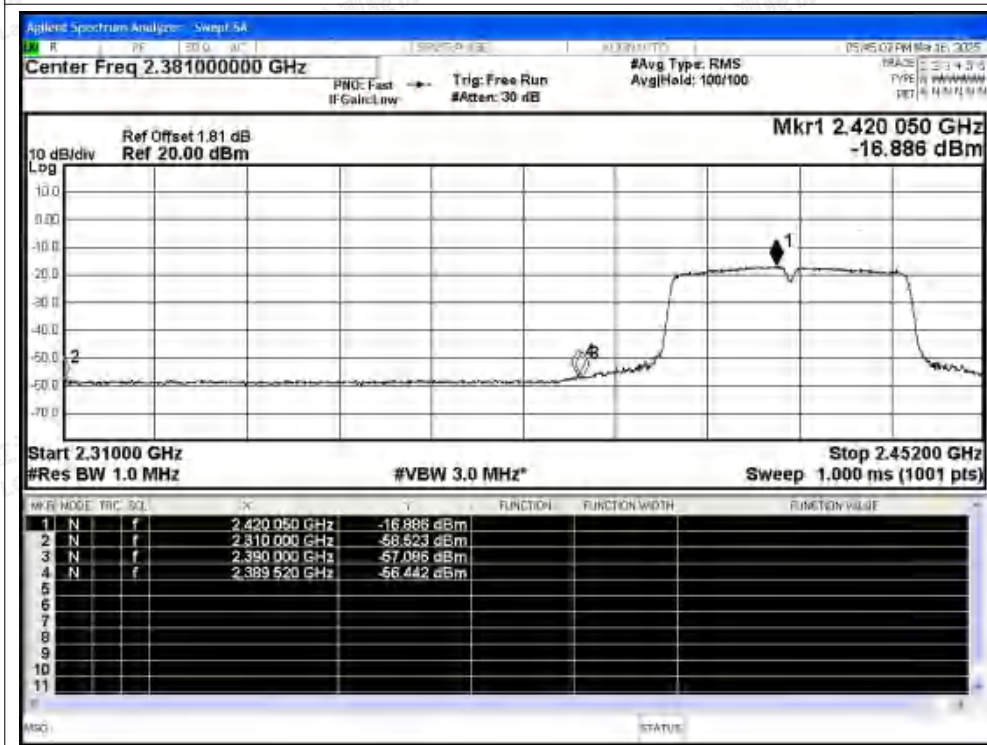



## Restrict Band NVNT n40 2452MHz Ant1 Peak

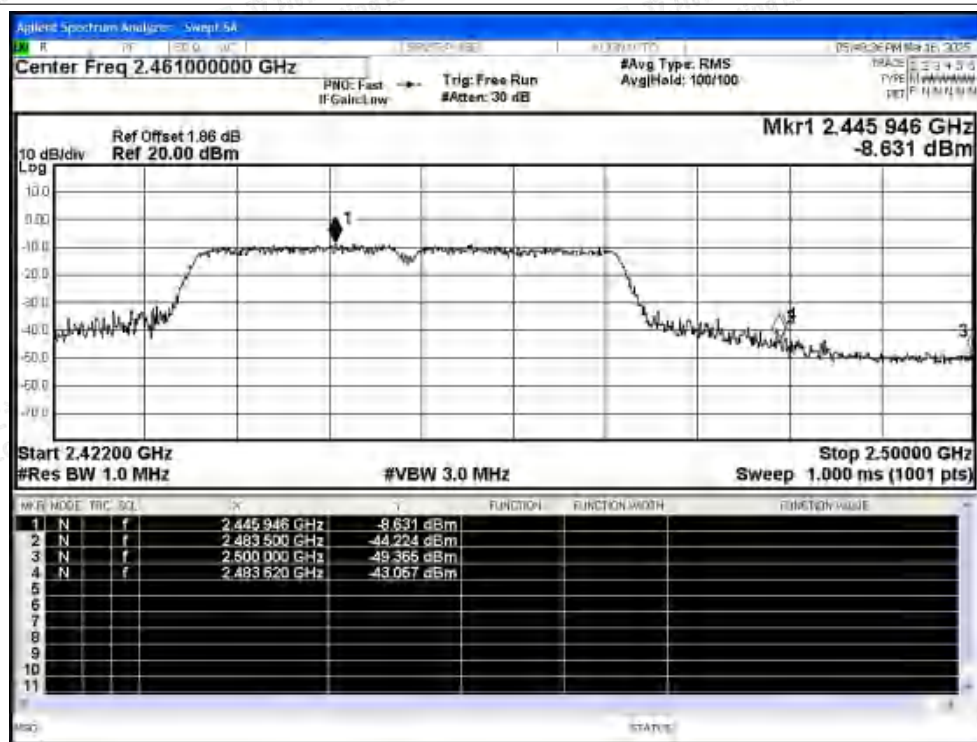

## Restrict Band NVNT n40 2452MHz Ant1 Average

