



# FCC TEST REPORT

## FCC ID:2A36M-SHM-MY621EM

**Applicant:** Shenzhen Anjia Information Technology Co. Ltd  
**Address:** No.13,Anye Road,Anliang Community,Yuanshan Street,Longgang District,Shenzhen, Guangdong, China

**Manufacturer:** Shenzhen Anjia Information Technology Co. Ltd  
**Address:** No.13,Anye Road,Anliang Community,Yuanshan Street,Longgang District,Shenzhen, Guangdong, China

**EUT:** Indoor wifi pan-tilt camera

**Trade Mark:** SightSys

**Model Number:** SHM-MY621EM  
STY-MY621EM, Y621EM

**Date of Receipt:** May 19, 2025

**Test Date:** May 19, 2025 to May 26, 2025

**Date of Report:** May 26, 2025

**Prepared By:** Shenzhen DL Testing Technology Co., Ltd.

**Address:** 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

**Applicable Standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407  
ANSI C63.10:2013  
KDB 789033 D02 v02r01

**Test Result:** Pass

**Report Number:** DLE-250610007R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



| Table of Contents                                                 | Page      |
|-------------------------------------------------------------------|-----------|
| <b>1. VERSION .....</b>                                           | <b>4</b>  |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                           | <b>5</b>  |
| 2.1 TEST FACILITY .....                                           | 6         |
| 2.2 MEASUREMENT UNCERTAINTY .....                                 | 6         |
| <b>3. GENERAL INFORMATION .....</b>                               | <b>7</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                              | 7         |
| 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED ..... | 9         |
| 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....            | 9         |
| 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....                      | 10        |
| <b>4. EMC EMISSION TEST .....</b>                                 | <b>12</b> |
| 4.1 CONDUCTED EMISSION MEASUREMENT .....                          | 12        |
| 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS .....                  | 12        |
| 4.1.2 TEST PROCEDURE .....                                        | 12        |
| 4.1.3 DEVIATION FROM TEST STANDARD .....                          | 12        |
| 4.1.4 TEST SETUP .....                                            | 13        |
| 4.1.5 EUT OPERATING CONDITIONS .....                              | 13        |
| 4.1.6 TEST RESULT .....                                           | 14        |
| 4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT .....             | 16        |
| 4.2.1 APPLICABLE STANDARD .....                                   | 16        |
| 4.2.2 CONFORMANCE LIMIT .....                                     | 16        |
| 4.2.3 MEASURING INSTRUMENTS .....                                 | 17        |
| 4.2.4 TEST CONFIGURATION .....                                    | 17        |
| 4.2.5 TEST PROCEDURE .....                                        | 18        |
| 4.2.6 RADIATED EMISSION TEST RESULT .....                         | 19        |
| 4.2.7 RADIATED BAND EDGE TEST RESULT .....                        | 27        |
| <b>5. POWER SPECTRAL DENSITY TEST .....</b>                       | <b>30</b> |
| 5.1 APPLIED PROCEDURES / LIMIT .....                              | 30        |
| 5.2 TEST PROCEDURE .....                                          | 30        |
| 5.3 DEVIATION FROM STANDARD .....                                 | 30        |
| 5.4 TEST SETUP .....                                              | 31        |
| 5.5 EUT OPERATION CONDITIONS .....                                | 31        |
| 5.6 TEST RESULTS .....                                            | 32        |
| <b>6. 6DB OCCUPIED BANDWIDTH .....</b>                            | <b>35</b> |
| 6.1 APPLIED PROCEDURES / LIMIT .....                              | 35        |
| 6.2 TEST PROCEDURE .....                                          | 35        |



| Table of Contents                        | Page |
|------------------------------------------|------|
| 6.3 EUT OPERATION CONDITIONS .....       | 35   |
| 6.4 TEST RESULTS .....                   | 36   |
| 7. MAXIMUM CONDUCTED OUTPUT POWER .....  | 40   |
| 7.1 PPLIED PROCEDURES / LIMIT .....      | 40   |
| 7.2 TEST PROCEDURE .....                 | 40   |
| 7.3 DEVIATION FROM STANDARD .....        | 40   |
| 7.4 TEST SETUP .....                     | 40   |
| 7.5 EUT OPERATION CONDITIONS .....       | 40   |
| 7.6 TEST RESULTS .....                   | 41   |
| 8. OUT OF BAND EMISSIONS .....           | 42   |
| 8.1 APPLICABLE STANDARD .....            | 42   |
| 8.2 TEST PROCEDURE .....                 | 42   |
| 8.3 DEVIATION FROM STANDARD .....        | 42   |
| 8.4 TEST SETUP .....                     | 42   |
| 8.5 EUT OPERATION CONDITIONS .....       | 42   |
| 8.6 TEST RESULTS .....                   | 43   |
| 9. FREQUENCY STABILITY MEASUREMENT ..... | 44   |
| 9.1 LIMIT .....                          | 44   |
| 9.2 TEST PROCEDURES .....                | 44   |
| 9.3 TEST SETUP LAYOUT .....              | 44   |
| 9.4 EUT OPERATION DURING TEST .....      | 44   |
| 9.5 TEST RESULTS .....                   | 45   |
| 10. DUTY CYCLE .....                     | 48   |
| 10.1 APPLIED PROCEDURES / LIMIT .....    | 48   |
| 10.2 DEVIATION FROM STANDARD .....       | 48   |
| 10.3 TEST SETUP .....                    | 48   |
| 10.4 EUT OPERATION CONDITIONS .....      | 48   |
| 10.5 TEST RESULTS .....                  | 49   |
| 11. ANTENNA REQUIREMENT .....            | 51   |
| 12. TEST SETUP PHOTO .....               | 52   |
| 13. EUT CONSTRUCTIONAL DETAILS .....     | 52   |



**1. VERSION**

| Report No.     | Version | Description             | Approved      |
|----------------|---------|-------------------------|---------------|
| DLE-250610007R | Rev.01  | Initial issue of report | May. 26, 2025 |
|                |         |                         |               |



## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.407) , Subpart E                               |                                                       |          |        |
|---------------------------------------------------------------|-------------------------------------------------------|----------|--------|
| Standard Section                                              | Test Item                                             | Judgment | Remark |
| 15.207(a)                                                     | AC Power Line Conducted Emission                      | PASS     |        |
| 789033 D02 General U-NII                                      | Duty Cycle                                            | PASS     |        |
| 15.205(a) 15.209(a)<br>15.407(b)(4)<br>15.407(b)(8)<br>2.1051 | Radiated Emissions and Band Edge                      | PASS     |        |
| 15.407 (e)                                                    | 26dB Emission Bandwidth and<br>6dB Occupied Bandwidth | PASS     |        |
| 15.407 (a)(3) i                                               | Maximum Conducted Output Power                        | PASS     |        |
| 15.407 (a)(3) i                                               | Power Spectral Density                                | PASS     |        |
| 15.407(g)                                                     | Frequency Stability                                   | PASS     |        |
| 15.203                                                        | Antenna Requirement                                   | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                              | Uncertainty              |
|-----|---------------------------------------------------|--------------------------|
| 1   | 3m camber Radiated spurious emission(9KHz-30MHz)  | $U=4.5\text{dB}$         |
| 2   | 3m camber Radiated spurious emission(30MHz-1GHz)  | $U=4.8\text{dB}$         |
| 3   | 3m chamber Radiated spurious emission(1GHz-6GHz)  | $U=4.9\text{dB}$         |
| 4   | 3m chamber Radiated spurious emission(6GHz-40GHz) | $U=5.0\text{dB}$         |
| 5   | Conducted disturbance                             | $U=3.2\text{dB}$         |
| 6   | RF Band Edge                                      | $U=1.68\text{dB}$        |
| 7   | RF power conducted                                | $U=1.86\text{dB}$        |
| 8   | RF conducted Spurious Emission                    | $U=2.2\text{dB}$         |
| 9   | RF Occupied Bandwidth                             | $U=1.8\text{MHz}$        |
| 10  | RF Power Spectral Density                         | $U=1.75\text{dB}$        |
| 11  | humidity uncertainty                              | $U=5.3\%$                |
| 12  | Temperature uncertainty                           | $U=0.59^{\circ}\text{C}$ |



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                      |                                                                         |                                                                                                                                                                                             |
|----------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:        | Indoor wifi pan-tilt camera                                             |                                                                                                                                                                                             |
| Model No.:           | SHM-MY621EM                                                             |                                                                                                                                                                                             |
| Serial Model:        | STY-MY621EM, Y621EM                                                     |                                                                                                                                                                                             |
| Model Different:     | All the model are the same circuit , only the model name are different. |                                                                                                                                                                                             |
| Sample ID            | E-1                                                                     |                                                                                                                                                                                             |
| Sample(s) Status:    | Engineer sample                                                         |                                                                                                                                                                                             |
| Product Description: | IEEE 802.11 WLAN Mode Supported                                         | <input checked="" type="checkbox"/> 802.11a/n                                                                                                                                               |
|                      | Data Rate                                                               | 802.11a: 6/9/12/24/18/36/48/54Mbit/s;<br>802.11n: MCS0-MCS7;                                                                                                                                |
|                      | Modulation                                                              | 802.11a/n:<br>Orthogonal Frequency Division Multiplexing(OFDM)                                                                                                                              |
|                      | Operating Frequency Range                                               | <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n (20M)<br><input checked="" type="checkbox"/> 5755-5795 MHz for 802.11n (40M)                                                |
|                      | Number of Channels                                                      | <input checked="" type="checkbox"/> 5 channels for 802.11a/n (20M) in the 5745-5825MHz band;<br><input checked="" type="checkbox"/> 2 channels for 802.11n (40M) in the 5755-5795 MHz band; |
| Channel List:        | Please refer to the Note 2.                                             |                                                                                                                                                                                             |
| Antenna Type:        | FPC Antenna                                                             |                                                                                                                                                                                             |
| Antenna Gain:        | 2.64dBi                                                                 |                                                                                                                                                                                             |
| Power Supply:        | Input: 5V $\overline{\text{---}}$ 2A                                    |                                                                                                                                                                                             |
| AC/DC Adapter:       | Input: 100-240V ~ 50/60Hz<br>Output: 5V $\overline{\text{---}}$ 2A      |                                                                                                                                                                                             |

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

| 802.11a/n (20MHz) Frequency Channel |                 |         |                 |         |                 |         |                 |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 149                                 | 5745            | 153     | 5765            | 157     | 5785            | 161     | 5805            |
| 165                                 | 5825            | -       | -               | -       | -               | -       | -               |

| 802.11n (40MHz) Frequency Channel |                 |         |                 |         |                 |         |                 |
|-----------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                           | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 151                               | 5755            | 159     | 5795            | -       | -               | -       | -               |



### 3.2 DESCRIPTION OF TEST MODES

| Pretest Mode | Description                            |
|--------------|----------------------------------------|
| Mode 1       | 802.11a/n (20M) CH149 / CH157 / CH 165 |
| Mode 2       | 802.11n (40M) CH 151 / CH 159          |

| Final Test Mode | For Conducted                          |
|-----------------|----------------------------------------|
|                 | Description                            |
| Mode 1          | 802.11a/n (20M) CH149 / CH157 / CH 165 |
| Mode 2          | 802.11n (40M) CH 151 / CH 159          |

| Final Test Mode | For Radiated                           |
|-----------------|----------------------------------------|
|                 | Description                            |
| Mode 1          | 802.11a/n (20M) CH149 / CH157 / CH 165 |
| Mode 2          | 802.11n (40M) CH 151 / CH 159          |

|                                                                                                                                                                                                                                       |                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                |


|                                                                                                                                                                                                              |         |           |           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|-----------|
| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows: |         |           |           |
| Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.                                                                                                         |         |           |           |
| Mode                                                                                                                                                                                                         | 802.11a | 802.11n20 | 802.11n40 |
| Data rate                                                                                                                                                                                                    | 6Mbps   | MCS0(HT0) | MCS0(HT0) |

|                   |         |
|-------------------|---------|
| Test Software     | CMD     |
| Power level setup | Default |



### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


#### Conducted Emission



#### Radiated Emission



#### Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                   | Mfr/Brand | Model/Type No. | Series No. | Note      |
|------|-----------------------------|-----------|----------------|------------|-----------|
| E-1  | Indoor wifi pan-tilt camera | SightSys  | SHM-MY621EM    | N/A        | EUT       |
| E-2  | AC/DC Adapter               | SANXING   | SX-050450C00   | N/A        | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



### 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Conduction Emissions Test

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No.        | Firmware Version | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|-------------------|------------------|------------------|------------------|
| 1    | LISN              | R&S          | ENV216   | 101471            | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 2    | LISN              | CYBERTEK     | EM5040A  | E1850400149       | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | Test Cable        | N/A          | C-01     | N/A               | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 4    | EMI Test Receiver | R&S          | ESCI3    | 101393            | 4.42 SP3         | Sep. 29, 2024    | Sep. 28, 2025    |
| 5    | EMC Software      | Frad         | EZ-EMC   | Ver.EMC-CON 3A1.1 | N/A              | \                | \                |

#### Radiation Emissions & Radiation Spurious Emissions Test

| Item | Equipment                         | Manufacturer   | Type No.        | Serial No.         | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|----------------|-----------------|--------------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT       | N9020A          | MY55370835         | A.17.05          | Sep. 29, 2024    | Sep. 28, 2025    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S            | FSV40-N         | 100363             | 1.71 SP2         | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | EMI Test Receiver (9kHz-7GHz)     | R&S            | ESCI7           | 100969             | 4.32             | Sep. 29, 2024    | Sep. 28, 2025    |
| 4    | Bilog Antenna (30MHz-1500MHz)     | Schwarzbeck    | VULB9168        | 00877              | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 5    | Horn Antenna (1GHz-18GHz)         | Agilent        | AH-118          | 071145             | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 6    | Horn Antenna (15GHz-40GHz)        | A.H.System     | SAS-574         | 588                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 7    | Loop Antenna                      | TESEQ          | HLA6121         | 58357              | N/A              | Oct. 11, 2024    | Oct. 10, 2025    |
| 8    | Amplifier (30-1000MHz)            | EM Electronics | EM330 Amplifier | 60747              | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 9    | Amplifier (1GHz-26.5GHz)          | HuiPu          | 8449B           | 3008A00315         | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 10   | Amplifier (500MHz-40GHz)          | QuanJuDa       | DLE-161         | 097                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 11   | Test Cable                        | N/A            | R-01            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 12   | Test Cable                        | N/A            | R-02            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 13   | Test Cable                        | N/A            | R-03            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 14   | D.C. Power Supply                 | LongWei        | TPR-6405D       | GQ7516             | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 15   | EMC Software                      | Frad           | EZ-EMC          | Ver.EMC-CO N 3A1.1 | N/A              | \                | \                |
| 16   | Turntable                         | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |
| 17   | Antenna tower                     | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |



## RF Conducted Test

| Item | Equipment                         | Manufacturer                | Type No.    | Serial No. | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|-----------------------------|-------------|------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT                    | N9020A      | MY55370835 | A.17.05          | Sep. 29, 2024    | Sep. 28, 2025    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S                         | FSV40-N     | 100363     | 1.71 SP2         | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | Test Cable                        | N/A                         | RF-01       | N/A        | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 4    | Test Cable                        | N/A                         | RF-02       | N/A        | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 5    | Test Cable                        | N/A                         | RF-03       | N/A        | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 6    | ESG Signal Generator              | Agilent                     | E4421B      | GB40051203 | B.03.84          | Sep. 29, 2024    | Sep. 28, 2025    |
| 7    | Signal Generator                  | Agilent                     | N5182A      | MY47420215 | A.01.87          | Sep. 29, 2024    | Sep. 28, 2025    |
| 8    | Magnetic Field Probe Tester       | Narda                       | ELT-400     | 0-0344     | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 9    | Van der Hoofden measuring head    | Schwarzbeck Mess-elektronik | VDHH 9502   | 9502-039   | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 10   | Wideband Radio Communication Test | R&S                         | CMW500      | 106504     | V 3.7.22         | Sep. 30, 2024    | Sep. 29, 2025    |
| 11   | MWRF Power Meter Test system      | MW                          | MW100-RF CB | 10371      | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 12   | Power Meter                       | KEYSIGHT                    | N1912AP     | 926431     | A.05.00          | Sep. 29, 2024    | Sep. 28, 2025    |
| 13   | D.C. Power Supply                 | LongWei                     | TPR-6405D   | GQ7516     | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 14   | RF Software                       | MW                          | MTS8310     | V2.0.0.0   | N/A              | \                | \                |



#### 4. EMC EMISSION TEST

##### 4.1 CONDUCTED EMISSION MEASUREMENT

|                       |                                      |
|-----------------------|--------------------------------------|
| Test Requirement:     | FCC Part15 C Section 15.207          |
| Test Method:          | ANSI C63.10:2013                     |
| Test Frequency Range: | 150KHz to 30MHz                      |
| Receiver setup:       | RBW=9KHz, VBW=30KHz, Sweep time=auto |

##### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

(1) \*Decreases with the logarithm of the frequency.

##### 4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments
- a. powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
  - b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.  
I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the
  - c. cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
  - d. LISN at least 80 cm from nearest part of EUT chassis.
  - e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.4 TEST SETUP

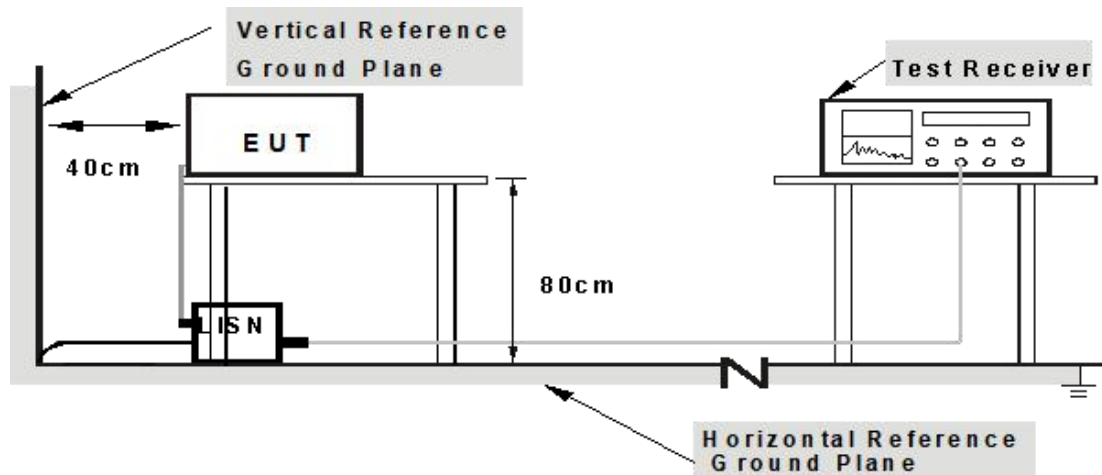

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



#### 4.1.6 TEST RESULT

|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                 |
| Pressure:     | 101 kPa      | Polarization:      | L                   |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | 802.11n20 - 5745MHz |

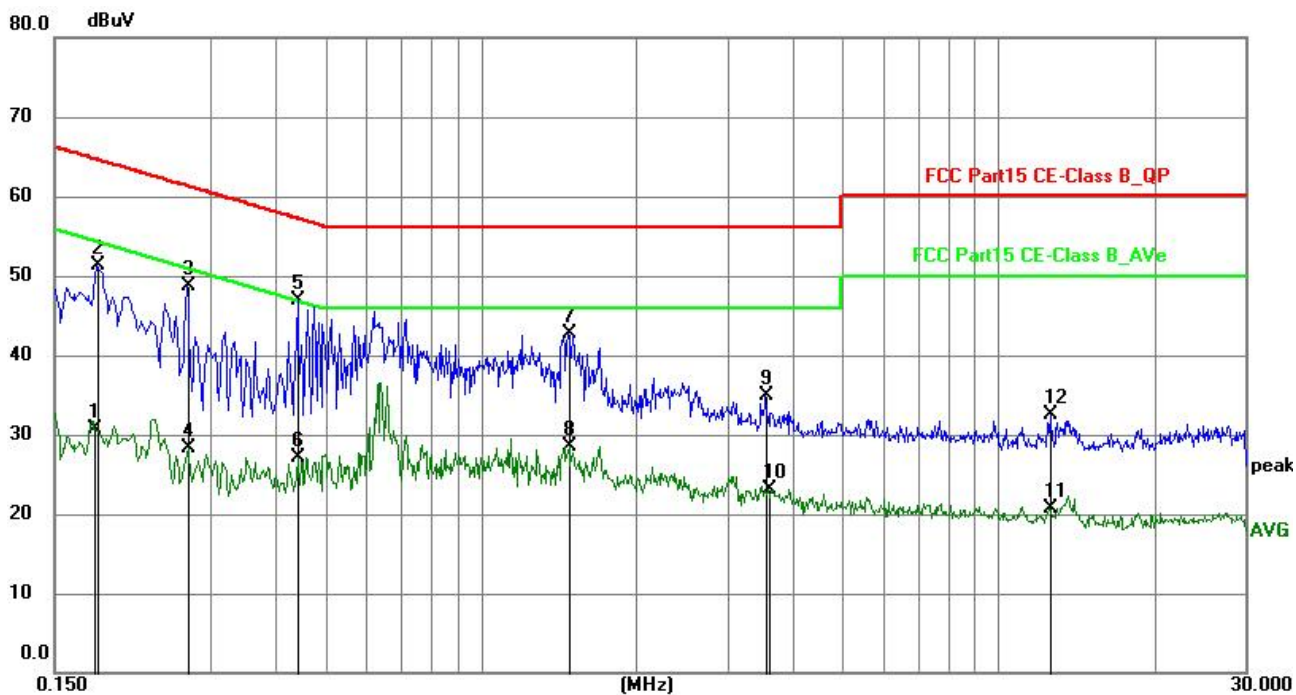


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.1796          | 10.32          | 20.30       | 30.62        | 54.50        | -23.88      | AVG      | P   |        |
| 2   | 0.1814          | 31.00          | 20.31       | 51.31        | 64.42        | -13.11      | QP       | P   |        |
| 3   | 0.2714          | 28.33          | 20.35       | 48.68        | 61.07        | -12.39      | QP       | P   |        |
| 4   | 0.2714          | 8.03           | 20.35       | 28.38        | 51.07        | -22.69      | AVG      | P   |        |
| 5   | 0.4425          | 26.65          | 20.31       | 46.96        | 57.01        | -10.05      | QP       | P   |        |
| 6   | 0.4425          | 6.84           | 20.31       | 27.15        | 47.01        | -19.86      | AVG      | P   |        |
| 7   | 1.4729          | 22.30          | 20.31       | 42.61        | 56.00        | -13.39      | QP       | P   |        |
| 8   | 1.4858          | 8.24           | 20.31       | 28.55        | 46.00        | -17.45      | AVG      | P   |        |
| 9   | 3.5609          | 14.54          | 20.34       | 34.88        | 56.00        | -21.12      | QP       | P   |        |
| 10  | 3.5924          | 2.77           | 20.34       | 23.11        | 46.00        | -22.89      | AVG      | P   |        |
| 11  | 12.5518         | 0.17           | 20.47       | 20.64        | 50.00        | -29.36      | AVG      | P   |        |
| 12  | 12.5922         | 11.98          | 20.47       | 32.45        | 60.00        | -27.55      | QP       | P   |        |

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liss factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case TX 802.11n20 - 5745MHz.



|               |              |                    |                     |
|---------------|--------------|--------------------|---------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                 |
| Pressure:     | 101 kPa      | Polarization:      | N                   |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | 802.11n20 - 5745MHz |

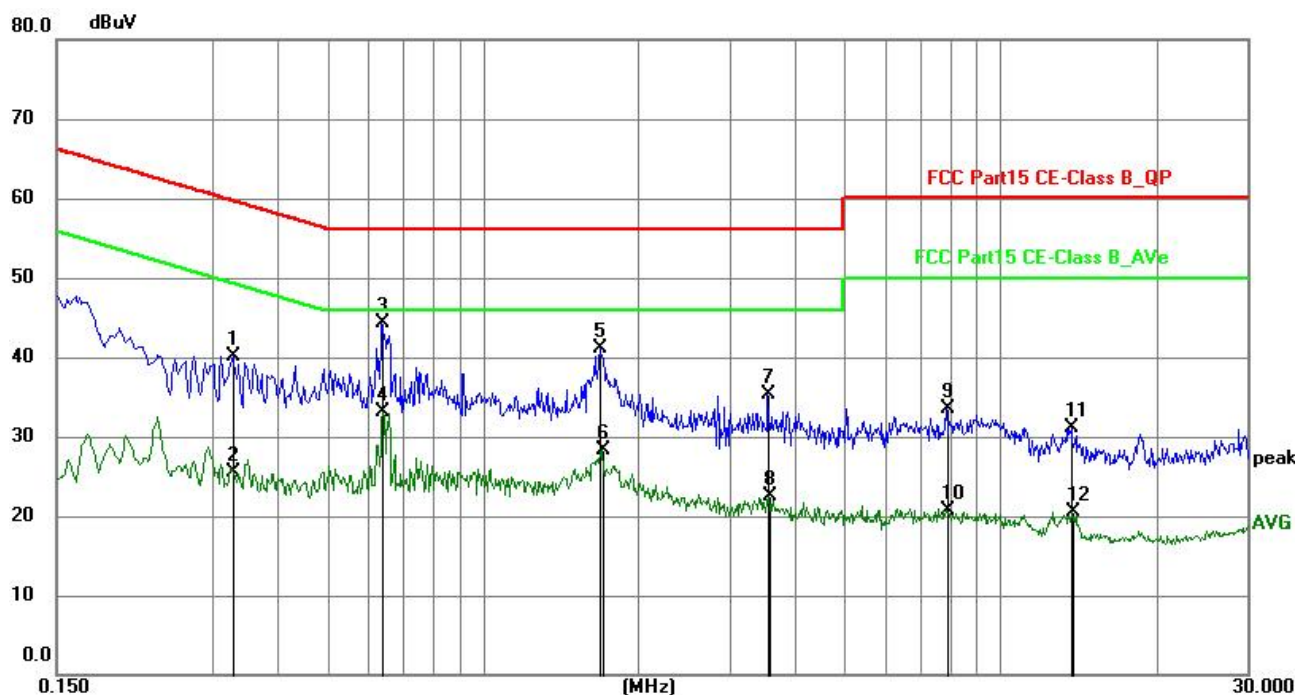

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.3300          | 19.85          | 20.34       | 40.19        | 59.45        | -19.26      | QP       | P   |        |
| 2   | 0.3301          | 5.16           | 20.34       | 25.50        | 49.45        | -23.95      | AVG      | P   |        |
| 3   | 0.6401          | 24.01          | 20.30       | 44.31        | 56.00        | -11.69      | QP       | P   |        |
| 4   | 0.6401          | 12.83          | 20.30       | 33.13        | 46.00        | -12.87      | AVG      | P   |        |
| 5   | 1.6837          | 20.90          | 20.30       | 41.20        | 56.00        | -14.80      | QP       | P   |        |
| 6   | 1.7017          | 8.06           | 20.30       | 28.36        | 46.00        | -17.64      | AVG      | P   |        |
| 7   | 3.5565          | 14.98          | 20.33       | 35.31        | 56.00        | -20.69      | QP       | P   |        |
| 8   | 3.5745          | 2.24           | 20.33       | 22.57        | 46.00        | -23.43      | AVG      | P   |        |
| 9   | 7.8900          | 13.01          | 20.42       | 33.43        | 60.00        | -26.57      | QP       | P   |        |
| 10  | 7.8900          | 0.29           | 20.42       | 20.71        | 50.00        | -29.29      | AVG      | P   |        |
| 11  | 13.7309         | 10.63          | 20.49       | 31.12        | 60.00        | -28.88      | QP       | P   |        |
| 12  | 13.8071         | 0.08           | 20.49       | 20.57        | 50.00        | -29.43      | AVG      | P   |        |

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lism factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case TX 802.11n20 - 5745MHz.



## 4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT

### 4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b)(4)(i) and 15.205(a) and 15.209(a).

### 4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(1) Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

| Frequency Range                | Peak            | Average     |
|--------------------------------|-----------------|-------------|
| All emissions shall be limited | 68.20 (dBuV/m)  | 54 (dBuV/m) |
| Band edge $\pm$ 75 MHz         | 105.20 (dBuV/m) | 54 (dBuV/m) |
| Band edge $\pm$ 25 MHz         | 110.80 (dBuV/m) | 54 (dBuV/m) |
| Band edge $\pm$ 5 MHz          | 122.20 (dBuV/m) | 54 (dBuV/m) |

According to FCC Part 15.407(b)(10): Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands:

| (MHz)             | (MHz)               | (MHz)         | (GHz)       |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

| Restricted Frequency (MHz) | Field Strength ( $\mu$ V/m) | Field Strength (dB $\mu$ V/m) | Measurement Distance |
|----------------------------|-----------------------------|-------------------------------|----------------------|
| 0.009~0.490                | 2400/F(KHz)                 | 20 log ( $\mu$ V/m)           | 300                  |
| 0.490~1.705                | 2400/F(KHz)                 | 20 log ( $\mu$ V/m)           | 30                   |
| 1.705~30.0                 | 30                          | 29.5                          | 30                   |
| 30-88                      | 100                         | 40                            | 3                    |
| 88-216                     | 150                         | 43.5                          | 3                    |
| 216-960                    | 200                         | 46                            | 3                    |
| Above 960                  | 500                         | 54                            | 3                    |



## Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency<br>(MHz) | Class B (dBuV/m) (at 3M) |         |
|--------------------|--------------------------|---------|
|                    | Peak                     | Average |
| Above 1000         | 74                       | 54      |


- Remark: 1. Emission level in dBuV/m =  $20 \log (\mu\text{V/m})$ ;  
2. Measurement was performed at an antenna to the closed point of EUT distance of meters;  
3. Distance extrapolation factor =  $40 \log (\text{Specific distance/ test distance})$  (dB);  
4. Limit line = Specific limits (dBuV) + distance extrapolation factor.  
5. Emission level in dBuV/m = (dBm) + 95.2 .

## 4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 3.5 of this test report.

## 4.2.4 TEST CONFIGURATION


1.For radiated emissions below 30MHz

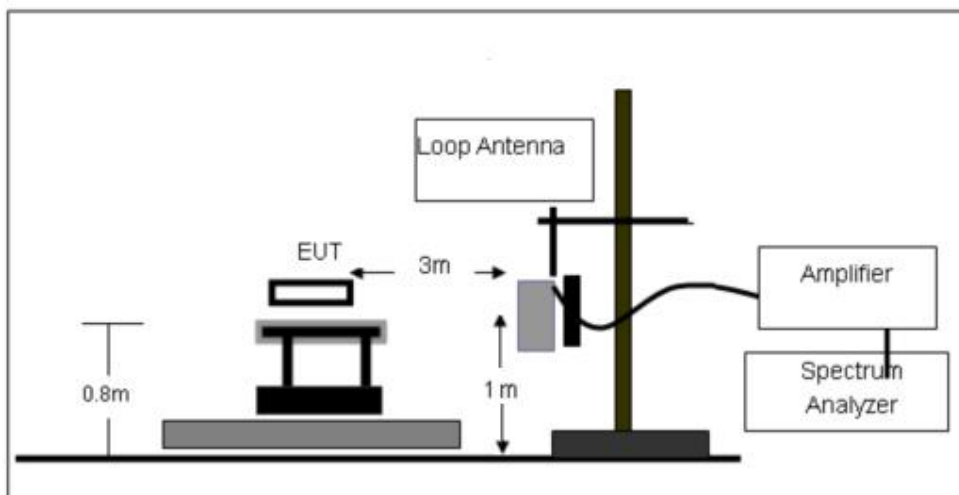

2.For radiated emissions from 30MHz to 1000MHz

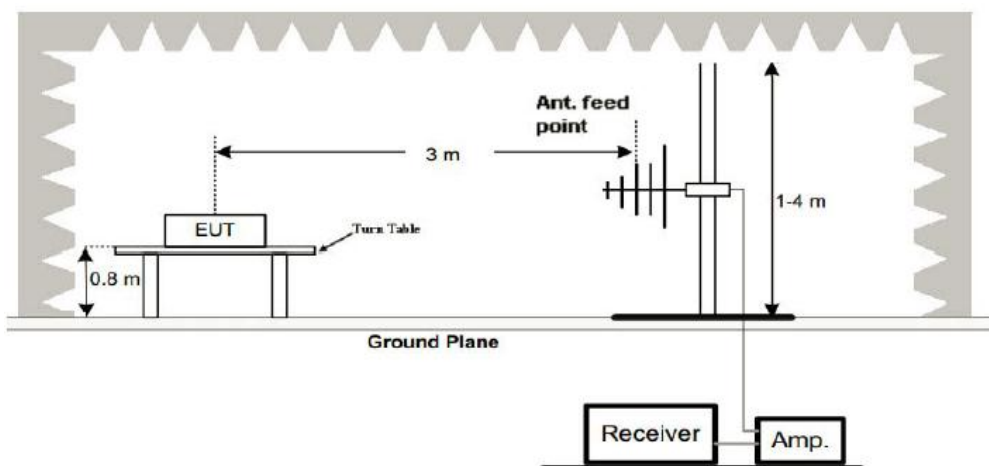

### 3. Radiated Emission Test-Up Frequency Above 1GHz

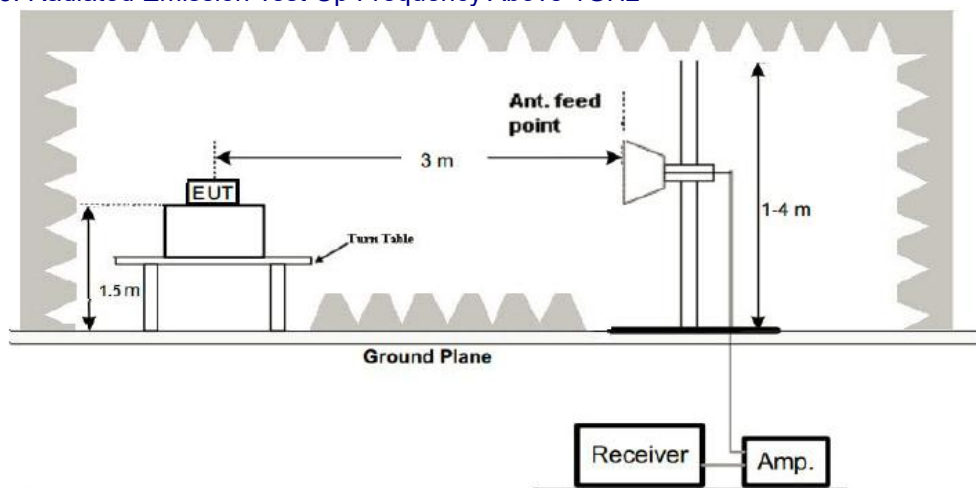

#### 4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

#### 4.2.6 RADIATED EMISSION TEST RESULT


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz:

|               |         |                    |                        |
|---------------|---------|--------------------|------------------------|
| Temperature:  | 26°C    | Relative Humidity: | 54%                    |
| Pressure:     | 101 kPa | Polarization:      | Horizontal             |
| Test Voltage: | DC 5V   | Test Mode :        | TX 802.11n20 - 5745MHz |

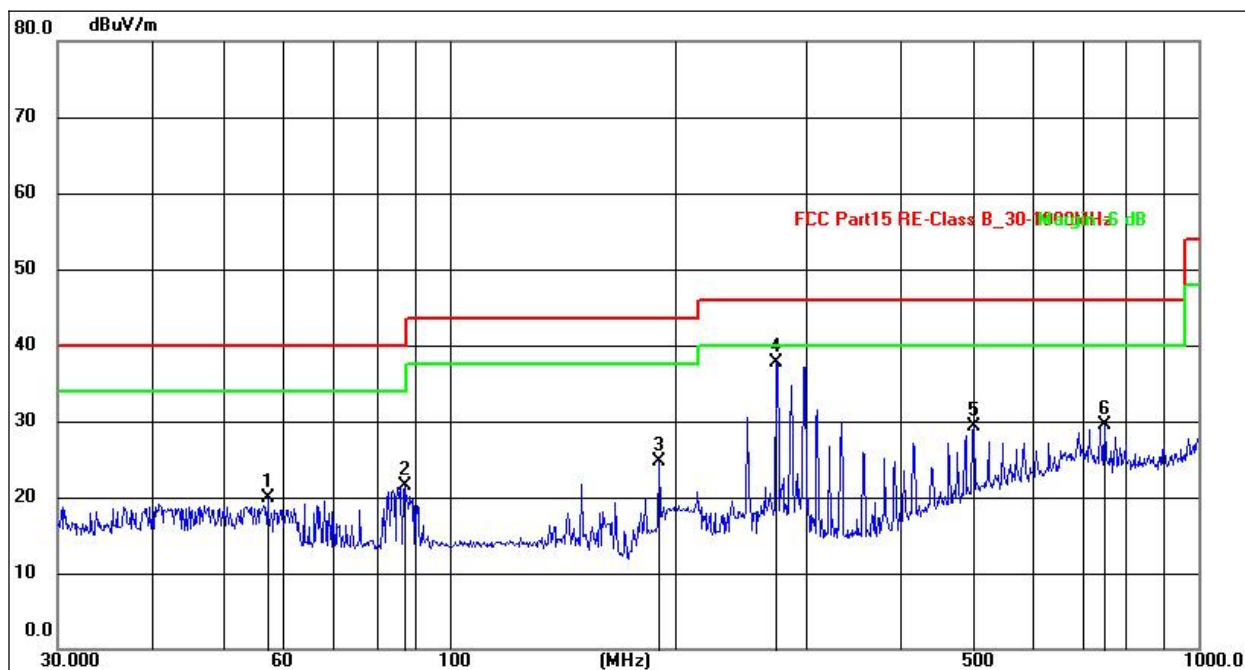


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 57.1914         | 33.92          | -14.07        | 19.85          | 40.00          | -20.15      | QP       |
| 2   | 87.1115         | 41.31          | -19.87        | 21.44          | 40.00          | -18.56      | QP       |
| 3   | 190.4050        | 42.76          | -18.06        | 24.70          | 43.50          | -18.80      | QP       |
| 4   | 273.2339        | 52.09          | -14.36        | 37.73          | 46.00          | -8.27       | QP       |
| 5   | 501.1788        | 40.25          | -11.00        | 29.25          | 46.00          | -16.75      | QP       |
| 6   | 750.1082        | 36.01          | -6.54         | 29.47          | 46.00          | -16.53      | QP       |

## Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 5745MHz.



|               |        |                    |                        |
|---------------|--------|--------------------|------------------------|
| Temperature:  | 26°C   | Relative Humidity: | 54%                    |
| Pressure:     | 101kPa | Polarization:      | Vertical               |
| Test Voltage: | DC 5V  | Test Mode :        | TX 802.11n20 - 5745MHz |

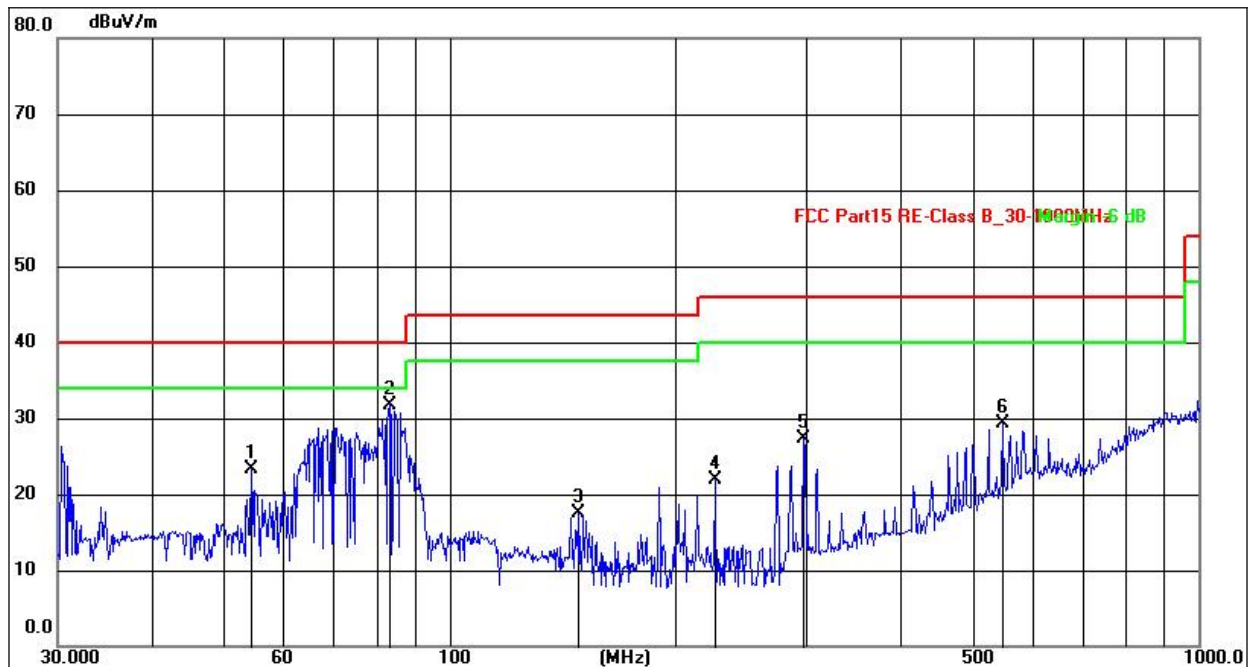

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 54.4515         | 40.97          | -17.64        | 23.33          | 40.00          | -16.67      | QP       |
| 2   | 83.2296         | 53.43          | -21.63        | 31.80          | 40.00          | -8.20       | QP       |
| 3   | 148.9624        | 37.82          | -20.39        | 17.43          | 43.50          | -26.07      | QP       |
| 4   | 226.0994        | 41.94          | -20.01        | 21.93          | 46.00          | -24.07      | QP       |
| 5   | 297.2238        | 45.23          | -17.98        | 27.25          | 46.00          | -18.75      | QP       |
| 6   | 547.0976        | 38.55          | -9.26         | 29.29          | 46.00          | -16.71      | QP       |

**Notes:**

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin = Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11n20 - 5745MHz.



Between 1GHz – 40GHz:

|               |                   |                     |       |
|---------------|-------------------|---------------------|-------|
| Temperature : | 26°C              | Relative Humidity : | 54%   |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 5V |
| Test Mode :   | 802.11a/ n20/ n40 |                     |       |

## 802.11a

| Polar (H/V)         | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detect or Type |
|---------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|----------------|
| Low Channel:5745MHz |                 |                      |                    |                 |                     |                         |                 |             |                |
| V                   | 11490.00        | 50.47                | 30.55              | 5.77            | 24.66               | 50.35                   | 74.00           | -23.65      | PK             |
| V                   | 11490.00        | 43.51                | 30.55              | 5.77            | 24.66               | 43.39                   | 54.00           | -10.61      | AV             |
| V                   | 17235.00        | 52.32                | 30.33              | 6.32            | 24.55               | 52.86                   | 68.20           | -15.34      | PK             |
| V                   | 17235.00        | 42.90                | 30.33              | 6.32            | 24.55               | 43.44                   | 54.00           | -10.56      | AV             |
| V                   | 22980.00        | 49.20                | 30.85              | 7.45            | 24.69               | 50.49                   | 74.00           | -23.51      | PK             |
| V                   | 22980.00        | 42.92                | 30.85              | 7.45            | 24.69               | 44.21                   | 54.00           | -9.79       | AV             |
| V                   | 28725.00        | 53.22                | 31.02              | 8.99            | 25.57               | 56.76                   | 68.20           | -11.44      | PK             |
| V                   | 28725.00        | 43.25                | 31.02              | 8.99            | 25.57               | 46.79                   | 54.00           | -7.21       | AV             |
| H                   | 11490.00        | 50.95                | 30.55              | 5.77            | 24.66               | 50.83                   | 74.00           | -23.17      | PK             |
| H                   | 11490.00        | 42.30                | 30.55              | 5.77            | 24.66               | 42.18                   | 54.00           | -11.82      | AV             |
| H                   | 17235.00        | 54.11                | 30.33              | 6.32            | 24.55               | 54.65                   | 68.20           | -13.55      | PK             |
| H                   | 17235.00        | 41.98                | 30.33              | 6.32            | 24.55               | 42.52                   | 54.00           | -11.48      | AV             |
| H                   | 22980.00        | 52.31                | 30.85              | 7.45            | 24.69               | 53.60                   | 74.00           | -20.40      | PK             |
| H                   | 22980.00        | 43.61                | 30.85              | 7.45            | 24.69               | 44.90                   | 54.00           | -9.10       | AV             |
| H                   | 28725.00        | 52.79                | 31.02              | 8.99            | 25.57               | 56.33                   | 68.20           | -11.87      | PK             |
| H                   | 28725.00        | 42.65                | 31.02              | 8.99            | 25.57               | 46.19                   | 54.00           | -7.81       | AV             |

| Polar (H/V)            | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detect or Type |
|------------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|----------------|
| Middle Channel:5785MHz |                 |                      |                    |                 |                     |                         |                 |             |                |
| V                      | 11570.00        | 49.29                | 30.55              | 5.77            | 24.66               | 49.17                   | 74.00           | -24.83      | PK             |
| V                      | 11570.00        | 41.86                | 30.55              | 5.77            | 24.66               | 41.74                   | 54.00           | -12.26      | AV             |
| V                      | 17355.00        | 48.73                | 30.33              | 6.32            | 24.55               | 49.27                   | 68.20           | -18.93      | PK             |
| V                      | 17355.00        | 41.52                | 30.33              | 6.32            | 24.55               | 42.06                   | 54.00           | -11.94      | AV             |
| V                      | 23140.00        | 50.60                | 30.85              | 7.45            | 24.69               | 51.89                   | 68.20           | -16.31      | PK             |
| V                      | 23140.00        | 41.18                | 30.85              | 7.45            | 24.69               | 42.47                   | 54.00           | -11.53      | AV             |
| V                      | 28925.00        | 48.24                | 31.02              | 8.99            | 25.57               | 51.78                   | 68.20           | -16.42      | PK             |
| V                      | 28925.00        | 41.74                | 31.02              | 8.99            | 25.57               | 45.28                   | 54.00           | -8.72       | AV             |
| H                      | 11570.00        | 48.71                | 30.55              | 5.77            | 24.66               | 48.59                   | 74.00           | -25.41      | PK             |
| H                      | 11570.00        | 42.03                | 30.55              | 5.77            | 24.66               | 41.91                   | 54.00           | -12.09      | AV             |
| H                      | 17355.00        | 53.07                | 30.33              | 6.32            | 24.55               | 53.61                   | 68.20           | -14.59      | PK             |
| H                      | 17355.00        | 41.23                | 30.33              | 6.32            | 24.55               | 41.77                   | 54.00           | -12.23      | AV             |
| H                      | 23140.00        | 50.58                | 30.85              | 7.45            | 24.69               | 51.87                   | 68.20           | -16.33      | PK             |
| H                      | 23140.00        | 41.98                | 30.85              | 7.45            | 24.69               | 43.27                   | 54.00           | -10.73      | AV             |
| H                      | 28925.00        | 48.43                | 31.02              | 8.99            | 25.57               | 51.97                   | 68.20           | -16.23      | PK             |
| H                      | 28925.00        | 41.69                | 31.02              | 8.99            | 25.57               | 45.23                   | 54.00           | -8.77       | AV             |



| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detect<br>or<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|----------------------|
| High Channel:5825MHz |                    |                            |                           |                       |                           |                               |                    |                |                      |
| V                    | 11650.00           | 49.88                      | 30.55                     | 5.77                  | 24.66                     | 49.76                         | 74.00              | -24.24         | PK                   |
| V                    | 11650.00           | 41.49                      | 30.55                     | 5.77                  | 24.66                     | 41.37                         | 54.00              | -12.63         | AV                   |
| V                    | 17475.00           | 48.06                      | 30.33                     | 6.32                  | 24.55                     | 48.60                         | 68.20              | -19.60         | PK                   |
| V                    | 17475.00           | 41.22                      | 30.33                     | 6.32                  | 24.55                     | 41.76                         | 54.00              | -12.24         | AV                   |
| V                    | 23300.00           | 49.27                      | 30.85                     | 7.45                  | 24.69                     | 50.56                         | 68.20              | -17.64         | PK                   |
| V                    | 23300.00           | 41.26                      | 30.85                     | 7.45                  | 24.69                     | 42.55                         | 54.00              | -11.45         | AV                   |
| V                    | 29125.00           | 51.96                      | 31.02                     | 8.99                  | 25.57                     | 55.50                         | 68.20              | -12.70         | PK                   |
| V                    | 29125.00           | 41.50                      | 31.02                     | 8.99                  | 25.57                     | 45.04                         | 54.00              | -8.96          | AV                   |
| H                    | 11650.00           | 50.84                      | 30.55                     | 5.77                  | 24.66                     | 50.72                         | 74.00              | -23.28         | PK                   |
| H                    | 11650.00           | 40.76                      | 30.55                     | 5.77                  | 24.66                     | 40.64                         | 54.00              | -13.36         | AV                   |
| H                    | 17475.00           | 51.05                      | 30.33                     | 6.32                  | 24.55                     | 51.59                         | 68.20              | -16.61         | PK                   |
| H                    | 17475.00           | 41.42                      | 30.33                     | 6.32                  | 24.55                     | 41.96                         | 54.00              | -12.04         | AV                   |
| H                    | 23300.00           | 51.81                      | 30.85                     | 7.45                  | 24.69                     | 53.10                         | 68.20              | -15.10         | PK                   |
| H                    | 23300.00           | 41.55                      | 30.85                     | 7.45                  | 24.69                     | 42.84                         | 54.00              | -11.16         | AV                   |
| H                    | 29125.00           | 48.20                      | 31.02                     | 8.99                  | 25.57                     | 51.74                         | 68.20              | -16.46         | PK                   |
| H                    | 29125.00           | 41.42                      | 31.02                     | 8.99                  | 25.57                     | 44.96                         | 54.00              | -9.04          | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n20

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5745MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 11490.00  | 50.99            | 30.55             | 5.77          | 24.66             | 50.87             | 74.00    | -23.13 | PK                   |
| V                   | 11490.00  | 42.28            | 30.55             | 5.77          | 24.66             | 42.16             | 54.00    | -11.84 | AV                   |
| V                   | 17235.00  | 51.95            | 30.33             | 6.32          | 24.55             | 52.49             | 68.20    | -15.71 | PK                   |
| V                   | 17235.00  | 42.07            | 30.33             | 6.32          | 24.55             | 42.61             | 54.00    | -11.39 | AV                   |
| V                   | 22980.00  | 49.84            | 30.85             | 7.45          | 24.69             | 51.13             | 74.00    | -22.87 | PK                   |
| V                   | 22980.00  | 42.35            | 30.85             | 7.45          | 24.69             | 43.64             | 54.00    | -10.36 | AV                   |
| V                   | 28725.00  | 51.97            | 31.02             | 8.99          | 25.57             | 55.51             | 68.20    | -12.69 | PK                   |
| V                   | 28725.00  | 42.41            | 31.02             | 8.99          | 25.57             | 45.95             | 54.00    | -8.05  | AV                   |
| H                   | 11490.00  | 51.75            | 30.55             | 5.77          | 24.66             | 51.63             | 74.00    | -22.37 | PK                   |
| H                   | 11490.00  | 43.14            | 30.55             | 5.77          | 24.66             | 43.02             | 54.00    | -10.98 | AV                   |
| H                   | 17235.00  | 54.04            | 30.33             | 6.32          | 24.55             | 54.58             | 68.20    | -13.62 | PK                   |
| H                   | 17235.00  | 43.49            | 30.33             | 6.32          | 24.55             | 44.03             | 54.00    | -9.97  | AV                   |
| H                   | 22980.00  | 51.25            | 30.85             | 7.45          | 24.69             | 52.54             | 74.00    | -21.46 | PK                   |
| H                   | 22980.00  | 43.47            | 30.85             | 7.45          | 24.69             | 44.76             | 54.00    | -9.24  | AV                   |
| H                   | 28725.00  | 51.61            | 31.02             | 8.99          | 25.57             | 55.15             | 68.20    | -13.05 | PK                   |
| H                   | 28725.00  | 43.79            | 31.02             | 8.99          | 25.57             | 47.33             | 54.00    | -6.67  | AV                   |

| Polar<br>(H/V)         | Frequency<br><br>(MHz) | Meter<br>Reading<br><br>(dBuV) | Pre-ampl<br>ifier<br><br>(dB) | Cable<br>Loss<br><br>(dB) | Antenna<br>Factor<br><br>(dB) | Emission<br>Level<br><br>(dBuV/m) | Limits<br><br>(dBuV/m) | Margin<br><br>(dB) | Detect<br>or<br>Type |
|------------------------|------------------------|--------------------------------|-------------------------------|---------------------------|-------------------------------|-----------------------------------|------------------------|--------------------|----------------------|
| Middle Channel:5785MHz |                        |                                |                               |                           |                               |                                   |                        |                    |                      |
| V                      | 11570.00               | 49.20                          | 30.55                         | 5.77                      | 24.66                         | 49.08                             | 74.00                  | -24.92             | PK                   |
| V                      | 11570.00               | 41.87                          | 30.55                         | 5.77                      | 24.66                         | 41.75                             | 54.00                  | -12.25             | AV                   |
| V                      | 17355.00               | 48.64                          | 30.33                         | 6.32                      | 24.55                         | 49.18                             | 68.20                  | -19.02             | PK                   |
| V                      | 17355.00               | 41.53                          | 30.33                         | 6.32                      | 24.55                         | 42.07                             | 54.00                  | -11.93             | AV                   |
| V                      | 23140.00               | 50.43                          | 30.85                         | 7.45                      | 24.69                         | 51.72                             | 68.20                  | -16.48             | PK                   |
| V                      | 23140.00               | 41.28                          | 30.85                         | 7.45                      | 24.69                         | 42.57                             | 54.00                  | -11.43             | AV                   |
| V                      | 28925.00               | 48.72                          | 31.02                         | 8.99                      | 25.57                         | 52.26                             | 68.20                  | -15.94             | PK                   |
| V                      | 28925.00               | 41.61                          | 31.02                         | 8.99                      | 25.57                         | 45.15                             | 54.00                  | -8.85              | AV                   |
| H                      | 11570.00               | 48.78                          | 30.55                         | 5.77                      | 24.66                         | 48.66                             | 74.00                  | -25.34             | PK                   |
| H                      | 11570.00               | 41.80                          | 30.55                         | 5.77                      | 24.66                         | 41.68                             | 54.00                  | -12.32             | AV                   |
| H                      | 17355.00               | 53.03                          | 30.33                         | 6.32                      | 24.55                         | 53.57                             | 68.20                  | -14.63             | PK                   |
| H                      | 17355.00               | 41.59                          | 30.33                         | 6.32                      | 24.55                         | 42.13                             | 54.00                  | -11.87             | AV                   |
| H                      | 23140.00               | 50.27                          | 30.85                         | 7.45                      | 24.69                         | 51.56                             | 68.20                  | -16.64             | PK                   |
| H                      | 23140.00               | 41.86                          | 30.85                         | 7.45                      | 24.69                         | 43.15                             | 54.00                  | -10.85             | AV                   |
| H                      | 28925.00               | 48.18                          | 31.02                         | 8.99                      | 25.57                         | 51.72                             | 68.20                  | -16.48             | PK                   |
| H                      | 28925.00               | 41.78                          | 31.02                         | 8.99                      | 25.57                         | 45.32                             | 54.00                  | -8.68              | AV                   |



| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detect<br>or<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|----------------------|
| High Channel:5825MHz |                    |                            |                           |                       |                           |                               |                    |                |                      |
| V                    | 11650.00           | 50.28                      | 30.55                     | 5.77                  | 24.66                     | 50.16                         | 74.00              | -23.84         | PK                   |
| V                    | 11650.00           | 41.81                      | 30.55                     | 5.77                  | 24.66                     | 41.69                         | 54.00              | -12.31         | AV                   |
| V                    | 17475.00           | 48.15                      | 30.33                     | 6.32                  | 24.55                     | 48.69                         | 68.20              | -19.51         | PK                   |
| V                    | 17475.00           | 41.51                      | 30.33                     | 6.32                  | 24.55                     | 42.05                         | 54.00              | -11.95         | AV                   |
| V                    | 23300.00           | 49.37                      | 30.85                     | 7.45                  | 24.69                     | 50.66                         | 68.20              | -17.54         | PK                   |
| V                    | 23300.00           | 41.03                      | 30.85                     | 7.45                  | 24.69                     | 42.32                         | 54.00              | -11.68         | AV                   |
| V                    | 29125.00           | 51.72                      | 31.02                     | 8.99                  | 25.57                     | 55.26                         | 68.20              | -12.94         | PK                   |
| V                    | 29125.00           | 41.09                      | 31.02                     | 8.99                  | 25.57                     | 44.63                         | 54.00              | -9.37          | AV                   |
| H                    | 11650.00           | 50.75                      | 30.55                     | 5.77                  | 24.66                     | 50.63                         | 74.00              | -23.37         | PK                   |
| H                    | 11650.00           | 41.27                      | 30.55                     | 5.77                  | 24.66                     | 41.15                         | 54.00              | -12.85         | AV                   |
| H                    | 17475.00           | 51.38                      | 30.33                     | 6.32                  | 24.55                     | 51.92                         | 68.20              | -16.28         | PK                   |
| H                    | 17475.00           | 41.21                      | 30.33                     | 6.32                  | 24.55                     | 41.75                         | 54.00              | -12.25         | AV                   |
| H                    | 23300.00           | 52.15                      | 30.85                     | 7.45                  | 24.69                     | 53.44                         | 68.20              | -14.76         | PK                   |
| H                    | 23300.00           | 41.57                      | 30.85                     | 7.45                  | 24.69                     | 42.86                         | 54.00              | -11.14         | AV                   |
| H                    | 29125.00           | 48.06                      | 31.02                     | 8.99                  | 25.57                     | 51.60                         | 68.20              | -16.60         | PK                   |
| H                    | 29125.00           | 41.54                      | 31.02                     | 8.99                  | 25.57                     | 45.08                         | 54.00              | -8.92          | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n40

| Polar (H/V)         | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detect or Type |
|---------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|----------------|
| Low Channel:5755MHz |                 |                      |                    |                 |                     |                         |                 |             |                |
| V                   | 11510.00        | 51.36                | 30.55              | 5.77            | 24.66               | 51.24                   | 74.00           | -22.76      | PK             |
| V                   | 11510.00        | 43.63                | 30.55              | 5.77            | 24.66               | 43.51                   | 54.00           | -10.49      | AV             |
| V                   | 17265.00        | 52.20                | 30.33              | 6.32            | 24.55               | 52.74                   | 68.20           | -15.46      | PK             |
| V                   | 17265.00        | 43.24                | 30.33              | 6.32            | 24.55               | 43.78                   | 54.00           | -10.22      | AV             |
| V                   | 23020.00        | 49.40                | 30.85              | 7.45            | 24.69               | 50.69                   | 74.00           | -23.31      | PK             |
| V                   | 23020.00        | 43.17                | 30.85              | 7.45            | 24.69               | 44.46                   | 54.00           | -9.54       | AV             |
| V                   | 28775.00        | 52.54                | 31.02              | 8.99            | 25.57               | 56.08                   | 68.20           | -12.12      | PK             |
| V                   | 28775.00        | 43.00                | 31.02              | 8.99            | 25.57               | 46.54                   | 54.00           | -7.46       | AV             |
| H                   | 11510.00        | 50.78                | 30.55              | 5.77            | 24.66               | 50.66                   | 74.00           | -23.34      | PK             |
| H                   | 11510.00        | 42.65                | 30.55              | 5.77            | 24.66               | 42.53                   | 54.00           | -11.47      | AV             |
| H                   | 17265.00        | 54.23                | 30.33              | 6.32            | 24.55               | 54.77                   | 68.20           | -13.43      | PK             |
| H                   | 17265.00        | 42.63                | 30.33              | 6.32            | 24.55               | 43.17                   | 54.00           | -10.83      | AV             |
| H                   | 23020.00        | 51.80                | 30.85              | 7.45            | 24.69               | 53.09                   | 74.00           | -20.91      | PK             |
| H                   | 23020.00        | 43.44                | 30.85              | 7.45            | 24.69               | 44.73                   | 54.00           | -9.27       | AV             |
| H                   | 28775.00        | 52.00                | 31.02              | 8.99            | 25.57               | 55.54                   | 68.20           | -12.66      | PK             |
| H                   | 28775.00        | 43.10                | 31.02              | 8.99            | 25.57               | 46.64                   | 54.00           | -7.36       | AV             |

| Polar (H/V)            | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detect or Type |
|------------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|----------------|
| Middle Channel:5795MHz |                 |                      |                    |                 |                     |                         |                 |             |                |
| V                      | 11590.00        | 49.19                | 30.55              | 5.77            | 24.66               | 49.07                   | 74.00           | -24.93      | PK             |
| V                      | 11590.00        | 41.71                | 30.55              | 5.77            | 24.66               | 41.59                   | 54.00           | -12.41      | AV             |
| V                      | 17385.00        | 48.62                | 30.33              | 6.32            | 24.55               | 49.16                   | 68.20           | -19.04      | PK             |
| V                      | 17385.00        | 41.60                | 30.33              | 6.32            | 24.55               | 42.14                   | 54.00           | -11.86      | AV             |
| V                      | 23180.00        | 50.79                | 30.85              | 7.45            | 24.69               | 52.08                   | 68.20           | -16.12      | PK             |
| V                      | 23180.00        | 41.35                | 30.85              | 7.45            | 24.69               | 42.64                   | 54.00           | -11.36      | AV             |
| V                      | 28975.00        | 48.62                | 31.02              | 8.99            | 25.57               | 52.16                   | 68.20           | -16.04      | PK             |
| V                      | 28975.00        | 41.80                | 31.02              | 8.99            | 25.57               | 45.34                   | 54.00           | -8.66       | AV             |
| H                      | 11590.00        | 48.93                | 30.55              | 5.77            | 24.66               | 48.81                   | 74.00           | -25.19      | PK             |
| H                      | 11590.00        | 41.88                | 30.55              | 5.77            | 24.66               | 41.76                   | 54.00           | -12.24      | AV             |
| H                      | 17385.00        | 53.09                | 30.33              | 6.32            | 24.55               | 53.63                   | 68.20           | -14.57      | PK             |
| H                      | 17385.00        | 41.58                | 30.33              | 6.32            | 24.55               | 42.12                   | 54.00           | -11.88      | AV             |
| H                      | 23180.00        | 50.37                | 30.85              | 7.45            | 24.69               | 51.66                   | 68.20           | -16.54      | PK             |
| H                      | 23180.00        | 41.50                | 30.85              | 7.45            | 24.69               | 42.79                   | 54.00           | -11.21      | AV             |
| H                      | 28975.00        | 48.29                | 31.02              | 8.99            | 25.57               | 51.83                   | 68.20           | -16.37      | PK             |
| H                      | 28975.00        | 41.83                | 31.02              | 8.99            | 25.57               | 45.37                   | 54.00           | -8.63       | AV             |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



#### 4.2.7 RADIATED BAND EDGE TEST RESULT

|               |                          |                     |       |
|---------------|--------------------------|---------------------|-------|
| Temperature : | 26°C                     | Relative Humidity : | 54%   |
| Pressure :    | 1010 hPa                 | Test Voltage :      | DC 5V |
| Test Mode :   | TX - 802.11a & n20 & n40 |                     |       |

#### 802.11a

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5745MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 5700.00   | 64.41            | 30.45             | 8.77          | 38.66             | 81.39             | 110.80   | -29.41 | PK                   |
| V                   | 5700.00   | 30.57            | 30.45             | 8.77          | 38.66             | 47.55             | 54.00    | -6.45  | AV                   |
| V                   | 5725.00   | 63.24            | 30.45             | 8.77          | 38.66             | 80.22             | 122.20   | -41.98 | PK                   |
| V                   | 5725.00   | 31.50            | 30.45             | 8.77          | 38.66             | 48.48             | 54.00    | -5.52  | AV                   |
| H                   | 5700.00   | 63.90            | 30.45             | 8.77          | 38.66             | 80.88             | 110.80   | -29.92 | PK                   |
| H                   | 5700.00   | 31.14            | 30.45             | 8.77          | 38.66             | 48.12             | 54.00    | -5.88  | AV                   |
| H                   | 5725.00   | 65.31            | 30.45             | 8.77          | 38.66             | 82.29             | 122.20   | -39.91 | PK                   |
| H                   | 5725.00   | 32.01            | 30.45             | 8.77          | 38.66             | 48.99             | 54.00    | -5.01  | AV                   |

| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5825MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 5850.00   | 65.34            | 30.45             | 8.77          | 38.66             | 82.32             | 122.20   | -39.88 | PK                   |
| V                    | 5850.00   | 32.08            | 30.45             | 8.77          | 38.66             | 49.06             | 54.00    | -4.94  | AV                   |
| V                    | 5875.00   | 64.99            | 30.45             | 8.77          | 38.66             | 81.97             | 110.80   | -28.83 | PK                   |
| V                    | 5875.00   | 31.05            | 30.45             | 8.77          | 38.66             | 48.03             | 54.00    | -5.97  | AV                   |
| H                    | 5850.00   | 65.95            | 30.45             | 8.77          | 38.66             | 82.93             | 122.20   | -39.27 | PK                   |
| H                    | 5850.00   | 31.58            | 30.45             | 8.77          | 38.66             | 48.56             | 54.00    | -5.44  | AV                   |
| H                    | 5875.00   | 64.48            | 30.45             | 8.77          | 38.66             | 81.46             | 110.80   | -29.34 | PK                   |
| H                    | 5875.00   | 31.38            | 30.45             | 8.77          | 38.66             | 48.36             | 54.00    | -5.64  | AV                   |

#### Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5745MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 5700.00   | 64.63            | 30.45             | 8.77          | 38.66             | 81.61             | 110.80   | -29.19 | PK                   |
| V                   | 5700.00   | 30.85            | 30.45             | 8.77          | 38.66             | 47.83             | 54.00    | -6.17  | AV                   |
| V                   | 5725.00   | 62.88            | 30.45             | 8.77          | 38.66             | 79.86             | 122.20   | -42.34 | PK                   |
| V                   | 5725.00   | 31.62            | 30.45             | 8.77          | 38.66             | 48.60             | 54.00    | -5.40  | AV                   |
| H                   | 5700.00   | 63.74            | 30.45             | 8.77          | 38.66             | 80.72             | 110.80   | -30.08 | PK                   |
| H                   | 5700.00   | 30.62            | 30.45             | 8.77          | 38.66             | 47.60             | 54.00    | -6.40  | AV                   |
| H                   | 5725.00   | 64.89            | 30.45             | 8.77          | 38.66             | 81.87             | 122.20   | -40.33 | PK                   |
| H                   | 5725.00   | 32.40            | 30.45             | 8.77          | 38.66             | 49.38             | 54.00    | -4.62  | AV                   |

| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5825MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 5850.00   | 65.98            | 30.45             | 8.77          | 38.66             | 82.96             | 122.20   | -39.24 | PK                   |
| V                    | 5850.00   | 31.79            | 30.45             | 8.77          | 38.66             | 48.77             | 54.00    | -5.23  | AV                   |
| V                    | 5875.00   | 64.90            | 30.45             | 8.77          | 38.66             | 81.88             | 110.80   | -28.92 | PK                   |
| V                    | 5875.00   | 30.74            | 30.45             | 8.77          | 38.66             | 47.72             | 54.00    | -6.28  | AV                   |
| H                    | 5850.00   | 66.17            | 30.45             | 8.77          | 38.66             | 83.15             | 122.20   | -39.05 | PK                   |
| H                    | 5850.00   | 31.68            | 30.45             | 8.77          | 38.66             | 48.66             | 54.00    | -5.34  | AV                   |
| H                    | 5875.00   | 64.57            | 30.45             | 8.77          | 38.66             | 81.55             | 110.80   | -29.25 | PK                   |
| H                    | 5875.00   | 31.06            | 30.45             | 8.77          | 38.66             | 48.04             | 54.00    | -5.96  | AV                   |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| Low Channel:5755MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                   | 5700.00   | 64.94            | 30.45             | 8.77          | 38.66             | 81.92             | 110.80   | -28.88 | PK                   |
| V                   | 5700.00   | 30.76            | 30.45             | 8.77          | 38.66             | 47.74             | 54.00    | -6.26  | AV                   |
| V                   | 5725.00   | 63.04            | 30.45             | 8.77          | 38.66             | 80.02             | 122.20   | -42.18 | PK                   |
| V                   | 5725.00   | 32.19            | 30.45             | 8.77          | 38.66             | 49.17             | 54.00    | -4.83  | AV                   |
| H                   | 5700.00   | 63.49            | 30.45             | 8.77          | 38.66             | 80.47             | 110.80   | -30.33 | PK                   |
| H                   | 5700.00   | 30.72            | 30.45             | 8.77          | 38.66             | 47.70             | 54.00    | -6.30  | AV                   |
| H                   | 5725.00   | 65.33            | 30.45             | 8.77          | 38.66             | 82.31             | 122.20   | -39.89 | PK                   |
| H                   | 5725.00   | 32.44            | 30.45             | 8.77          | 38.66             | 49.42             | 54.00    | -4.58  | AV                   |

| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                      |
| High Channel:5795MHz |           |                  |                   |               |                   |                   |          |        |                      |
| V                    | 5850.00   | 65.90            | 30.45             | 8.77          | 38.66             | 82.88             | 122.20   | -39.32 | PK                   |
| V                    | 5850.00   | 32.03            | 30.45             | 8.77          | 38.66             | 49.01             | 54.00    | -4.99  | AV                   |
| V                    | 5875.00   | 65.25            | 30.45             | 8.77          | 38.66             | 82.23             | 110.80   | -28.57 | PK                   |
| V                    | 5875.00   | 31.13            | 30.45             | 8.77          | 38.66             | 48.11             | 54.00    | -5.89  | AV                   |
| H                    | 5850.00   | 66.06            | 30.45             | 8.77          | 38.66             | 83.04             | 122.20   | -39.16 | PK                   |
| H                    | 5850.00   | 32.27            | 30.45             | 8.77          | 38.66             | 49.25             | 54.00    | -4.75  | AV                   |
| H                    | 5875.00   | 63.98            | 30.45             | 8.77          | 38.66             | 80.96             | 110.80   | -29.84 | PK                   |
| H                    | 5875.00   | 31.13            | 30.45             | 8.77          | 38.66             | 48.11             | 54.00    | -5.89  | AV                   |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a) (3) (i)

(1) Power limits:

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 5.2 TEST PROCEDURE

For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ( $< 1$  MHz, or  $< 500$  kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW ( $< 500$  KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW ( $< 1$  MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

### 5.3 DEVIATION FROM STANDARD

No deviation.



#### 5.4 TEST SETUP



#### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




|               |          |                     |       |
|---------------|----------|---------------------|-------|
| Temperature : | 26 °C    | Relative Humidity : | 54%   |
| Pressure :    | 1015 hPa | Test Voltage :      | DC 5V |
| Test Band :   | 5.8G     |                     |       |


| Test mode                                  | Test Channel<br>(MHz) | PSD<br>(dBm/500kHz) | Duty Cycle<br>Factor<br>(dB) | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------------------------------|-----------------------|---------------------|------------------------------|---------------------------|-----------------------|--------|
| 802.11a                                    | 5745                  | 1.251               | 0                            | 1.251                     | 30                    | Pass   |
|                                            | 5785                  | 1.984               | 0                            | 1.984                     | 30                    | Pass   |
|                                            | 5825                  | 2.420               | 0                            | 2.420                     | 30                    | Pass   |
| 802.11n20                                  | 5745                  | 0.108               | 0                            | 0.108                     | 30                    | Pass   |
|                                            | 5785                  | 0.968               | 0                            | 0.968                     | 30                    | Pass   |
|                                            | 5825                  | 1.579               | 0                            | 1.579                     | 30                    | Pass   |
| 802.11n40                                  | 5755                  | -3.197              | 0                            | -3.197                    | 30                    | Pass   |
|                                            | 5795                  | -2.578              | 0                            | -2.578                    | 30                    | Pass   |
| Note: Total PSD = PSD + Duty Cycle Factor. |                       |                     |                              |                           |                       |        |




802.11a  
CH149

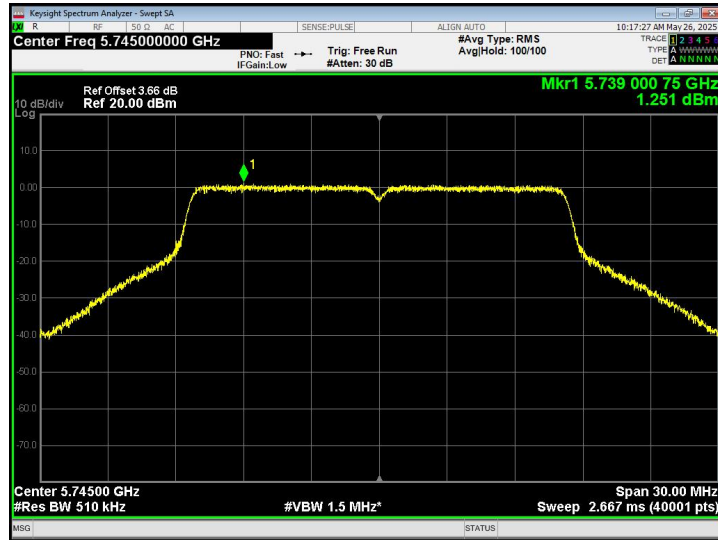

CH157

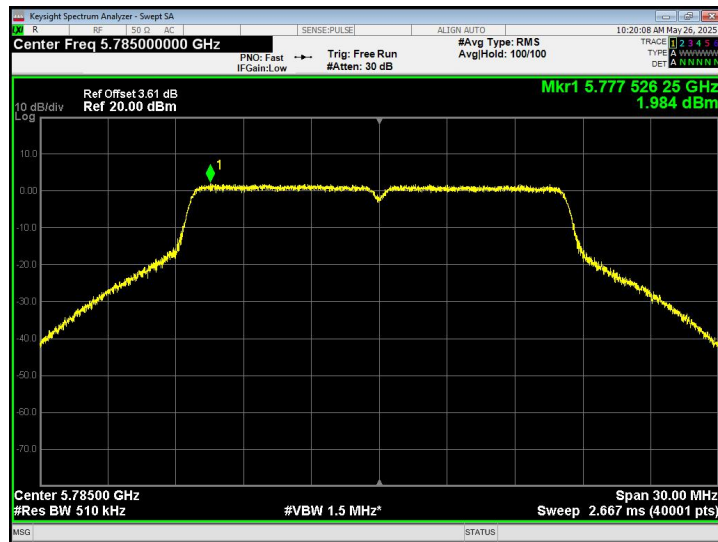


CH165

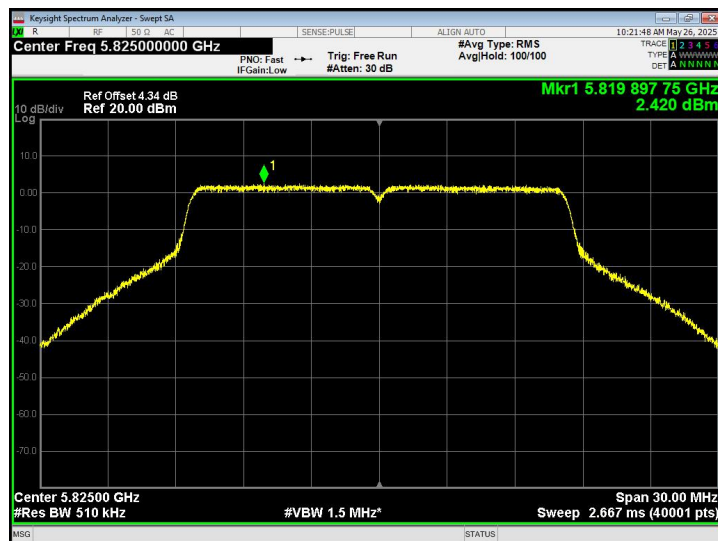





802.11n20  
CH149

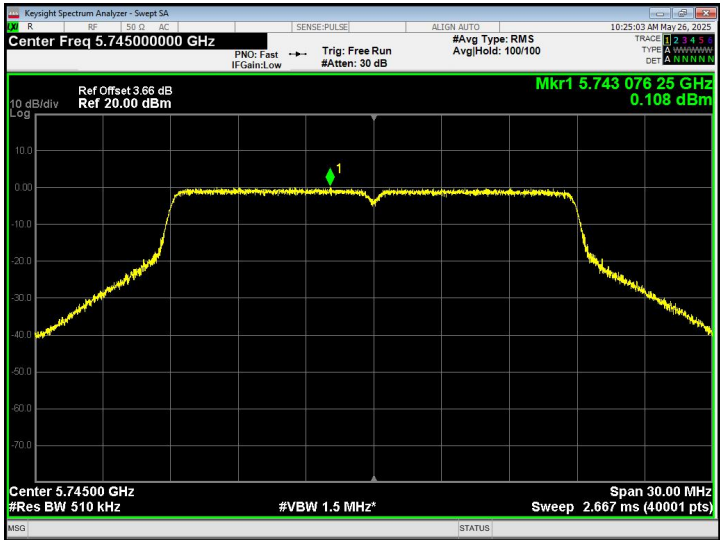


802.11n40  
CH151

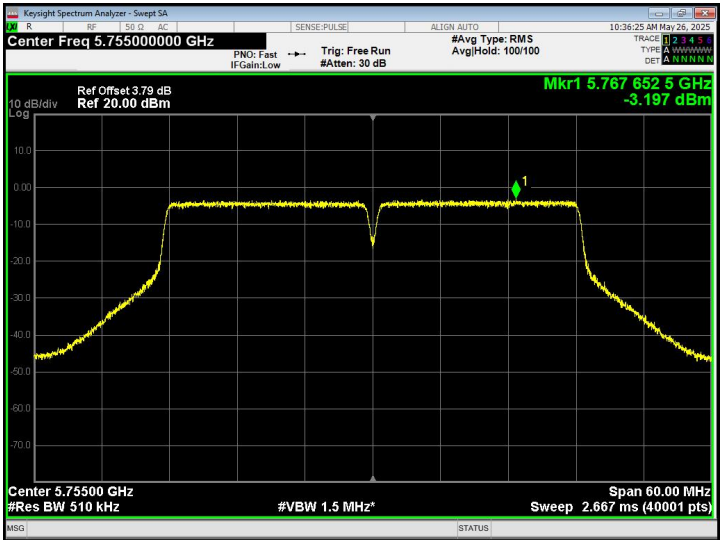


CH157

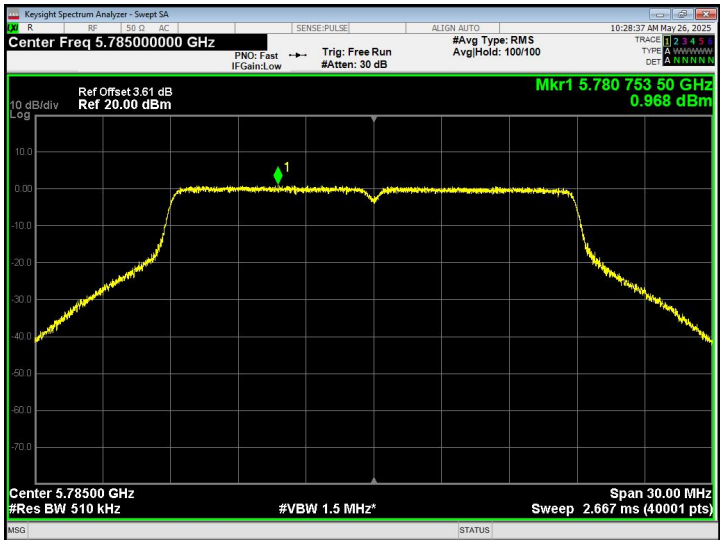

CH159

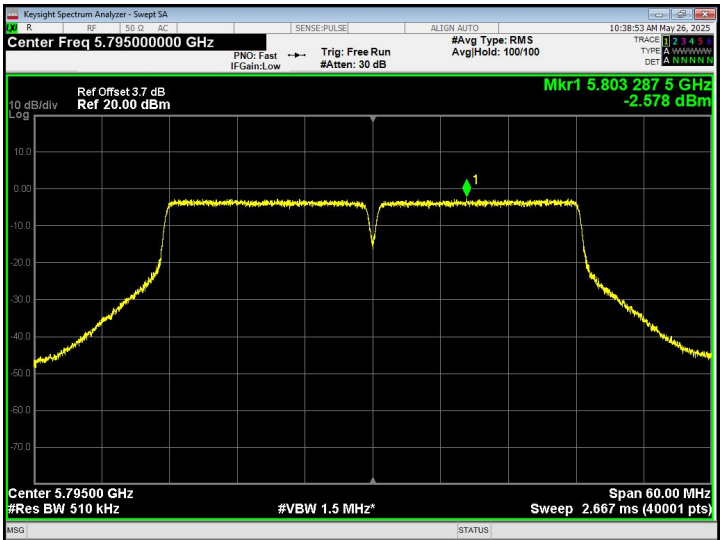

CH165

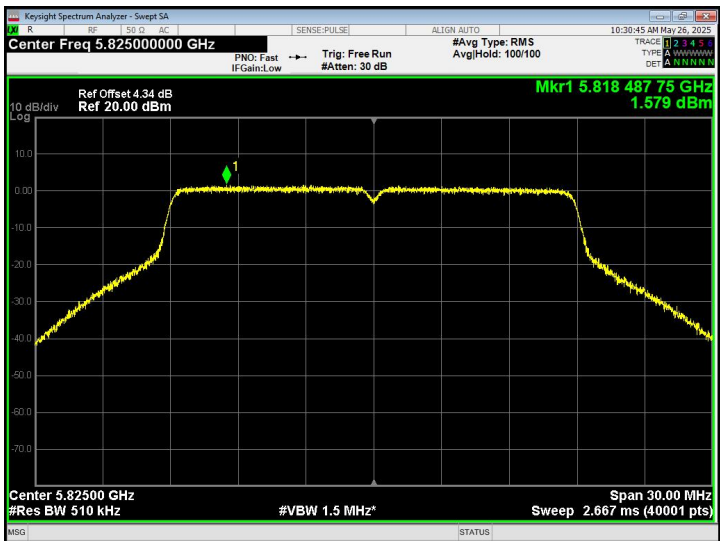



## 6. 6DB OCCUPIED BANDWIDTH

### 6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB Occupied Bandwidth:


The procedure for this method is as follows:

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB Emission bandwidth:

The procedure for this method is as follows:

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

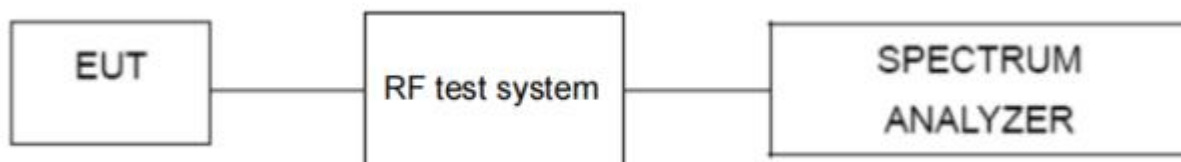

### 6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



#### 6.4 TEST RESULTS


|               |        |                     |       |
|---------------|--------|---------------------|-------|
| Temperature : | 26 °C  | Relative Humidity : | 54%   |
| Pressure :    | 101kPa | Test Voltage :      | DC 5V |
| Test Band :   | 5.8G   |                     |       |

| Test Mode | Test Channel<br>(MHz) | 6dB Bandwidth<br>(MHz) | 6dB Limit<br>(kHz) | Result |
|-----------|-----------------------|------------------------|--------------------|--------|
| 802.11a   | 5745                  | 16.31                  | >500               | Pass   |
|           | 5785                  | 16.33                  |                    |        |
|           | 5825                  | 16.30                  |                    |        |
| 802.11n20 | 5745                  | 17.55                  | >500               | Pass   |
|           | 5785                  | 17.60                  |                    |        |
|           | 5825                  | 17.55                  |                    |        |
| 802.11n40 | 5755                  | 36.29                  | >500               | Pass   |
|           | 5795                  | 36.34                  |                    |        |




802.11a


6dB Bandwidth plot on channel 149

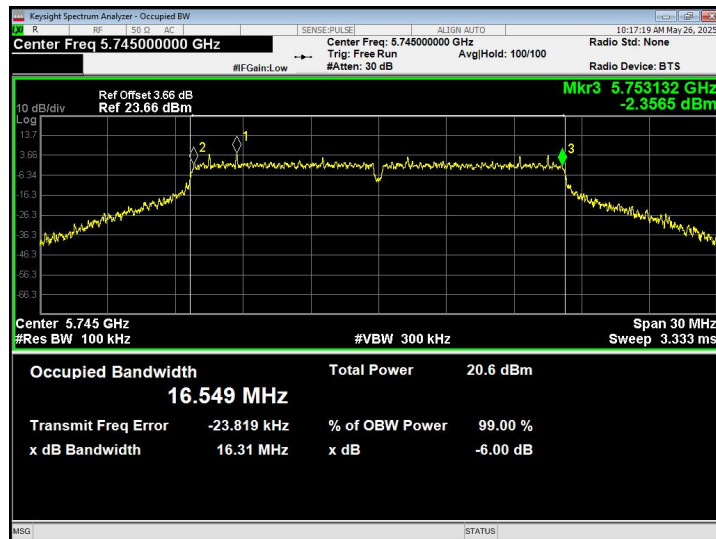

6dB Bandwidth plot on channel 157

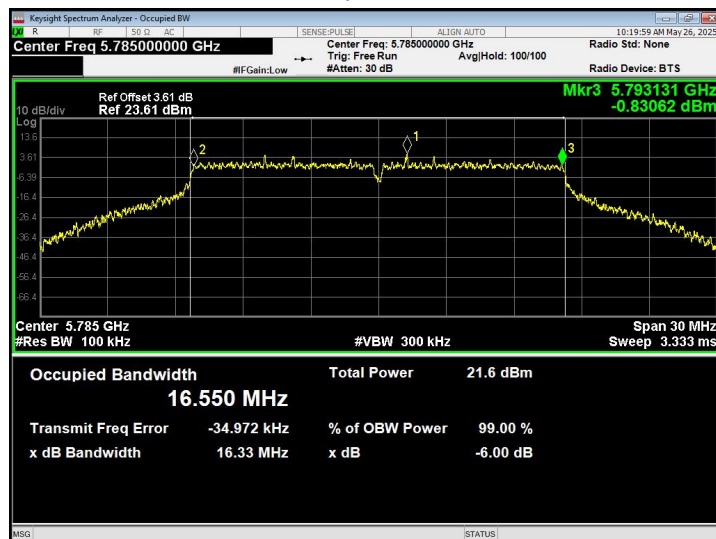


6dB Bandwidth plot on channel 165

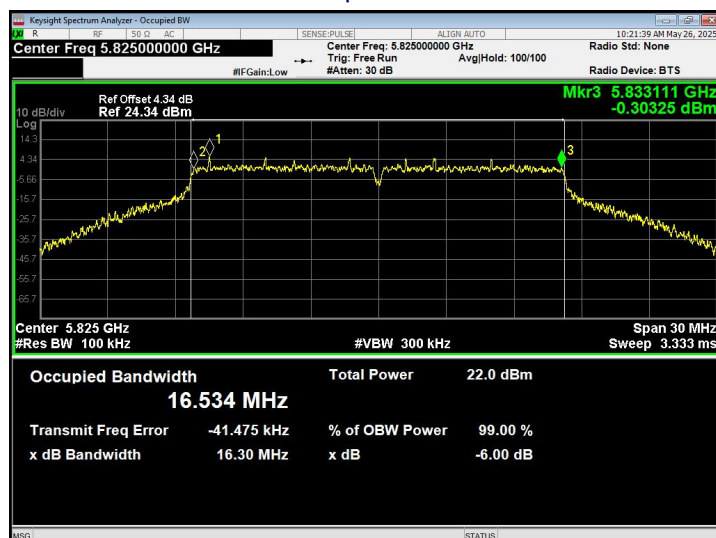




802.11n20


6dB Bandwidth plot on channel 149

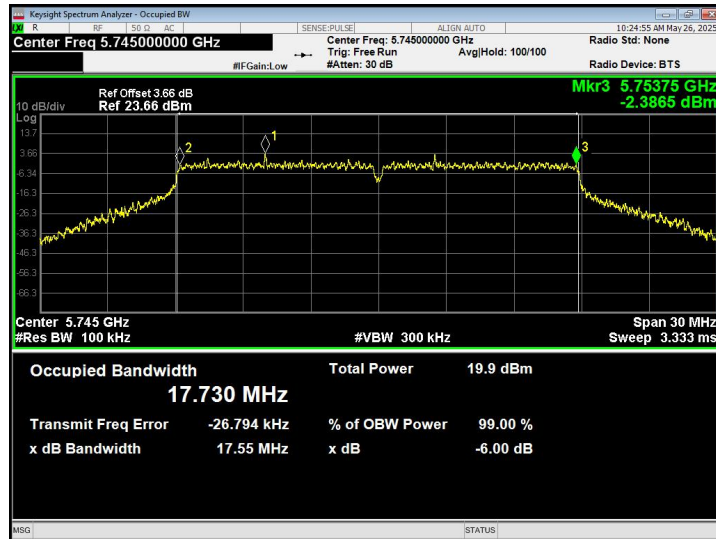

6dB Bandwidth plot on channel 157

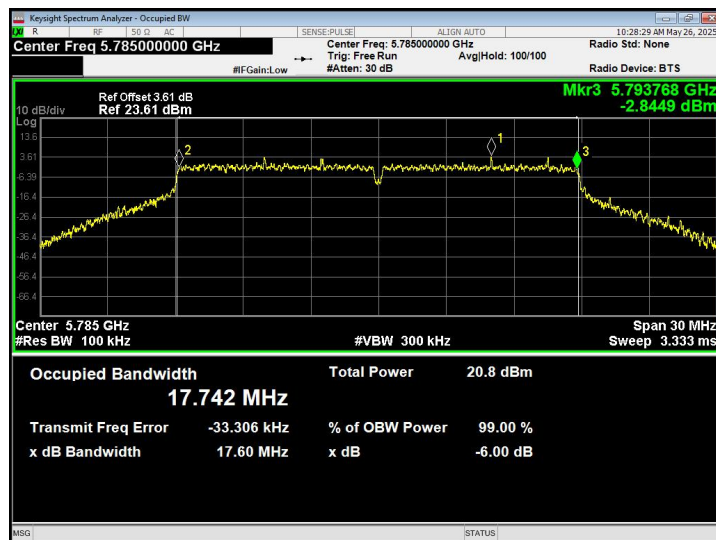


6dB Bandwidth plot on channel 165

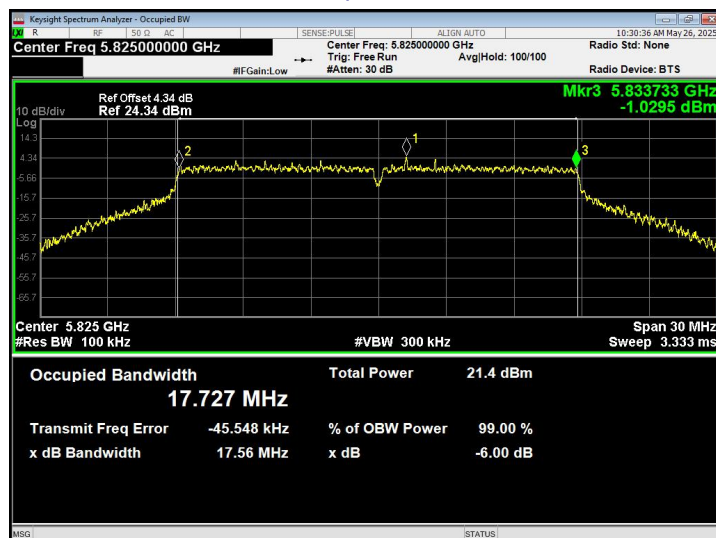




802.11n40

6dB Bandwidth plot on channel 151

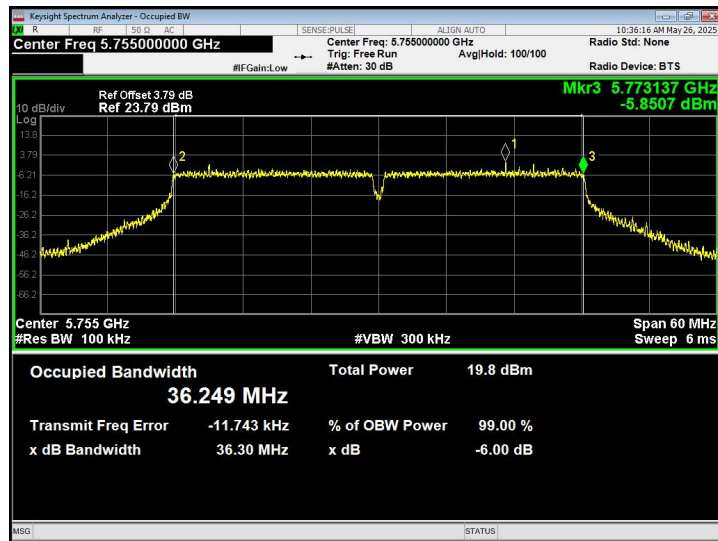

6dB Bandwidth plot on channel 159

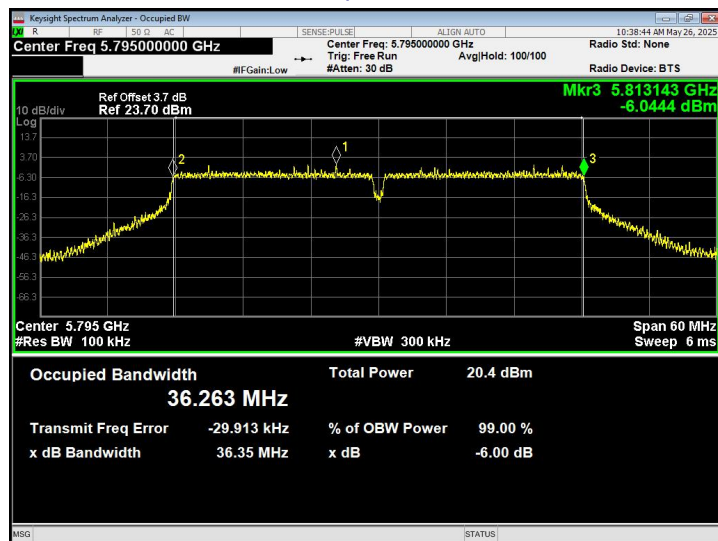



## 7. MAXIMUM CONDUCTED OUTPUT POWER

### 7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407 (a)(3)(i)  
The maximum conducted output power should not exceed:

| Frequency Band(MHz) | Limit |
|---------------------|-------|
| 5725~5850           | 1W    |

### 7.2 TEST PROCEDURE

According 789033 D02 General UNII Test Procedures New Rules v02r01.  
EUT Measurement using a Power Meter (PM)

a) Method PM (Measurement using an RF average power meter):

(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
- The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(ii) If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding  $10 \log (1/x)$  where  $x$  is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25%).


b) Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

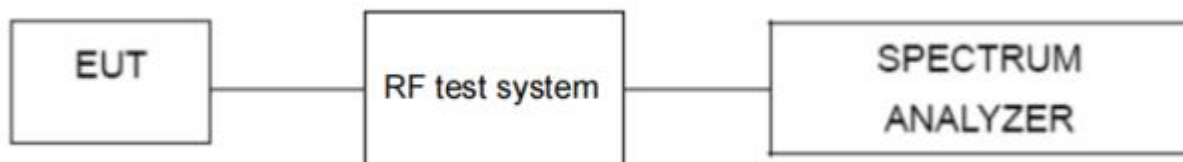

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



## 7.6 TEST RESULTS

|               |          |                     |       |
|---------------|----------|---------------------|-------|
| Temperature : | 26 °C    | Relative Humidity : | 54%   |
| Pressure :    | 1012 hPa | Test Voltage :      | DC 5V |
| Test Band :   | 5.8G     |                     |       |

| Test Mode  | Frequency (MHz) | Output Power (dBm) | Duty Cycle Factor (dB) | Total Power (dBm) | Limit (dBm) | Result |
|------------|-----------------|--------------------|------------------------|-------------------|-------------|--------|
| 802.11 a   | 5745            | 6.64               | 0                      | 6.64              | 30          | Pass   |
|            | 5785            | 6.55               | 0                      | 6.55              | 30          | Pass   |
|            | 5825            | 6.11               | 0                      | 6.11              | 30          | Pass   |
| 802.11 n20 | 5745            | 4.89               | 0                      | 4.89              | 30          | Pass   |
|            | 5785            | 4.92               | 0                      | 4.92              | 30          | Pass   |
|            | 5825            | 4.49               | 0                      | 4.49              | 30          | Pass   |
| 802.11 n40 | 5755            | 3.82               | 0                      | 3.82              | 30          | Pass   |
|            | 5795            | 3.36               | 0                      | 3.36              | 30          | Pass   |

Note: Total Power = Output Power + Duty Cycle Factor.



## 8. OUT OF BAND EMISSIONS

### 8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2)

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


### 8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

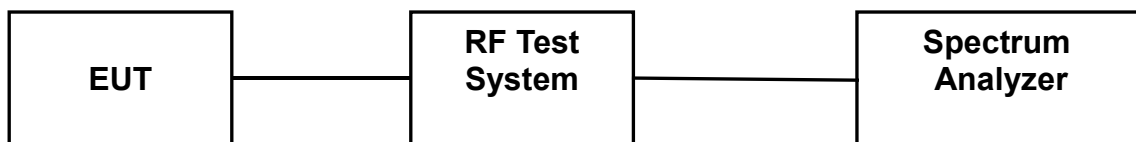

### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.6 TEST RESULTS


|               |          |                     |         |
|---------------|----------|---------------------|---------|
| Temperature : | 26 °C    | Relative Humidity : | 54%     |
| Pressure :    | 1012 hPa | Test Voltage :      | DC 5V   |
| Test band :   | 5.8G     | Antenna gain :      | 2.64dBi |

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

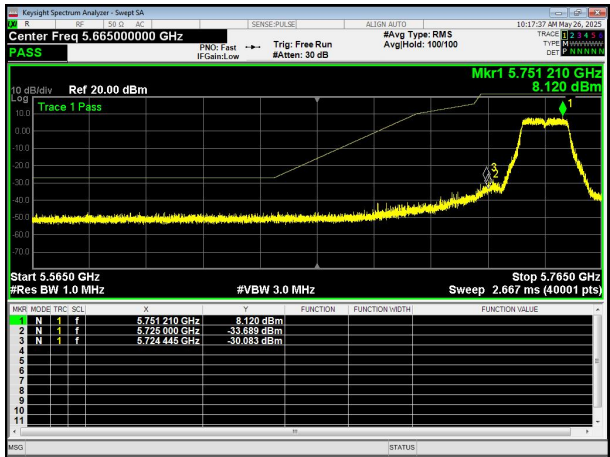


(802.11a) Band Edge, Right Side

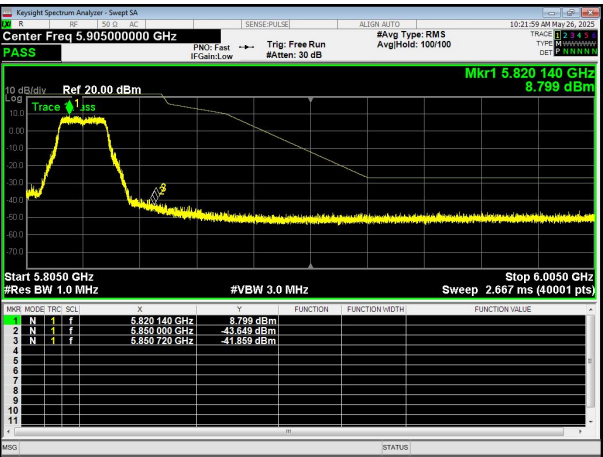


(802.11n20) Band Edge, Left Side

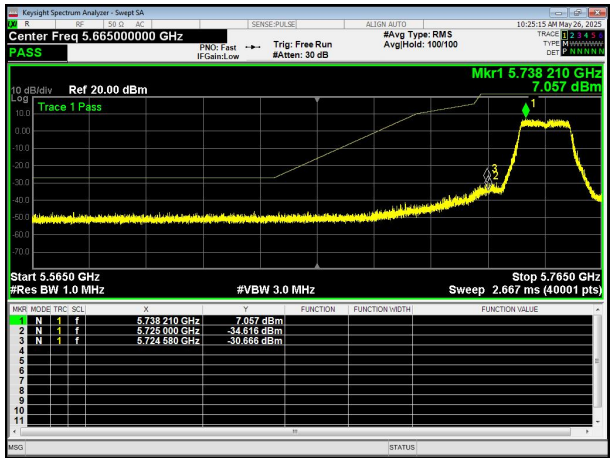


(802.11n20) Band Edge, Right Side

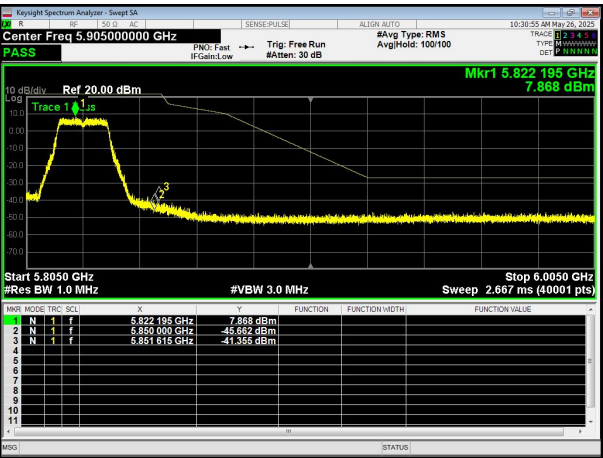

(802.11n40) Band Edge, Left Side

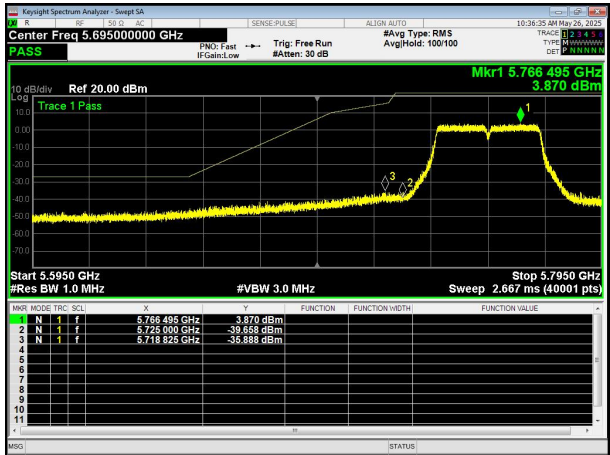

(802.11n40) Band Edge, Right Side

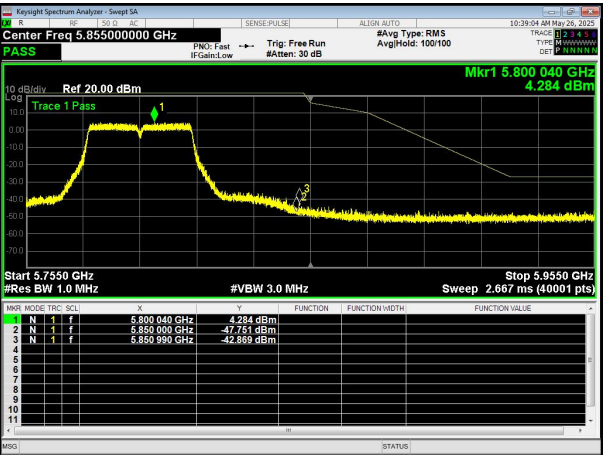



## 9. FREQUENCY STABILITY MEASUREMENT

### 9.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be (IEEE 802.11n specification).

### 9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm.
6. The test extreme voltage is to change the primary supply voltage from 85% to 115% percent of the nominal value.
7. Extreme temperature is -20°C~70°C.

### 9.3 TEST SETUP LAYOUT

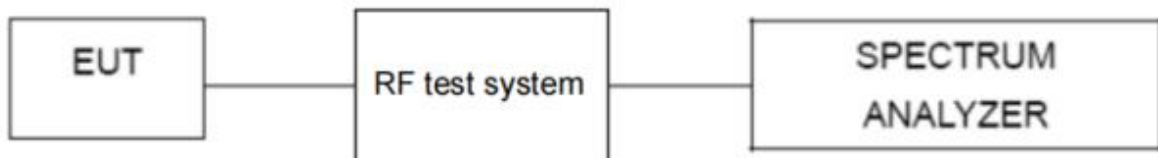

### 9.4 EUT OPERATION DURING TEST

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



## 9.5 TEST RESULTS

|                                                                                                     |          |                     |       |
|-----------------------------------------------------------------------------------------------------|----------|---------------------|-------|
| Temperature :                                                                                       | 26 °C    | Relative Humidity : | 54%   |
| Pressure :                                                                                          | 1012 hPa | Test Voltage :      | DC 5V |
| Note: Note: All channels have been tested, and only the worst test data is recorded in this report. |          |                     |       |

Extreme temperature frequency stability:

| Reference Frequency: 802.11a - 5745MHz |                      |                                     |                 |
|----------------------------------------|----------------------|-------------------------------------|-----------------|
| Environment Temperature (°C)           | Power Supplied (VDC) | Frequency Measure with Time Elapsed |                 |
|                                        |                      | Measured Frequency (MHz)            | Deviation (ppm) |
| 70                                     | 5                    | 5744.963                            | -6.376          |
| 60                                     | 5                    | 5744.978                            | -3.801          |
| 50                                     | 5                    | 5744.961                            | -6.708          |
| 40                                     | 5                    | 5744.962                            | -6.602          |
| 30                                     | 5                    | 5744.966                            | -5.842          |
| 25                                     | 5                    | 5744.979                            | -3.724          |
| 10                                     | 5                    | 5744.968                            | -5.591          |
| 0                                      | 5                    | 5744.973                            | -4.622          |
| -10                                    | 5                    | 5744.963                            | -6.500          |
| -20                                    | 5                    | 5744.976                            | -4.187          |

| Reference Frequency: 802.11n20 - 5745MHz |                      |                                     |                 |
|------------------------------------------|----------------------|-------------------------------------|-----------------|
| Environment Temperature (°C)             | Power Supplied (VDC) | Frequency Measure with Time Elapsed |                 |
|                                          |                      | Measured Frequency (MHz)            | Deviation (ppm) |
| 70                                       | 5                    | 5744.971                            | -5.032          |
| 60                                       | 5                    | 5744.972                            | -4.790          |
| 50                                       | 5                    | 5744.969                            | -5.471          |
| 40                                       | 5                    | 5744.951                            | -8.517          |
| 30                                       | 5                    | 5744.970                            | -5.287          |
| 25                                       | 5                    | 5744.973                            | -4.649          |
| 10                                       | 5                    | 5744.978                            | -3.854          |
| 0                                        | 5                    | 5744.956                            | -7.614          |
| -10                                      | 5                    | 5744.963                            | -6.420          |
| -20                                      | 5                    | 5744.963                            | -6.418          |



| Reference Frequency: 802.11n40 - 5755MHz |                      |                                     |                 |
|------------------------------------------|----------------------|-------------------------------------|-----------------|
| Environment Temperature (°C)             | Power Supplied (VDC) | Frequency Measure with Time Elapsed |                 |
|                                          |                      | Measured Frequency (MHz)            | Deviation (ppm) |
| 70                                       | 5                    | 5754.968                            | -5.620          |
| 60                                       | 5                    | 5754.977                            | -4.081          |
| 50                                       | 5                    | 5754.966                            | -5.913          |
| 40                                       | 5                    | 5754.952                            | -8.273          |
| 30                                       | 5                    | 5754.979                            | -3.653          |
| 25                                       | 5                    | 5754.965                            | -5.998          |
| 10                                       | 5                    | 5754.974                            | -4.559          |
| 0                                        | 5                    | 5754.953                            | -8.172          |
| -10                                      | 5                    | 5754.961                            | -6.704          |
| -20                                      | 5                    | 5754.977                            | -3.970          |



|                                                                                                     |          |                     |       |
|-----------------------------------------------------------------------------------------------------|----------|---------------------|-------|
| Temperature :                                                                                       | 26 °C    | Relative Humidity : | 54%   |
| Pressure :                                                                                          | 1012 hPa | Test Voltage :      | DC 5V |
| Note: Note: All channels have been tested, and only the worst test data is recorded in this report. |          |                     |       |

Extreme voltage frequency stability:

| Reference Frequency: 802.11a - 5745MHz |                      |                                     |                 |
|----------------------------------------|----------------------|-------------------------------------|-----------------|
| Environment Temperature (°C)           | Power Supplied (VDC) | Frequency Measure with Time Elapsed |                 |
|                                        |                      | Measured Frequency (MHz)            | Deviation (ppm) |
| 25                                     | 5.7                  | 5744.975                            | -4.385          |
| 25                                     | 5.2                  | 5744.979                            | -3.644          |
| 25                                     | 5                    | 5744.980                            | -3.574          |
| 25                                     | 4.6                  | 5744.980                            | -3.473          |
| 25                                     | 3.8                  | 5744.970                            | -5.145          |

| Reference Frequency: 802.11n20 - 5745MHz |                      |                                     |                 |
|------------------------------------------|----------------------|-------------------------------------|-----------------|
| Environment Temperature (°C)             | Power Supplied (VDC) | Frequency Measure with Time Elapsed |                 |
|                                          |                      | Measured Frequency (MHz)            | Deviation (ppm) |
| 25                                       | 5.7                  | 5744.969                            | -5.437          |
| 25                                       | 5.2                  | 5744.975                            | -4.375          |
| 25                                       | 5                    | 5744.969                            | -5.443          |
| 25                                       | 4.6                  | 5744.974                            | -4.571          |
| 25                                       | 3.8                  | 5744.970                            | -5.264          |

| Reference Frequency: 802.11n40 - 5755MHz |                      |                                     |                 |
|------------------------------------------|----------------------|-------------------------------------|-----------------|
| Environment Temperature (°C)             | Power Supplied (VDC) | Frequency Measure with Time Elapsed |                 |
|                                          |                      | Measured Frequency (MHz)            | Deviation (ppm) |
| 25                                       | 5.7                  | 5754.970                            | -5.274          |
| 25                                       | 5.2                  | 5754.971                            | -5.142          |
| 25                                       | 5                    | 5754.971                            | -5.152          |
| 25                                       | 4.6                  | 5754.955                            | -7.724          |
| 25                                       | 3.8                  | 5754.968                            | -5.653          |



## 10. DUTY CYCLE

### 10.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
  - 1) Set the center frequency of the instrument to the center frequency of the transmission.
  - 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
  - 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
  - 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 10.2 DEVIATION FROM STANDARD

No deviation.

### 10.3 TEST SETUP

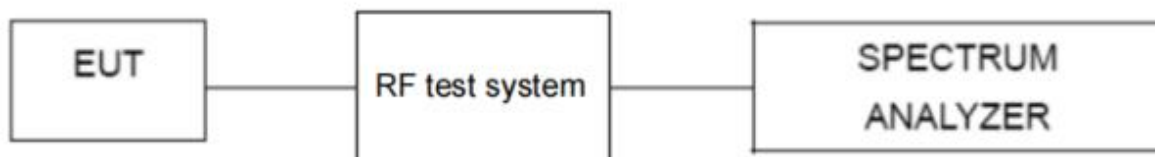

### 10.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




## 10.5 TEST RESULTS

|                                                                                               |          |                     |       |
|-----------------------------------------------------------------------------------------------|----------|---------------------|-------|
| Temperature :                                                                                 | 26 °C    | Relative Humidity : | 54%   |
| Pressure :                                                                                    | 1012 hPa | Test Voltage :      | DC 5V |
| Note: All channels have been tested, and only the worst test data is recorded in this report. |          |                     |       |


| Test Mode                                                                                | Frequency<br>(MHz) | Duty Cycle<br>(%) | Factor<br>(dB) | Result |
|------------------------------------------------------------------------------------------|--------------------|-------------------|----------------|--------|
| 802.11a                                                                                  | 5745               | 98.12             | 0              | Pass   |
| 802.11n20                                                                                | 5745               | 99.00             | 0              | Pass   |
| 802.11n40                                                                                | 5755               | 98.76             | 0              | Pass   |
| Note: Duty Cycle= Ton /Total*100%<br>Duty Cycle Correction Factor = 10log (1/Duty Cycle) |                    |                   |                |        |




### 802.11a - 5745MHz

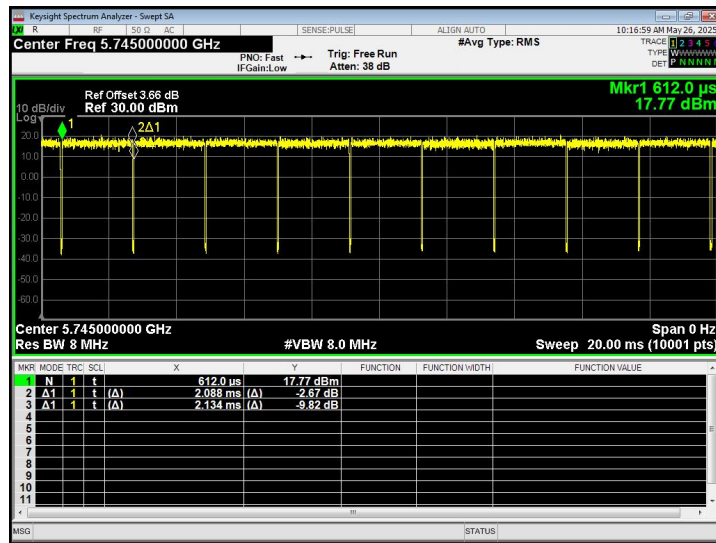

### 802.11n20 - 5745MHz

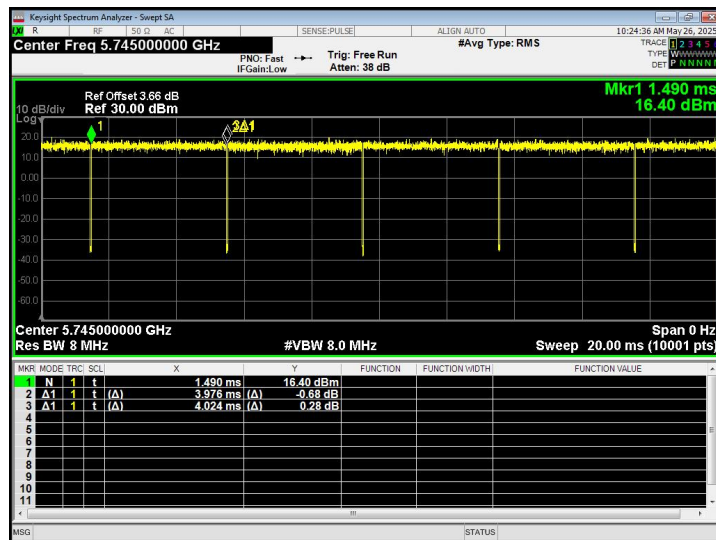

### 802.11n40 - 5755MHz

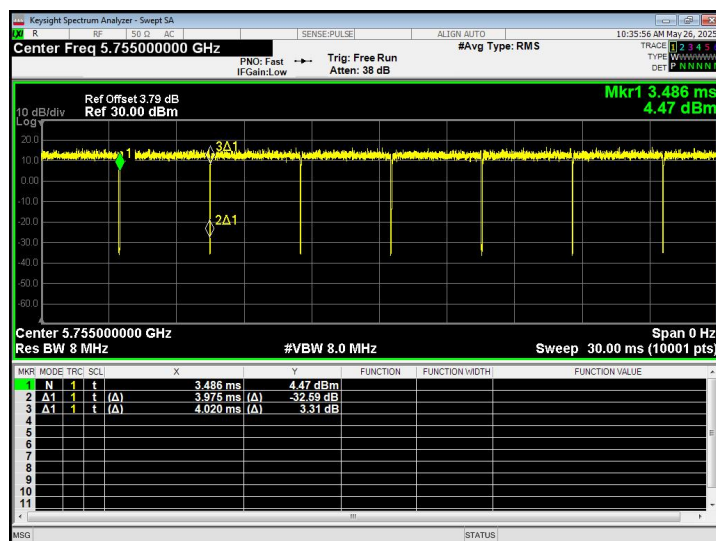

Note: All channel have been tested, and the report only reflects the worst case data.

**11. ANTENNA REQUIREMENT**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 |
| 15.203 requirement:<br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                             |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                             |
| The antenna is FPC Antenna, the best case gain of the antenna is 2.64dBi, reference to the appendix II for details                                                                                                                                                                                                                                                                                                                                                        |                             |



## **12. TEST SETUP PHOTO**

Reference to the appendix I for details.

## **13. EUT CONSTRUCTIONAL DETAILS**

Reference to the appendix II for details.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***