

TEST REPORT

Application No.: SZCR2503001121AT
Applicant: Vuaant, Inc. (dba care.ai)
Address of Applicant: 7300 Sand Lake Commons BLVD, Orlando, Florida 32819 United States
Manufacturer: Vuaant, Inc. (dba care.ai)
Address of Manufacturer: 4501 Vineland Road Suite 105 Orlando FL 32811 USA
Equipment Under Test (EUT):
EUT Name: Ambient Monitoring Sensor
Model No.: AMS-R2O-C
Trade Mark: care.ai®
FCC ID: 2A8DC-AMS-R2O-C
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-03-24
Date of Test: 2025-04-24 to 2025-05-21
Date of Issue: 2025-05-21

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 2 of 615

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2025-05-21		Original

Authorized for issue by:				
				
		Leo Lai/Project Engineer		
				
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Maximum Conducted output power		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
In-Band Emissions		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (b)	Pass
Contention-based Protocol		KDB 987594 D02	47 CFR Part 15, Subpart E 15.407 (d)(6)	Pass
Duty Cycle		ANSI C63.10 (2013) Section 12.2	ANSI C63.10 (2013) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2013) Section 12.4.2	ANSI C63.10 (2013) Section 12.4.2	Pass
26dB Emission bandwidth		ANSI C63.10 (2013) Section 12.4.1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	8
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement	14
6.1.1 Test Requirement:	14
6.1.2 Conclusion	14
7 Radio Spectrum Matter Test Results	15
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram	16
7.1.4 Measurement Procedure and Data	16
7.2 Maximum Conducted output power	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Mode Description	19
7.2.3 Test Setup Diagram	20
7.2.4 Measurement Procedure and Data	20
7.3 Radiated Emissions (Below 1GHz)	21
7.3.1 E.U.T. Operation	21
7.3.2 Test Mode Description	21
7.3.3 Test Setup Diagram	21
7.3.4 Measurement Procedure and Data	22
7.4 Radiated Emissions (Above 1GHz)	25
7.4.1 E.U.T. Operation	25
7.4.2 Test Mode Description	25
7.4.3 Test Setup Diagram	25
7.4.4 Measurement Procedure and Data	26
7.5 Radiated Emissions which fall in the restricted bands	75
7.5.1 E.U.T. Operation	75



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 5 of 615

7.5.2	Test Mode Description	75
7.5.3	Test Setup Diagram	75
7.5.4	Measurement Procedure and Data.....	76
7.6	In-Band Emissions	117
7.6.1	E.U.T. Operation	117
7.6.2	Test Mode Description	117
7.6.3	Test Setup Diagram	118
7.6.4	Measurement Procedure and Data.....	118
7.7	Contention-based Protocol.....	119
7.7.1	E.U.T. Operation	119
7.7.2	Test Mode Description	119
7.7.3	Test Setup Diagram	120
7.7.4	Measurement Procedure and Data.....	120
7.8	Duty Cycle	121
7.8.1	E.U.T. Operation	121
7.8.2	Test Mode Description	121
7.8.3	Test Setup Diagram	122
7.8.4	Measurement Procedure and Data.....	122
7.9	99% Bandwidth	123
7.9.1	E.U.T. Operation	123
7.9.2	Test Mode Description	123
7.9.3	Test Setup Diagram	124
7.9.4	Measurement Procedure and Data.....	124
7.10	26dB Emission bandwidth	125
7.10.1	E.U.T. Operation.....	125
7.10.2	Test Mode Description.....	125
7.10.3	Test Setup Diagram.....	126
7.10.4	Measurement Procedure and Data	126
7.11	Peak Power spectrum density.....	127
7.11.1	E.U.T. Operation.....	127
7.11.2	Test Mode Description.....	127
7.11.3	Test Setup Diagram.....	128
7.11.4	Measurement Procedure and Data	128
7.12	Frequency Stability.....	129
7.12.1	E.U.T. Operation.....	129
7.12.2	Test Mode Description.....	129
7.12.3	Test Setup Diagram.....	130
7.12.4	Measurement Procedure and Data	130
8	Test Setup Photo	131
9	EUT Constructional Details (EUT Photos)	131
10	Appendix.....	132



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 12V from Adapter FJJ-SW20251206000 Input: 100-240V~50/60Hz, 1.5A Max Output: 12.0V 6.0A
Test Voltage:	120V~60Hz
Cable Loss:	1.5dBi
Operation Frequency / Number of channels (20MHz):	U-NII-5: 5955-6415MHz (24 Channels);U-NII-6: 6435-6515MHz (5 Channels);U-NII-7: 6535-6855MHz (17 Channels);U-NII-8: 6875-7115MHz (13 Channels)
Operation Frequency / Number of channels (40MHz):	U-NII-5: 5965-6405MHz (12 Channels);U-NII-6: 6445-6485MHz (2 Channels);U-NII-7: 6525-6845MHz (9 Channels);U-NII-8: 6885-7085MHz (6 Channels)
Operation Frequency / Number of channels (80MHz):	U-NII-5: 5985-6385MHz (6 Channels);U-NII-6: 6465-6545MHz (2 Channels);U-NII-7: 6625-6785MHz (3 Channels);U-NII-8: 6865-7025MHz (3 Channels)
Operation Frequency / Number of channels (160MHz):	U-NII-5: 6025-6345MHz (3 Channels);U-NII-6: 6505MHz (1 Channels);U-NII-7: 6665MHz (2 Channels);U-NII-8: 6985MHz (1 Channels)
Modulation Type:	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM)
Channel Spacing:	802.11ax 20: 20MHz; 802.11n/ax: 40MHz; 802.11ax 80: 80MHz; 802.11ax 160: 160MHz
Antenna Type:	External Antenna
Antenna Gain:	ANT1: 5.81 dBi, ANT2: 5.81 dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.1\text{dB}$
Maximum Conducted output power	$\pm 0.75\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
In-Band Emissions	$\pm 2.84\text{dB}$
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Frequency Stability	$\pm 7.25 \times 10^{-8}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 8 of 615

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-01-08	2026-01-07
Matching Pad	N/A	N/A	SEM021-23	2025-03-19	2026-03-18
Matching Pad	N/A	N/A	SEM021-24	2025-03-19	2026-03-18
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2024-07-06	2025-07-05
LISN	Rohde&Schwarz	ENV216	SEM007-01	2024-08-15	2025-08-14
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Maximum Conducted output power					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-03-04	2026-03-03
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 10 of 615

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2024-08-14	2025-08-13
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-01-08	2026-01-07
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 11 of 615

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-01-07	2026-01-06
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

In-Band Emissions					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 12 of 615

Contention-based Protocol

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	AUDIX	N/A	SEM001-08	2025-05-16	2028-05-15
EXA Signal Analyzer	KEYSIGHT	N9010A	SEM004-09	2025-03-03	2026-03-02
ESG Vector Signal Generator	KEYSIGHT	E4438C	SEM006-15	2024-08-15	2025-08-14
DC Power Supply	KEYSIGHT	E3642A	SEM011-07	2025-02-26	2026-02-25
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2025-03-03	2026-03-02
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2025-03-03	2026-03-02
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	TST PASS	TSPS2023R	SEM009-27	2025-03-04	2026-03-03
Power Sensor	TST PASS	TSPS2023R	SEM009-28	2025-03-04	2026-03-03
Power Sensor	TST PASS	TSPS2023R	SEM009-29	2025-03-04	2026-03-03
Programmable Temperature&Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25
Universal Radio Communication Tester	Rohde&Schwarz	CMW500	SEM010-08	2025-03-04	2026-03-03
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM028-01	2024-07-06	2025-07-05

RF Conducted Test

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 13 of 615

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is ANT1: 5.8 dBi, ANT2: 5.8 dBi.

Antenna location: Refer to internal photos



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C

Humidity: 40.5 % RH


Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

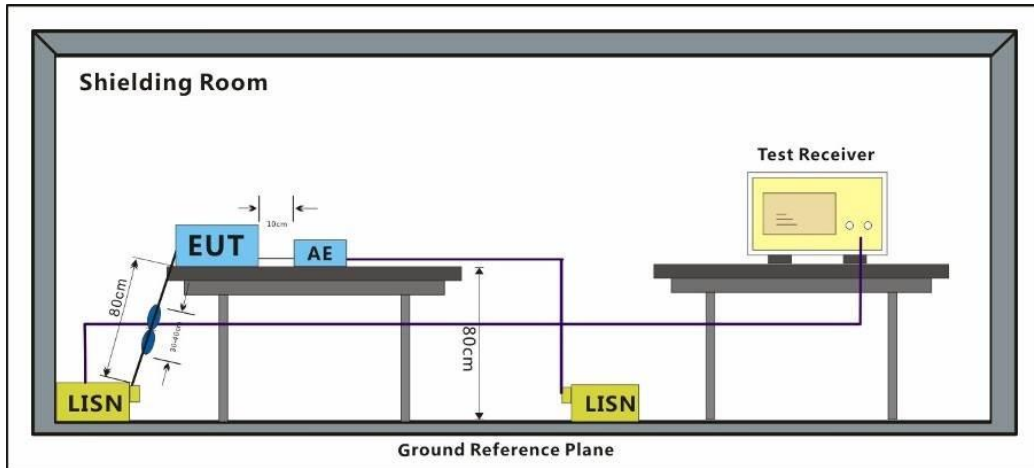

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 17 of 615

Test Mode: 09; Line: Live line

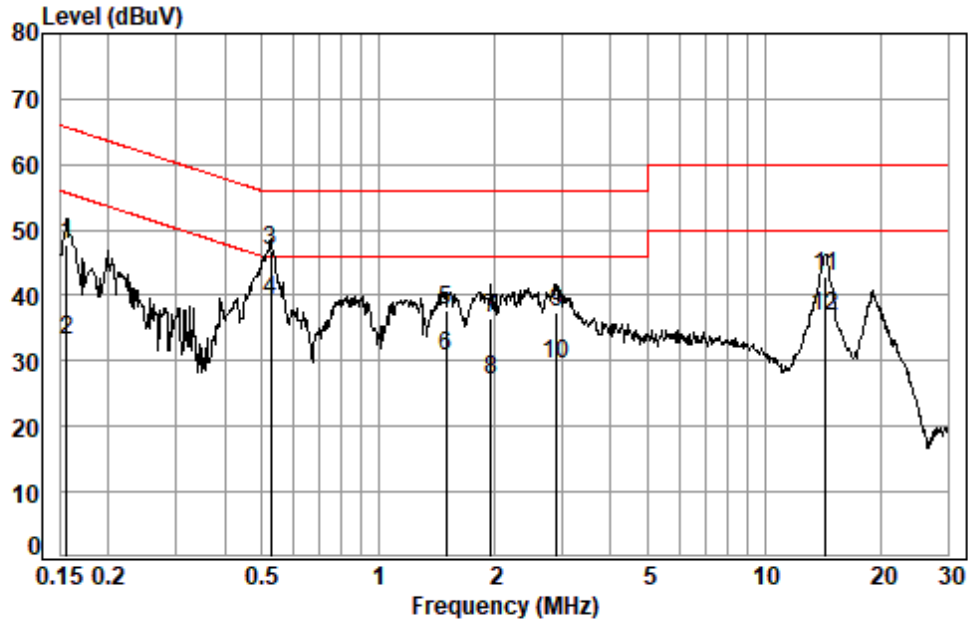

Site : Shielding Room
Condition: Line
Job No. : 01121AT
Test mode: 09

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1565	0.06	10.18	37.47	47.71	65.65	-17.94	QP
2	0.1565	0.06	10.18	22.84	33.08	55.65	-22.57	Average
3 *	0.5265	0.08	9.56	37.31	46.95	56.00	-9.05	QP
4 *	0.5265	0.08	9.56	29.52	39.16	46.00	-6.84	Average
5	1.4953	0.10	9.58	28.19	37.87	56.00	-18.13	QP
6	1.4953	0.10	9.58	21.19	30.87	46.00	-15.13	Average
7	1.9593	0.10	9.58	26.80	36.48	56.00	-19.52	QP
8	1.9593	0.10	9.58	17.29	26.97	46.00	-19.03	Average
9	2.8998	0.11	9.64	27.62	37.37	56.00	-18.63	QP
10	2.8998	0.11	9.64	19.83	29.58	46.00	-16.42	Average
11	14.3641	0.25	9.90	32.80	42.95	60.00	-17.05	QP
12	14.3641	0.25	9.90	26.55	36.70	50.00	-13.30	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 18 of 615

Test Mode: 09; Line: Neutral Line

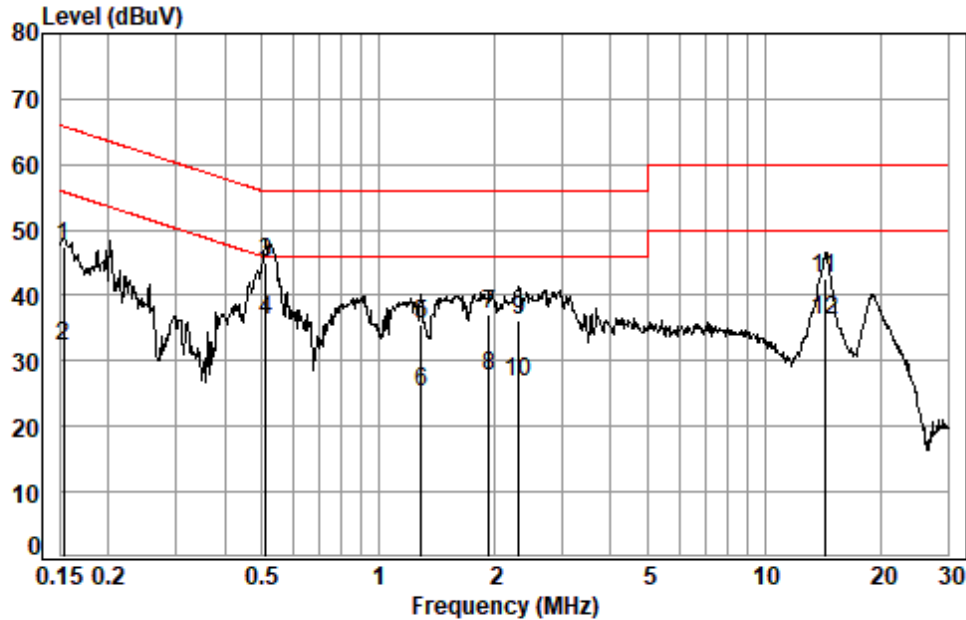

Site : Shielding Room
Condition: Neutral
Job No. : 01121AT
Test mode: 09

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1532	0.06	10.15	37.18	47.39	65.82	-18.43	QP
2	0.1532	0.06	10.15	21.89	32.10	55.82	-23.72	Average
3 *	0.5128	0.08	9.71	35.28	45.07	56.00	-10.93	QP
4 *	0.5128	0.08	9.71	26.50	36.29	46.00	-9.71	Average
5	1.2892	0.09	9.54	25.97	35.60	56.00	-20.40	QP
6	1.2892	0.09	9.54	15.60	25.23	46.00	-20.77	Average
7	1.9386	0.10	9.55	27.34	36.99	56.00	-19.01	QP
8	1.9386	0.10	9.55	18.16	27.81	46.00	-18.19	Average
9	2.3090	0.11	9.55	26.59	36.25	56.00	-19.75	QP
10	2.3090	0.11	9.55	17.17	26.83	46.00	-19.17	Average
11	14.2882	0.25	9.82	32.58	42.65	60.00	-17.35	QP
12	14.2882	0.25	9.82	26.24	36.31	50.00	-13.69	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.3

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 21.7 °C Humidity: 40.2 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.



7.2.3 Test Setup Diagram

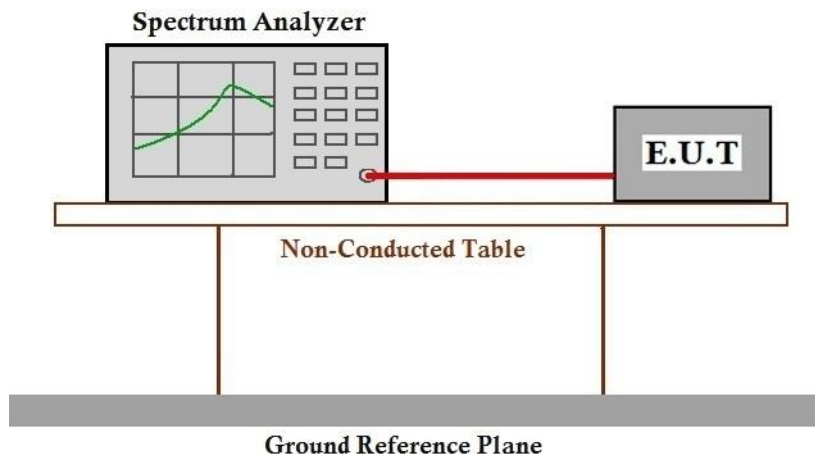

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.3 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.2 °C


Humidity: 50.1 % RH

Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

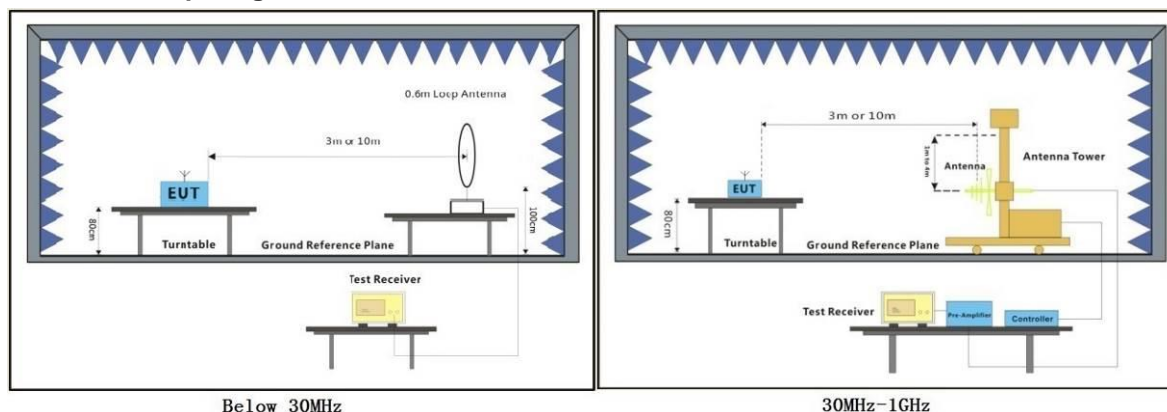

7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Test Mode: 09; Polarity: Horizontal

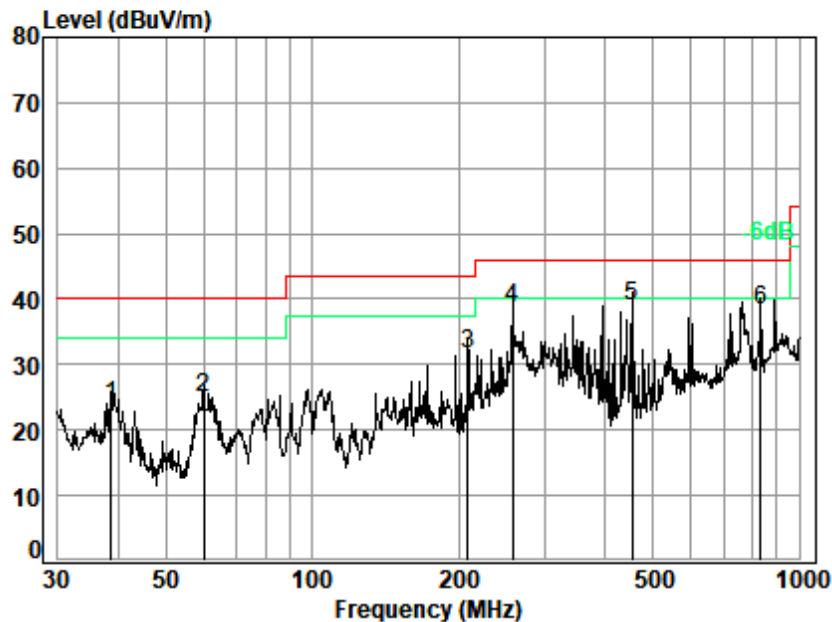


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 01121AT
Test Mode: 09

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	38.616	17.01	0.77	27.77	33.84	23.85	40.00	-16.15	QP
2	59.859	11.50	0.95	27.71	40.15	24.89	40.00	-15.11	QP
3	208.580	14.71	1.81	27.13	42.30	31.69	43.50	-11.81	QP
4	257.422	17.27	2.03	26.93	46.27	38.64	46.00	-7.36	QP
5 q	454.310	21.21	2.77	27.38	42.46	39.06	46.00	-6.94	QP
6	833.317	26.50	3.95	27.24	35.09	38.30	46.00	-7.70	QP



Test Mode: 09; Polarity: Vertical

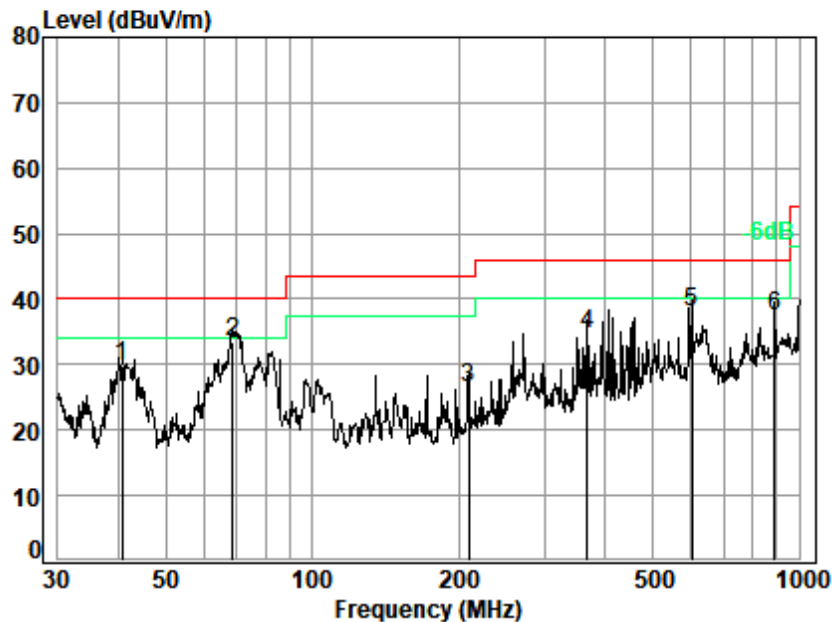

Site : chamber
Condition: 3m VERTICAL
Job No. : 01121AT
Test Mode: 09

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	40.702	16.05	0.79	27.76	40.78	29.86	40.00	-10.14	QP
2	68.631	10.68	1.01	27.68	49.42	33.43	40.00	-6.57	QP
3	209.313	14.75	1.81	27.13	37.14	26.57	43.50	-16.93	QP
4	366.823	20.35	2.47	27.02	38.89	34.69	46.00	-11.31	QP
5	601.427	24.43	3.24	27.97	38.29	37.99	46.00	-8.01	QP
6	890.728	28.06	4.10	26.83	32.15	37.48	46.00	-8.52	QP



7.4 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C


Humidity: 51.5 % RH

Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

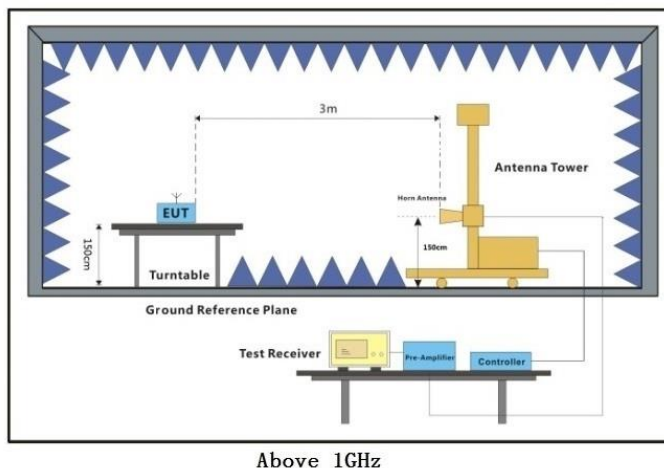

7.4.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

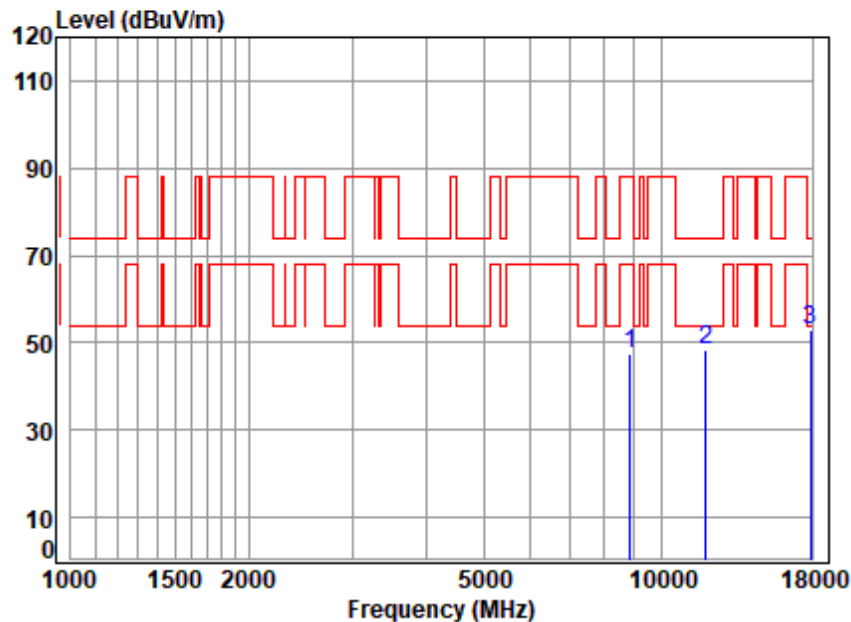

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 5955 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8866.062	12.55	38.53	55.12	51.38	47.34	88.20	-40.86	peak
2 11910.000	14.62	39.71	53.77	47.96	48.52	74.00	-25.48	peak
3 pp17865.000	19.21	42.89	54.47	45.10	52.73	74.00	-21.27	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

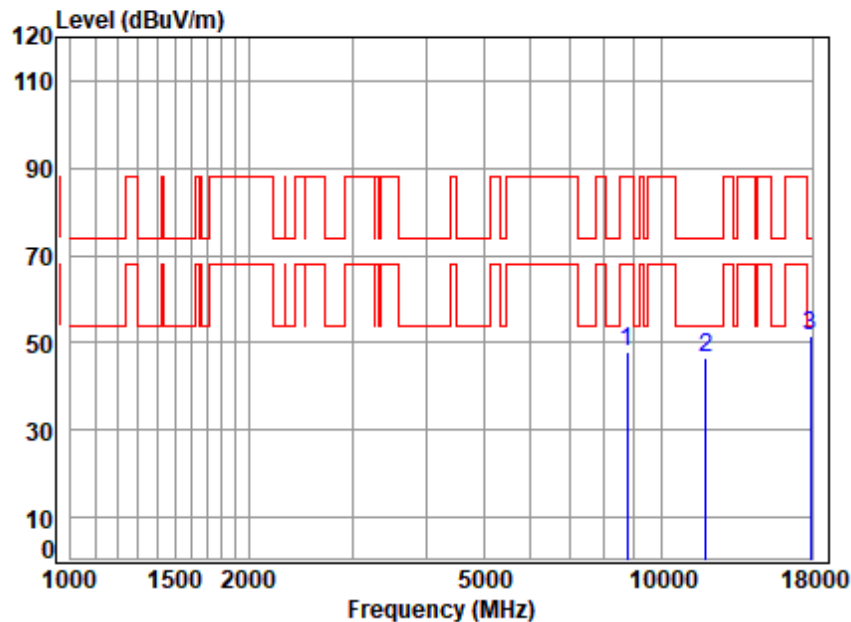

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 5955 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8764.146	12.45	38.50	55.21	52.34	48.08	88.20	-40.12	peak
2 11910.000	14.62	39.71	53.77	46.11	46.67	74.00	-27.33	peak
3 pp17865.000	19.21	42.89	54.47	43.80	51.43	74.00	-22.57	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

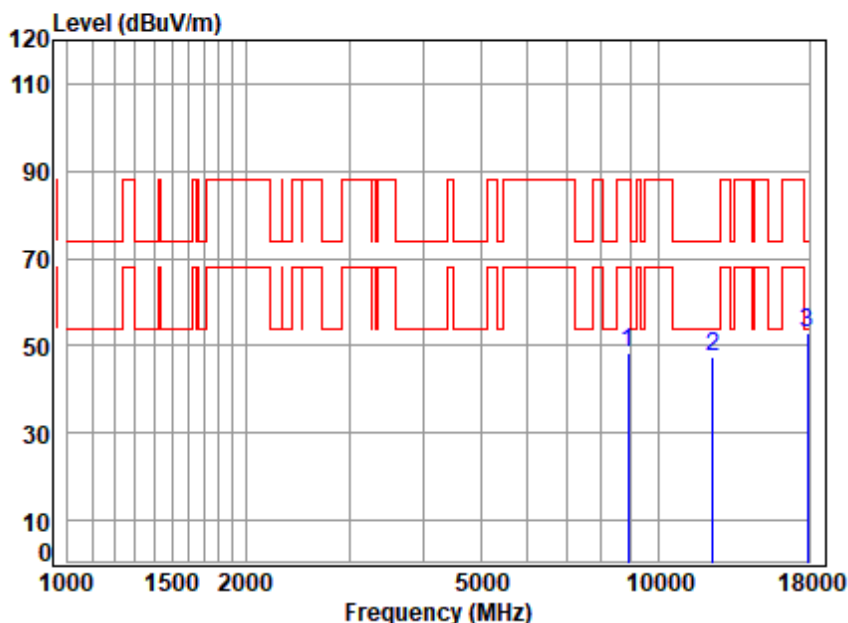

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6175 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 8891.725	12.59	38.58	55.10	52.31	48.38	88.20	-39.82 peak
2 12350.000	14.81	39.85	54.04	46.91	47.53	74.00	-26.47 peak
3 pp17896.250	19.26	43.08	54.48	44.85	52.71	74.00	-21.29 peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

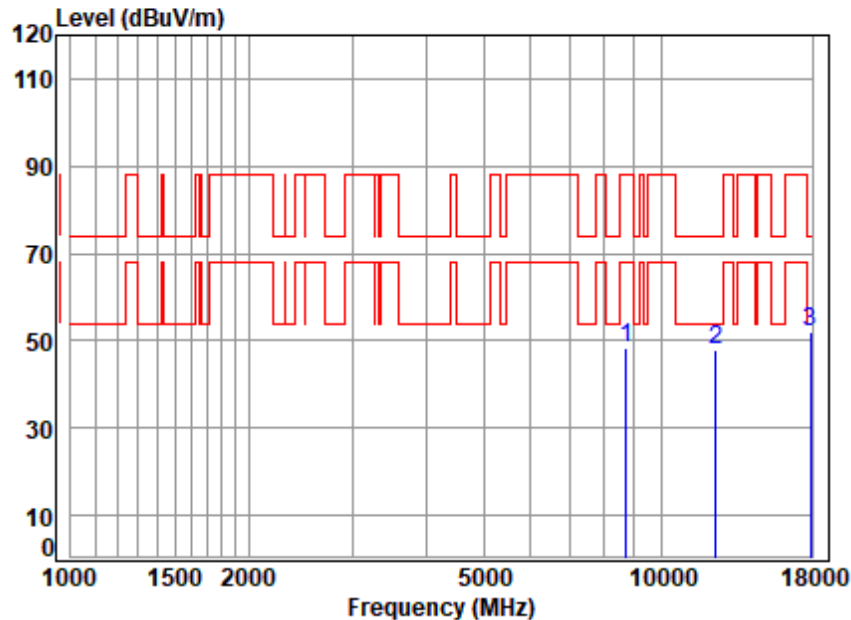

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6175 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.64	48.40	88.20	-39.80	peak
2 12350.000	14.81	39.85	54.04	47.14	47.76	74.00	-26.24	peak
3 pp17896.250	19.26	43.08	54.48	44.15	52.01	74.00	-21.99	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

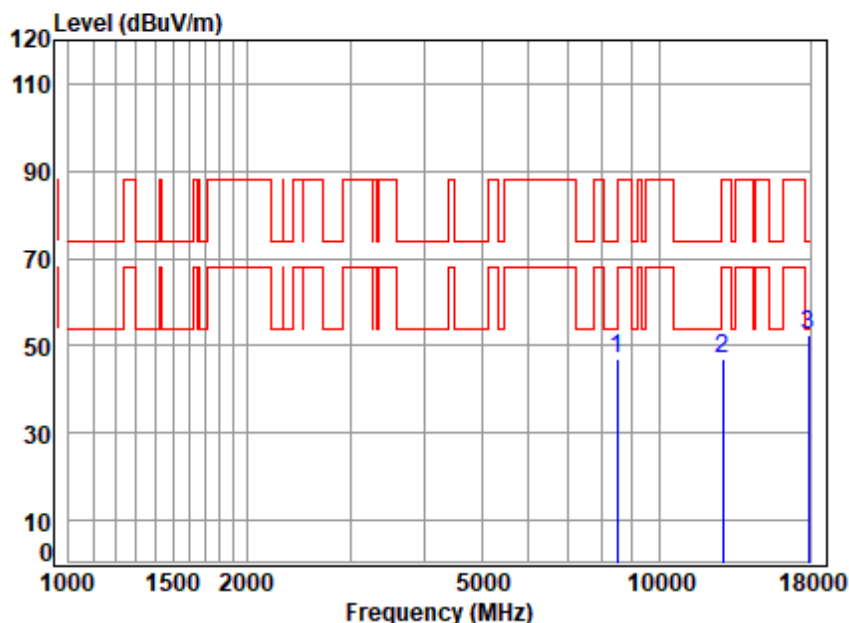

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6415 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8489.882	12.66	38.32	55.46	51.70	47.22	74.00	-26.78	peak
2 12830.000	15.28	40.33	54.38	45.94	47.17	88.20	-41.03	peak
3 pp17896.250	19.26	43.08	54.48	44.56	52.42	74.00	-21.58	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

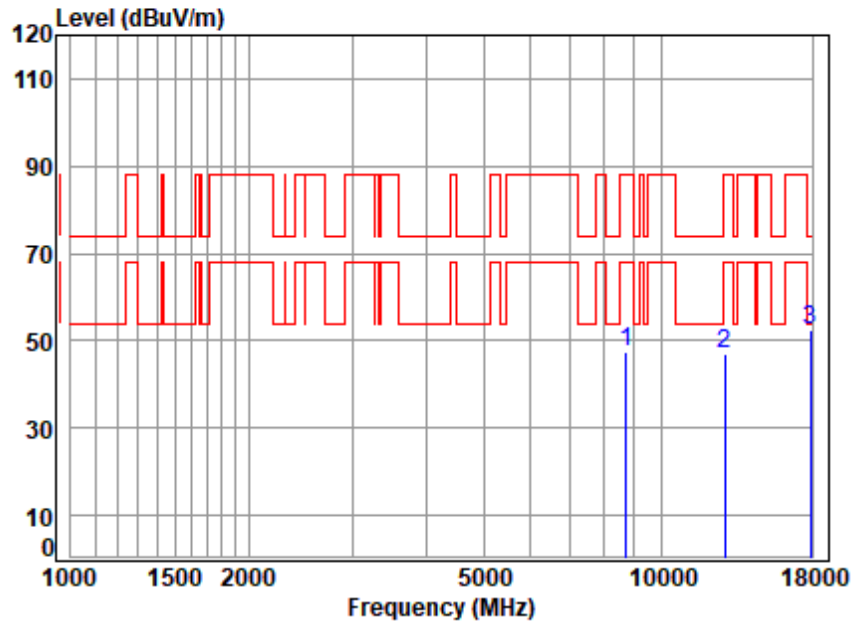

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6415 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	51.90	47.66	88.20	-40.54	peak
2 12830.000	15.28	40.33	54.38	45.98	47.21	88.20	-40.99	peak
3 pp17896.250	19.26	43.08	54.48	44.72	52.58	74.00	-21.42	peak



Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

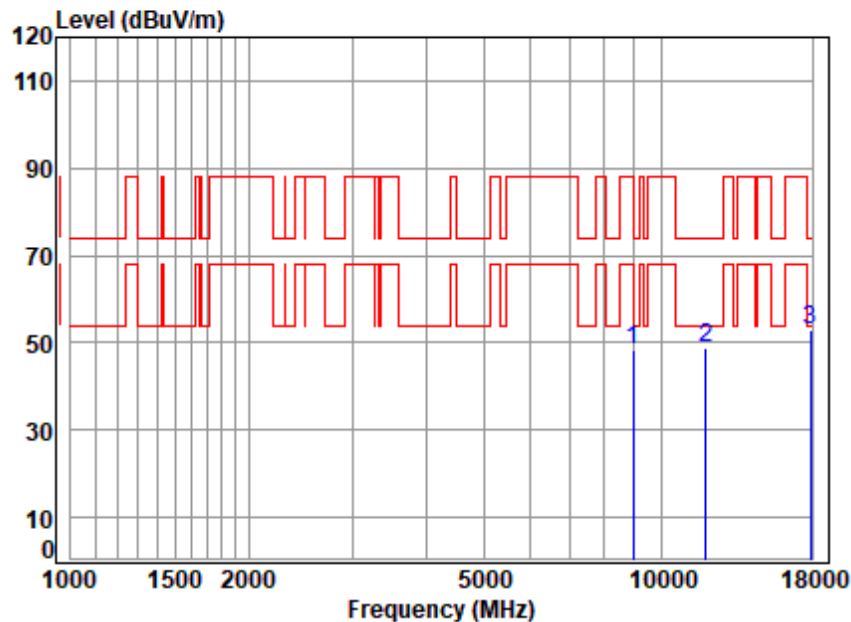

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 5955 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8943.274	12.50	38.51	55.05	52.56	48.52	88.20	-39.68	peak
2 11910.000	14.62	39.71	53.77	48.11	48.67	74.00	-25.33	peak
3 pp17865.000	19.21	42.89	54.47	45.11	52.74	74.00	-21.26	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

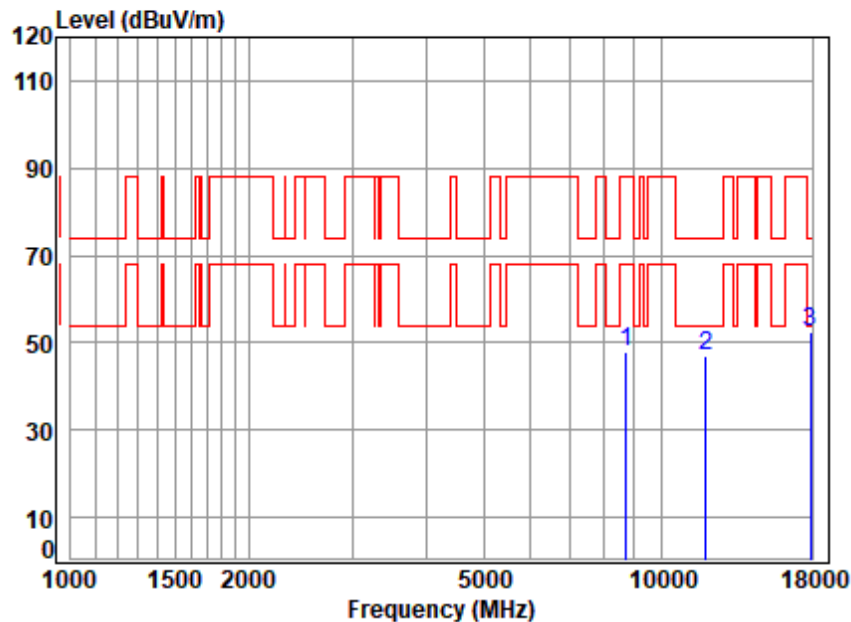

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 5955 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.28	48.04	88.20	-40.16	peak
2 11910.000	14.62	39.71	53.77	46.24	46.80	74.00	-27.20	peak
3 pp17865.000	19.21	42.89	54.47	44.73	52.36	74.00	-21.64	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

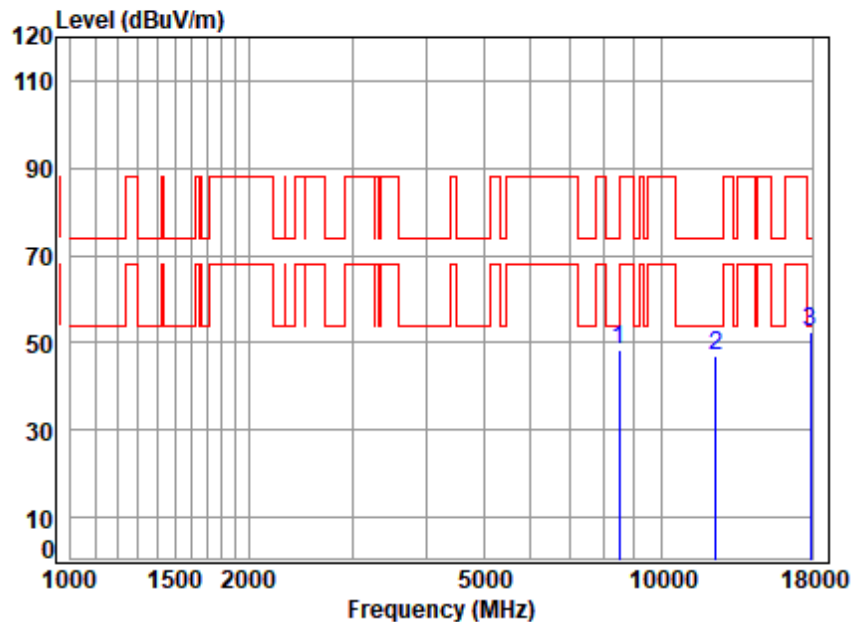

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6175 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8489.882	12.66	38.32	55.46	52.86	48.38	74.00	-25.62	peak
2 12350.000	14.81	39.85	54.04	46.50	47.12	74.00	-26.88	peak
3 pp17896.250	19.26	43.08	54.48	44.82	52.68	74.00	-21.32	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

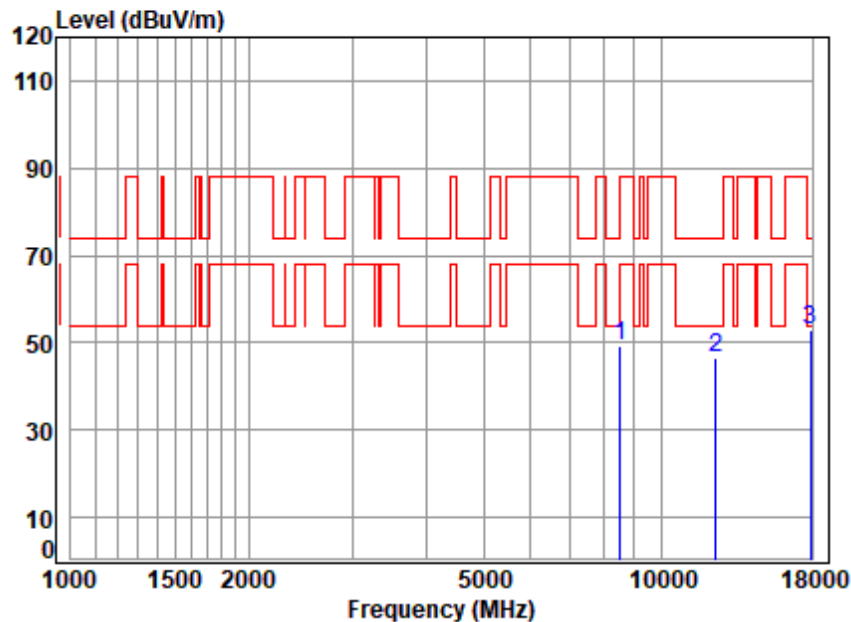

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6175 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8514.456	12.69	38.30	55.44	53.59	49.14	88.20	-39.06	peak
2 12350.000	14.81	39.85	54.04	45.89	46.51	74.00	-27.49	peak
3 pp17896.250	19.26	43.08	54.48	45.11	52.97	74.00	-21.03	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

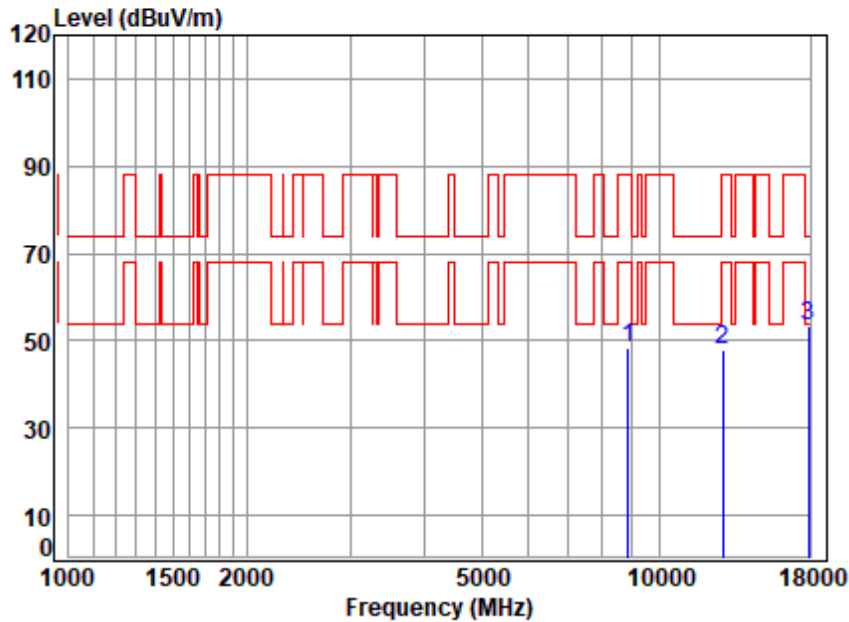

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6415 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8866.062	12.55	38.53	55.12	52.36	48.32	88.20	-39.88	peak
2 12830.000	15.28	40.33	54.38	46.72	47.95	88.20	-40.25	peak
3 pp17896.250	19.26	43.08	54.48	45.48	53.34	74.00	-20.66	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

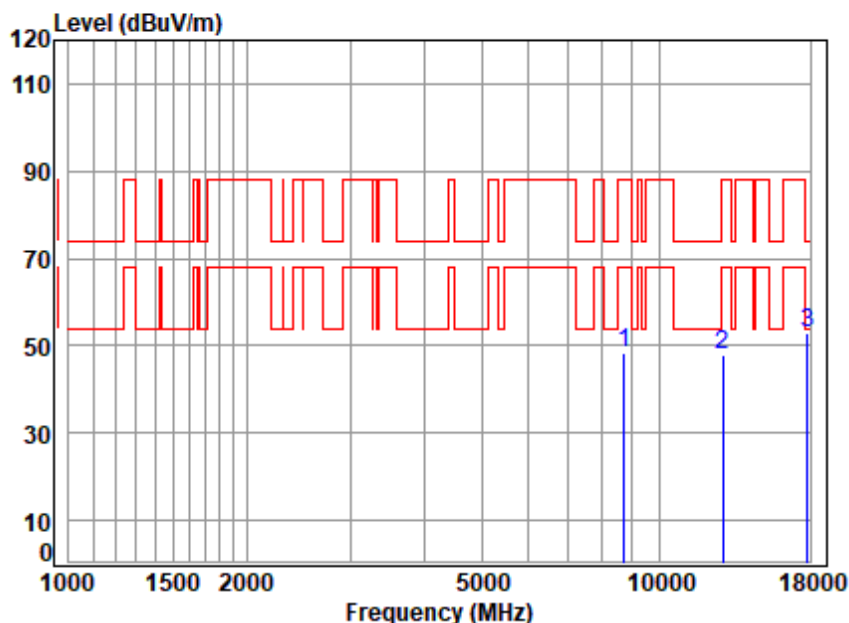

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6415 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.53	48.29	88.20	-39.91	peak
2 12830.000	15.28	40.33	54.38	46.48	47.71	88.20	-40.49	peak
3 pp17793.090	19.13	42.45	54.46	46.01	53.13	74.00	-20.87	peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

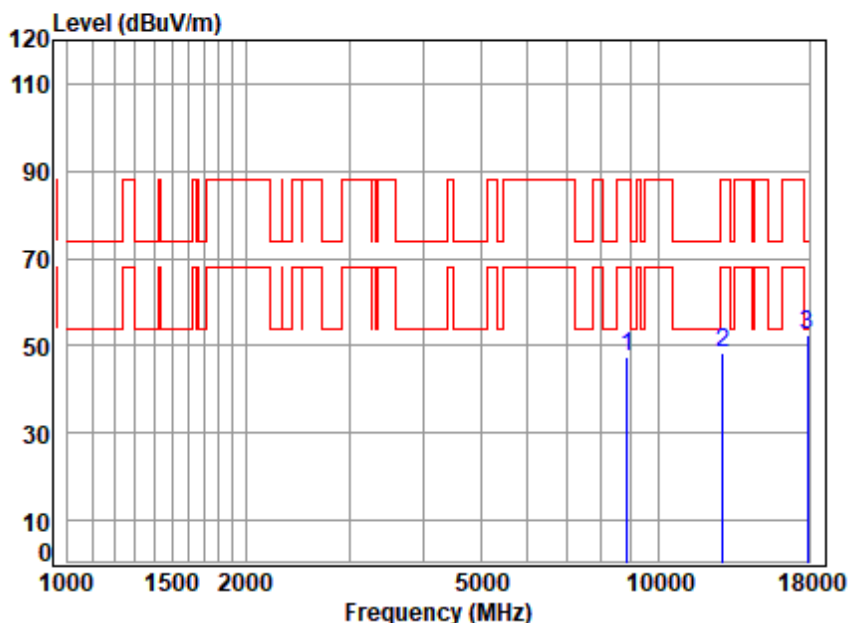

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8866.062	12.55	38.53	55.12	51.68	47.64	88.20	-40.56	peak
2 12870.000	15.31	40.37	54.41	47.11	48.38	88.20	-39.82	peak
3 pp17896.250	19.26	43.08	54.48	44.67	52.53	74.00	-21.47	peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

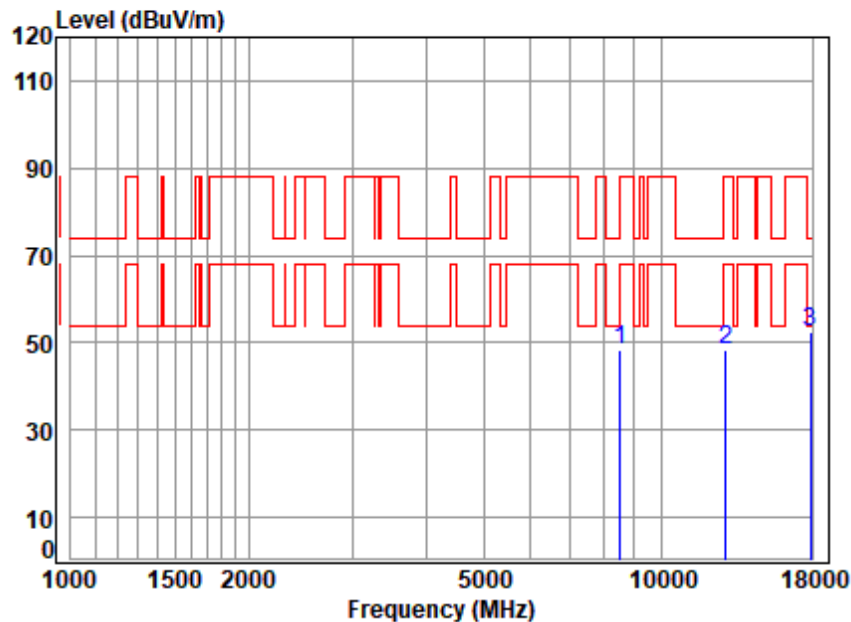

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 8514.456	12.69	38.30	55.44	52.62	48.17	88.20	-40.03 peak
2 12870.000	15.31	40.37	54.41	47.25	48.52	88.20	-39.68 peak
3 pp17896.250	19.26	43.08	54.48	44.79	52.65	74.00	-21.35 peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

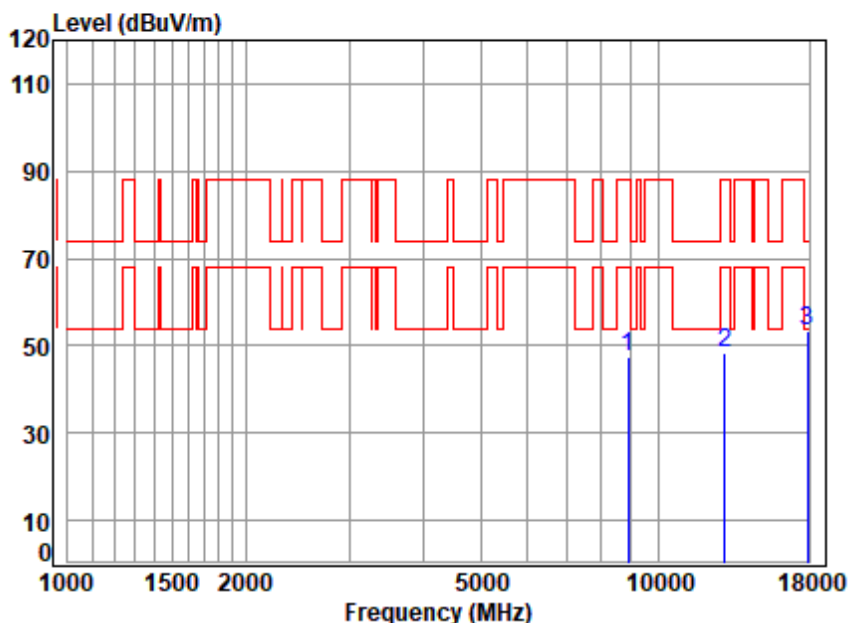

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8891.725	12.59	38.58	55.10	51.45	47.52	88.20	-40.68	peak
2 12950.000	15.35	40.35	54.47	47.09	48.32	88.20	-39.88	peak
3 pp17896.250	19.26	43.08	54.48	45.61	53.47	74.00	-20.53	peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

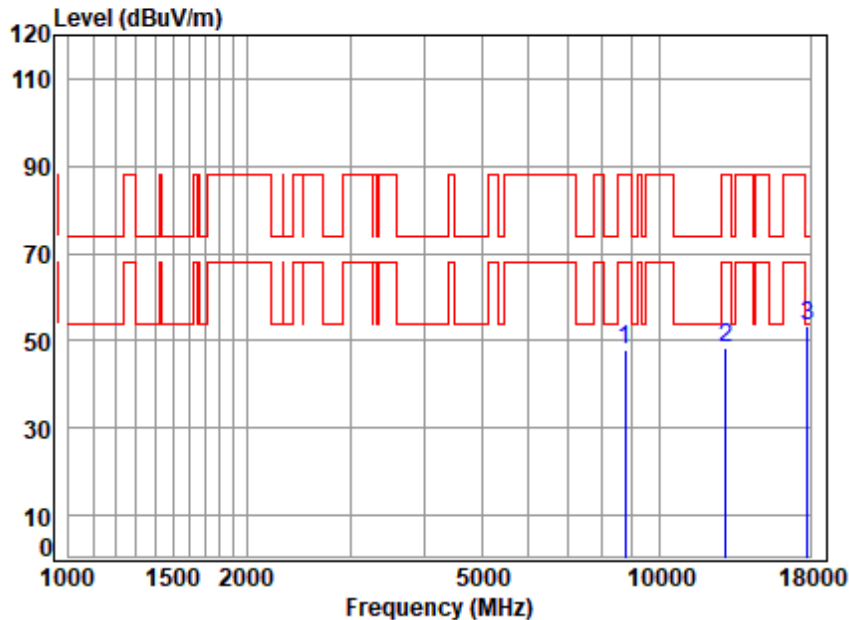

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8764.146	12.45	38.50	55.21	52.02	47.76	88.20	-40.44	peak
2 12950.000	15.35	40.35	54.47	47.11	48.34	88.20	-39.86	peak
3 pp17844.590	19.19	42.77	54.47	45.79	53.28	74.00	-20.72	peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

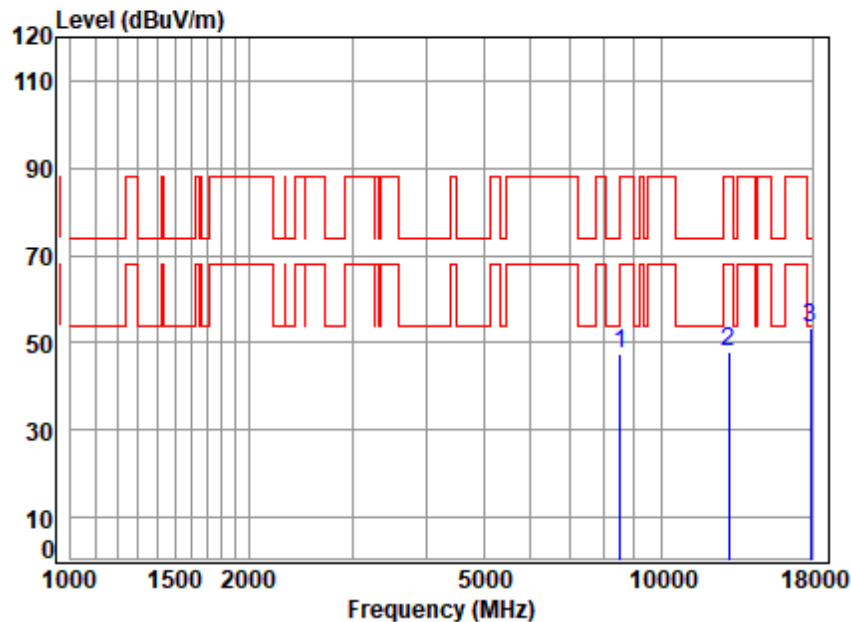

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 8514.456	12.69	38.30	55.44	52.02	47.57	88.20	-40.63 peak
2 13030.000	15.39	40.30	54.50	46.89	48.08	88.20	-40.12 peak
3 pp17896.250	19.26	43.08	54.48	45.64	53.50	74.00	-20.50 peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

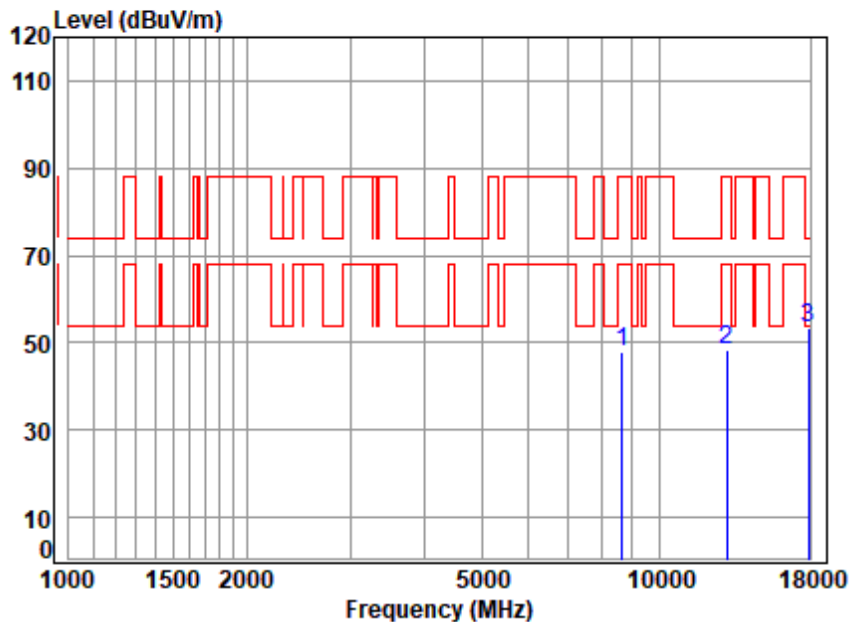

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8663.404	12.41	38.45	55.30	52.49	48.05	88.20	-40.15	peak
2 13030.000	15.39	40.30	54.50	47.39	48.58	88.20	-39.62	peak
3 pp17896.250	19.26	43.08	54.48	45.34	53.20	74.00	-20.80	peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

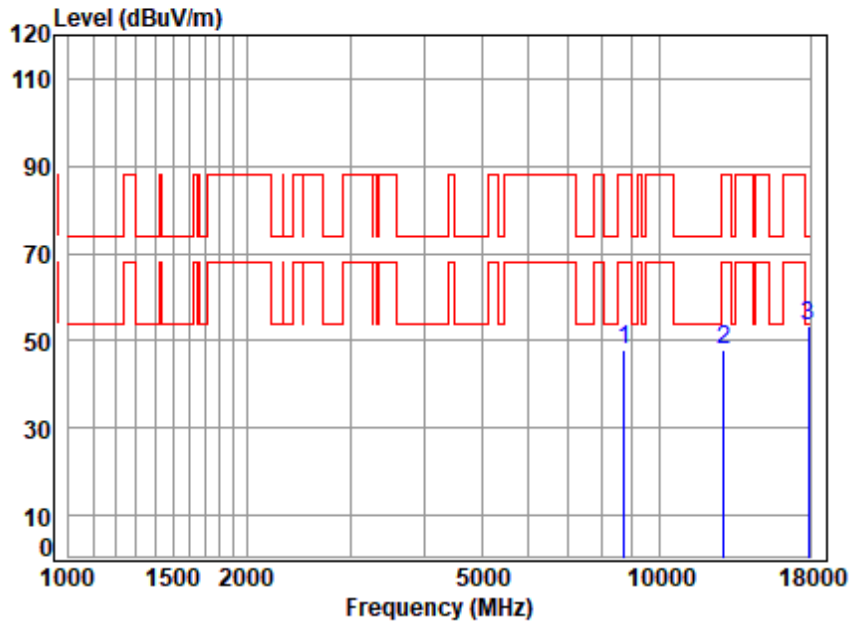

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.10	47.86	88.20	-40.34	peak
2 12870.000	15.31	40.37	54.41	46.67	47.94	88.20	-40.26	peak
3 pp17896.250	19.26	43.08	54.48	45.32	53.18	74.00	-20.82	peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

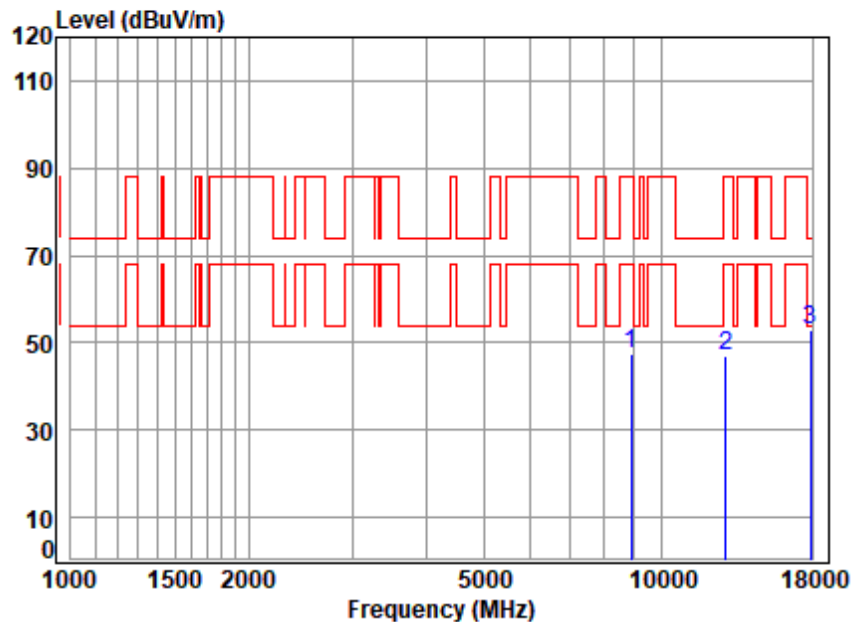

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8891.725	12.59	38.58	55.10	51.54	47.61	88.20	-40.59	peak
2 12870.000	15.31	40.37	54.41	45.91	47.18	88.20	-41.02	peak
3 pp17896.250	19.26	43.08	54.48	45.19	53.05	74.00	-20.95	peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

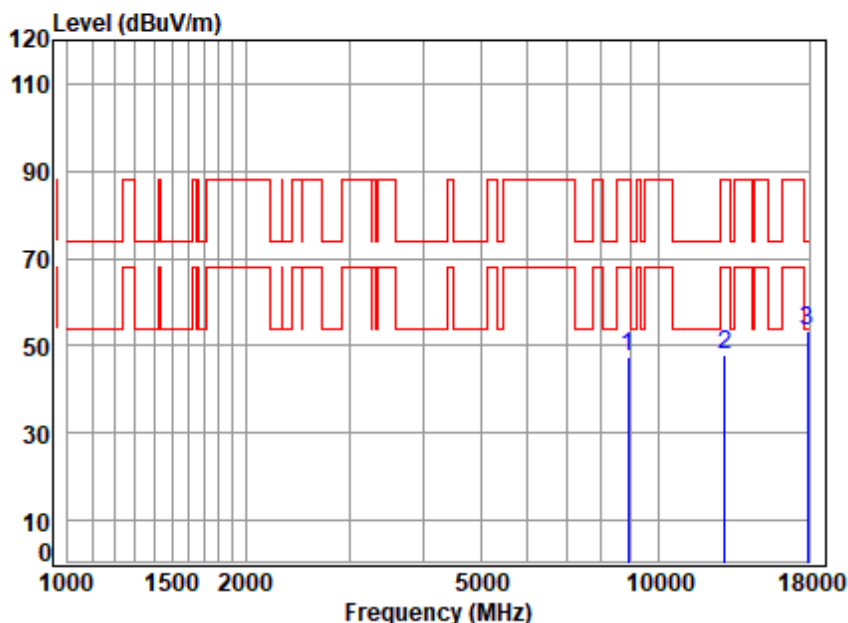

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8891.725	12.59	38.58	55.10	51.29	47.36	88.20	-40.84	peak
2 12950.000	15.35	40.35	54.47	46.86	48.09	88.20	-40.11	peak
3 pp17896.250	19.26	43.08	54.48	45.59	53.45	74.00	-20.55	peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

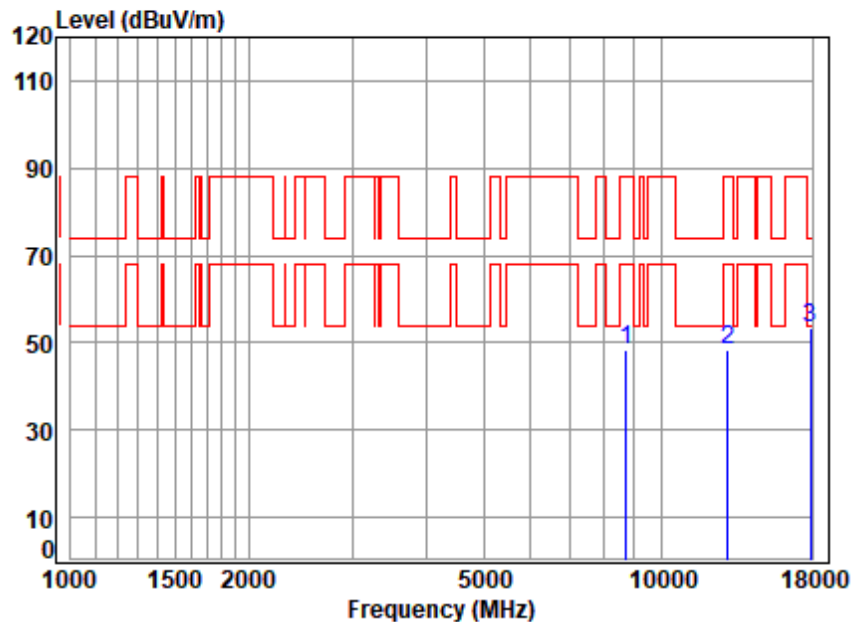

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.66	48.42	88.20	-39.78	peak
2 12950.000	15.35	40.35	54.47	47.03	48.26	88.20	-39.94	peak
3 pp17896.250	19.26	43.08	54.48	45.35	53.21	74.00	-20.79	peak



Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

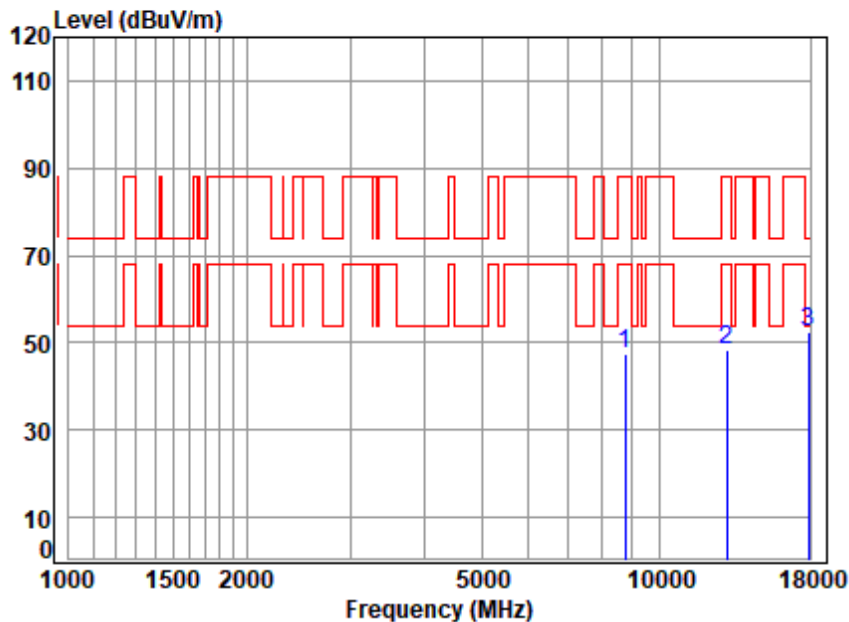

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8738.852	12.45	38.52	55.24	51.82	47.55	88.20	-40.65	peak
2 13030.000	15.39	40.30	54.50	47.11	48.30	88.20	-39.90	peak
3 pp17896.250	19.26	43.08	54.48	44.73	52.59	74.00	-21.41	peak



Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

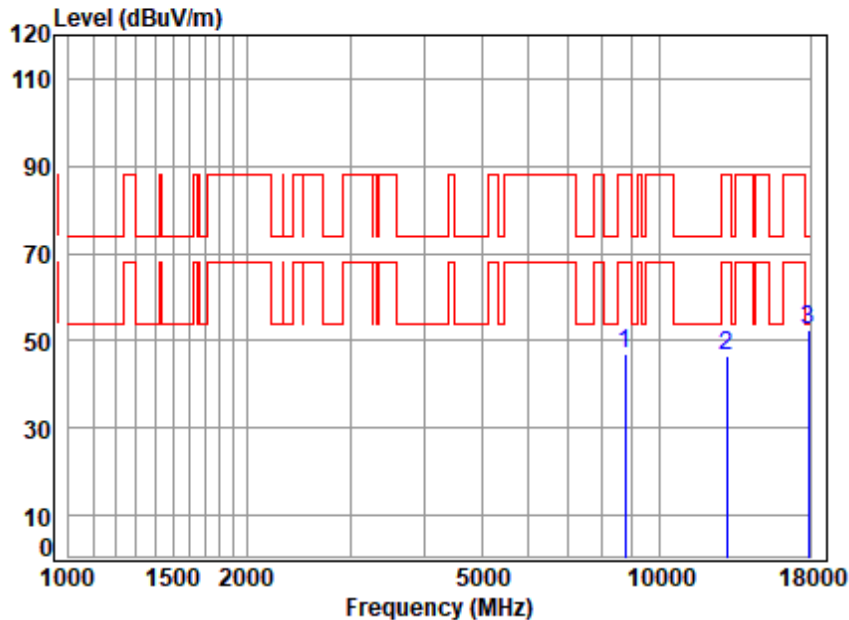

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8764.146	12.45	38.50	55.21	51.35	47.09	88.20	-41.11	peak
2 13030.000	15.39	40.30	54.50	45.45	46.64	88.20	-41.56	peak
3 pp17896.250	19.26	43.08	54.48	44.77	52.63	74.00	-21.37	peak



Test Mode: 11; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

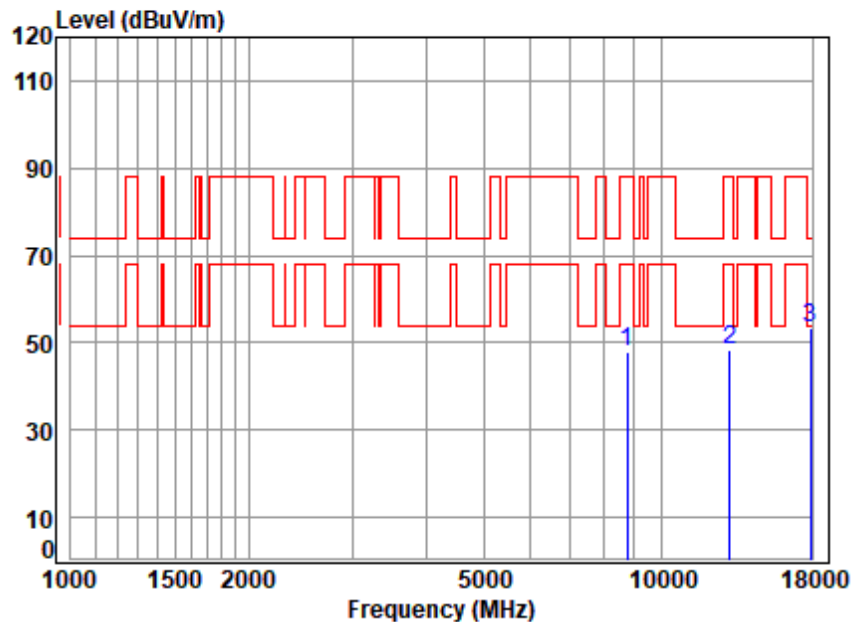

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8738.852	12.45	38.52	55.24	52.14	47.87	88.20	-40.33	peak
2 13070.000	15.42	40.30	54.49	47.29	48.52	88.20	-39.68	peak
3 pp17896.250	19.26	43.08	54.48	45.65	53.51	74.00	-20.49	peak



Test Mode: 11; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

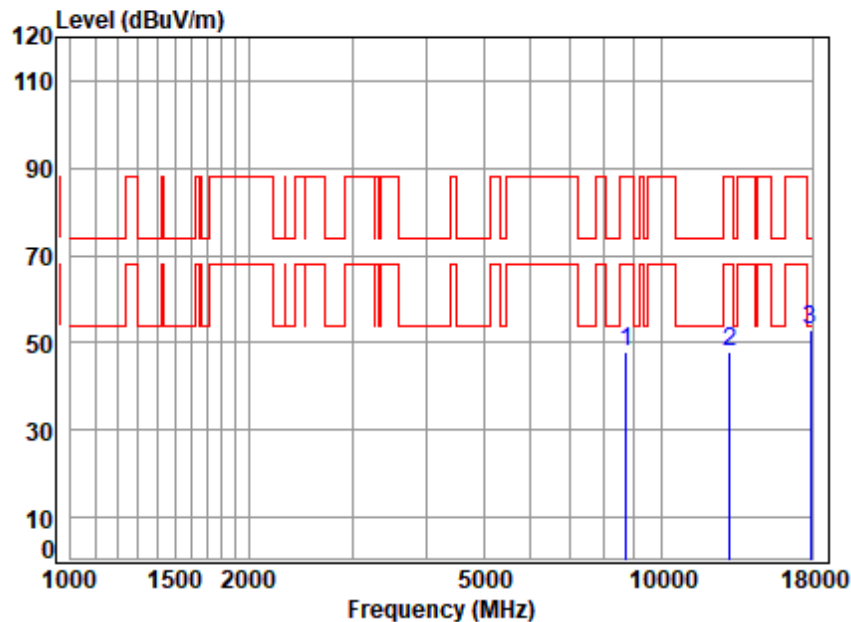

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.27	48.03	88.20	-40.17	peak
2 13070.000	15.42	40.30	54.49	46.76	47.99	88.20	-40.21	peak
3 pp17896.250	19.26	43.08	54.48	44.87	52.73	74.00	-21.27	peak



Test Mode: 11; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

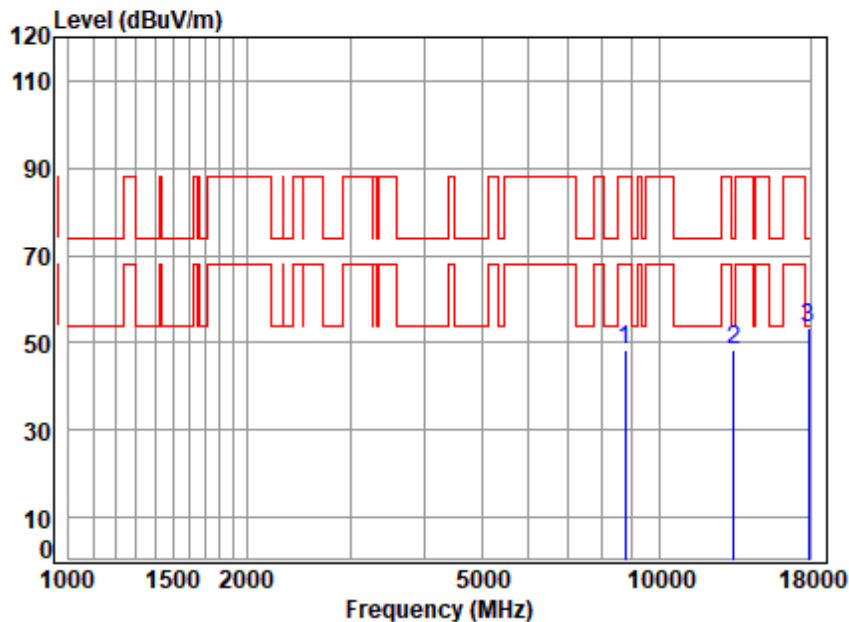

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8738.852	12.45	38.52	55.24	52.46	48.19	88.20	-40.01	peak
2 13390.000	15.69	40.30	54.46	46.71	48.24	74.00	-25.76	peak
3 pp17896.250	19.26	43.08	54.48	45.30	53.16	74.00	-20.84	peak



Test Mode: 11; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

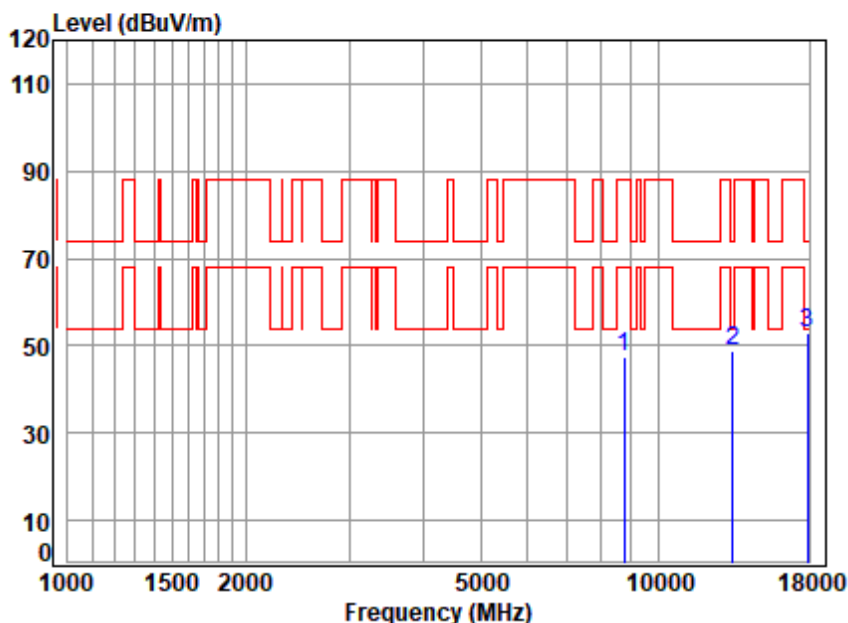

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8738.852	12.45	38.52	55.24	51.82	47.55	88.20	-40.65	peak
2 13390.000	15.69	40.30	54.46	47.20	48.73	74.00	-25.27	peak
3 pp17896.250	19.26	43.08	54.48	44.94	52.80	74.00	-21.20	peak



Test Mode: 11; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

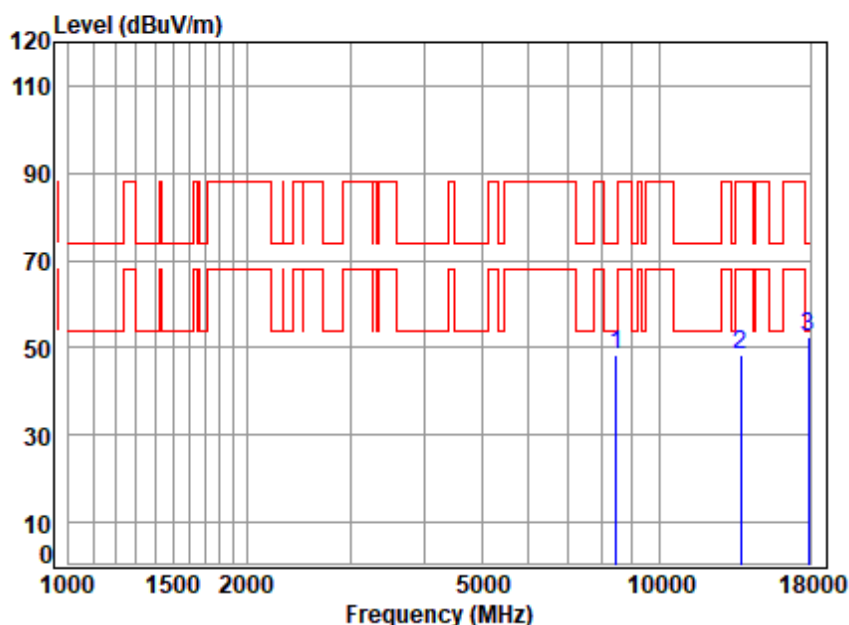

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8465.379	12.45	38.37	55.48	52.96	48.30	74.00	-25.70	peak
2 13710.000	16.11	39.99	54.43	46.91	48.58	88.20	-39.62	peak
3 pp17896.250	19.26	43.08	54.48	44.63	52.49	74.00	-21.51	peak



Test Mode: 11; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

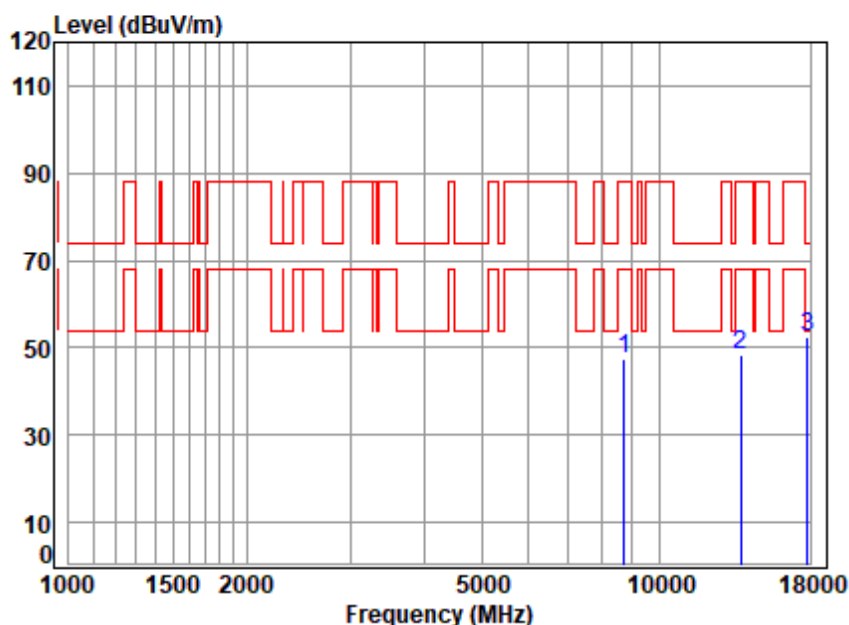

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	51.85	47.61	88.20	-40.59	peak
2 13710.000	16.11	39.99	54.43	46.80	48.47	88.20	-39.73	peak
3 pp17844.590	19.19	42.77	54.47	45.18	52.67	74.00	-21.33	peak



Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

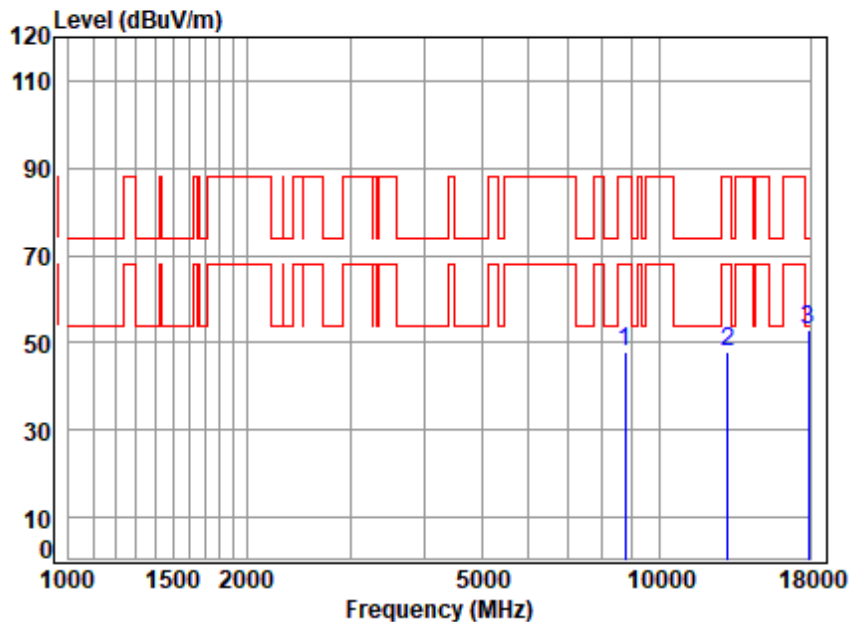

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8738.852	12.45	38.52	55.24	52.31	48.04	88.20	-40.16	peak
2 13070.000	15.42	40.30	54.49	46.70	47.93	88.20	-40.27	peak
3 pp17896.250	19.26	43.08	54.48	45.05	52.91	74.00	-21.09	peak



Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

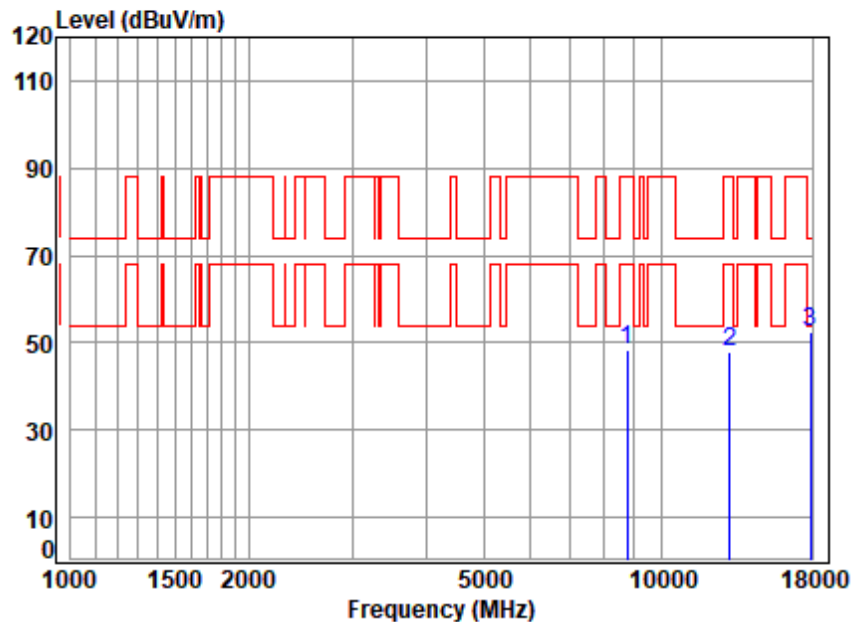

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8764.146	12.45	38.50	55.21	52.80	48.54	88.20	-39.66	peak
2 13070.000	15.42	40.30	54.49	46.79	48.02	88.20	-40.18	peak
3 pp17896.250	19.26	43.08	54.48	44.60	52.46	74.00	-21.54	peak



Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

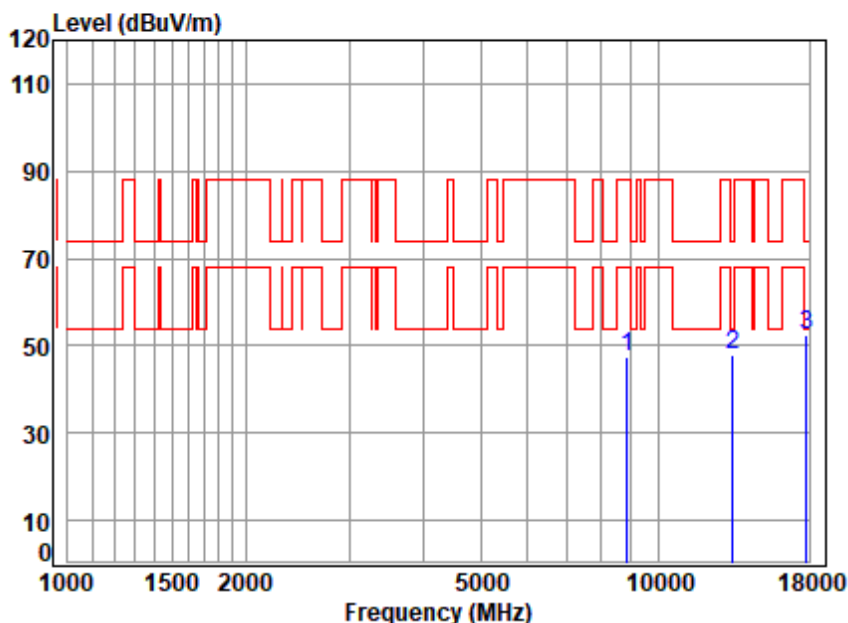

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8866.062	12.55	38.53	55.12	51.28	47.24	88.20	-40.96	peak
2 13390.000	15.69	40.30	54.46	46.35	47.88	74.00	-26.12	peak
3 pp17793.090	19.13	42.45	54.46	45.37	52.49	74.00	-21.51	peak



Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

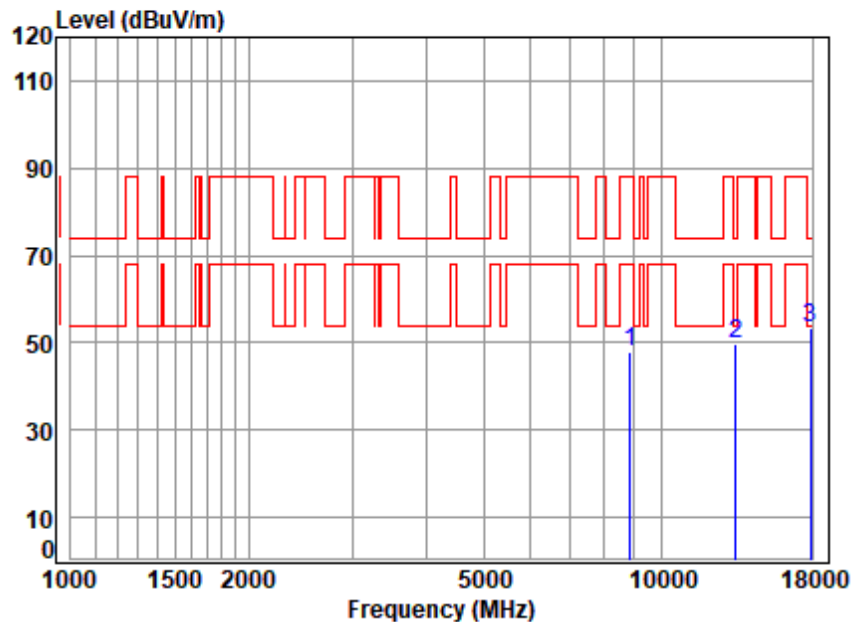

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8866.062	12.55	38.53	55.12	51.82	47.78	88.20	-40.42	peak
2 13390.000	15.69	40.30	54.46	48.00	49.53	74.00	-24.47	peak
3 pp17896.250	19.26	43.08	54.48	45.33	53.19	74.00	-20.81	peak



Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

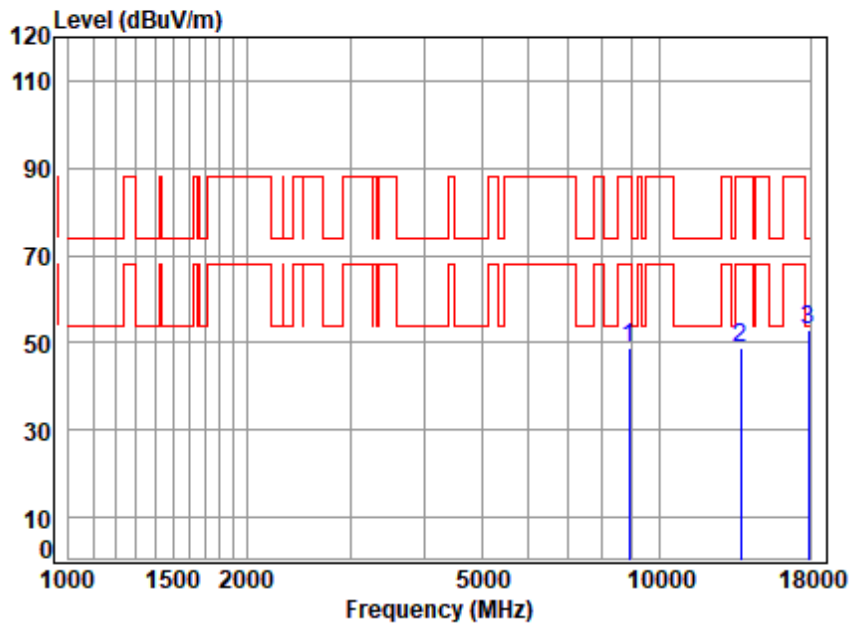

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8891.725	12.59	38.58	55.10	52.84	48.91	88.20	-39.29	peak
2 13710.000	16.11	39.99	54.43	47.31	48.98	88.20	-39.22	peak
3 pp17896.250	19.26	43.08	54.48	45.20	53.06	74.00	-20.94	peak



Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

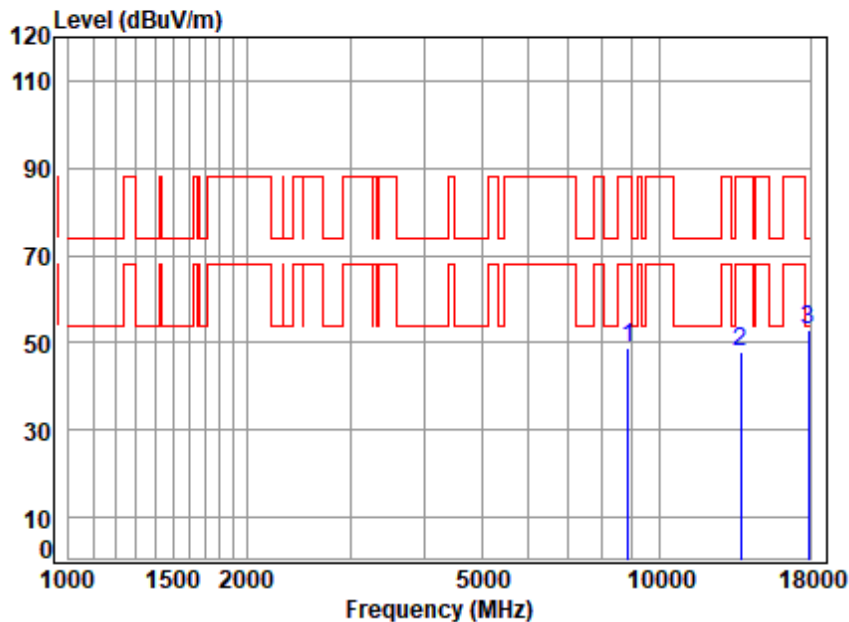

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8866.062	12.55	38.53	55.12	52.76	48.72	88.20	-39.48	peak
2 13710.000	16.11	39.99	54.43	46.46	48.13	88.20	-40.07	peak
3 pp17896.250	19.26	43.08	54.48	44.96	52.82	74.00	-21.18	peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

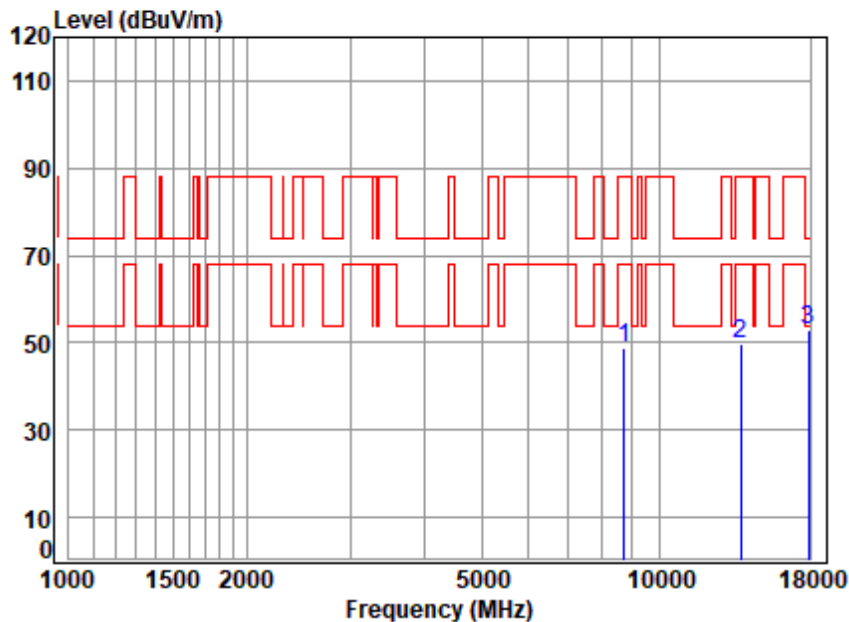

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.85	48.61	88.20	-39.59	peak
2 13750.000	15.89	39.95	54.43	48.11	49.52	88.20	-38.68	peak
3 pp17896.250	19.26	43.08	54.48	45.23	53.09	74.00	-20.91	peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

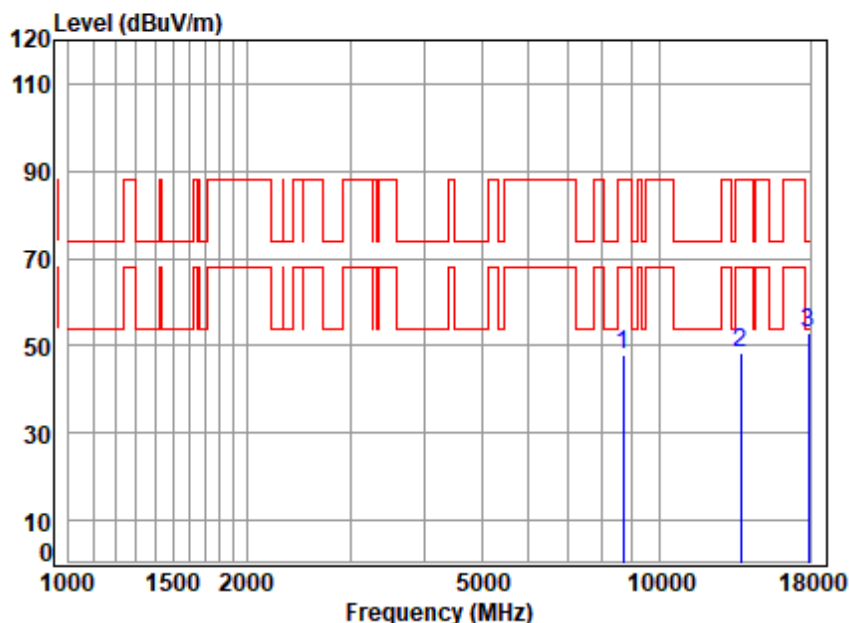

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 8688.480	12.44	38.55	55.28	52.00	47.71	88.20	-40.49 peak
2 13750.000	15.89	39.95	54.43	47.08	48.49	88.20	-39.71 peak
3 pp17896.250	19.26	43.08	54.48	45.12	52.98	74.00	-21.02 peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

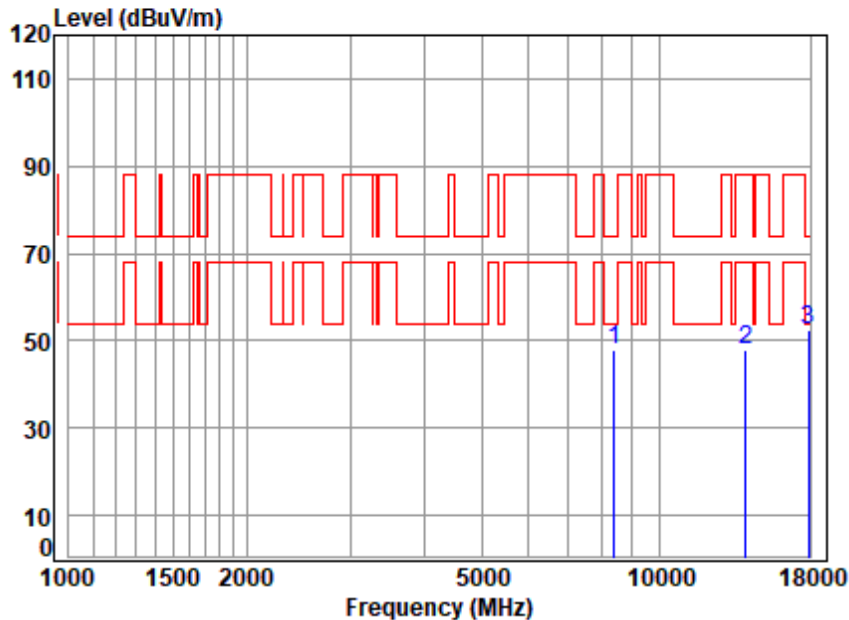

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8392.292	11.89	38.62	55.55	52.77	47.73	74.00	-26.27	peak
2 13990.000	16.42	39.90	54.40	45.87	47.79	88.20	-40.41	peak
3 pp17896.250	19.26	43.08	54.48	44.75	52.61	74.00	-21.39	peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

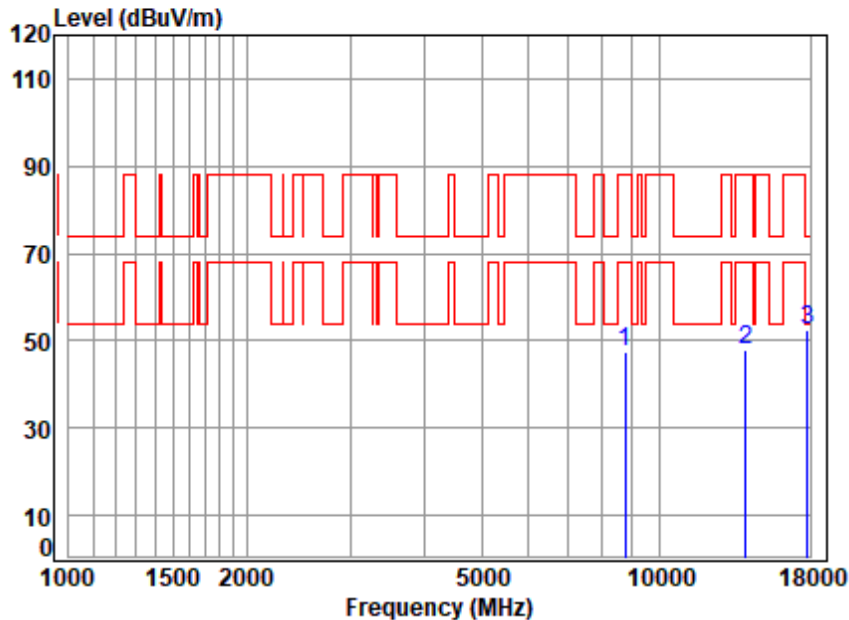

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8764.146	12.45	38.50	55.21	51.72	47.46	88.20	-40.74	peak
2 13990.000	16.42	39.90	54.40	46.05	47.97	88.20	-40.23	peak
3 pp17844.590	19.19	42.77	54.47	45.15	52.64	74.00	-21.36	peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

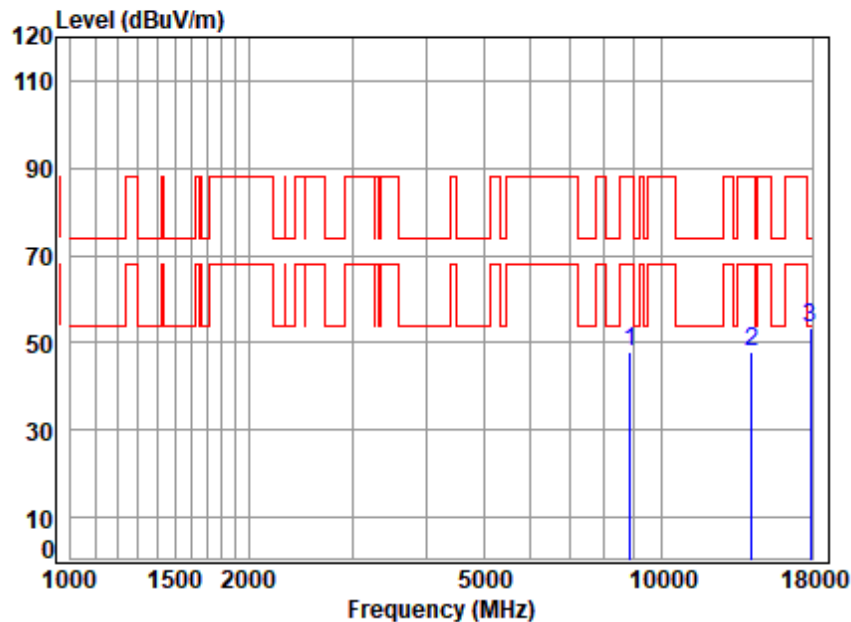

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 7115 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 8866.062	12.55	38.53	55.12	52.11	48.07	88.20	-40.13 peak
2 14230.000	16.31	39.80	54.38	46.39	48.12	88.20	-40.08 peak
3 pp17896.250	19.26	43.08	54.48	45.67	53.53	74.00	-20.47 peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

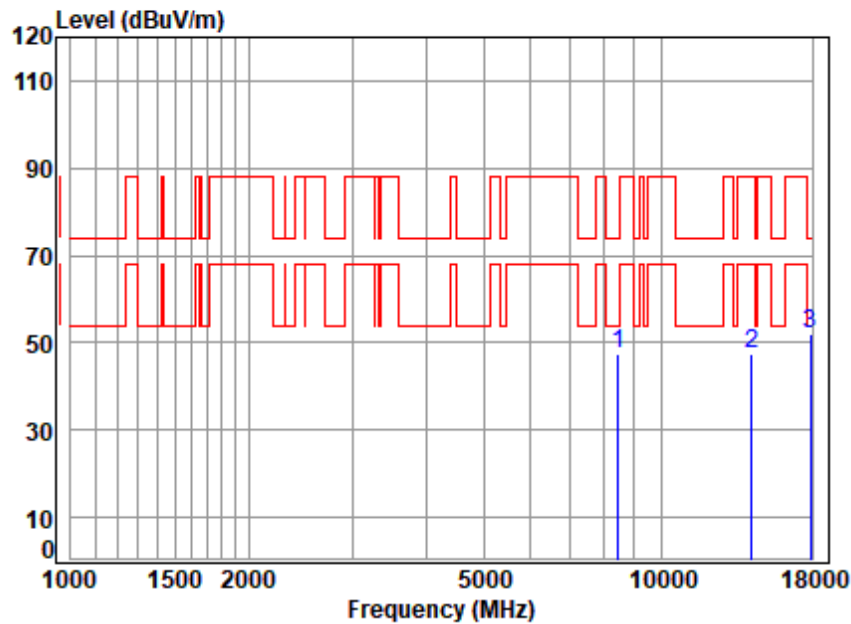

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 7115 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 8440.945	12.24	38.44	55.50	52.37	47.55	74.00	-26.45 peak
2 14230.000	16.31	39.80	54.38	45.94	47.67	88.20	-40.53 peak
3 pp17896.250	19.26	43.08	54.48	44.30	52.16	74.00	-21.84 peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

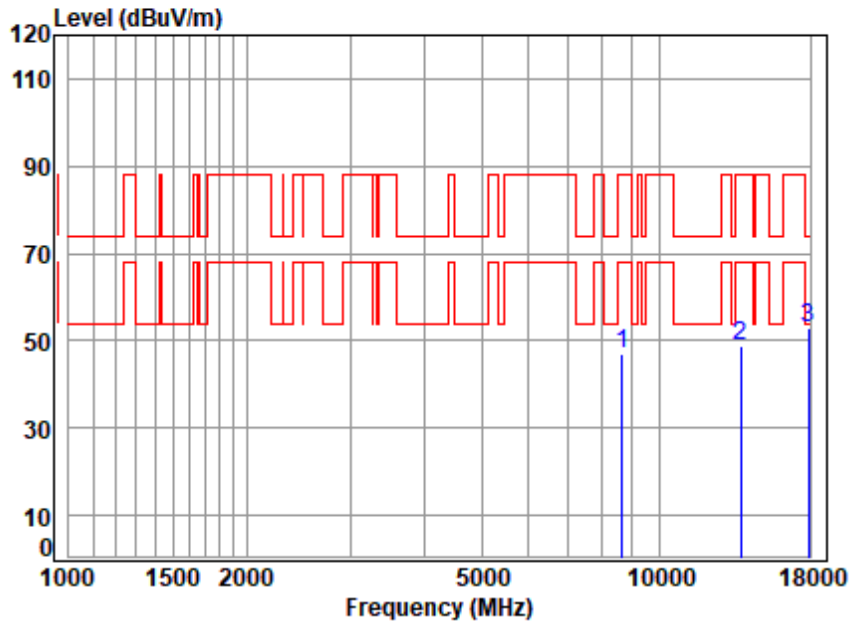

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8638.399	12.38	38.42	55.33	51.64	47.11	88.20	-41.09	peak
2 13750.000	15.89	39.95	54.43	47.40	48.81	88.20	-39.39	peak
3 pp17896.250	19.26	43.08	54.48	44.85	52.71	74.00	-21.29	peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

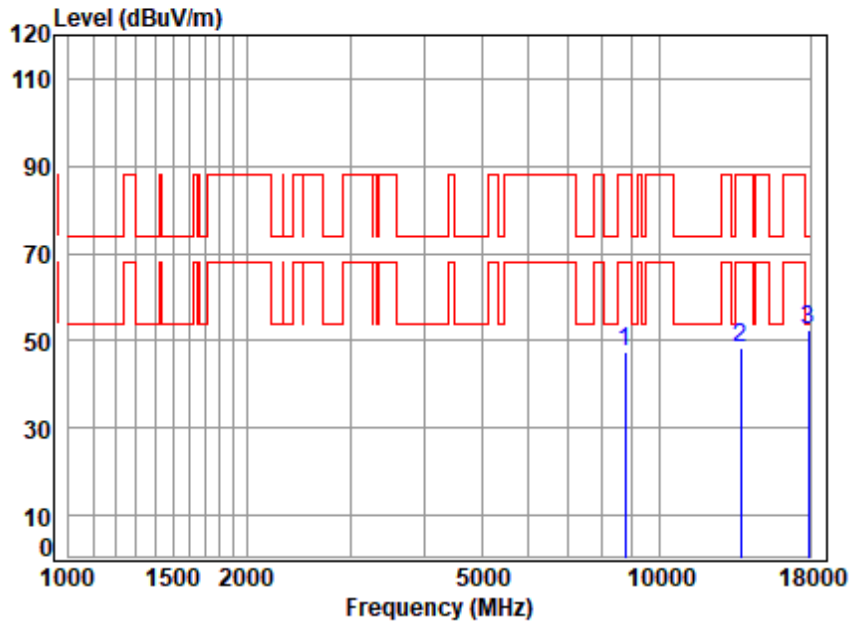

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 6875 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8738.852	12.45	38.52	55.24	51.68	47.41	88.20	-40.79	peak
2 13750.000	15.89	39.95	54.43	47.06	48.47	88.20	-39.73	peak
3 pp17896.250	19.26	43.08	54.48	44.82	52.68	74.00	-21.32	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 71 of 615

Test Mode: 12; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: middle

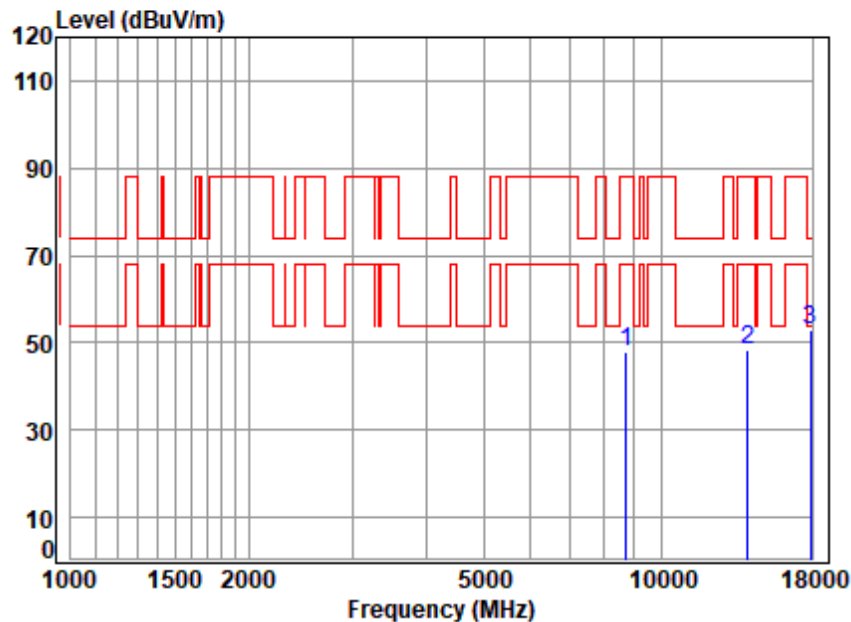

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 6995 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8713.630	12.45	38.57	55.26	52.02	47.78	88.20	-40.42	peak
2 13990.000	16.42	39.90	54.40	46.29	48.21	88.20	-39.99	peak
3 pp17896.250	19.26	43.08	54.48	45.07	52.93	74.00	-21.07	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

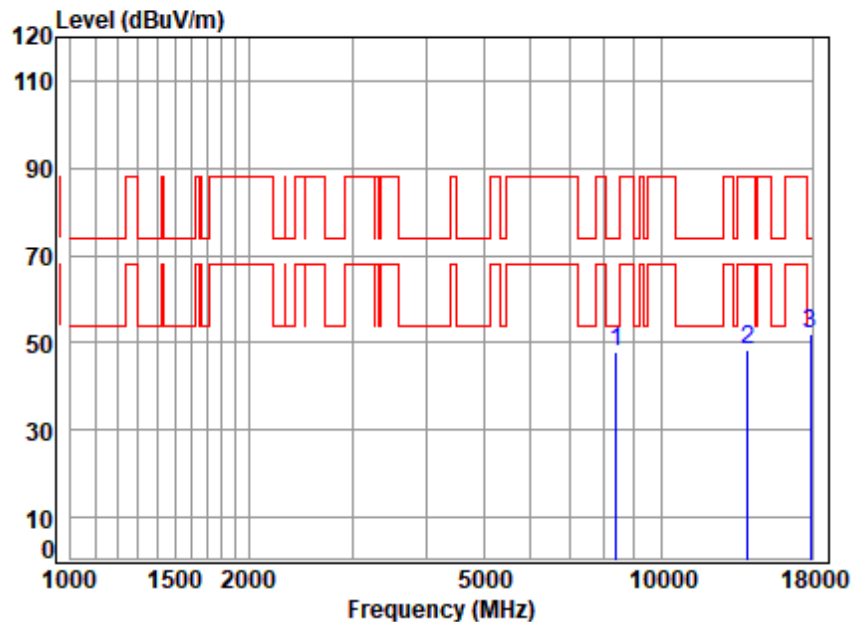

Condition: 3m VERTICAL

Job No : 01121AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8392.292	11.89	38.62	55.55	52.89	47.85	74.00	-26.15	peak
2 13990.000	16.42	39.90	54.40	46.36	48.28	88.20	-39.92	peak
3 pp17896.250	19.26	43.08	54.48	44.23	52.09	74.00	-21.91	peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

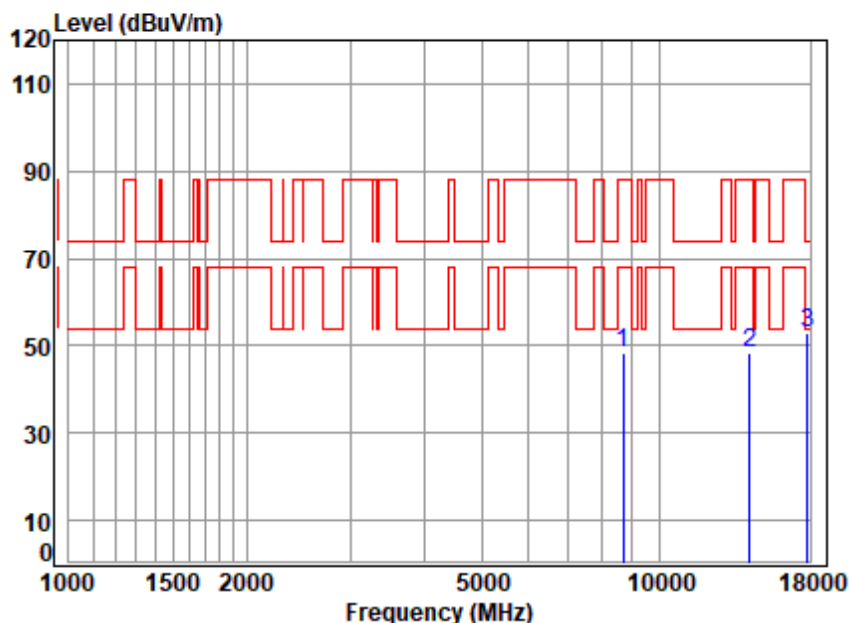

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 7115 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8688.480	12.44	38.55	55.28	52.51	48.22	88.20	-39.98	peak
2 14230.000	16.31	39.80	54.38	46.71	48.44	88.20	-39.76	peak
3 pp17444.590	19.19	42.77	54.47	45.62	53.11	74.00	-20.89	peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

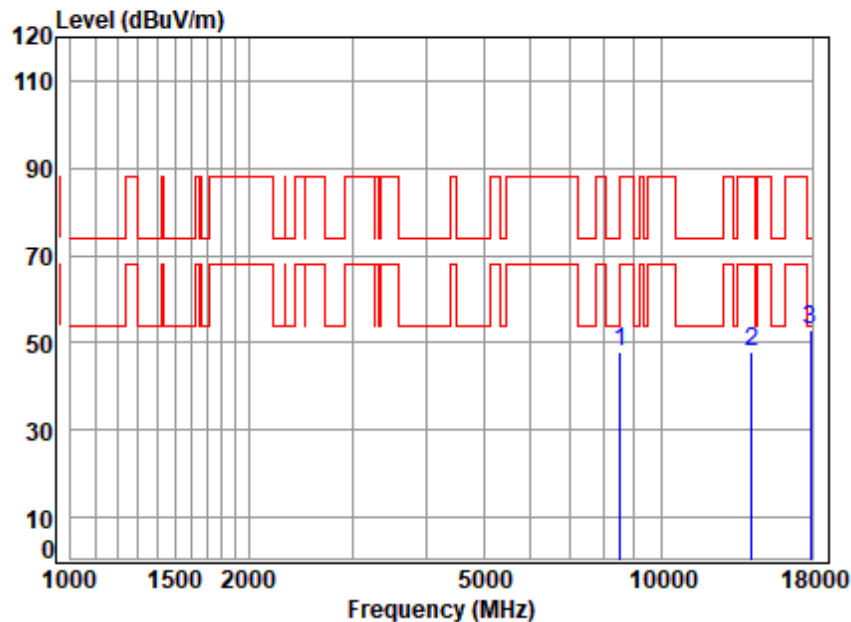

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 7115 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 8514.456	12.69	38.30	55.44	52.57	48.12	88.20	-40.08	peak
2 14230.000	16.31	39.80	54.38	46.33	48.06	88.20	-40.14	peak
3 pp17896.250	19.26	43.08	54.48	44.97	52.83	74.00	-21.17	peak



7.5 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C


Humidity: 55.0 % RH

Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

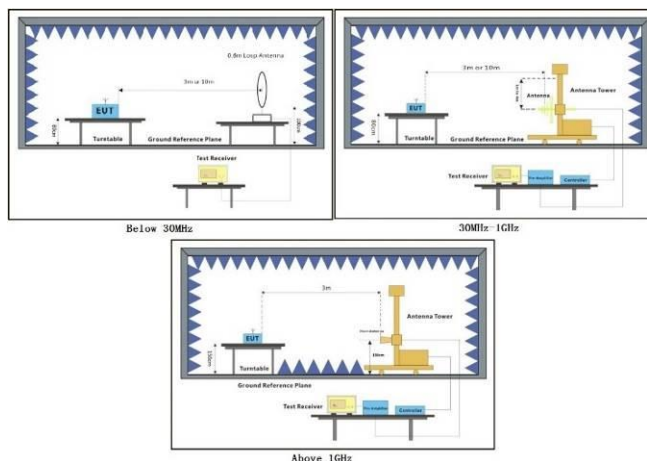

7.5.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

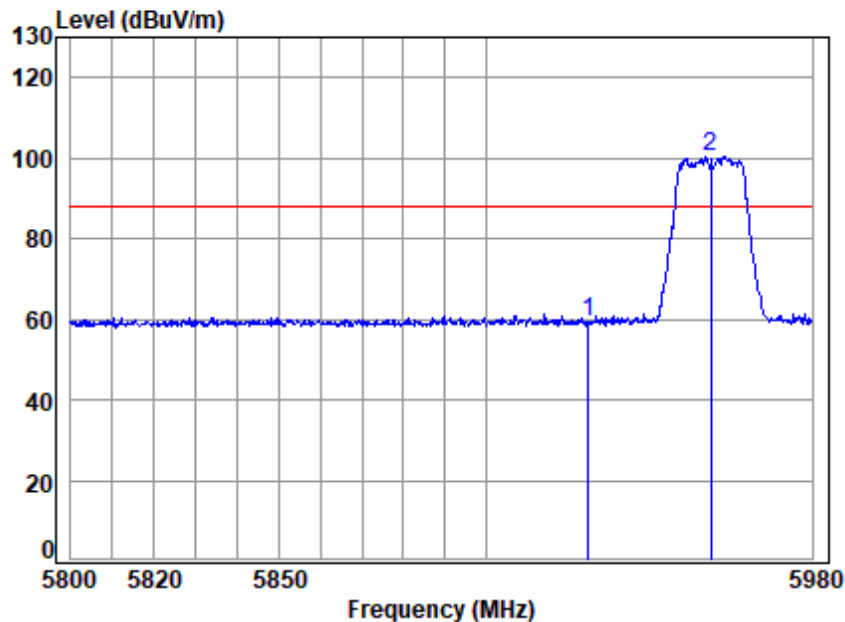

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 5955 Band edge
: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	45.40	59.29	88.20	-28.91	peak
2 pp	5955.000	10.85	33.62	30.52	86.46	100.41	88.20	12.21	peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

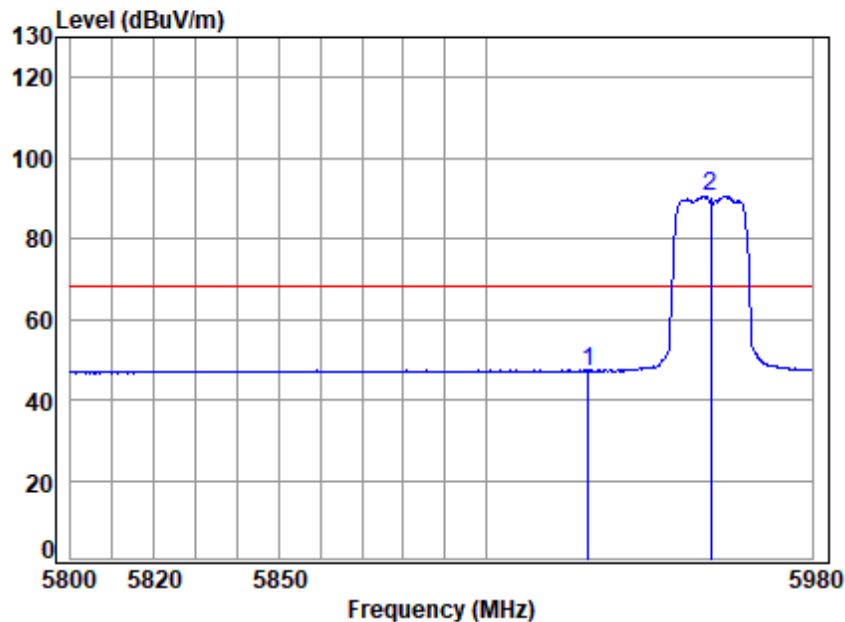

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 5955 Band edge
: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	33.23	47.12	68.20	-21.08	Average
2 pp	5955.000	10.85	33.62	30.52	76.57	90.52	68.20	22.32	Average



Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

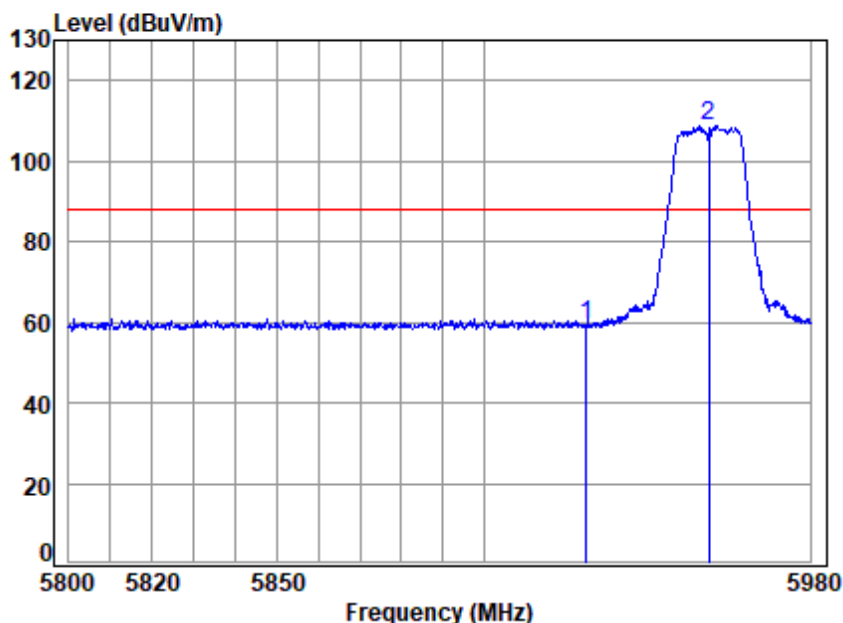

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 5955 Band edge
: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	45.53	59.42	88.20	-28.78	peak
2 pp	5955.000	10.85	33.62	30.52	94.93	108.88	88.20	20.68	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

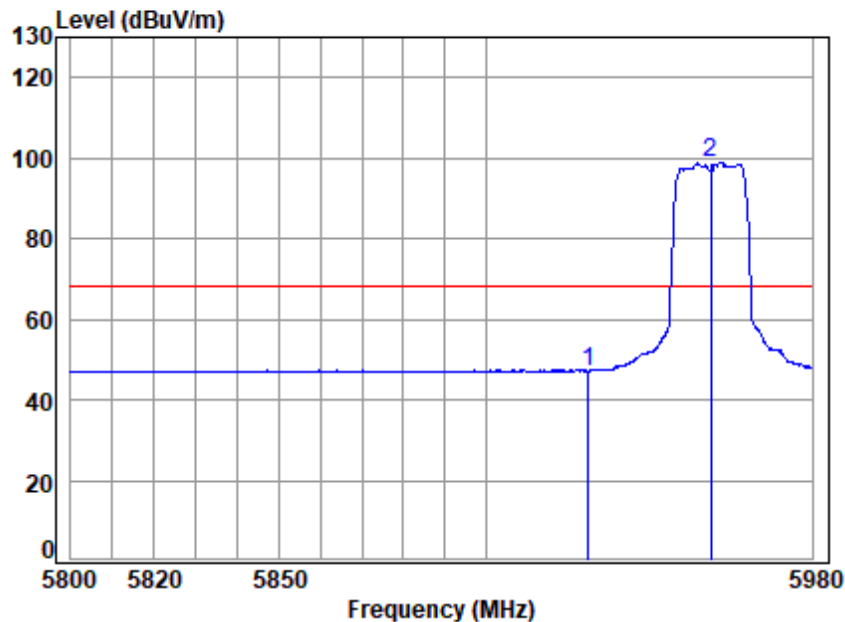

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 5955 Band edge
: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5925.000	10.87	33.55	30.53	33.22	47.11	68.20	-21.09 Average
2 pp	5955.000	10.85	33.62	30.52	84.88	98.83	68.20	30.63 Average



Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

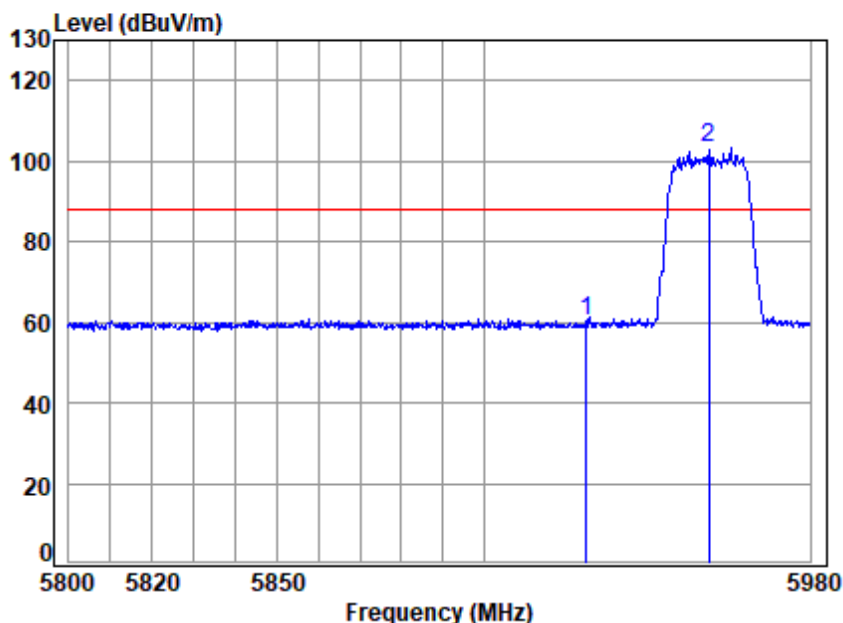

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 5955 Band edge

: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	46.20	60.09	88.20	-28.11	peak
2 pp	5955.000	10.85	33.62	30.52	89.14	103.09	88.20	14.89	peak



Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

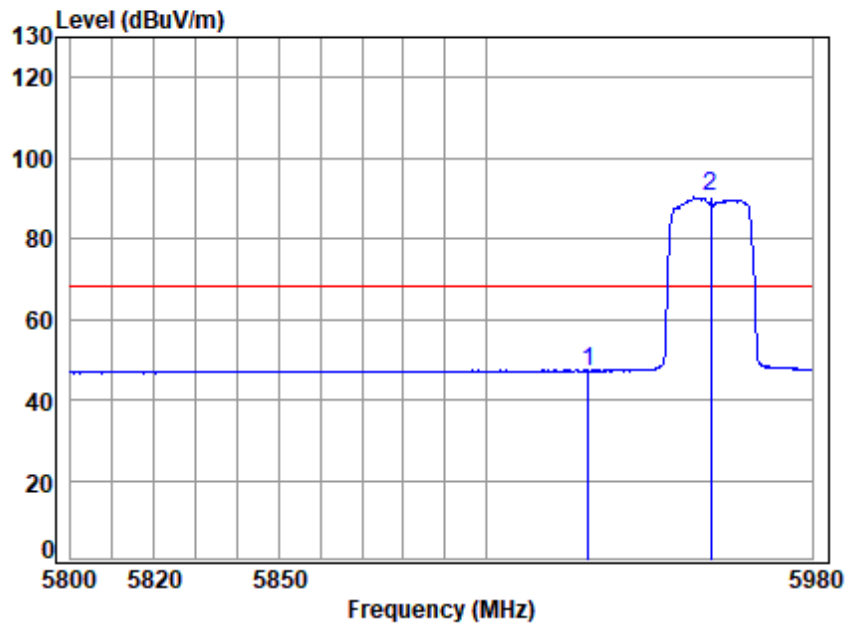

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 5955 Band edge

: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	33.15	47.04	68.20	-21.16 Average
2 pp	5955.000	10.85	33.62	30.52	76.28	90.23	68.20	22.03 Average



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

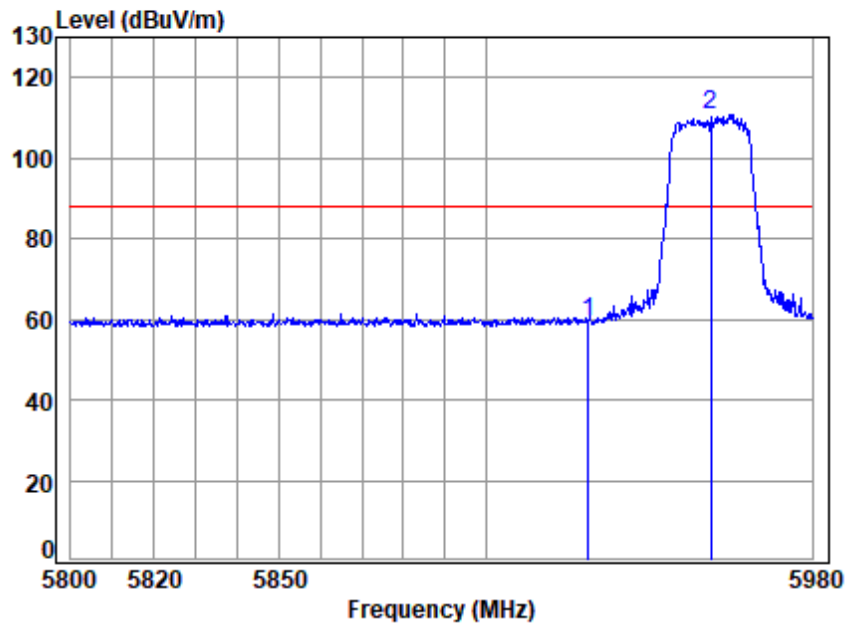

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 5955 Band edge
: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	45.41	59.30	88.20	-28.90	peak
2 pp	5955.000	10.85	33.62	30.52	96.82	110.77	88.20	22.57	peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

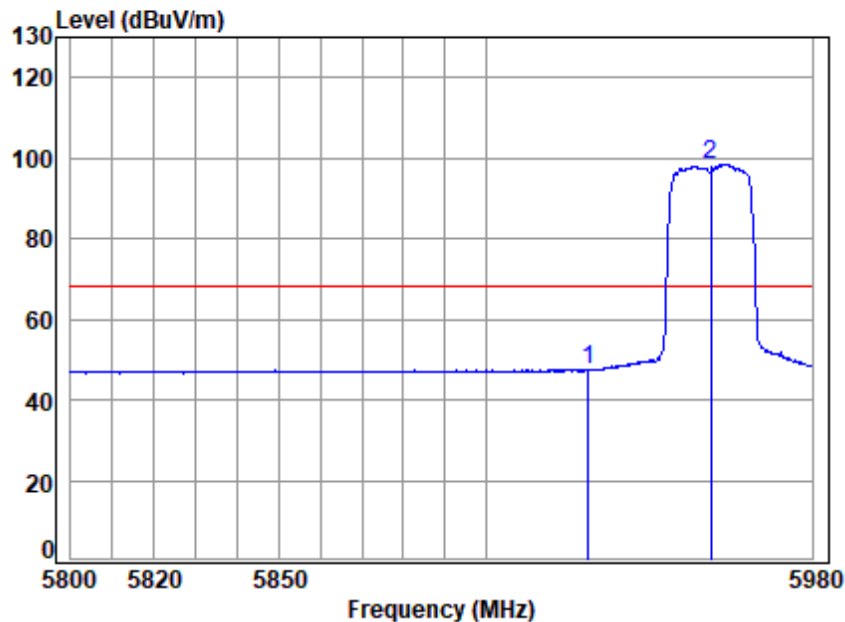

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 5955 Band edge
: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	33.56	47.45	68.20	-20.75	Average
2 pp	5955.000	10.85	33.62	30.52	84.51	98.46	68.20	30.26	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 85 of 615

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

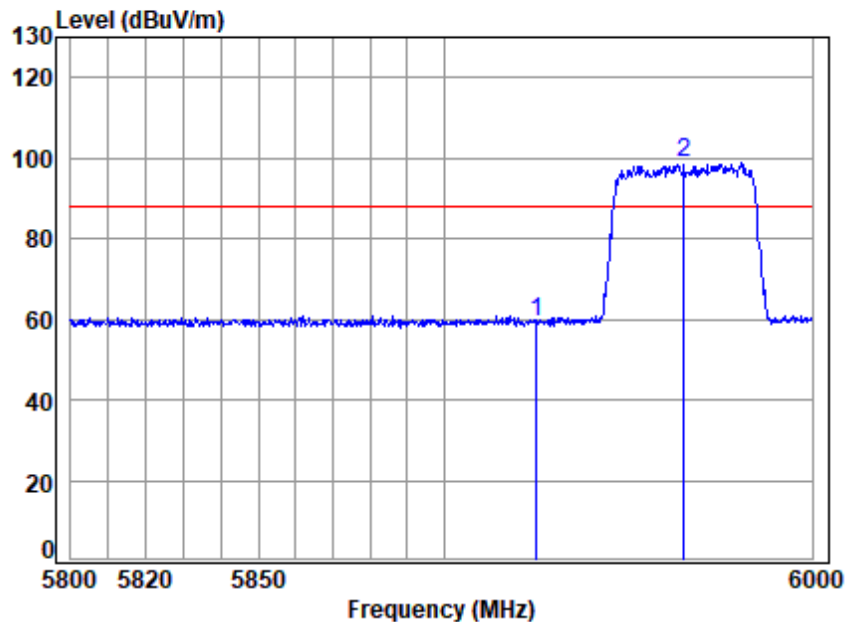

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 5965 Band edge
: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	45.31	59.20	88.20	-29.00 peak
2	5965.000	10.84	33.66	30.51	84.73	98.72	88.20	10.52 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 09; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

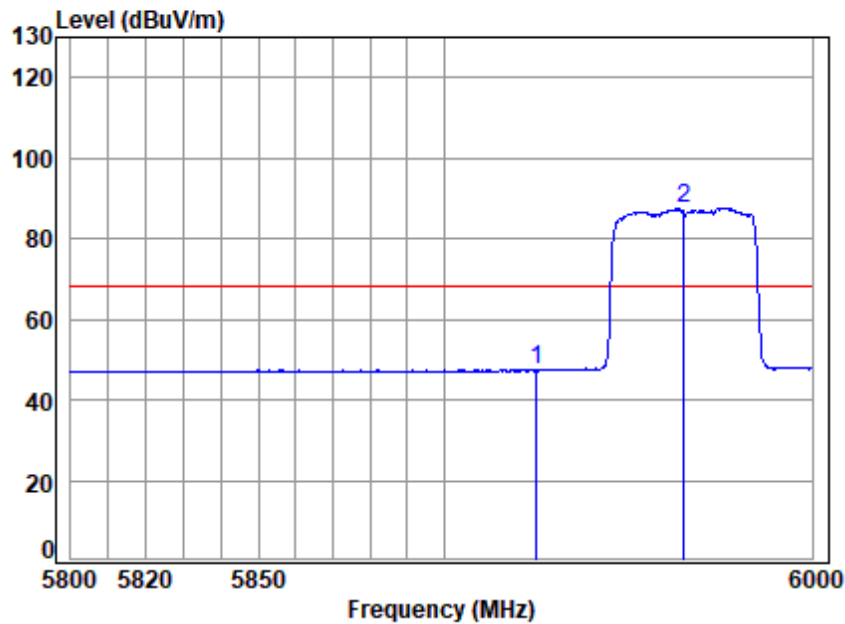

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 5965 Band edge

: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5925.000	10.87	33.55	30.53	33.45	47.34	68.20	-20.86 Average
2 pp	5965.000	10.84	33.66	30.51	73.67	87.66	68.20	19.46 Average



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

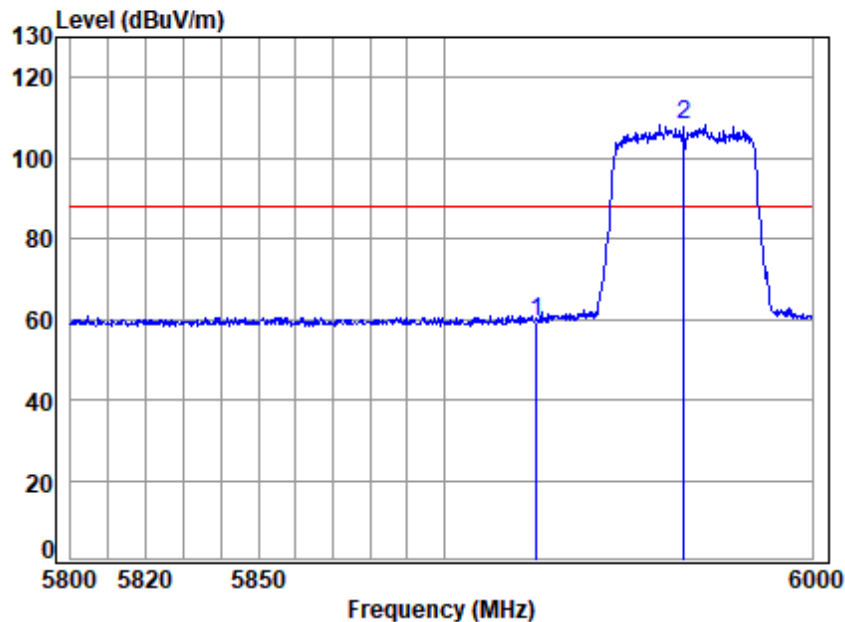

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 5965 Band edge
: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	45.41	59.30	88.20	-28.90 peak
2	5965.000	10.84	33.66	30.51	94.44	108.43	88.20	20.23 peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

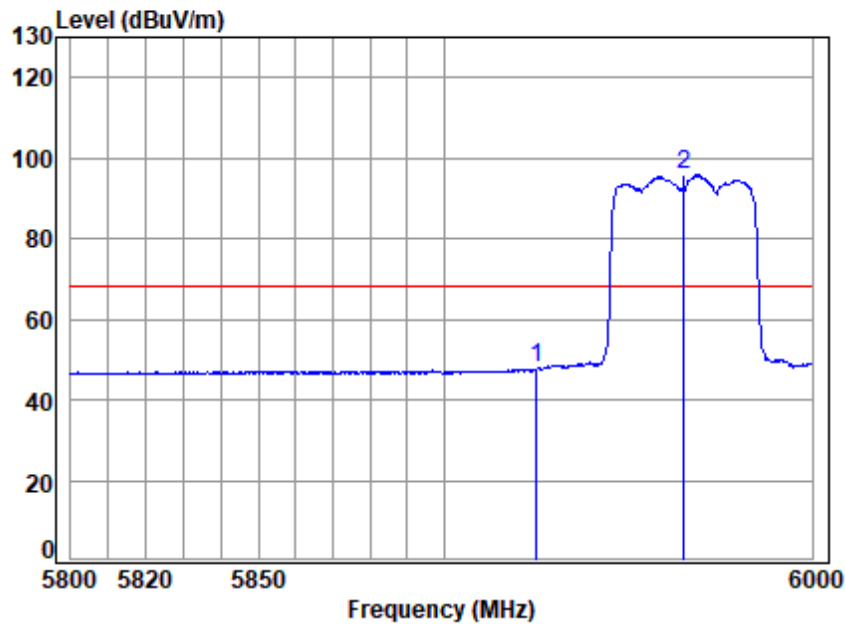

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 5965 Band edge
: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	33.83	47.72	68.20	-20.48 Average
2	pp 5965.000	10.84	33.66	30.51	81.76	95.75	68.20	27.55 Average



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

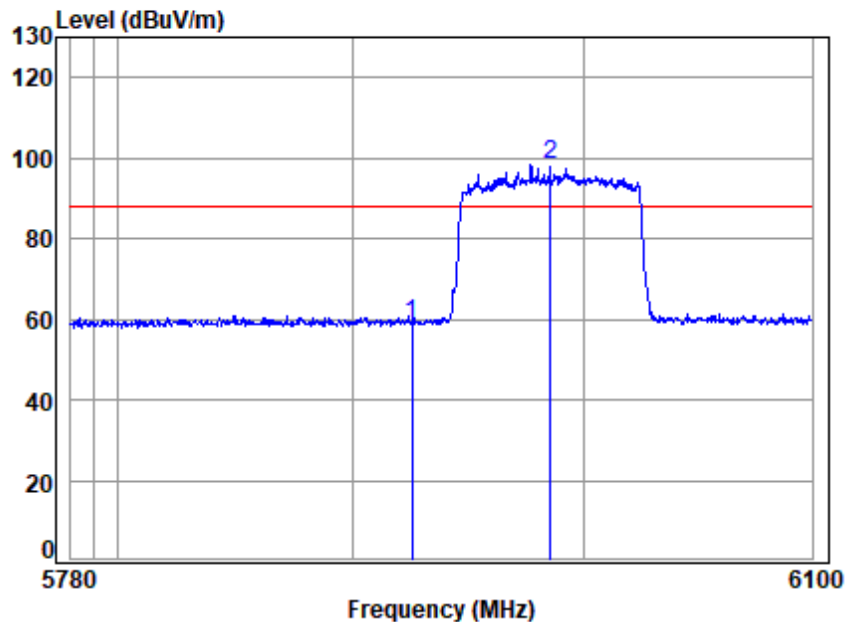

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 5985 Band edge
: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	44.79	58.68	88.20	-29.52 peak
2	pp 5985.000	10.82	33.74	30.51	84.34	98.39	88.20	10.19 peak



Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

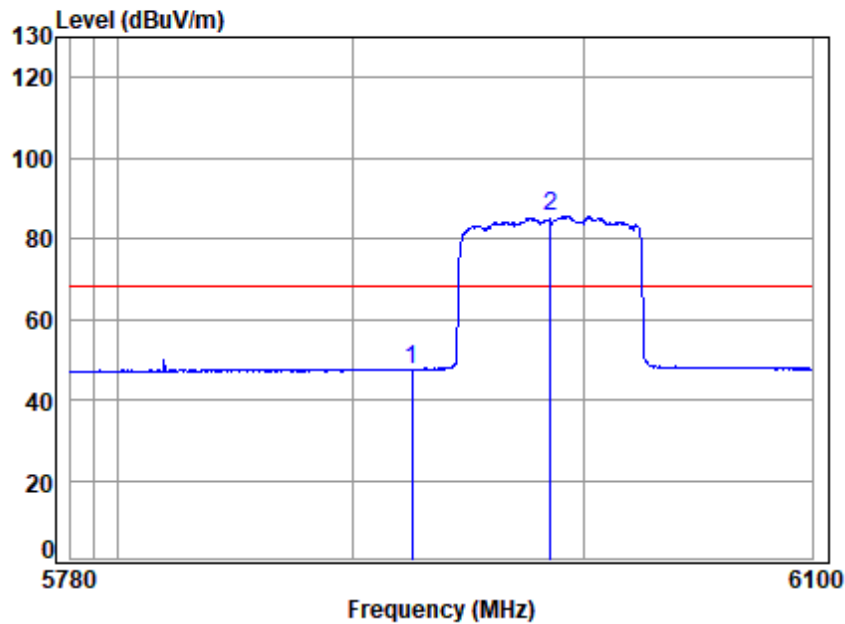

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 5985 Band edge
: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5925.000	10.87	33.55	30.53	33.62	47.51	68.20	-20.69 Average
2 pp	5985.000	10.82	33.74	30.51	71.58	85.63	68.20	17.43 Average



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

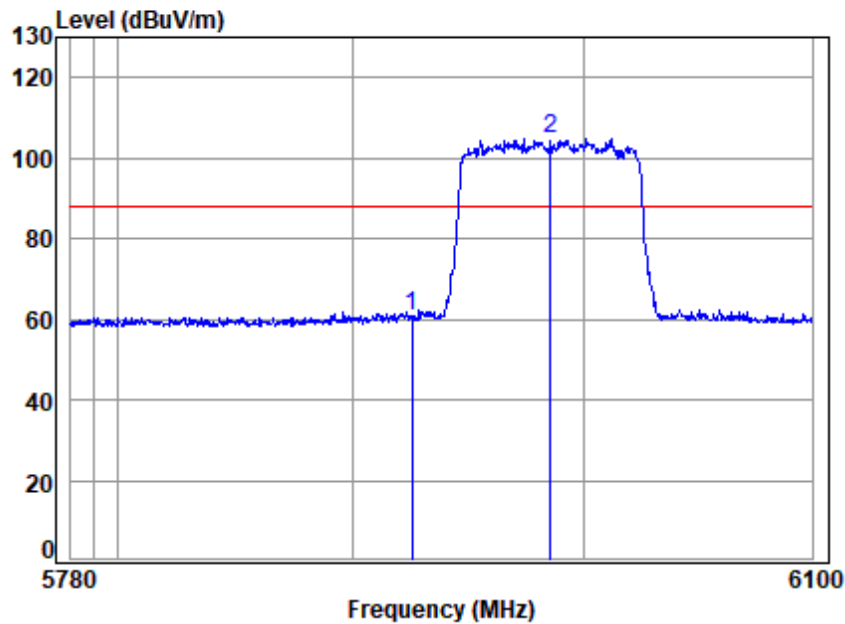

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 5985 Band edge
: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	47.09	60.98	88.20	-27.22 peak
2	pp 5985.000	10.82	33.74	30.51	90.72	104.77	88.20	16.57 peak



Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

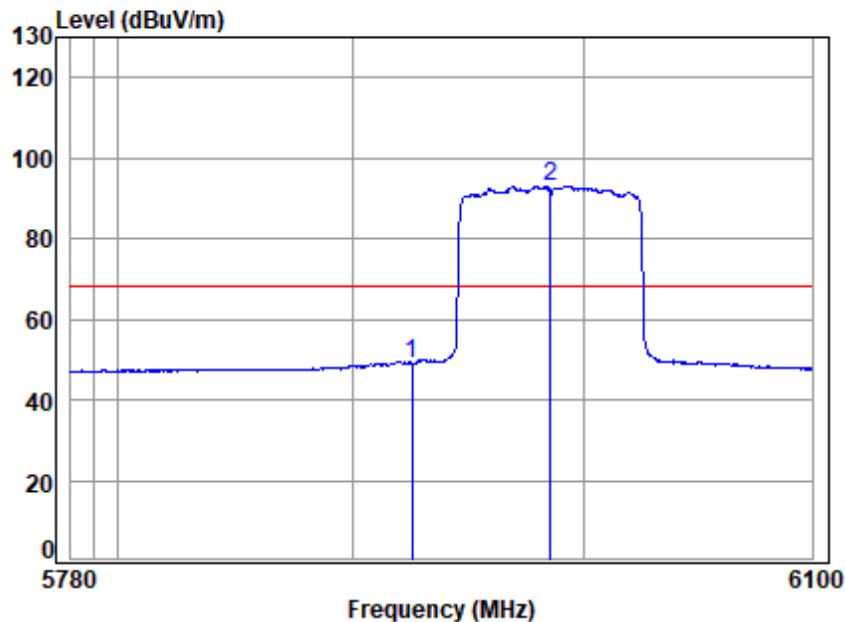

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 5985 Band edge
: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5925.000	10.87	33.55	30.53	35.17	49.06	68.20	-19.14 Average
2 pp	5985.000	10.82	33.74	30.51	79.03	93.08	68.20	24.88 Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 93 of 615

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

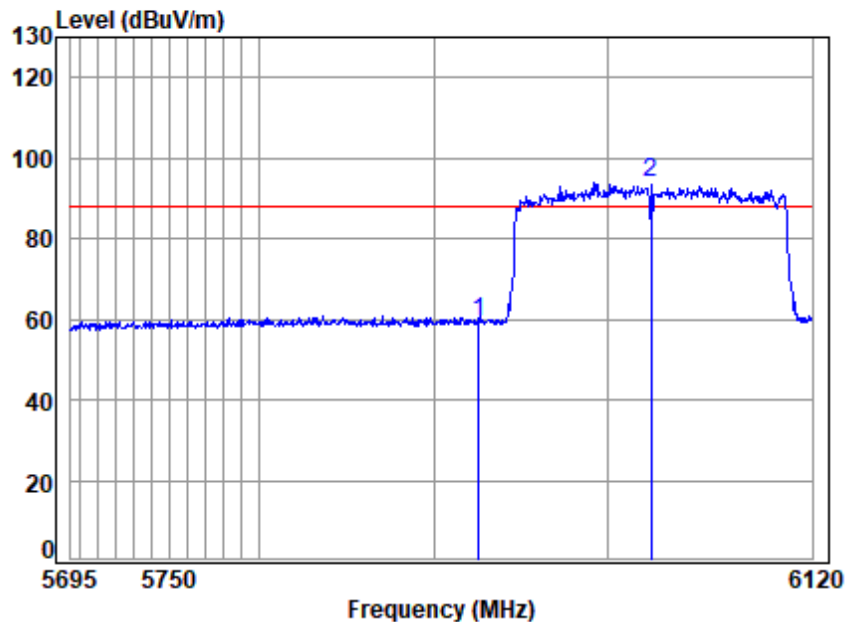

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 6025 Band edge

: Wi-Fi 6E 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	45.26	59.15	88.20	-29.05	peak
2 pp	6025.000	10.82	33.85	30.52	79.98	94.13	88.20	5.93	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 94 of 615

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

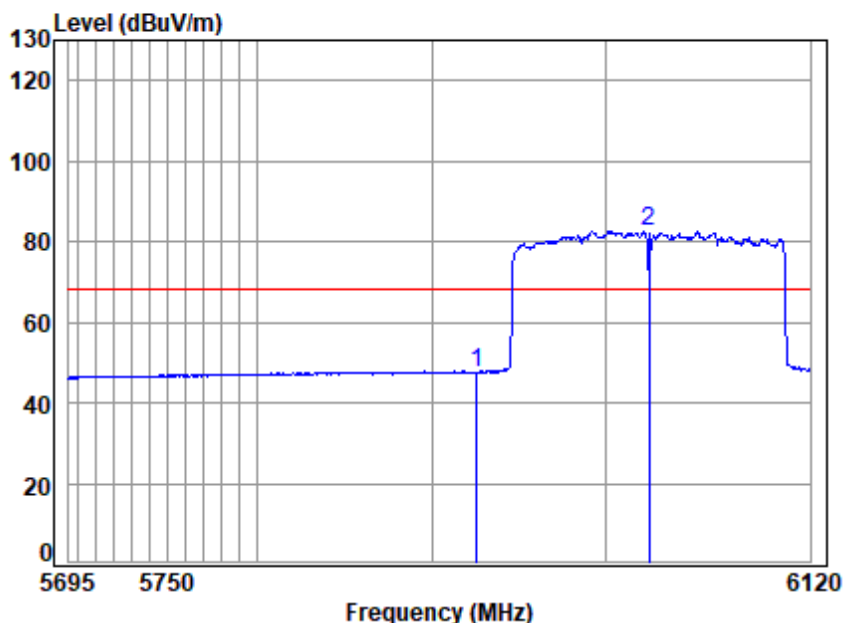

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 6025 Band edge

: Wi-Fi 6E 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	33.69	47.58	68.20	-20.62	Average
2 pp	6025.000	10.82	33.85	30.52	68.57	82.72	68.20	14.52	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

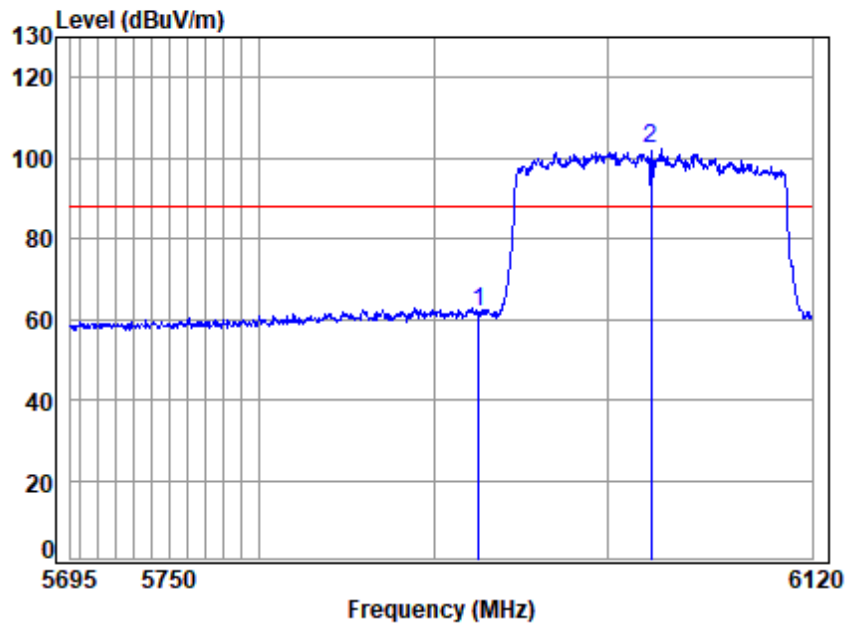

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 6025 Band edge

: Wi-Fi 6E 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	47.75	61.64	88.20	-26.56	peak
2	pp 6025.000	10.82	33.85	30.52	87.98	102.13	88.20	13.93	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 96 of 615

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

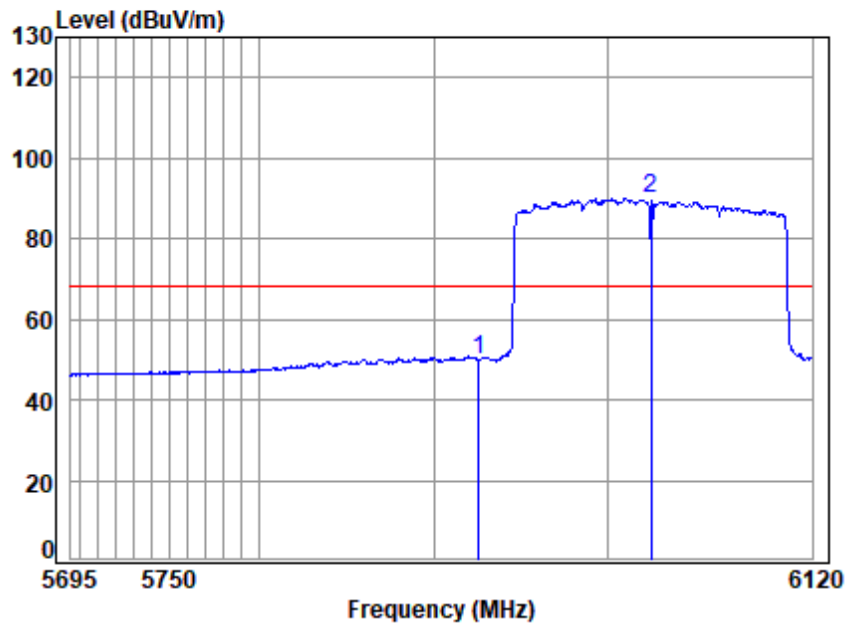

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 6025 Band edge
: Wi-Fi 6E 11ax160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5925.000	10.87	33.55	30.53	36.16	50.05	68.20	-18.15	Average
2 pp	6025.000	10.82	33.85	30.52	75.80	89.95	68.20	21.75	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 12; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

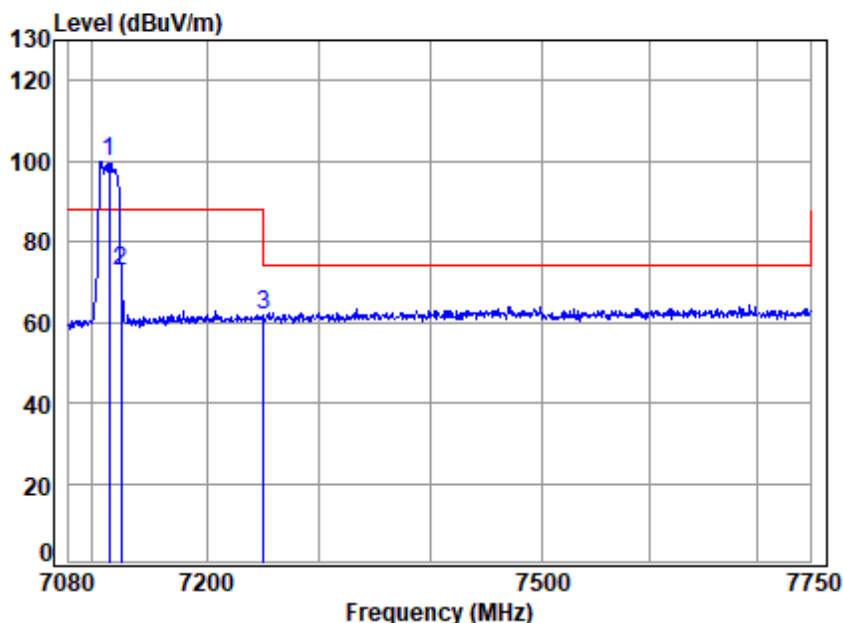

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 7115 Band edge
: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
7115.000	11.81	36.43	31.26	82.78	99.76	88.20	11.56	peak
7125.598	11.82	36.45	31.26	55.52	72.53	88.20	-15.67	peak
7250.000	11.90	36.60	31.33	44.85	62.02	74.00	-11.98	peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

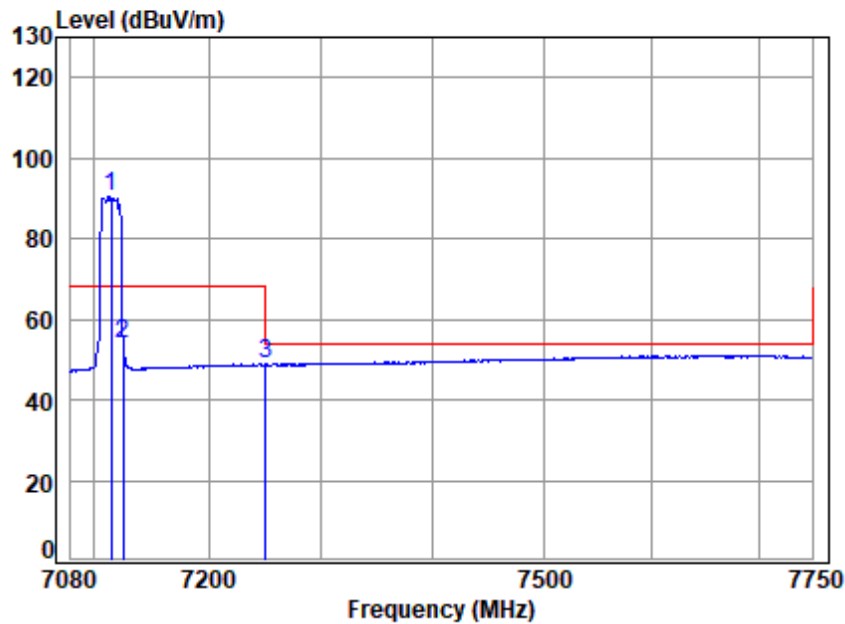

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 7115 Band edge
: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	73.59	90.57	68.20	22.37	Average
2	7125.598	11.82	36.45	31.26	36.97	53.98	68.20	-14.22	Average
3	7250.000	11.90	36.60	31.33	31.90	49.07	54.00	-4.93	Average



Test Mode: 12; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

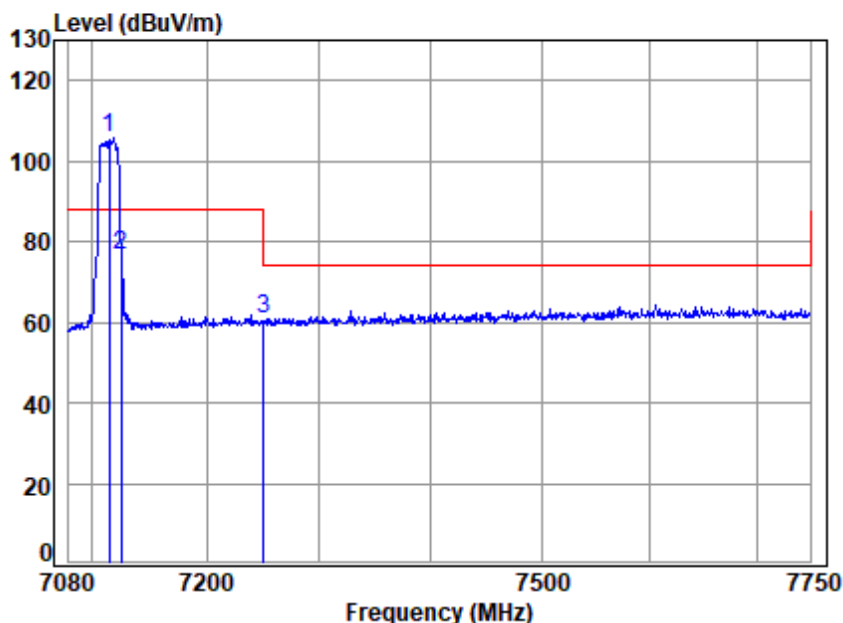

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7115 Band edge
: Wi-Fi 6E 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	88.64	105.62	88.20	17.42	peak
2	7125.598	11.82	36.45	31.26	59.47	76.48	88.20	-11.72	peak
3	7250.000	11.90	36.60	31.33	43.67	60.84	74.00	-13.16	peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

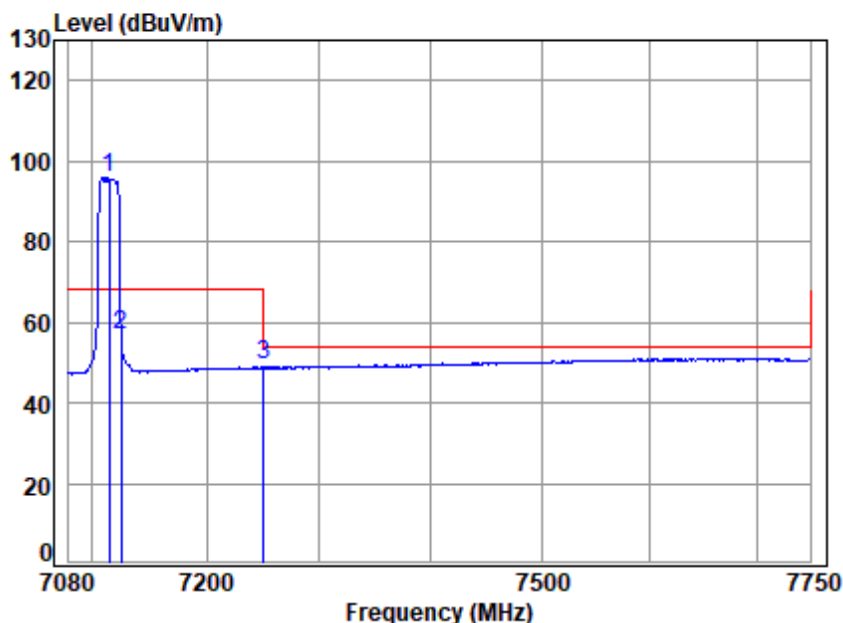

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7115 Band edge
: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	78.88	95.86	68.20	27.66	Average
2	7125.598	11.82	36.45	31.26	39.96	56.97	68.20	-11.23	Average
3	7250.000	11.90	36.60	31.33	32.06	49.23	54.00	-4.77	Average



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

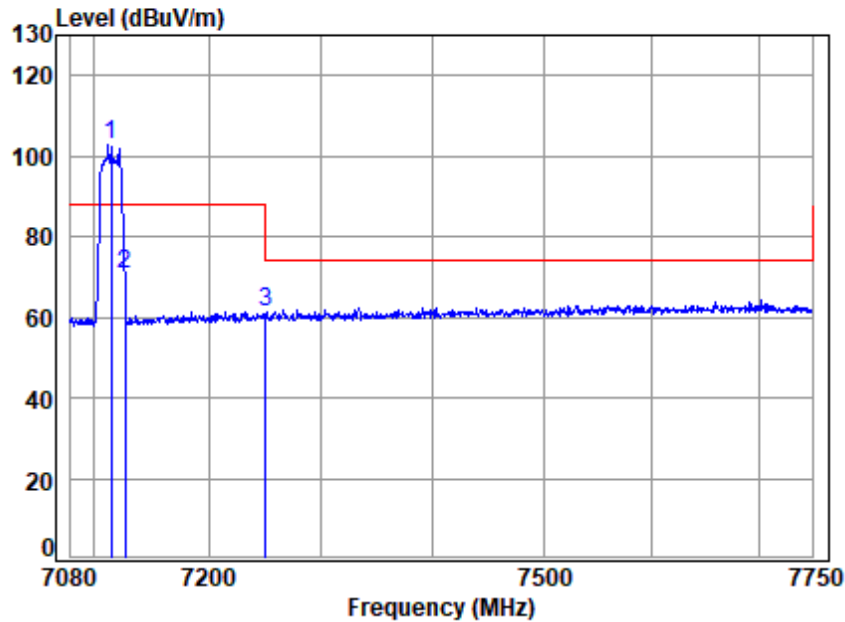

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 7115 Band edge

: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	85.74	102.72	88.20	14.52	peak
2	7126.887	11.82	36.45	31.26	53.89	70.90	88.20	-17.30	Peak
3	7250.000	11.90	36.60	31.33	43.91	61.08	74.00	-12.92	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 102 of 615

Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

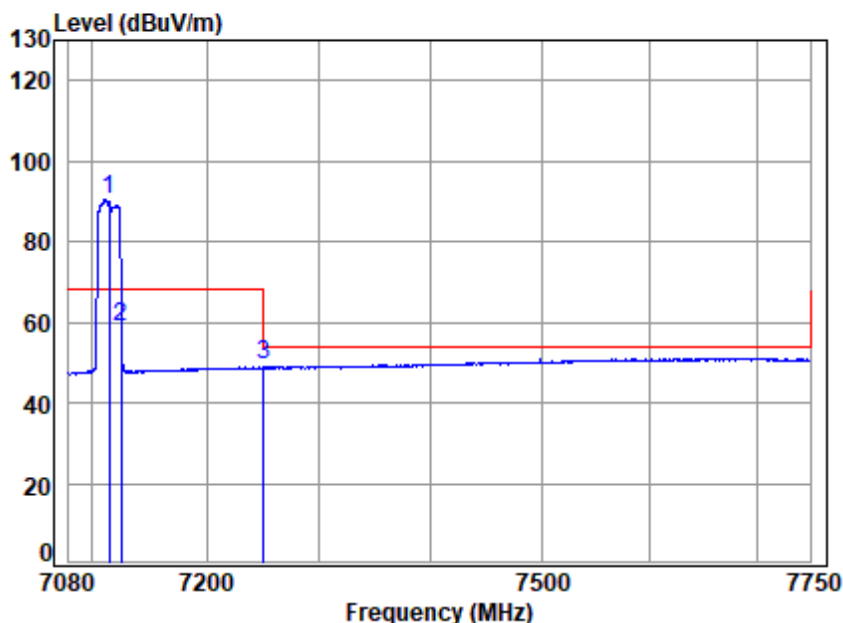

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 7115 Band edge

: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	73.59	90.57	68.20	22.37	Average
2	7125.598	11.82	36.45	31.26	41.79	58.80	68.20	-9.40	Average
3	7250.000	11.90	36.60	31.33	32.03	49.20	54.00	-4.80	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

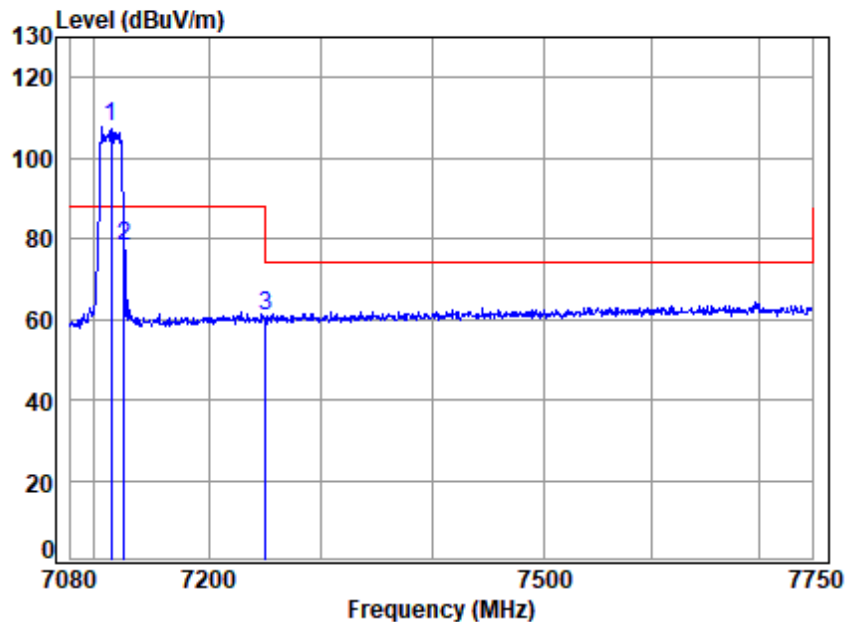

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7115 Band edge
: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	90.61	107.59	88.20	19.39	peak
2	7126.242	11.82	36.45	31.26	61.01	78.02	88.20	-10.18	Peak
3	7250.000	11.90	36.60	31.33	43.71	60.88	74.00	-13.12	peak



Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

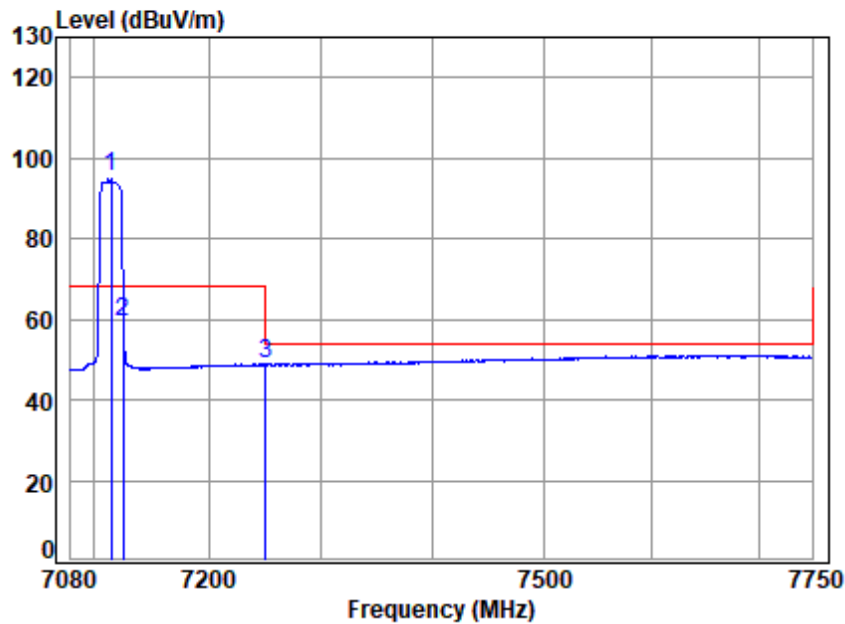

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7115 Band edge
: Wi-Fi 6E 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7115.000	11.81	36.43	31.26	78.22	95.20	68.20	27.00	Average
2	7125.598	11.82	36.45	31.26	42.18	59.19	68.20	-9.01	Average
3	7250.000	11.90	36.60	31.33	31.64	48.81	54.00	-5.19	Average



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

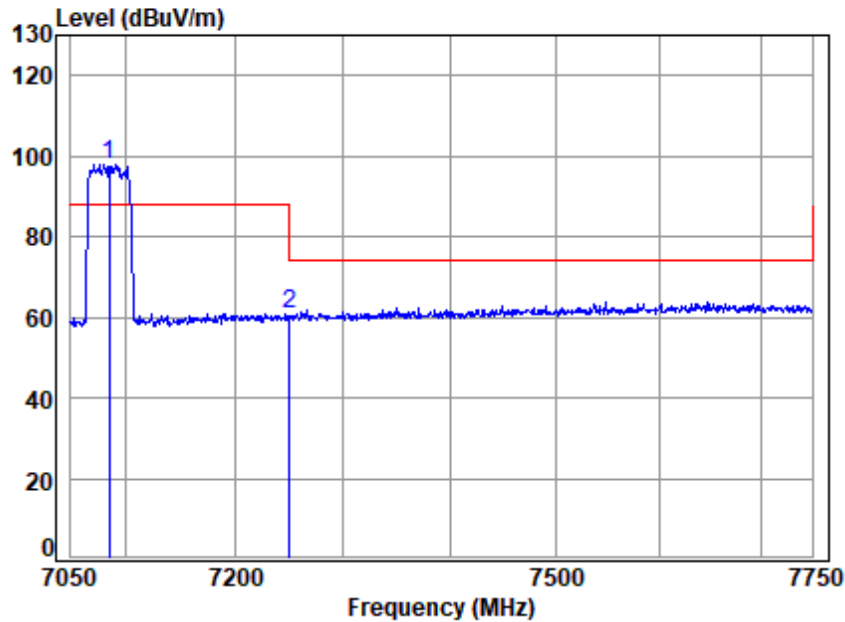

Condition: 3m HORIZONTAL

Job No : 01121AT


Mode : 7085 Band edge

: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7085.000	11.77	36.37	31.24	81.20	98.10	88.20	9.90	peak
2	7250.000	11.90	36.60	31.33	43.56	60.73	74.00	-13.27	peak



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

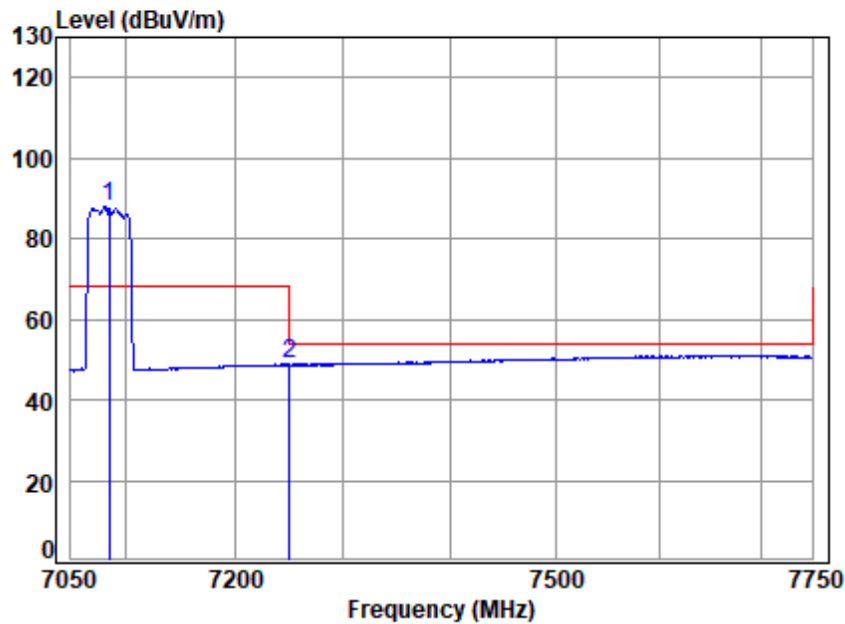

Condition: 3m HORIZONTAL


Job No : 01121AT

Mode : 7085 Band edge
: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7085.000	11.77	36.37	31.24	71.03	87.93	68.20	19.73	Average
2	7250.000	11.90	36.60	31.33	31.72	48.89	54.00	-5.11	Average



Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

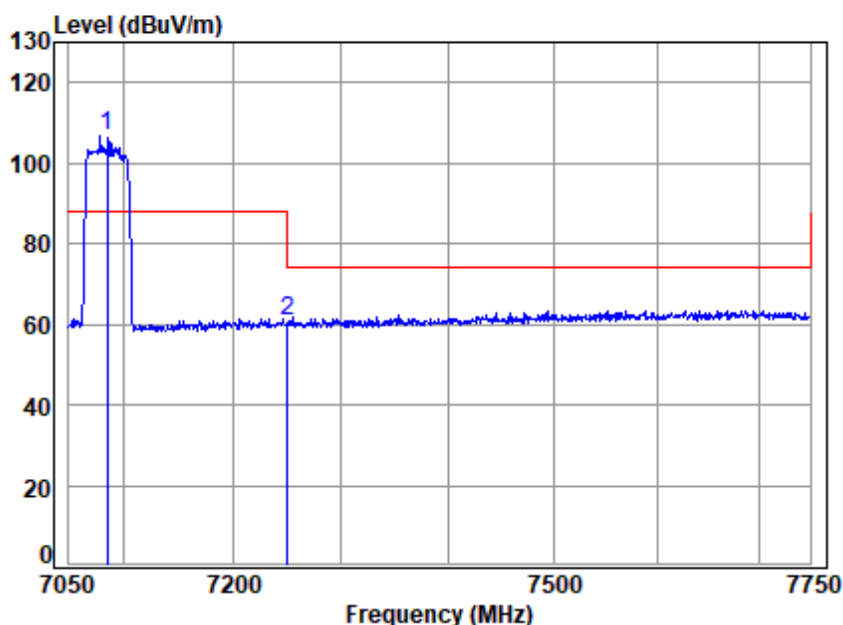

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7085 Band edge
: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 7085.000	11.77	36.37	31.24	89.84	106.74	88.20	18.54	peak	
2 7250.000	11.90	36.60	31.33	43.52	60.69	74.00	-13.31	peak	



Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

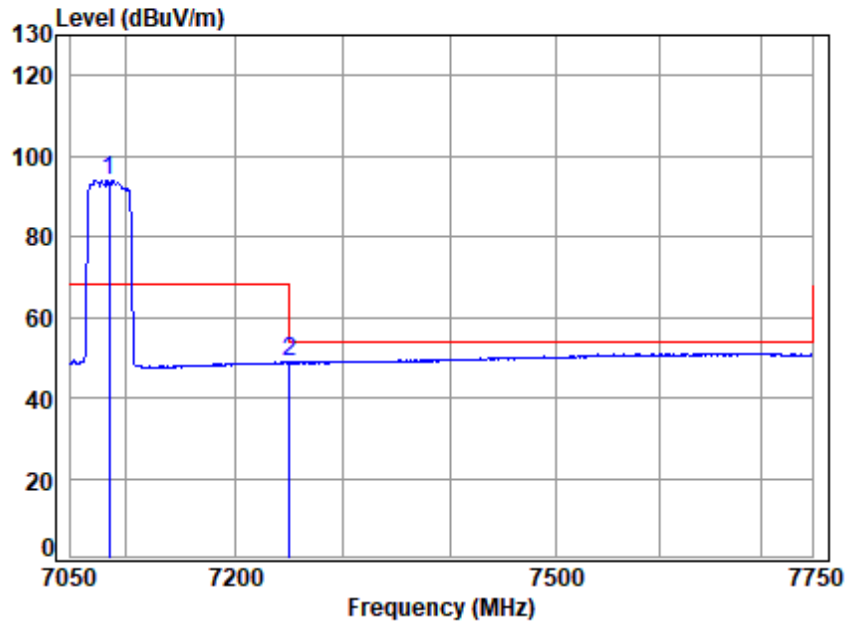

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7085 Band edge
: Wi-Fi 6E 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 7085.000	11.77	36.37	31.24	76.96	93.86	68.20	25.66	Average	
2 7250.000	11.90	36.60	31.33	31.59	48.76	54.00	-5.24	Average	



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

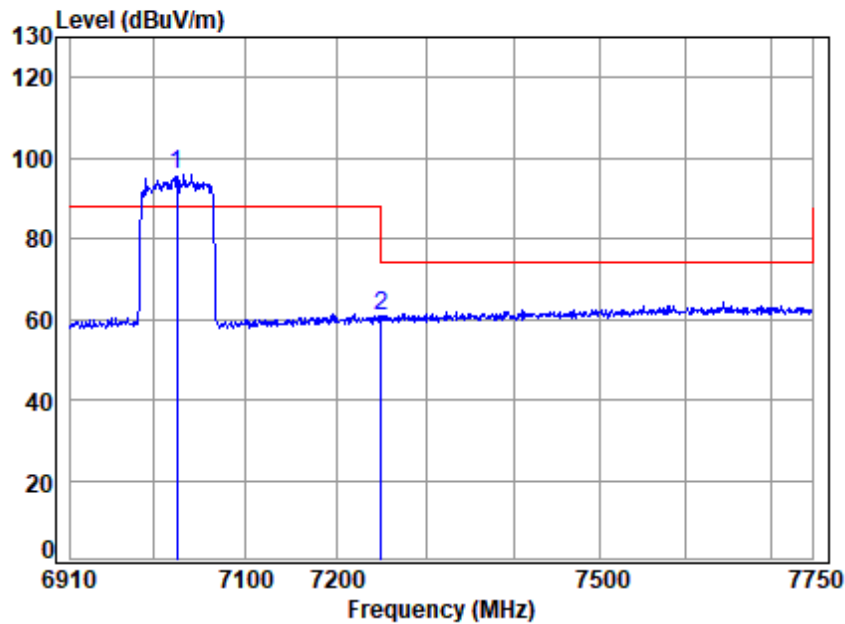

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 7025 Band edge

: Wi-Fi 6E 11ax80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	7025.000	11.64	36.25	31.21	79.36	96.04	88.20	7.84	peak
2	7250.000	11.90	36.60	31.33	43.52	60.69	74.00	-13.31	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 110 of 615

Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

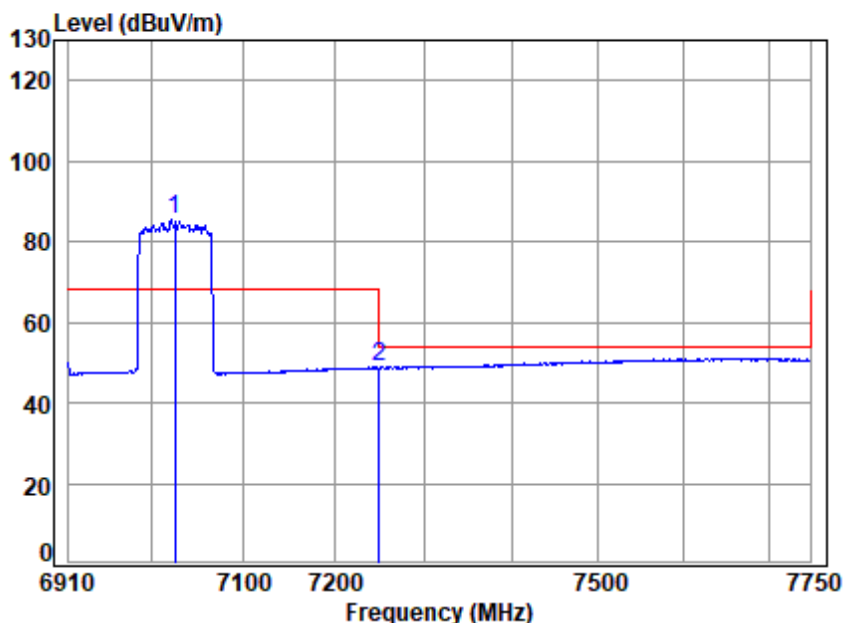

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 7025 Band edge

: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 7025.000	11.64	36.25	31.21	68.90	85.58	68.20	17.38	Average	
2 7250.000	11.90	36.60	31.33	31.80	48.97	54.00	-5.03	Average	




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

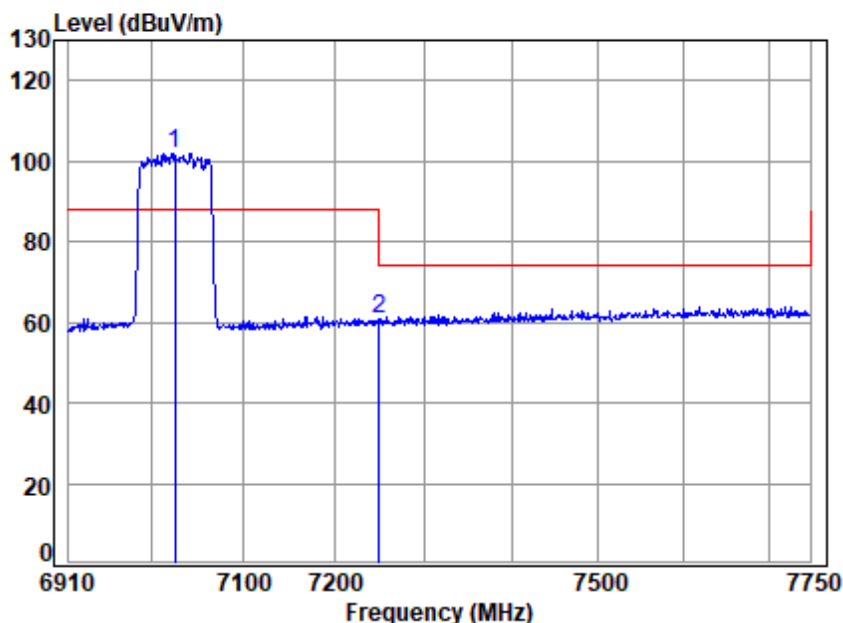

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7025 Band edge
: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 7025.000	11.64	36.25	31.21	85.14	101.82	88.20	13.62	peak	
2 7250.000	11.90	36.60	31.33	43.71	60.88	74.00	-13.12	peak	



Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

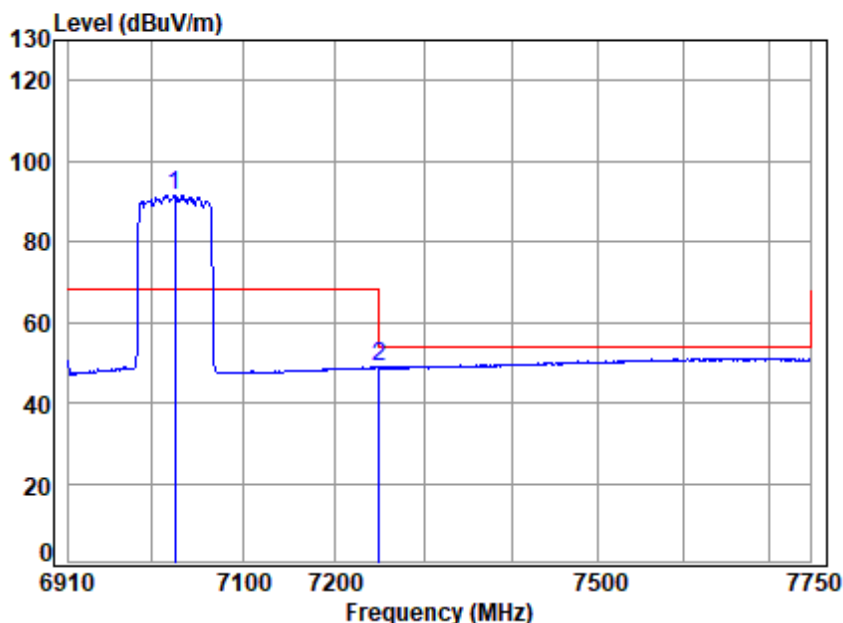

Condition: 3m VERTICAL


Job No : 01121AT

Mode : 7025 Band edge
: Wi-Fi 6E 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 7025.000	11.64	36.25	31.21	74.79	91.47	68.20	23.27	Average	
2 7250.000	11.90	36.60	31.33	31.52	48.69	54.00	-5.31	Average	



Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

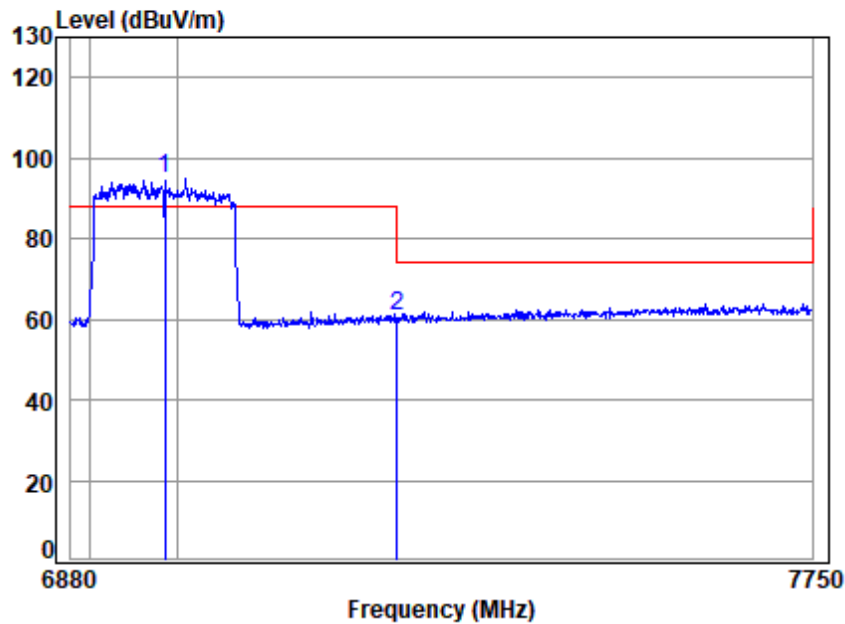

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 6985 Band edge

: Wi-Fi 6E 11ax160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	6985.000	11.57	36.17	31.19	78.23	94.78	88.20	6.58	peak
2	7250.000	11.90	36.60	31.33	43.65	60.82	74.00	-13.18	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 114 of 615

Test Mode: 12; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

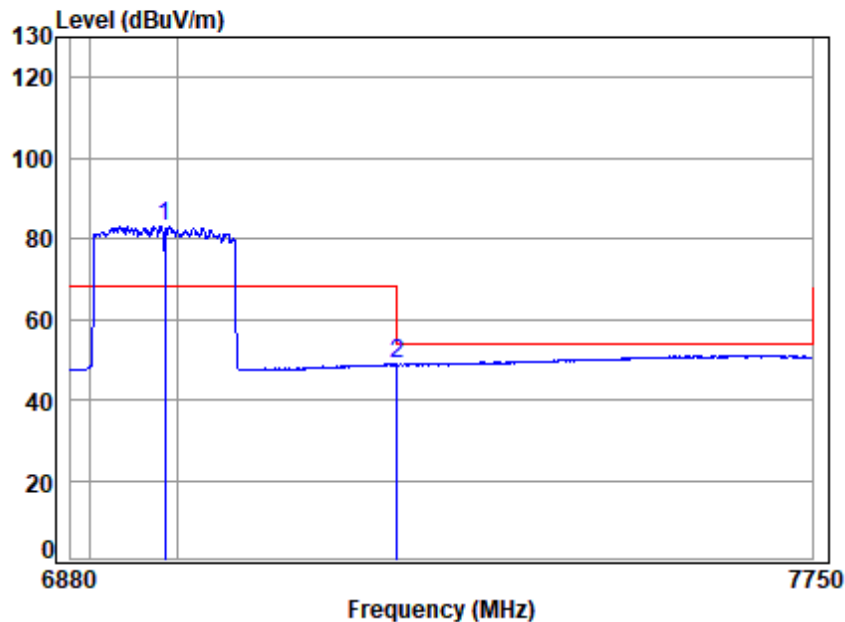

Condition: 3m HORIZONTAL

Job No : 01121AT

Mode : 6985 Band edge

: Wi-Fi 6E 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	6985.000	11.57	36.17	31.19	66.61	83.16	68.20	14.96	Average
2	7250.000	11.90	36.60	31.33	31.81	48.98	54.00	-5.02	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

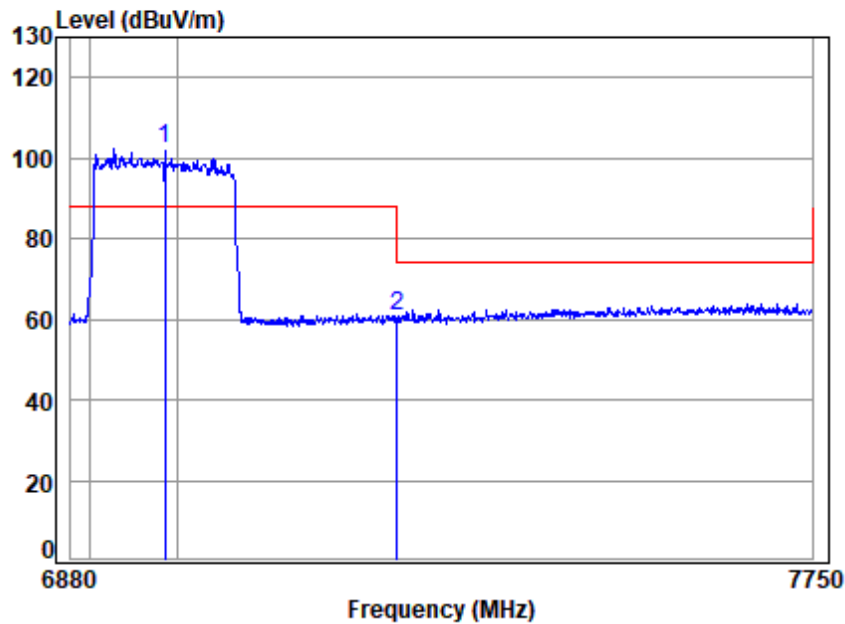

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 6985 Band edge

: Wi-Fi 6E 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	6985.000	11.57	36.17	31.19	85.96	102.51	88.20	14.31	peak
2	7250.000	11.90	36.60	31.33	43.70	60.87	74.00	-13.13	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 116 of 615

Test Mode: 12; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

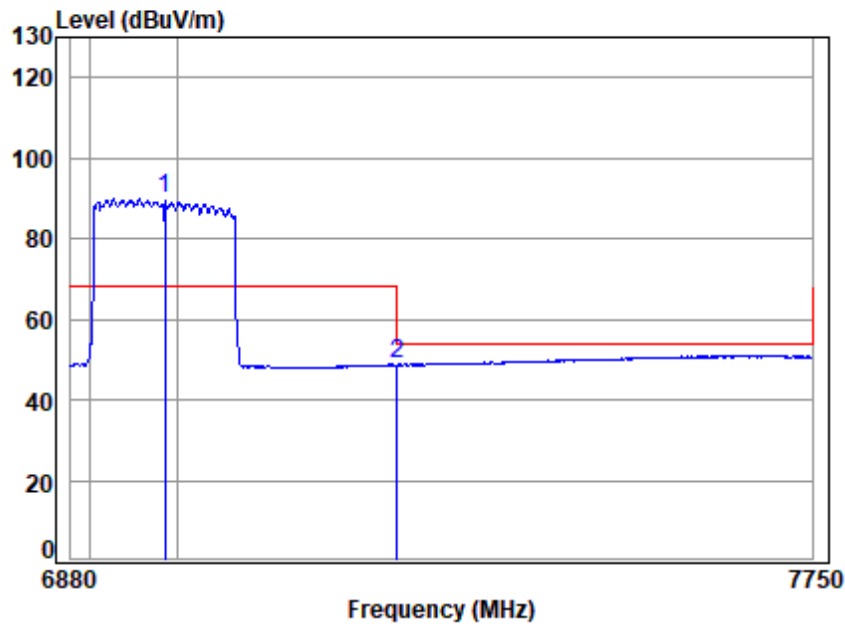

Condition: 3m VERTICAL

Job No : 01121AT

Mode : 6985 Band edge

: Wi-Fi 6E 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	6985.000	11.57	36.17	31.19	73.45	90.00	68.20	21.80	Average
2	7250.000	11.90	36.60	31.33	31.81	48.98	54.00	-5.02	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.6 In-Band Emissions

Test Requirement 47 CFR Part 15, Subpart E 15.407 (b)

Test Method: ANSI C63.10 (2013) Section 12.5

Limit:

For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and onehalf times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C

Humidity: 40.2 % RH


Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.



7.6.3 Test Setup Diagram

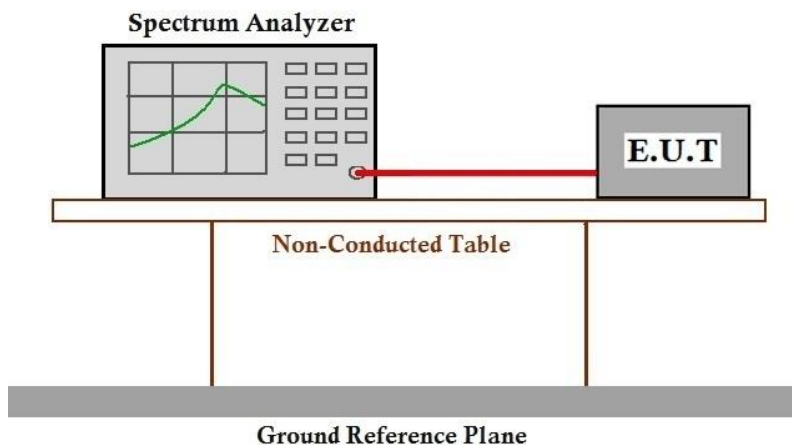

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Contention-based Protocol

Test Requirement 47 CFR Part 15, Subpart E 15.407 (d)(6)

Test Method: KDB 987594 D02

Limit:

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 27.7 °C

Humidity: 38.2 % RH


Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.



7.7.3 Test Setup Diagram

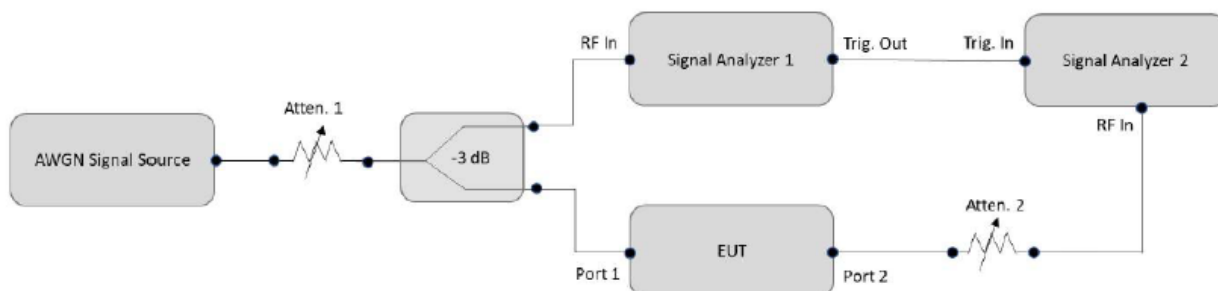

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 121 of 615

7.8 Duty Cycle

Test Requirement ANSI C63.10 (2013) Section 12.2

Test Method: ANSI C63.10 (2013) Section 12.2

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C Humidity: 40.2 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.8.3 Test Setup Diagram

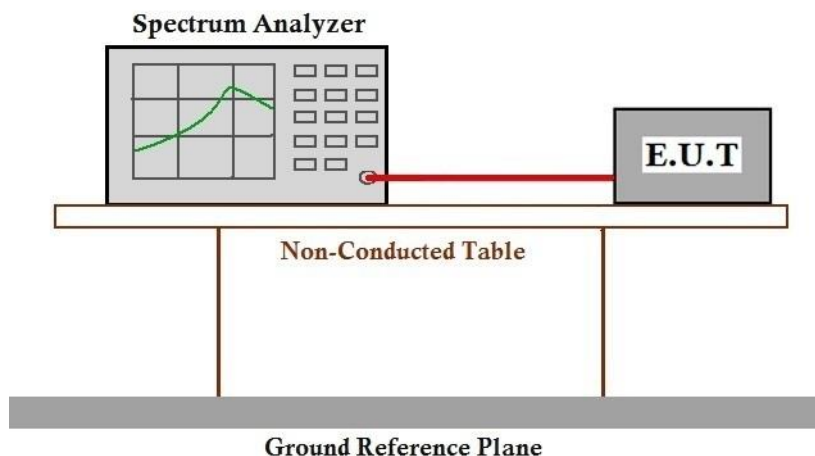

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 123 of 615

7.9 99% Bandwidth

Test Requirement ANSI C63.10 (2013) Section 12.4.2

Test Method: ANSI C63.10 (2013) Section 12.4.2

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C Humidity: 40.2 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.9.3 Test Setup Diagram

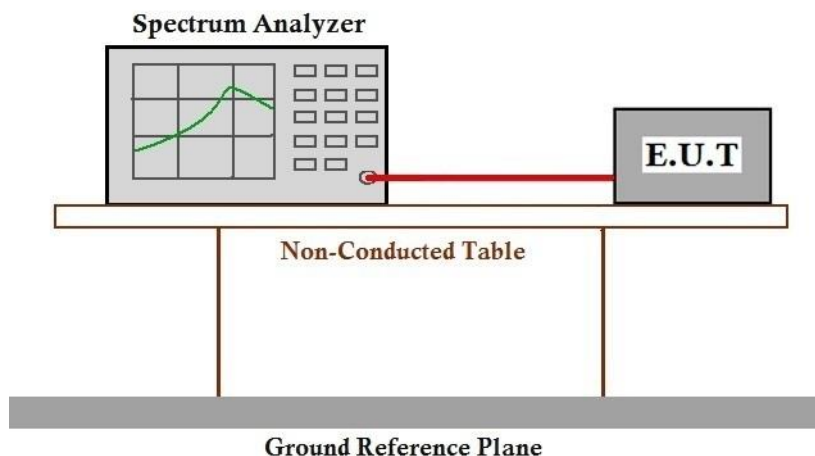

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 125 of 615

7.10 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.4.1

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C Humidity: 40.2 % RH Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.10.3 Test Setup Diagram

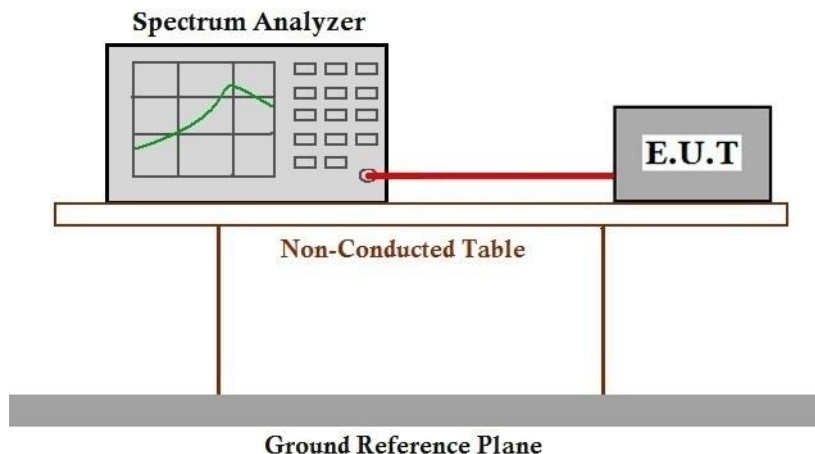

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 127 of 615

7.11 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.5

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C

Humidity: 40.2 % RH

Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.11.3 Test Setup Diagram

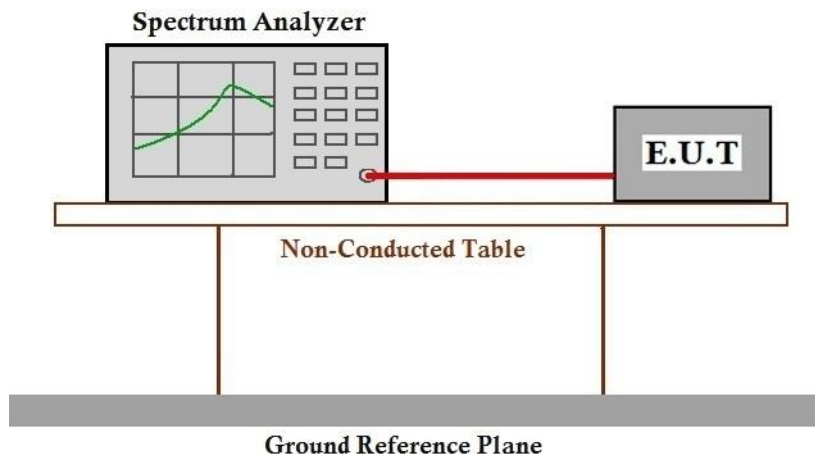

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 129 of 615

7.12 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C

Humidity: 40.2 % RH

Atmospheric Pressure: 1020 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ MCS0 is the worst case of IEEE 802.11ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.12.3 Test Setup Diagram

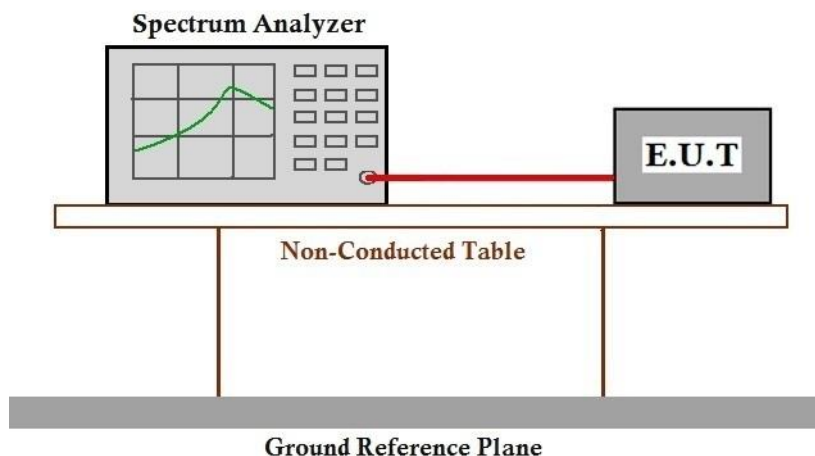

7.12.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2503001121AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2503001121AT



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	5955	/	/	2.098	2.113	99.29	0.03	0.00
			6175	/	/	2.097	2.112	99.29	0.03	0.03
			6415	/	/	2.097	2.113	99.24	0.03	0.03
	802.11ax (HEW20)	MIMO	5955	RU242	Left	5.430	5.445	99.72	0.01	0.00
			6175	RU242	Left	5.430	5.445	99.72	0.01	0.00
			6415	RU242	Left	5.430	5.445	99.72	0.01	0.00
	802.11ax (HEW40)	MIMO	5965	RU484	Left	4.817	4.832	99.69	0.01	0.00
			6165	RU484	Left	4.817	4.832	99.69	0.01	0.03
			6405	RU484	Left	4.817	4.834	99.65	0.02	0.03
	802.11ax (HEW80)	MIMO	5985	RU996	Left	2.555	2.570	99.42	0.03	0.03
			6145	RU996	Left	2.555	2.571	99.38	0.03	0.03
			6385	RU996	Left	2.555	2.571	99.38	0.03	0.03
	802.11ax (HEW160)	MIMO	6025	2xRU996	Left	2.206	2.222	99.28	0.03	0.04
			6185	2xRU996	Left	2.206	2.221	99.32	0.03	0.04
			6345	2xRU996	Left	2.208	2.223	99.33	0.03	0.04



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 133 of 615

1.1.2 Ant1

Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	6435	/	/	2.098	2.114	99.24	0.03	0.03
			6475	/	/	2.097	2.112	99.29	0.03	0.03
			6515	/	/	2.098	2.113	99.29	0.03	0.03
	802.11ax (HEW20)	MIMO	6435	RU242	Left	5.430	5.446	99.71	0.01	0.04
			6475	RU242	Left	5.428	5.444	99.71	0.01	0.04
			6515	RU242	Left	5.430	5.446	99.71	0.01	0.04
	802.11ax (HEW40)	MIMO	6445	RU484	Left	4.816	4.831	99.69	0.01	0.00
			6485	RU484	Left	4.816	4.833	99.65	0.02	0.04
	802.11ax (HEW80)	MIMO	6465	RU996	Left	2.555	2.570	99.42	0.03	0.03

1.1.3 Ant1

Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	6535	/	/	2.098	2.113	99.29	0.03	0.03
			6695	/	/	2.098	2.113	99.29	0.03	0.03
			6855	/	/	2.098	2.113	99.29	0.03	0.03
	802.11ax (HEW20)	MIMO	6535	RU242	Left	5.430	5.446	99.71	0.01	0.04
			6695	RU242	Left	5.430	5.445	99.72	0.01	0.00
			6855	RU242	Left	5.428	5.445	99.69	0.01	0.03
	802.11ax (HEW40)	MIMO	6565	RU484	Left	4.817	4.833	99.67	0.01	0.04
			6685	RU484	Left	4.817	4.832	99.69	0.01	0.00
			6845	RU484	Left	4.817	4.832	99.69	0.01	0.00
	802.11ax (HEW80)	MIMO	6625	RU996	Left	2.555	2.570	99.42	0.03	0.03
			6705	RU996	Left	2.555	2.570	99.42	0.03	0.00
			6785	RU996	Left	2.555	2.570	99.42	0.03	0.03
	802.11ax (HEW160)	MIMO	6665	2xRU996	Left	2.207	2.222	99.32	0.03	0.04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 134 of 615

1.1.4 Ant1

Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	6895	/	/	2.098	2.113	99.29	0.03	0.03
			6995	/	/	2.097	2.112	99.29	0.03	0.03
			7115	/	/	2.097	2.112	99.29	0.03	0.03
	802.11ax (HEW20)	MIMO	6895	RU242	Left	5.428	5.444	99.71	0.01	0.04
			6995	RU242	Left	5.430	5.445	99.72	0.01	0.00
			7115	RU242	Left	5.430	5.446	99.71	0.01	0.04
	802.11ax (HEW40)	MIMO	6925	RU484	Left	4.817	4.832	99.69	0.01	0.00
			7005	RU484	Left	4.817	4.834	99.65	0.02	0.03
			7085	RU484	Left	4.817	4.833	99.67	0.01	0.04
	802.11ax (HEW80)	MIMO	6945	RU996	Left	2.555	2.571	99.38	0.03	0.03
			7025	RU996	Left	2.555	2.570	99.42	0.03	0.00
	802.11ax (HEW160)	MIMO	6985	2xRU996	Left	2.206	2.222	99.28	0.03	0.04

1.1.5 Ant1

Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11a	MIMO	6875	/	/	2.098	2.113	99.29	0.03	0.03
	802.11ax (HEW20)	MIMO	6875	RU242	Left	5.430	5.445	99.72	0.01	0.00
	802.11ax (HEW40)	MIMO	6885	RU484	Left	4.817	4.832	99.69	0.01	0.00
	802.11ax (HEW80)	MIMO	6865	RU996	Left	2.555	2.570	99.42	0.03	0.03
	802.11ax (HEW160)	MIMO	6825	2xRU996	Left	2.207	2.223	99.28	0.03	0.04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300112106

Page: 135 of 615

1.1.6 Ant1

Ant1										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11ax (HEW40)	MIMO	6525	RU484	Left	4.817	4.832	99.69	0.01	0.00
	802.11ax (HEW80)	MIMO	6545	RU996	Left	2.554	2.570	99.38	0.03	0.03
	802.11ax (HEW160)	MIMO	6505	2xRU996	Left	2.207	2.222	99.32	0.03	0.04



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.2 Test Graph


1.2.1 Ant1

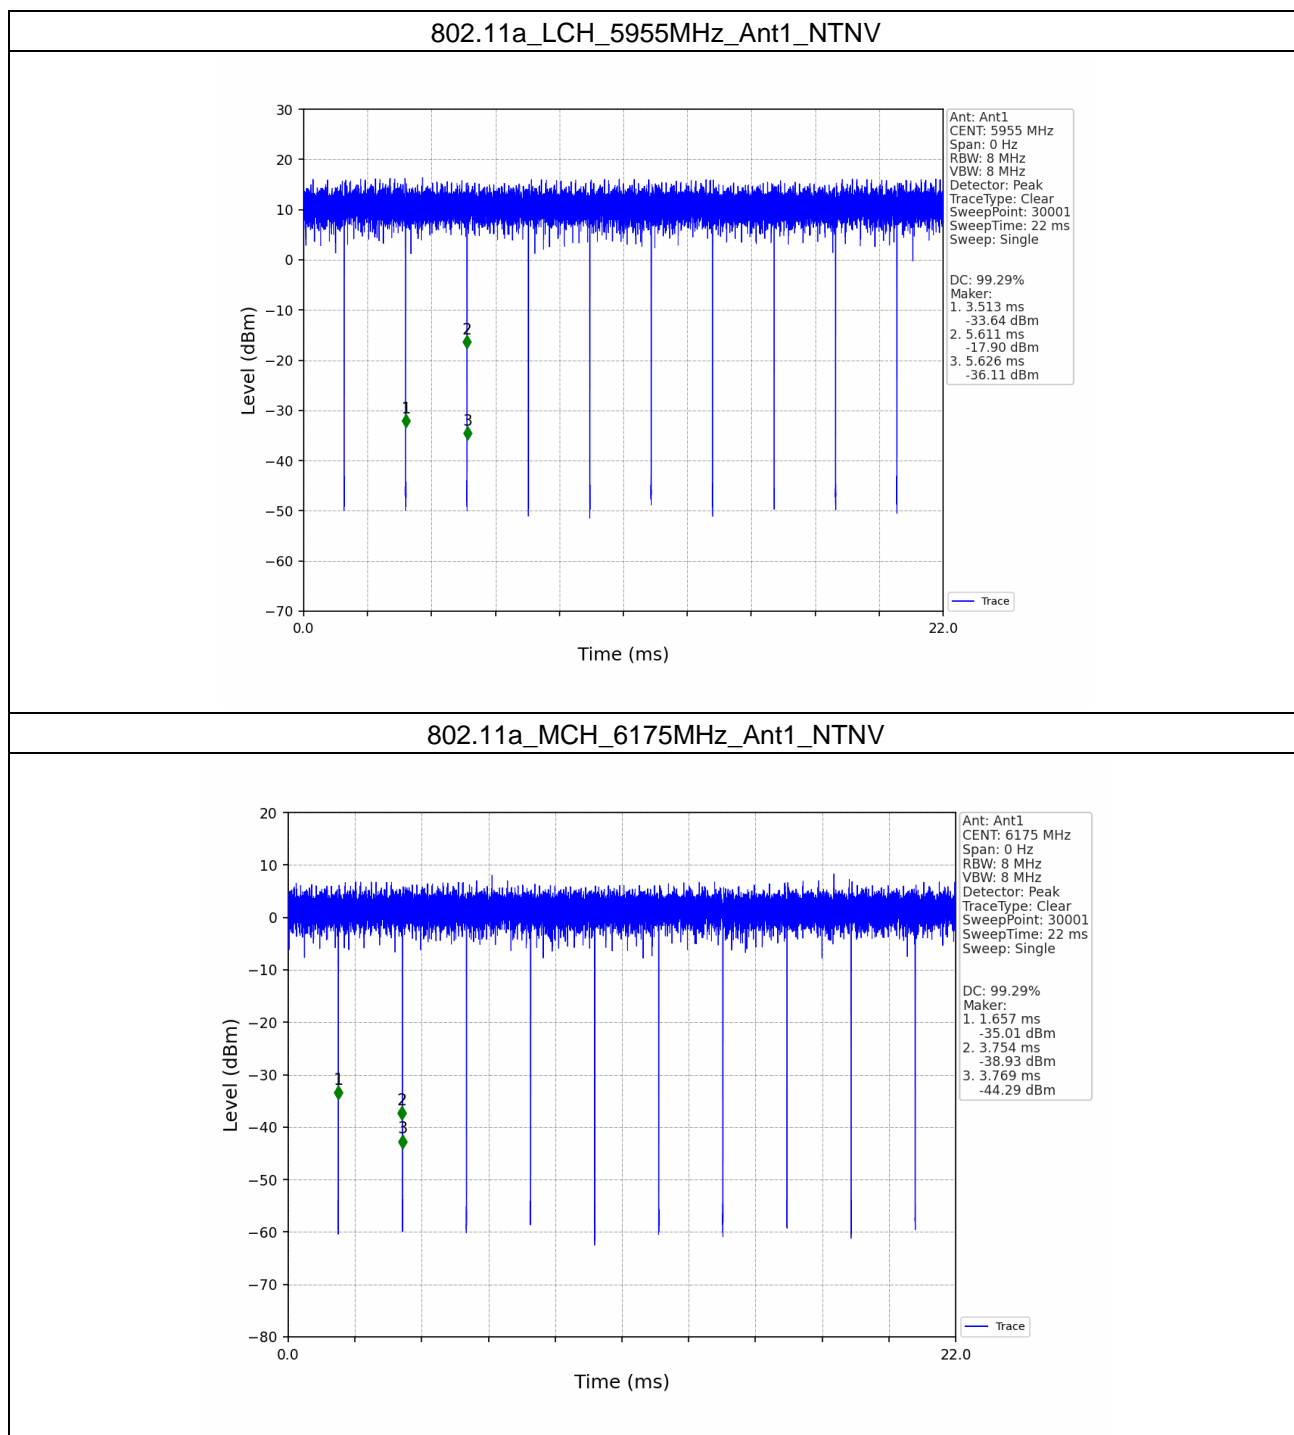


802.11a_HCH_6415MHz_Ant1_NTNV

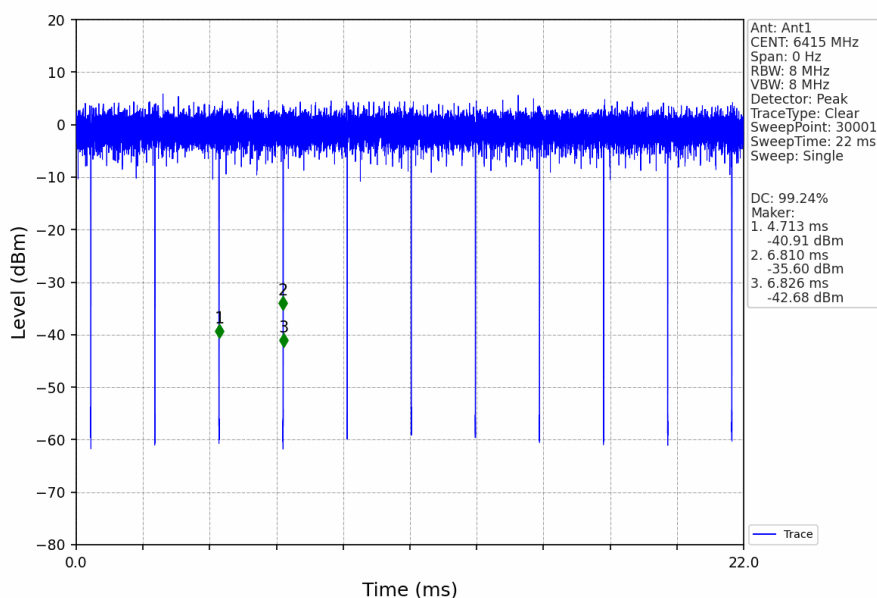


802.11ax(HEW20)_LCH_5955MHz_RU242_Left_Ant1_NTNV

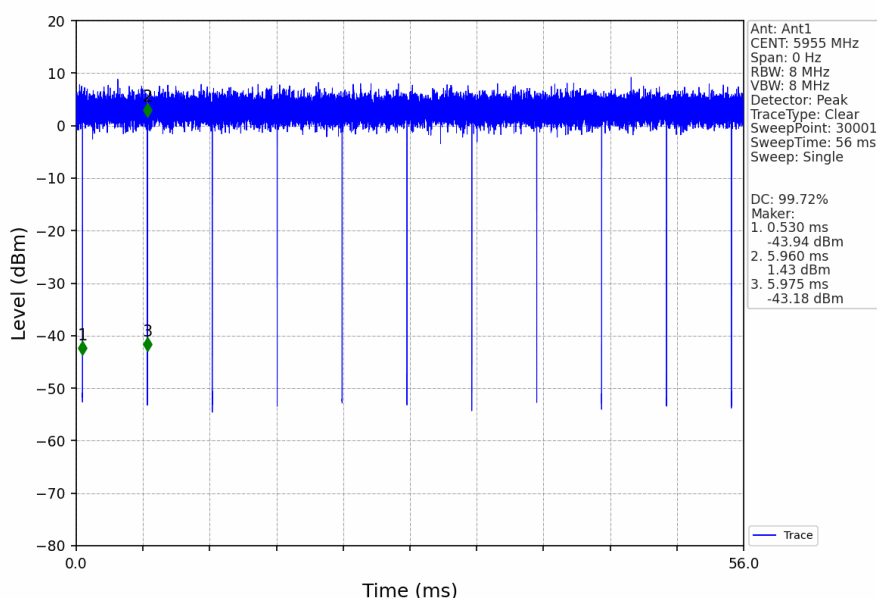


802.11ax(HEW20)_MCH_6175MHz_RU242_Left_Ant1_NTNV

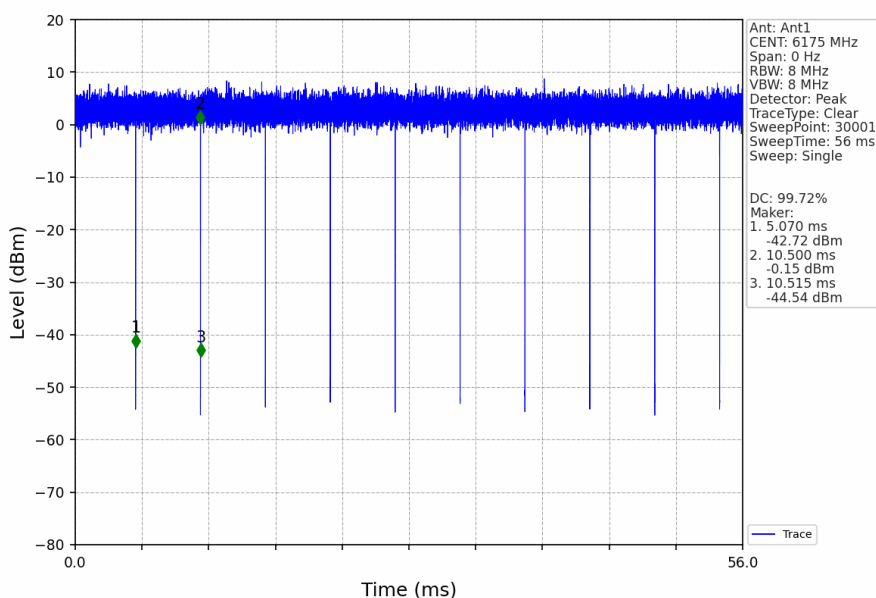


802.11ax(HEW20)_HCH_6415MHz_RU242_Left_Ant1_NTNV

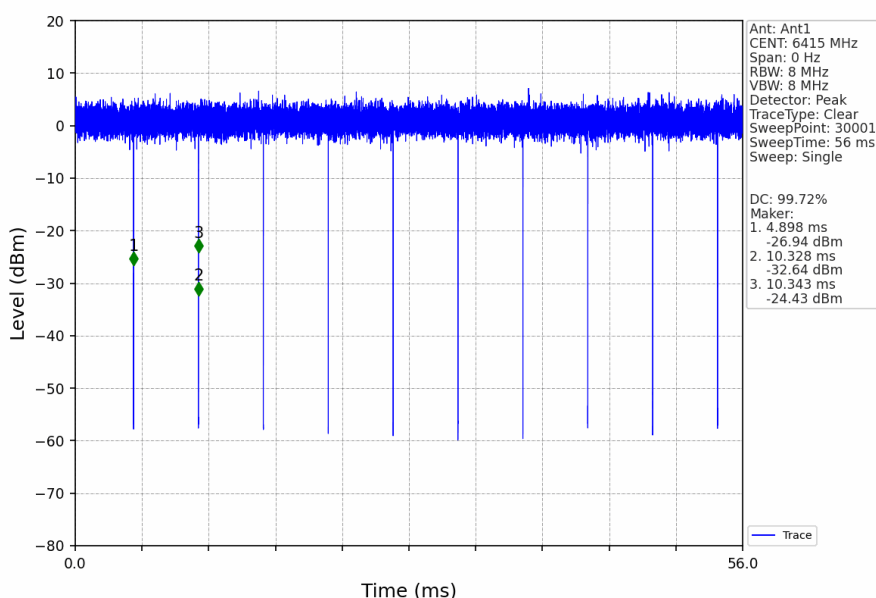


802.11ax(HEW40)_LCH_5965MHz_RU484_Left_Ant1_NTNV

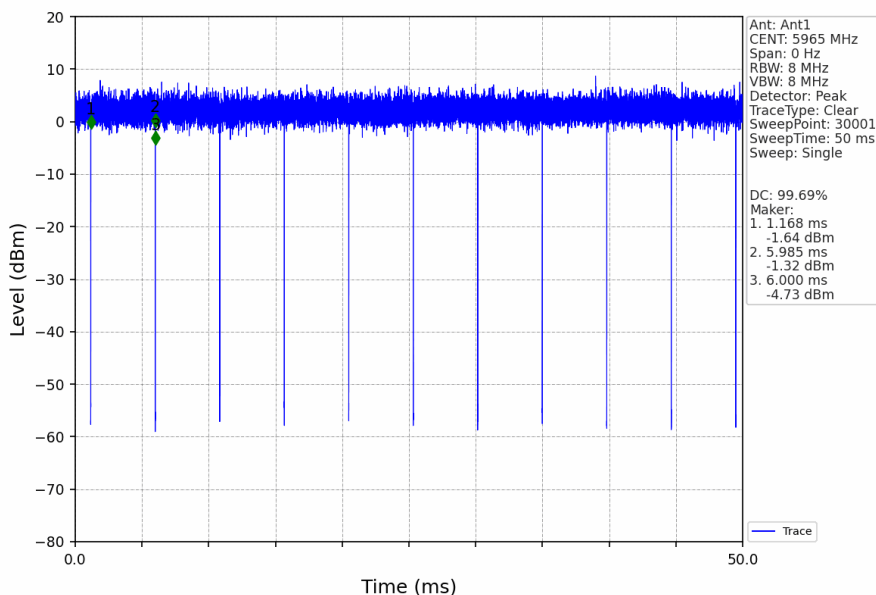


802.11ax(HEW40)_MCH_6165MHz_RU484_Left_Ant1_NTNV

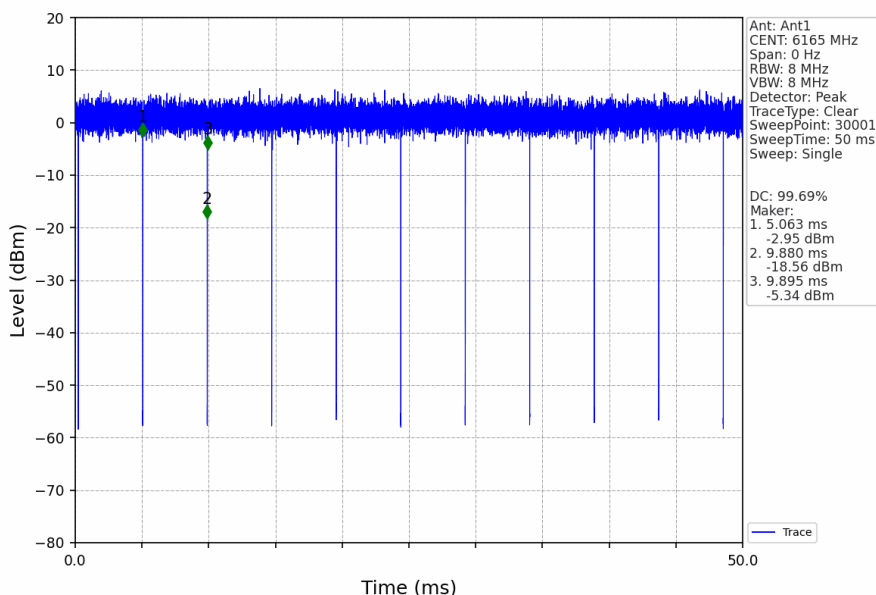


802.11ax(HEW40)_HCH_6405MHz_RU484_Left_Ant1_NTNV

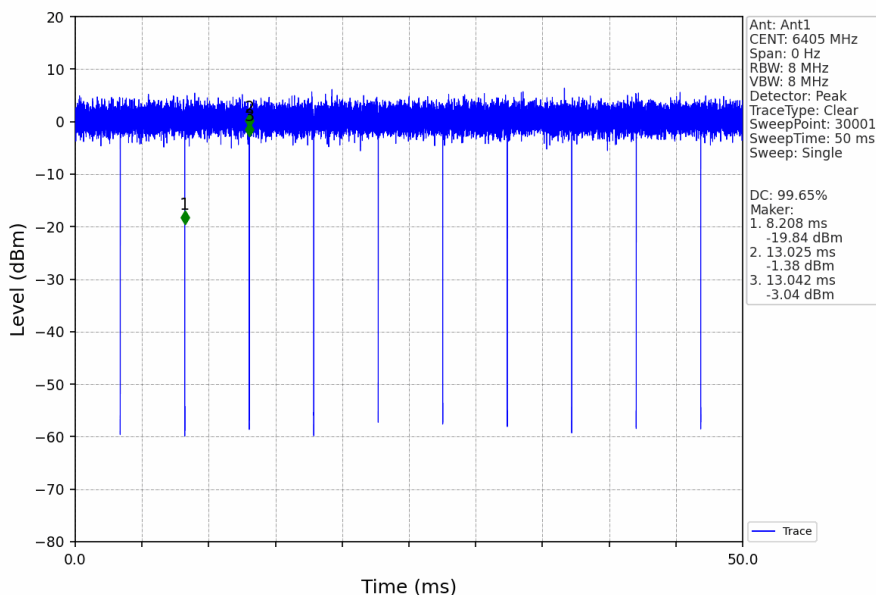


802.11ax(HEW80)_LCH_5985MHz_RU996_Left_Ant1_NTNV

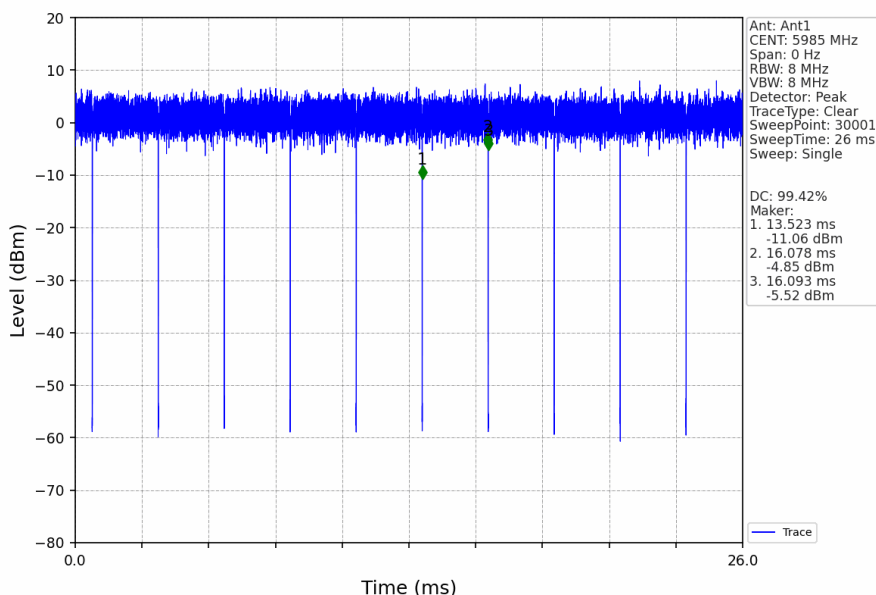

802.11ax(HEW80)_MCH_6145MHz_RU996_Left_Ant1_NTNV

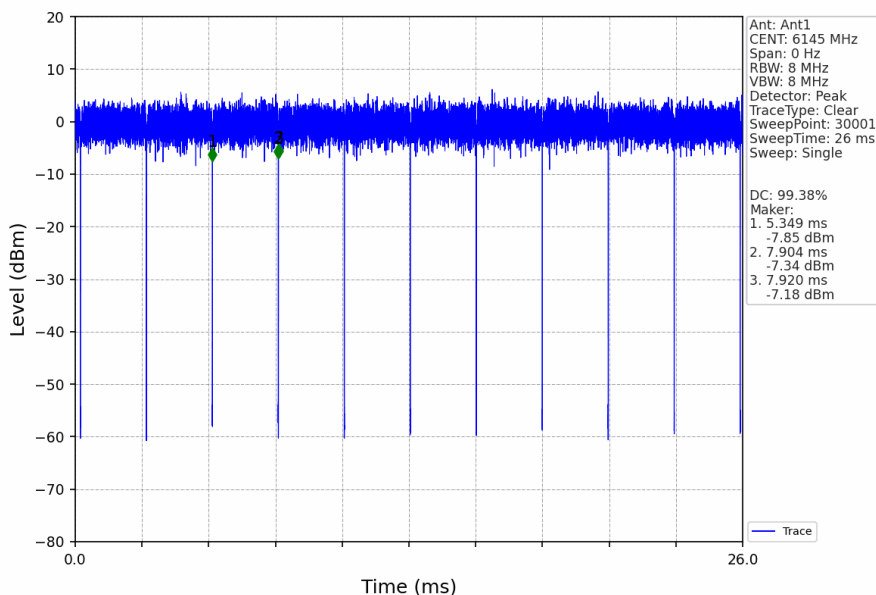


802.11ax(HEW80)_HCH_6385MHz_RU996_Left_Ant1_NTNV

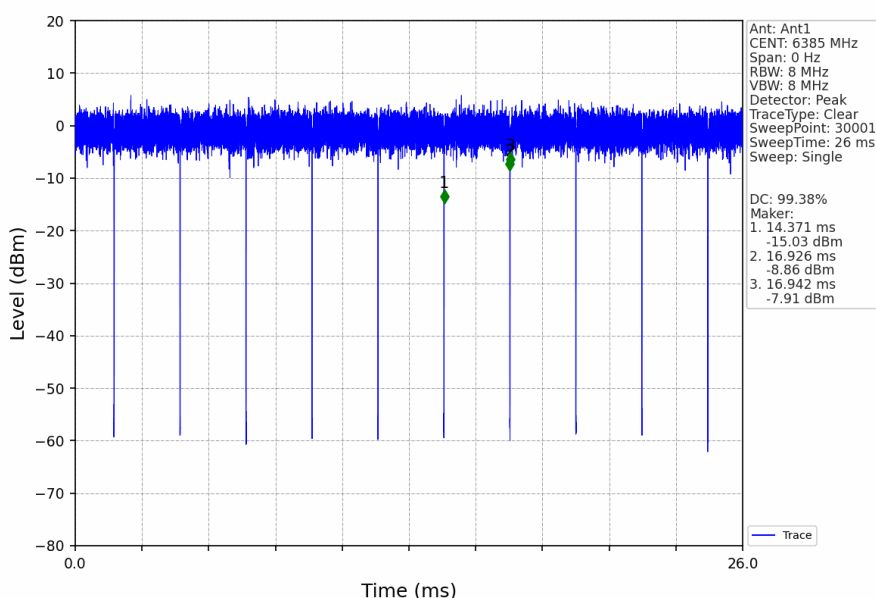


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11ax(HEW160)_LCH_6025MHz_2xRU996_Left_Ant1_NTNV

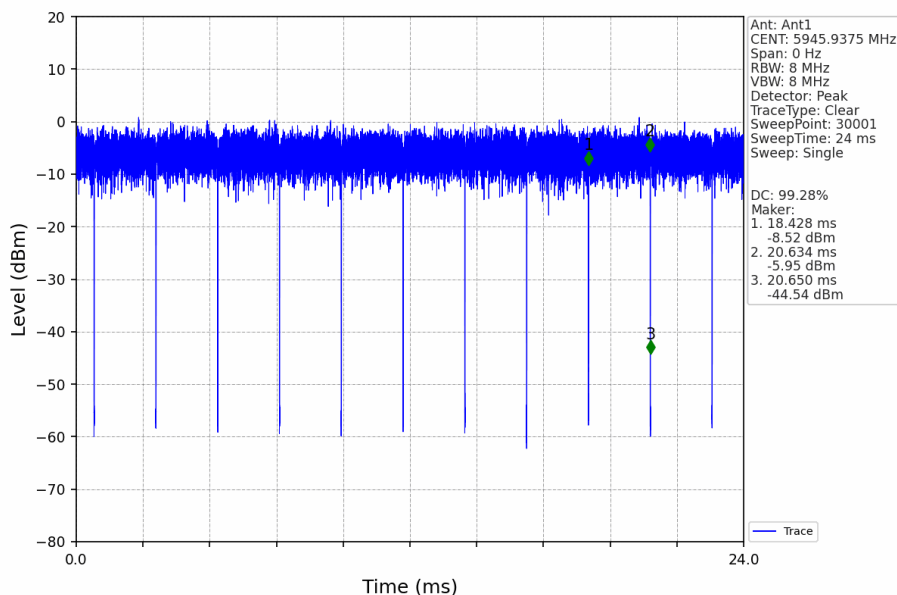


802.11ax(HEW160)_MCH_6185MHz_2xRU996_Left_Ant1_NTNV

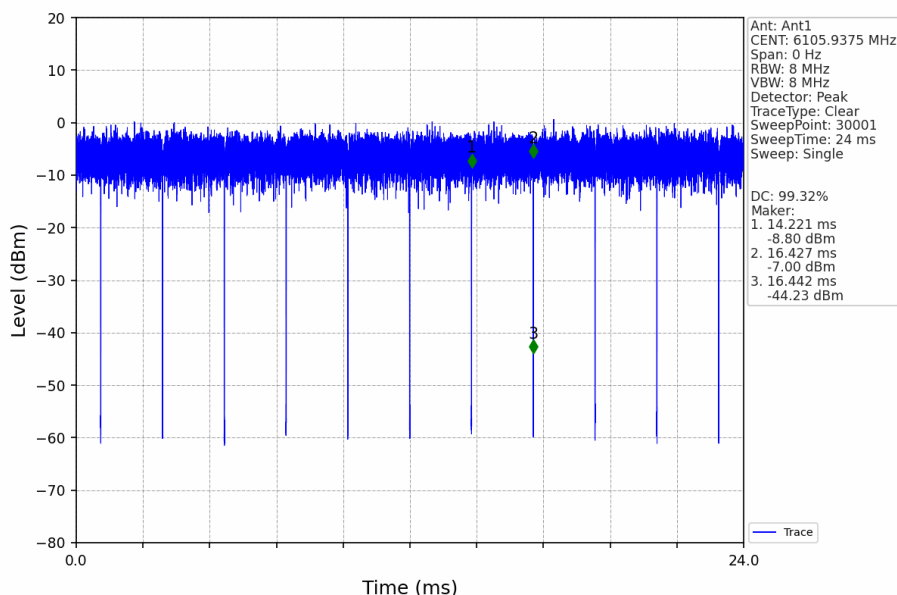


802.11ax(HEW160)_HCH_6345MHz_2xRU996_Left_Ant1_NTNV

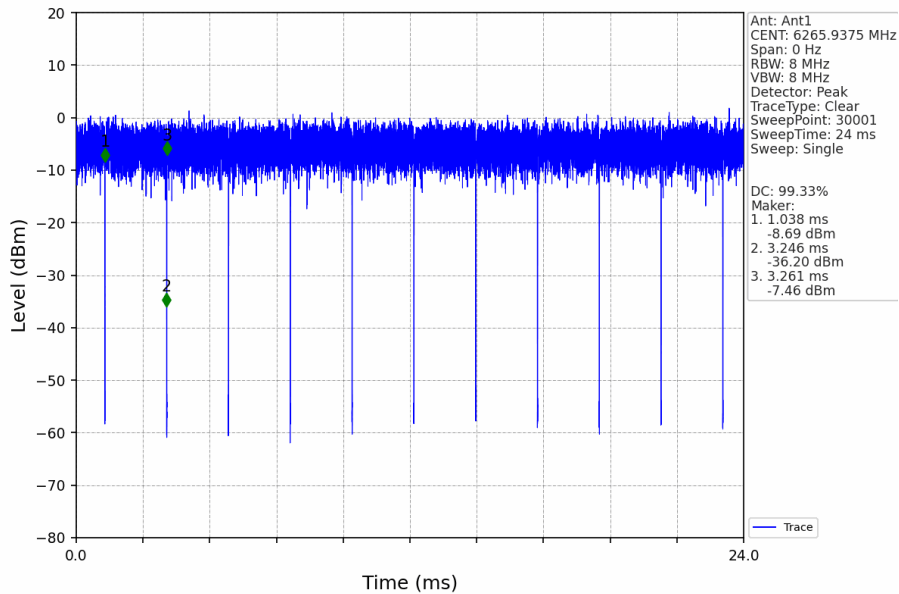


1.2.2 Ant1

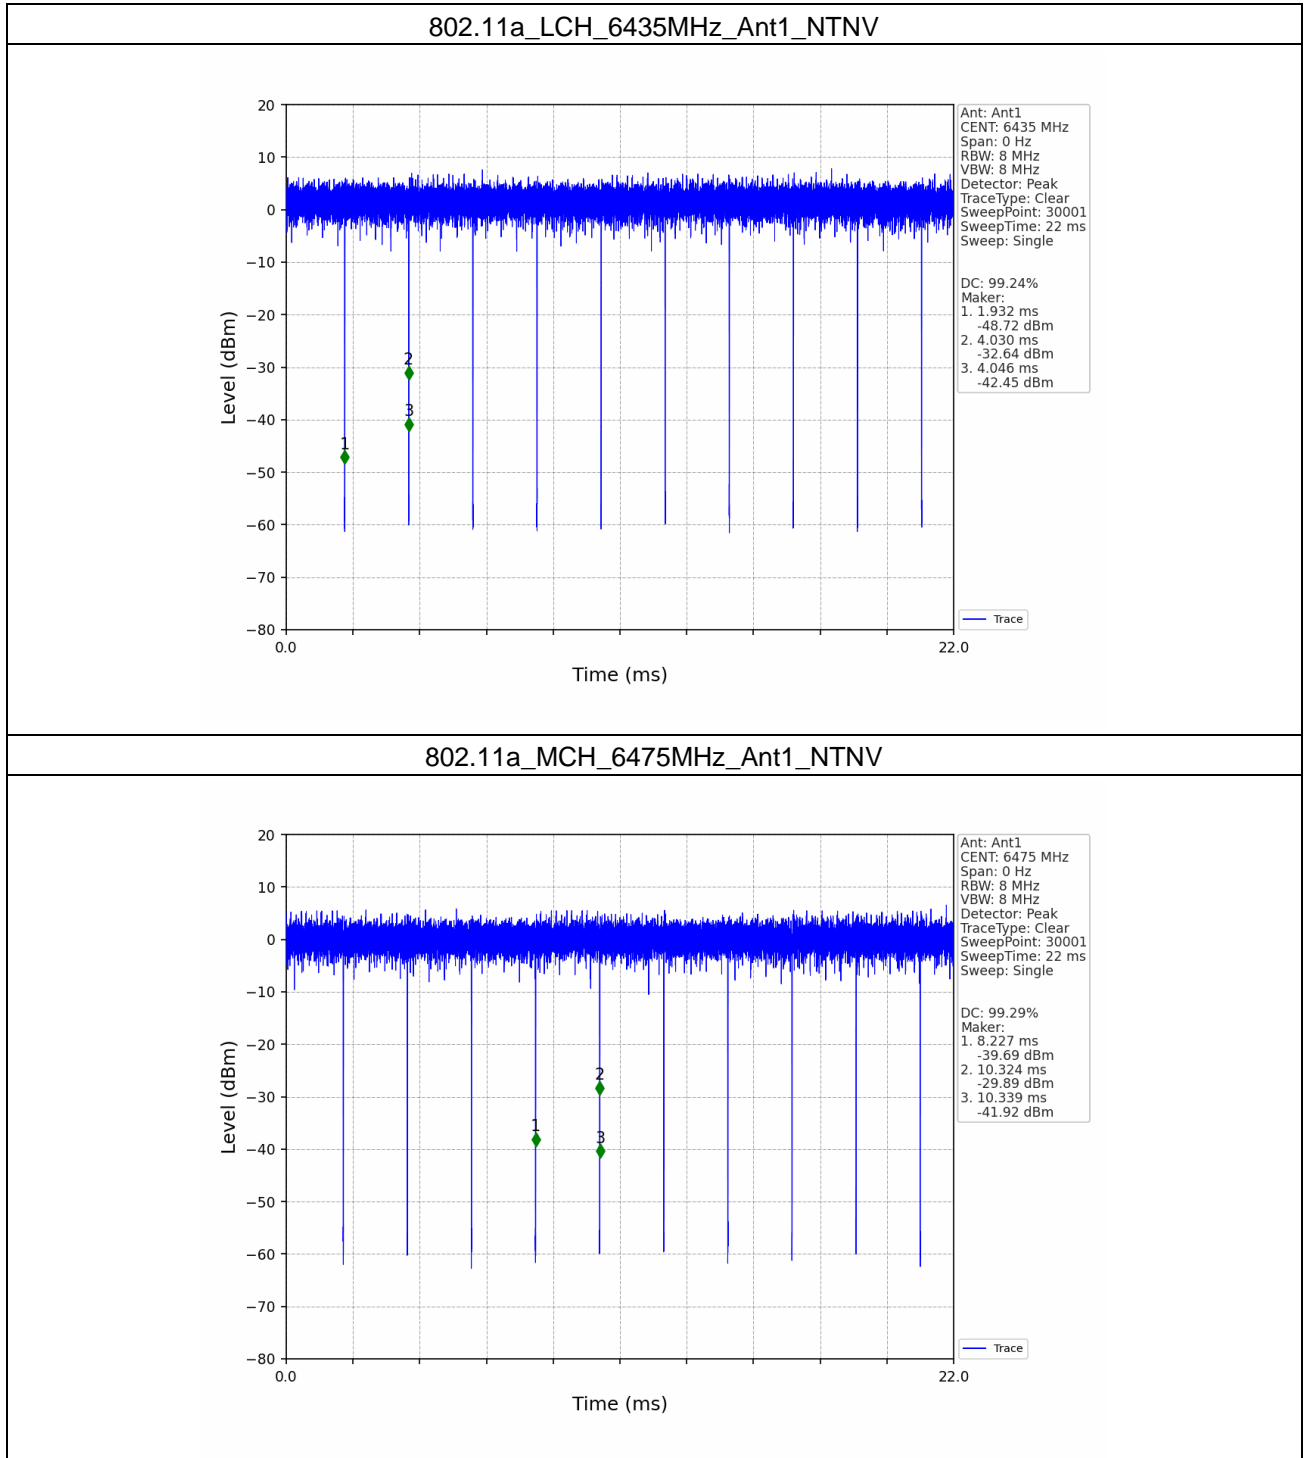


802.11a_HCH_6515MHz_Ant1_NTNV

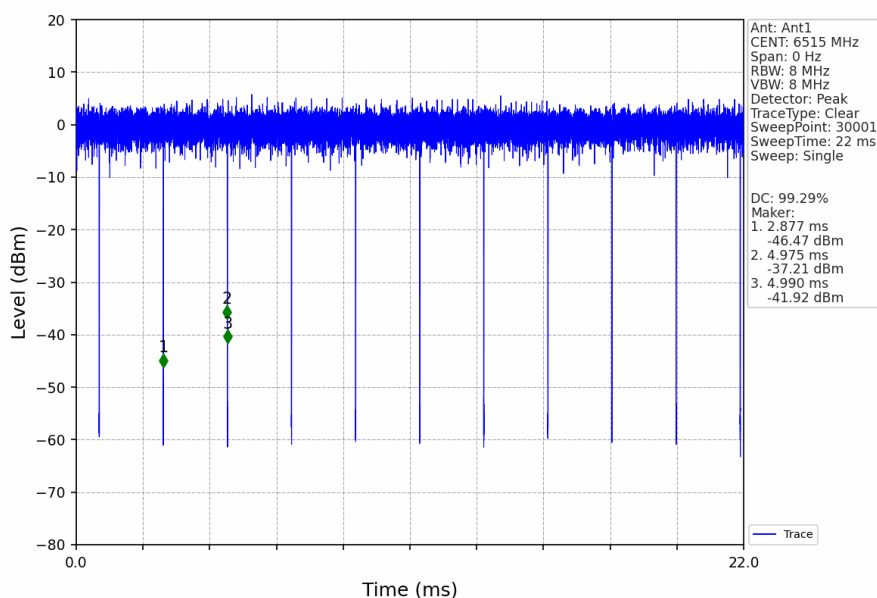


802.11ax(HEW20)_LCH_6435MHz_RU242_Left_Ant1_NTNV

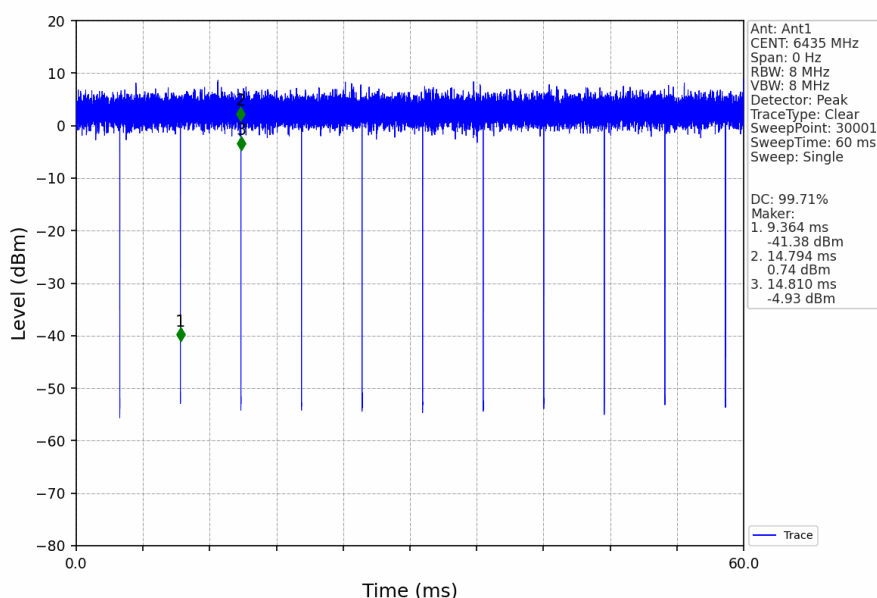


802.11ax(HEW20)_MCH_6475MHz_RU242_Left_Ant1_NTNV

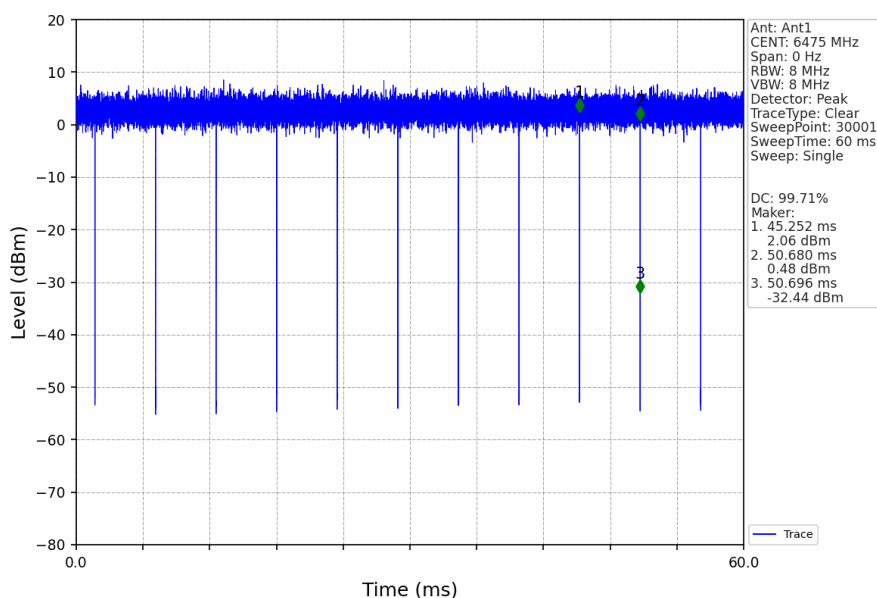


802.11ax(HEW20)_HCH_6515MHz_RU242_Left_Ant1_NTNV

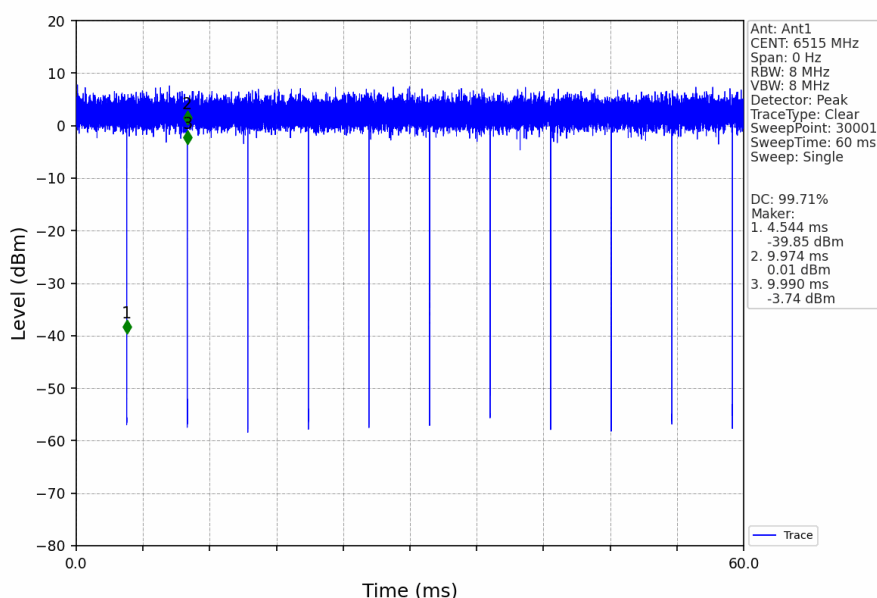


802.11ax(HEW40)_LCH_6445MHz_RU484_Left_Ant1_NTNV

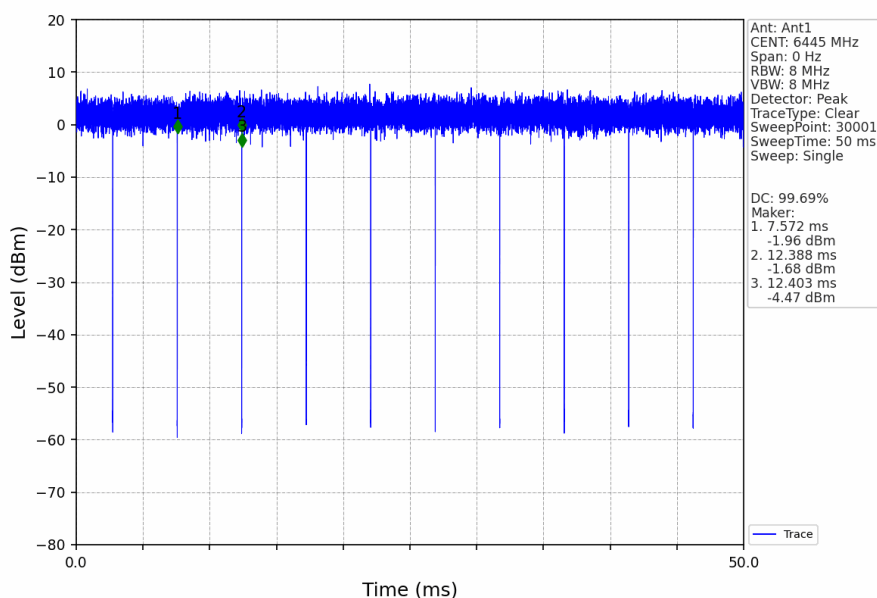


802.11ax(HEW40)_MCH_6485MHz_RU484_Left_Ant1_NTNV

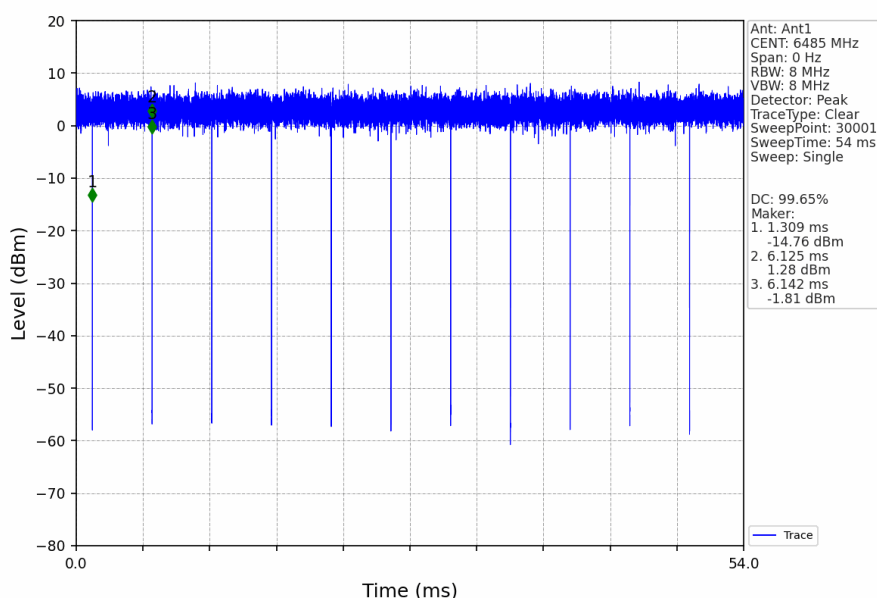


802.11ax(HEW80)_LCH_6465MHz_RU996_Left_Ant1_NTNV

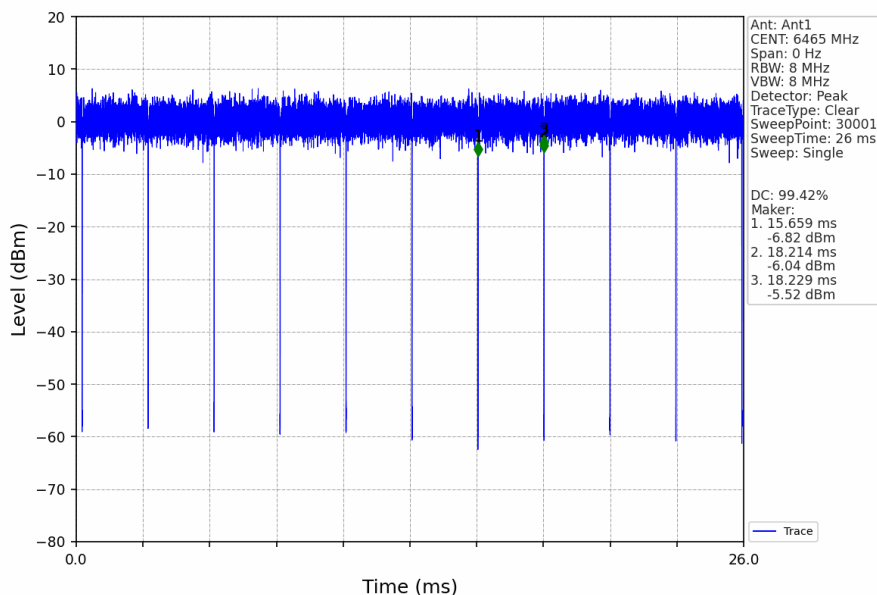


1.2.3 Ant1

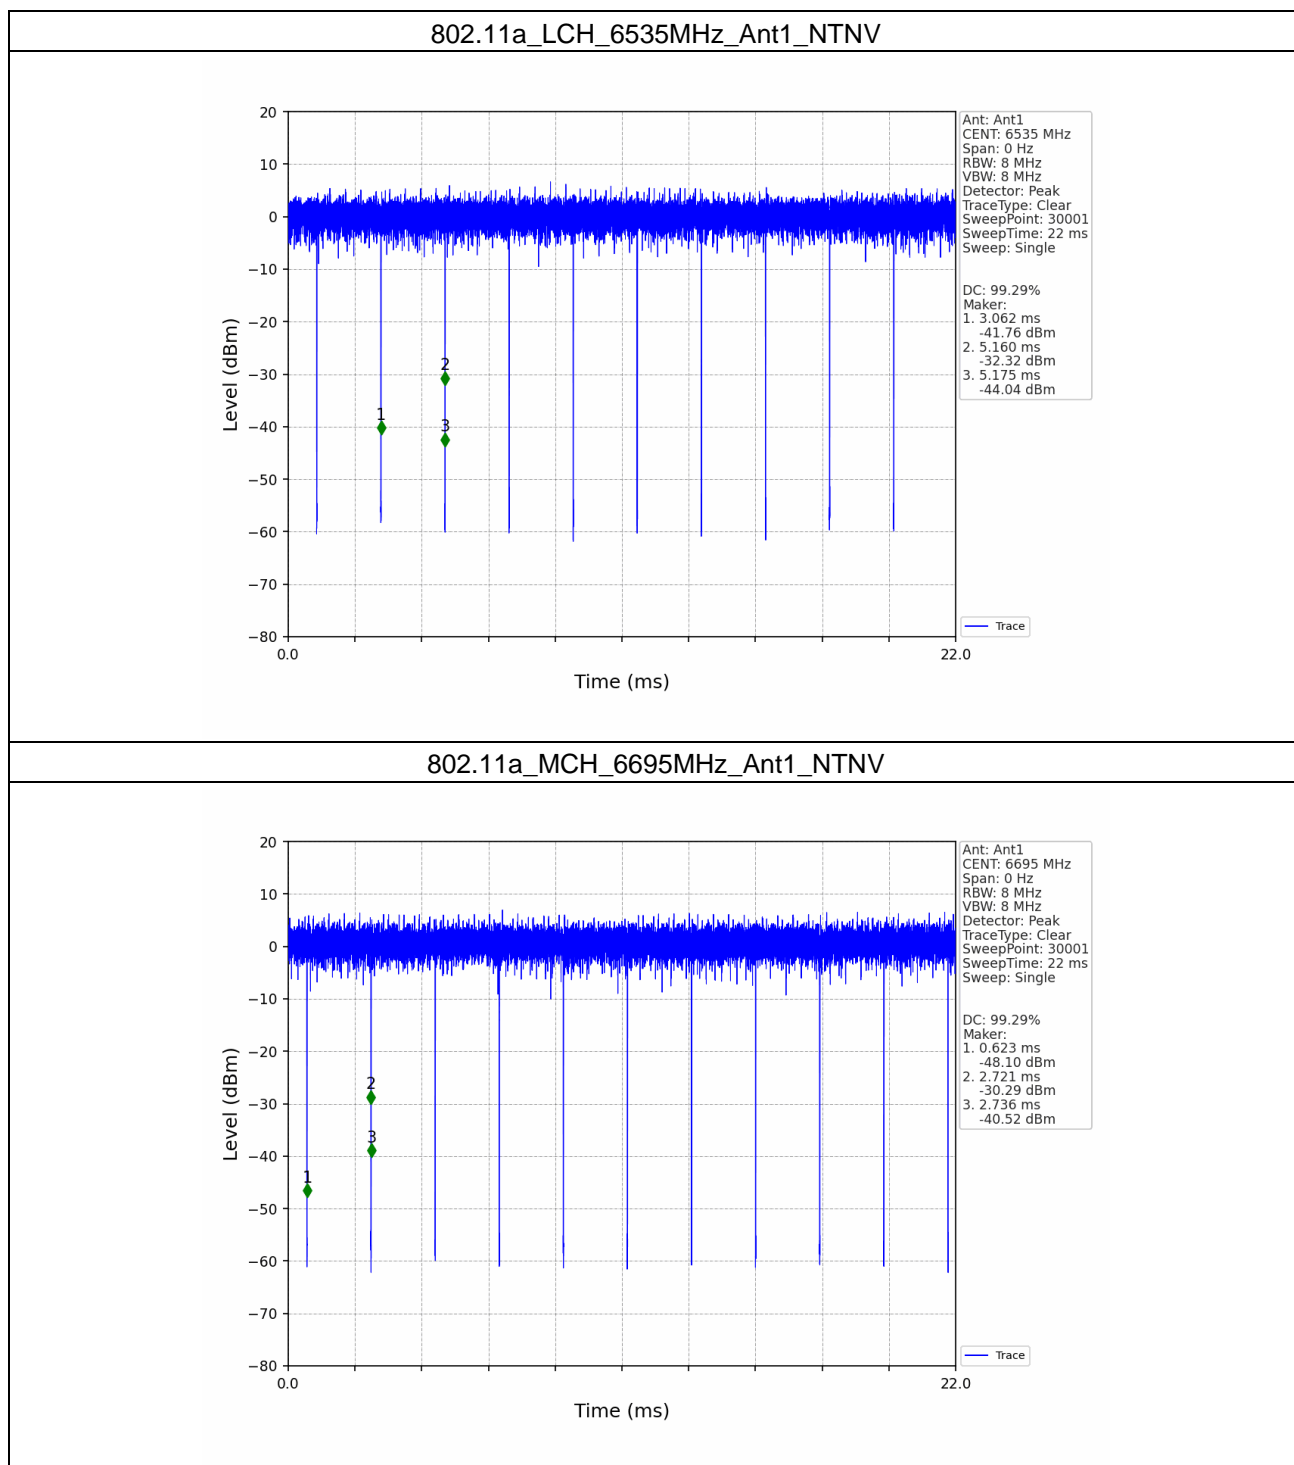


802.11a_HCH_6855MHz_Ant1_NTNV

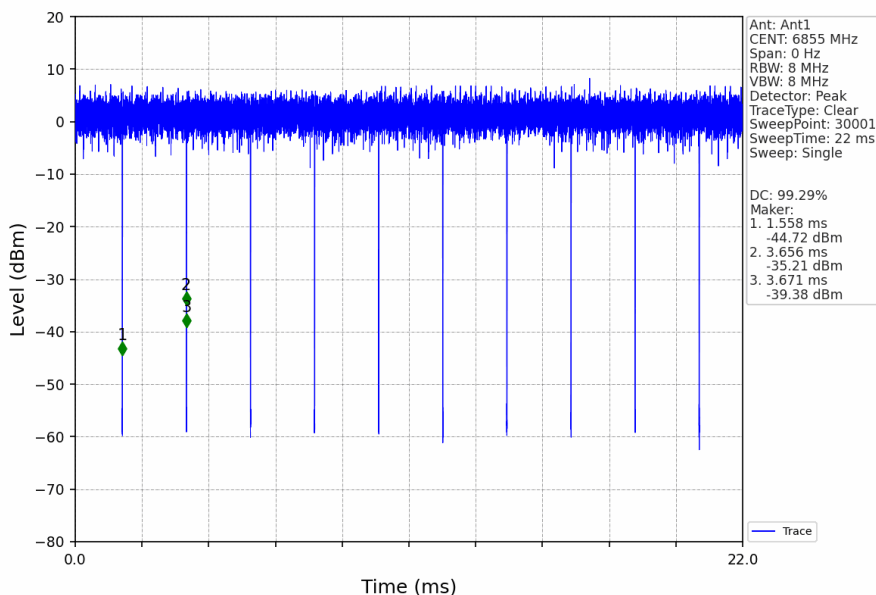


802.11ax(HEW20)_LCH_6535MHz_RU242_Left_Ant1_NTNV

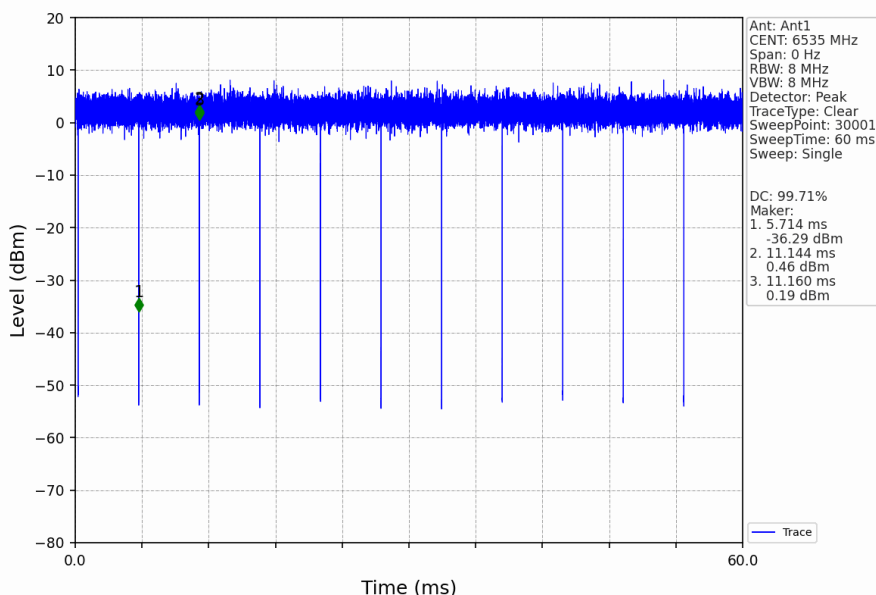


802.11ax(HEW20)_MCH_6695MHz_RU242_Left_Ant1_NTNV

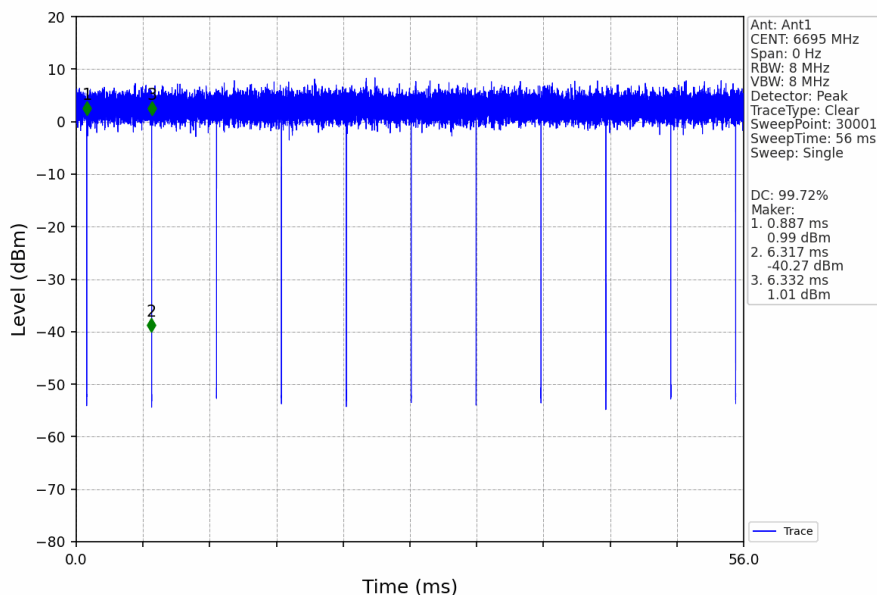


802.11ax(HEW20)_HCH_6855MHz_RU242_Left_Ant1_NTNV

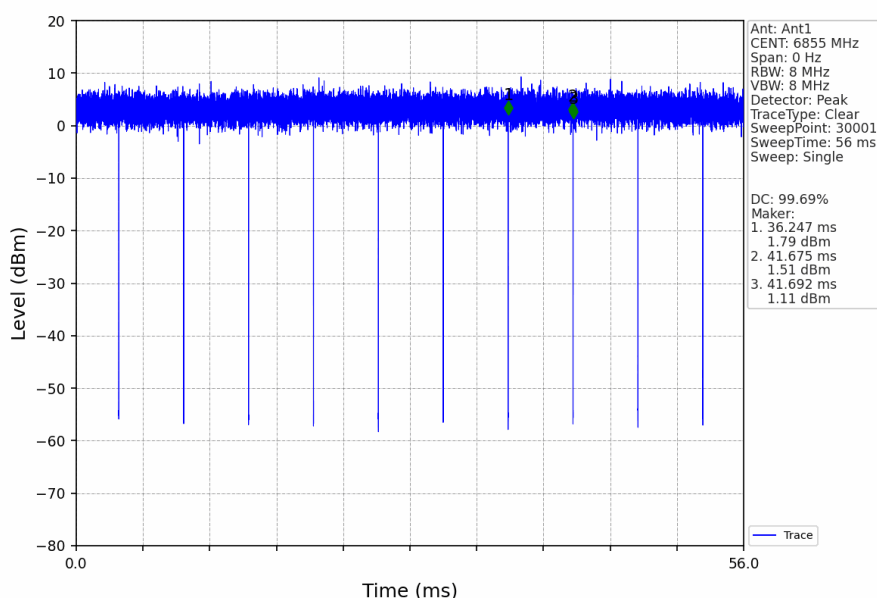

802.11ax(HEW40)_LCH_6565MHz_RU484_Left_Ant1_NTNV

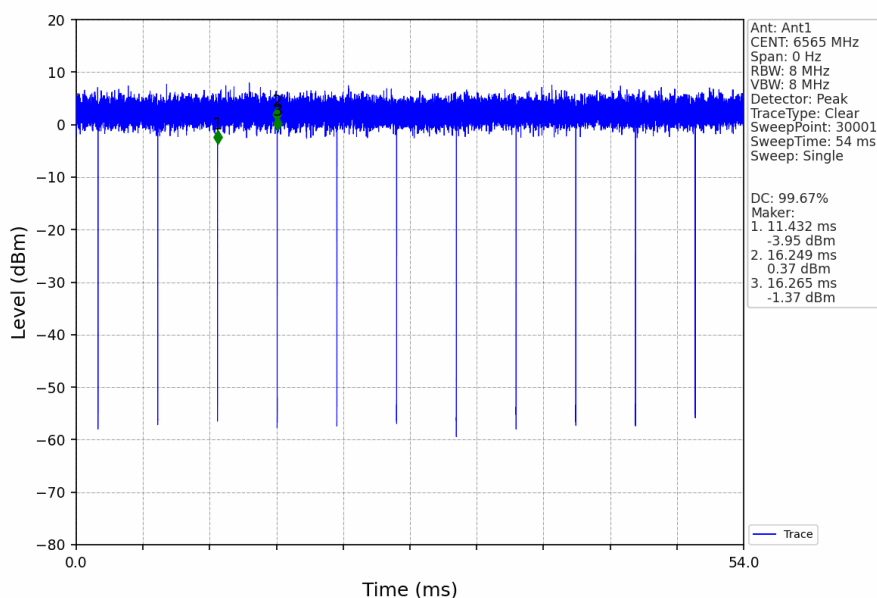

802.11ax(HEW40)_MCH_6685MHz_RU484_Left_Ant1_NTNV

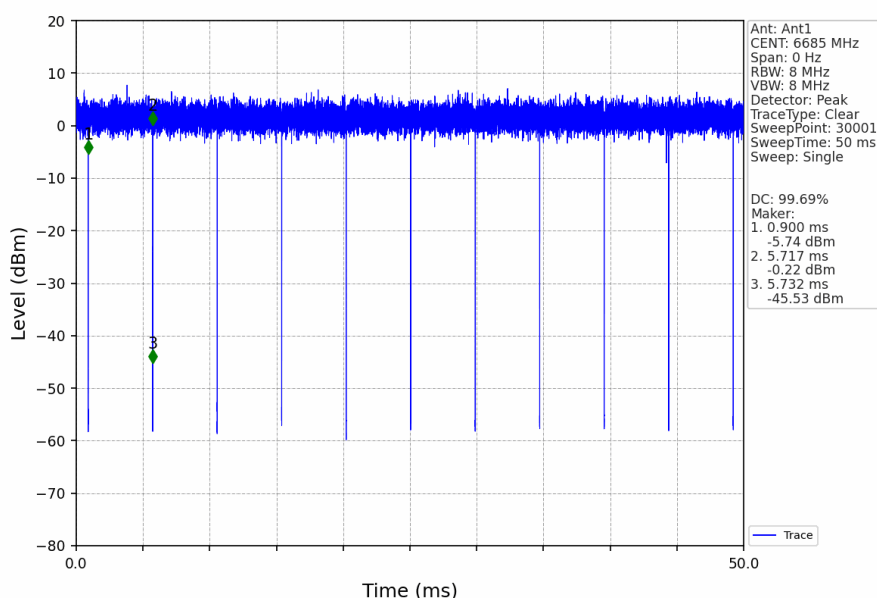

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com