

RF Test Data for 5G Wi-Fi (Conducted Measurements)

General Description of EUT	
EUT Name:	Tablet
Model:	B7
Sample ID:	HC-C-202503-3450-03-01-2#
Test Standard:	FCC Part 15.407
Environmental Conditions	
Ambient Temperature:	23.8°C
Ambient Humidity:	48%
Test Power Supply:	DC 3.85V
Test Engineer:	Rick. chen
Note: For a more detailed features description, please refer to the report TBR-C-202503-3450-113	

Contents



1: Emission Bandwidth	3
1.1 Test Result	3
1.2 Test Graphs	4
2: Occupied channel bandwidth	7
2.1 Test Result	7
2.2 Test Graphs	8
3: Min emission bandwidth	13
3.1 Test Result-B4	13
3.2 Test Graphs-B4	14
4: Duty Cycle	17
4.1 Test Result	17
4.2 Test Graphs	18
5: Maximum conducted output power	20
5.1 Test Result	20
6: Maximum power spectral density	21
6.1 Test Result	21
6.2 Test Graphs	22
7: Band edge measurements	27
7.1 Test Result B1	27
7.2 Test Result B4	28
7.3 Test Graphs B1	30
7.4 Test Graphs B4	32
9: Frequency Stability	34
9.1 Test Result	34
10: Emissions in Restricted Bands	40
10.1 Test Result	40
10.2 Test Graphs	43

1: Emission Bandwidth


1.1 Test Result

TestMode	Antenna	Frequency[MHz]	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.92	5169.96	5189.88	---	---
11A	Ant1	5200	25.56	5187.04	5212.60	---	---
11A	Ant1	5240	26.44	5226.16	5252.60	---	---
11N20SISO	Ant1	5180	20.24	5170.04	5190.28	---	---
11N20SISO	Ant1	5200	20.32	5189.84	5210.16	---	---
11N20SISO	Ant1	5240	20.44	5229.72	5250.16	---	---
11N40SISO	Ant1	5190	39.68	5170.40	5210.08	---	---
11N40SISO	Ant1	5230	47.12	5203.36	5250.48	---	---
11AC20SISO	Ant1	5180	20.04	5170.08	5190.12	---	---
11AC20SISO	Ant1	5200	20.12	5190.08	5210.20	---	---
11AC20SISO	Ant1	5240	20.36	5229.96	5250.32	---	---
11AC40SISO	Ant1	5190	39.52	5170.08	5209.60	---	---
11AC40SISO	Ant1	5230	40.48	5209.60	5250.08	---	---
11AC80SISO	Ant1	5210	79.68	5170.16	5249.84	---	---


1.2 Test Graphs

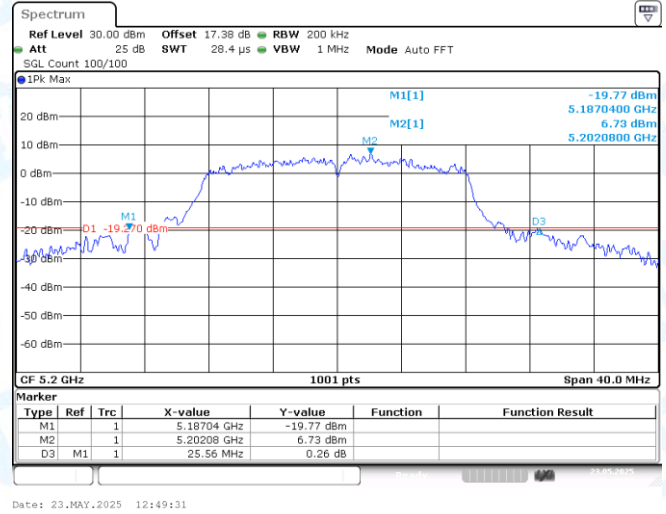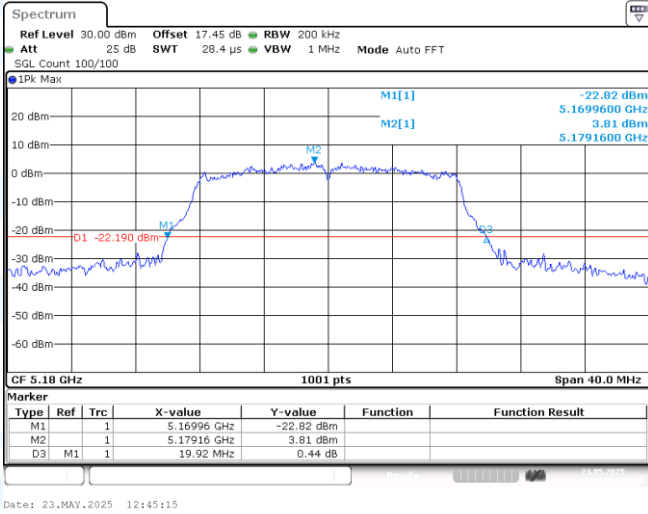


11A-Ant1-5180

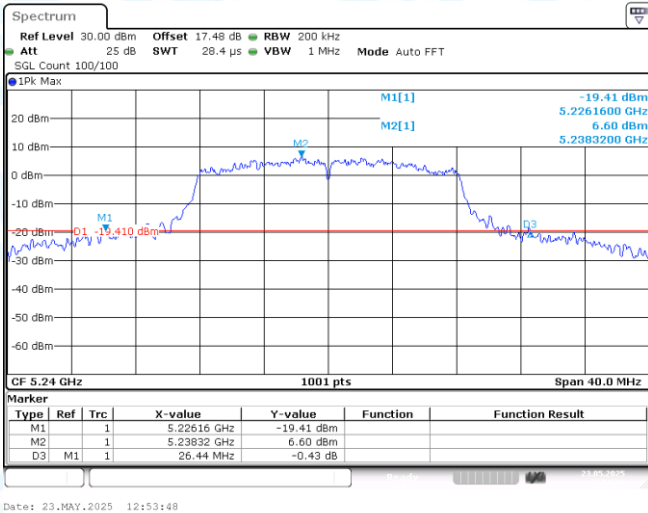


11A-Ant1-5240

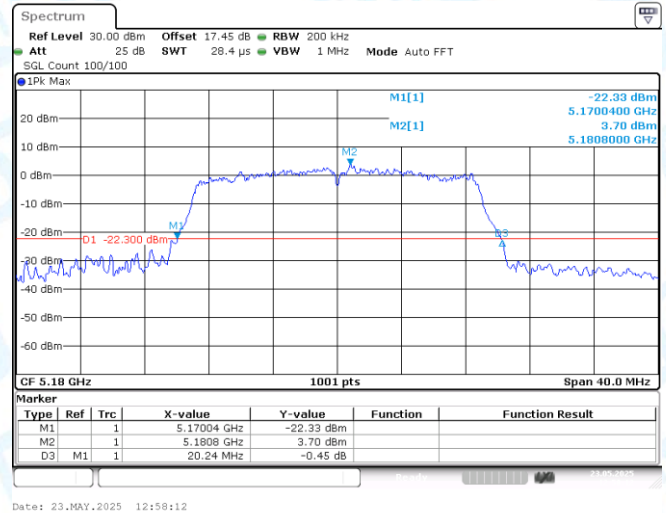



11N20SISO-Ant1-5180

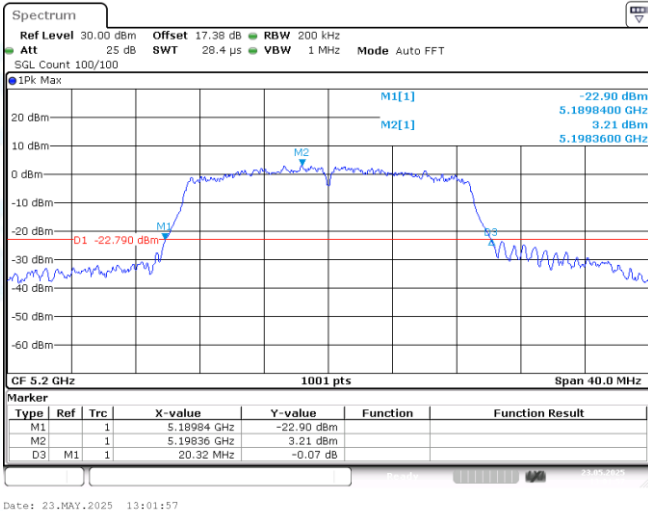

11N20SISO-Ant1-5200


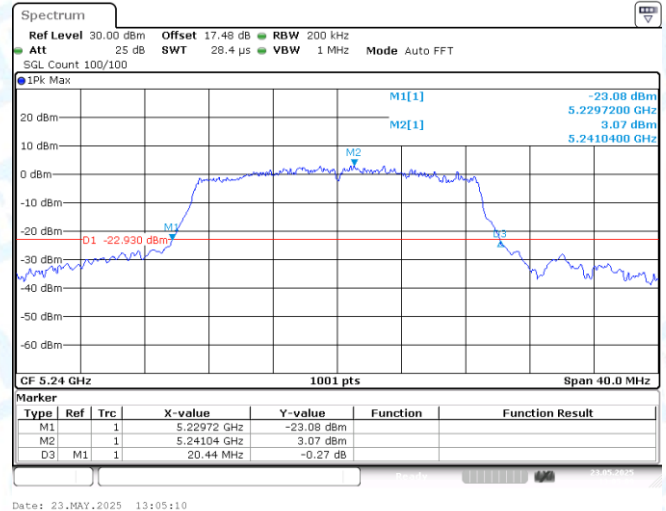


11N20SISO-Ant1-5240

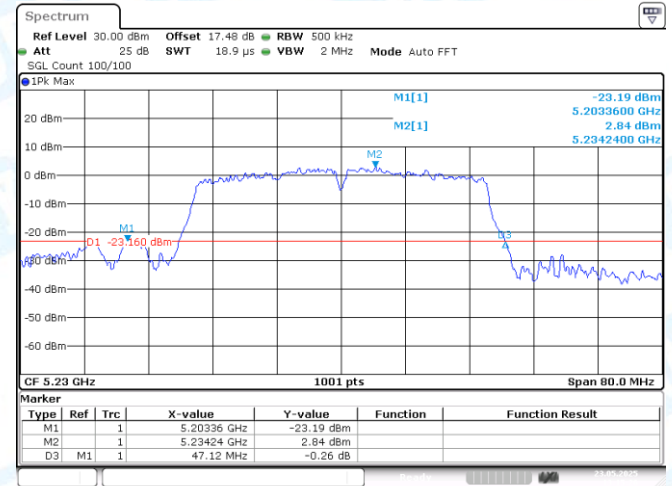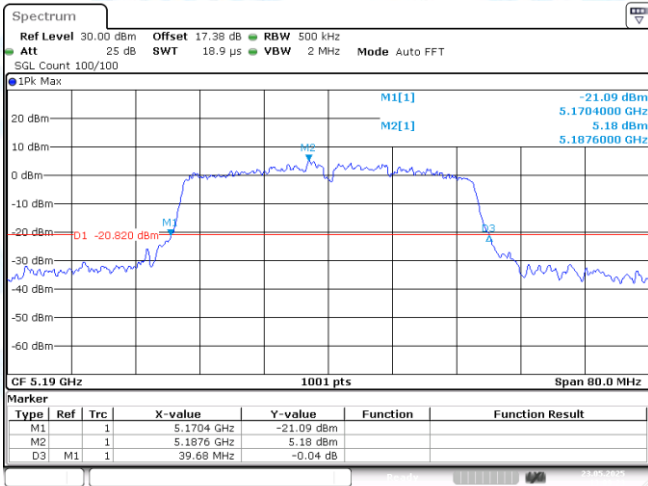



11N40SISO-Ant1-5190

11N40SISO-Ant1-5230

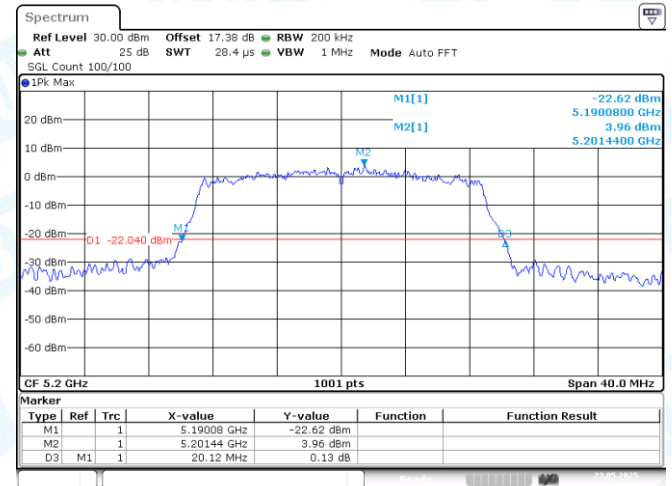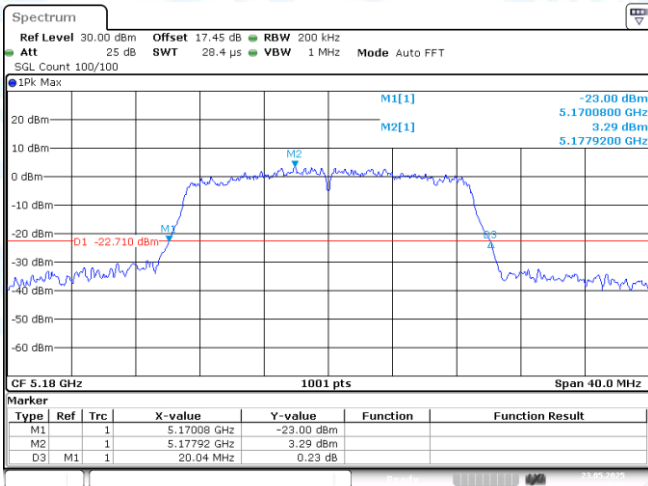


11AC20SISO-Ant1-5180

11AC20SISO-Ant1-5200

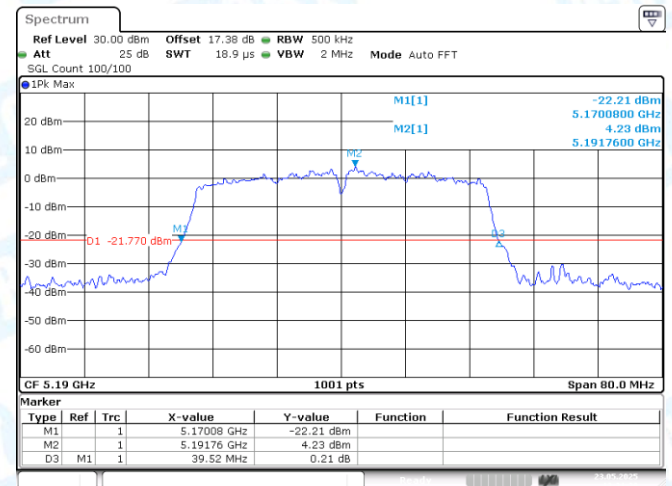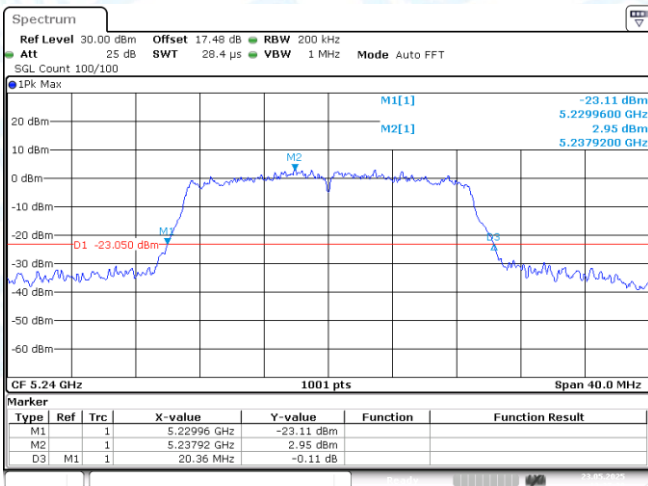


11AC20SISO-Ant1-5240

11AC40SISO-Ant1-5190

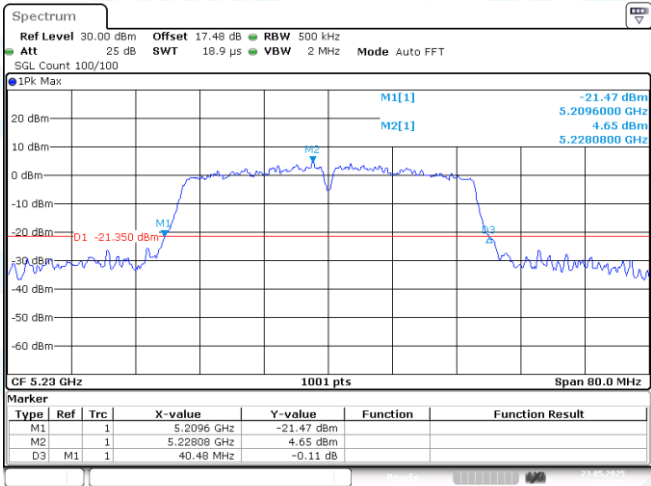

11AC40SISO-Ant1-5230

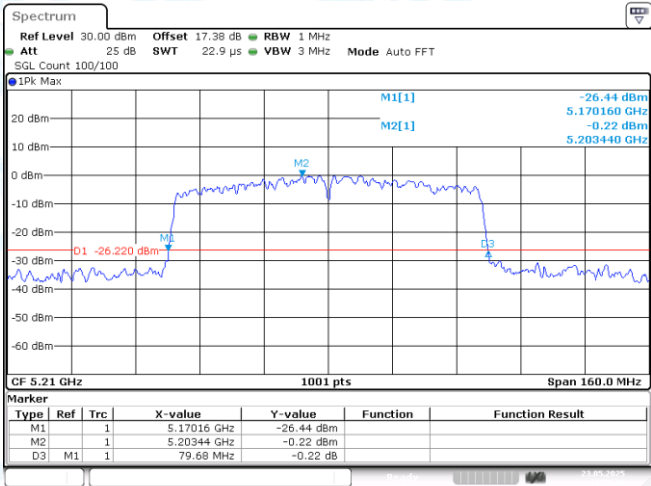



11AC80SISO-Ant1-5210

2: Occupied channel bandwidth

2.1 Test Result



TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.783	5171.6883	5188.4715	---	---
11A	Ant1	5200	17.103	5191.2887	5208.3916	---	---
11A	Ant1	5240	17.183	5231.4086	5248.5914	---	---
11A	Ant1	5745	17.662	5736.0889	5753.7512	---	---
11A	Ant1	5785	17.303	5776.2887	5793.5914	---	---
11A	Ant1	5825	17.383	5816.0490	5833.4316	---	---
11N20SISO	Ant1	5180	17.742	5171.1289	5188.8711	---	---
11N20SISO	Ant1	5200	17.702	5191.2088	5208.9111	---	---
11N20SISO	Ant1	5240	17.702	5231.1289	5248.8312	---	---
11N20SISO	Ant1	5745	18.422	5735.8492	5754.2707	---	---
11N20SISO	Ant1	5785	18.342	5775.6893	5794.0310	---	---
11N20SISO	Ant1	5825	18.102	5815.8092	5833.9111	---	---
11N40SISO	Ant1	5190	36.284	5172.0180	5208.3017	---	---
11N40SISO	Ant1	5230	36.204	5211.9381	5248.1419	---	---
11N40SISO	Ant1	5755	36.523	5736.5385	5773.0619	---	---
11N40SISO	Ant1	5795	36.204	5776.8581	5813.0619	---	---
11AC20SISO	Ant1	5180	17.702	5171.1289	5188.8312	---	---
11AC20SISO	Ant1	5200	17.862	5191.1688	5209.0310	---	---
11AC20SISO	Ant1	5240	17.942	5231.0889	5249.0310	---	---
11AC20SISO	Ant1	5745	18.142	5735.7692	5753.9111	---	---
11AC20SISO	Ant1	5785	18.022	5775.8891	5793.9111	---	---
11AC20SISO	Ant1	5825	18.062	5815.9291	5833.9910	---	---
11AC40SISO	Ant1	5190	36.204	5171.9381	5208.1419	---	---
11AC40SISO	Ant1	5230	36.364	5211.6983	5248.0619	---	---
11AC40SISO	Ant1	5755	36.523	5736.4585	5772.9820	---	---
11AC40SISO	Ant1	5795	36.204	5776.8581	5813.0619	---	---
11AC80SISO	Ant1	5210	75.445	5172.4376	5247.8821	---	---
11AC80SISO	Ant1	5775	76.404	5736.3187	5812.7223	---	---

2.2 Test Graphs

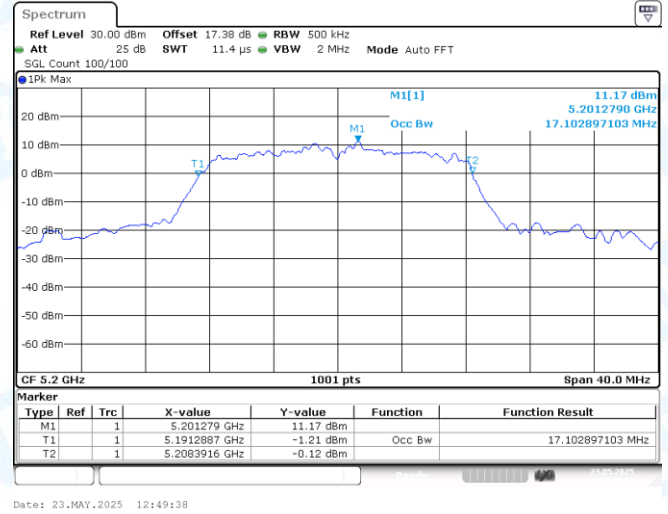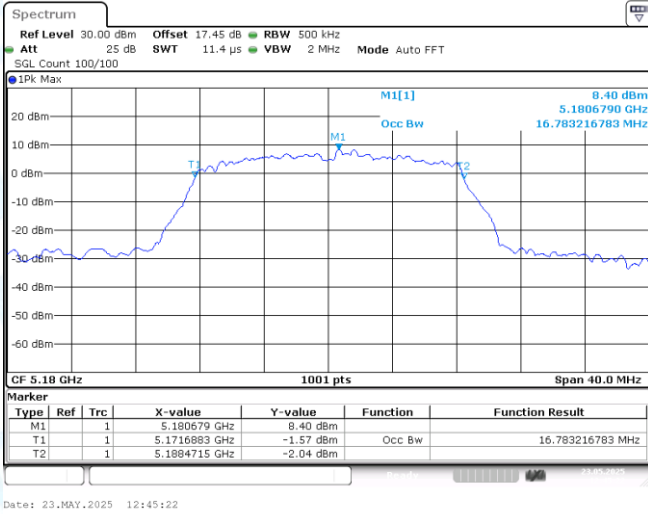



11A-Ant1-5180

11A-Ant1-5200

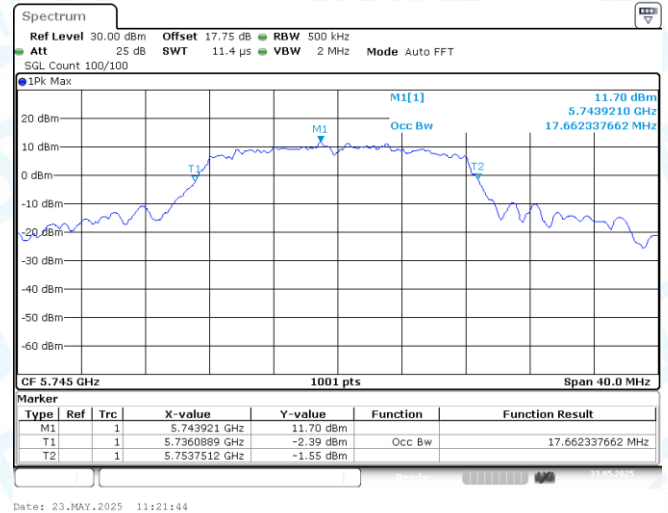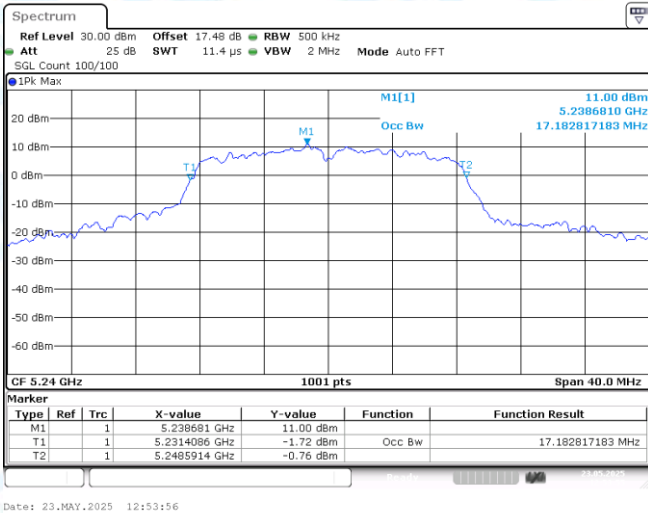


11A-Ant1-5240

11A-Ant1-5745

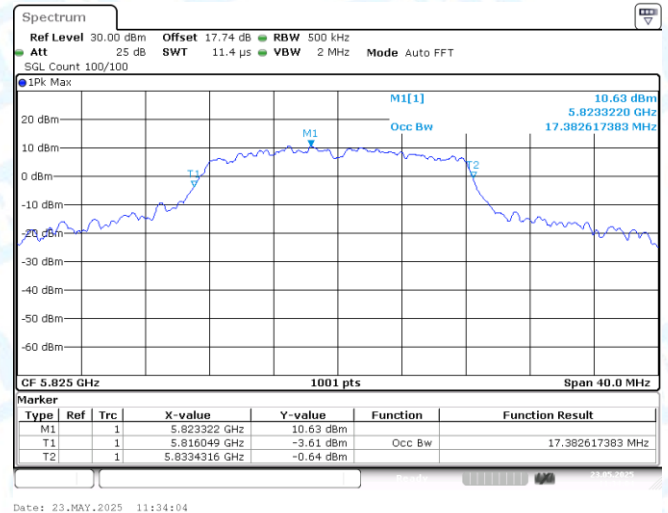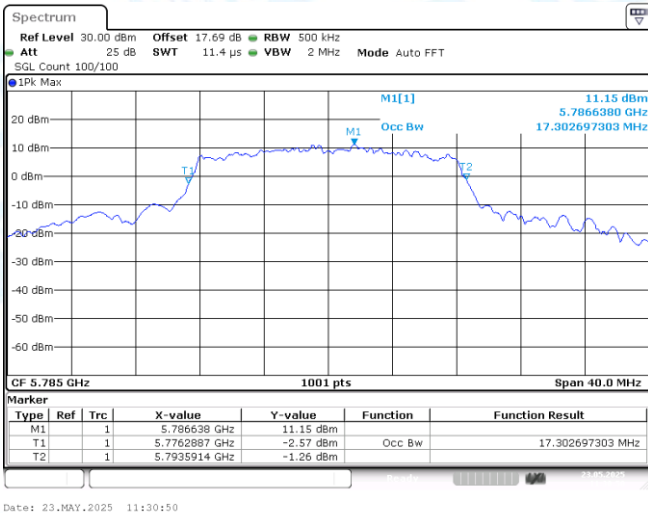


11A-Ant1-5785


11A-Ant1-5825

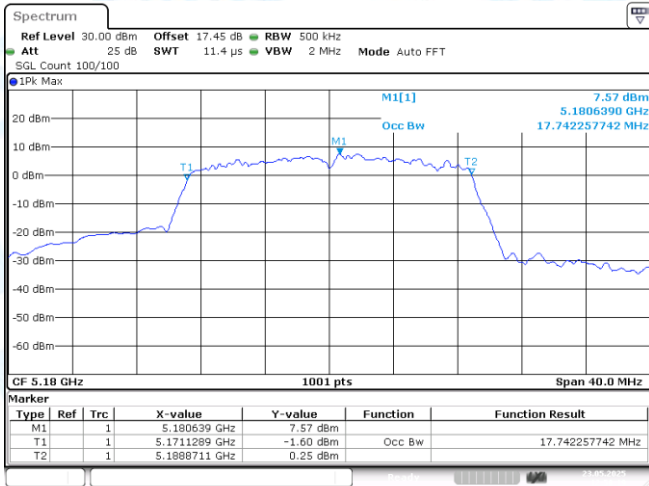


11N20SISO-Ant1-5180

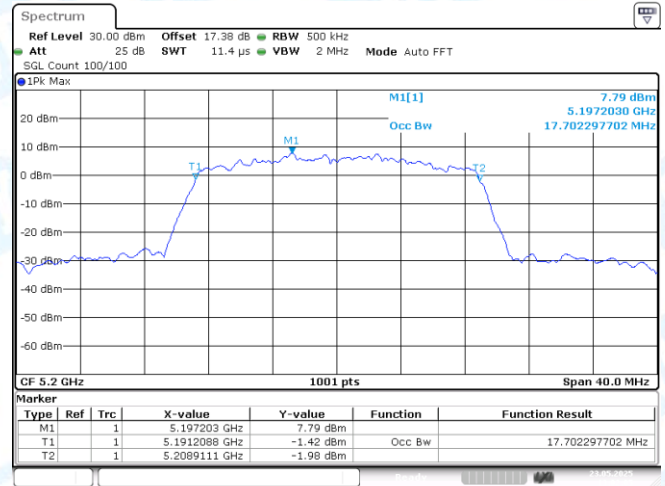


11N20SISO-Ant1-5200

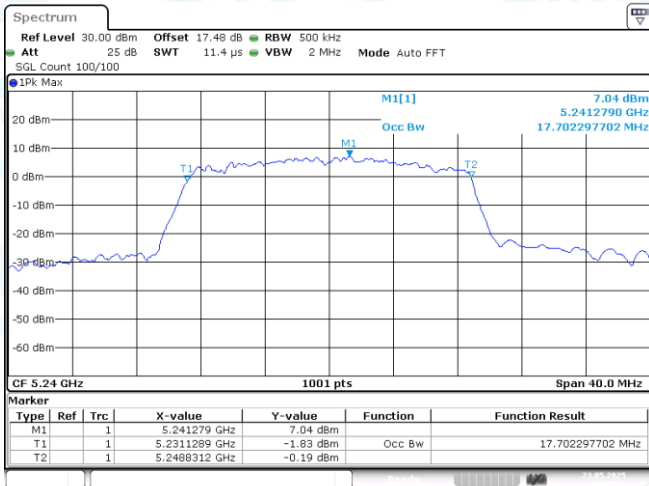


11N20SISO-Ant1-5240

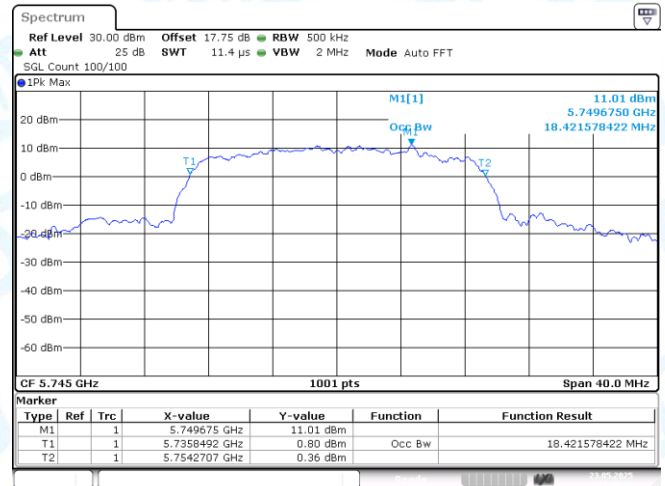


11N20SISO-Ant1-5745

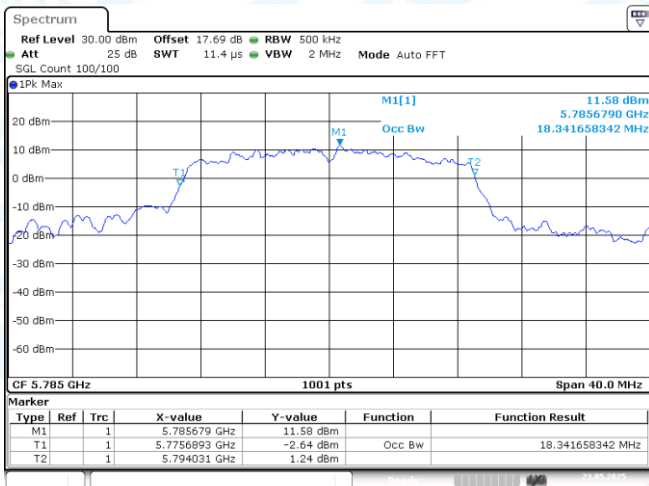


11N20SISO-Ant1-5785

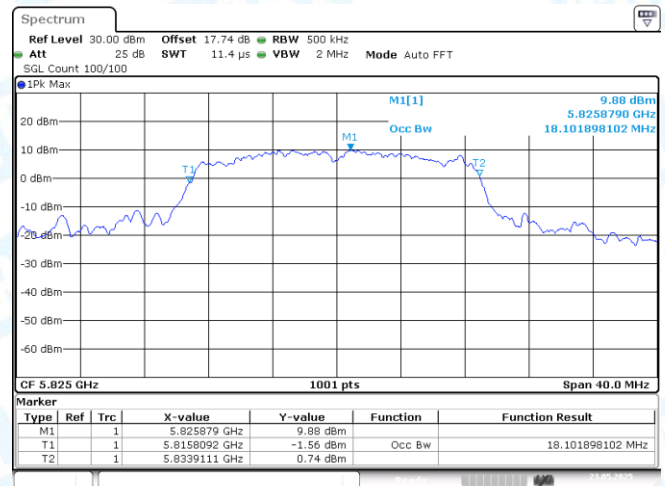


11N20SISO-Ant1-5825

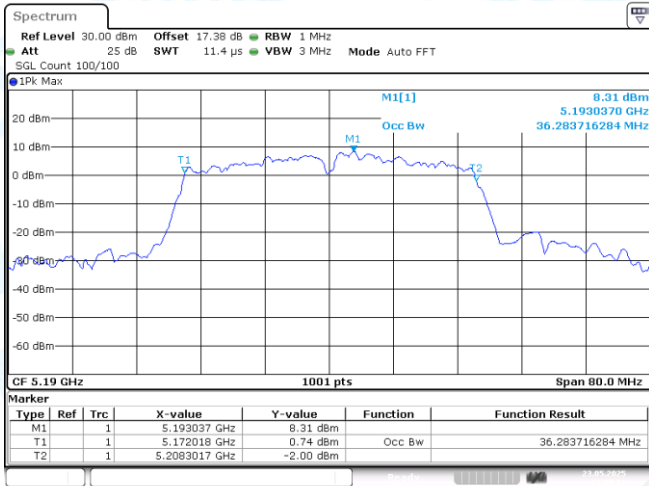


11N40SISO-Ant1-5190

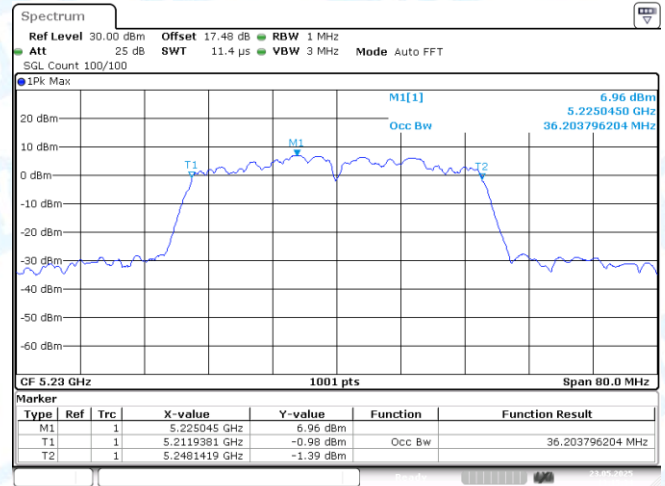


11N40SISO-Ant1-5230

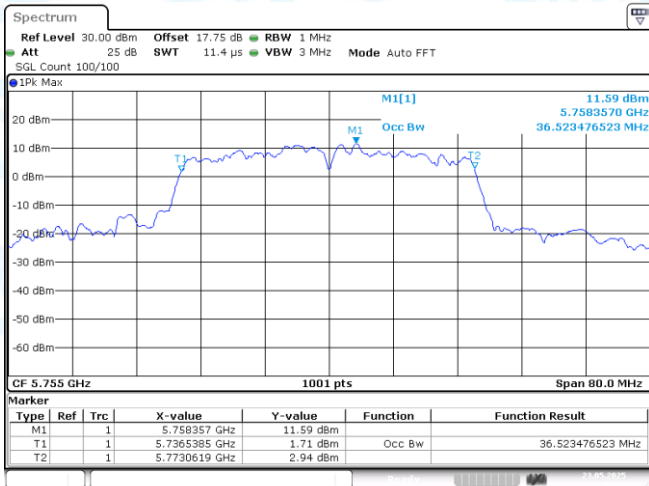


11N40SISO-Ant1-5755

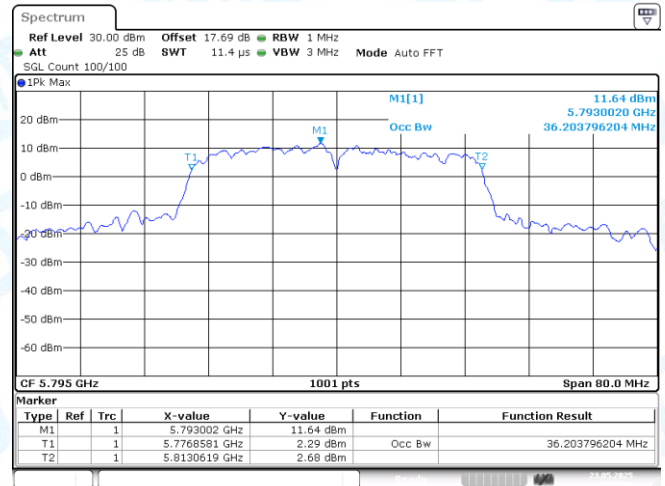


11N40SISO-Ant1-5795

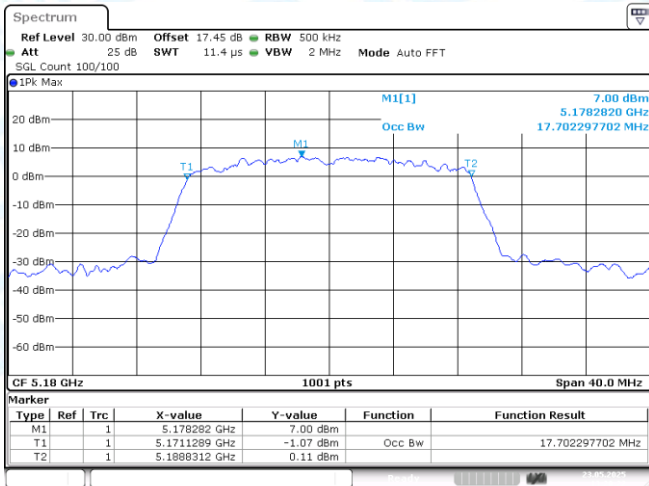


11AC20SISO-Ant1-5180

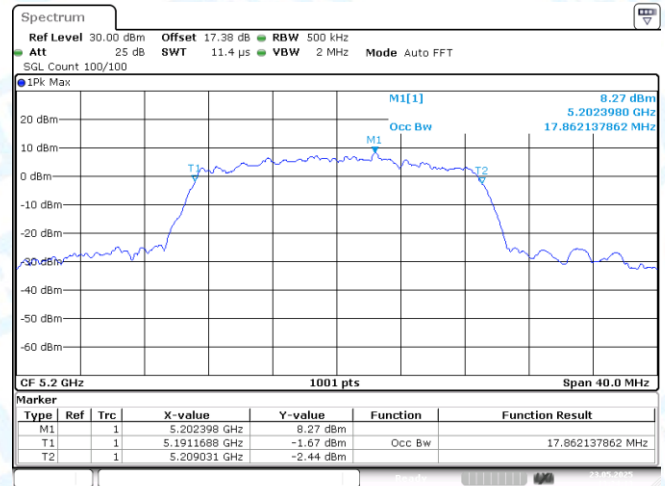


11AC20SISO-Ant1-5200

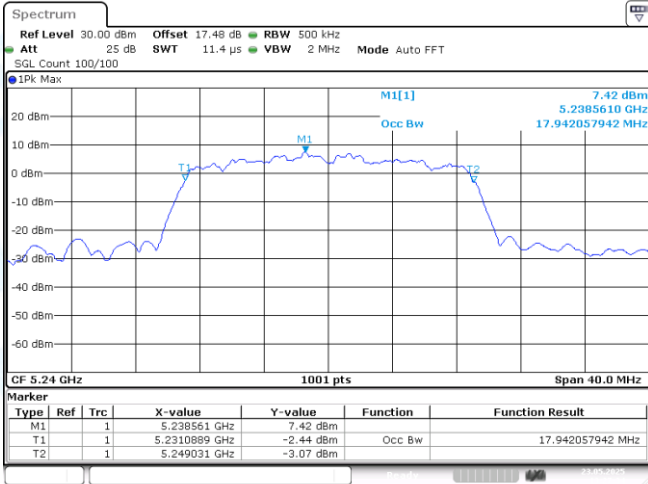


11AC20SISO-Ant1-5240

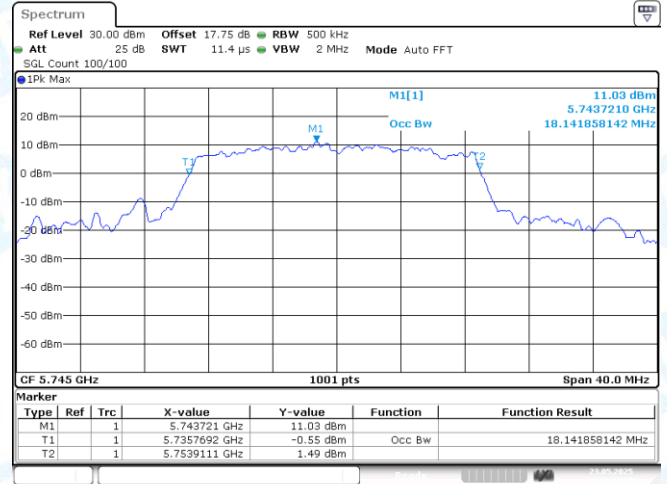


11AC20SISO-Ant1-5745

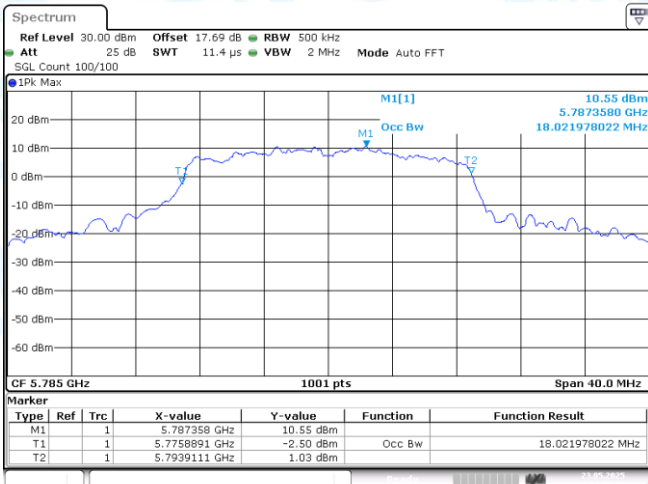


11AC20SISO-Ant1-5785

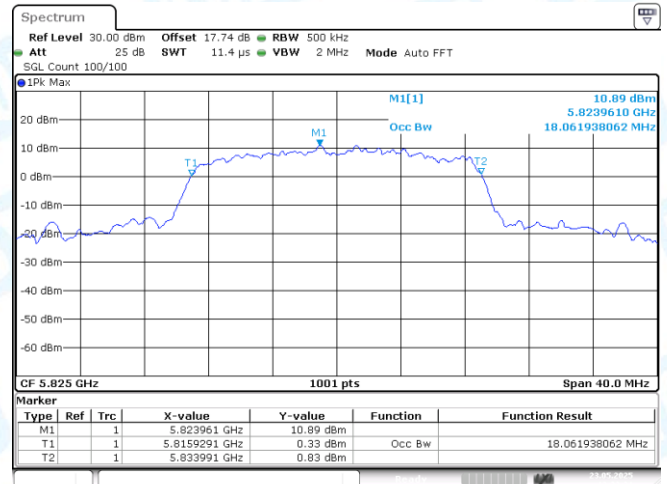


11AC20SISO-Ant1-5825

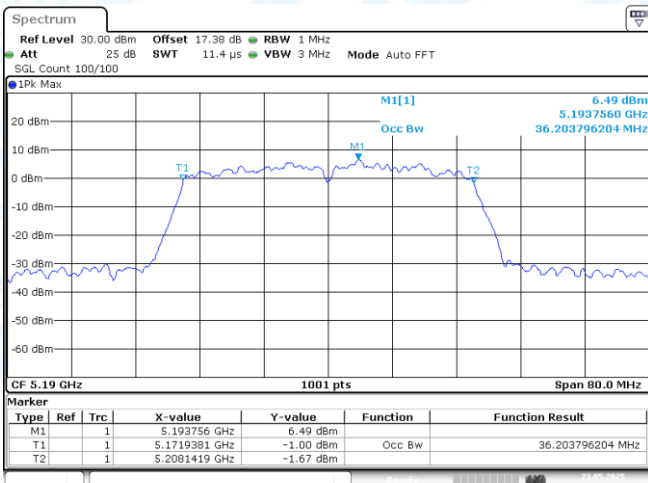


11AC40SISO-Ant1-5190

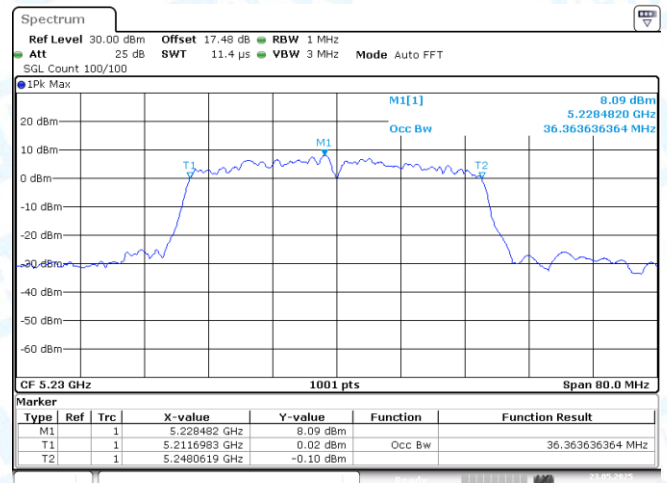


11AC40SISO-Ant1-5230

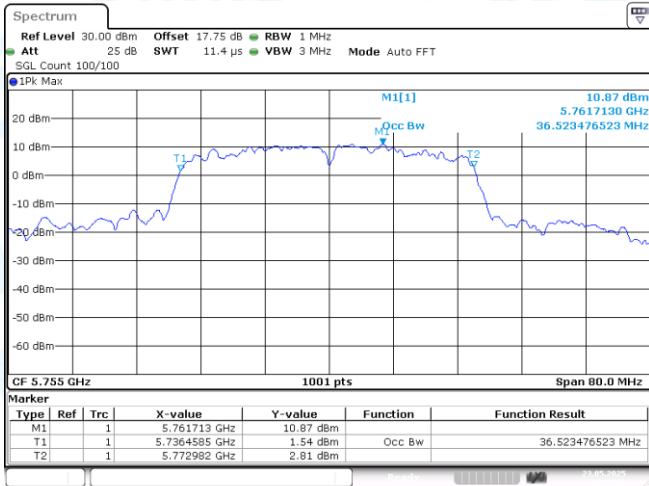


11AC40SISO-Ant1-5755

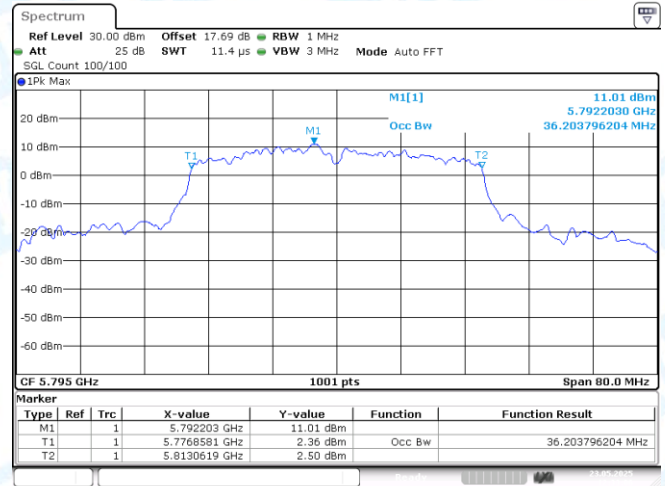

11AC40SISO-Ant1-5795

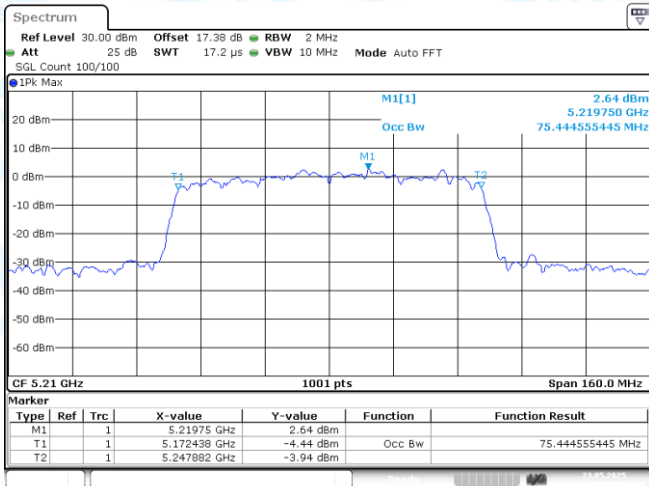

11AC80SISO-Ant1-5210

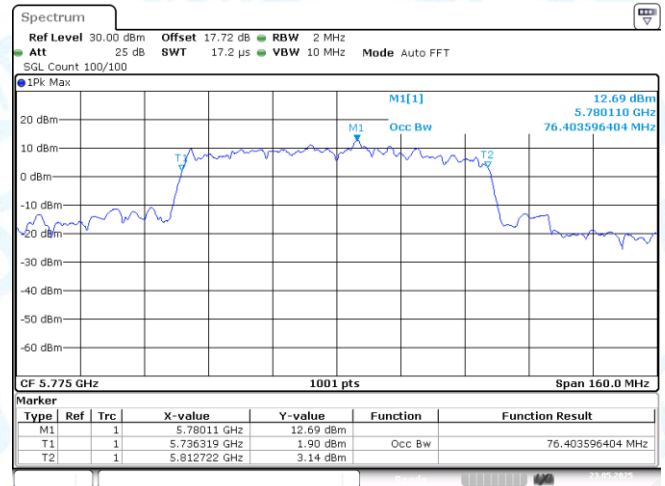



11AC80SISO-Ant1-5775

3: Min emission bandwidth

3.1 Test Result-B4



TestMode	Antenna	Frequency[MHz]	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.32	5736.84	5753.16	0.5	PASS
11A	Ant1	5785	16.32	5776.84	5793.16	0.5	PASS
11A	Ant1	5825	16.32	5816.84	5833.16	0.5	PASS
11N20SISO	Ant1	5745	16.80	5736.60	5753.40	0.5	PASS
11N20SISO	Ant1	5785	16.52	5776.88	5793.40	0.5	PASS
11N20SISO	Ant1	5825	17.60	5816.20	5833.80	0.5	PASS
11N40SISO	Ant1	5755	35.44	5737.08	5772.52	0.5	PASS
11N40SISO	Ant1	5795	35.44	5777.08	5812.52	0.5	PASS
11AC20SISO	Ant1	5745	16.88	5736.24	5753.12	0.5	PASS
11AC20SISO	Ant1	5785	17.56	5776.20	5793.76	0.5	PASS
11AC20SISO	Ant1	5825	17.56	5816.20	5833.76	0.5	PASS
11AC40SISO	Ant1	5755	35.92	5736.84	5772.76	0.5	PASS
11AC40SISO	Ant1	5795	35.68	5776.84	5812.52	0.5	PASS
11AC80SISO	Ant1	5775	75.84	5736.76	5812.60	0.5	PASS

3.2 Test Graphs-B4

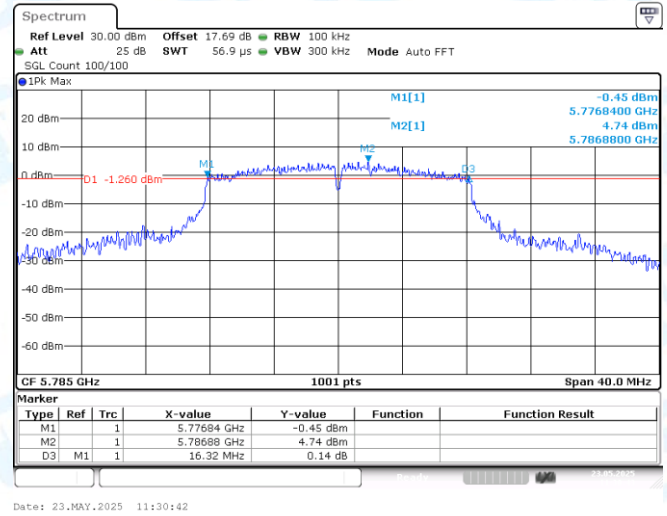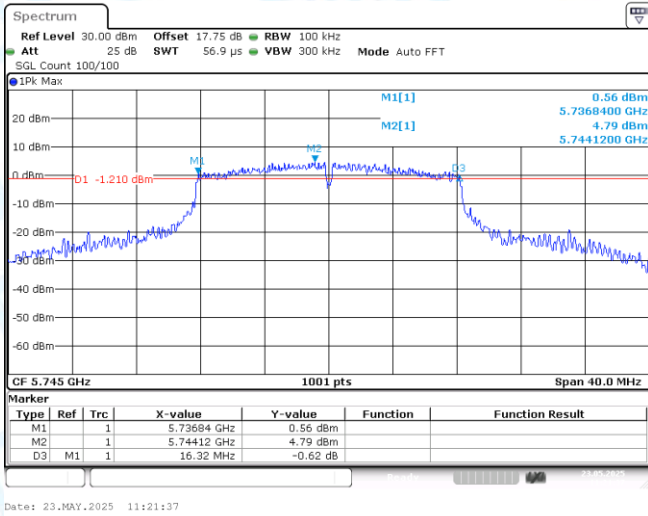



11A-Ant1-5745-PASS

11A-Ant1-5785-PASS

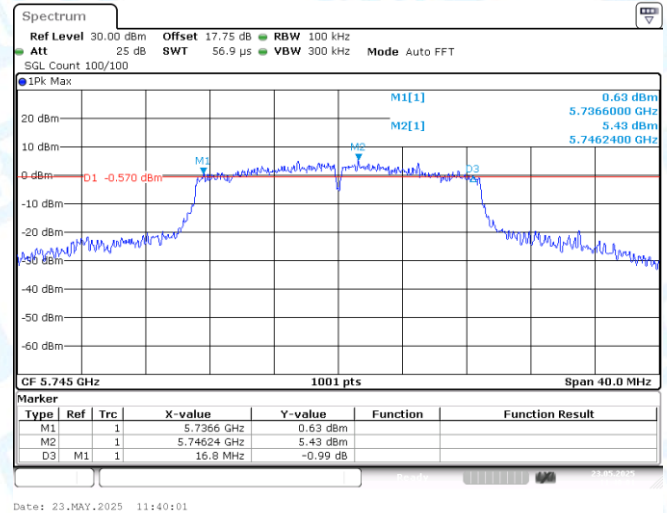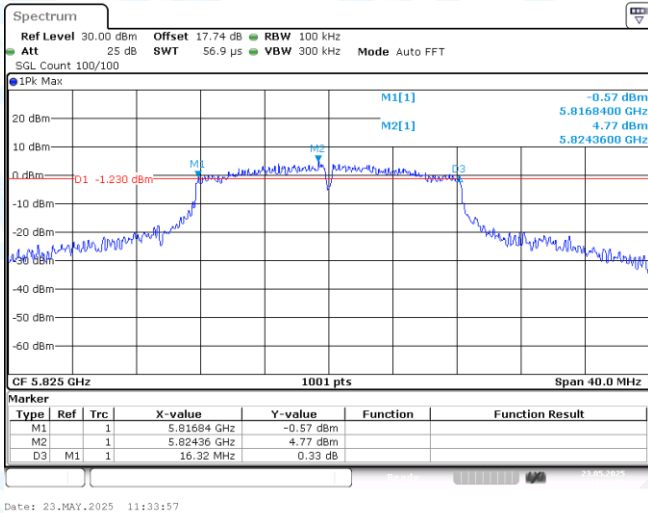


11A-Ant1-5825-PASS

11N20SISO-Ant1-5745-PASS

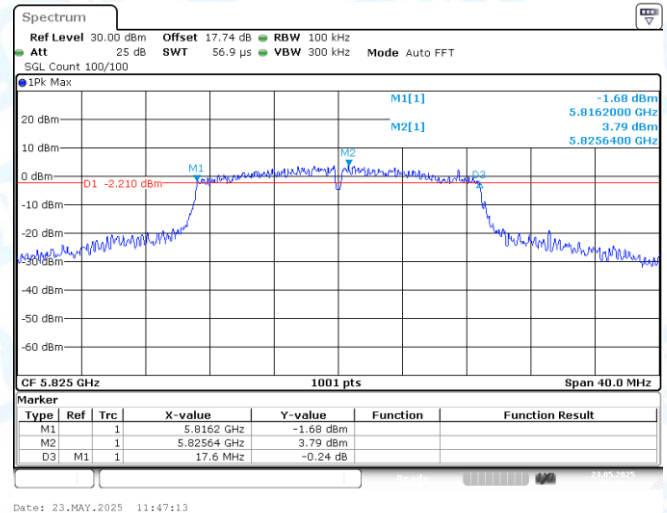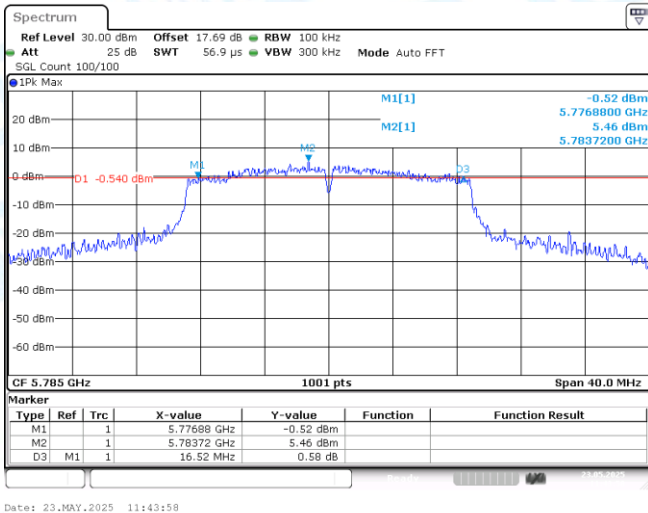


11N20SISO-Ant1-5785-PASS

11N20SISO-Ant1-5825-PASS

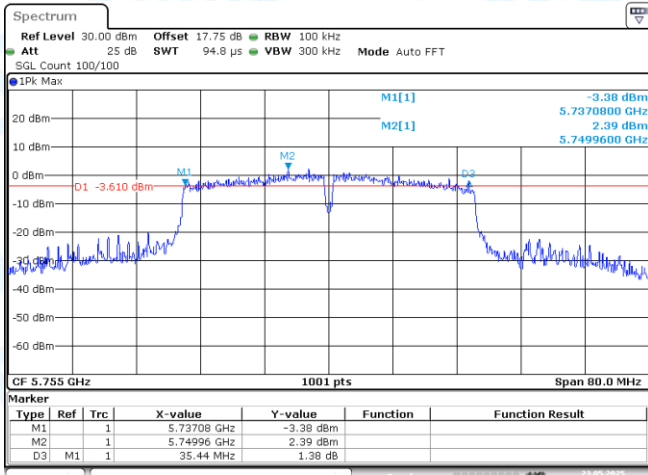


Date: 23.MAY.2025 11:51:39

11N40SISO-Ant1-5755-PASS

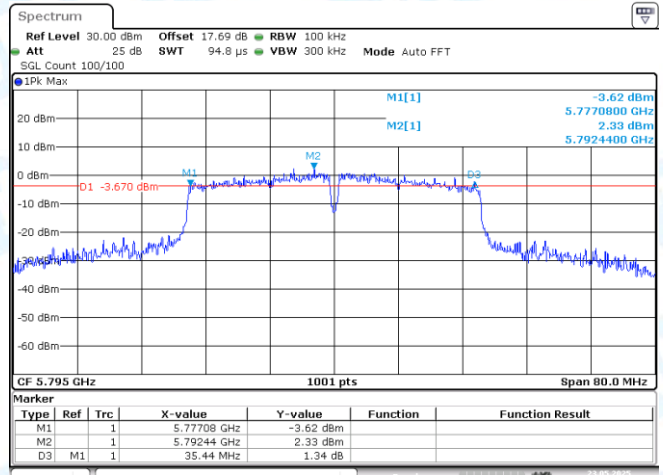


Date: 23.MAY.2025 11:56:51

11N40SISO-Ant1-5795-PASS

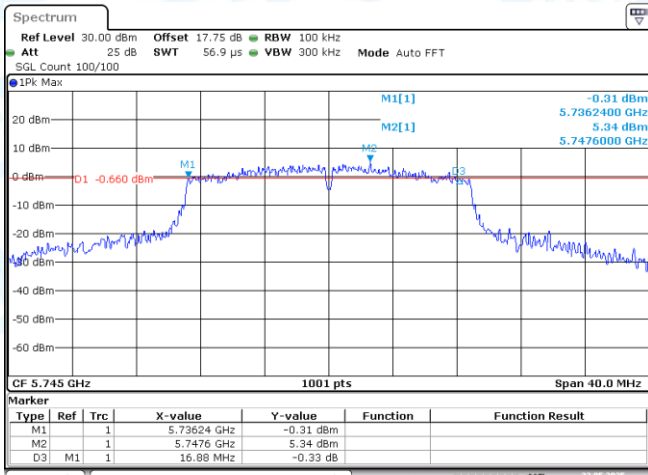


Date: 23.MAY.2025 12:01:17

11AC20SISO-Ant1-5745-PASS

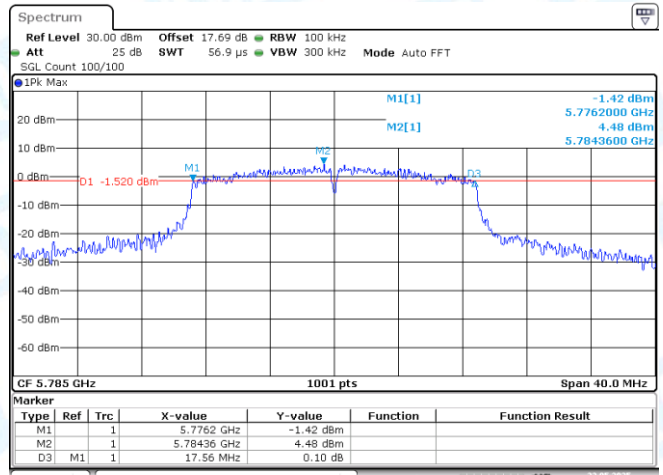


Date: 23.MAY.2025 12:05:22

11AC20SISO-Ant1-5785-PASS

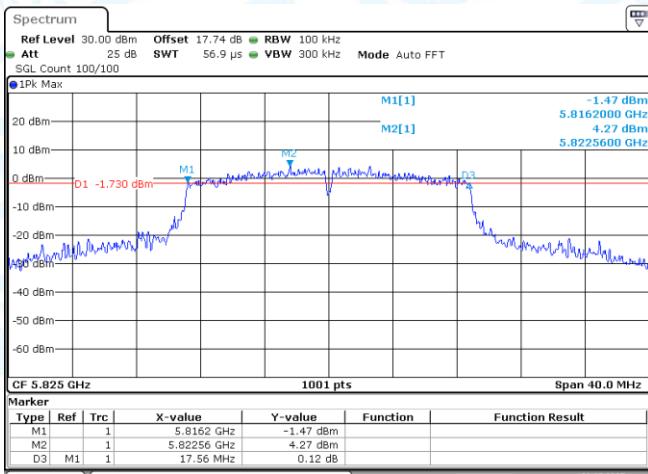



Date: 23.MAY.2025 12:23:14

11AC20SISO-Ant1-5825-PASS

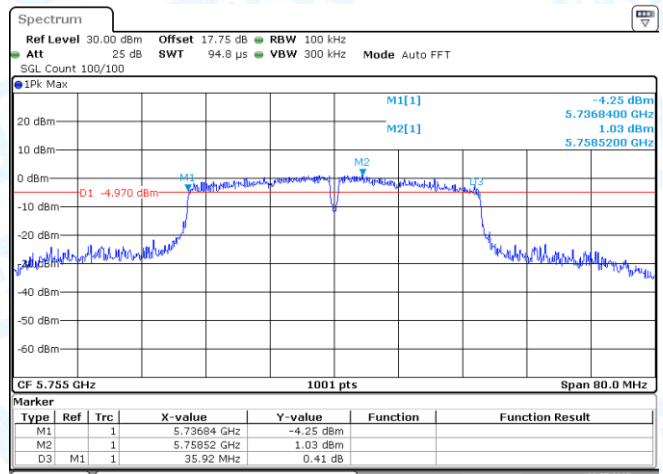

Date: 23.MAY.2025 12:27:39

11AC40SISO-Ant1-5755-PASS

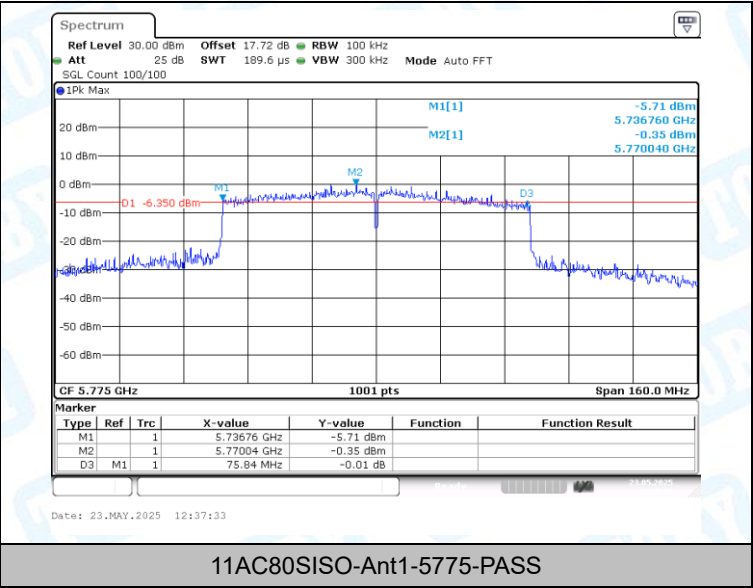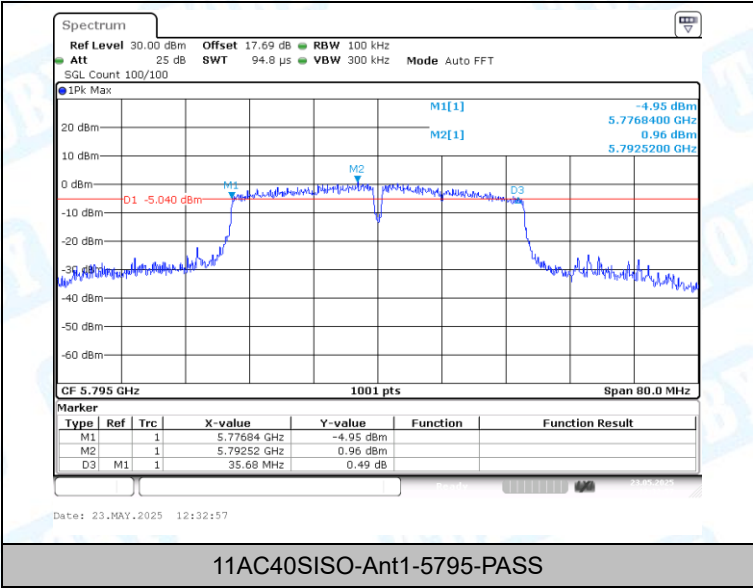

4: Duty Cycle

4.1 Test Result



TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factory	1/T [kHz]
11A	Ant1	5180	1.39	1.44	96.53	0.15	0.72
11A	Ant1	5745	1.40	1.44	97.22	0.12	0.71
11N20SISO	Ant1	5180	1.30	1.35	96.30	0.16	0.77
11N20SISO	Ant1	5745	1.30	1.35	96.30	0.16	0.77
11N40SISO	Ant1	5190	0.65	0.69	94.20	0.26	1.54
11N40SISO	Ant1	5755	0.65	0.70	92.86	0.32	1.54
11AC20SISO	Ant1	5180	1.31	1.35	97.04	0.13	0.76
11AC20SISO	Ant1	5745	1.32	1.36	97.06	0.13	0.76
11AC40SISO	Ant1	5190	0.65	0.70	92.86	0.32	1.54
11AC40SISO	Ant1	5755	0.65	0.70	92.86	0.32	1.54
11AC80SISO	Ant1	5210	0.32	0.36	88.89	0.51	3.13
11AC80SISO	Ant1	5775	0.33	0.37	89.19	0.50	3.03

Note: 1, Duty Cycle= Transmission Duration/ Transmission Period

2, DC Factory=10*Log₁₀(1/Duty Cycle)



3, 1/T=1/ Transmission Duration

4.2 Test Graphs

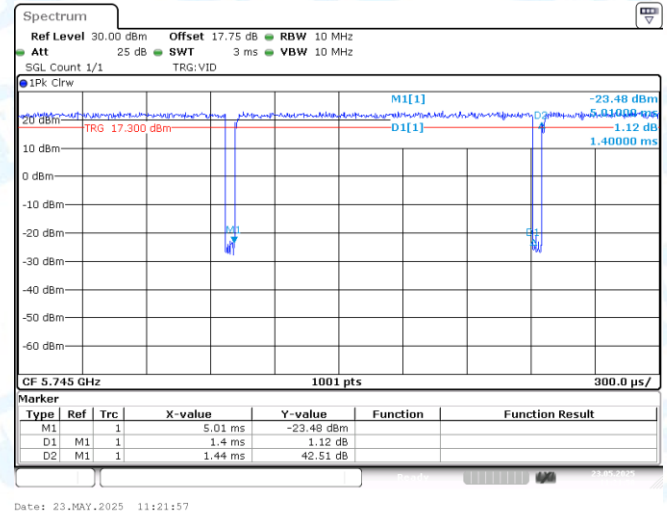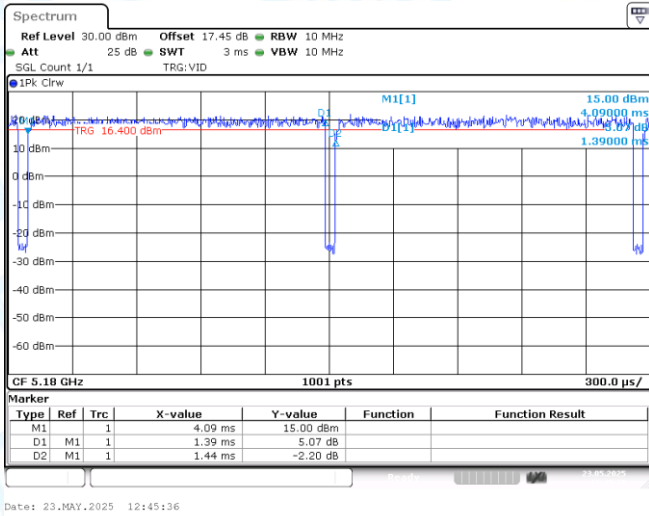



NTNV-11A-Ant1-5180

NTNV-11A-Ant1-5745

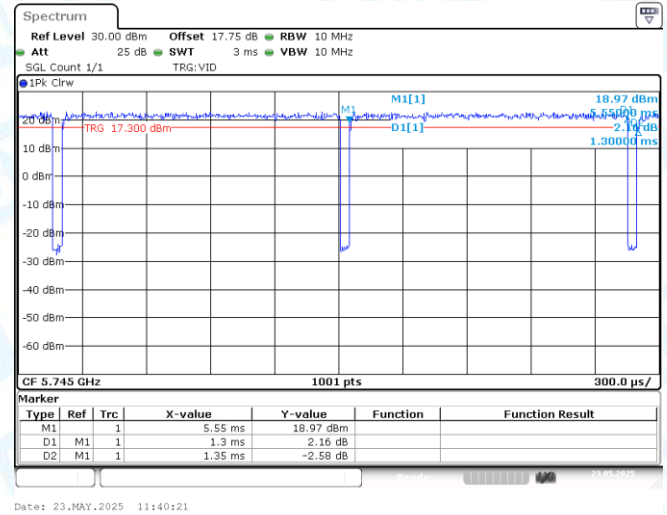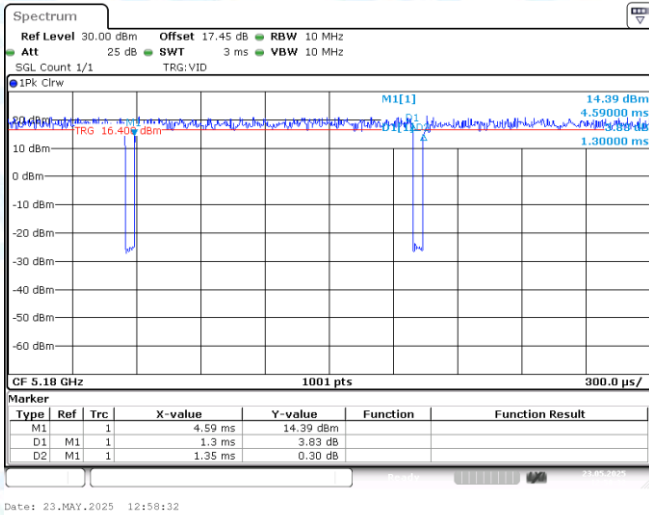


NTNV-11N20SISO-Ant1-5180

NTNV-11N20SISO-Ant1-5745

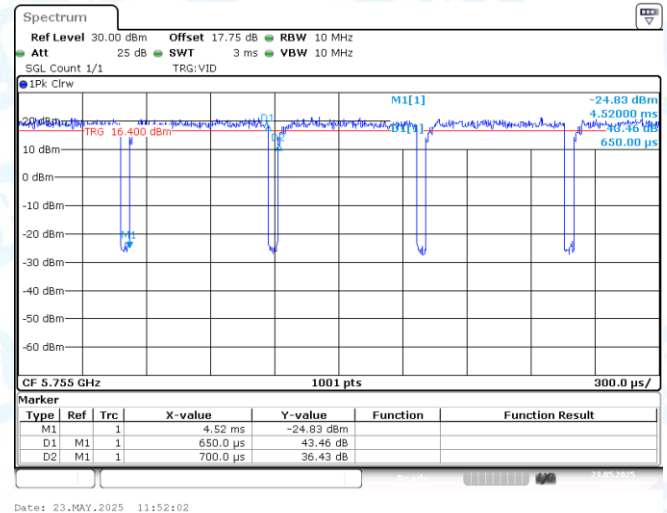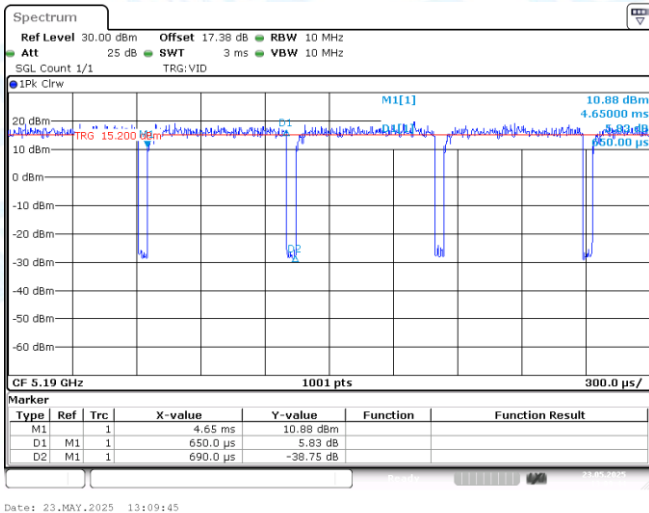


NTNV-11N40SISO-Ant1-5190

NTNV-11N40SISO-Ant1-5755

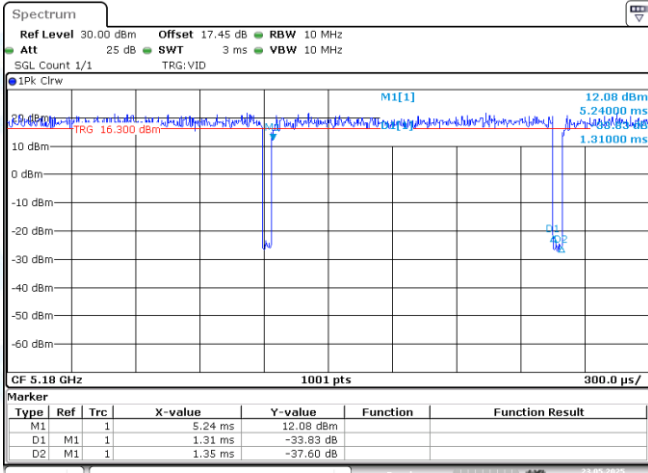


Date: 23.MAY.2025 13:20:36

NTNV-11AC20SISO-Ant1-5180

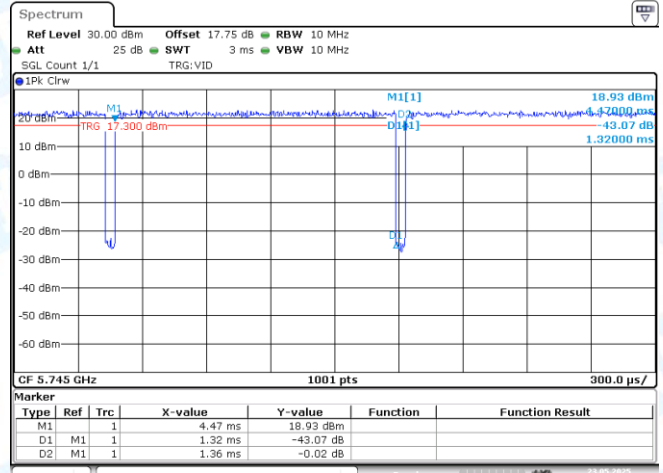


Date: 23.MAY.2025 12:01:38

NTNV-11AC20SISO-Ant1-5745

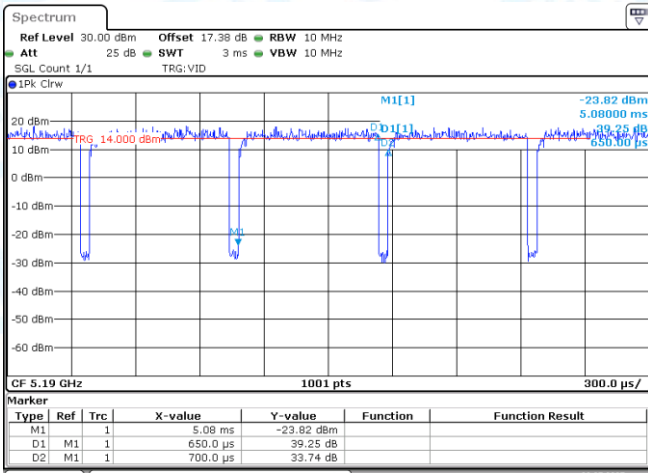


Date: 23.MAY.2025 13:31:59

NTNV-11AC40SISO-Ant1-5190

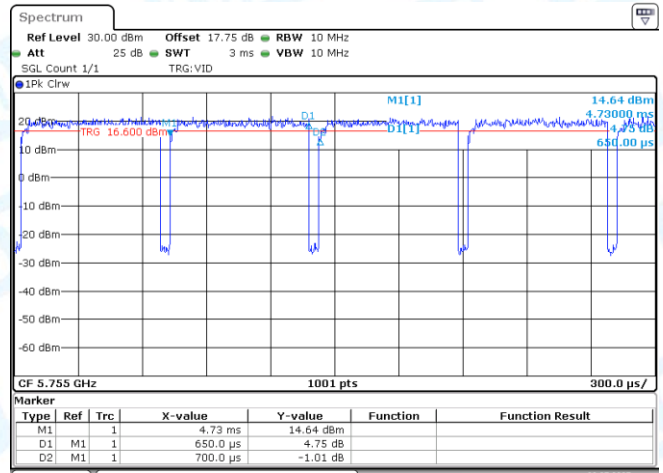


Date: 23.MAY.2025 12:28:01

NTNV-11AC40SISO-Ant1-5755

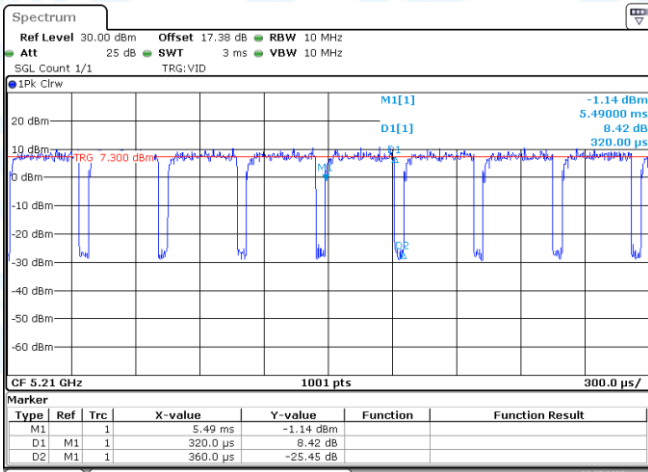

Date: 23.MAY.2025 13:55:36

NTNV-11AC80SISO-Ant1-5210

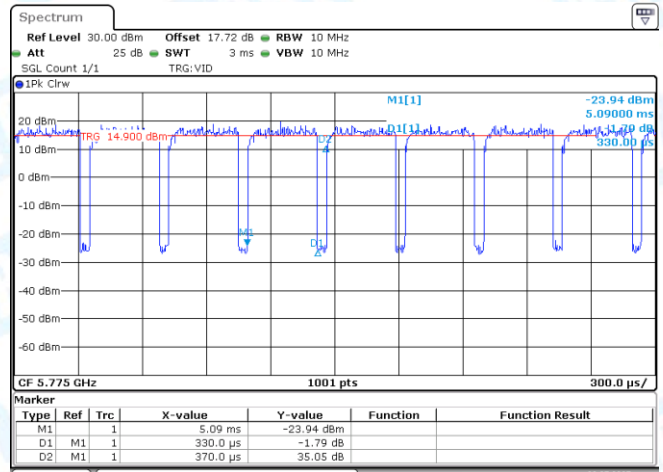

Date: 23.MAY.2025 12:37:59

NTNV-11AC80SISO-Ant1-5775

5: Maximum conducted output power

5.1 Test Result

TestMode	Antenna	Frequency [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	13.85	≤23.98	PASS
11A	Ant1	5200	16.13	≤23.98	PASS
11A	Ant1	5240	16.55	≤23.98	PASS
11A	Ant1	5745	17.70	≤30.00	PASS
11A	Ant1	5785	17.36	≤30.00	PASS
11A	Ant1	5825	17.04	≤30.00	PASS
11N20SISO	Ant1	5180	13.63	≤23.98	PASS
11N20SISO	Ant1	5200	13.49	≤23.98	PASS
11N20SISO	Ant1	5240	13.68	≤23.98	PASS
11N20SISO	Ant1	5745	17.43	≤30.00	PASS
11N20SISO	Ant1	5785	17.22	≤30.00	PASS
11N20SISO	Ant1	5825	16.87	≤30.00	PASS
11N40SISO	Ant1	5190	12.33	≤23.98	PASS
11N40SISO	Ant1	5230	12.28	≤23.98	PASS
11N40SISO	Ant1	5755	16.55	≤30.00	PASS
11N40SISO	Ant1	5795	16.43	≤30.00	PASS
11AC20SISO	Ant1	5180	13.45	≤23.98	PASS
11AC20SISO	Ant1	5200	13.66	≤23.98	PASS
11AC20SISO	Ant1	5240	13.54	≤23.98	PASS
11AC20SISO	Ant1	5745	17.29	≤30.00	PASS
11AC20SISO	Ant1	5785	17.11	≤30.00	PASS
11AC20SISO	Ant1	5825	16.71	≤30.00	PASS
11AC40SISO	Ant1	5190	12.34	≤23.98	PASS
11AC40SISO	Ant1	5230	13.36	≤23.98	PASS
11AC40SISO	Ant1	5755	17.00	≤30.00	PASS
11AC40SISO	Ant1	5795	16.26	≤30.00	PASS
11AC80SISO	Ant1	5210	8.94	≤23.98	PASS
11AC80SISO	Ant1	5775	16.81	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

6: Maximum power spectral density


6.1 Test Result

Test Mode	Ant.	Frequency [MHz]	RawData [dBm/3kHz]	DC Factory	Result [dBm/MHz] Result [dBm/500kHz]	Limit[dBm/MHz] Limit[dBm/500kHz]	Verdict
11A	Ant1	5180	3.81	0.15	3.96	≤11.00	PASS
11A	Ant1	5200	6.08	0.16	6.24	≤11.00	PASS
11A	Ant1	5240	6.36	0.16	6.52	≤11.00	PASS
11A	Ant1	5745	4.7	0.12	4.82	≤30.00	PASS
11A	Ant1	5785	4.32	0.16	4.48	≤30.00	PASS
11A	Ant1	5825	4.17	0.16	4.33	≤30.00	PASS
11N20SISO	Ant1	5180	3.46	0.16	3.62	≤11.00	PASS
11N20SISO	Ant1	5200	3.55	0.17	3.72	≤11.00	PASS
11N20SISO	Ant1	5240	3.4	0.17	3.57	≤11.00	PASS
11N20SISO	Ant1	5745	4.44	0.16	4.60	≤30.00	PASS
11N20SISO	Ant1	5785	3.96	0.17	4.13	≤30.00	PASS
11N20SISO	Ant1	5825	3.62	0.17	3.79	≤30.00	PASS
11N40SISO	Ant1	5190	-0.68	0.26	-0.42	≤11.00	PASS
11N40SISO	Ant1	5230	-0.78	0.33	-0.45	≤11.00	PASS
11N40SISO	Ant1	5755	0.43	0.32	0.75	≤30.00	PASS
11N40SISO	Ant1	5795	-0.06	0.33	0.27	≤30.00	PASS
11AC20SISO	Ant1	5180	3.4	0.13	3.53	≤11.00	PASS
11AC20SISO	Ant1	5200	3.66	0.17	3.83	≤11.00	PASS
11AC20SISO	Ant1	5240	3.32	0.17	3.49	≤11.00	PASS
11AC20SISO	Ant1	5745	4.31	0.13	4.44	≤30.00	PASS
11AC20SISO	Ant1	5785	4.03	0.17	4.20	≤30.00	PASS
11AC20SISO	Ant1	5825	3.79	0.17	3.96	≤30.00	PASS
11AC40SISO	Ant1	5190	-0.91	0.32	-0.59	≤11.00	PASS
11AC40SISO	Ant1	5230	0.14	0.33	0.47	≤11.00	PASS
11AC40SISO	Ant1	5755	0.86	0.32	1.18	≤30.00	PASS
11AC40SISO	Ant1	5795	-0.15	0.33	0.18	≤30.00	PASS
11AC80SISO	Ant1	5210	-7.8	0.63	-7.17	≤11.00	PASS
11AC80SISO	Ant1	5775	-2.44	0.50	-1.94	≤30.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.


6.2 Test Graphs

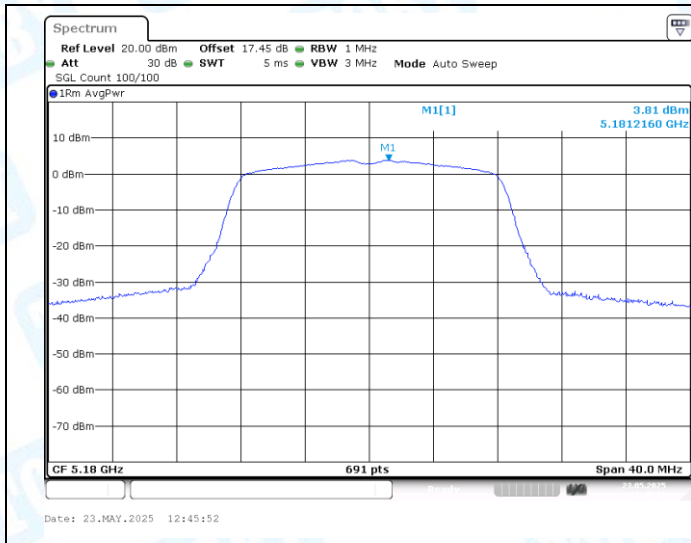


11A-Ant1-5180-PASS

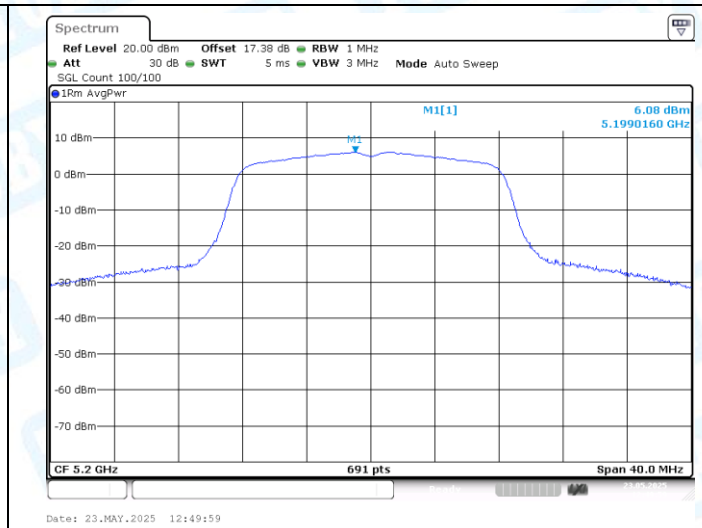


11A-Ant1-5200-PASS

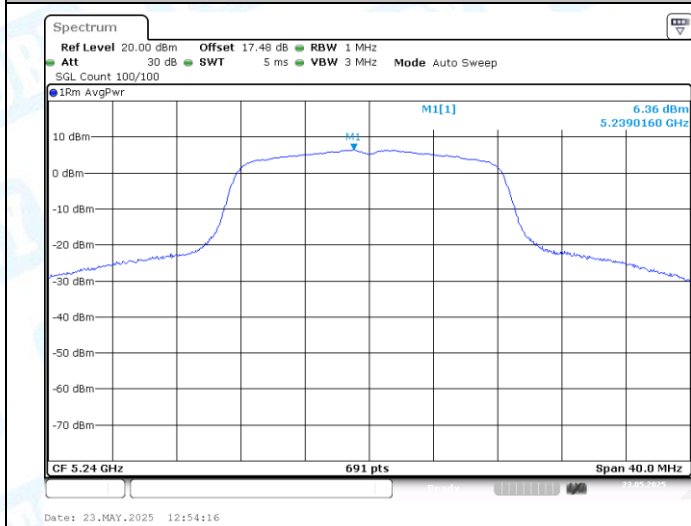


11A-Ant1-5240-PASS

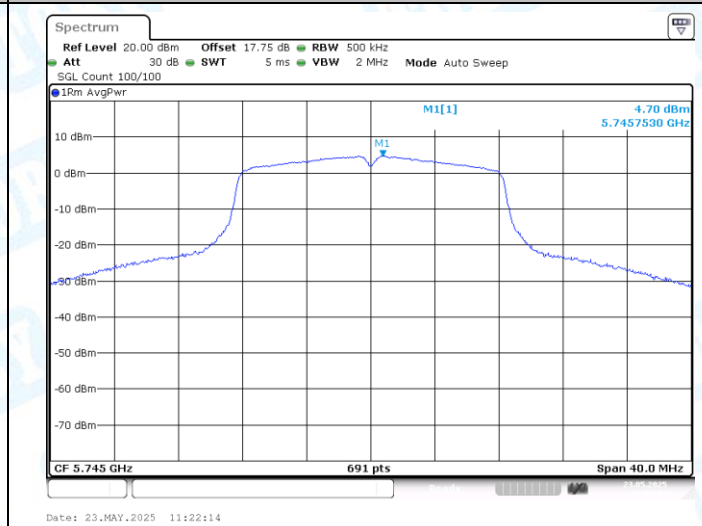


11A-Ant1-5745-PASS

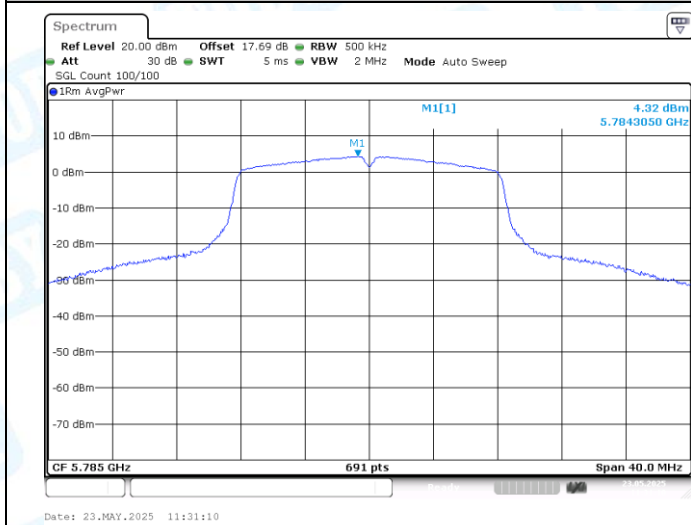

11A-Ant1-5785-PASS

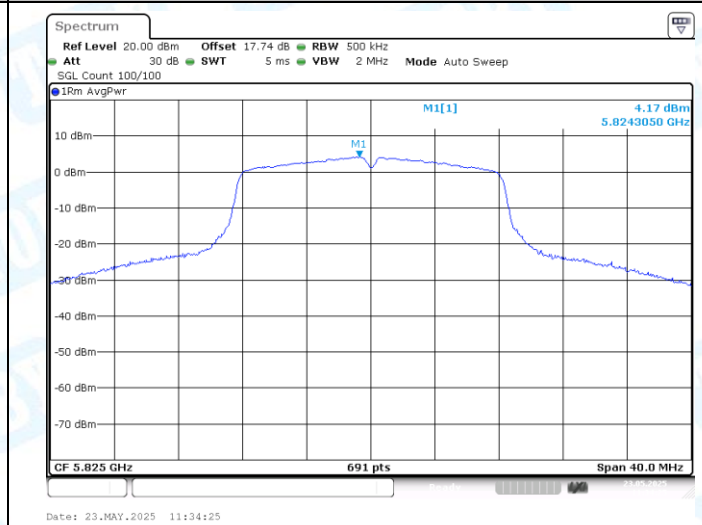


11A-Ant1-5825-PASS

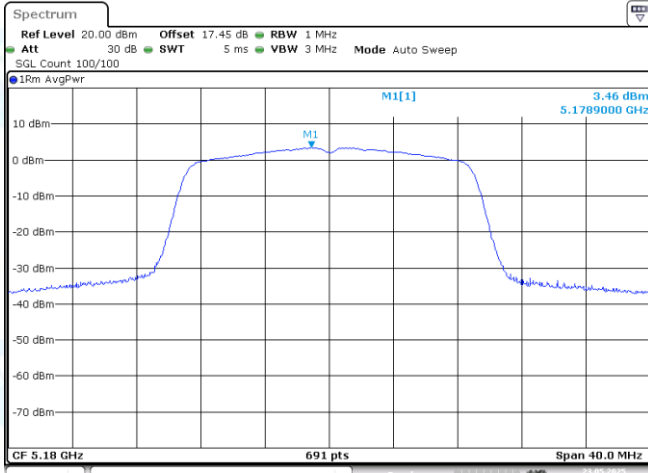


Date: 23.MAY.2025 12:58:49

11N20SISO-Ant1-5180-PASS

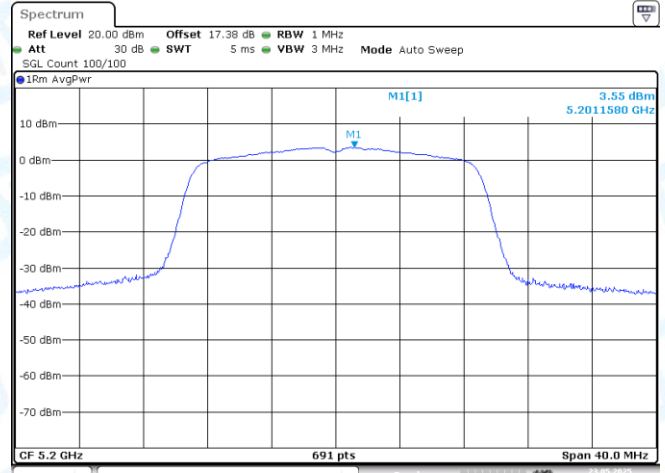


Date: 23.MAY.2025 13:02:25

11N20SISO-Ant1-5200-PASS

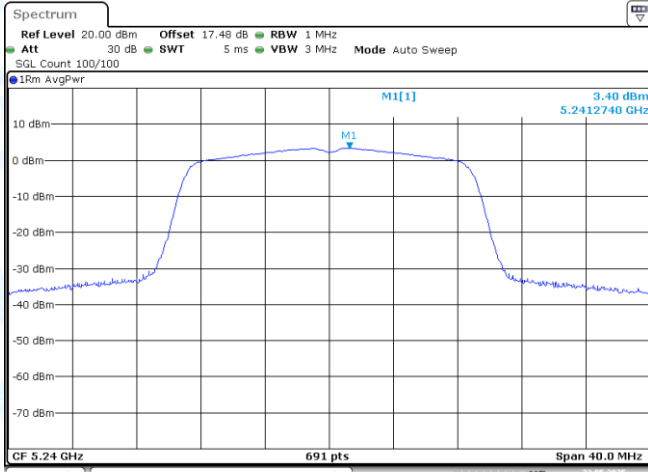


Date: 23.MAY.2025 13:05:37

11N20SISO-Ant1-5240-PASS

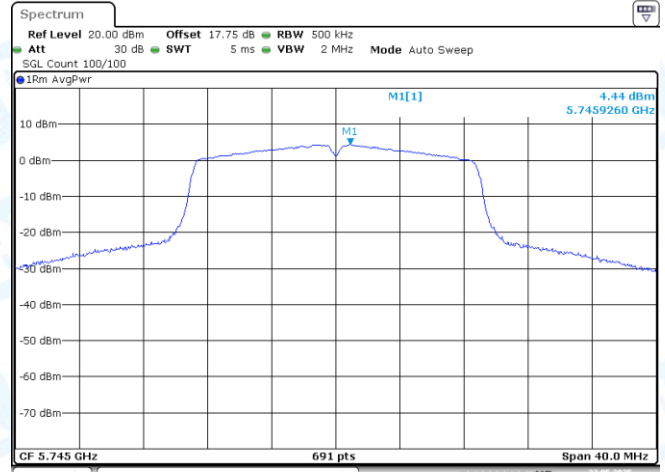


Date: 23.MAY.2025 11:40:38

11N20SISO-Ant1-5240-PASS

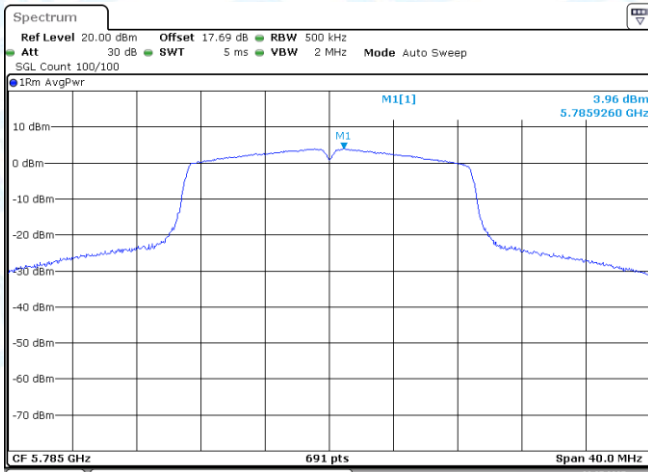


Date: 23.MAY.2025 11:44:26

11N20SISO-Ant1-5745-PASS

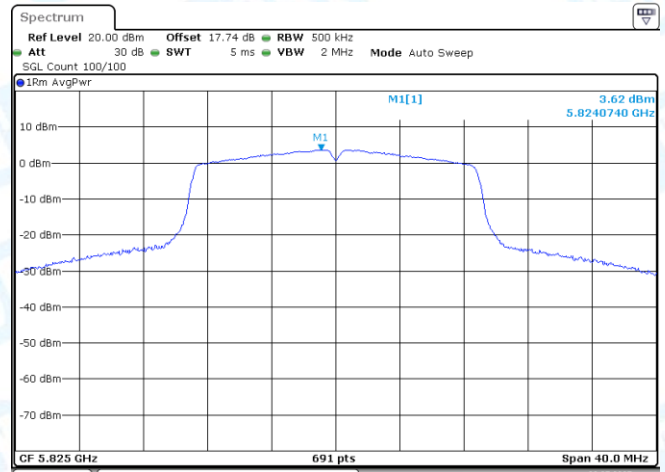


Date: 23.MAY.2025 11:47:41

11N20SISO-Ant1-5785-PASS

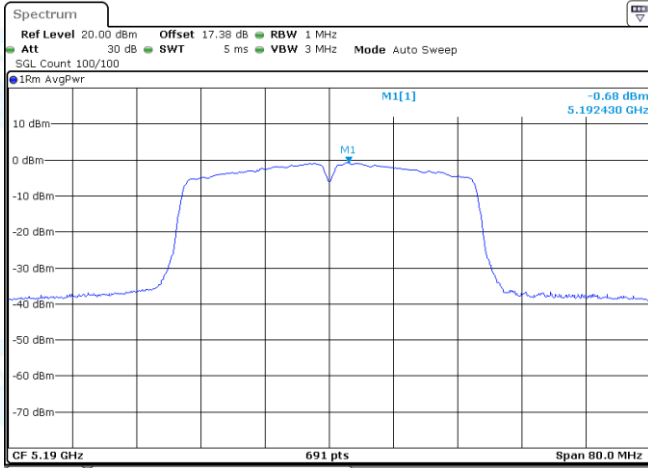


Date: 23.MAY.2025 13:12:20

11N40SISO-Ant1-5190-PASS

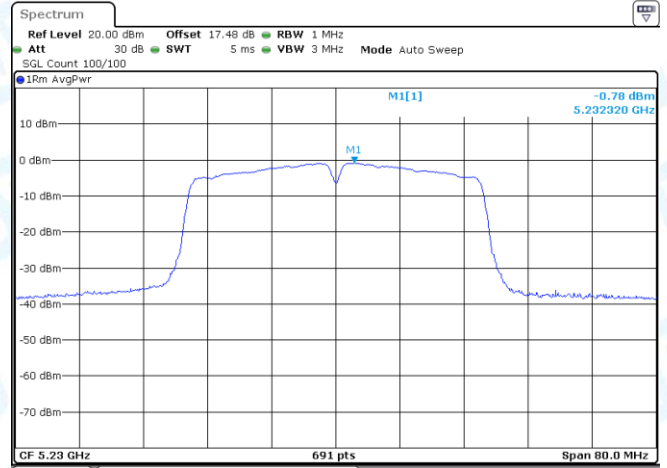


Date: 23.MAY.2025 13:15:55

11N40SISO-Ant1-5230-PASS

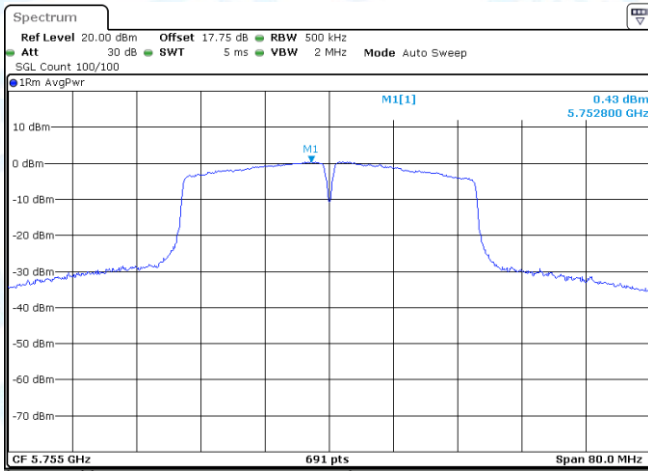


Date: 23.MAY.2025 11:52:18

11N40SISO-Ant1-5755-PASS

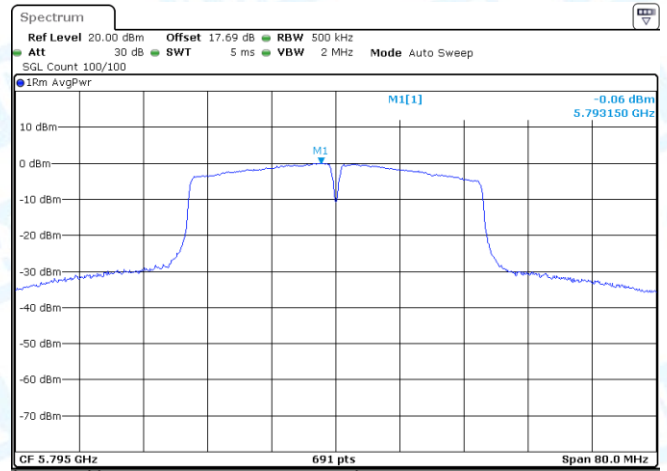


Date: 23.MAY.2025 11:57:20

11N40SISO-Ant1-5795-PASS

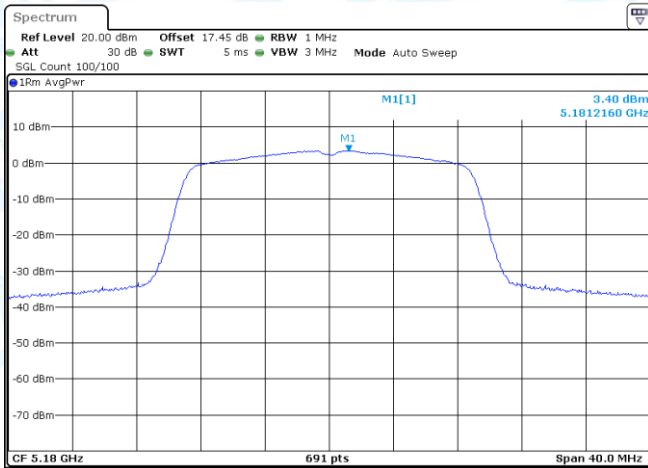


Date: 23.MAY.2025 13:20:52

11AC20SISO-Ant1-5180-PASS

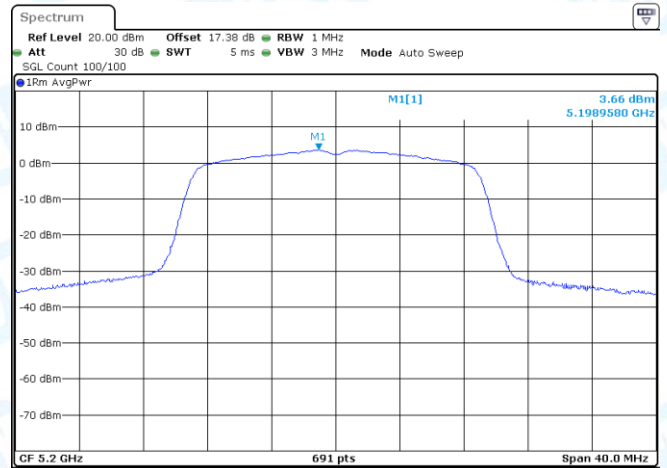


Date: 23.MAY.2025 13:24:33

11AC20SISO-Ant1-5200-PASS

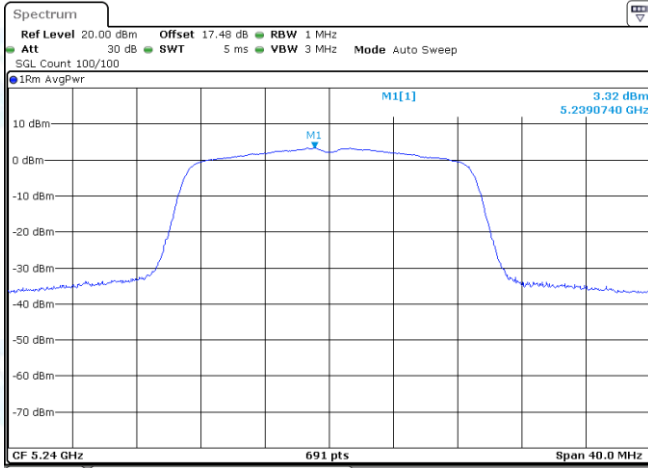


Date: 23.MAY.2025 13:27:55

11AC20SISO-Ant1-5240-PASS

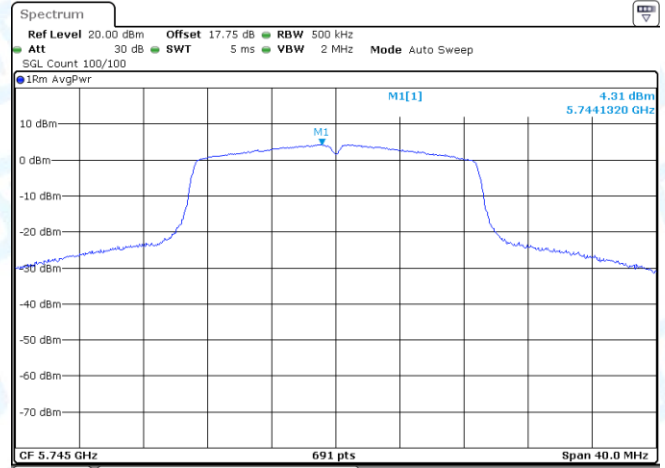


Date: 23.MAY.2025 12:01:54

11AC20SISO-Ant1-5745-PASS

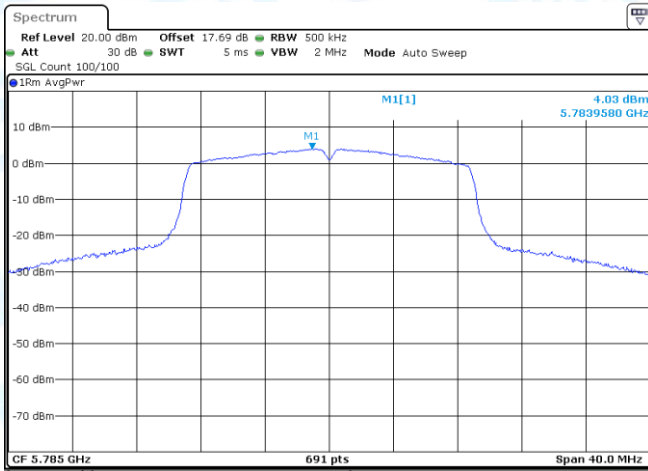


Date: 23.MAY.2025 12:05:50

11AC20SISO-Ant1-5785-PASS

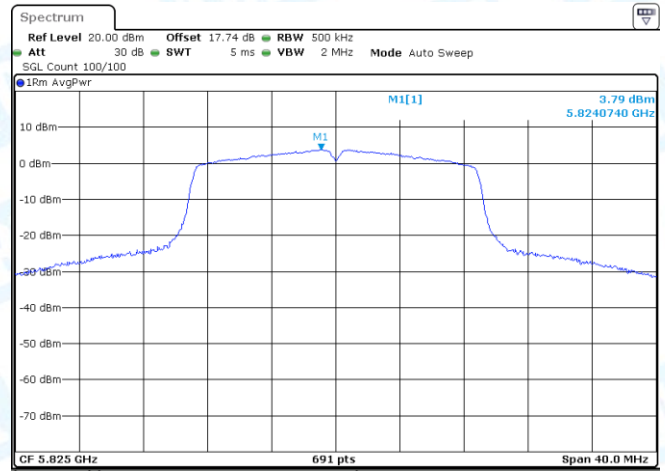


Date: 23.MAY.2025 12:23:42

11AC20SISO-Ant1-5825-PASS

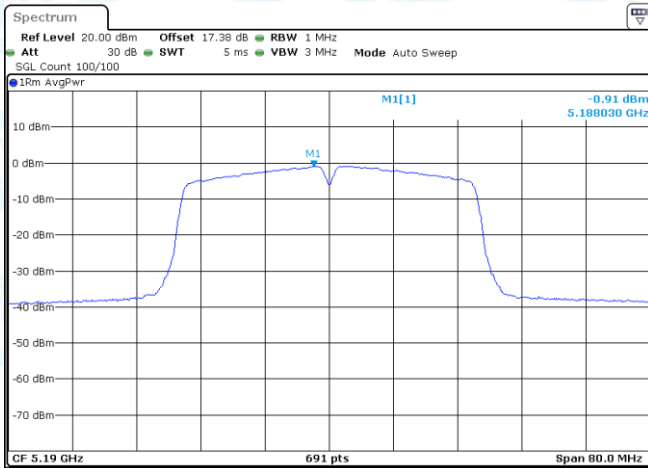


Date: 23.MAY.2025 13:32:16

11AC40SISO-Ant1-5190-PASS

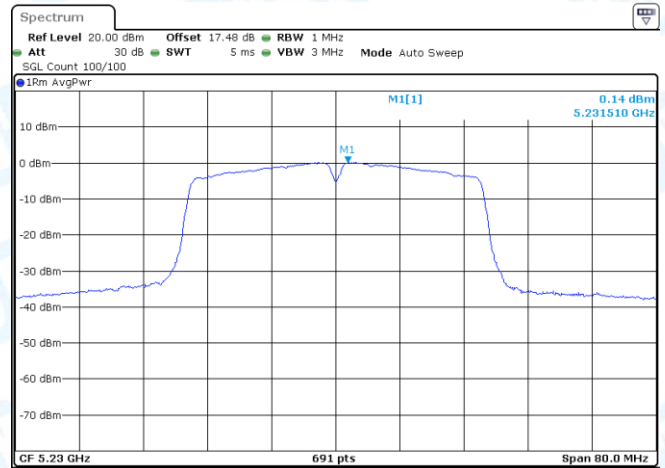


Date: 23.MAY.2025 13:36:35


11AC40SISO-Ant1-5230-PASS

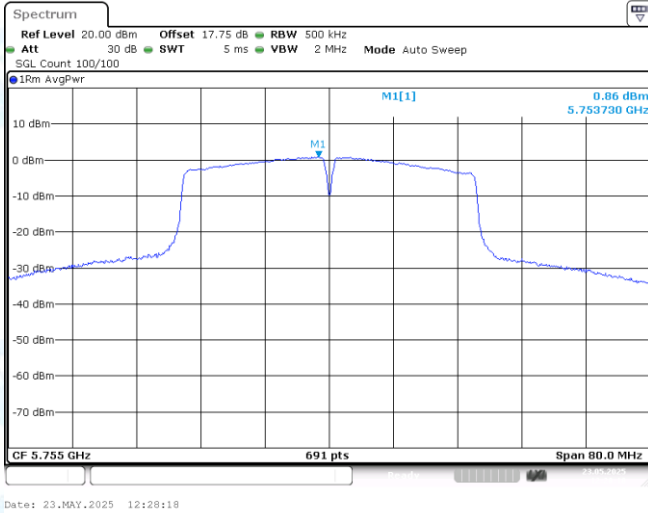


11AC40SISO-Ant1-5755-PASS

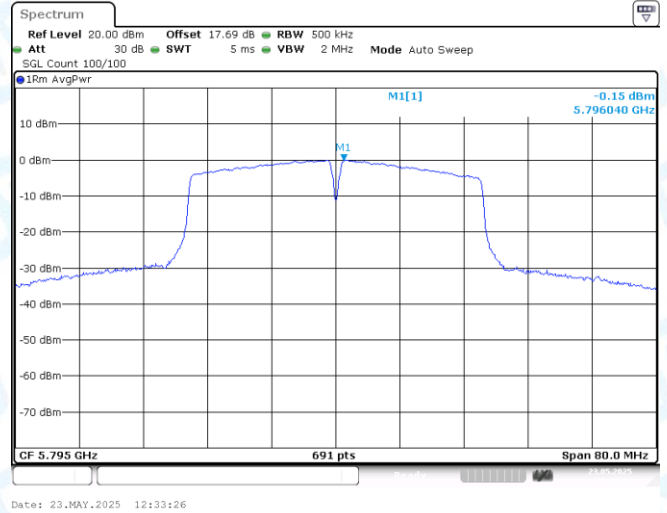

11AC40SISO-Ant1-5795-PASS

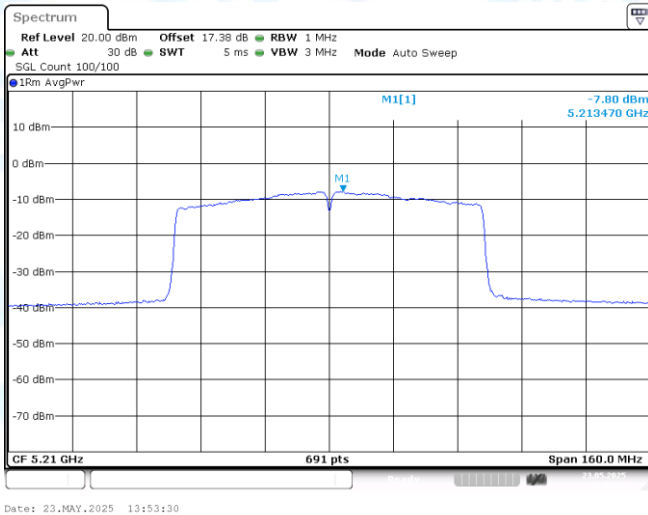

11AC80SISO-Ant1-5210-PASS

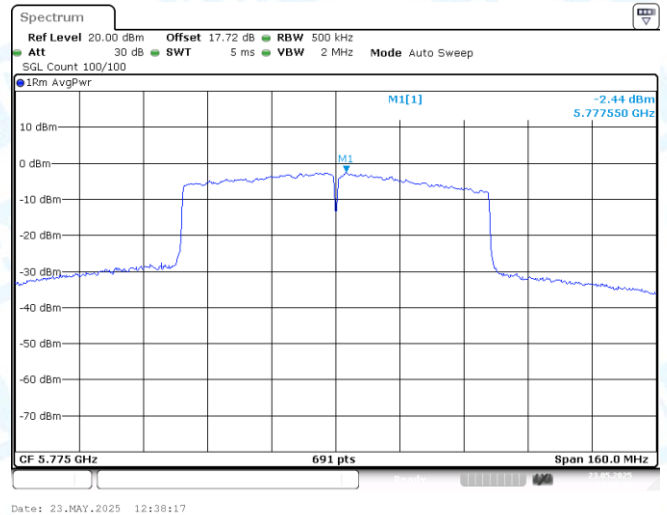

11AC80SISO-Ant1-5775-PASS

7: Band edge measurements

7.1 Test Result B1



TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-27.49	≤ -27	PASS
11A	Ant1	High	5240	-35.06	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-28.17	≤ -27	PASS
11N20SISO	Ant1	High	5240	-35.6	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-27.38	≤ -27	PASS
11N40SISO	Ant1	High	5230	-34.55	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-32.8	≤ -27	PASS
11AC20SISO	Ant1	High	5240	-35.73	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-28.6	≤ -27	PASS
11AC40SISO	Ant1	High	5230	-35.26	≤ -27	PASS
11AC80SISO	Ant1	Low	5210	-32.27	≤ -27	PASS
11AC80SISO	Ant1	High	5210	-36.06	≤ -27	PASS

7.2 Test Result B4


TestMode	Antenna	ChName	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-11.53	≤27.00	PASS
11A	Ant1	Low	5745	5700~5720	-23.93	≤14.43	PASS
11A	Ant1	Low	5745	5650~5700	-35.44	≤-26.63	PASS
11A	Ant1	Low	5745	5760~5650	-35.09	≤-27	PASS
11A	Ant1	High	5825	5850~5855	-25.46	≤16.10	PASS
11A	Ant1	High	5825	5855~5875	-27.68	≤14.51	PASS
11A	Ant1	High	5825	5875~5925	-36.52	≤-26.87	PASS
11A	Ant1	High	5825	5925~5935	-36.35	≤-27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-18.61	≤18.26	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-22.03	≤13.22	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-35.51	≤-26.88	PASS
11N20SISO	Ant1	Low	5745	5760~5650	-36.16	≤-27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-25.75	≤18.33	PASS
11N20SISO	Ant1	High	5825	5855~5875	-27.31	≤15.17	PASS
11N20SISO	Ant1	High	5825	5875~5925	-36.13	≤-26.87	PASS
11N20SISO	Ant1	High	5825	5925~5935	-36.09	≤-27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-18.58	≤15.90	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-18.85	≤11.03	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-36.9	≤-26.94	PASS
11N40SISO	Ant1	Low	5755	5780~5650	-34.92	≤-27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-31.7	≤15.85	PASS
11N40SISO	Ant1	High	5795	5855~5875	-32.18	≤11.21	PASS
11N40SISO	Ant1	High	5795	5875~5925	-36.5	≤-26.44	PASS
11N40SISO	Ant1	High	5795	5925~5935	-35.4	≤-27	PASS
11AC20SISO	Ant1	Low	5745	5720~5725	-13.15	≤25.48	PASS
11AC20SISO	Ant1	Low	5745	5700~5720	-19.19	≤15.23	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-37.38	≤-26.88	PASS
11AC20SISO	Ant1	Low	5745	5760~5650	-35.53	≤-27	PASS
11AC20SISO	Ant1	High	5825	5850~5855	-28.06	≤15.65	PASS
11AC20SISO	Ant1	High	5825	5855~5875	-24.55	≤15.17	PASS
11AC20SISO	Ant1	High	5825	5875~5925	-34.06	≤-26.44	PASS
11AC20SISO	Ant1	High	5825	5925~5935	-35.52	≤-27	PASS
11AC40SISO	Ant1	Low	5755	5720~5725	-13.33	≤19.02	PASS
11AC40SISO	Ant1	Low	5755	5700~5720	-14.49	≤15.09	PASS
11AC40SISO	Ant1	Low	5755	5650~5700	-35.06	≤-26.94	PASS
11AC40SISO	Ant1	Low	5755	5780~5650	-34.77	≤-27	PASS
11AC40SISO	Ant1	High	5795	5850~5855	-30.74	≤15.85	PASS
11AC40SISO	Ant1	High	5795	5855~5875	-32.15	≤12.35	PASS
11AC40SISO	Ant1	High	5795	5875~5925	-37.75	≤-26.08	PASS
11AC40SISO	Ant1	High	5795	5925~5935	-35.67	≤-27	PASS
11AC80SISO	Ant1	Low	5775	5720~5725	-11.09	≤16.18	PASS
11AC80SISO	Ant1	Low	5775	5700~5720	-16.43	≤10.01	PASS

11AC80SISO	Ant1	Low	5775	5650~5700	-31.04	≤-25.88	PASS
11AC80SISO	Ant1	Low	5775	5800~5650	-31.25	≤-27	PASS
11AC80SISO	Ant1	High	5775	5850~5855	-23.21	≤15.98	PASS
11AC80SISO	Ant1	High	5775	5855~5875	-23.4	≤11.89	PASS
11AC80SISO	Ant1	High	5775	5875~5925	-35.82	≤-26.66	PASS
11AC80SISO	Ant1	High	5775	5925~5935	-34.12	≤-27	PASS


7.3 Test Graphs B1

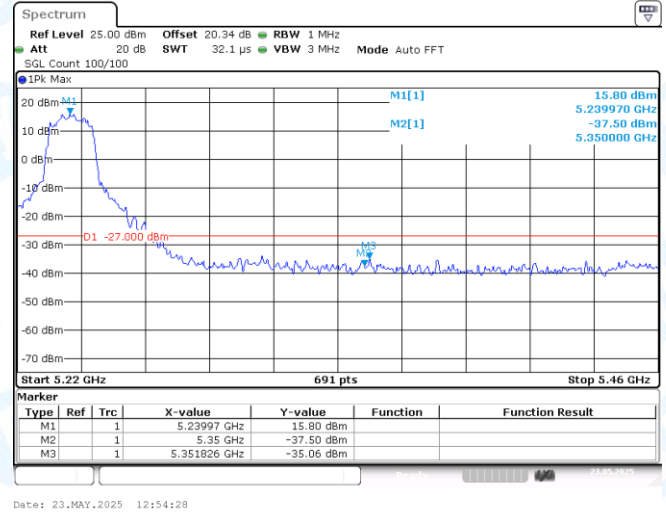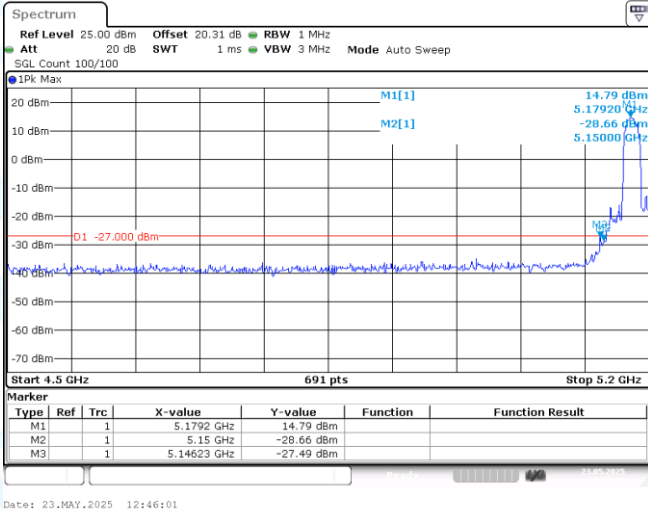


11A-Ant1-5180-PASS

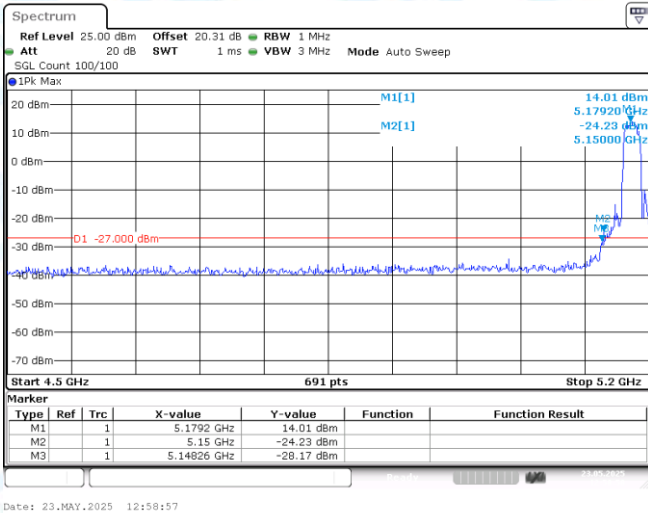


11A-Ant1-5240-PASS

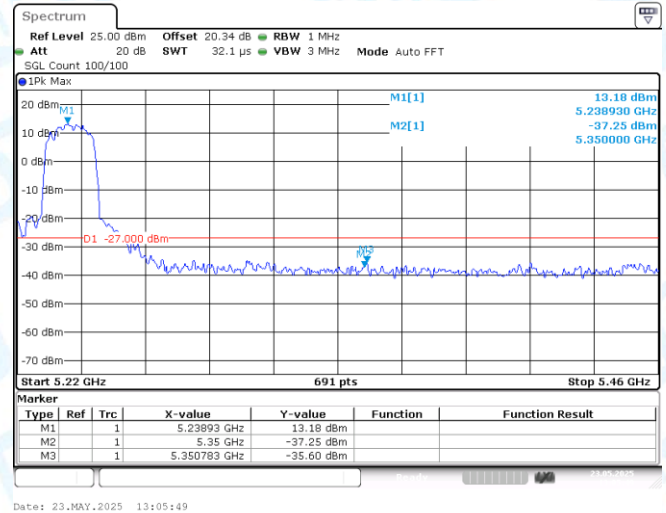

11N20SISO-Ant1-5180-PASS

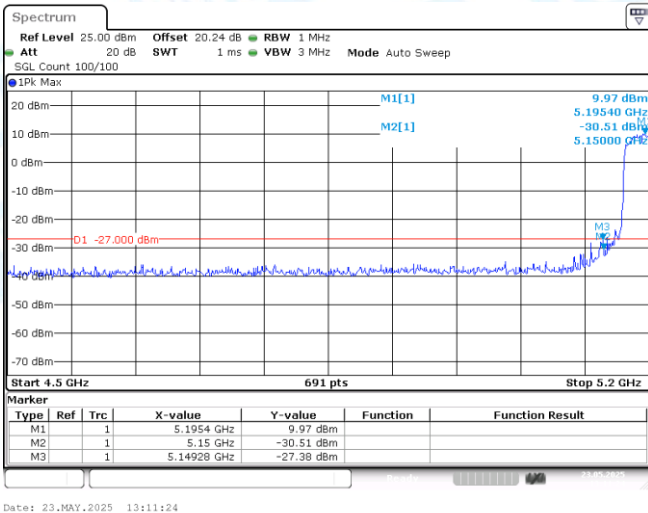


11N20SISO-Ant1-5240-PASS

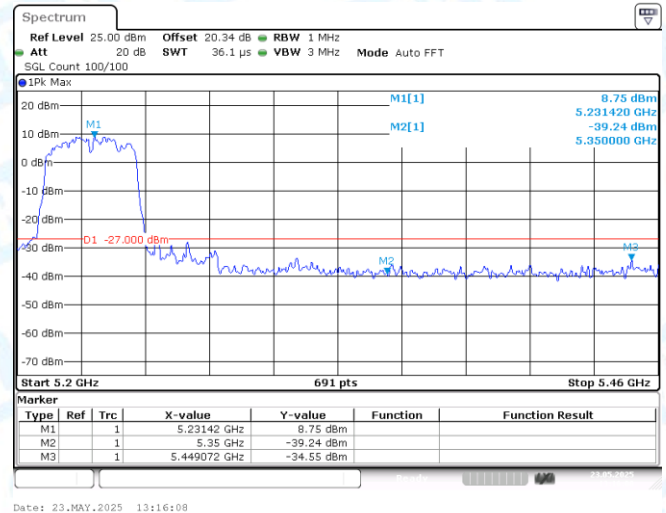


11N40SISO-Ant1-5190-PASS


11N40SISO-Ant1-5230-PASS

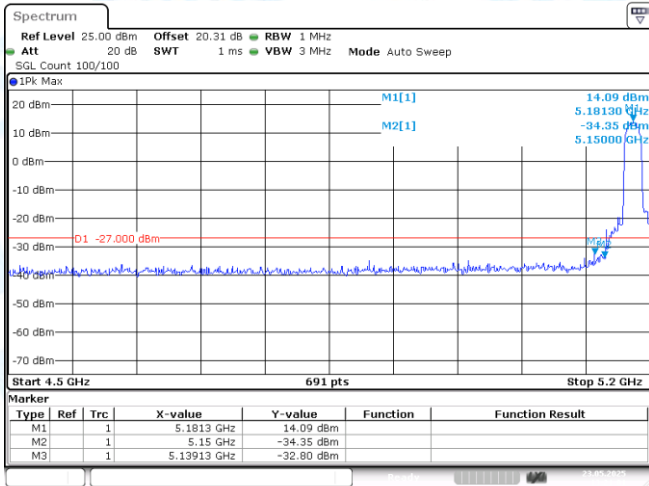


11AC20SISO-Ant1-5180-PASS

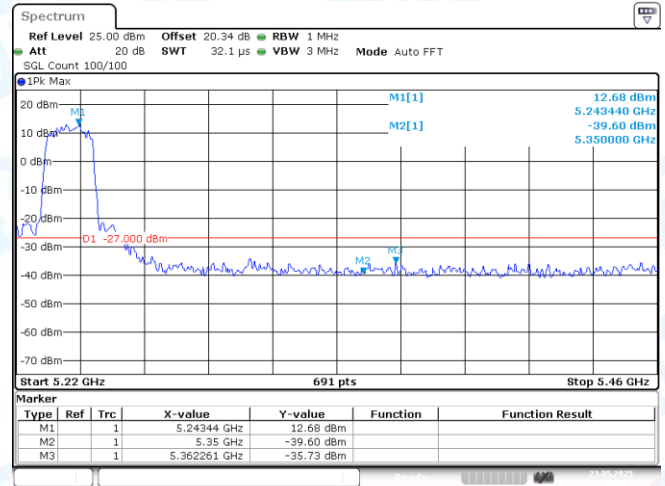


11AC20SISO-Ant1-5240-PASS

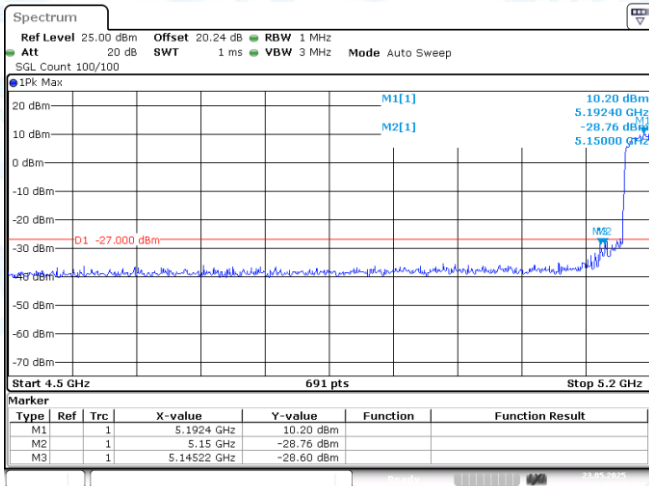


11AC20SISO-Ant1-5190-PASS

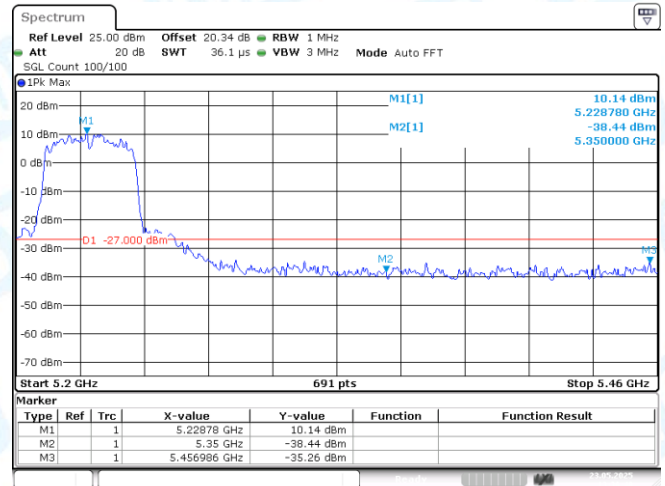

11AC20SISO-Ant1-5230-PASS

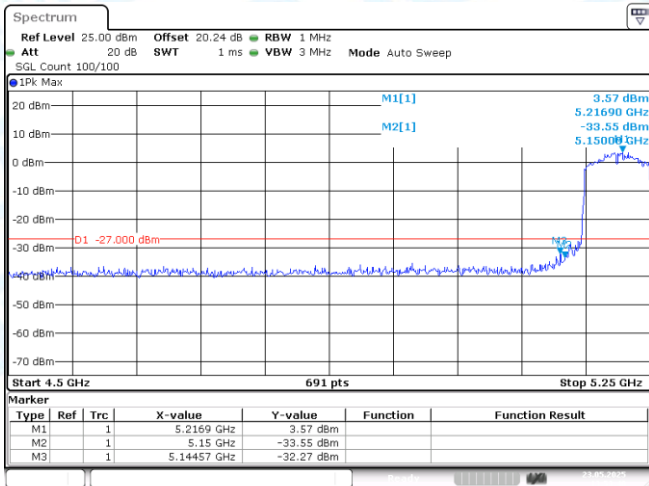

11AC40SISO-Ant1-5190-PASS

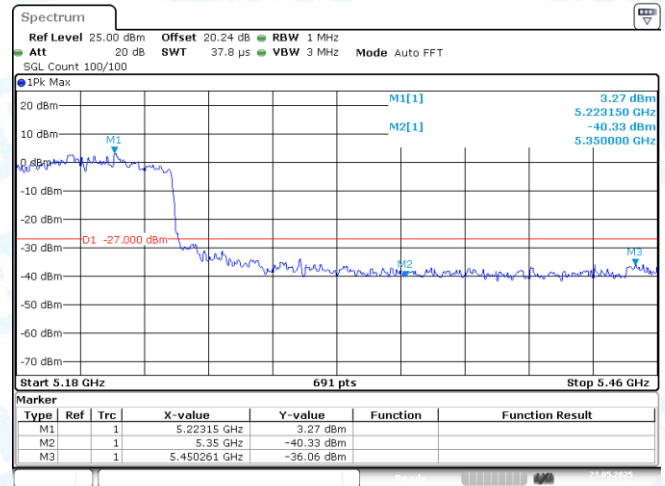

11AC40SISO-Ant1-5230-PASS





11AC80SISO-Ant1-5210-PASS




11AC80SISO-Ant1-5210-PASS

7.4 Test Graphs B4

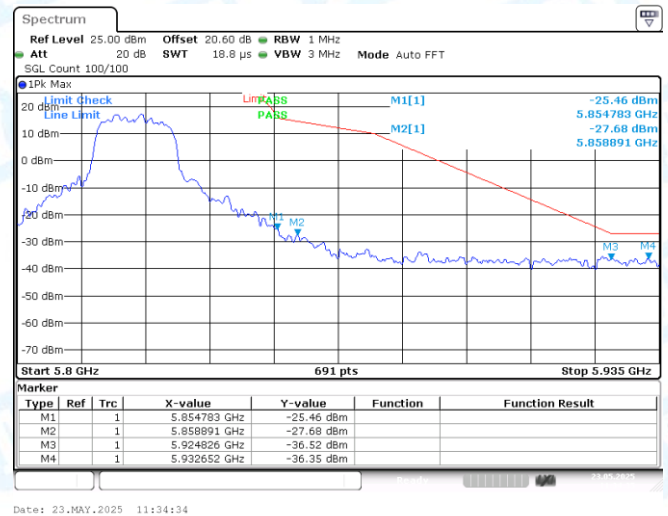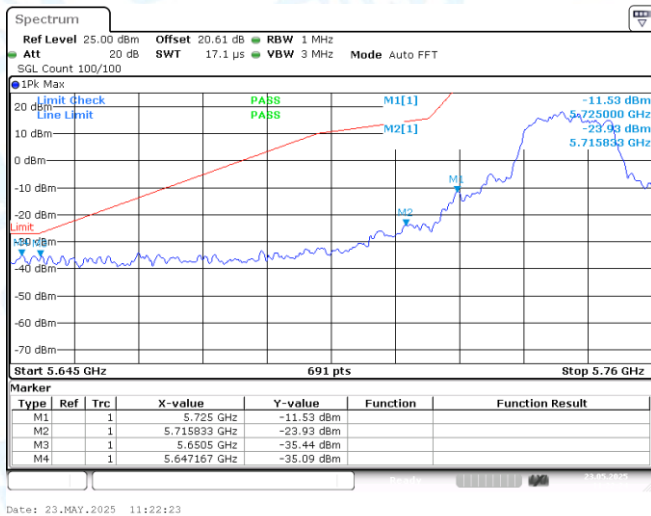



11A-Ant1-5745-PASS

11A-Ant1-5825-PASS

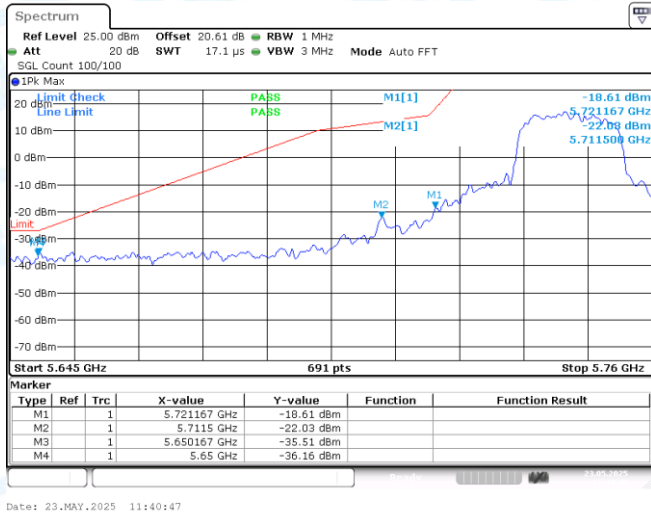

11N20SISO-Ant1-5745-PASS

11N20SISO-Ant1-5825-PASS

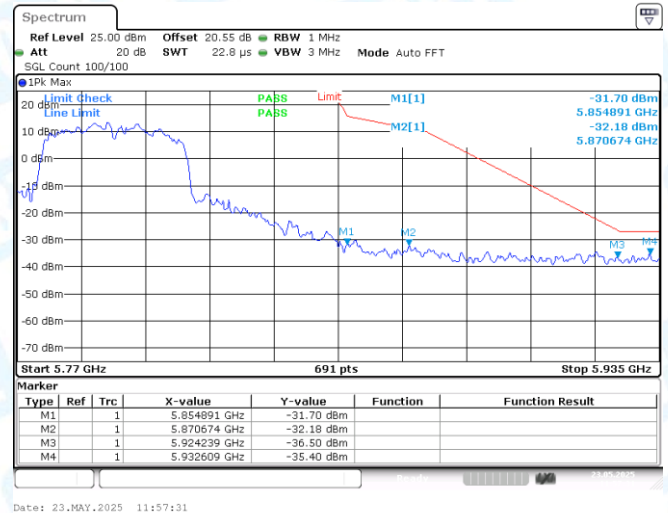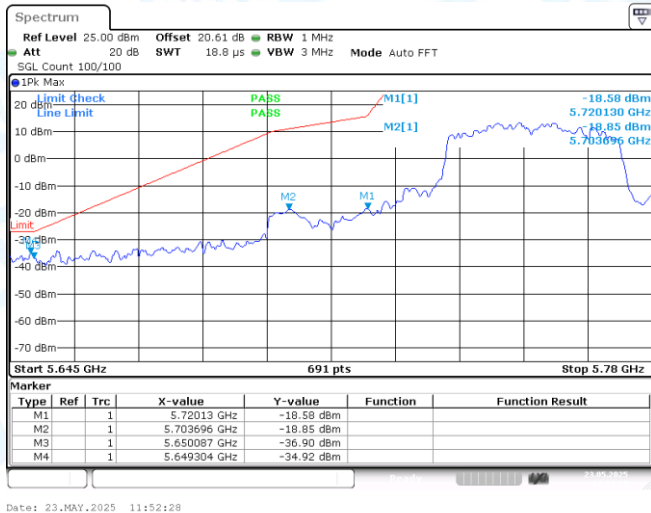

11N40SISO-Ant1-5755-PASS

11N40SISO-Ant1-5795-PASS