

FCC Part 15C Test Report

FCC ID:2A36MCM-I310M

Applicant: Shenzhen Anjia Information Technology Co., Ltd.

Address: No. 13, Anye Road, Anliang Community, Yuanshan Street, Longgang District, Shenzhen, Guangdong, China

Manufacturer: Shenzhen Anjia Information Technology Co., Ltd.

Address: No. 13, Anye Road, Anliang Community, Yuanshan Street, Longgang District, Shenzhen, Guangdong, China

EUT: HD Smart camera

Trade Mark: N/A

Model Number: CM-I310M

Date of Receipt: Jun. 25, 2023

Test Date: Jun. 25, 2023 – Jul. 10, 2023

Date of Report: Jul. 10, 2023

Prepared By: BTF Testing Lab (Shenzhen) Co., Ltd.

Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: BTF230714R00501

Reviewer (Supervisor): Jack Bu

Approved (Manager): Ryan.CJ



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of BTF Testing Lab (Shenzhen) Co., Ltd.

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	17
3.2.5 EUT OPERATING CONDITIONS	18
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	19
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	20
3.2.8 TEST RESULTS (1GHZ~25GHZ)	22
3.3 RADIATED BAND EMISSION MEASUREMENT	27
3.3.1 TEST REQUIREMENT:	27
3.3.2 TEST PROCEDURE	27
3.3.3 DEVIATION FROM TEST STANDARD	27
3.3.4 TEST SETUP	28
3.3.5 EUT OPERATING CONDITIONS	28
4 . AVERAGE OUTPUT POWER	33
4.1 APPLIED PROCEDURES / LIMIT	33
4.1.1 TEST PROCEDURE	33
4.1.2 DEVIATION FROM STANDARD	33

Table of Contents	Page
4.1.3 TEST SETUP	33
4.1.4 EUT OPERATION CONDITIONS	33
4.1.5 TEST RESULTS	33
5 . POWER SPECTRAL DENSITY TEST	34
5.1 APPLIED PROCEDURES / LIMIT	34
5.1.1 TEST PROCEDURE	34
5.1.2 DEVIATION FROM STANDARD	34
5.1.3 TEST SETUP	34
5.1.4 EUT OPERATION CONDITIONS	34
5.1.5 TEST RESULTS	34
6 . 6DB BANDWIDTH TEST	35
6.1 APPLIED PROCEDURES / LIMIT	35
6.1.1 TEST PROCEDURE	35
6.1.2 DEVIATION FROM STANDARD	35
6.1.3 TEST SETUP	35
6.1.4 EUT OPERATION CONDITIONS	35
6.1.5 TEST RESULTS	35
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	36
7.1 APPLIED PROCEDURES / LIMIT	36
7.1.1 TEST PROCEDURE	36
7.1.2 DEVIATION FROM STANDARD	36
7.1.3 TEST SETUP	36
7.1.4 EUT OPERATION CONDITIONS	36
7.1.5 TEST RESULTS	36
8 . ANTENNA REQUIREMENT	37
8.1 STANDARD REQUIREMENT	37
8.2 EUT ANTENNA	37
9 . TEST SEUUP PHOTO	38
10 . EUT PHOTO	39

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d), 15.205, 15.209	Radiated Spurious Emission	PASS	
15.247(d), 15.209	Band Edge Emission	PASS	
15.247(b)(4)	Average Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	HD Smart camera
Trademark	N/A
Model No.:	CM-I310M
Model Difference	N/A
Operation Frequency:	2412~2462 MHz for 802.11ax/b/g/nHT20 2422~2452 MHz for 802.11ax/nHT40
Channel numbers:	11 Channels for 802.11ax/b/g/nHT20 7 channels for 802.11ax/nHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11ax/g/n(20/40): DSSS (CCK, DQPSK,DBPSK)+OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps
Antenna Type:	Internal Antenna
Antenna gain:	3.03dBi
Power supply:	DC 5V from charger

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

2. Channel List(802.11ax/b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		

Channel List(802.11ax/nHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		

2.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode
For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode
For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode


Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	HD Smart camera	CM-I310M	N/A	EUT
E-2	Charger(Provide by test lab)	DY12V10	002	Manufacturer: RUN SHENG FENG TECHNOLOGY Model:RSF-DY080A-0502000US Input: AC 100-240V 50/60Hz Output: DC 5V/2A

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: Wifi Test Toolv1.4.1			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	6Mbps	MSC0	MSC0
Power Setting of Softwave	15	15	13	12

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Maximum Conducted Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Power Spectral Density					
------------------------	--	--	--	--	--

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in non-restricted frequency bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Band edge emissions (Radiated)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2022-03-26	2023-03-25
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST	ROHDE&SCHWA	ESCI7	101032	2022-11-24	2023-11-23

RECEIVER	RZ				
SIGNAL ANALYZER	ROHDE&SCHWA RZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2022-03-26	2023-03-25
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2022-03-26	2023-03-25
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWA RZ	ESCi7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWA RZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2022-03-26	2023-03-25
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2022-03-26	2023-03-25
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1	21101568	2022-11-24	2023-11-23

		m			
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2022-03-26	2023-03-25
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	50.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

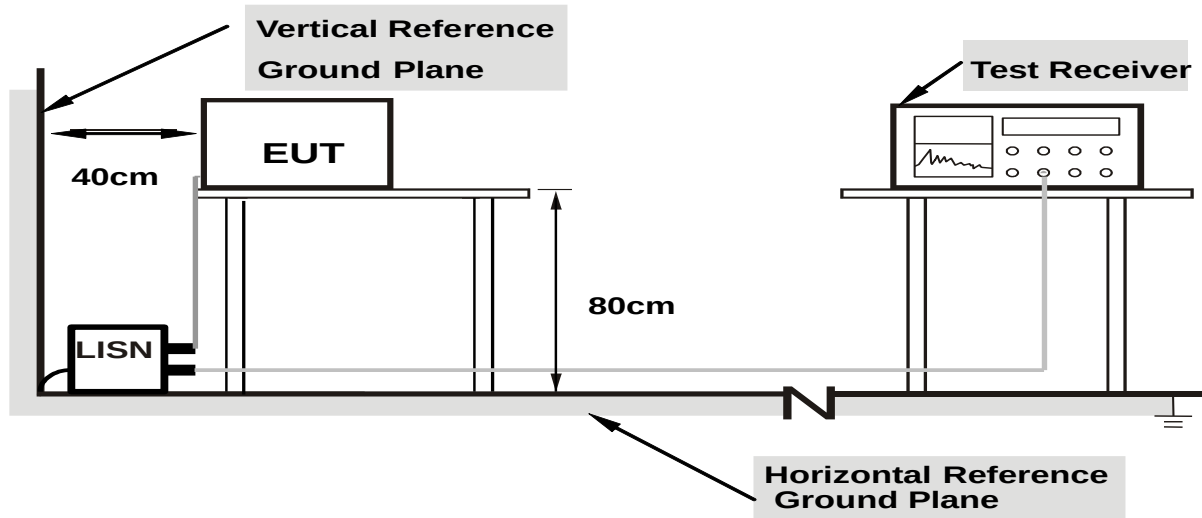

- Note:** 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

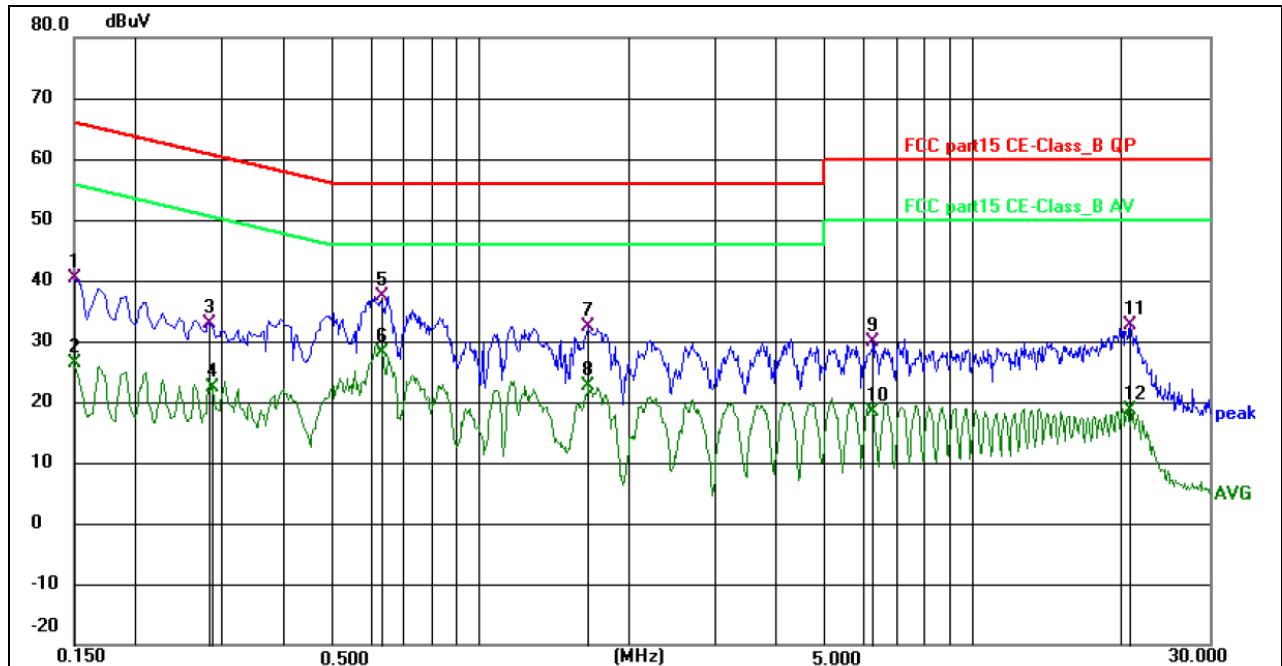


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.150000	29.85	10.50	40.35	66.00	-25.65	QP	P	
2	0.150000	15.95	10.50	26.45	56.00	-29.55	AVG	P	
3	0.280500	23.76	9.13	32.89	60.80	-27.91	QP	P	
4	0.285000	13.28	9.10	22.38	50.67	-28.29	AVG	P	
5	0.631500	28.16	9.34	37.50	56.00	-18.50	QP	P	
6 *	0.631500	18.89	9.34	28.23	46.00	-17.77	AVG	P	
7	1.653000	22.73	9.66	32.39	56.00	-23.61	QP	P	
8	1.653000	12.92	9.66	22.58	46.00	-23.42	AVG	P	
9	6.238500	20.15	9.71	29.86	60.00	-30.14	QP	P	
10	6.238500	8.65	9.71	18.36	50.00	-31.64	AVG	P	
11	20.773500	21.99	10.55	32.54	60.00	-27.46	QP	P	
12	20.773500	8.07	10.55	18.62	50.00	-31.38	AVG	P	

Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

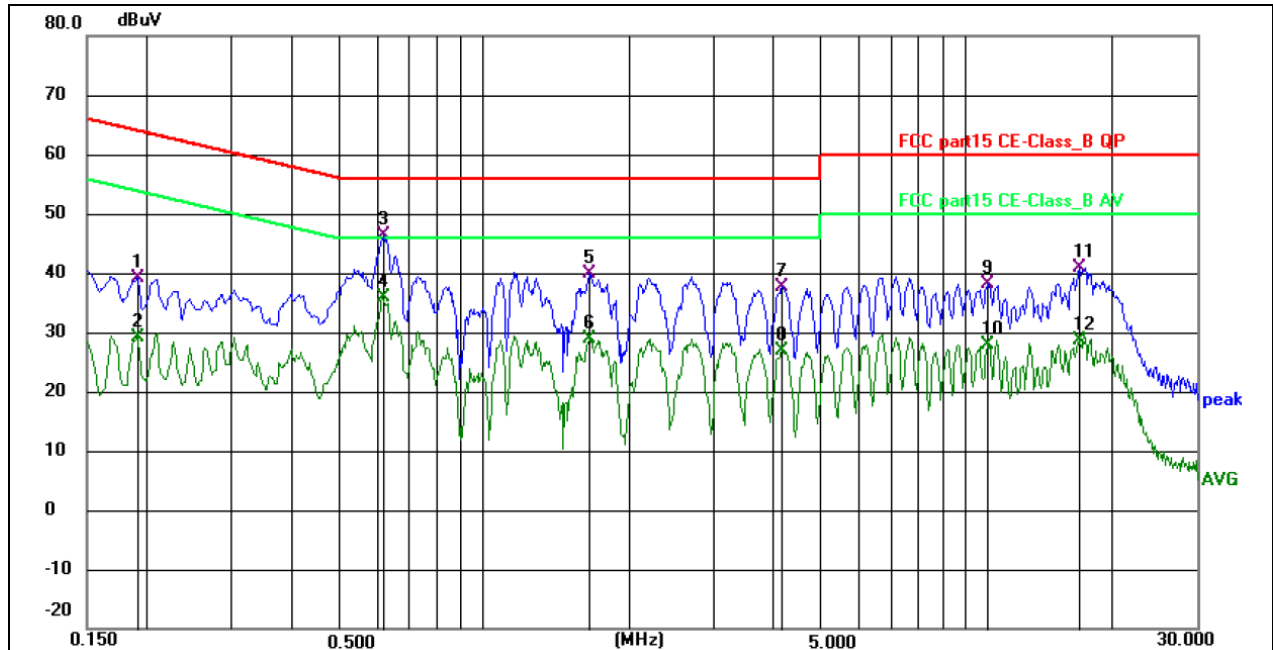

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.190500	29.93	9.13	39.06	64.01	-24.95	QP	P	
2	0.190500	19.91	9.13	29.04	54.01	-24.97	AVG	P	
3 *	0.618000	37.02	9.24	46.26	56.00	-9.74	QP	P	
4	0.618000	26.54	9.24	35.78	46.00	-10.22	AVG	P	
5	1.657500	30.15	9.69	39.84	56.00	-16.16	QP	P	
6	1.657500	19.28	9.69	28.97	46.00	-17.03	AVG	P	
7	4.150500	27.82	9.80	37.62	56.00	-18.38	QP	P	
8	4.150500	17.10	9.80	26.90	46.00	-19.10	AVG	P	
9	11.044400	28.13	10.12	38.25	60.00	-21.75	QP	P	
10	11.044400	17.88	10.12	28.00	50.00	-22.00	AVG	P	
11	17.155500	30.51	10.34	40.85	60.00	-19.15	QP	P	
12	17.155500	18.41	10.34	28.75	50.00	-21.25	AVG	P	

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 0.8 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to all antenna,. The worst case was antenna 1 and emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

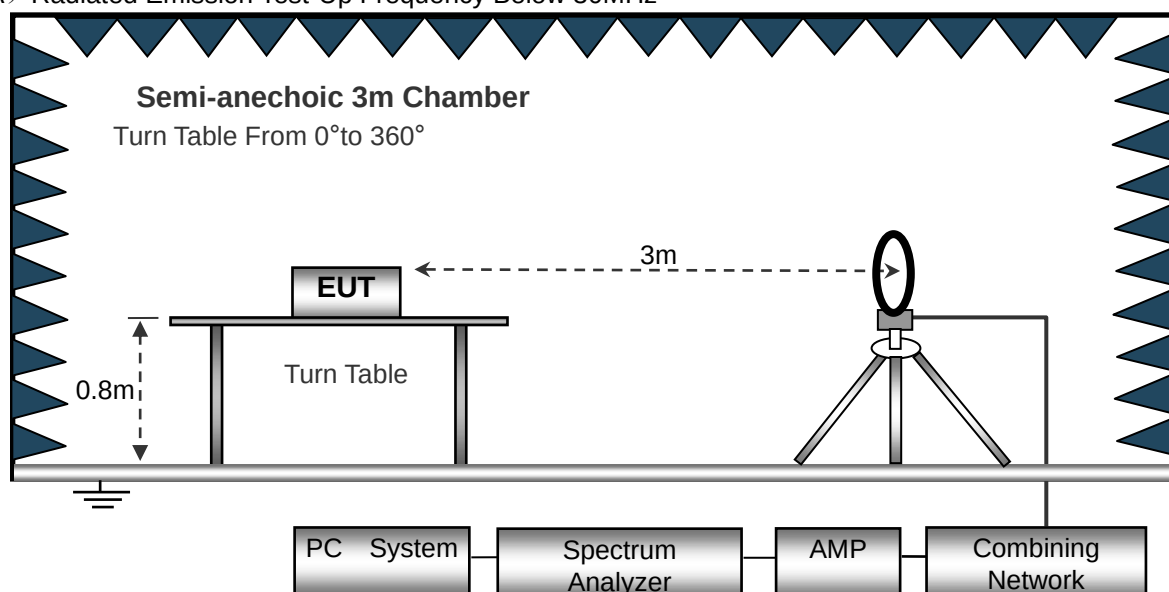

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

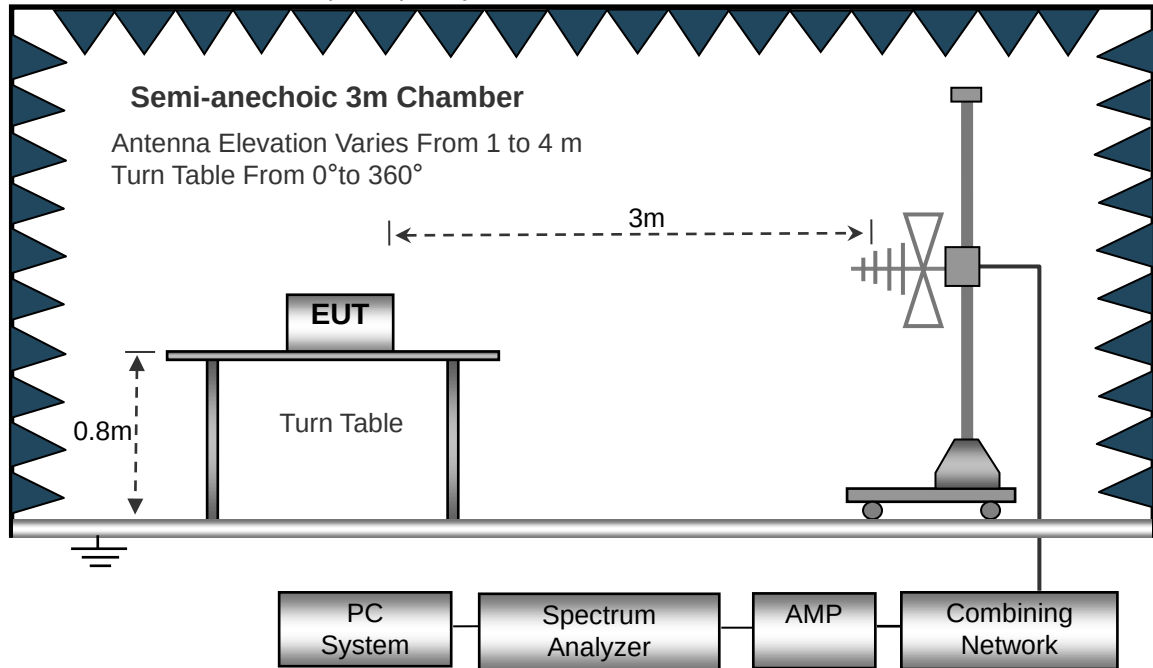

(C) Radiated Emission Test-Up Frequency Above 1GHz

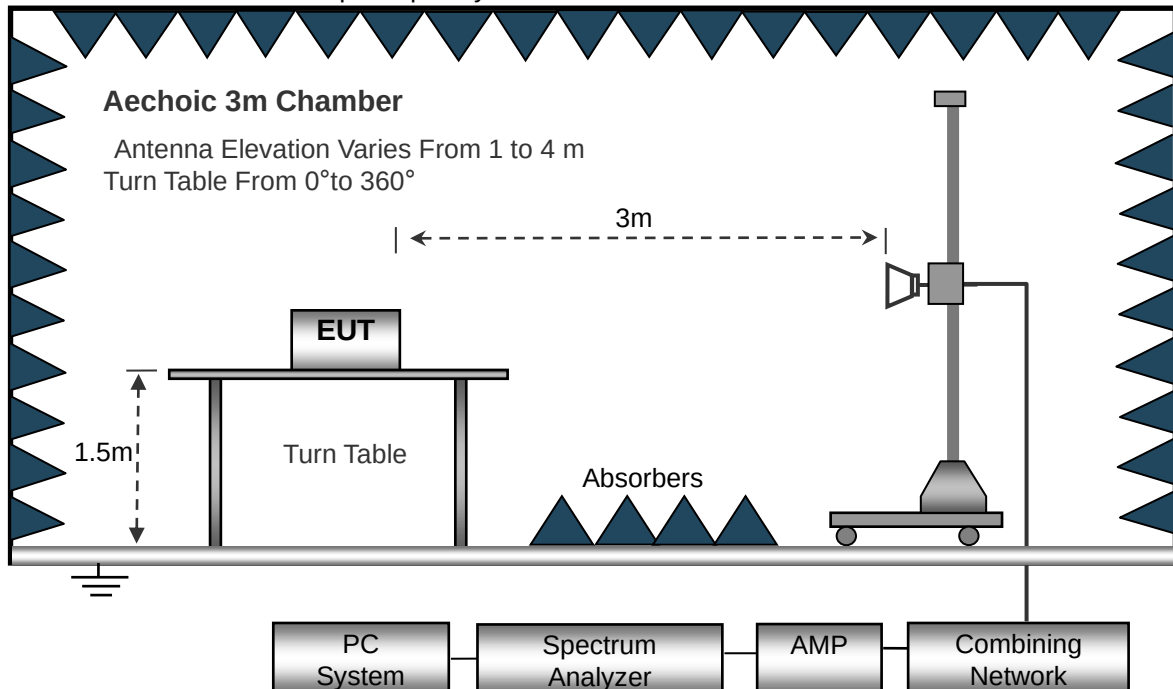

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

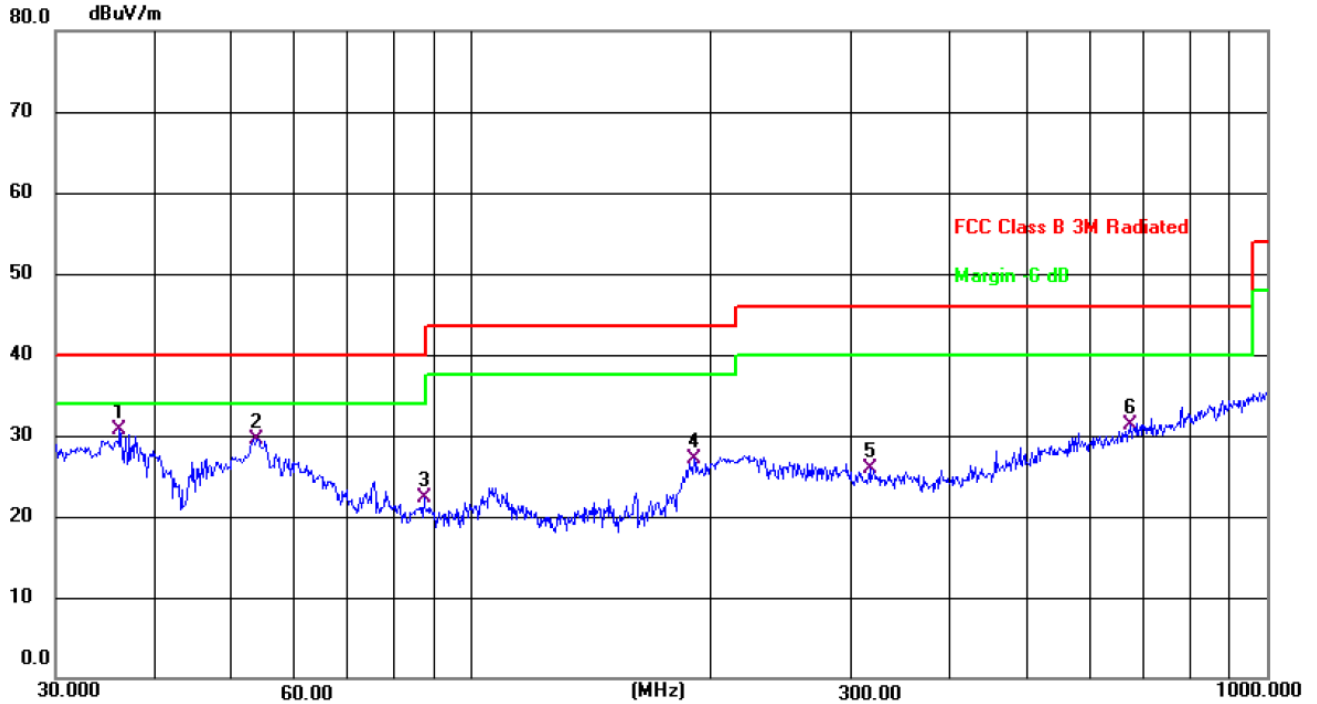


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1	*	36.1269	44.09	-13.46	30.63	40.00	-9.37	QP
2		53.6931	41.00	-11.42	29.58	40.00	-10.42	QP
3		87.1115	37.97	-15.59	22.38	40.00	-17.62	QP
4		190.4050	40.77	-13.70	27.07	43.50	-16.43	QP
5		316.5889	35.21	-9.39	25.82	46.00	-20.18	QP
6		672.8442	34.45	-3.17	31.28	46.00	-14.72	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

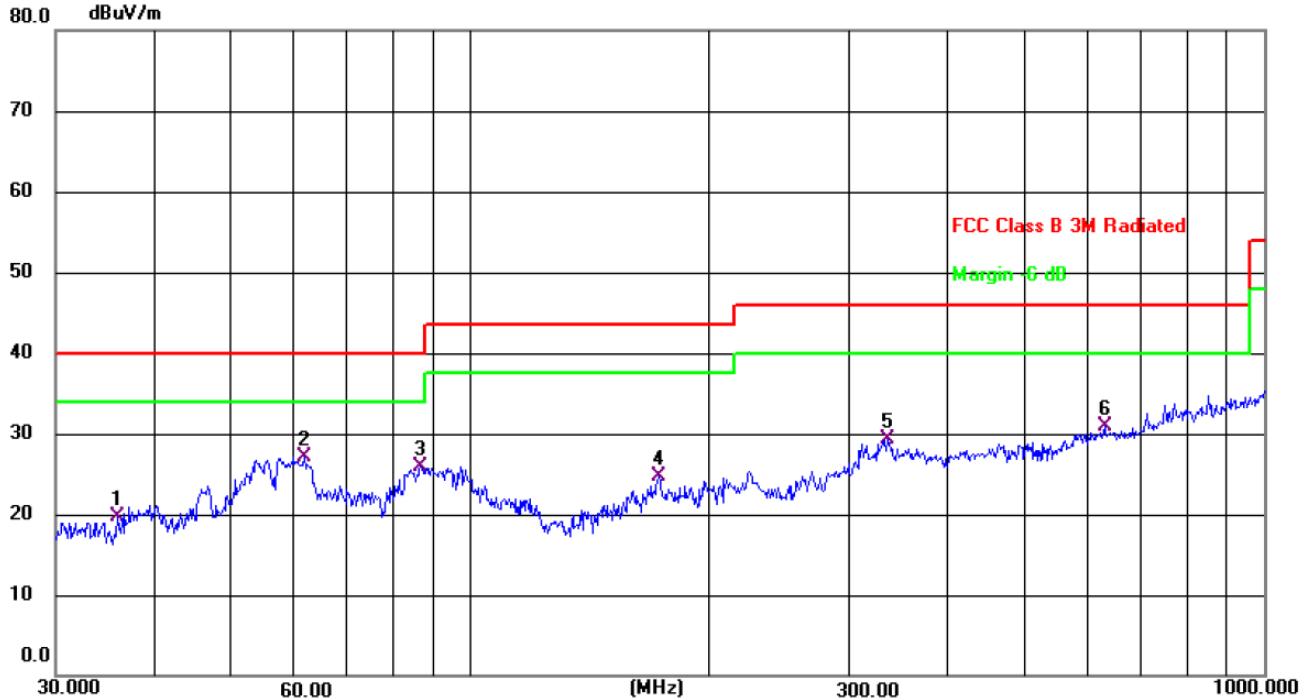

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		35.8746	32.87	-13.17	19.70	40.00	-20.30	QP
2	*	61.7779	38.81	-11.65	27.16	40.00	-12.84	QP
3		86.5027	41.88	-15.89	25.99	40.00	-14.01	QP
4		172.5987	39.64	-14.99	24.65	43.50	-18.85	QP
5		334.8586	39.44	-10.21	29.23	46.00	-16.77	QP
6		629.4772	35.96	-5.14	30.82	46.00	-15.18	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	68.04	50.65	6.88	31.29	55.56	74	-18.44	PK
V	4824	56.14	50.65	6.88	31.29	43.66	54	-10.34	AV
V	7236	67.30	49.98	7.16	36.63	61.11	74	-12.89	PK
V	7236	46.54	49.98	7.16	36.63	40.35	54	-13.65	AV
V	16103	50.32	51.53	11.34	41.52	51.65	74	-22.35	PK
H	4824	69.93	50.65	6.88	31.29	57.45	74	-16.55	PK
H	4824	52.92	50.65	6.88	31.29	40.44	54	-13.56	AV
H	7236	66.71	49.98	7.16	36.63	60.52	74	-13.48	PK
H	7236	47.94	49.98	7.16	36.63	41.75	54	-12.25	AV
H	16103	47.86	51.53	11.34	41.52	49.19	74	-24.81	PK
operation frequency:2437									
V	4874	67.98	50.67	6.89	31.38	55.58	74	-18.42	PK
V	4874	55.60	50.67	6.89	31.38	43.20	54	-10.80	AV
V	7311	67.11	50.02	7.24	36.63	60.96	74	-13.04	PK
V	7311	46.66	50.02	7.24	36.63	40.51	54	-13.49	AV
V	16103	48.79	51.53	11.34	41.52	50.12	74	-23.88	PK
H	4874	66.95	50.67	6.89	31.38	54.55	74	-19.45	PK
H	4874	55.83	50.67	6.89	31.38	43.43	54	-10.57	AV
H	7311	66.21	50.02	7.24	36.63	60.06	74	-13.94	PK
H	7311	47.64	50.02	7.24	36.63	41.49	54	-12.51	AV
H	16103	48.57	51.53	11.34	41.52	49.90	74	-24.10	PK
operation frequency:2462									
V	4924	67.61	50.79	6.83	31.36	55.01	74	-18.99	PK
V	4924	56.17	50.79	6.83	31.36	43.57	54	-10.43	AV
V	7386	67.42	50.11	7.25	36.58	61.14	74	-12.86	PK
V	7386	47.67	50.11	7.25	36.58	41.39	54	-12.61	AV
V	16103	46.94	51.53	11.34	41.52	48.27	74	-25.73	PK
H	4924	66.81	50.79	6.83	31.36	54.21	74	-19.79	PK
H	4924	54.81	50.79	6.83	31.36	42.21	54	-11.79	AV
H	7386	66.15	50.11	7.25	36.58	59.87	74	-14.13	PK
H	7386	46.02	50.11	7.25	36.58	39.74	54	-14.26	AV
H	16103	47.79	51.53	11.34	41.52	49.12	74	-24.88	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	66.89	50.65	6.88	31.29	54.41	74	-19.59	PK
V	4824	55.75	50.65	6.88	31.29	43.27	54	-10.73	AV
V	7236	67.03	49.98	7.16	36.63	60.84	74	-13.16	PK
V	7236	46.75	49.98	7.16	36.63	40.56	54	-13.44	AV
V	16103	46.62	51.53	11.34	41.52	47.95	74	-26.05	PK
H	4824	67.10	50.65	6.88	31.29	54.62	74	-19.38	PK
H	4824	56.17	50.65	6.88	31.29	43.69	54	-10.31	AV
H	7236	65.18	49.98	7.16	36.63	58.99	74	-15.01	PK
H	7236	47.66	49.98	7.16	36.63	41.47	54	-12.53	AV
H	16103	47.74	51.53	11.34	41.52	49.07	74	-24.93	PK
operation frequency:2437									
V	4874	67.19	50.67	6.89	31.38	54.79	74	-19.21	PK
V	4874	55.41	50.67	6.89	31.38	43.01	54	-10.99	AV
V	7311	65.70	50.02	7.24	36.63	59.55	74	-14.45	PK
V	7311	47.92	50.02	7.24	36.63	41.77	54	-12.23	AV
V	16103	47.67	51.53	11.34	41.52	49.00	74	-25.00	PK
H	4874	66.16	50.67	6.89	31.38	53.76	74	-20.24	PK
H	4874	54.44	50.67	6.89	31.38	42.04	54	-11.96	AV
H	7311	65.80	50.02	7.24	36.63	59.65	74	-14.35	PK
H	7311	46.74	50.02	7.24	36.63	40.59	54	-13.41	AV
H	16103	47.06	51.53	11.34	41.52	48.39	74	-25.61	PK
operation frequency:2462									
V	4924	67.92	50.79	6.83	31.36	55.32	74	-18.68	PK
V	4924	55.06	50.79	6.83	31.36	42.46	54	-11.54	AV
V	7386	65.07	50.11	7.25	36.58	58.79	74	-15.21	PK
V	7386	46.71	50.11	7.25	36.58	40.43	54	-13.57	AV
V	16103	48.86	51.53	11.34	41.52	50.19	74	-23.81	PK
H	4924	67.90	50.79	6.83	31.36	55.30	74	-18.70	PK
H	4924	54.63	50.79	6.83	31.36	42.03	54	-11.97	AV
H	7386	66.26	50.11	7.25	36.58	59.98	74	-14.02	PK
H	7386	47.73	50.11	7.25	36.58	41.45	54	-12.55	AV
H	16103	47.64	51.53	11.34	41.52	48.97	74	-25.03	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	67.94	50.65	6.88	31.29	55.46	74	-18.54	PK
V	4824	55.68	50.65	6.88	31.29	43.20	54	-10.80	AV
V	7236	67.16	49.98	7.16	36.63	60.97	74	-13.03	PK
V	7236	47.14	49.98	7.16	36.63	40.95	54	-13.05	AV
V	16103	48.71	51.53	11.34	41.52	50.04	74	-23.96	PK
H	4824	67.10	50.65	6.88	31.29	54.62	74	-19.38	PK
H	4824	55.82	50.65	6.88	31.29	43.34	54	-10.66	AV
H	7236	69.92	49.98	7.16	36.63	63.73	74	-10.27	PK
H	7236	45.58	49.98	7.16	36.63	39.39	54	-14.61	AV
H	16103	48.65	51.53	11.34	41.52	49.98	74	-24.02	PK
operation frequency:2437									
V	4874	67.90	50.67	6.89	31.38	55.50	74	-18.50	PK
V	4874	56.06	50.67	6.89	31.38	43.66	54	-10.34	AV
V	7311	70.10	50.02	7.24	36.63	63.95	74	-10.05	PK
V	7311	47.02	50.02	7.24	36.63	40.87	54	-13.13	AV
V	16103	49.02	51.53	11.34	41.52	50.35	74	-23.65	PK
H	4874	67.22	50.67	6.89	31.38	54.82	74	-19.18	PK
H	4874	55.90	50.67	6.89	31.38	43.50	54	-10.50	AV
H	7311	69.99	50.02	7.24	36.63	63.84	74	-10.16	PK
H	7311	47.95	50.02	7.24	36.63	41.80	54	-12.20	AV
H	16103	49.12	51.53	11.34	41.52	50.45	74	-23.55	PK
operation frequency:2462									
V	4924	68.91	50.79	6.83	31.36	56.31	74	-17.69	PK
V	4924	56.17	50.79	6.83	31.36	43.57	54	-10.43	AV
V	7386	70.30	50.11	7.25	36.58	64.02	74	-9.98	PK
V	7386	46.85	50.11	7.25	36.58	40.57	54	-13.43	AV
V	16103	49.63	51.53	11.34	41.52	50.96	74	-23.04	PK
H	4924	68.27	50.79	6.83	31.36	55.67	74	-18.33	PK
H	4924	55.70	50.79	6.83	31.36	43.10	54	-10.90	AV
H	7386	67.83	50.11	7.25	36.58	61.55	74	-12.45	PK
H	7386	48.65	50.11	7.25	36.58	42.37	54	-11.63	AV
H	16103	49.61	51.53	11.34	41.52	50.94	74	-23.06	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									

802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422									
V	4844	66.76	50.67	6.89	31.32	54.30	74	-19.70	PK
V	4844	55.84	50.67	6.89	31.32	43.38	54	-10.62	AV
V	7266	66.98	50.01	7.15	36.62	60.74	74	-13.26	PK
V	7266	47.30	50.01	7.15	36.62	41.06	54	-12.94	AV
V	16103	46.41	51.53	11.34	41.52	47.74	74	-26.26	PK
H	4844	66.98	50.67	6.89	31.32	54.52	74	-19.48	PK
H	4844	55.86	50.67	6.89	31.32	43.40	54	-10.60	AV
H	7266	64.69	50.01	7.15	36.62	58.45	74	-15.55	PK
H	7266	47.79	50.01	7.15	36.62	41.55	54	-12.45	AV
H	16103	47.94	51.53	11.34	41.52	49.27	74	-24.73	PK
operation frequency:2437									
V	4874	67.18	50.67	6.89	31.38	54.78	74	-19.22	PK
V	4874	54.71	50.67	6.89	31.38	42.31	54	-11.69	AV
V	7311	65.96	50.02	7.24	36.63	59.81	74	-14.19	PK
V	7311	47.27	50.02	7.24	36.63	41.12	54	-12.88	AV
V	16103	47.99	51.53	11.34	41.52	49.32	74	-24.68	PK
H	4874	65.90	50.67	6.89	31.38	53.50	74	-20.50	PK
H	4874	54.15	50.67	6.89	31.38	41.75	54	-12.25	AV
H	7311	65.92	50.02	7.24	36.63	59.77	74	-14.23	PK
H	7311	47.94	50.02	7.24	36.63	41.79	54	-12.21	AV
H	16103	46.55	51.53	11.34	41.52	47.88	74	-26.12	PK
operation frequency:2452									
V	4904	68.12	50.76	6.81	31.31	55.48	74	-18.52	PK
V	4904	54.66	50.76	6.81	31.31	42.02	54	-11.98	AV
V	7356	65.29	50.08	7.21	36.52	58.94	74	-15.06	PK
V	7356	47.77	50.08	7.21	36.52	41.42	54	-12.58	AV
V	16103	49.24	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4904	67.82	50.76	6.81	31.31	55.18	74	-18.82	PK
H	4904	55.02	50.76	6.81	31.31	42.38	54	-11.62	AV
H	7356	66.23	50.08	7.21	36.52	59.88	74	-14.12	PK
H	7356	46.79	50.08	7.21	36.52	40.44	54	-13.56	AV
H	16103	47.63	51.53	11.34	41.52	48.96	74	-25.04	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For Conducted
Please see annex 1

3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to all antenna,. The worst case was antenna 1 and emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

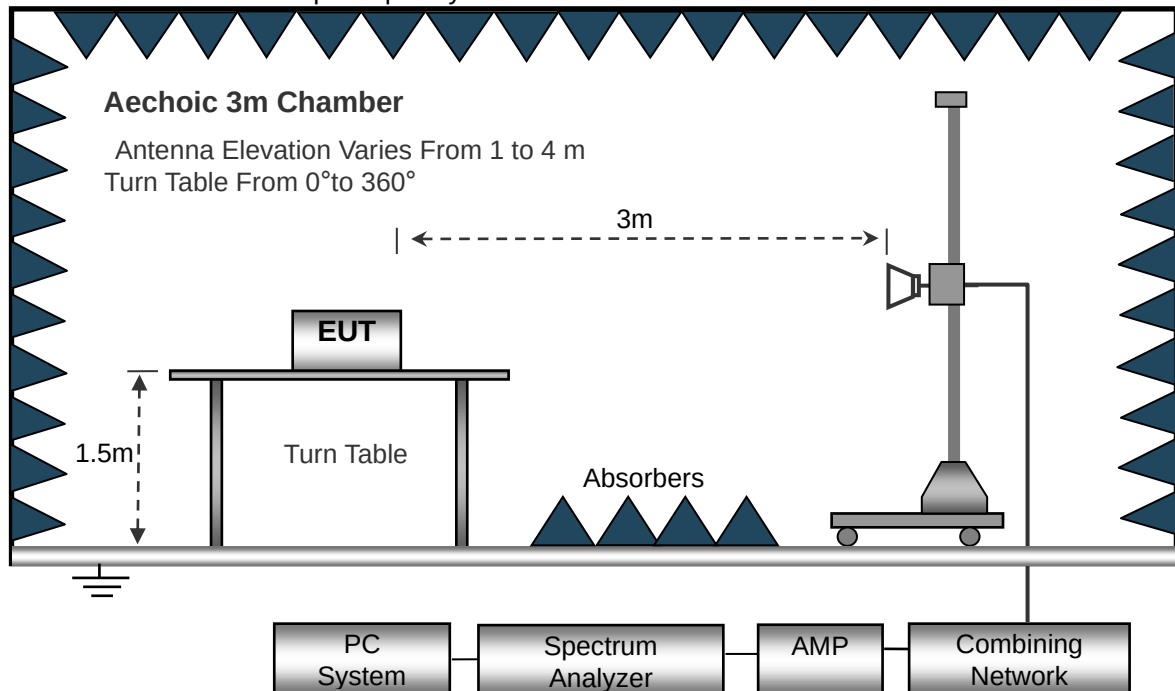

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULT

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	76.98	52.12	2.73	27.38	54.97	74	-19.03	PK
V	2390	65.81	52.12	2.73	27.38	43.80	54	-10.20	AV
V	2400	77.03	52.16	2.78	27.41	55.06	74	-18.94	PK
V	2400	64.72	52.16	2.78	27.41	42.75	54	-11.25	AV
H	2390	76.90	52.12	2.73	27.38	54.89	74	-19.11	PK
H	2390	65.90	52.12	2.73	27.38	43.89	54	-10.11	AV
H	2400	77.34	52.16	2.78	27.41	55.37	74	-18.63	PK
H	2400	66.25	52.16	2.78	27.41	44.28	54	-9.72	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	77.43	52.23	2.86	27.44	55.50	74	-18.50	PK
V	2483.5	65.82	52.23	2.86	27.44	43.89	54	-10.11	AV
V	2500	77.31	52.26	2.88	27.49	55.42	74	-18.58	PK
V	2500	65.72	52.26	2.88	27.49	43.83	54	-10.17	AV
H	2483.5	77.39	52.23	2.86	27.44	55.46	74	-18.54	PK
H	2483.5	66.44	52.23	2.86	27.44	44.51	54	-9.49	AV
H	2500	77.34	52.26	2.88	27.49	55.45	74	-18.55	PK
H	2500	66.30	52.26	2.88	27.49	44.41	54	-9.59	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	77.01	52.12	2.73	27.38	55.00	74	-19.00	PK
V	2390	65.78	52.12	2.73	27.38	43.77	54	-10.23	AV
V	2400	78.00	52.16	2.78	27.41	56.03	74	-17.97	PK
V	2400	65.85	52.16	2.78	27.41	43.88	54	-10.12	AV
H	2390	77.96	52.12	2.73	27.38	55.95	74	-18.05	PK
H	2390	65.70	52.12	2.73	27.38	43.69	54	-10.31	AV
H	2400	77.33	52.16	2.78	27.41	55.36	74	-18.64	PK
H	2400	65.81	52.16	2.78	27.41	43.84	54	-10.16	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	77.82	52.23	2.86	27.44	55.89	74	-18.11	PK
V	2483.5	65.73	52.23	2.86	27.44	43.80	54	-10.20	AV
V	2500	76.79	52.26	2.88	27.49	54.90	74	-19.10	PK
V	2500	66.09	52.26	2.88	27.49	44.20	54	-9.80	AV
H	2483.5	78.03	52.23	2.86	27.44	56.10	74	-17.90	PK
H	2483.5	65.93	52.23	2.86	27.44	44.00	54	-10.00	AV
H	2500	77.27	52.26	2.88	27.49	55.38	74	-18.62	PK
H	2500	67.20	52.26	2.88	27.49	45.31	54	-8.69	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	77.00	52.12	2.73	27.38	54.99	74	-19.01	PK
V	2390	65.84	52.12	2.73	27.38	43.83	54	-10.17	AV
V	2400	78.24	52.16	2.78	27.41	56.27	74	-17.73	PK
V	2400	66.20	52.16	2.78	27.41	44.23	54	-9.77	AV
H	2390	78.02	52.12	2.73	27.38	56.01	74	-17.99	PK
H	2390	65.94	52.12	2.73	27.38	43.93	54	-10.07	AV
H	2400	77.49	52.16	2.78	27.41	55.52	74	-18.48	PK
H	2400	65.91	52.16	2.78	27.41	43.94	54	-10.06	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	77.95	52.23	2.86	27.44	56.02	74	-17.98	PK
V	2483.5	65.73	52.23	2.86	27.44	43.80	54	-10.20	AV
V	2500	77.29	52.26	2.88	27.49	55.40	74	-18.60	PK
V	2500	65.91	52.26	2.88	27.49	44.02	54	-9.98	AV
H	2483.5	78.06	52.23	2.86	27.44	56.13	74	-17.87	PK
H	2483.5	65.71	52.23	2.86	27.44	43.78	54	-10.22	AV
H	2500	77.46	52.26	2.88	27.49	55.57	74	-18.43	PK
H	2500	66.88	52.26	2.88	27.49	44.99	54	-9.01	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2422									
V	2390	76.99	52.12	2.73	27.38	54.98	74	-19.02	PK
V	2390	65.86	52.12	2.73	27.38	43.85	54	-10.15	AV
V	2400	76.84	52.16	2.78	27.41	54.87	74	-19.13	PK
V	2400	64.75	52.16	2.78	27.41	42.78	54	-11.22	AV
H	2390	76.88	52.12	2.73	27.38	54.87	74	-19.13	PK
H	2390	65.96	52.12	2.73	27.38	43.95	54	-10.05	AV
H	2400	77.31	52.16	2.78	27.41	55.34	74	-18.66	PK
H	2400	66.24	52.16	2.78	27.41	44.27	54	-9.73	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2452									
V	2483.5	77.39	52.23	2.86	27.44	55.46	74	-18.54	PK
V	2483.5	65.84	52.23	2.86	27.44	43.91	54	-10.09	AV
V	2500	77.35	52.26	2.88	27.49	55.46	74	-18.54	PK
V	2500	65.71	52.26	2.88	27.49	43.82	54	-10.18	AV
H	2483.5	77.43	52.23	2.86	27.44	55.50	74	-18.50	PK
H	2483.5	66.45	52.23	2.86	27.44	44.52	54	-9.48	AV
H	2500	77.31	52.26	2.88	27.49	55.42	74	-18.58	PK
H	2500	66.34	52.26	2.88	27.49	44.45	54	-9.55	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For Conducted
Please see annex 1

4. AVERAGE OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW =1MHz
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
VBW $\geq$ RBW
Sweep = auto
Detector function = channel power
Trace = max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

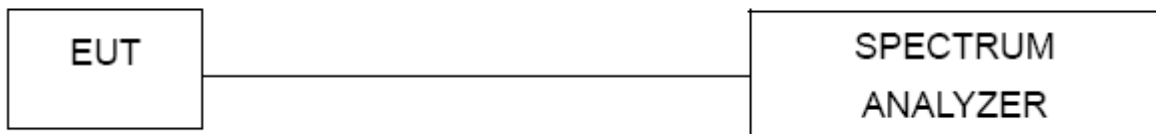

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

Please see annex 1.

5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3kHz$
VB	$VBW \geq 3RBW$
Detector	AVG
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Please see annex 1.

6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

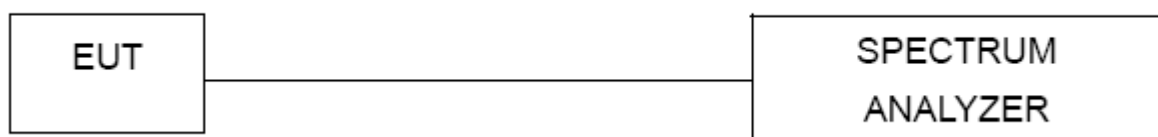

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Please see annex 1.

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


7.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

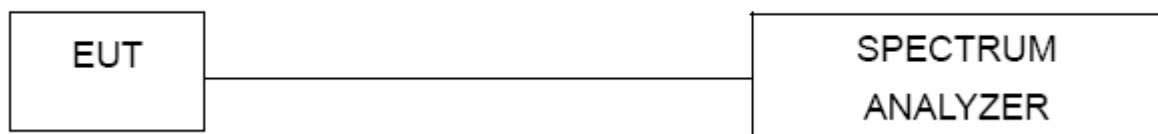

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

Please see annex 1.

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is equipped unique antenna connector and antenna gain less than 6dBi, It comply with the standard requirement.

9. TEST SETUP PHOTO

Please see setup photos

10. EUT PHOTO





***** END OF REPORT *****