

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	29.03	PASS
EGPRS1900 1 Slot	661	1880	28.82	PASS
EGPRS1900 1 Slot	810	1909.8	28.56	PASS
EGPRS1900 2 Slot	512	1850.2	28.67	PASS
EGPRS1900 2 Slot	661	1880	28.47	PASS
EGPRS1900 2 Slot	810	1909.8	27.89	PASS
EGPRS1900 3 Slot	512	1850.2	26.97	PASS
EGPRS1900 3 Slot	661	1880	26.59	PASS
EGPRS1900 3 Slot	810	1909.8	26.58	PASS
EGPRS1900 4 Slot	512	1850.2	25.86	PASS
EGPRS1900 4 Slot	661	1880	25.82	PASS
EGPRS1900 4 Slot	810	1909.8	24.96	PASS
EGPRS850 1 Slot	128	824.2	29.82	PASS
EGPRS850 1 Slot	189	836.4	29.86	PASS
EGPRS850 1 Slot	251	848.8	29.65	PASS
EGPRS850 2 Slot	128	824.2	29.34	PASS
EGPRS850 2 Slot	189	836.4	29.23	PASS
EGPRS850 2 Slot	251	848.8	28.90	PASS
EGPRS850 3 Slot	128	824.2	27.95	PASS
EGPRS850 3 Slot	189	836.4	27.87	PASS
EGPRS850 3 Slot	251	848.8	27.52	PASS
EGPRS850 4 Slot	128	824.2	26.73	PASS
EGPRS850 4 Slot	189	836.4	26.67	PASS
EGPRS850 4 Slot	251	848.8	26.84	PASS
GPRS1900 1 Slot	512	1850.2	29.32	PASS
GPRS1900 1 Slot	661	1880	29.59	PASS
GPRS1900 1 Slot	810	1909.8	29.49	PASS
GPRS1900 2 Slot	512	1850.2	28.49	PASS
GPRS1900 2 Slot	661	1880	28.80	PASS
GPRS1900 2 Slot	810	1909.8	28.45	PASS
GPRS1900 3 Slot	512	1850.2	26.71	PASS
GPRS1900 3 Slot	661	1880	27.10	PASS
GPRS1900 3 Slot	810	1909.8	26.99	PASS
GPRS1900 4 Slot	512	1850.2	25.80	PASS
GPRS1900 4 Slot	661	1880	26.18	PASS
GPRS1900 4 Slot	810	1909.8	26.07	PASS
GPRS850 1 Slot	128	824.2	31.70	PASS
GPRS850 1 Slot	189	836.4	31.79	PASS
GPRS850 1 Slot	251	848.8	31.74	PASS
GPRS850 2 Slot	128	824.2	30.88	PASS
GPRS850 2 Slot	189	836.4	30.93	PASS

GPRS850 2 Slot	251	848.8	30.89	PASS
GPRS850 3 Slot	128	824.2	28.92	PASS
GPRS850 3 Slot	189	836.4	29.09	PASS
GPRS850 3 Slot	251	848.8	29.02	PASS
GPRS850 4 Slot	128	824.2	27.70	PASS
GPRS850 4 Slot	189	836.4	27.82	PASS
GPRS850 4 Slot	251	848.8	27.77	PASS
GSM1900	512	1850.2	29.30	PASS
GSM1900	661	1880	29.55	PASS
GSM1900	810	1909.8	29.45	PASS
GSM850	128	824.2	31.81	PASS
GSM850	189	836.4	31.90	PASS
GSM850	251	848.8	31.86	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	4.30	13	PASS
EGPRS1900	661	1880	4.37	13	PASS
EGPRS1900	810	1909.8	4.56	13	PASS
EGPRS850	128	824.2	4.58	13	PASS
EGPRS850	189	836.4	4.72	13	PASS
EGPRS850	251	848.8	4.96	13	PASS


EGPRS1900 Channel=512

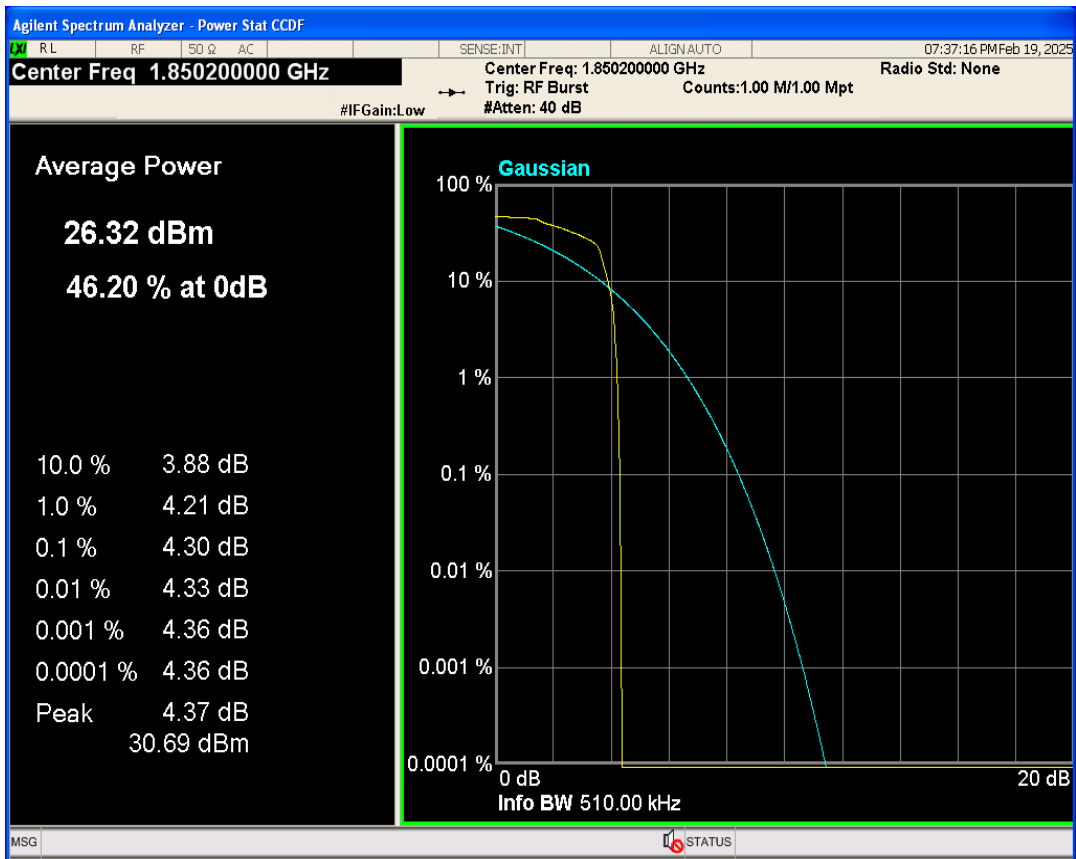


EGPRS1900 Channel=810

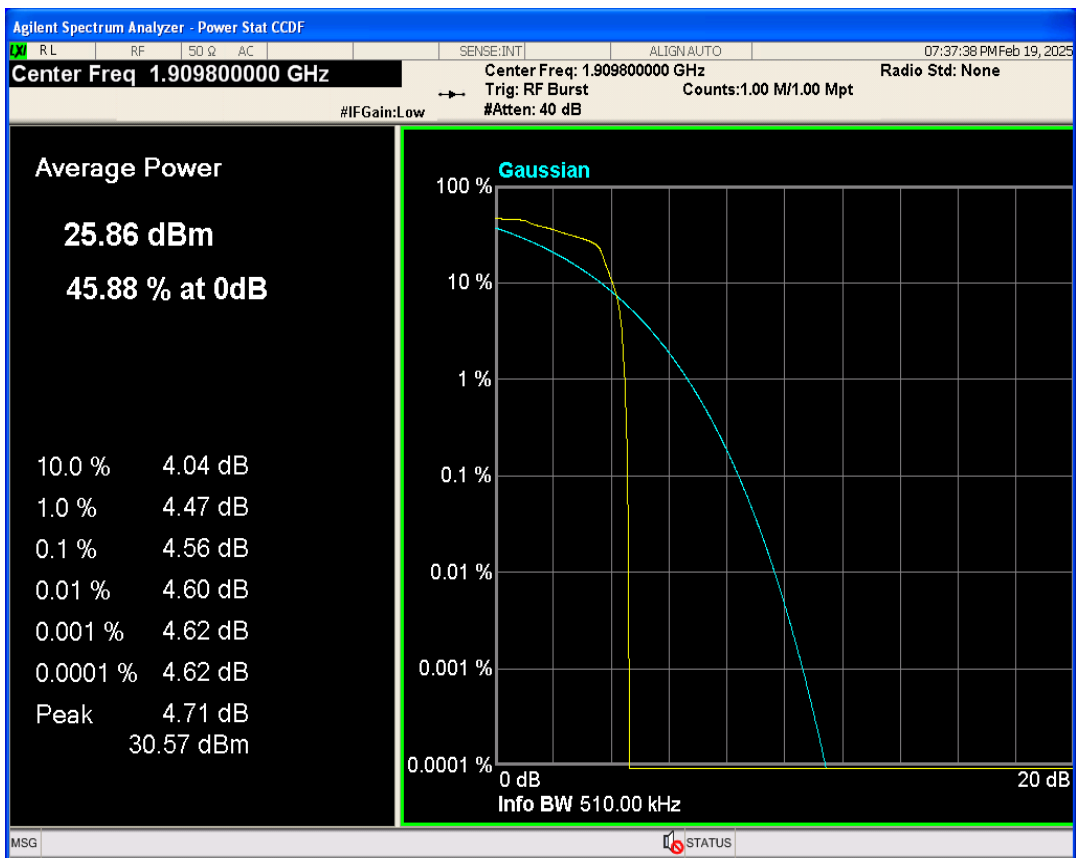


EGPRS1900 Channel=661

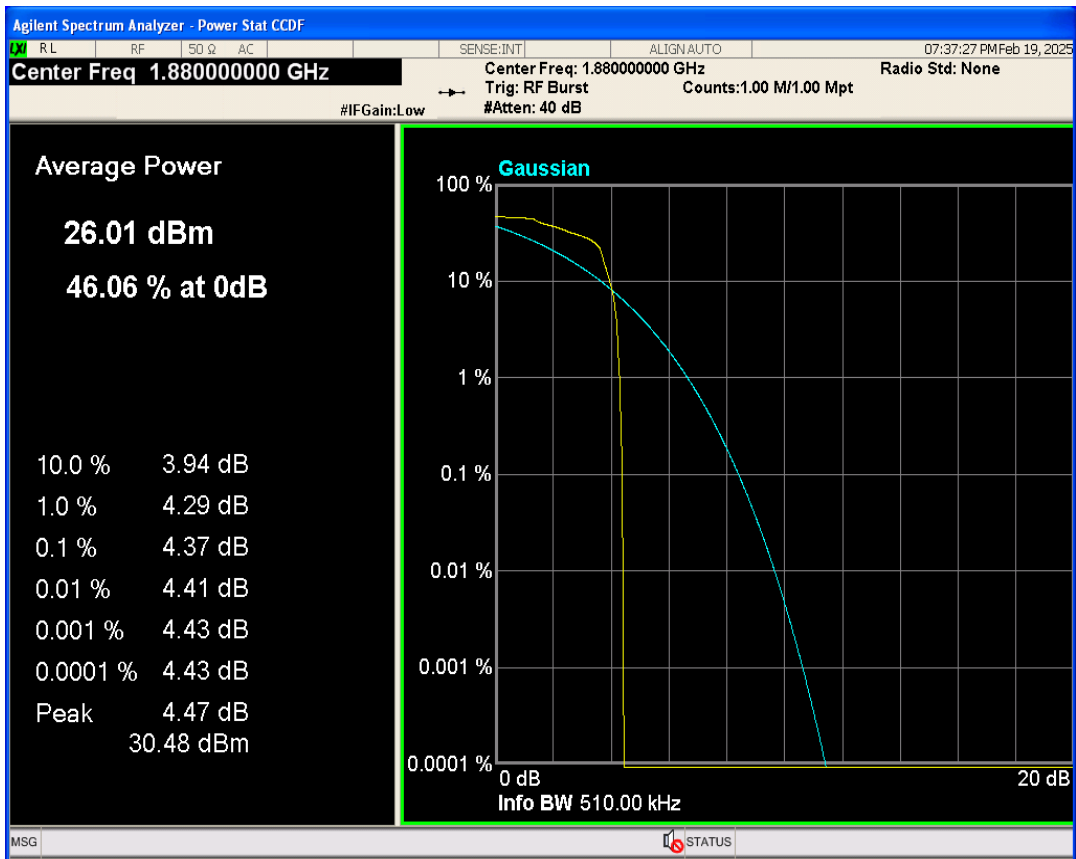


EGPRS850 Channel=128

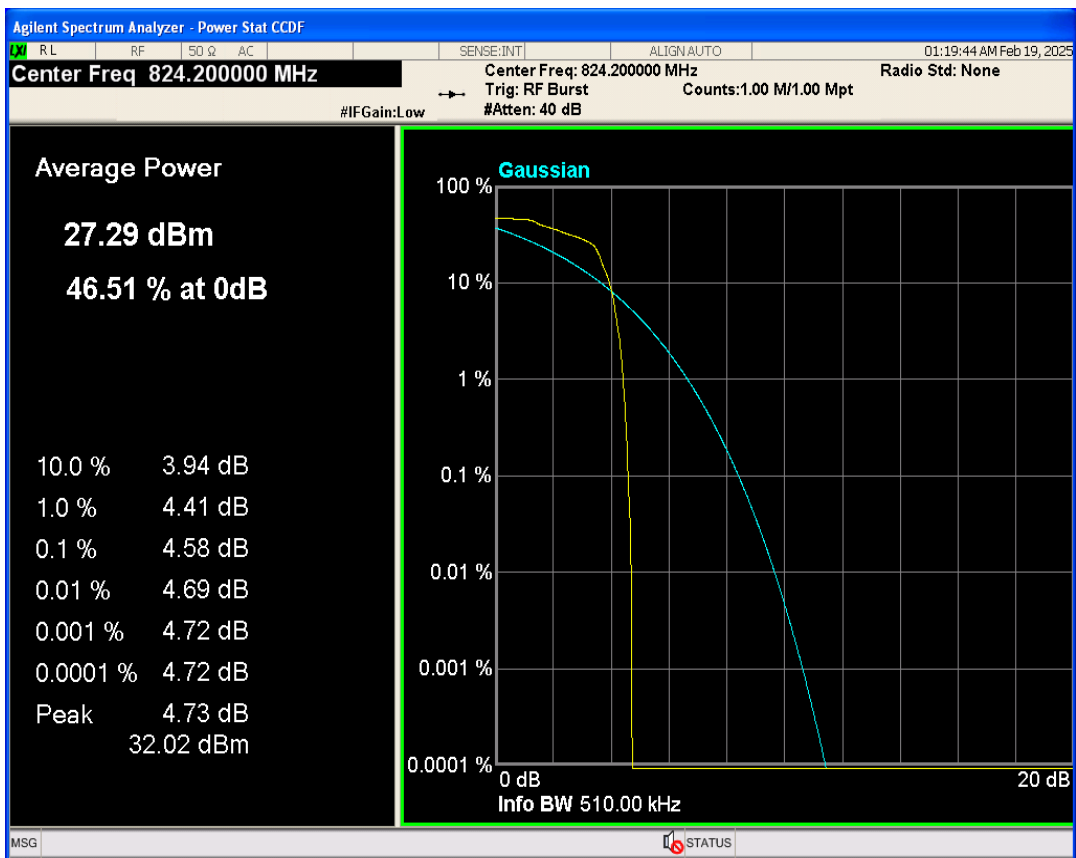

EGPRS850 Channel=251

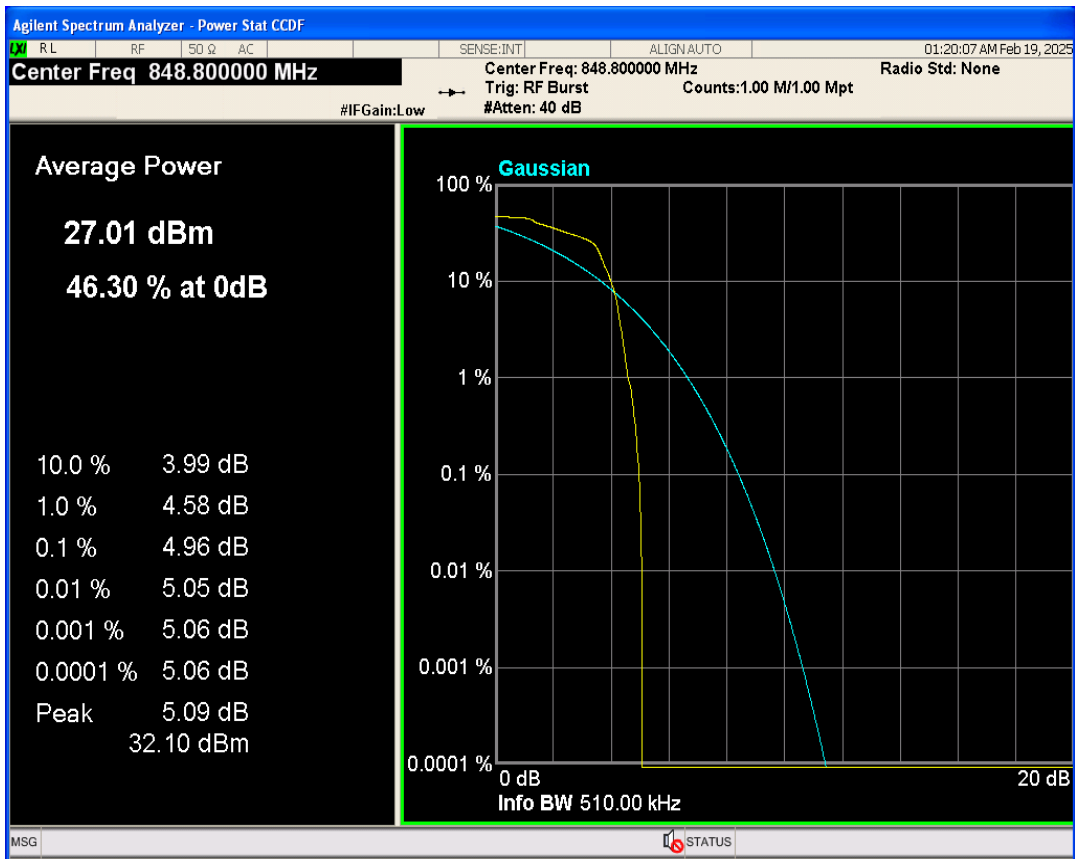


EGPRS850 Channel=189

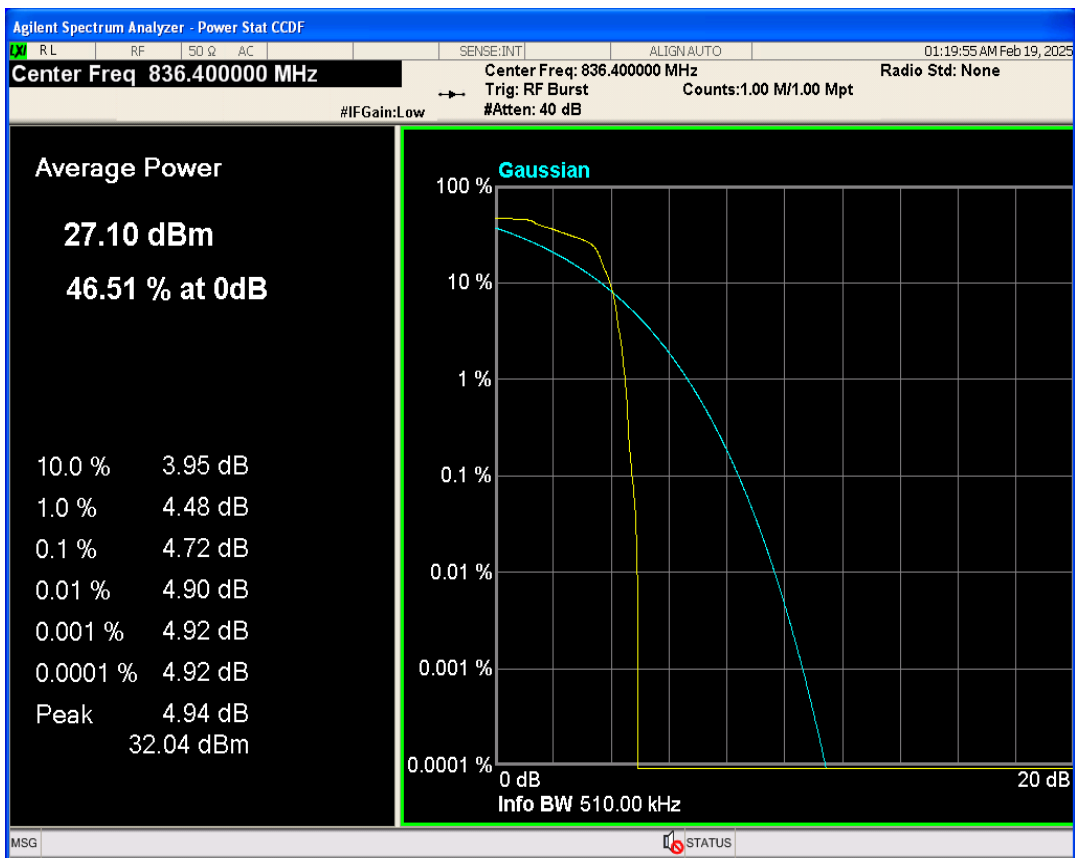


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	268.733	349.961	PASS
EGPRS1900	661	1880	268.514	349.786	PASS
EGPRS1900	810	1909.8	261.153	330.666	PASS
EGPRS850	128	824.2	274.584	386.159	PASS
EGPRS850	189	836.4	273.888	372.169	PASS
EGPRS850	251	848.8	268.440	368.526	PASS


EGPRS1900 Channel=661

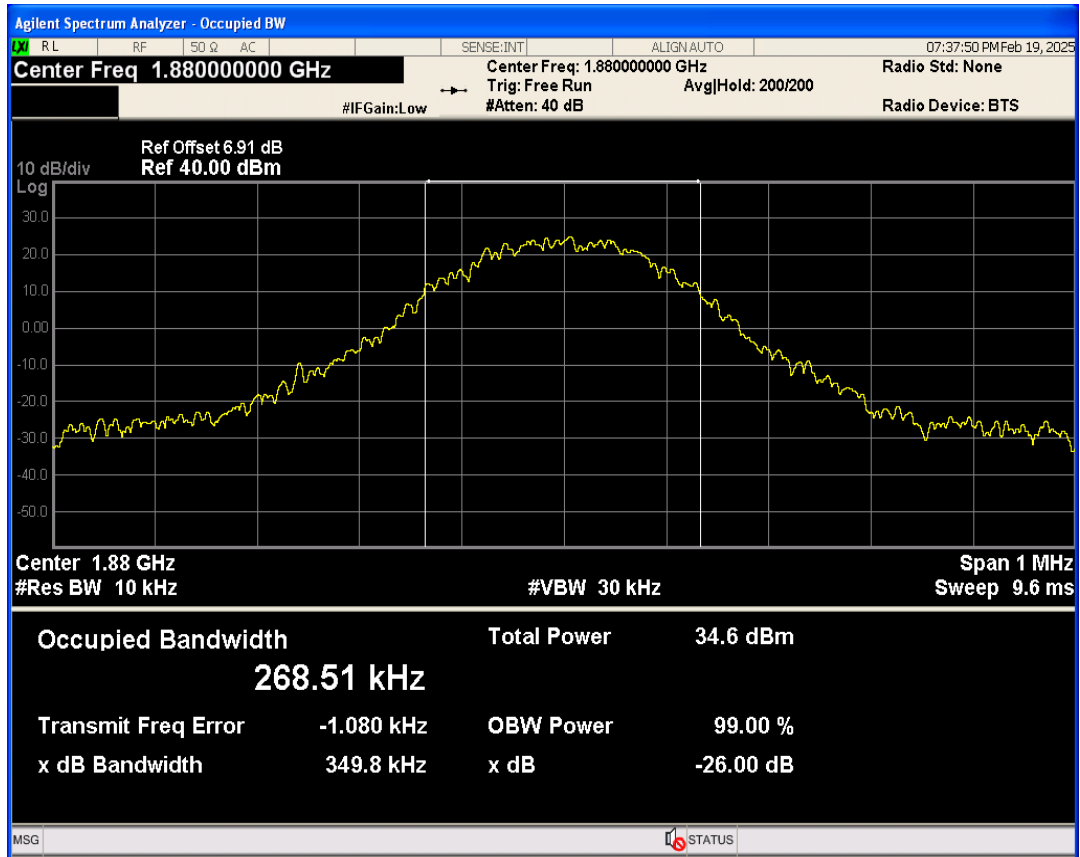


EGPRS1900 Channel=512

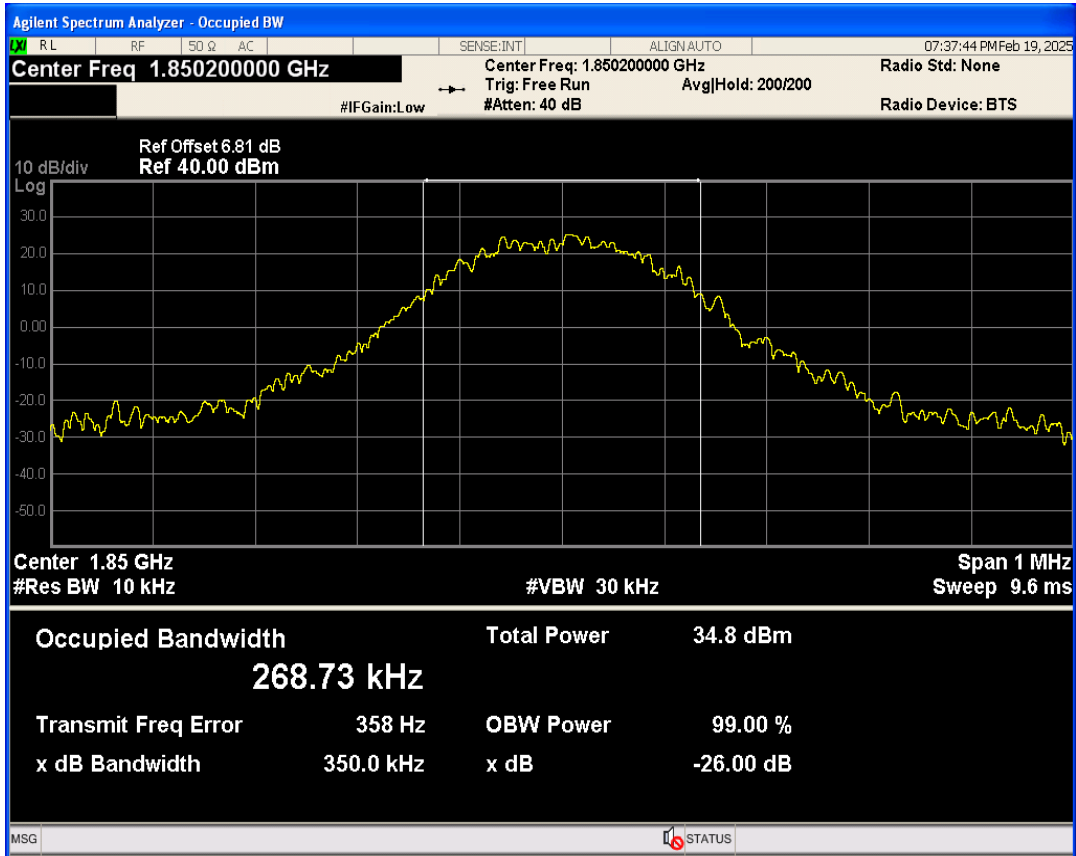


EGPRS1900 Channel=810

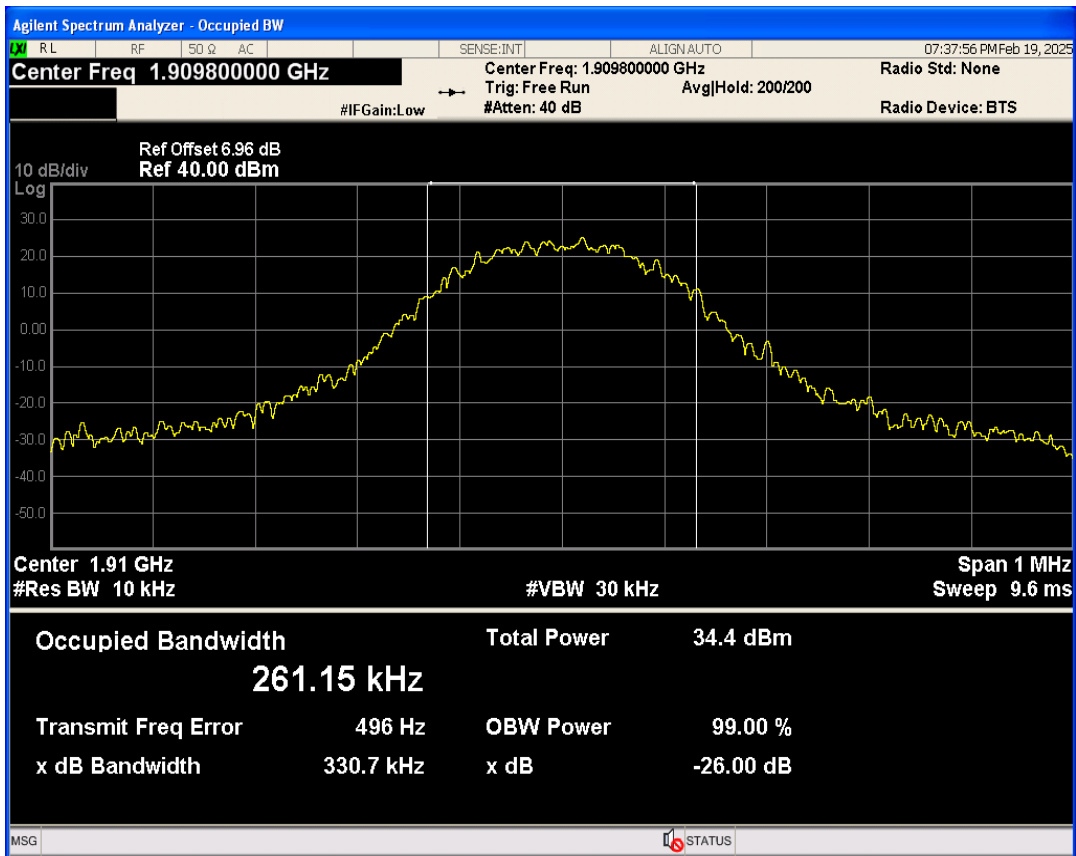


EGPRS850 Channel=128

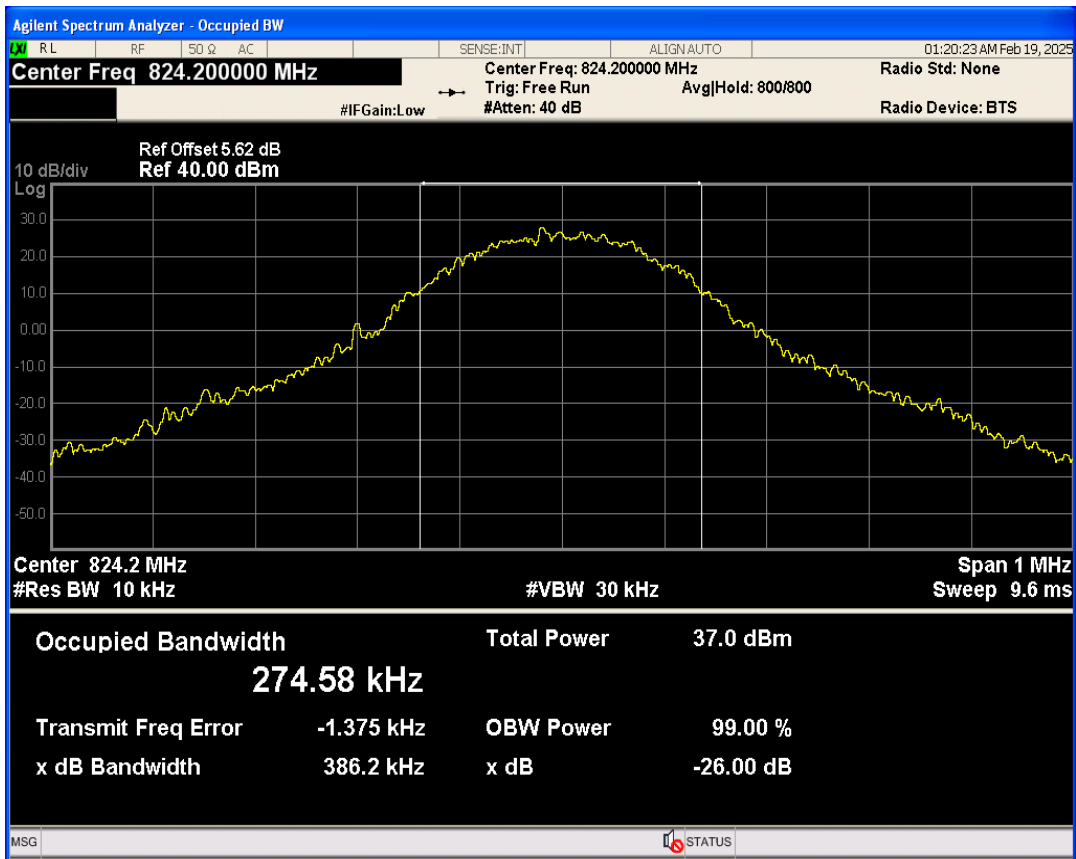

EGPRS850 Channel=189

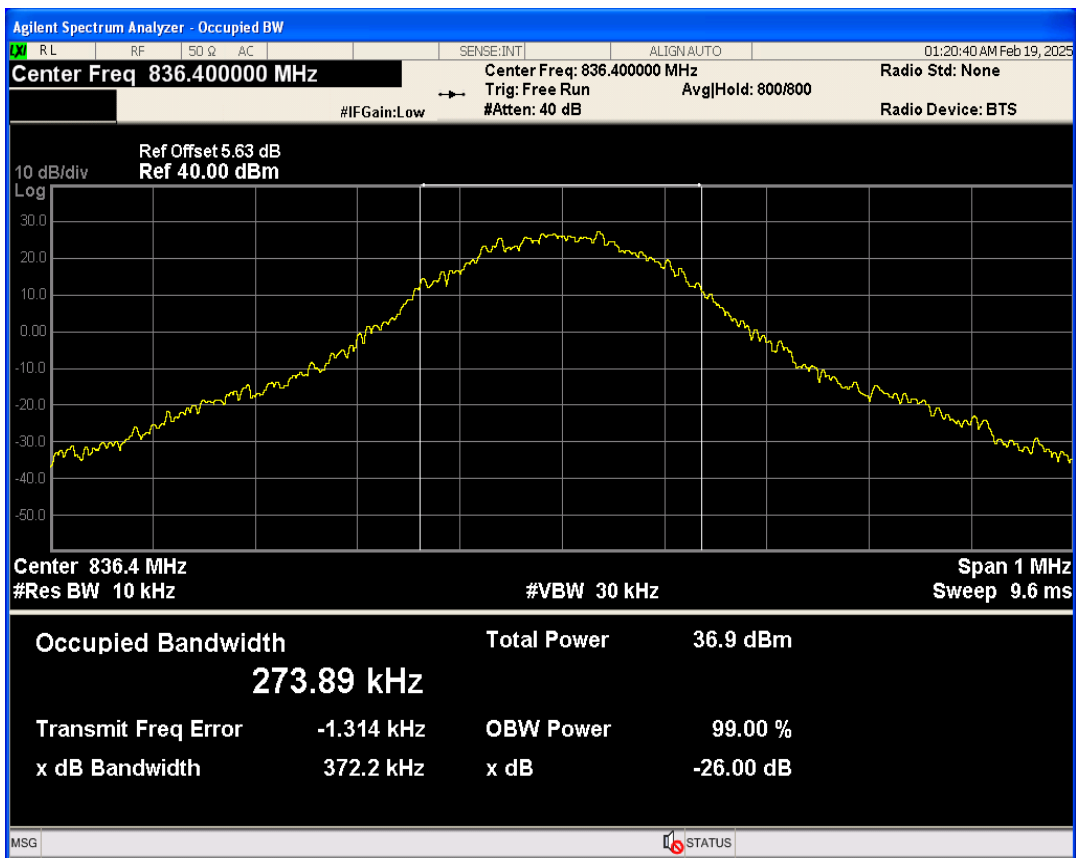


EGPRS850 Channel=251

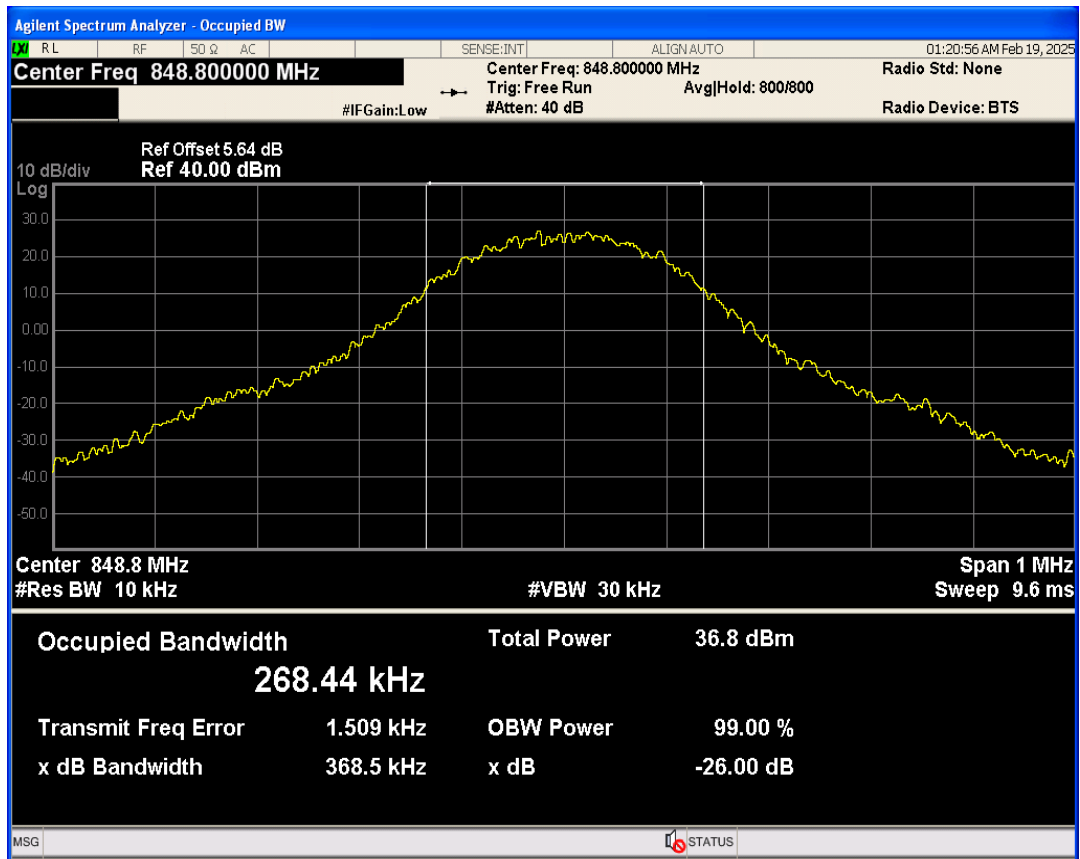


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1850.00	-25.62	-13	PASS
EGPRS1900	810	1909.8	1910.01	-28.34	-13	PASS
EGPRS850	128	824.2	823.99	-24.33	-13	PASS
EGPRS850	251	848.8	849.00	-26.55	-13	PASS


EGPRS1900 Channel=810

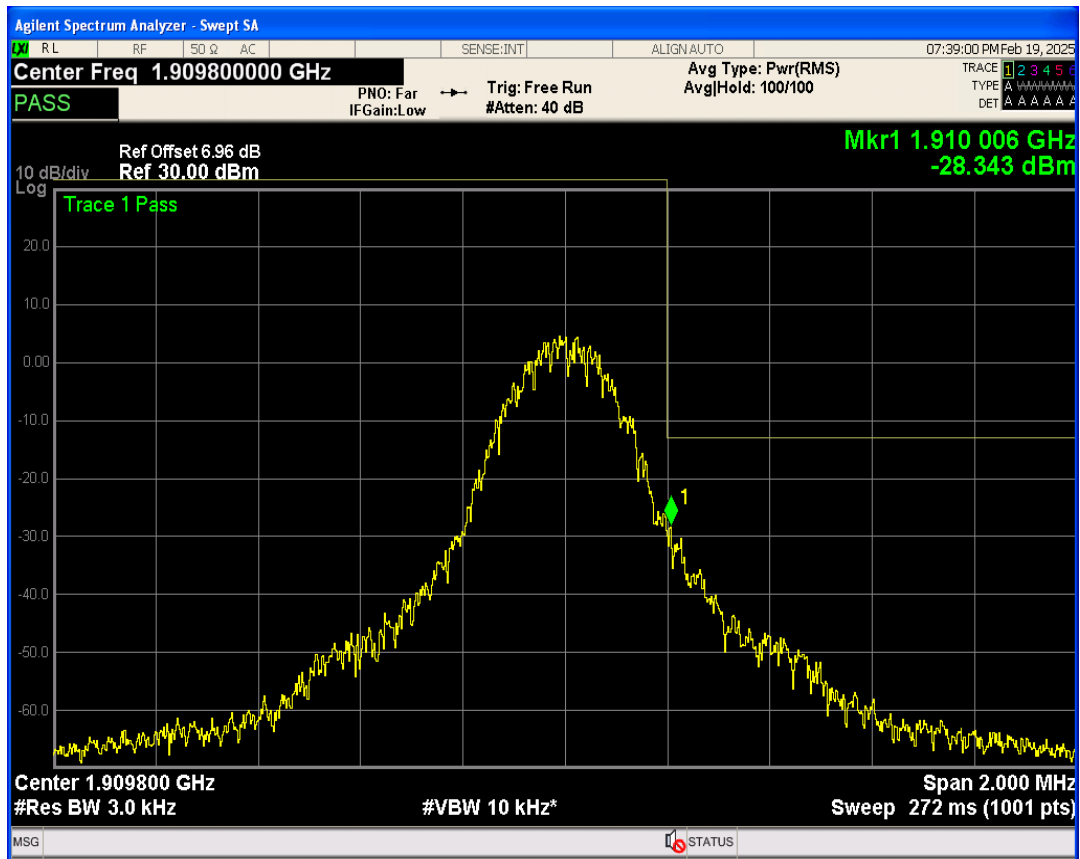


EGPRS1900 Channel=512

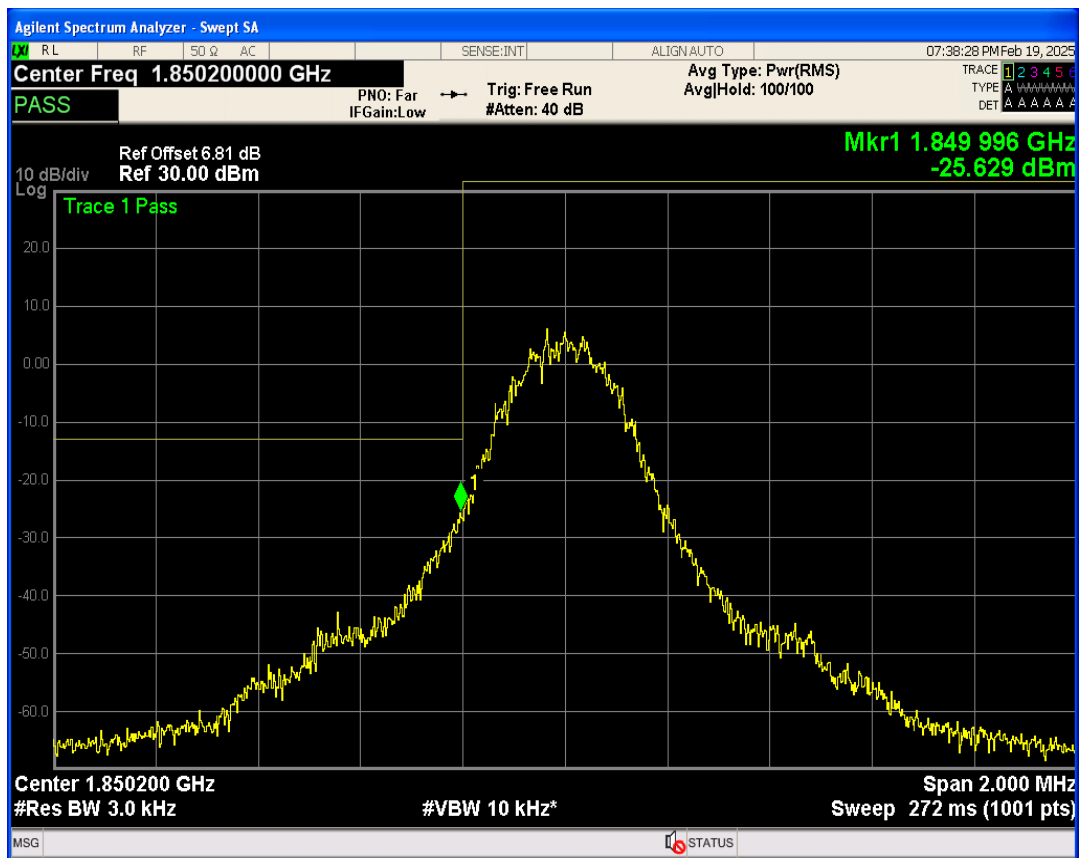

EGPRS850 Channel=128

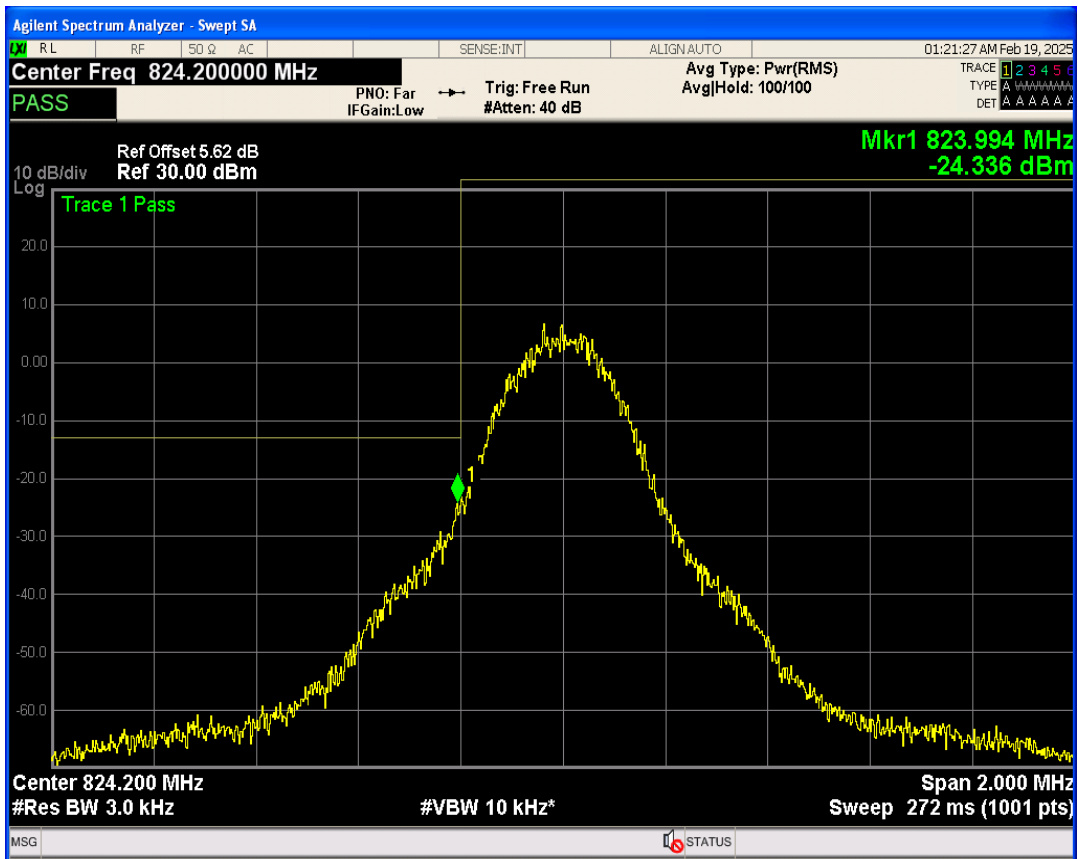


EGPRS850 Channel=251

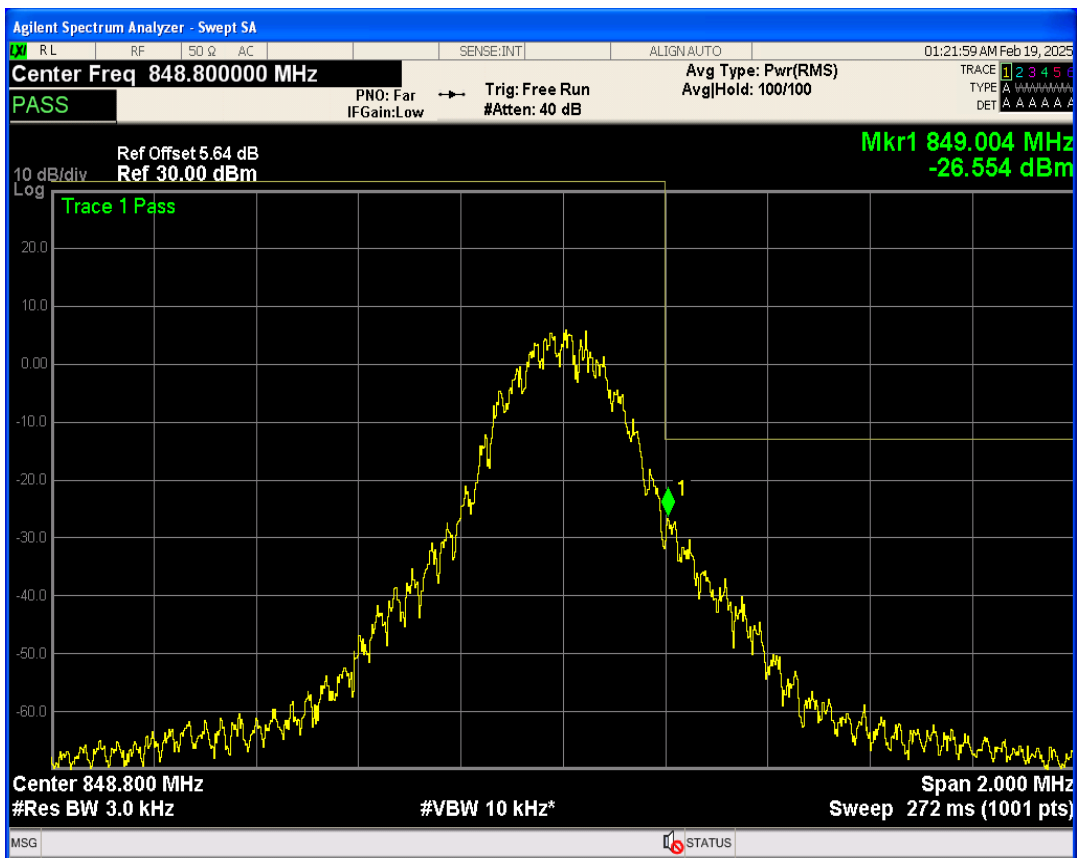


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25940.16	-19.10	-13	PASS
EGPRS1900	661	1880	25981.85	-19.34	-13	PASS
EGPRS1900	810	1909.8	25631.12	-18.95	-13	PASS
EGPRS850	128	824.2	25979.86	-20.46	-13	PASS
EGPRS850	189	836.4	26011.63	-20.55	-13	PASS
EGPRS850	251	848.8	25994.42	-20.63	-13	PASS


EGPRS1900 Channel=512

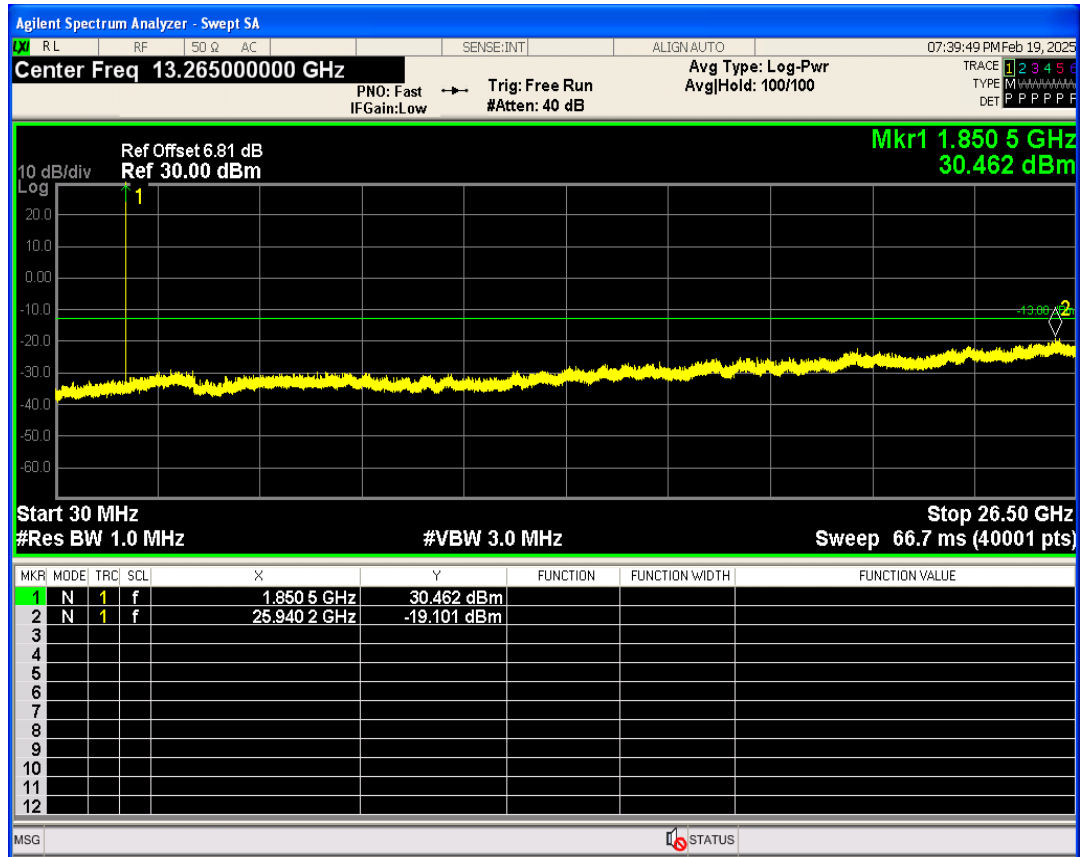


EGPRS1900 Channel=810

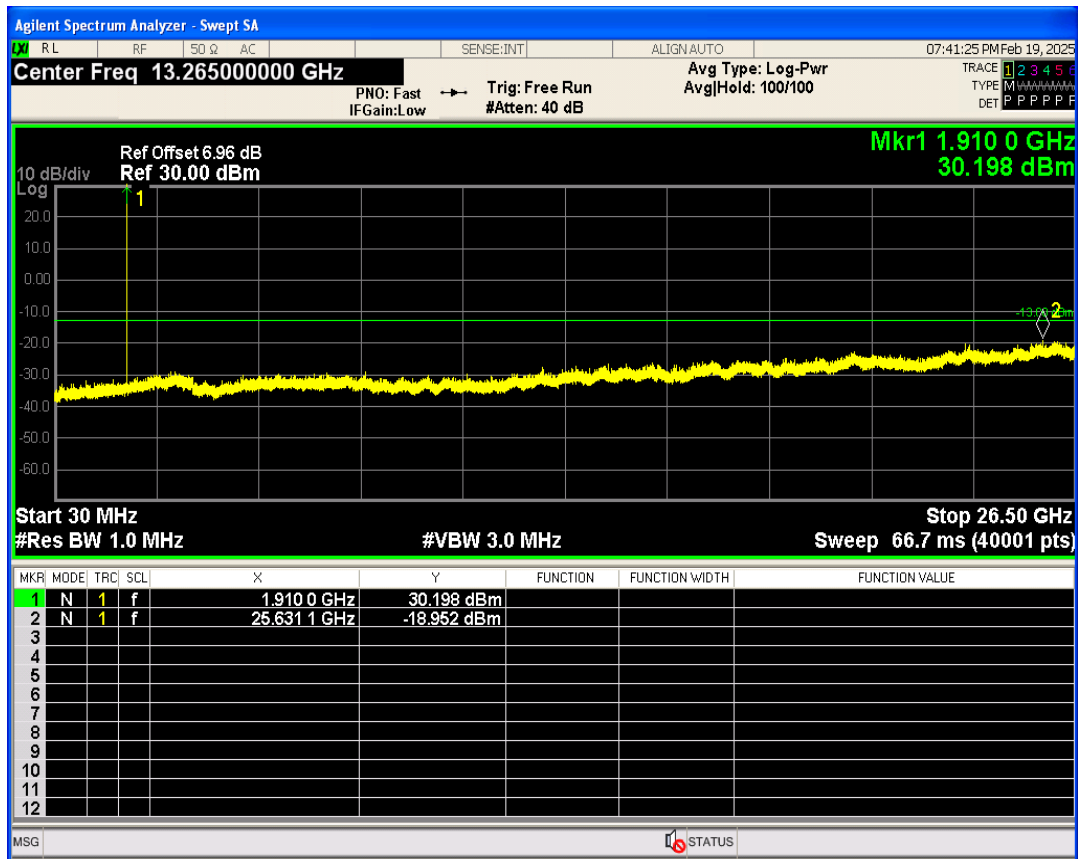


EGPRS1900 Channel=661

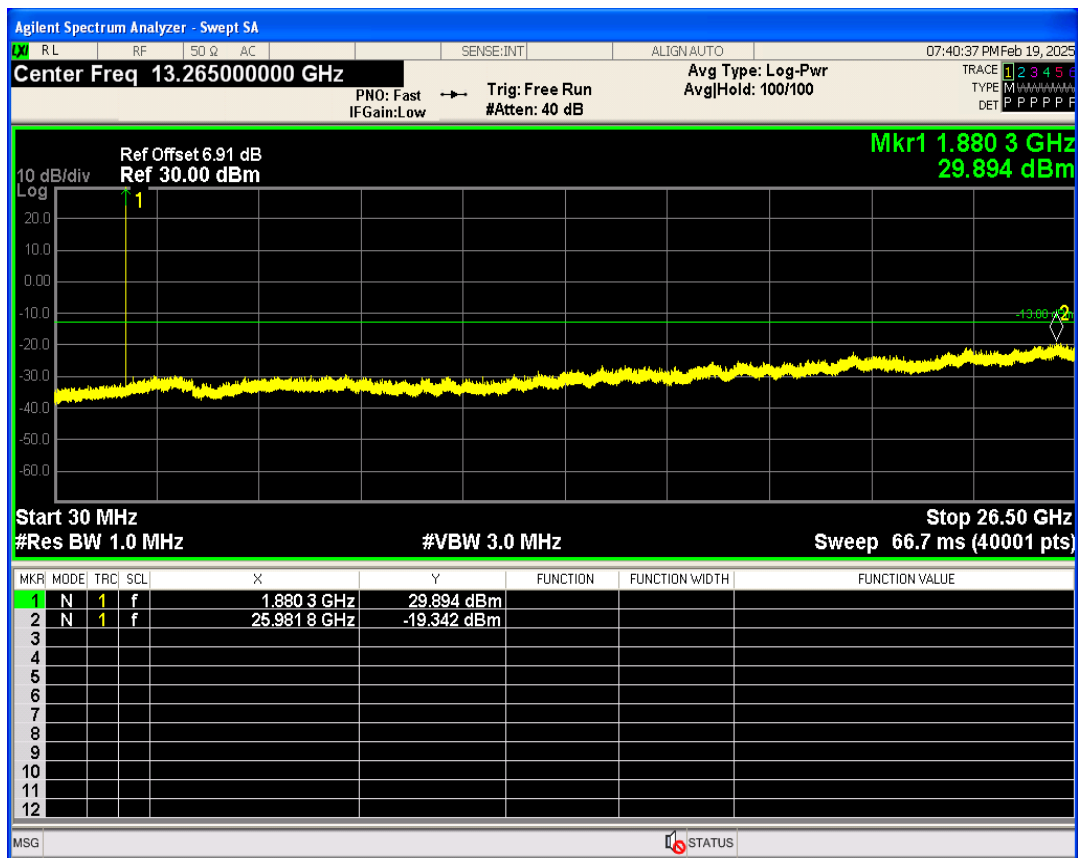


EGPRS850 Channel=128

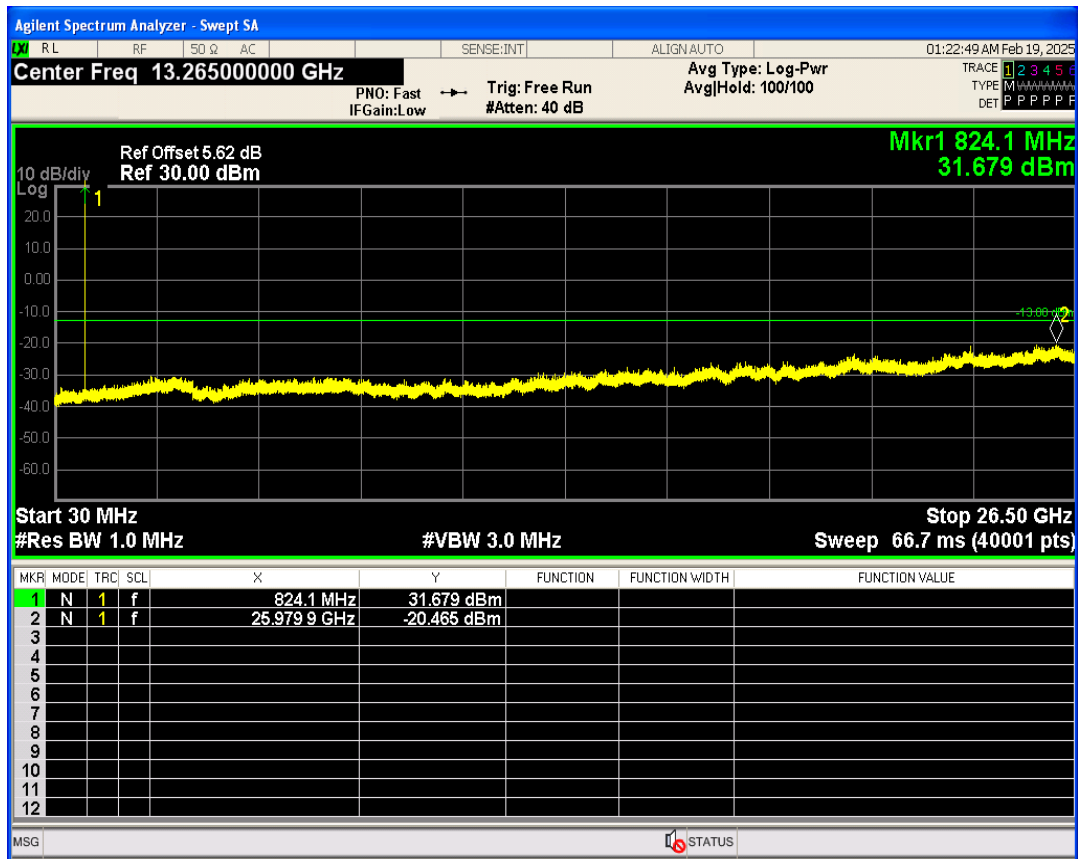

EGPRS850 Channel=189

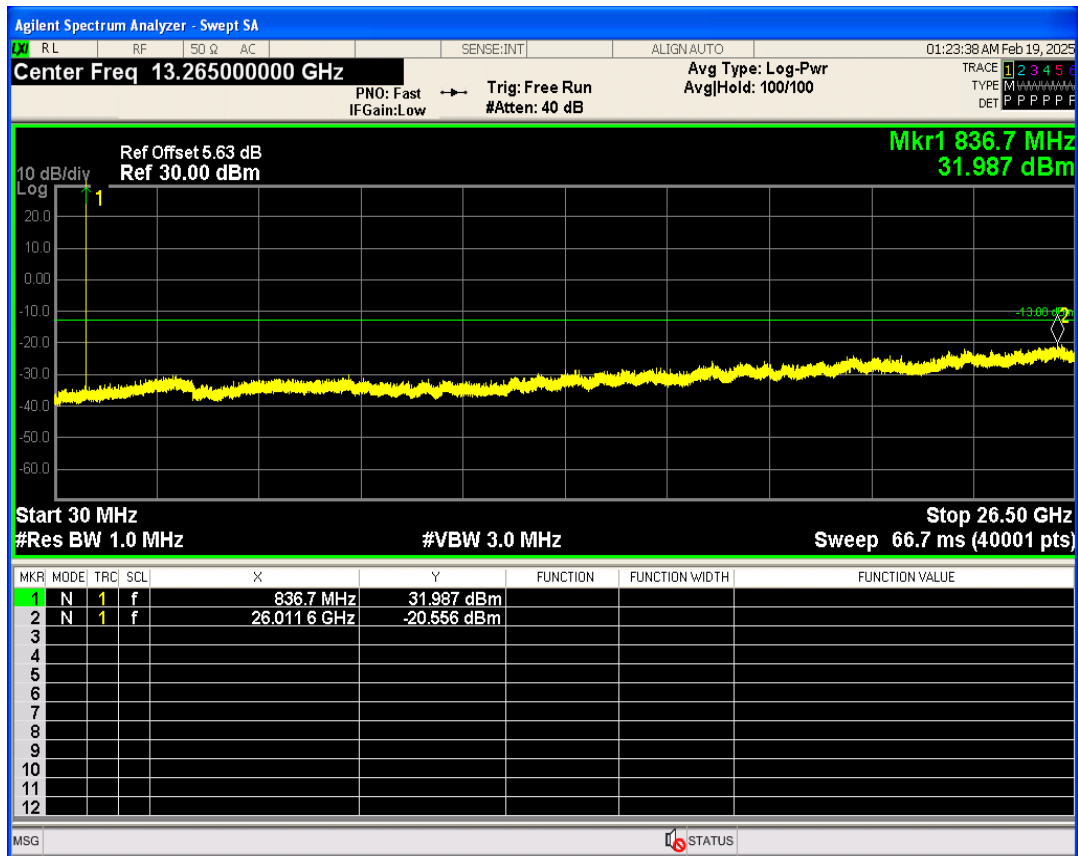


EGPRS850 Channel=251

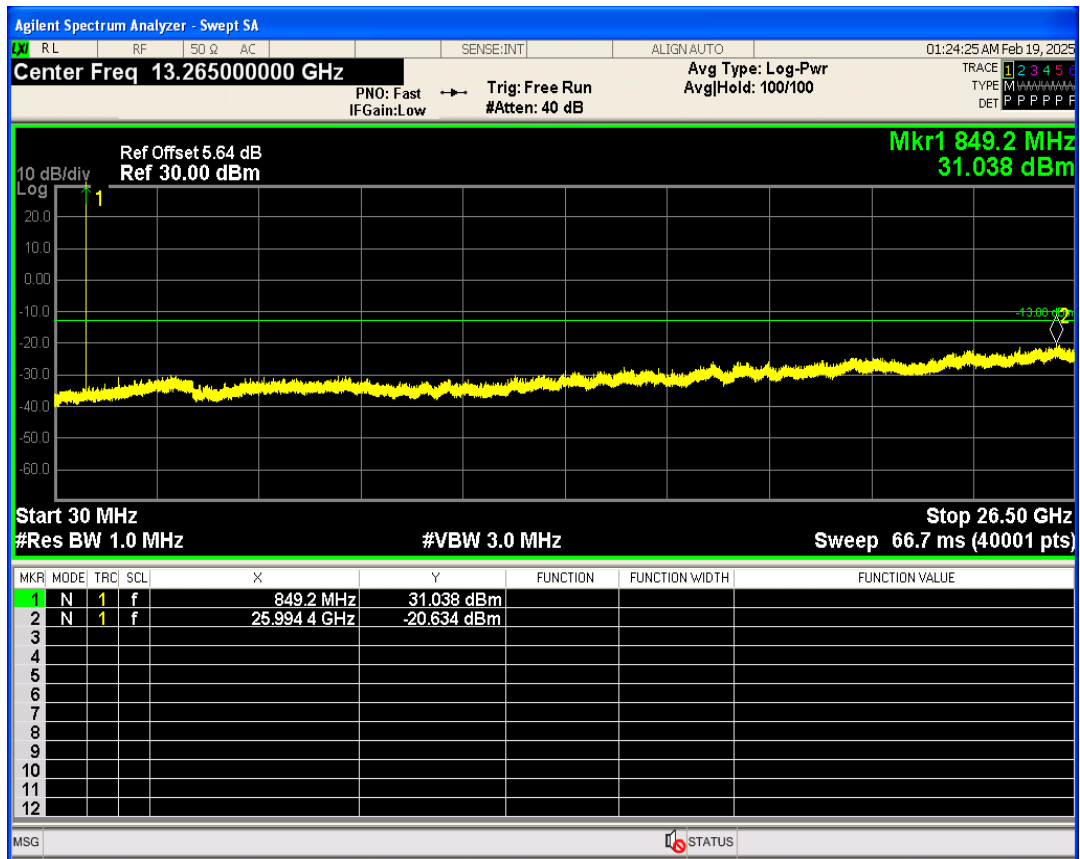


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.83	13	PASS
GPRS1900	661	1880	2.79	13	PASS
GPRS1900	810	1909.8	2.82	13	PASS
GPRS850	128	824.2	2.96	13	PASS
GPRS850	189	836.4	2.96	13	PASS
GPRS850	251	848.8	2.90	13	PASS


GPRS1900 Channel=661

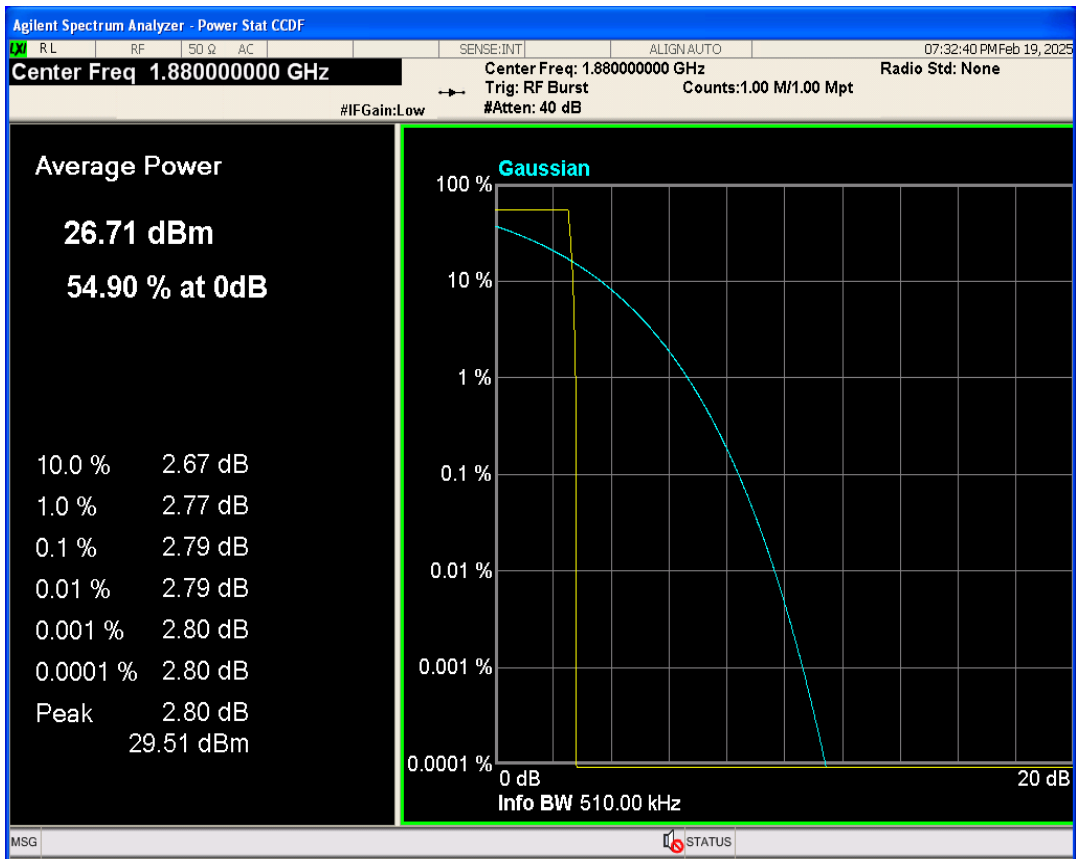


GPRS1900 Channel=512

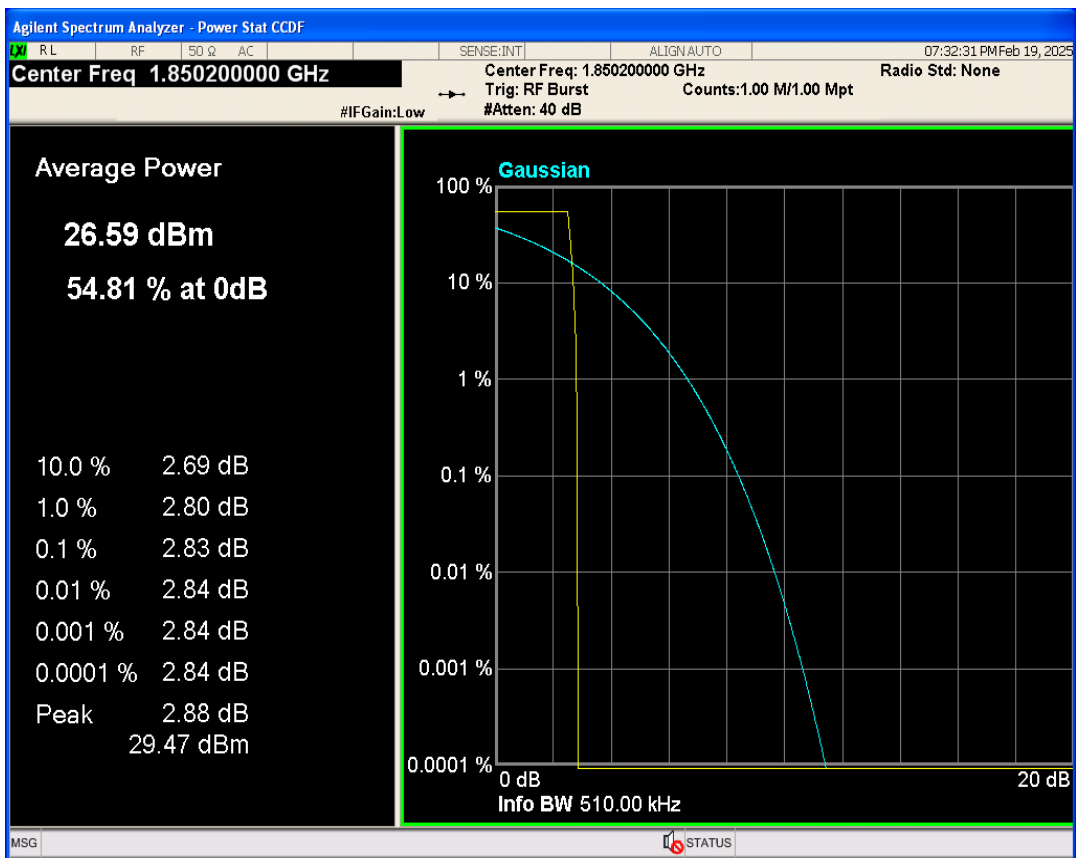


GPRS1900 Channel=810

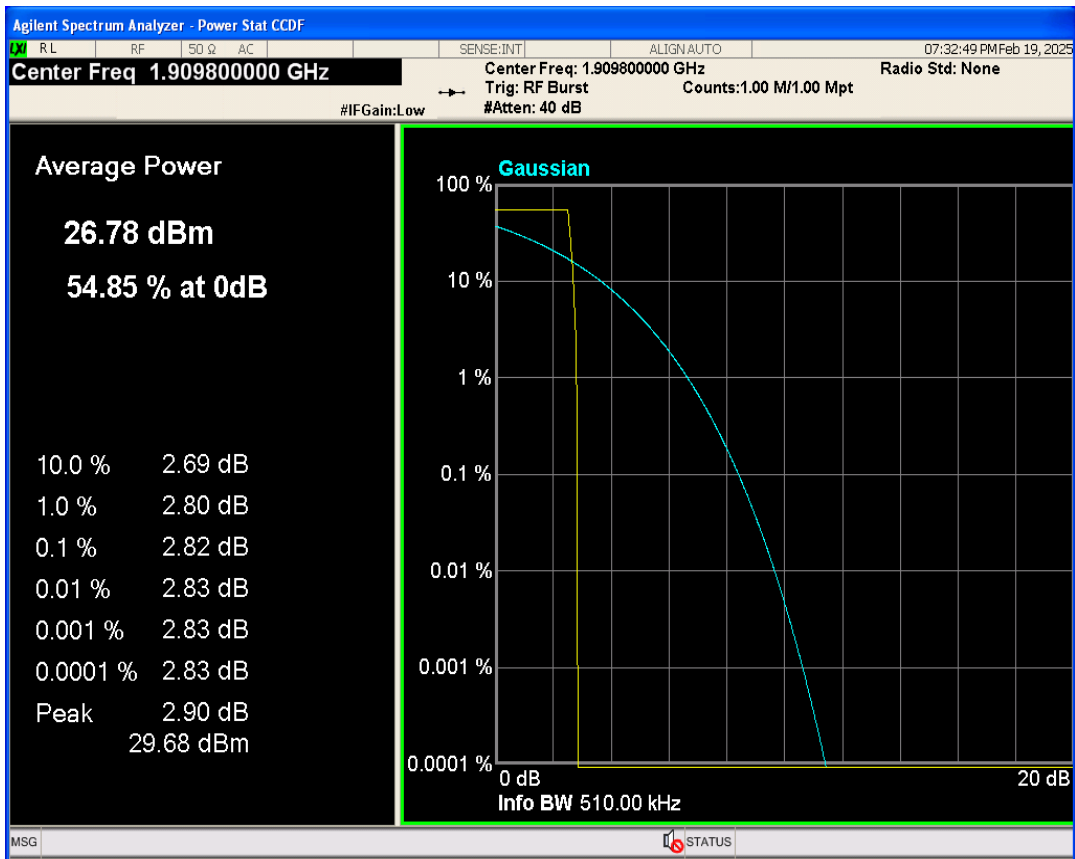


GPRS850 Channel=128

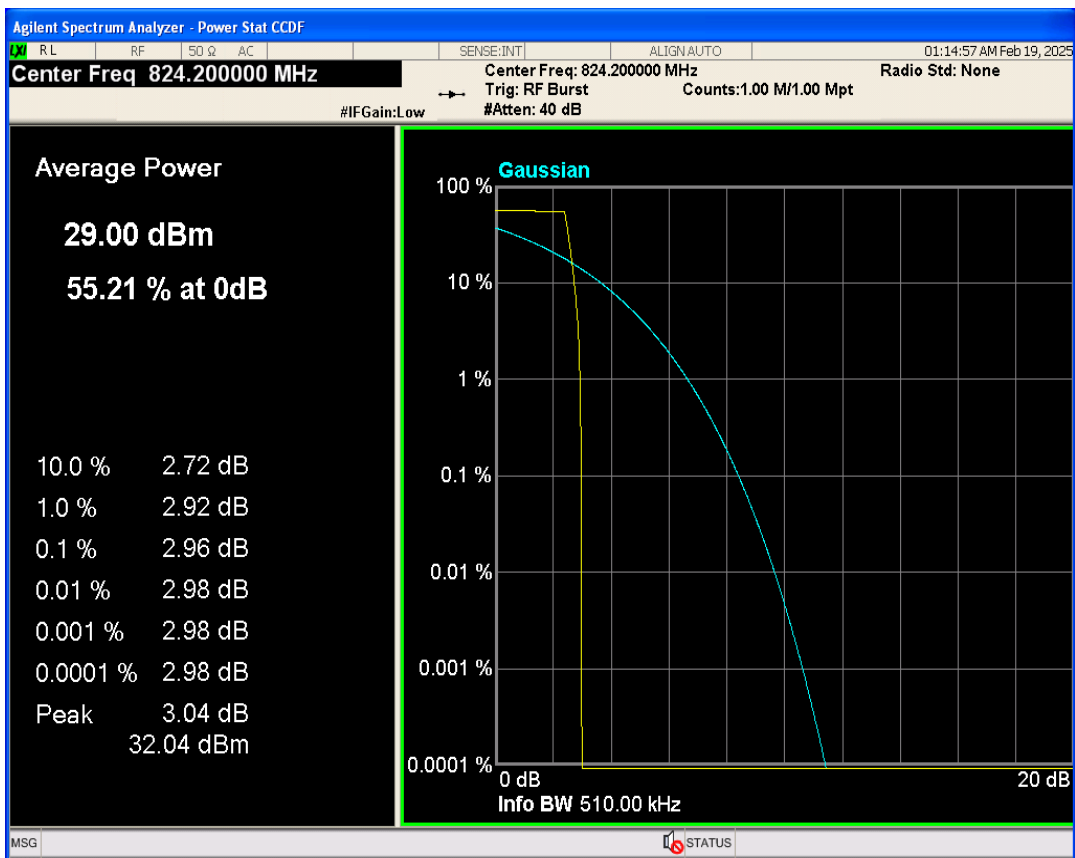

GPRS850 Channel=251

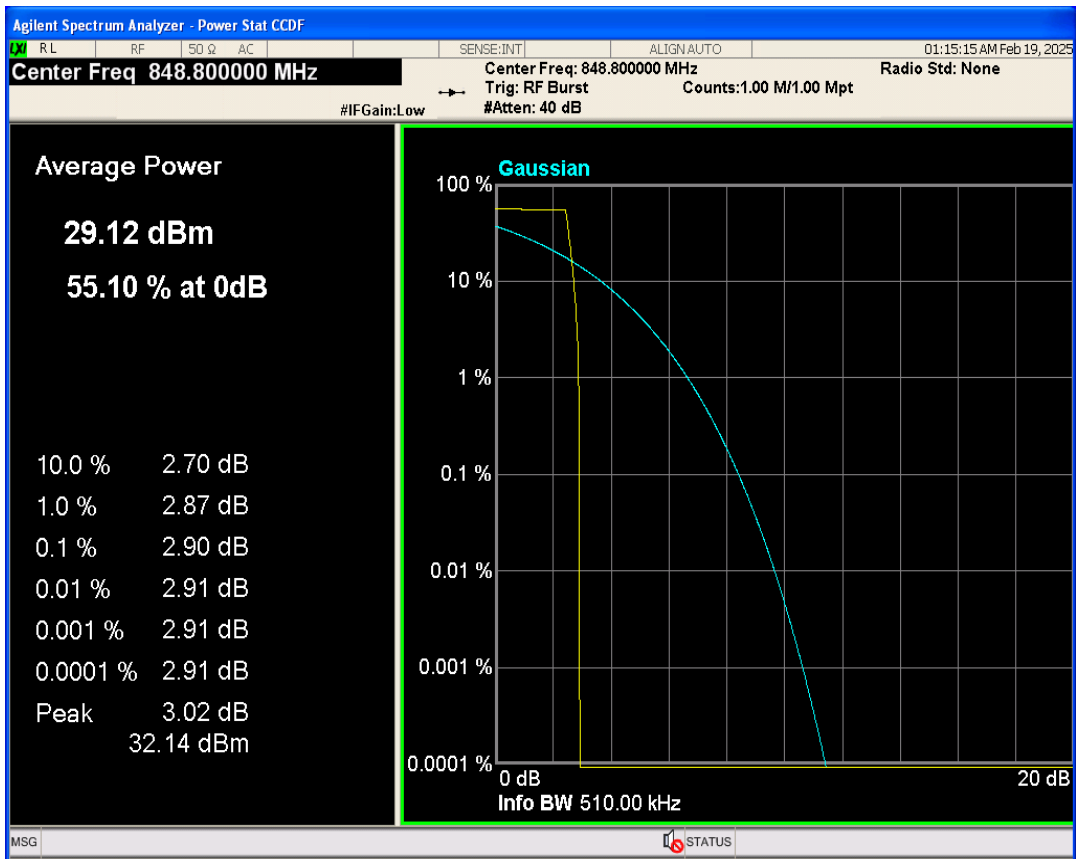


GPRS850 Channel=189

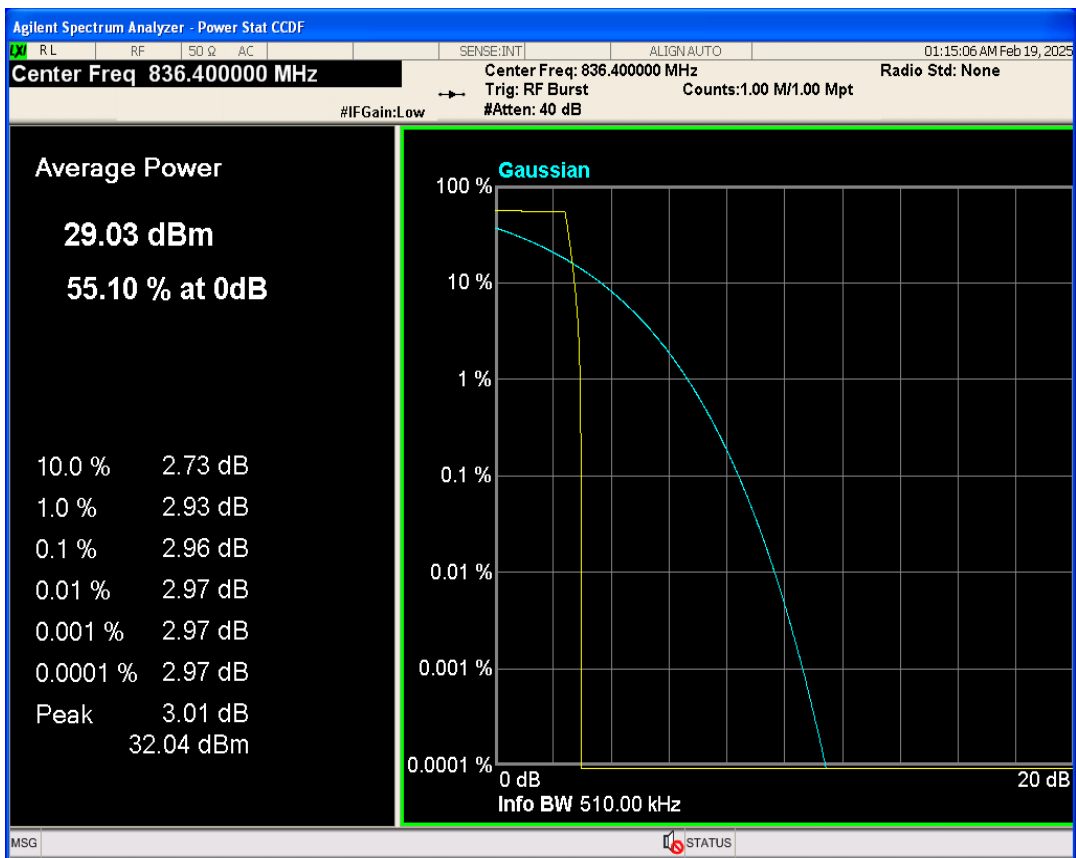


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	245.614	311.273	PASS
GPRS1900	661	1880	244.366	320.271	PASS
GPRS1900	810	1909.8	242.298	309.162	PASS
GPRS850	128	824.2	245.250	319.791	PASS
GPRS850	189	836.4	246.905	316.996	PASS
GPRS850	251	848.8	245.446	318.263	PASS


GPRS1900 Channel=512

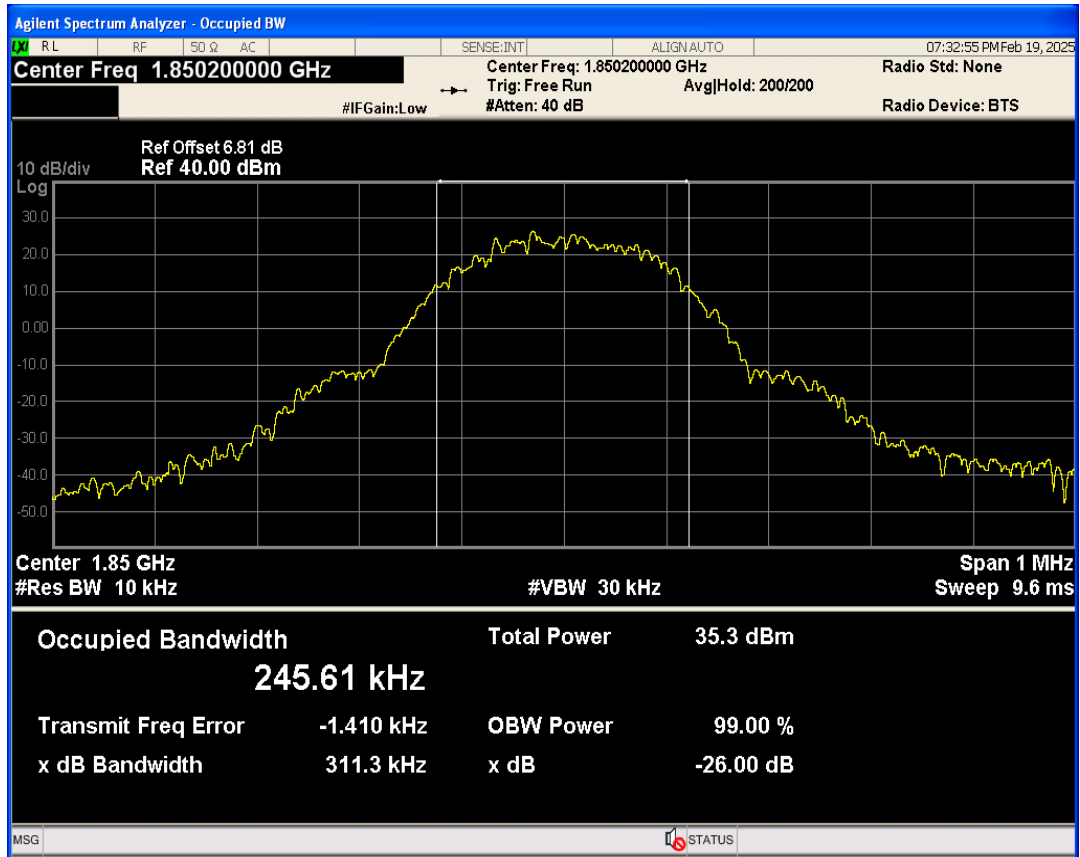


GPRS1900 Channel=810

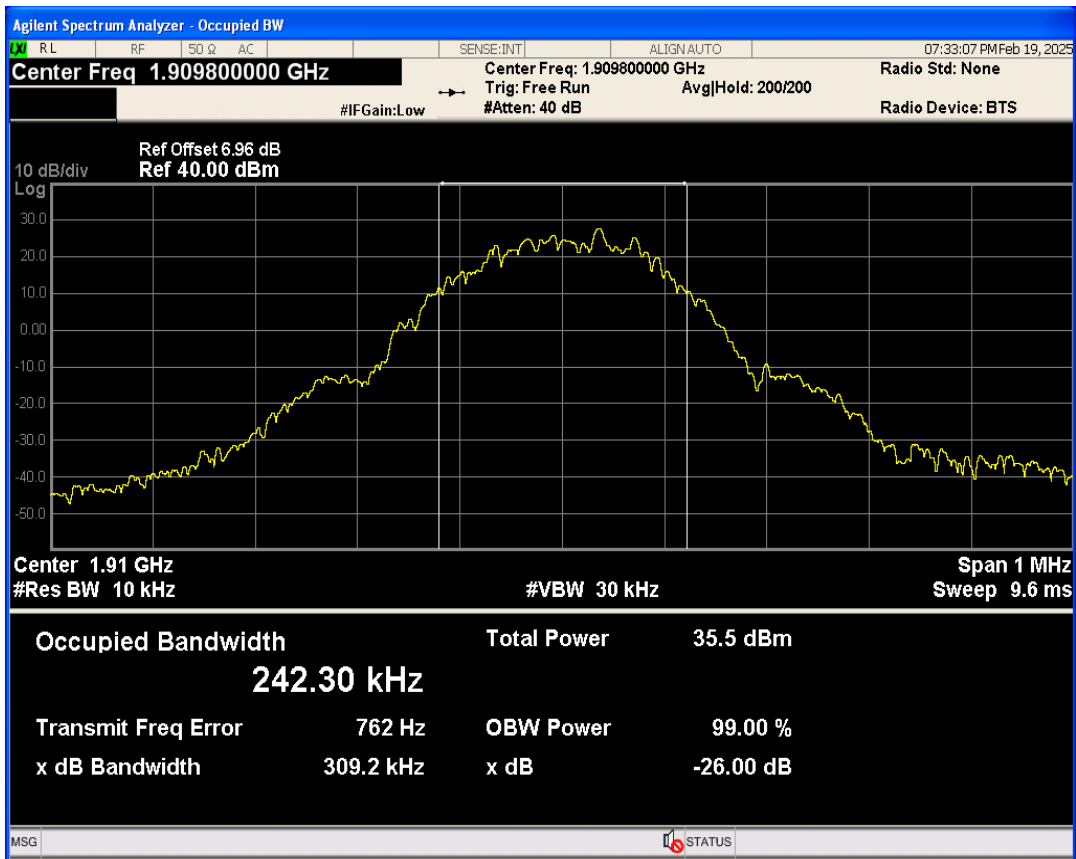


GPRS1900 Channel=661

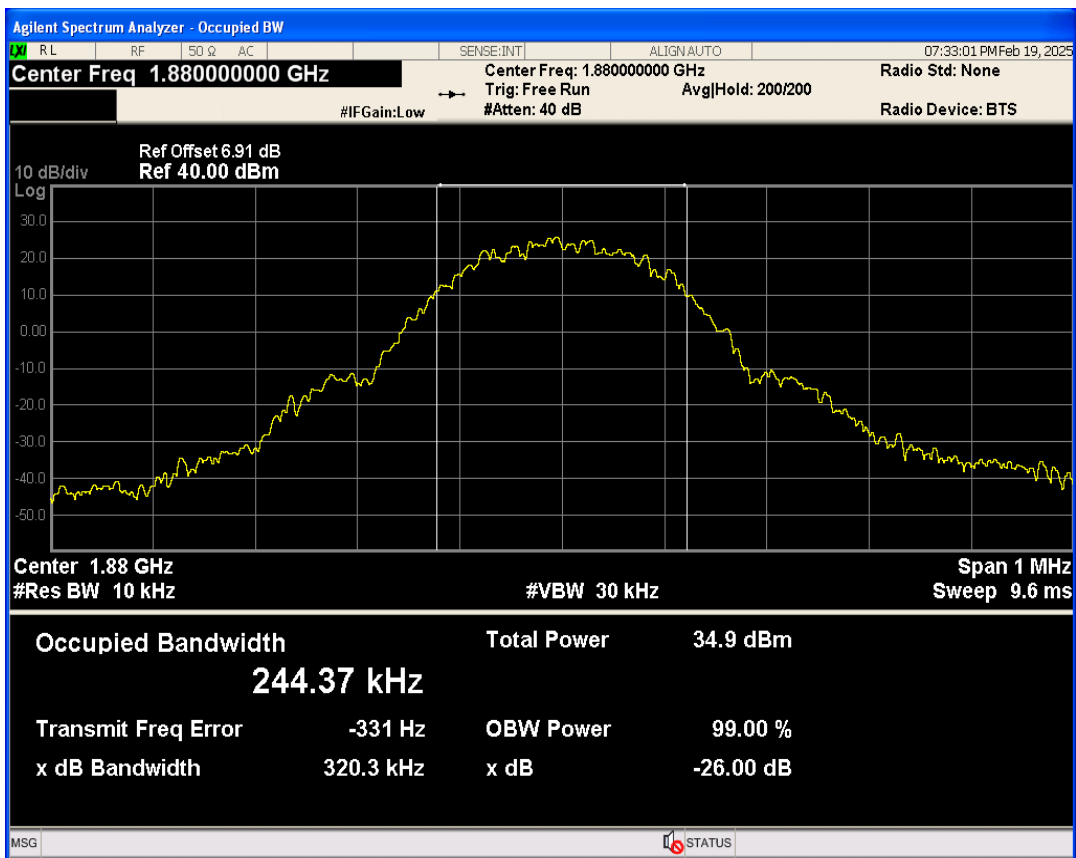


GPRS850 Channel=128

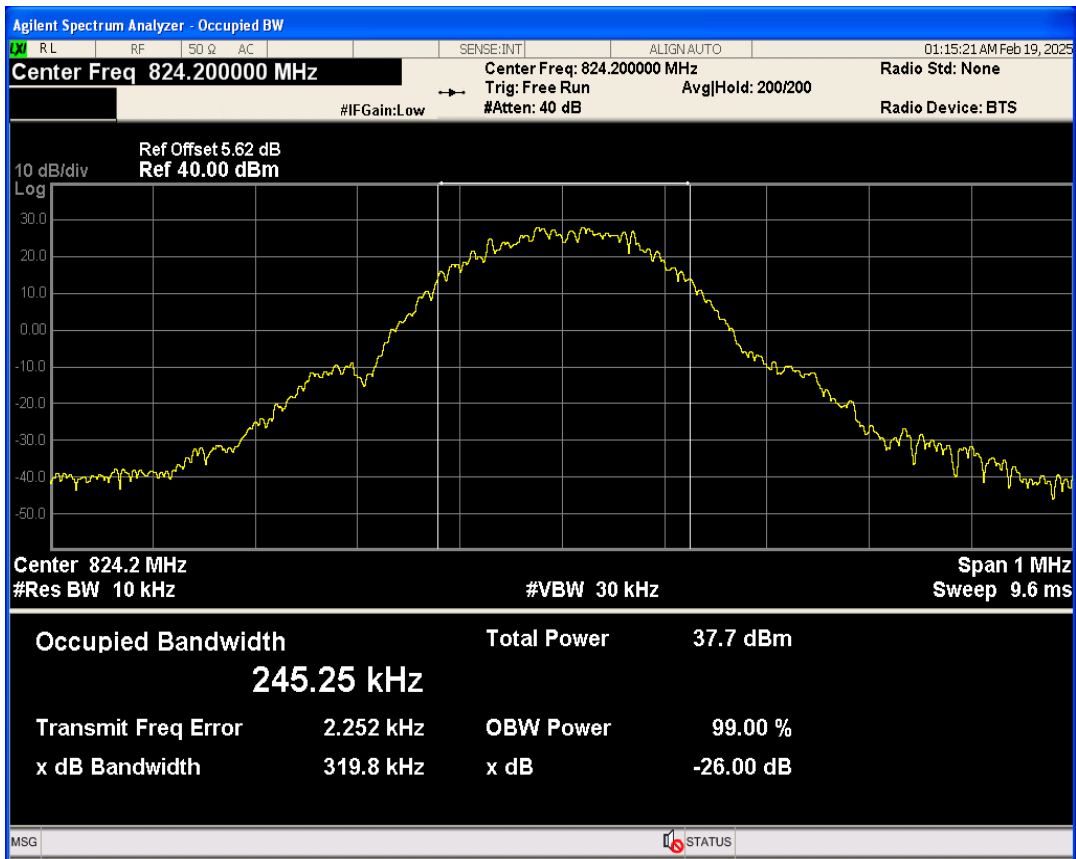

GPRS850 Channel=189

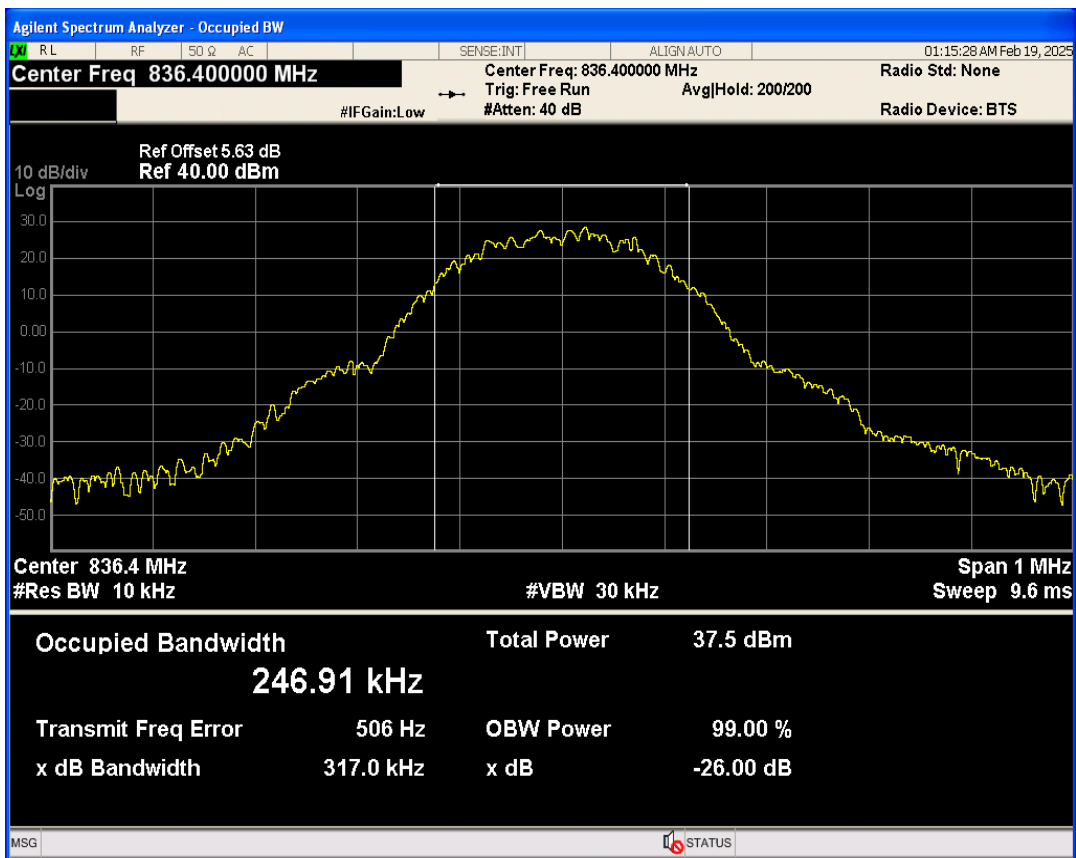


GPRS850 Channel=251

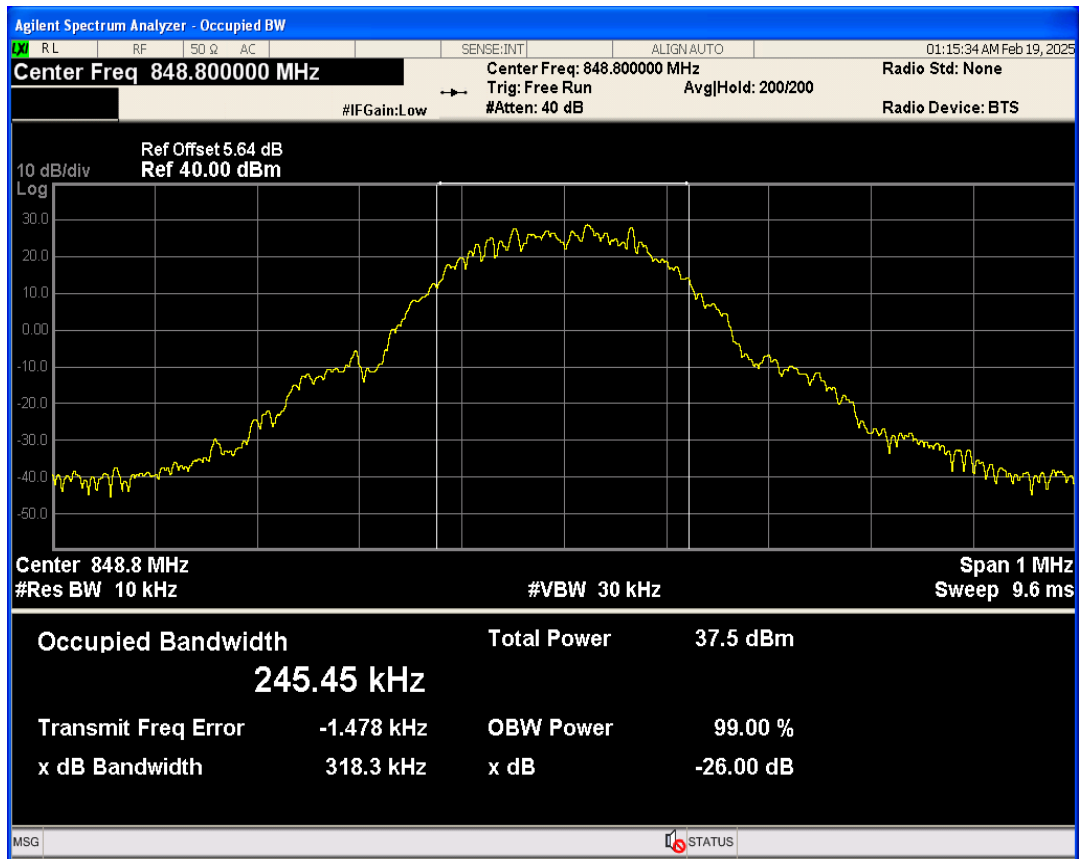


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.47	-13	PASS
GPRS1900	810	1909.8	1910.01	-30.94	-13	PASS
GPRS850	128	824.2	823.98	-28.64	-13	PASS
GPRS850	251	848.8	849.02	-27.98	-13	PASS


GPRS1900 Channel=512

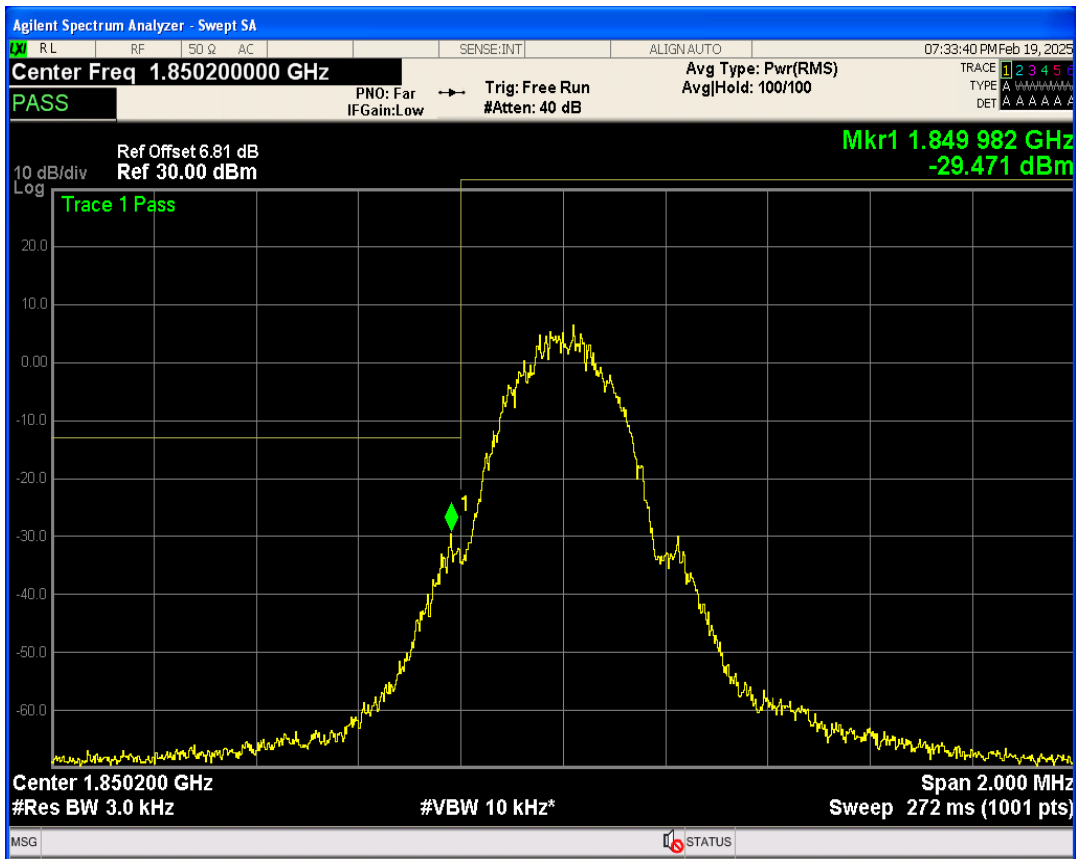


GPRS1900 Channel=810

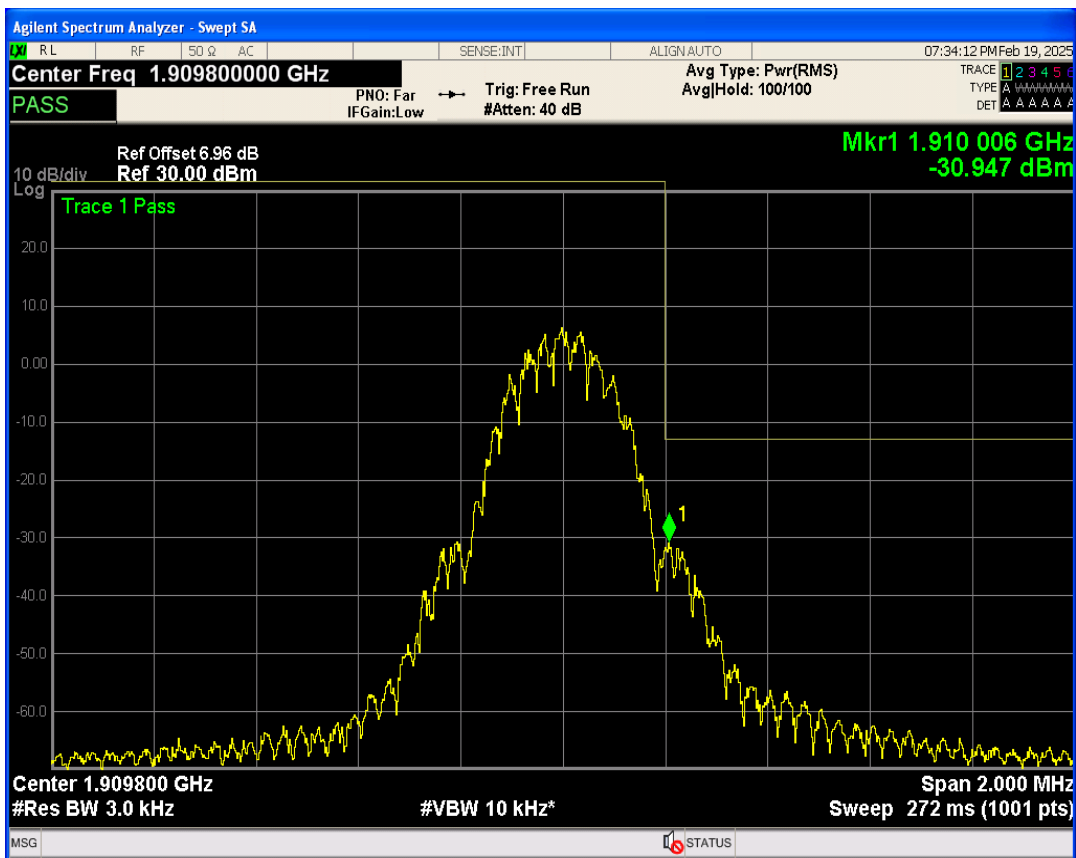

GPRS850 Channel=251

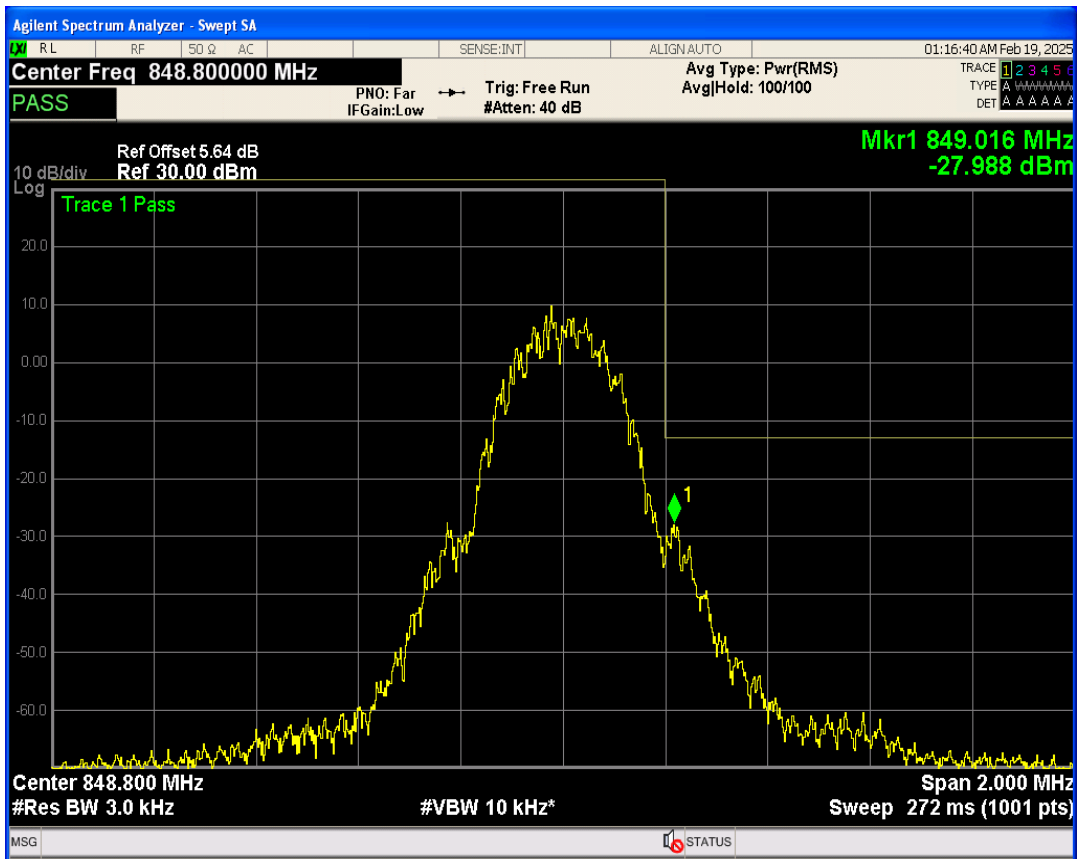


GPRS850 Channel=128

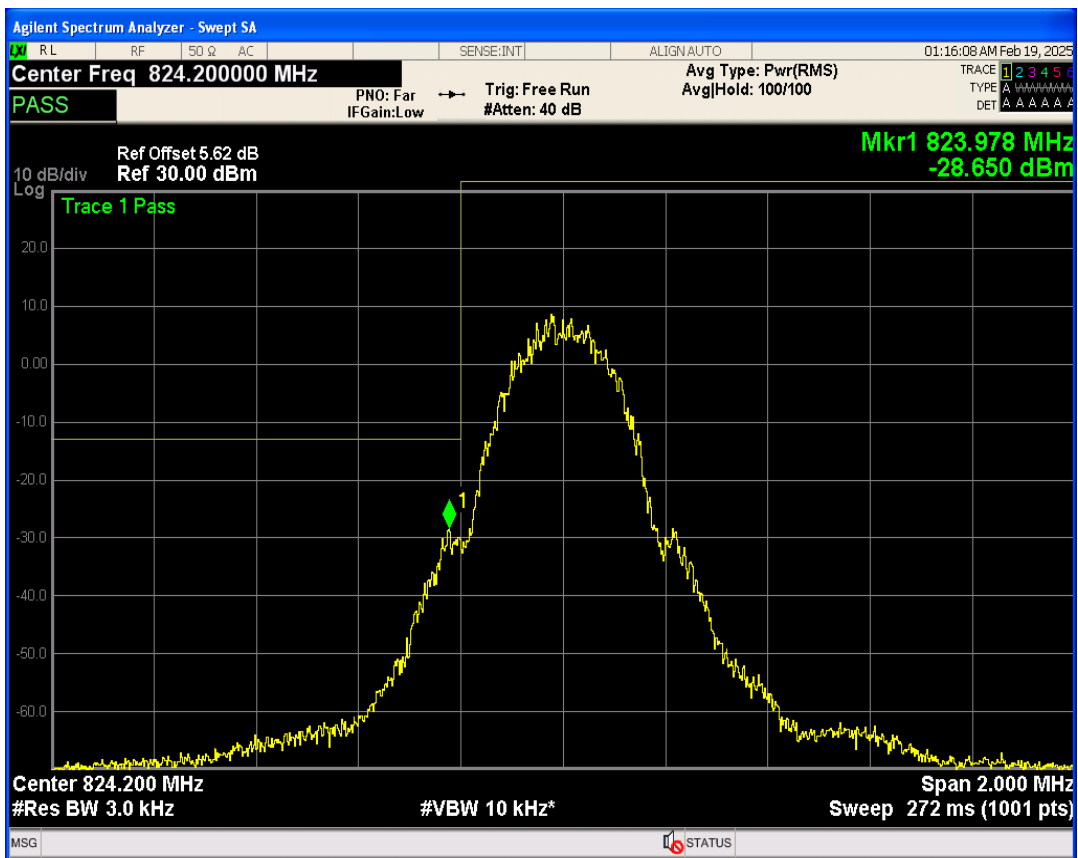


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25570.90	-19.17	-13	PASS
GPRS1900	661	1880	26041.41	-19.68	-13	PASS
GPRS1900	810	1909.8	25432.60	-19.05	-13	PASS
GPRS850	128	824.2	25984.50	-20.67	-13	PASS
GPRS850	189	836.4	26015.60	-19.44	-13	PASS
GPRS850	251	848.8	25959.35	-20.06	-13	PASS


GPRS1900 Channel=661

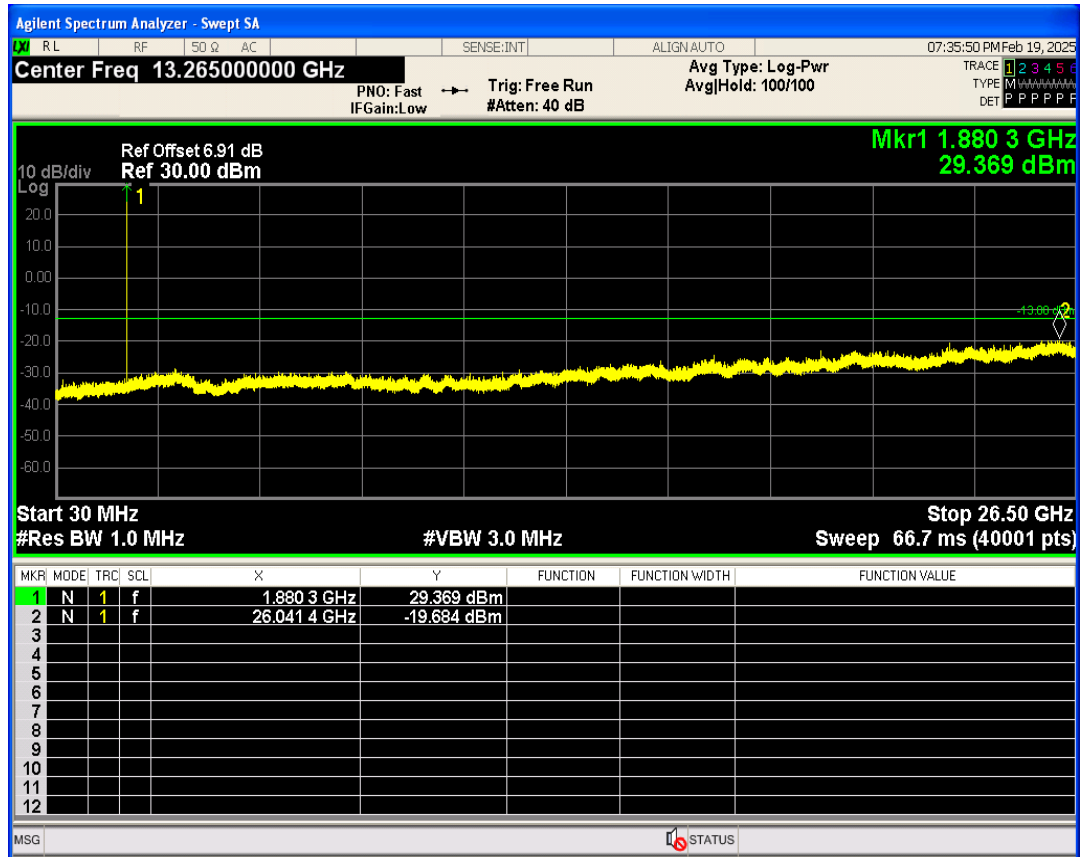


GPRS1900 Channel=512

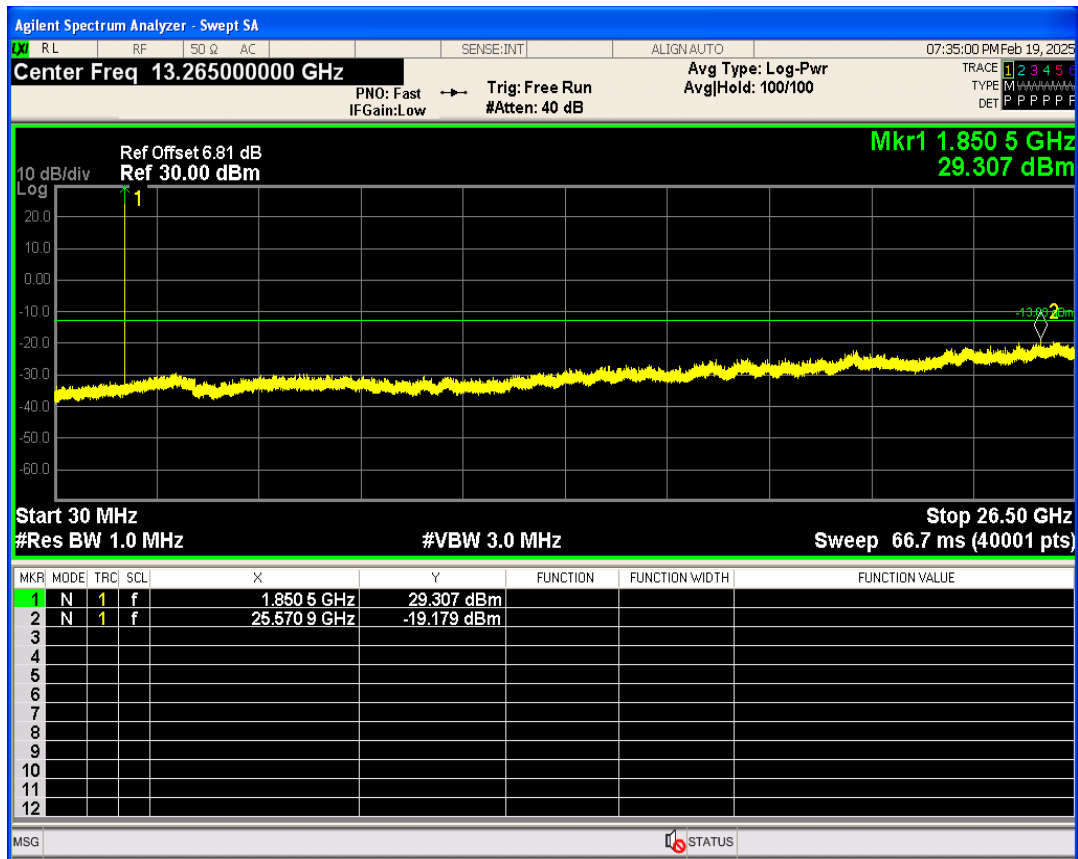


GPRS1900 Channel=810

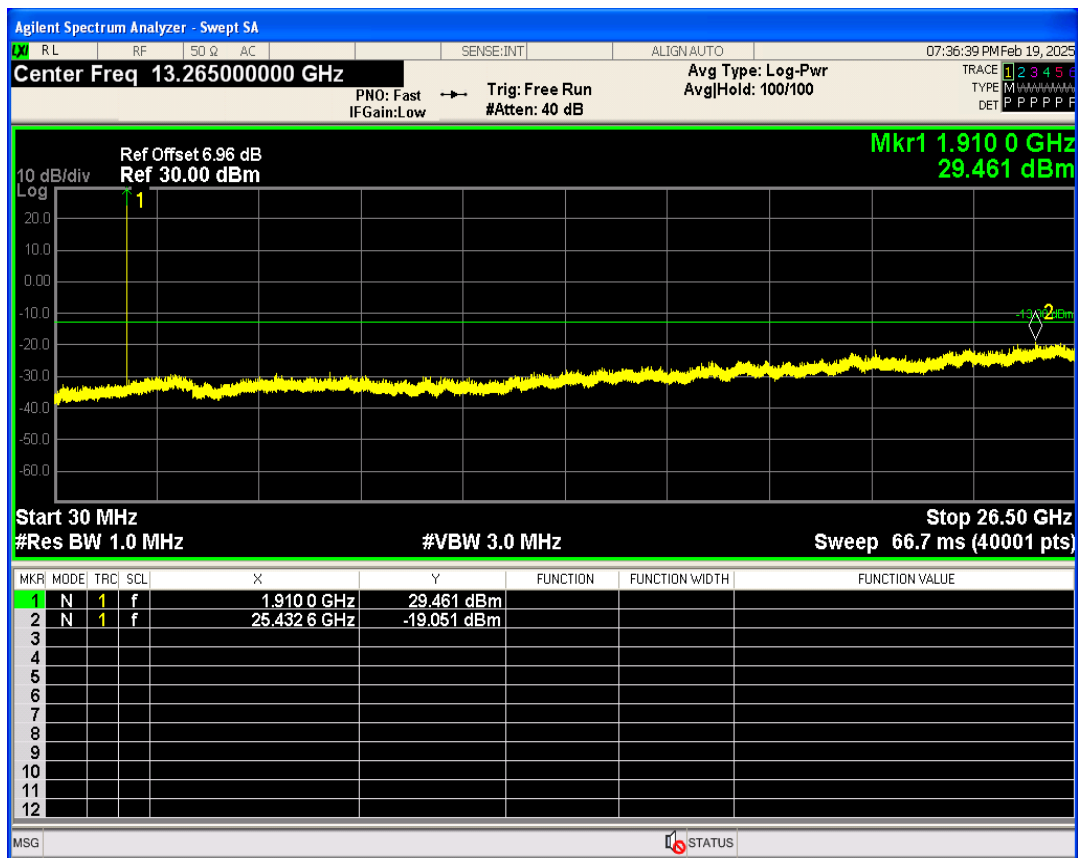


GPRS850 Channel=128

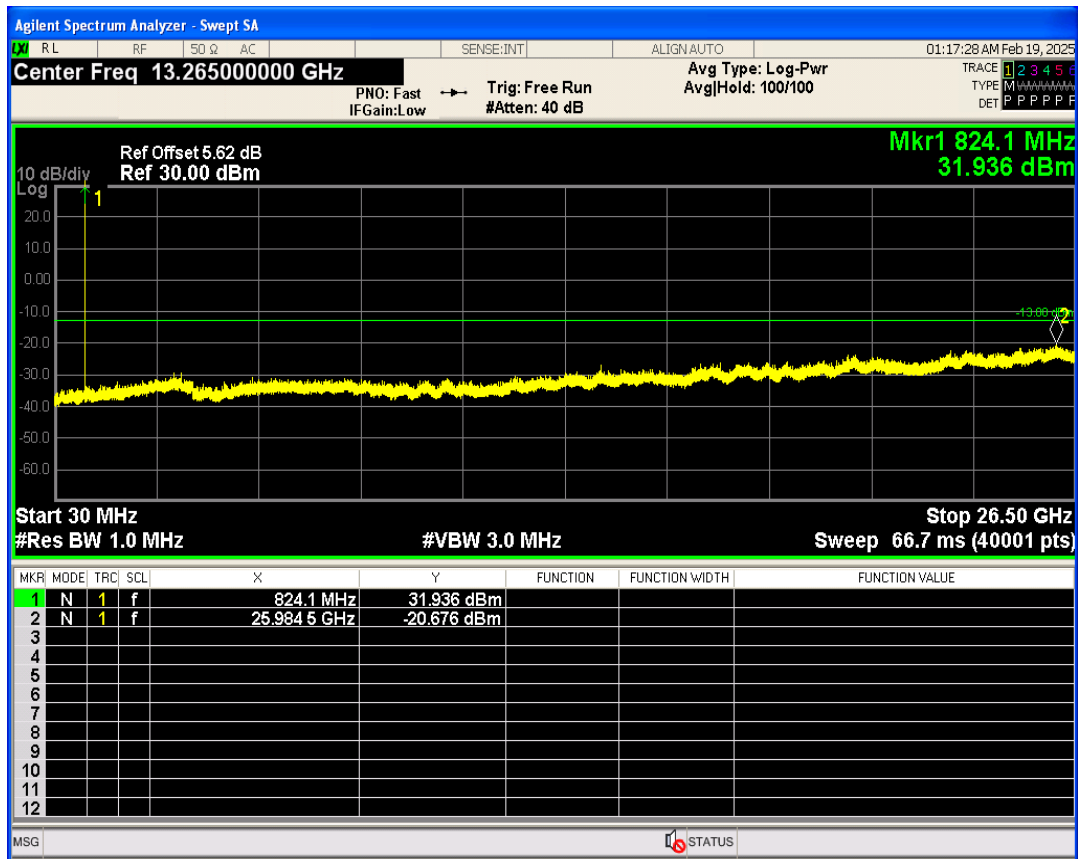

GPRS850 Channel=251

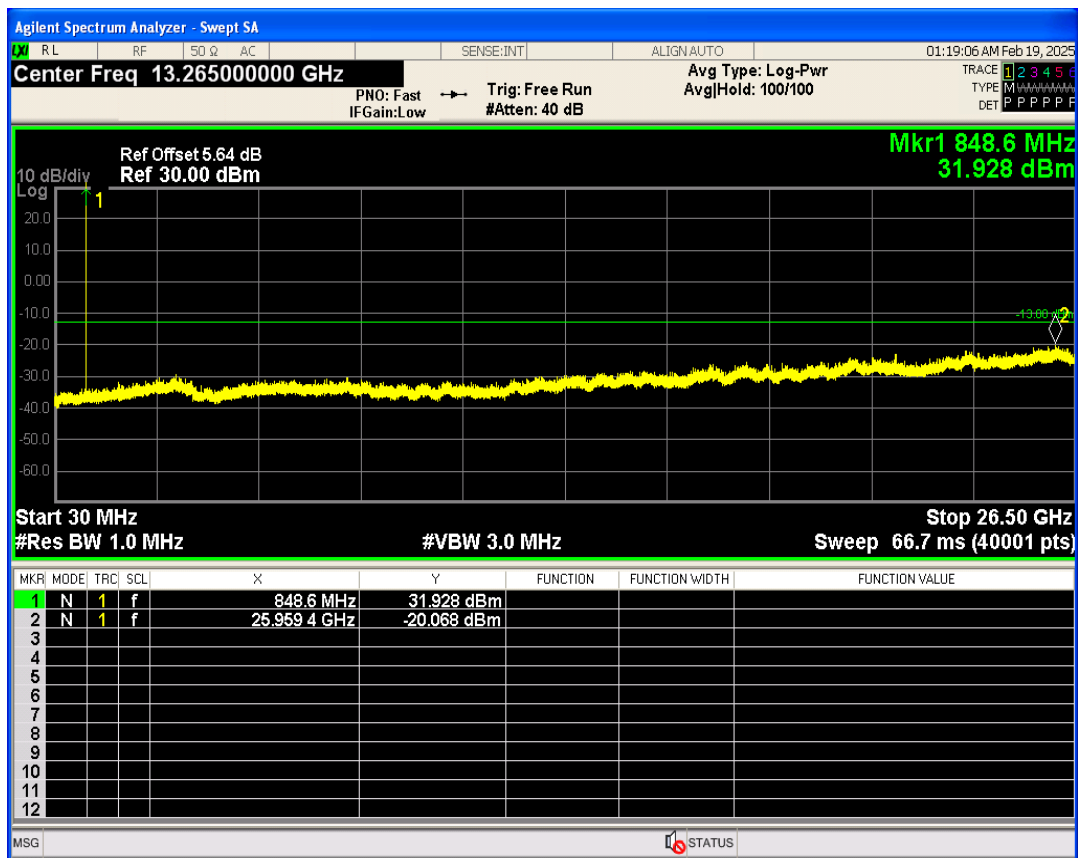


GPRS850 Channel=189

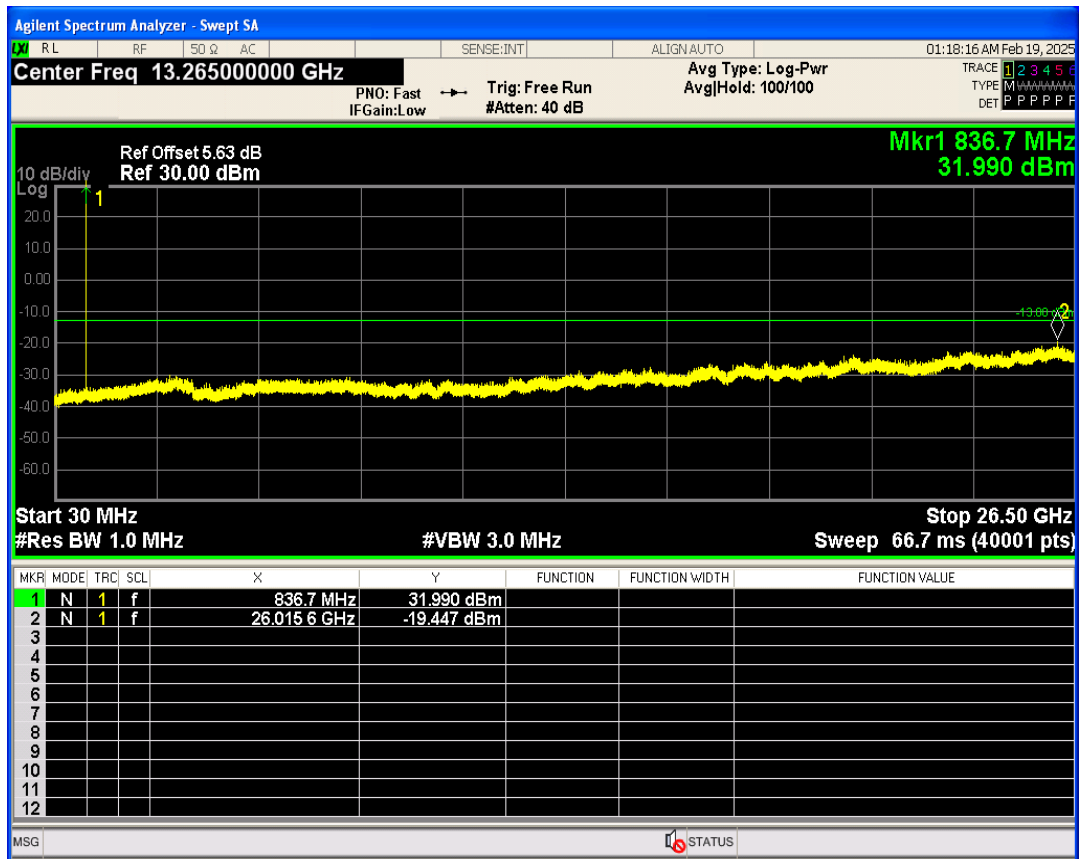


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.78	13	PASS
GSM1900	661	1880	2.75	13	PASS
GSM1900	810	1909.8	2.79	13	PASS
GSM850	128	824.2	2.90	13	PASS
GSM850	189	836.4	2.90	13	PASS
GSM850	251	848.8	2.85	13	PASS


GSM1900 Channel=512

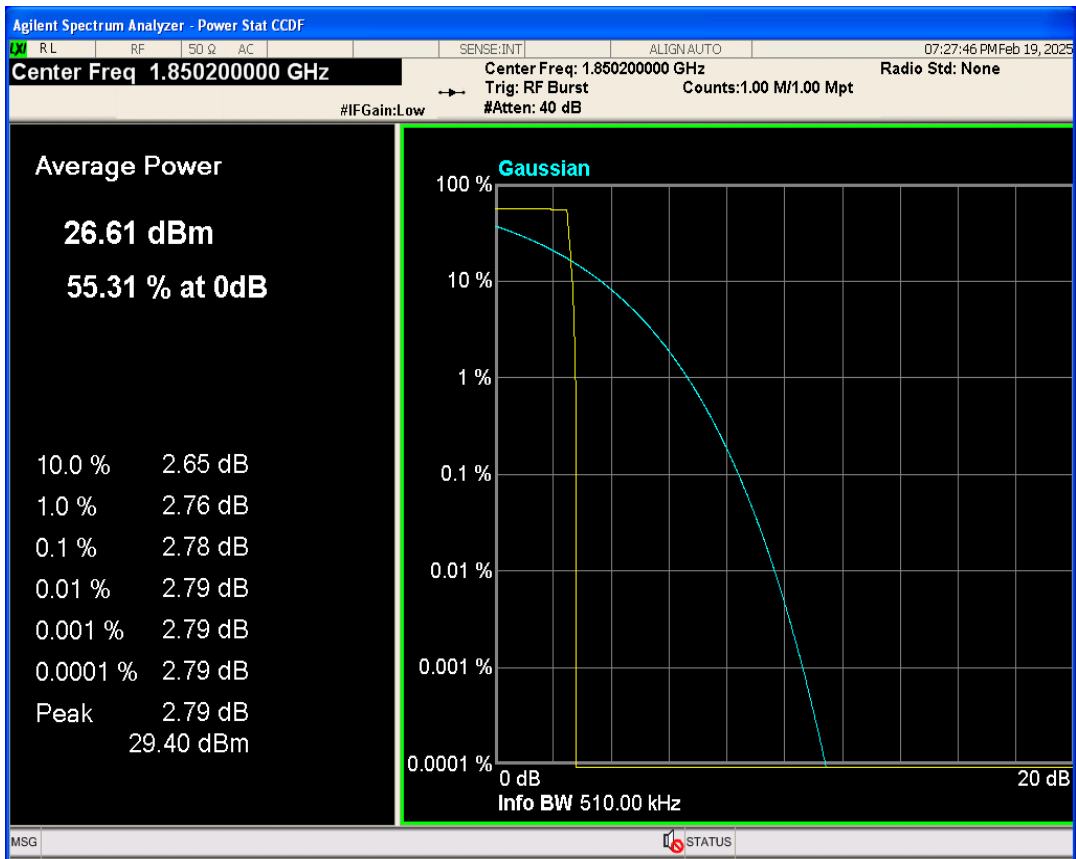


GSM1900 Channel=810

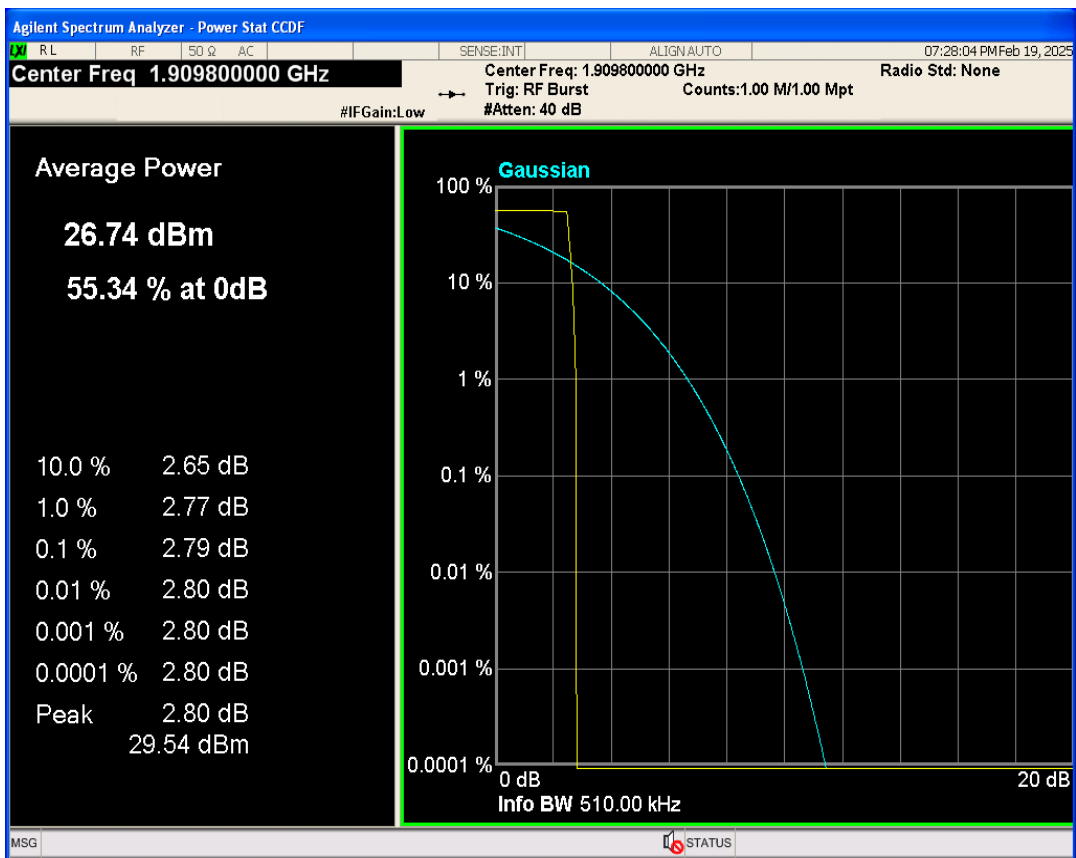


GSM1900 Channel=661

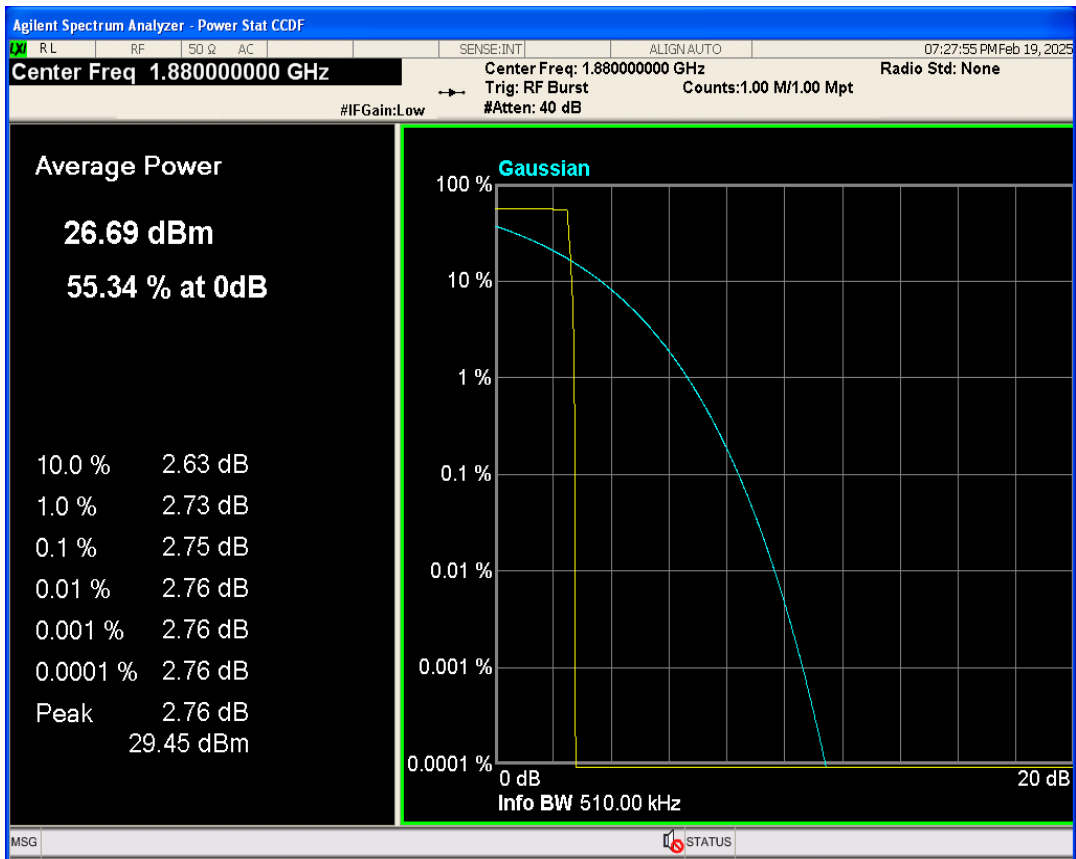


GSM850 Channel=128

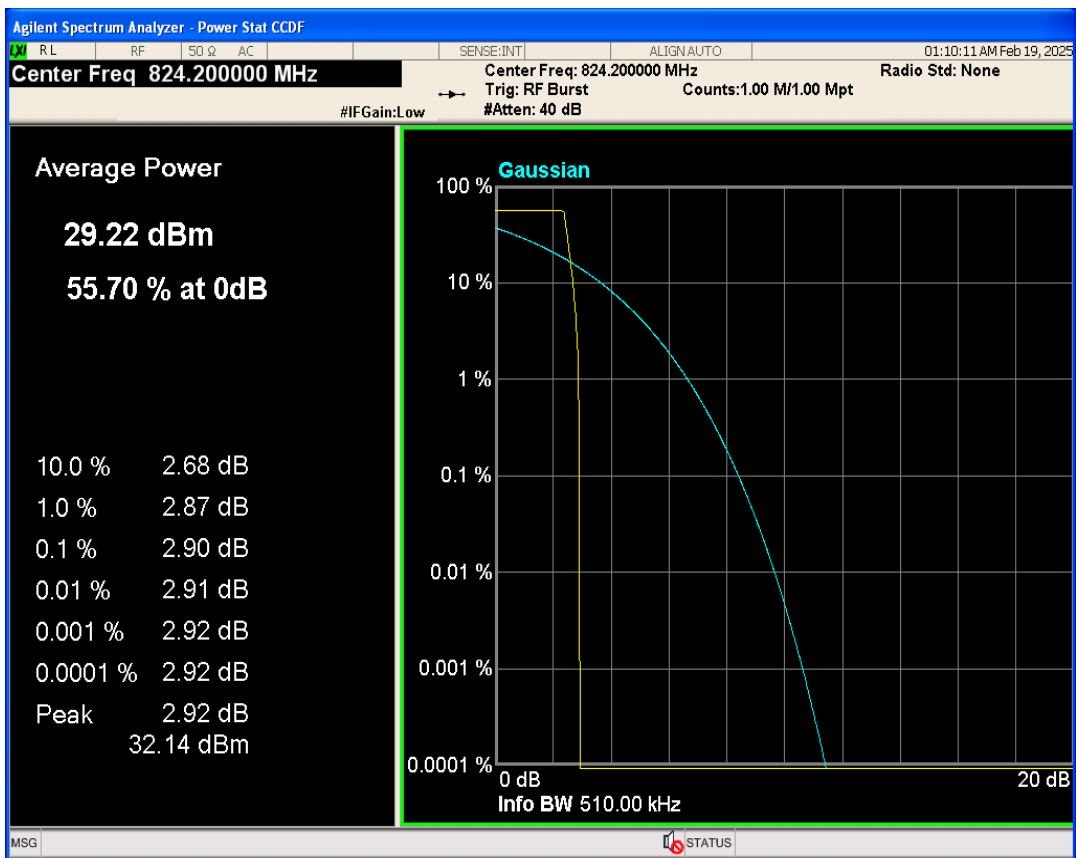

GSM850 Channel=189

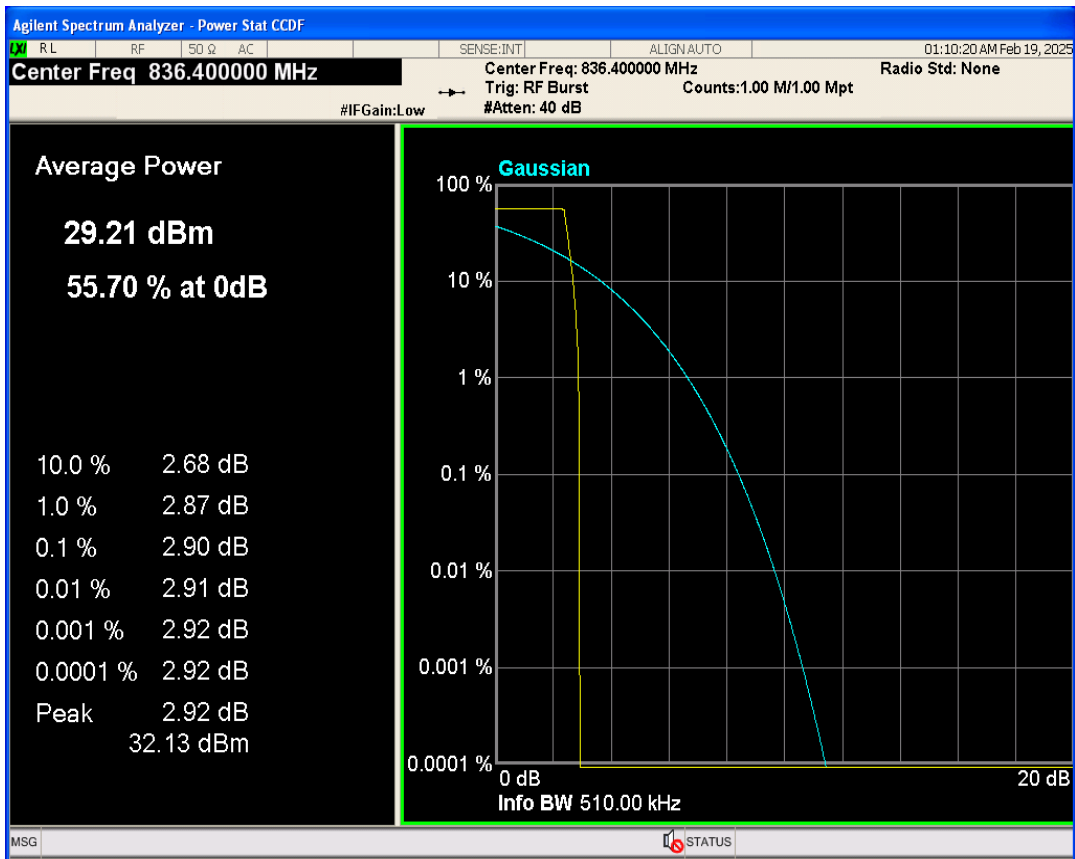


GSM850 Channel=251

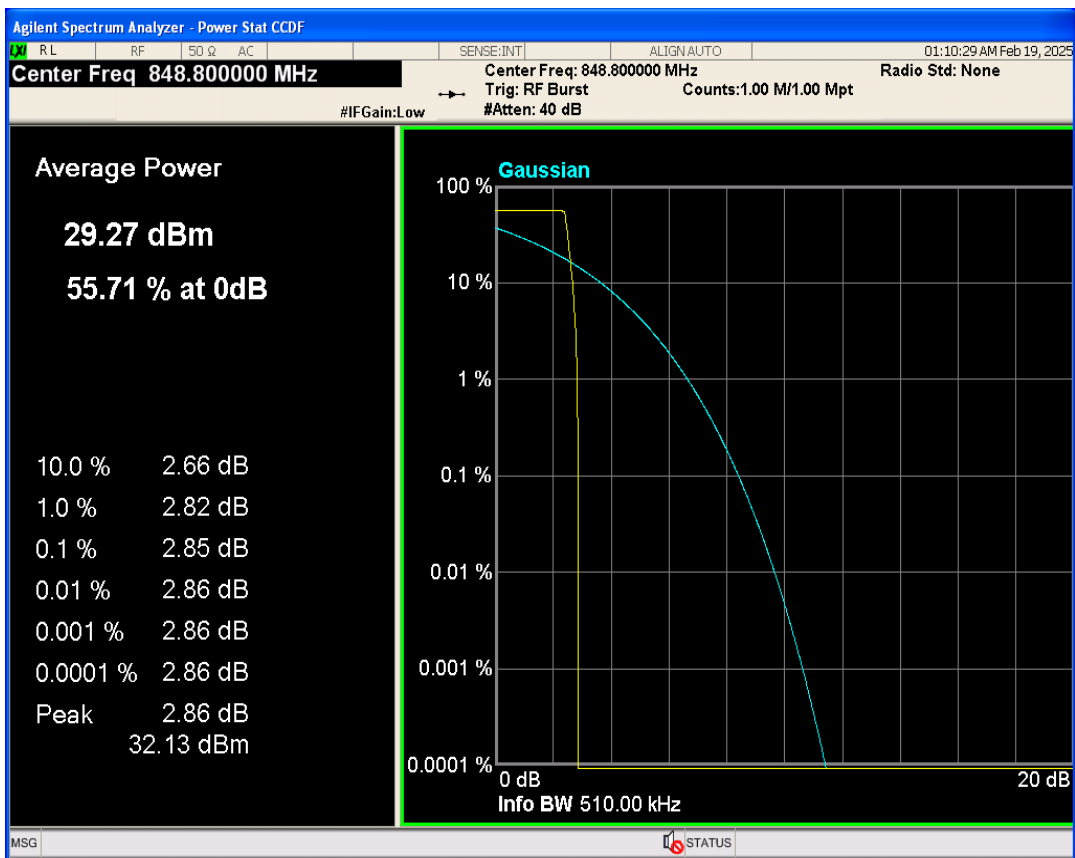


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	244.320	317.066	PASS
GSM1900	661	1880	246.663	318.947	PASS
GSM1900	810	1909.8	244.859	319.829	PASS
GSM850	128	824.2	247.672	318.403	PASS
GSM850	189	836.4	245.139	312.306	PASS
GSM850	251	848.8	240.676	317.313	PASS


GSM1900 Channel=512

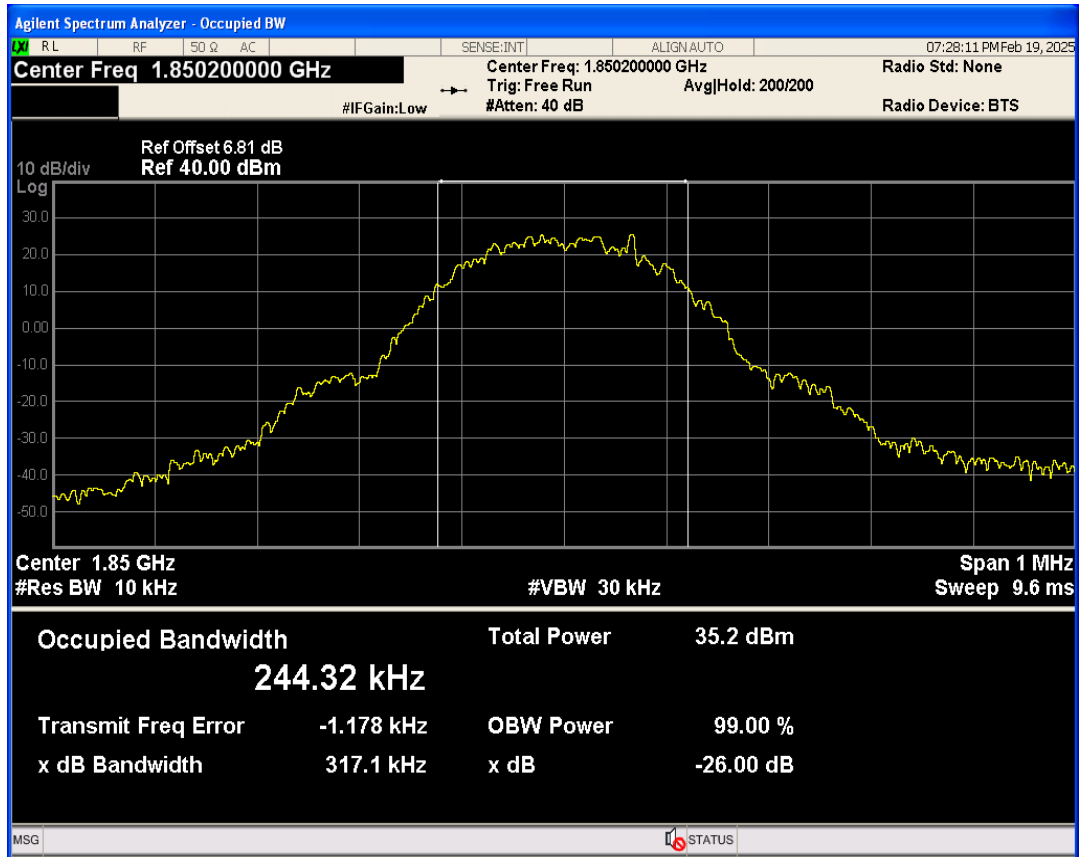


GSM1900 Channel=661

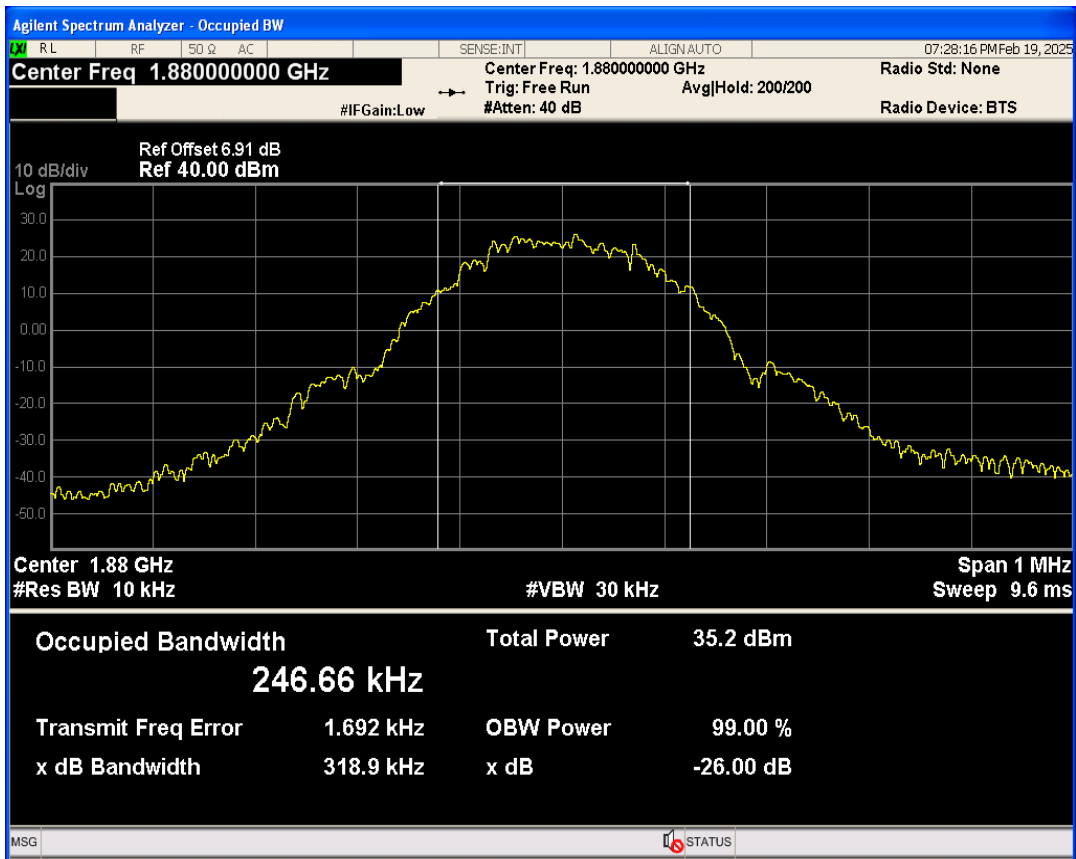


GSM1900 Channel=810

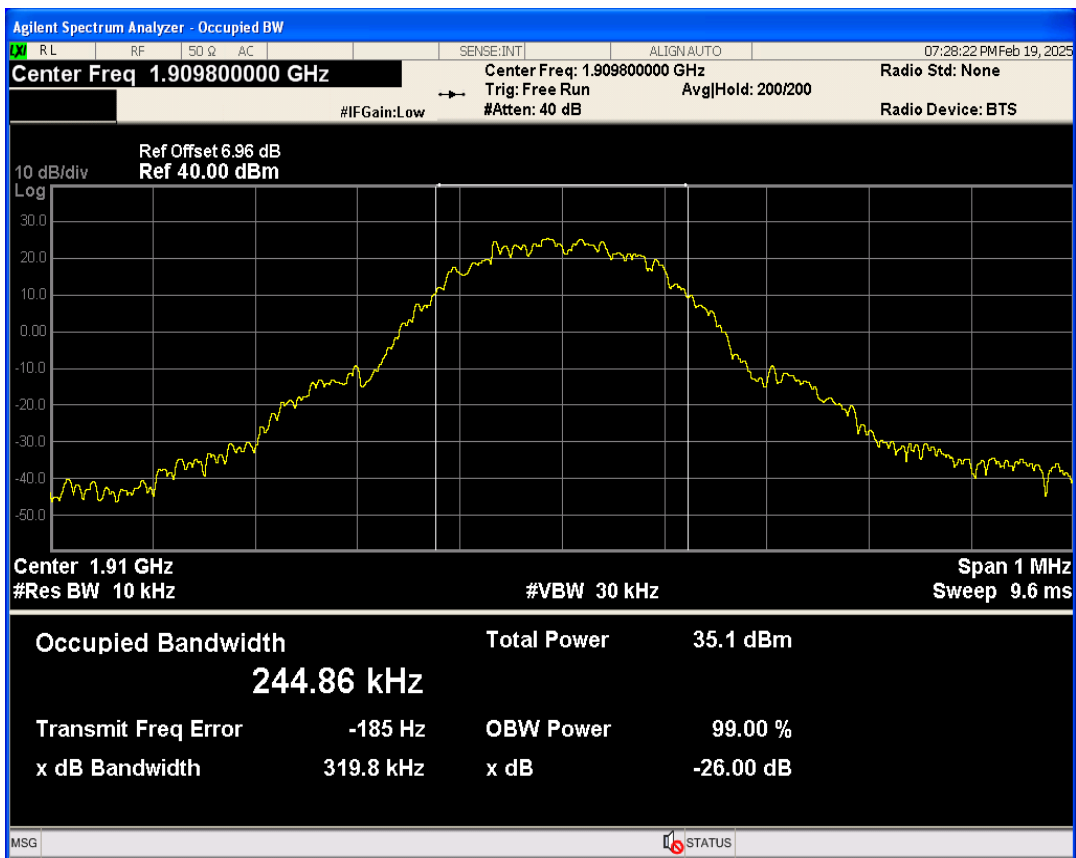


GSM850 Channel=189

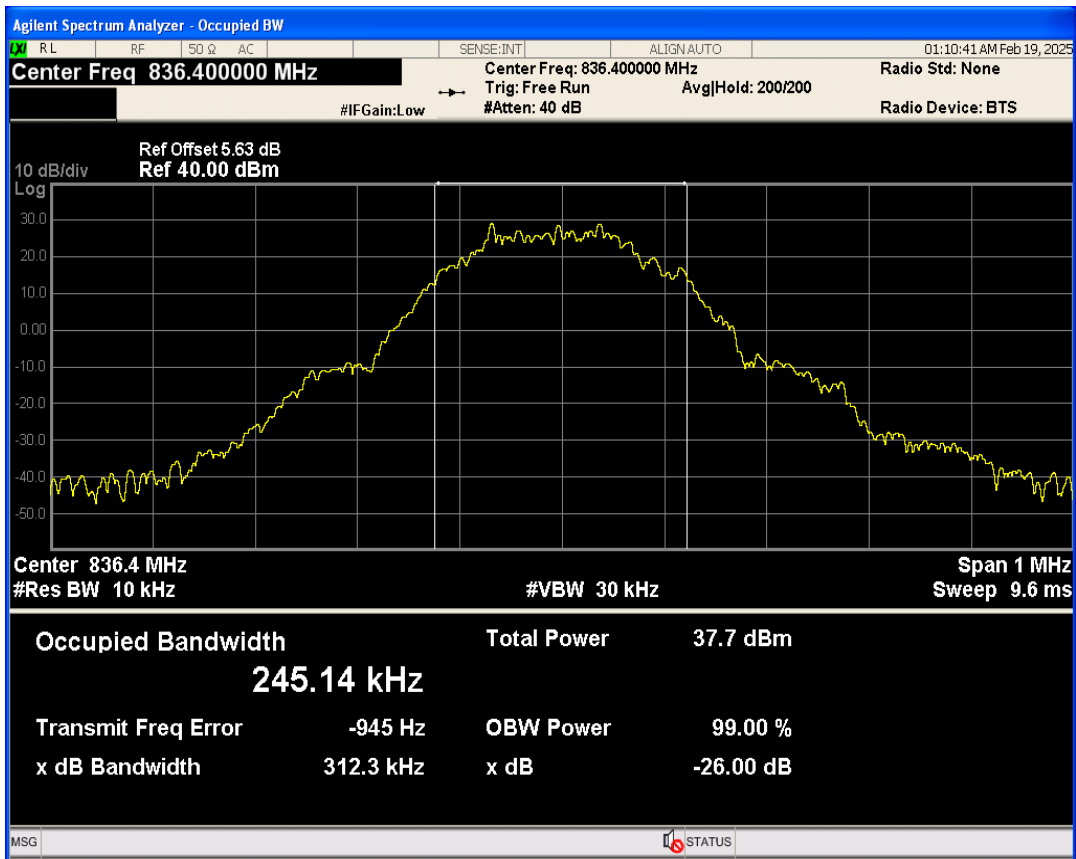

GSM850 Channel=128

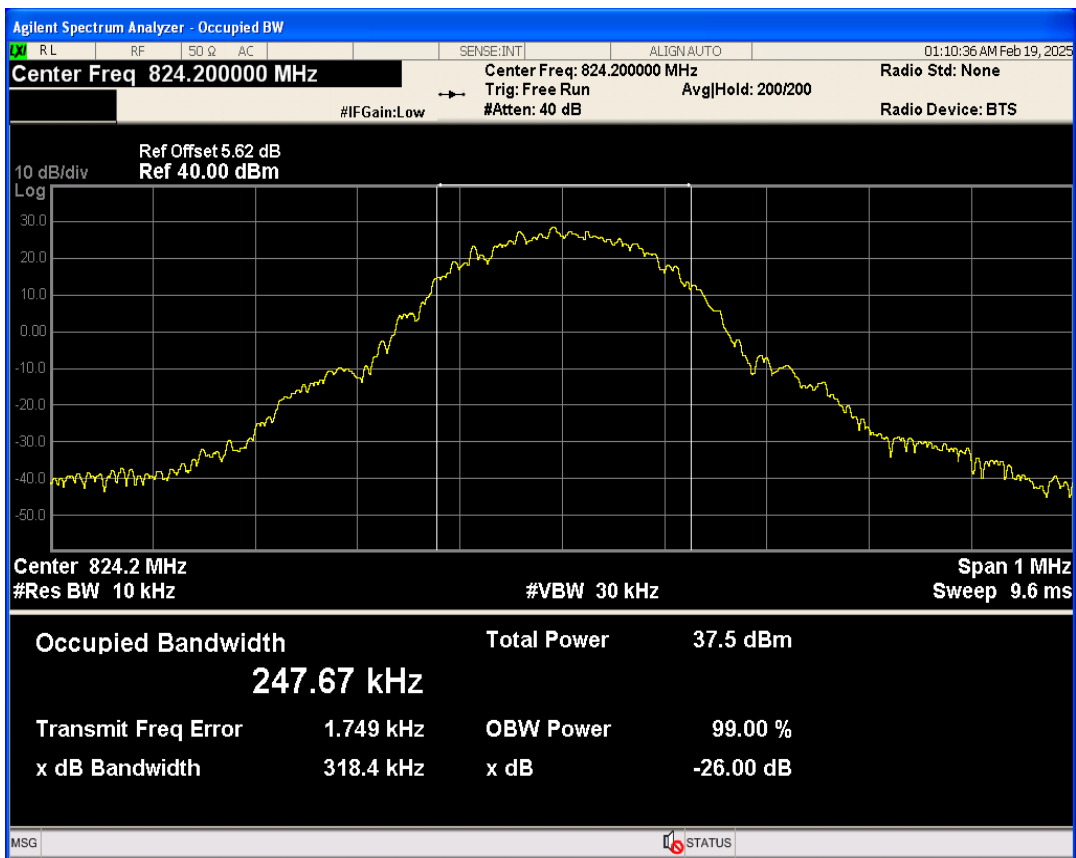


GSM850 Channel=251

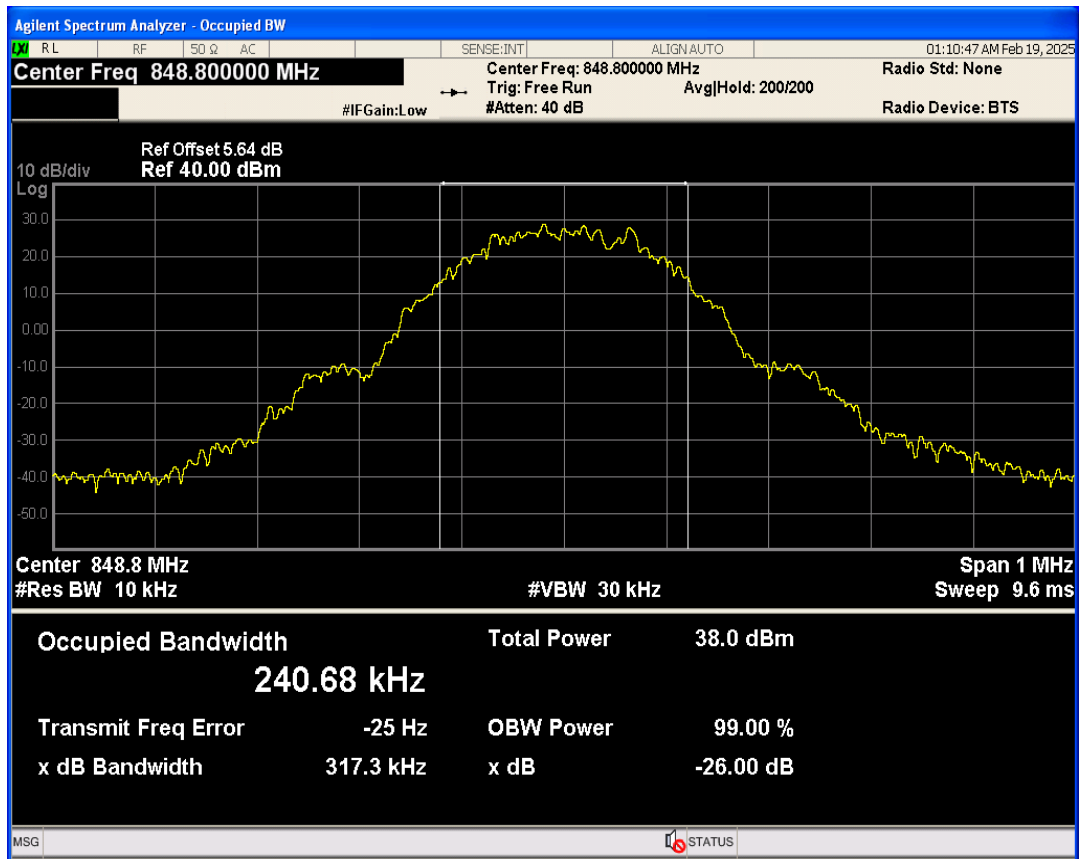


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-30.87	-13	PASS
GSM1900	810	1909.8	1910.02	-28.49	-13	PASS
GSM850	128	824.2	823.98	-25.39	-13	PASS
GSM850	251	848.8	849.02	-26.89	-13	PASS


GSM1900 Channel=512

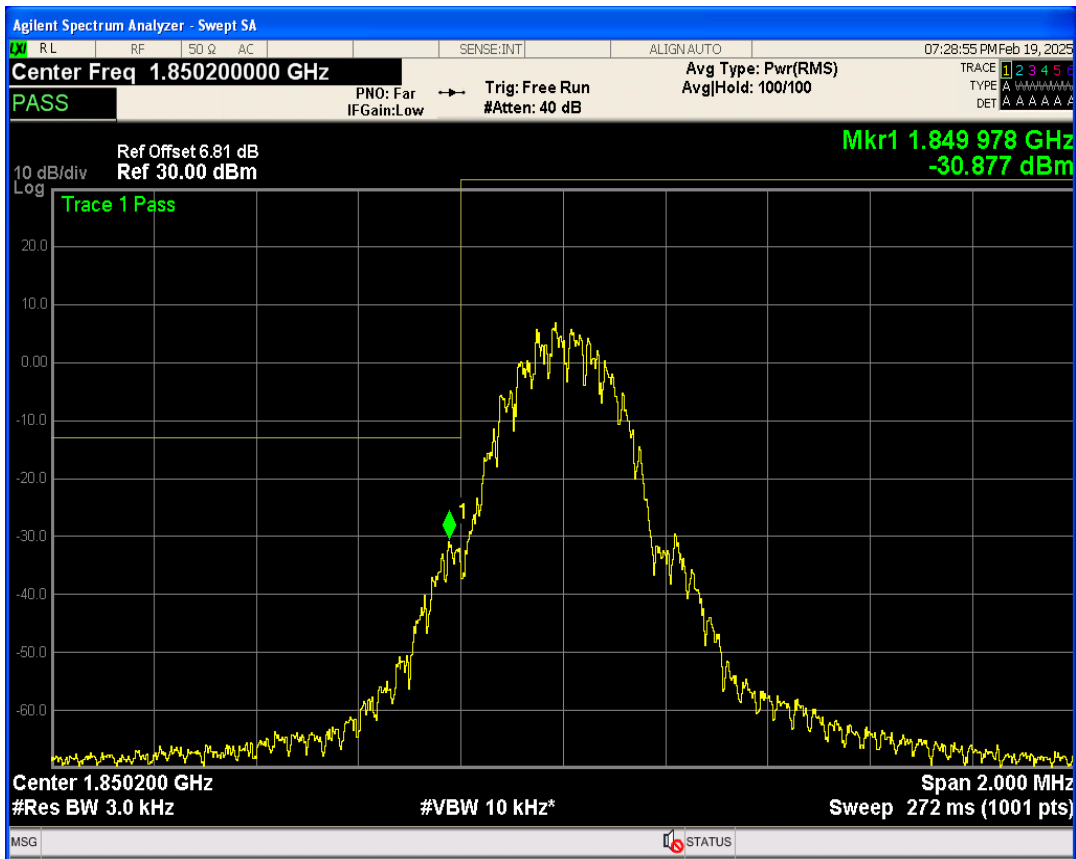


GSM1900 Channel=810

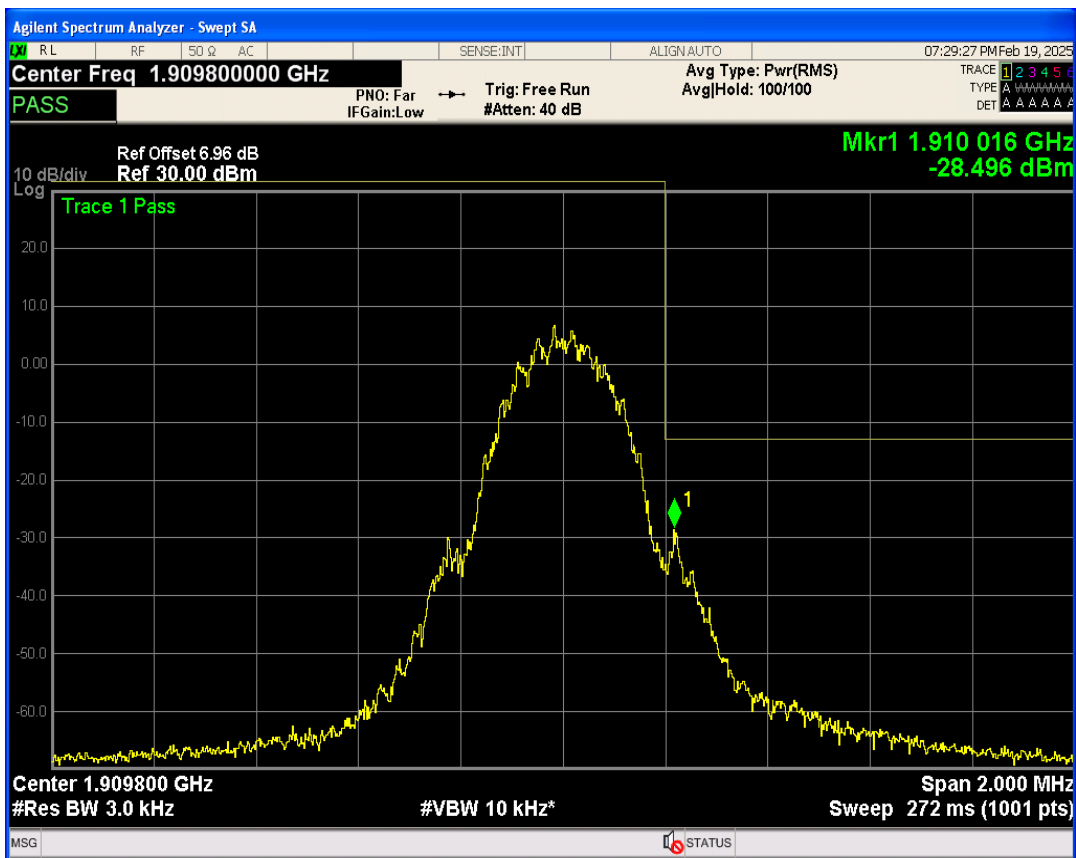

GSM850 Channel=128

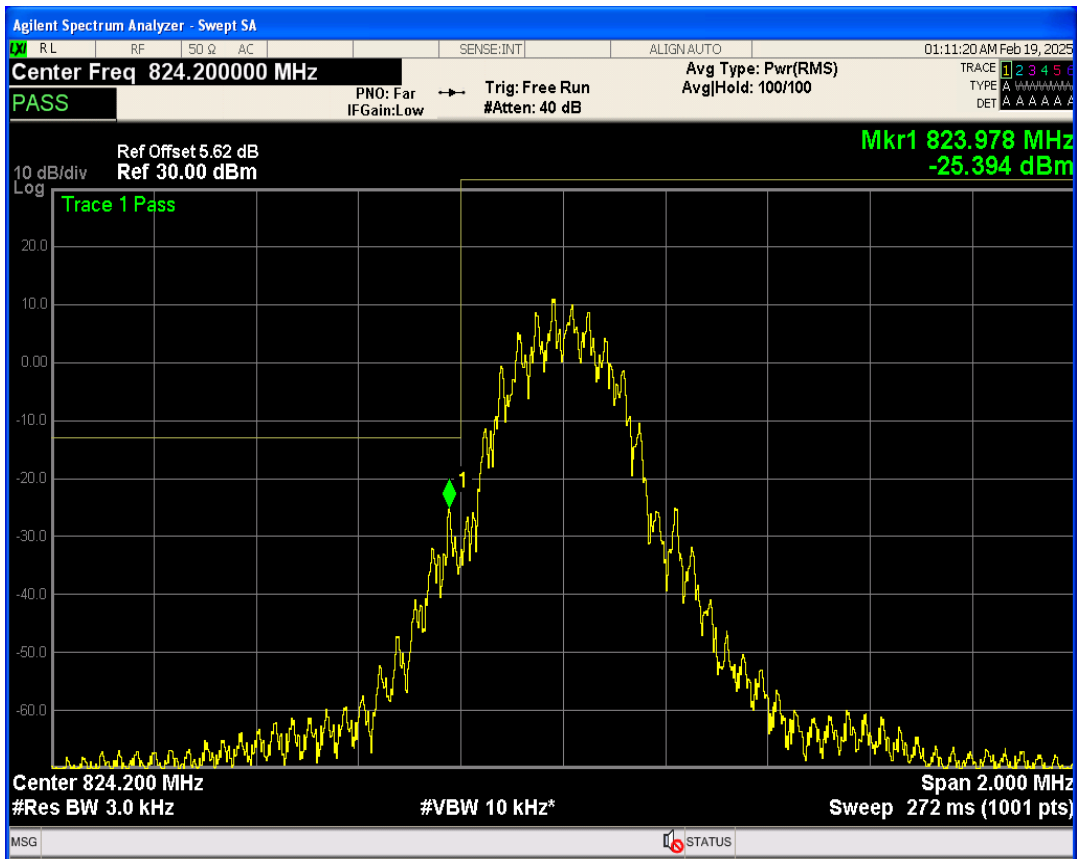


GSM850 Channel=251

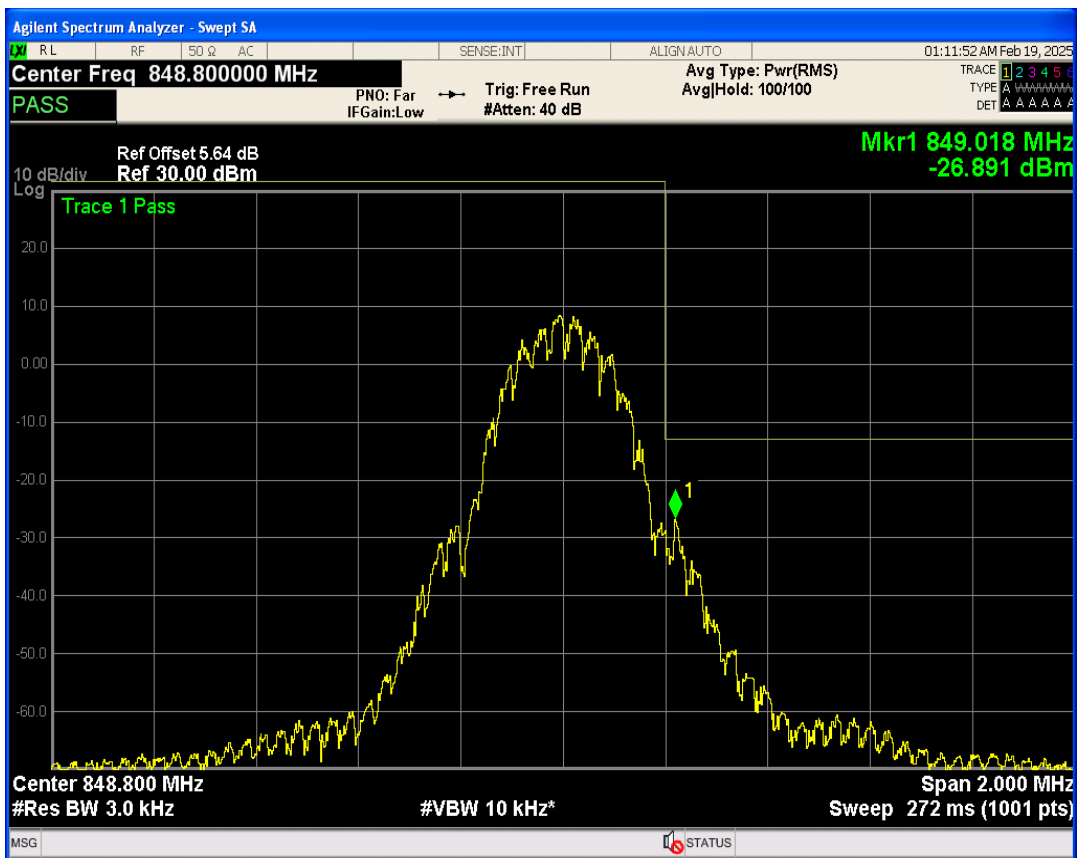


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25962.00	-19.19	-13	PASS
GSM1900	661	1880	26029.50	-19.34	-13	PASS
GSM1900	810	1909.8	26049.35	-18.89	-13	PASS
GSM850	128	824.2	25597.37	-20.35	-13	PASS
GSM850	189	836.4	26132.73	-20.15	-13	PASS
GSM850	251	848.8	25980.53	-19.79	-13	PASS


GSM1900 Channel=512

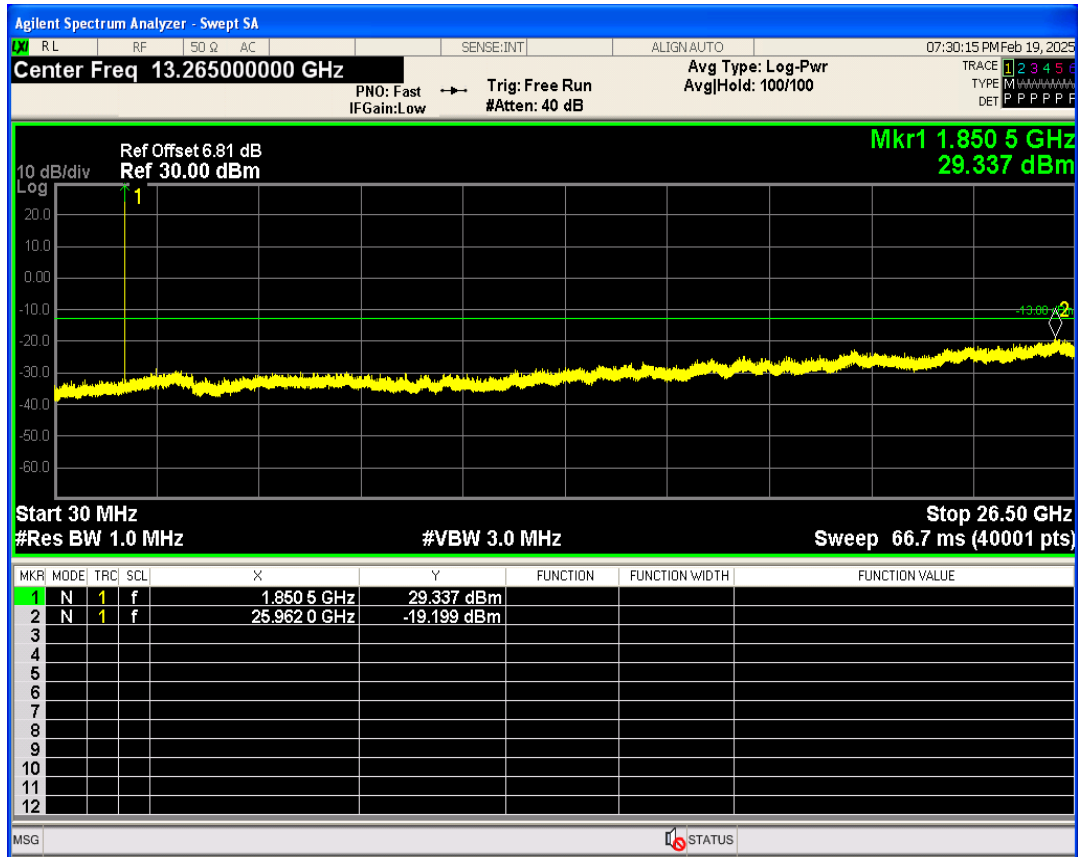


GSM1900 Channel=661

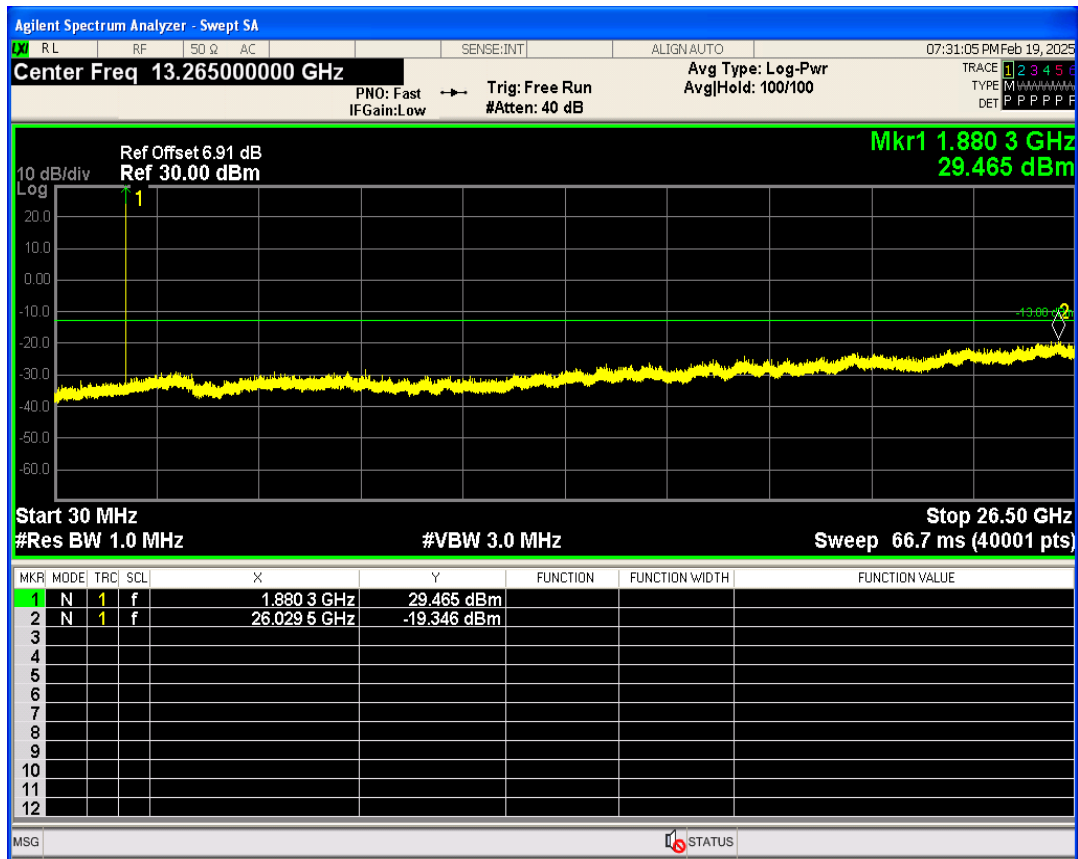


GSM1900 Channel=810

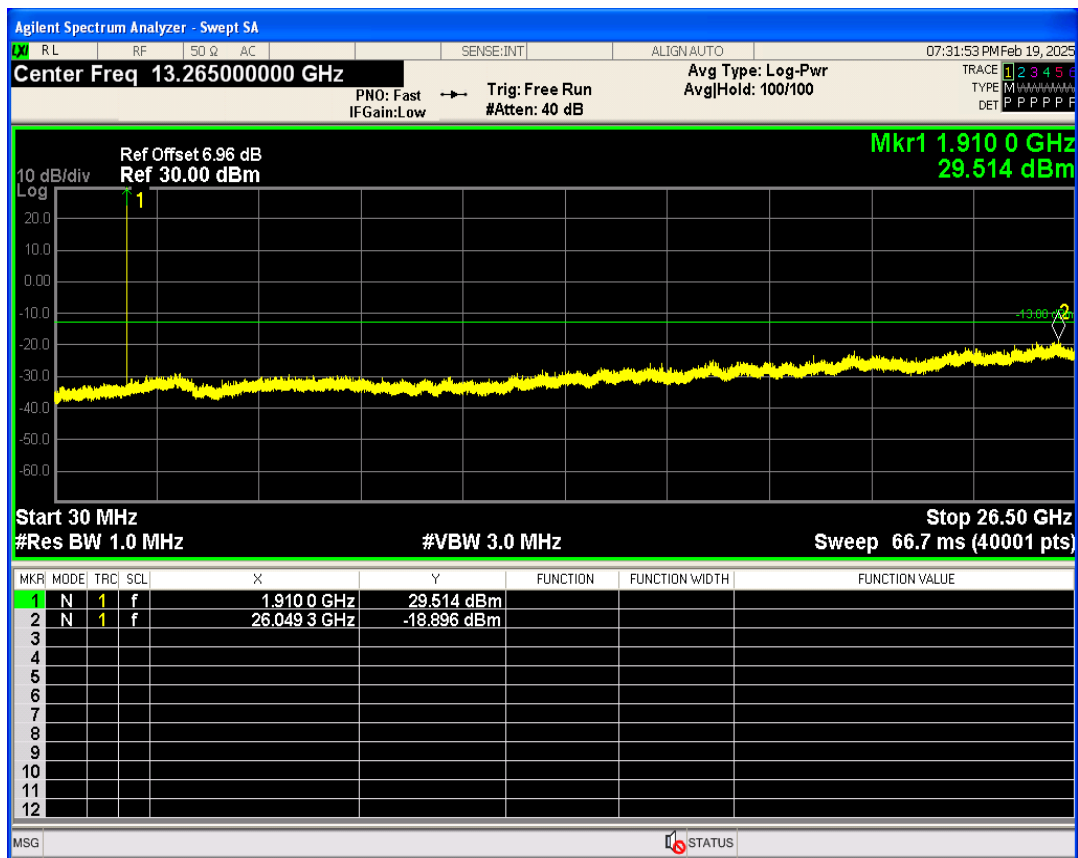

GSM850 Channel=128

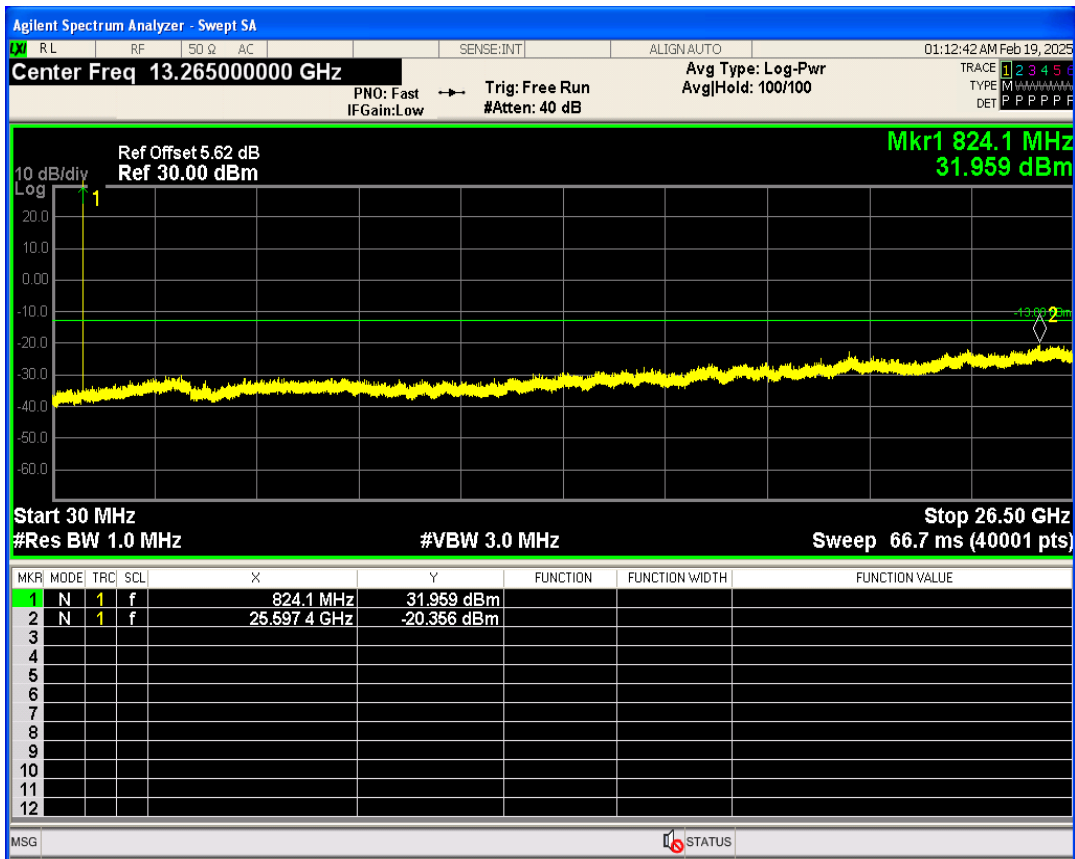

GSM850 Channel=251

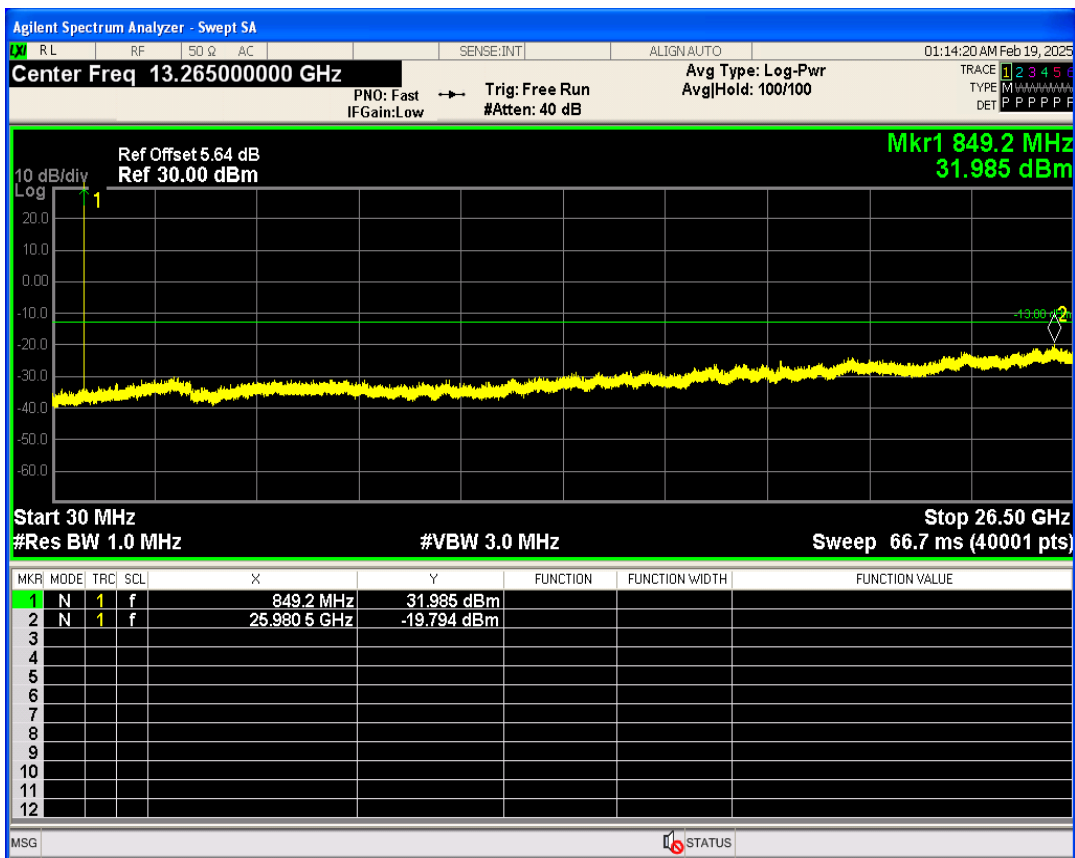

GSM850 Channel=189

