## SEE ELECTRONIC REVISION HISTORY REPORT

## NOTES: UNLESS OTHERWISE SPECIFIED

## **PURCHASED LABEL**

PRINT PER LABEL CONTENT SHOWN.

2 PRINTING SPECIFICATION:

INK COLOR - BLACK BACKGROUND - WHITE


MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT

ADHESIVE - 1.8 mil #350 ACRYLIC

LABEL SIZE -  $2.0 \times 1.0 \pm .02$ 


CORNER RADIUS - .05 ± .02 ROLL SIZE - 500, MAX

- $\langle 3 \rangle$  INNER DIE CUT: 1.25 x 0.5 ± .02
- 4. DIE CUT TO LINER.
  PERFORATING LINER BETWEEN LABELS IS OPTIONAL.
  PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.
- 5. LABEL MUST CONFORM TO UL 969 AND SHALL BE UL APPROVED MATERIAL WITH SUPPLIER NAME AND LABEL NAME OR DESIGNATION ON INSIDE OF ROLL CORE.
- 6. LABEL MUST BE PROCURED FROM UL AUTHORIZED SUPPLIER.
- REFERENCE S14913.
- 8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS PART MUST BE APPROVED BY EMC/SAFETY GROUP.
- 9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE LATEST REVISION OF ABBOTT SPECIFICATION S205053.



CONFIDENTIAL INFORMATION

CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED BY 21CFR 20.61, DO NOT DISCLOSE TO THE PUBLIC.

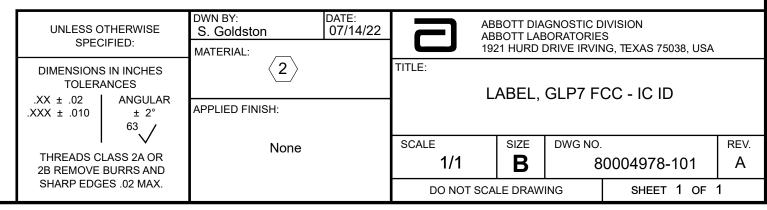

FCC/IC Label Location (Permenant Acrylic Adhesive)

