

## Appendix G

### RF Test Data for 5.8GWIFI (Conducted Measurement)


Product Name: PineTab-V tablet

Test Model: PINETAB-V

#### Environmental Conditions

|                    |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| Temperature:       | 23.8 ° C                                                                             |
| Relative Humidity: | 52.1%                                                                                |
| ATM Pressure:      | 100.0 kPa                                                                            |
| Test Engineer:     | Nick Peng                                                                            |
|                    |    |
| Supervised by:     | Ling Zhu                                                                             |
|                    |  |





## G.1 -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant0    | 16.355                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5785            | Ant0    | 16.356                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5825            | Ant0    | 16.324                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 16.786                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5785            | Ant0    | 17.567                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 17.555                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 35.107                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5795            | Ant0    | 35.047                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5745            | Ant0    | 17.552                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5785            | Ant0    | 17.576                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5825            | Ant0    | 17.142                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5755            | Ant0    | 35.106                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5795            | Ant0    | 35.083                | $\geq 0.5$                  | Pass    |
| NVNT      | ac80 | 5775            | Ant0    | 75.114                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5745            | Ant0    | 18.31                 | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5785            | Ant0    | 18.605                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5825            | Ant0    | 17.535                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 5755            | Ant0    | 35.039                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 5795            | Ant0    | 35.053                | $\geq 0.5$                  | Pass    |
| NVNT      | ax80 | 5775            | Ant0    | 75.263                | $\geq 0.5$                  | Pass    |






## Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant0

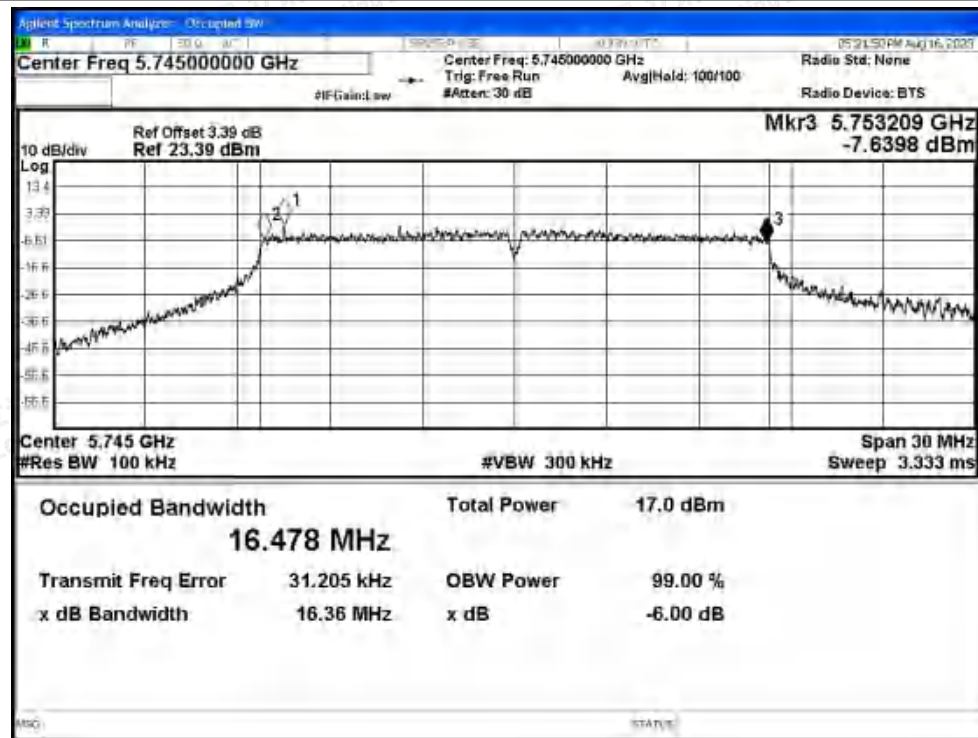

-6dB Bandwidth NVNT a 5785MHz Ant0

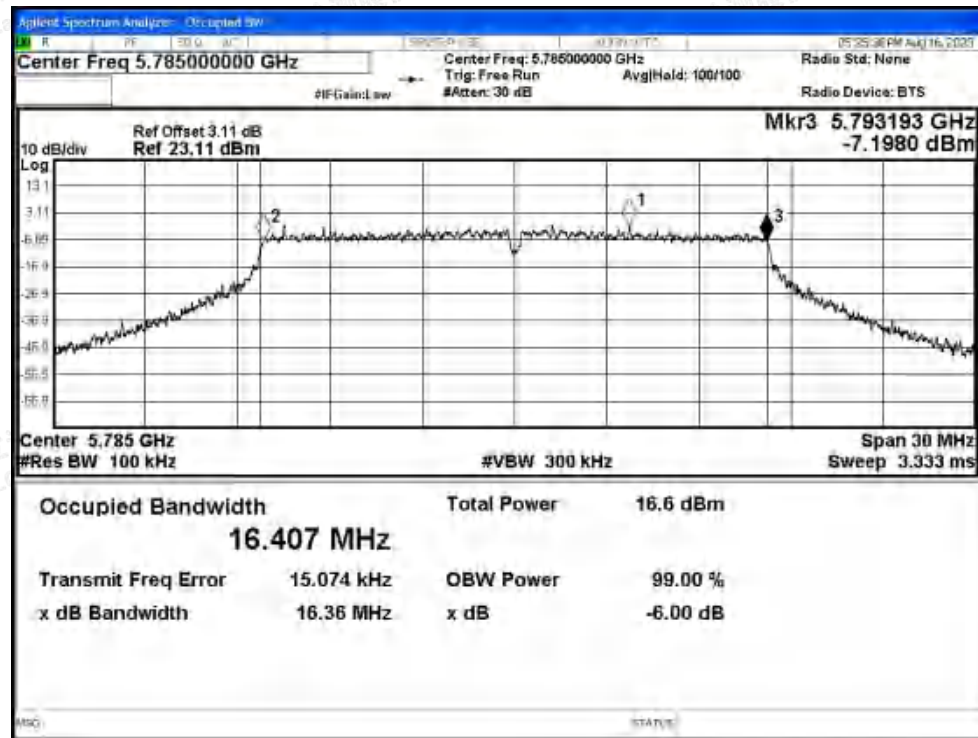

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## -6dB Bandwidth NVNT a 5825MHz Ant0

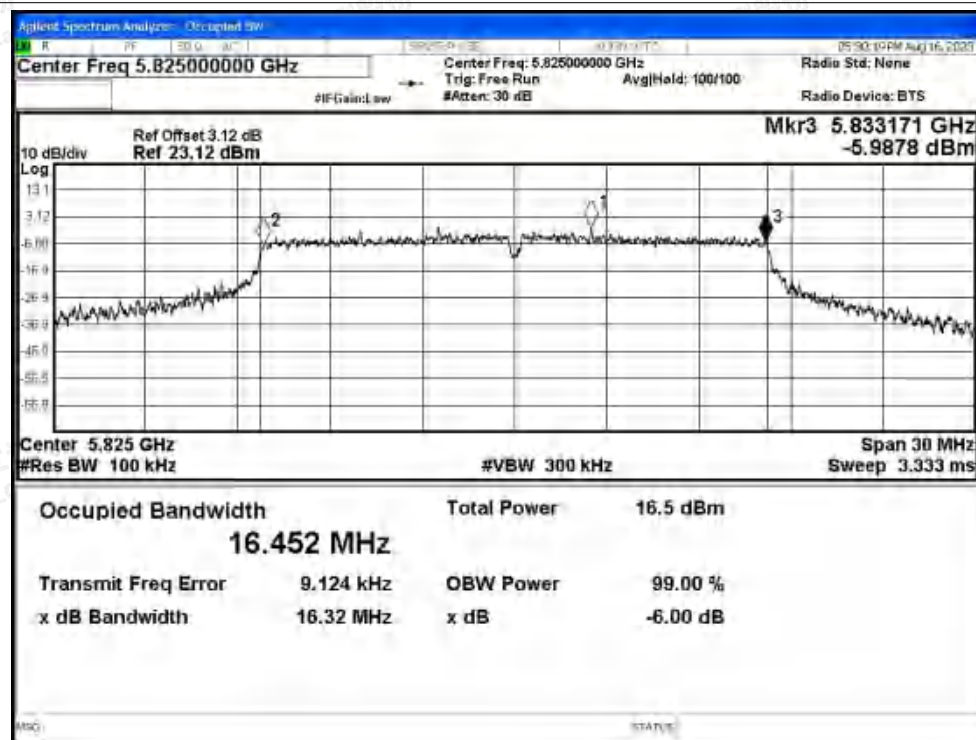

## -6dB Bandwidth NVNT n20 5745MHz Ant0



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT n20 5785MHz Ant0

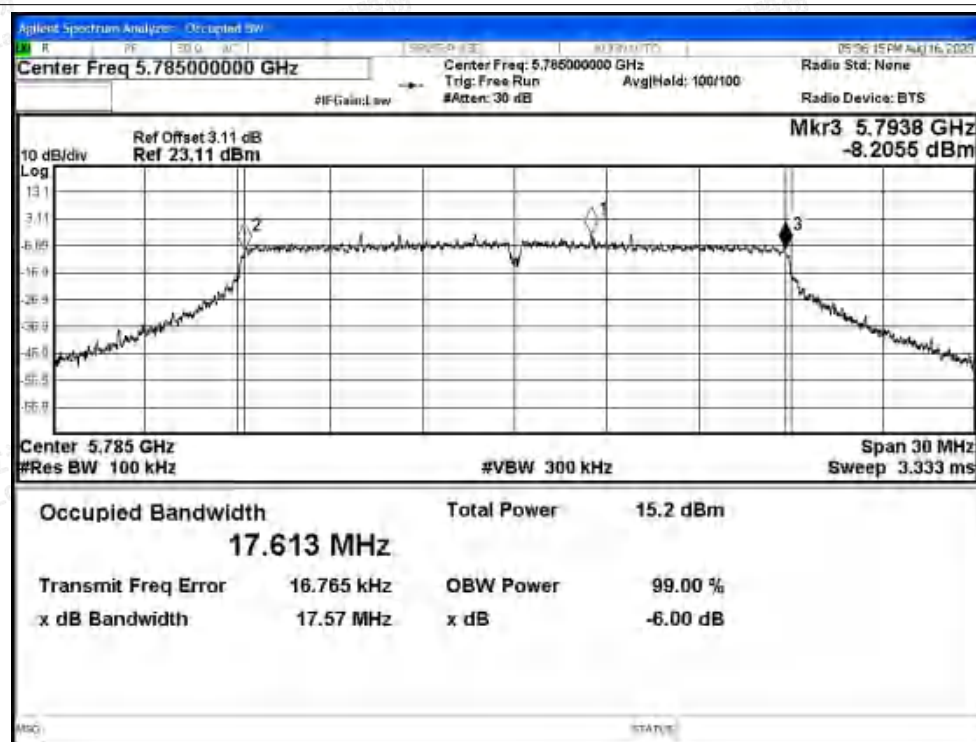

-6dB Bandwidth NVNT n20 5825MHz Ant0

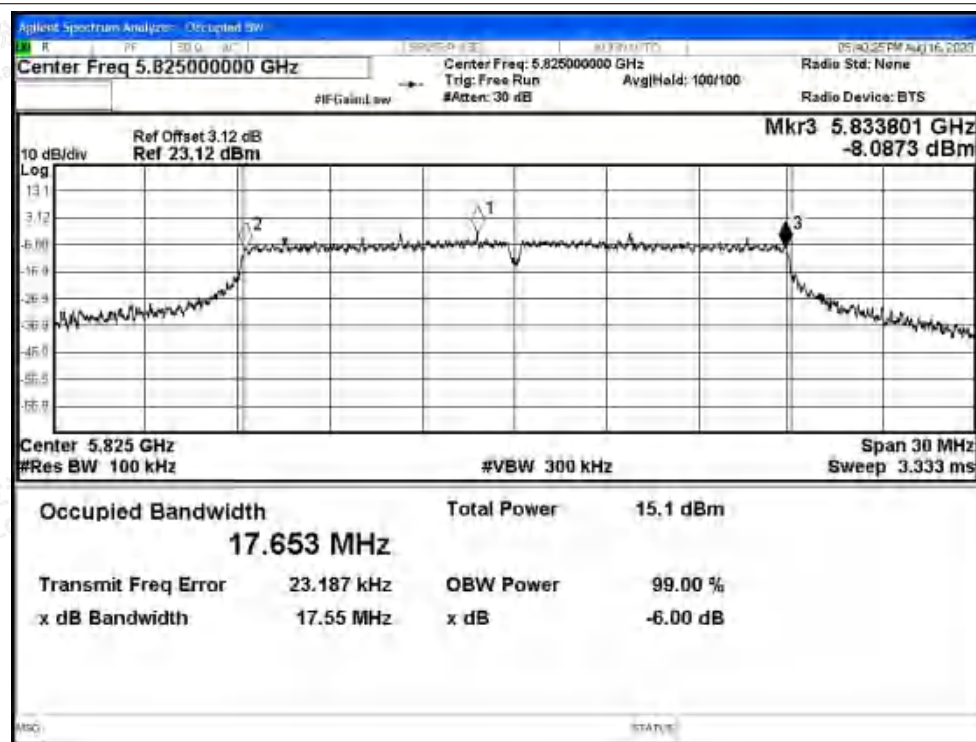

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n40 5755MHz Ant0



## -6dB Bandwidth NVNT n40 5795MHz Ant0

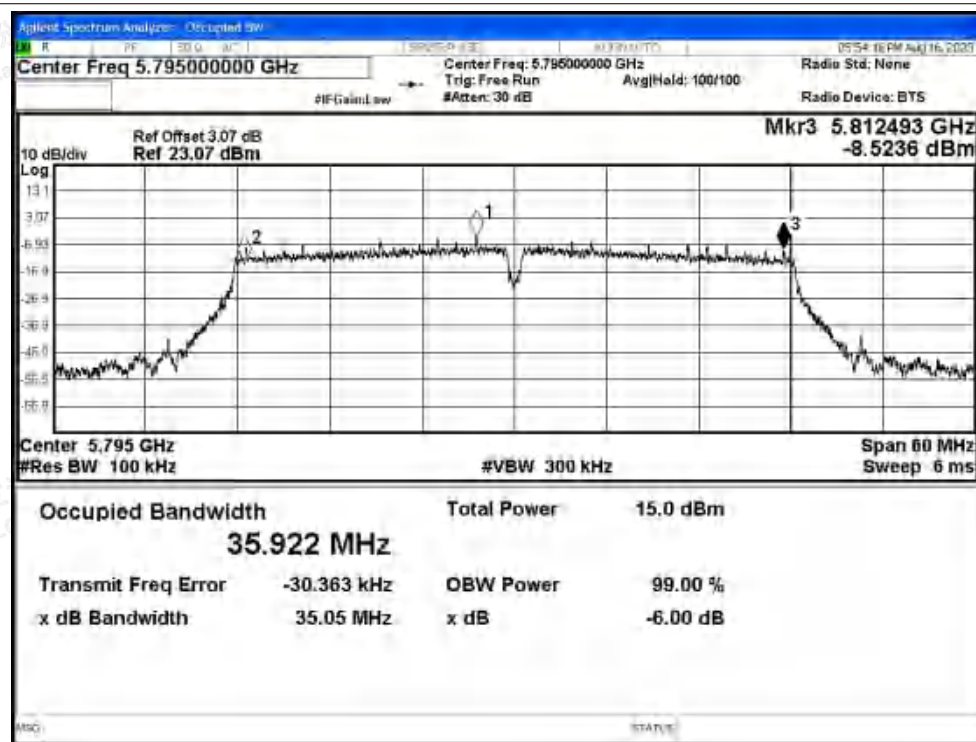

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ac20 5745MHz Ant0

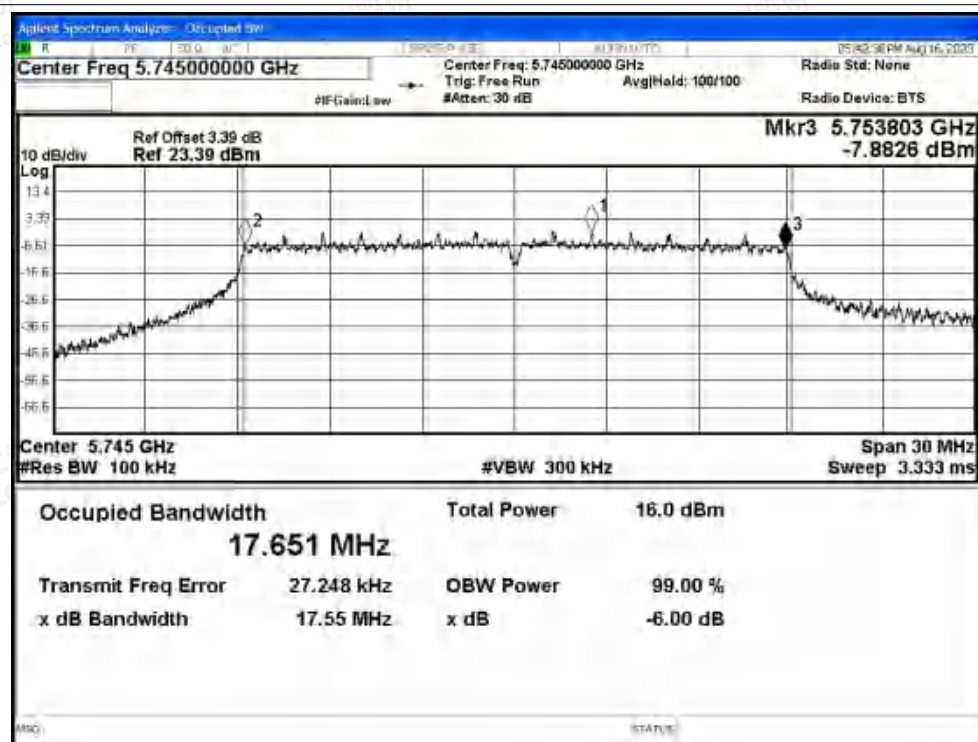

-6dB Bandwidth NVNT ac20 5785MHz Ant0

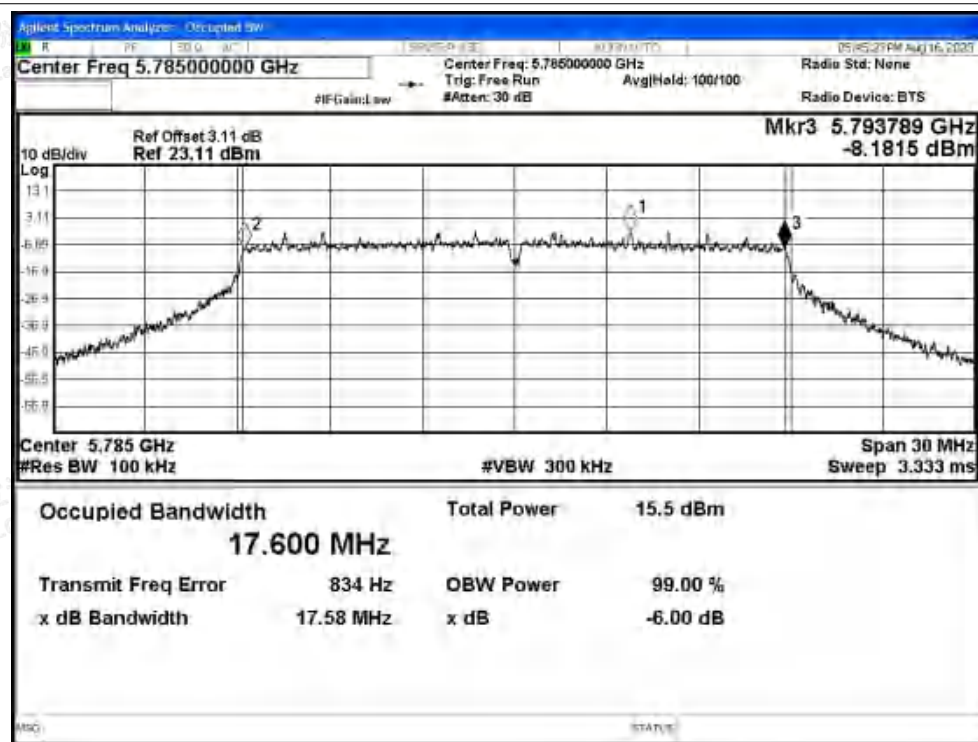

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-6dB Bandwidth NVNT ac20 5825MHz Ant0

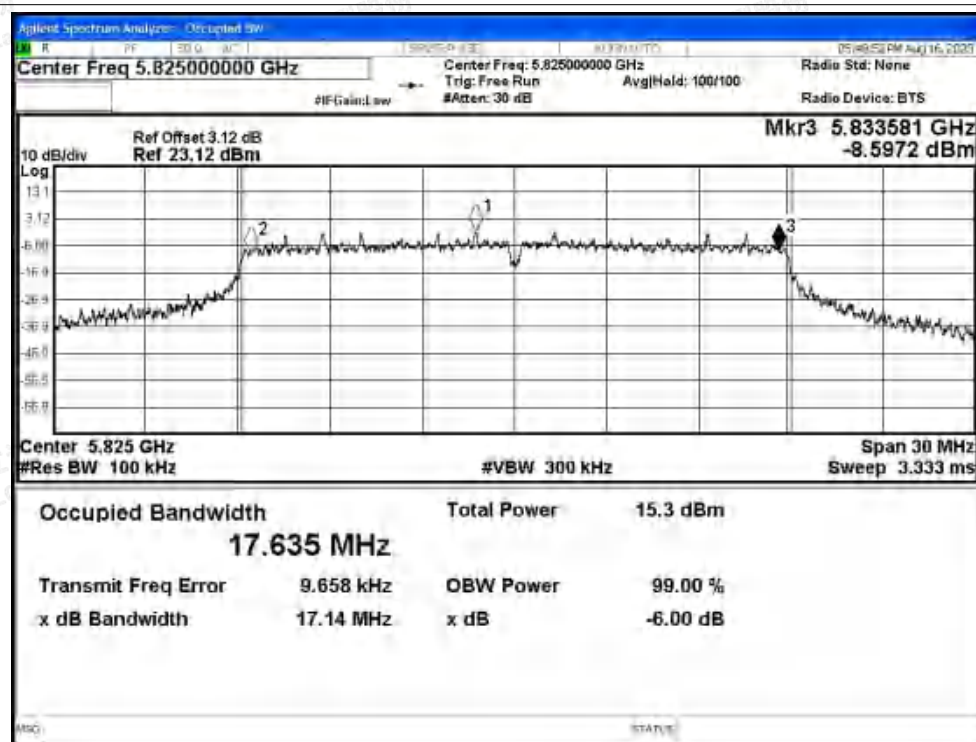

-6dB Bandwidth NVNT ac40 5755MHz Ant0



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ac40 5795MHz Ant0

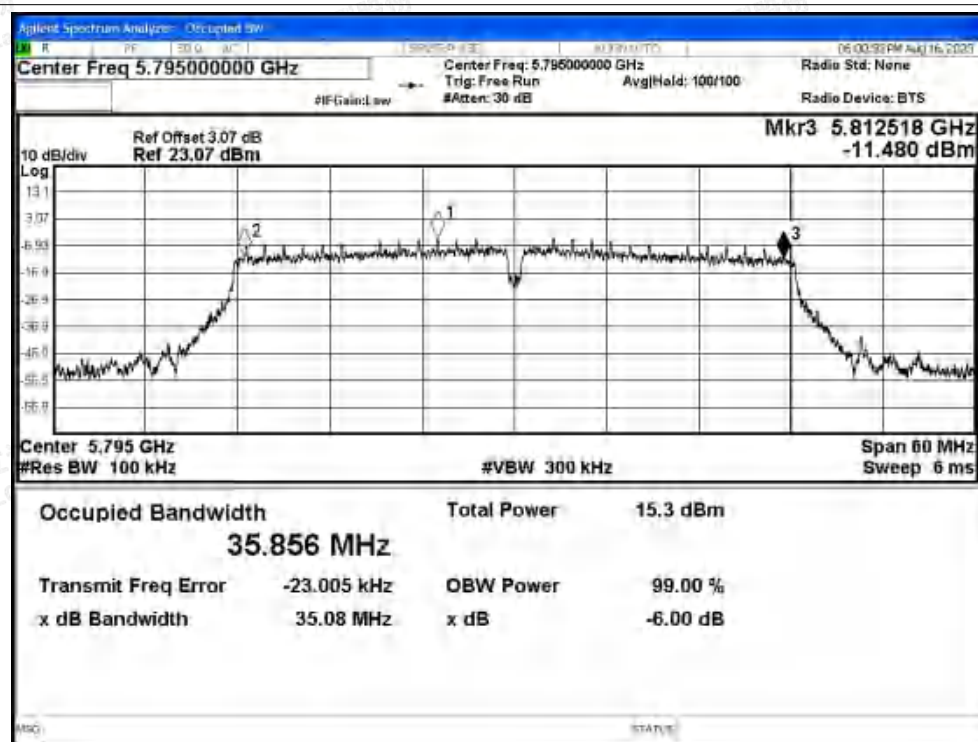

-6dB Bandwidth NVNT ac80 5775MHz Ant0

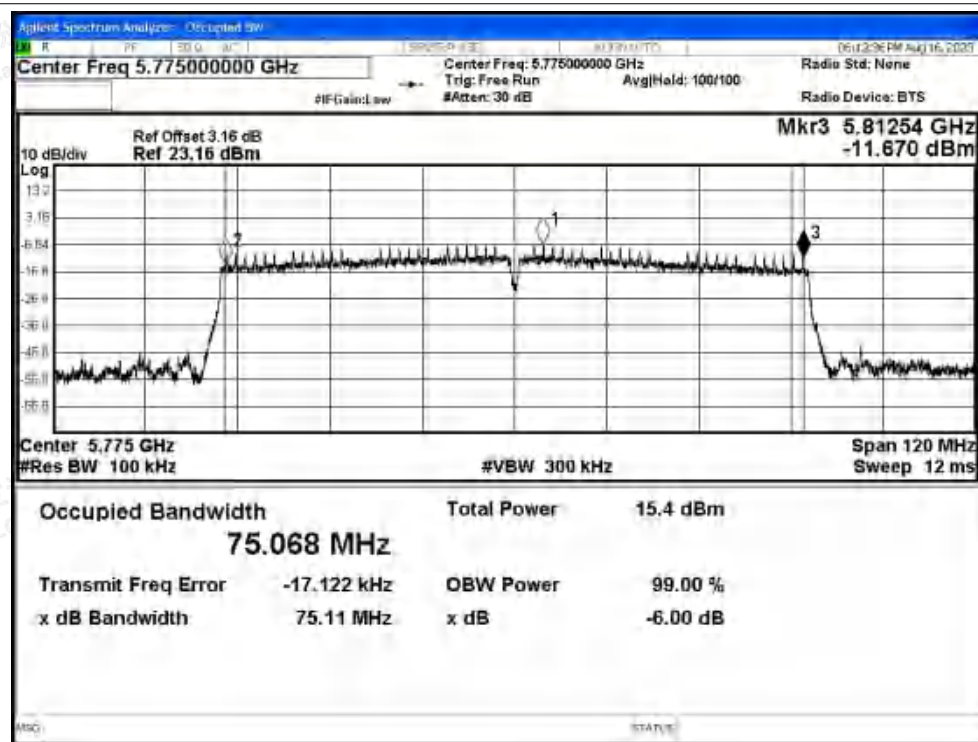

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ax20 5745MHz Ant0

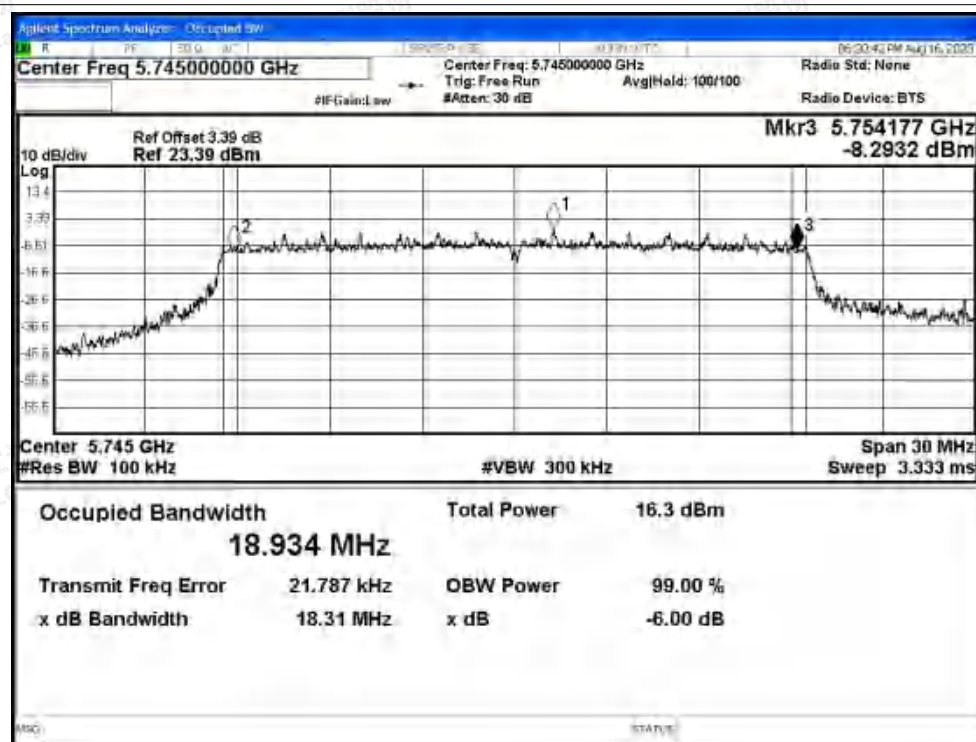

-6dB Bandwidth NVNT ax20 5785MHz Ant0

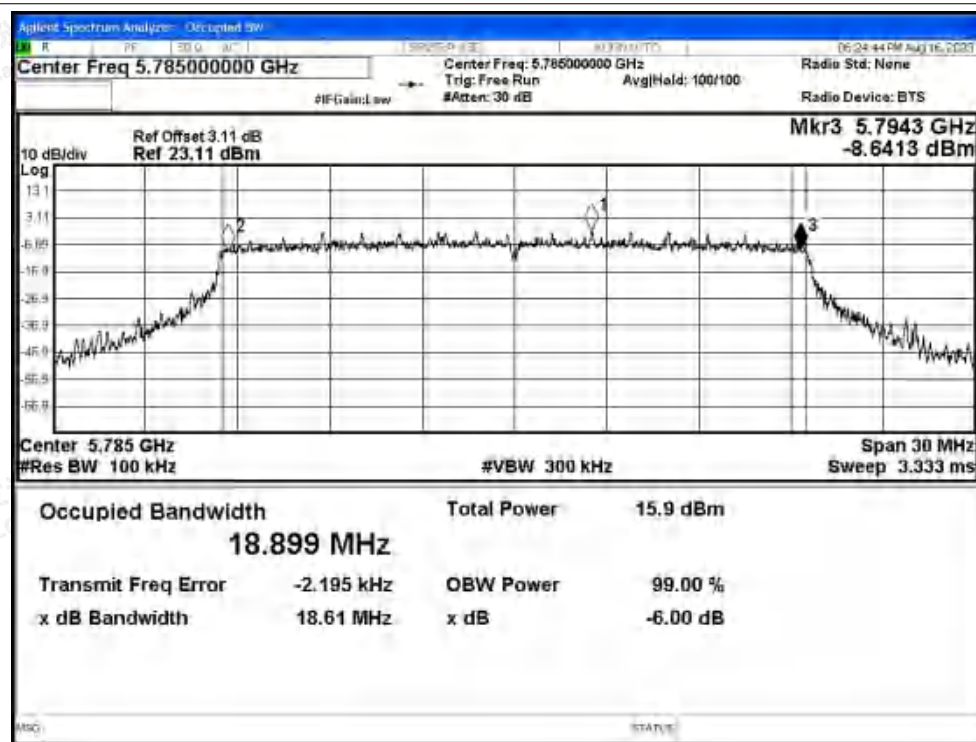


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ax20 5825MHz Ant0



## -6dB Bandwidth NVNT ax40 5755MHz Ant0

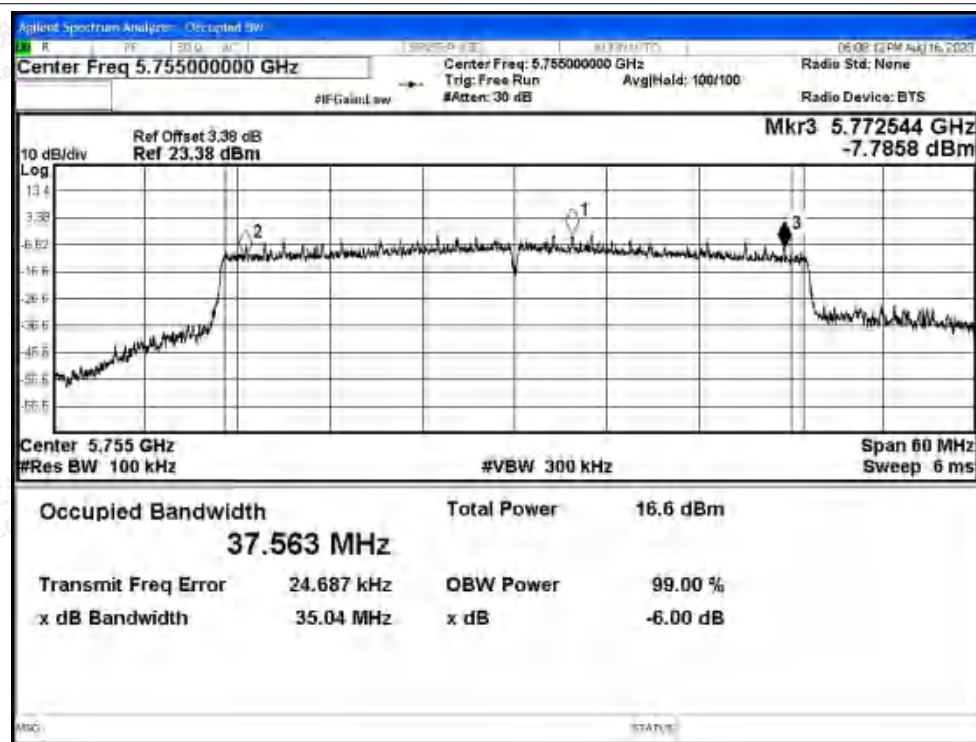

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ax40 5795MHz Ant0

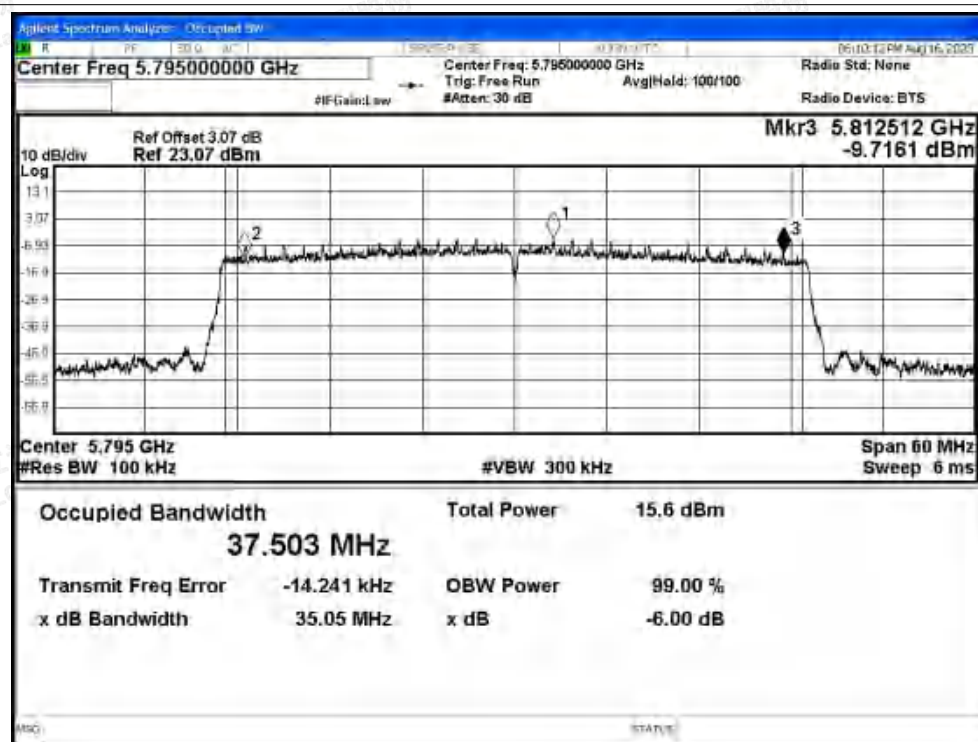

-6dB Bandwidth NVNT ax80 5775MHz Ant0

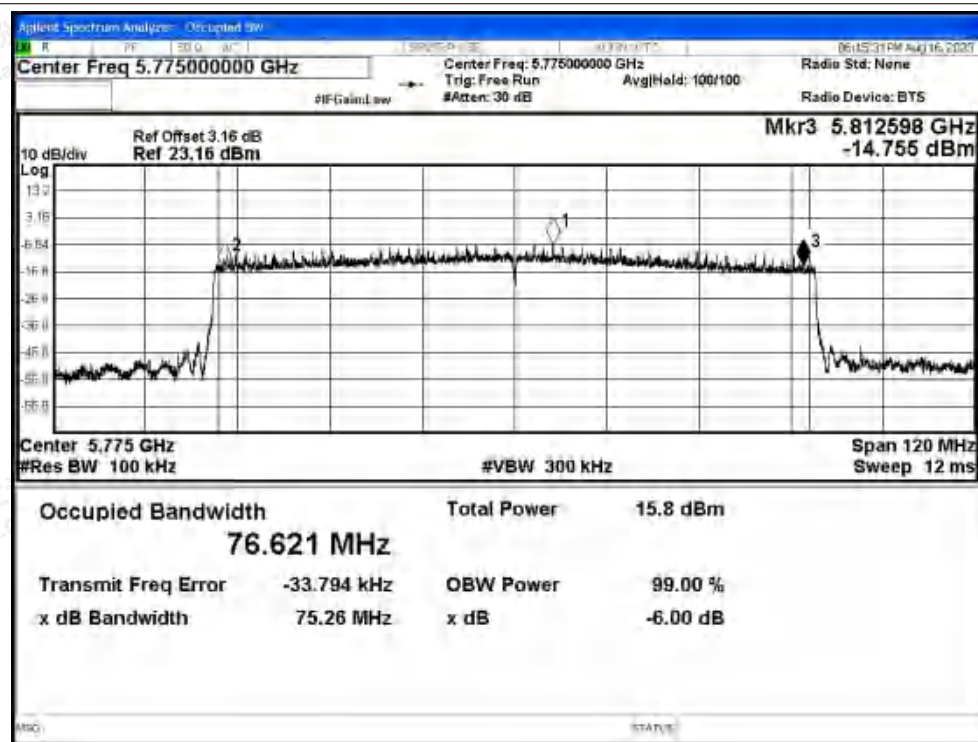

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant1    | 16.339                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5785            | Ant1    | 16.326                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5825            | Ant1    | 15.934                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 17.559                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 17.528                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 17.148                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 35.077                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 35.13                 | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 17.545                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 17.556                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 17.273                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 35.114                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 35.125                | $\geq 0.5$                  | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 75.112                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5745            | Ant1    | 18.668                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5785            | Ant1    | 18.291                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5825            | Ant1    | 17.659                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 5755            | Ant1    | 35.099                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 5795            | Ant1    | 36.238                | $\geq 0.5$                  | Pass    |
| NVNT      | ax80 | 5775            | Ant1    | 76.081                | $\geq 0.5$                  | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




## Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1



-6dB Bandwidth NVNT a 5785MHz Ant1

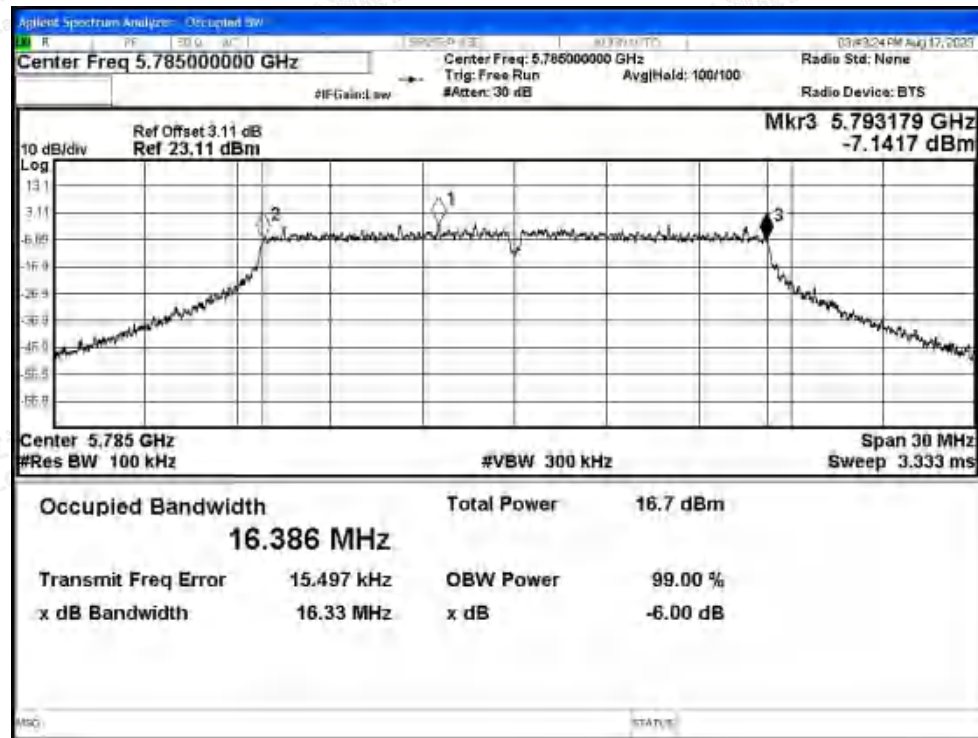

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT a 5825MHz Ant1

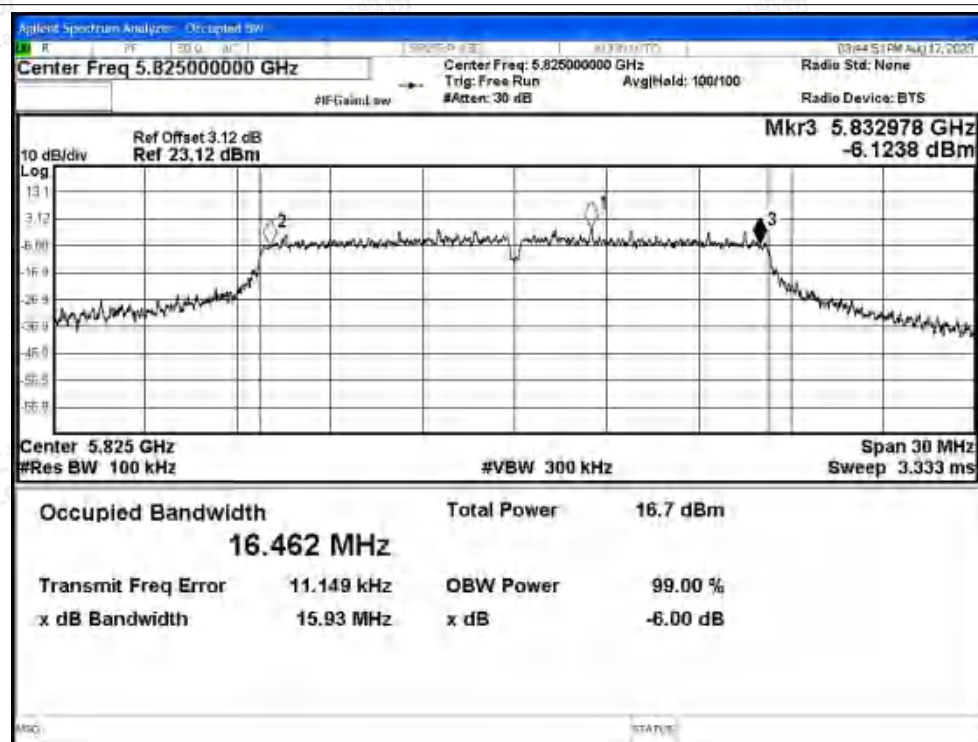

-6dB Bandwidth NVNT n20 5745MHz Ant1

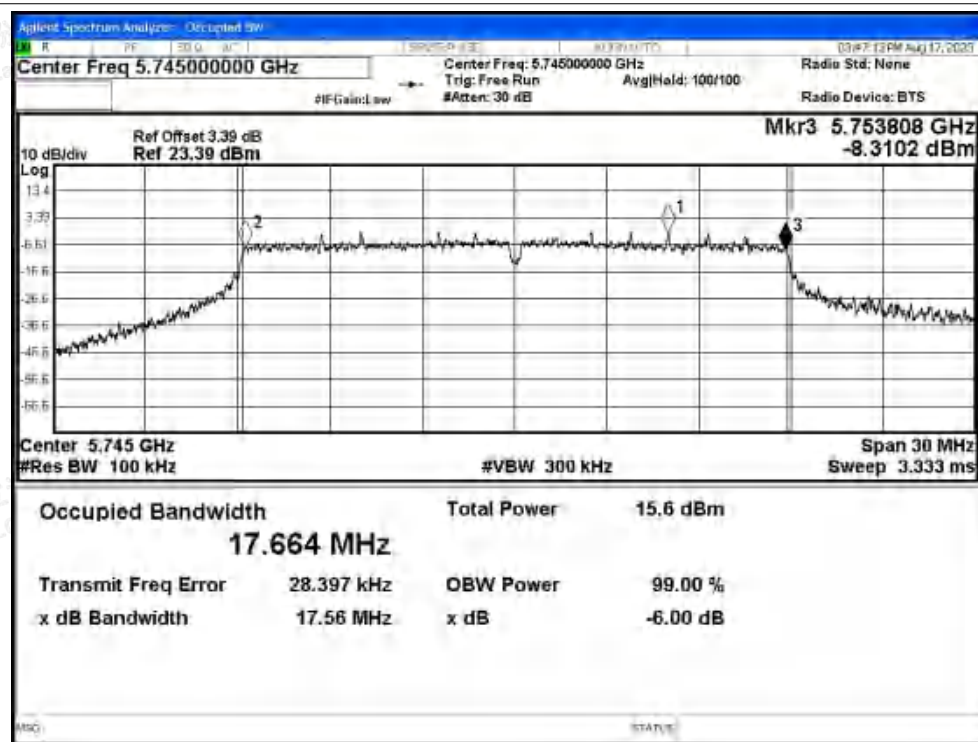

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT n20 5785MHz Ant1

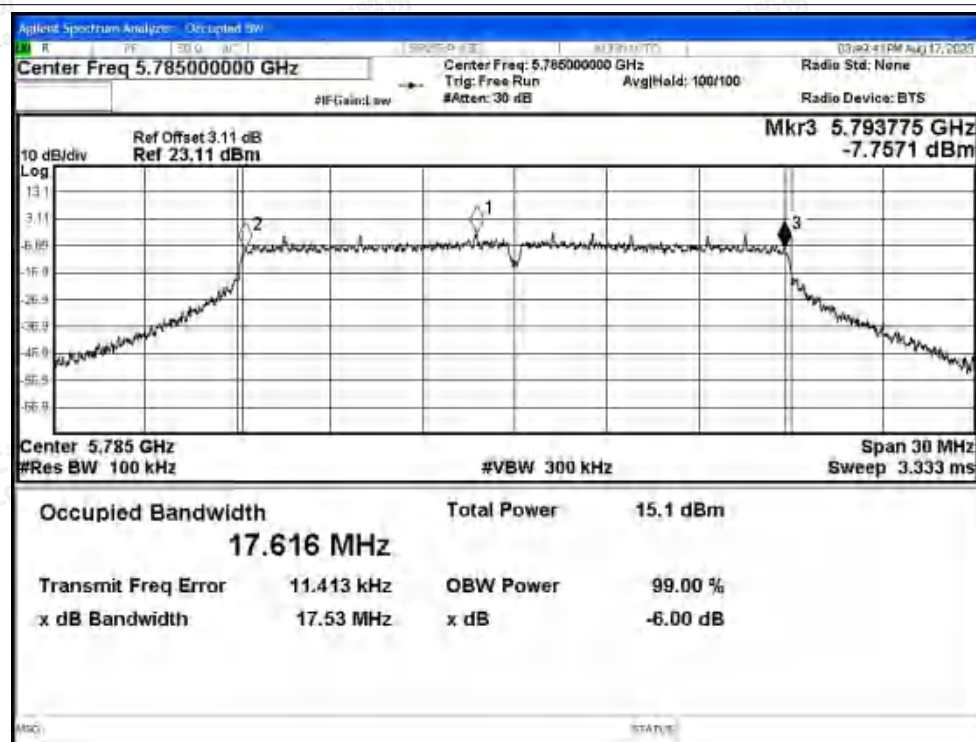

-6dB Bandwidth NVNT n20 5825MHz Ant1

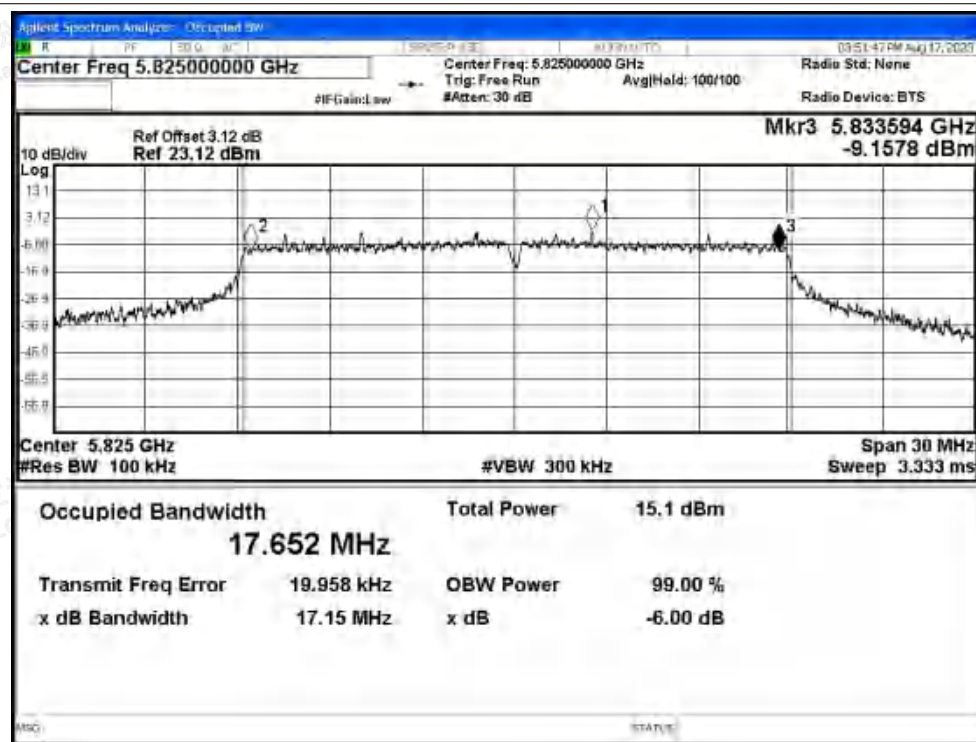

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT n40 5755MHz Ant1



-6dB Bandwidth NVNT n40 5795MHz Ant1

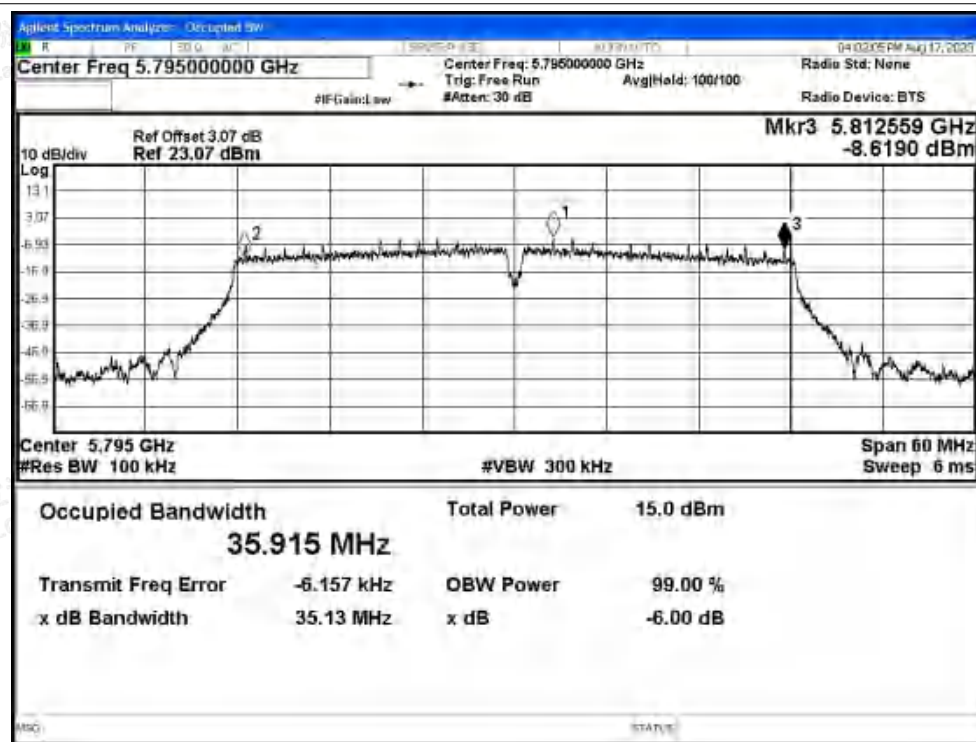


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ac20 5745MHz Ant1

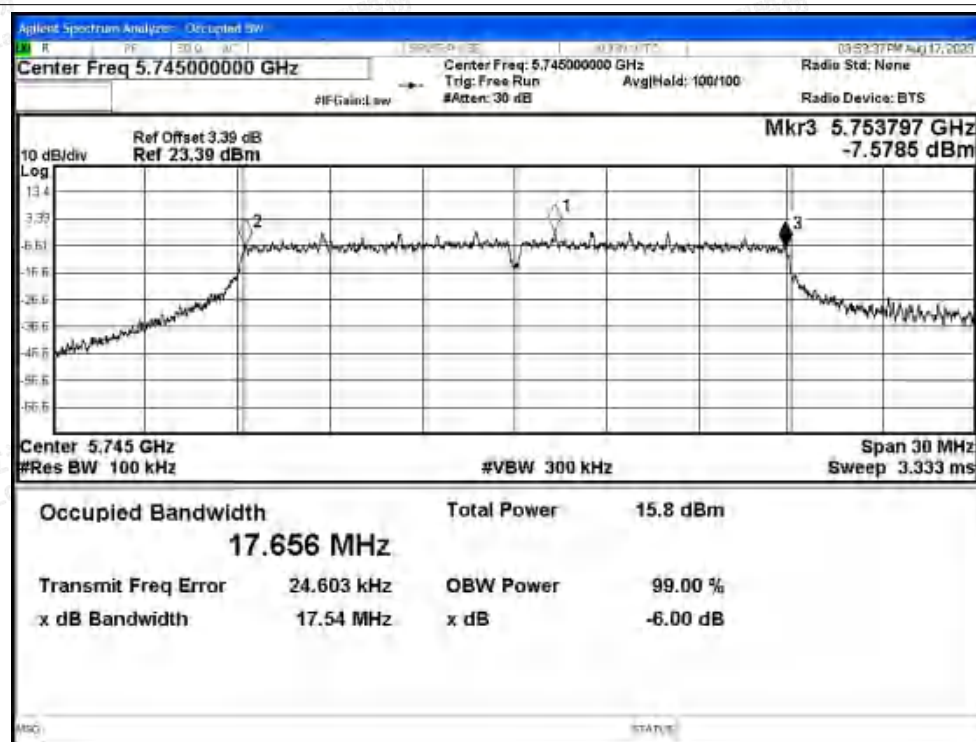

-6dB Bandwidth NVNT ac20 5785MHz Ant1

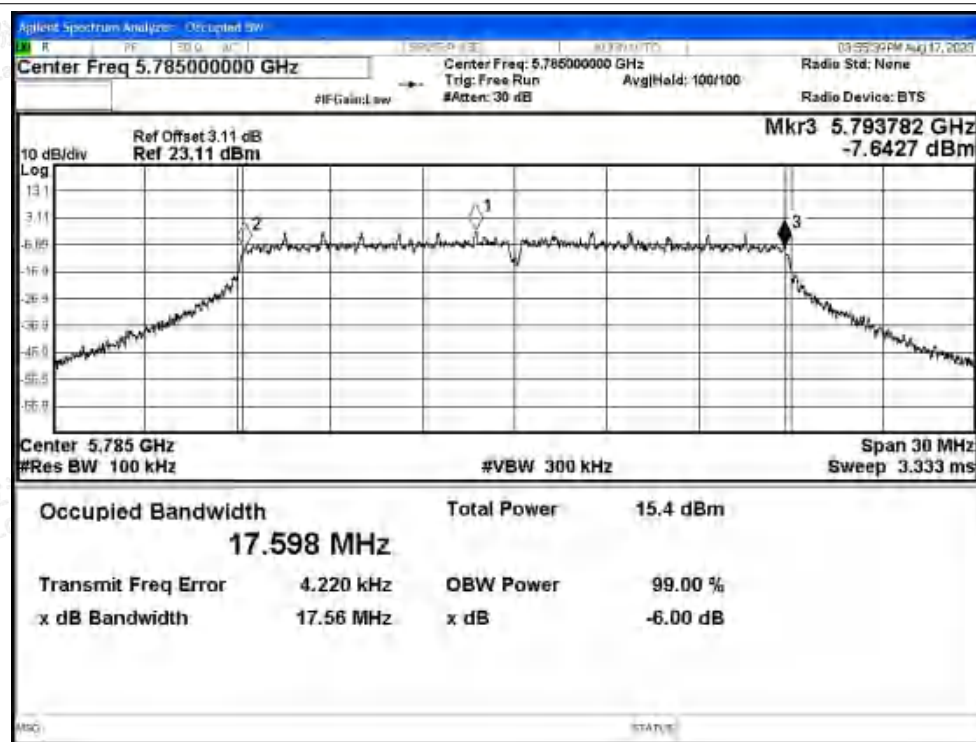

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-6dB Bandwidth NVNT ac20 5825MHz Ant1

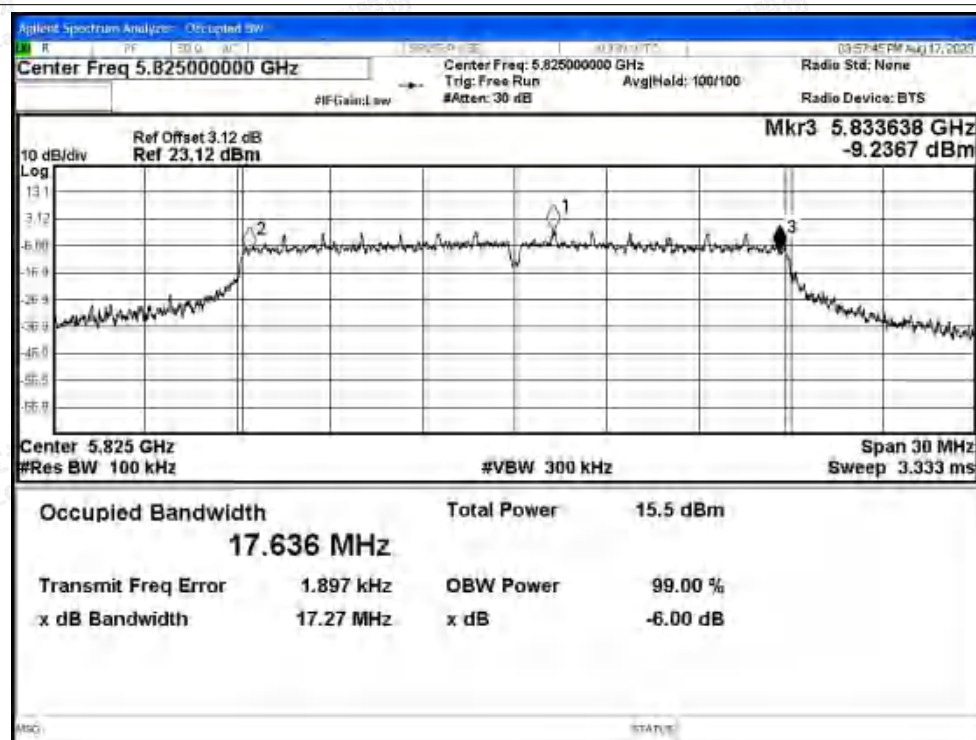

-6dB Bandwidth NVNT ac40 5755MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ac40 5795MHz Ant1

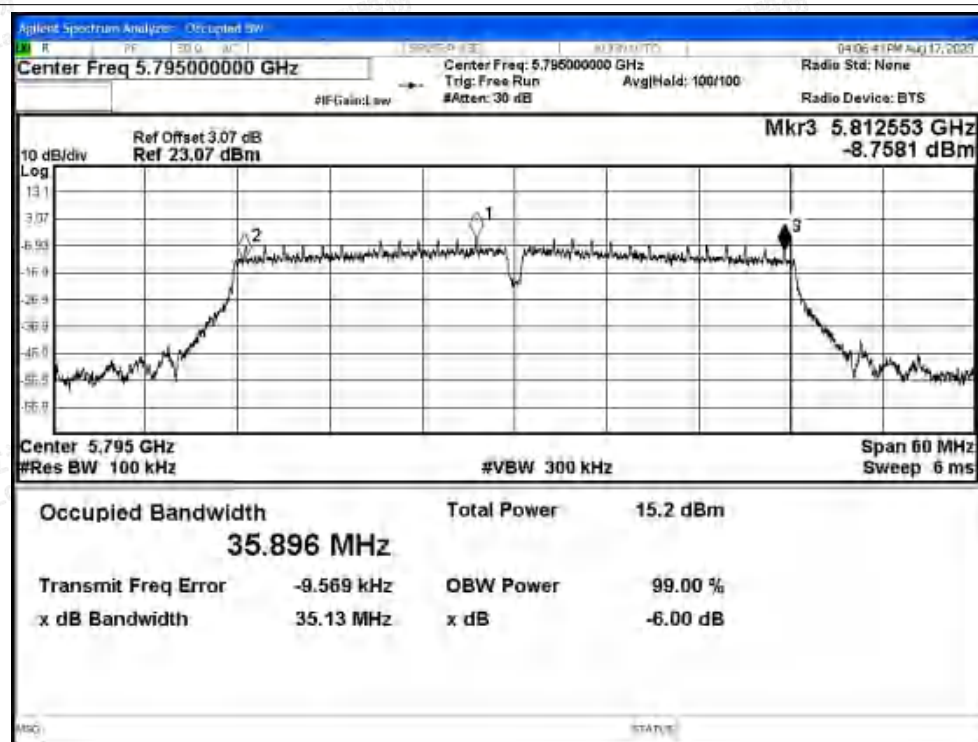

-6dB Bandwidth NVNT ac80 5775MHz Ant1

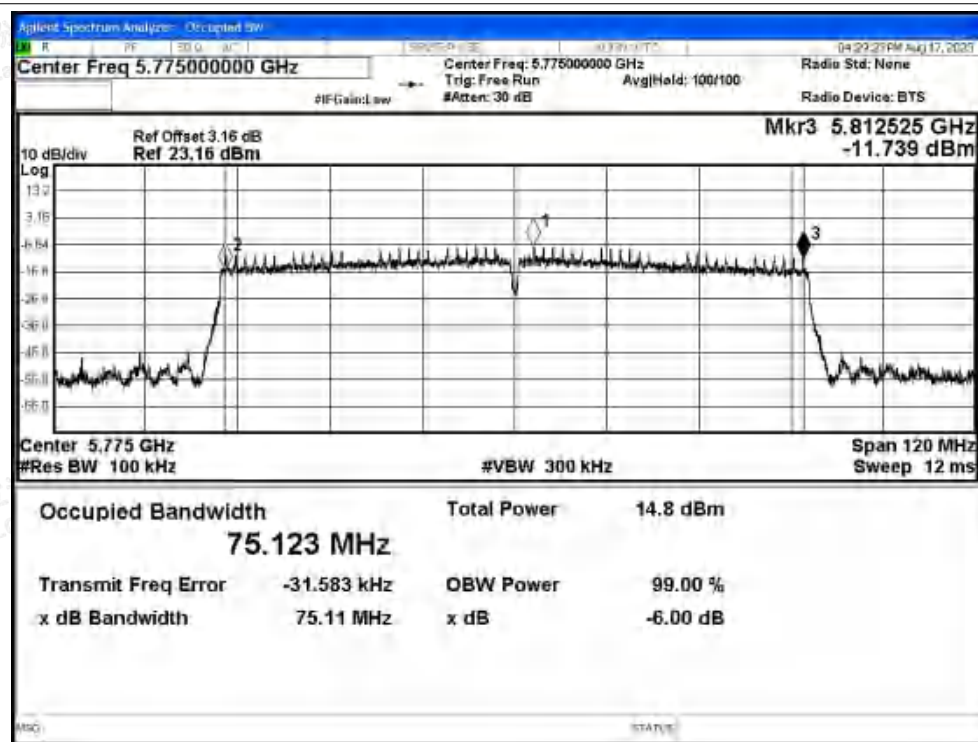

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ax20 5745MHz Ant1

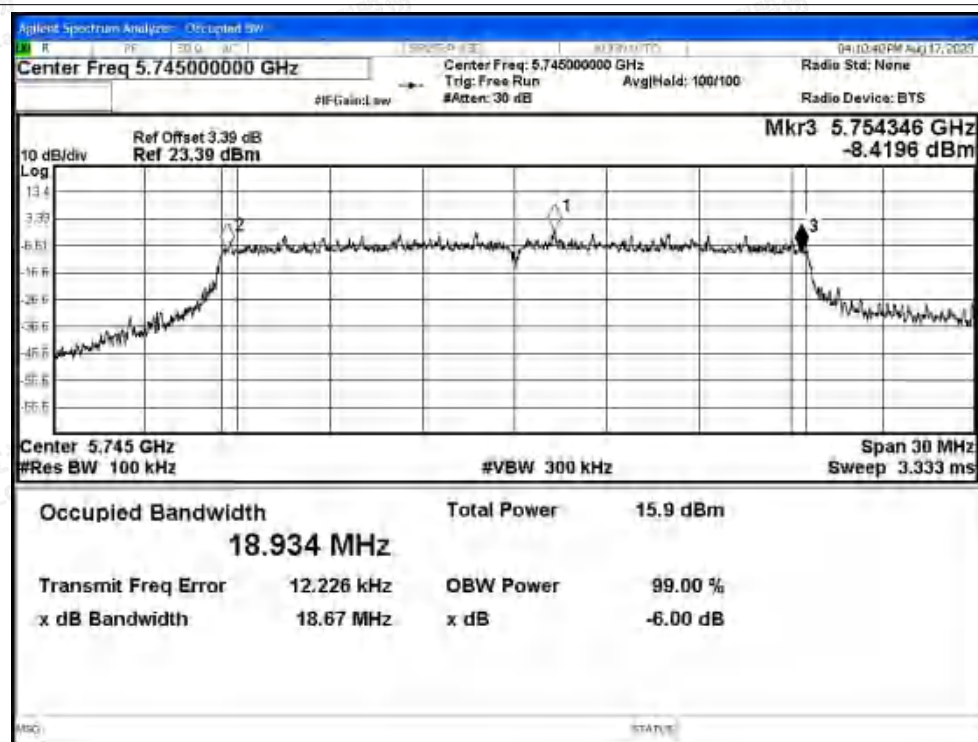

-6dB Bandwidth NVNT ax20 5785MHz Ant1

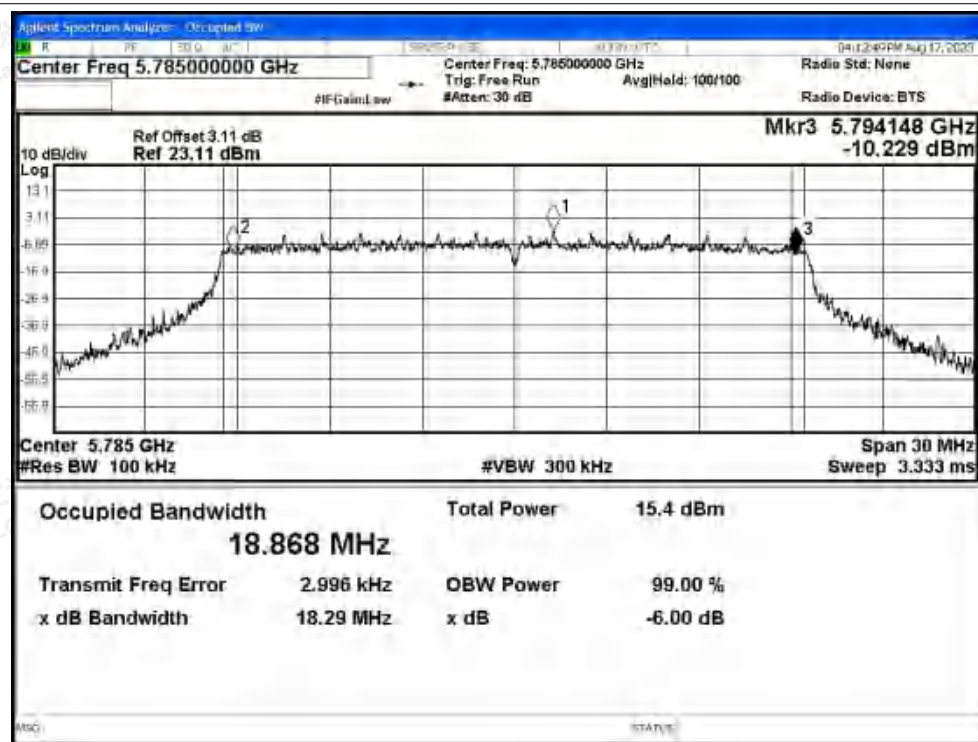

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ax20 5825MHz Ant1



-6dB Bandwidth NVNT ax40 5755MHz Ant1

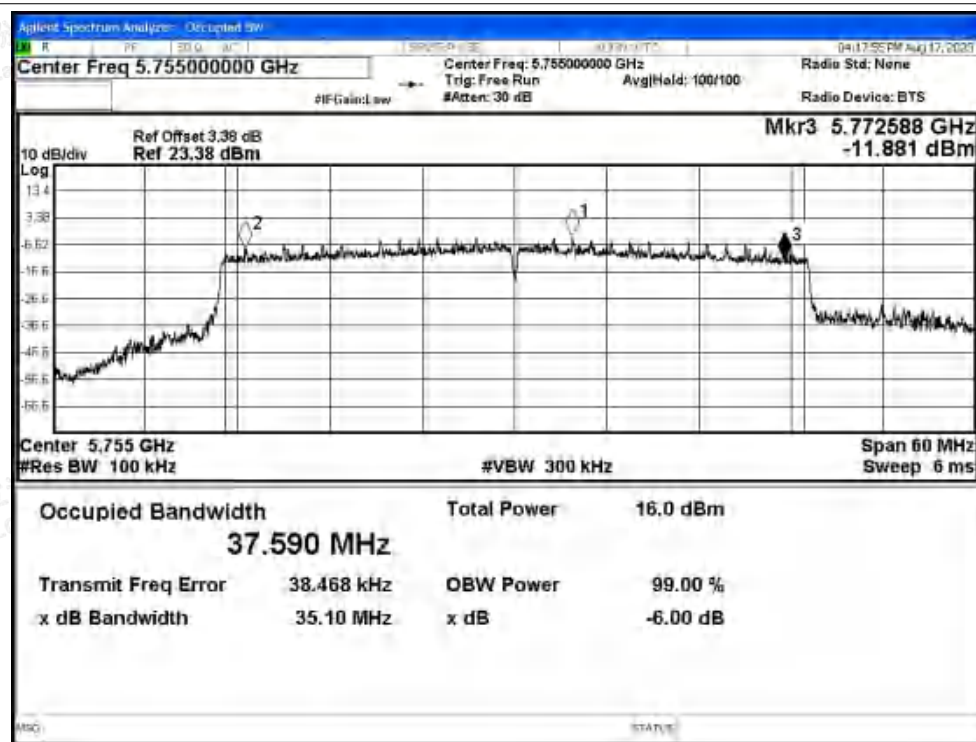


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ax40 5795MHz Ant1

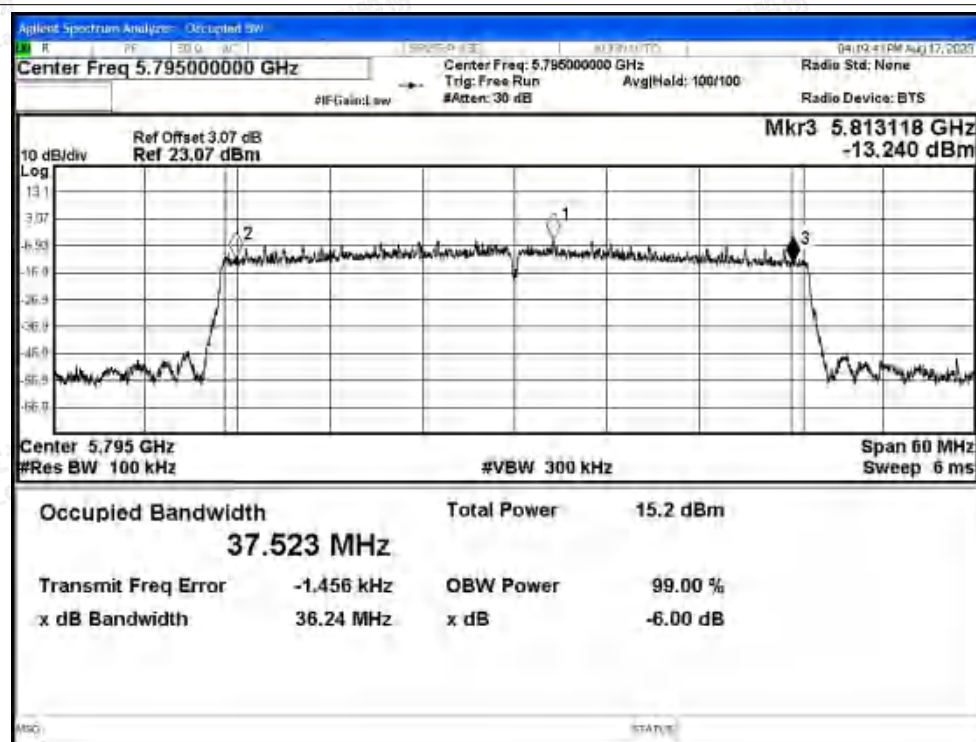

-6dB Bandwidth NVNT ax80 5775MHz Ant1

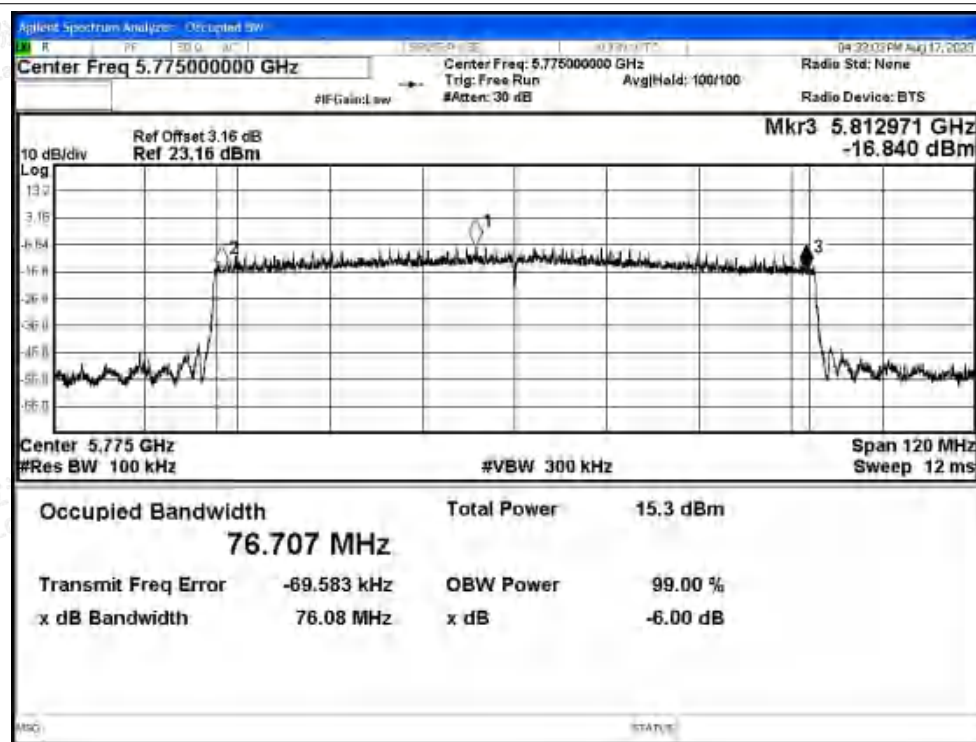


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-------------------|-------------|---------|
| NVNT      | a    | 5745            | Ant0    | 11.34             | 30          | Pass    |
| NVNT      | a    | 5785            | Ant0    | 10.91             | 30          | Pass    |
| NVNT      | a    | 5825            | Ant0    | 10.69             | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 9.83              | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant0    | 9.42              | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 9.25              | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 10.03             | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant0    | 8.94              | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant0    | 9.94              | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant0    | 9.57              | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant0    | 9.36              | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant0    | 10.11             | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant0    | 9.04              | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant0    | 8.78              | 30          | Pass    |
| NVNT      | ax20 | 5745            | Ant0    | 10.17             | 30          | Pass    |
| NVNT      | ax20 | 5785            | Ant0    | 9.71              | 30          | Pass    |
| NVNT      | ax20 | 5825            | Ant0    | 9.61              | 30          | Pass    |
| NVNT      | ax40 | 5755            | Ant0    | 10.38             | 30          | Pass    |
| NVNT      | ax40 | 5795            | Ant0    | 9.34              | 30          | Pass    |
| NVNT      | ax80 | 5775            | Ant0    | 9.15              | 30          | Pass    |

| Condition | Mode | Frequency (MHz) | Antenna | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-------------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 11.31             | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | 10.95             | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 10.79             | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 9.76              | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 9.26              | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 9.28              | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 9.83              | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 8.91              | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 9.84              | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 9.45              | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 9.45              | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 9.92              | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 8.99              | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 8.21              | 30          | Pass    |
| NVNT      | ax20 | 5745            | Ant1    | 9.61              | 30          | Pass    |
| NVNT      | ax20 | 5785            | Ant1    | 9.21              | 30          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |    |      |
|------|------|------|------|------|----|------|
| NVNT | ax20 | 5825 | Ant1 | 9.09 | 30 | Pass |
| NVNT | ax40 | 5755 | Ant1 | 9.65 | 30 | Pass |
| NVNT | ax40 | 5795 | Ant1 | 8.83 | 30 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 8.63 | 30 | Pass |

## MIMO

| Condition | Mode | Frequency (MHz) | Total Power (dBm) |      |           | Limit (dBm) | Verdict |
|-----------|------|-----------------|-------------------|------|-----------|-------------|---------|
|           |      |                 | Ant0              | Ant1 | Ant0+Ant1 |             |         |
| NVNT      | n20  | 5745            | 9.83              | 9.76 | 12.81     | 30          | Pass    |
| NVNT      | n20  | 5785            | 9.42              | 9.26 | 12.35     | 30          | Pass    |
| NVNT      | n20  | 5825            | 9.25              | 9.28 | 12.28     | 30          | Pass    |
| NVNT      | n40  | 5755            | 10.03             | 9.83 | 12.94     | 30          | Pass    |
| NVNT      | n40  | 5795            | 8.94              | 8.91 | 11.94     | 30          | Pass    |
| NVNT      | ac20 | 5745            | 9.94              | 9.84 | 12.90     | 30          | Pass    |
| NVNT      | ac20 | 5785            | 9.57              | 9.45 | 12.52     | 30          | Pass    |
| NVNT      | ac20 | 5825            | 9.36              | 9.45 | 12.42     | 30          | Pass    |
| NVNT      | ac40 | 5755            | 10.11             | 9.92 | 13.03     | 30          | Pass    |
| NVNT      | ac40 | 5795            | 9.04              | 8.99 | 12.03     | 30          | Pass    |
| NVNT      | ac80 | 5775            | 8.78              | 8.21 | 11.51     | 30          | Pass    |
| NVNT      | ax20 | 5745            | 10.17             | 9.61 | 12.91     | 30          | Pass    |
| NVNT      | ax20 | 5785            | 9.71              | 9.21 | 12.48     | 30          | Pass    |
| NVNT      | ax20 | 5825            | 9.61              | 9.09 | 12.37     | 30          | Pass    |
| NVNT      | ax40 | 5755            | 10.38             | 9.65 | 13.04     | 30          | Pass    |
| NVNT      | ax40 | 5795            | 9.34              | 8.83 | 12.10     | 30          | Pass    |
| NVNT      | ax80 | 5775            | 9.15              | 8.63 | 11.91     | 30          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)

Scan code to check authenticity



### G.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant0    | -1.69           | 30          | Pass    |
| NVNT      | a    | 5785            | Ant0    | -1.88           | 30          | Pass    |
| NVNT      | a    | 5825            | Ant0    | -2.24           | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant0    | -3.36           | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant0    | -3.8            | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | -3.98           | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant0    | -5.48           | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant0    | -6.51           | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant0    | -3.31           | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant0    | -3.68           | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant0    | -3.6            | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant0    | -5.48           | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant0    | -6.5            | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant0    | -9.36           | 30          | Pass    |
| NVNT      | ax20 | 5745            | Ant0    | -3.31           | 30          | Pass    |
| NVNT      | ax20 | 5785            | Ant0    | -3.51           | 30          | Pass    |
| NVNT      | ax20 | 5825            | Ant0    | -3.53           | 30          | Pass    |
| NVNT      | ax40 | 5755            | Ant0    | -5.2            | 30          | Pass    |
| NVNT      | ax40 | 5795            | Ant0    | -6.54           | 30          | Pass    |
| NVNT      | ax80 | 5775            | Ant0    | -9.59           | 30          | Pass    |

| Condition | Mode | Frequency (MHz) | Antenna | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | -1.71           | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | -2.17           | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | -1.93           | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | -3.59           | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | -3.92           | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | -3.95           | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | -5.61           | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | -6.54           | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | -3.49           | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | -3.95           | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | -3.65           | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | -5.82           | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | -6.3            | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -9.9            | 30          | Pass    |
| NVNT      | ax20 | 5745            | Ant1    | -3.85           | 30          | Pass    |
| NVNT      | ax20 | 5785            | Ant1    | -3.95           | 30          | Pass    |
| NVNT      | ax20 | 5825            | Ant1    | -4.11           | 30          | Pass    |
| NVNT      | ax40 | 5755            | Ant1    | -5.93           | 30          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |        |    |      |
|------|------|------|------|--------|----|------|
| NVNT | ax40 | 5795 | Ant1 | -6.67  | 30 | Pass |
| NVNT | ax80 | 5775 | Ant1 | -10.14 | 30 | Pass |

## MIMO

| Condition | Mode | Frequency (MHz) | Total PSD (dBm/500KHz) |        |           | Limit<br>(dBm/500KHz) | Verdict |
|-----------|------|-----------------|------------------------|--------|-----------|-----------------------|---------|
|           |      |                 | Ant0                   | Ant1   | Ant0+Ant1 |                       |         |
| NVNT      | n20  | 5745            | -3.36                  | -3.59  | -0.46     | 30                    | Pass    |
| NVNT      | n20  | 5785            | -3.8                   | -3.92  | -0.85     | 30                    | Pass    |
| NVNT      | n20  | 5825            | -3.98                  | -3.95  | -0.95     | 30                    | Pass    |
| NVNT      | n40  | 5755            | -5.48                  | -5.61  | -2.53     | 30                    | Pass    |
| NVNT      | n40  | 5795            | -6.51                  | -6.54  | -3.51     | 30                    | Pass    |
| NVNT      | ac20 | 5745            | -3.31                  | -3.49  | -0.39     | 30                    | Pass    |
| NVNT      | ac20 | 5785            | -3.68                  | -3.95  | -0.80     | 30                    | Pass    |
| NVNT      | ac20 | 5825            | -3.6                   | -3.65  | -0.61     | 30                    | Pass    |
| NVNT      | ac40 | 5755            | -5.48                  | -5.82  | -2.64     | 30                    | Pass    |
| NVNT      | ac40 | 5795            | -6.5                   | -6.3   | -3.39     | 30                    | Pass    |
| NVNT      | ac80 | 5775            | -9.36                  | -9.9   | -6.61     | 30                    | Pass    |
| NVNT      | ax20 | 5745            | -3.31                  | -3.85  | -0.56     | 30                    | Pass    |
| NVNT      | ax20 | 5785            | -3.51                  | -3.95  | -0.71     | 30                    | Pass    |
| NVNT      | ax20 | 5825            | -3.53                  | -4.11  | -0.80     | 30                    | Pass    |
| NVNT      | ax40 | 5755            | -5.2                   | -5.93  | -2.54     | 30                    | Pass    |
| NVNT      | ax40 | 5795            | -6.54                  | -6.67  | -3.59     | 30                    | Pass    |
| NVNT      | ax80 | 5775            | -9.59                  | -10.14 | -6.85     | 30                    | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity






## Test Graphs

PSD NVNT a 5745MHz Ant0

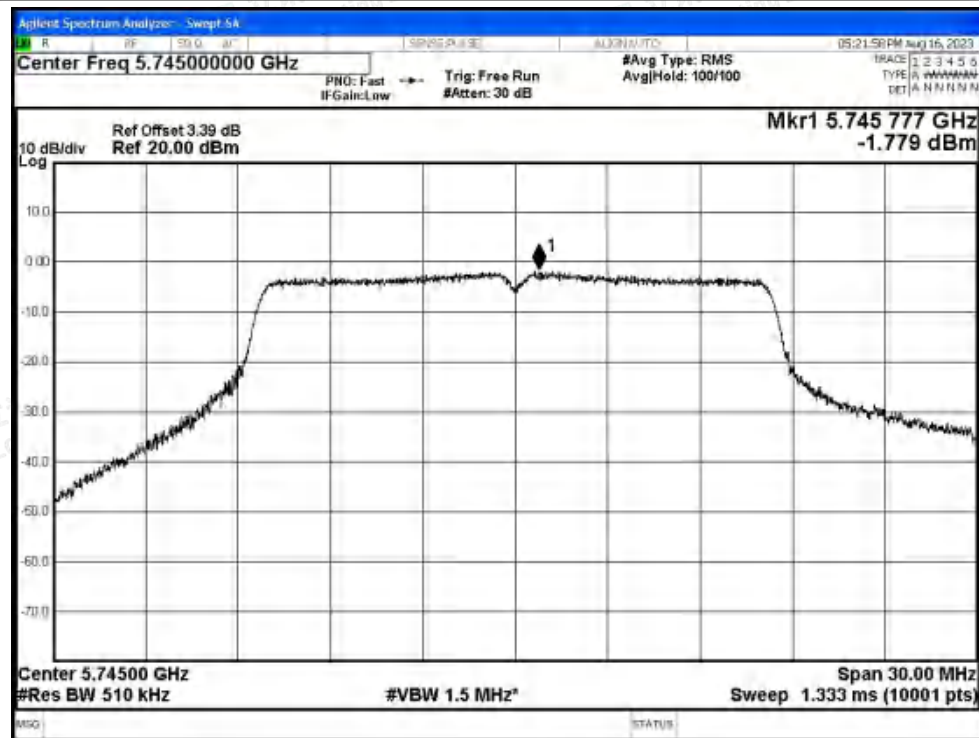

PSD NVNT a 5785MHz Ant0

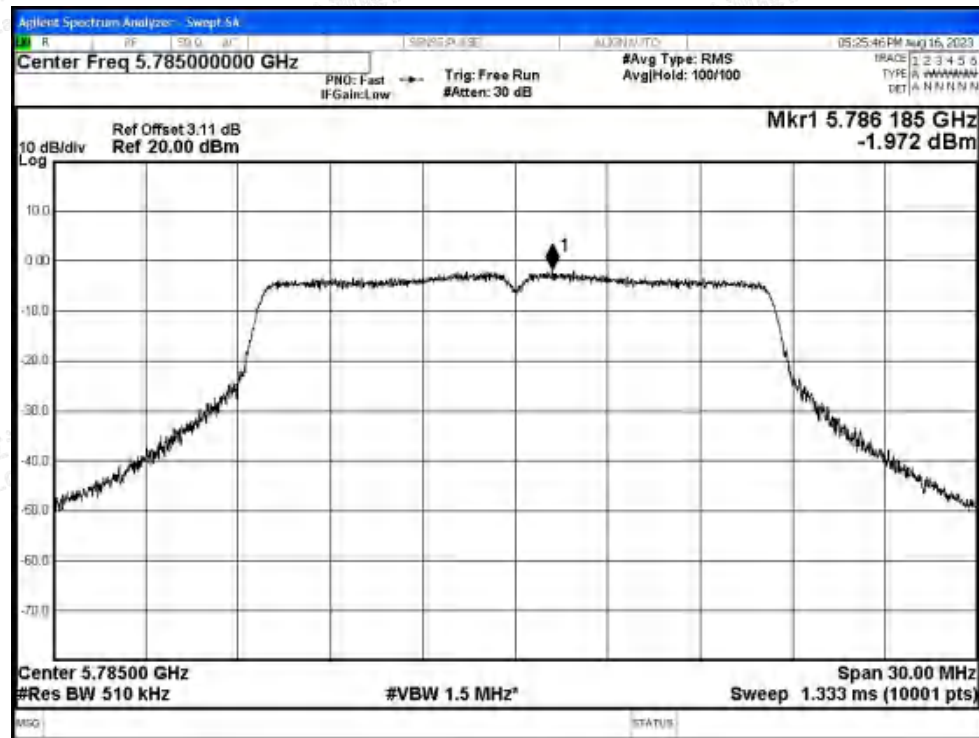

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT a 5825MHz Ant0

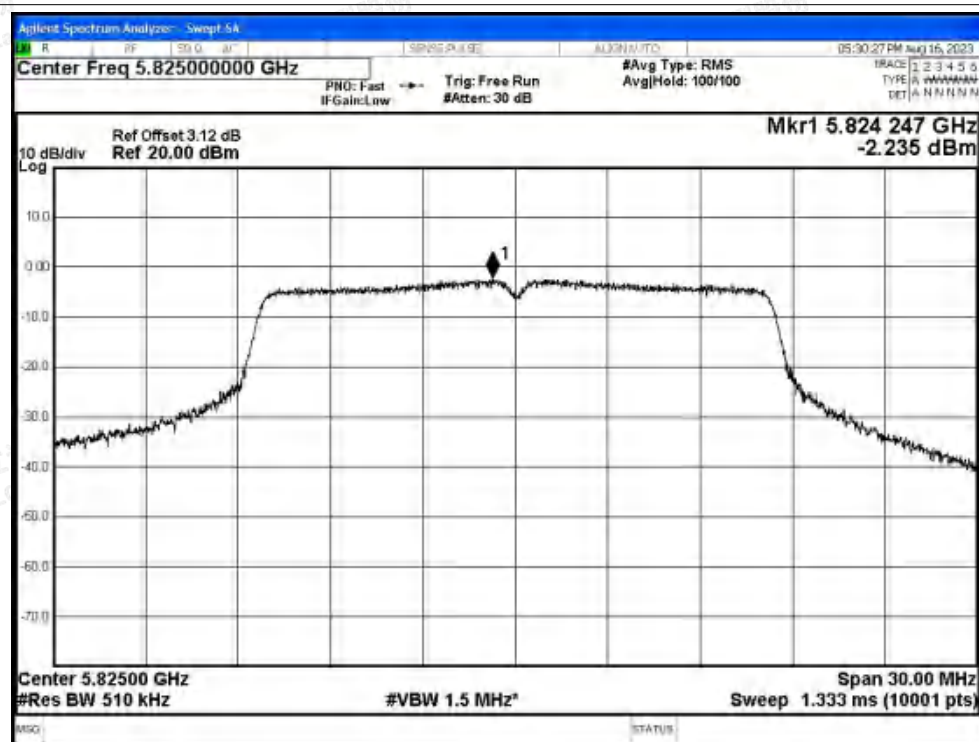

PSD NVNT n20 5745MHz Ant0

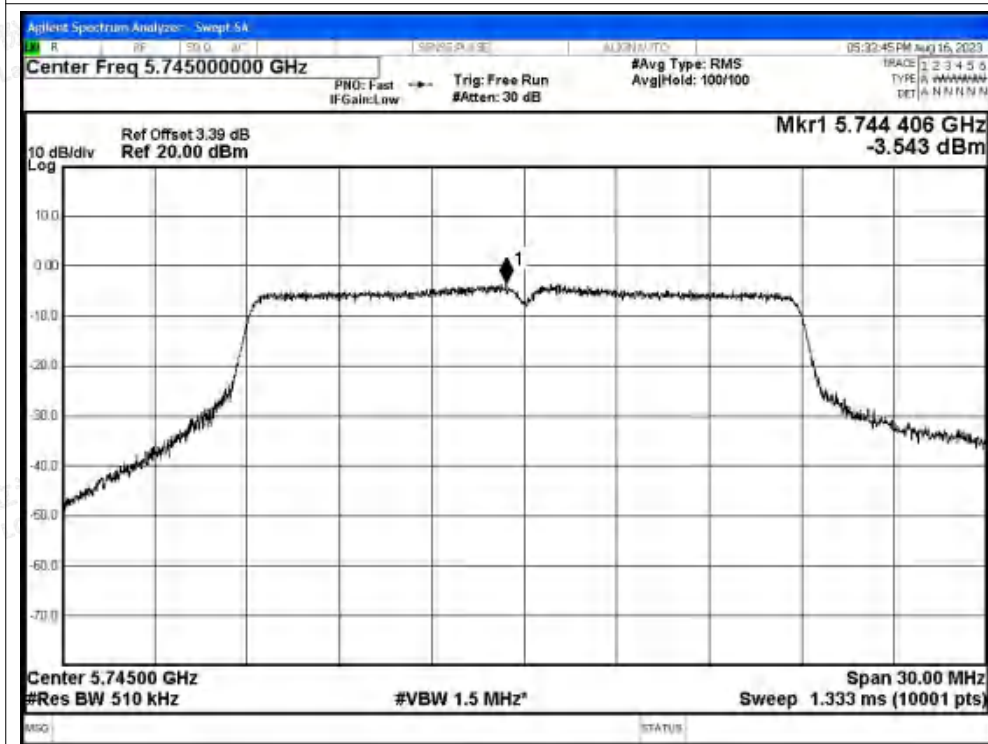

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT n20 5785MHz Ant0

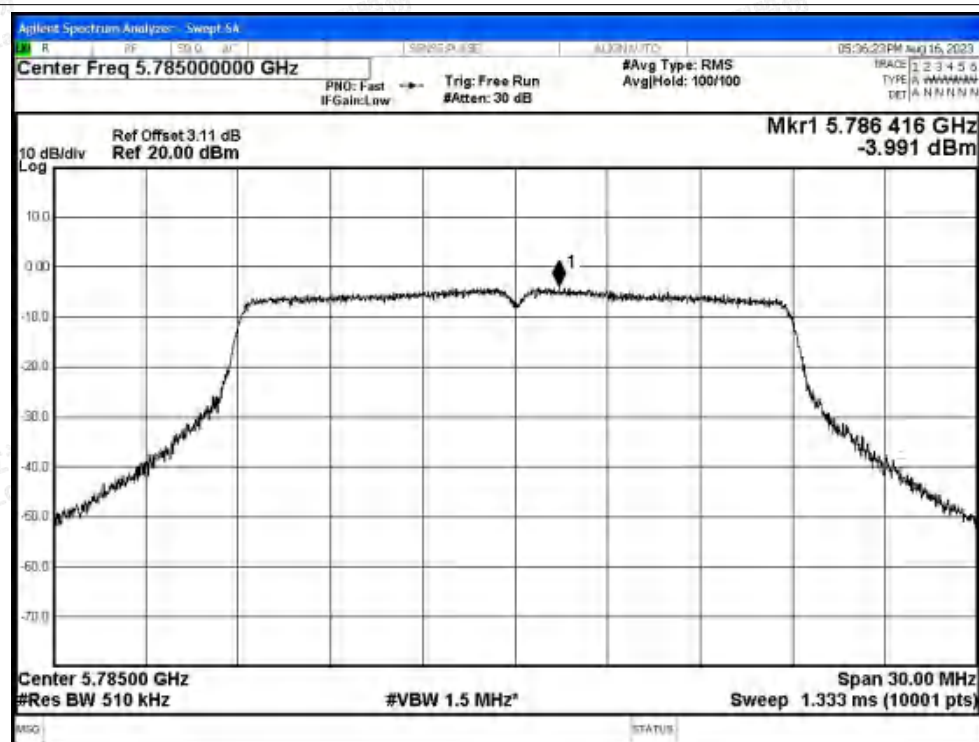

PSD NVNT n20 5825MHz Ant0

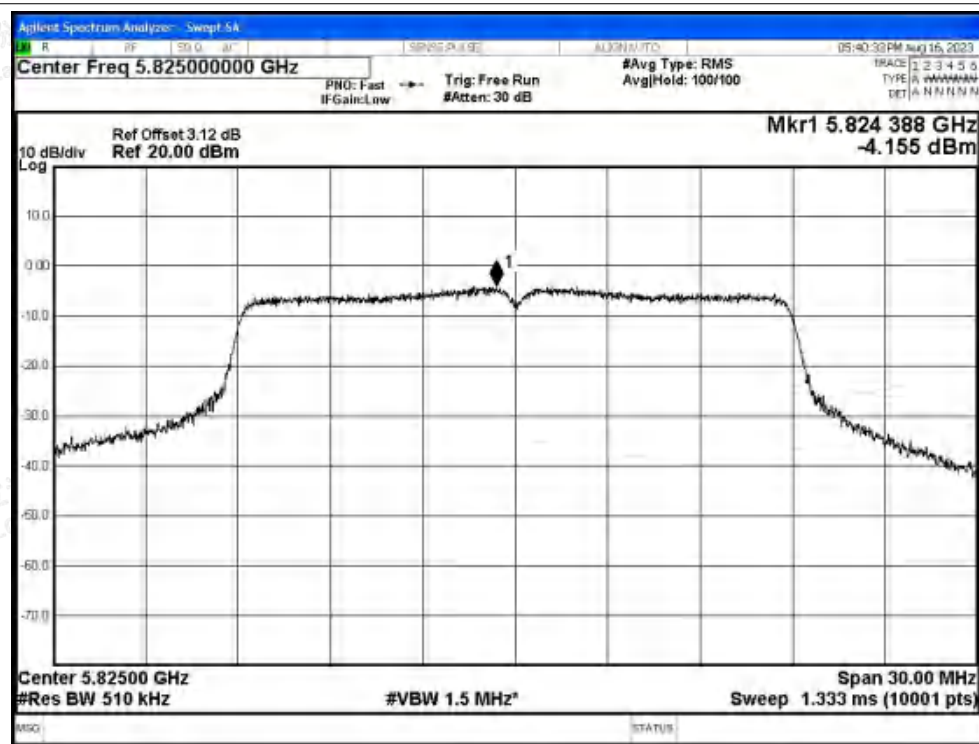

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT n40 5755MHz Ant0

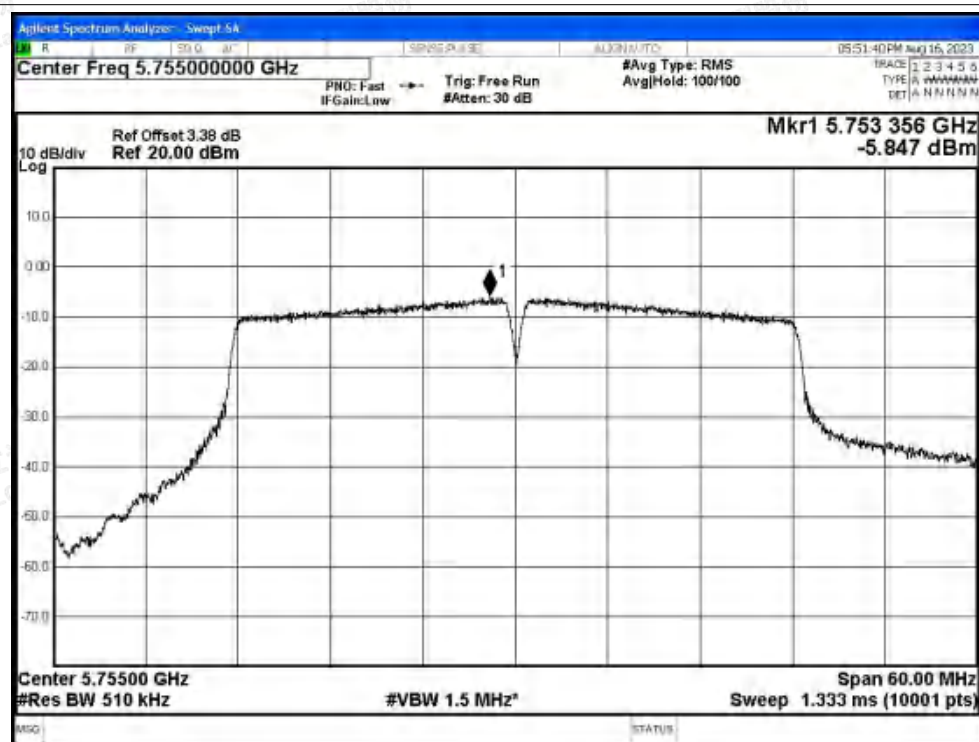

PSD NVNT n40 5795MHz Ant0

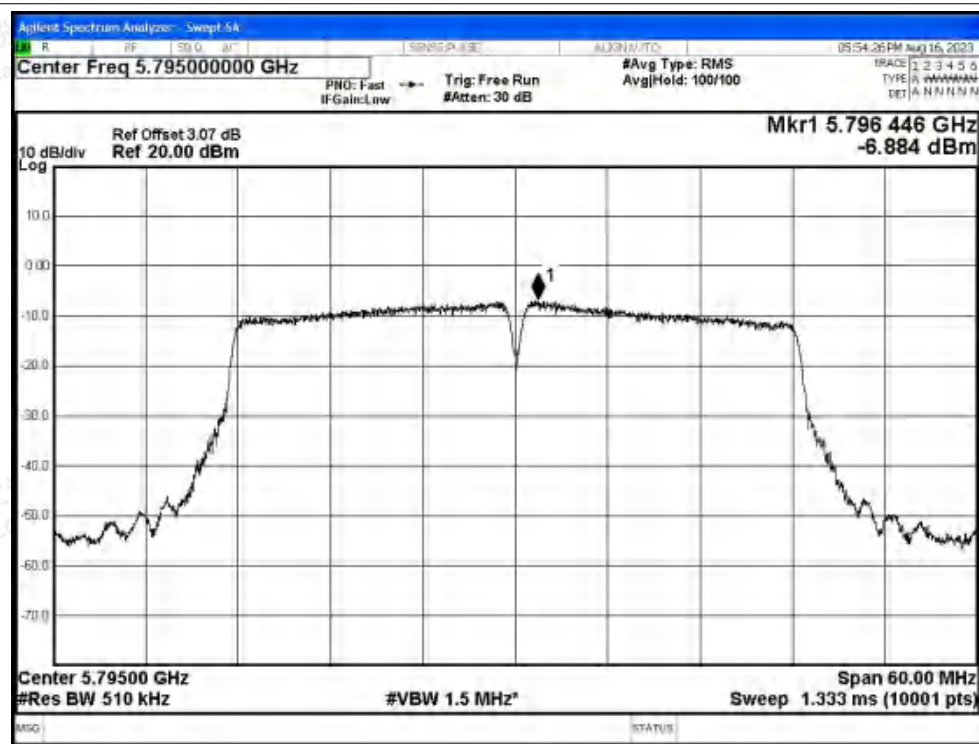

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac20 5745MHz Ant0

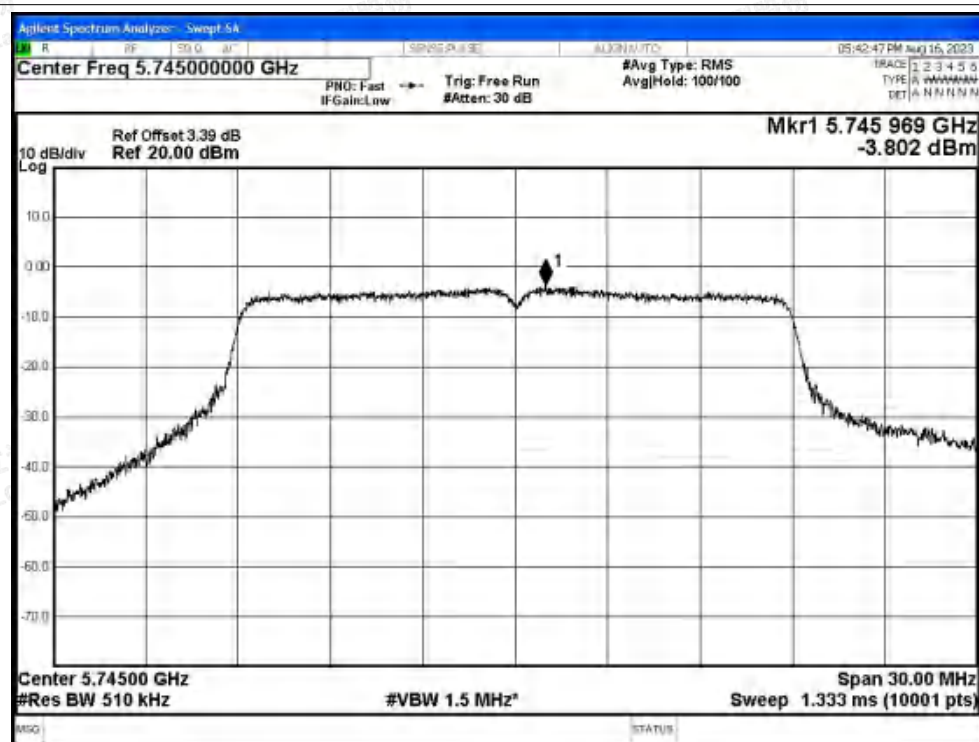

PSD NVNT ac20 5785MHz Ant0

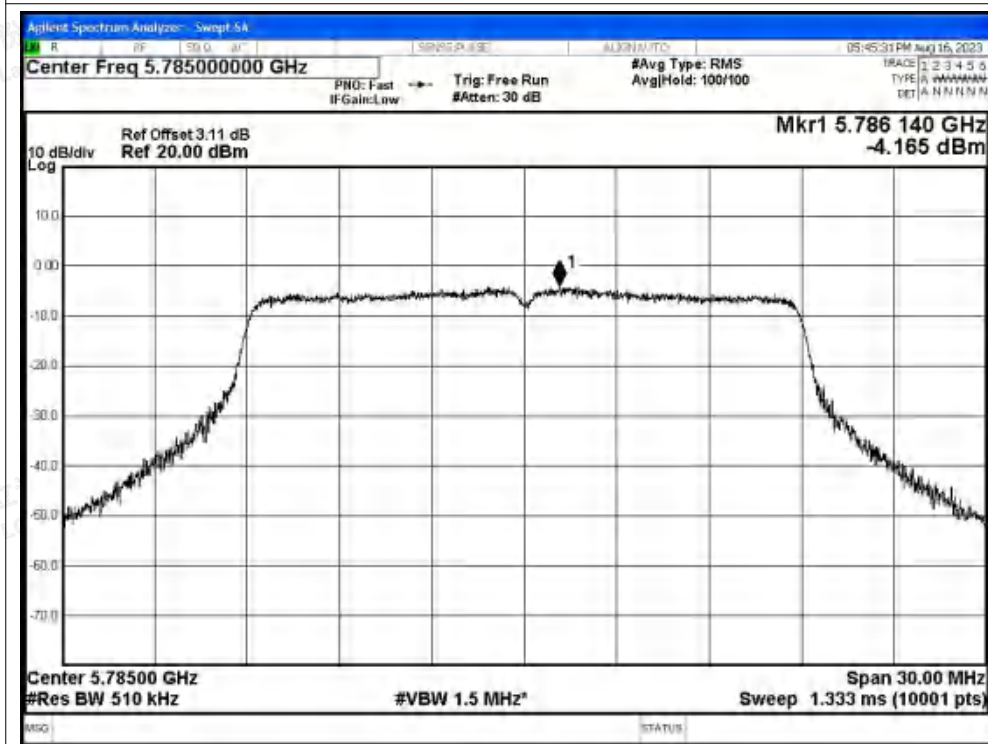

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac20 5825MHz Ant0

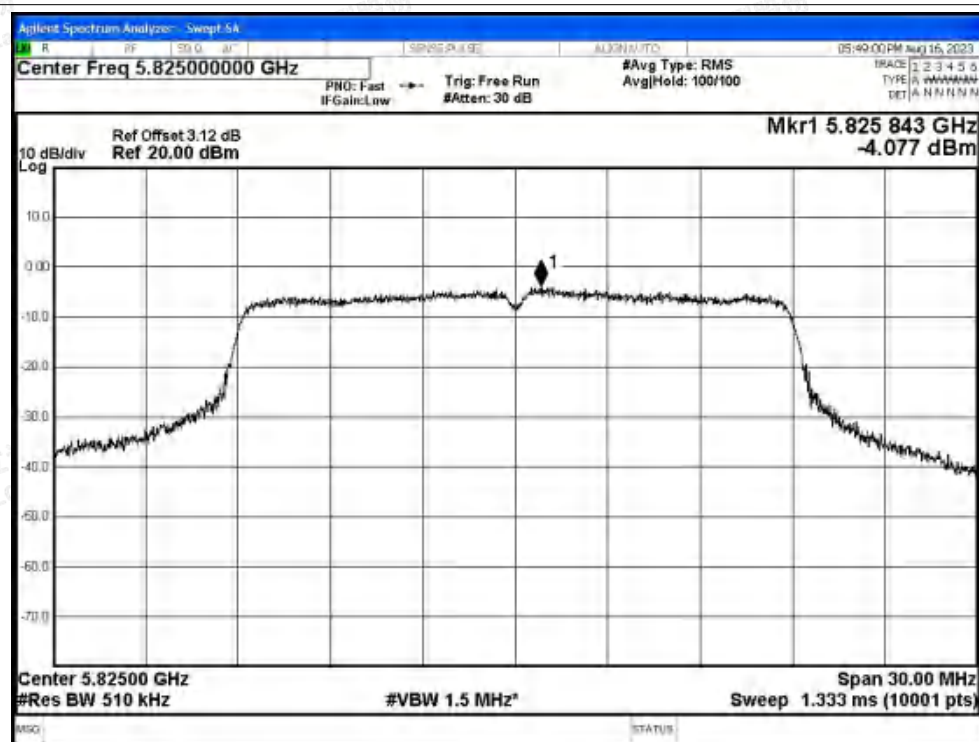

PSD NVNT ac40 5755MHz Ant0

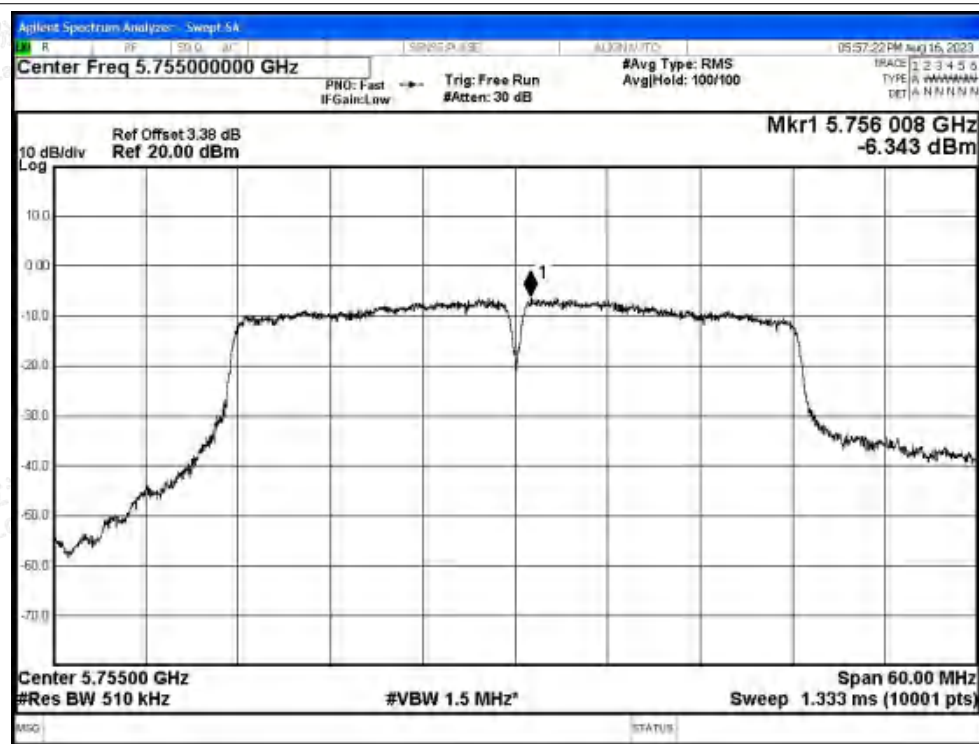

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac40 5795MHz Ant0

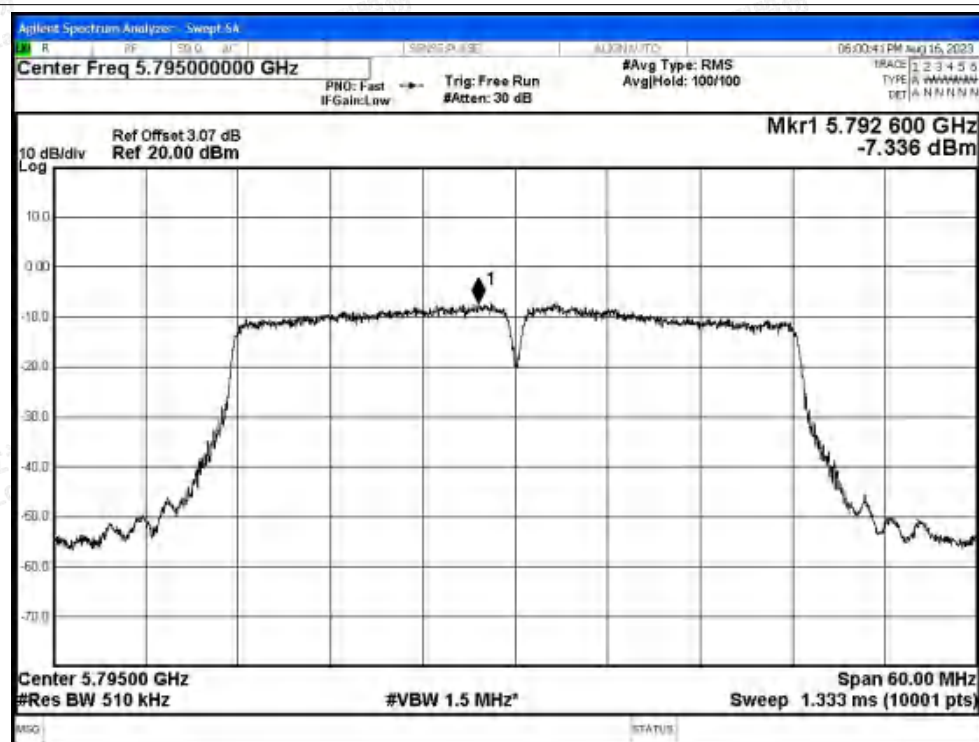

PSD NVNT ac80 5775MHz Ant0

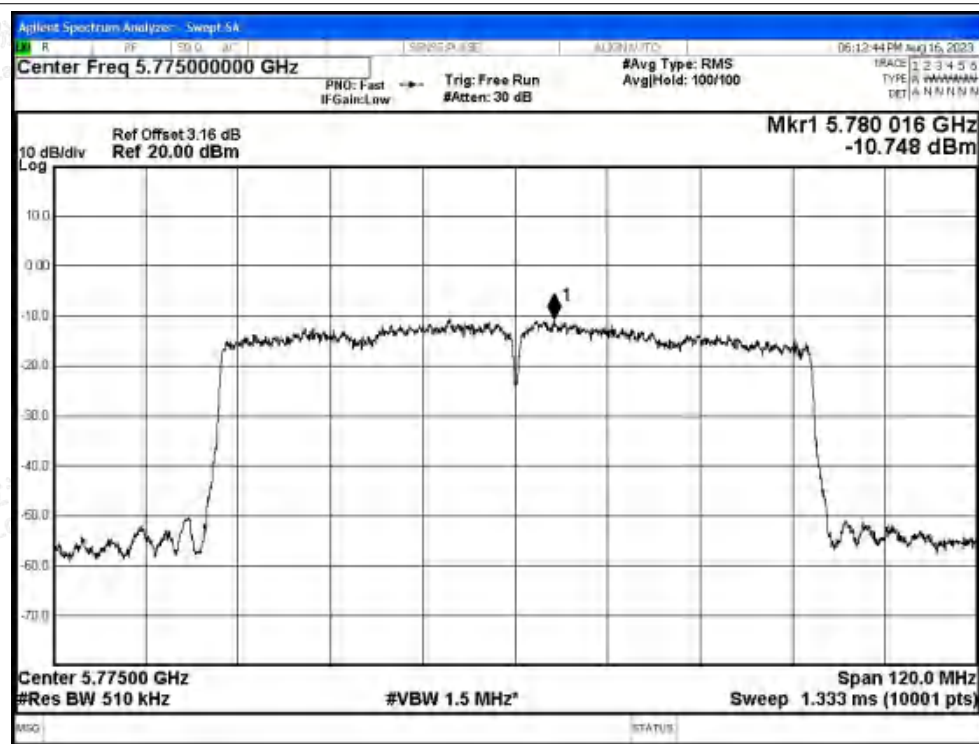

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ax20 5745MHz Ant0

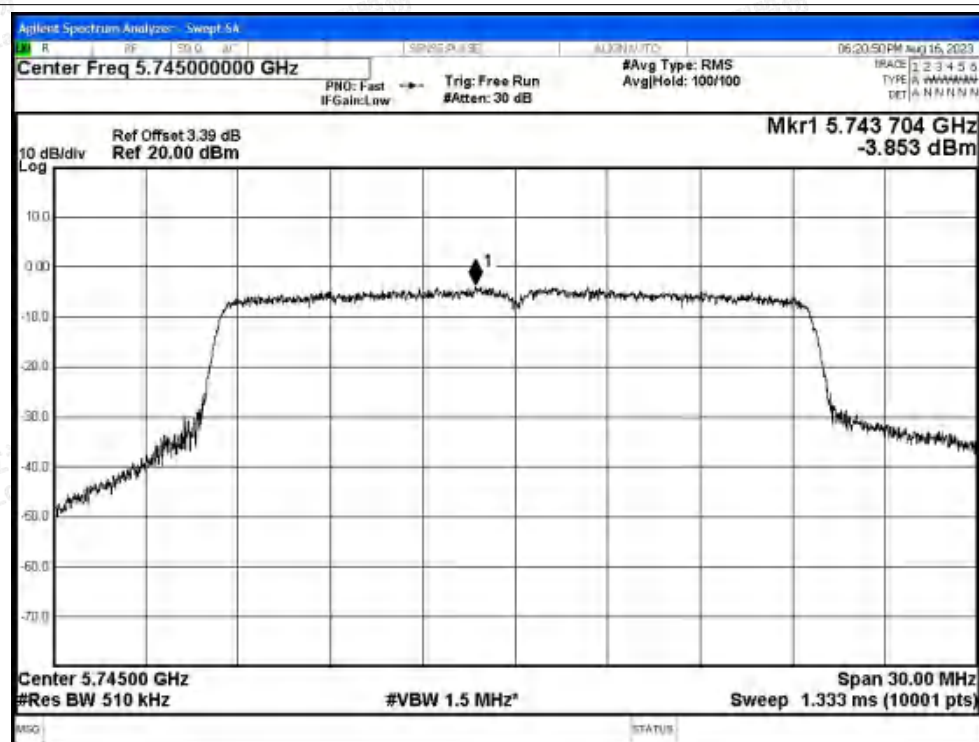

PSD NVNT ax20 5785MHz Ant0

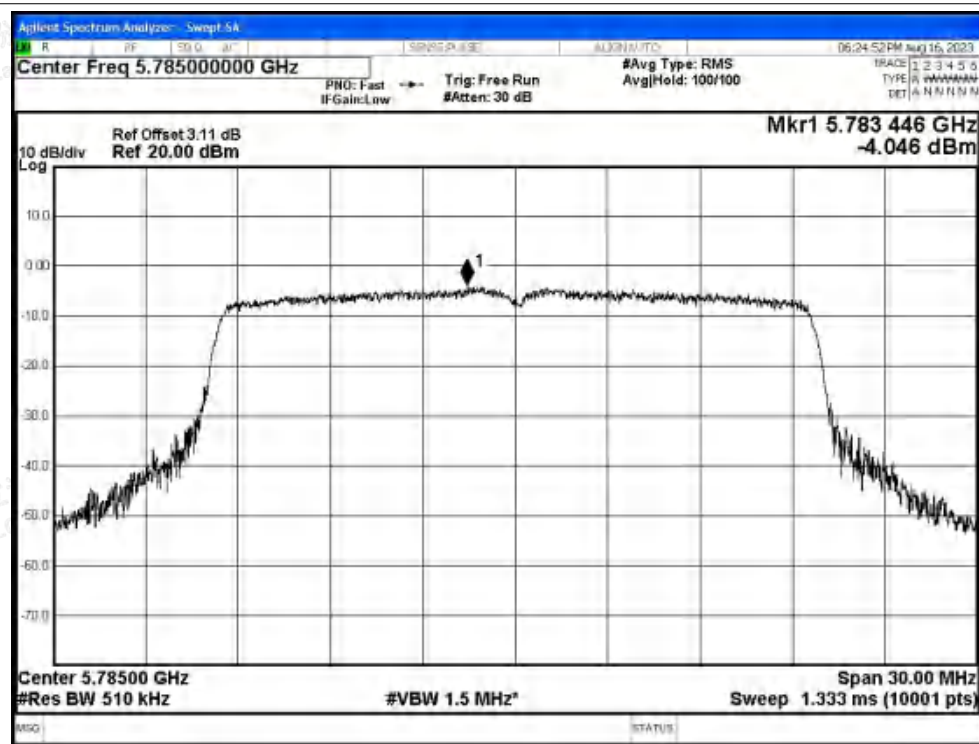

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ax20 5825MHz Ant0

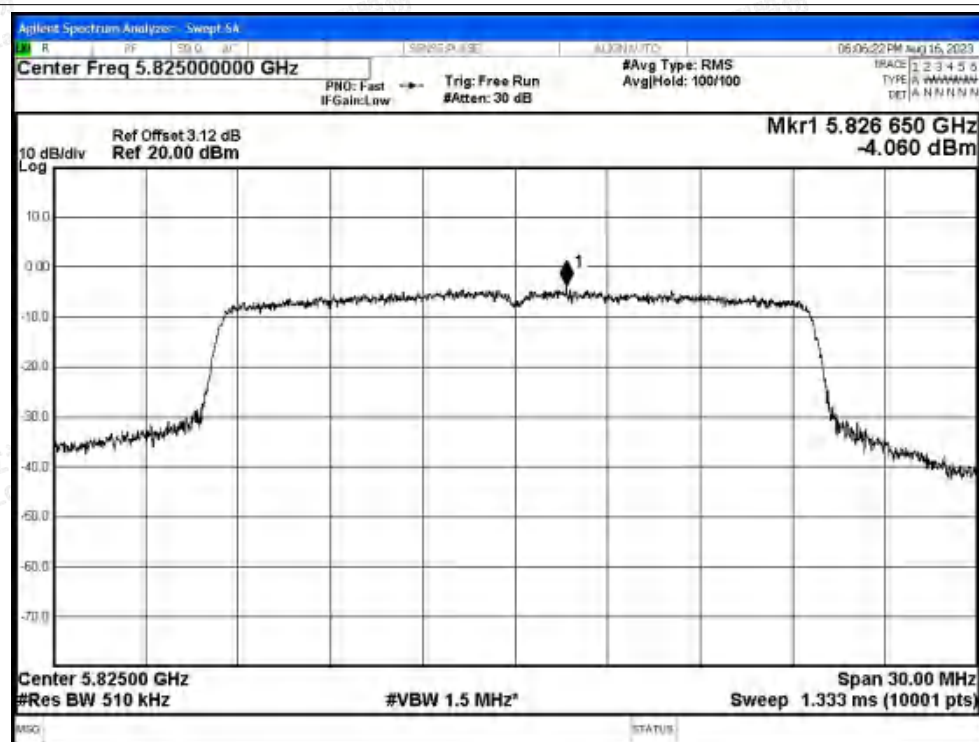

PSD NVNT ax40 5755MHz Ant0

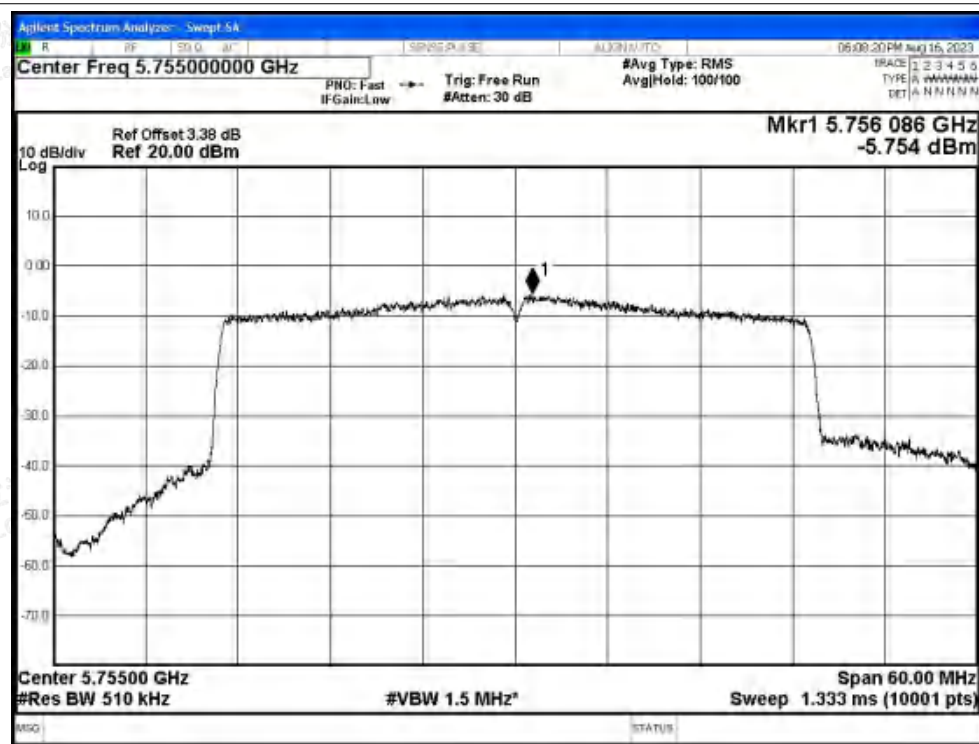

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ax40 5795MHz Ant0

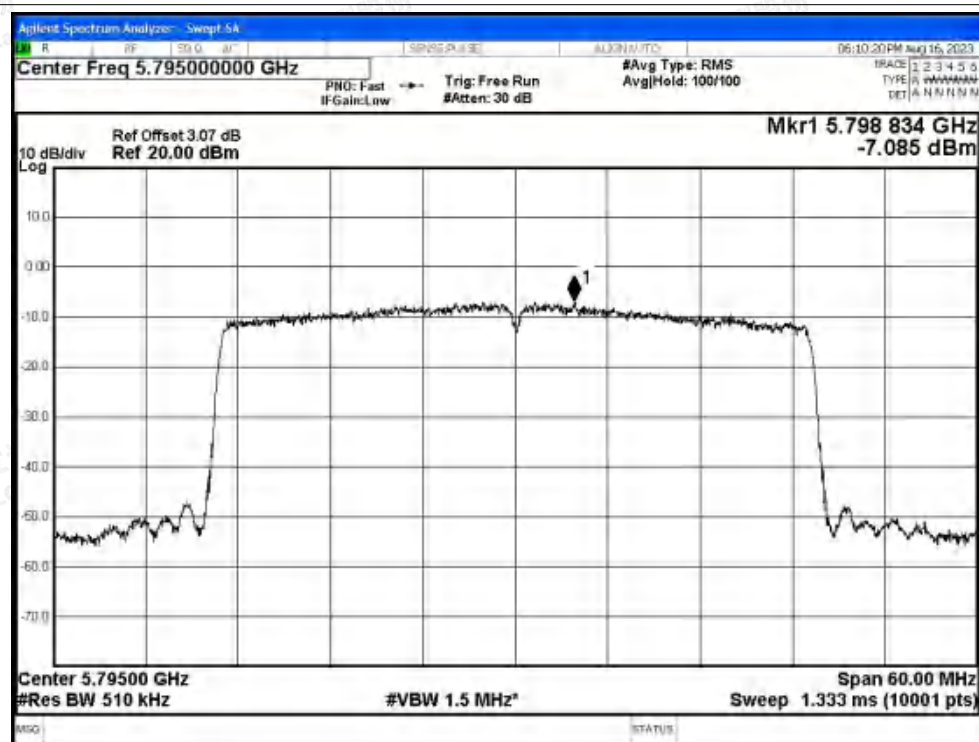

PSD NVNT ax80 5775MHz Ant0

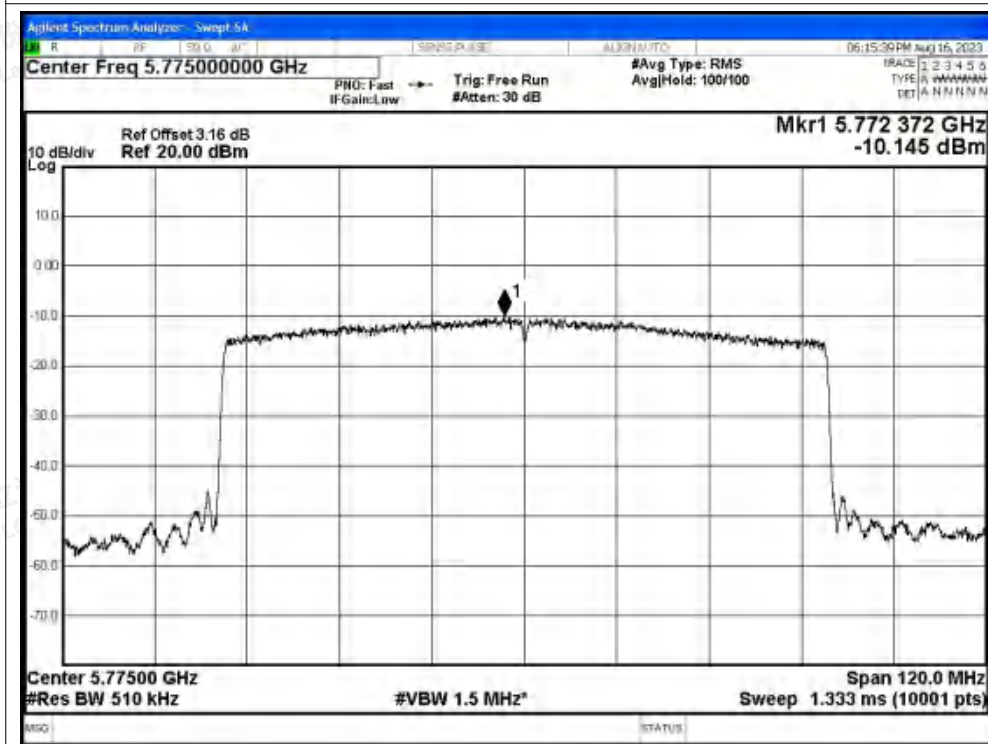


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | EIRP Power (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant0    | 5650            | -49.45      | 0.68       | -48.77           | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5650            | -57.01      | 0.68       | -56.33           | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5700            | -49.21      | 0.68       | -48.53           | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5700            | -57.14      | 0.68       | -56.46           | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5720            | -48.03      | 0.68       | -47.35           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5720            | -57.14      | 0.68       | -56.46           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5725            | -48.51      | 0.68       | -47.83           | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant0    | 5725            | -57.1       | 0.68       | -56.42           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5850            | -50.45      | 0.68       | -49.77           | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5850            | -57.49      | 0.68       | -56.81           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5855            | -49.63      | 0.68       | -48.95           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5855            | -57.23      | 0.68       | -56.55           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5875            | -48.41      | 0.68       | -47.73           | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5875            | -57.1       | 0.68       | -56.42           | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5925            | -49.91      | 0.68       | -49.23           | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant0    | 5925            | -56.81      | 0.68       | -56.13           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5650            | -50.14      | 0.68       | -49.46           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5650            | -56.74      | 0.68       | -56.06           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5700            | -49.22      | 0.68       | -48.54           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5700            | -57.04      | 0.68       | -56.36           | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5720            | -50.22      | 0.68       | -49.54           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5720            | -57.12      | 0.68       | -56.44           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5725            | -51.09      | 0.68       | -50.41           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant0    | 5725            | -57.13      | 0.68       | -56.45           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5850            | -51.02      | 0.68       | -50.34           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5850            | -57.39      | 0.68       | -56.71           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5855            | -51.24      | 0.68       | -50.56           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5855            | -57.49      | 0.68       | -56.81           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5875            | -50.03      | 0.68       | -49.35           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5875            | -57.22      | 0.68       | -56.54           | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5925            | -49.29      | 0.68       | -48.61           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant0    | 5925            | -56.86      | 0.68       | -56.18           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 5650            | -50.25      | 0.68       | -49.57           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 5650            | -56.88      | 0.68       | -56.2            | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 5700            | -48.58      | 0.68       | -47.9            | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 5700            | -56.68      | 0.68       | -56              | Average  | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant0    | 5720            | -50.51      | 0.68       | -49.83           | Peak     | 15.6        | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | n40  | 5755 | Ant0 | 5720 | -56.91 | 0.68 | -56.23 | Average | 15.6 | Pass |
| NVNT | n40  | 5755 | Ant0 | 5725 | -49.93 | 0.68 | -49.25 | Peak    | 27   | Pass |
| NVNT | n40  | 5755 | Ant0 | 5725 | -56.29 | 0.68 | -55.61 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant0 | 5850 | -51.5  | 0.68 | -50.82 | Peak    | 27   | Pass |
| NVNT | n40  | 5795 | Ant0 | 5850 | -57.43 | 0.68 | -56.75 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant0 | 5855 | -48.97 | 0.68 | -48.29 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant0 | 5855 | -57.44 | 0.68 | -56.76 | Average | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant0 | 5875 | -49.73 | 0.68 | -49.05 | Peak    | 10   | Pass |
| NVNT | n40  | 5795 | Ant0 | 5875 | -57.11 | 0.68 | -56.43 | Average | 10   | Pass |
| NVNT | n40  | 5795 | Ant0 | 5925 | -49.48 | 0.68 | -48.8  | Peak    | -27  | Pass |
| NVNT | n40  | 5795 | Ant0 | 5925 | -56.52 | 0.68 | -55.84 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5650 | -49.52 | 0.68 | -48.84 | Peak    | -27  | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5650 | -56.94 | 0.68 | -56.26 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5700 | -49.48 | 0.68 | -48.8  | Peak    | 10   | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5700 | -57.17 | 0.68 | -56.49 | Average | 10   | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5720 | -49.78 | 0.68 | -49.1  | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5720 | -56.75 | 0.68 | -56.07 | Average | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5725 | -50.12 | 0.68 | -49.44 | Peak    | 27   | Pass |
| NVNT | ac20 | 5745 | Ant0 | 5725 | -56.89 | 0.68 | -56.21 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5850 | -50.57 | 0.68 | -49.89 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5850 | -57.17 | 0.68 | -56.49 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5855 | -51.18 | 0.68 | -50.5  | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5855 | -57.3  | 0.68 | -56.62 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5875 | -49.37 | 0.68 | -48.69 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5875 | -57.21 | 0.68 | -56.53 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5925 | -49.4  | 0.68 | -48.72 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | Ant0 | 5925 | -56.73 | 0.68 | -56.05 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5650 | -49.11 | 0.68 | -48.43 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5650 | -55.96 | 0.68 | -55.28 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5700 | -52.07 | 0.68 | -51.39 | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5700 | -56.78 | 0.68 | -56.1  | Average | 10   | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5720 | -50.77 | 0.68 | -50.09 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5720 | -56.62 | 0.68 | -55.94 | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5725 | -50.28 | 0.68 | -49.6  | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | Ant0 | 5725 | -56.57 | 0.68 | -55.89 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5850 | -52.12 | 0.68 | -51.44 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5850 | -57.3  | 0.68 | -56.62 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5855 | -51.29 | 0.68 | -50.61 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5855 | -56.69 | 0.68 | -56.01 | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5875 | -51.82 | 0.68 | -51.14 | Peak    | 10   | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5875 | -56.49 | 0.68 | -55.81 | Average | 10   | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5925 | -48.82 | 0.68 | -48.14 | Peak    | -27  | Pass |
| NVNT | ac40 | 5795 | Ant0 | 5925 | -56.34 | 0.68 | -55.66 | Average | -27  | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ac80 | 5775 | Ant0 | 5850 | -50.08 | 0.68 | -49.4  | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5850 | -56.5  | 0.68 | -55.82 | Average | 27   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5855 | -49.48 | 0.68 | -48.8  | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5855 | -56.01 | 0.68 | -55.33 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5875 | -50.81 | 0.68 | -50.13 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5875 | -56.17 | 0.68 | -55.49 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5925 | -50.21 | 0.68 | -49.53 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5925 | -56.29 | 0.68 | -55.61 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5650 | -49.89 | 0.68 | -49.21 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5650 | -56.44 | 0.68 | -55.76 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5700 | -48.41 | 0.68 | -47.73 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5700 | -56.54 | 0.68 | -55.86 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5720 | -50.28 | 0.68 | -49.6  | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5720 | -56.31 | 0.68 | -55.63 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5725 | -49.02 | 0.68 | -48.34 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant0 | 5725 | -55.78 | 0.68 | -55.1  | Average | 27   | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5650 | -48.6  | 0.68 | -47.92 | Peak    | -27  | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5650 | -56.82 | 0.68 | -56.14 | Average | -27  | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5700 | -49.47 | 0.68 | -48.79 | Peak    | 10   | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5700 | -56.89 | 0.68 | -56.21 | Average | 10   | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5720 | -50.71 | 0.68 | -50.03 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5720 | -56.96 | 0.68 | -56.28 | Average | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5725 | -47.99 | 0.68 | -47.31 | Peak    | 27   | Pass |
| NVNT | ax20 | 5745 | Ant0 | 5725 | -56.62 | 0.68 | -55.94 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5850 | -50.45 | 0.68 | -49.77 | Peak    | 27   | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5850 | -57.7  | 0.68 | -57.02 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5855 | -50.53 | 0.68 | -49.85 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5855 | -56.98 | 0.68 | -56.3  | Average | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5875 | -49.13 | 0.68 | -48.45 | Peak    | 10   | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5875 | -56.82 | 0.68 | -56.14 | Average | 10   | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5925 | -49.25 | 0.68 | -48.57 | Peak    | -27  | Pass |
| NVNT | ax20 | 5825 | Ant0 | 5925 | -56.35 | 0.68 | -55.67 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5650 | -49.82 | 0.68 | -49.14 | Peak    | -27  | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5650 | -56.75 | 0.68 | -56.07 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5700 | -50.24 | 0.68 | -49.56 | Peak    | 10   | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5700 | -56.73 | 0.68 | -56.05 | Average | 10   | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5720 | -48.92 | 0.68 | -48.24 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5720 | -56.76 | 0.68 | -56.08 | Average | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5725 | -49.38 | 0.68 | -48.7  | Peak    | 27   | Pass |
| NVNT | ax40 | 5755 | Ant0 | 5725 | -56.2  | 0.68 | -55.52 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5850 | -50.79 | 0.68 | -50.11 | Peak    | 27   | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5850 | -57.39 | 0.68 | -56.71 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5855 | -48.49 | 0.68 | -47.81 | Peak    | 15.6 | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ax40 | 5795 | Ant0 | 5855 | -57.17 | 0.68 | -56.49 | Average | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5875 | -49.53 | 0.68 | -48.85 | Peak    | 10   | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5875 | -57.02 | 0.68 | -56.34 | Average | 10   | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5925 | -50.28 | 0.68 | -49.6  | Peak    | -27  | Pass |
| NVNT | ax40 | 5795 | Ant0 | 5925 | -56.5  | 0.68 | -55.82 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5850 | -50.41 | 0.68 | -49.73 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5850 | -57.09 | 0.68 | -56.41 | Average | 27   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5855 | -49.87 | 0.68 | -49.19 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5855 | -56.98 | 0.68 | -56.3  | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5875 | -49.41 | 0.68 | -48.73 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5875 | -56.71 | 0.68 | -56.03 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5925 | -48.16 | 0.68 | -47.48 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5925 | -56.22 | 0.68 | -55.54 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5650 | -50.4  | 0.68 | -49.72 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5650 | -57.04 | 0.68 | -56.36 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5700 | -50.24 | 0.68 | -49.56 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5700 | -56.71 | 0.68 | -56.03 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5720 | -50.8  | 0.68 | -50.12 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5720 | -56.84 | 0.68 | -56.16 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5725 | -48.92 | 0.68 | -48.24 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant0 | 5725 | -56.28 | 0.68 | -55.6  | Average | 27   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




## Test Graphs

## Restrict Band NVNT a 5745MHz Ant0 Peak

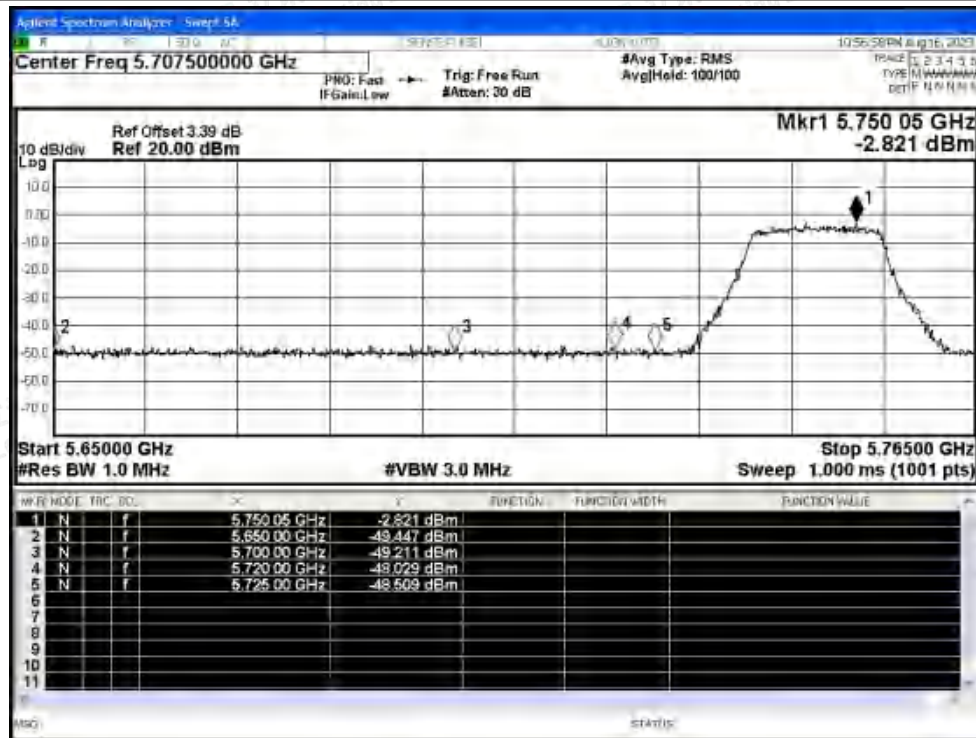

## Restrict Band NVNT a 5745MHz Ant0 Average

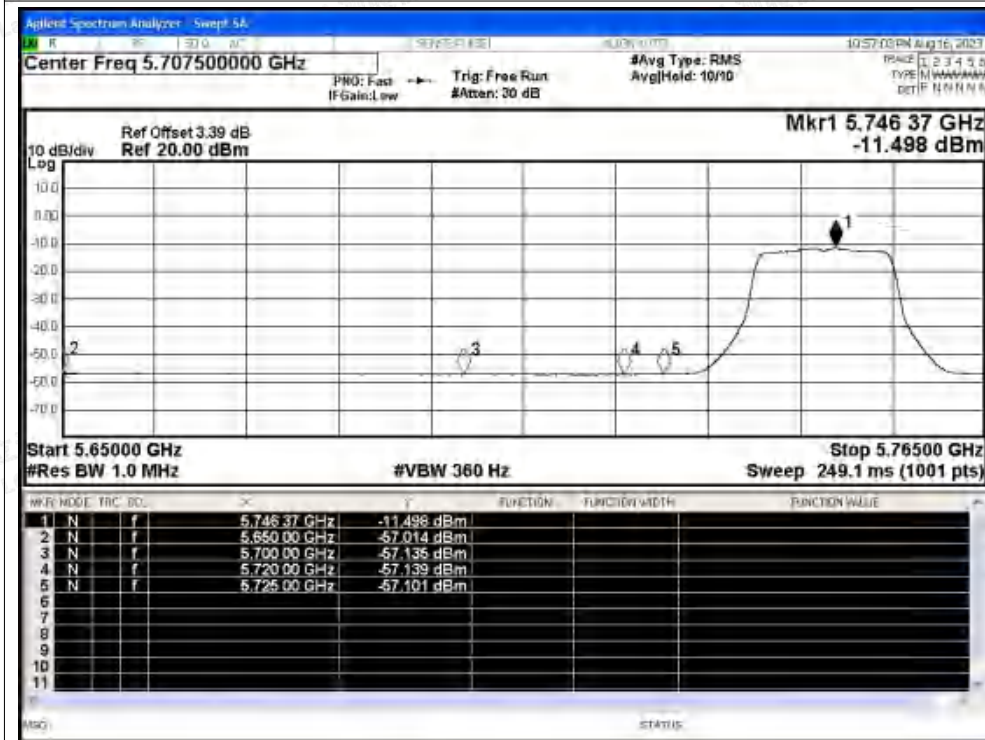


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT a 5825MHz Ant0 Peak

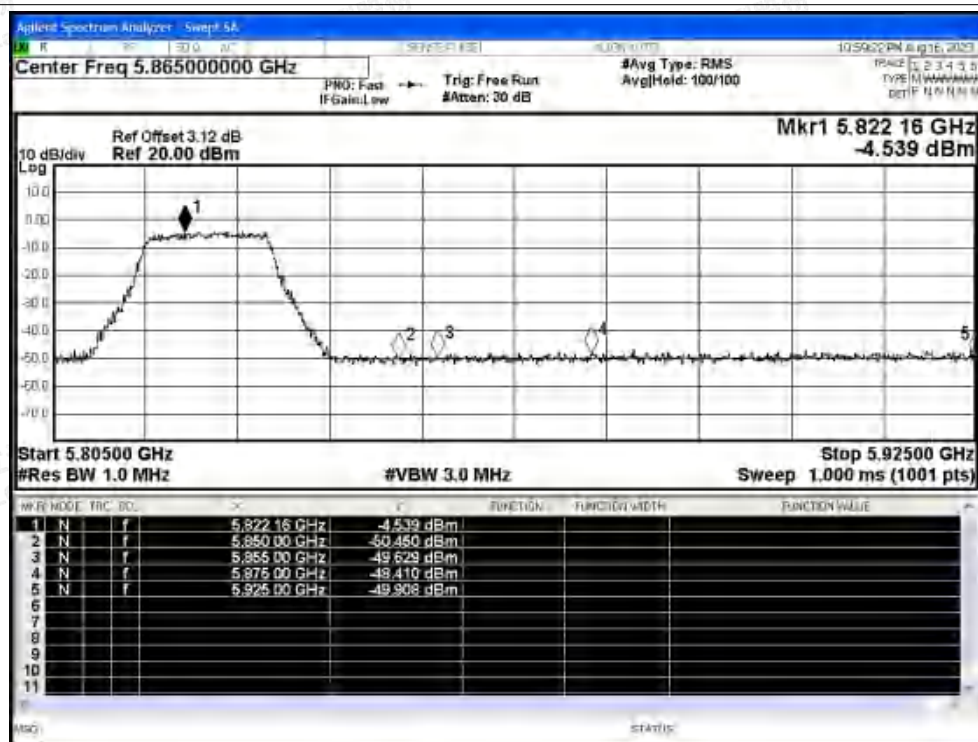

## Restrict Band NVNT a 5825MHz Ant0 Average

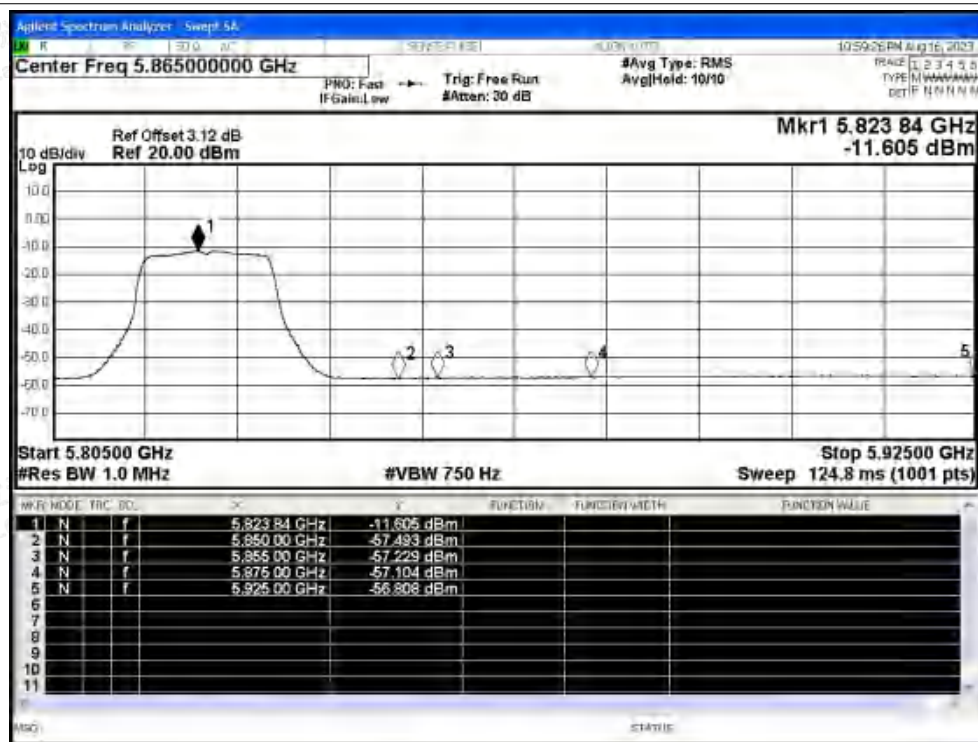


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5745MHz Ant0 Peak



## Restrict Band NVNT n20 5745MHz Ant0 Average

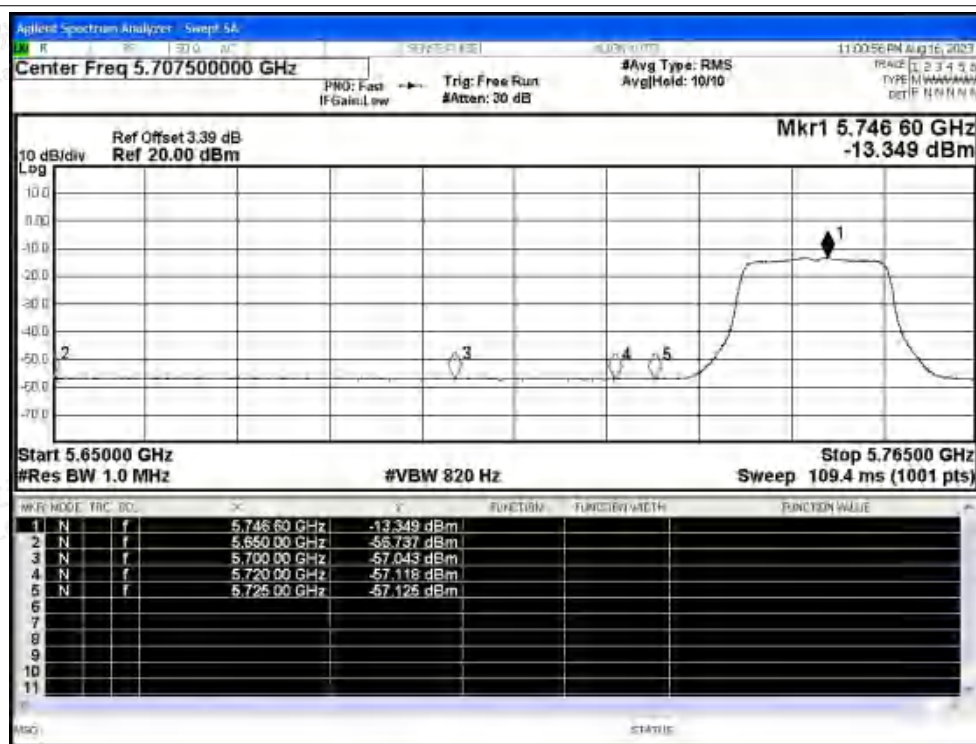

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5825MHz Ant0 Peak

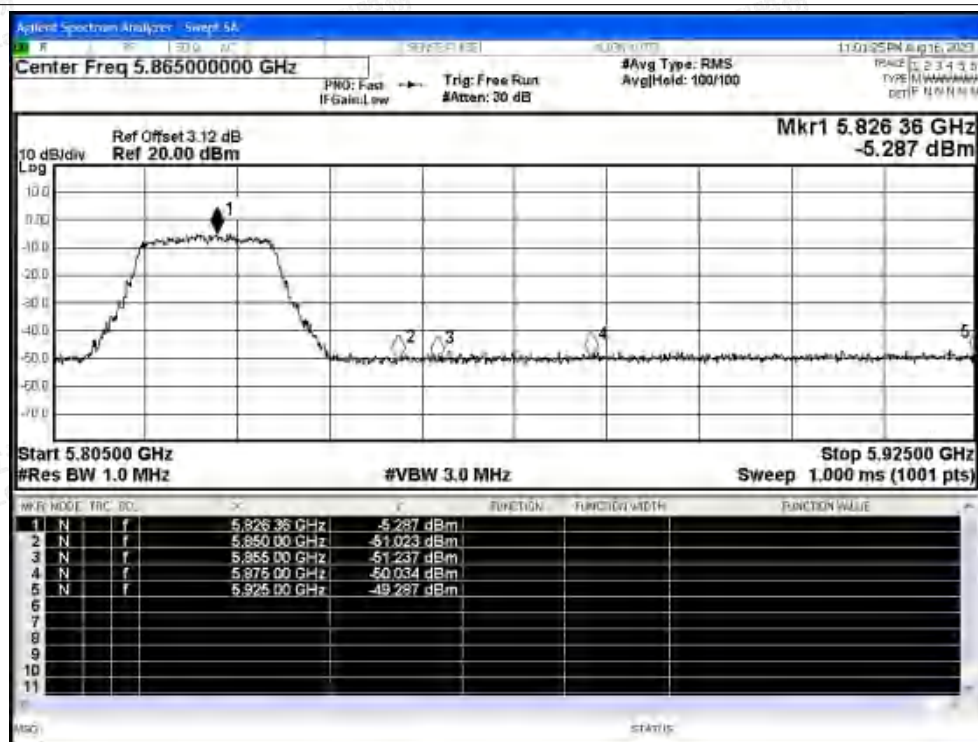

## Restrict Band NVNT n20 5825MHz Ant0 Average

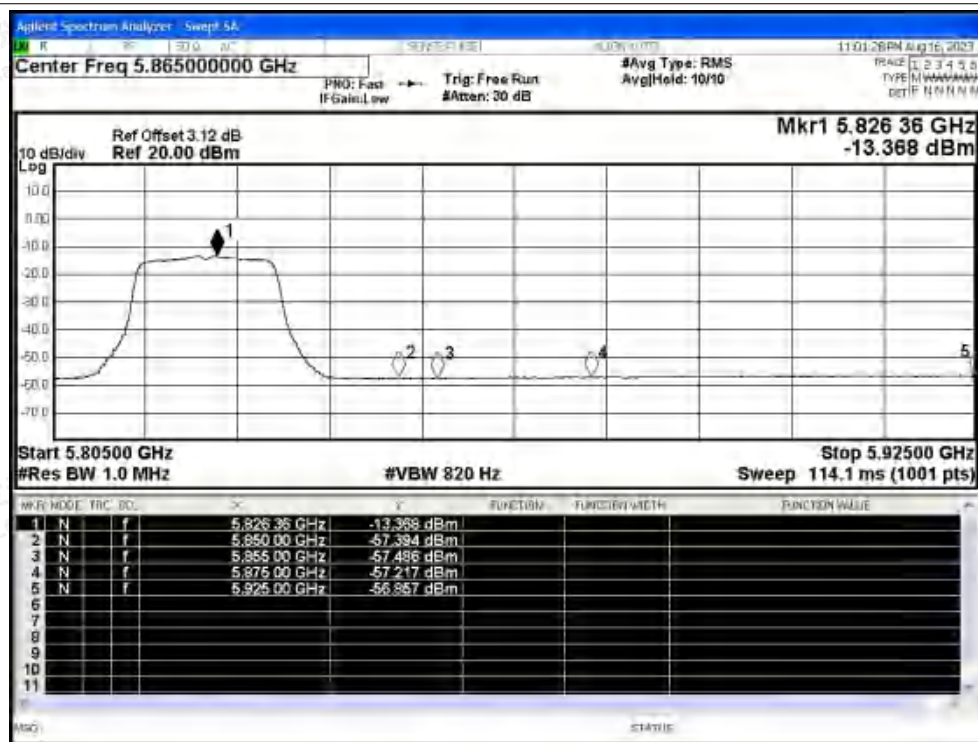

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5755MHz Ant0 Peak

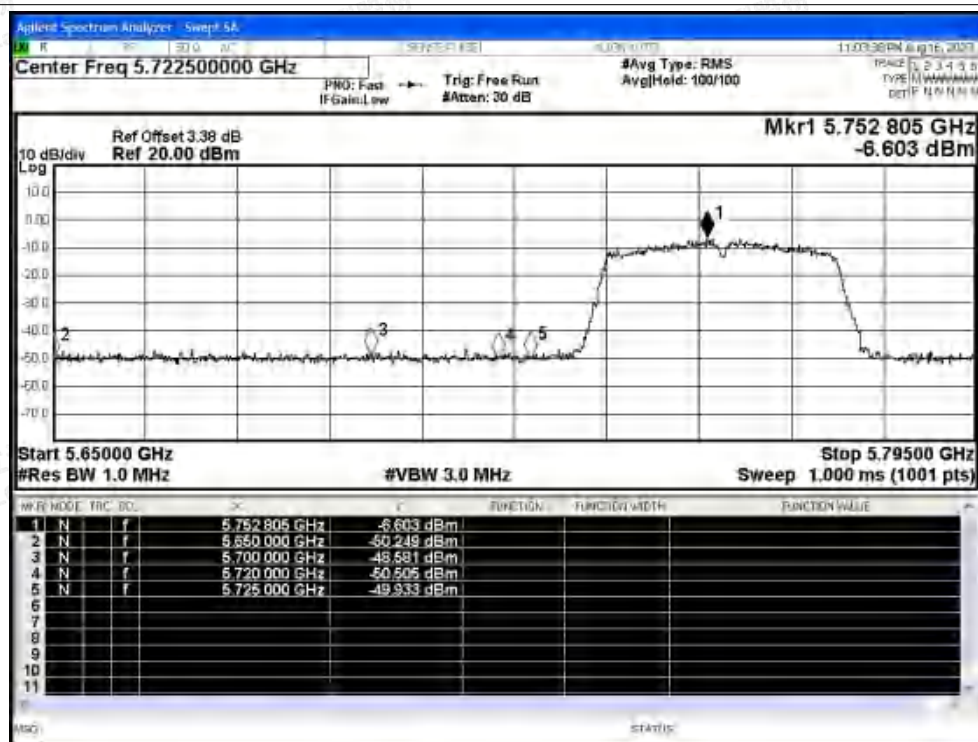

## Restrict Band NVNT n40 5755MHz Ant0 Average

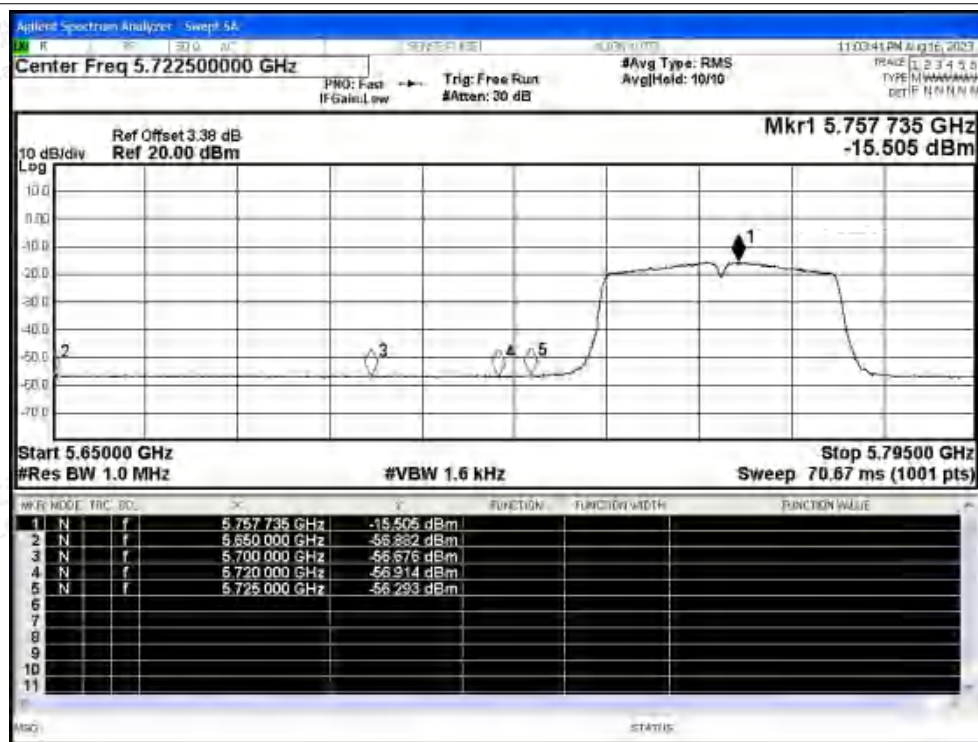


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5795MHz Ant0 Peak

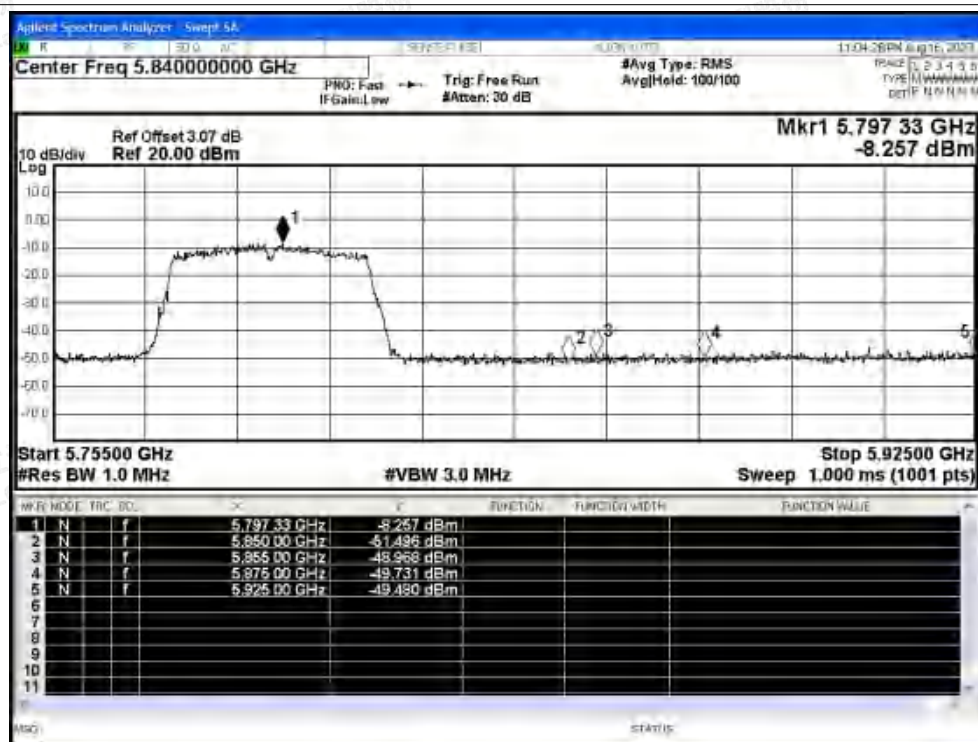

## Restrict Band NVNT n40 5795MHz Ant0 Average

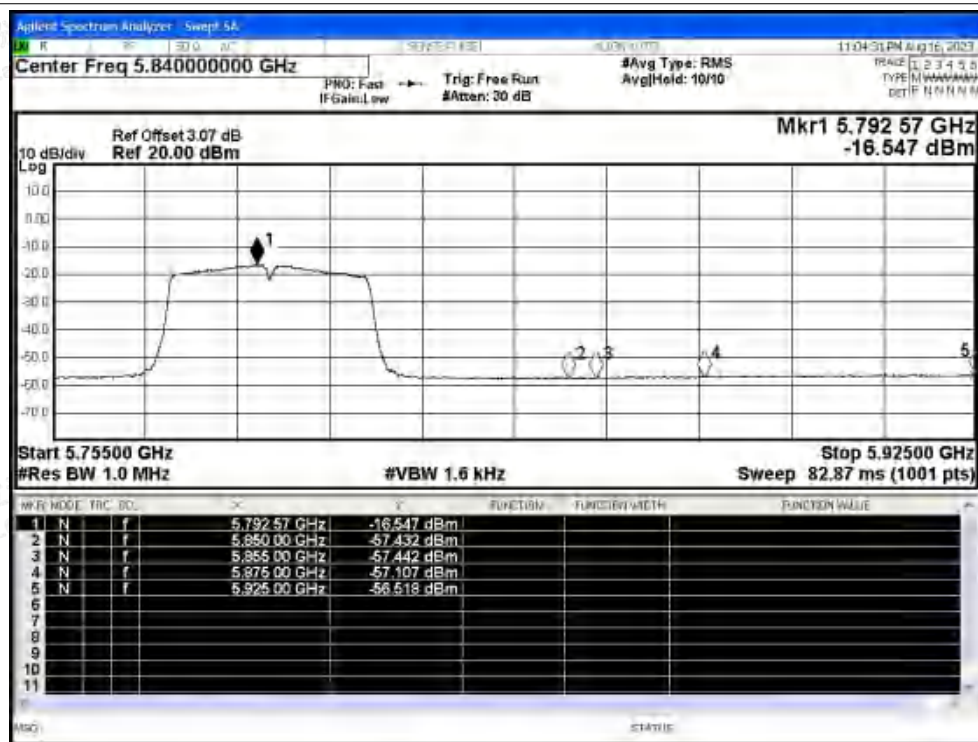


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5745MHz Ant0 Peak



## Restrict Band NVNT ac20 5745MHz Ant0 Average

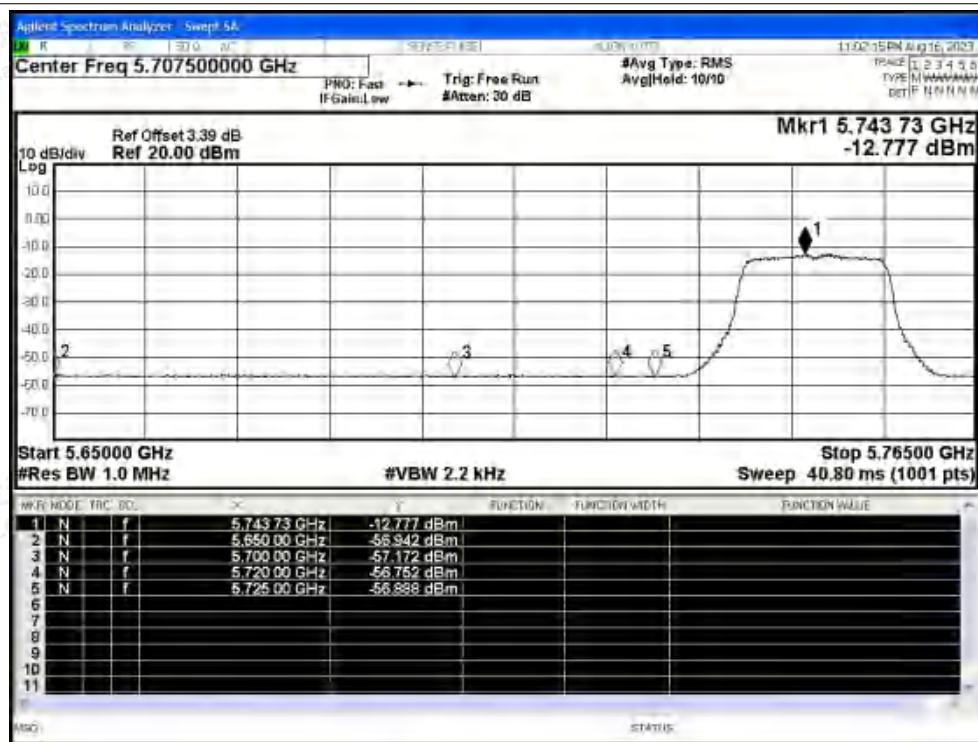

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5825MHz Ant0 Peak

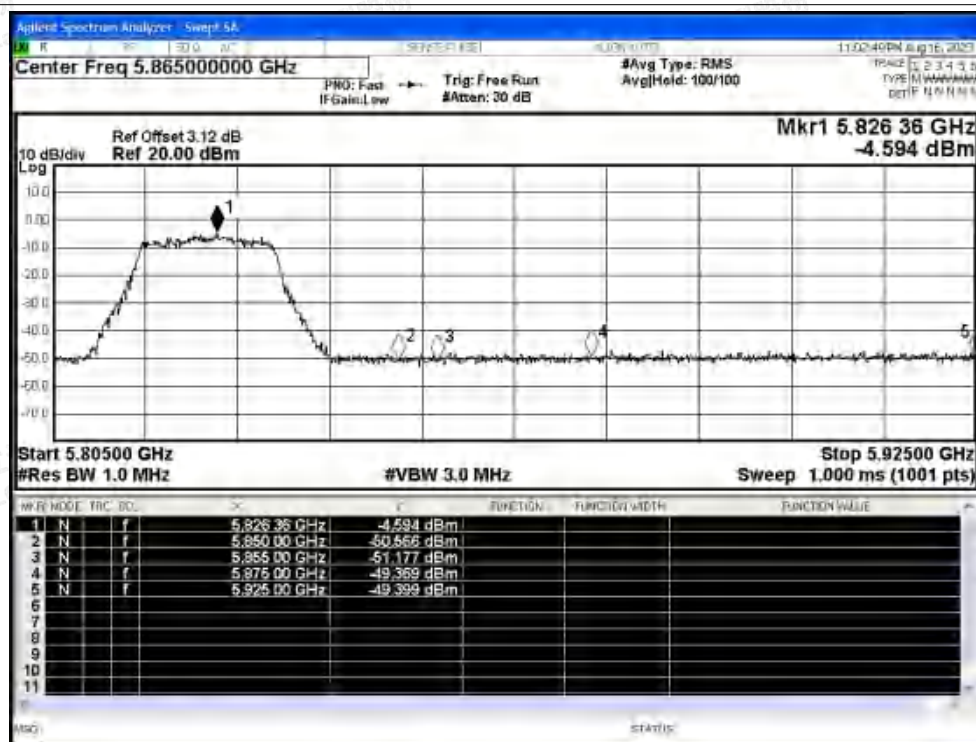

## Restrict Band NVNT ac20 5825MHz Ant0 Average

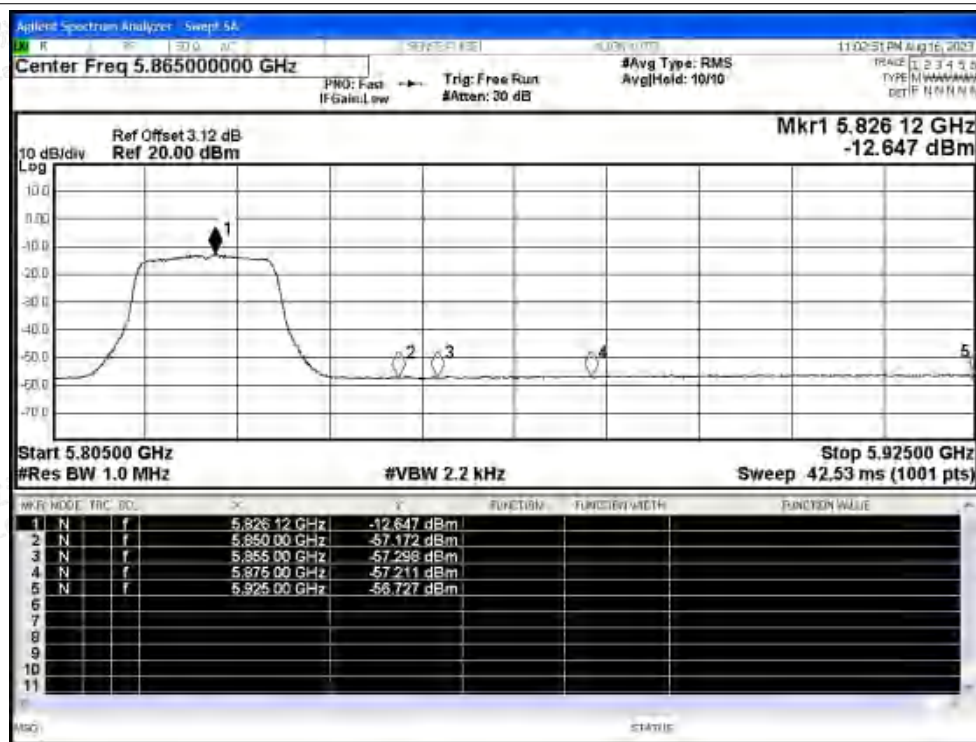

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5755MHz Ant0 Peak

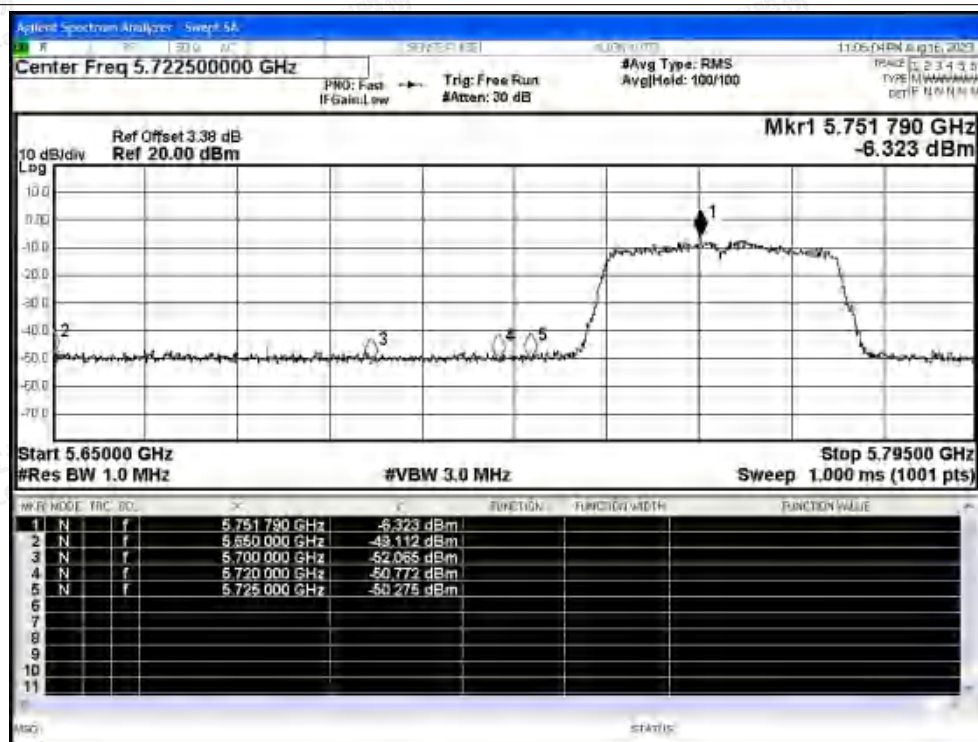

## Restrict Band NVNT ac40 5755MHz Ant0 Average

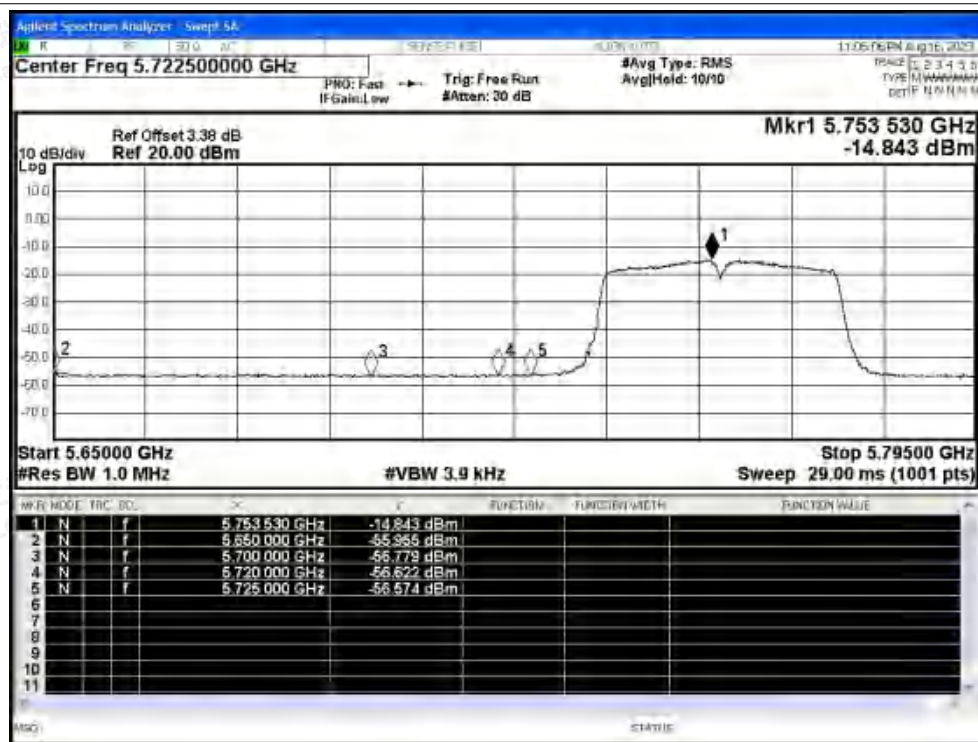


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5795MHz Ant0 Peak

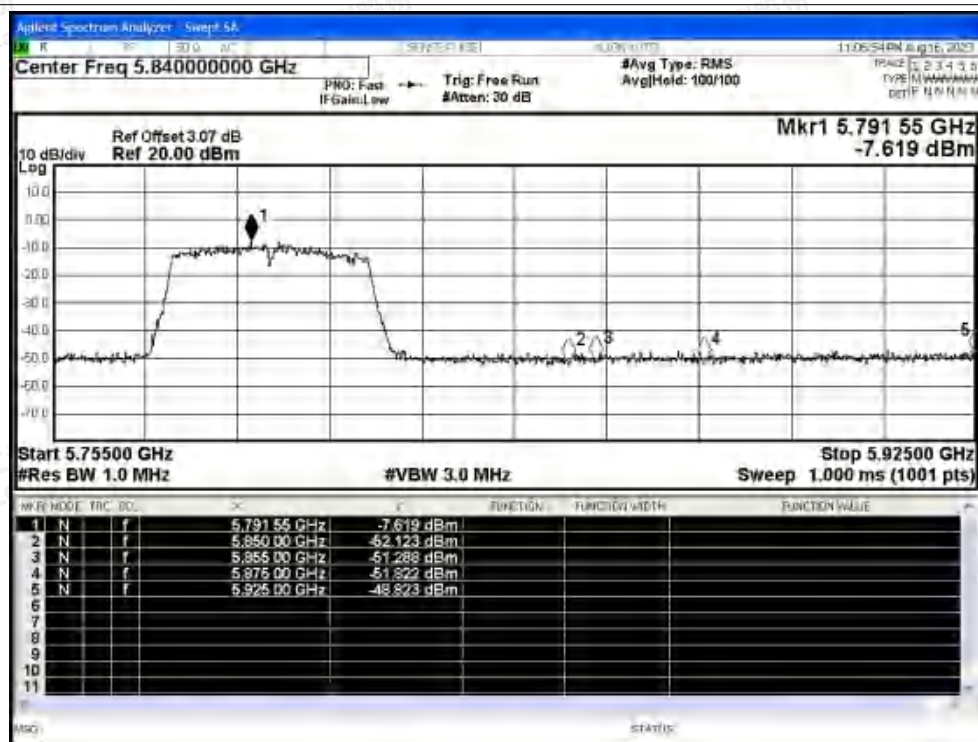

## Restrict Band NVNT ac40 5795MHz Ant0 Average

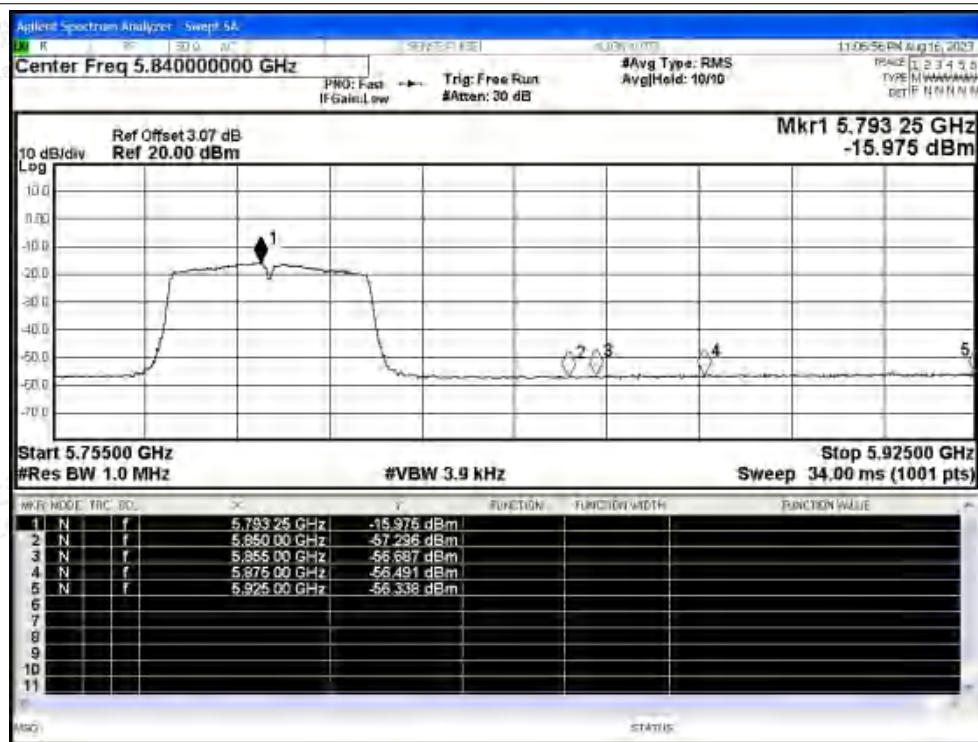

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac80 5775MHz Ant0 Peak

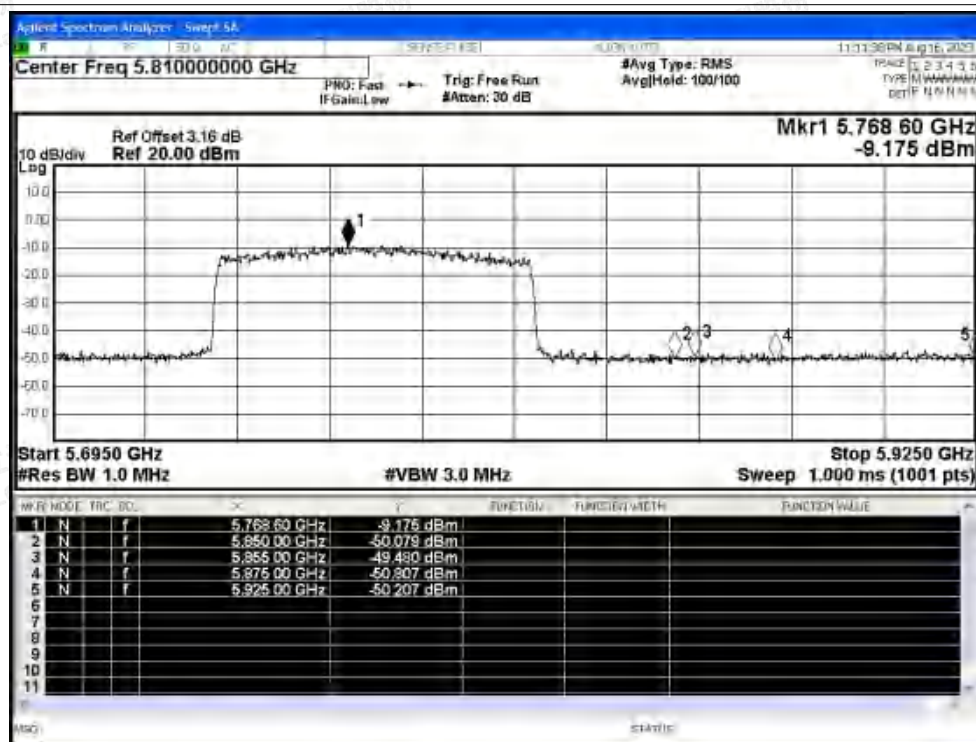

## Restrict Band NVNT ac80 5775MHz Ant0 Average

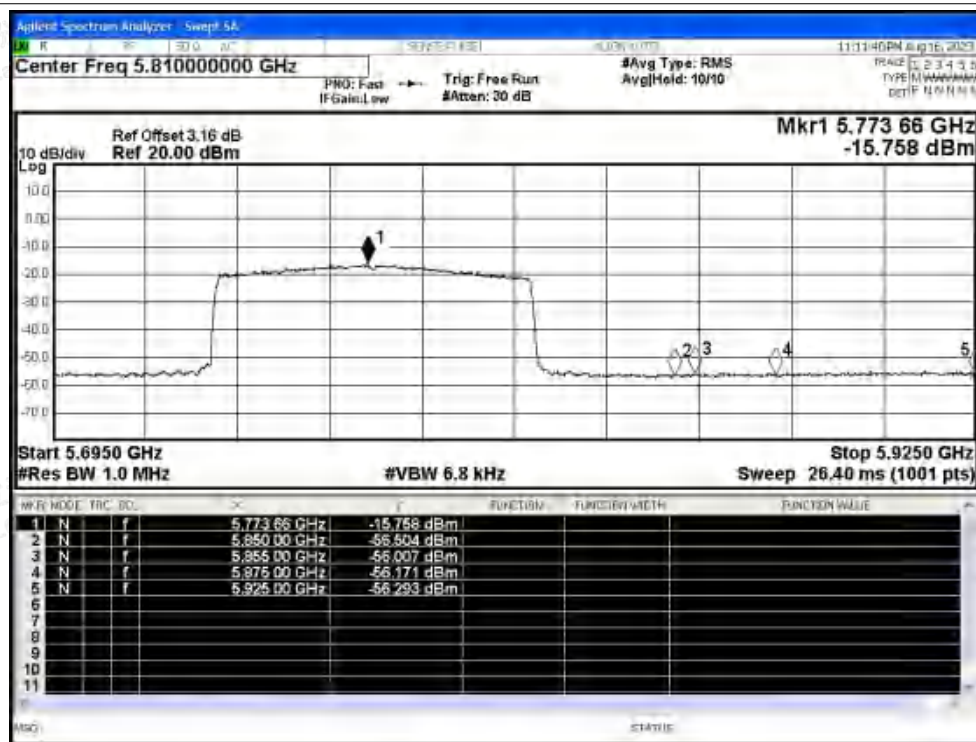


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac80 5775MHz Ant0 Peak

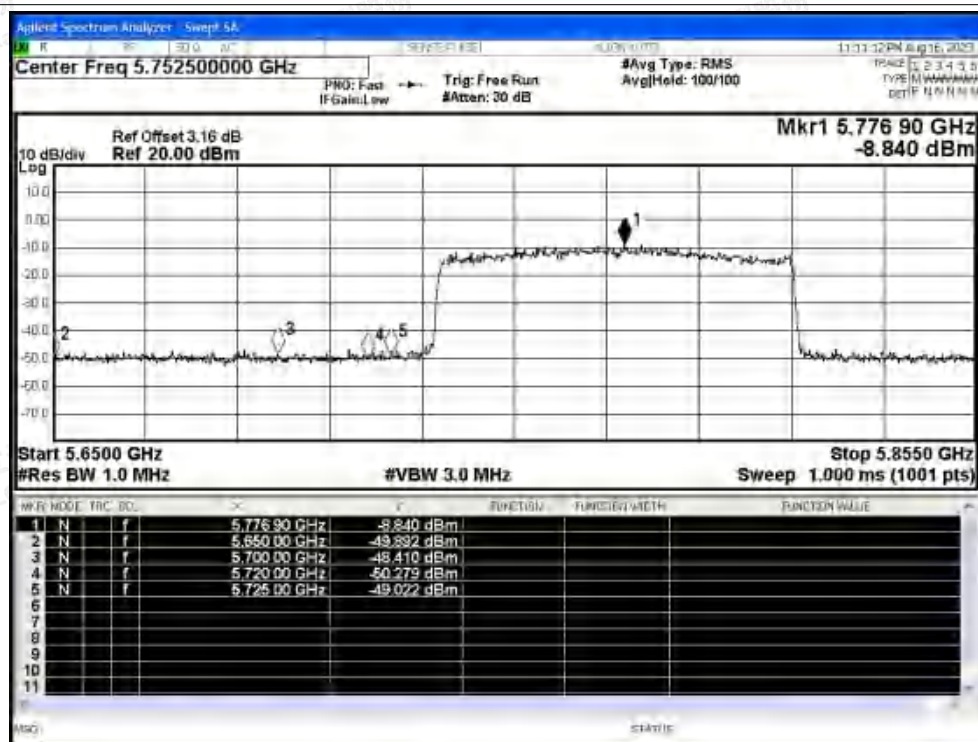

## Restrict Band NVNT ac80 5775MHz Ant0 Average

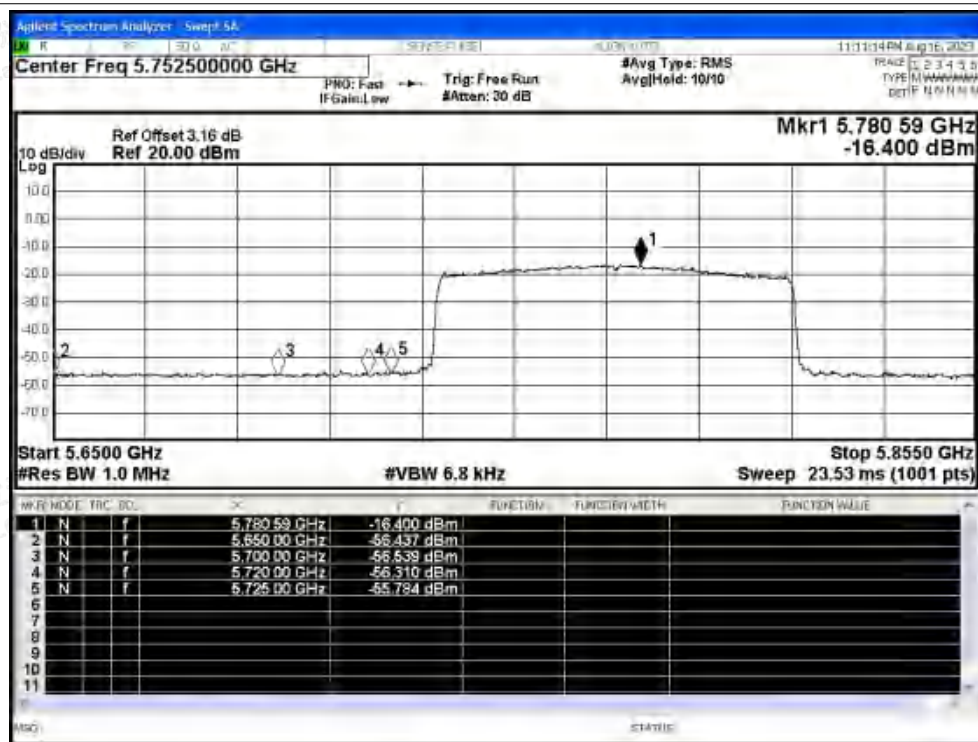


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5745MHz Ant0 Peak



## Restrict Band NVNT ax20 5745MHz Ant0 Average

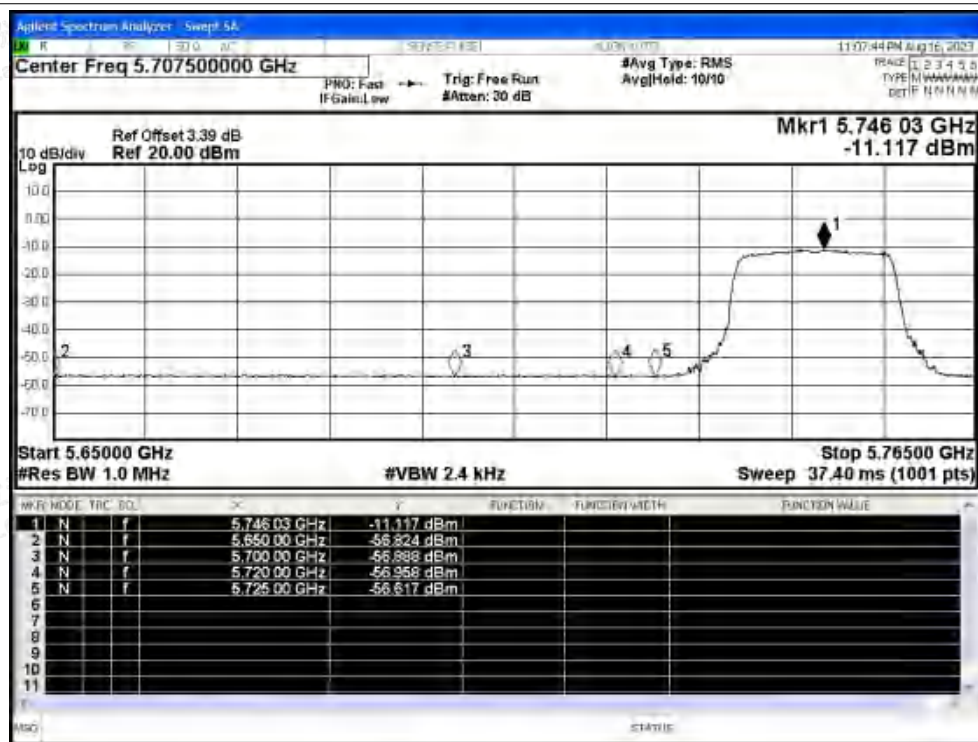


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5825MHz Ant0 Peak

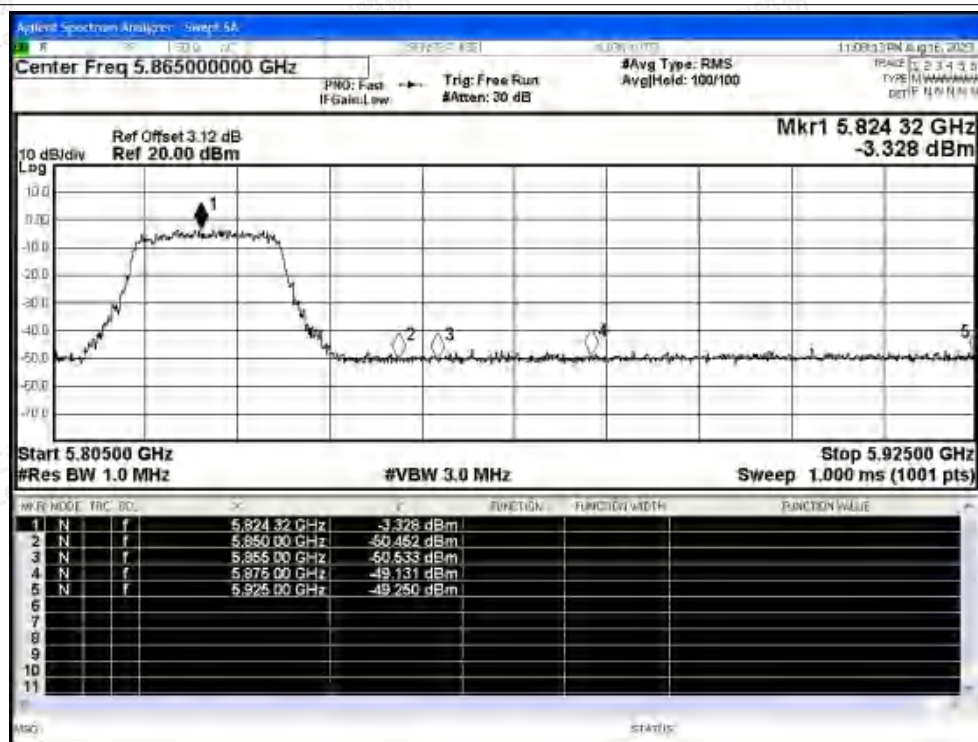

## Restrict Band NVNT ax20 5825MHz Ant0 Average

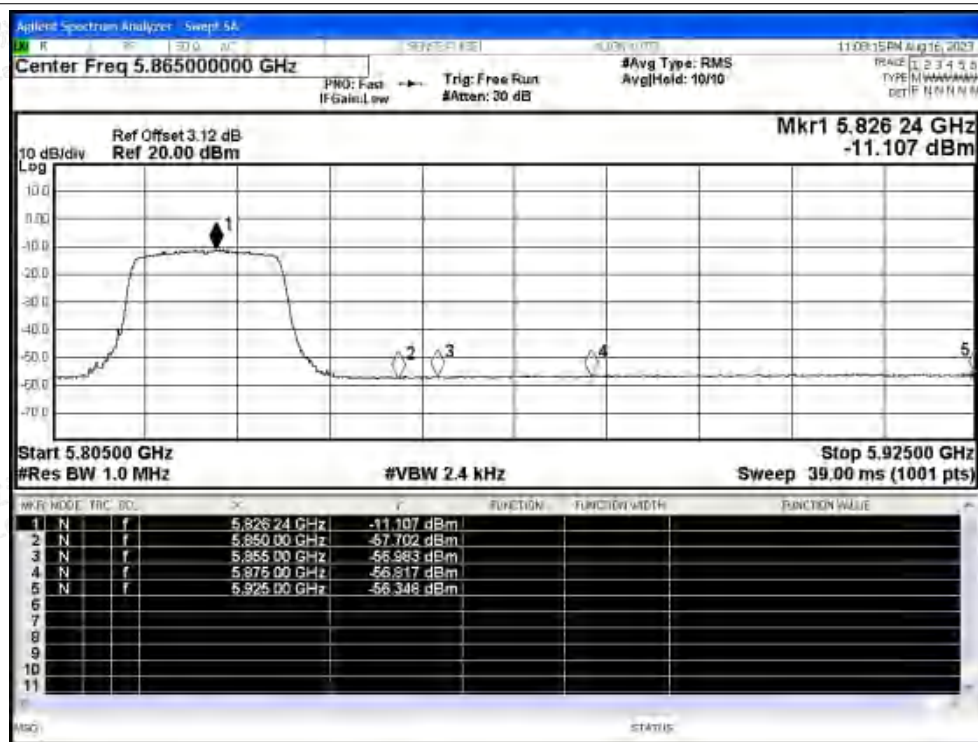


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5755MHz Ant0 Peak

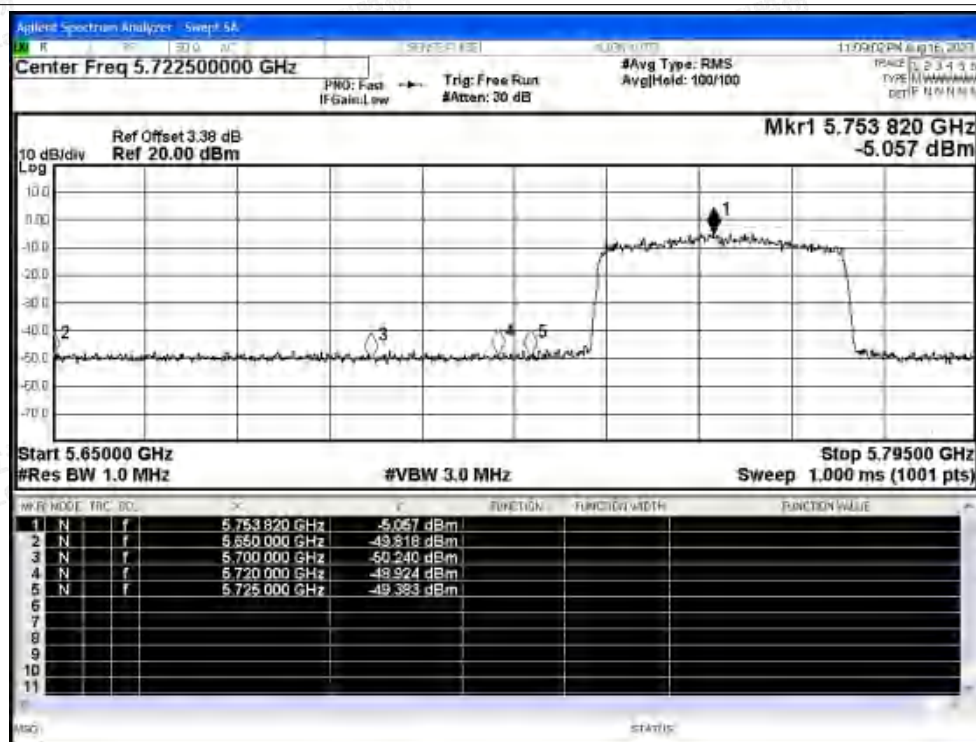

## Restrict Band NVNT ax40 5755MHz Ant0 Average

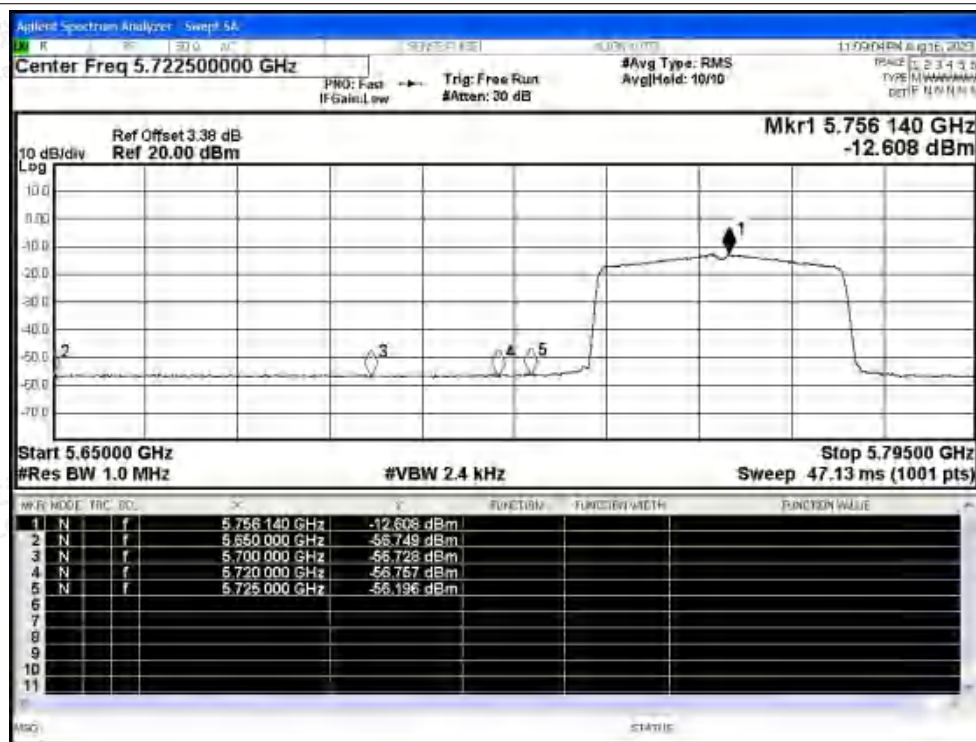


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5795MHz Ant0 Peak

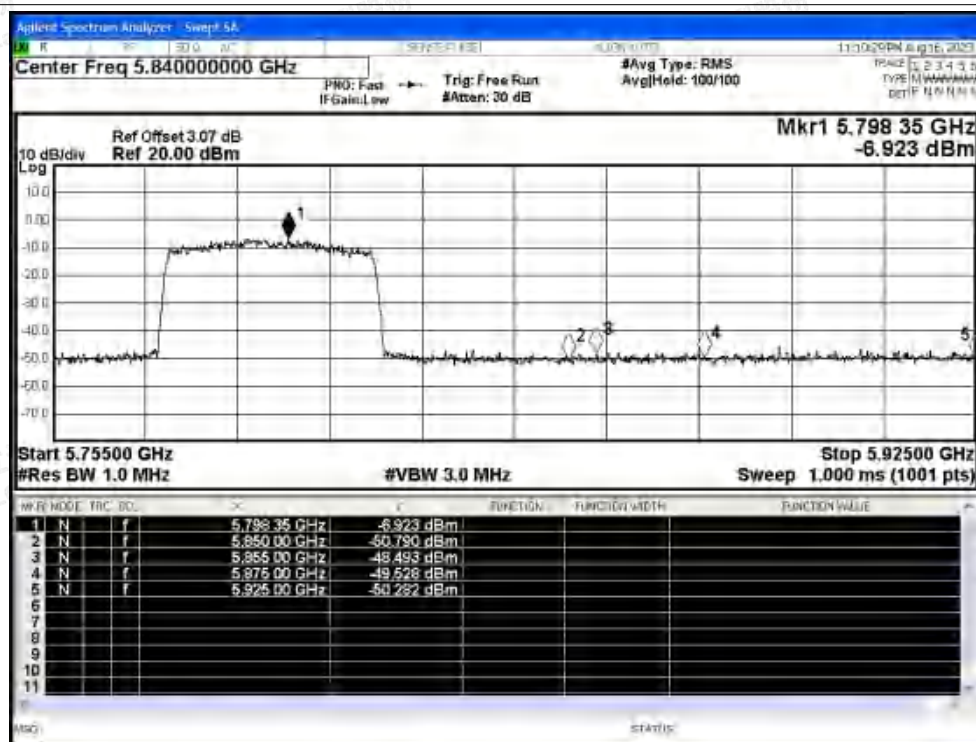

## Restrict Band NVNT ax40 5795MHz Ant0 Average

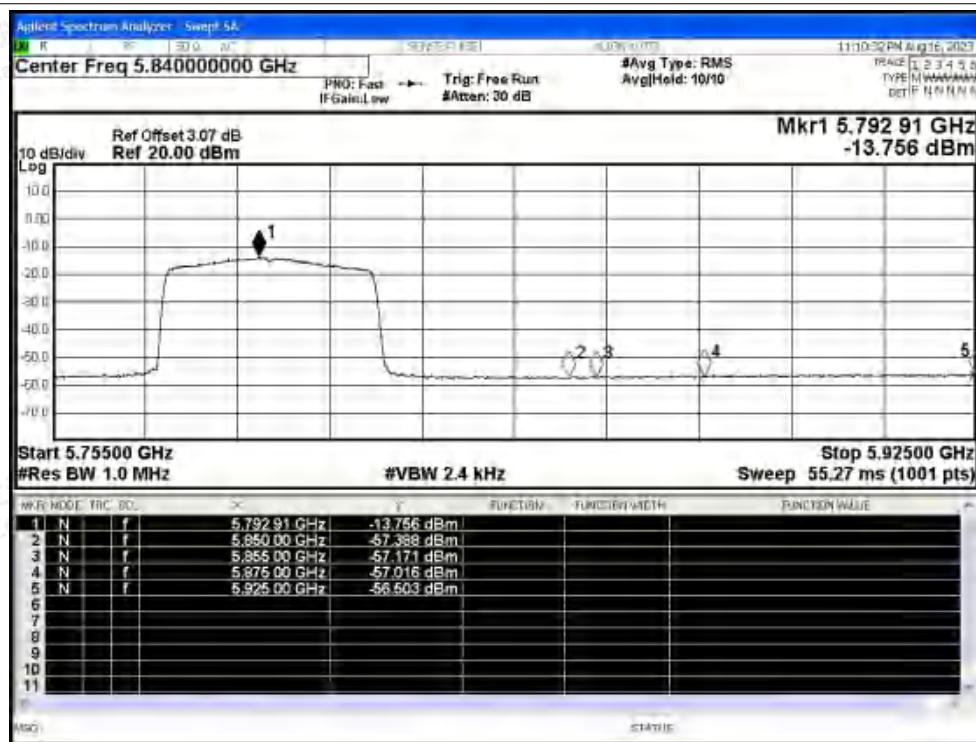


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax80 5775MHz Ant0 Peak

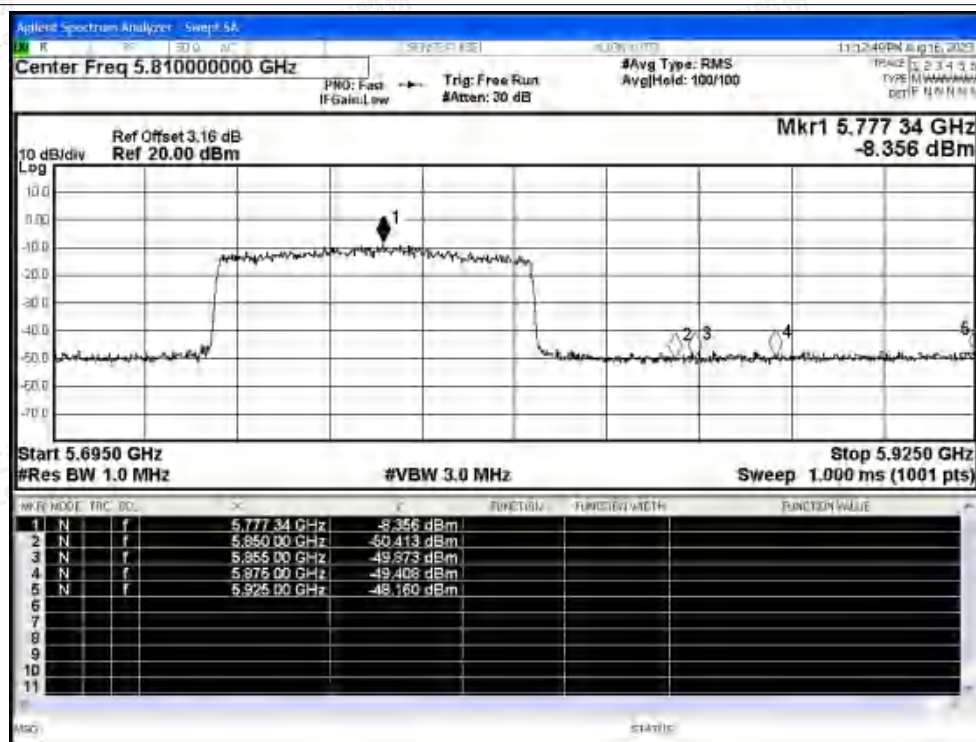

## Restrict Band NVNT ax80 5775MHz Ant0 Average

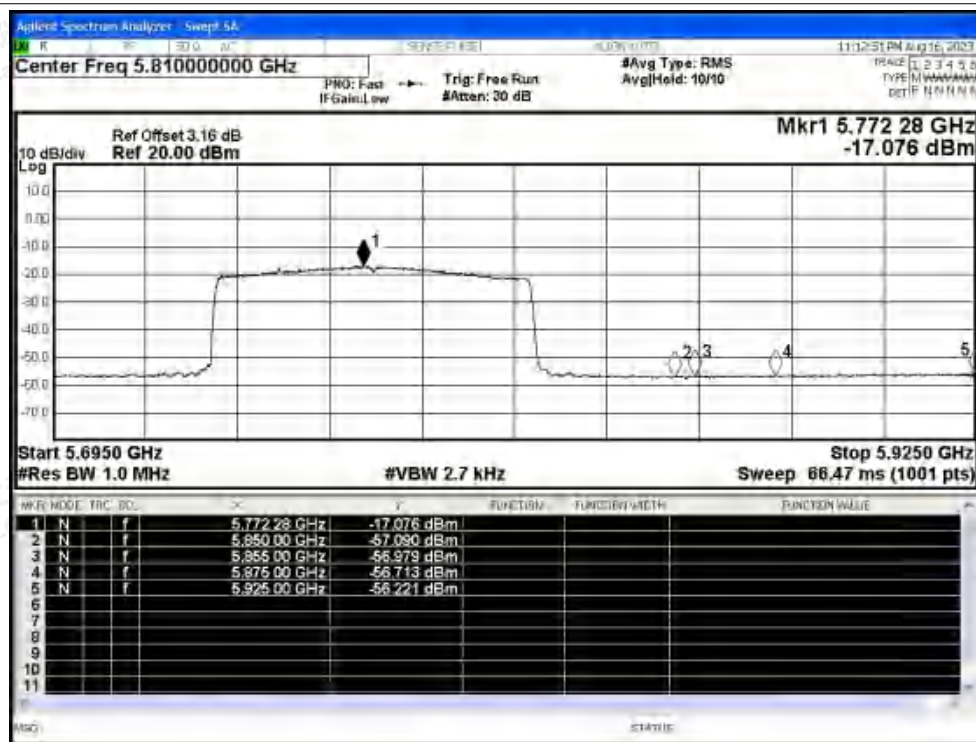


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax80 5775MHz Ant0 Peak

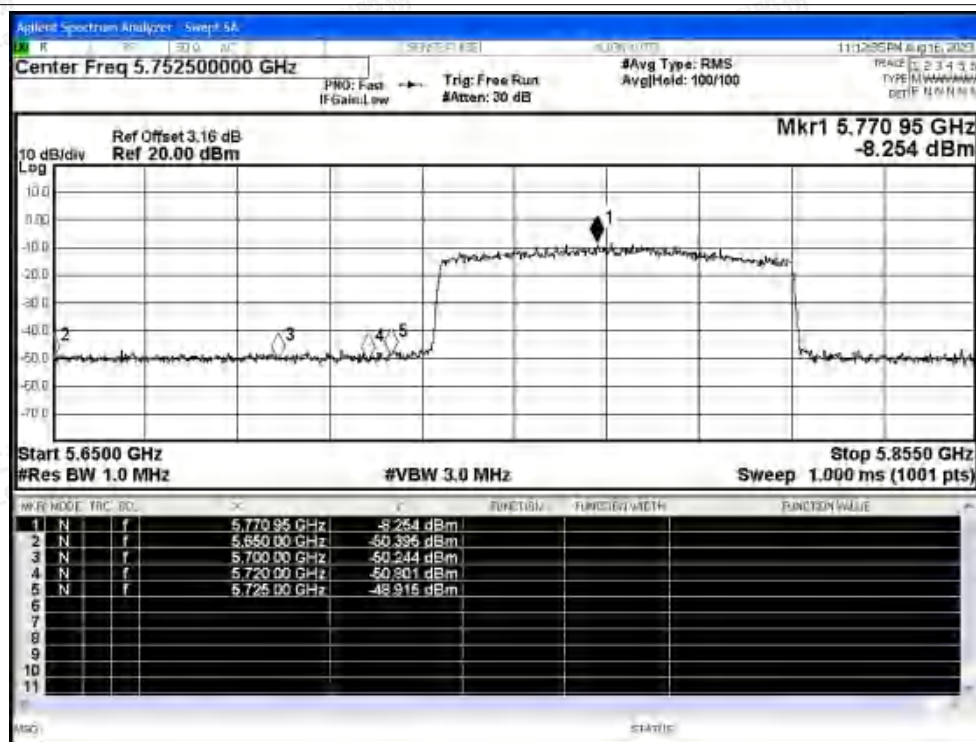

## Restrict Band NVNT ax80 5775MHz Ant0 Average

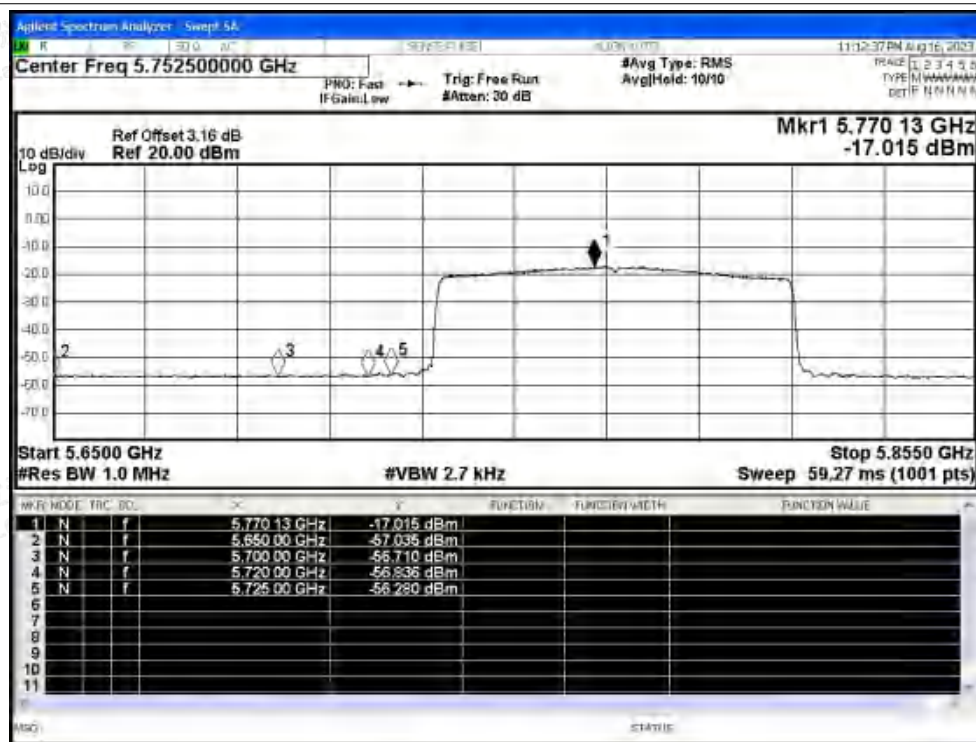


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | EIRP Power (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 5650            | -48.24      | 0.55       | -47.69           | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5650            | -57.01      | 0.55       | -56.46           | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -48.25      | 0.55       | -47.7            | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -56.91      | 0.55       | -56.36           | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -50.88      | 0.55       | -50.33           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -57.11      | 0.55       | -56.56           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -50.76      | 0.55       | -50.21           | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -57.04      | 0.55       | -56.49           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -49.5       | 0.55       | -48.95           | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -57.51      | 0.55       | -56.96           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -51.68      | 0.55       | -51.13           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -57.32      | 0.55       | -56.77           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -49.76      | 0.55       | -49.21           | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -57.19      | 0.55       | -56.64           | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -50.55      | 0.55       | -50              | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -56.77      | 0.55       | -56.22           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -50.47      | 0.55       | -49.92           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -57.03      | 0.55       | -56.48           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -49.54      | 0.55       | -48.99           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -57         | 0.55       | -56.45           | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -50.12      | 0.55       | -49.57           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -57.14      | 0.55       | -56.59           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -50.73      | 0.55       | -50.18           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -57.13      | 0.55       | -56.58           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -50.59      | 0.55       | -50.04           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -57.57      | 0.55       | -57.02           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -50.77      | 0.55       | -50.22           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -57.19      | 0.55       | -56.64           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -49.76      | 0.55       | -49.21           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -57.26      | 0.55       | -56.71           | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -48.52      | 0.55       | -47.97           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -56.74      | 0.55       | -56.19           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -50.34      | 0.55       | -49.79           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -56.82      | 0.55       | -56.27           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -50.05      | 0.55       | -49.5            | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -56.62      | 0.55       | -56.07           | Average  | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5720            | -48.39      | 0.55       | -47.84           | Peak     | 15.6        | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5720            | -56.93      | 0.55       | -56.38           | Average  | 15.6        | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5725            | -48.97      | 0.55       | -48.42           | Peak     | 27          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5725            | -56.44      | 0.55       | -55.89           | Average  | 27          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 5850            | -51.3       | 0.55       | -50.75           | Peak     | 27          | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | n40  | 5795 | Ant1 | 5850 | -57.58 | 0.55 | -57.03 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5855 | -50.37 | 0.55 | -49.82 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant1 | 5855 | -57.3  | 0.55 | -56.75 | Average | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant1 | 5875 | -50.75 | 0.55 | -50.2  | Peak    | 10   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5875 | -57.1  | 0.55 | -56.55 | Average | 10   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5925 | -49.02 | 0.55 | -48.47 | Peak    | -27  | Pass |
| NVNT | n40  | 5795 | Ant1 | 5925 | -56.85 | 0.55 | -56.3  | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5650 | -49.92 | 0.55 | -49.37 | Peak    | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5650 | -56.77 | 0.55 | -56.22 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5700 | -50.98 | 0.55 | -50.43 | Peak    | 10   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5700 | -57.01 | 0.55 | -56.46 | Average | 10   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5720 | -48.77 | 0.55 | -48.22 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5720 | -56.62 | 0.55 | -56.07 | Average | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5725 | -48.48 | 0.55 | -47.93 | Peak    | 27   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5725 | -56.65 | 0.55 | -56.1  | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5850 | -50.37 | 0.55 | -49.82 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5850 | -57.21 | 0.55 | -56.66 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5855 | -50.36 | 0.55 | -49.81 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5855 | -57.27 | 0.55 | -56.72 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5875 | -50.23 | 0.55 | -49.68 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5875 | -57.13 | 0.55 | -56.58 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5925 | -51.34 | 0.55 | -50.79 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5925 | -56.76 | 0.55 | -56.21 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5650 | -49.11 | 0.55 | -48.56 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5650 | -56.12 | 0.55 | -55.57 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5700 | -49.63 | 0.55 | -49.08 | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5700 | -56.65 | 0.55 | -56.1  | Average | 10   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5720 | -50.54 | 0.55 | -49.99 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5720 | -56.72 | 0.55 | -56.17 | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5725 | -50.08 | 0.55 | -49.53 | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5725 | -56.57 | 0.55 | -56.02 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5850 | -51.04 | 0.55 | -50.49 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5850 | -57.42 | 0.55 | -56.87 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5855 | -51.24 | 0.55 | -50.69 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5855 | -56.47 | 0.55 | -55.92 | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5875 | -51.39 | 0.55 | -50.84 | Peak    | 10   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5875 | -56.69 | 0.55 | -56.14 | Average | 10   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5925 | -49.83 | 0.55 | -49.28 | Peak    | -27  | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5925 | -56.56 | 0.55 | -56.01 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5850 | -50.21 | 0.55 | -49.66 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5850 | -56.44 | 0.55 | -55.89 | Average | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5855 | -50.92 | 0.55 | -50.37 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5855 | -57.13 | 0.55 | -56.58 | Average | 15.6 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ac80 | 5775 | Ant1 | 5875 | -51.5  | 0.55 | -50.95 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5875 | -56.9  | 0.55 | -56.35 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5925 | -49.37 | 0.55 | -48.82 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5925 | -56.22 | 0.55 | -55.67 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5650 | -49.94 | 0.55 | -49.39 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5650 | -56.15 | 0.55 | -55.6  | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5700 | -50.08 | 0.55 | -49.53 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5700 | -56.89 | 0.55 | -56.34 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5720 | -49.47 | 0.55 | -48.92 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5720 | -56.61 | 0.55 | -56.06 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5725 | -49.77 | 0.55 | -49.22 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5725 | -56.6  | 0.55 | -56.05 | Average | 27   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5650 | -50.55 | 0.55 | -50    | Peak    | -27  | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5650 | -56.57 | 0.55 | -56.02 | Average | -27  | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5700 | -48    | 0.55 | -47.45 | Peak    | 10   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5700 | -56.67 | 0.55 | -56.12 | Average | 10   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5720 | -49.85 | 0.55 | -49.3  | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5720 | -56.81 | 0.55 | -56.26 | Average | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5725 | -49.9  | 0.55 | -49.35 | Peak    | 27   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5725 | -56.8  | 0.55 | -56.25 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5850 | -50.62 | 0.55 | -50.07 | Peak    | 27   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5850 | -57.26 | 0.55 | -56.71 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5855 | -48.33 | 0.55 | -47.78 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5855 | -57.08 | 0.55 | -56.53 | Average | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5875 | -49.51 | 0.55 | -48.96 | Peak    | 10   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5875 | -56.56 | 0.55 | -56.01 | Average | 10   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5925 | -49.29 | 0.55 | -48.74 | Peak    | -27  | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5925 | -56.1  | 0.55 | -55.55 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5650 | -50.49 | 0.55 | -49.94 | Peak    | -27  | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5650 | -56.67 | 0.55 | -56.12 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5700 | -48.68 | 0.55 | -48.13 | Peak    | 10   | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5700 | -56.84 | 0.55 | -56.29 | Average | 10   | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5720 | -49.85 | 0.55 | -49.3  | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5720 | -56.63 | 0.55 | -56.08 | Average | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5725 | -48.39 | 0.55 | -47.84 | Peak    | 27   | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5725 | -56.19 | 0.55 | -55.64 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5850 | -52.14 | 0.55 | -51.59 | Peak    | 27   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5850 | -57.36 | 0.55 | -56.81 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5855 | -50.2  | 0.55 | -49.65 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5855 | -57.3  | 0.55 | -56.75 | Average | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5875 | -49.54 | 0.55 | -48.99 | Peak    | 10   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5875 | -56.98 | 0.55 | -56.43 | Average | 10   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5925 | -50.18 | 0.55 | -49.63 | Peak    | -27  | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ax40 | 5795 | Ant1 | 5925 | -56.67 | 0.55 | -56.12 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5850 | -51.23 | 0.55 | -50.68 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5850 | -57.06 | 0.55 | -56.51 | Average | 27   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5855 | -48.38 | 0.55 | -47.83 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5855 | -56.64 | 0.55 | -56.09 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5875 | -51.4  | 0.55 | -50.85 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5875 | -56.79 | 0.55 | -56.24 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5925 | -49.92 | 0.55 | -49.37 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5925 | -56.45 | 0.55 | -55.9  | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5650 | -50.32 | 0.55 | -49.77 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5650 | -56.66 | 0.55 | -56.11 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5700 | -49.72 | 0.55 | -49.17 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5700 | -57.06 | 0.55 | -56.51 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5720 | -49.78 | 0.55 | -49.23 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5720 | -56.85 | 0.55 | -56.3  | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5725 | -49.95 | 0.55 | -49.4  | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5725 | -56.54 | 0.55 | -55.99 | Average | 27   | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## MIMO

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | EIRP Power (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|----------|-------------|---------|
| NVNT      | n20  | 5745            | MIMO    | 5650            | -46.67      | 3.63       | -43.04           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5650            | -53.25      | 3.63       | -49.62           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5700            | -45.75      | 3.63       | -42.12           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5700            | -53.39      | 3.63       | -49.76           | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5720            | -46.54      | 3.63       | -42.91           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5720            | -53.50      | 3.63       | -49.87           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5725            | -47.28      | 3.63       | -43.65           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | MIMO    | 5725            | -53.50      | 3.63       | -49.87           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5850            | -47.18      | 3.63       | -43.55           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5850            | -53.85      | 3.63       | -50.22           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5855            | -47.38      | 3.63       | -43.75           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5855            | -53.71      | 3.63       | -50.08           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5875            | -46.27      | 3.63       | -42.64           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5875            | -53.61      | 3.63       | -49.98           | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5925            | -45.27      | 3.63       | -41.64           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | MIMO    | 5925            | -53.17      | 3.63       | -49.54           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5650            | -46.67      | 3.63       | -43.04           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5650            | -53.22      | 3.63       | -49.59           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5700            | -45.62      | 3.63       | -41.99           | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5700            | -53.02      | 3.63       | -49.39           | Average  | 10          | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5720            | -45.71      | 3.63       | -42.08           | Peak     | 15.6        | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5720            | -53.29      | 3.63       | -49.66           | Average  | 15.6        | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5725            | -45.80      | 3.63       | -42.17           | Peak     | 27          | Pass    |
| NVNT      | n40  | 5755            | MIMO    | 5725            | -52.74      | 3.63       | -49.11           | Average  | 27          | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5850            | -47.77      | 3.63       | -44.14           | Peak     | 27          | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5850            | -53.88      | 3.63       | -50.25           | Average  | 27          | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5855            | -45.98      | 3.63       | -42.35           | Peak     | 15.6        | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5855            | -53.74      | 3.63       | -50.11           | Average  | 15.6        | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5875            | -46.58      | 3.63       | -42.95           | Peak     | 10          | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5875            | -53.48      | 3.63       | -49.85           | Average  | 10          | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5925            | -45.62      | 3.63       | -41.99           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5795            | MIMO    | 5925            | -53.05      | 3.63       | -49.42           | Average  | -27         | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5650            | -46.09      | 3.63       | -42.46           | Peak     | -27         | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5650            | -53.23      | 3.63       | -49.60           | Average  | -27         | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5700            | -46.53      | 3.63       | -42.90           | Peak     | 10          | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5700            | -53.46      | 3.63       | -49.83           | Average  | 10          | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5720            | -45.63      | 3.63       | -42.00           | Peak     | 15.6        | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5720            | -53.06      | 3.63       | -49.43           | Average  | 15.6        | Pass    |
| NVNT      | ac20 | 5745            | MIMO    | 5725            | -45.61      | 3.63       | -41.98           | Peak     | 27          | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ac20 | 5745 | MIMO | 5725 | -53.14 | 3.63 | -49.51 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | MIMO | 5850 | -46.84 | 3.63 | -43.21 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | MIMO | 5850 | -53.56 | 3.63 | -49.93 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | MIMO | 5855 | -47.13 | 3.63 | -43.50 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | MIMO | 5855 | -53.66 | 3.63 | -50.03 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | MIMO | 5875 | -46.15 | 3.63 | -42.52 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | MIMO | 5875 | -53.54 | 3.63 | -49.91 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | MIMO | 5925 | -46.62 | 3.63 | -42.99 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | MIMO | 5925 | -53.12 | 3.63 | -49.49 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | MIMO | 5650 | -45.48 | 3.63 | -41.85 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | MIMO | 5650 | -52.41 | 3.63 | -48.78 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | MIMO | 5700 | -47.07 | 3.63 | -43.44 | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | MIMO | 5700 | -53.09 | 3.63 | -49.46 | Average | 10   | Pass |
| NVNT | ac40 | 5755 | MIMO | 5720 | -47.03 | 3.63 | -43.40 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | MIMO | 5720 | -53.04 | 3.63 | -49.41 | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | MIMO | 5725 | -46.55 | 3.63 | -42.92 | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | MIMO | 5725 | -52.94 | 3.63 | -49.31 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | MIMO | 5850 | -47.93 | 3.63 | -44.30 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | MIMO | 5850 | -53.73 | 3.63 | -50.10 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | MIMO | 5855 | -47.64 | 3.63 | -44.01 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | MIMO | 5855 | -52.95 | 3.63 | -49.32 | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | MIMO | 5875 | -47.98 | 3.63 | -44.35 | Peak    | 10   | Pass |
| NVNT | ac40 | 5795 | MIMO | 5875 | -52.96 | 3.63 | -49.33 | Average | 10   | Pass |
| NVNT | ac40 | 5795 | MIMO | 5925 | -45.66 | 3.63 | -42.03 | Peak    | -27  | Pass |
| NVNT | ac40 | 5795 | MIMO | 5925 | -52.82 | 3.63 | -49.19 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | MIMO | 5850 | -46.52 | 3.63 | -42.89 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5850 | -52.84 | 3.63 | -49.21 | Average | 27   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5855 | -46.50 | 3.63 | -42.87 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | MIMO | 5855 | -52.90 | 3.63 | -49.27 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | MIMO | 5875 | -47.51 | 3.63 | -43.88 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5875 | -52.89 | 3.63 | -49.26 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5925 | -46.15 | 3.63 | -42.52 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | MIMO | 5925 | -52.63 | 3.63 | -49.00 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | MIMO | 5650 | -46.29 | 3.63 | -42.66 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | MIMO | 5650 | -52.67 | 3.63 | -49.04 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | MIMO | 5700 | -45.53 | 3.63 | -41.90 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5700 | -53.08 | 3.63 | -49.45 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5720 | -46.24 | 3.63 | -42.61 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | MIMO | 5720 | -52.83 | 3.63 | -49.20 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | MIMO | 5725 | -45.75 | 3.63 | -42.12 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | MIMO | 5725 | -52.54 | 3.63 | -48.91 | Average | 27   | Pass |
| NVNT | ax20 | 5745 | MIMO | 5650 | -45.83 | 3.63 | -42.20 | Peak    | -27  | Pass |
| NVNT | ax20 | 5745 | MIMO | 5650 | -53.07 | 3.63 | -49.44 | Average | -27  | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ax20 | 5745 | MIMO | 5700 | -45.06 | 3.63 | -41.43 | Peak    | 10   | Pass |
| NVNT | ax20 | 5745 | MIMO | 5700 | -53.15 | 3.63 | -49.52 | Average | 10   | Pass |
| NVNT | ax20 | 5745 | MIMO | 5720 | -46.64 | 3.63 | -43.01 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5745 | MIMO | 5720 | -53.26 | 3.63 | -49.63 | Average | 15.6 | Pass |
| NVNT | ax20 | 5745 | MIMO | 5725 | -45.20 | 3.63 | -41.57 | Peak    | 27   | Pass |
| NVNT | ax20 | 5745 | MIMO | 5725 | -53.08 | 3.63 | -49.45 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | MIMO | 5850 | -46.91 | 3.63 | -43.28 | Peak    | 27   | Pass |
| NVNT | ax20 | 5825 | MIMO | 5850 | -53.85 | 3.63 | -50.22 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | MIMO | 5855 | -45.68 | 3.63 | -42.05 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5825 | MIMO | 5855 | -53.40 | 3.63 | -49.77 | Average | 15.6 | Pass |
| NVNT | ax20 | 5825 | MIMO | 5875 | -45.69 | 3.63 | -42.06 | Peak    | 10   | Pass |
| NVNT | ax20 | 5825 | MIMO | 5875 | -53.06 | 3.63 | -49.43 | Average | 10   | Pass |
| NVNT | ax20 | 5825 | MIMO | 5925 | -45.64 | 3.63 | -42.01 | Peak    | -27  | Pass |
| NVNT | ax20 | 5825 | MIMO | 5925 | -52.60 | 3.63 | -48.97 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | MIMO | 5650 | -46.51 | 3.63 | -42.88 | Peak    | -27  | Pass |
| NVNT | ax40 | 5755 | MIMO | 5650 | -53.08 | 3.63 | -49.45 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | MIMO | 5700 | -45.78 | 3.63 | -42.15 | Peak    | 10   | Pass |
| NVNT | ax40 | 5755 | MIMO | 5700 | -53.16 | 3.63 | -49.53 | Average | 10   | Pass |
| NVNT | ax40 | 5755 | MIMO | 5720 | -45.73 | 3.63 | -42.10 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5755 | MIMO | 5720 | -53.07 | 3.63 | -49.44 | Average | 15.6 | Pass |
| NVNT | ax40 | 5755 | MIMO | 5725 | -45.24 | 3.63 | -41.61 | Peak    | 27   | Pass |
| NVNT | ax40 | 5755 | MIMO | 5725 | -52.57 | 3.63 | -48.94 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | MIMO | 5850 | -47.78 | 3.63 | -44.15 | Peak    | 27   | Pass |
| NVNT | ax40 | 5795 | MIMO | 5850 | -53.75 | 3.63 | -50.12 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | MIMO | 5855 | -45.62 | 3.63 | -41.99 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5795 | MIMO | 5855 | -53.61 | 3.63 | -49.98 | Average | 15.6 | Pass |
| NVNT | ax40 | 5795 | MIMO | 5875 | -45.91 | 3.63 | -42.28 | Peak    | 10   | Pass |
| NVNT | ax40 | 5795 | MIMO | 5875 | -53.37 | 3.63 | -49.74 | Average | 10   | Pass |
| NVNT | ax40 | 5795 | MIMO | 5925 | -46.60 | 3.63 | -42.97 | Peak    | -27  | Pass |
| NVNT | ax40 | 5795 | MIMO | 5925 | -52.96 | 3.63 | -49.33 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | MIMO | 5850 | -47.17 | 3.63 | -43.54 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5850 | -53.45 | 3.63 | -49.82 | Average | 27   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5855 | -45.45 | 3.63 | -41.82 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | MIMO | 5855 | -53.18 | 3.63 | -49.55 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | MIMO | 5875 | -46.65 | 3.63 | -43.02 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5875 | -53.12 | 3.63 | -49.49 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5925 | -45.31 | 3.63 | -41.68 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | MIMO | 5925 | -52.71 | 3.63 | -49.08 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | MIMO | 5650 | -46.73 | 3.63 | -43.10 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | MIMO | 5650 | -53.22 | 3.63 | -49.59 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | MIMO | 5700 | -46.35 | 3.63 | -42.72 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5700 | -53.25 | 3.63 | -49.62 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5720 | -46.64 | 3.63 | -43.01 | Peak    | 15.6 | Pass |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |      |        |         |      |      |
|------|------|------|------|------|--------|------|--------|---------|------|------|
| NVNT | ax80 | 5775 | MIMO | 5720 | -53.22 | 3.63 | -49.59 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | MIMO | 5725 | -45.77 | 3.63 | -42.14 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | MIMO | 5725 | -52.78 | 3.63 | -49.15 | Average | 27   | Pass |






## G.5 Frequency Stability


| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | n40  | 5755            | Ant0    | 5755.04                  | 40000                | 6.95            | 25          | Pass    |
| NVNT      | n40  | 5795            | Ant0    | 5795                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5745            | Ant0    | 5745.02                  | 20000                | 3.48            | 25          | Pass    |
| NVNT      | ac20 | 5785            | Ant0    | 5785                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5825            | Ant0    | 5825                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac40 | 5755            | Ant0    | 5755                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac40 | 5795            | Ant0    | 5795.04                  | 40000                | 6.9             | 25          | Pass    |
| NVNT      | ac80 | 5775            | Ant0    | 5774.92                  | -80000               | -13.85          | 25          | Pass    |






## Test Graphs

Freq. Stability NVNT n40 5755MHz Ant0

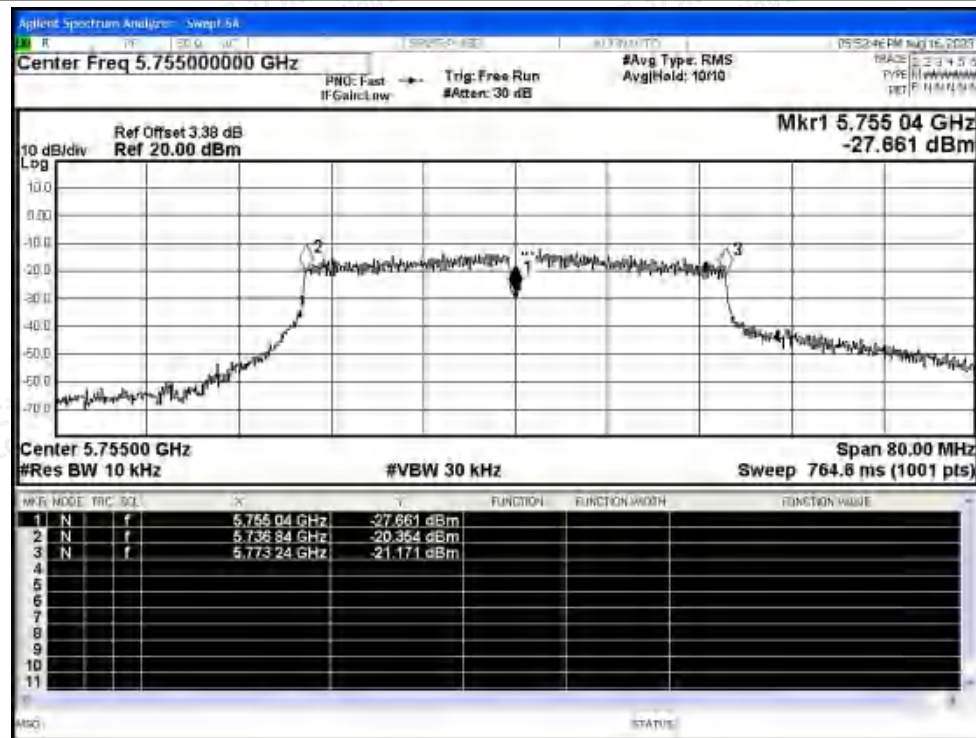

Freq. Stability NVNT n40 5795MHz Ant0

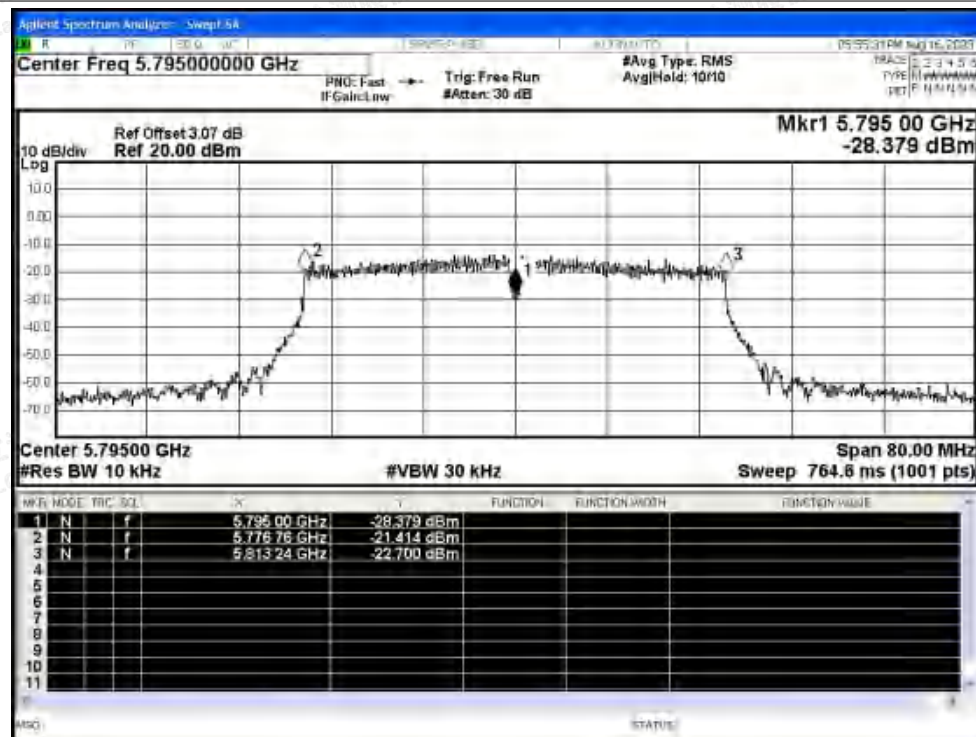


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Freq. Stability NVNT ac20 5745MHz Ant0

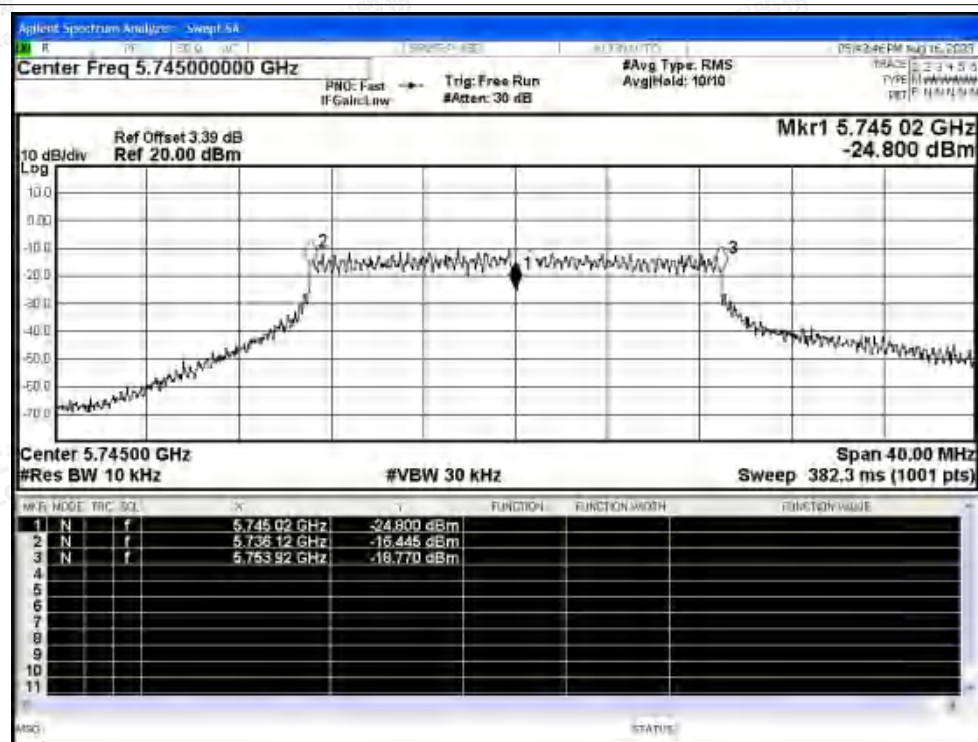

Freq. Stability NVNT ac20 5785MHz Ant0

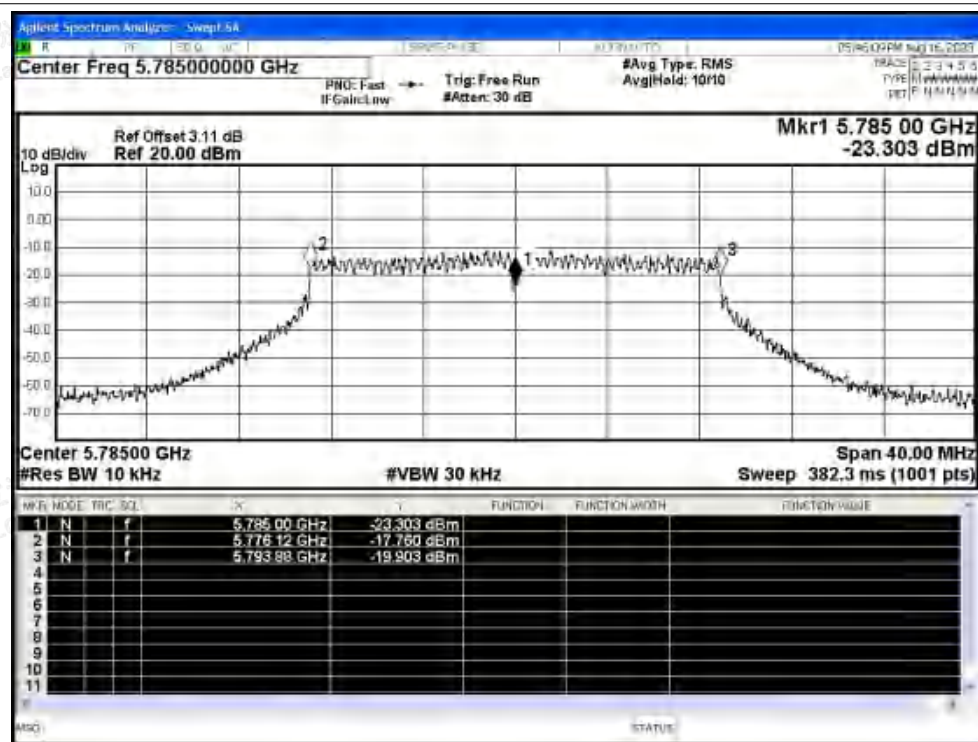


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




Freq. Stability NVNT ac20 5825MHz Ant0

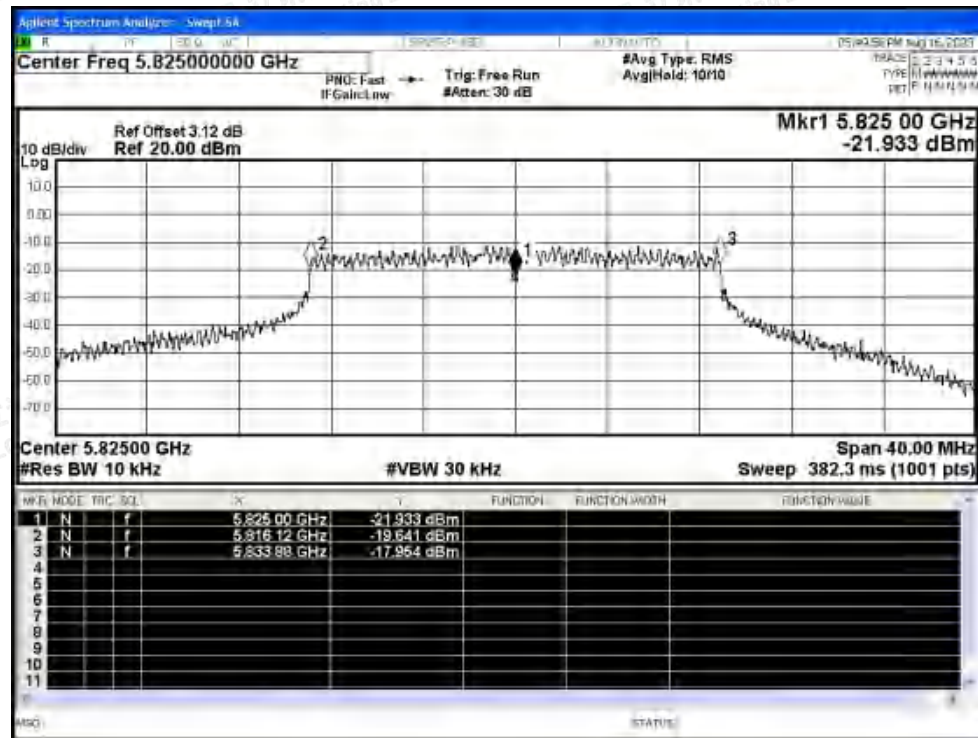


Freq. Stability NVNT ac40 5755MHz Ant0

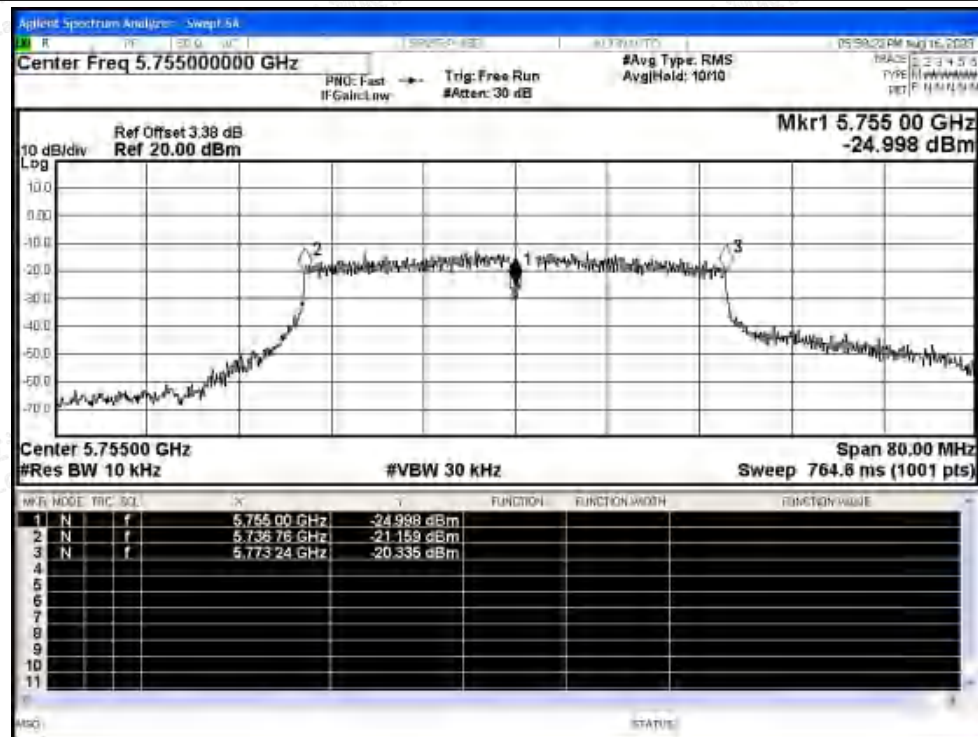




Freq. Stability NVNT ac40 5795MHz Ant0

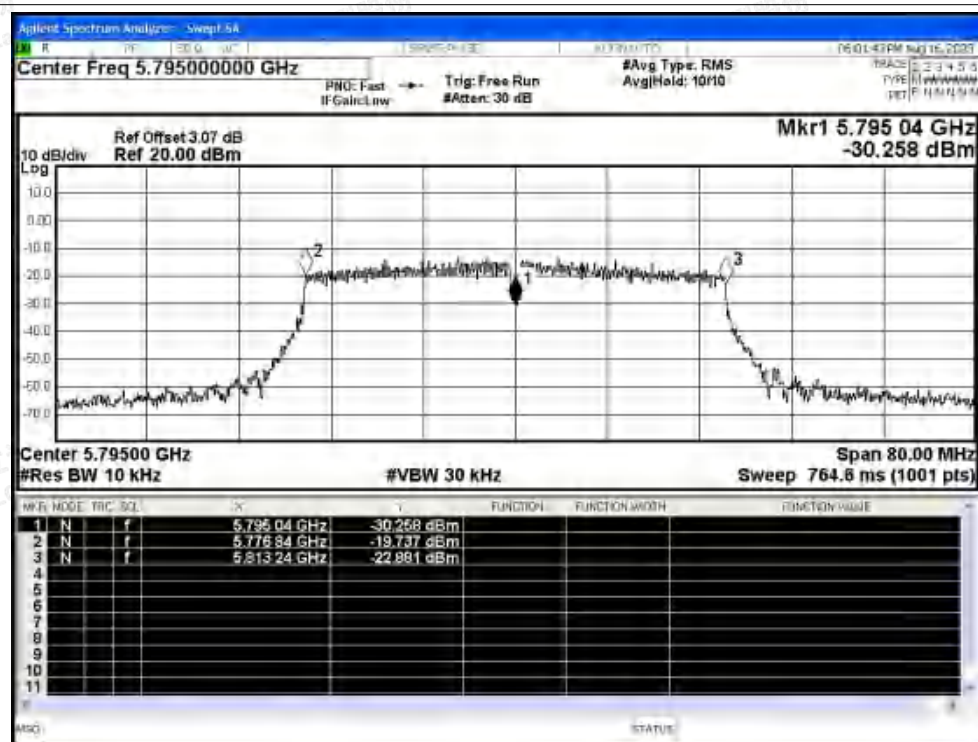

Freq. Stability NVNT ac80 5775MHz Ant0

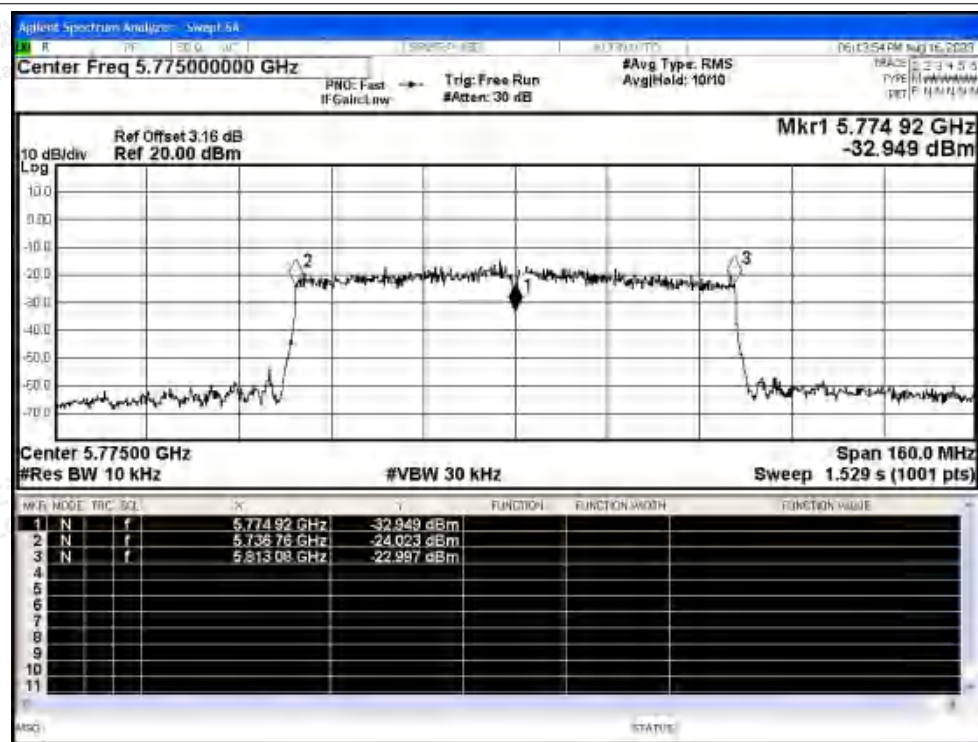


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




| Condition | Mode | Frequency<br>(MHz) | Antenna | Measured Frequency<br>(MHz) | Frequency Error<br>(Hz) | Deviation<br>(ppm) | Limit<br>(ppm) | Verdict |
|-----------|------|--------------------|---------|-----------------------------|-------------------------|--------------------|----------------|---------|
| NVNT      | n40  | 5755               | Ant1    | 5755                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | n40  | 5795               | Ant1    | 5795                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | ac20 | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | ac20 | 5785               | Ant1    | 5785                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | ac20 | 5825               | Ant1    | 5825                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | ac40 | 5755               | Ant1    | 5755                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | ac40 | 5795               | Ant1    | 5795                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | ac80 | 5775               | Ant1    | 5775                        | 0                       | 0                  | 25             | Pass    |






## Test Graphs

Freq. Stability NVNT n40 5755MHz Ant1

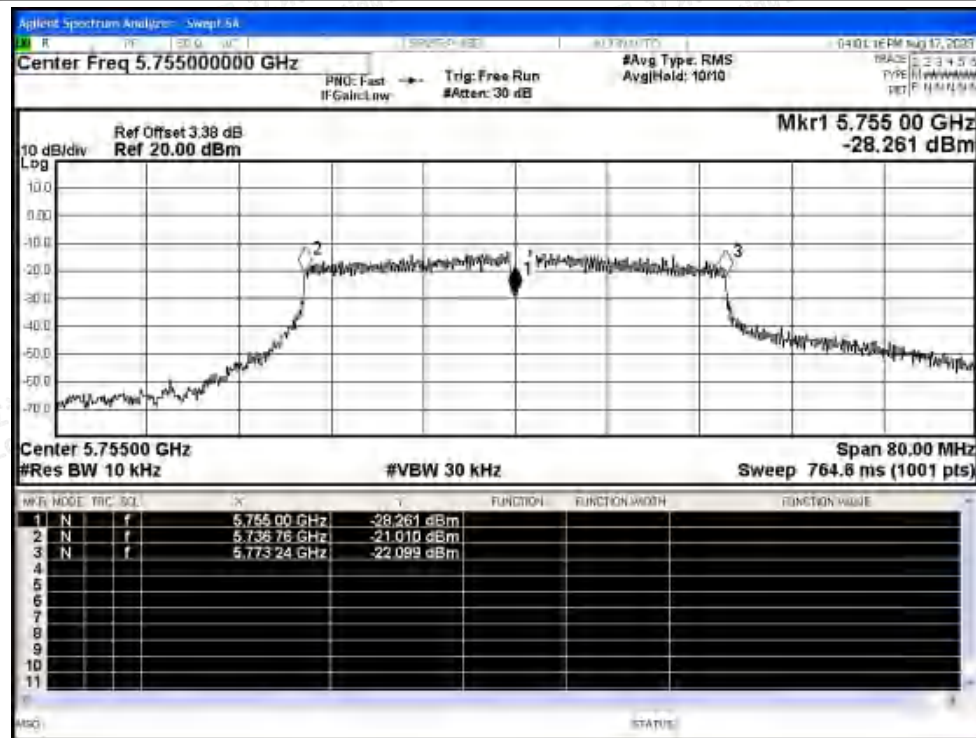

Freq. Stability NVNT n40 5795MHz Ant1

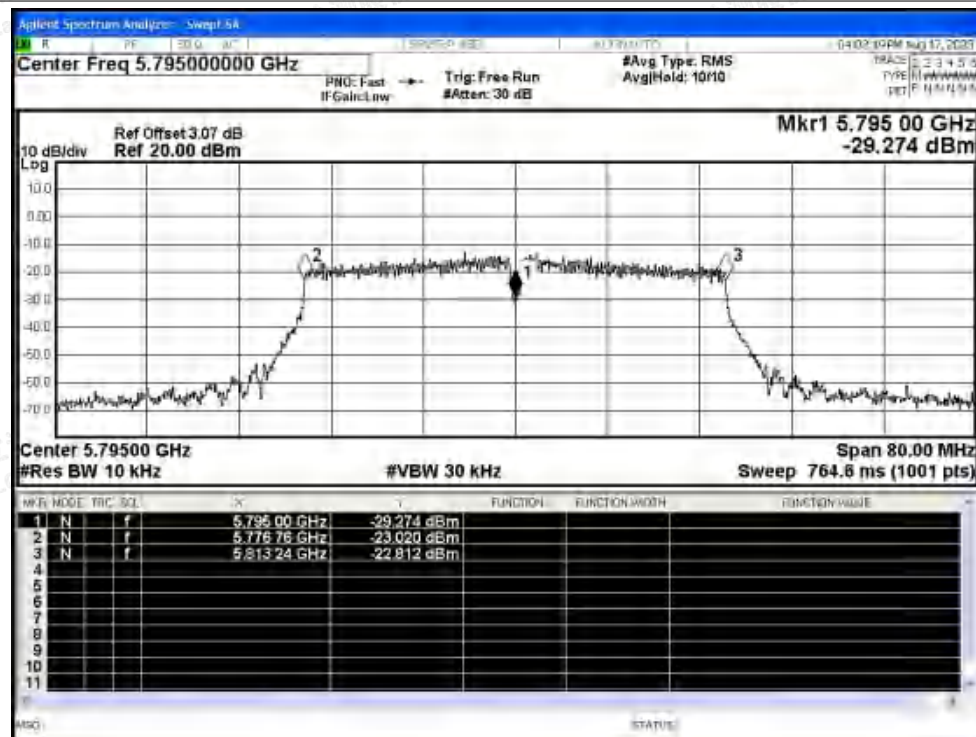

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Freq. Stability NVNT ac20 5745MHz Ant1

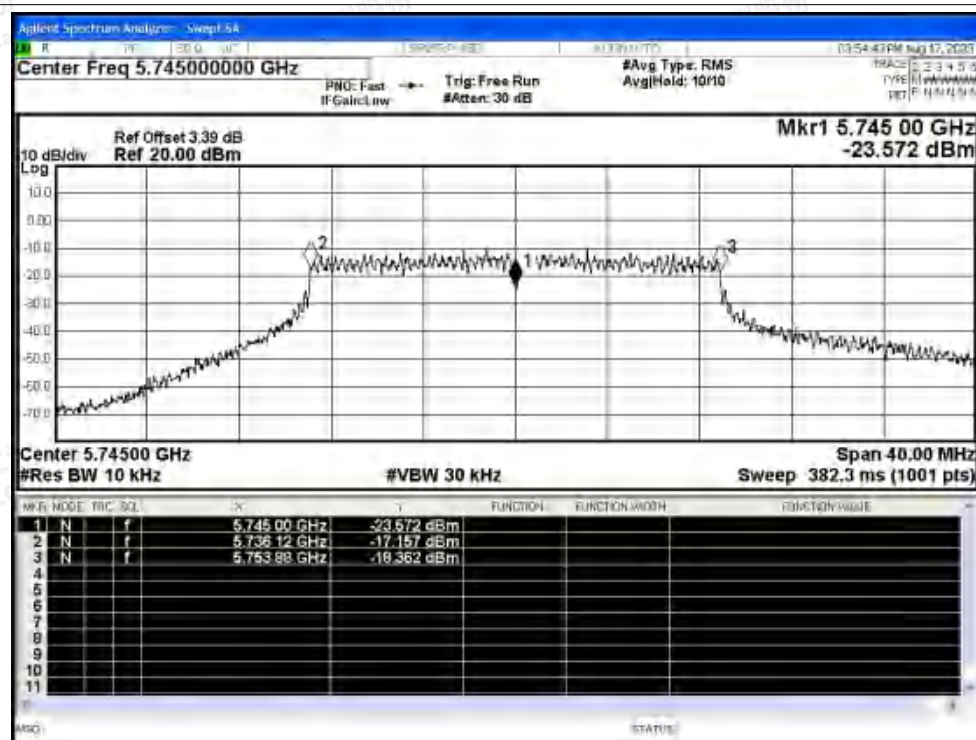

Freq. Stability NVNT ac20 5785MHz Ant1

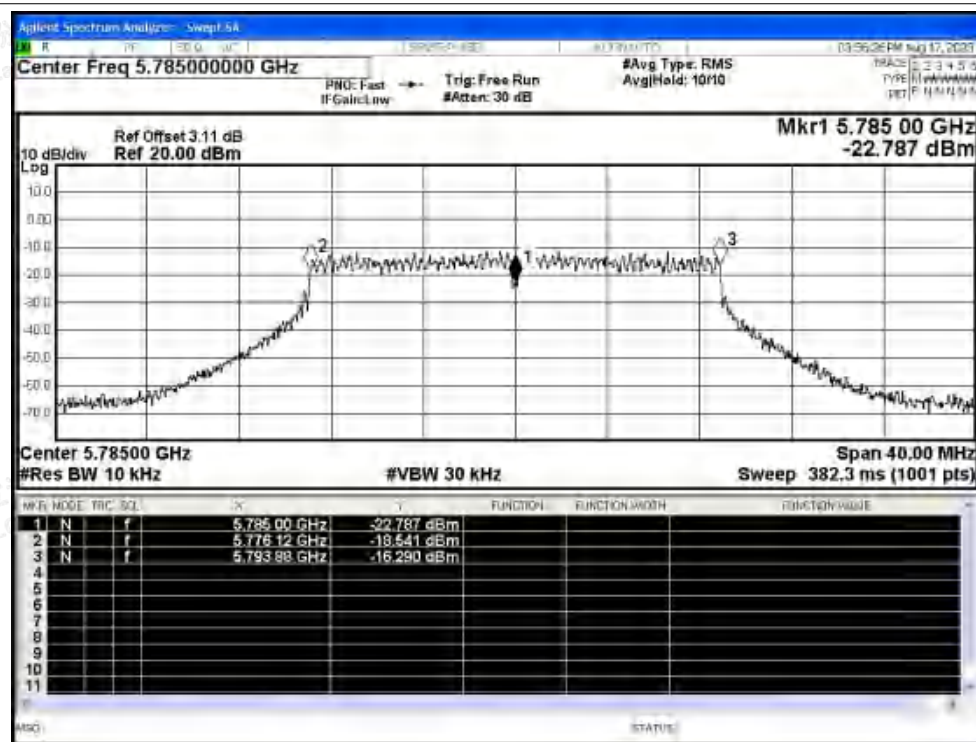


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Freq. Stability NVNT ac20 5825MHz Ant1

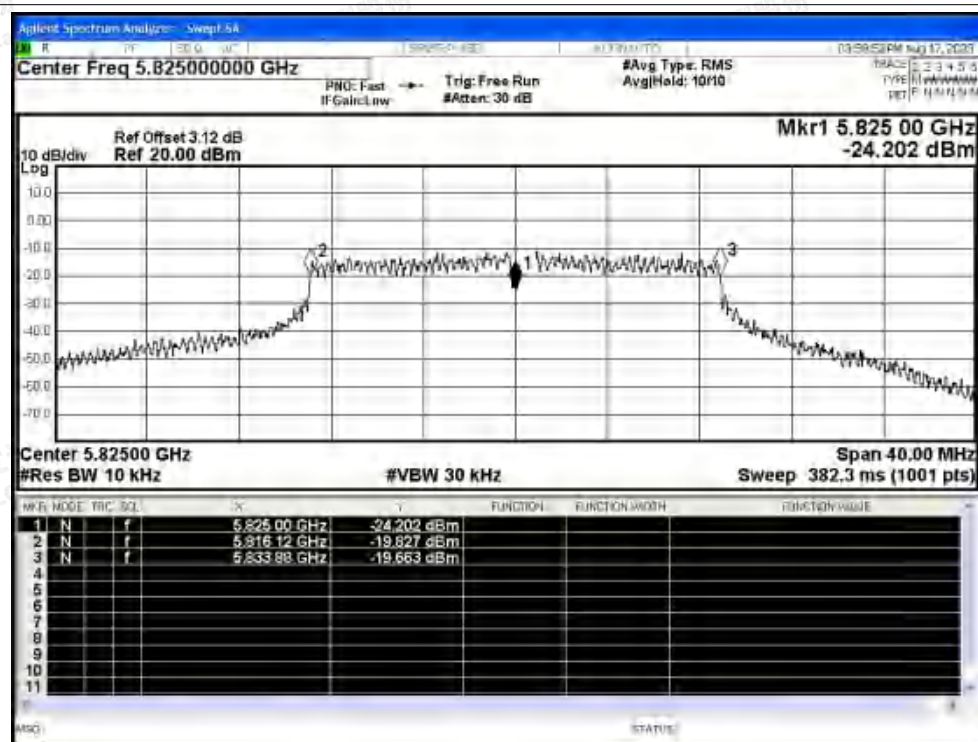

Freq. Stability NVNT ac40 5755MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Freq. Stability NVNT ac40 5795MHz Ant1

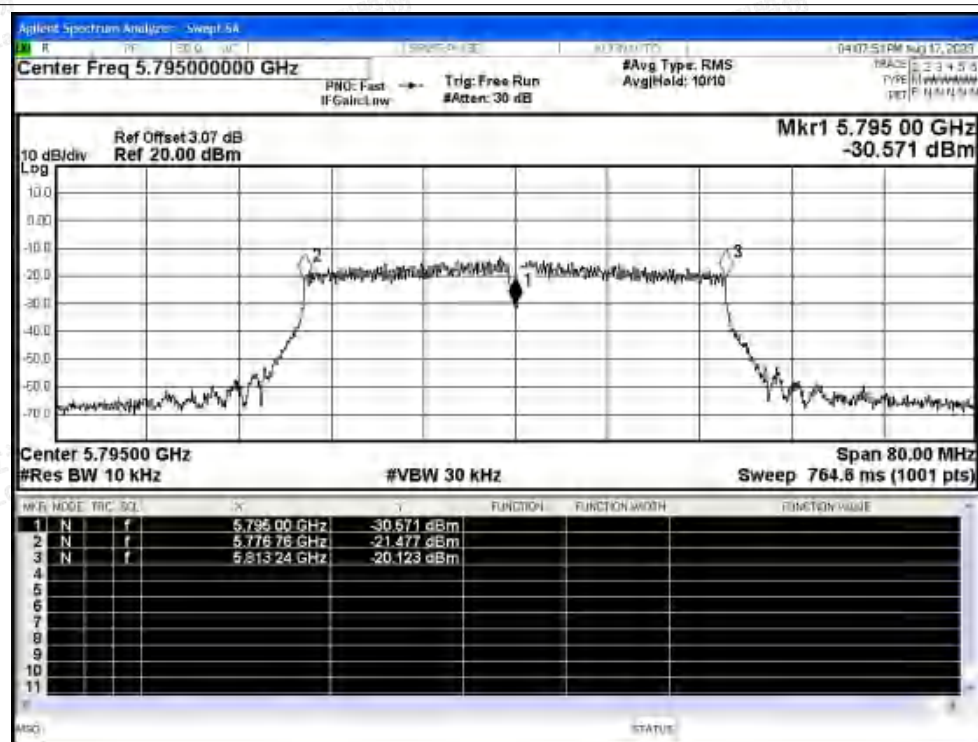

Freq. Stability NVNT ac80 5775MHz Ant1

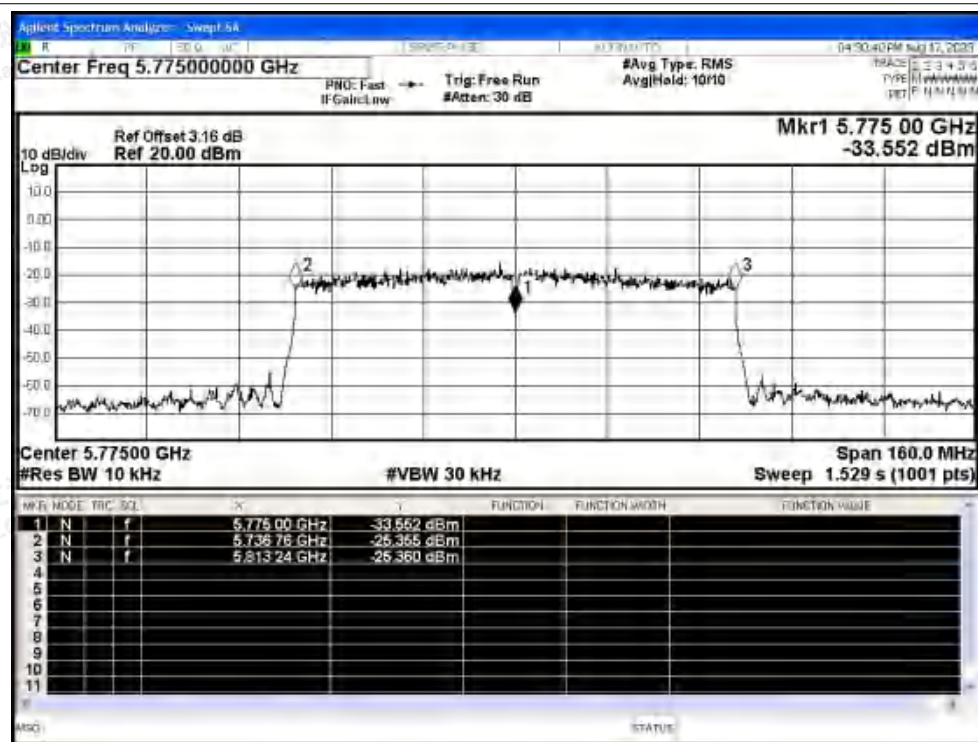


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.6 Duty Cycle

| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5745            | Ant0    | 97.98          | 0.09                   | 0.36      |
| NVNT      | a    | 5785            | Ant0    | 97.98          | 0.09                   | 0.36      |
| NVNT      | a    | 5825            | Ant0    | 98.01          | 0                      | 0.36      |
| NVNT      | n20  | 5745            | Ant0    | 95.85          | 0.18                   | 0.77      |
| NVNT      | n20  | 5785            | Ant0    | 95.77          | 0.19                   | 0.77      |
| NVNT      | n20  | 5825            | Ant0    | 95.85          | 0.18                   | 0.77      |
| NVNT      | n40  | 5755            | Ant0    | 91.77          | 0.37                   | 1.57      |
| NVNT      | n40  | 5795            | Ant0    | 91.92          | 0.37                   | 1.57      |
| NVNT      | ac20 | 5745            | Ant0    | 89.39          | 0.49                   | 2.08      |
| NVNT      | ac20 | 5785            | Ant0    | 89.39          | 0.49                   | 2.08      |
| NVNT      | ac20 | 5825            | Ant0    | 89.57          | 0.48                   | 2.08      |
| NVNT      | ac40 | 5755            | Ant0    | 82.02          | 0.86                   | 3.85      |
| NVNT      | ac40 | 5795            | Ant0    | 82.33          | 0.84                   | 3.83      |
| NVNT      | ac80 | 5775            | Ant0    | 72.55          | 1.39                   | 6.76      |
| NVNT      | ax20 | 5745            | Ant0    | 88.27          | 0.54                   | 2.33      |
| NVNT      | ax20 | 5785            | Ant0    | 88.27          | 0.54                   | 2.33      |
| NVNT      | ax20 | 5825            | Ant0    | 88.45          | 0.53                   | 2.33      |
| NVNT      | ax40 | 5755            | Ant0    | 88.17          | 0.55                   | 2.35      |
| NVNT      | ax40 | 5795            | Ant0    | 88.17          | 0.55                   | 2.35      |
| NVNT      | ax80 | 5775            | Ant0    | 87.85          | 0.56                   | 2.43      |




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




## Test Graphs

Duty Cycle NVNT a 5745MHz Ant0

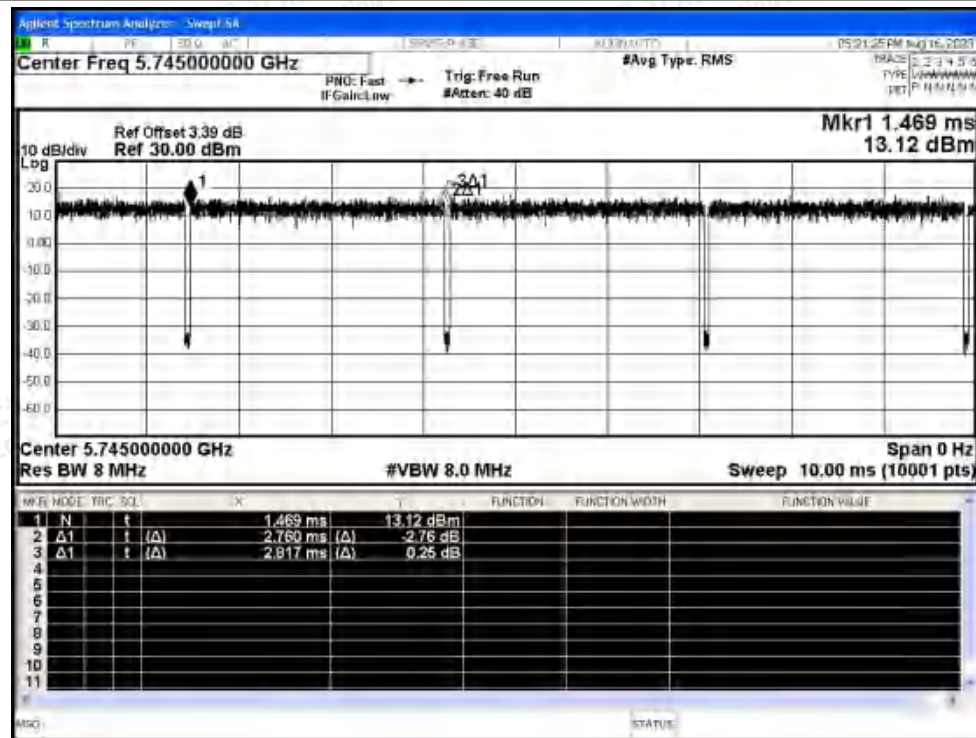

Duty Cycle NVNT a 5785MHz Ant0

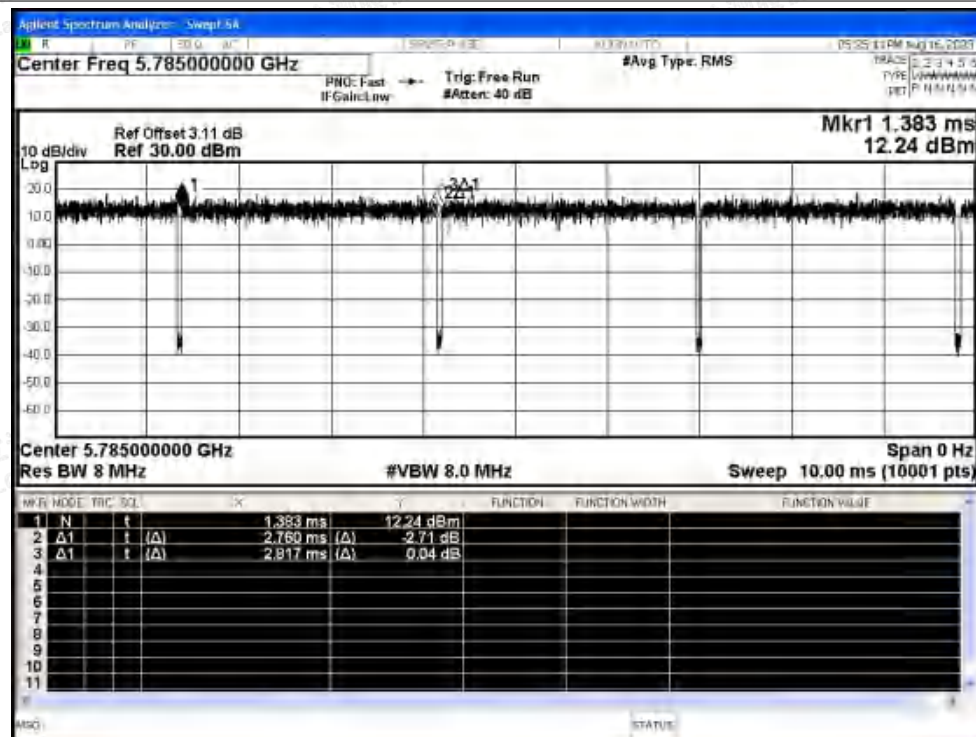


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT a 5825MHz Ant0

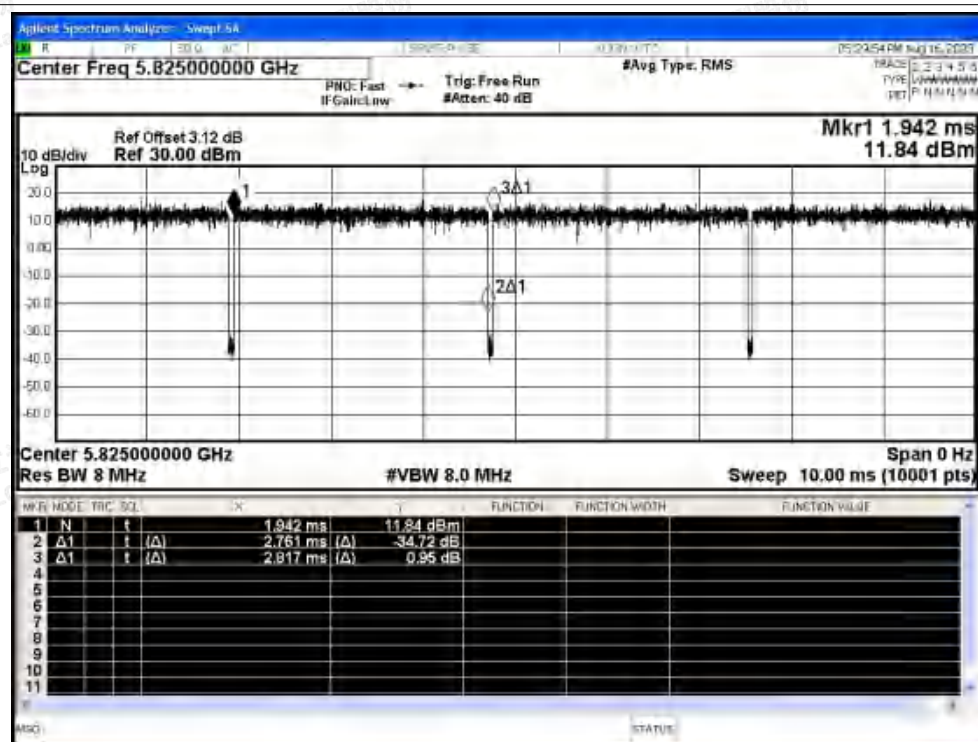

Duty Cycle NVNT n20 5745MHz Ant0

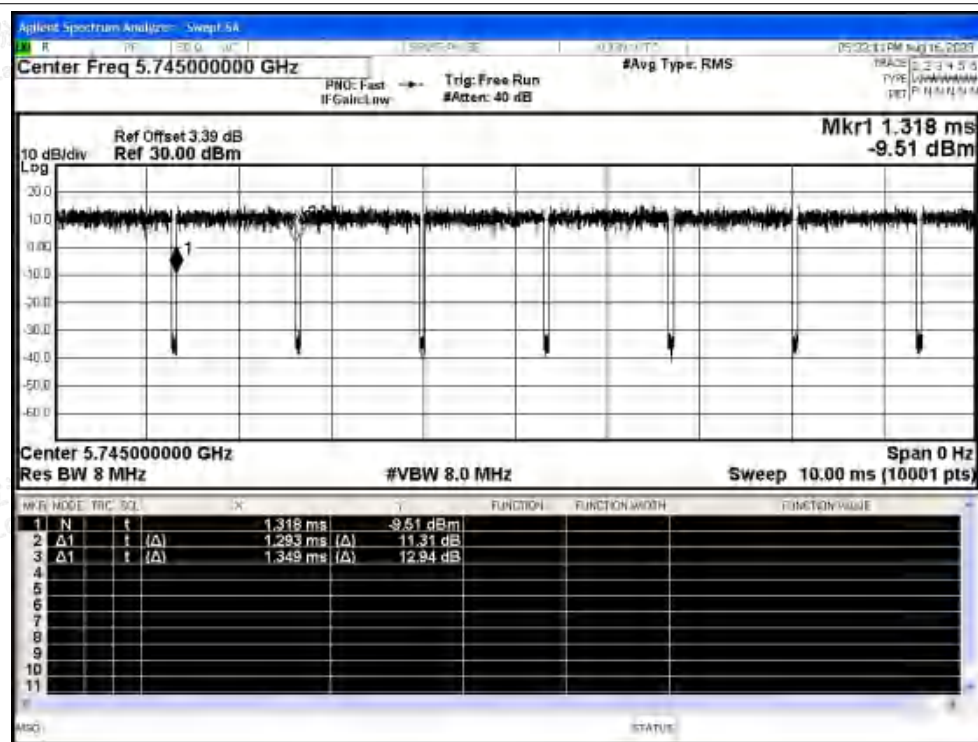


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT n20 5785MHz Ant0

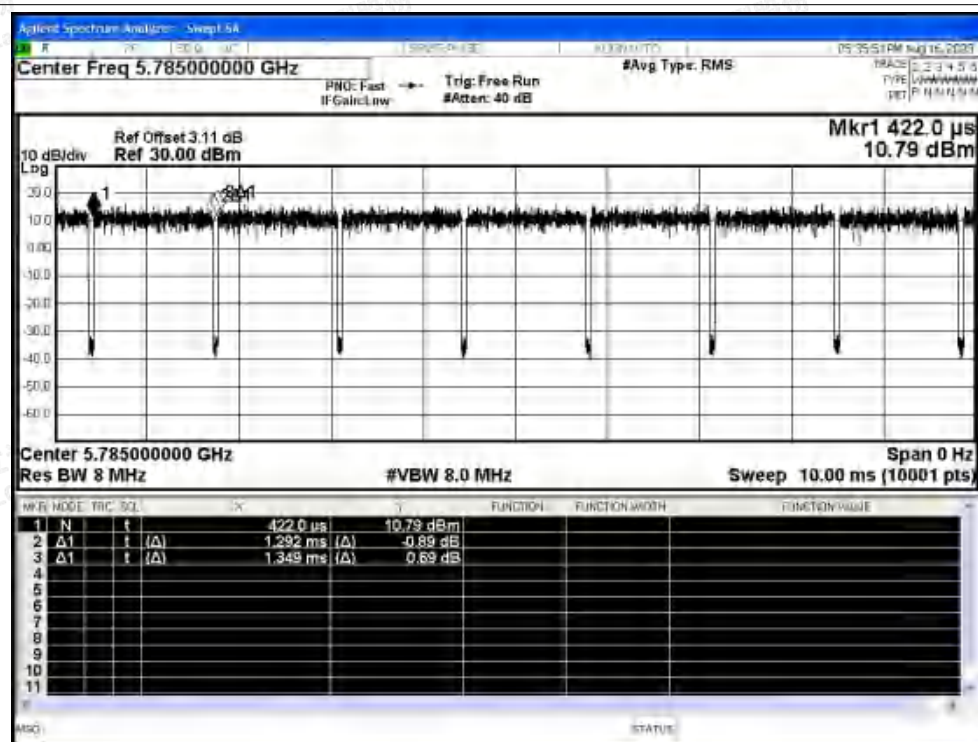

Duty Cycle NVNT n20 5825MHz Ant0

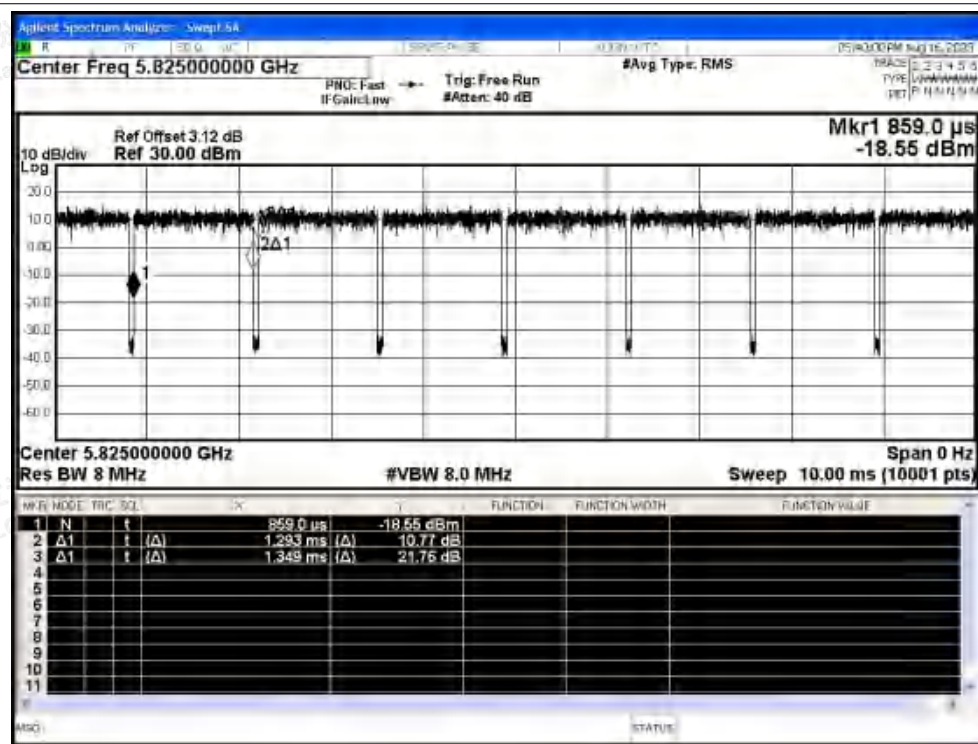


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT n40 5755MHz Ant0

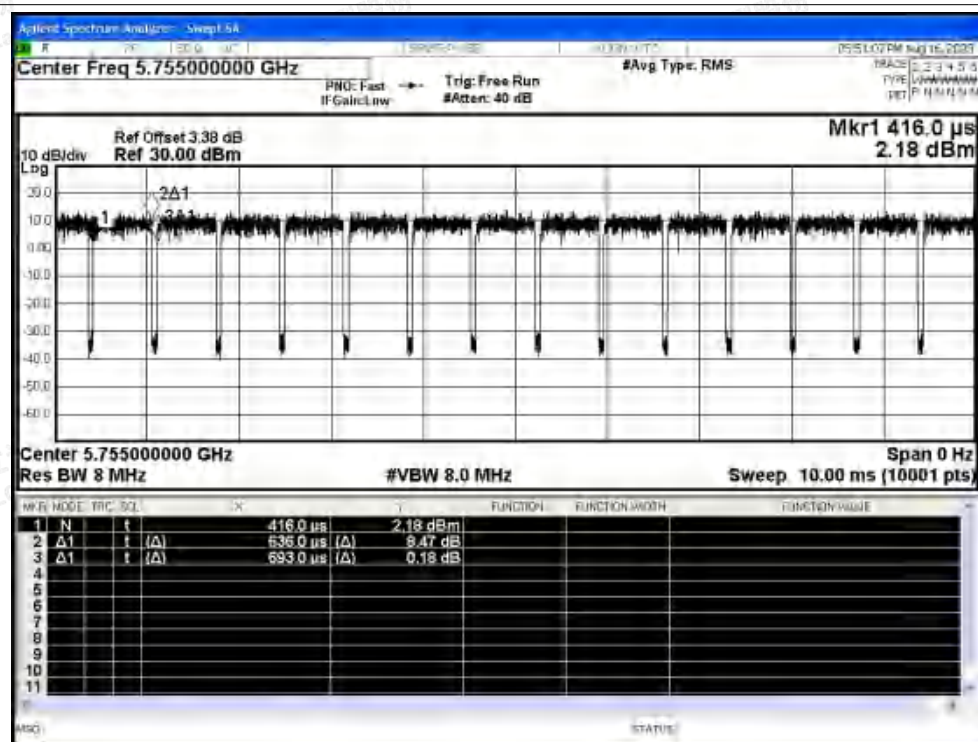

Duty Cycle NVNT n40 5795MHz Ant0

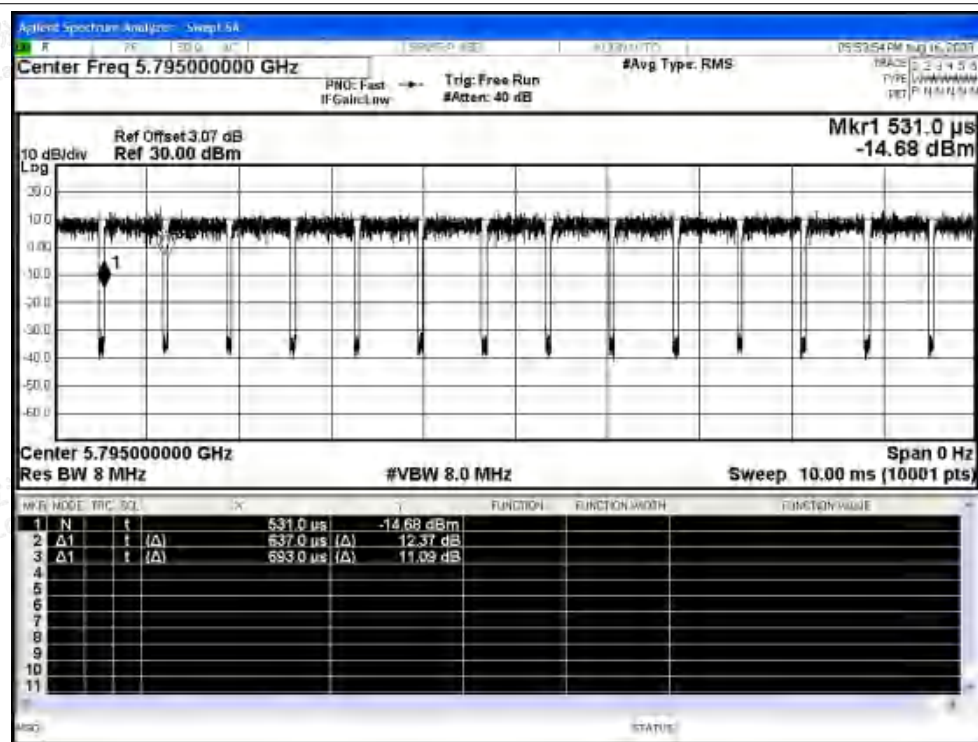


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac20 5745MHz Ant0

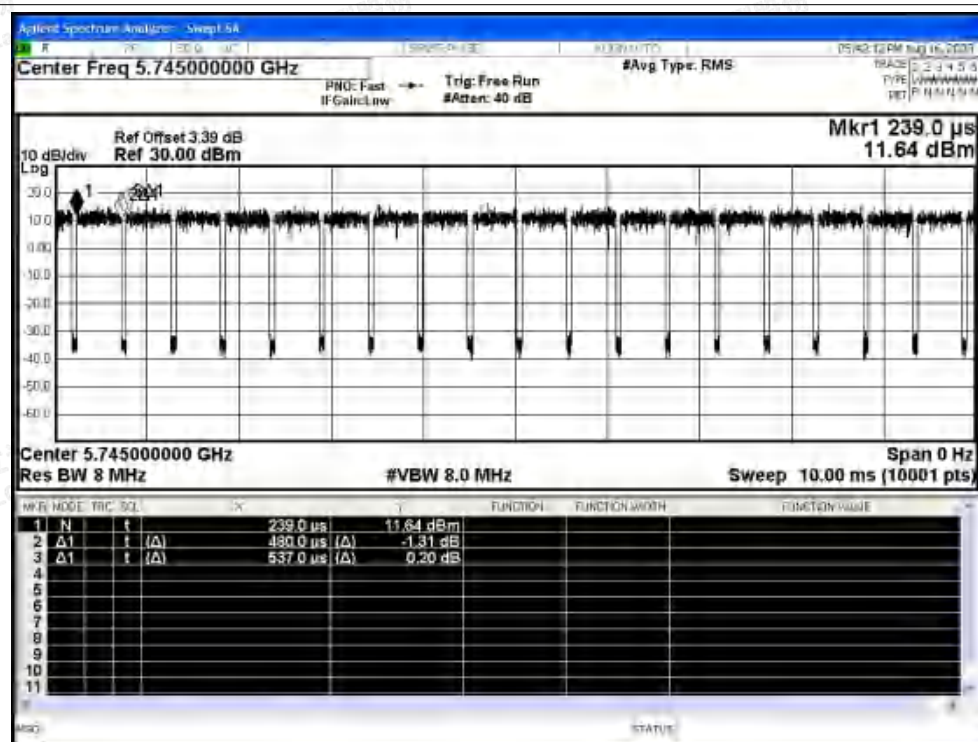

Duty Cycle NVNT ac20 5785MHz Ant0

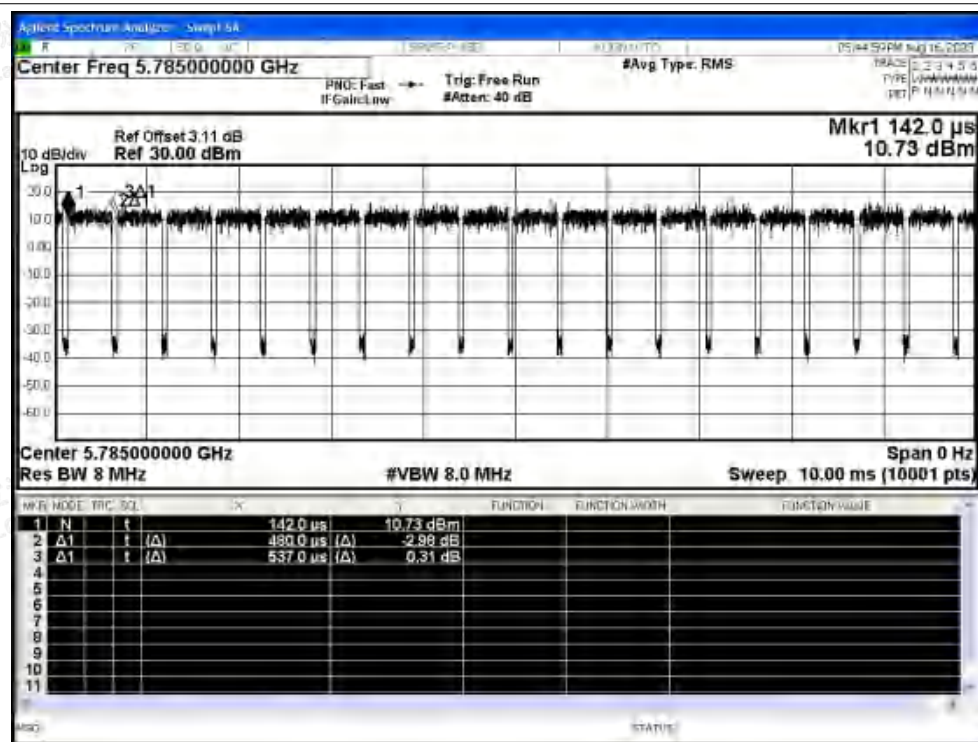


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac20 5825MHz Ant0

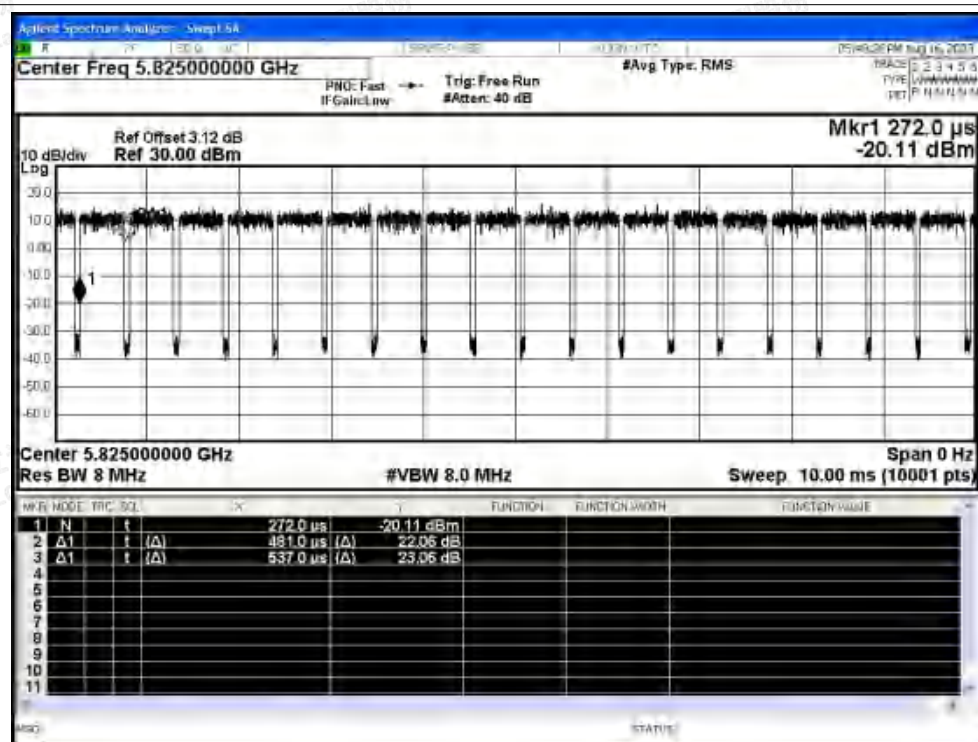

Duty Cycle NVNT ac40 5755MHz Ant0

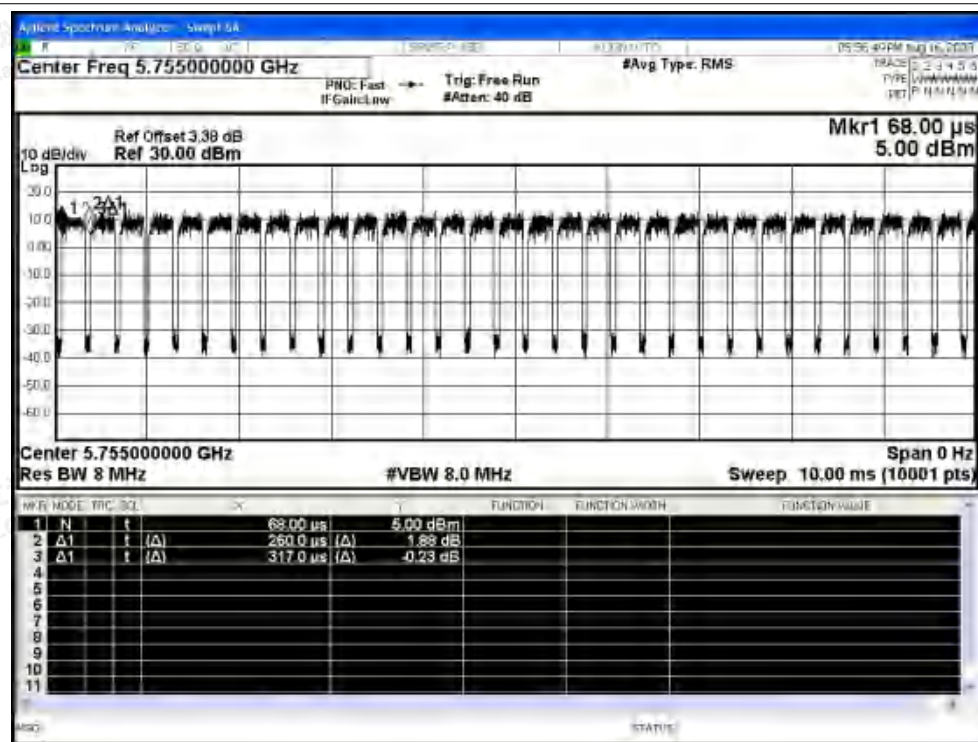


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac40 5795MHz Ant0

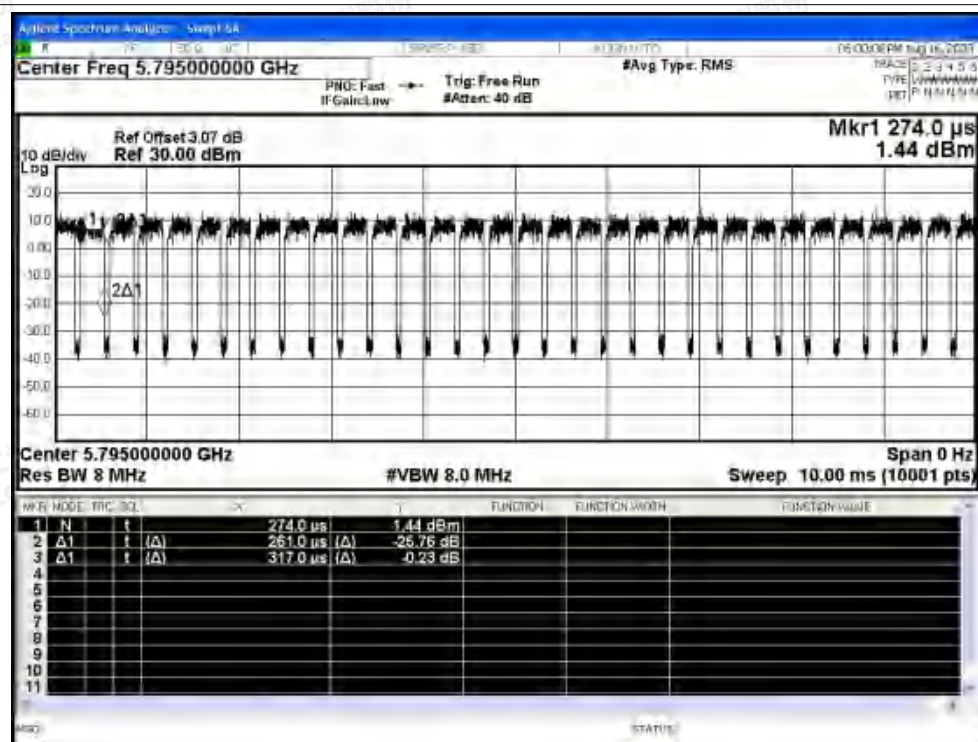

Duty Cycle NVNT ac80 5775MHz Ant0

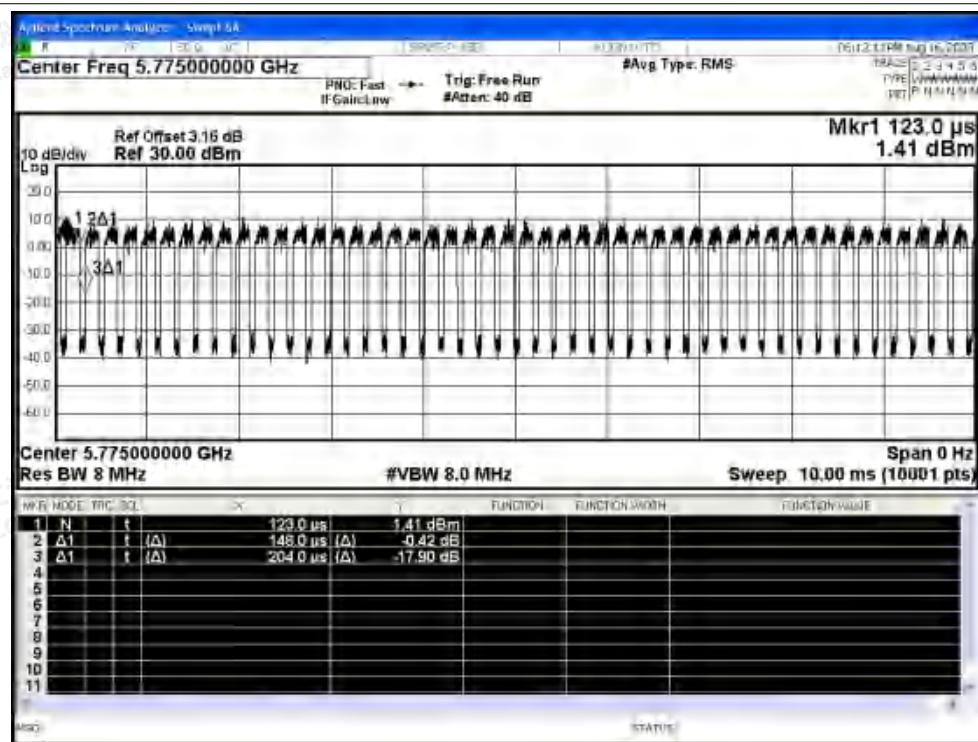


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ax20 5745MHz Ant0

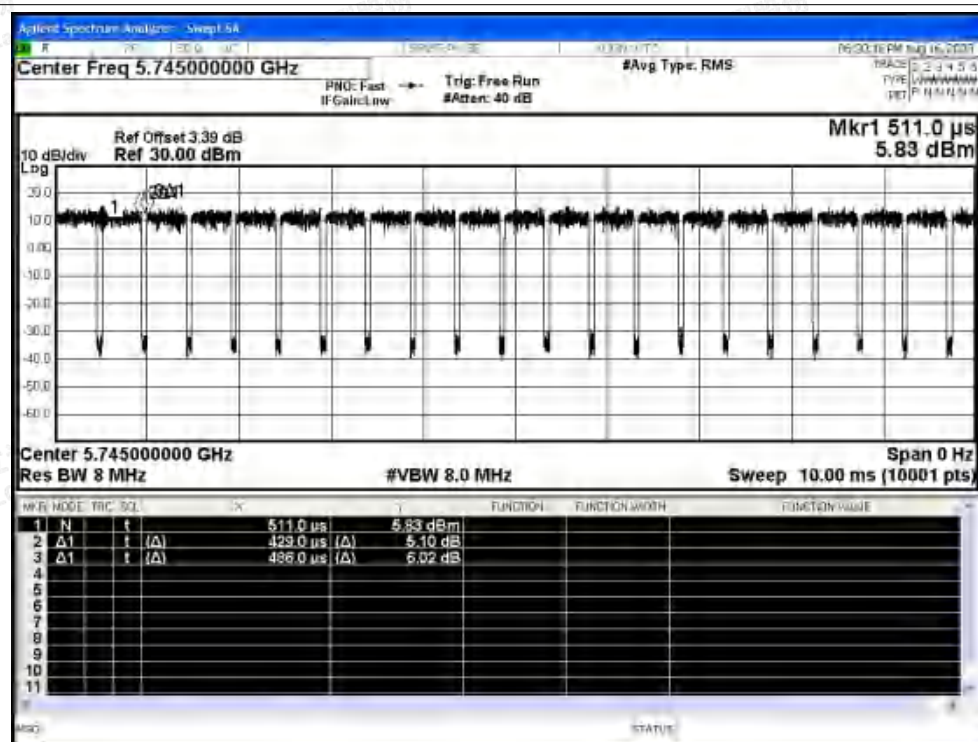

Duty Cycle NVNT ax20 5785MHz Ant0

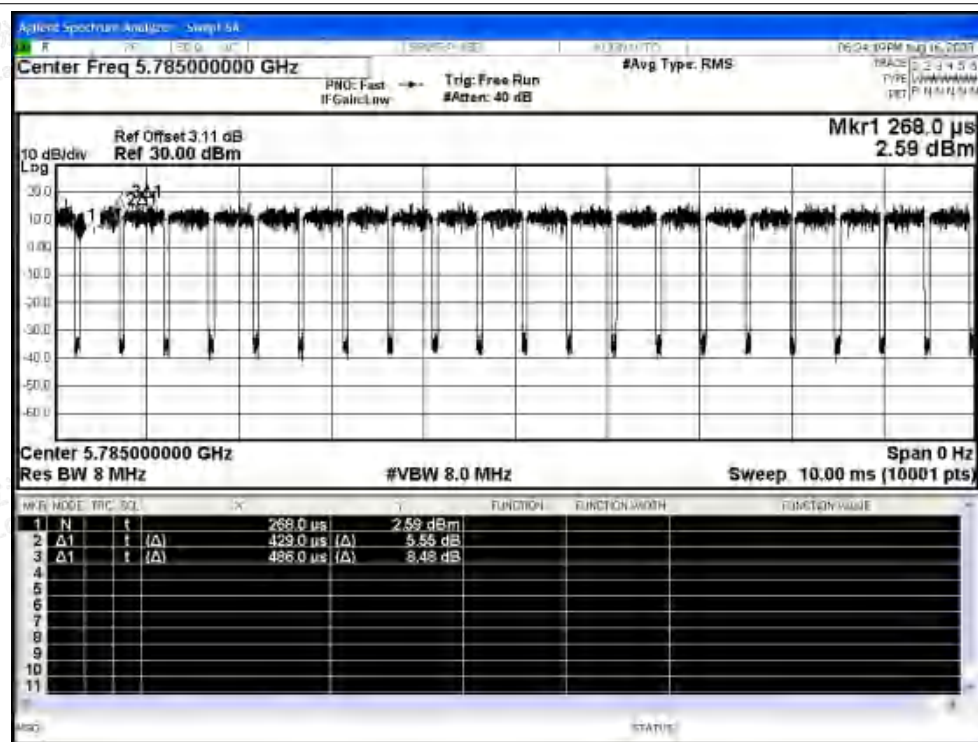


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ax20 5825MHz Ant0

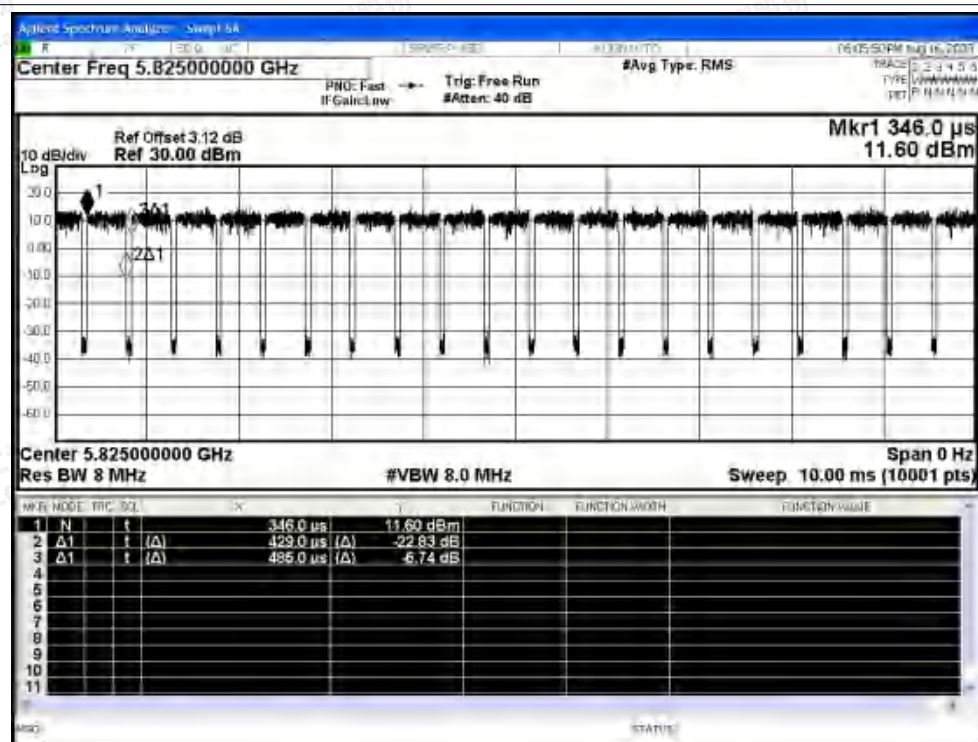

Duty Cycle NVNT ax40 5755MHz Ant0

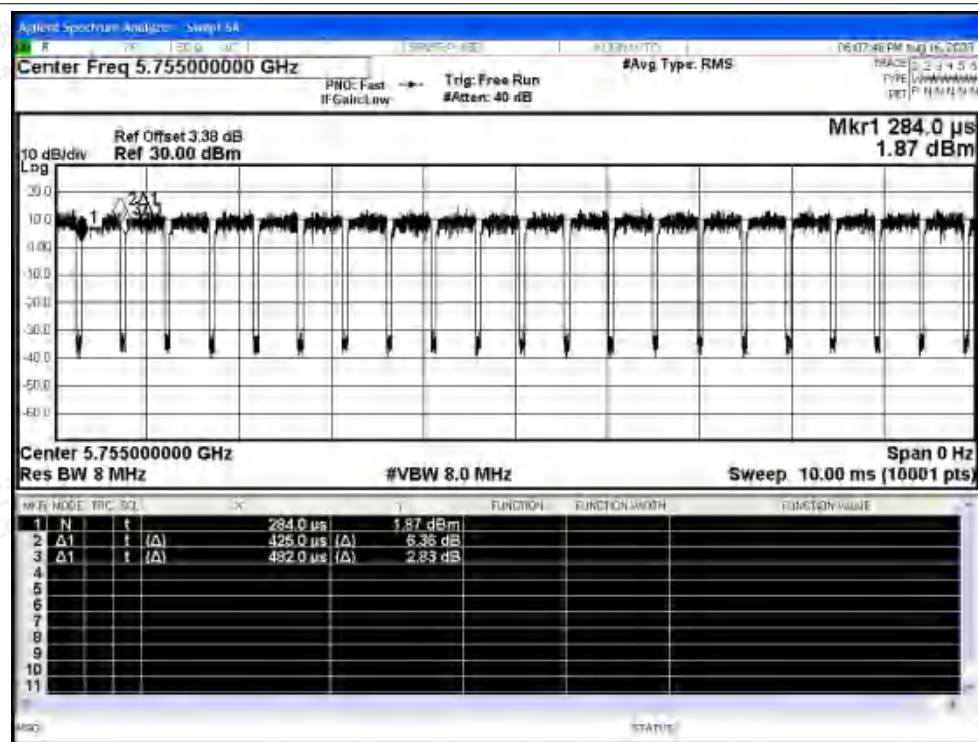


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ax40 5795MHz Ant0

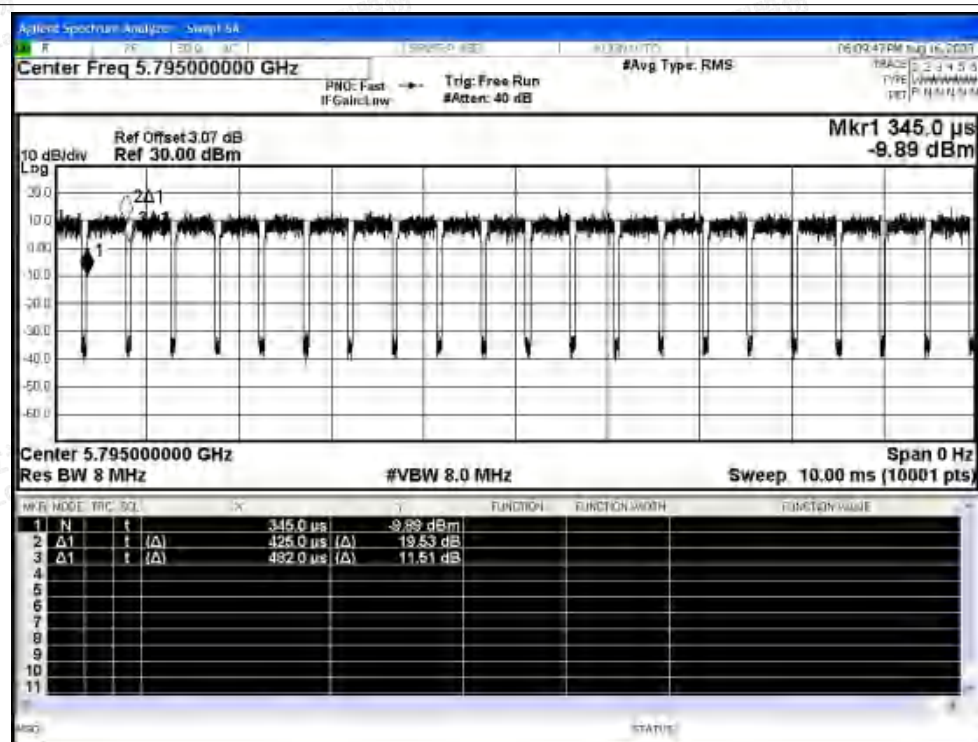

Duty Cycle NVNT ax80 5775MHz Ant0

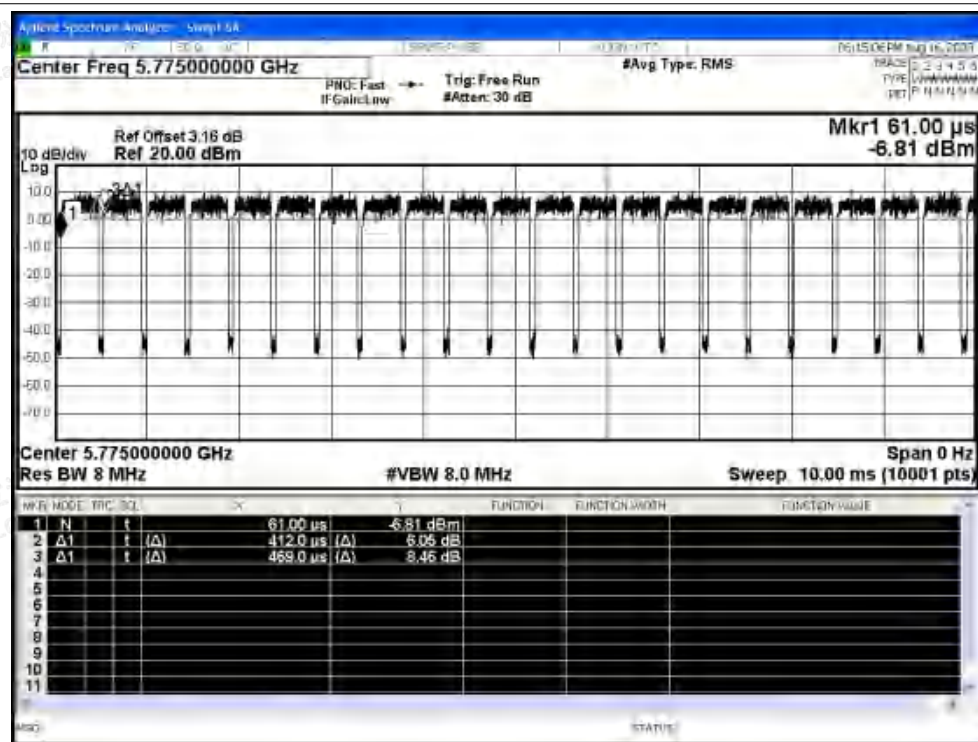


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5745            | Ant1    | 96.08          | 0.17                   | 0.72      |
| NVNT      | a    | 5785            | Ant1    | 96.08          | 0.17                   | 0.72      |
| NVNT      | a    | 5825            | Ant1    | 96.15          | 0.17                   | 0.72      |
| NVNT      | n20  | 5745            | Ant1    | 95.77          | 0.19                   | 0.77      |
| NVNT      | n20  | 5785            | Ant1    | 95.77          | 0.19                   | 0.77      |
| NVNT      | n20  | 5825            | Ant1    | 95.85          | 0.18                   | 0.77      |
| NVNT      | n40  | 5755            | Ant1    | 91.92          | 0.37                   | 1.57      |
| NVNT      | n40  | 5795            | Ant1    | 91.77          | 0.37                   | 1.57      |
| NVNT      | ac20 | 5745            | Ant1    | 89.39          | 0.49                   | 2.08      |
| NVNT      | ac20 | 5785            | Ant1    | 89.57          | 0.48                   | 2.08      |
| NVNT      | ac20 | 5825            | Ant1    | 89.39          | 0.49                   | 2.08      |
| NVNT      | ac40 | 5755            | Ant1    | 82.02          | 0.86                   | 3.85      |
| NVNT      | ac40 | 5795            | Ant1    | 82.02          | 0.86                   | 3.85      |
| NVNT      | ac80 | 5775            | Ant1    | 72.68          | 1.39                   | 6.71      |
| NVNT      | ax20 | 5745            | Ant1    | 88.27          | 0.54                   | 2.33      |
| NVNT      | ax20 | 5785            | Ant1    | 88.27          | 0.54                   | 2.33      |
| NVNT      | ax20 | 5825            | Ant1    | 88.48          | 0.53                   | 2.33      |
| NVNT      | ax40 | 5755            | Ant1    | 88.17          | 0.55                   | 2.35      |
| NVNT      | ax40 | 5795            | Ant1    | 88.17          | 0.55                   | 2.35      |
| NVNT      | ax80 | 5775            | Ant1    | 87.85          | 0.56                   | 2.43      |







## Test Graphs

Duty Cycle NVNT a 5745MHz Ant1

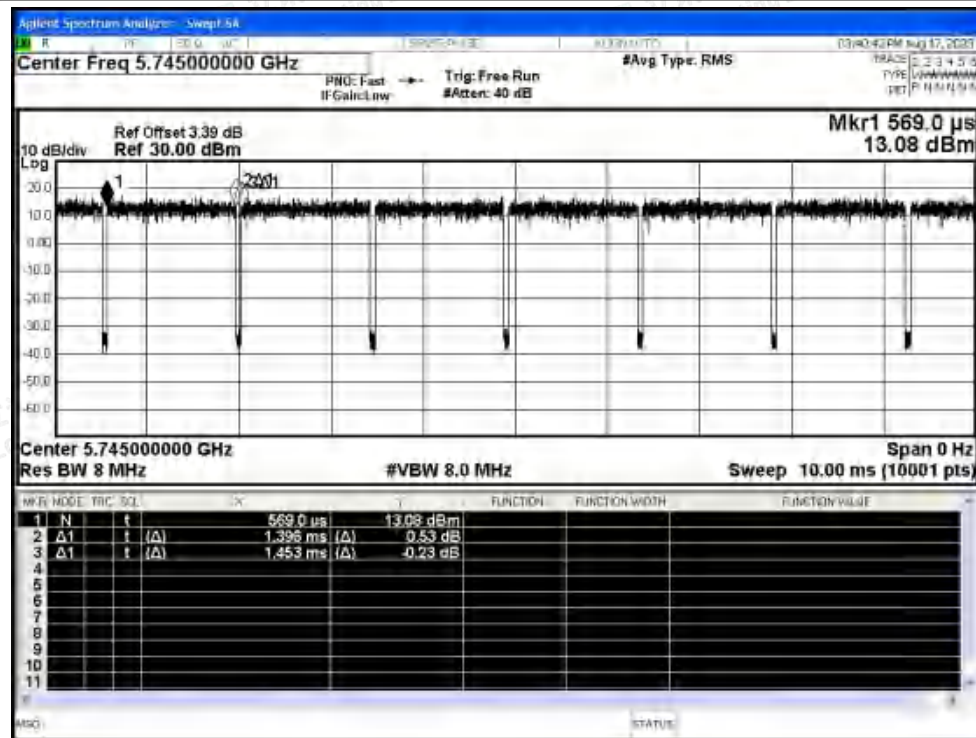


Duty Cycle NVNT a 5785MHz Ant1

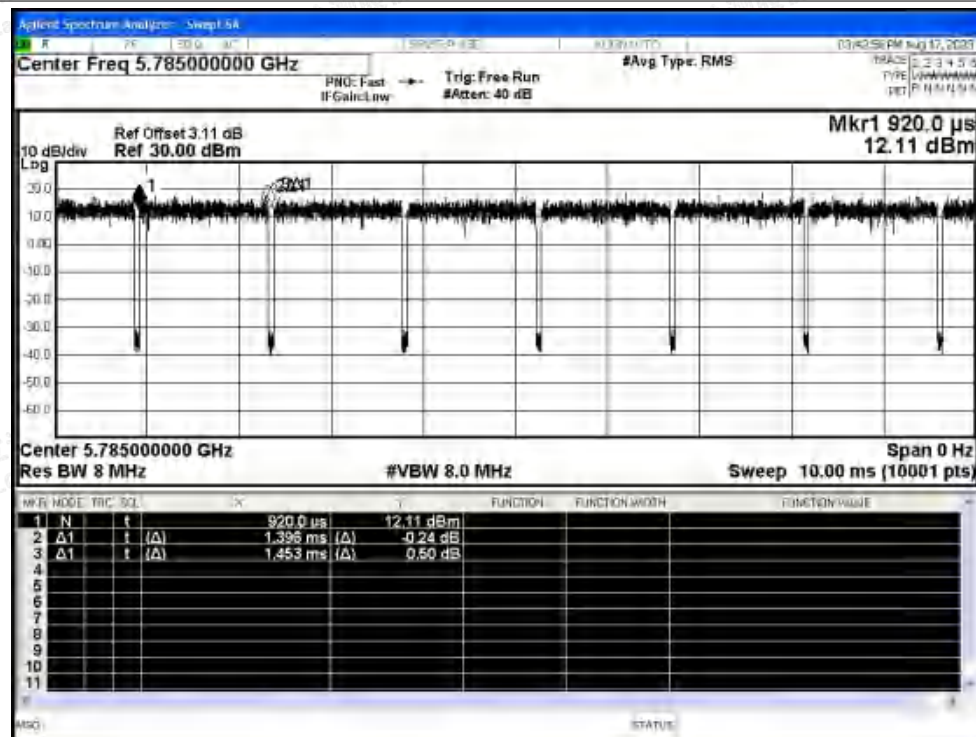




Duty Cycle NVNT a 5825MHz Ant1

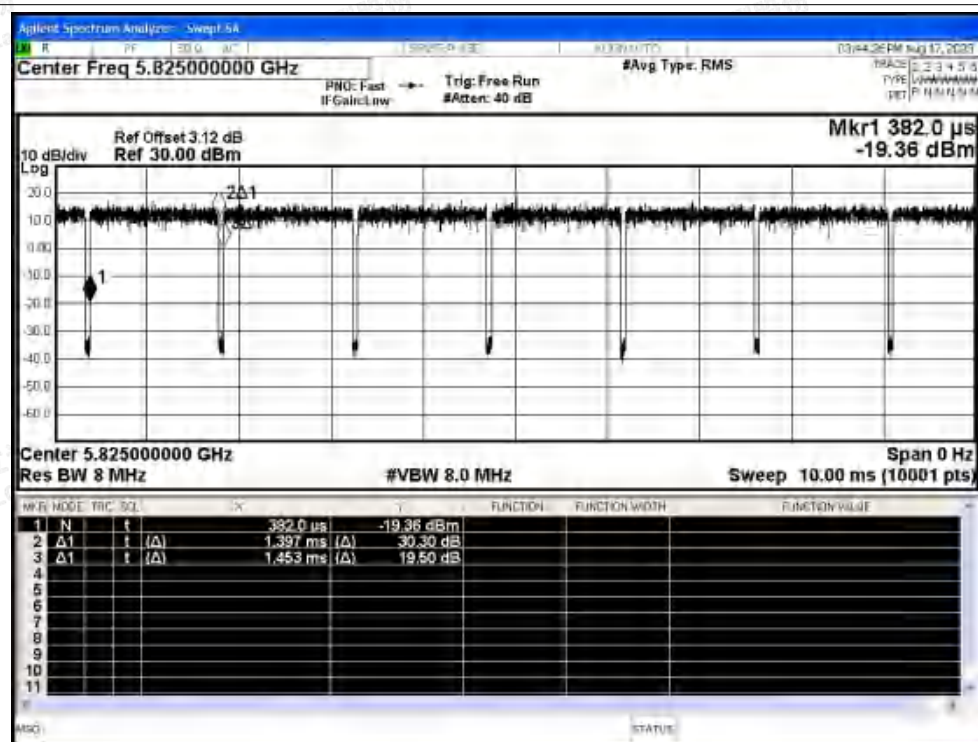

Duty Cycle NVNT n20 5745MHz Ant1

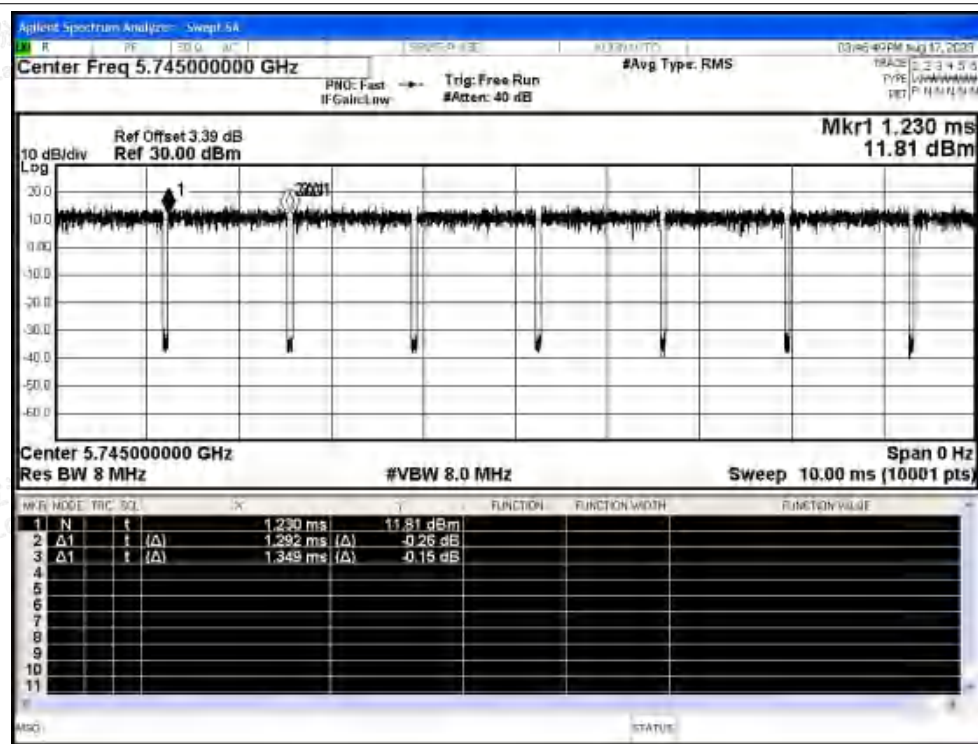


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT n20 5785MHz Ant1

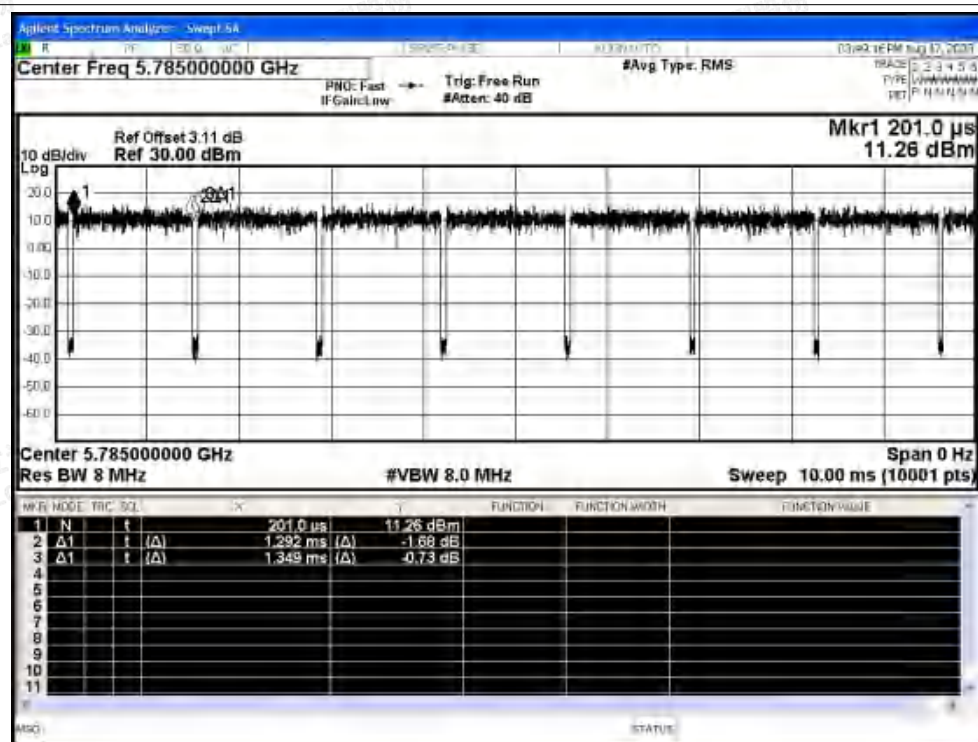

Duty Cycle NVNT n20 5825MHz Ant1

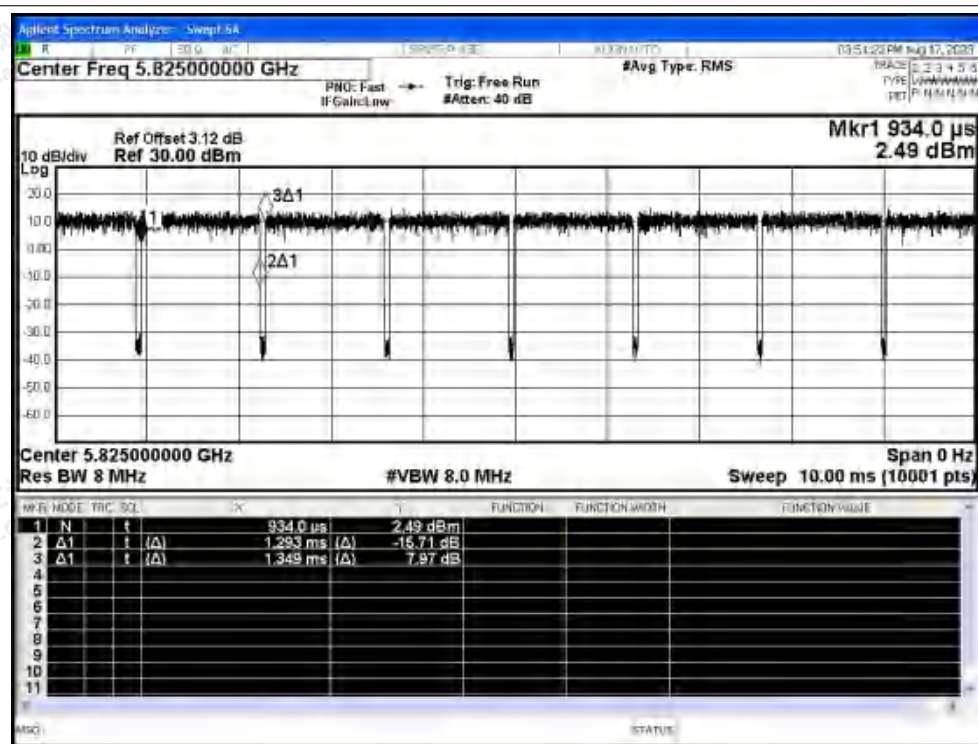


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT n40 5755MHz Ant1

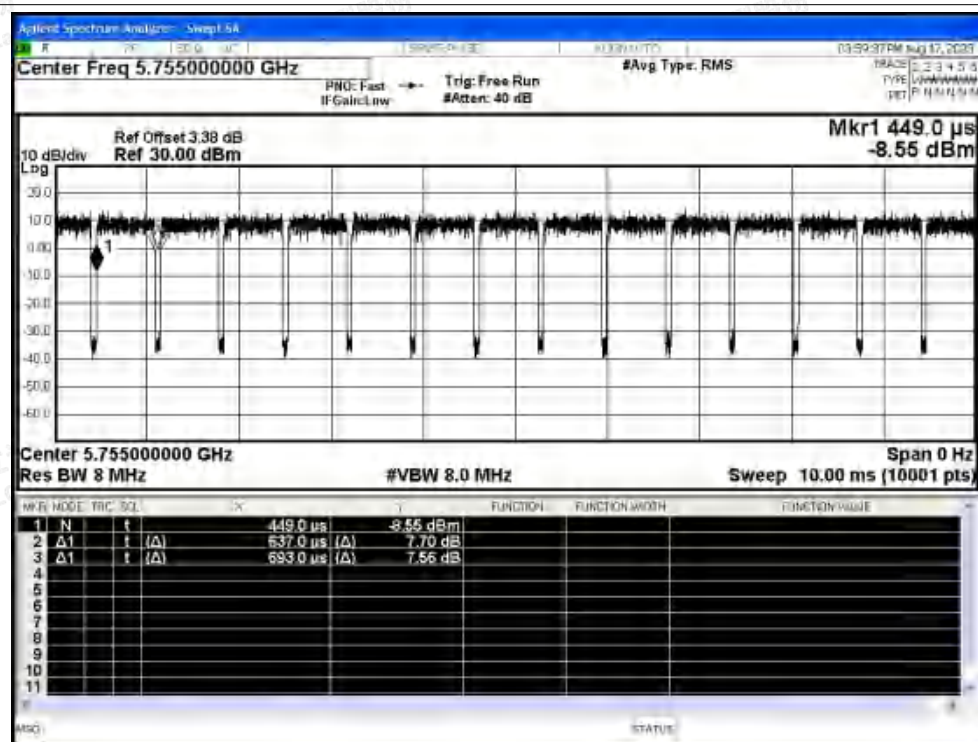

Duty Cycle NVNT n40 5795MHz Ant1

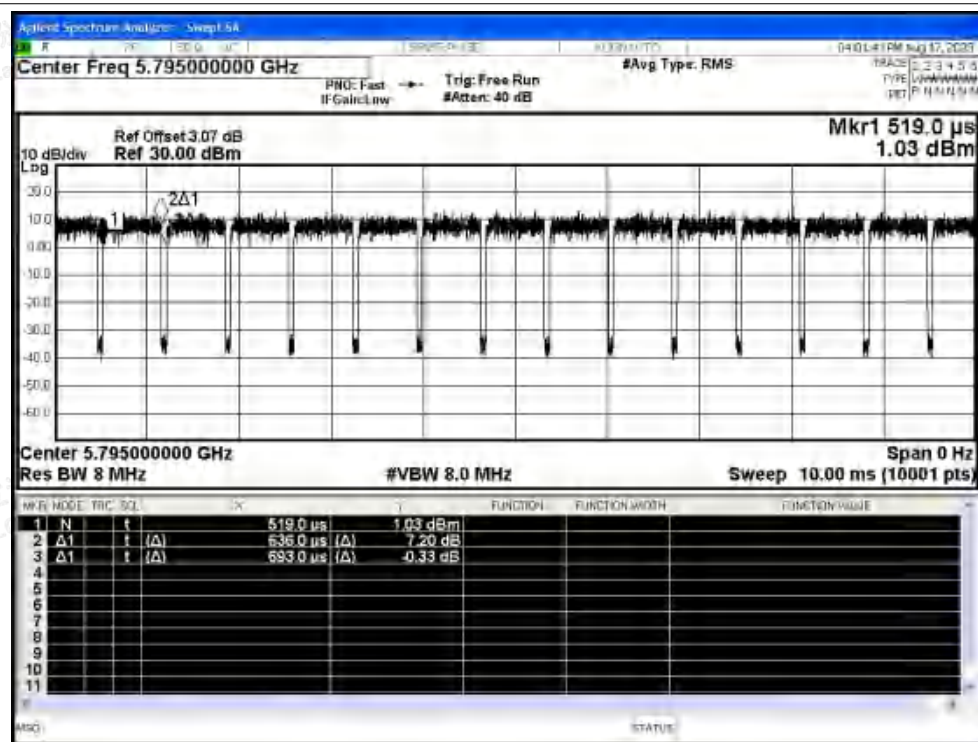


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac20 5745MHz Ant1

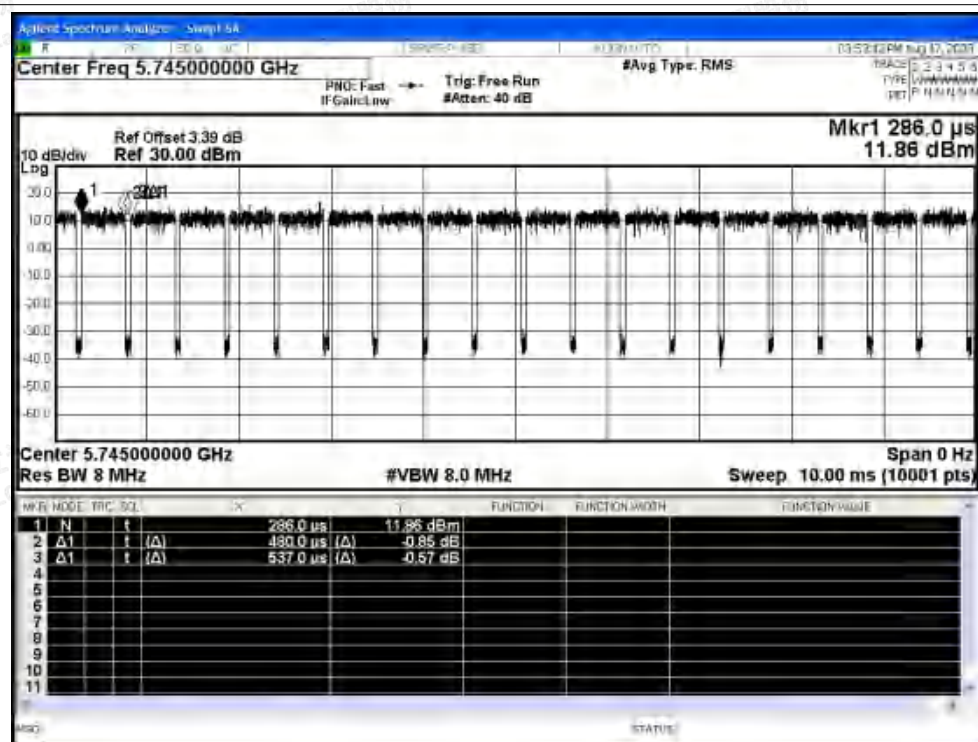

Duty Cycle NVNT ac20 5785MHz Ant1

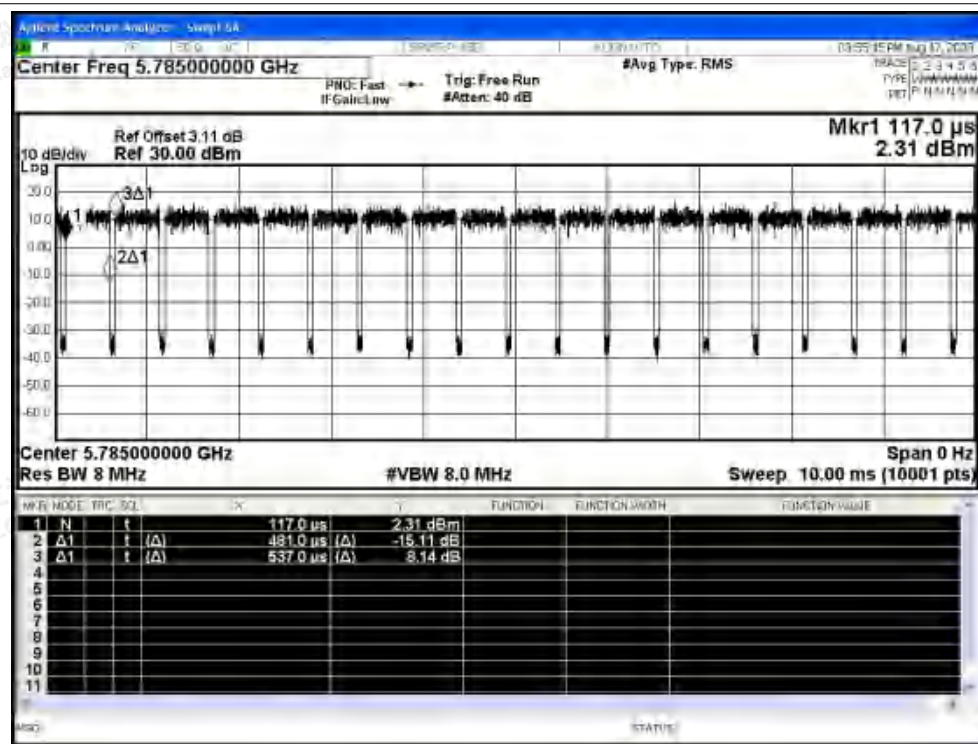


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac20 5825MHz Ant1

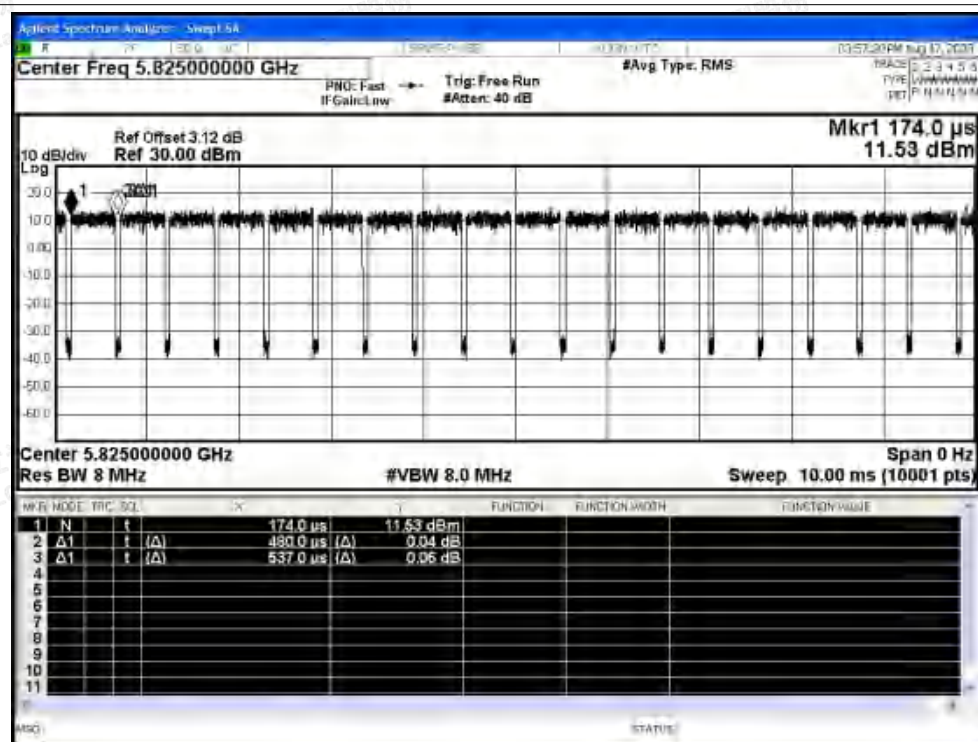

Duty Cycle NVNT ac40 5755MHz Ant1

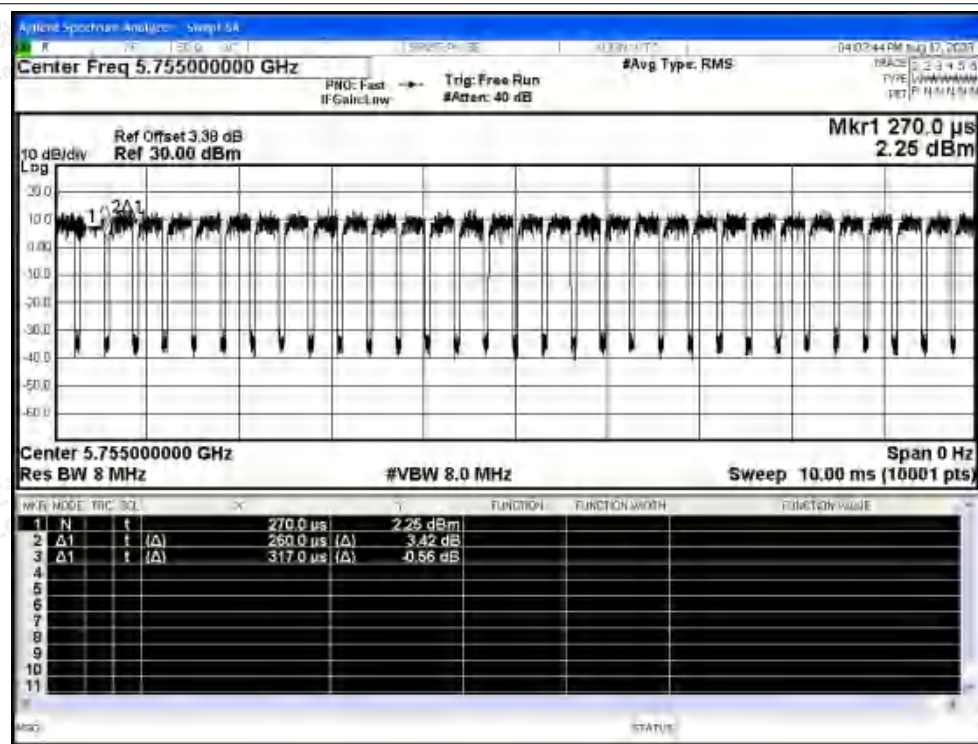

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac40 5795MHz Ant1

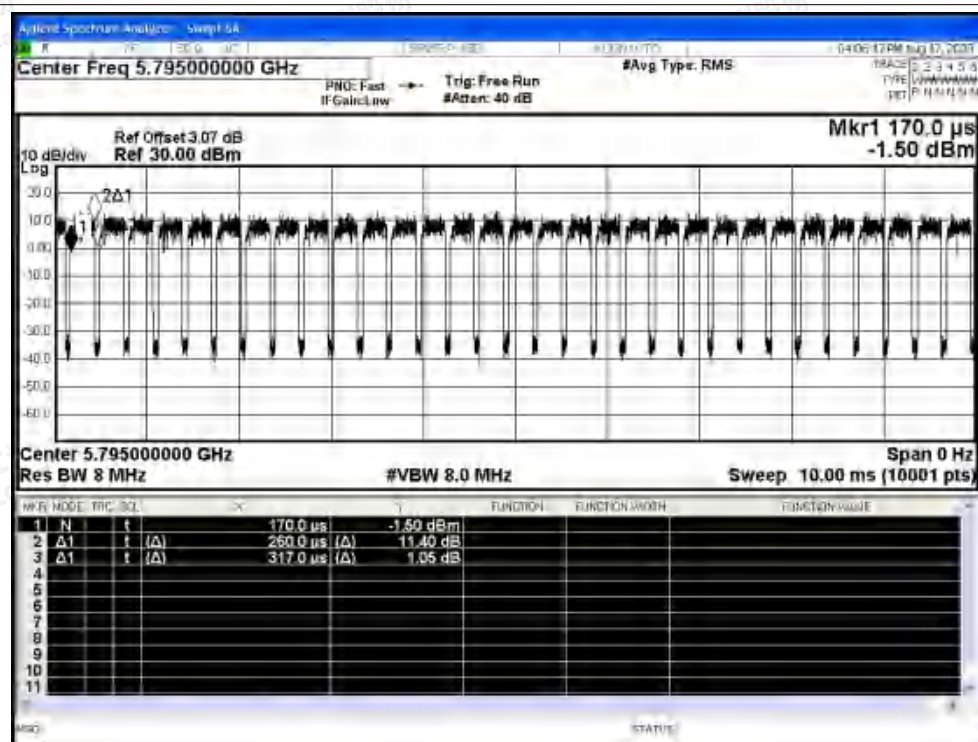

Duty Cycle NVNT ac80 5775MHz Ant1

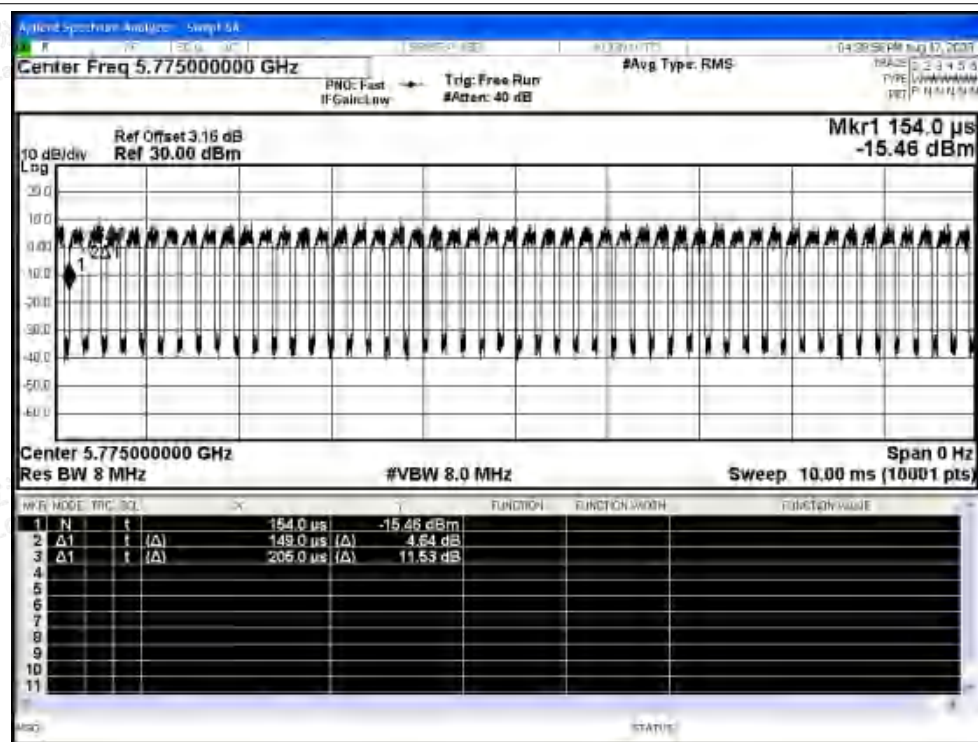


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ax20 5745MHz Ant1

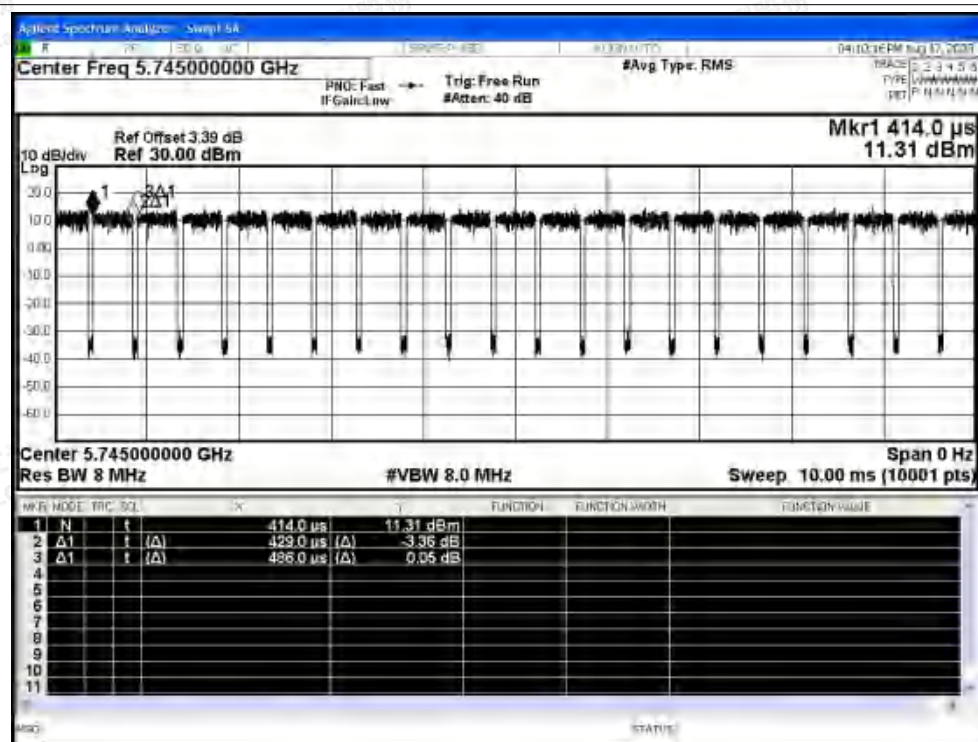

Duty Cycle NVNT ax20 5785MHz Ant1

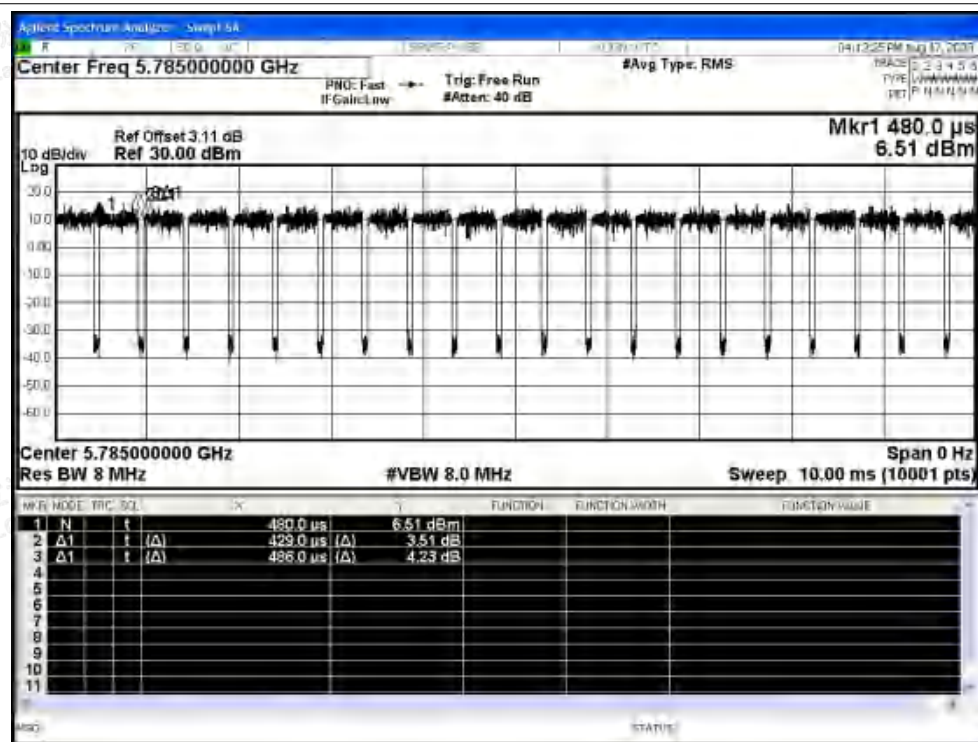


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ax20 5825MHz Ant1

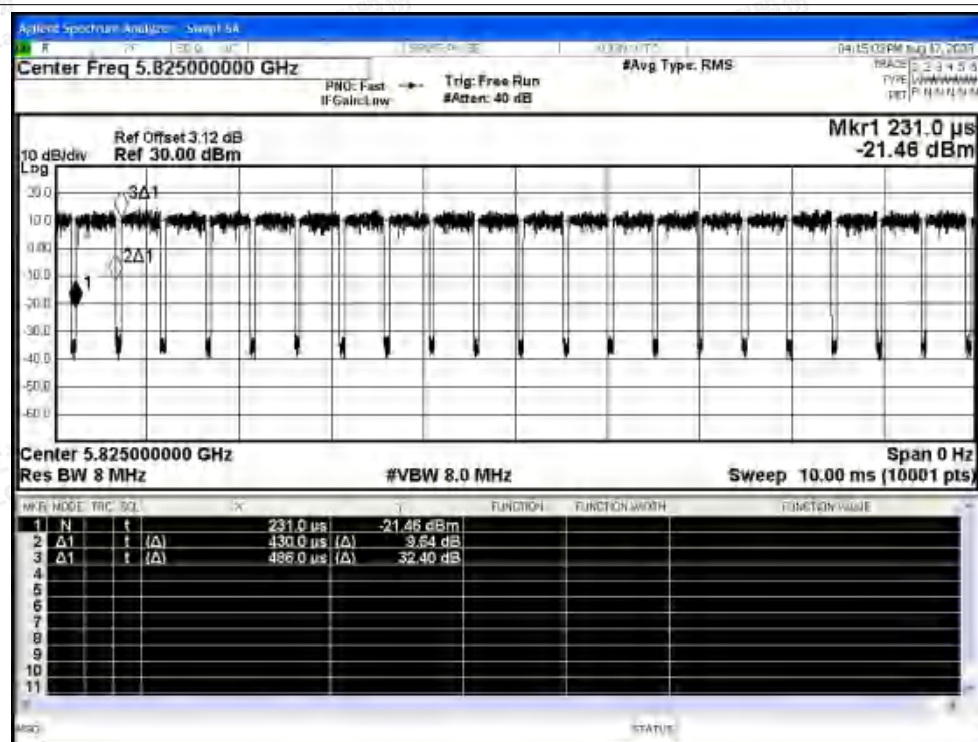

Duty Cycle NVNT ax40 5755MHz Ant1

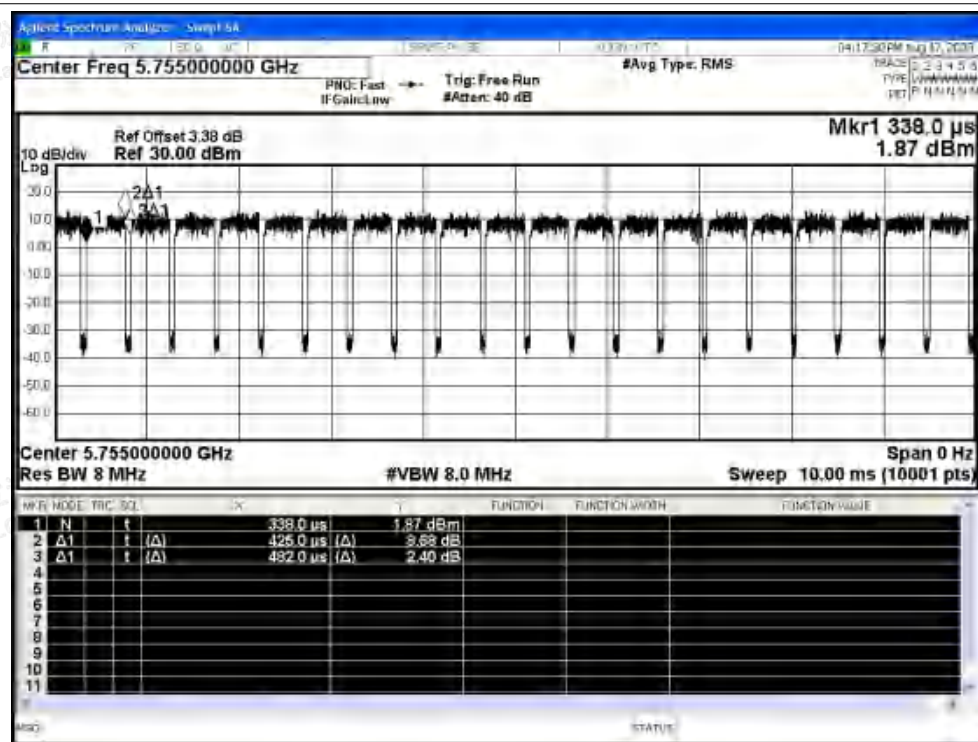


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ax40 5795MHz Ant1

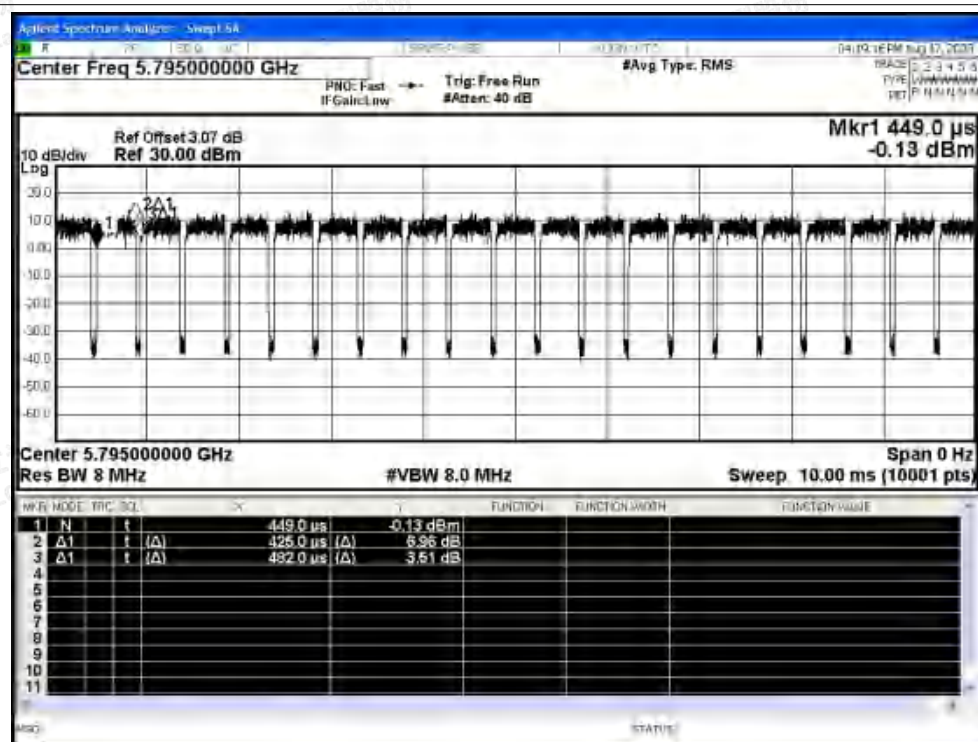

Duty Cycle NVNT ax80 5775MHz Ant1

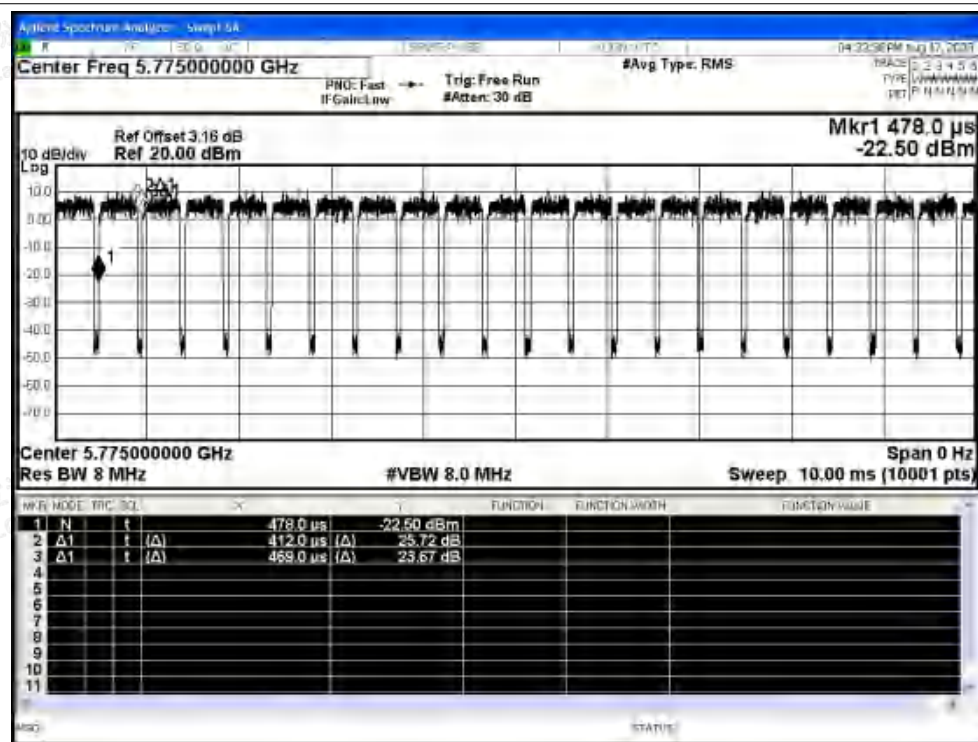

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity