

70mm

90mm


TIKTAALIK mic⁺

USER MANUAL



ENGLISH

• EXTERIOR DIAGRAM

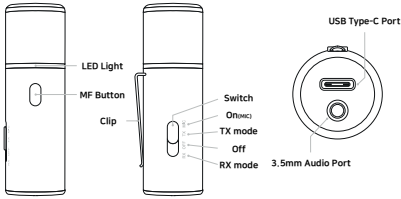

• HOW TO USE

On/Off Switch => The power is turned off when the menu key is depressed. Enter each mode and hold down the MF key for more than 3 seconds to activate it.

• HOW TO CHARGE

Charging by using a C Type cable. When it is turned off, the charging light turns off, and as it enters each mode, the LED indication gradually turns on and off in red, and this process is repeated. When completely charged, the light turns off.

• HOW TO USE RX/TX/MIC MODES

How to record a microphone (while using the app): Press the menu key to set RX mode. Then, the white LED indication flashes. Check the Bluetooth connection on the smartphone with the app loaded and choose TIKTAALIK. The LED indicator is completely white. Start the TIKTAALIK app and record a video.

MIC mode(Loudspeaker): Press the menu key to set MIC mode. Hold the MF key for 3 seconds. Then, the green LED indication flashes. Enter pairing mode by turning on the Bluetooth speaker that will be utilized as a loudspeaker. It is utilized as a loudspeaker once the microphone and speaker are connected in about 1 minute. The LED indication becomes completely green.

RX mode: Press the menu key to set RX mode. Hold the MF key for 3 seconds. Then, the white LED indication flashes. Connect the 3.5-pi connector to the microphone and wired devices (car speakers, wired speakers, etc.) Check the Bluetooth connection on the smartphone and select TIKTAALIK. The LED indicator is solid white

TX mode: Press the menu key to set TX mode. Hold the MF key for 3 seconds. Then, the blue LED indication flashes. Connect the 3.5-pi connector to the microphone and wired devices (TV, treadmill, aircraft monitor, etc.) Go to the pairing mode on your Bluetooth earphone or speaker. In about 1 minute, when the TIKTAALIK microphone and earphone or speaker are connected, the use starts. The LED indicator turns blue.

• SPECIFICATION

Color : Black	Encoder : SBC, AAC
BT Ver : 5.0	Recodrding Bandwidth : Full Band(22kHz)
Sampling frequency : 44.1Khz	Battery life : 10hours max
Wireless channel : 2	Battery capacity : 300mAh
Charging port : Type C	Noise reduction function : 90db
TPS out port : 3.5mm 4Pin	BT protocol : A2DP, AVRCP, HFP, HSP, PBAP, SPP, GATT



www.ct5inc.com



Awake your senses

• FCC Statement


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help
- This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

한국어

• 제품설명

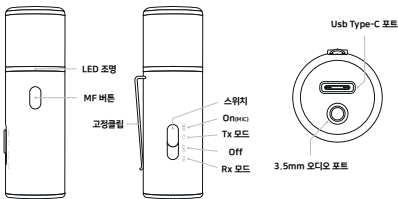

• 사용방법

전원 on/off => 매뉴키에서 off로 두면 전원 꺼짐, 각각의 모드에 들어가서 MF키를 3초이상 누르면 on.

• 충전방법

C Type 케이블을 사용하여 충전, off에 있으면 충전등이 꺼짐으로되고 각 모드에 들어가 있으면 LED표시등이 빨간색으로 서서히 켜졌다 꺼졌다를 반복. 완충되면 표시등 꺼짐

• 모드별 사용방법

마이크 녹음(앱과 연동하여) 방법 : 매뉴키를 RX에 위치시킨다. MF키를 3초간 누르면 LED지시등이 흰색으로 깜빡인다. 앱이 설치된 스마트폰에서 블루투스 연결을 확인하고 TIKTAALIK을 선택한다. LED표시등이 흰색으로 고정된다. TIKTAALIK 앱을 실행하고 영상을 촬영한다.


MIC(확성기모드) : 매뉴키를 MIC에 위치시킨다. MF키를 3초간 누른다. LED표시등이 녹색으로 깜빡인다. 확성기로 사용할 블루투스 스피커의 전원을 켜고 페어링 모드로 들어간다. 약 1분안에 마이크와 스피커가 연결되면 확성기로 사용한다. LED표시등이 녹색으로 고정된다.

RX모드 : 매뉴키를 RX에 위치시킨다. MF키를 3초간 누르면 LED표시등이 흰색으로 깜빡인다. 3.5파이 연결잭을 마이크와 유선기기(차량용 스피커, 유선스피커 등)에 연결시킨다. 스마트폰에서 블루투스 연결을 확인하고 TIKTAALIK을 선택한다. LED표시등이 흰색으로 고정된다.

TX모드 : 매뉴키를 TX에 위치시킨다. MF키를 3초간 누르면 LED표시등이 파란색으로 깜빡인다. 3.5파이 연결잭을 마이크와 유선기기(TV, 러닝머신, 항공기 모니터 등)에 연결시킨다. 블루투스 이어폰 또는 스피커에서 페어링 모드로 들어간다. 약 1분안에 틱타알릭 마이크와 이어폰 또는 스피커가 연결되면 사용이 시작된다. LED표시등이 파란색으로 고정된다.

日本語

• 製品説明

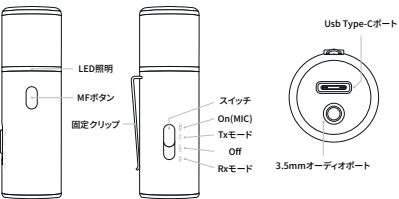

• 使用方法

電源on/off => メニューキーでオフにすると電源オフ、それぞれのモードに入りMFキーを3秒以上押すとオン。

• 充電方法

C Typeケーブルを使用して充電、オフになっていると充電ランプが消え、各モードを選択するとLED表示ランプが赤色にゆっくり点滅を繰り返す。充電が完了するとランプが消える。

• モード別使用方法

マイクの録音(アプリと連動)方法:メニューキーをRXに移動します。MFキーを3秒間押すとLED指示灯が白く点滅します。アプリがインストールされているスマートフォンでBluetooth接続を確認し、TIKTAALIKを選択します。LED表示灯が白く光ります。TIKTAALIKアプリを起動してビデオを撮影します。

MIC(拡声器モード) :メニューキーをMICに移動する。MFキーを3秒間押す。LED指示灯が緑色に点滅します。拡声器として使用するBluetoothスピーカーの電源を入れ、ペアリングモードを設定します。約1分以内にマイクとスピーカーを接続すると、拡声器として使用可能です。LED指示灯が緑色に光ります。

RXモード:メニューキーをRXに移動します。MFキーを3秒間押すとLED表示灯が白く点滅します。3.5バイ接続端子部分をマイクと有線機器(車用スピーカー、有線スピーカーなど)に接続します。スマートフォンでBluetooth接続を確認し、TIKTAALIKを選択します。LED表示灯が白色に光ります。

TXモード:メニューキーをTXに移動します。MFキーを3秒間押すとLED表示灯が青色に点滅します。3.5バイ接続端子部分をマイクと有線機器(テレビ、ランニングマシン、航空機モニターなど)に接続します。Bluetoothイヤホンまたはスピーカーからペアリングモードを設定します。約1分以内にディクターリクマイクやイヤホンまたはスピーカーを接続して使用可能です。LED表示灯が青色に光ります。