

SC2450M3216A1

Specification


1. Product number

SC2450M3216A1

(1) (2) (3) (4) (5) (6)

Numbers Information:

- (1)Product Company: SemitelElectronics Co., Ltd.
- (2)Product Series:SMD Antenna
- (3)site: Room 101, 1st Floor, Building 7, No.7001
Zhongchun Road, Minhang District, Shanghai
- (4)Feed Mode: Monopole
- (5)External Dimensions(L×W×H) (mm): 3.20*1.60*0.72
- (6)Antenna Type: SMD Antenna

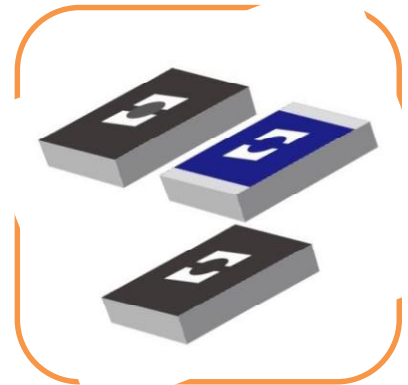

2. Features

- Stable and reliable in performances
- Low profile, compact size
- RoHS compliance
- SMT processes compatible

3. Applications

- ISM 2.4GHz application
- ZigBee/BLE application
- Bluetooth earphone systems
- Hand-held devices when Wi-Fi / Bluetooth functions are needed, e.g., Smart phone
- IEEE802.11 b/g/n
- Wireless PCMCIA cards or USB dongles

UNLESS OTHER SPECIFIED TOLERANCES ON:

0=±10.0=±0.500.00=±0.20

ANGLES = ±

HOLE DIA = ±

HMCORE Honmax Technology Limited

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.

A0

PAGE1


OF

10

4. Description

Semitel's chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, it shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.

5. Shape and Dimensions

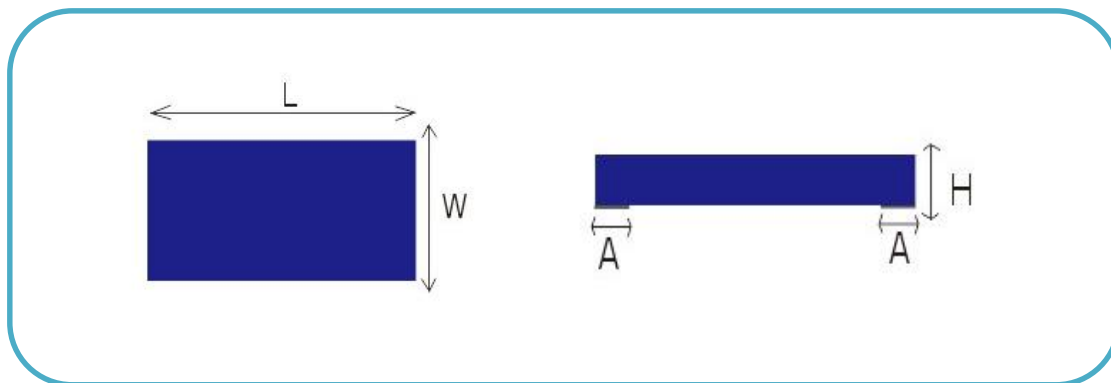

Dimensions:

	Dimensions(mm)
L	3.20 ± 0.20
W	1.60 ± 0.20
H	0.72 ± 0.20
A	0.3 ± 0.25


UNLESS OTHER SPECIFIED TOLERANCES ON: 0= ± 10 .0= ± 0.500 .00= ± 0.20 ANGLES = $\pm$ HOLE DIA = $\pm$		HMCORE Honmax Technology Limited	
SCALE: N/A	UNIT: mm	This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission	
DRAWN BY: SARA	CHECKED BY: XD		
DESIGNED BY: HEXIN	APPROVED BY: XD		
TITLE: SC2450M3216A1 Specification		DOCUMENT NO.	SPEC REV.
		SC2450M3216A1	A0
		PAGE2	OF 10

6. Layout Guide & Electrical Specifications


6.1 Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown blow. Recommendation on matching circuit will be provided according to customer's installation conditions.

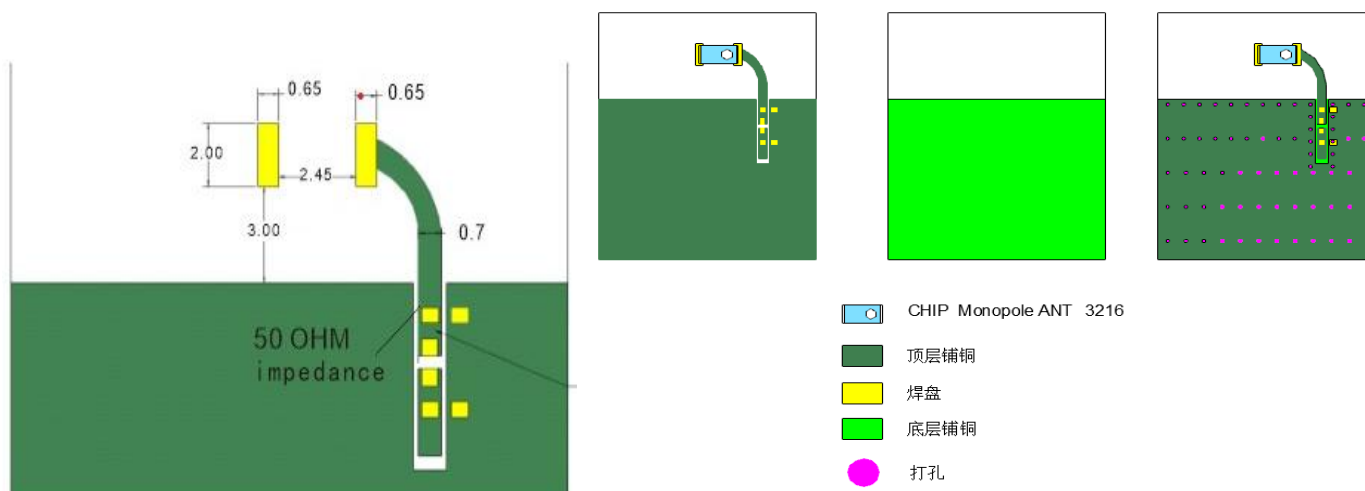

6.2 Application Guide

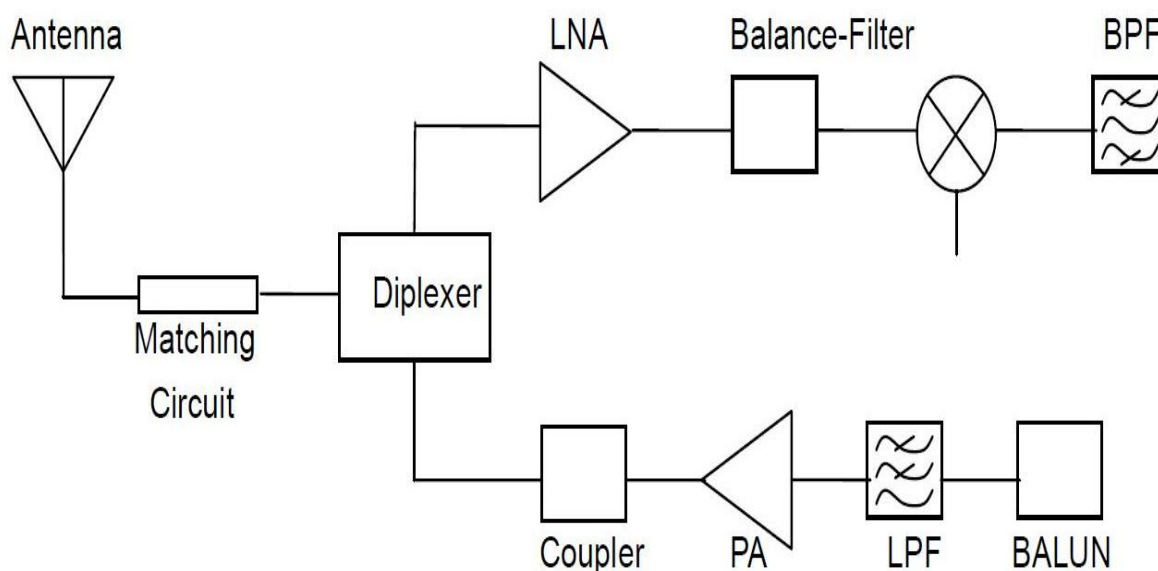

UNLESS OTHER SPECIFIED TOLERANCES ON:
0= ± 10.0 0= ± 0.500 00= ± 0.20

ANGLES = $\pm$ HOLE DIA = $\pm$

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.

A0

PAGE3

OF

10

6.3 Electrical Specifications (Evaluation Board Dimensions: 86*50)

Electrical Table (2400~2500 MHz Band)

Product number	S-C-2450-M-3216-A0	
Central Frequency	2440	MHz
Bandwidth	100 (Min.)	MHz
Return Loss	-11.96 (Max.)	dB
Peak Gain	2.73	dBi
Impedance	50	Ω
Operating Temperature	-40~+85	$^{\circ}\text{C}$
Maximum Power	5	W
Resistance to soldering heat	10 (@260 $^{\circ}\text{C}$)	Sec.
Polarization	Linear	
Azimuth Beam width	Omni-directional	
Termination	Sn (leadless)	

7. Electrical Characteristics

Return Loss



UNLESS OTHER SPECIFIED TOLERANCES ON:

0=±10.0=±0.500.00=±0.20

ANGLES = ±

HOLE DIA = ±

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.

A0

PAGE4


OF

10

□ Smith Chart



□ VSWR

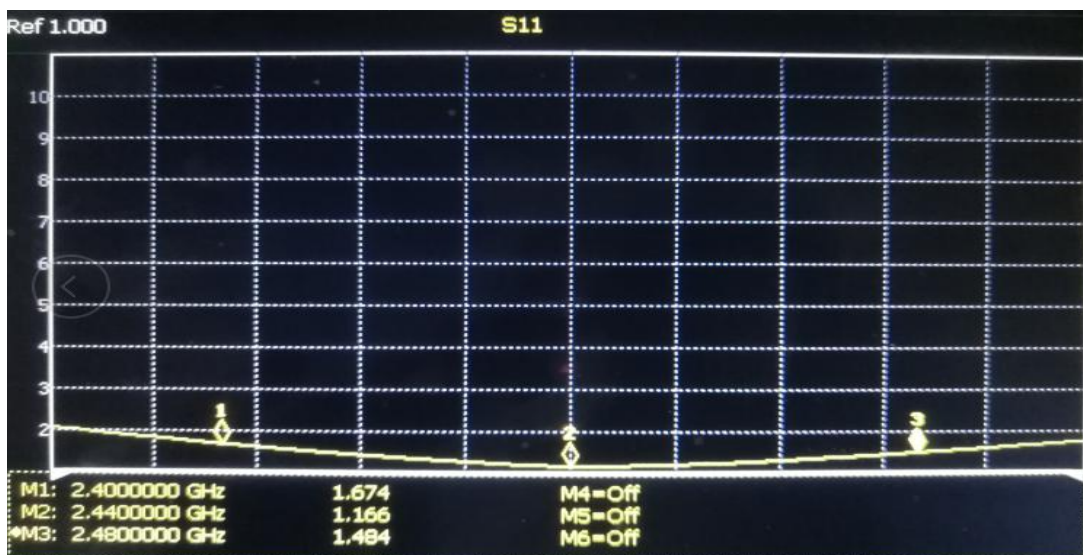

Mark	Frequency	VSWR
1	2400 MHz	1.674
2	2440 MHz	1.166
3	2480 MHz	1.484

UNLESS OTHER SPECIFIED TOLERANCES ON:
 $0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = $\pm$ HOLE DIA = $\pm$

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

SCALE: N/A UNIT: mm
 DRAWN BY: SARA CHECKED BY: XD
 DESIGNED BY: HEXIN APPROVED BY: XD

TITLE: SC2450M3216A1 Specification

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.
A0


PAGE5

OF


10

□ Radiation Pattern

The Gain pattern is measured in FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.

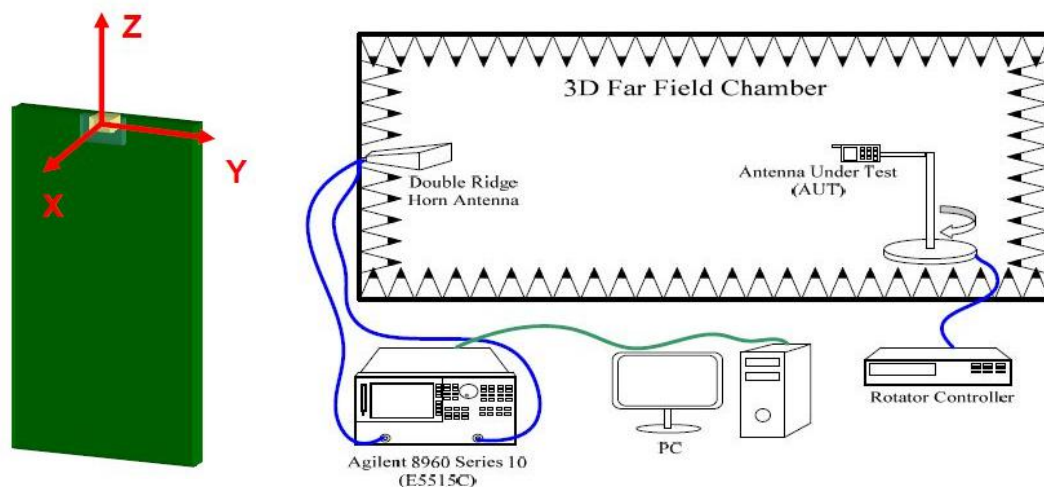


□ Efficiency

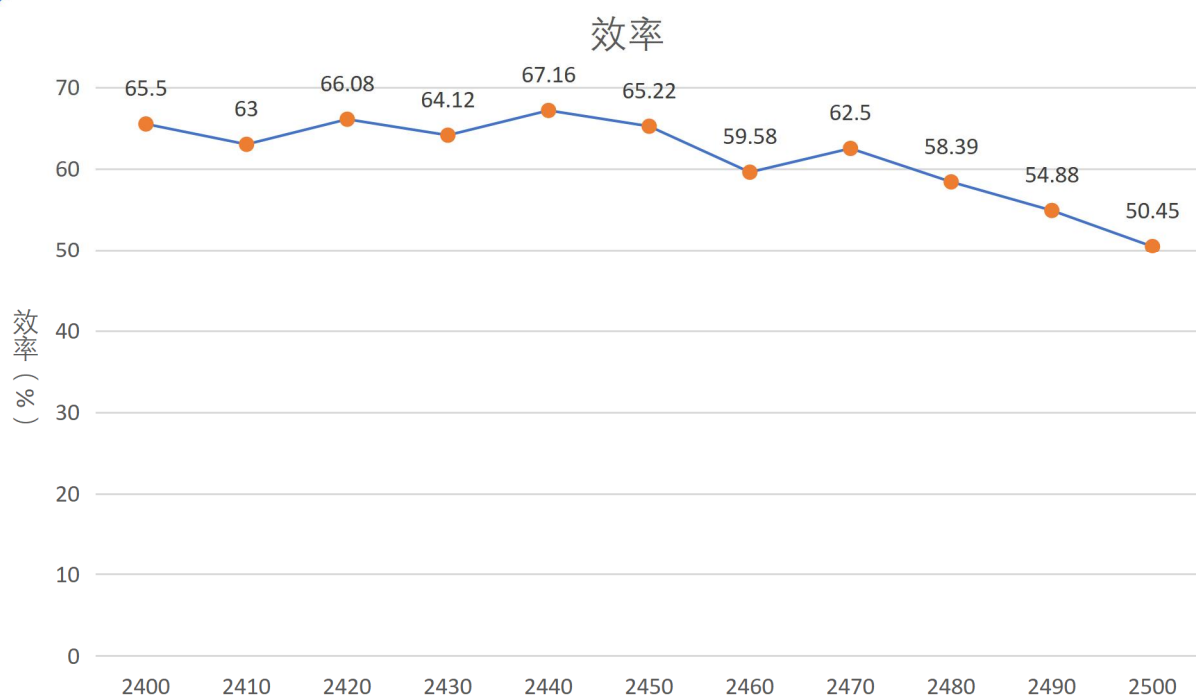


UNLESS OTHER SPECIFIED TOLERANCES ON: $0=\pm 10.0=\pm 0.500.00=\pm 0.20$ ANGLES = $\pm$ HOLE DIA = $\pm$		 Honmax Technology Limited	
SCALE: N/A	UNIT: mm	This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission	
DRAWN BY: SARA	CHECKED BY: XD		
DESIGNED BY: HEXIN	APPROVED BY: XD		
TITLE: SC2450M3216A1 Specification		DOCUMENT NO.	SC2450M3216A1 PAGE6 OF 10
			SPEC REV. A0

□ Peak Gain

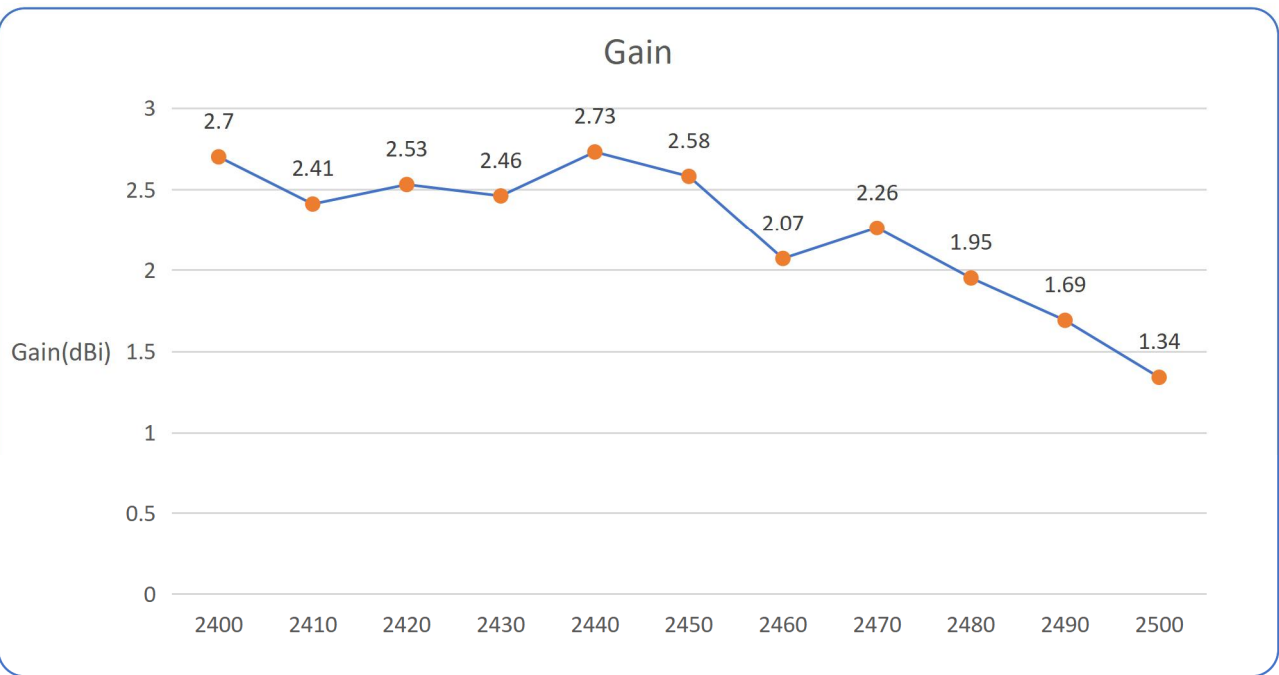


□ 3D Gain Pattern (2400 MHz)


2400.000MHz




2400.000MHz H



2400.000MHz E1



2400.000MHz E2



UNLESS OTHER SPECIFIED TOLERANCES ON:

0= ± 10.0 = $\pm 0.500.00$ = ± 0.20

ANGLES = $\pm$

HOLE DIA = $\pm$

HMCORE Honmax Technology Limited

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.

A0


PAGE7

OF


10

3D Gain Pattern (2450 MHz)


2450.000MHz




2450.000MHz H



2450.000MHz E1




2450.000MHz E2




3D Gain Pattern (2500 MHz)


2500.000MHz




2500.000MHz H



2500.000MHz E1



2500.000MHz E2



UNLESS OTHER SPECIFIED TOLERANCES ON:
0=±10.0=±0.500.00=±0.20

ANGLES = ± HOLE DIA = ±

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.
A0

PAGE8

OF

10

8.Environmental Characteristics

8.1 Reliability Test

Item	Condition	Specification
Thermal shock	1. 30 ± 3 minutes at $-40^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 2. Convert to $+105^{\circ}\text{C}$ (5 minutes) 3. 30 ± 3 minutes at $+105^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 4. Convert to -40°C (5 minutes) 5. Total 100 continuous cycles	No apparent damage Fulfill the electrical spec. after test.
Humidity resistance	1. Humidity: 85% R.H. 2. Temperature: $85\pm 5^{\circ}\text{C}$ 3. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
High temperature resistance	1. Temperature: $150^{\circ}\text{C}\pm 5^{\circ}\text{C}$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Low temperature resistance	1. Temperature: $-40^{\circ}\text{C}\pm 5^{\circ}\text{C}$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Soldering heat resistance	1. Solder bath temperature : $260\pm 5^{\circ}\text{C}$ 2. Bathing time: 10 ± 1 seconds	No apparent damage
Solderability	The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of $245\pm 5^{\circ}\text{C}$ for 3 ± 1 seconds.	No apparent damage

8.2 Storage Condition

(1) At warehouse:

The temperature should be within $0 \sim 30^{\circ}\text{C}$ and humidity should be less than 60% RH.

The product should be used within 1 year from the time of delivery.

(2) On board:


The temperature should be within $-40\sim 85^{\circ}\text{C}$ and humidity should be less than 85%RH.

8.3 Operating Temperature Range

Operating temperature range : -40°C to $+105^{\circ}\text{C}$.

UNLESS OTHER SPECIFIED TOLERANCES ON: $0=\pm 10.0=\pm 0.500.00=\pm 0.20$ ANGLES = $\pm$ HOLE DIA = $\pm$		 Honmax Technology Limited	
SCALE: N/A	UNIT: mm	This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission	
DRAWN BY: SARA	CHECKED BY: XD		
DESIGNED BY: HEXIN	APPROVED BY: XD		
TITLE: SC2450M3216A1 Specification		DOCUMENT NO.	SC2450M3216A1 PAGE9 OF 10
			SPEC REV. A0

9. Recommended Reflow Soldering

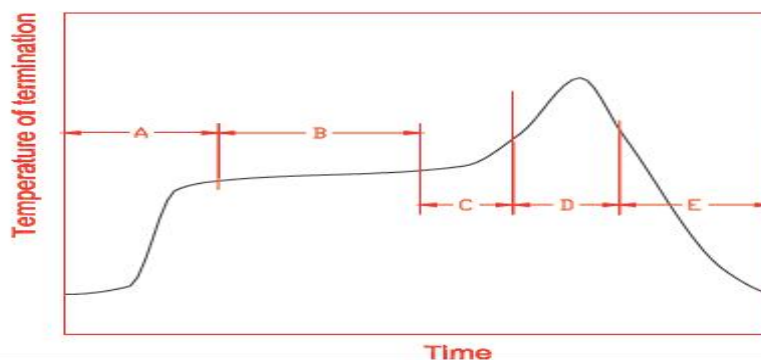

Time			
A	1 st rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 nd rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	if 220°C	50s~60s
		if 230°C	40s~50s
		if 240°C	30s~40s
		if 250°C	20s~40s
		if 260°C	20s~40s
E	Regular cooling	200°C to 100°C	1°C/s ~ 4°C/s

*reference: J-STD-020C

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all waves and re-flow soldering system. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

(1) Soldering Gun Procedure

Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350°C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.

(2) Soldering Volume

Note that excess of soldering volume will easily get crack the body of this product.

10. Taping Package and Label marking: (unit: mm)

(1) Quantity/Reel: 4000pcs/Reel

UNLESS OTHER SPECIFIED TOLERANCES ON: 0=±10.0=±0.500.00=±0.20 ANGLES = ± HOLE DIA = ±		 Honmax Technology Limited	
SCALE: N/A	UNIT: mm	This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission	
DRAWN BY: SARA	CHECKED BY: XD		
DESIGNED BY: HEXIN	APPROVED BY: XD		
TITLE: SC2450M3216A1 Specification		DOCUMENT NO.	SPEC REV.
		SC2450M3216A1	A0
		PAGE 10	OF 10