

TABLE OF CONTENTS

Conducted output power2

Frequency stability.....4

Peak-to-Average Ratio5

Occupied bandwidth12

Band edge.....19

Out-of-band emissions24

Conducted output power

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Power (dBm)</i>	<i>Gain (dBm)</i>	<i>Gain (dBd)</i>	<i>ERP (dBm)</i>	<i>ERP Limit (dBm)</i>	<i>Verdict</i>
EGPRS850 1 Slot	128	824.2	22.01	0.79	-1.36	20.65	38.45	PASS
EGPRS850 1 Slot	190	836.6	21.01	0.79	-1.36	19.65	38.45	PASS
EGPRS850 1 Slot	251	848.8	21.32	0.79	-1.36	19.96	38.45	PASS
EGPRS850 2 Slot	128	824.2	21.13	0.79	-1.36	19.77	38.45	PASS
EGPRS850 2 Slot	190	836.6	20.54	0.79	-1.36	19.18	38.45	PASS
EGPRS850 2 Slot	251	848.8	20.15	0.79	-1.36	18.79	38.45	PASS
EGPRS850 3 Slot	128	824.2	18.85	0.79	-1.36	17.49	38.45	PASS
EGPRS850 3 Slot	190	836.6	17.52	0.79	-1.36	16.16	38.45	PASS
EGPRS850 3 Slot	251	848.8	17.32	0.79	-1.36	15.96	38.45	PASS
EGPRS850 4 Slot	128	824.2	16.42	0.79	-1.36	15.06	38.45	PASS
EGPRS850 4 Slot	190	836.6	15.32	0.79	-1.36	13.96	38.45	PASS
EGPRS850 4 Slot	251	848.8	15.19	0.79	-1.36	13.83	38.45	PASS
GPRS850 1 Slot	128	824.2	28.37	0.79	-1.36	27.01	38.45	PASS
GPRS850 1 Slot	190	836.6	28.34	0.79	-1.36	26.98	38.45	PASS
GPRS850 1 Slot	251	848.8	28.75	0.79	-1.36	27.39	38.45	PASS
GPRS850 2 Slot	128	824.2	26.43	0.79	-1.36	25.07	38.45	PASS
GPRS850 2 Slot	190	836.6	26.28	0.79	-1.36	24.92	38.45	PASS
GPRS850 2 Slot	251	848.8	26.64	0.79	-1.36	25.28	38.45	PASS
GPRS850 3 Slot	128	824.2	24.58	0.79	-1.36	23.22	38.45	PASS
GPRS850 3 Slot	190	836.6	24.38	0.79	-1.36	23.02	38.45	PASS
GPRS850 3 Slot	251	848.8	24.73	0.79	-1.36	23.37	38.45	PASS
GPRS850 4 Slot	128	824.2	22.52	0.79	-1.36	21.16	38.45	PASS
GPRS850 4 Slot	190	836.6	22.32	0.79	-1.36	20.96	38.45	PASS
GPRS850 4 Slot	251	848.8	22.64	0.79	-1.36	21.28	38.45	PASS

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Power (dBm)</i>	<i>Gain (dBm)</i>	<i>EIRP (dBm)</i>	<i>EIRP Limit (dBm)</i>	<i>Verdict</i>
EGPRS1900 1 Slot	512	1850.2	24.41	2.28	26.69	33.01	PASS
EGPRS1900 1 Slot	661	1880	24.18	2.28	26.46	33.01	PASS
EGPRS1900 1 Slot	810	1909.8	22.68	2.28	24.96	33.01	PASS
EGPRS1900 2 Slot	512	1850.2	23.13	2.28	25.41	33.01	PASS
EGPRS1900 2 Slot	661	1880	23.13	2.28	25.41	33.01	PASS
EGPRS1900 2 Slot	810	1909.8	21.43	2.28	23.71	33.01	PASS
EGPRS1900 3 Slot	512	1850.2	21.58	2.28	23.86	33.01	PASS
EGPRS1900 3 Slot	661	1880	20.75	2.28	23.03	33.01	PASS
EGPRS1900 3 Slot	810	1909.8	19.85	2.28	22.13	33.01	PASS
EGPRS1900 4 Slot	512	1850.2	19.09	2.28	21.37	33.01	PASS
EGPRS1900 4 Slot	661	1880	19.05	2.28	21.33	33.01	PASS
EGPRS1900 4 Slot	810	1909.8	17.47	2.28	19.75	33.01	PASS
GPRS1900 1 Slot	512	1850.2	26.10	2.28	28.38	33.01	PASS
GPRS1900 1 Slot	661	1880	26.18	2.28	28.46	33.01	PASS
GPRS1900 1 Slot	810	1909.8	26.17	2.28	28.45	33.01	PASS
GPRS1900 2 Slot	512	1850.2	23.85	2.28	26.13	33.01	PASS
GPRS1900 2 Slot	661	1880	24.01	2.28	26.29	33.01	PASS
GPRS1900 2 Slot	810	1909.8	23.96	2.28	26.24	33.01	PASS
GPRS1900 3 Slot	512	1850.2	22.37	2.28	24.65	33.01	PASS
GPRS1900 3 Slot	661	1880	22.47	2.28	24.75	33.01	PASS
GPRS1900 3 Slot	810	1909.8	22.39	2.28	24.67	33.01	PASS
GPRS1900 4 Slot	512	1850.2	20.33	2.28	22.61	33.01	PASS
GPRS1900 4 Slot	661	1880	20.38	2.28	22.66	33.01	PASS
GPRS1900 4 Slot	810	1909.8	20.29	2.28	22.57	33.01	PASS


Frequency stability

Band	Channel	Frequency (MHz)	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
EGPRS850	128	824.2	3.777444	0.00	-2.500	2.5	PASS
EGPRS850	190	836.6	6.102026	0.01	-2.500	2.5	PASS
EGPRS850	251	848.8	5.972882	0.01	-2.500	2.5	PASS
GPRS850	128	824.2	-12.88205	-0.02	-2.500	2.5	PASS
GPRS850	190	836.6	15.14206	0.02	-2.500	2.5	PASS
GPRS850	251	848.8	8.16832	0.01	-2.500	2.5	PASS
EGPRS1900	512	1850.2	-12.49462	-0.01	-2.500	2.5	PASS
EGPRS1900	661	1880	1.969437	0.00	-2.500	2.5	PASS
EGPRS1900	810	1909.8	12.5592	0.01	-2.500	2.5	PASS
GPRS1900	512	1850.2	1.808008	0.00	-2.500	2.5	PASS
GPRS1900	661	1880	15.88464	0.01	-2.500	2.5	PASS
GPRS1900	810	1909.8	19.53294	0.01	-2.500	2.5	PASS


Note: (Voltage: 3.7V, Temperature: 25°C) only reflect the worst mode.

Peak-to-Average Ratio


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
EGPRS850	128	824.2	8.938006073	13.00	PASS
EGPRS850	190	836.6	9.527761771	13.00	PASS
EGPRS850	251	848.8	10.14422997	13.00	PASS
GPRS850	128	824.2	2.59887412	13.00	PASS
GPRS850	190	836.6	2.599679621	13.00	PASS
GPRS850	251	848.8	2.608403892	13.00	PASS
EGPRS1900	512	1850.2	5.463797101	13.00	PASS
EGPRS1900	661	1880	5.513815385	13.00	PASS
EGPRS1900	810	1909.8	5.923695364	13.00	PASS
GPRS1900	512	1850.2	2.656801834	13.00	PASS
GPRS1900	661	1880	2.649119401	13.00	PASS
GPRS1900	810	1909.8	2.659991382	13.00	PASS

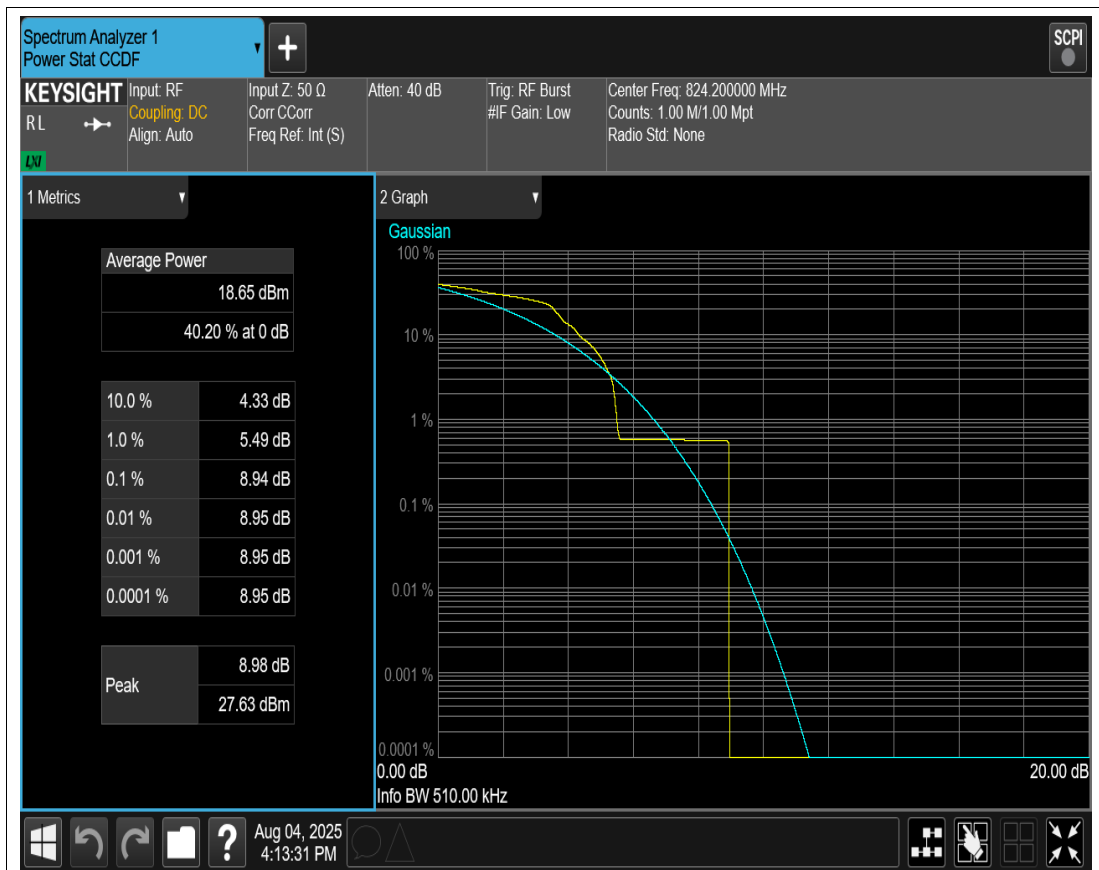


EGPRS850 Channel=128

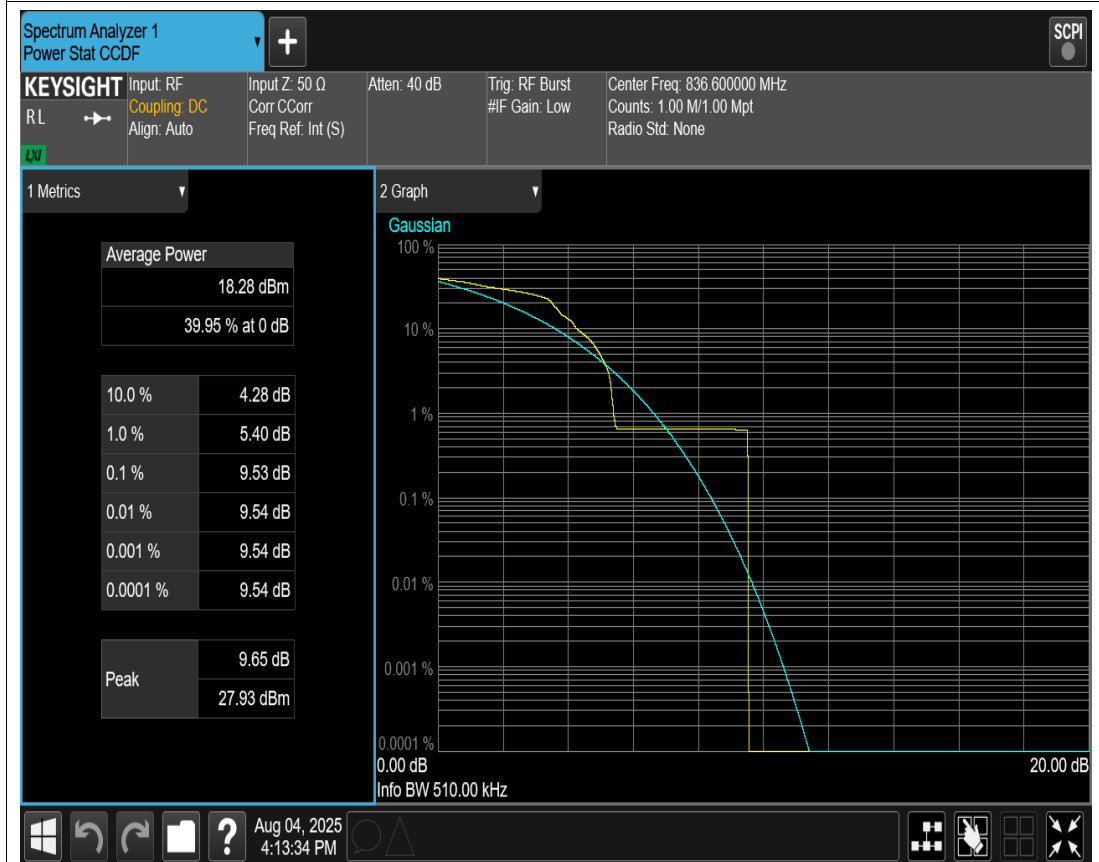


EGPRS850 Channel=190

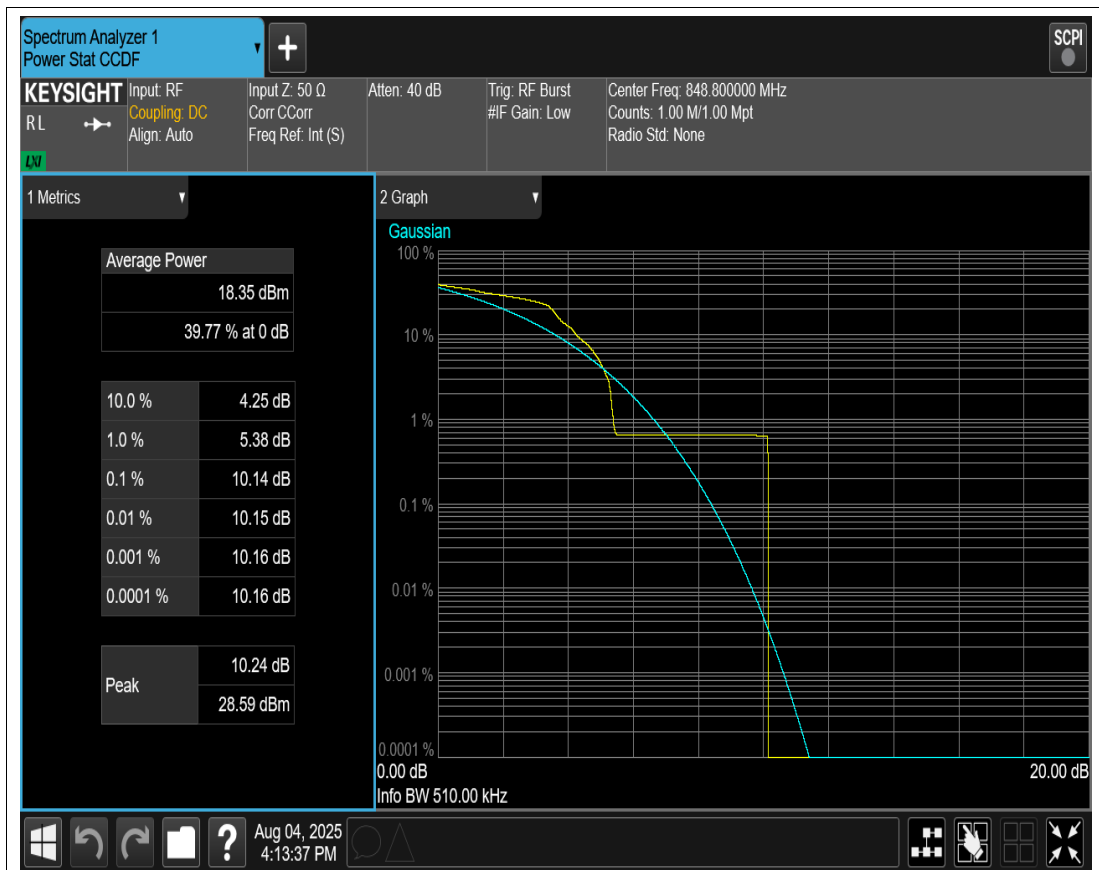


EGPRS850 Channel=251

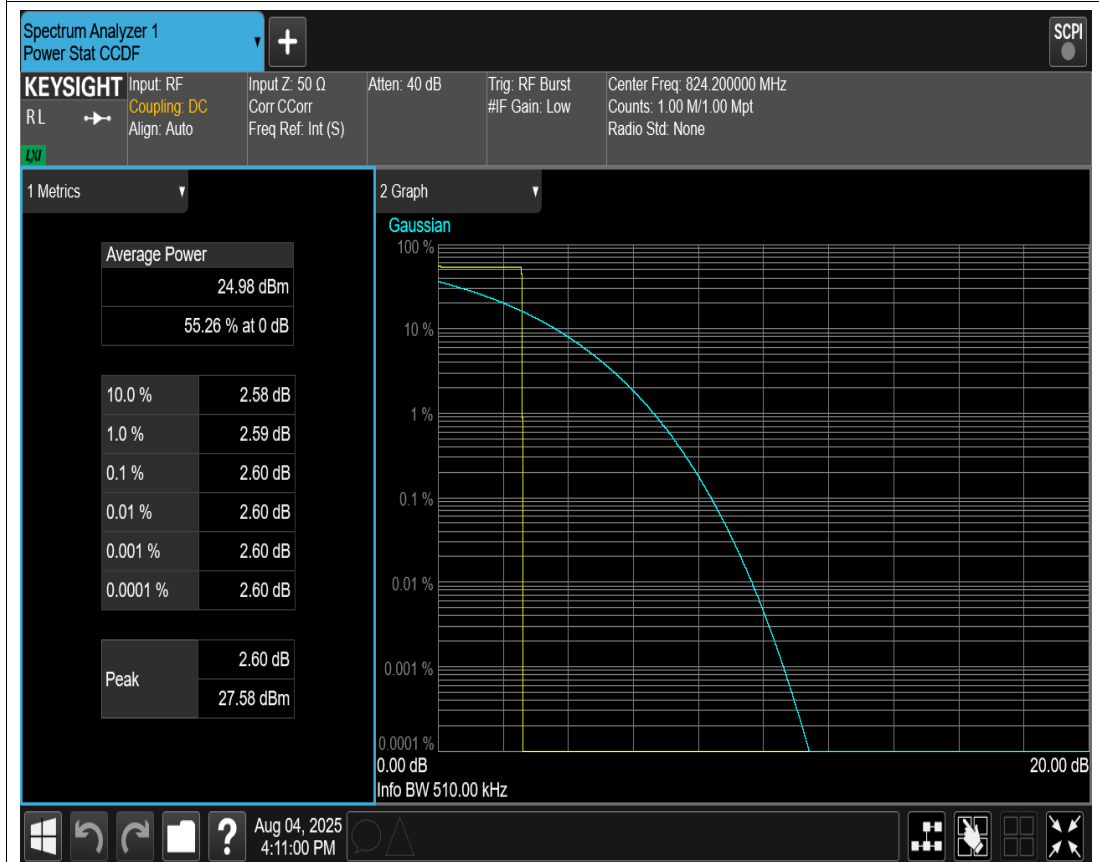


GPRS850 Channel=128

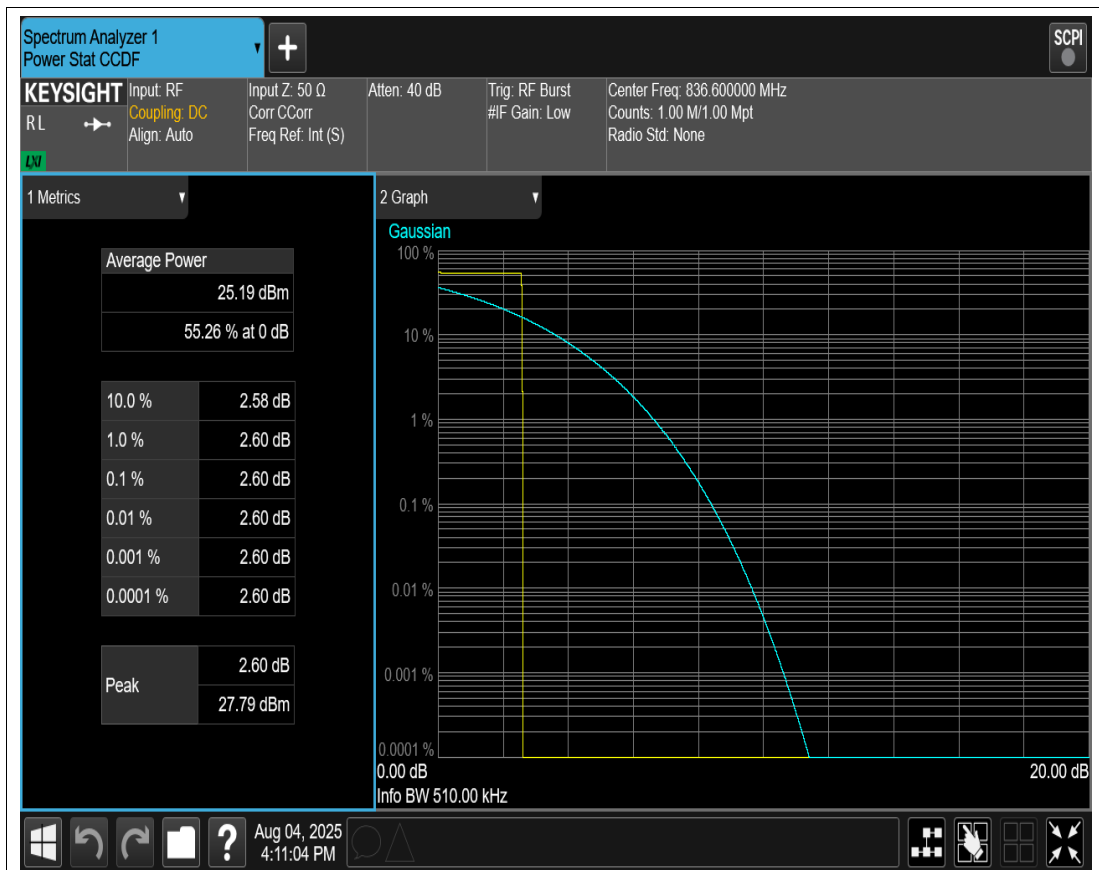


GPRS850 Channel=190

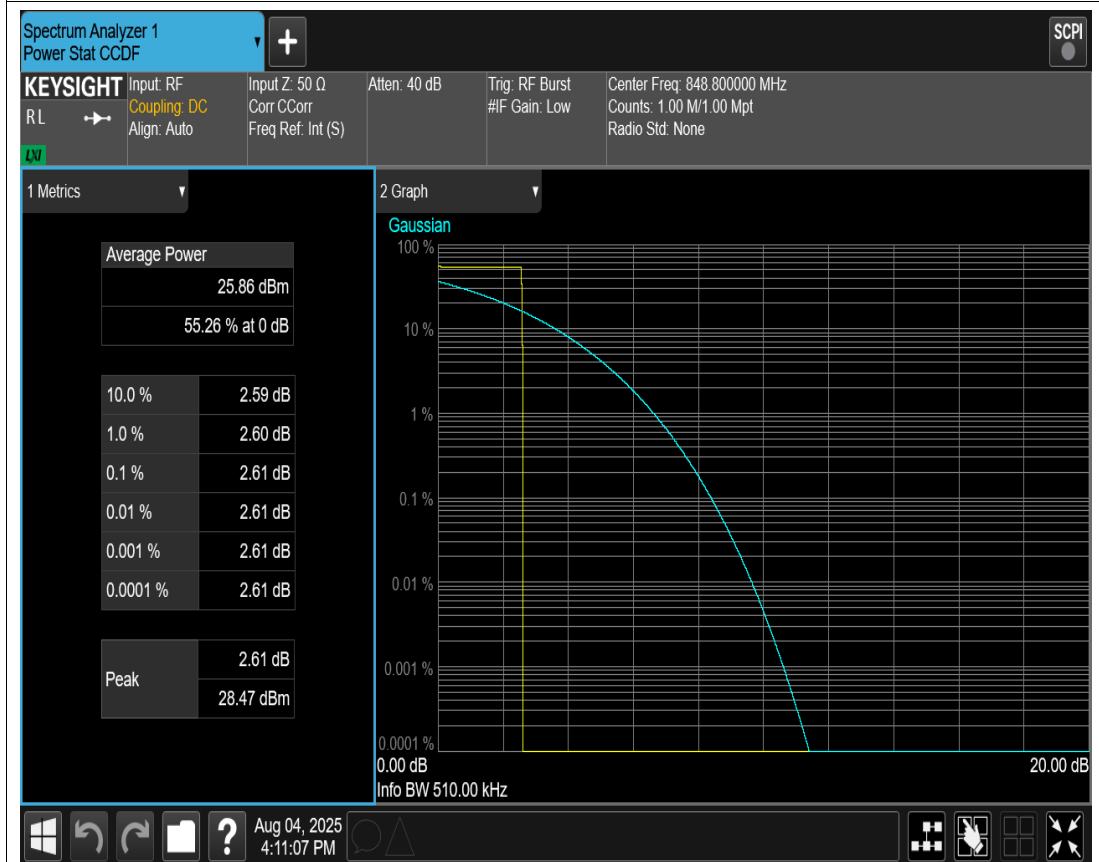


GPRS850 Channel=251

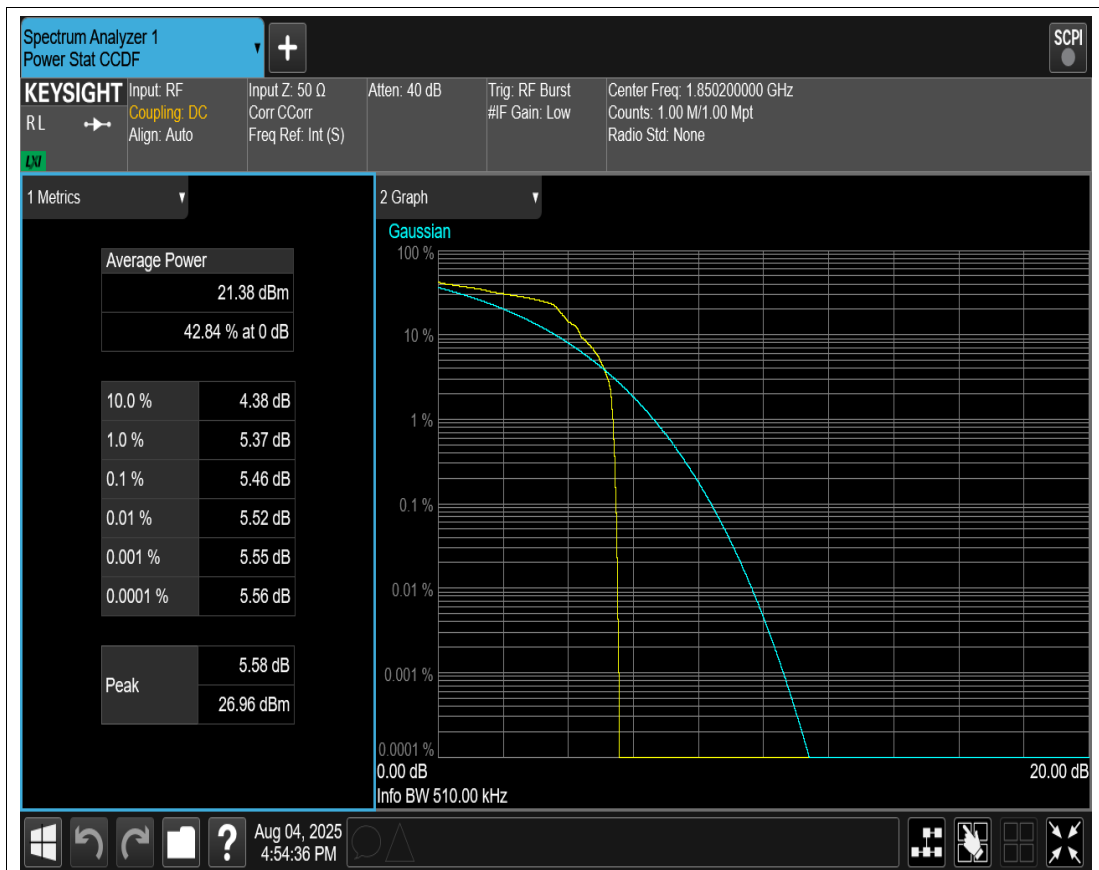


EGPRS1900 Channel=512

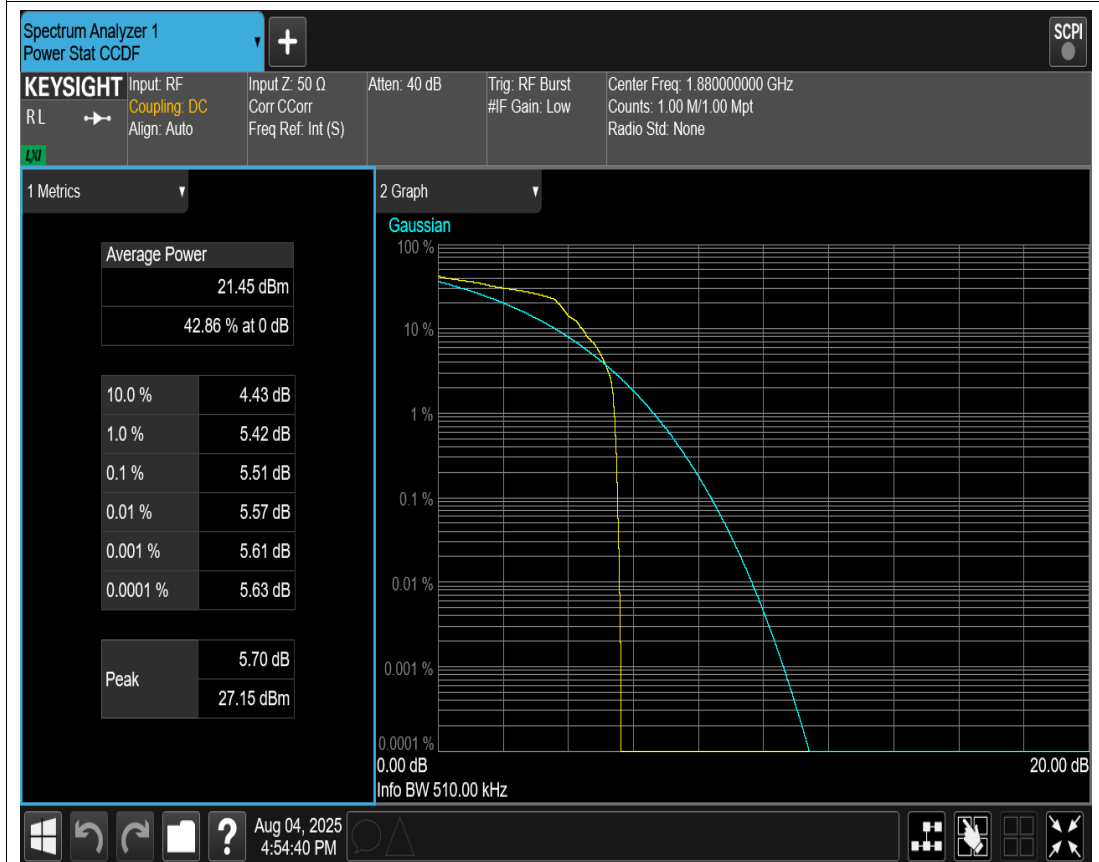


EGPRS1900 Channel=661

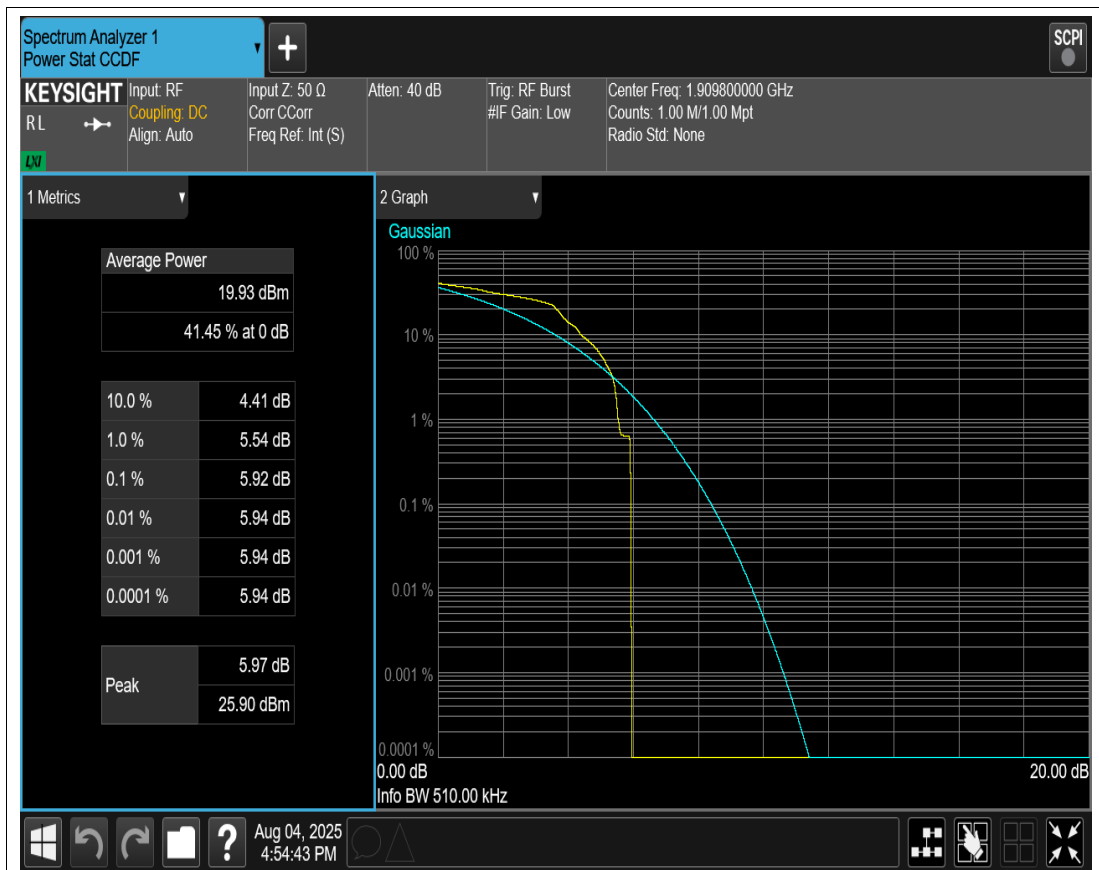


EGPRS1900 Channel=810

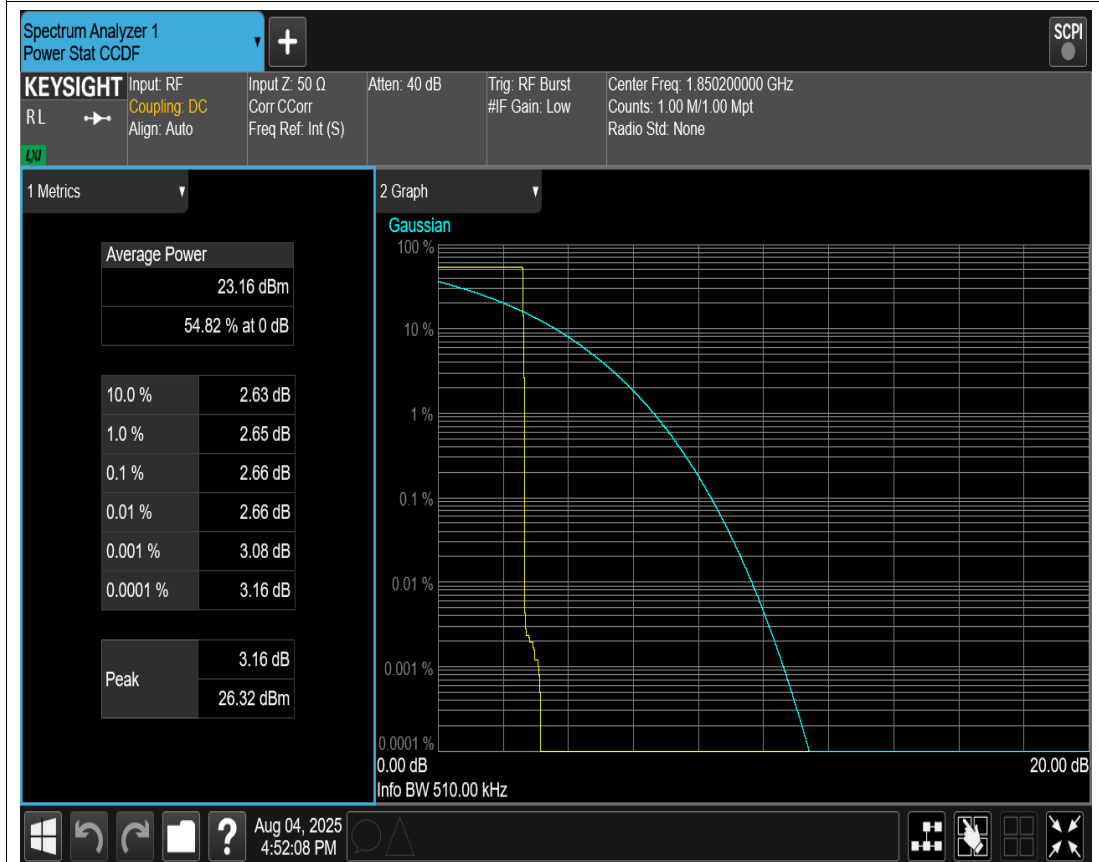

GPRS1900 Channel=512

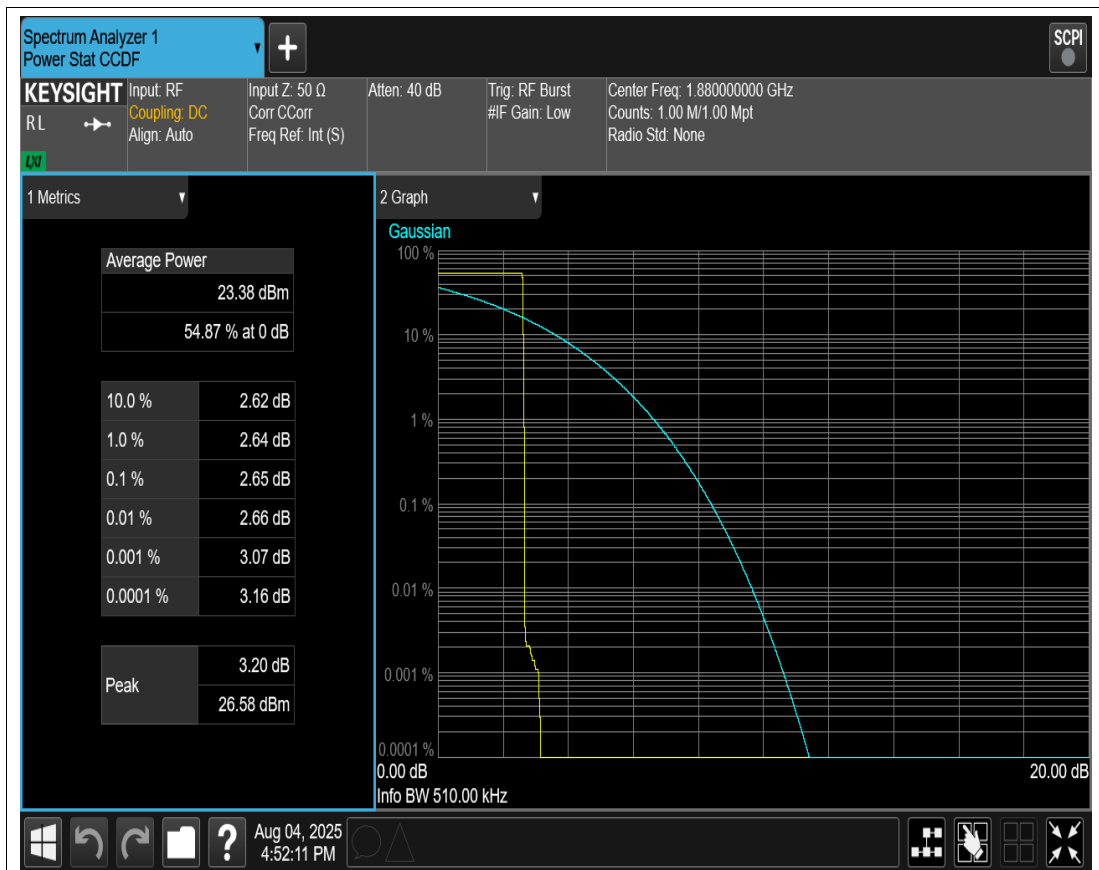


GPRS1900 Channel=661

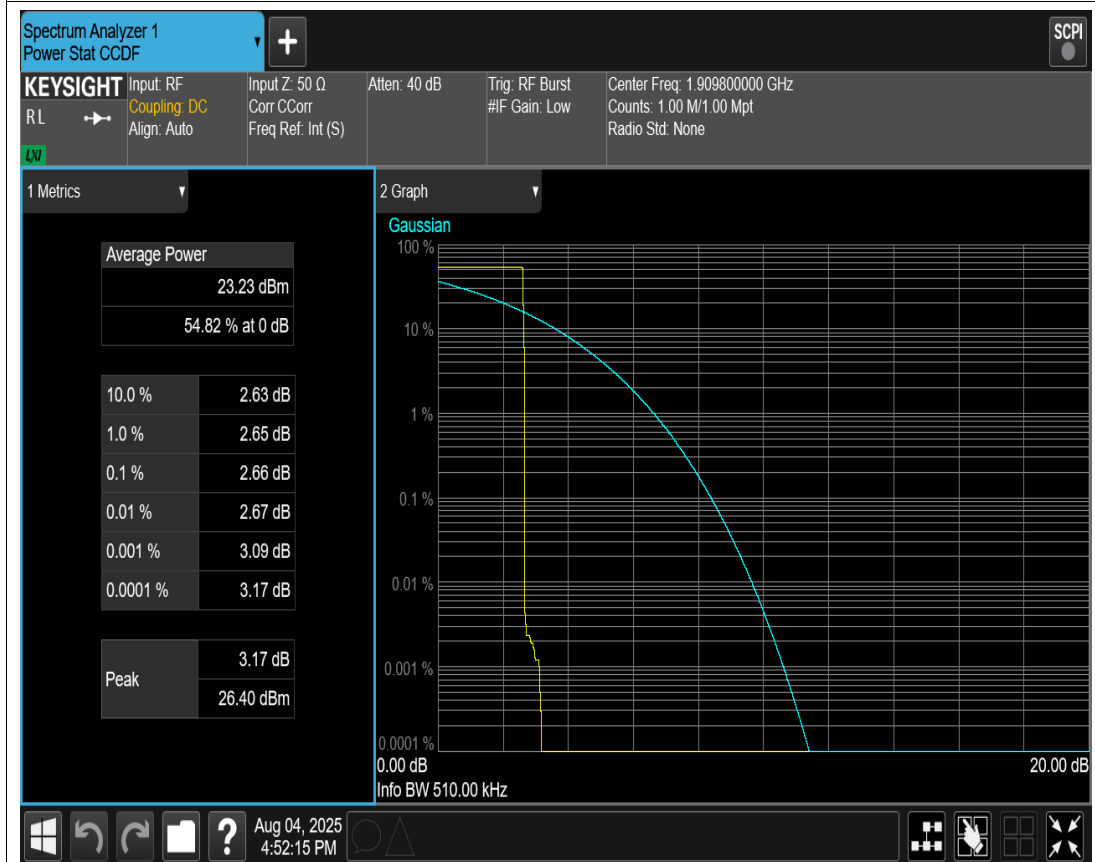


GPRS1900 Channel=810

Occupied bandwidth

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>99% OBW (kHz)</i>	<i>-26dB EBW (kHz)</i>	<i>Verdict</i>
EGPRS850	128	824.2	237.101	288.315	PASS
EGPRS850	190	836.6	249.941	282.534	PASS
EGPRS850	251	848.8	237.687	295.465	PASS
GPRS850	128	824.2	249.745	310.283	PASS
GPRS850	190	836.6	243.355	313.992	PASS
GPRS850	251	848.8	240.175	311.600	PASS
EGPRS1900	512	1850.2	243.258	300.379	PASS
EGPRS1900	661	1880	243.134	304.996	PASS
EGPRS1900	810	1909.8	246.894	307.720	PASS
GPRS1900	512	1850.2	247.993	320.050	PASS
GPRS1900	661	1880	245.572	310.643	PASS
GPRS1900	810	1909.8	239.846	310.358	PASS

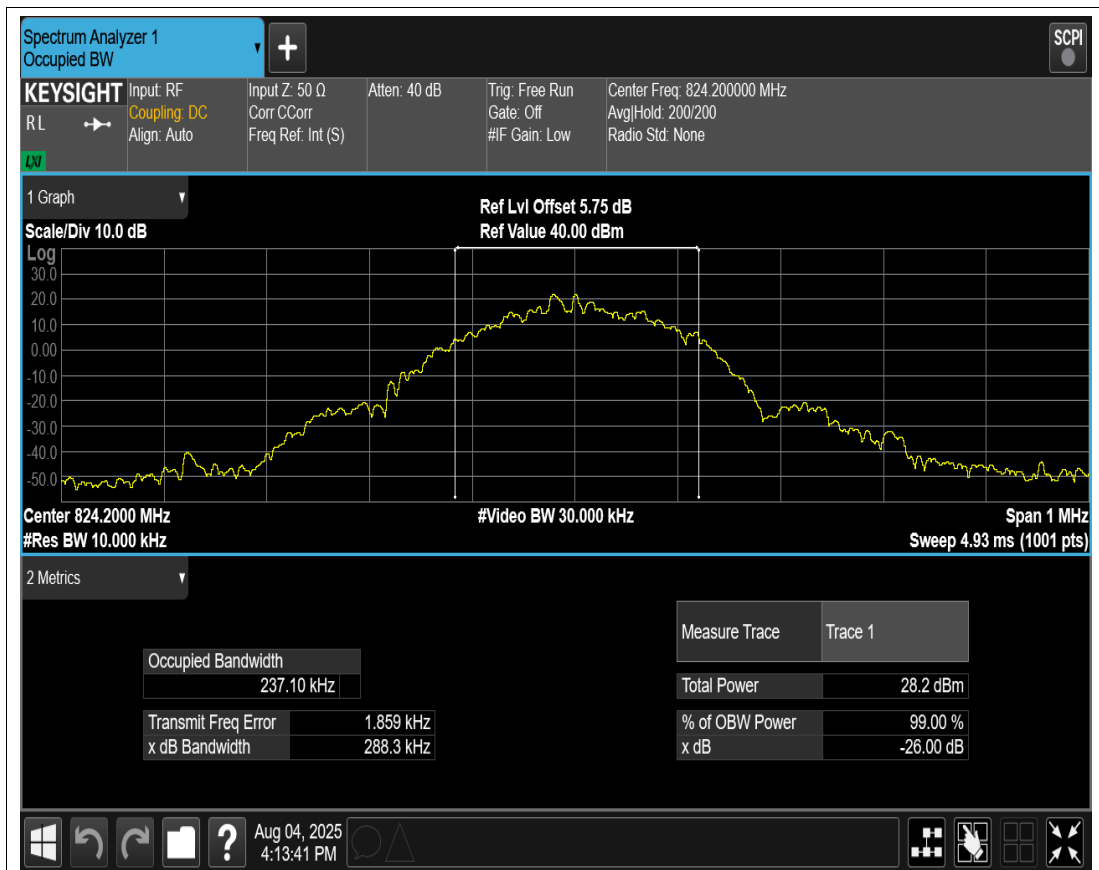


EGPRS850 Channel=128

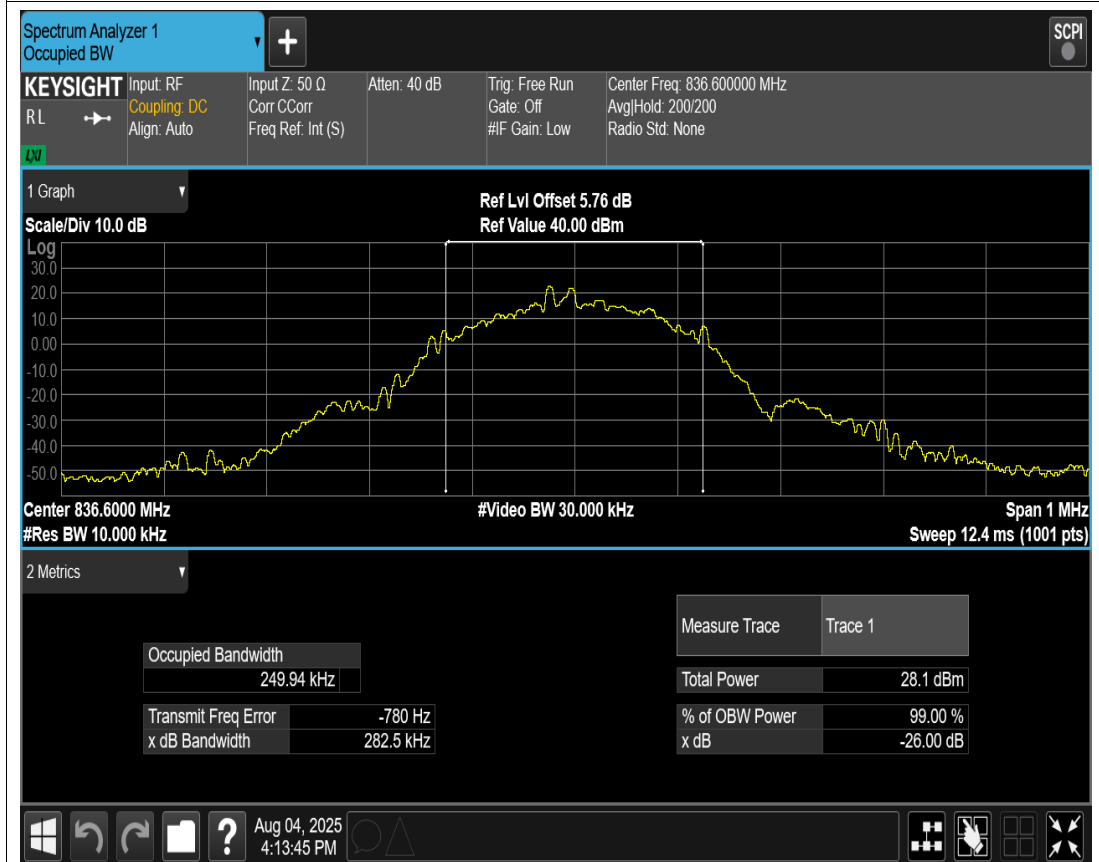


EGPRS850 Channel=190




EGPRS850 Channel=251

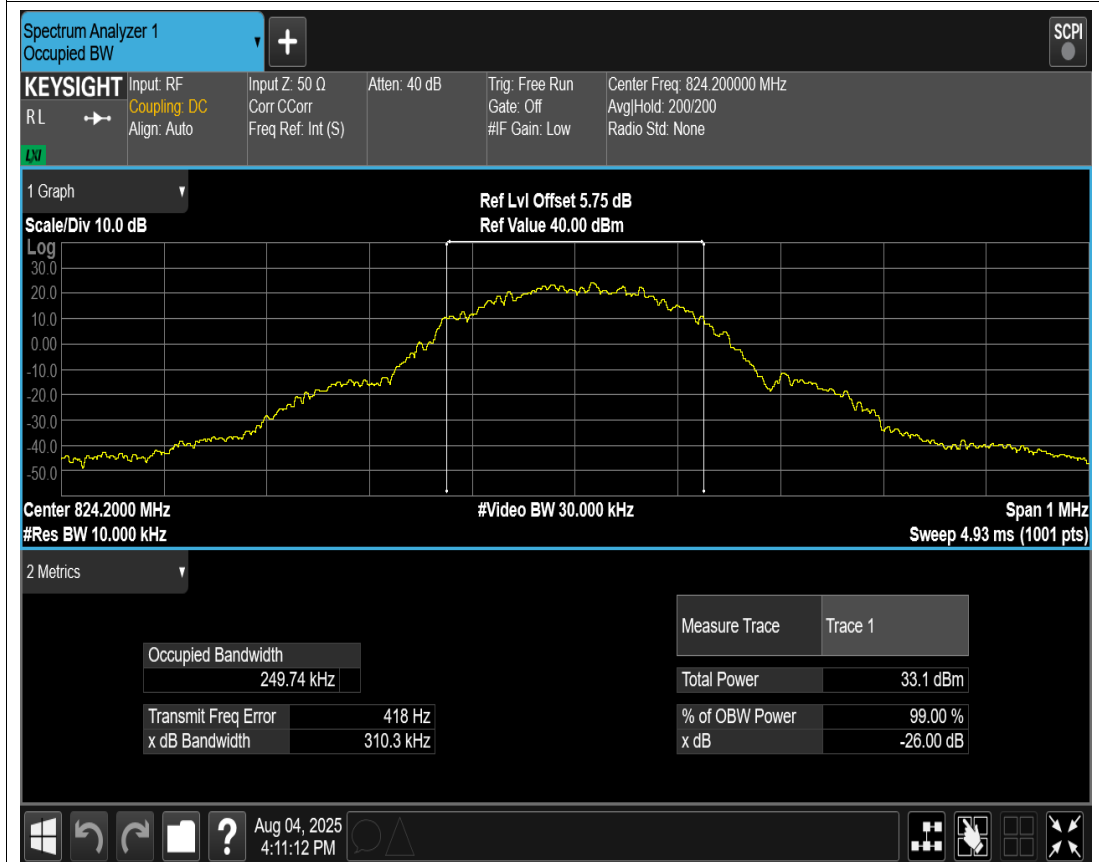


GPRS850 Channel=128

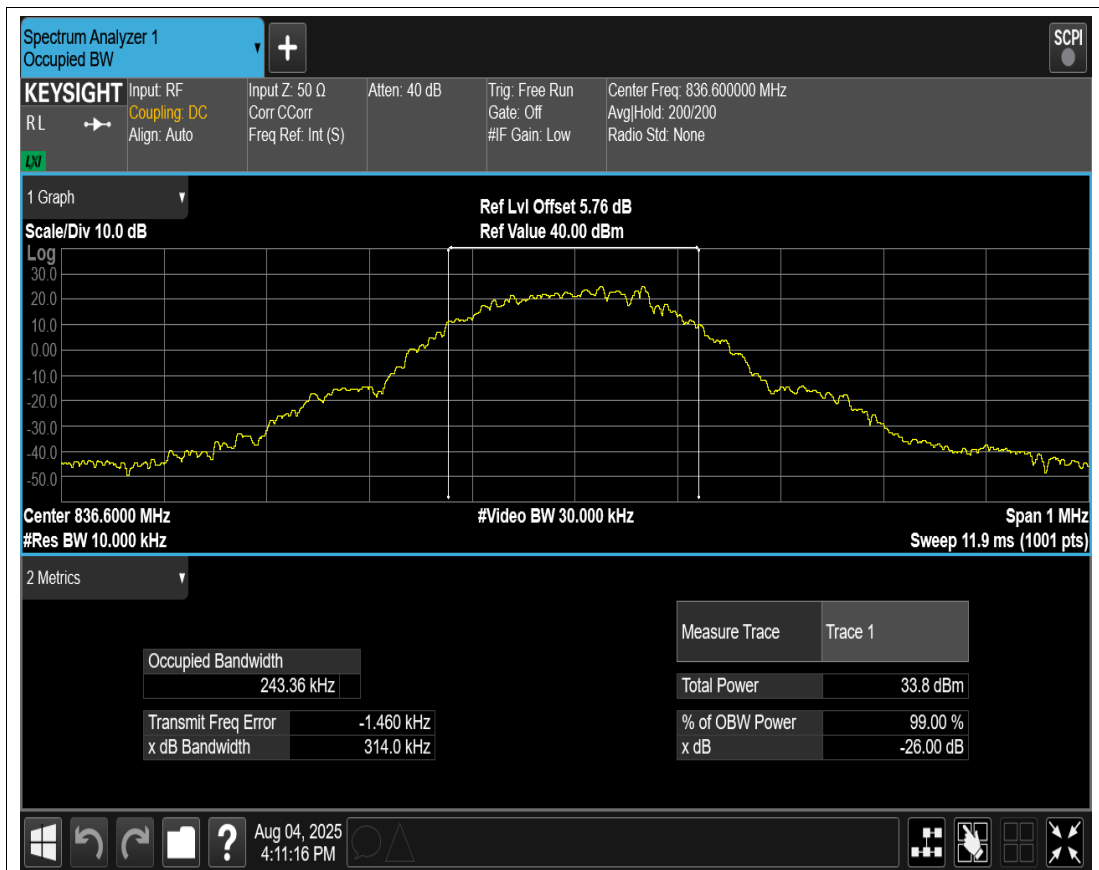


GPRS850 Channel=190

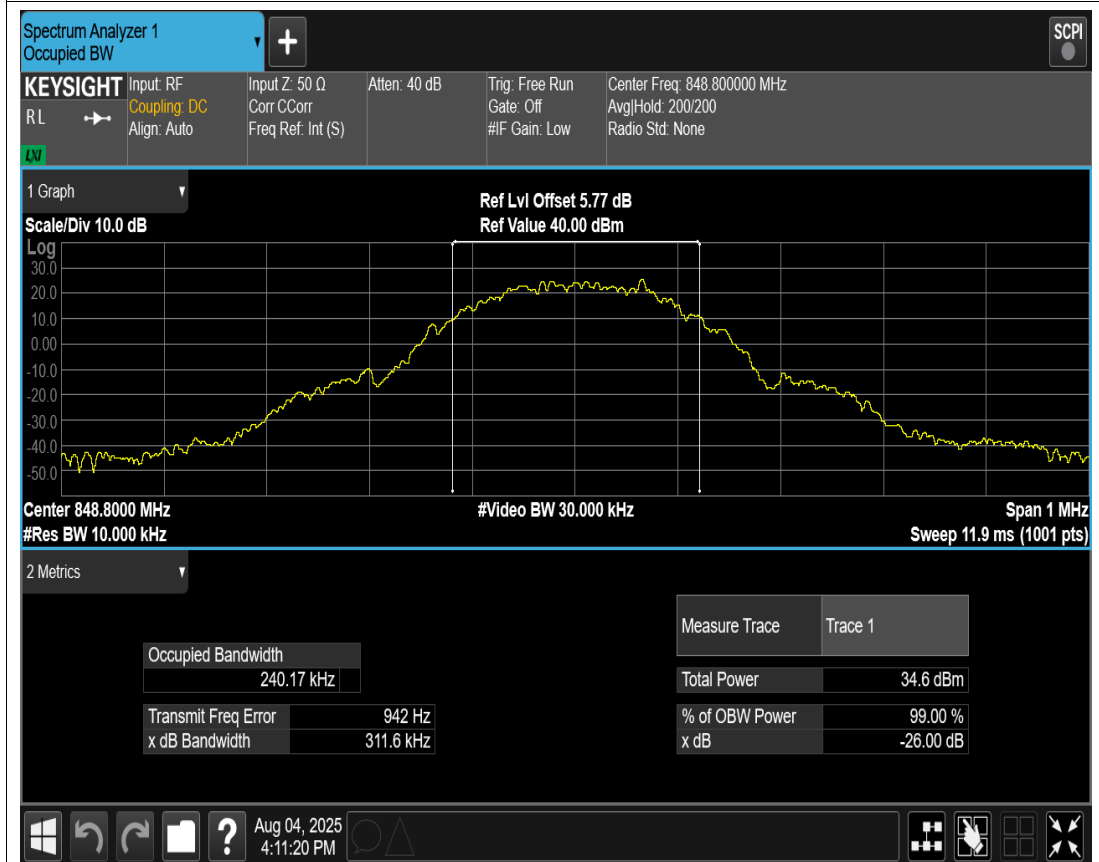


GPRS850 Channel=251

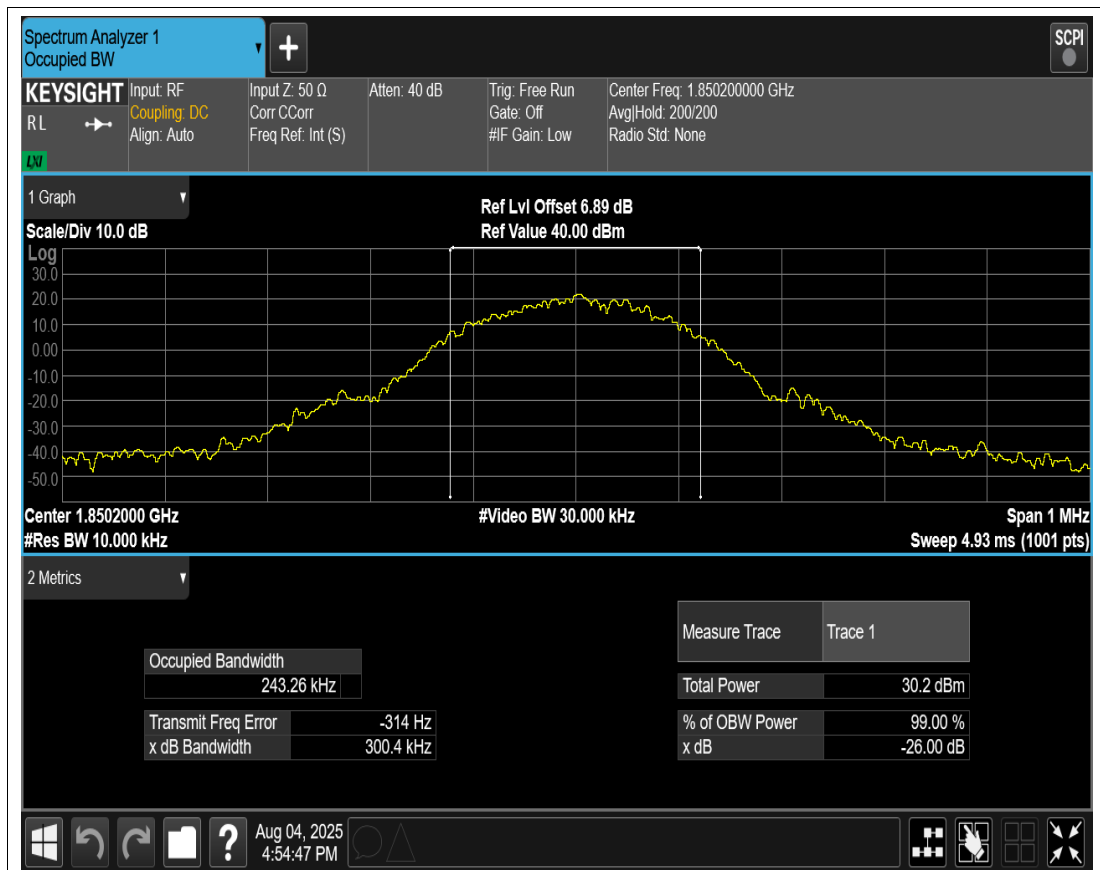


EGPRS1900 Channel=512

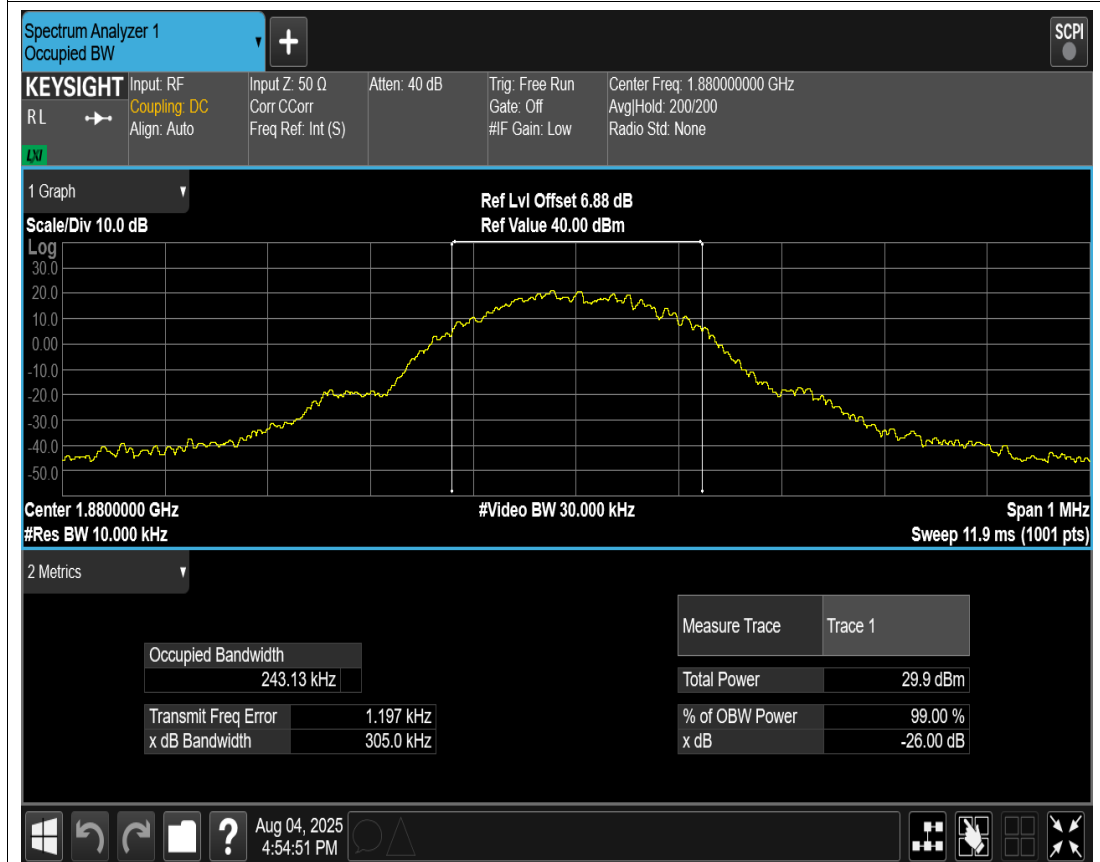

EGPRS1900 Channel=661

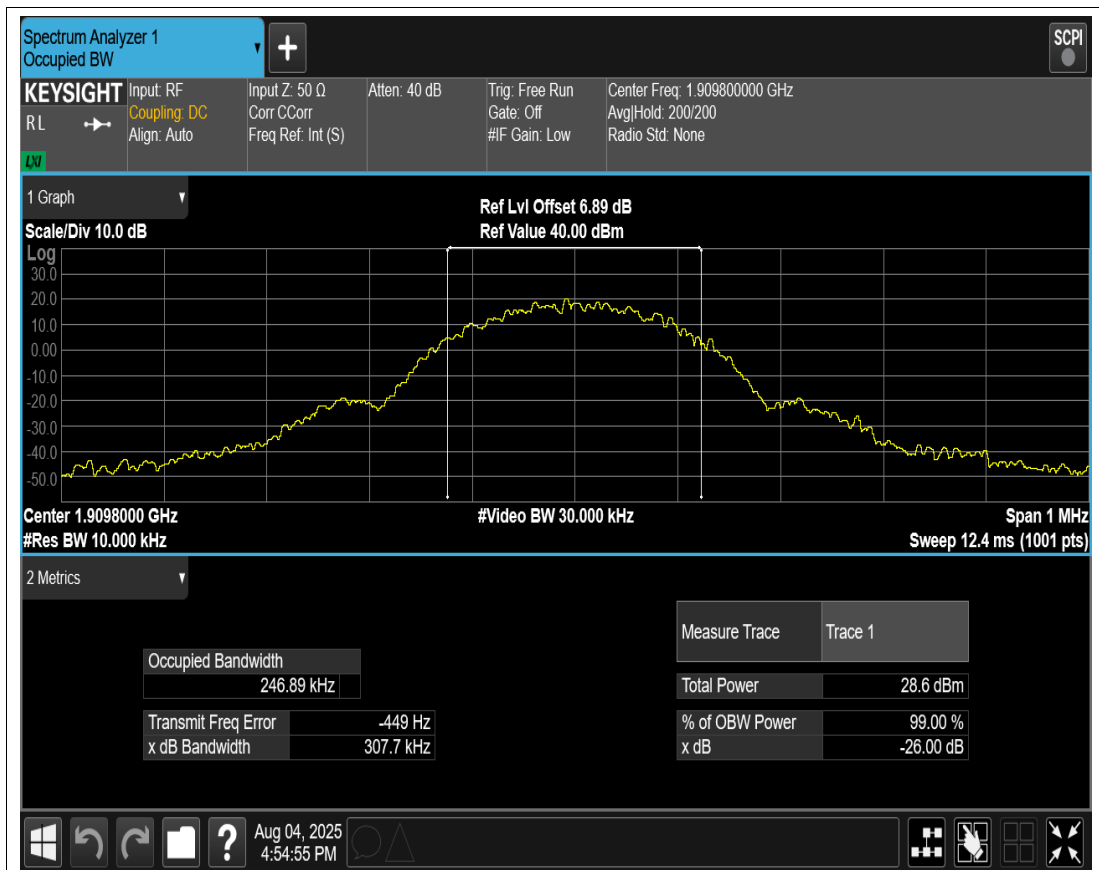

EGPRS1900 Channel=810

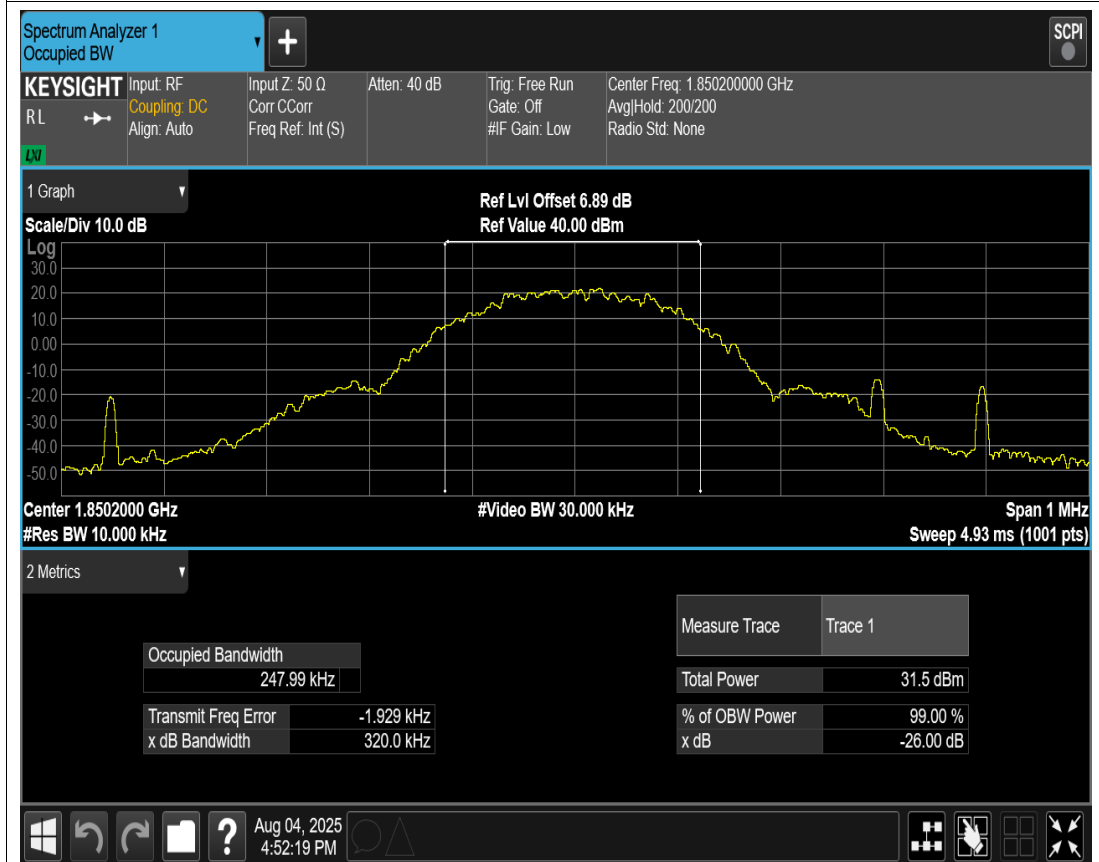

GPRS1900 Channel=512




GPRS1900 Channel=661




GPRS1900 Channel=810

Band edge


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	823.97	-40.67	-13	PASS
EGPRS850	251	848.8	849.02	-40.18	-13	PASS
GPRS850	128	824.2	823.99	-31.24	-13	PASS
GPRS850	251	848.8	849.02	-32.67	-13	PASS
EGPRS1900	512	1850.2	1849.99	-37.70	-13	PASS
EGPRS1900	810	1909.8	1910.01	-40.28	-13	PASS
GPRS1900	512	1850.2	1849.98	-34.53	-13	PASS
GPRS1900	810	1909.8	1910.02	-35.22	-13	PASS

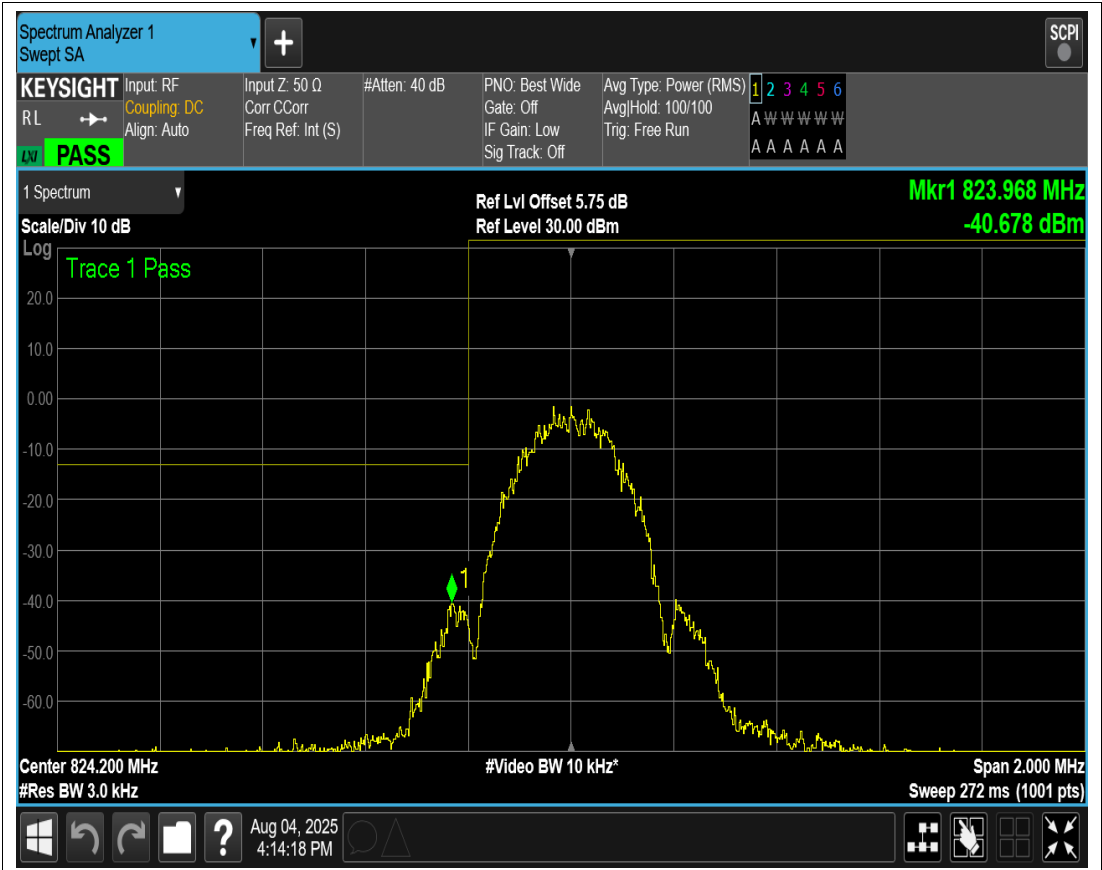


EGPRS850 Channel=128

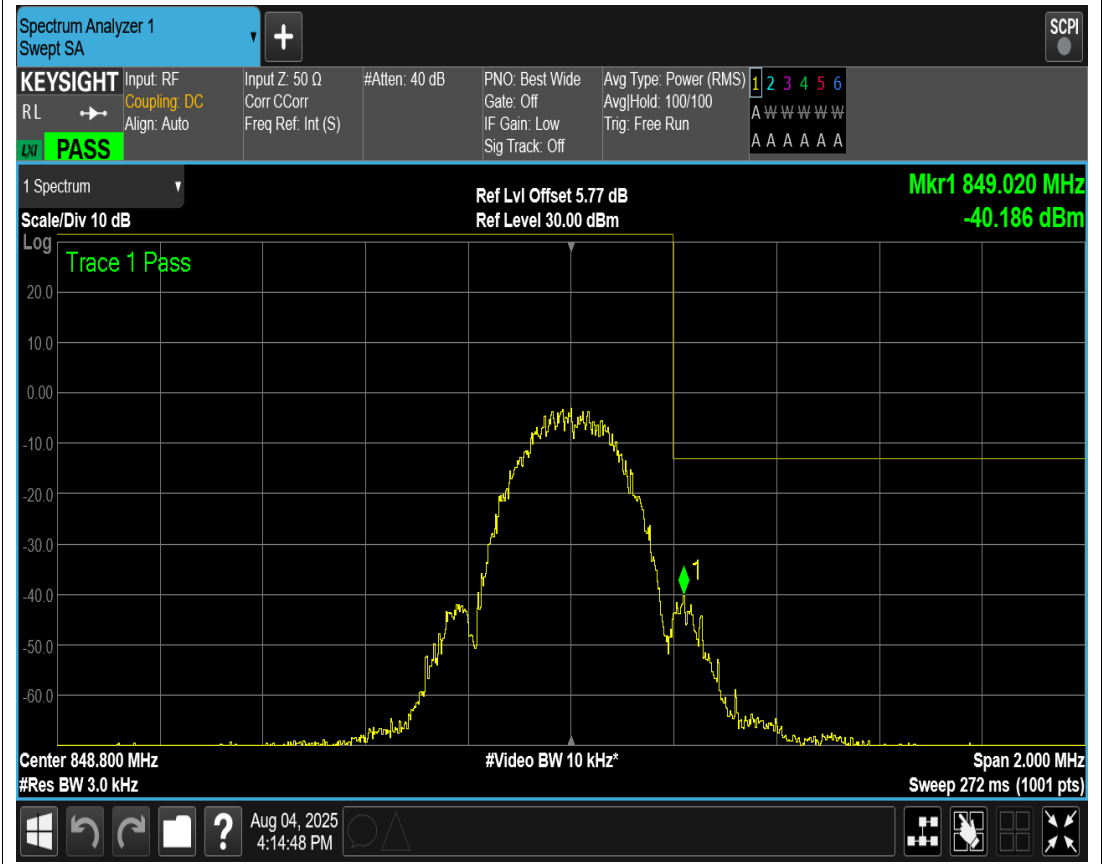


EGPRS850 Channel=251

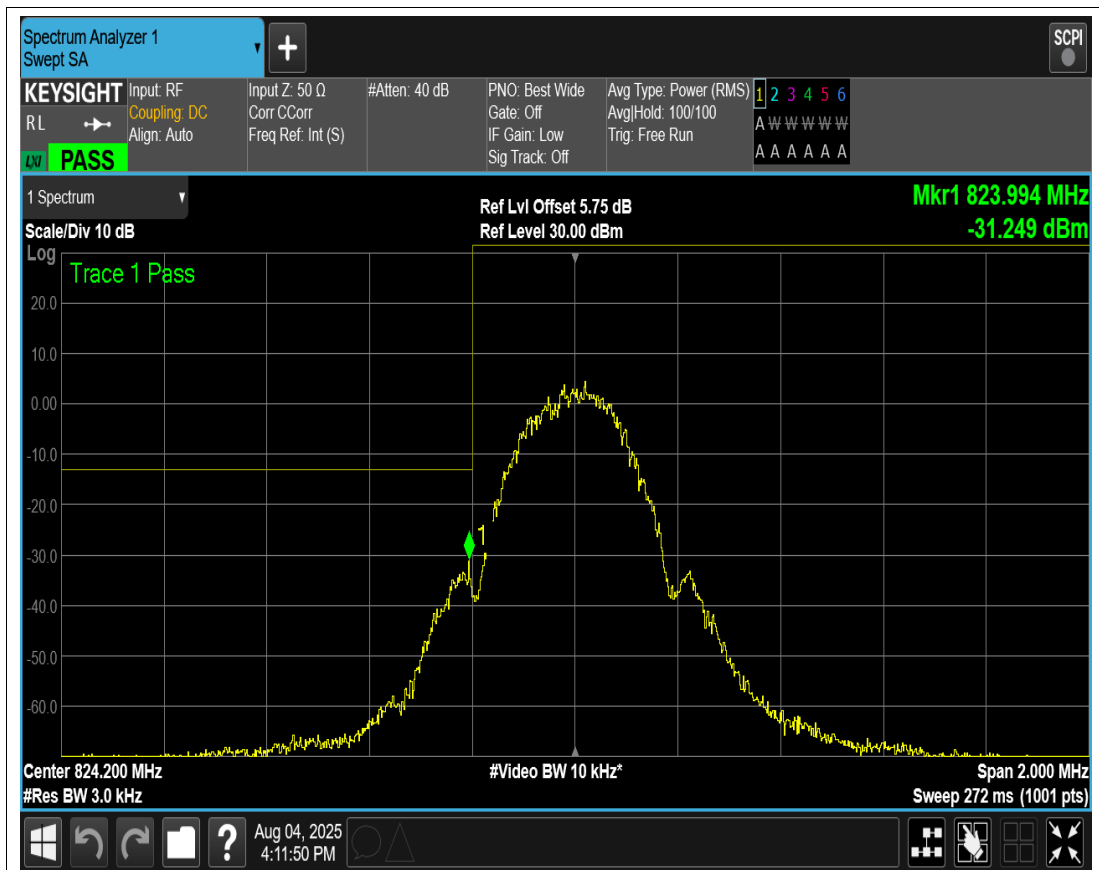


GPRS850 Channel=128

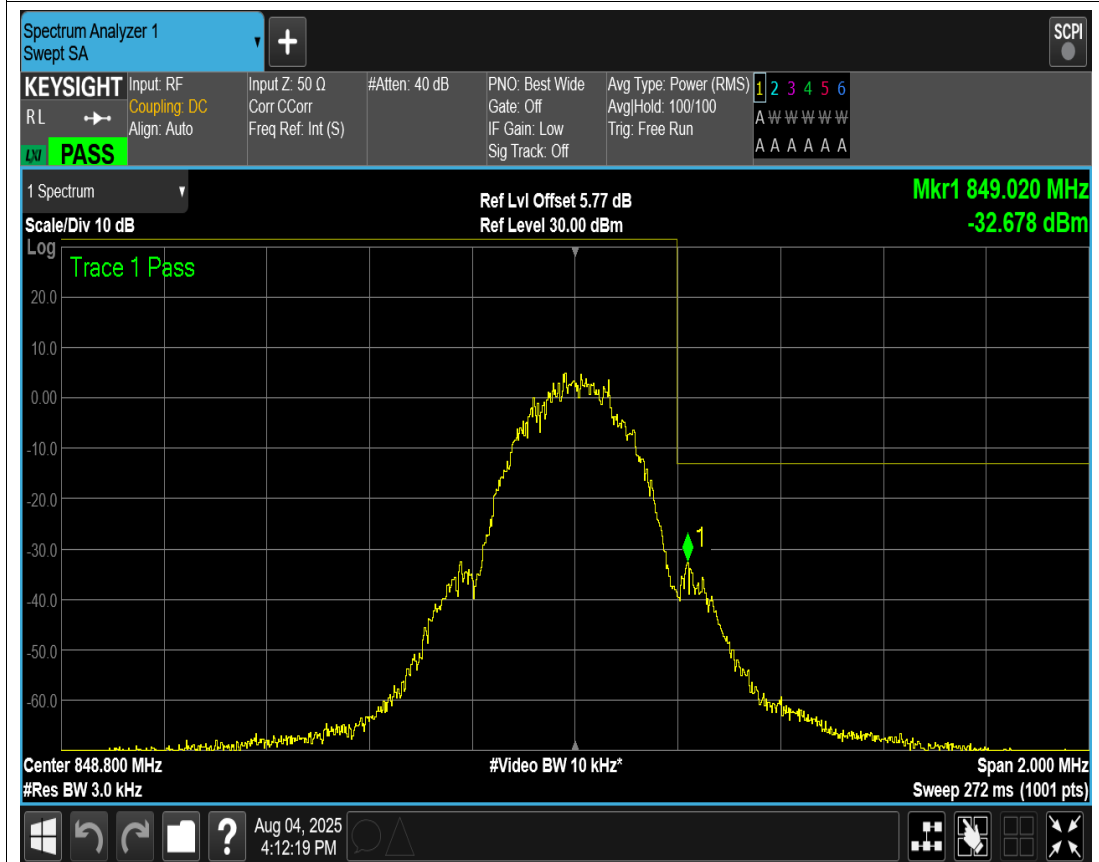


GPRS850 Channel=251

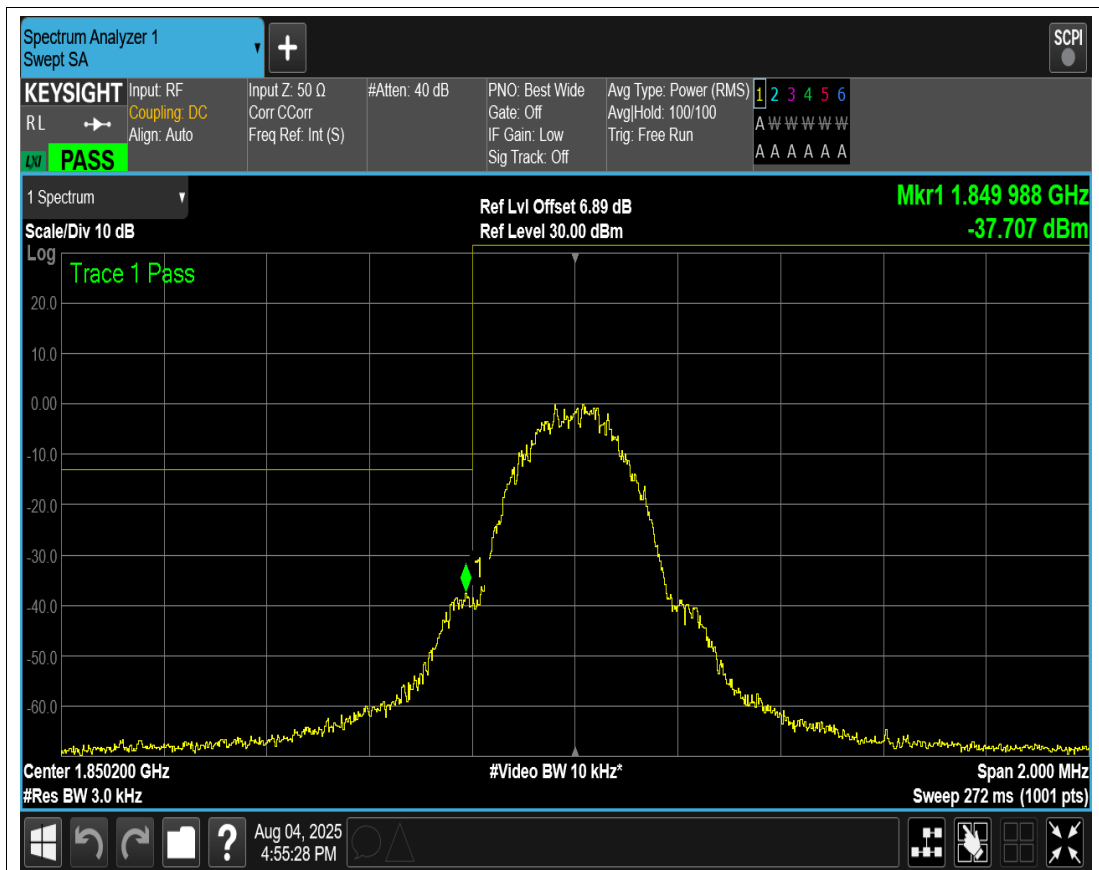


EGPRS1900 Channel=512

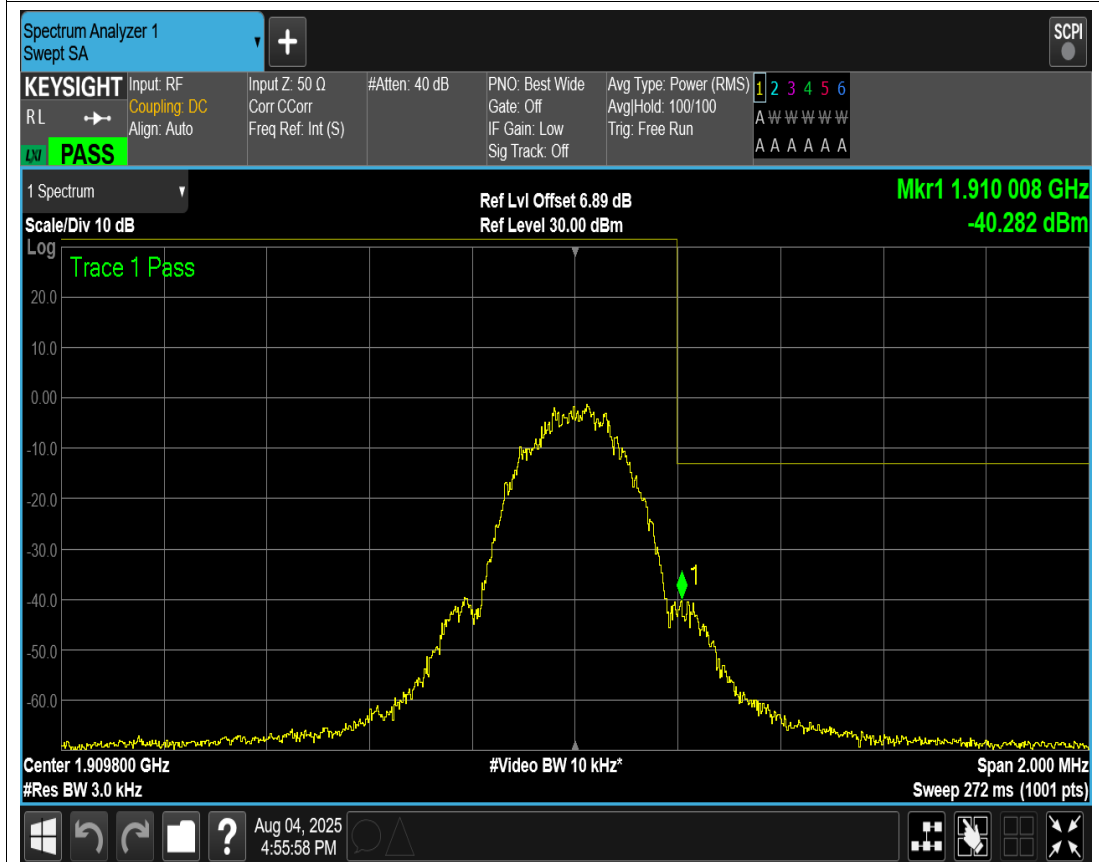

EGPRS1900 Channel=810

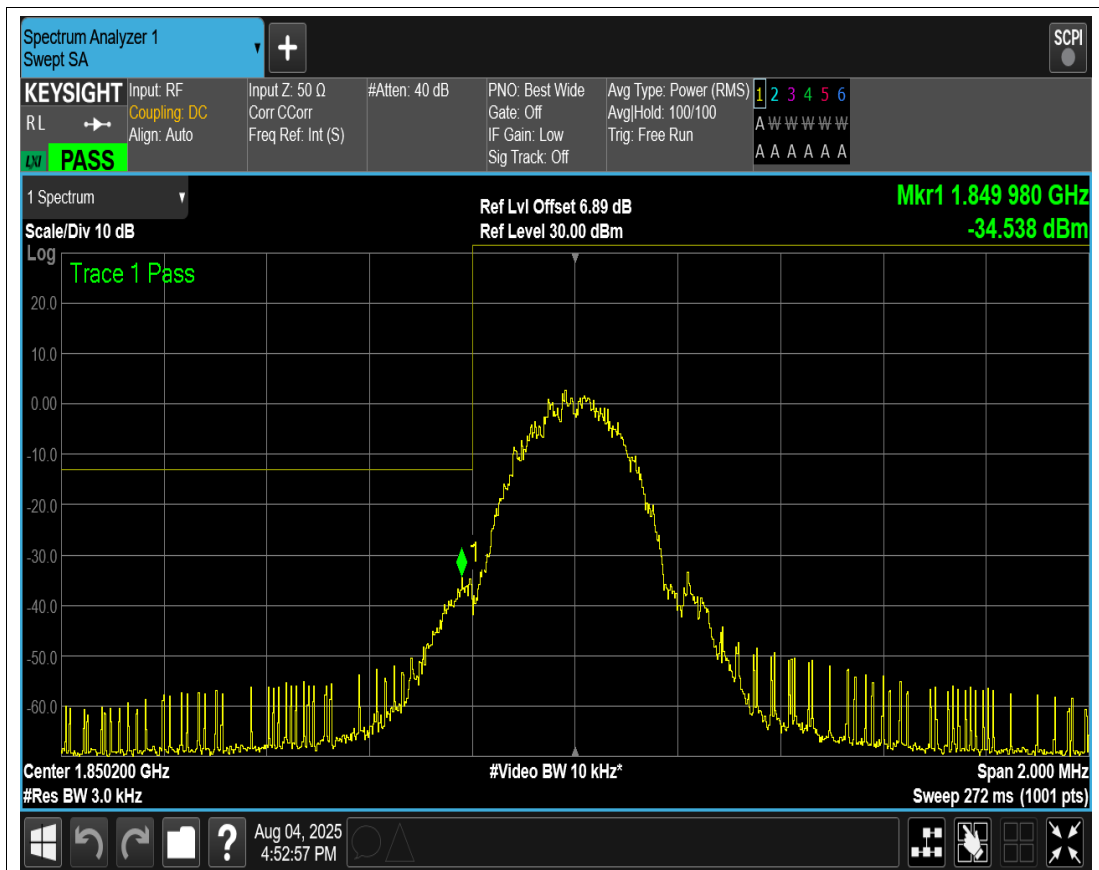


GPRS1900 Channel=512

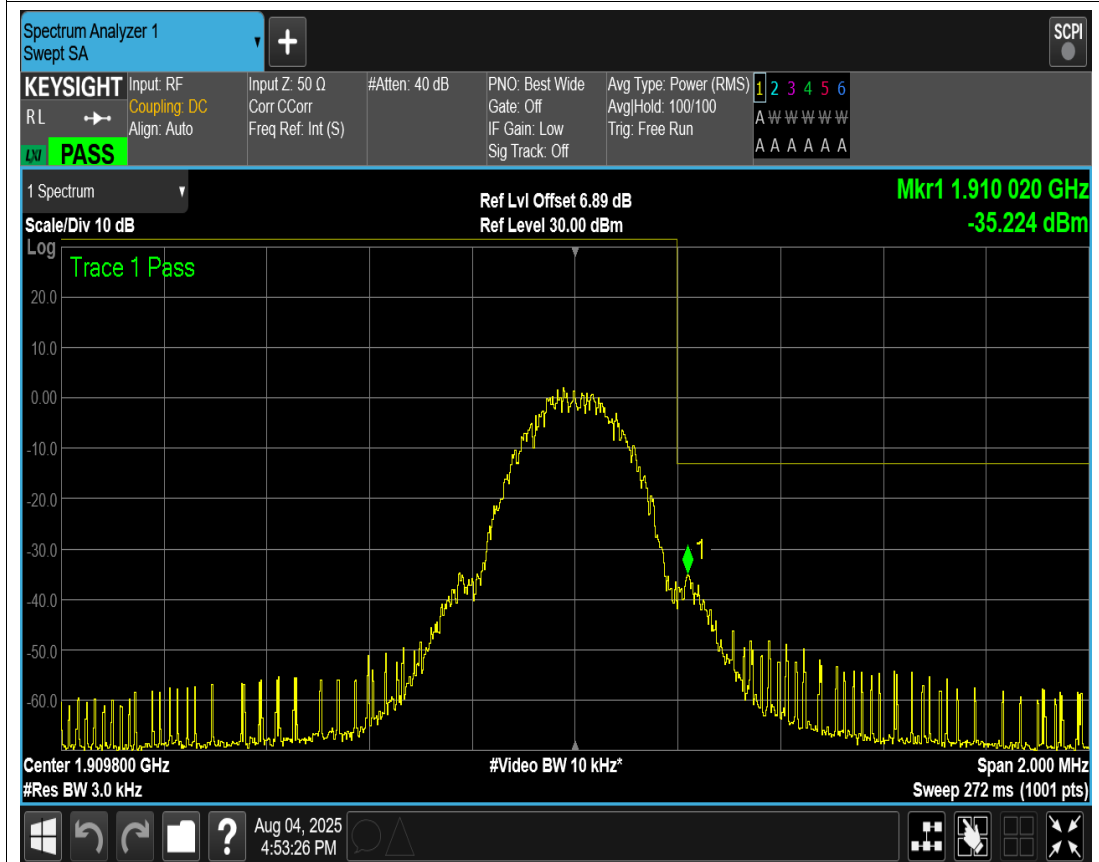


GPRS1900 Channel=810

Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	3840.78	-28.95	-13	PASS
EGPRS850	190	836.6	3406.59	-24.99	-13	PASS
EGPRS850	251	848.8	3402.10	-27.17	-13	PASS
GPRS850	128	824.2	3690.98	-29.85	-13	PASS
GPRS850	190	836.6	3846.02	-29.66	-13	PASS
GPRS850	251	848.8	3796.42	-29.90	-13	PASS
EGPRS1900	512	1850.2	3842.27	-26.57	-13	PASS
EGPRS1900	661	1880	18689.47	-27.86	-13	PASS
EGPRS1900	810	1909.8	3690.50	-28.16	-13	PASS
GPRS1900	512	1850.2	19237.65	-28.28	-13	PASS
GPRS1900	661	1880	3884.71	-27.51	-13	PASS
GPRS1900	810	1909.8	3408.92	-25.56	-13	PASS

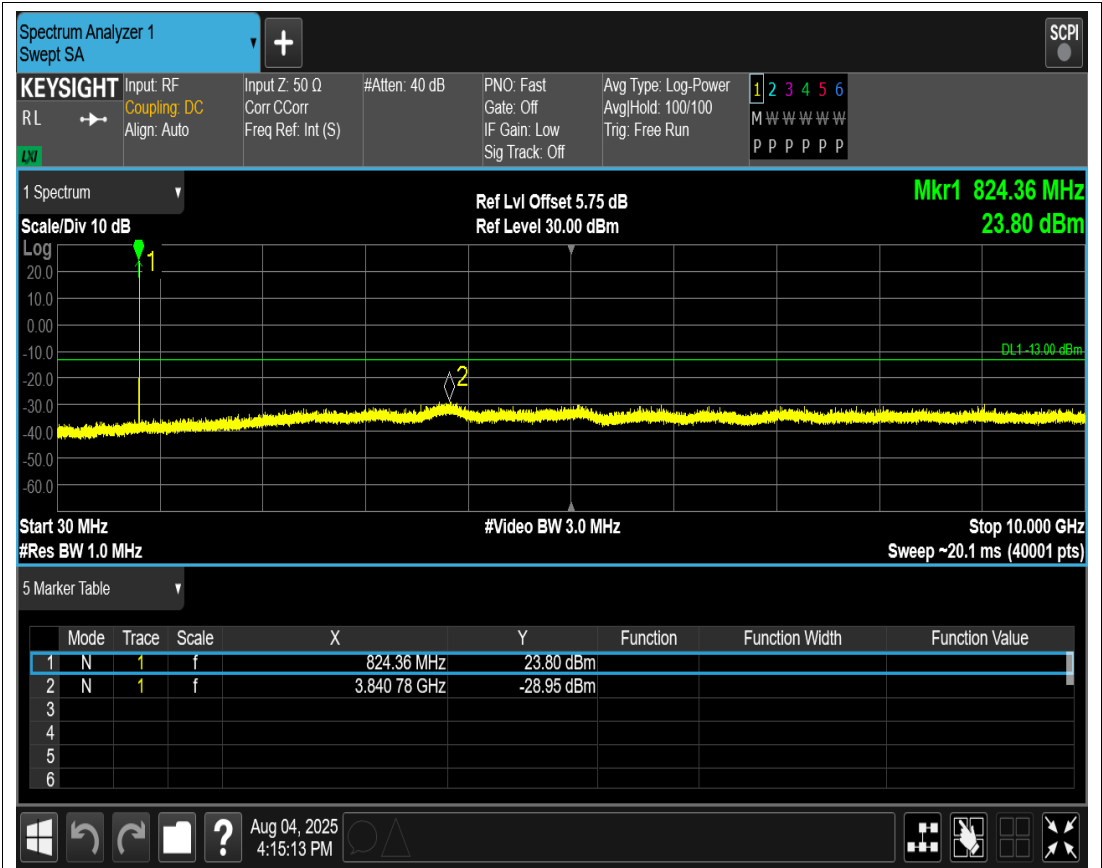


EGPRS850 Channel=128

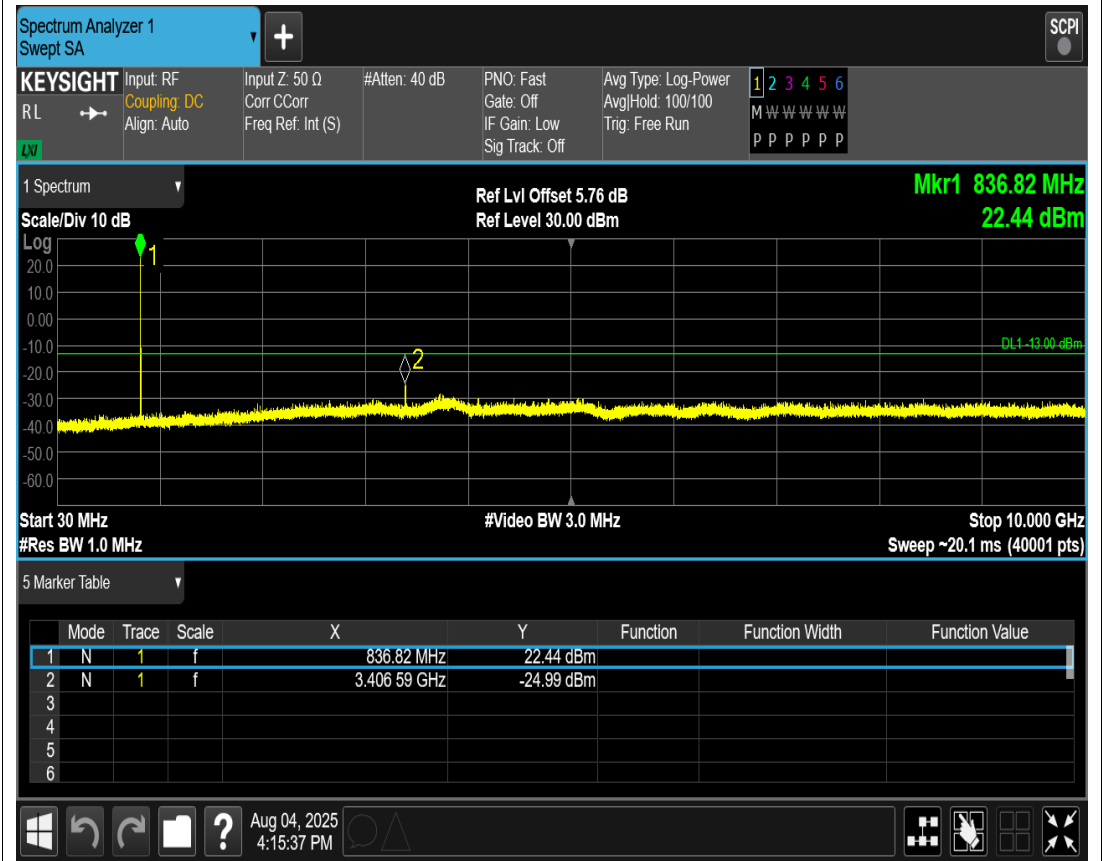


EGPRS850 Channel=190

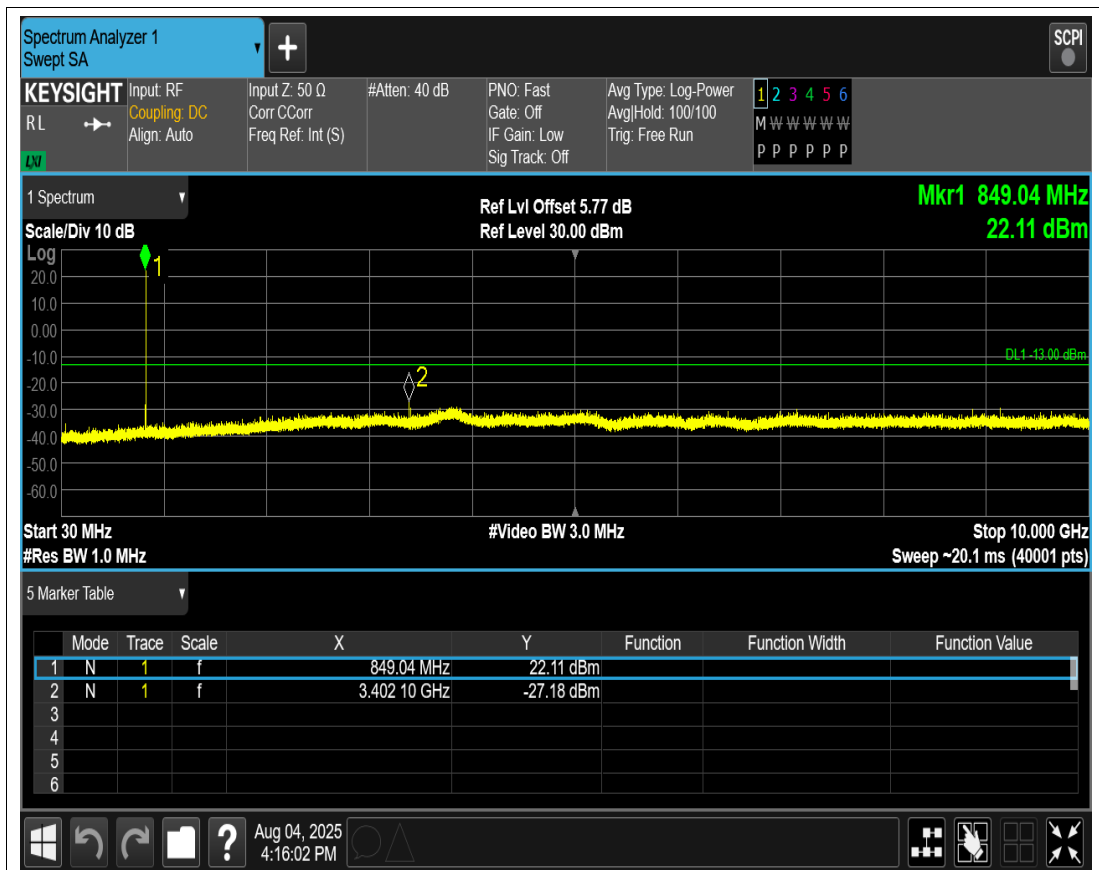


EGPRS850 Channel=251

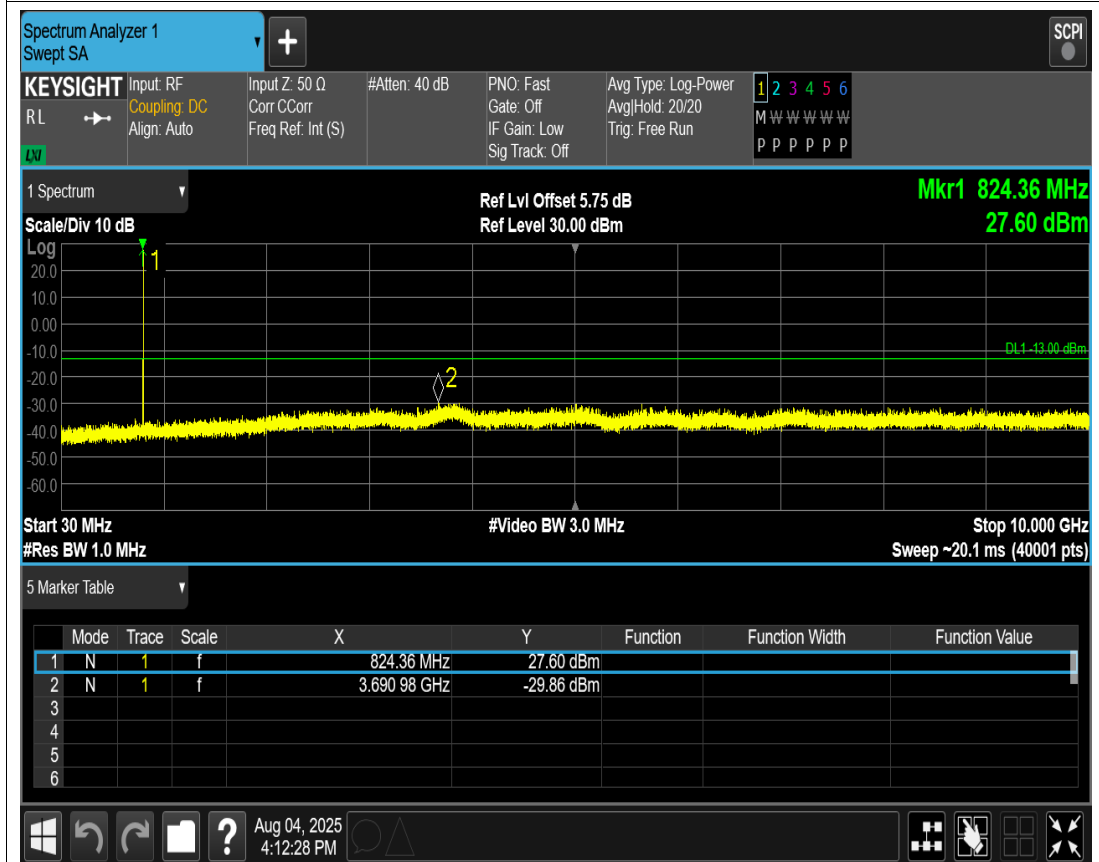


GPRS850 Channel=128

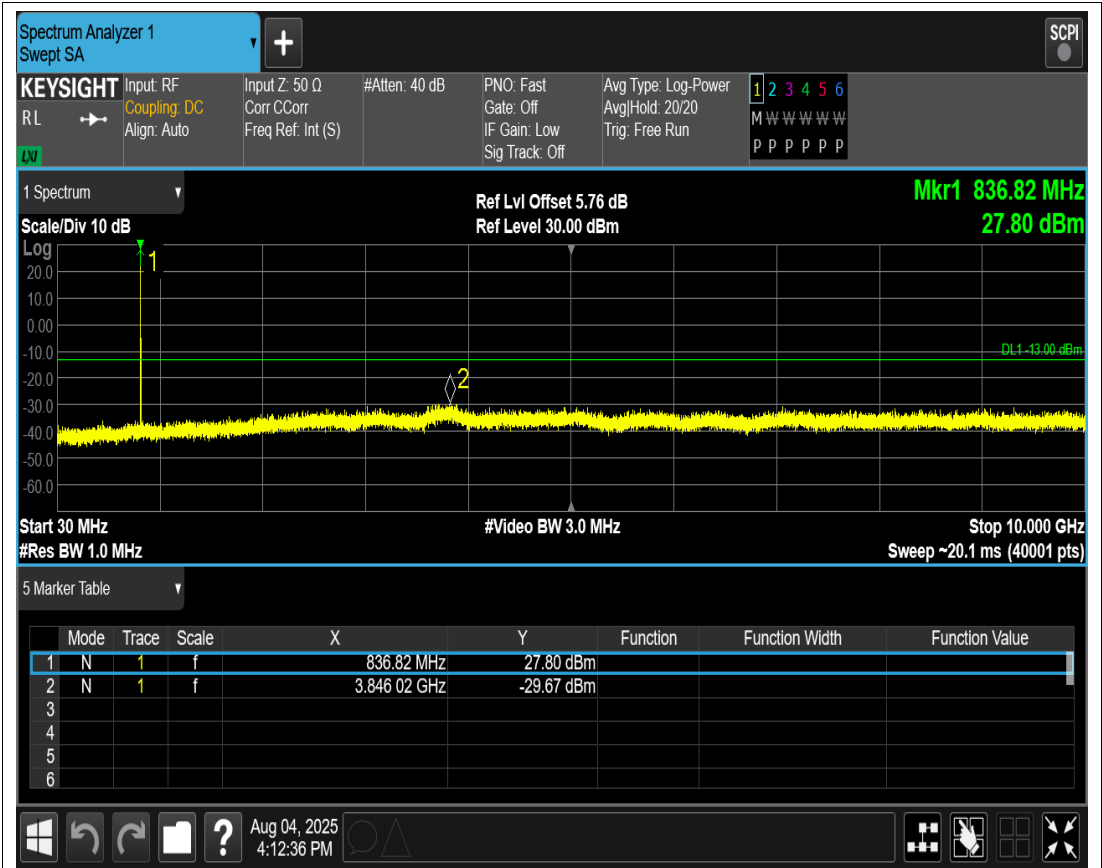


GPRS850 Channel=190

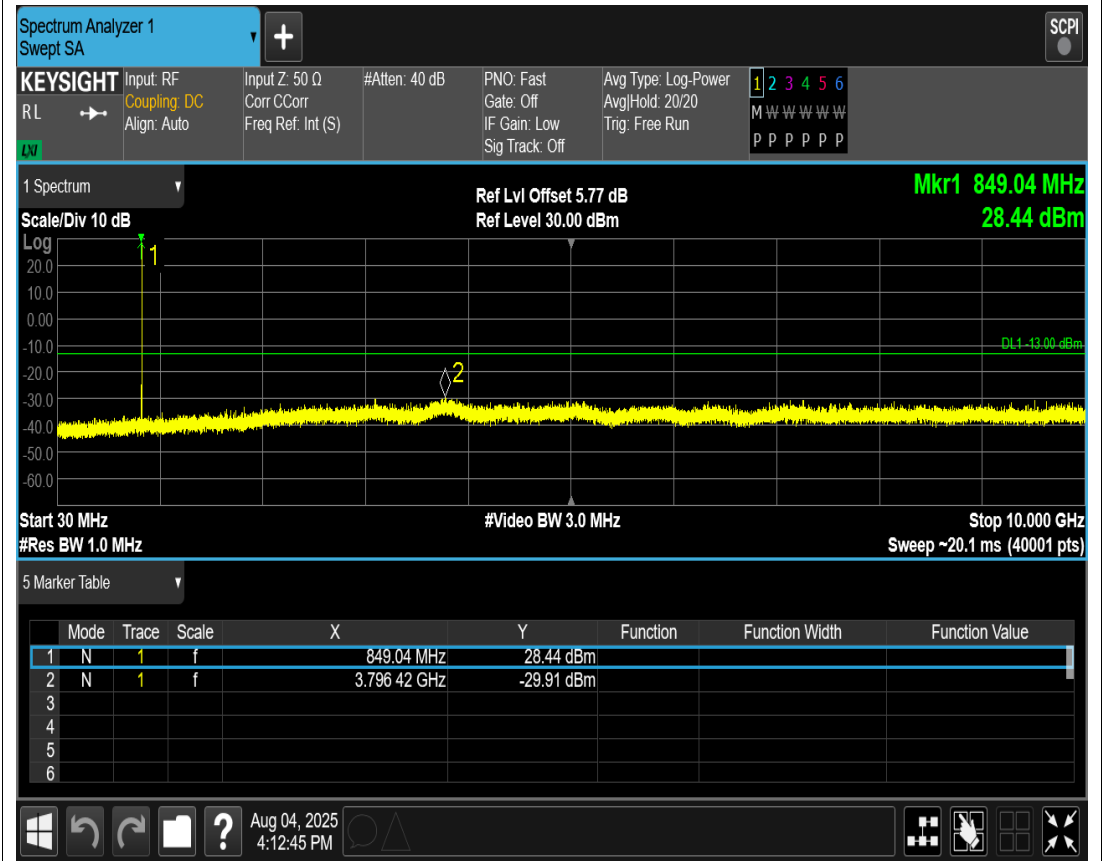


GPRS850 Channel=251

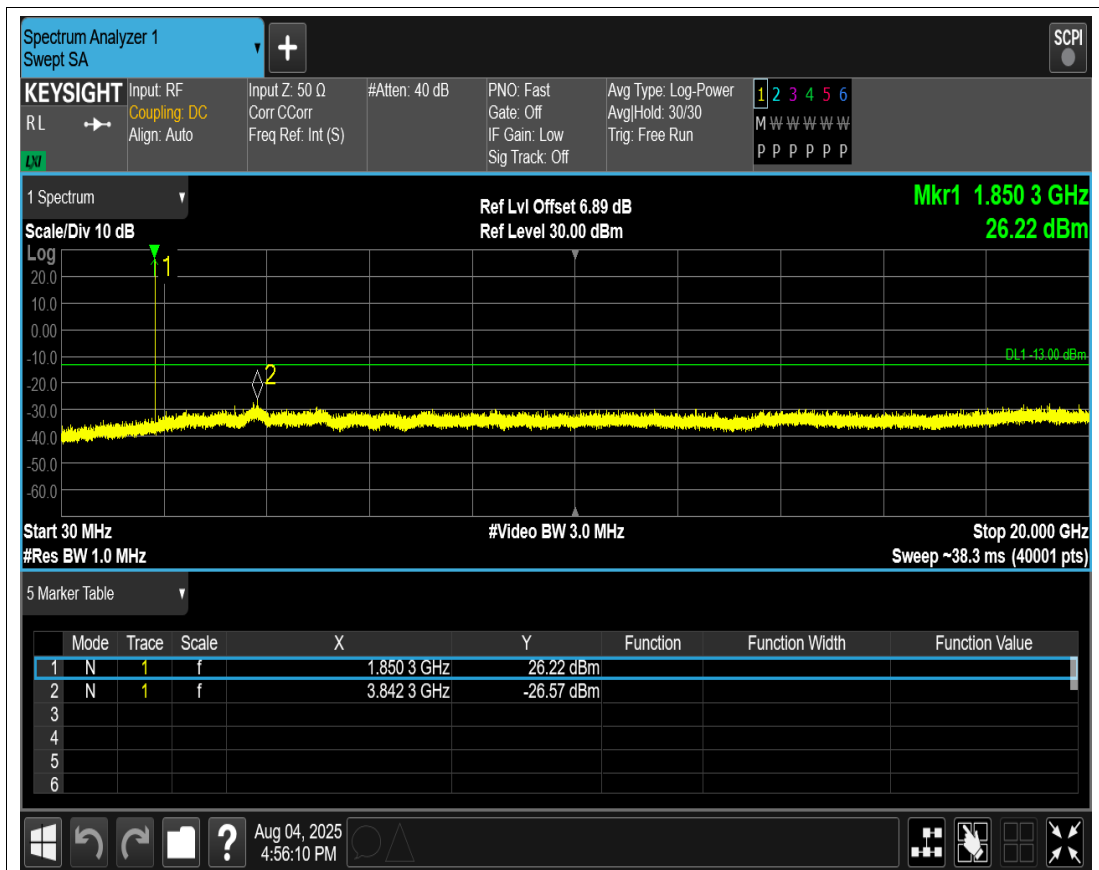


EGPRS1900 Channel=512

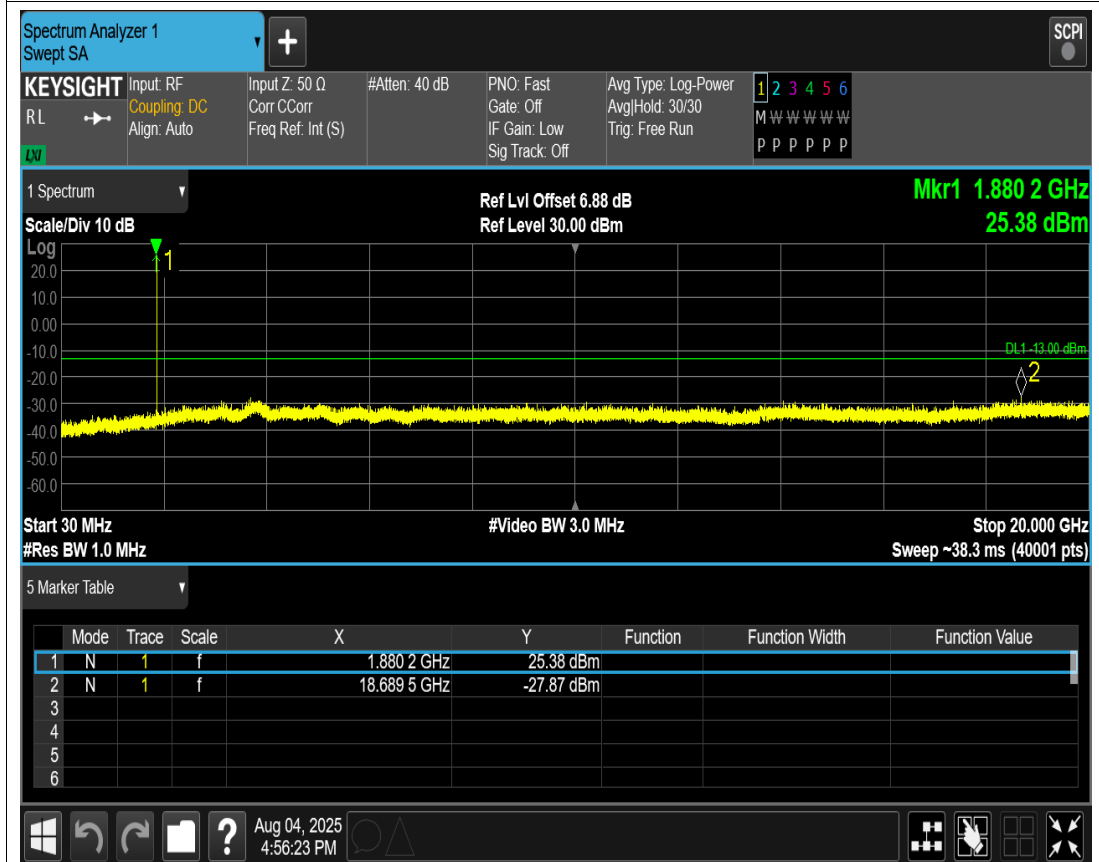


EGPRS1900 Channel=661

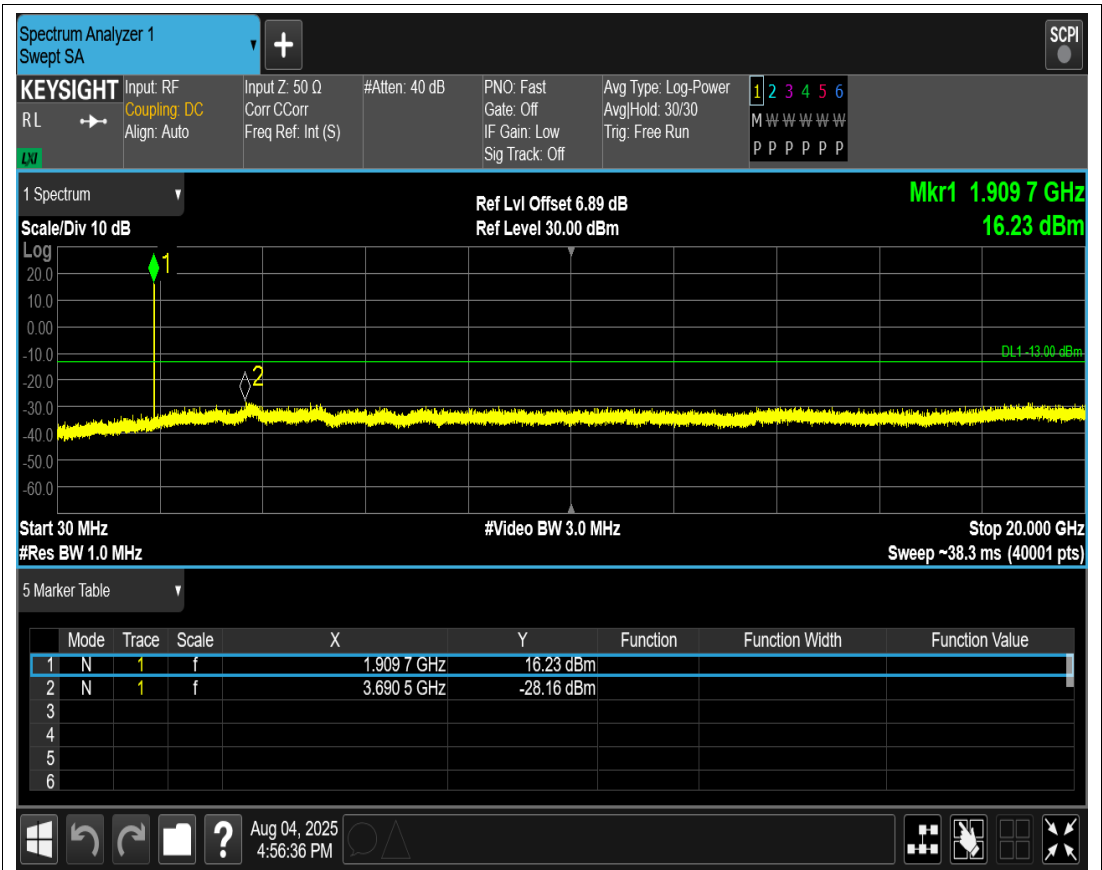


EGPRS1900 Channel=810

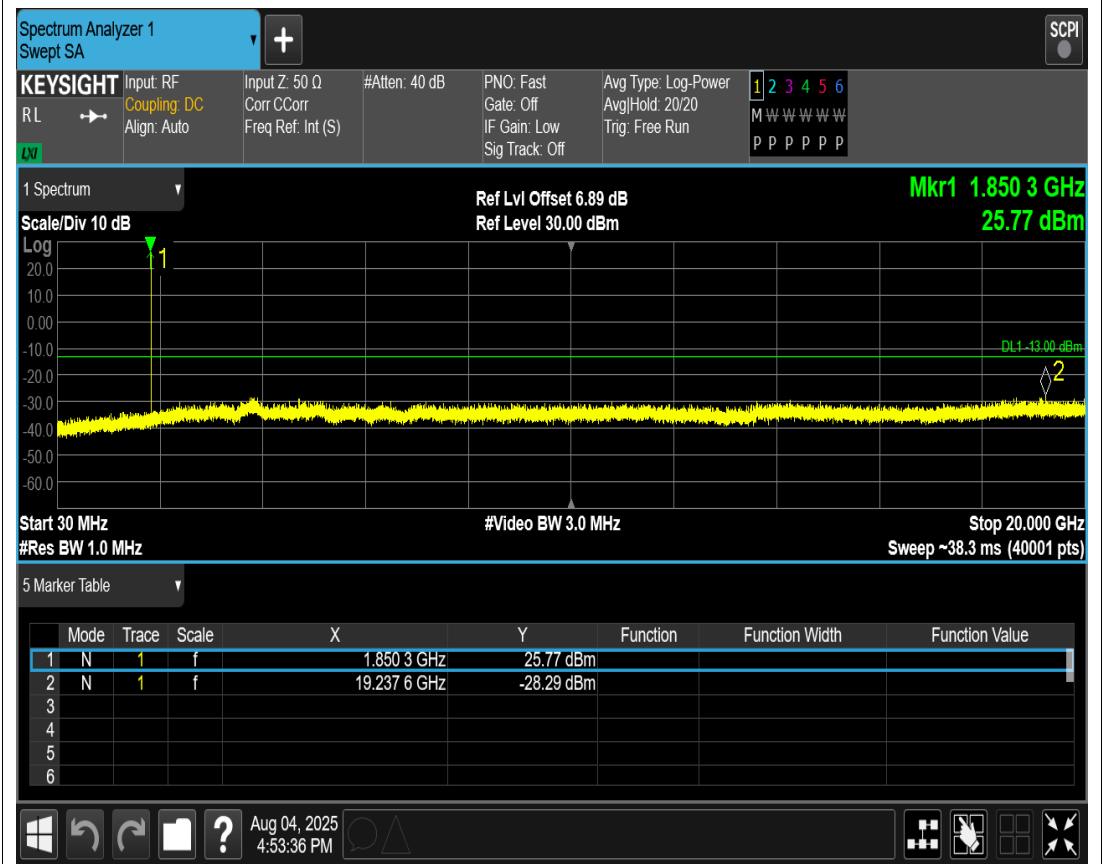

GPRS1900 Channel=512

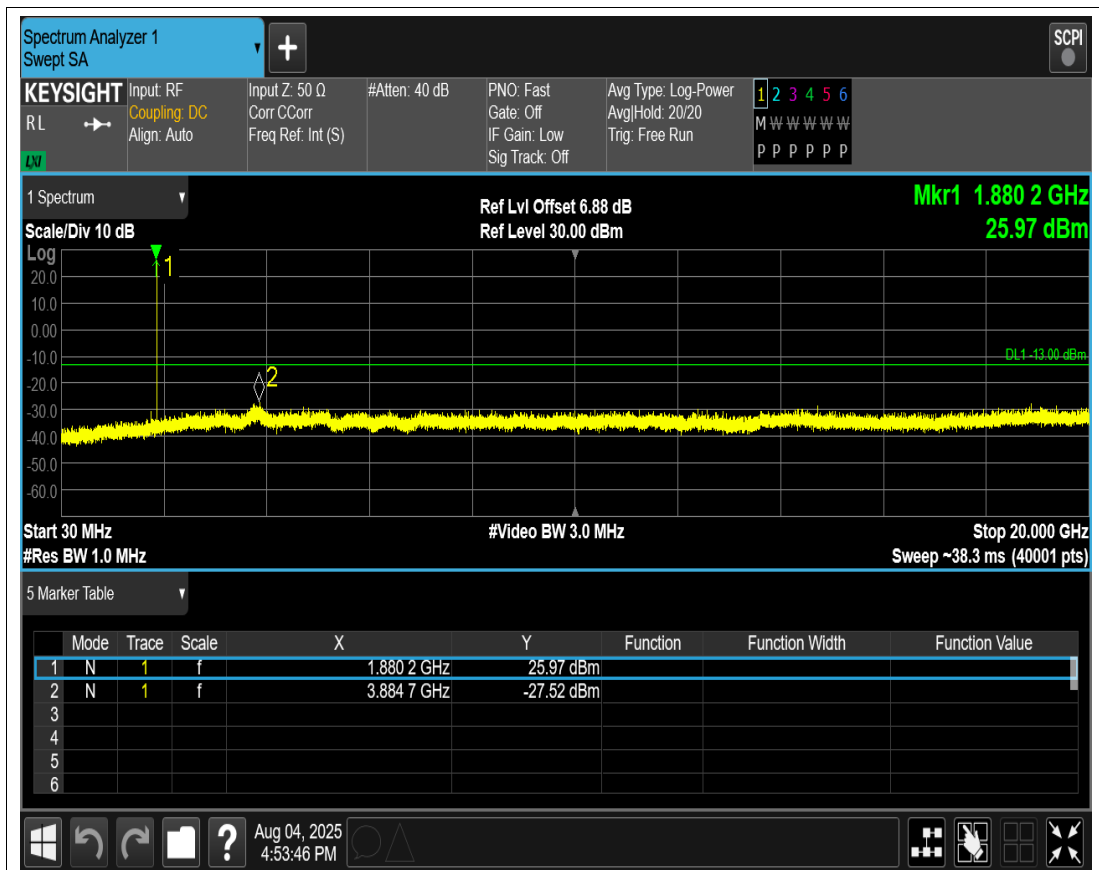

GPRS1900 Channel=661

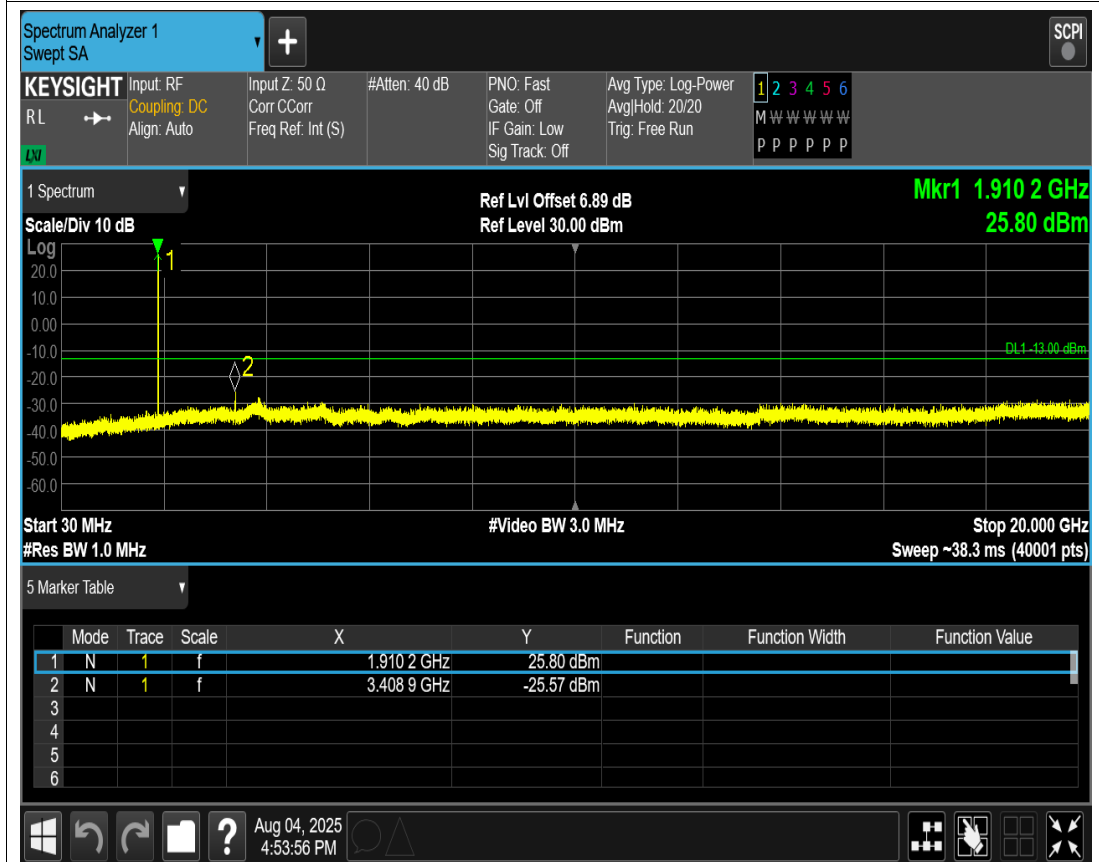

GPRS1900 Channel=810

