


5.8G:

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	97.62	0.1	0.74
NVNT	a	5785	Ant1	97.55	0.11	0.74
NVNT	a	5825	Ant1	97.64	0.1	0.73
NVNT	n20	5745	Ant1	97.39	0.11	0.79
NVNT	n20	5785	Ant1	97.36	0.12	0.79
NVNT	n20	5825	Ant1	97.49	0.11	0.78
NVNT	n40	5755	Ant1	95.04	0.22	1.59
NVNT	n40	5795	Ant1	95.13	0.22	1.56
NVNT	ac20	5745	Ant1	97.49	0.11	0.78
NVNT	ac20	5785	Ant1	97.41	0.11	0.78
NVNT	ac20	5825	Ant1	97.45	0.11	0.78
NVNT	ac40	5755	Ant1	95.13	0.22	1.56
NVNT	ac40	5795	Ant1	95.16	0.22	1.56
NVNT	ac80	5775	Ant1	90.38	0.44	3.12


Test Graphs


Duty Cycle NVNT a 5745MHz Ant1

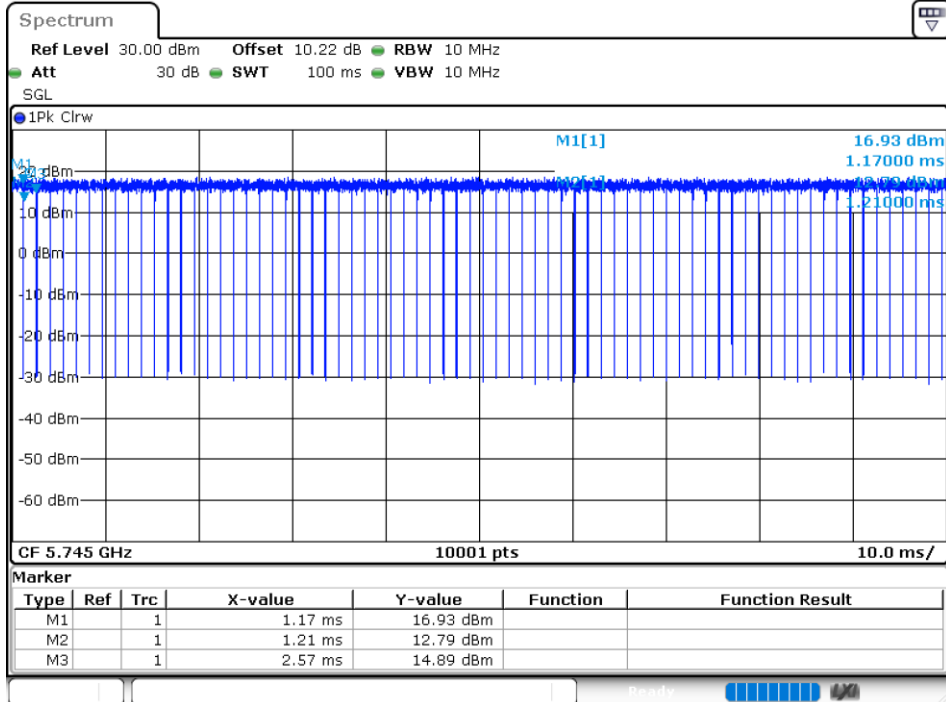



Duty Cycle NVNT a 5785MHz Ant1

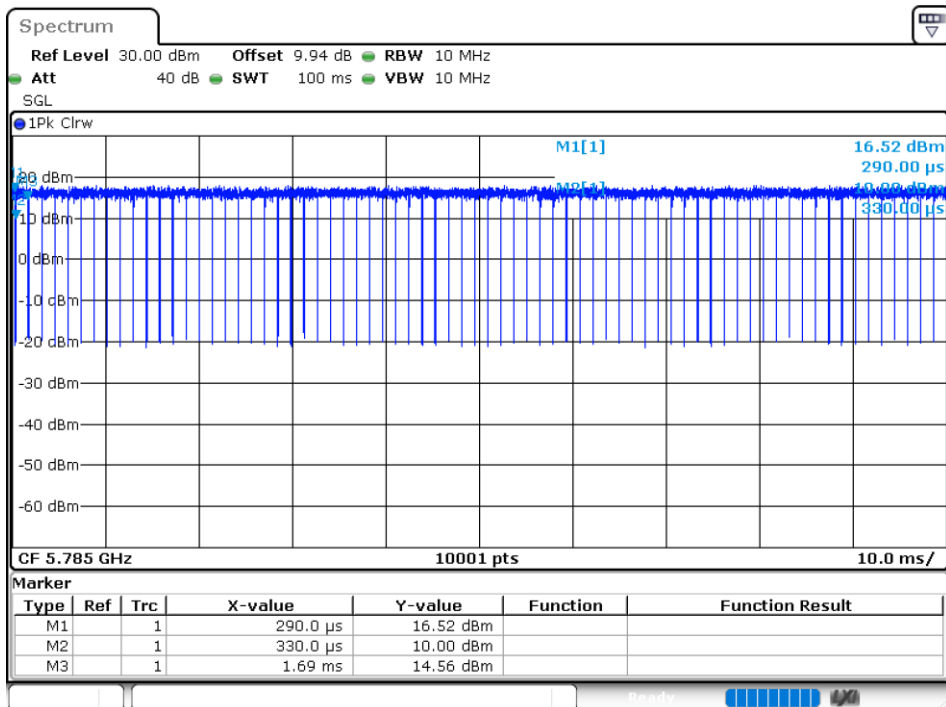


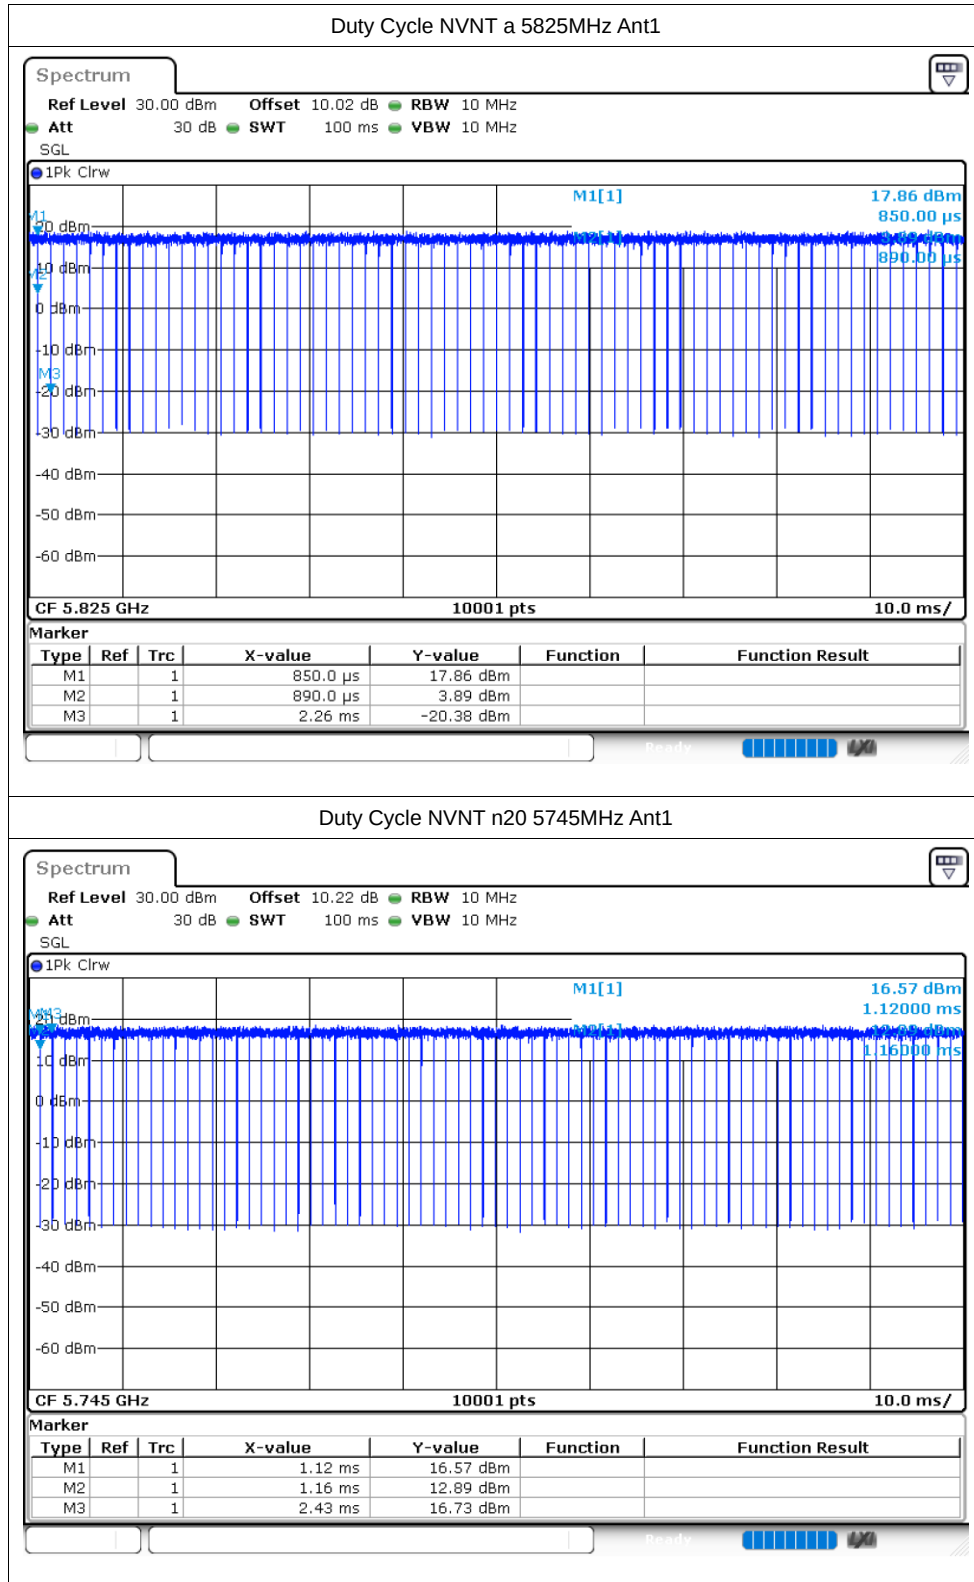


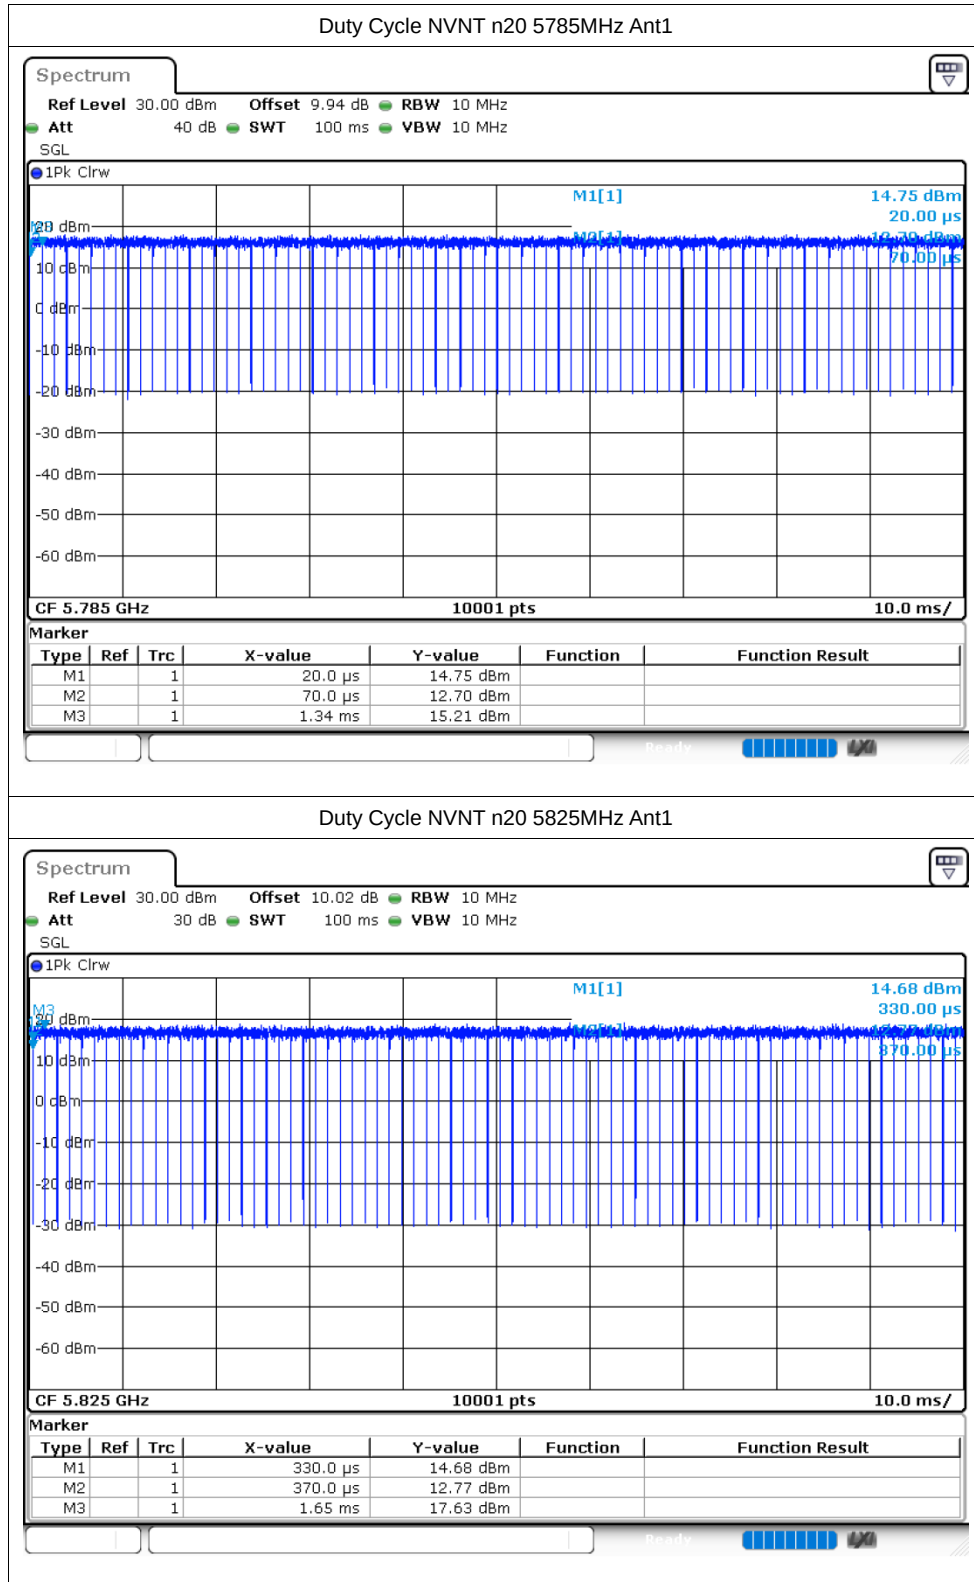

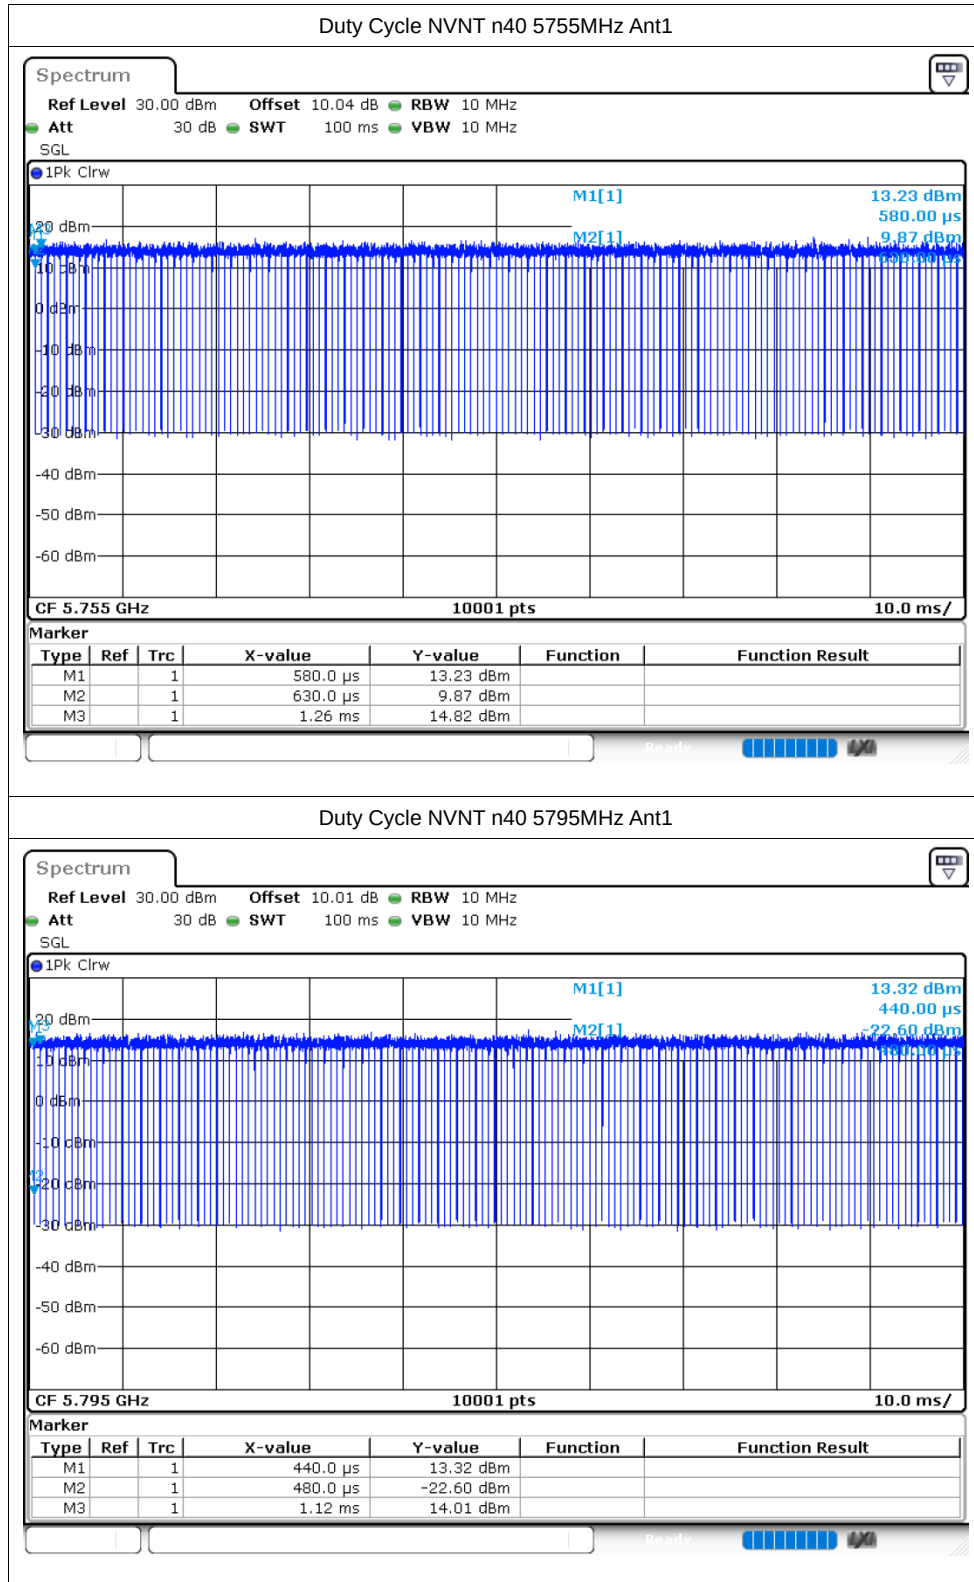

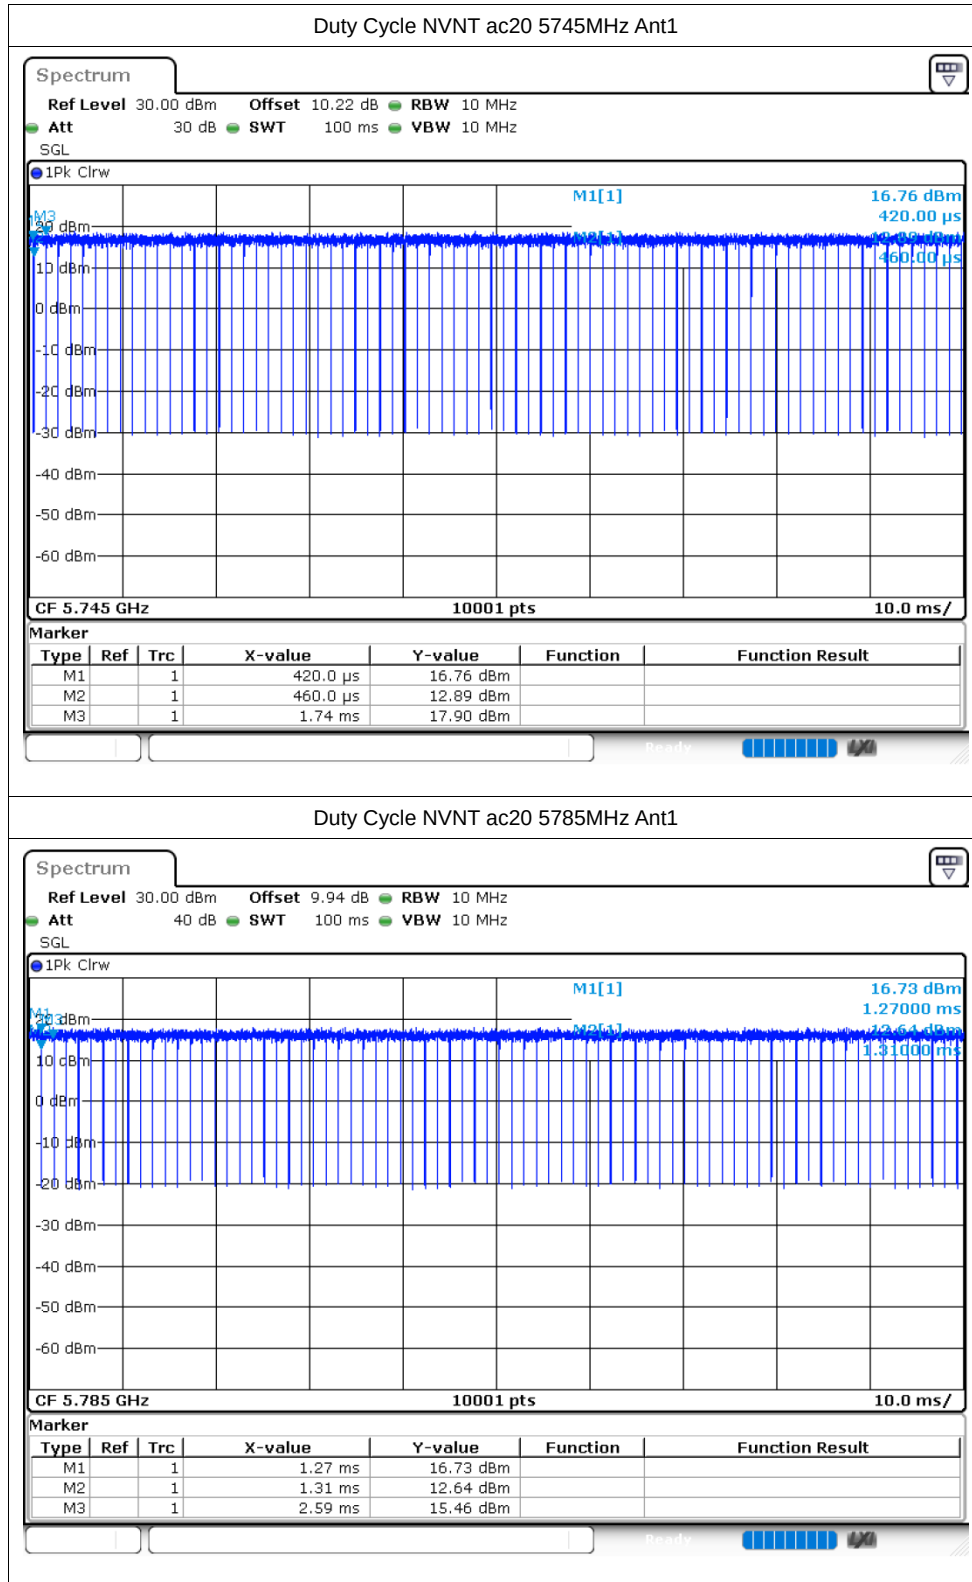

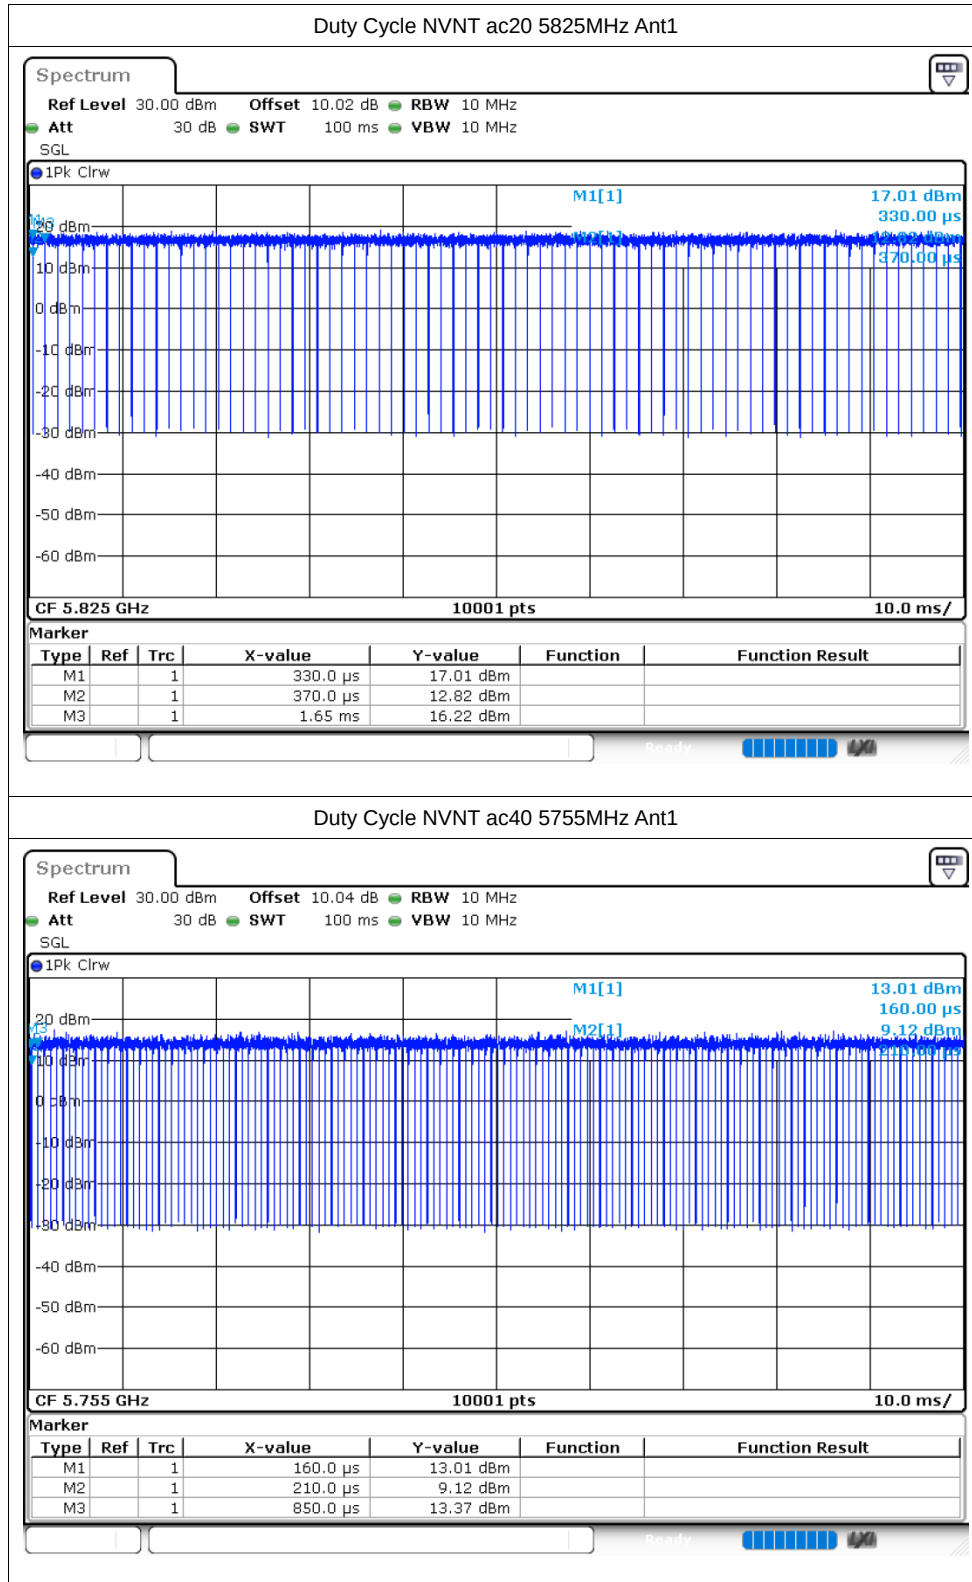

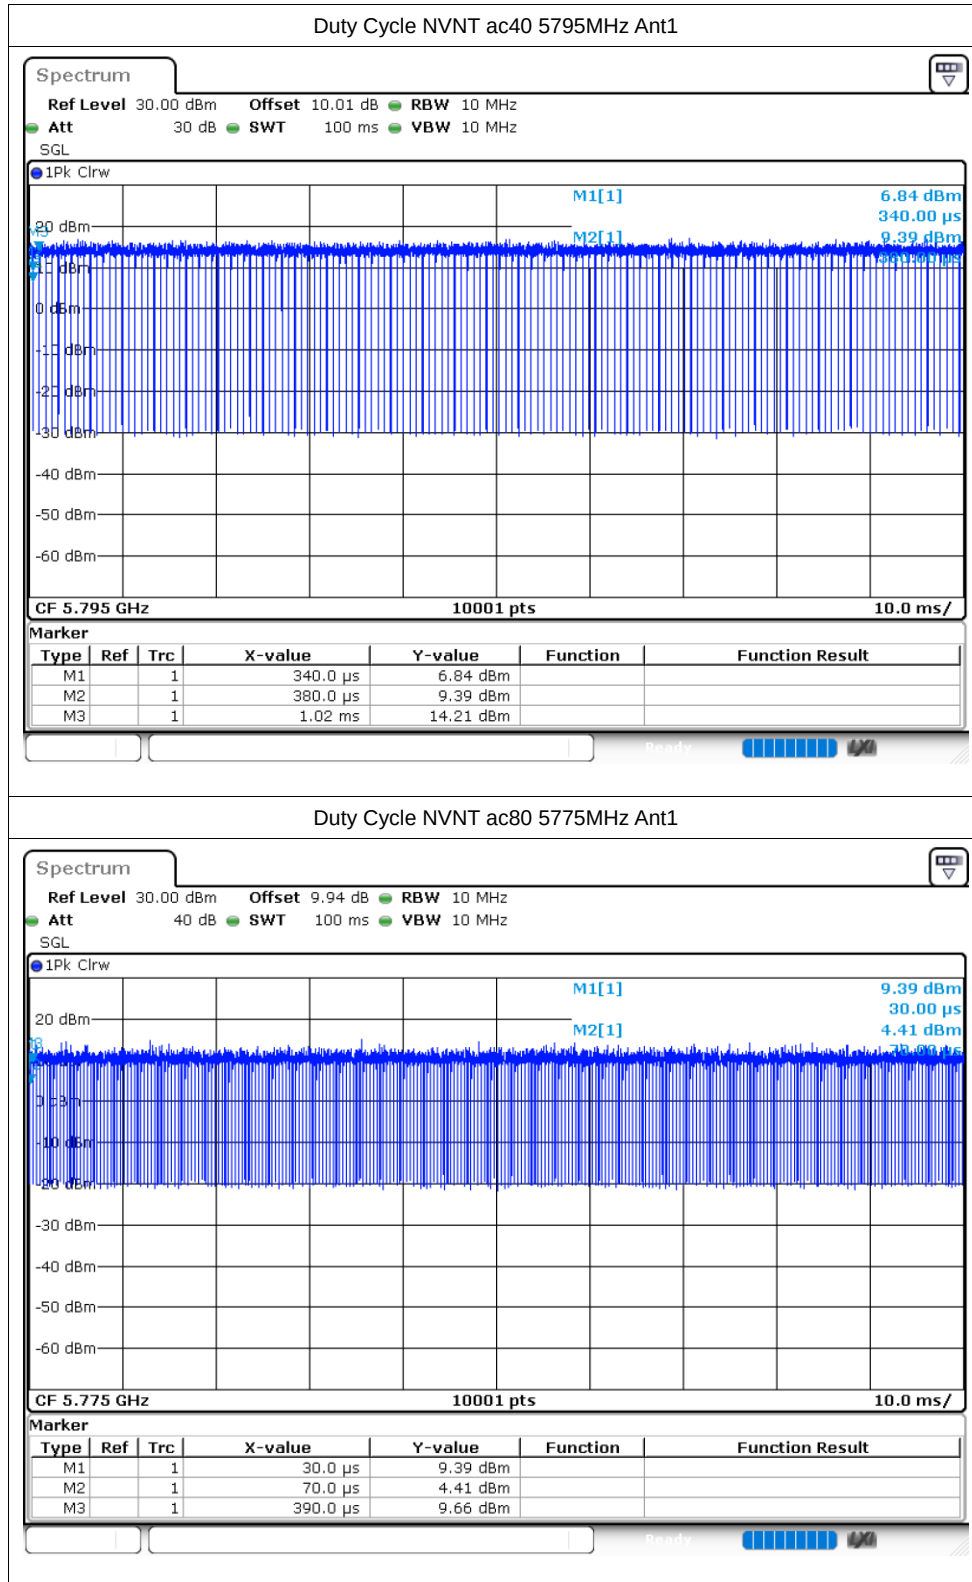

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	9.93	0.1	10.03	30	Pass
NVNT	a	5785	Ant1	9.85	0.11	9.96	30	Pass
NVNT	a	5825	Ant1	10.33	0.1	10.43	30	Pass
NVNT	n20	5745	Ant1	9.85	0.11	9.96	30	Pass
NVNT	n20	5785	Ant1	9.79	0.12	9.91	30	Pass
NVNT	n20	5825	Ant1	10.2	0.11	10.31	30	Pass
NVNT	n40	5755	Ant1	10.22	0.22	10.44	30	Pass
NVNT	n40	5795	Ant1	10.13	0.22	10.35	30	Pass
NVNT	ac20	5745	Ant1	9.81	0.11	9.92	30	Pass
NVNT	ac20	5785	Ant1	9.72	0.11	9.83	30	Pass
NVNT	ac20	5825	Ant1	10.2	0.11	10.31	30	Pass
NVNT	ac40	5755	Ant1	10.19	0.22	10.41	30	Pass
NVNT	ac40	5795	Ant1	10.13	0.22	10.35	30	Pass
NVNT	ac80	5775	Ant1	10.16	0.44	10.6	30	Pass

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	13.458	0.5	Pass
NVNT	a	5785	Ant1	13.848	0.5	Pass
NVNT	a	5825	Ant1	16.311	0.5	Pass
NVNT	n20	5745	Ant1	17.553	0.5	Pass
NVNT	n20	5785	Ant1	17.571	0.5	Pass
NVNT	n20	5825	Ant1	14.4	0.5	Pass
NVNT	n40	5755	Ant1	34.704	0.5	Pass
NVNT	n40	5795	Ant1	35.064	0.5	Pass
NVNT	ac20	5745	Ant1	16.671	0.5	Pass
NVNT	ac20	5785	Ant1	12.579	0.5	Pass
NVNT	ac20	5825	Ant1	17.58	0.5	Pass
NVNT	ac40	5755	Ant1	30.084	0.5	Pass
NVNT	ac40	5795	Ant1	33.84	0.5	Pass
NVNT	ac80	5775	Ant1	75.096	0.5	Pass


Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

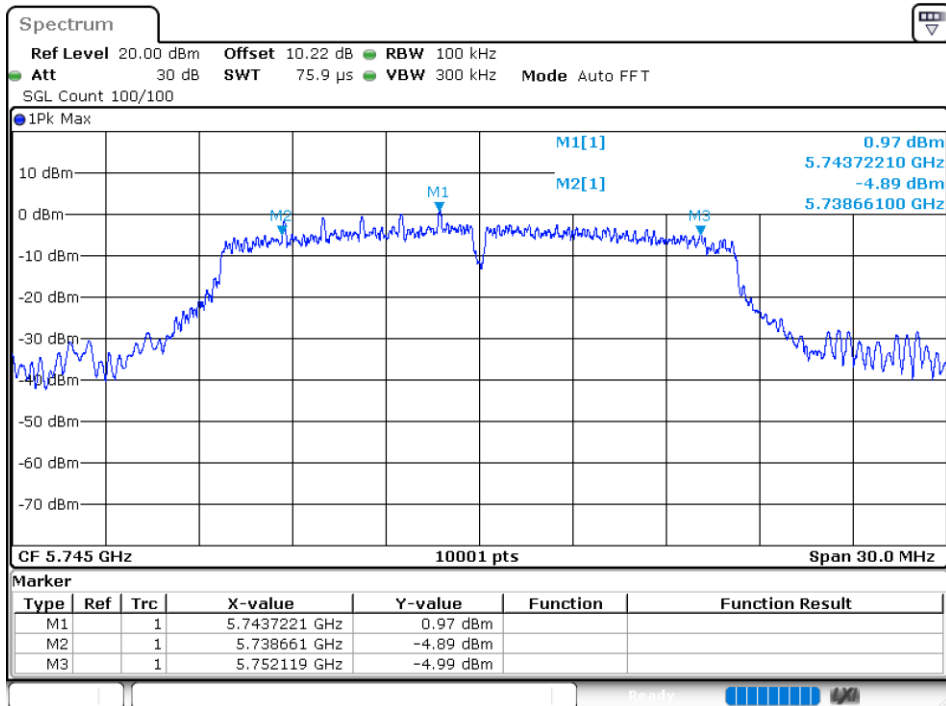



-6dB Bandwidth NVNT a 5785MHz Ant1

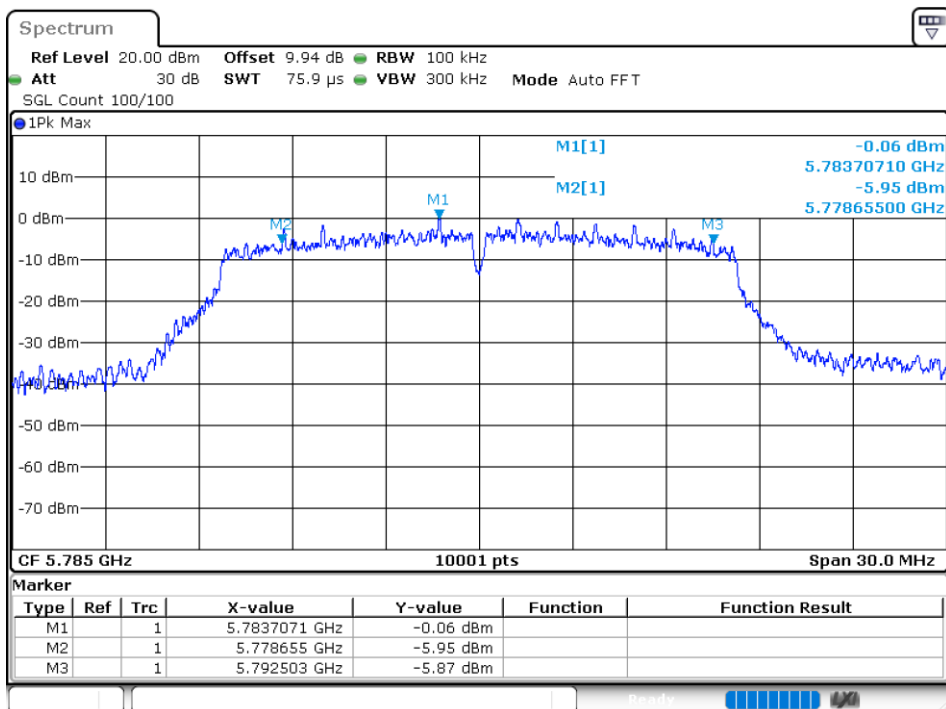


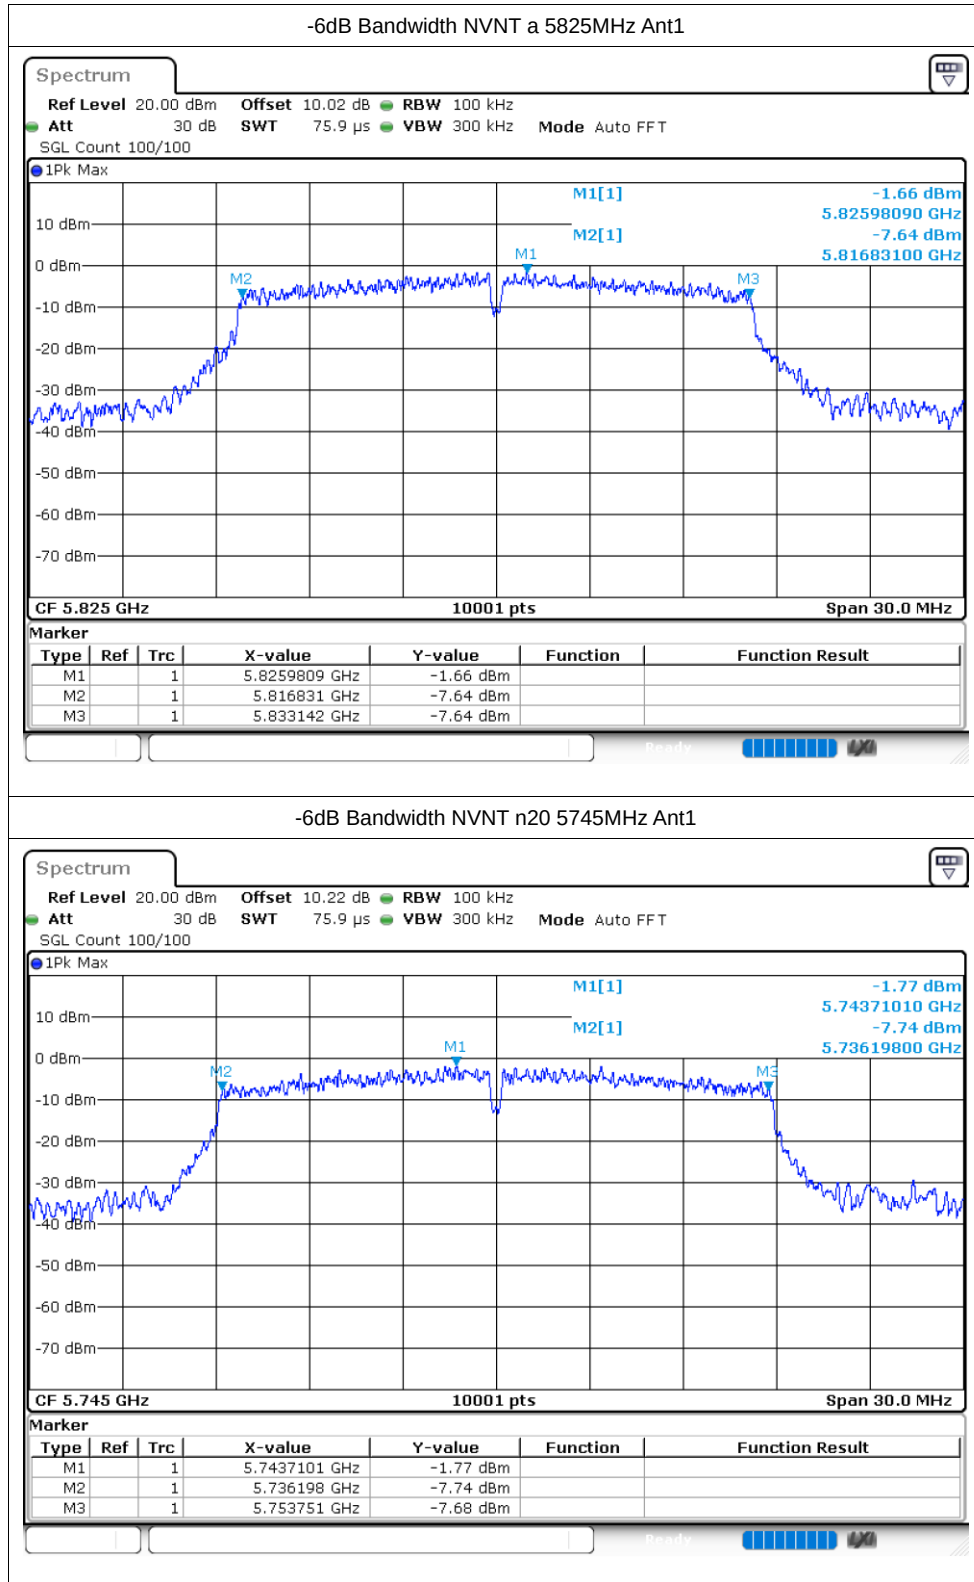


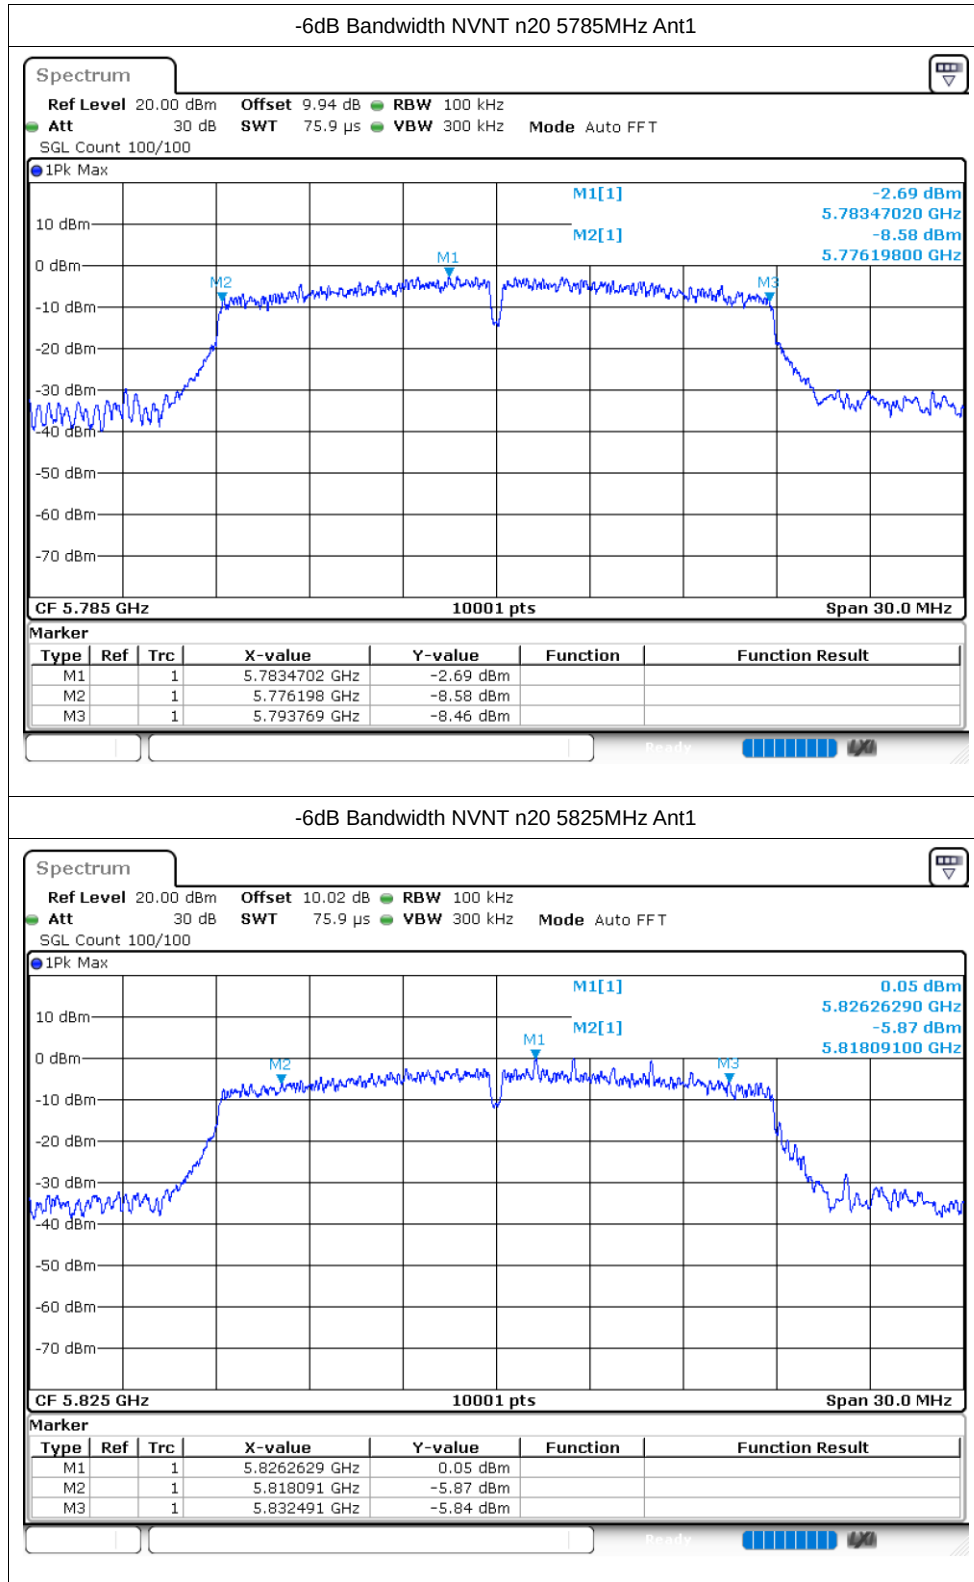

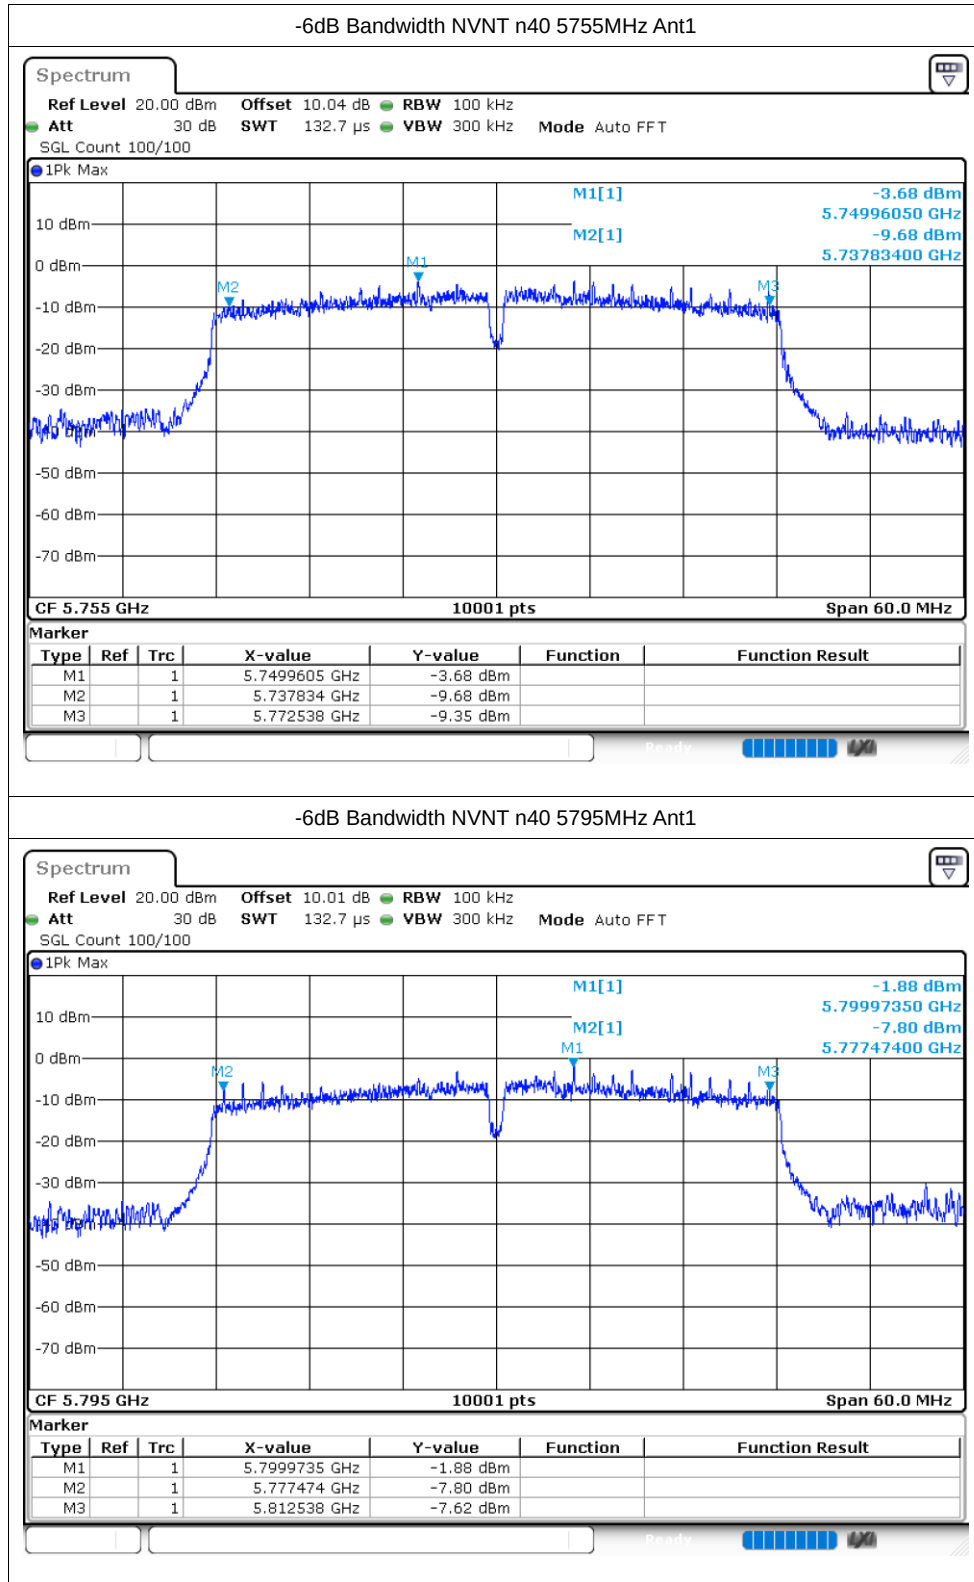

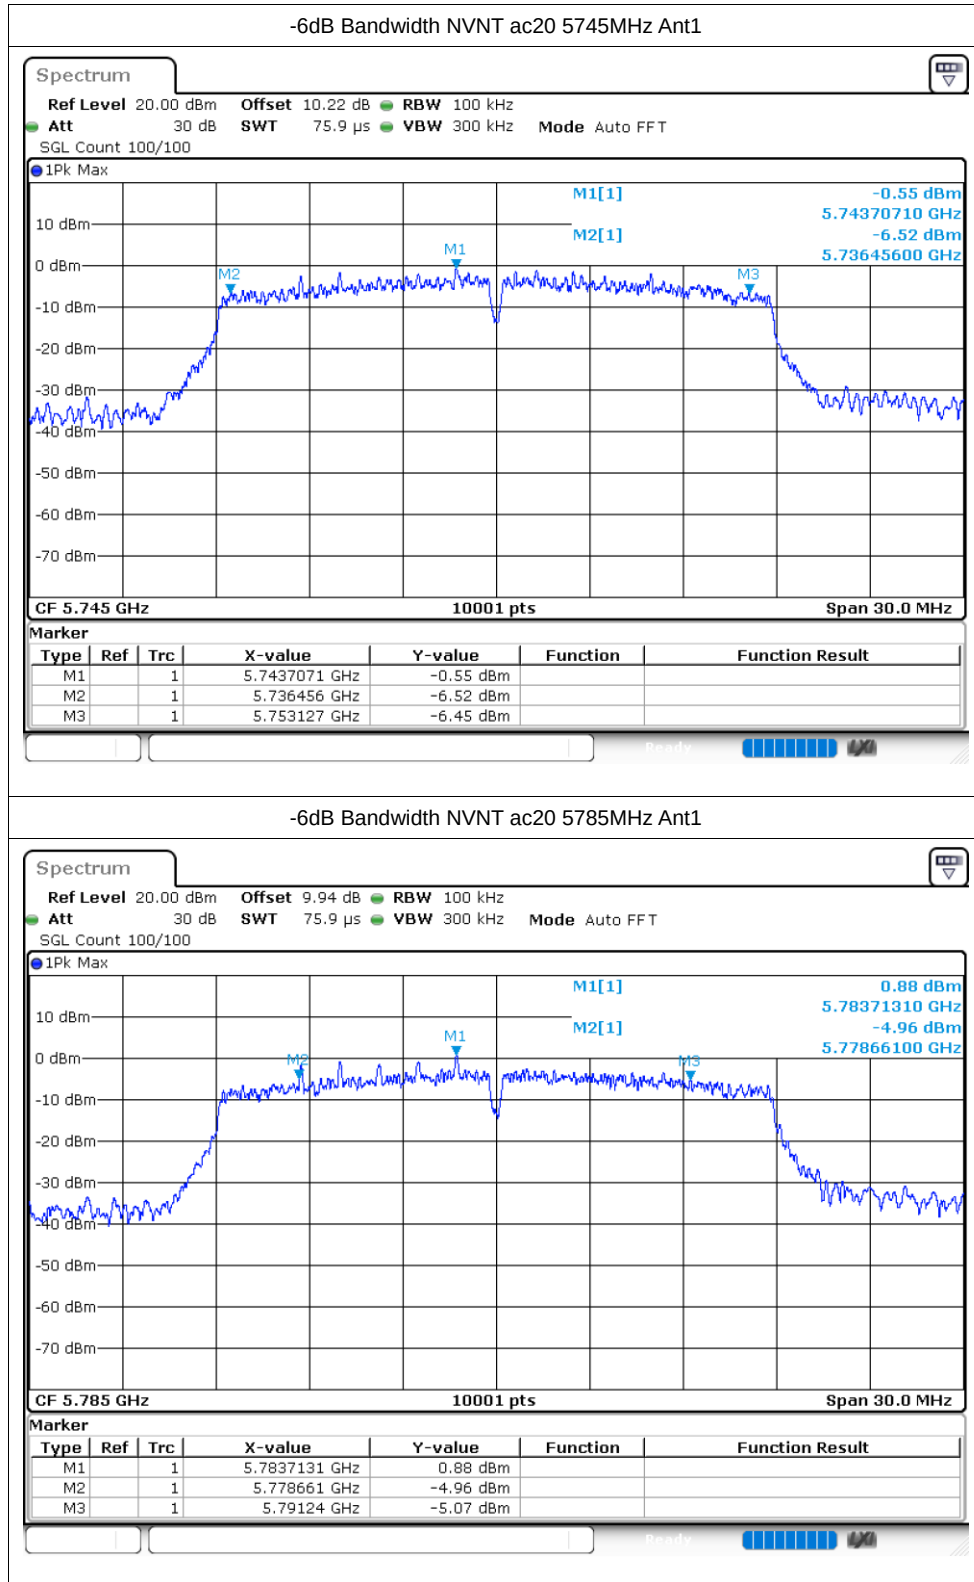

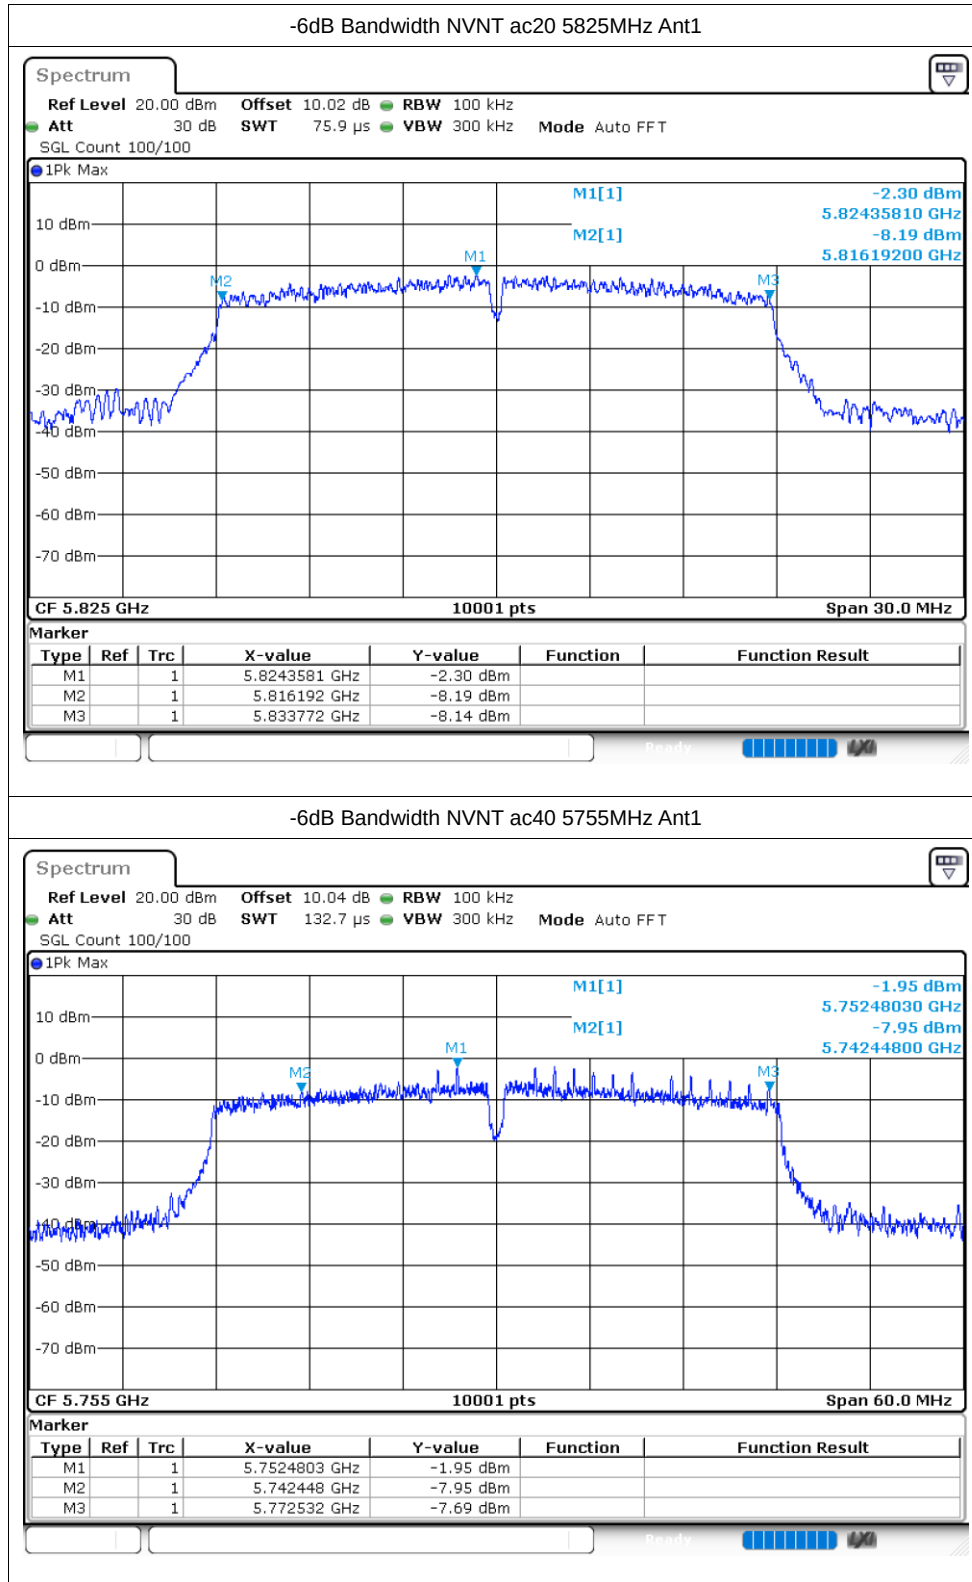

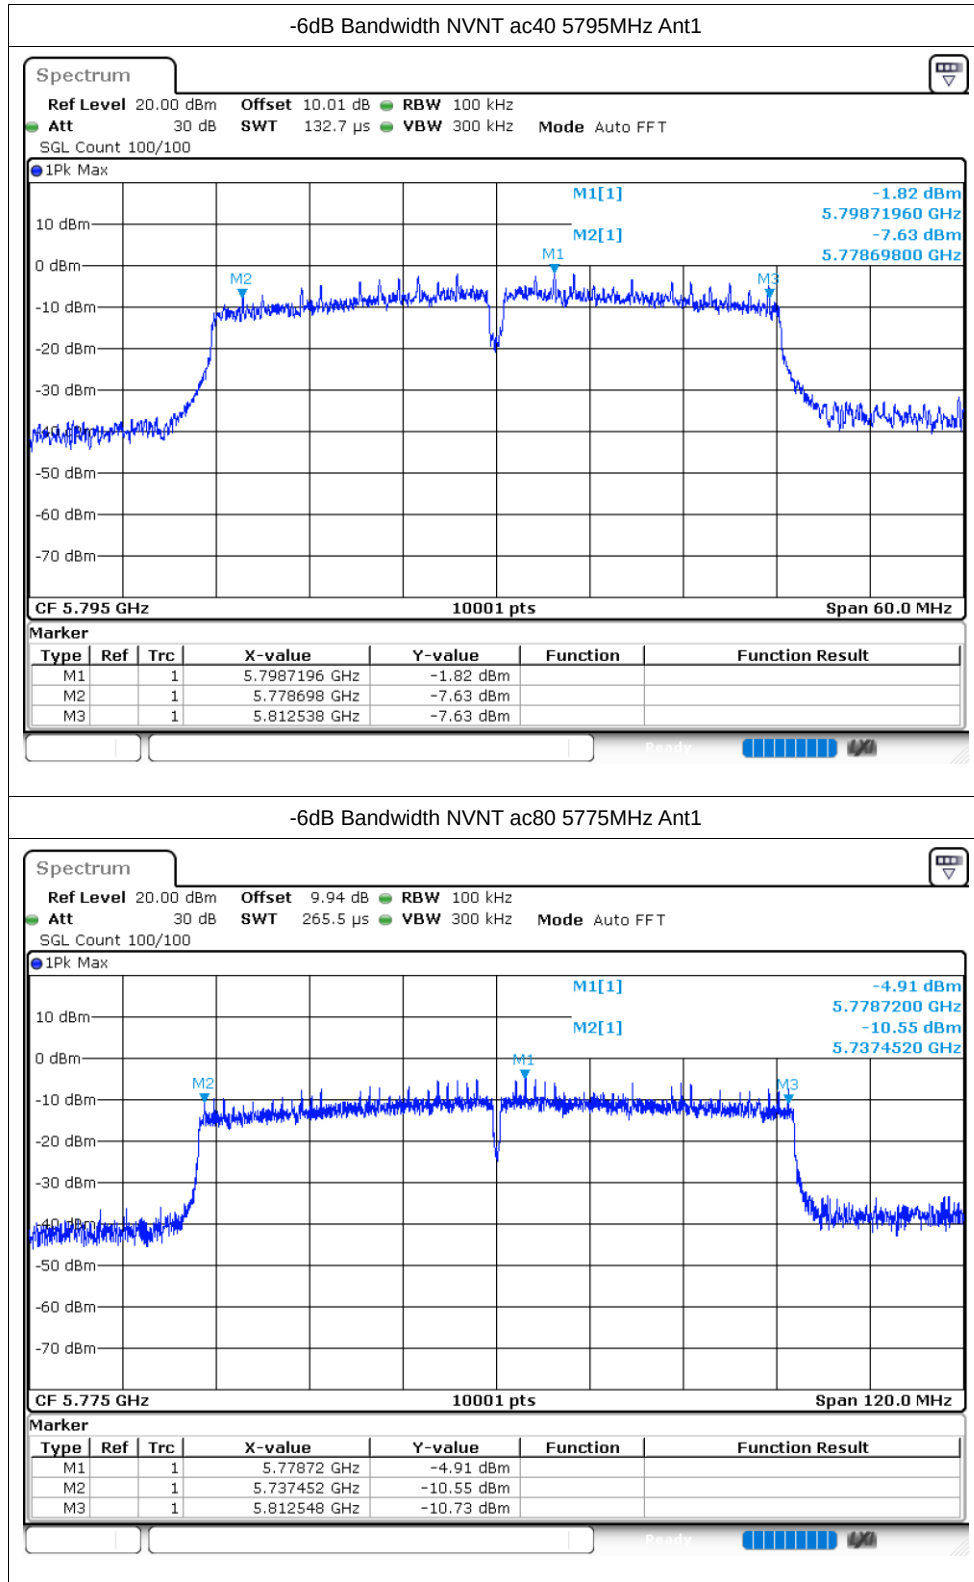


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.54
NVNT	a	5785	Ant1	16.462
NVNT	a	5825	Ant1	16.51
NVNT	n20	5745	Ant1	17.665
NVNT	n20	5785	Ant1	17.515
NVNT	n20	5825	Ant1	17.716
NVNT	n40	5755	Ant1	36.11
NVNT	n40	5795	Ant1	36.104
NVNT	ac20	5745	Ant1	17.551
NVNT	ac20	5785	Ant1	17.557
NVNT	ac20	5825	Ant1	17.545
NVNT	ac40	5755	Ant1	36.038
NVNT	ac40	5795	Ant1	36.068
NVNT	ac80	5775	Ant1	75.424


Test Graphs


OBW NVNT a 5745MHz Ant1

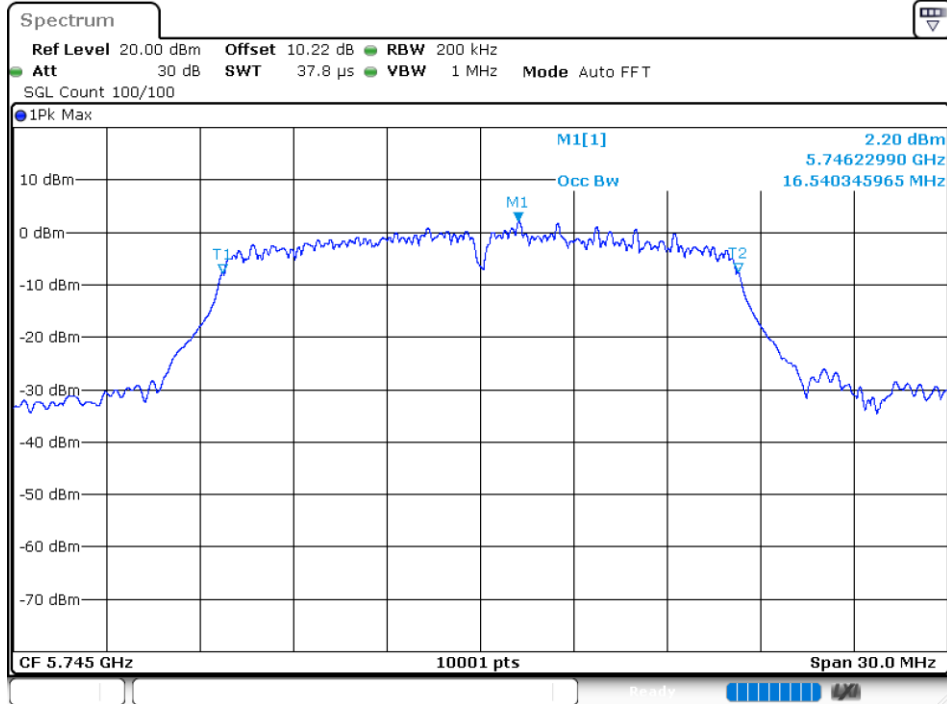



OBW NVNT a 5785MHz Ant1

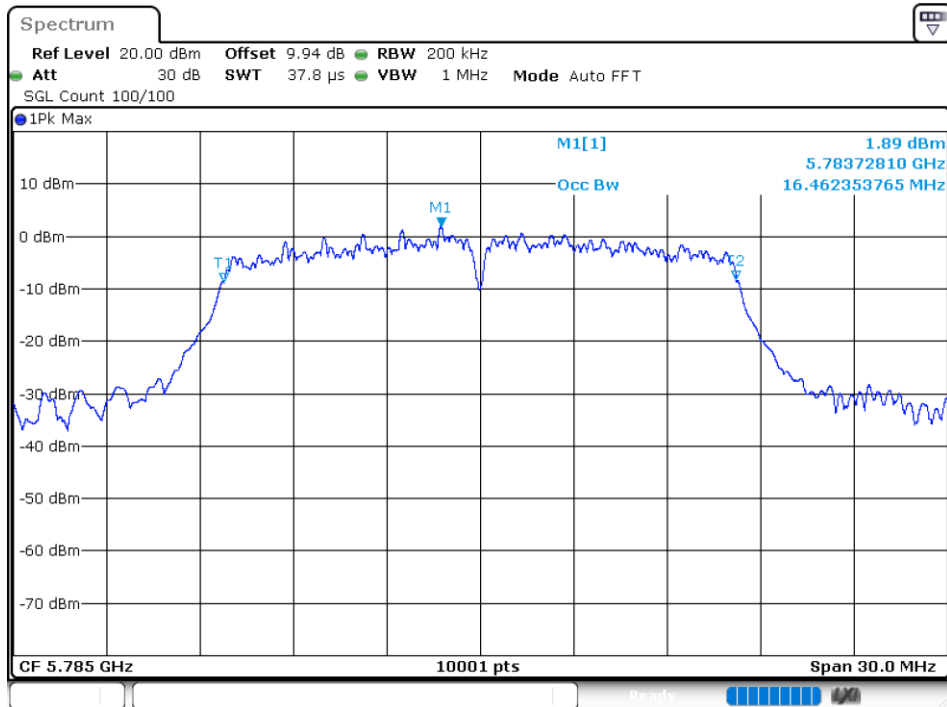


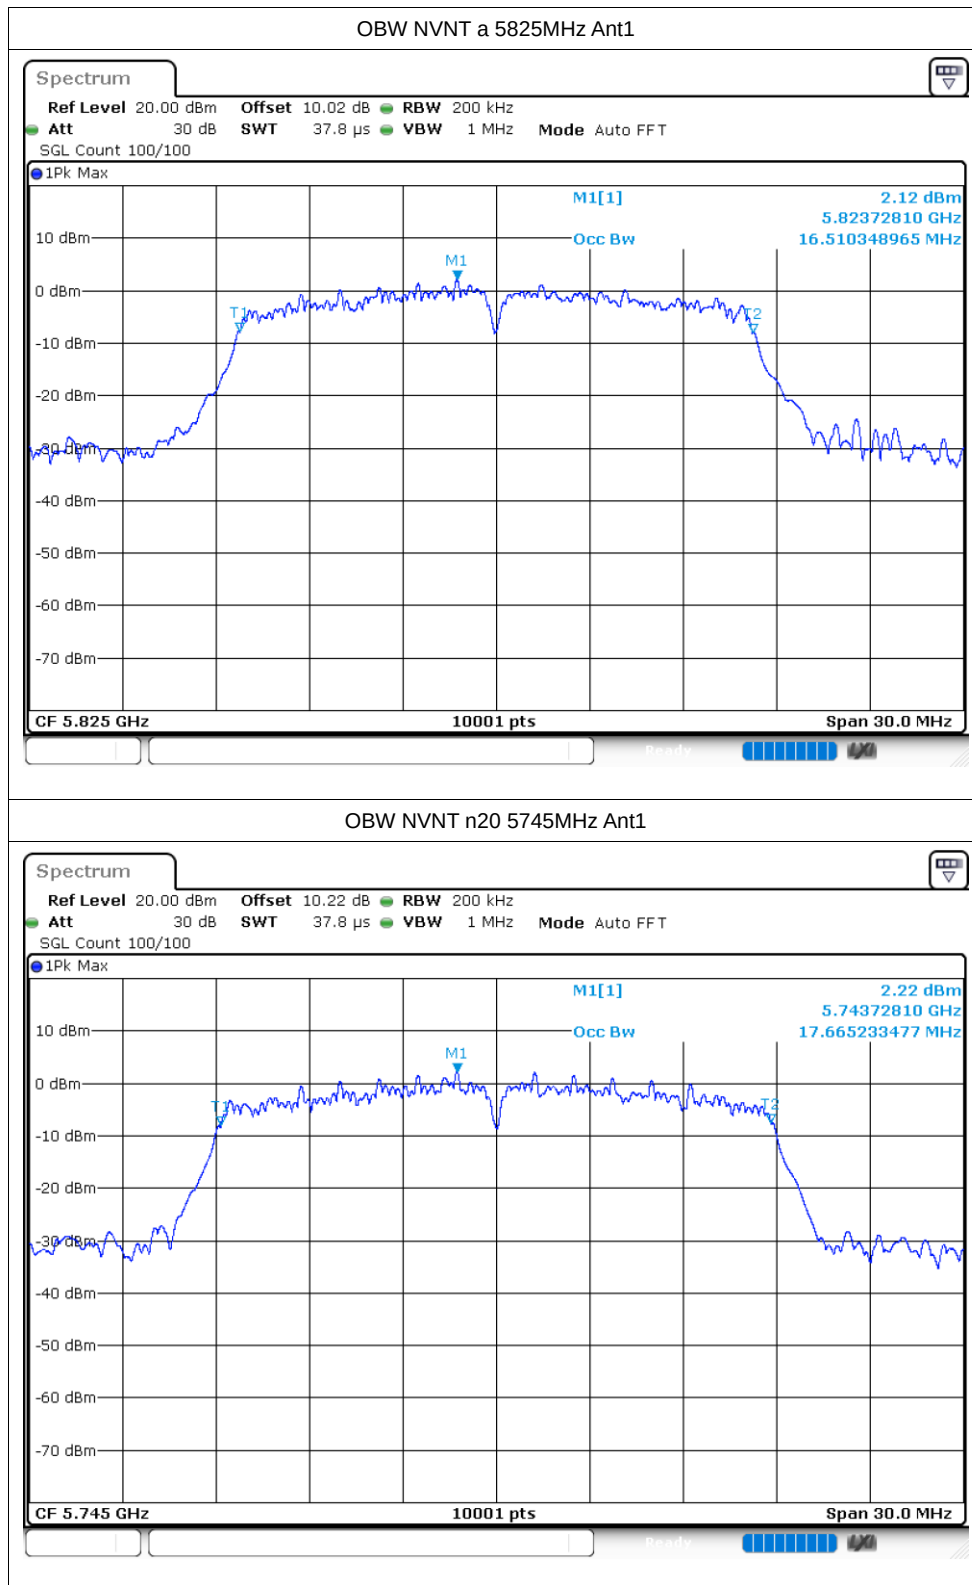


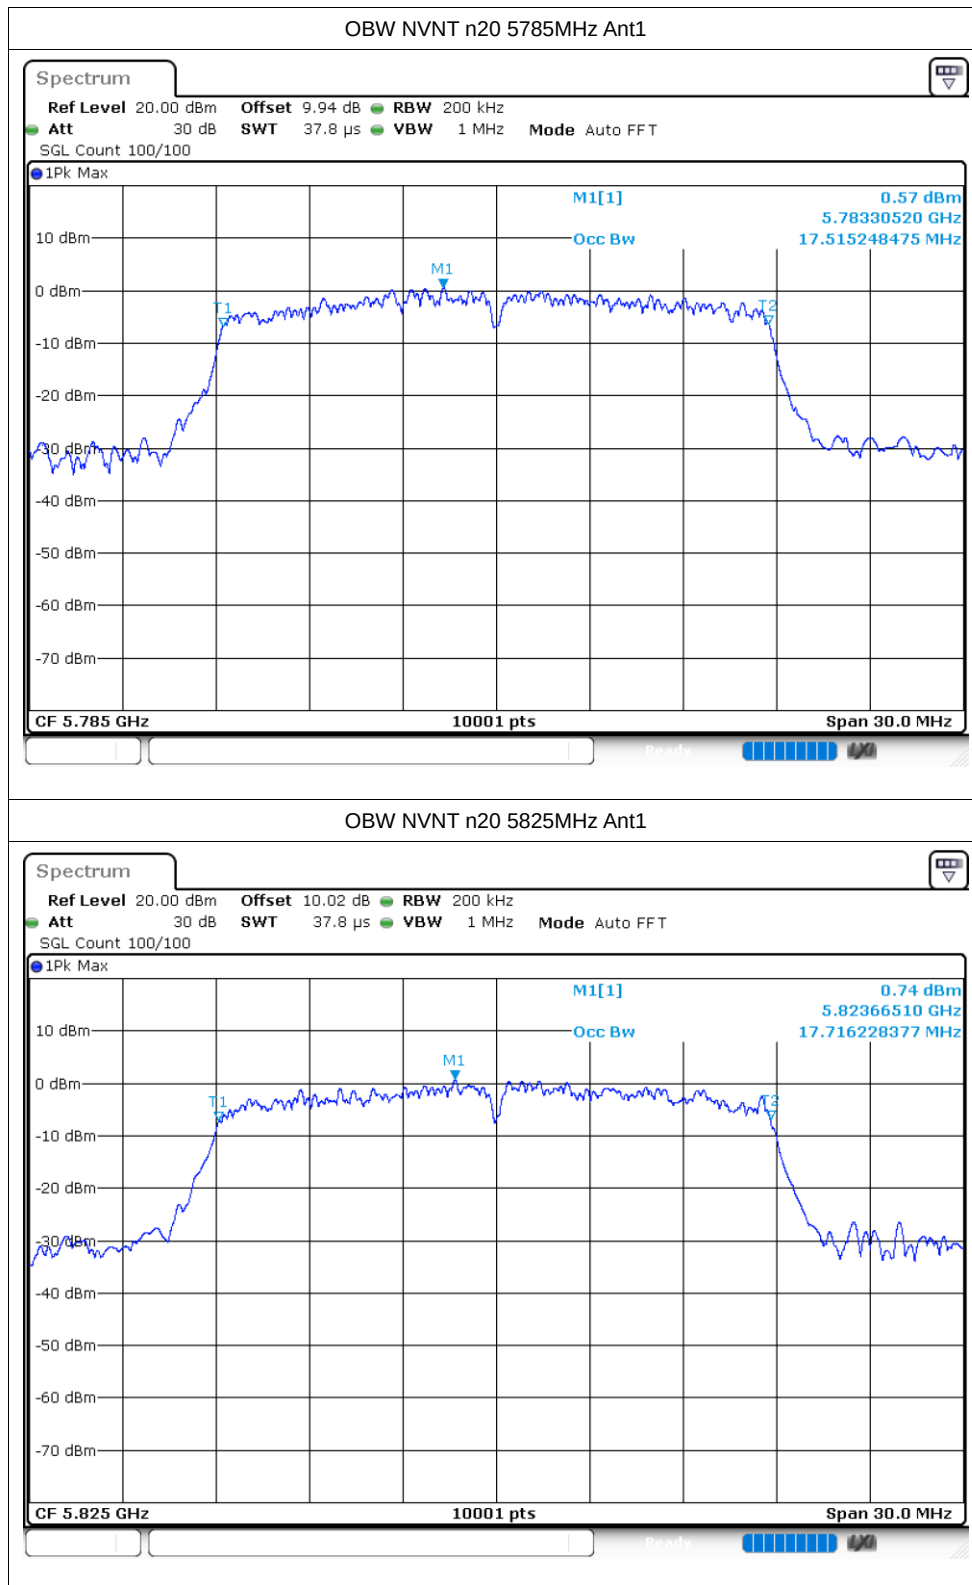

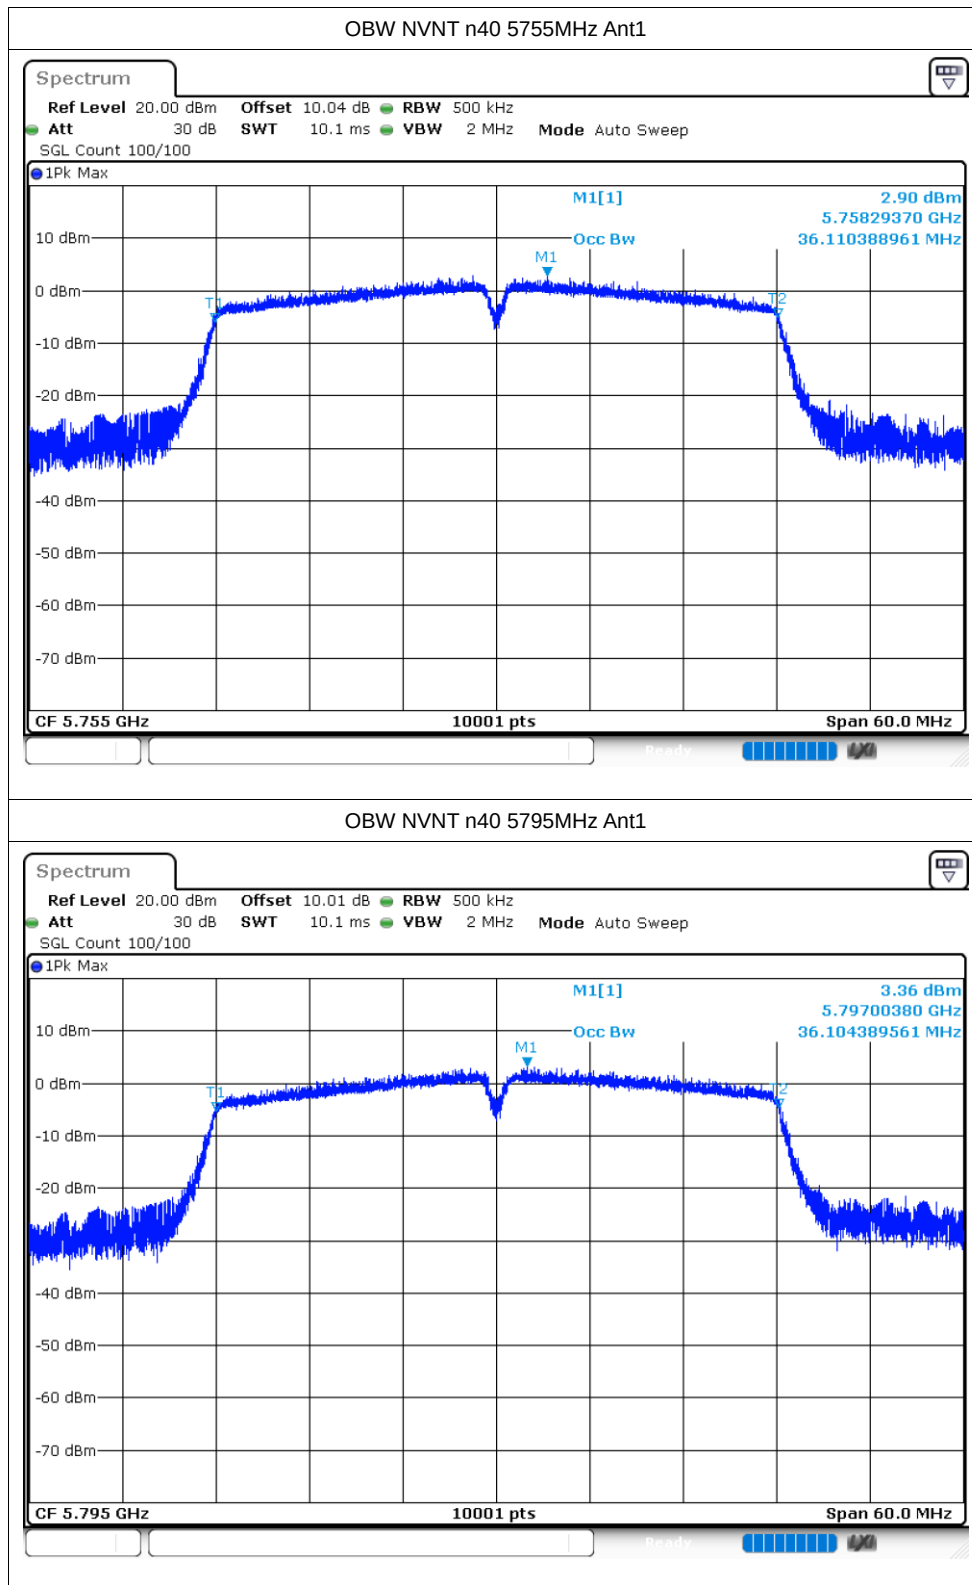

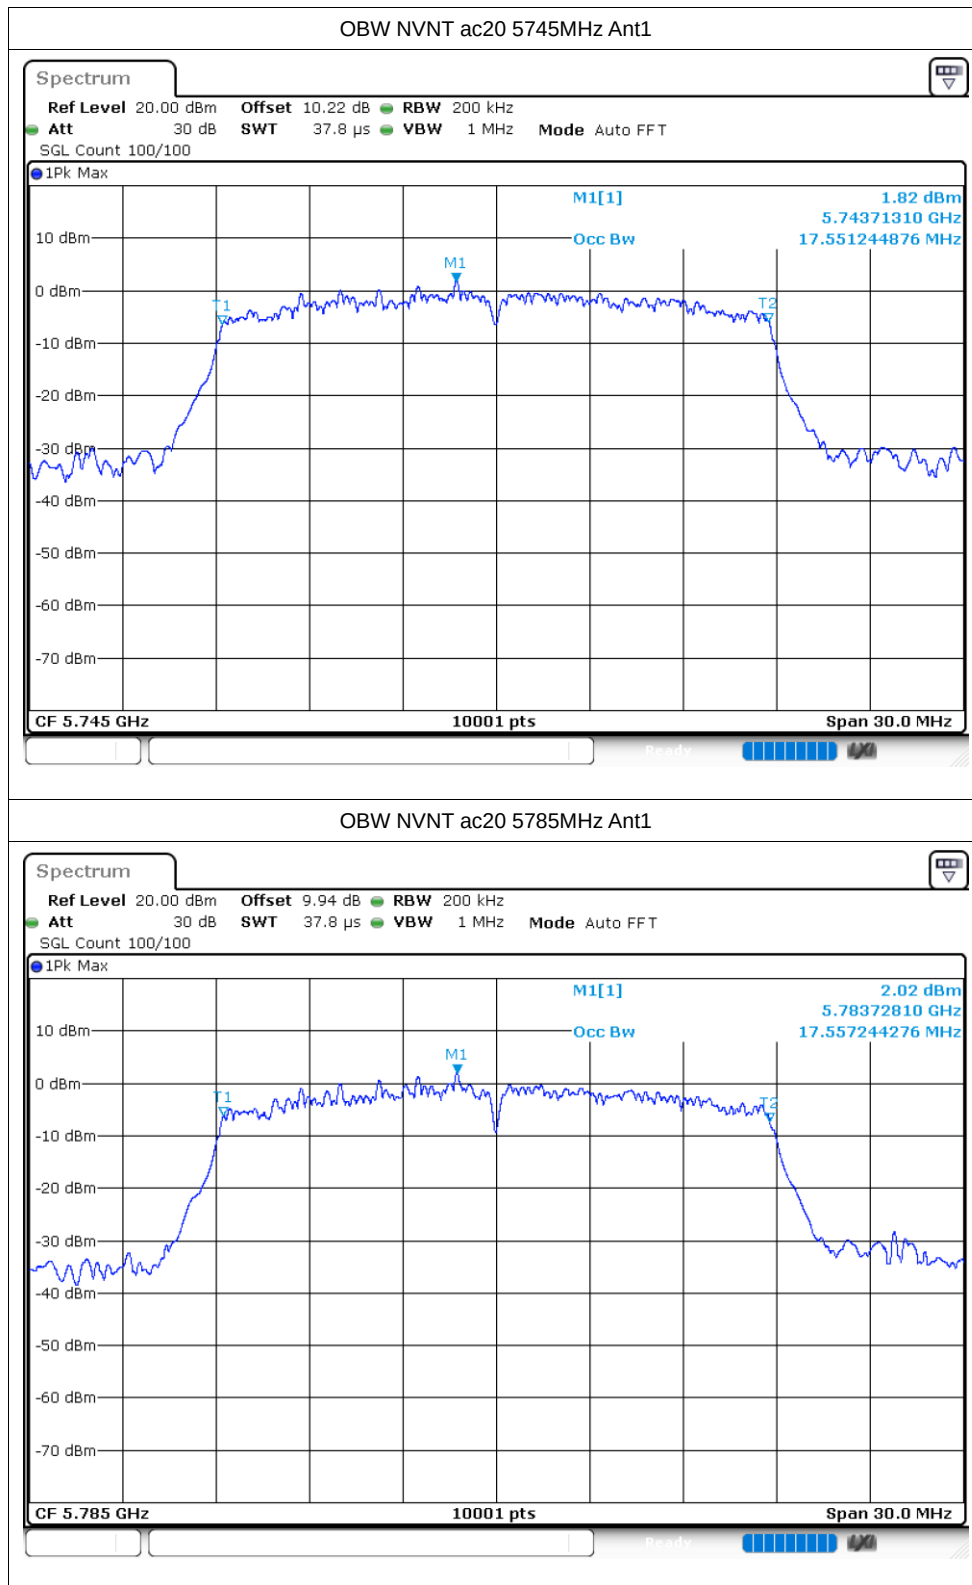

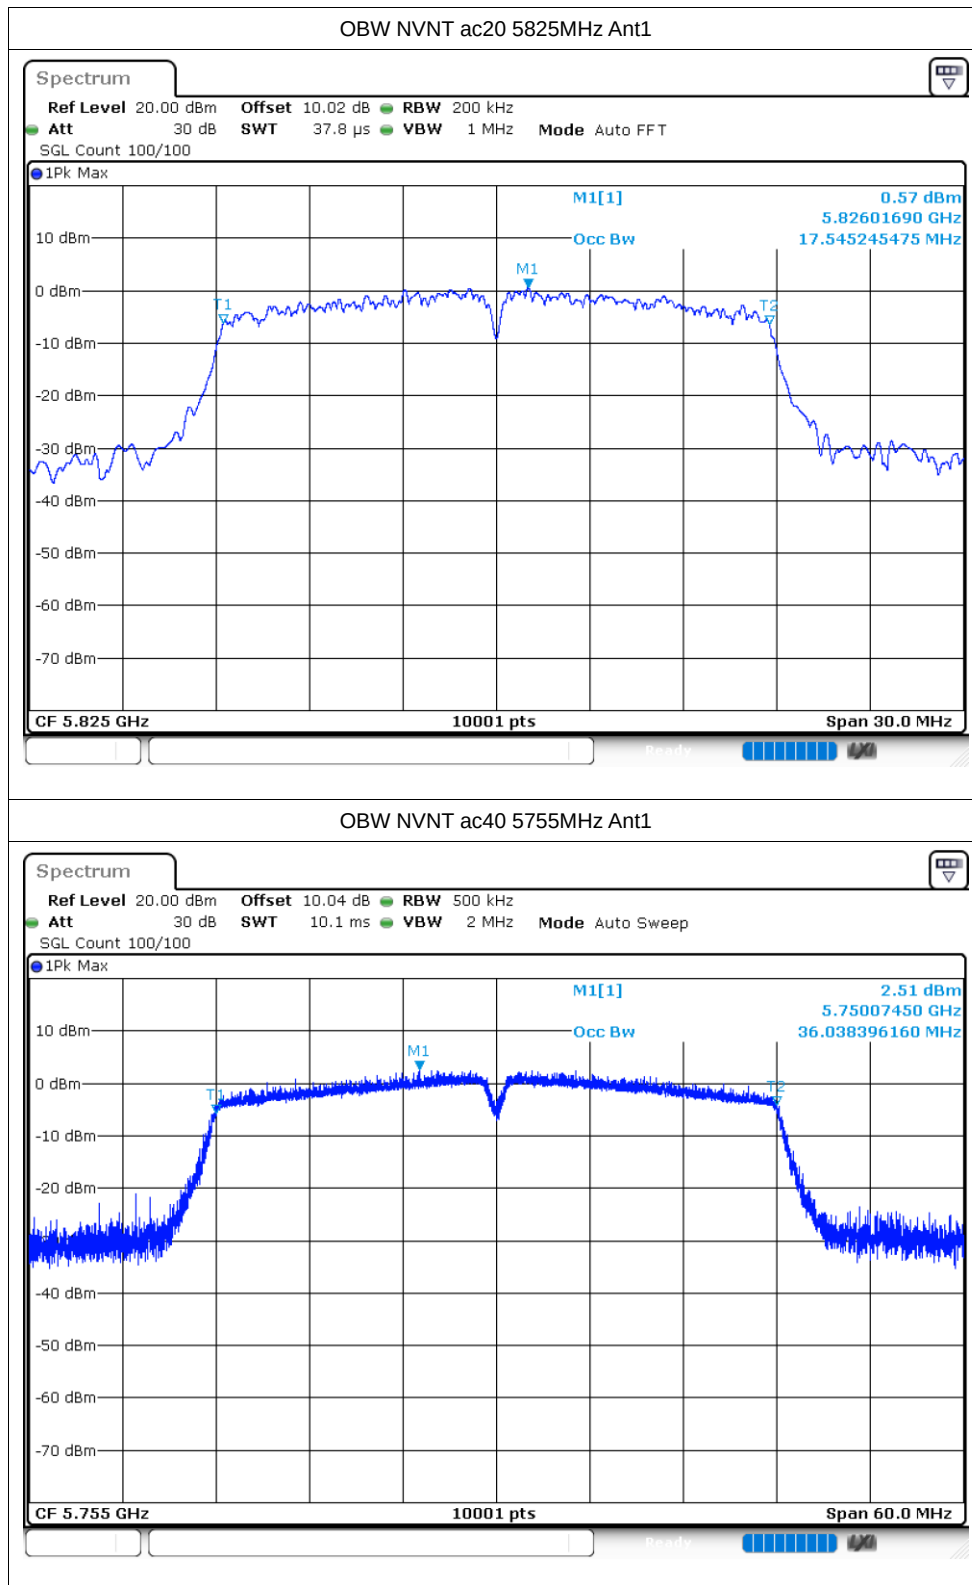

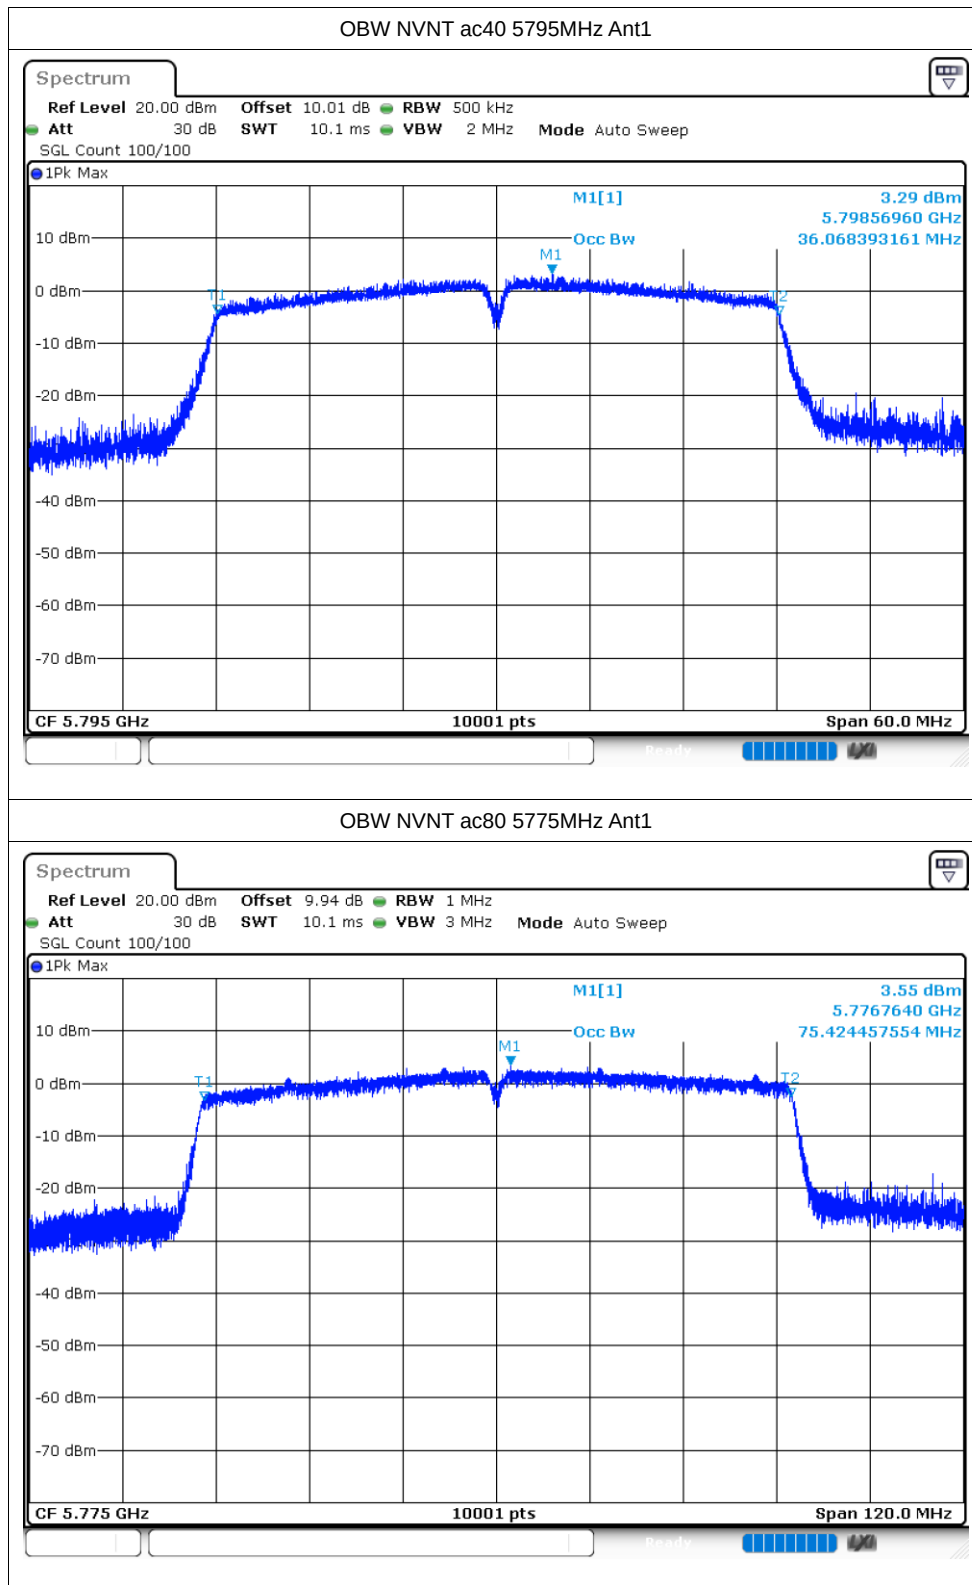


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-2.62	0.1	-2.52	30	Pass
NVNT	a	5785	Ant1	-3.11	0.11	-3	30	Pass
NVNT	a	5825	Ant1	-2.79	0.1	-2.69	30	Pass
NVNT	n20	5745	Ant1	-3.13	0.11	-3.02	30	Pass
NVNT	n20	5785	Ant1	-3.15	0.12	-3.03	30	Pass
NVNT	n20	5825	Ant1	-3.23	0.11	-3.12	30	Pass
NVNT	n40	5755	Ant1	-7.75	0.22	-7.53	30	Pass
NVNT	n40	5795	Ant1	-6.97	0.22	-6.75	30	Pass
NVNT	ac20	5745	Ant1	-3.04	0.11	-2.93	30	Pass
NVNT	ac20	5785	Ant1	-3.74	0.11	-3.63	30	Pass
NVNT	ac20	5825	Ant1	-2.78	0.11	-2.67	30	Pass
NVNT	ac40	5755	Ant1	-6.58	0.22	-6.36	30	Pass
NVNT	ac40	5795	Ant1	-7.21	0.22	-6.99	30	Pass
NVNT	ac80	5775	Ant1	-12.26	0.44	-11.82	30	Pass


Test Graphs


PSD NVNT a 5745MHz Ant1

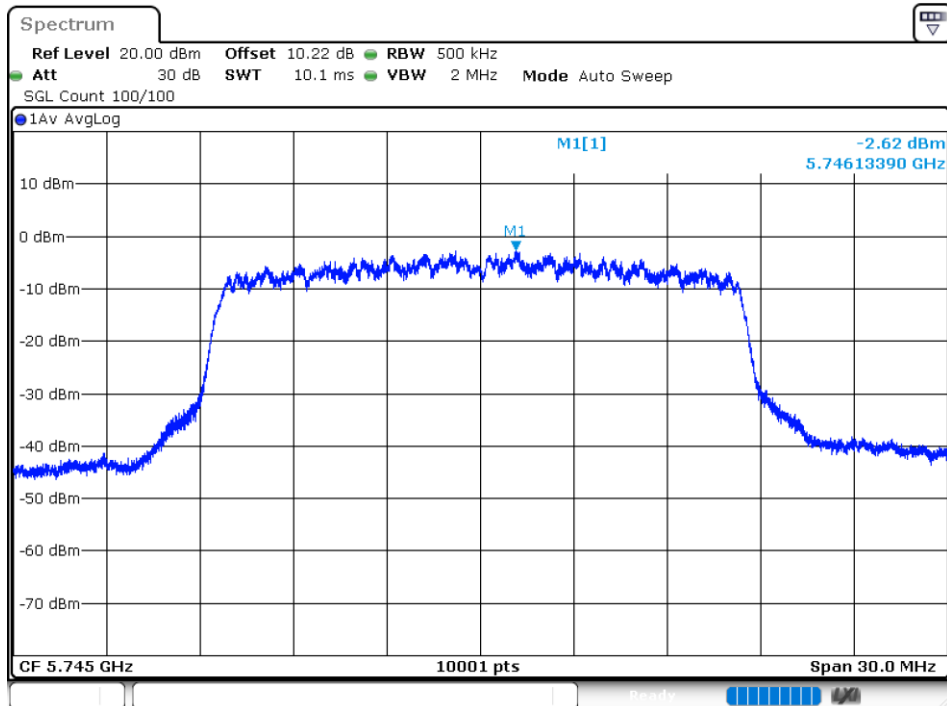



PSD NVNT a 5785MHz Ant1

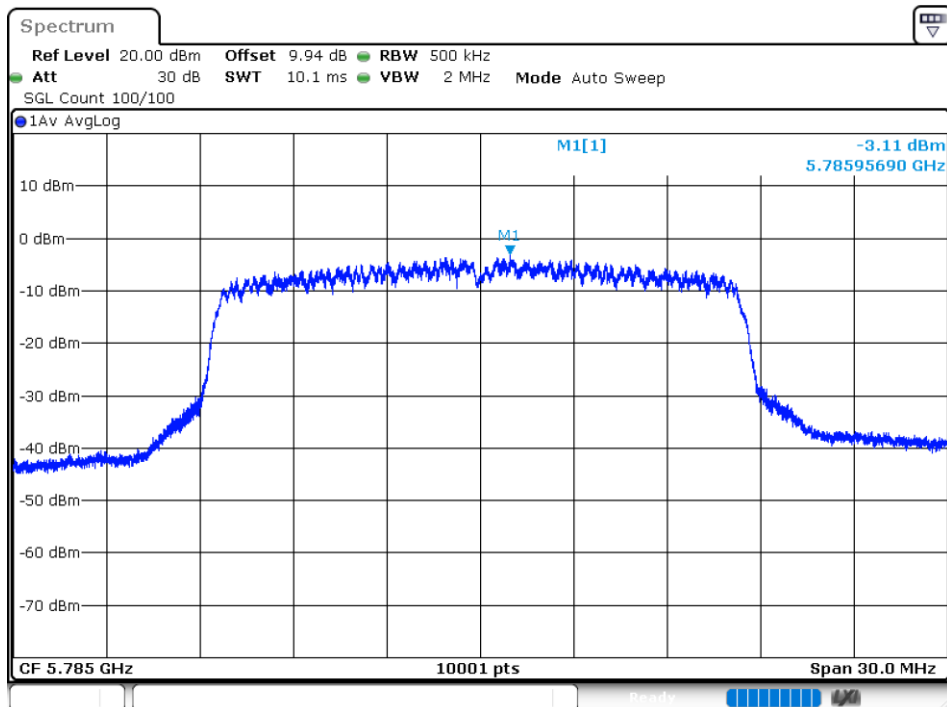


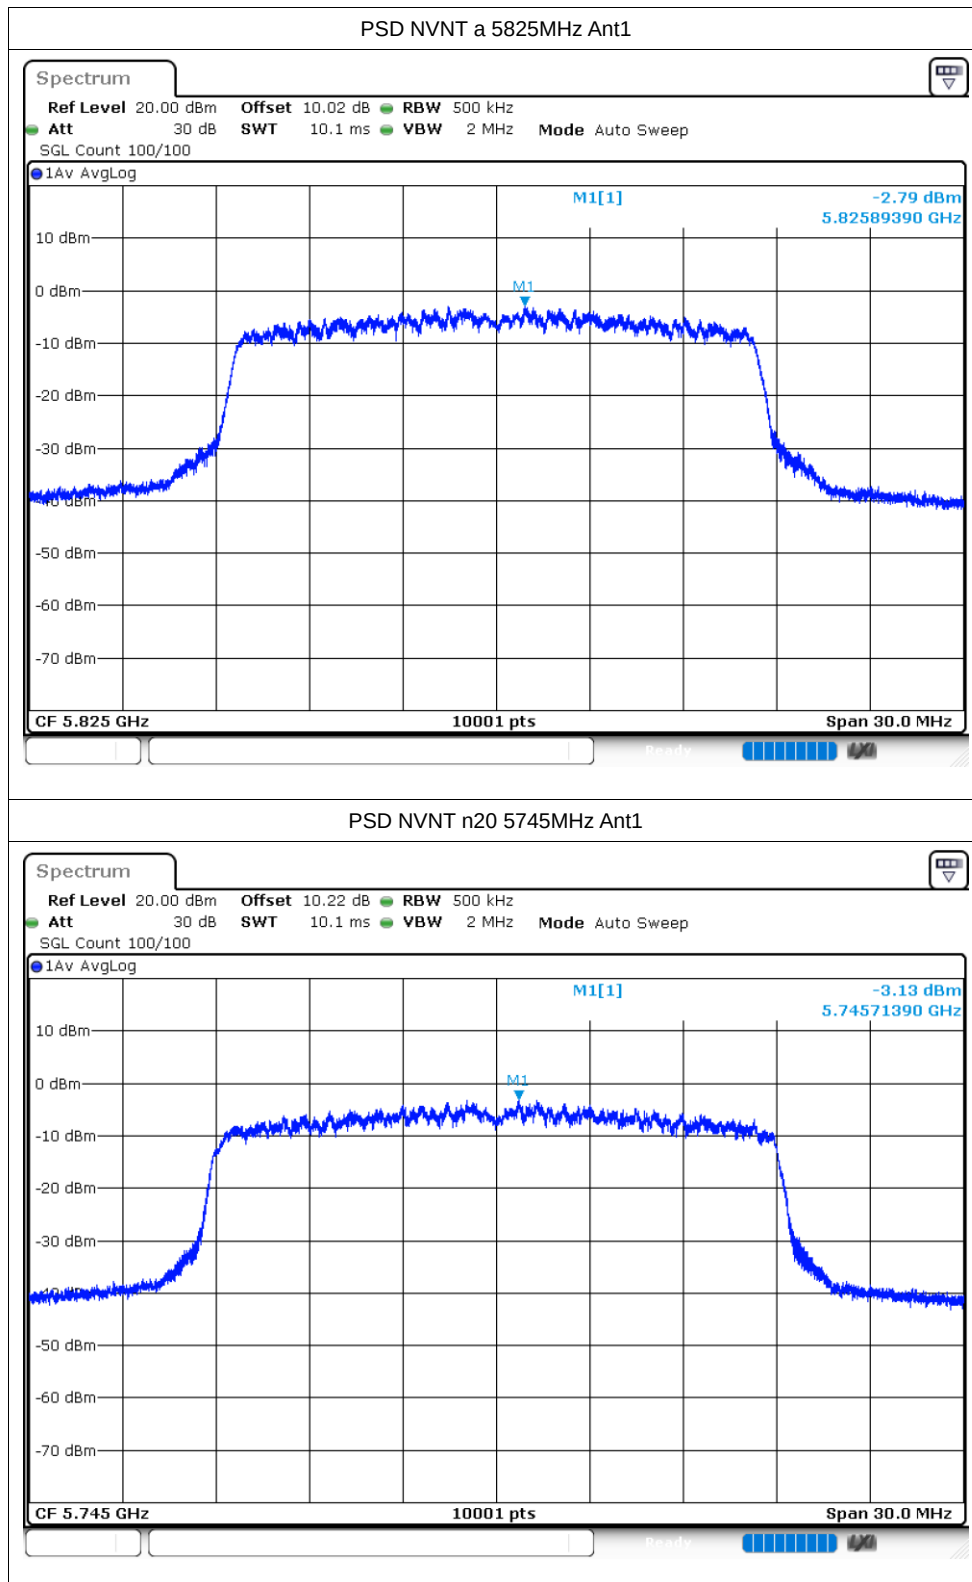


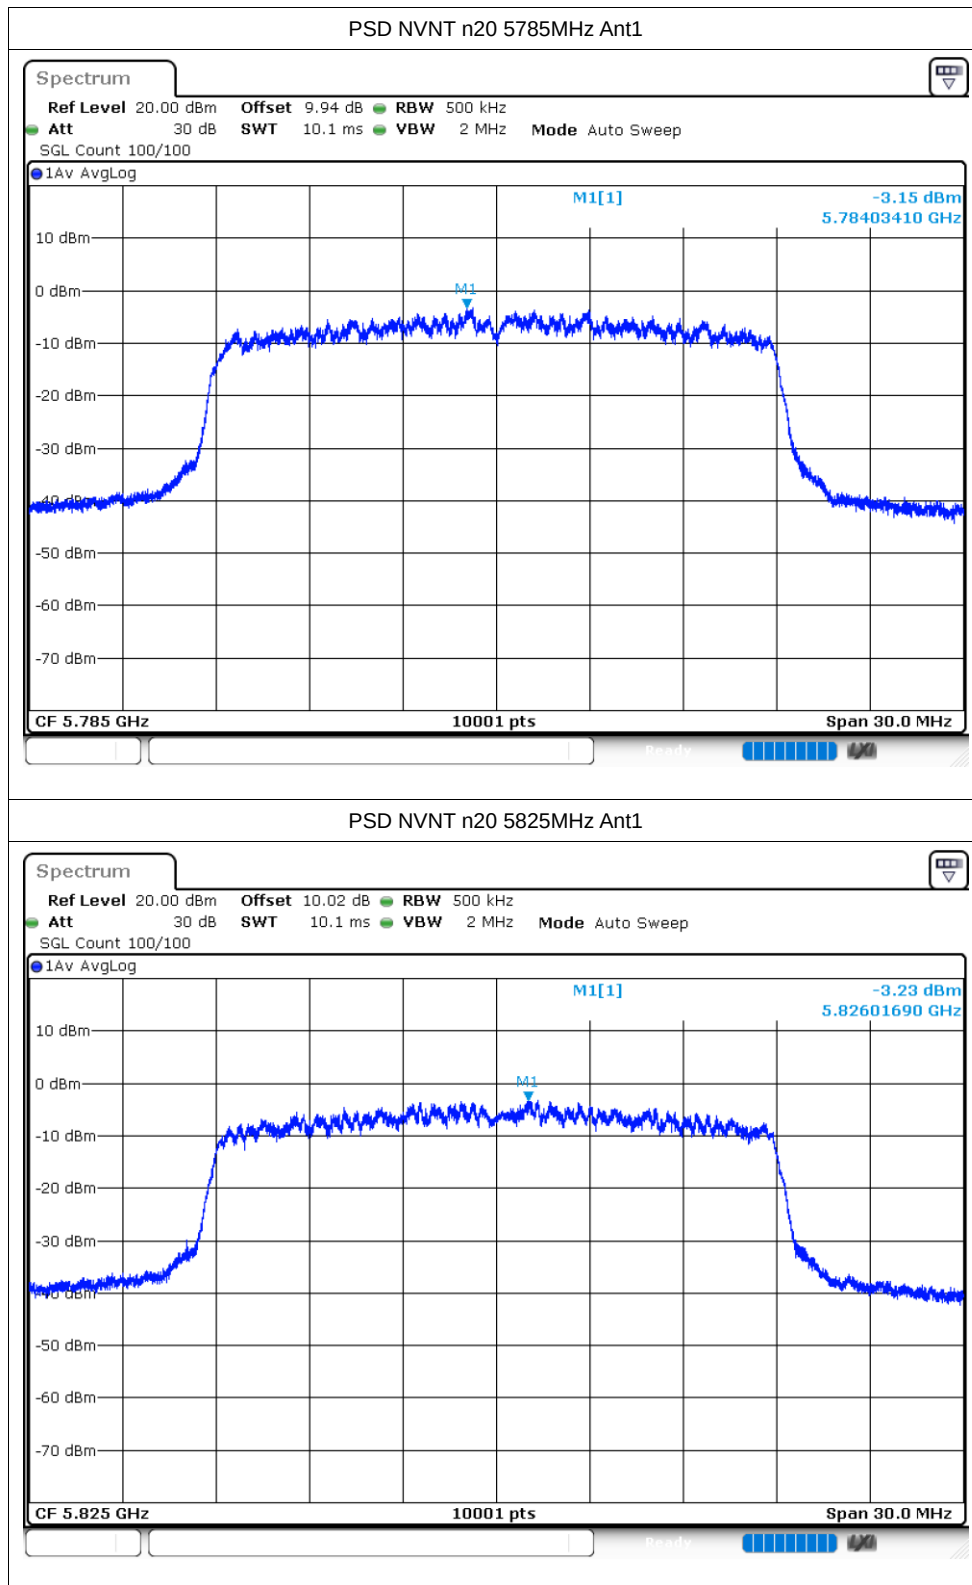

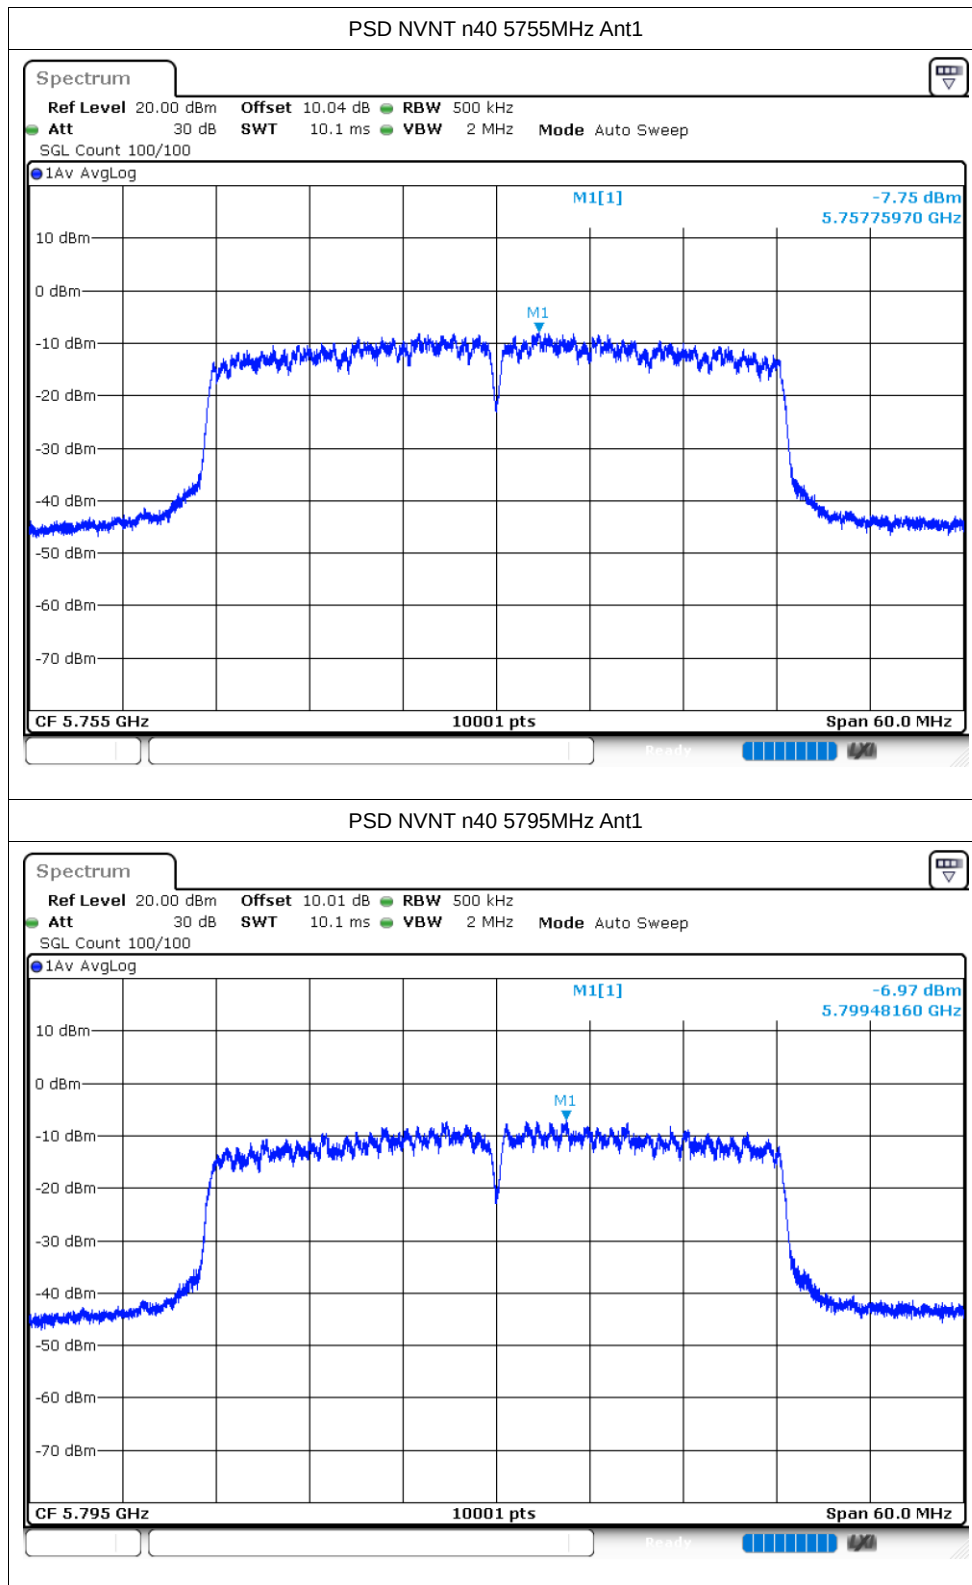

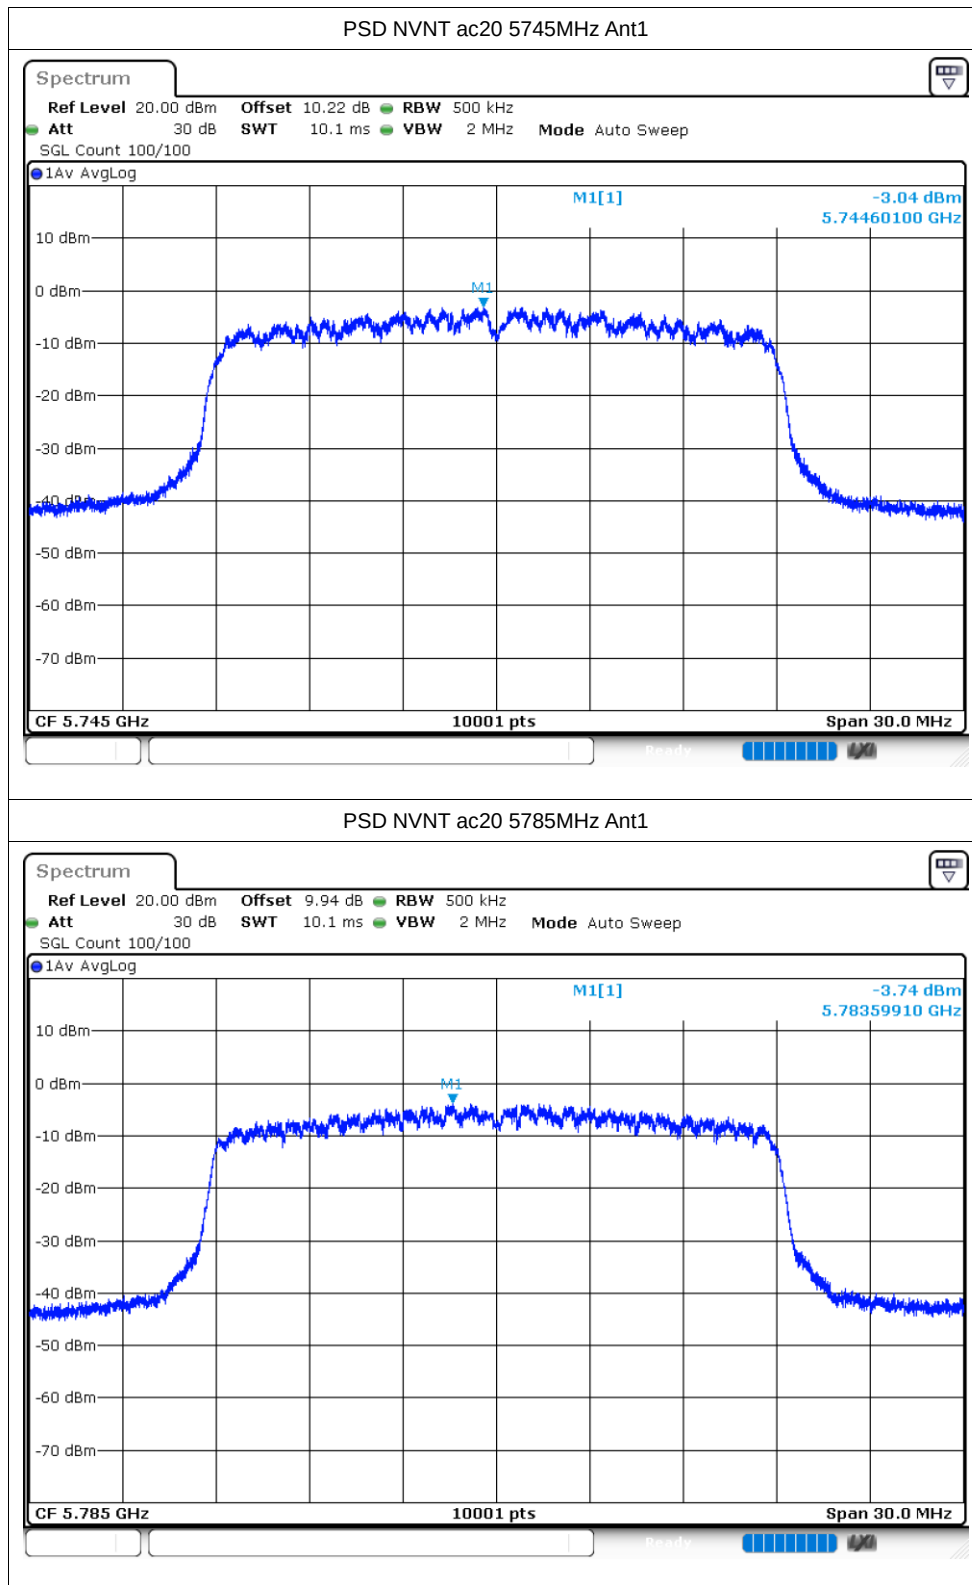

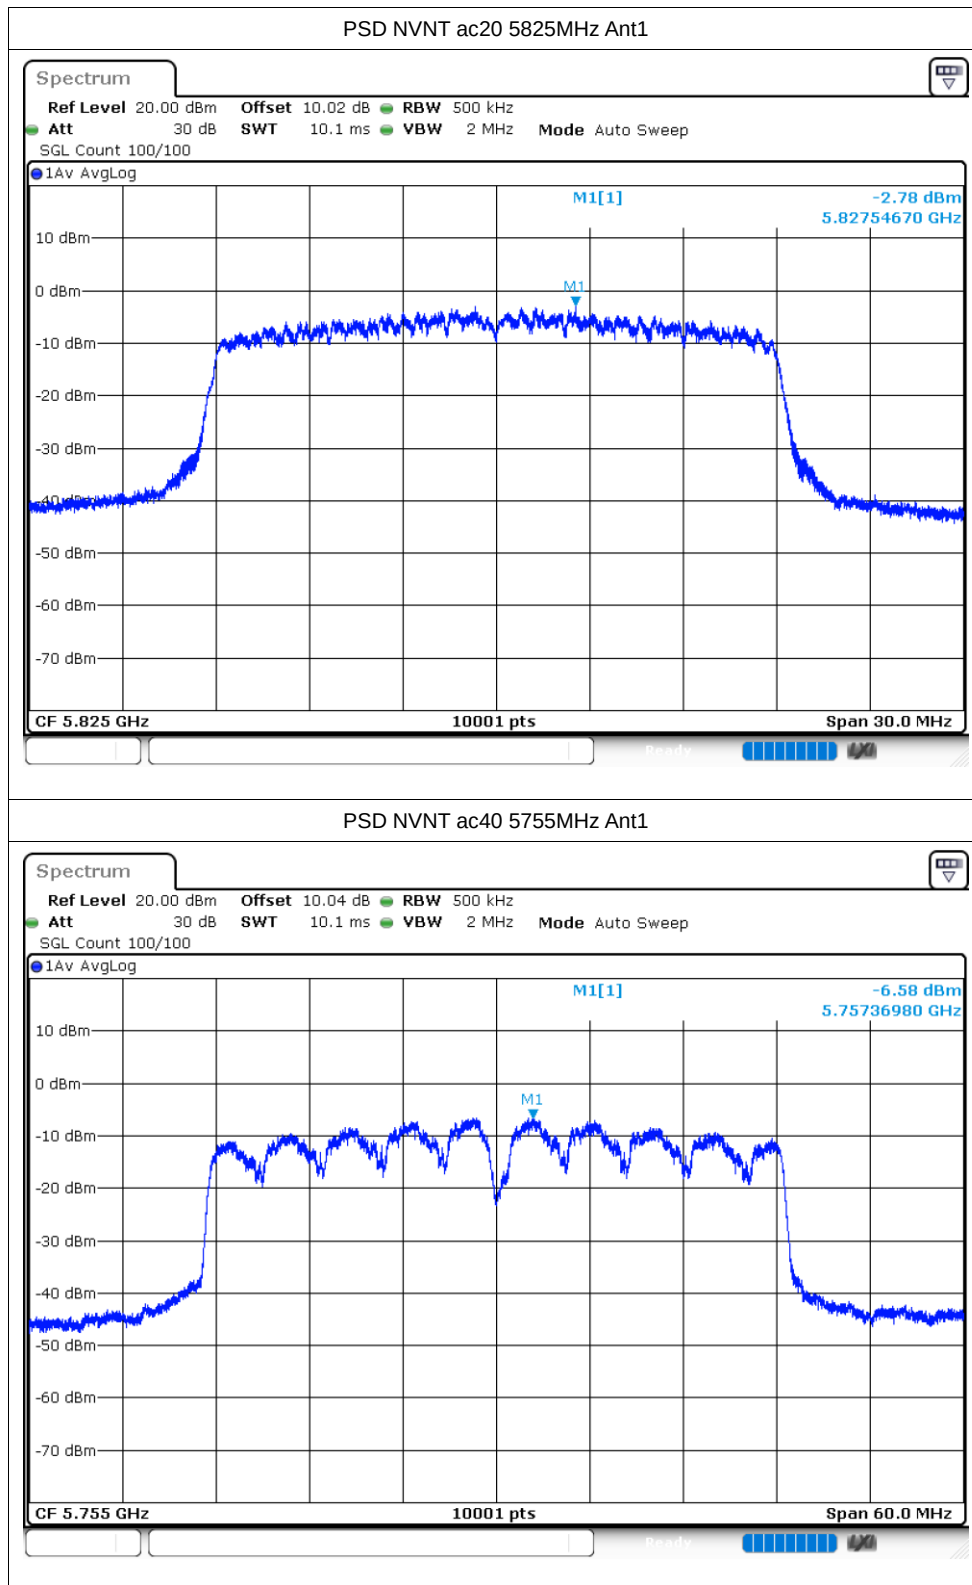

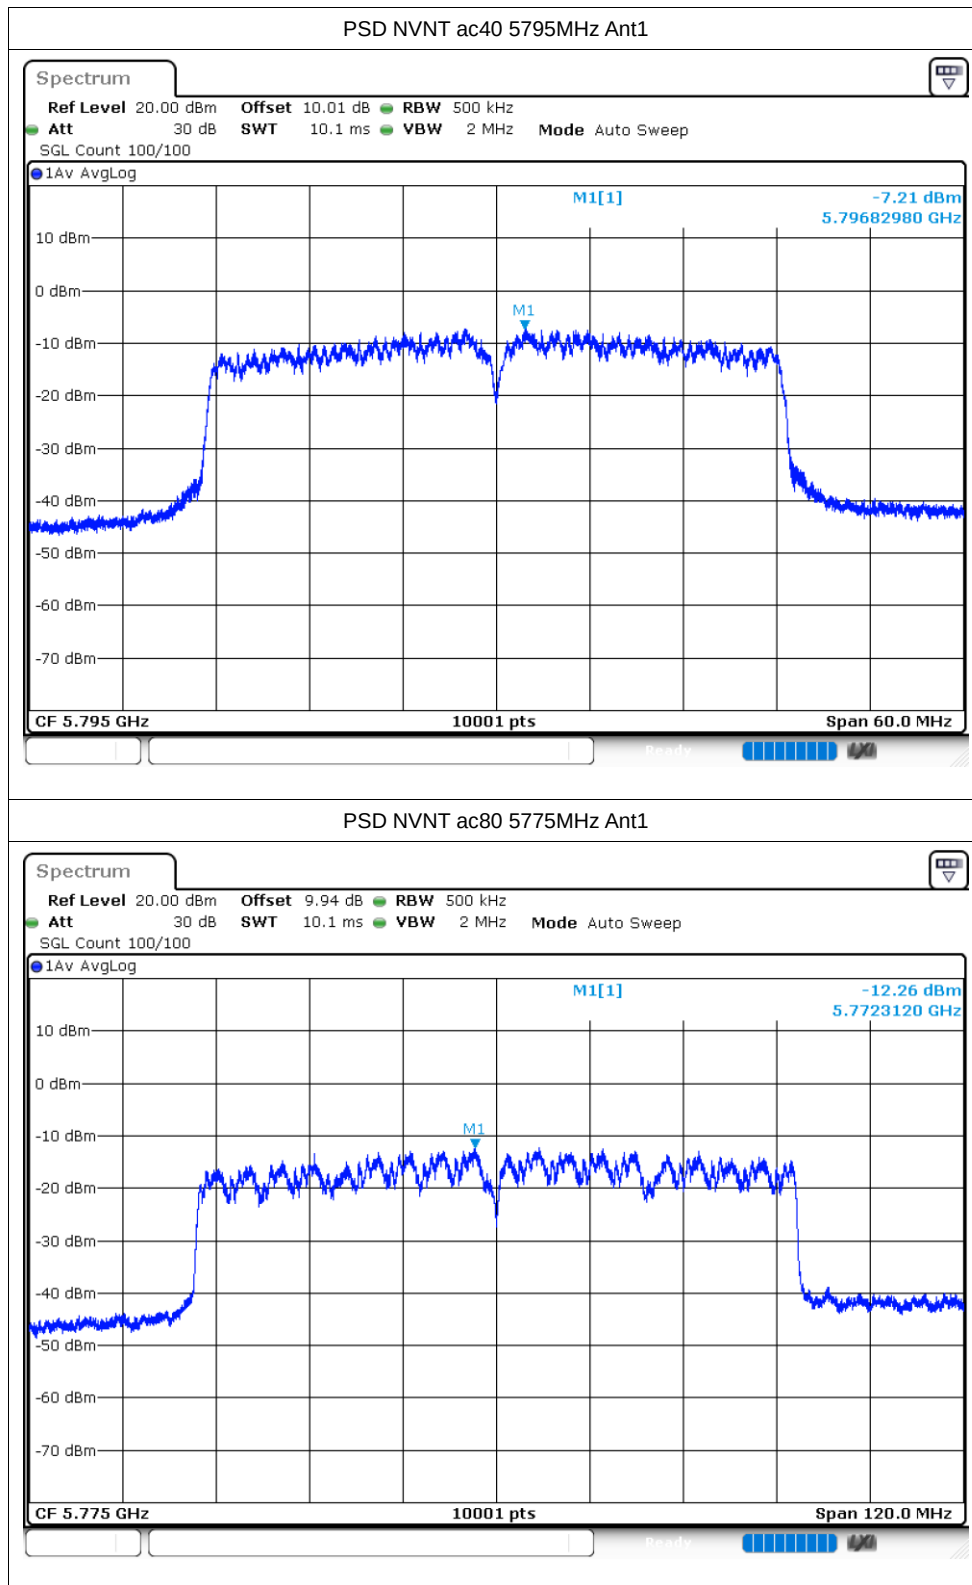


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-24.73		Pass
NVNT	a	5825	Ant1	-27.1		Pass
NVNT	n20	5745	Ant1	-22.23		Pass
NVNT	n20	5825	Ant1	-23.32		Pass
NVNT	n40	5755	Ant1	-20.32		Pass
NVNT	n40	5795	Ant1	-28.41		Pass
NVNT	ac20	5745	Ant1	-22.47		Pass
NVNT	ac20	5825	Ant1	-25.97		Pass
NVNT	ac40	5755	Ant1	-21.15		Pass
NVNT	ac40	5795	Ant1	-31.37		Pass
NVNT	ac80	5775	Ant1	-22.46		Pass

Test Graphs


Band Edge NVNT a 5745MHz Low Ant1

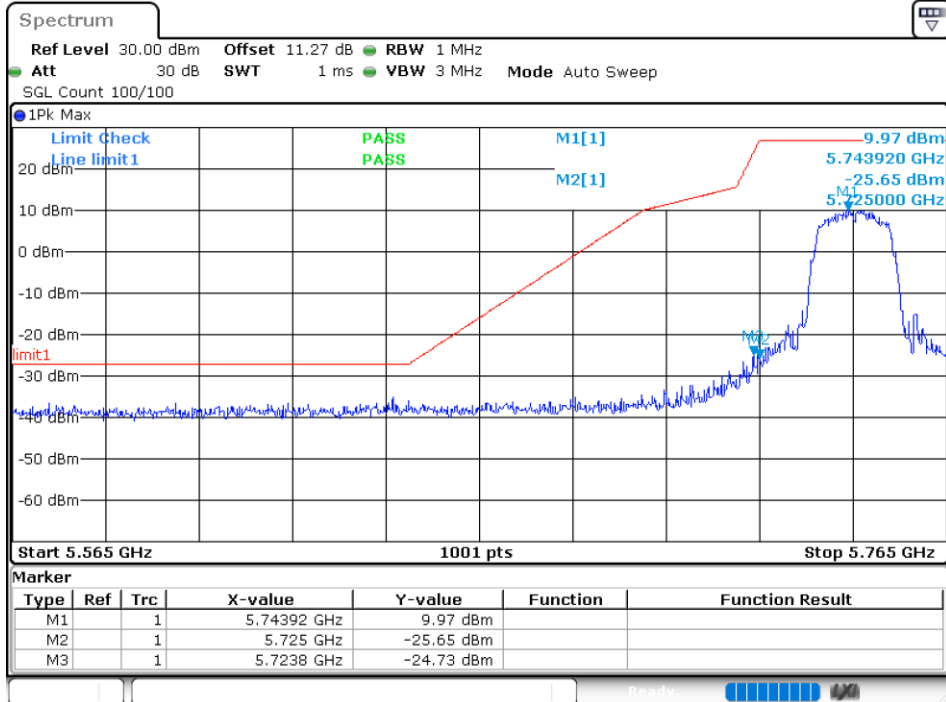


Band Edge NVNT a 5825MHz High Ant1

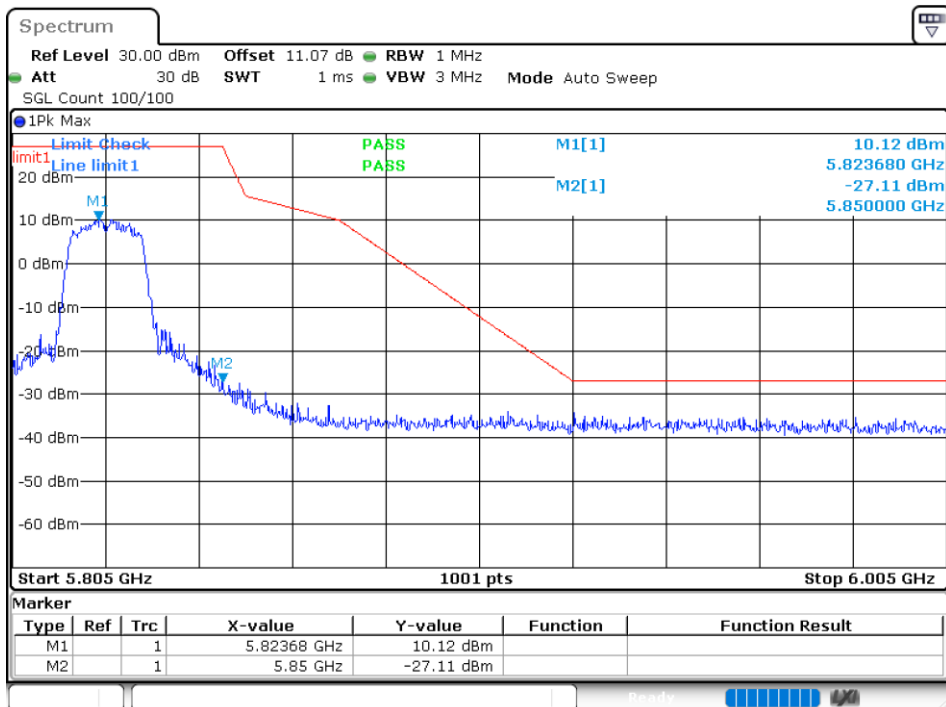



Band Edge NVNT n20 5745MHz Low Ant1

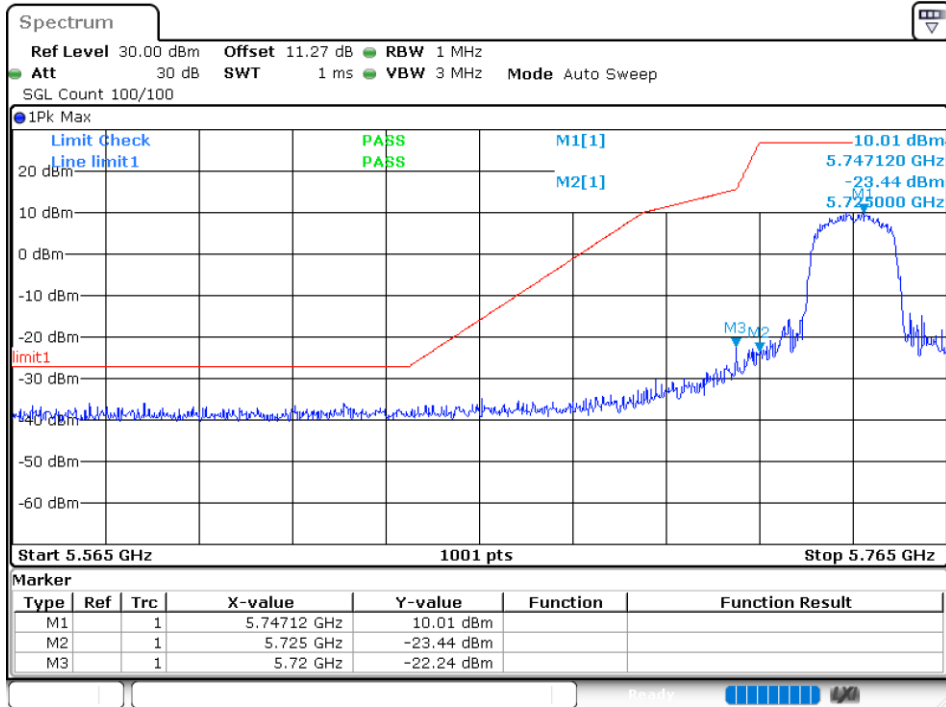



Band Edge NVNT n20 5825MHz High Ant1

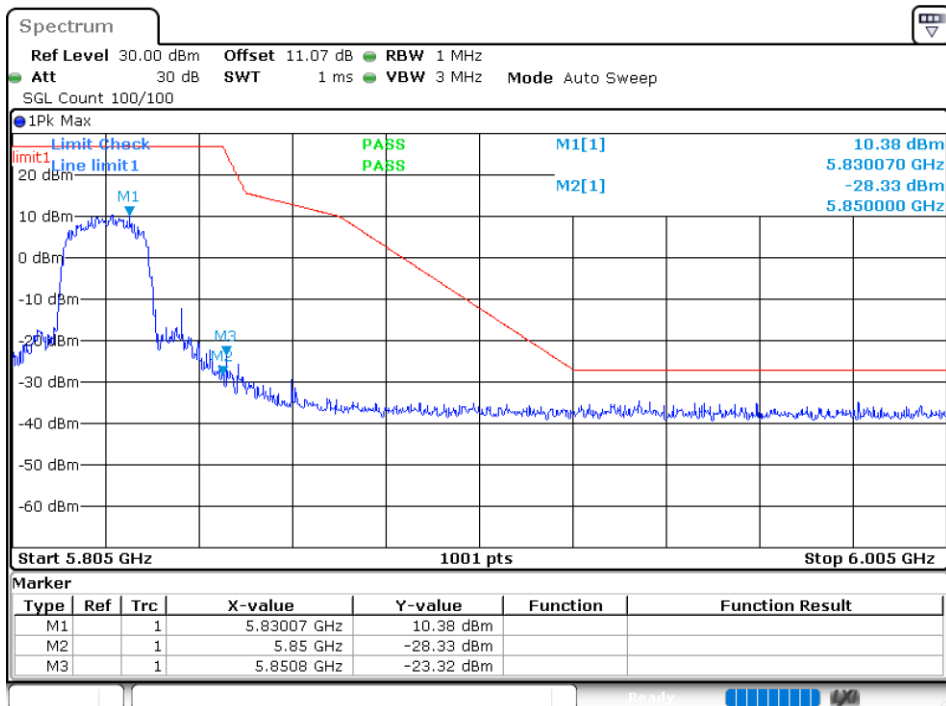

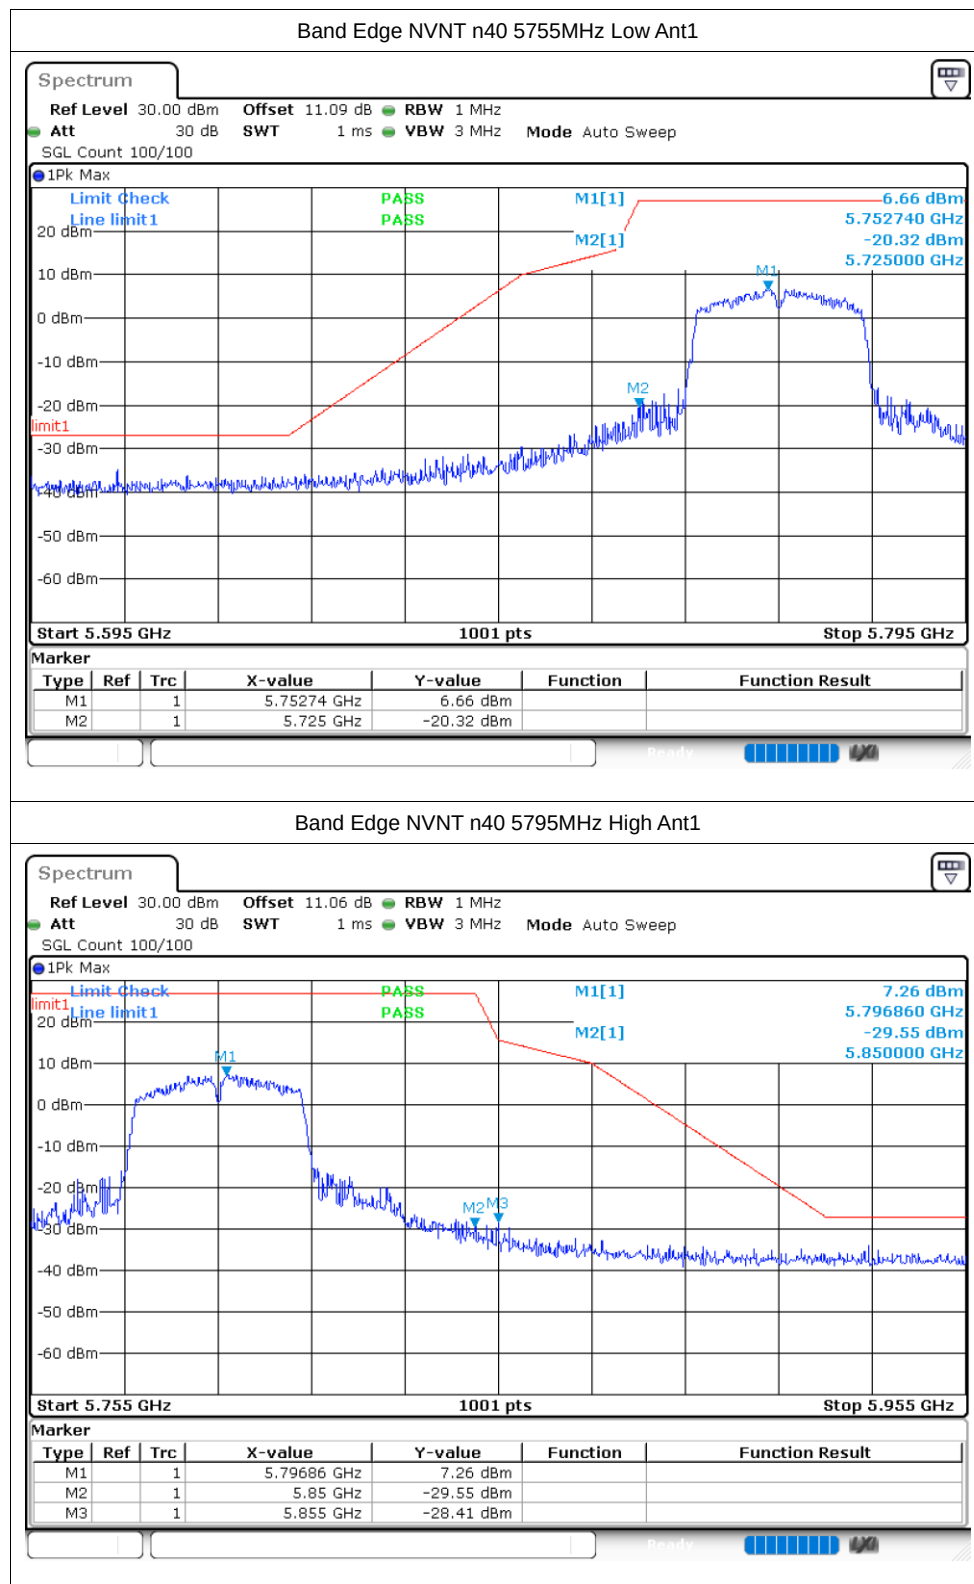

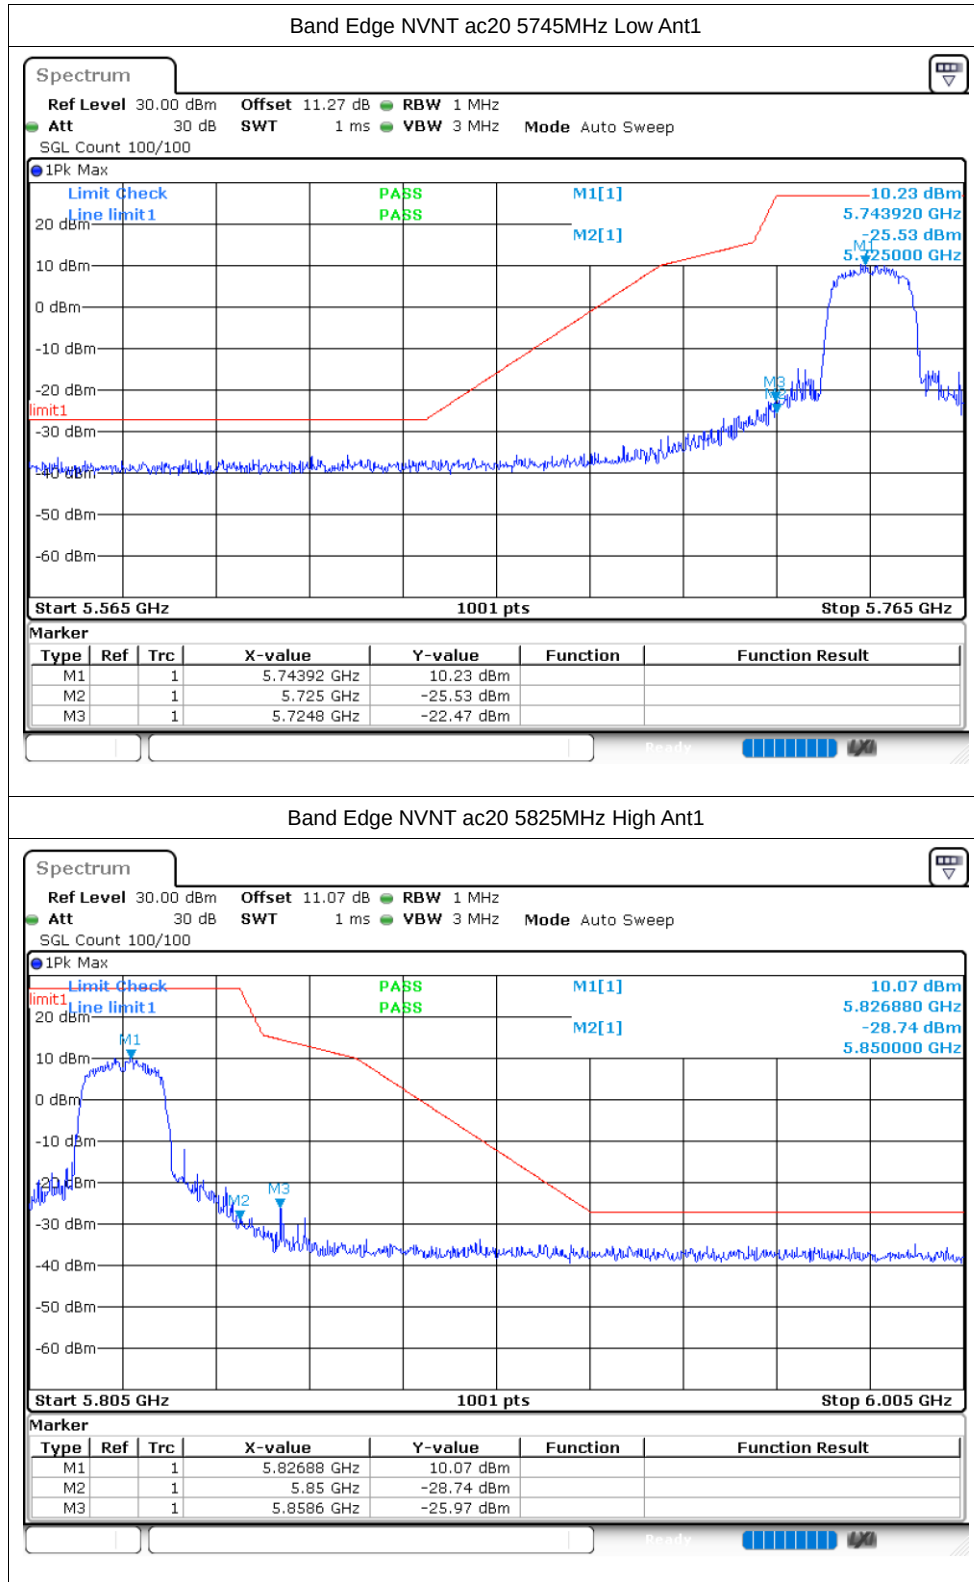

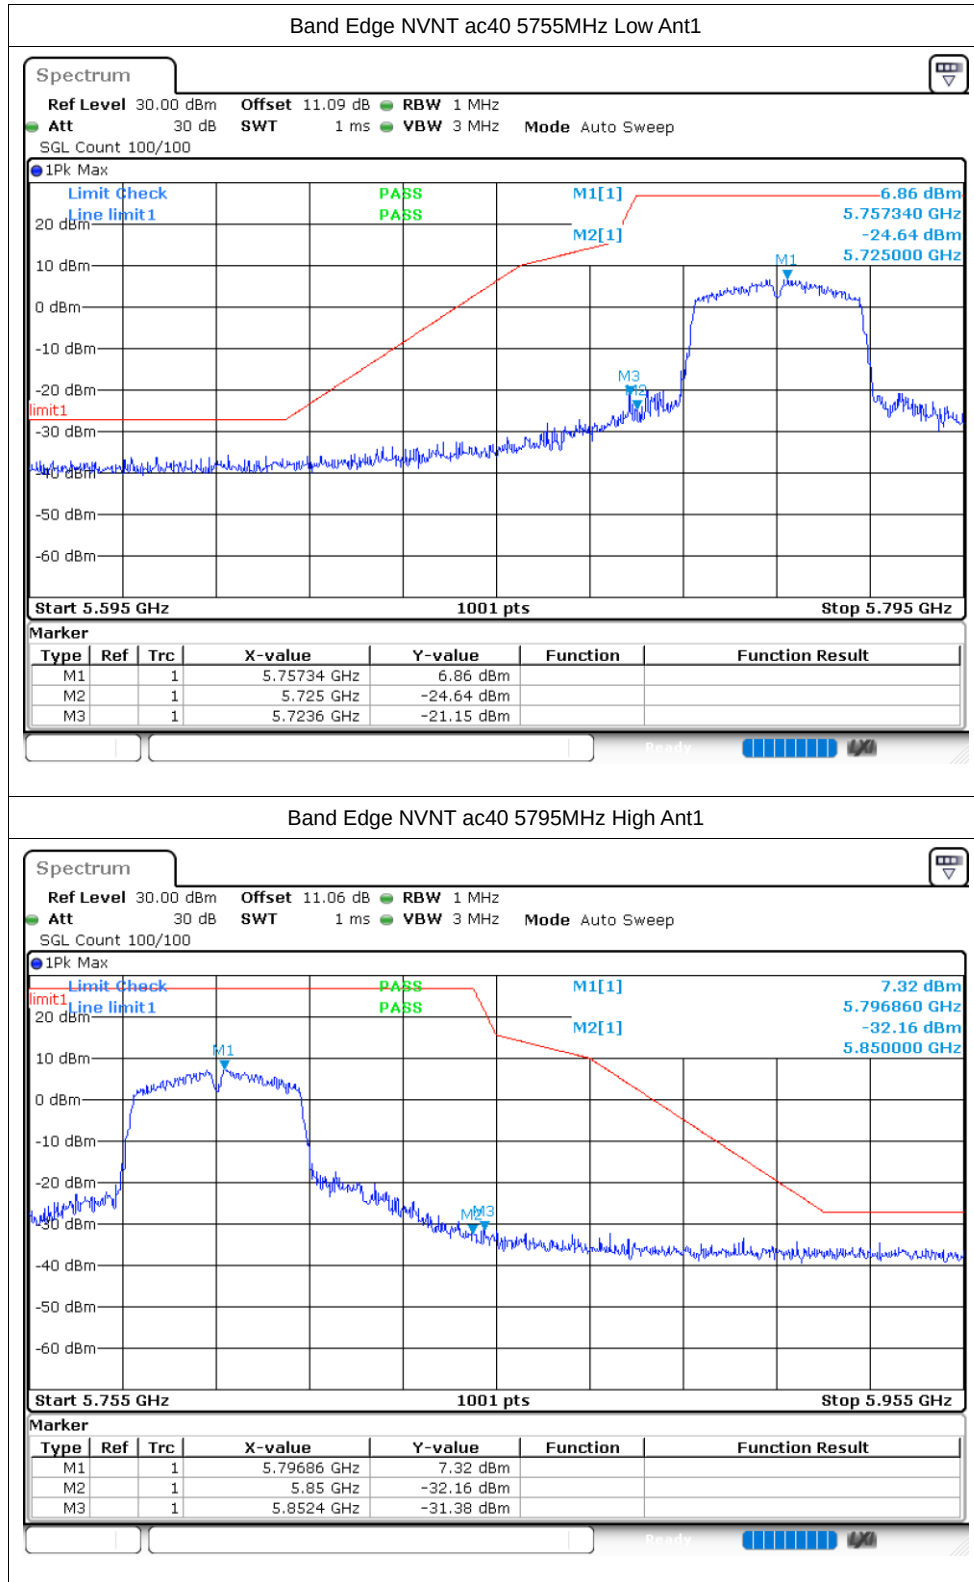

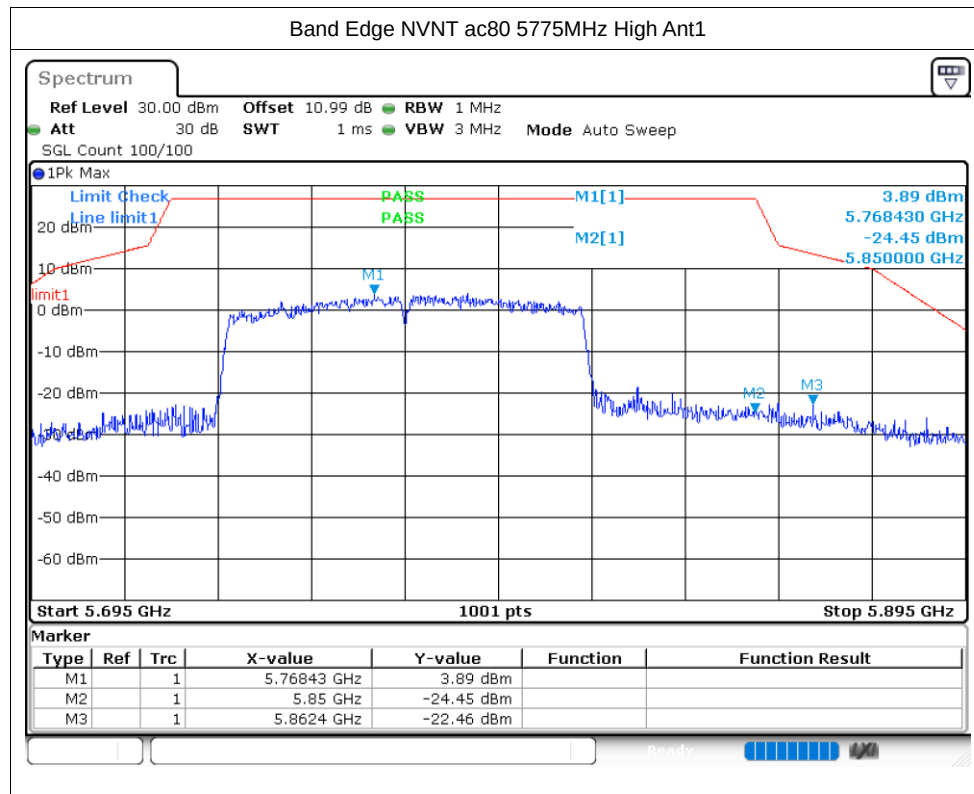


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5745	Ant1	-36.84	-27	Pass
NVNT	a	5785	Ant1	-28.14	-27	Pass
NVNT	a	5825	Ant1	-36.86	-27	Pass
NVNT	n20	5745	Ant1	-36.51	-27	Pass
NVNT	n20	5785	Ant1	-37.4	-27	Pass
NVNT	n20	5825	Ant1	-37.32	-27	Pass
NVNT	n40	5755	Ant1	-36.56	-27	Pass
NVNT	n40	5795	Ant1	-37.13	-27	Pass
NVNT	ac20	5745	Ant1	-36.86	-27	Pass
NVNT	ac20	5785	Ant1	-30.58	-27	Pass
NVNT	ac20	5825	Ant1	-33.62	-27	Pass
NVNT	ac40	5755	Ant1	-35.93	-27	Pass
NVNT	ac40	5795	Ant1	-35.75	-27	Pass
NVNT	ac80	5775	Ant1	-36.56	-27	Pass

Test Graphs

Tx. Spurious NVNT a 5745MHz Ant1 Emission

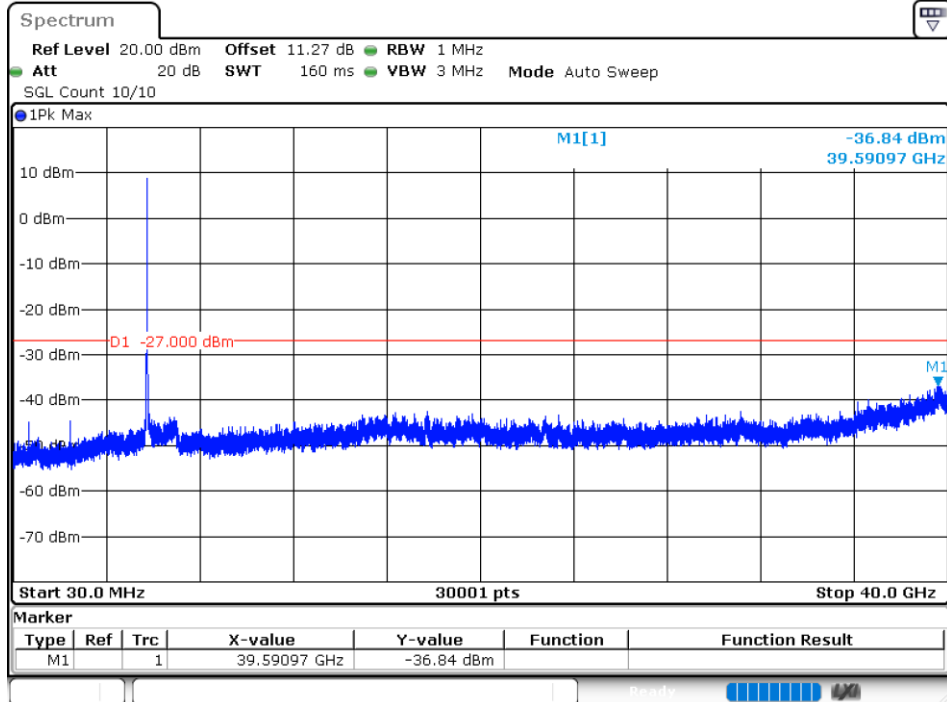

Tx. Spurious NVNT a 5785MHz Ant1 Emission

