


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.17	PASS
EGPRS1900 1 Slot	661	1880	25.58	PASS
EGPRS1900 1 Slot	810	1909.8	25.23	PASS
EGPRS1900 2 Slot	512	1850.2	25.08	PASS
EGPRS1900 2 Slot	661	1880	24.57	PASS
EGPRS1900 2 Slot	810	1909.8	23.93	PASS
EGPRS1900 3 Slot	512	1850.2	23.13	PASS
EGPRS1900 3 Slot	661	1880	22.26	PASS
EGPRS1900 3 Slot	810	1909.8	21.59	PASS
EGPRS1900 4 Slot	512	1850.2	21.42	PASS
EGPRS1900 4 Slot	661	1880	20.82	PASS
EGPRS1900 4 Slot	810	1909.8	19.92	PASS
EGPRS850 1 Slot	128	824.2	26.92	PASS
EGPRS850 1 Slot	189	836.4	27.60	PASS
EGPRS850 1 Slot	251	848.8	26.80	PASS
EGPRS850 2 Slot	128	824.2	26.82	PASS
EGPRS850 2 Slot	189	836.4	25.67	PASS
EGPRS850 2 Slot	251	848.8	26.57	PASS
EGPRS850 3 Slot	128	824.2	24.63	PASS
EGPRS850 3 Slot	189	836.4	24.85	PASS
EGPRS850 3 Slot	251	848.8	24.34	PASS
EGPRS850 4 Slot	128	824.2	21.89	PASS
EGPRS850 4 Slot	189	836.4	21.71	PASS
EGPRS850 4 Slot	251	848.8	22.10	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.528609626	13.00	PASS
EGPRS1900	661	1880	5.60721831	13.00	PASS
EGPRS1900	810	1909.8	7.088614458	13.00	PASS
EGPRS850	128	824.2	7.64816568	13.00	PASS
EGPRS850	189	836.4	7.519310924	13.00	PASS
EGPRS850	251	848.8	7.57939759	13.00	PASS


EGPRS1900 Channel=512

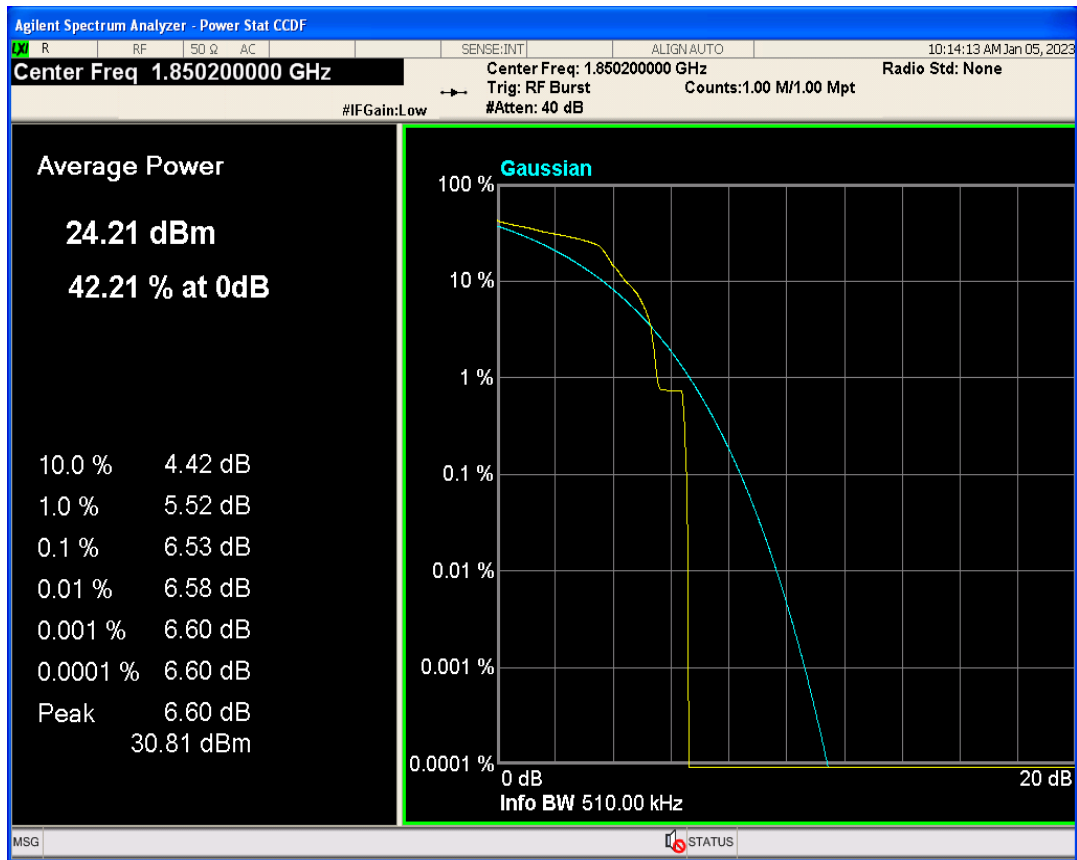

EGPRS1900 Channel=661

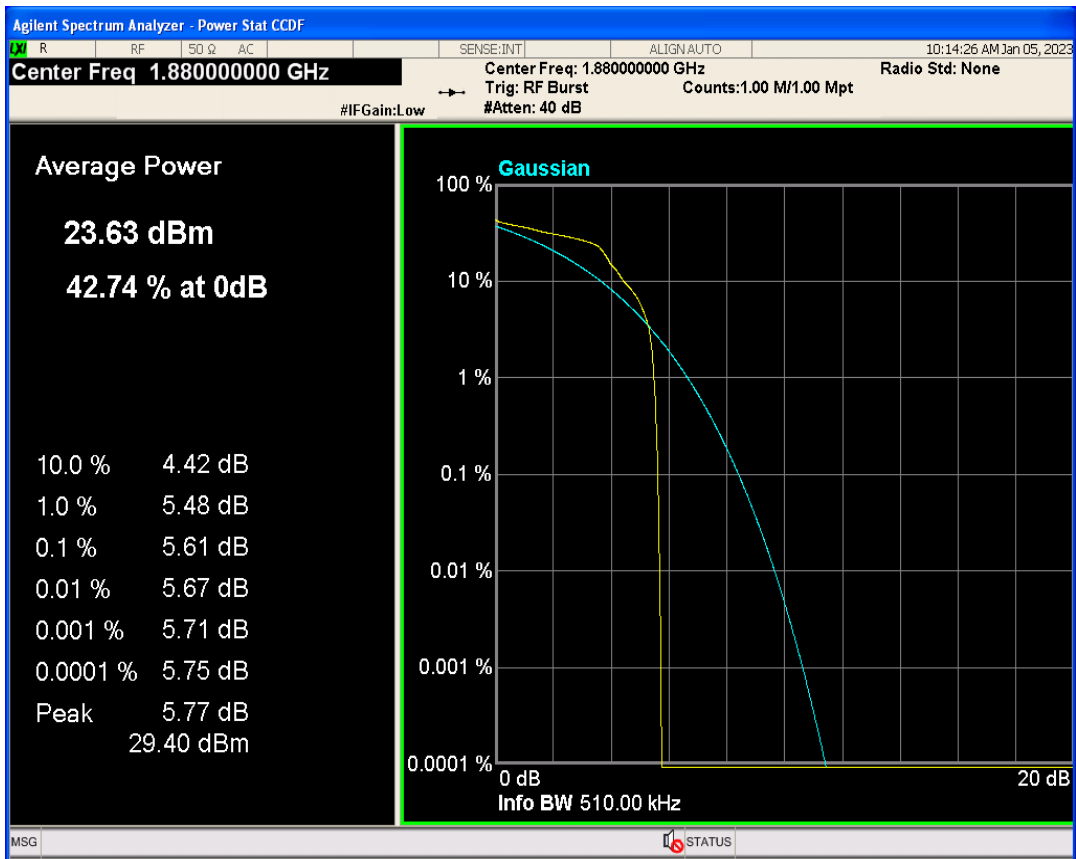


EGPRS1900 Channel=810

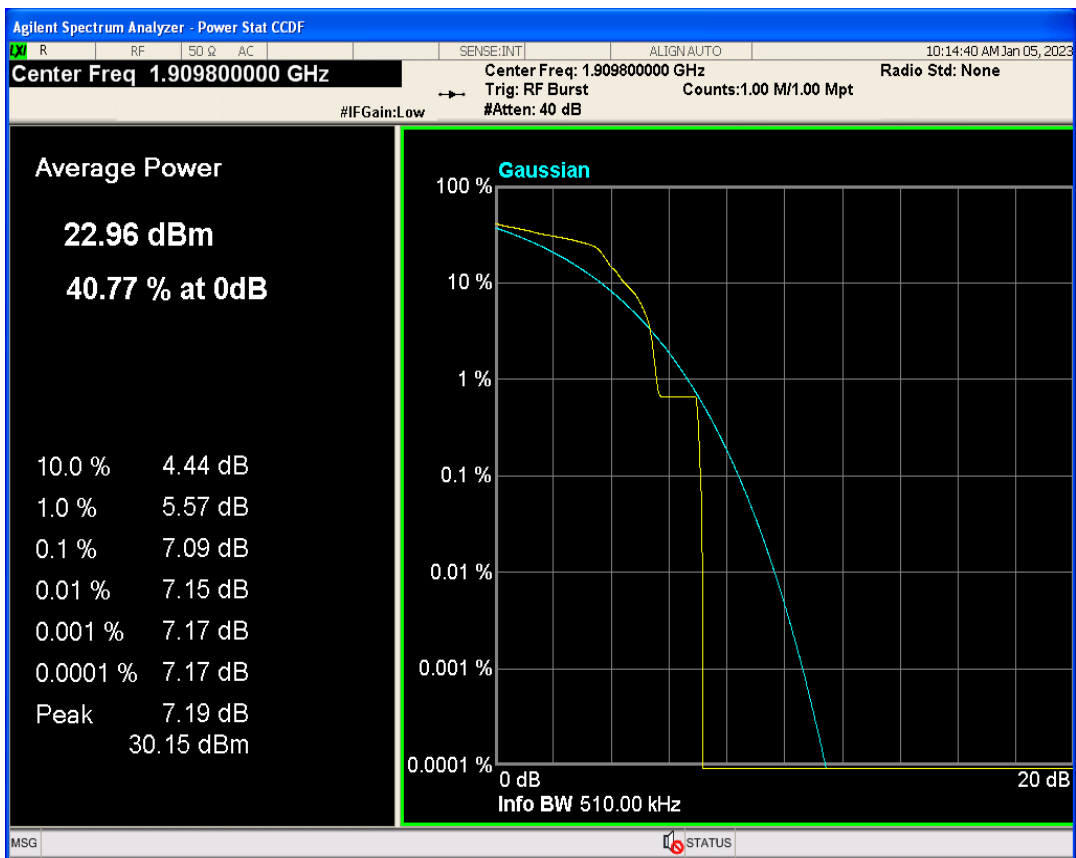


EGPRS850 Channel=128



EGPRS850 Channel=189

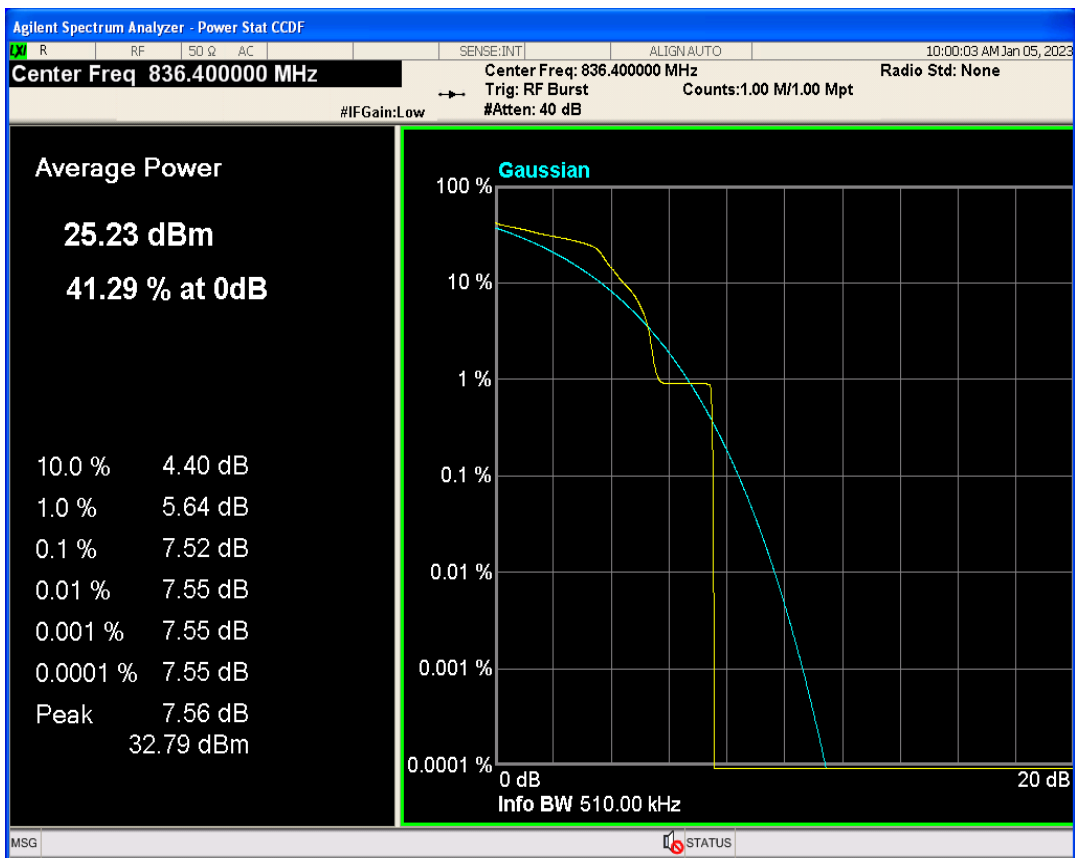


EGPRS850 Channel=251

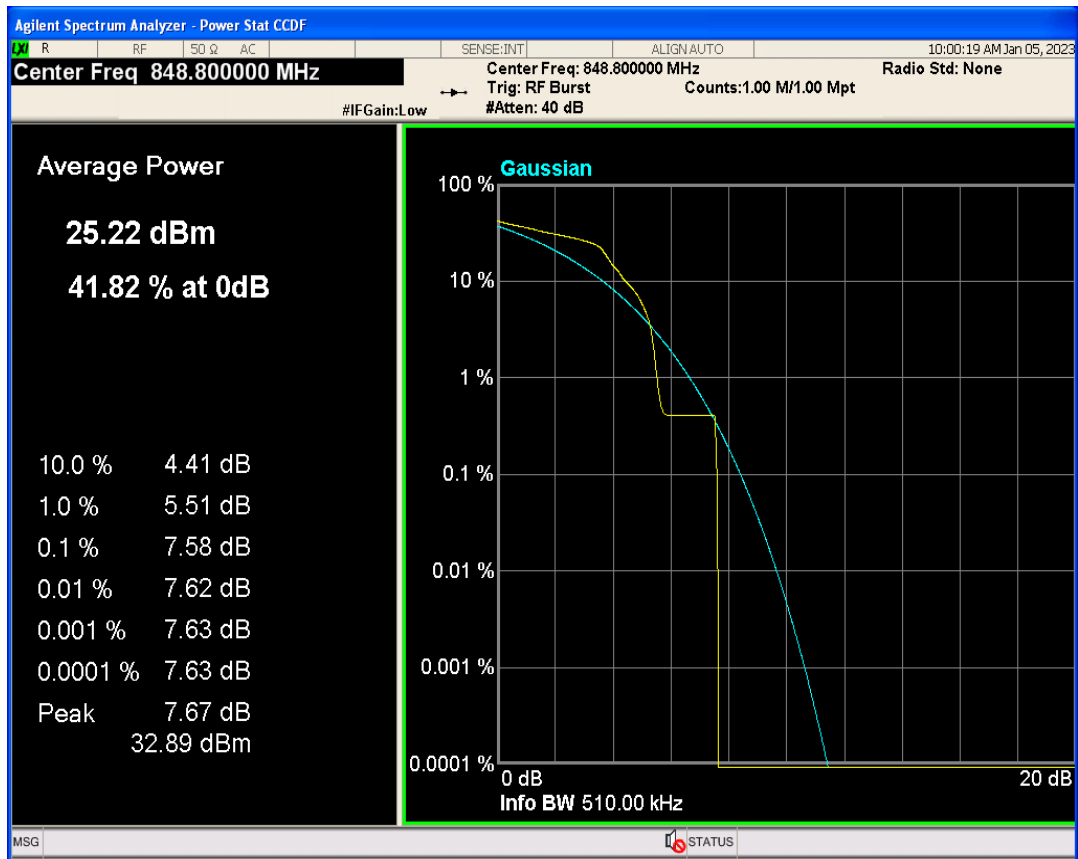


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	253.936	338.157	PASS
EGPRS1900	661	1880	239.595	295.787	PASS
EGPRS1900	810	1909.8	242.388	300.753	PASS
EGPRS850	128	824.2	242.443	299.674	PASS
EGPRS850	189	836.4	245.529	315.294	PASS
EGPRS850	251	848.8	252.455	317.399	PASS


EGPRS1900 Channel=512

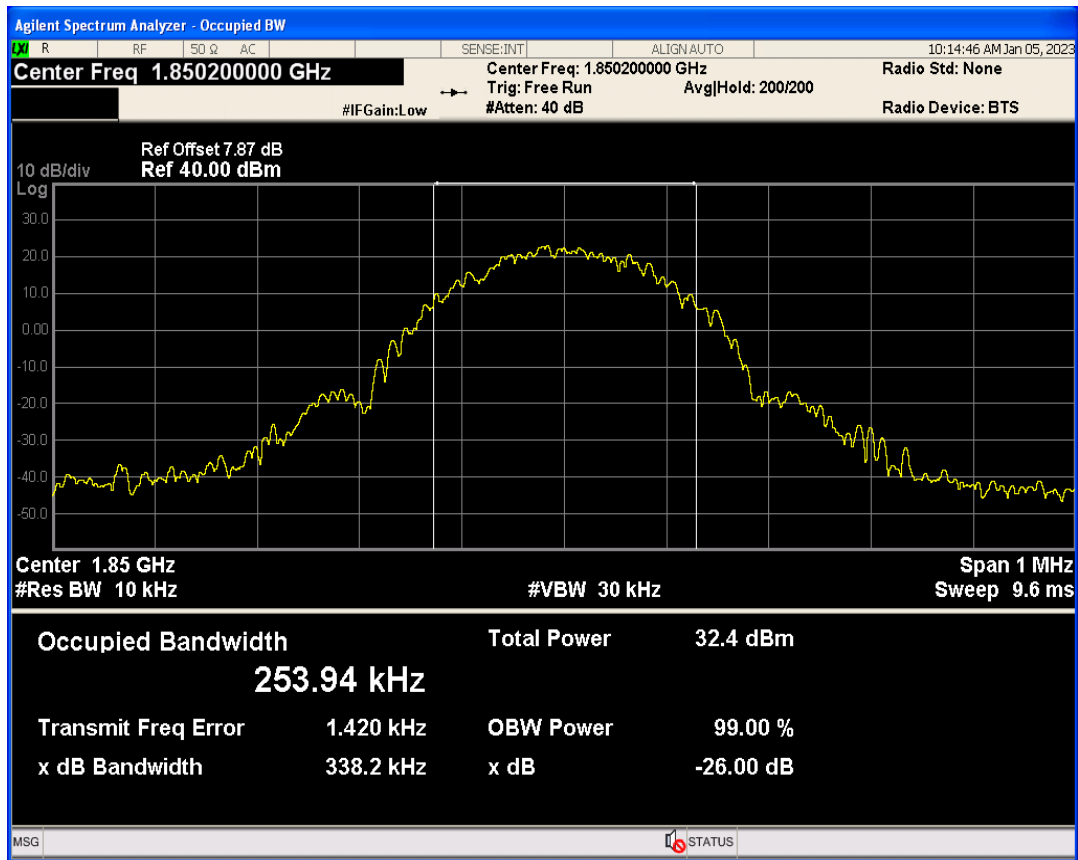


EGPRS1900 Channel=661

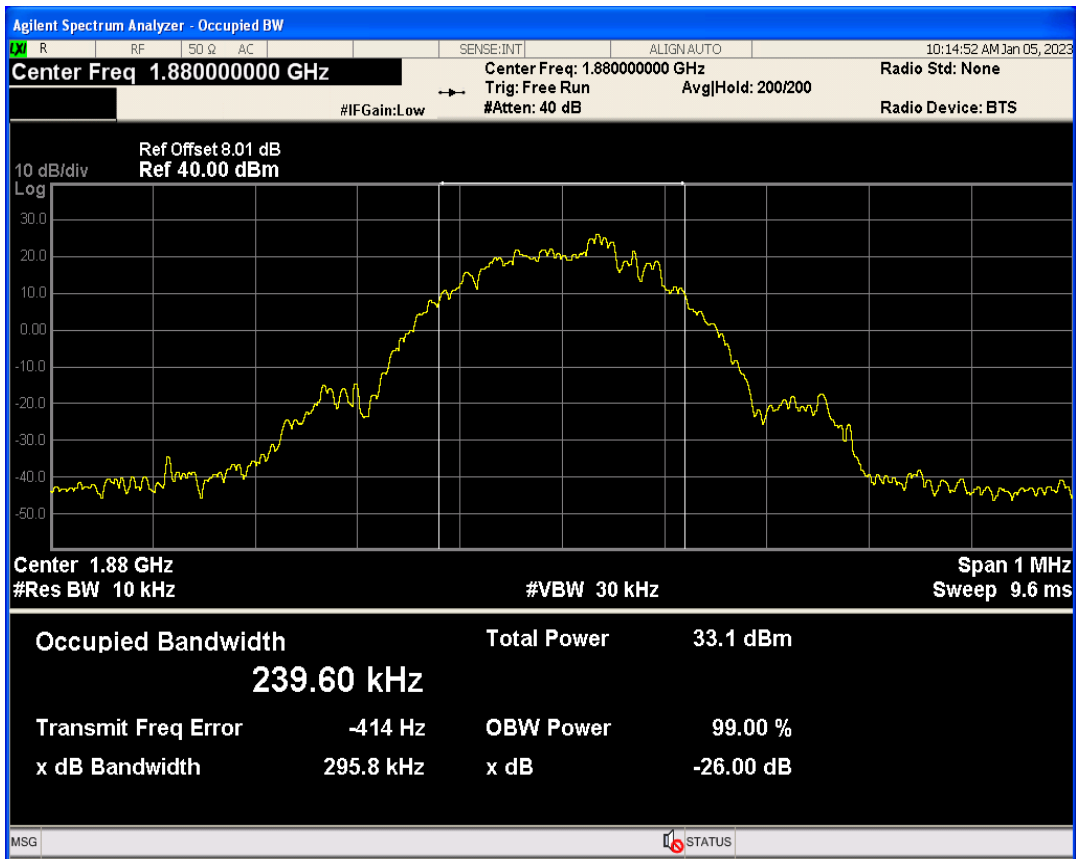


EGPRS1900 Channel=810

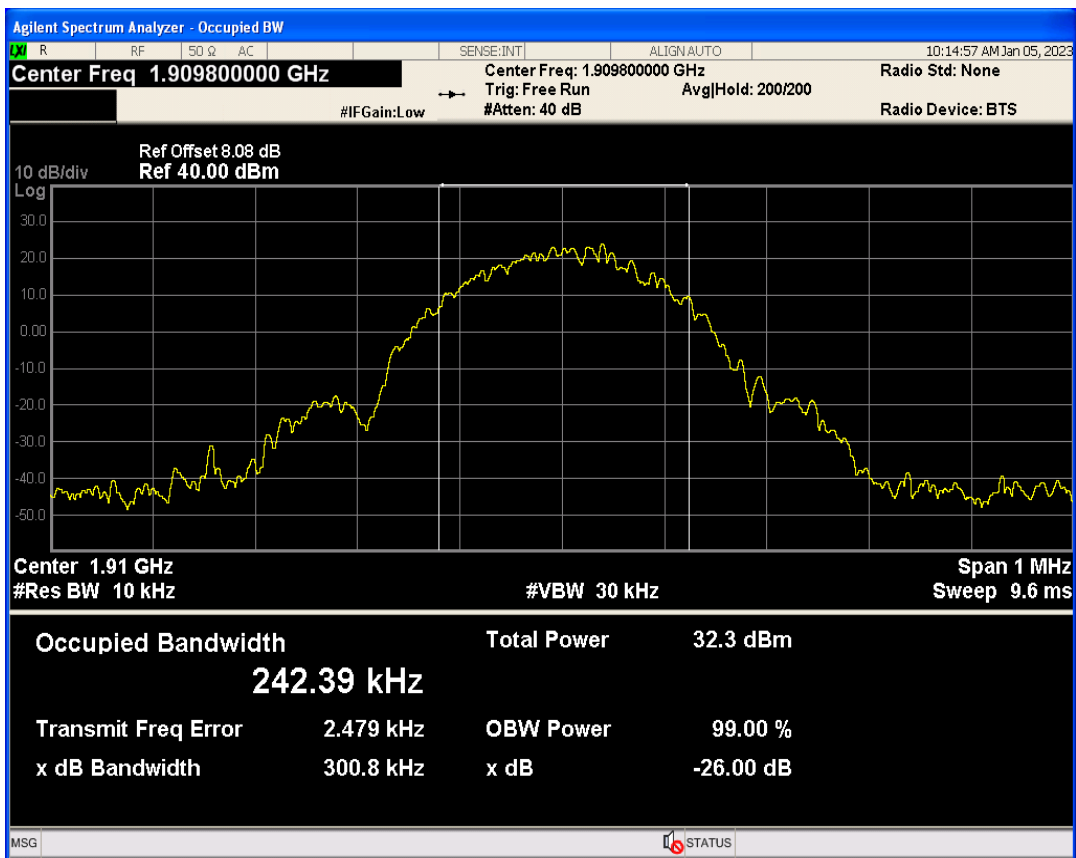


EGPRS850 Channel=189

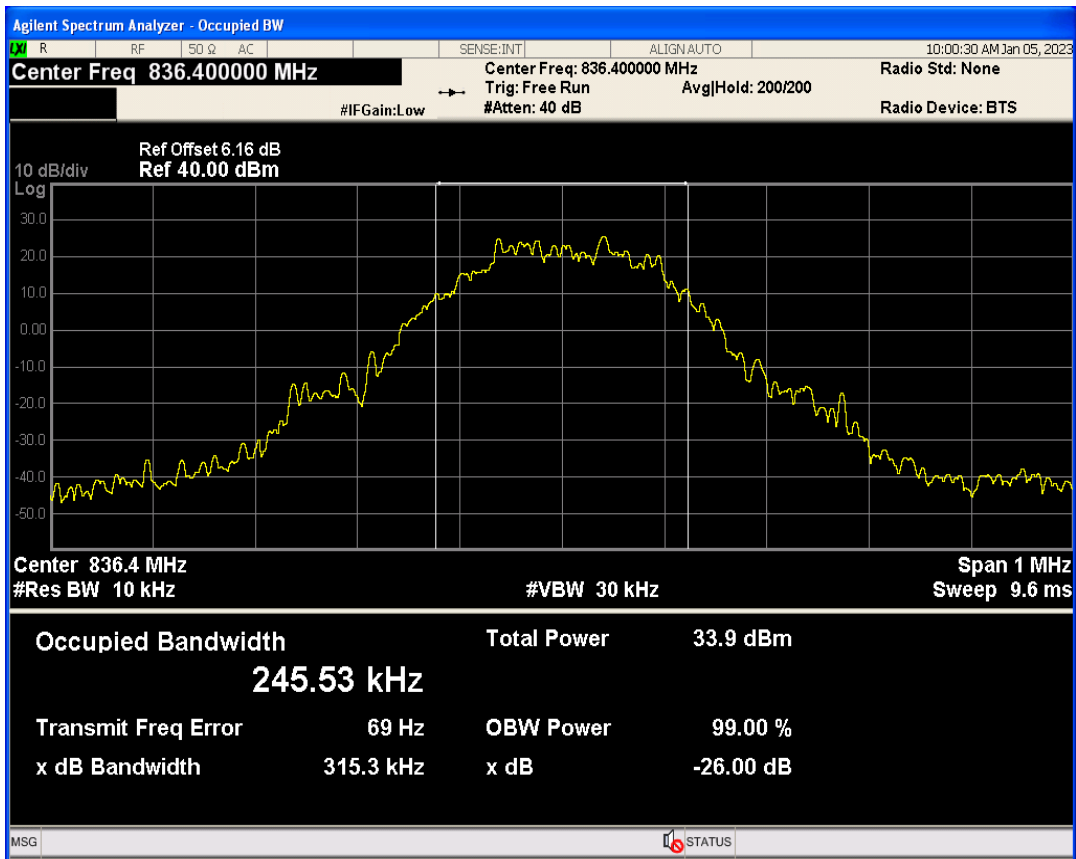

EGPRS850 Channel=128

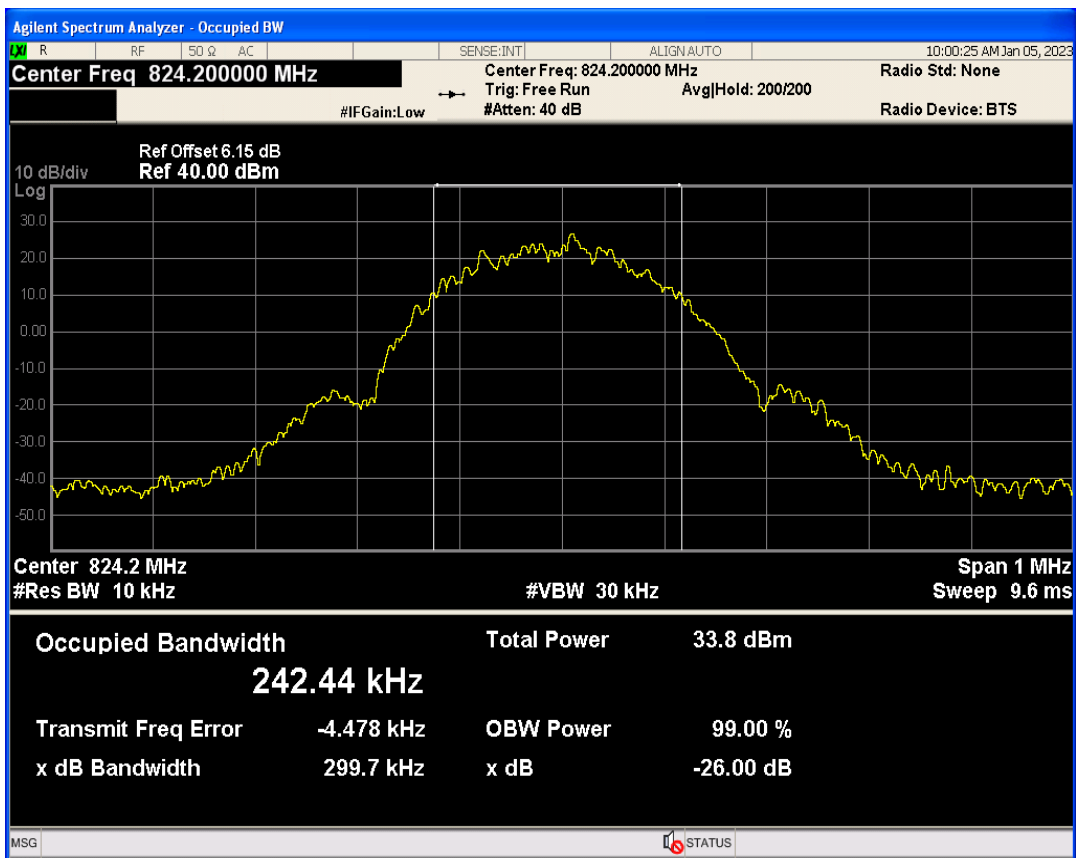


EGPRS850 Channel=251

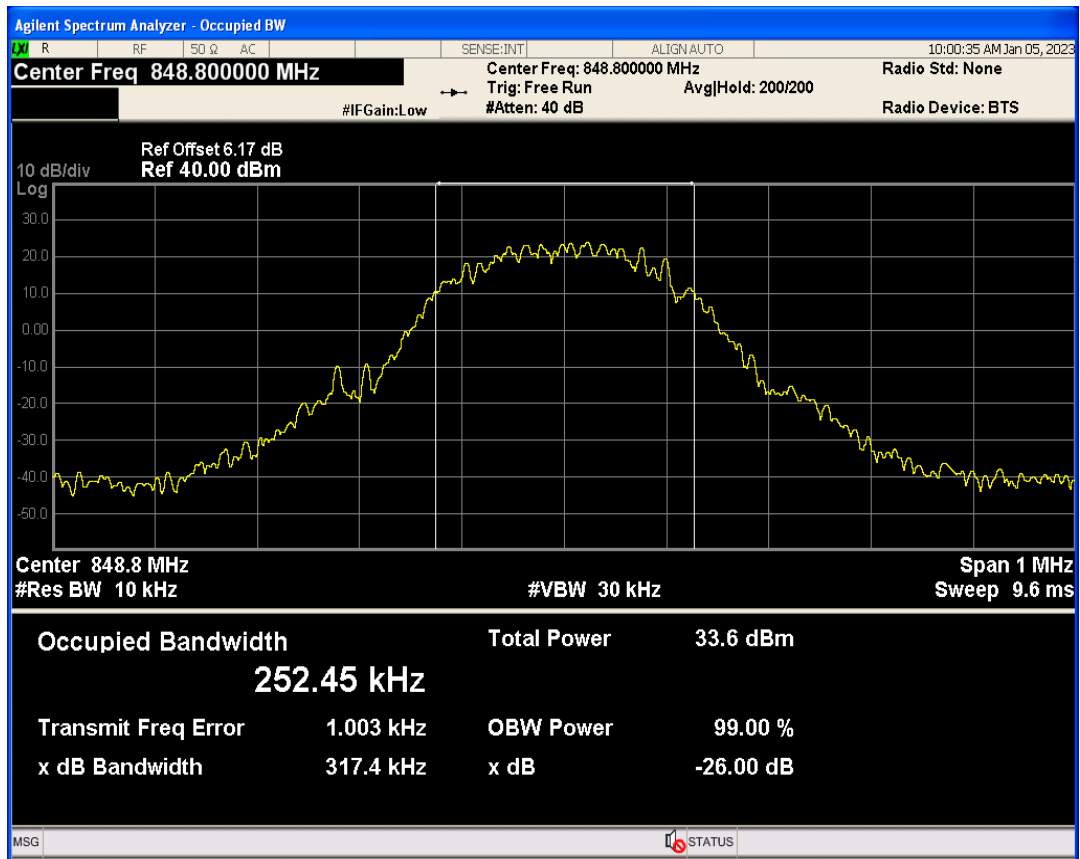


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-35.43	-13	PASS
EGPRS1900	810	1909.8	1910.01	-37.75	-13	PASS
EGPRS850	128	824.2	823.96	-35.81	-13	PASS
EGPRS850	251	848.8	849.01	-35.66	-13	PASS


EGPRS1900 Channel=810

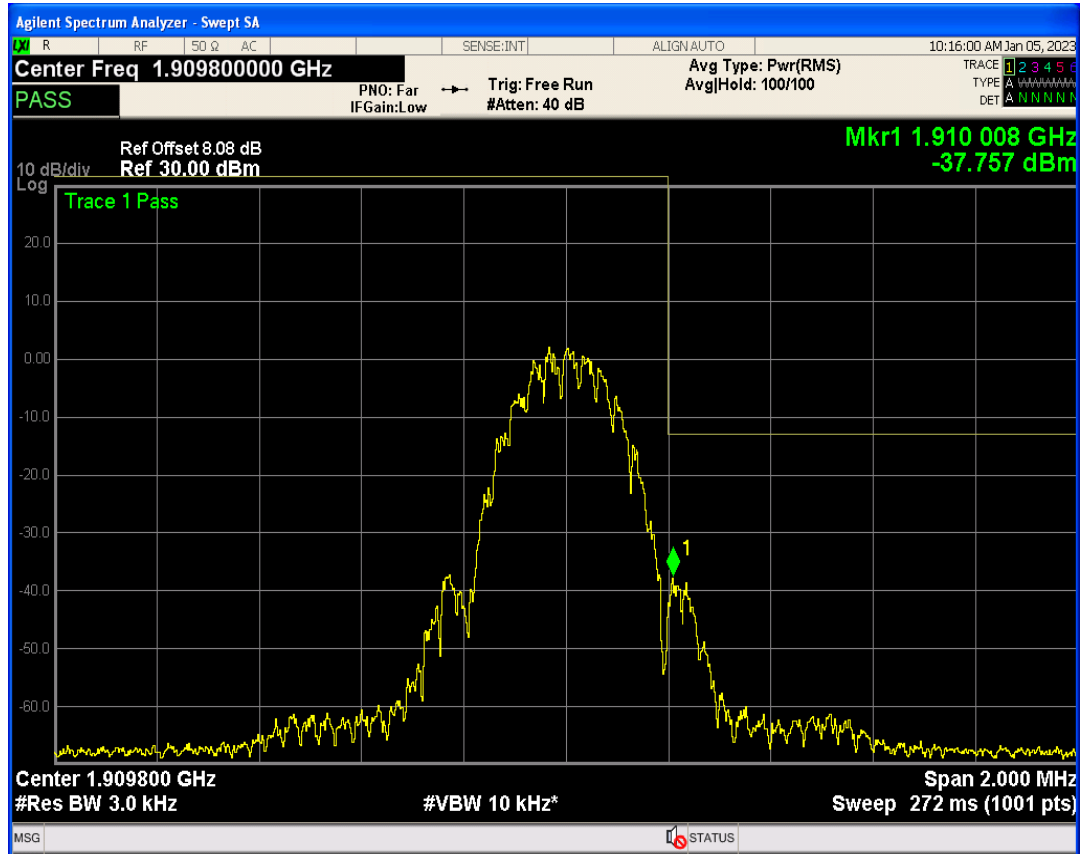


EGPRS1900 Channel=512

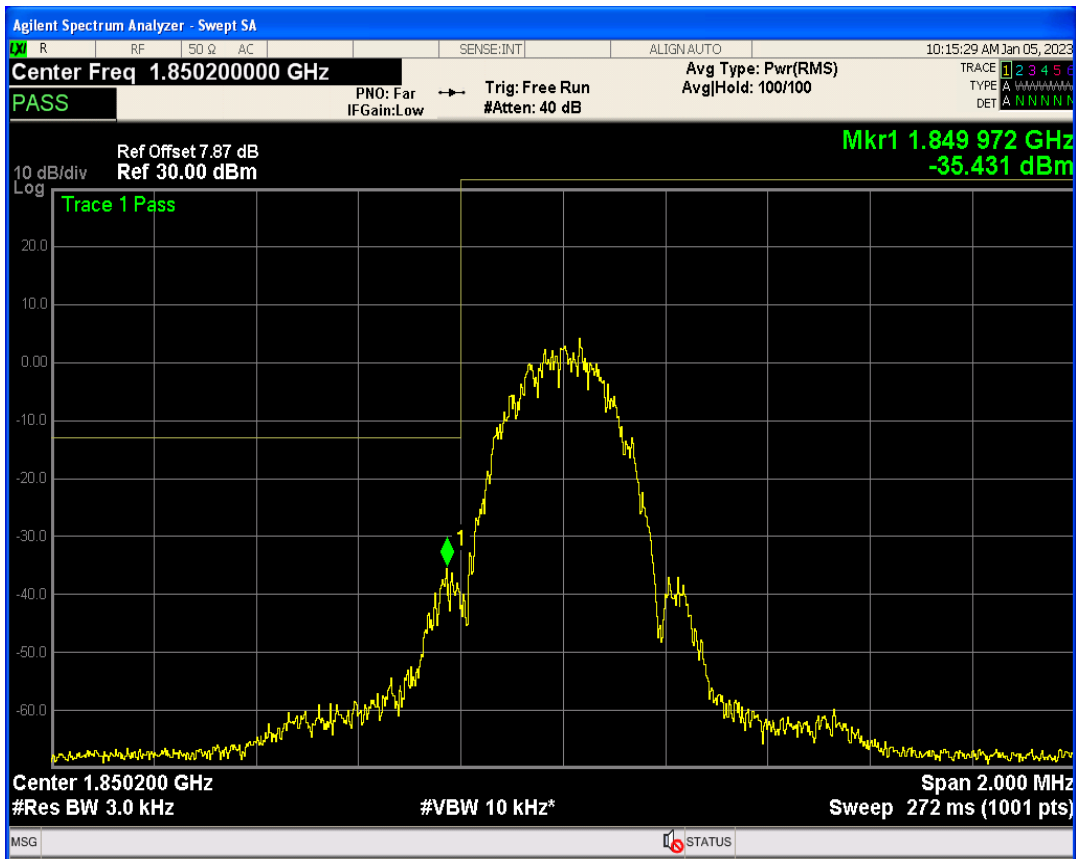

EGPRS850 Channel=251

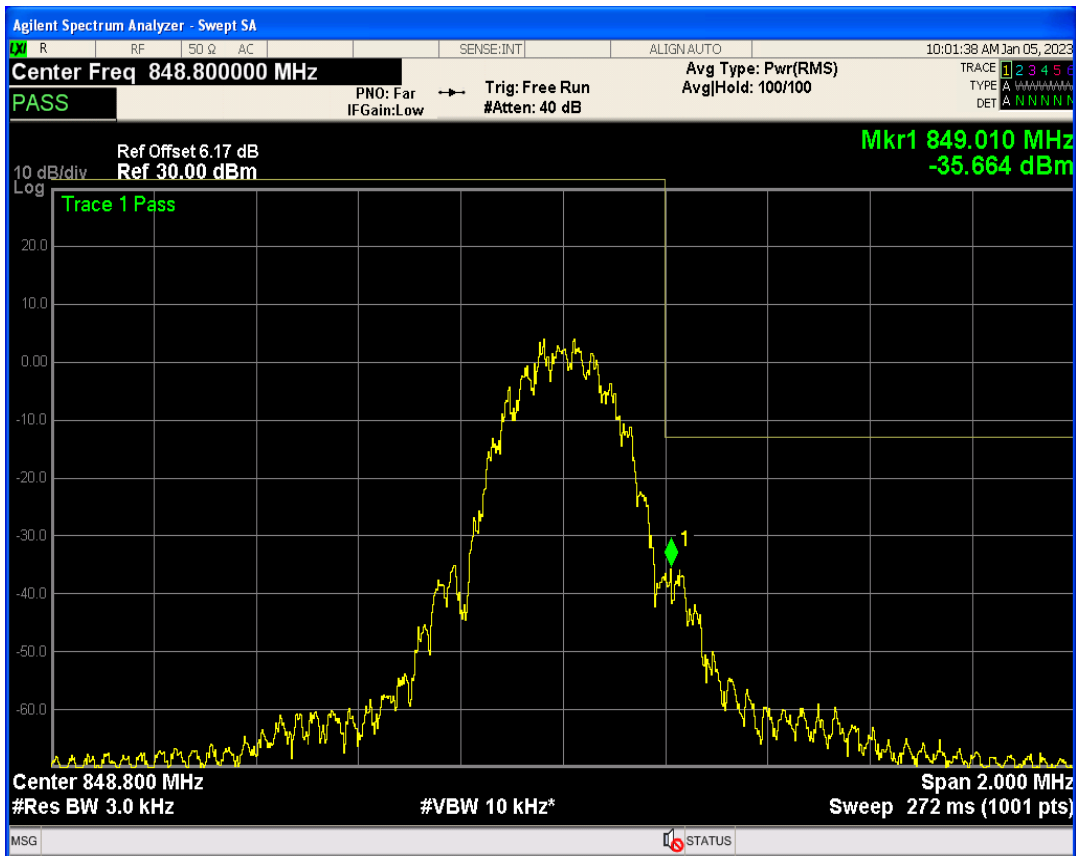


EGPRS850 Channel=128

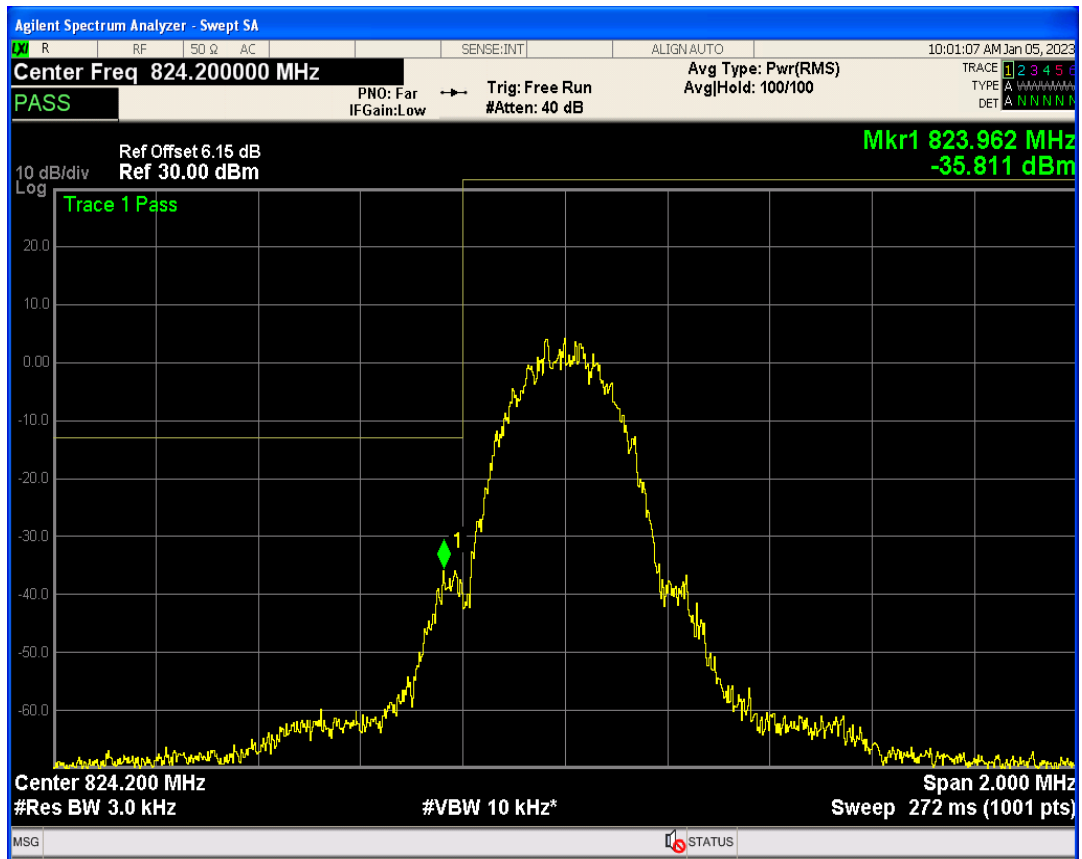


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25989.79	-18.53	-13	PASS
EGPRS1900	661	1880	25469.66	-18.23	-13	PASS
EGPRS1900	810	1909.8	25949.42	-18.36	-13	PASS
EGPRS850	128	824.2	25928.91	-20.73	-13	PASS
EGPRS850	189	836.4	26005.67	-20.36	-13	PASS
EGPRS850	251	848.8	25999.06	-20.46	-13	PASS


EGPRS1900 Channel=512

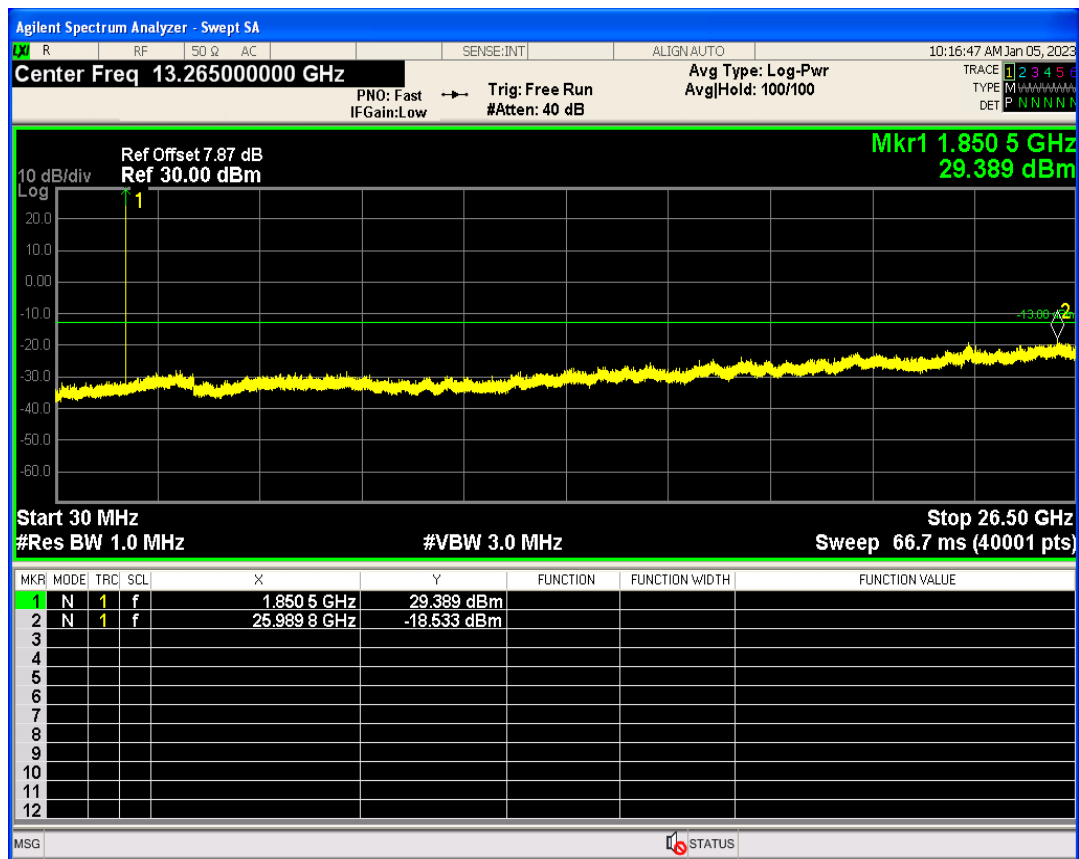


EGPRS1900 Channel=661

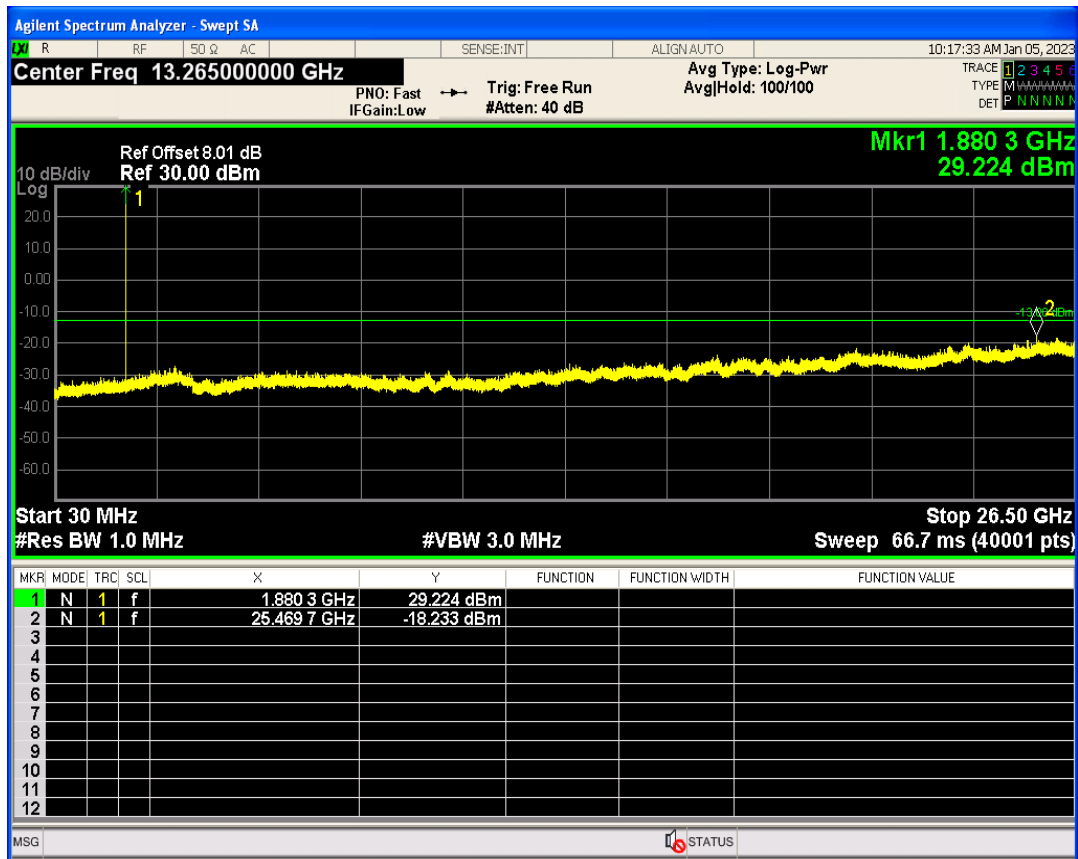


EGPRS1900 Channel=810

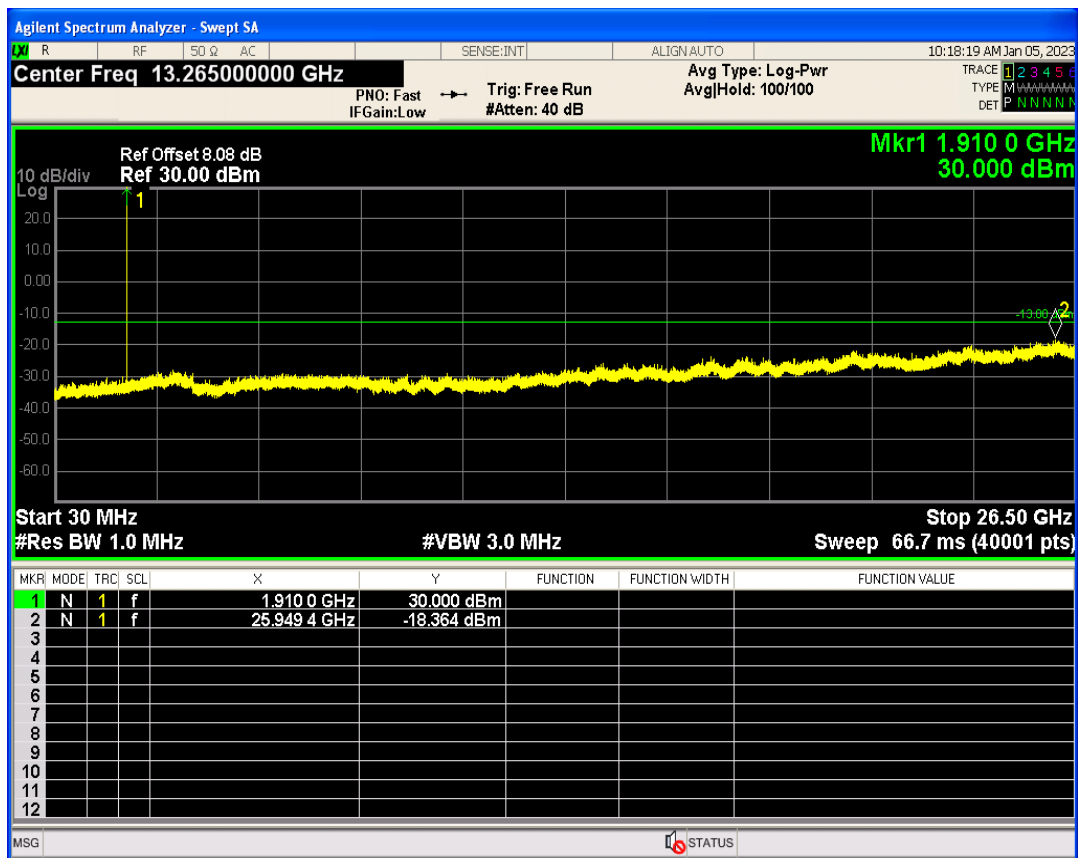


EGPRS850 Channel=128

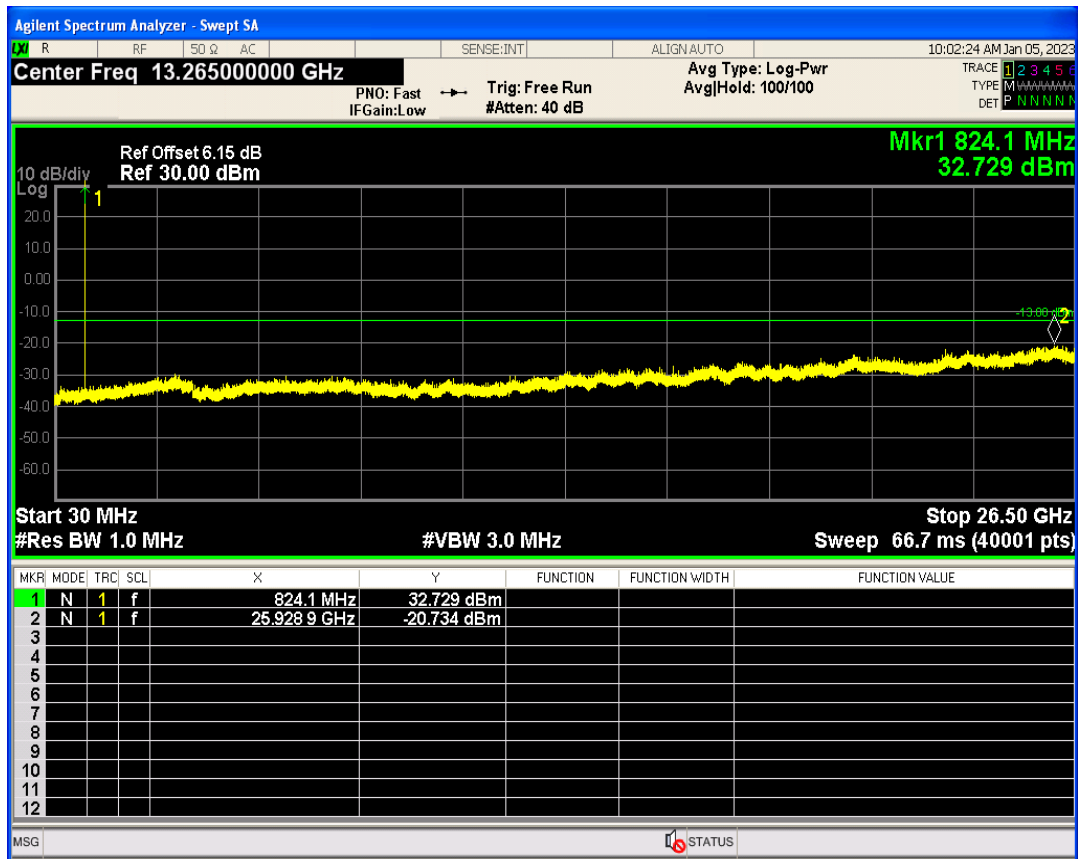

EGPRS850 Channel=189

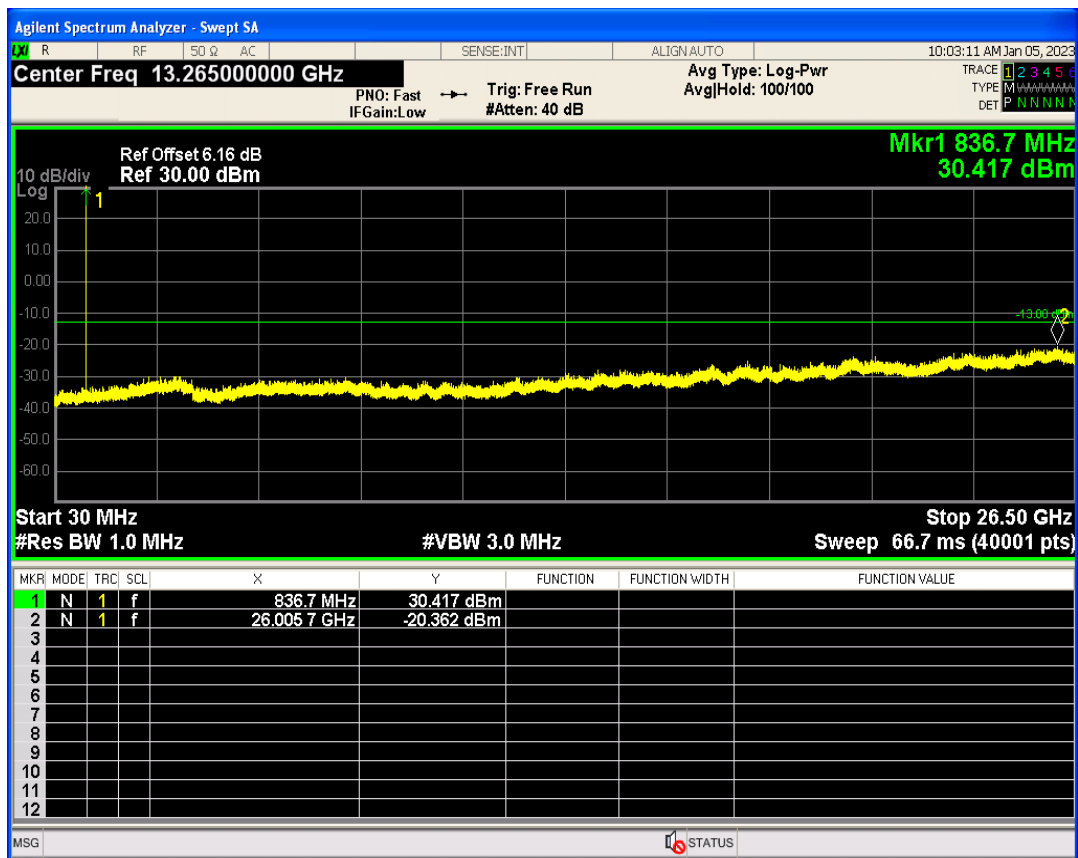

EGPRS850 Channel=251

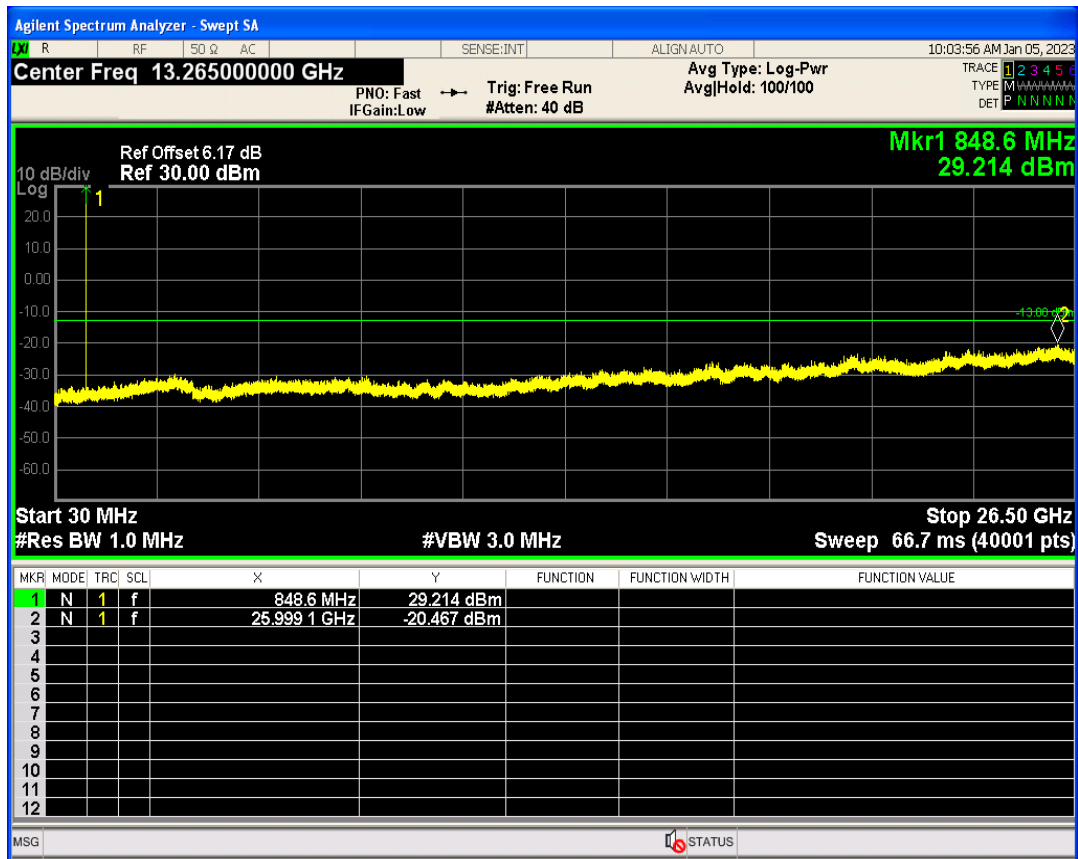

Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	30.02	PASS
GPRS1900 1 Slot	661	1880	29.79	PASS
GPRS1900 1 Slot	810	1909.8	29.49	PASS
GPRS1900 2 Slot	512	1850.2	28.89	PASS
GPRS1900 2 Slot	661	1880	28.59	PASS
GPRS1900 2 Slot	810	1909.8	28.32	PASS
GPRS1900 3 Slot	512	1850.2	26.64	PASS
GPRS1900 3 Slot	661	1880	26.33	PASS
GPRS1900 3 Slot	810	1909.8	26.01	PASS
GPRS1900 4 Slot	512	1850.2	25.47	PASS
GPRS1900 4 Slot	661	1880	25.26	PASS
GPRS1900 4 Slot	810	1909.8	24.82	PASS
GPRS850 1 Slot	128	824.2	32.70	PASS
GPRS850 1 Slot	189	836.4	32.42	PASS
GPRS850 1 Slot	251	848.8	32.42	PASS
GPRS850 2 Slot	128	824.2	31.16	PASS
GPRS850 2 Slot	189	836.4	31.25	PASS
GPRS850 2 Slot	251	848.8	31.22	PASS
GPRS850 3 Slot	128	824.2	29.78	PASS
GPRS850 3 Slot	189	836.4	29.69	PASS
GPRS850 3 Slot	251	848.8	29.87	PASS

17 / 47


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.790798429	13.00	PASS
GPRS1900	661	1880	2.805748503	13.00	PASS
GPRS1900	810	1909.8	2.821698944	13.00	PASS
GPRS850	128	824.2	2.794171123	13.00	PASS
GPRS850	189	836.4	2.796789838	13.00	PASS
GPRS850	251	848.8	2.786070496	13.00	PASS


GPRS1900 Channel=512

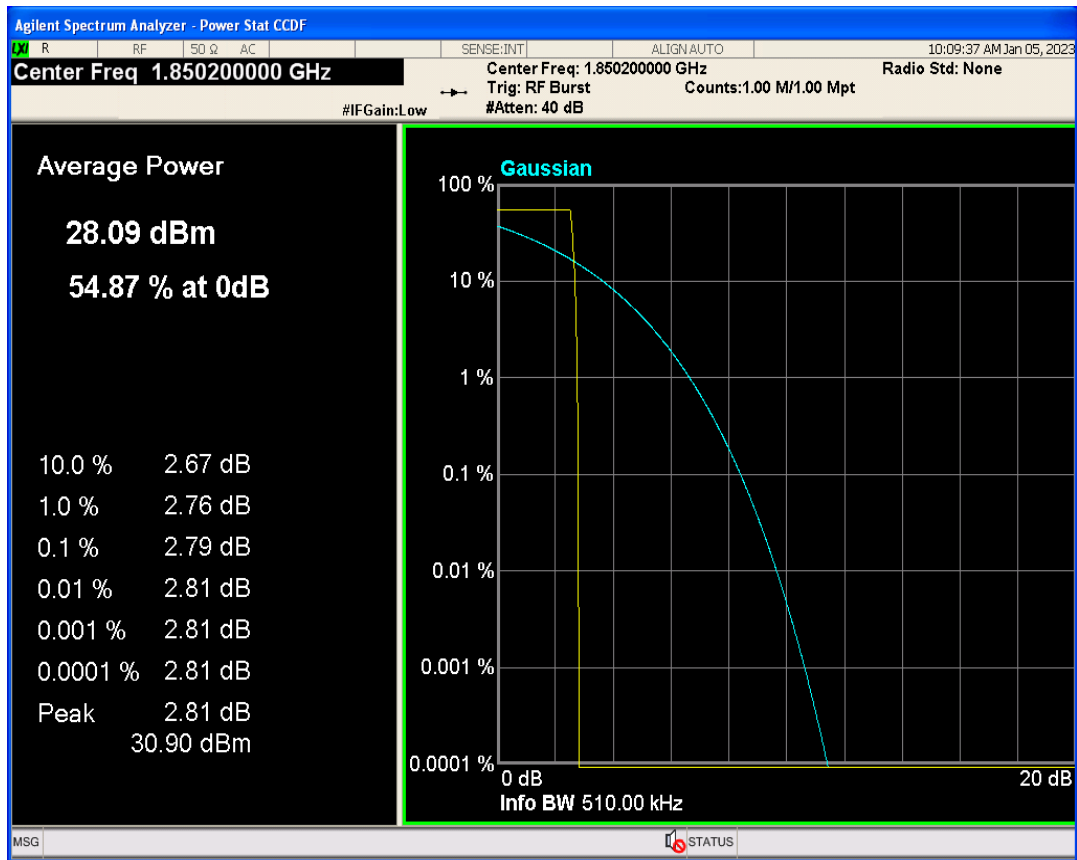


GPRS1900 Channel=661

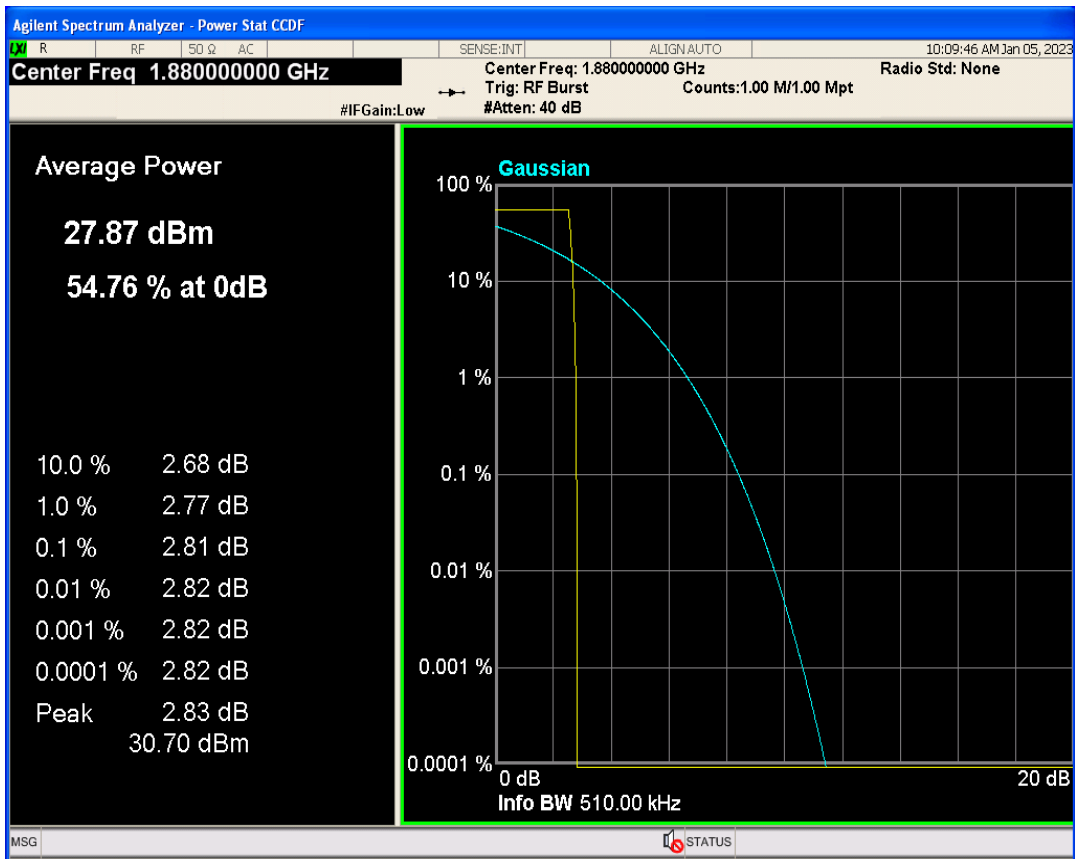


GPRS1900 Channel=810

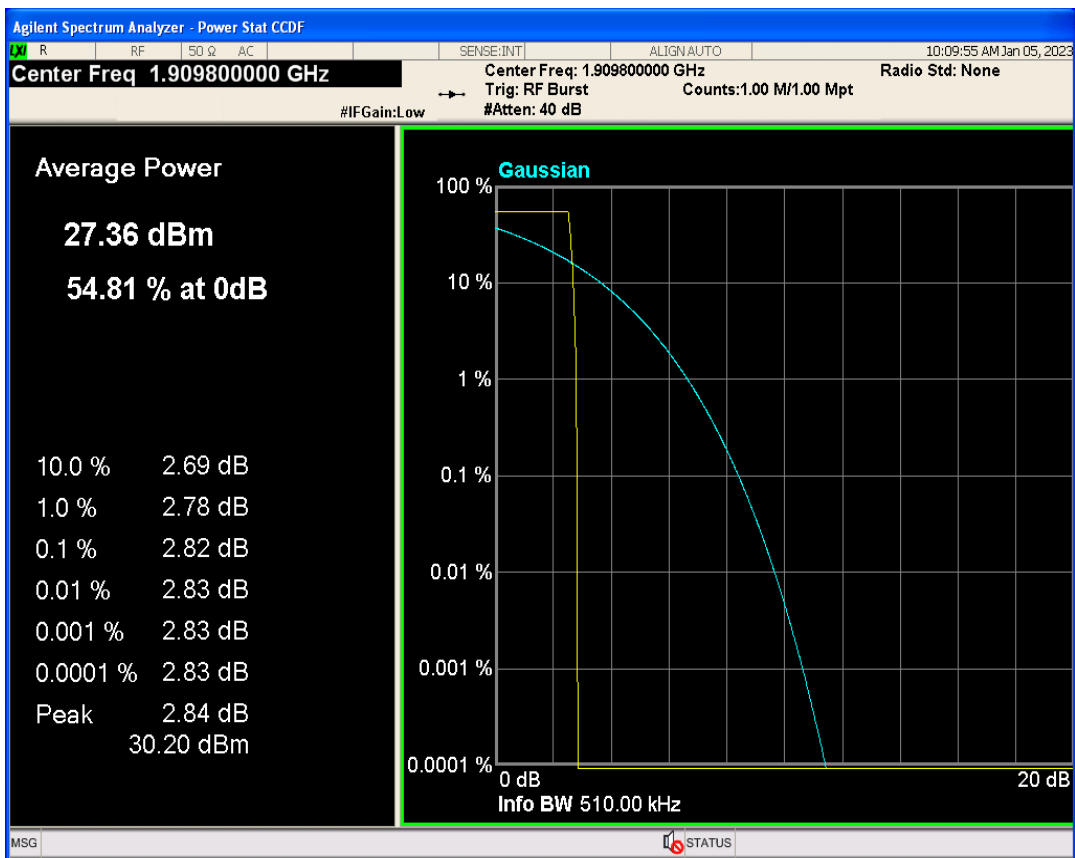


GPRS850 Channel=128

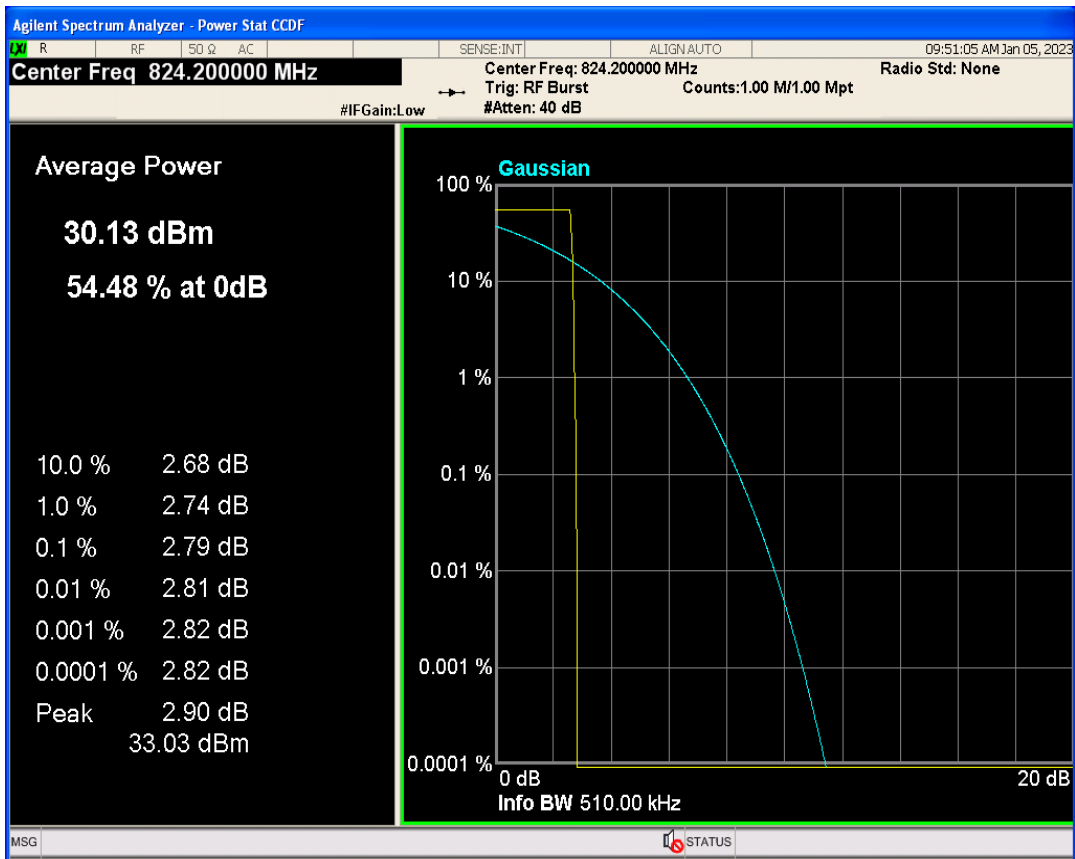

GPRS850 Channel=189

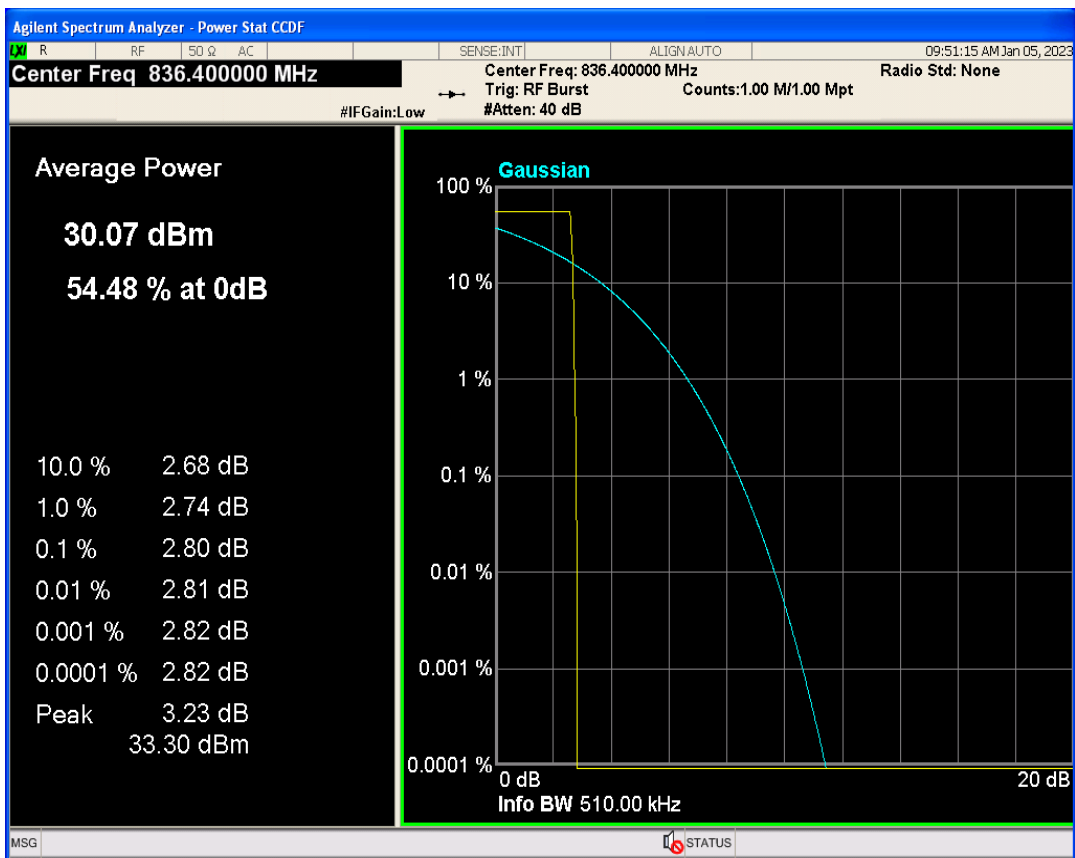


GPRS850 Channel=251

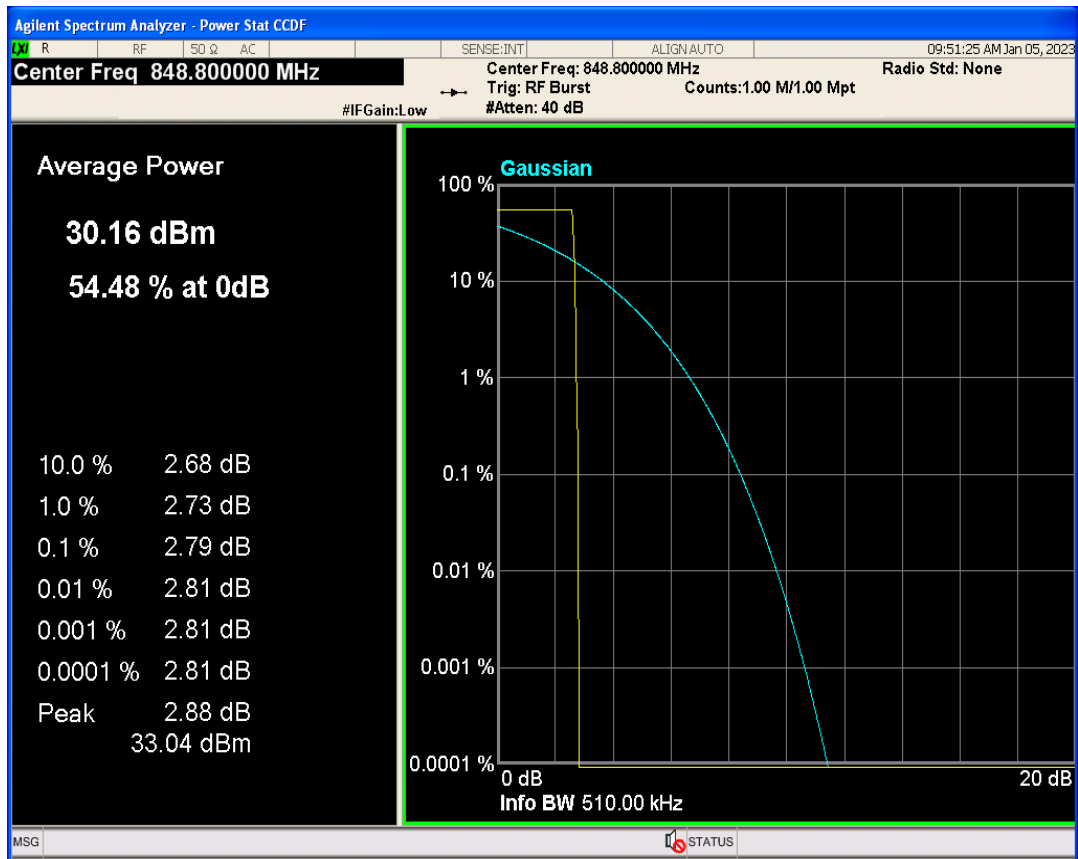


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	243.998	317.449	PASS
GPRS1900	661	1880	240.830	312.139	PASS
GPRS1900	810	1909.8	244.964	315.847	PASS
GPRS850	128	824.2	245.396	317.130	PASS
GPRS850	189	836.4	244.484	309.865	PASS
GPRS850	251	848.8	254.337	313.164	PASS


GPRS1900 Channel=661

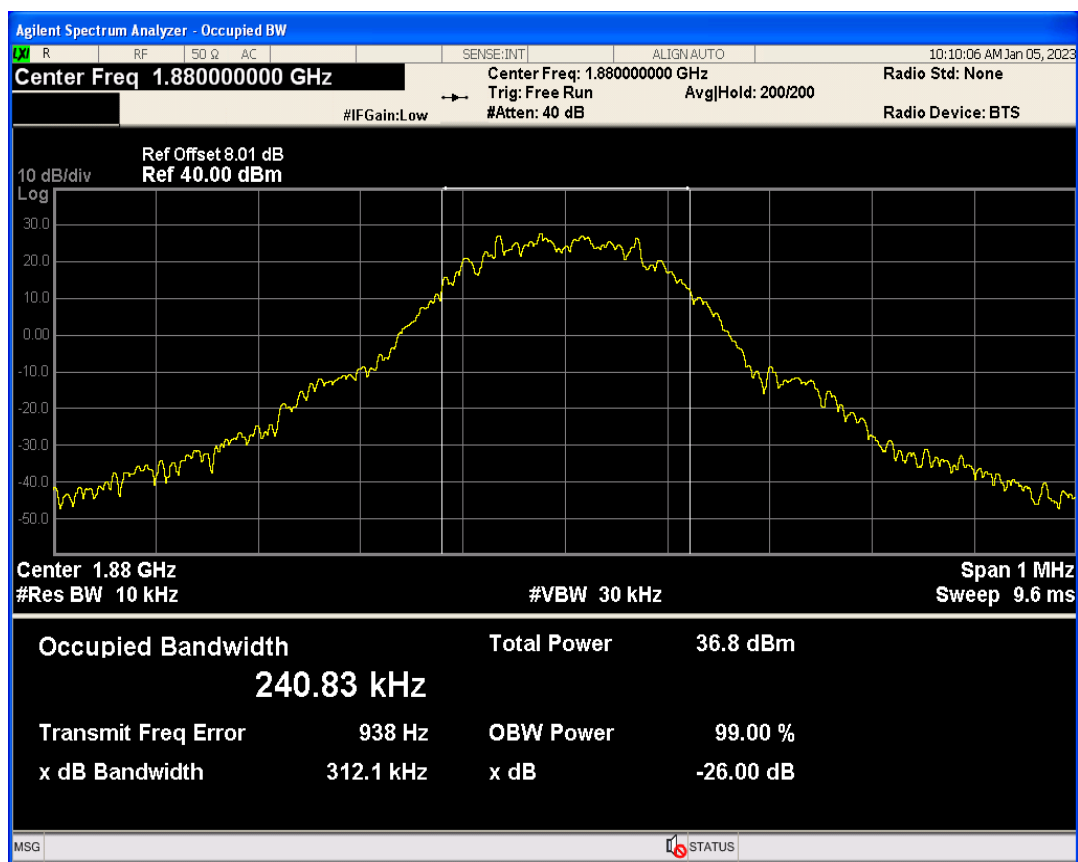


GPRS1900 Channel=512

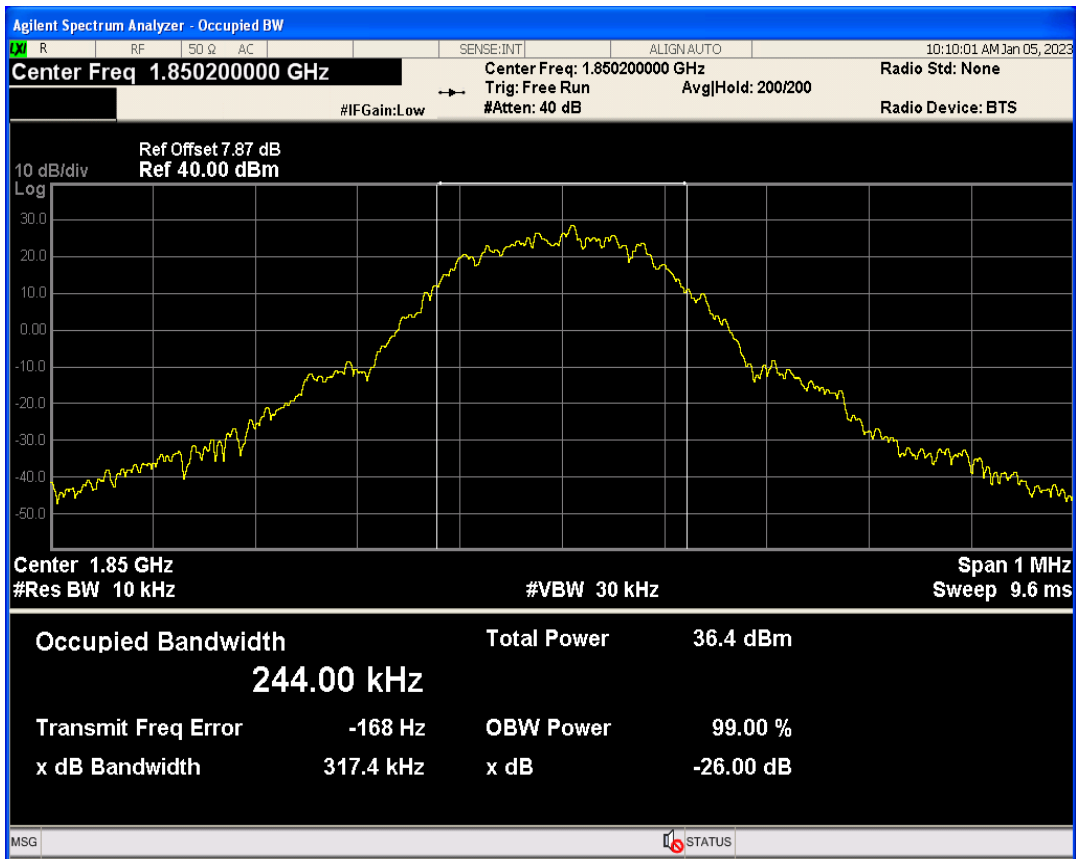


GPRS1900 Channel=810

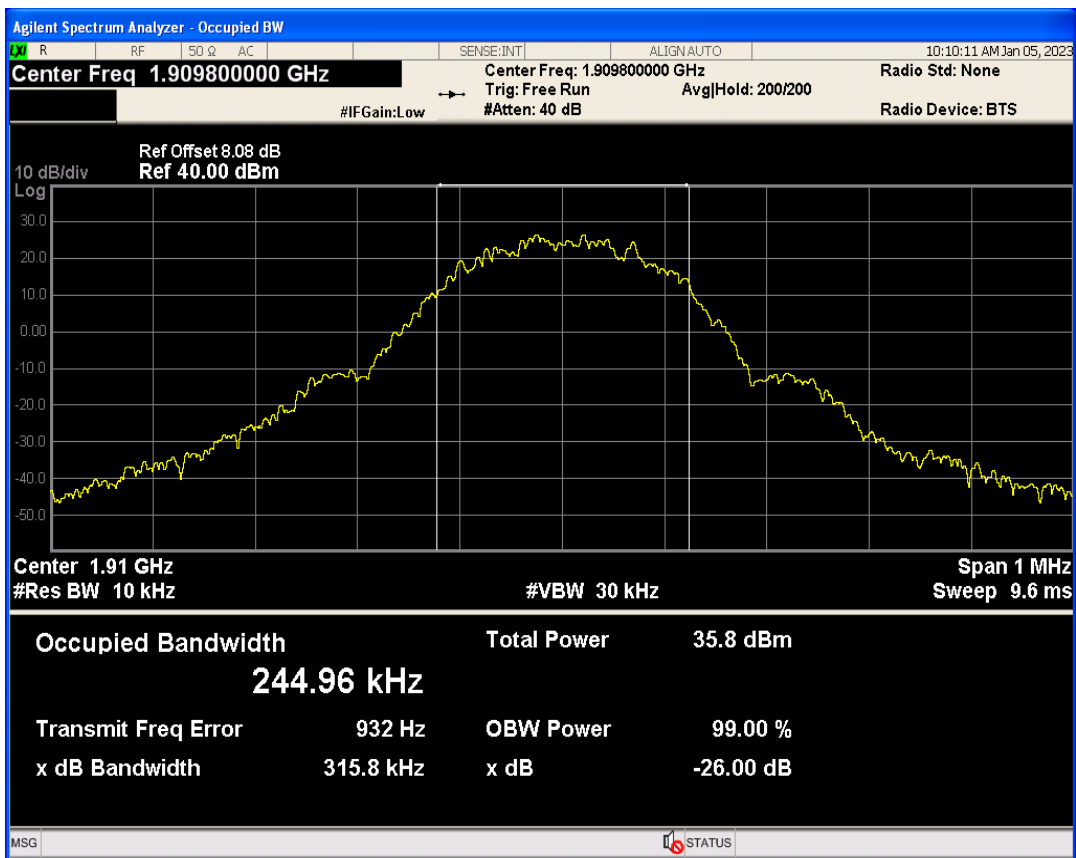


GPRS850 Channel=128

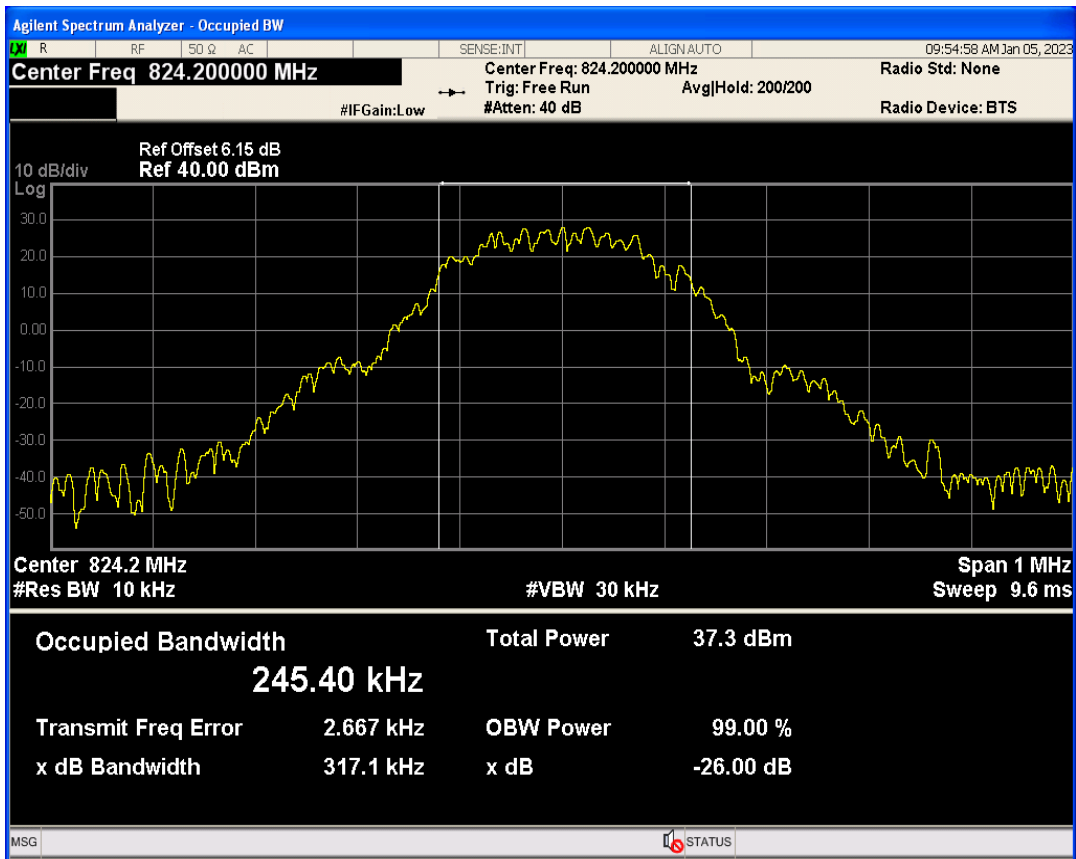

GPRS850 Channel=251

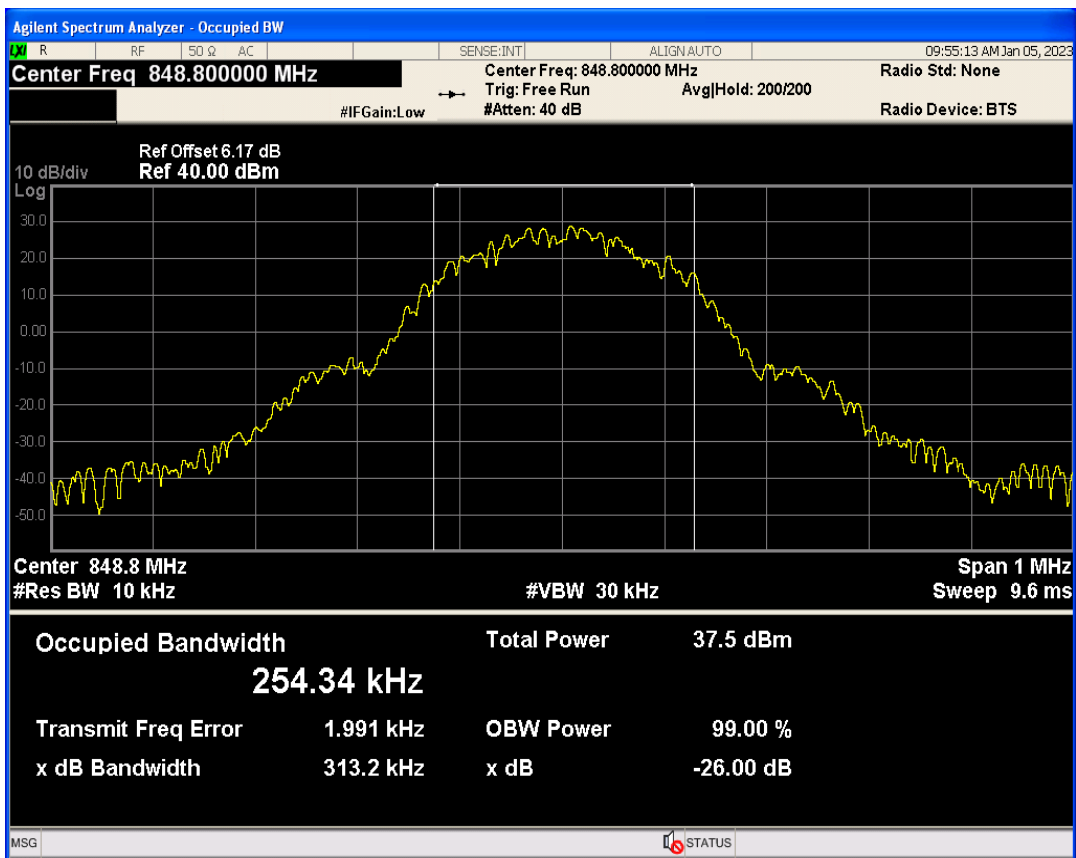


GPRS850 Channel=189

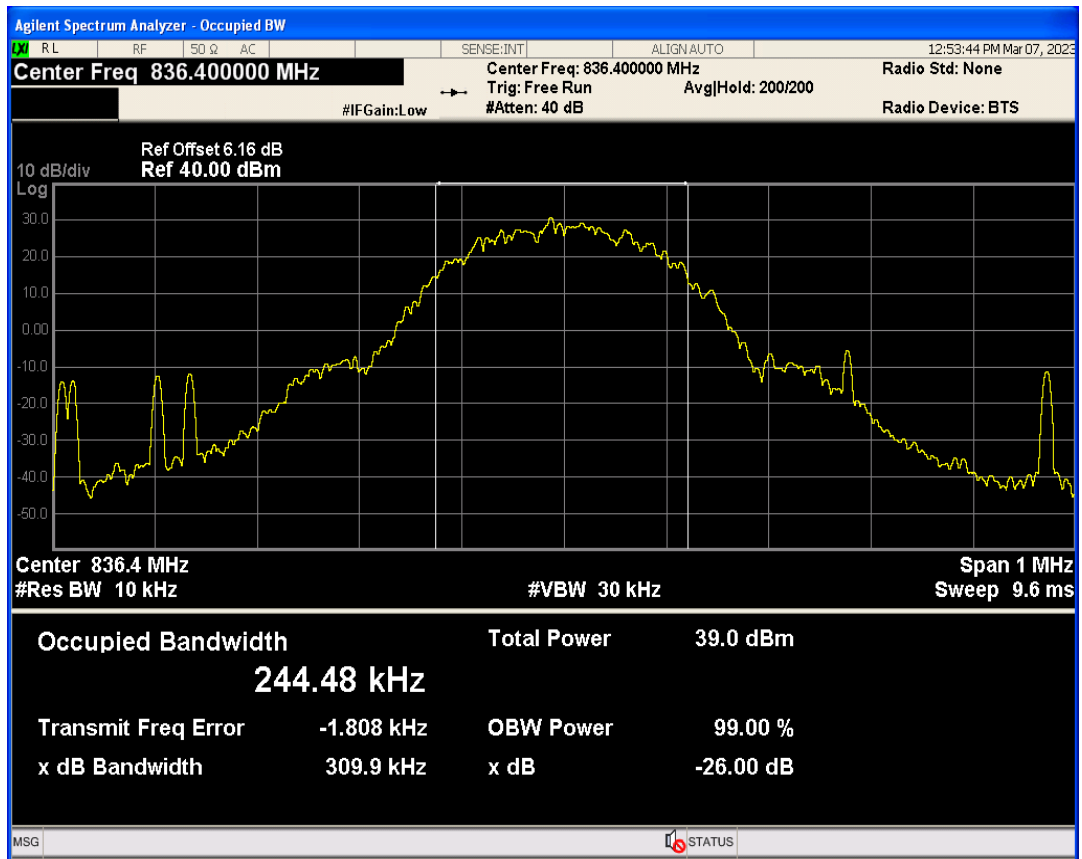


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.97	-29.73	-13	PASS
GPRS1900	810	1909.8	1910.03	-29.85	-13	PASS
GPRS850	128	824.2	823.74	-70.23	-13	PASS
GPRS850	251	848.8	849.01	-34.25	-13	PASS


GPRS1900 Channel=810

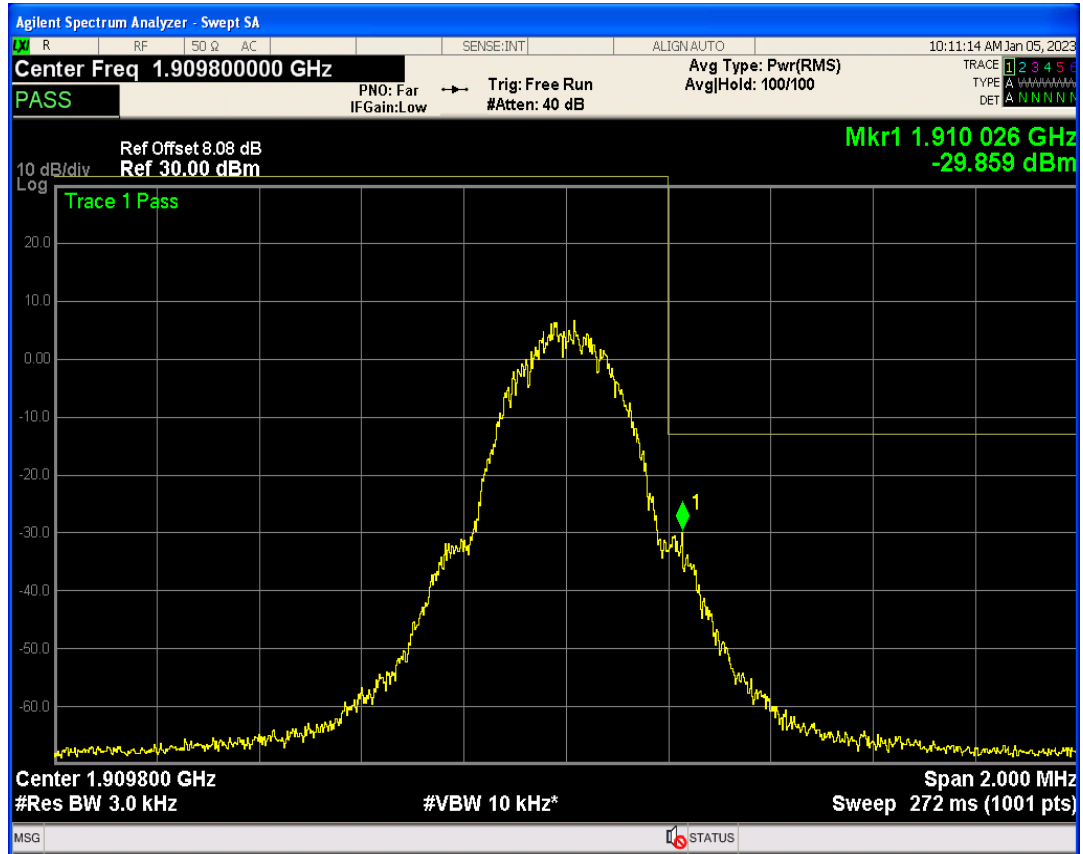


GPRS1900 Channel=512

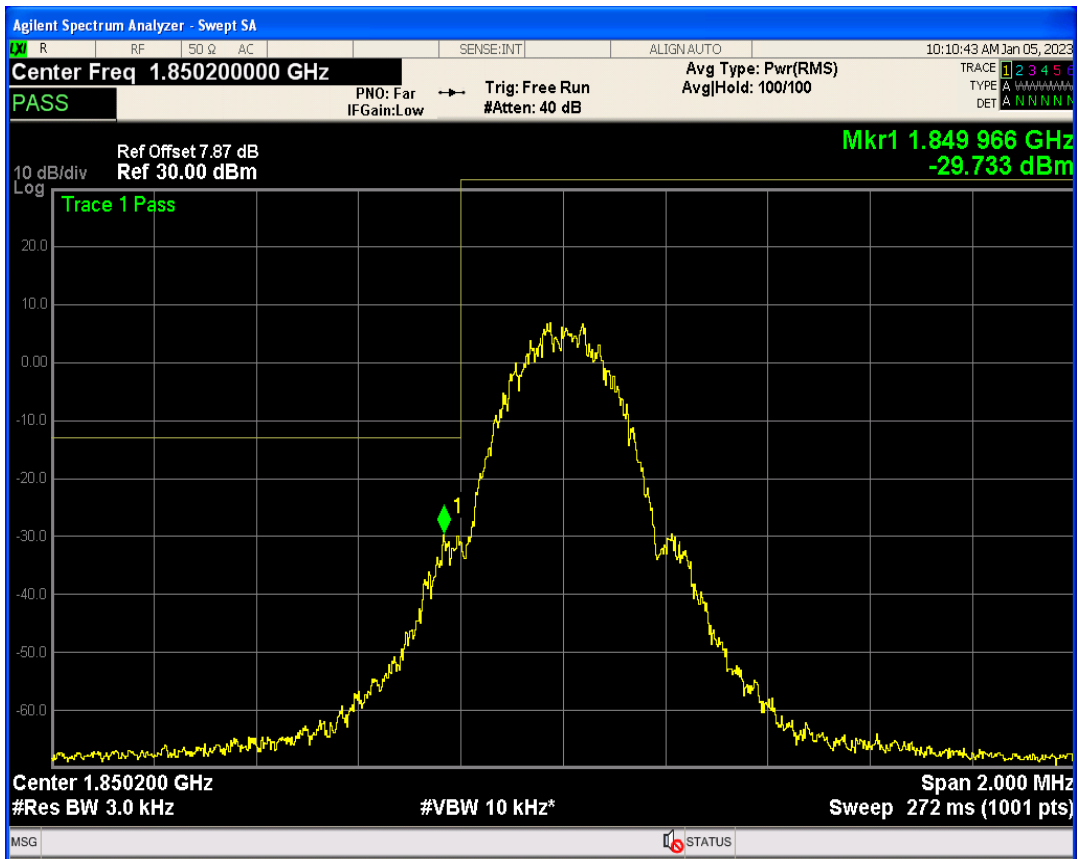

GPRS850 Channel=128

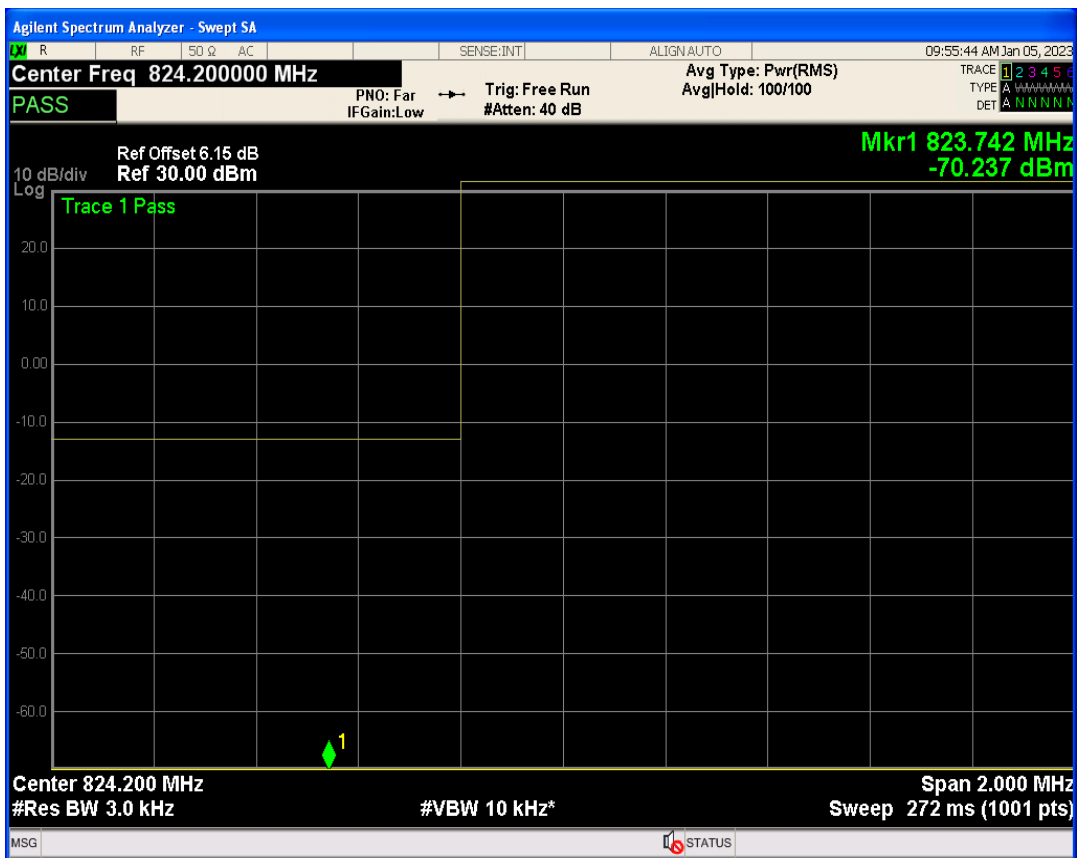


GPRS850 Channel=251

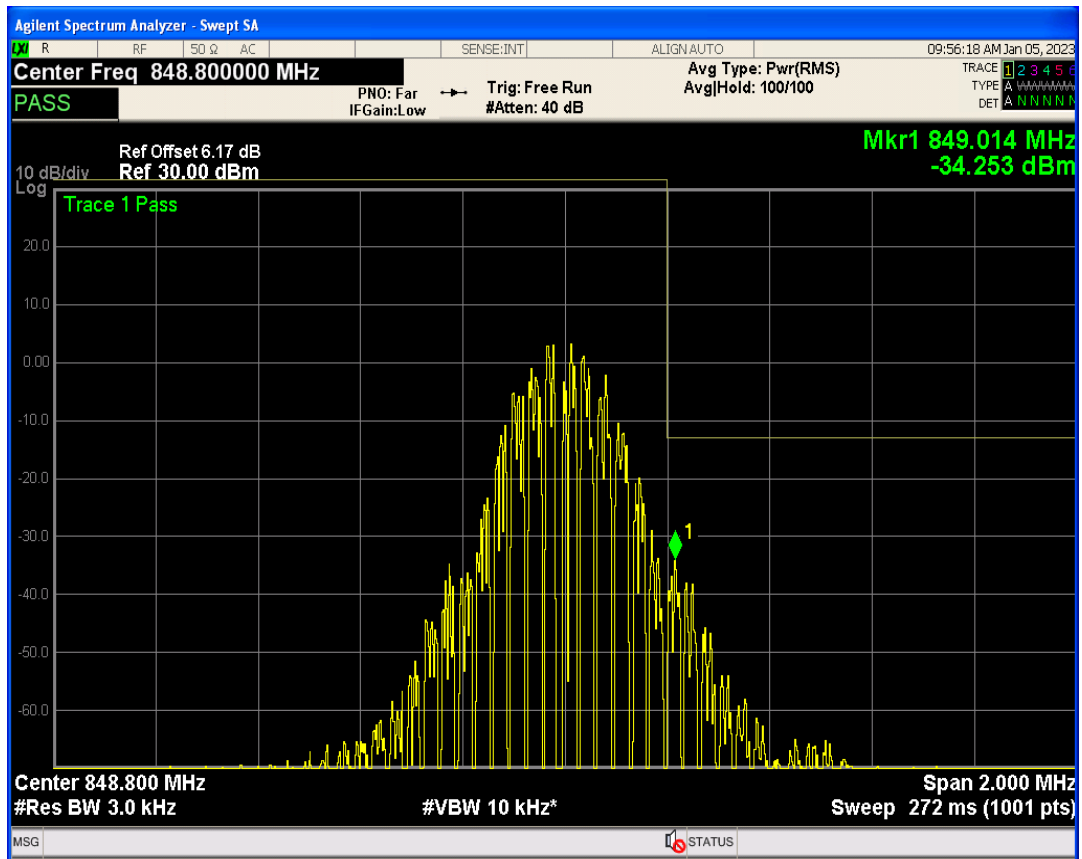


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25972.59	-18.97	-13	PASS
GPRS1900	661	1880	26085.74	-18.51	-13	PASS
GPRS1900	810	1909.8	25985.16	-18.48	-13	PASS
GPRS850	128	824.2	26061.26	-20.66	-13	PASS
GPRS850	189	836.4	25797.88	-20.38	-13	PASS
GPRS850	251	848.8	25966.63	-20.05	-13	PASS
GPRS850	128	824.2	25567.59	-20.50	-13	PASS


GPRS1900 Channel=661

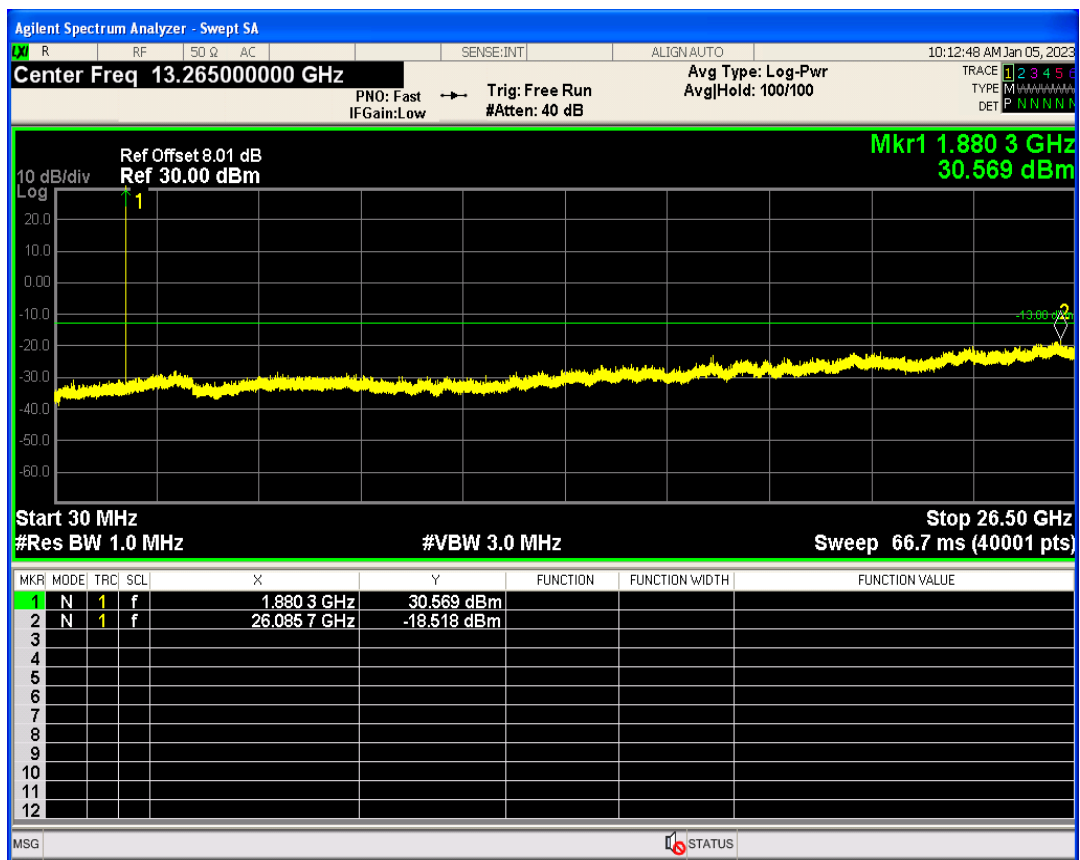


GPRS1900 Channel=512

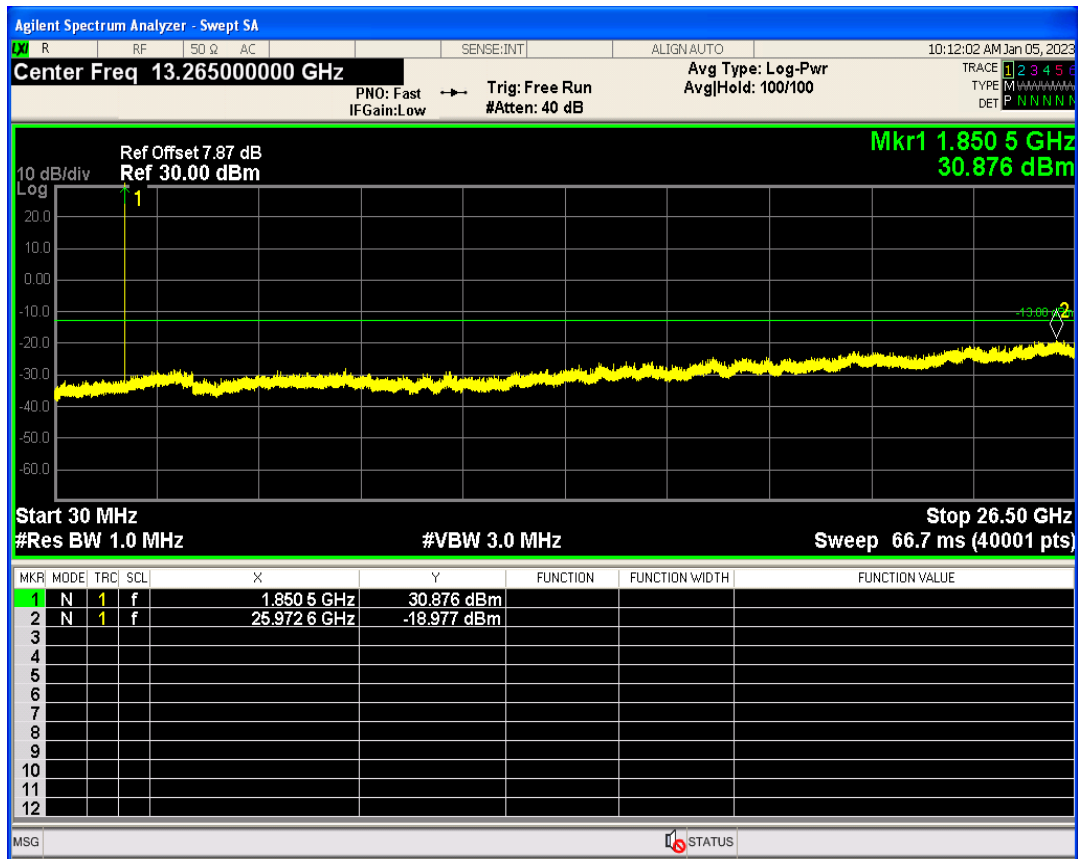


GPRS1900 Channel=810

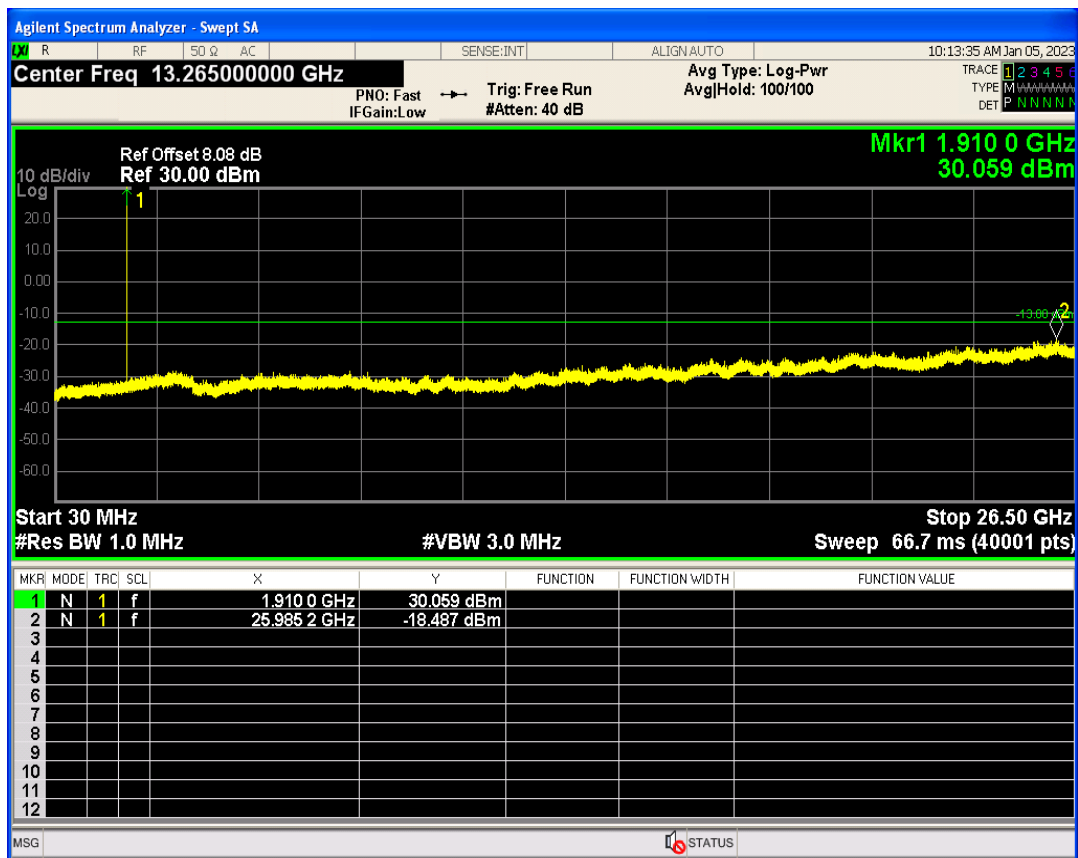


GPRS850 Channel=128

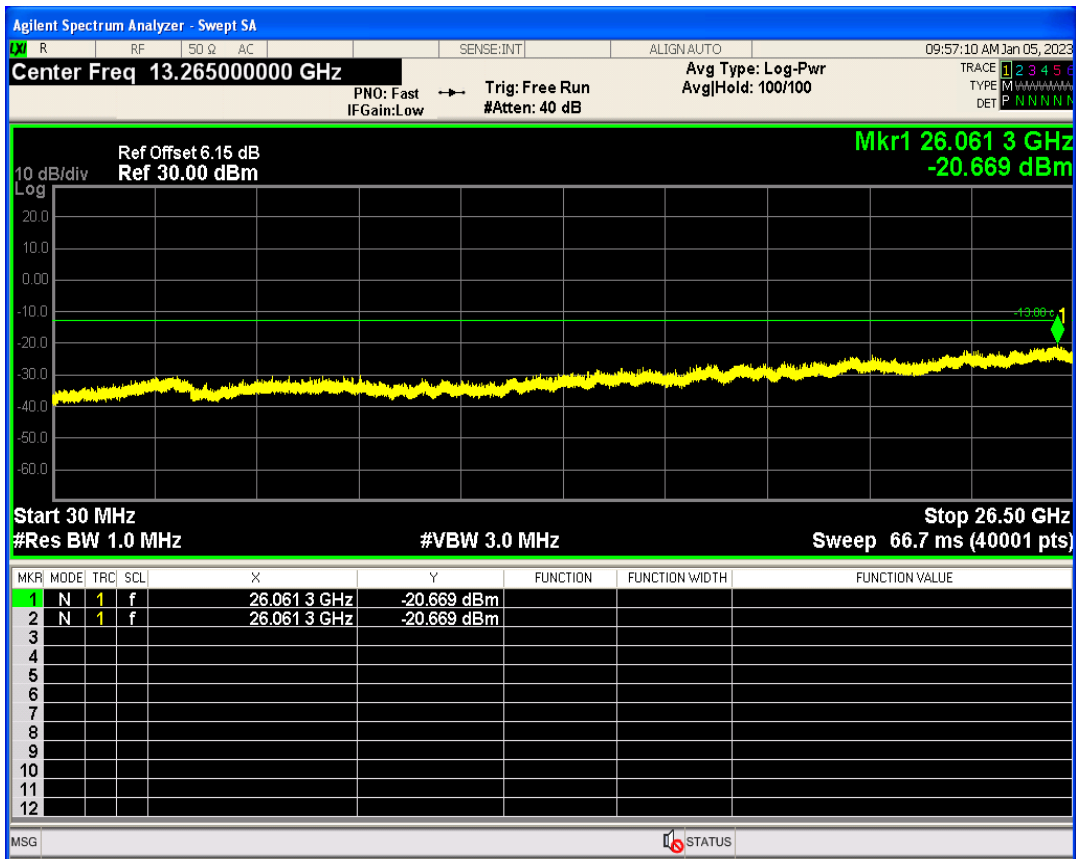


GPRS850 Channel=251

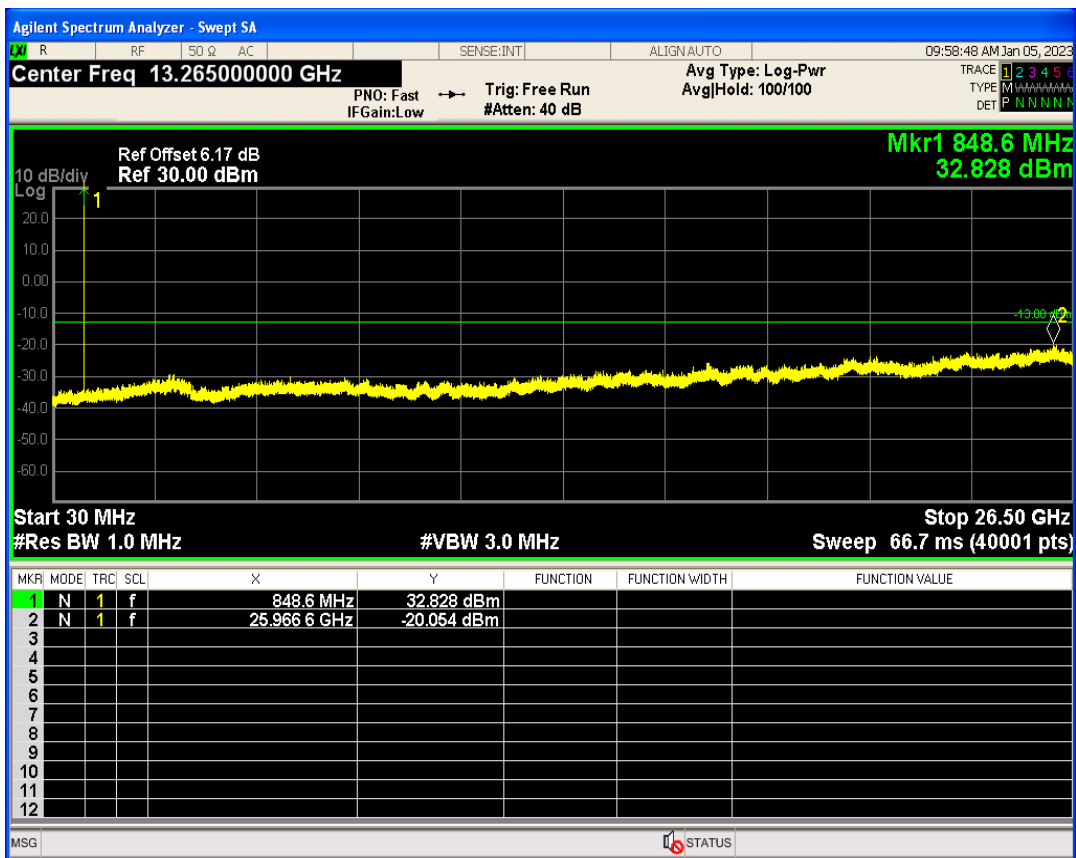

GPRS850 Channel=189

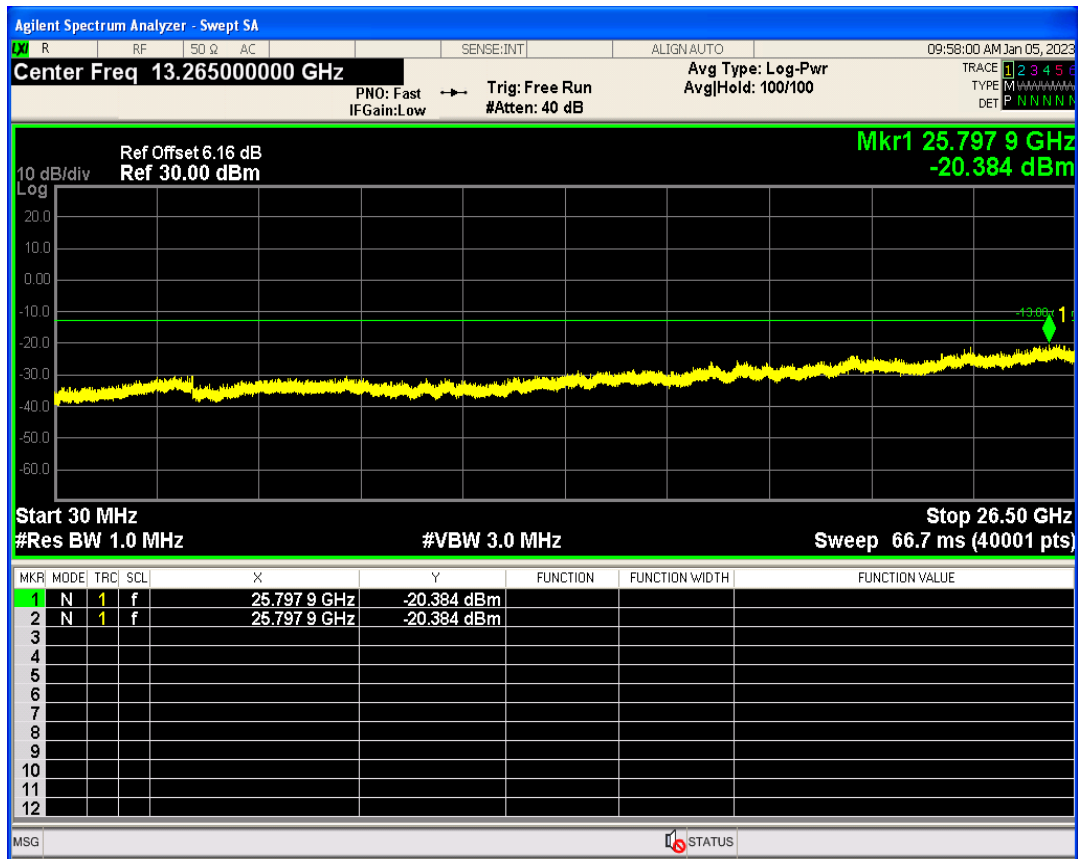

GPRS850 Channel=128

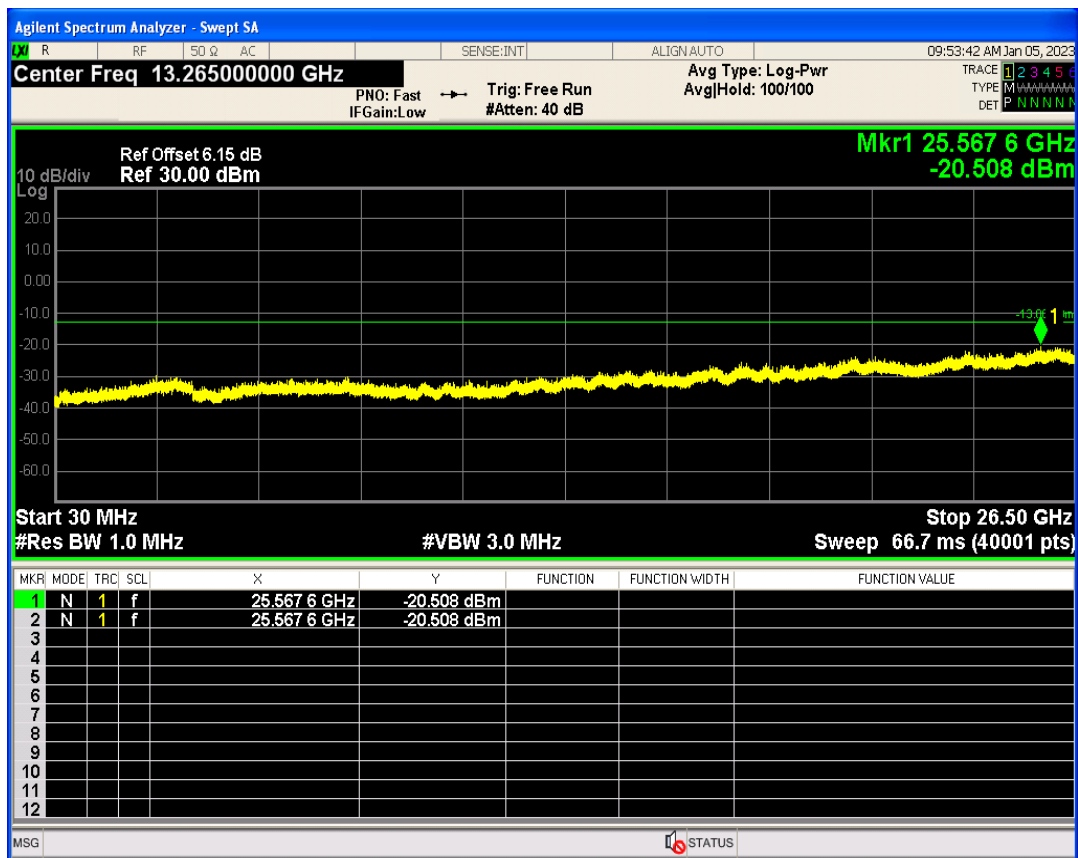


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	30.08	PASS
GSM1900	661	1880	29.82	PASS
GSM1900	810	1909.8	29.57	PASS
GSM850	128	824.2	32.73	PASS
GSM850	189	836.4	32.45	PASS
GSM850	251	848.8	32.45	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.75	13	PASS
GSM1900	661	1880	2.76	13	PASS
GSM1900	810	1909.8	2.77	13	PASS
GSM850	128	824.2	2.70	13	PASS
GSM850	189	836.4	2.70	13	PASS
GSM850	251	848.8	2.69	13	PASS


GSM1900 Channel=512

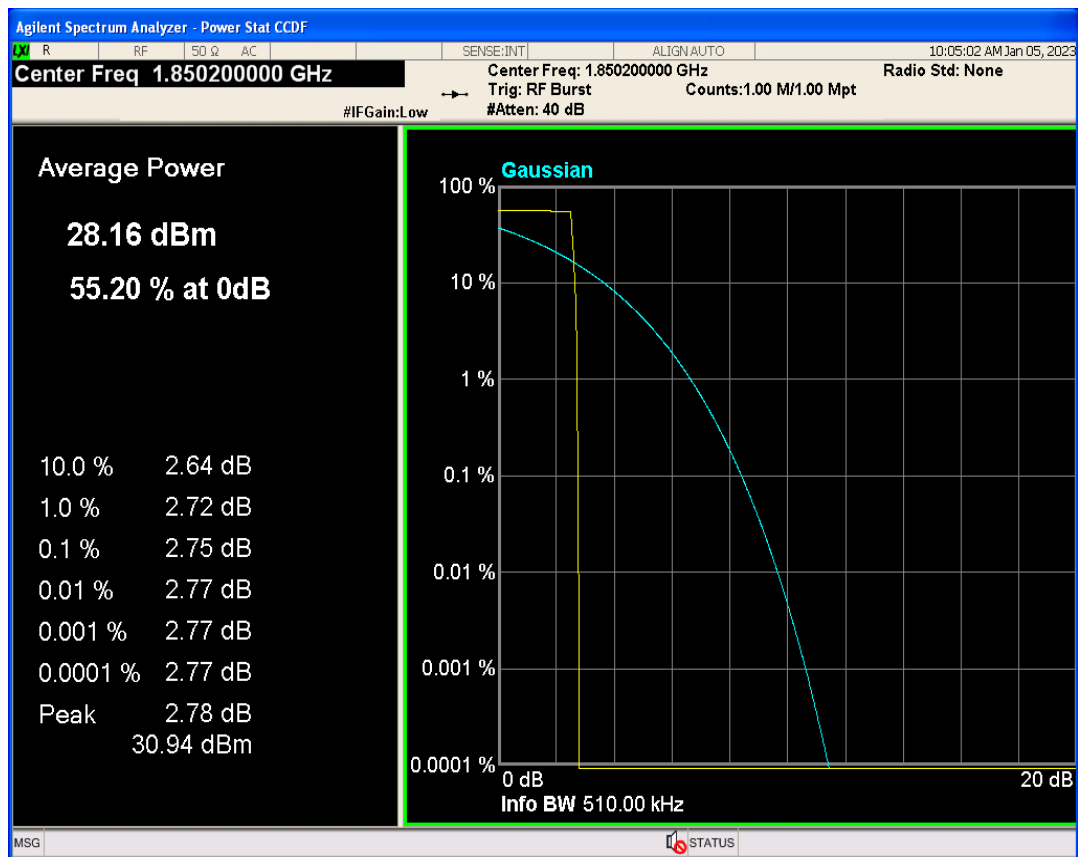


GSM1900 Channel=810

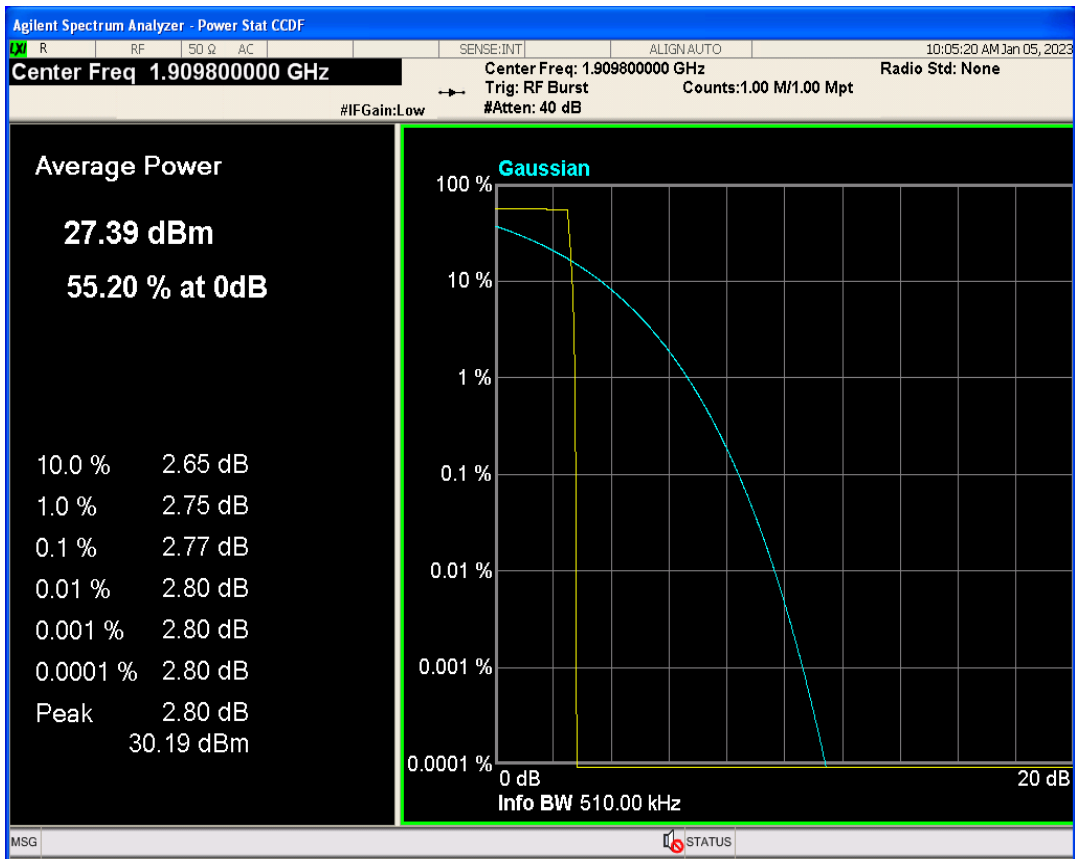


GSM1900 Channel=661

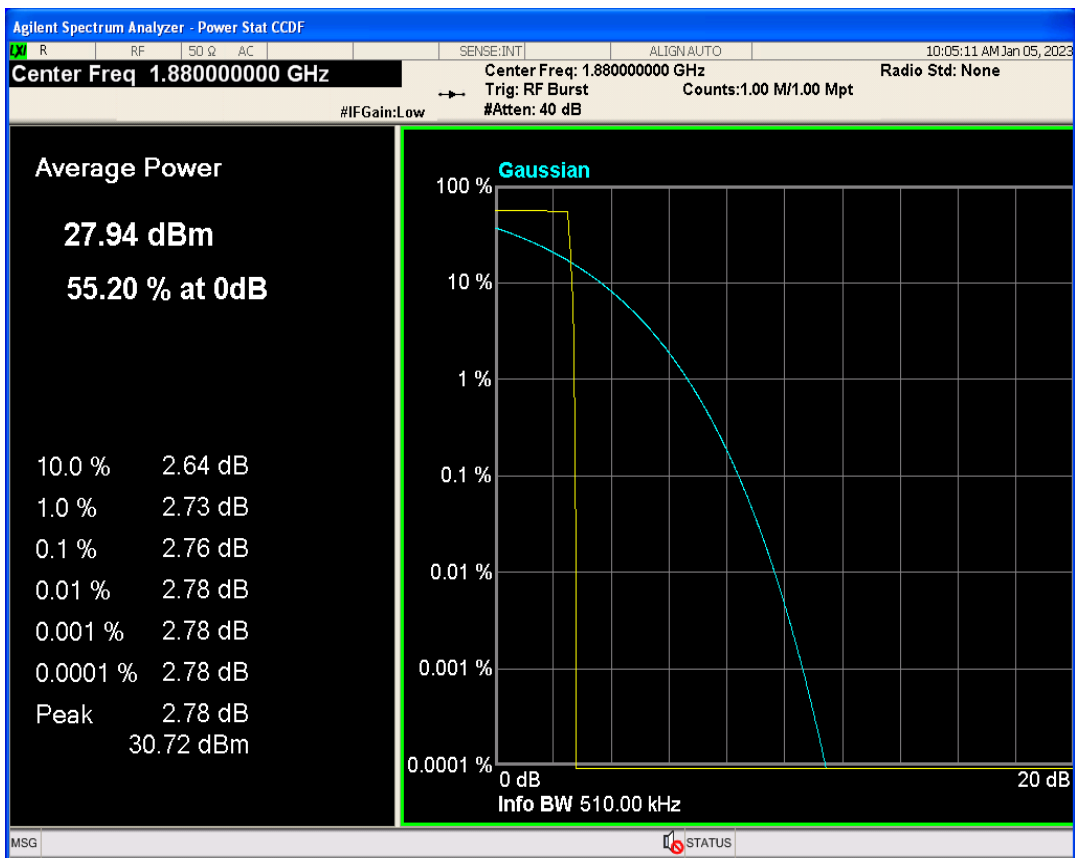

GSM850 Channel=128

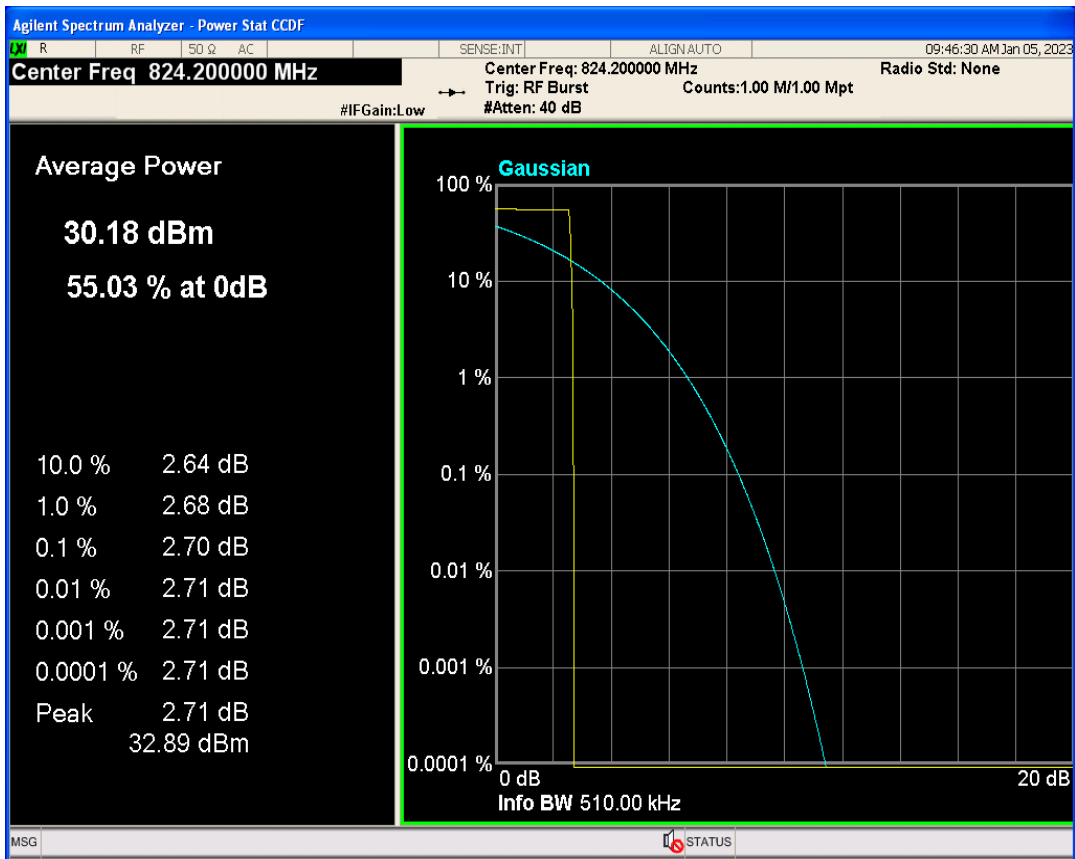

GSM850 Channel=251

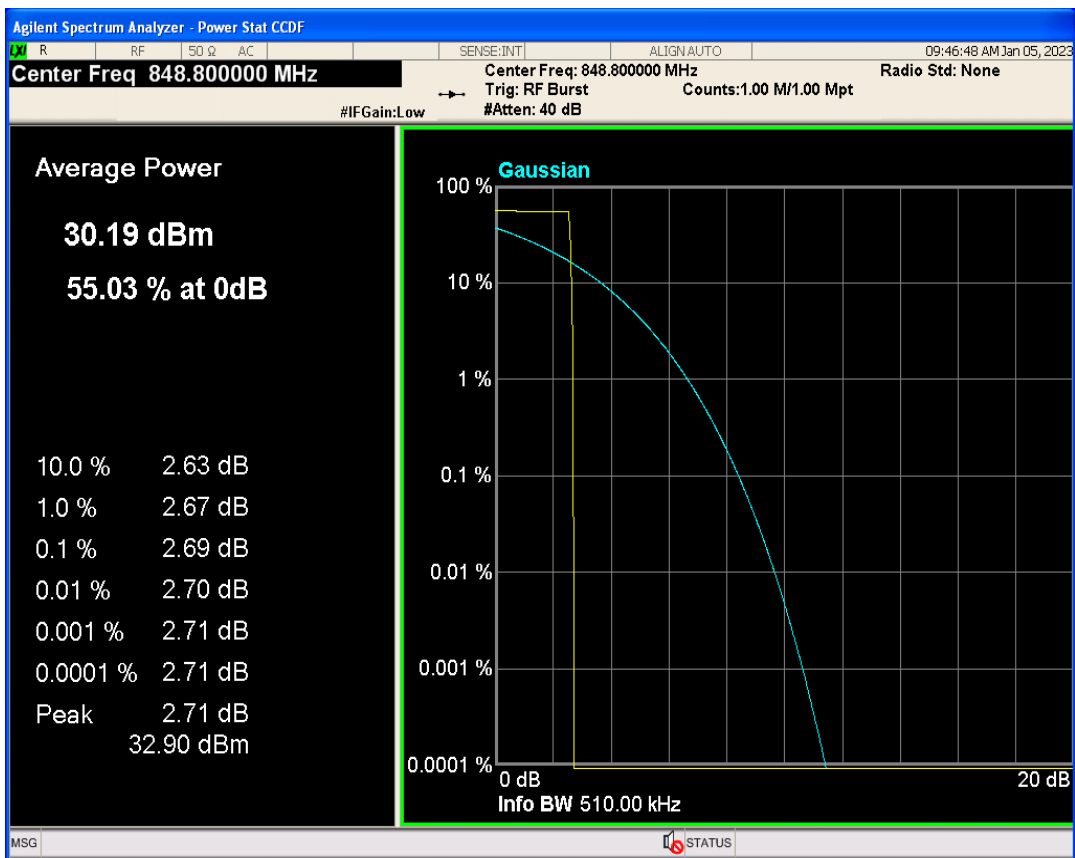


GSM850 Channel=189




Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	249.857	321.219	PASS
GSM1900	661	1880	245.879	316.978	PASS
GSM1900	810	1909.8	244.924	308.830	PASS
GSM850	128	824.2	247.542	319.580	PASS
GSM850	189	836.4	249.158	322.255	PASS
GSM850	251	848.8	242.010	315.258	PASS


GSM1900 Channel=661

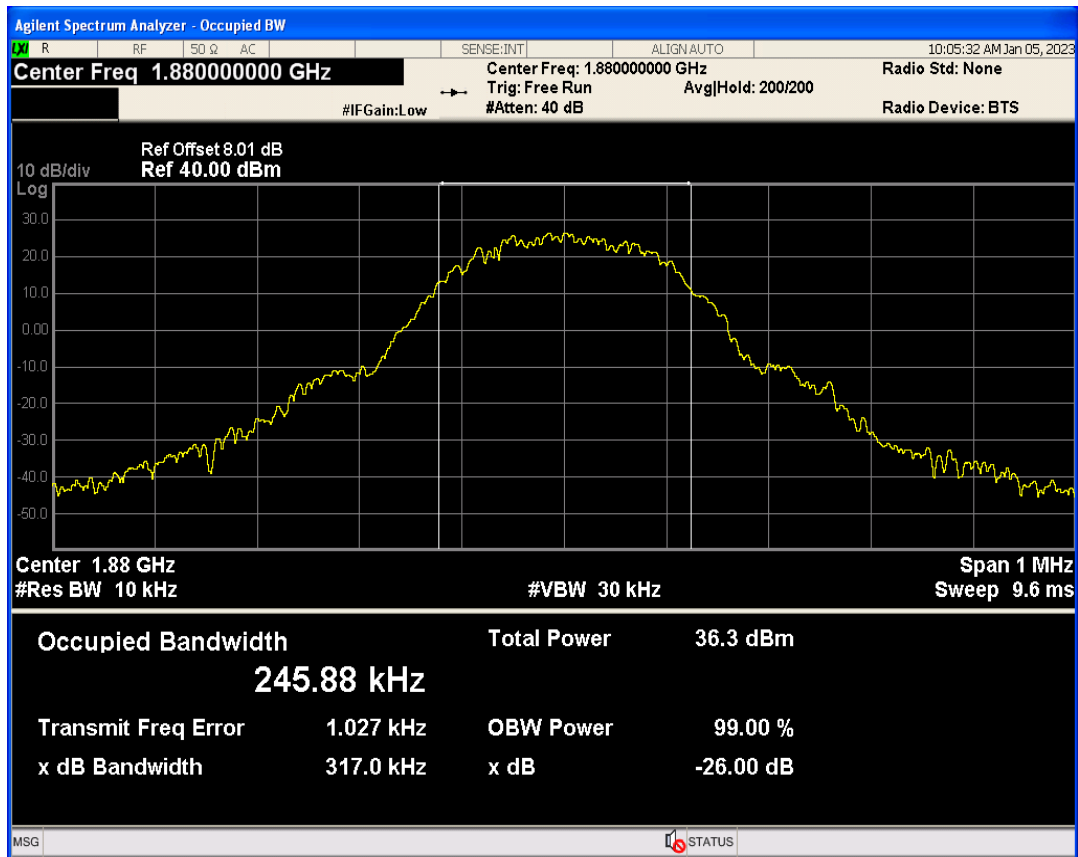


GSM1900 Channel=512

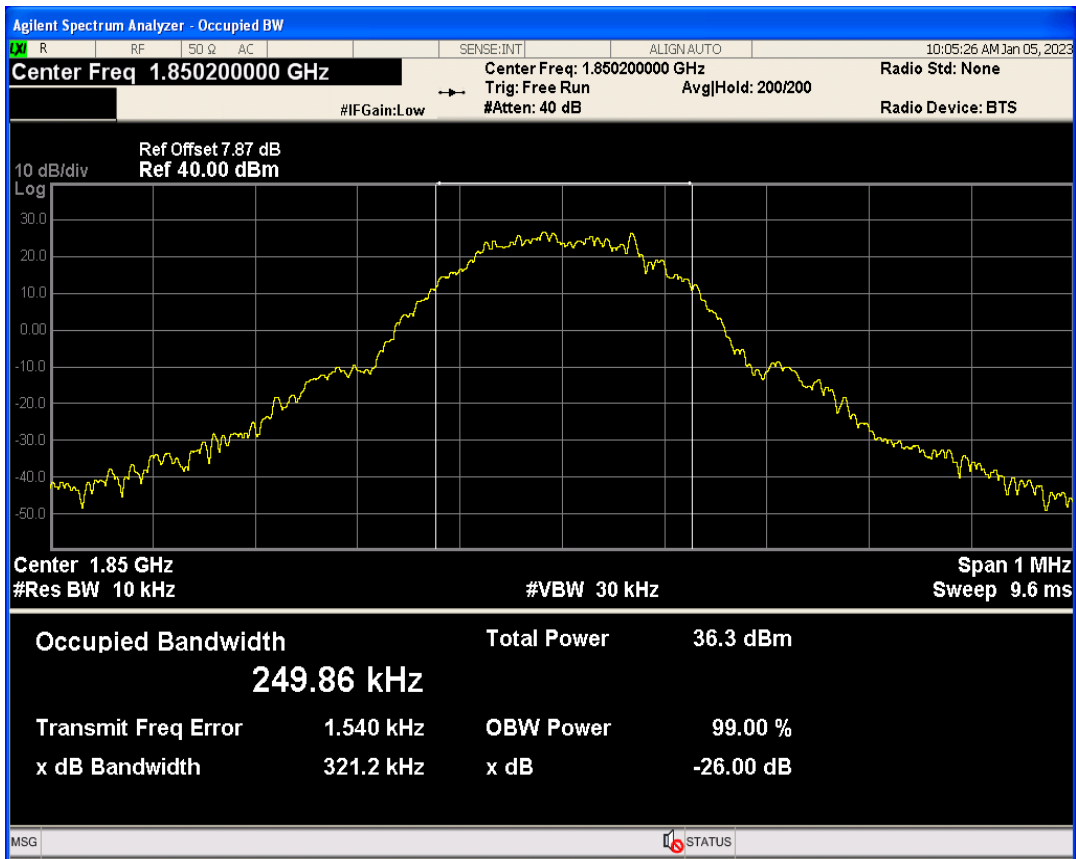


GSM1900 Channel=810

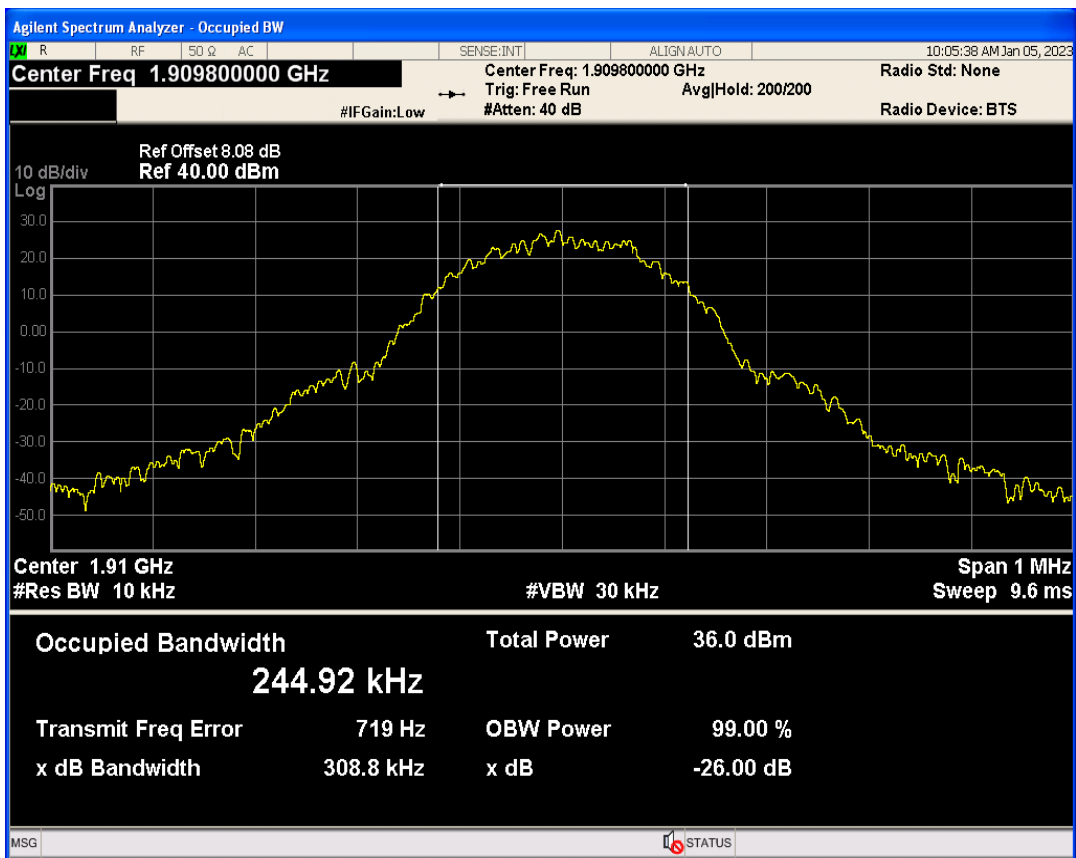


GSM850 Channel=128

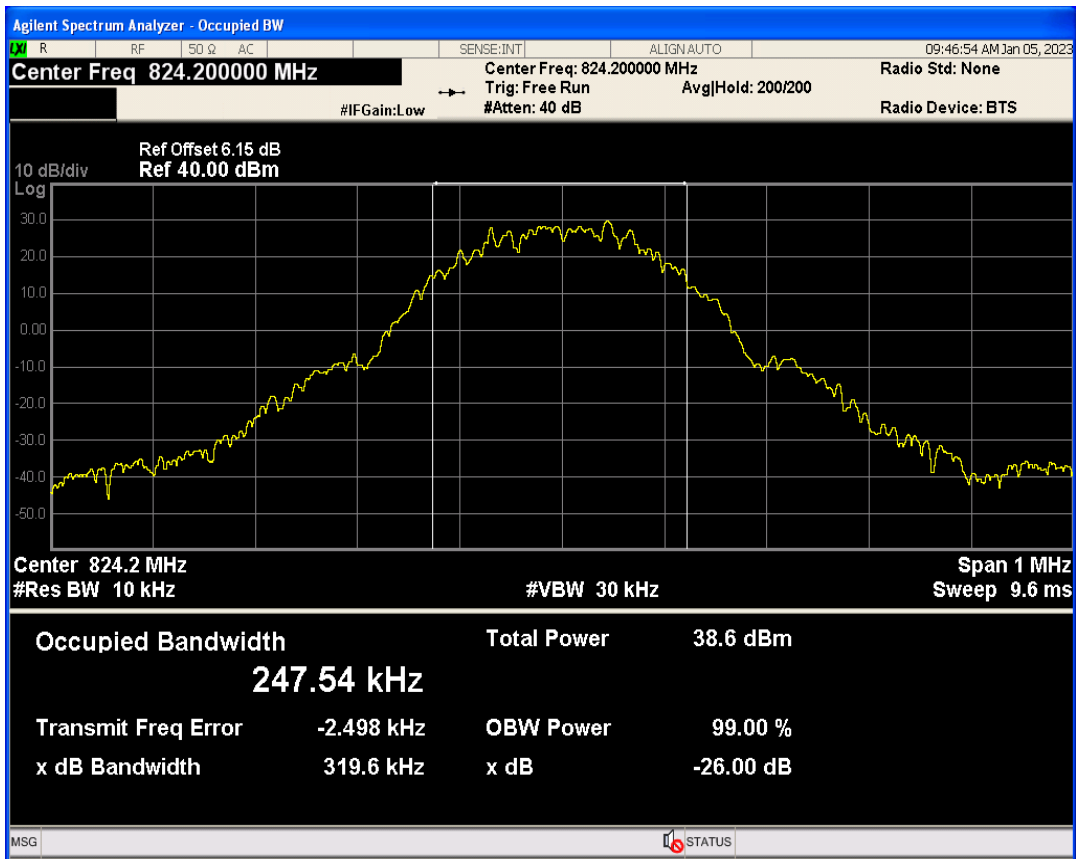

GSM850 Channel=251

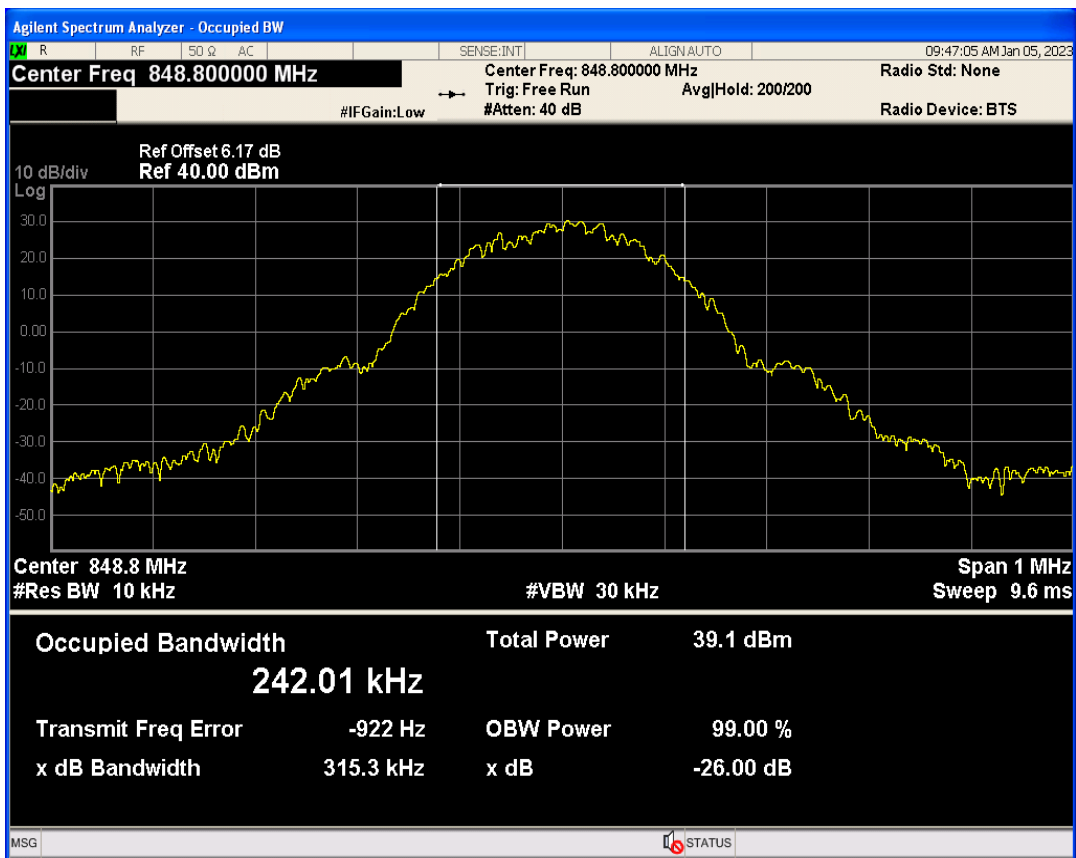


GSM850 Channel=189

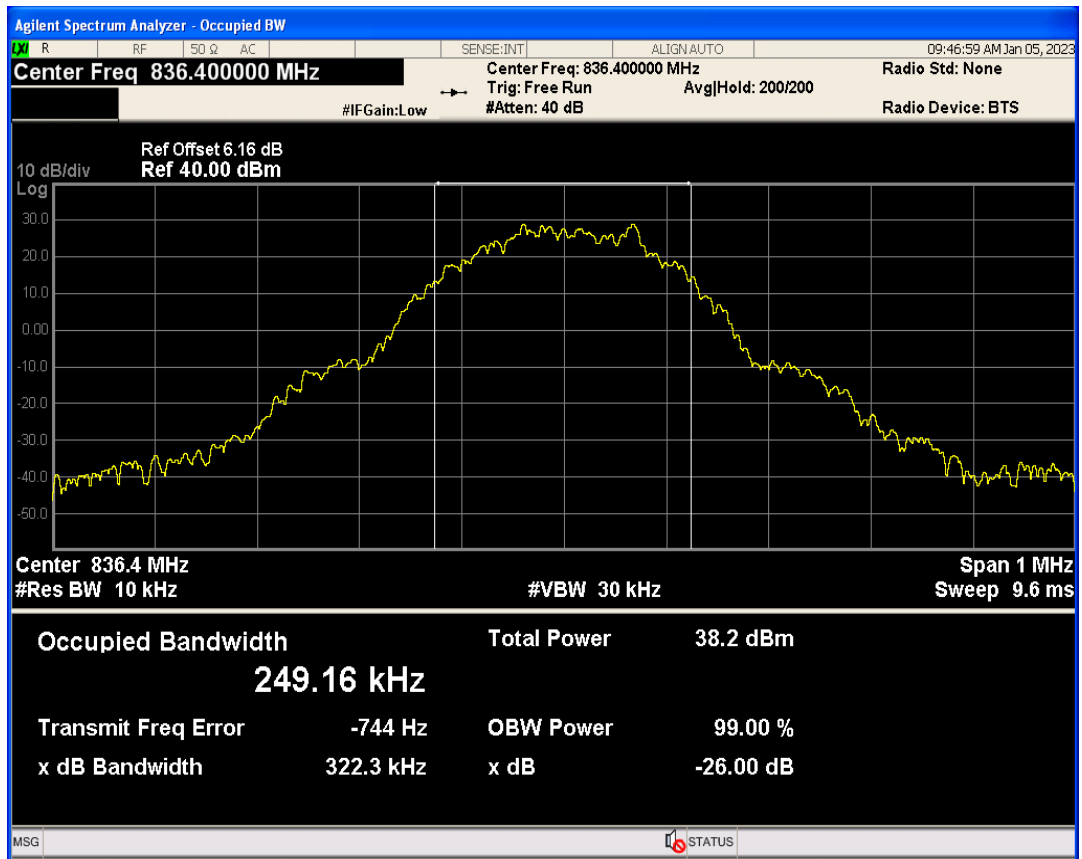


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1850.00	-29.26	-13	PASS
GSM1900	810	1909.8	1910.02	-29.42	-13	PASS
GSM850	128	824.2	823.98	-26.19	-13	PASS
GSM850	251	848.8	849.02	-26.58	-13	PASS


GSM1900 Channel=810

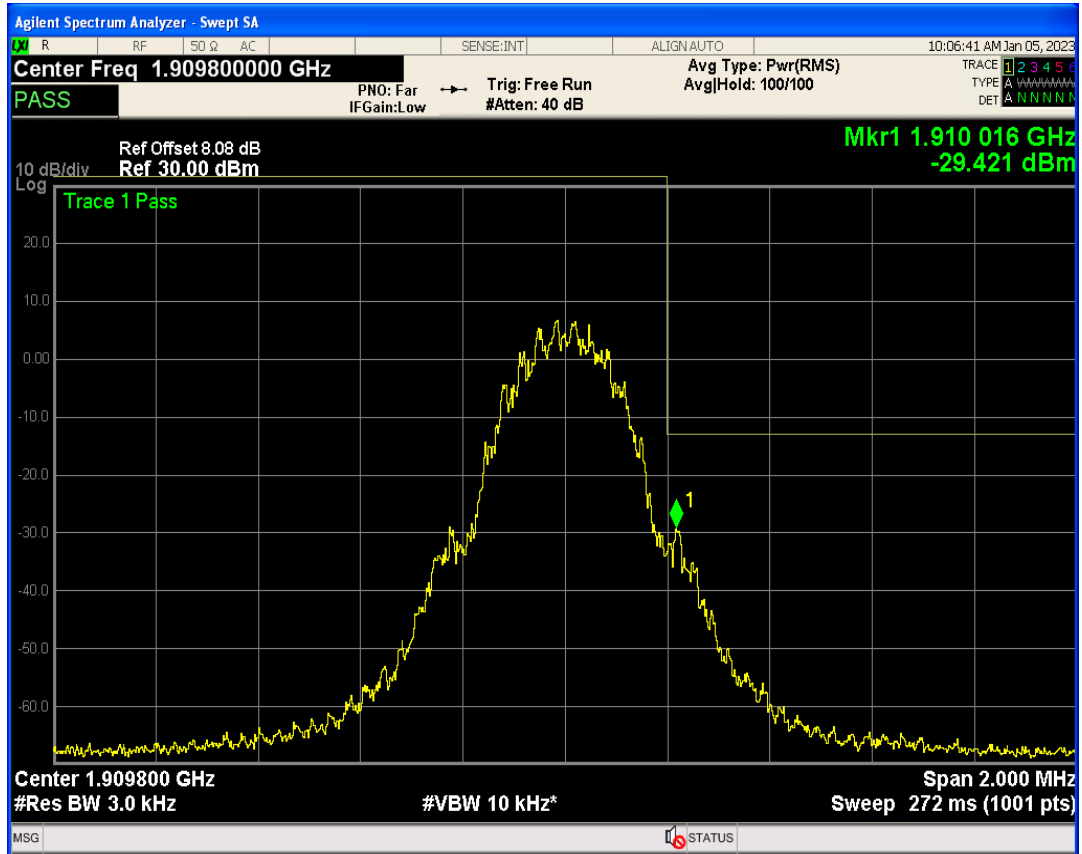


GSM1900 Channel=512

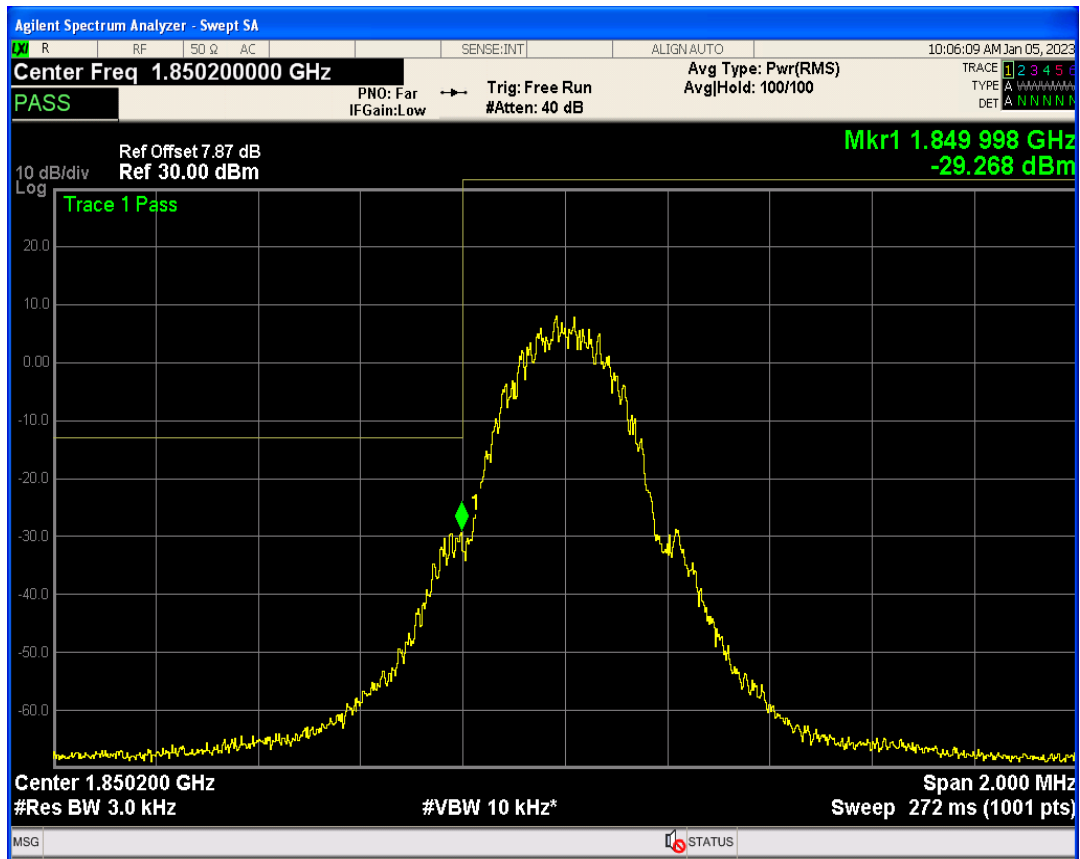

GSM850 Channel=128

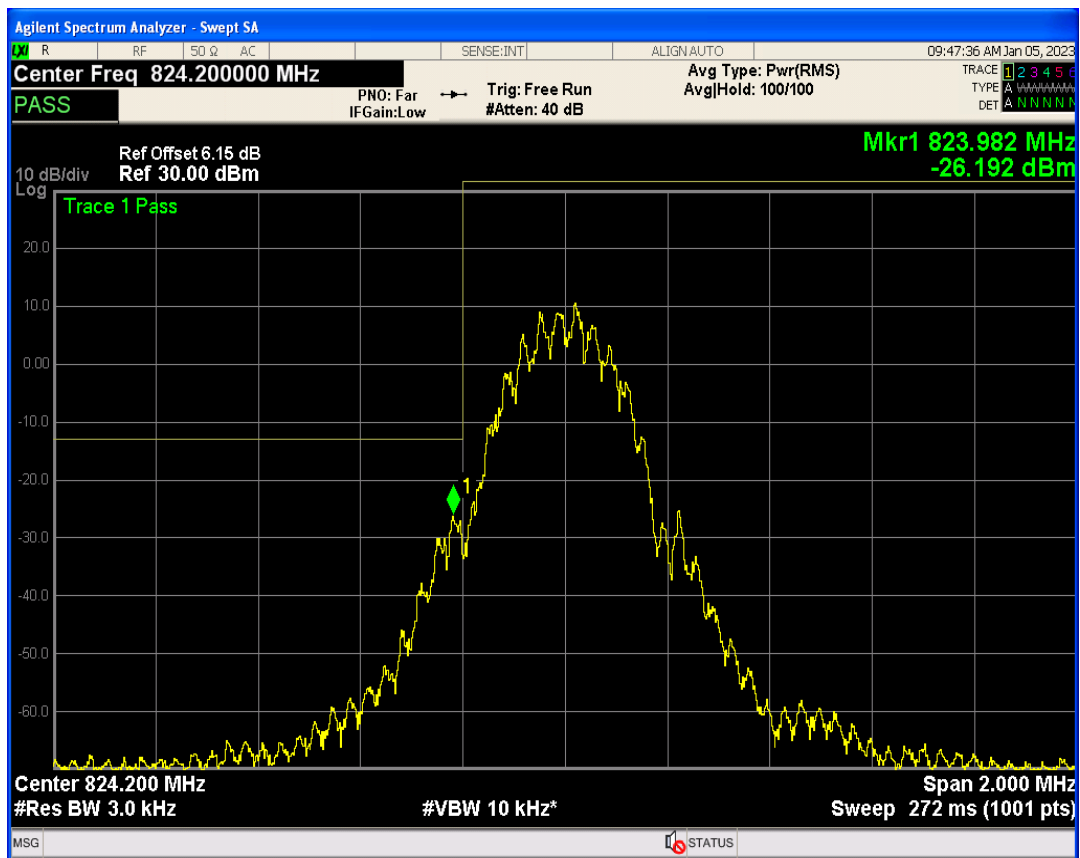


GSM850 Channel=251

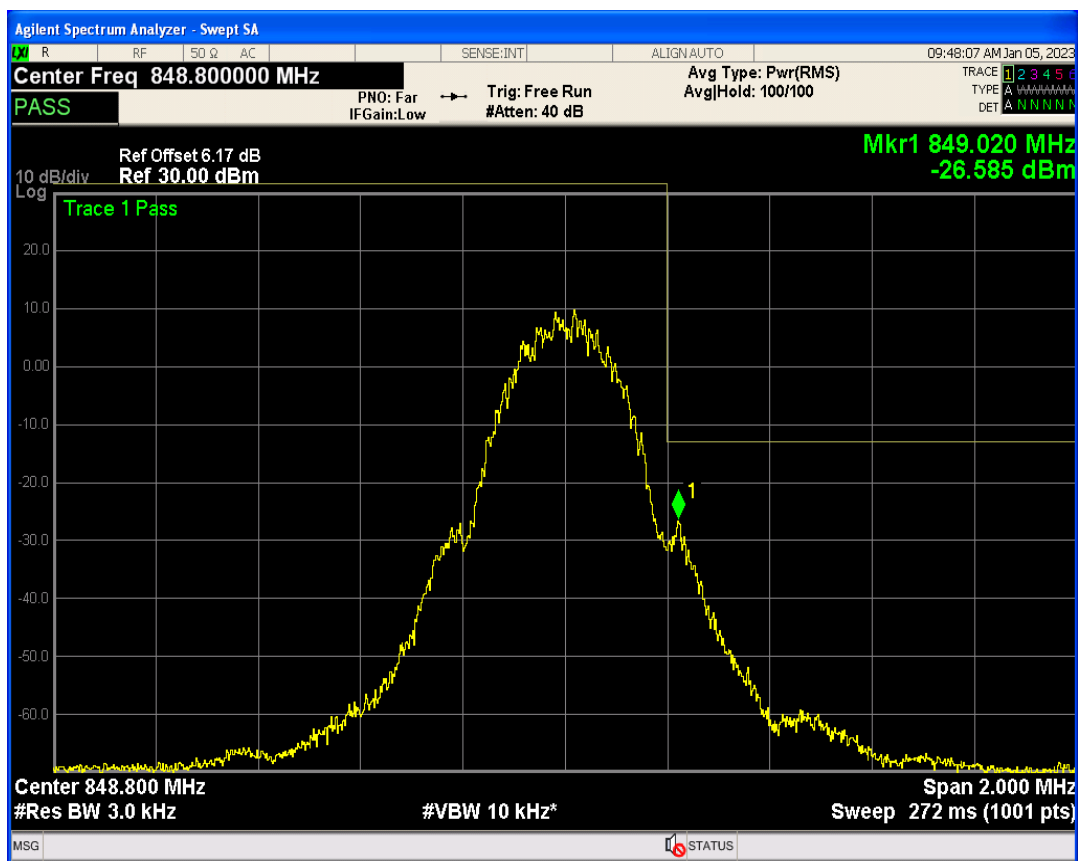


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	26103.61	-18.36	-13	PASS
GSM1900	661	1880	25860.09	-18.95	-13	PASS
GSM1900	810	1909.8	25506.71	-18.99	-13	PASS
GSM850	128	824.2	26120.16	-20.81	-13	PASS
GSM850	189	836.4	26001.70	-20.73	-13	PASS
GSM850	251	848.8	25989.79	-20.54	-13	PASS


GSM1900 Channel=512

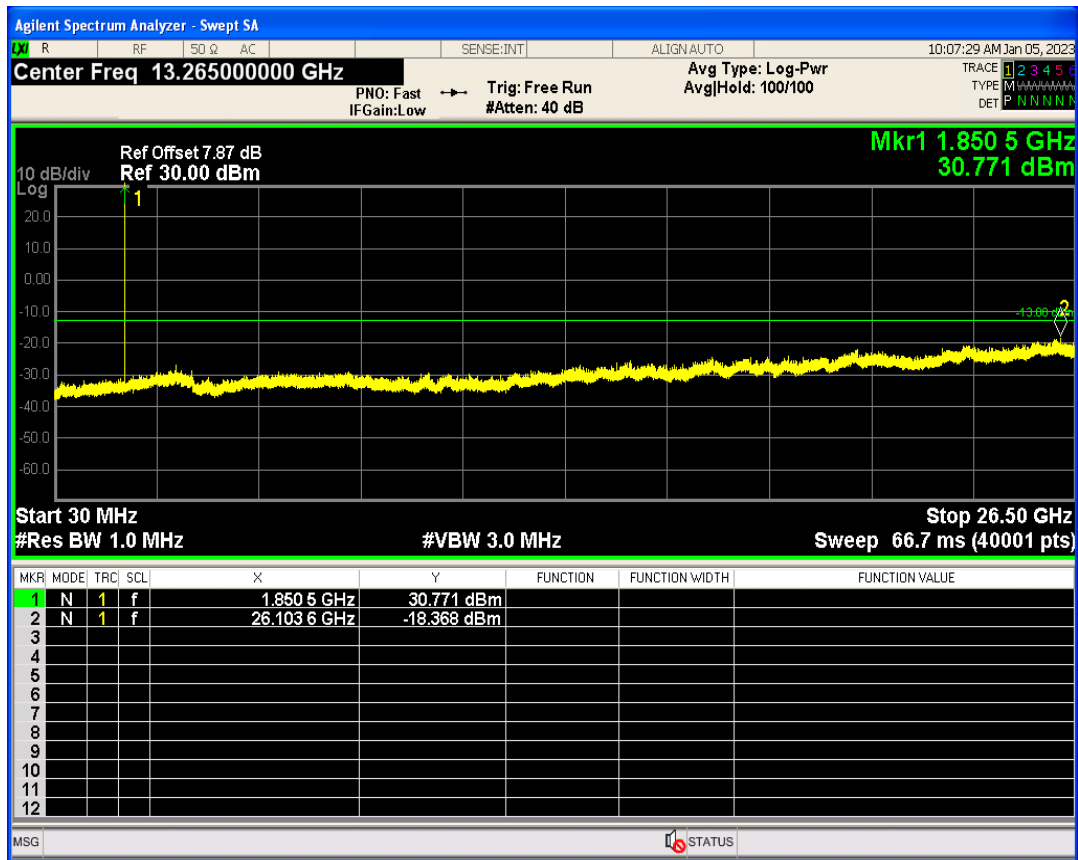


GSM1900 Channel=661

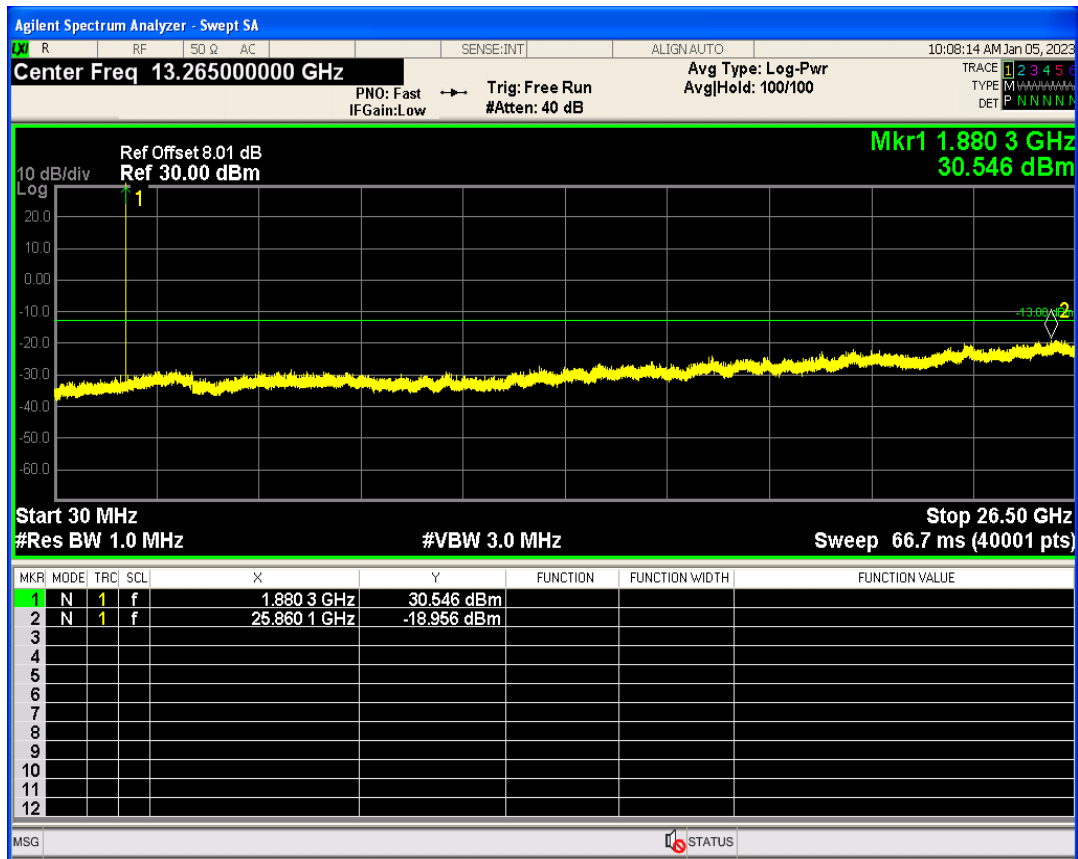


GSM1900 Channel=810

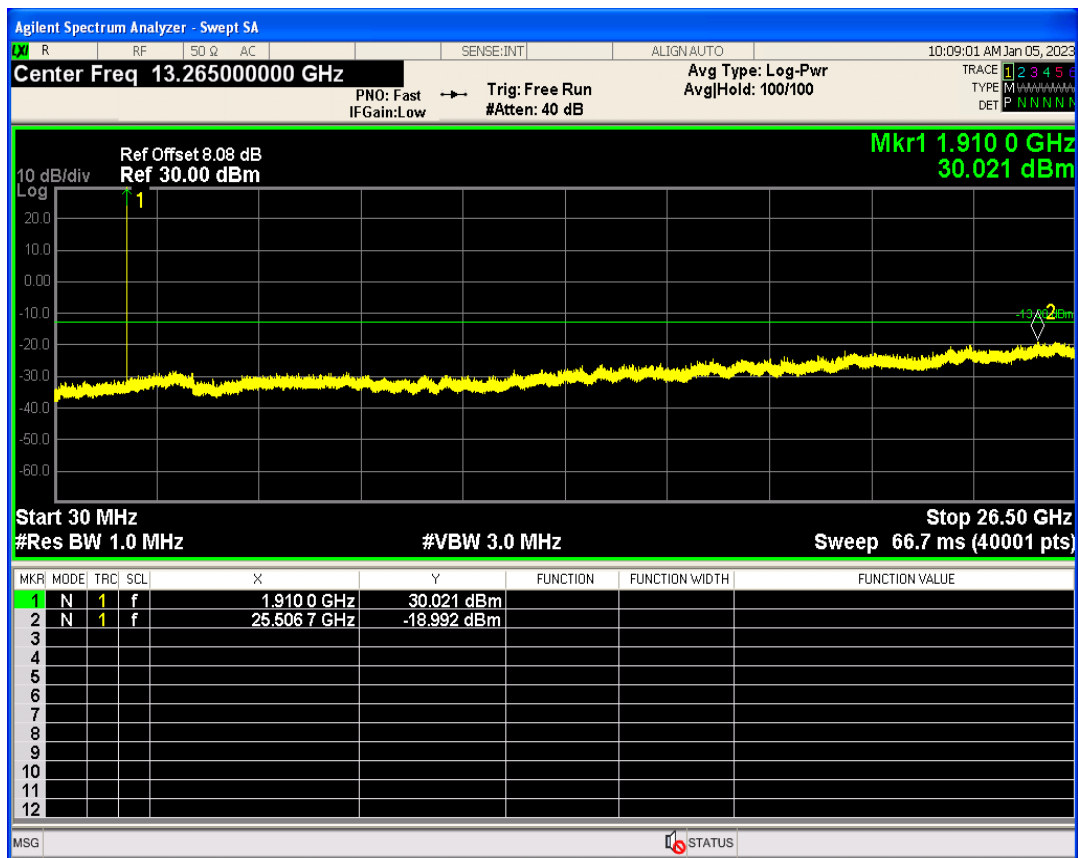

GSM850 Channel=128

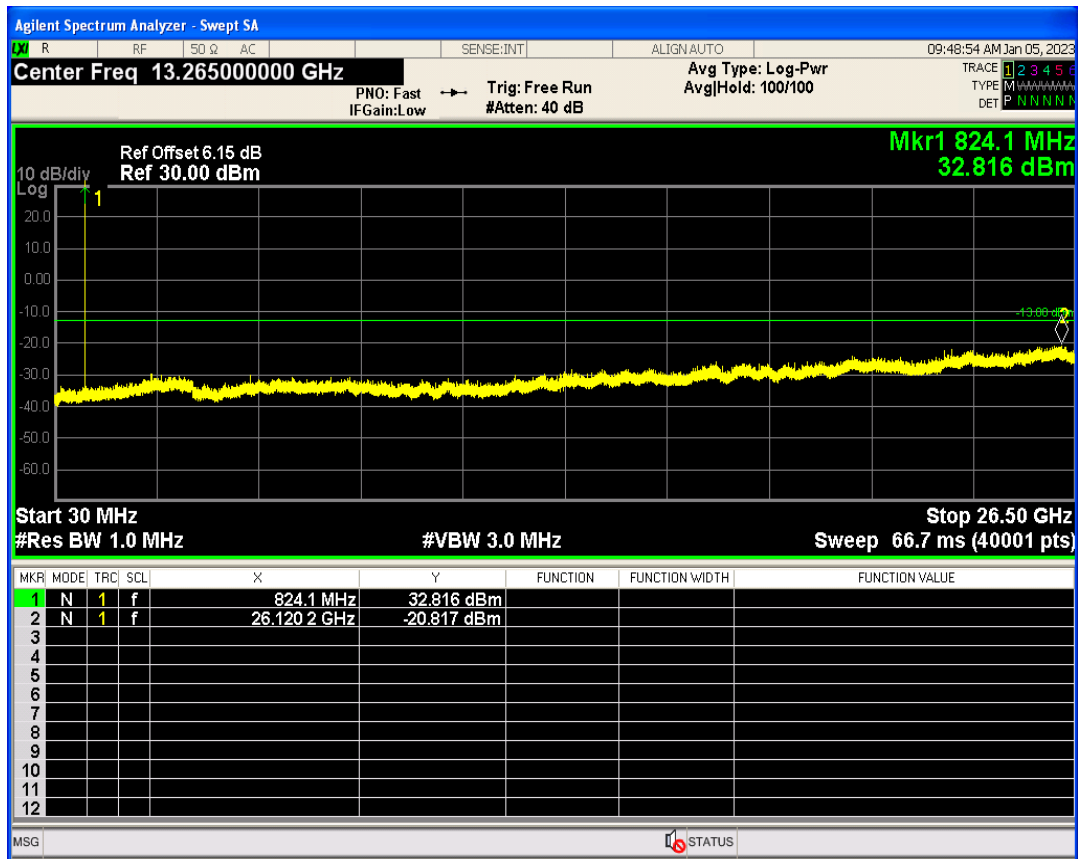

GSM850 Channel=189

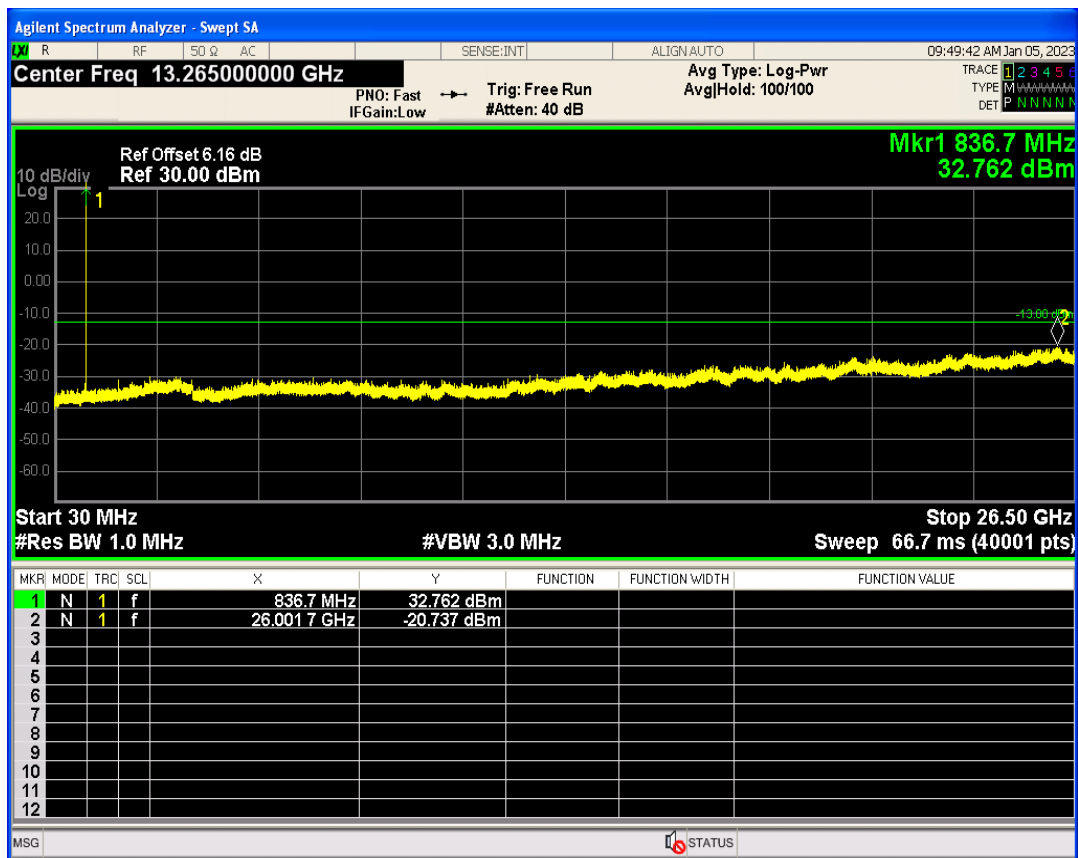

GSM850 Channel=251

