

TEST REPORT

Product Name: Interactive Flat Panel
FCC ID: 2A9I6-FB50-65U
Trademark: Flipbox
Model Number: FB50-65U, FB50-75U, FB50-86U, FB**-*** (* represents 0-10, A-Z.)
Prepared For: Integral POLYMEDIA Systems LLC
Address: 2403, Business Central Towers (B), Dubai Media City, PO Box 75476, Dubai, United Arab Emirates
Manufacturer: Integral POLYMEDIA Systems LLC
Address: 2403, Business Central Towers (B), Dubai Media City, PO Box 75476, Dubai, United Arab Emirates
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Oct. 26, 2022
Sample tested Date: Oct. 26, 2022 to Oct. 31, 2022
Issue Date: Oct. 31, 2022
Report No.: CTB221028005RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	7
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER	72
9.1 Block Diagram Of Test Setup	72
9.2 Limit	72
9.3 Test procedure	72
9.4 Test Result	73
10. 6DB OCCUPIED BANDWIDTH	74
10.1 Block Diagram Of Test Setup	74
10.2 Limit	74
10.3 Test procedure	74
10.4 Test Result	75
11. POWER SPECTRAL DENSITY	94
11.1 Block Diagram Of Test Setup	94
11.2 Limit	94
11.3 Test procedure	94
11.4 Test Result	95
12. ANTENNA REQUIREMENT	112
13. EUT PHOTOGRAPHS	113
14. EUT TEST SETUP PHOTOGRAPHS	114

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB221028005RFX	Oct.31, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	FB50-65U, FB50-75U, FB50-86U, FB**-*** (* represents 0-10, A-Z.)
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: FB50-65U
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 19.39dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: External antenna
Antenna Gain:	WiFi (2.4G) : ANT1:4.55dBi ANT2:4.55dBi ANT3:4.55dBi ANT4:4.55dBi
Ratings:	AC 100-240V ~ 50/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	Integral POLYMEDIA Systems LLC	2013010201614723	N/A	AE
2	remote control	Integral POLYMEDIA Systems LLC	FB50-65U-i5	N/A	DC

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.2dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

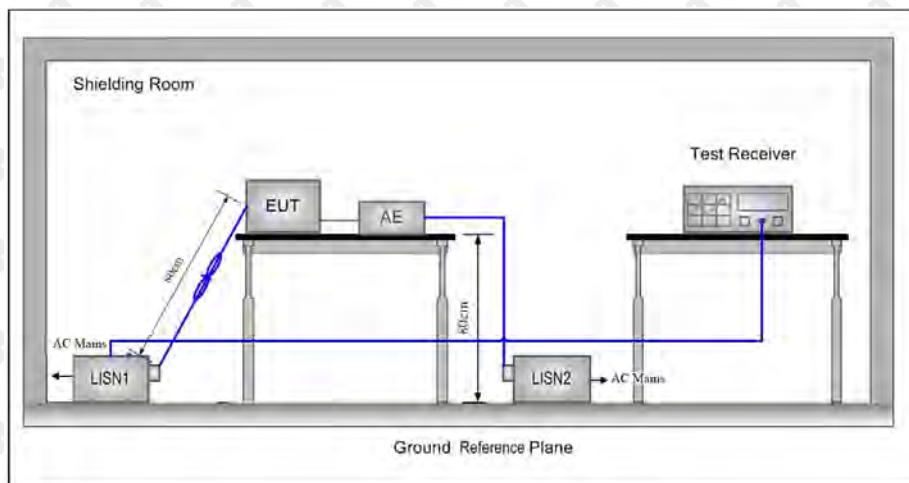

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

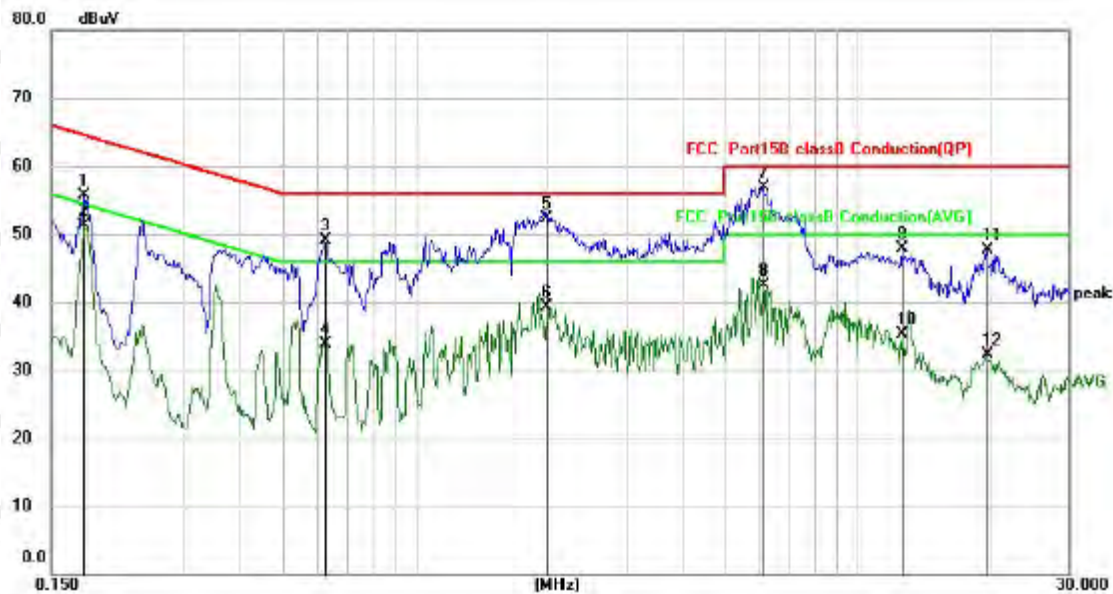

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1779	45.79	10.01	55.80	64.58	-8.78	QP
2		0.1779	41.29	10.01	51.30	54.58	-3.28	AVG
3		0.6260	39.12	9.97	49.09	56.00	-6.91	QP
4		0.6260	23.97	9.97	33.94	46.00	-12.06	AVG
5		1.9778	42.18	10.03	52.21	56.00	-3.79	QP
6		1.9778	29.29	10.03	39.32	46.00	-6.68	AVG
7	*	6.1139	46.60	10.21	56.81	60.00	-3.19	QP
8		6.1139	32.29	10.21	42.50	50.00	-7.50	AVG
9		12.6379	37.40	10.41	47.81	60.00	-12.19	QP
10		12.6379	24.94	10.41	35.35	50.00	-14.65	AVG
11		19.6018	37.17	10.56	47.73	60.00	-12.27	QP
12		19.6018	21.76	10.56	32.32	50.00	-17.68	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

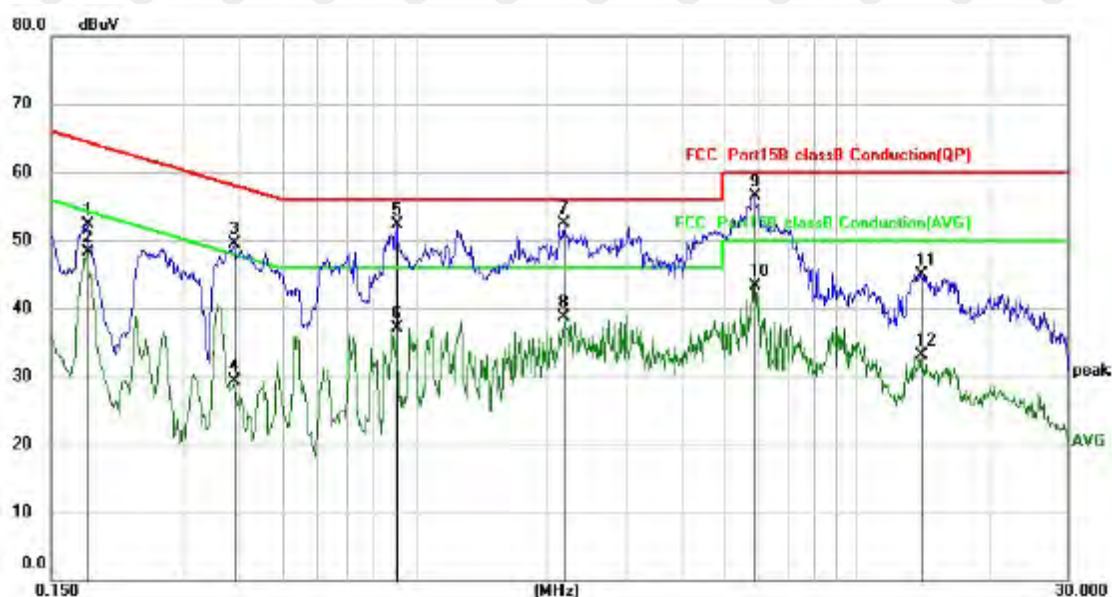

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	42.37	10.01	52.38	64.40	-12.02	QP
2		0.1819	38.37	10.01	48.38	54.40	-6.02	AVG
3		0.3899	39.47	9.98	49.45	58.07	-8.62	QP
4		0.3899	19.38	9.98	29.36	48.07	-18.71	AVG
5		0.9100	42.39	9.98	52.37	56.00	-3.63	QP
6		0.9100	27.04	9.98	37.02	46.00	-8.98	AVG
7	*	2.1779	42.54	10.04	52.58	56.00	-3.42	QP
8		2.1779	28.60	10.04	38.64	46.00	-7.36	AVG
9		5.8418	46.35	10.20	56.55	60.00	-3.45	QP
10		5.8418	33.17	10.20	43.37	50.00	-6.63	AVG
11		13.9176	34.47	10.44	44.91	60.00	-15.09	QP
12		13.9176	22.71	10.44	33.15	50.00	-16.85	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

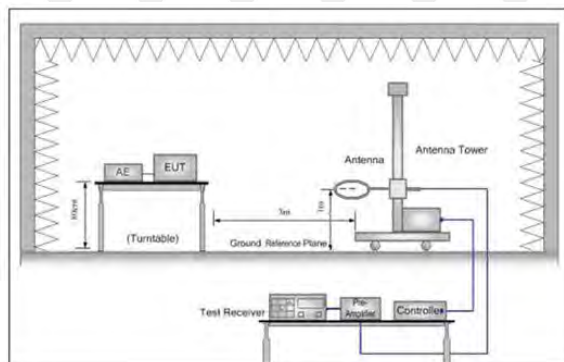


Figure 1. Below 30MHz

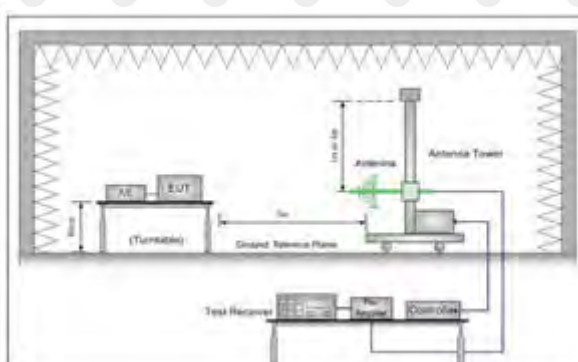


Figure 2. 30MHz to 1GHz

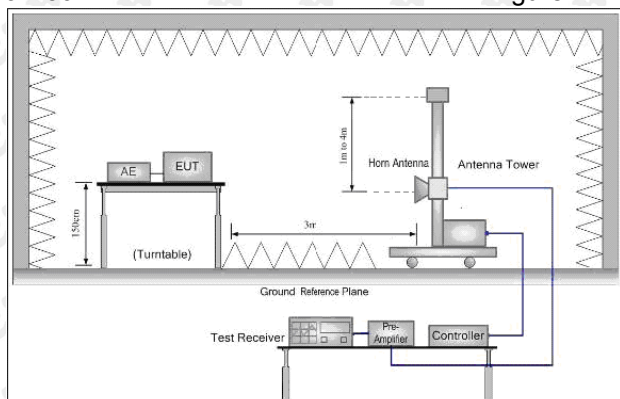


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H

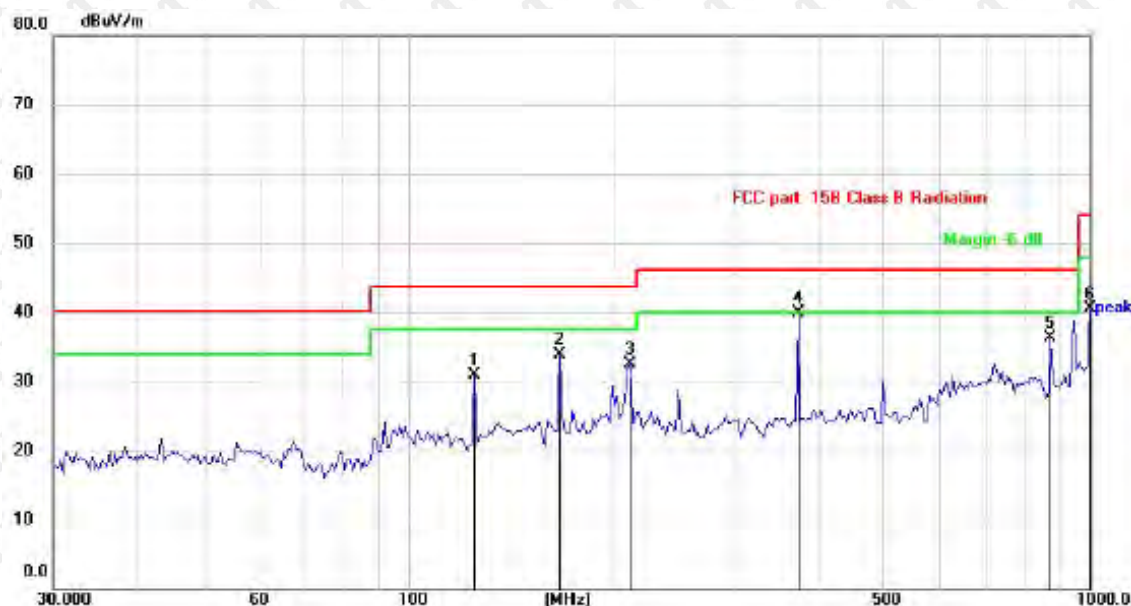

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		125.2258	38.03	-7.08	30.95	43.50	-12.55	QP
2		167.2366	40.22	-6.34	33.88	43.50	-9.62	QP
3		211.8976	41.70	-9.15	32.55	43.50	-10.95	QP
4	*	374.6225	43.19	-3.36	39.83	46.00	-6.17	QP
5		876.7826	29.45	6.76	36.21	46.00	-9.79	QP
6		1000.000	32.35	8.23	40.58	54.00	-13.42	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		125.2258	43.46	-7.08	36.38	43.50	-7.12	QP
2		167.2366	42.23	-6.34	35.89	43.50	-7.61	QP
3		374.6225	43.13	-3.36	39.77	46.00	-6.23	QP
4		628.3745	33.45	2.85	36.30	46.00	-9.70	QP
5		755.3872	32.17	4.92	37.09	46.00	-8.91	QP
6	*	876.7826	34.15	6.76	40.91	46.00	-5.09	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.32	-3.64	60.68	74	-13.32	peak
4824	48.37	-3.64	44.73	54	-9.27	AVG
7236	57.23	-0.95	56.28	74	-17.72	peak
7236	44.91	-0.95	43.96	54	-10.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.23	-3.64	61.59	74	-12.41	peak
4824	47.60	-3.64	43.96	54	-10.04	AVG
7236	57.82	-0.95	56.87	74	-17.13	peak
7236	45.87	-0.95	44.92	54	-9.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.44	-3.51	59.93	74	-14.07	peak
4874	47.91	-3.51	44.40	54	-9.60	AVG
7311	58.58	-0.82	57.76	74	-16.24	peak
7311	43.18	-0.82	42.36	54	-11.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.14	-3.51	59.63	74	-14.37	peak
4874	47.37	-3.51	43.86	54	-10.14	AVG
7311	58.05	-0.82	57.23	74	-16.77	peak
7311	44.36	-0.82	43.54	54	-10.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.04	-3.43	60.61	74	-13.39	peak
4924	47.95	-3.43	44.52	54	-9.48	AVG
7386	60.07	-0.75	59.32	74	-14.68	peak
7386	44.59	-0.75	43.84	54	-10.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.12	-3.43	60.69	74	-13.31	peak
4924	46.64	-3.43	43.21	54	-10.79	AVG
7386	56.77	-0.75	56.02	74	-17.98	peak
7386	41.72	-0.75	40.97	54	-13.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.86	-3.64	62.22	74	-11.78	peak
4824	48.27	-3.64	44.63	54	-9.37	AVG
7236	59.65	-0.95	58.70	74	-15.30	peak
7236	46.87	-0.95	45.92	54	-8.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.63	-3.64	60.99	74	-13.01	peak
4824	48.07	-3.64	44.43	54	-9.57	AVG
7236	57.94	-0.95	56.99	74	-17.01	peak
7236	44.44	-0.95	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.35	-3.51	59.84	74	-14.16	peak
4874	47.11	-3.51	43.60	54	-10.40	AVG
7311	58.80	-0.82	57.98	74	-16.02	peak
7311	43.96	-0.82	43.14	54	-10.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.83	-3.51	60.32	74	-13.68	peak
4874	47.58	-3.51	44.07	54	-9.93	AVG
7311	57.93	-0.82	57.11	74	-16.89	peak
7311	42.43	-0.82	41.61	54	-12.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.52	-3.43	60.09	74	-13.91	peak
4924	47.22	-3.43	43.79	54	-10.21	AVG
7386	57.09	-0.75	56.34	74	-17.66	peak
7386	41.88	-0.75	41.13	54	-12.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.56	-3.43	61.13	74	-12.87	peak
4924	47.56	-3.43	44.13	54	-9.87	AVG
7386	57.66	-0.75	56.91	74	-17.09	peak
7386	42.65	-0.75	41.90	54	-12.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Remark	:
(1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report	
(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.	
(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.	
(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.	

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.33	-3.64	61.69	74	-12.31	peak
4824	47.57	-3.64	43.93	54	-10.07	AVG
7236	57.14	-0.95	56.19	74	-17.81	peak
7236	42.81	-0.95	41.86	54	-12.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.33	-3.64	58.69	74	-15.31	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	58.16	-0.95	57.21	74	-16.79	peak
7236	46.57	-0.95	45.62	54	-8.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	65.06	-3.51	61.55	74.00	-12.45	peak
4874.00	49.25	-3.51	45.74	54.00	-8.26	AVG
7311.00	57.73	-0.82	56.91	74.00	-17.09	peak
7311.00	44.98	-0.82	44.16	54.00	-9.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	63.22	-3.51	59.71	74.00	-14.29	peak
4874.00	47.84	-3.51	44.33	54.00	-9.67	AVG
7311.00	59.20	-0.82	58.38	74.00	-15.62	peak
7311.00	41.86	-0.82	41.04	54.00	-12.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.61	-3.43	58.18	74	-15.82	peak
4924	45.55	-3.43	42.12	54	-11.88	AVG
7386	58.37	-0.75	57.62	74	-16.38	peak
7386	42.35	-0.75	41.60	54	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.81	-3.43	61.38	74	-12.62	peak
4924	47.36	-3.43	43.93	54	-10.07	AVG
7386	58.49	-0.75	57.74	74	-16.26	peak
7386	42.09	-0.75	41.34	54	-12.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.87	-3.63	61.24	74	-12.76	peak
4844	48.18	-3.63	44.55	54	-9.45	AVG
7266	57.64	-0.94	56.70	74	-17.30	peak
7266	45.91	-0.94	44.97	54	-9.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.23	-3.63	60.60	74	-13.40	peak
4844	49.20	-3.63	45.57	54	-8.43	AVG
7266	59.50	-0.94	58.56	74	-15.44	peak
7266	44.59	-0.94	43.65	54	-10.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.47	-3.51	60.96	74	-13.04	peak
4874	49.07	-3.51	45.56	54	-8.44	AVG
7311	60.82	-0.82	60.00	74	-14.00	peak
7311	44.11	-0.82	43.29	54	-10.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.34	-3.51	58.83	74	-15.17	peak
4874	46.52	-3.51	43.01	54	-10.99	AVG
7311	56.62	-0.82	55.80	74	-18.20	peak
7311	43.32	-0.82	42.50	54	-11.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.42	-3.43	58.99	74	-15.01	peak
4904	48.63	-3.43	45.20	54	-8.80	AVG
7356	57.59	-0.75	56.84	74	-17.16	peak
7356	41.34	-0.75	40.59	54	-13.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.47	-3.43	59.04	74	-14.96	peak
4904	48.34	-3.43	44.91	54	-9.09	AVG
7356	56.54	-0.75	55.79	74	-18.21	peak
7356	44.20	-0.75	43.45	54	-10.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.69	-5.81	51.88	74	-22.12	peak
2390	/	-5.81	/	54	/	AVG
2399	64.23	-5.84	58.39	74	-15.61	peak
2399	48.25	-5.84	42.41	54	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.91	-5.81	52.10	74	-21.90	peak
2390	/	-5.81	/	54	/	AVG
2399	61.92	-5.84	56.08	74	-17.92	peak
2399	45.88	-5.84	40.04	54	-13.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.78	-5.65	52.13	74	-21.87	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.92	-5.65	50.27	74	-23.73	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.56	-5.81	52.75	74	-21.25	peak
2390	/	-5.81	/	54	/	AVG
2399	62.53	-5.84	56.69	74	-17.31	peak
2399	47.31	-5.84	41.47	54	-12.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.18	-5.81	51.37	74	-22.63	peak
2390	/	-5.81	/	54	/	AVG
2399	63.21	-5.84	57.37	74	-16.63	peak
2399	46.55	-5.84	40.71	54	-13.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.13	-5.65	50.48	74	-23.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.91	-5.65	52.26	74	-21.74	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	63.00	-5.84	57.16	74	-16.84	peak
2399	48.12	-5.84	42.28	54	-11.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.50	-5.81	51.69	74	-22.31	peak
2390	/	-5.81	/	54	/	AVG
2399	59.92	-5.84	54.08	74	-19.92	peak
2399	47.36	-5.84	41.52	54	-12.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.58	-5.65	50.93	74	-23.07	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.38	-5.81	52.57	74	-21.43	peak
2390	/	-5.81	/	54	/	AVG
2399	63.62	-5.84	57.78	74	-16.22	peak
2399	45.64	-5.84	39.80	54	-14.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.77	-5.81	52.96	74	-21.04	peak
2390	/	-5.81	/	54	/	AVG
2399	61.30	-5.84	55.46	74	-18.54	peak
2399	46.94	-5.84	41.10	54	-12.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.56	-5.65	50.91	74	-23.09	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.55	-5.65	51.90	74	-22.10	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

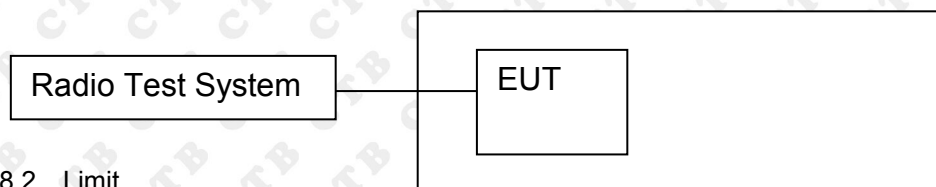

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:



BAND EDGE Graphs

802.11g/LCH

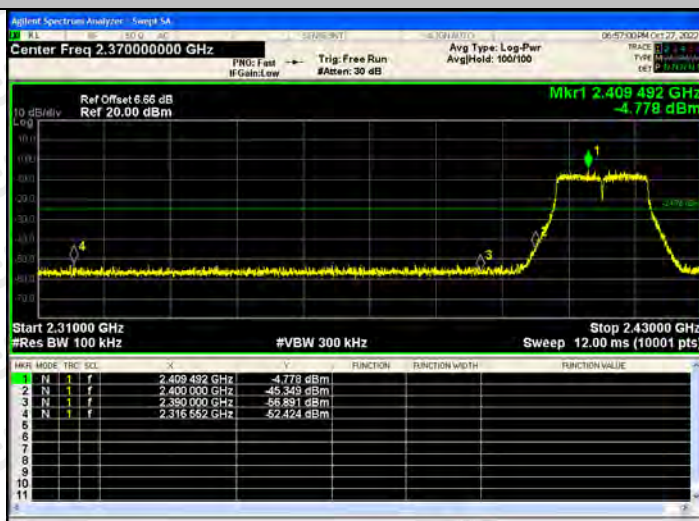


802.11g/HCH



BAND EDGE Graphs

802.11n(HT20)/L
CH

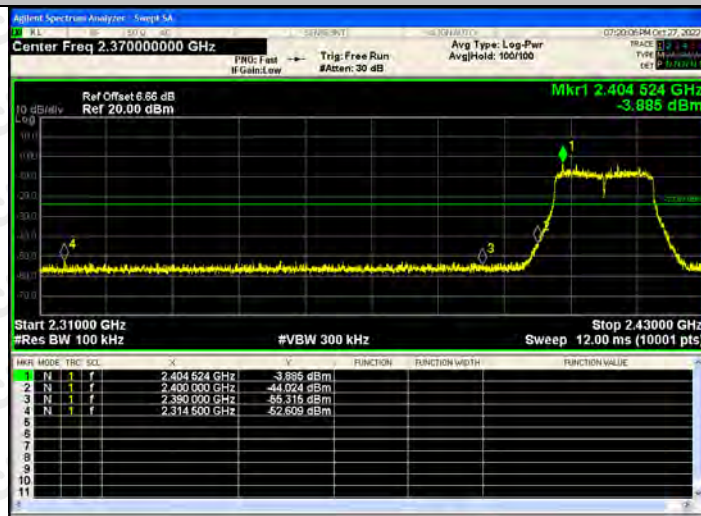


802.11n(HT20)/H
CH



BAND EDGE Graphs


802.11n(HT40)/L
CH

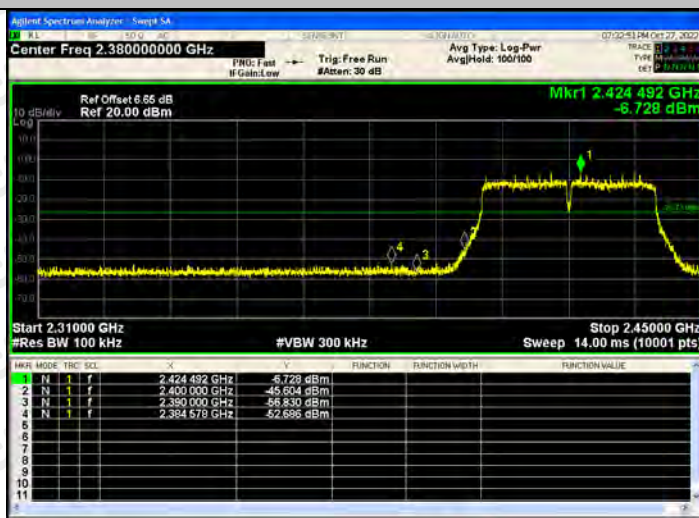


802.11n(HT40)/H
CH



RF Conducted Spurious Emissions Graphs

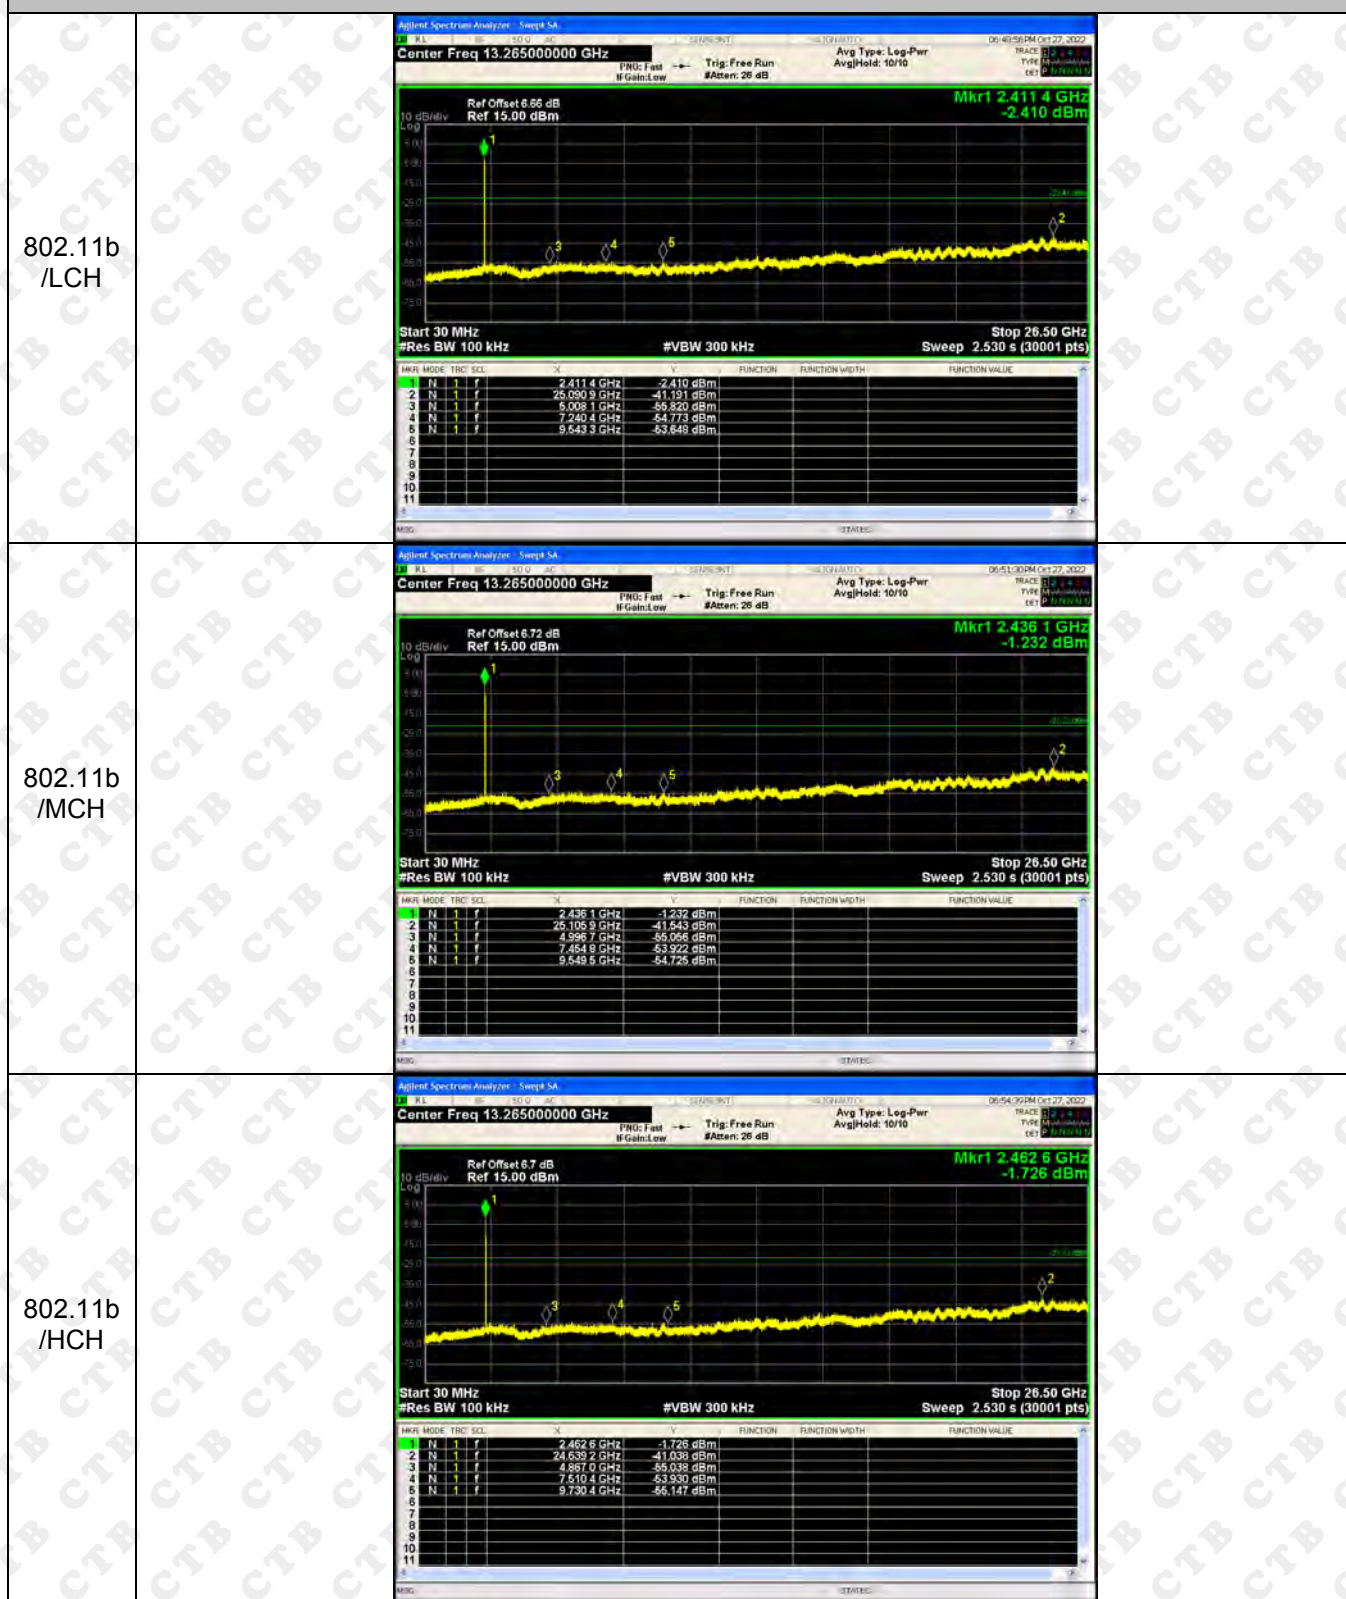


RF Conducted Spurious Emissions Graphs

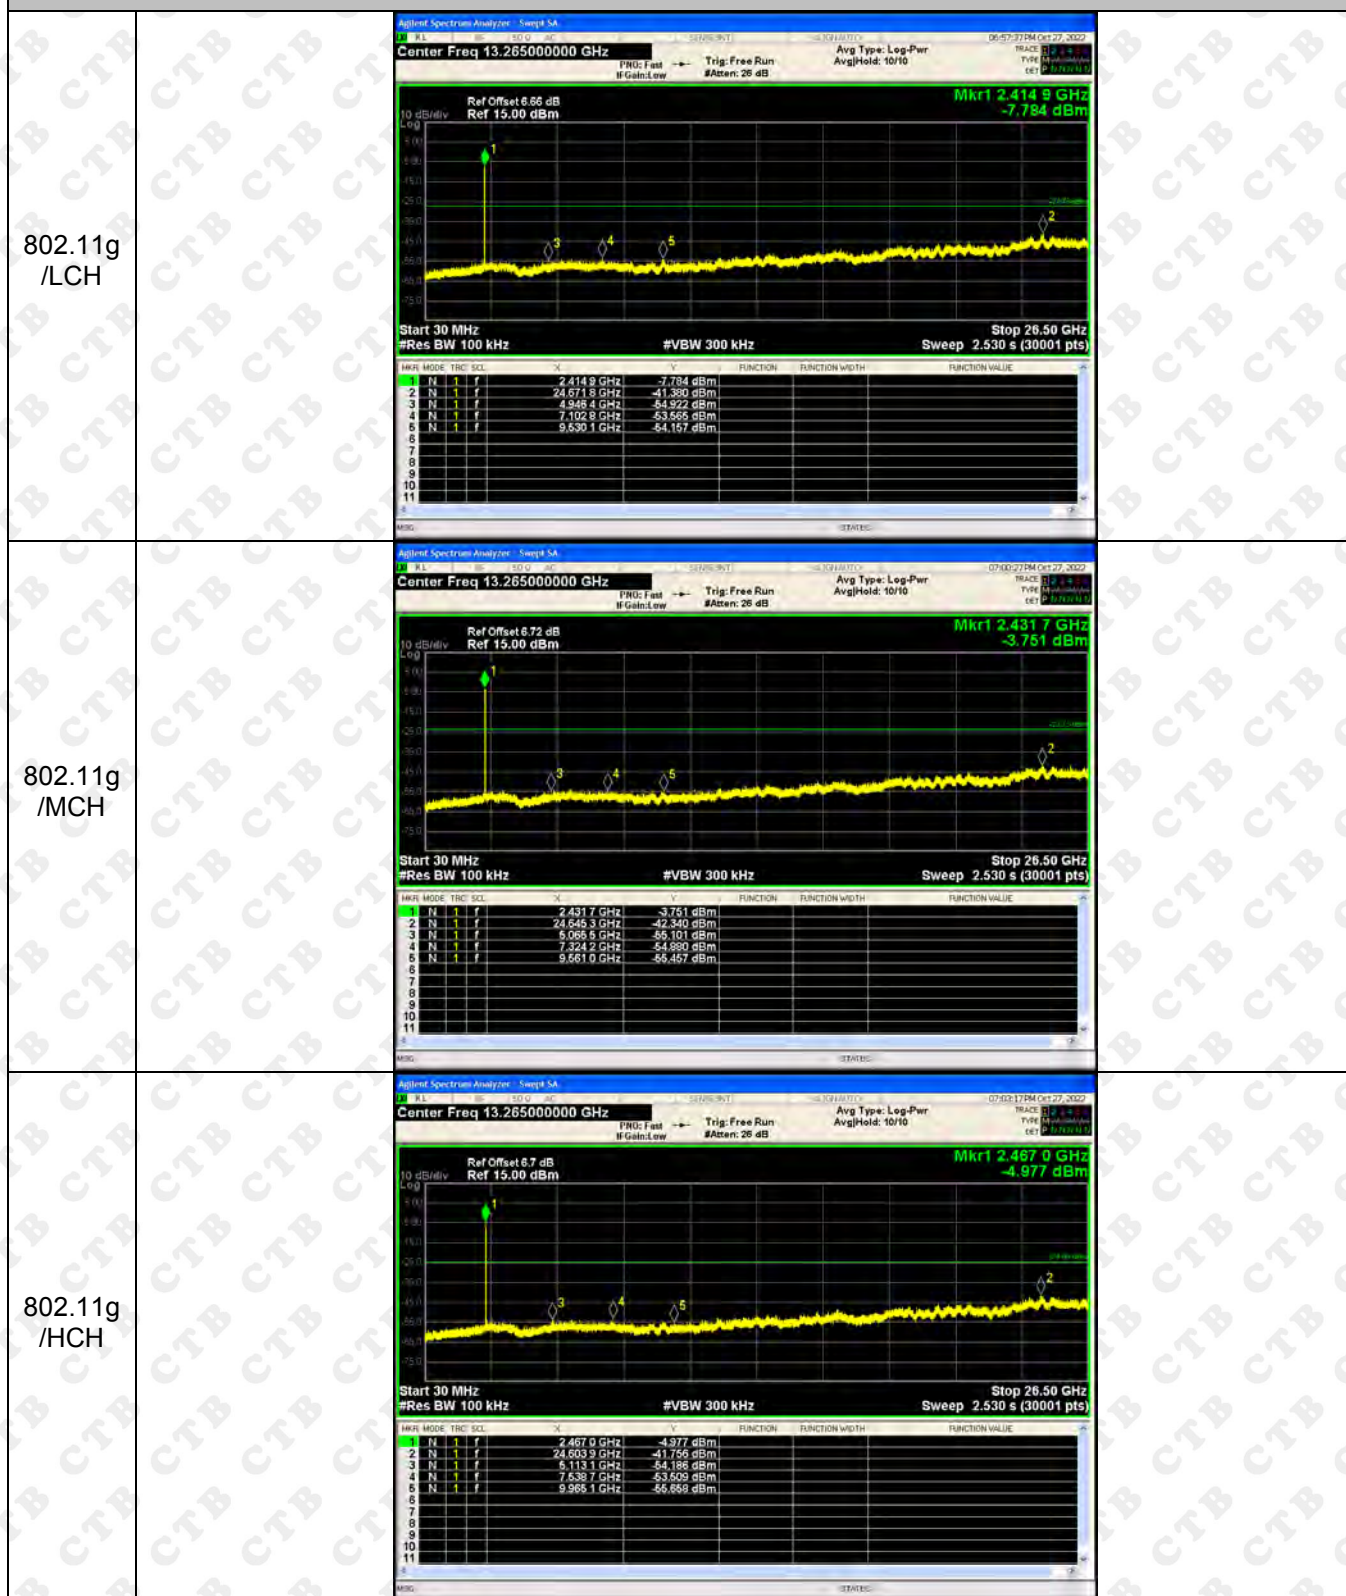

RF Conducted Spurious Emissions Graphs

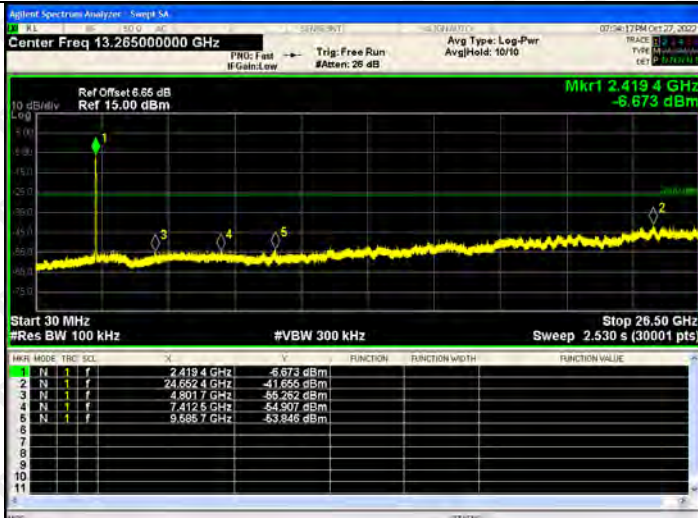


802.11n (HT40)/ LCH	 <table><tr><th>N</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.419 4 GHz</td><td></td><td>-6.673 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.662 4 GHz</td><td></td><td>-41.655 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.801 7 GHz</td><td></td><td>-56.282 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.412 5 GHz</td><td></td><td>-54.907 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.685 7 GHz</td><td></td><td>-53.846 dBm</td></tr></table>	N	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.419 4 GHz		-6.673 dBm	2	N	1	f	24.662 4 GHz		-41.655 dBm	3	N	1	f	4.801 7 GHz		-56.282 dBm	4	N	1	f	7.412 5 GHz		-54.907 dBm	5	N	1	f	9.685 7 GHz		-53.846 dBm
N	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	1	f	2.419 4 GHz		-6.673 dBm																																					
2	N	1	f	24.662 4 GHz		-41.655 dBm																																					
3	N	1	f	4.801 7 GHz		-56.282 dBm																																					
4	N	1	f	7.412 5 GHz		-54.907 dBm																																					
5	N	1	f	9.685 7 GHz		-53.846 dBm																																					
802.11 n(HT40) /MCH	 <table><tr><th>N</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 4 GHz</td><td></td><td>-7.240 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.678 9 GHz</td><td></td><td>-41.317 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.869 5 GHz</td><td></td><td>-54.441 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.509 5 GHz</td><td></td><td>-54.460 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.658 3 GHz</td><td></td><td>-56.227 dBm</td></tr></table>	N	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 4 GHz		-7.240 dBm	2	N	1	f	24.678 9 GHz		-41.317 dBm	3	N	1	f	4.869 5 GHz		-54.441 dBm	4	N	1	f	7.509 5 GHz		-54.460 dBm	5	N	1	f	9.658 3 GHz		-56.227 dBm
N	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	1	f	2.434 4 GHz		-7.240 dBm																																					
2	N	1	f	24.678 9 GHz		-41.317 dBm																																					
3	N	1	f	4.869 5 GHz		-54.441 dBm																																					
4	N	1	f	7.509 5 GHz		-54.460 dBm																																					
5	N	1	f	9.658 3 GHz		-56.227 dBm																																					
802.11 n(HT40) /HCH	 <table><tr><th>N</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td></td><td>-11.897 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.618 9 GHz</td><td></td><td>-41.515 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.024 9 GHz</td><td></td><td>-54.933 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.223 7 GHz</td><td></td><td>-54.278 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.884 5 GHz</td><td></td><td>-56.541 dBm</td></tr></table>	N	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz		-11.897 dBm	2	N	1	f	24.618 9 GHz		-41.515 dBm	3	N	1	f	5.024 9 GHz		-54.933 dBm	4	N	1	f	7.223 7 GHz		-54.278 dBm	5	N	1	f	9.884 5 GHz		-56.541 dBm
N	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	1	f	2.437 0 GHz		-11.897 dBm																																					
2	N	1	f	24.618 9 GHz		-41.515 dBm																																					
3	N	1	f	5.024 9 GHz		-54.933 dBm																																					
4	N	1	f	7.223 7 GHz		-54.278 dBm																																					
5	N	1	f	9.884 5 GHz		-56.541 dBm																																					


ANT2:

BAND EDGE Graphs

802.11b/LCH

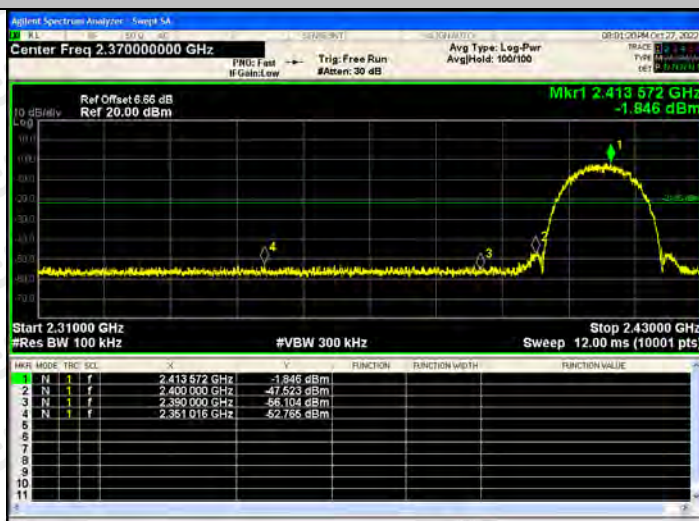


802.11b/HCH

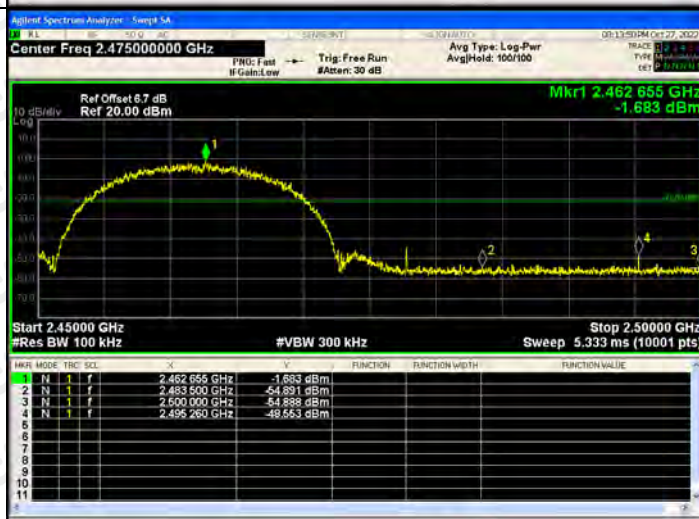


BAND EDGE Graphs

802.11g/LCH

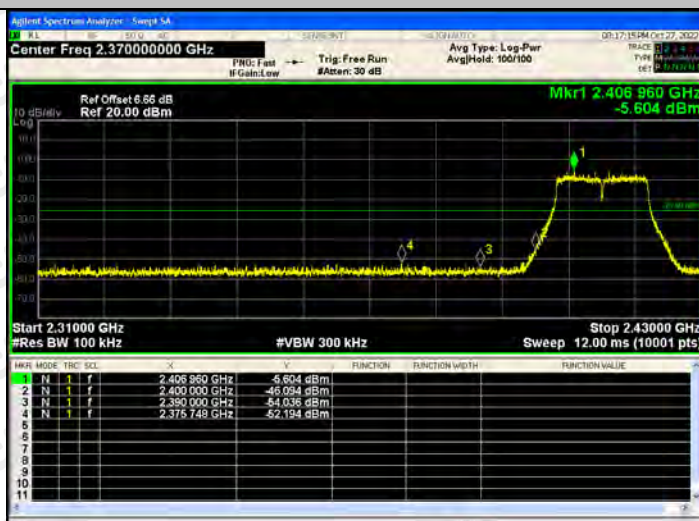


802.11g/HCH

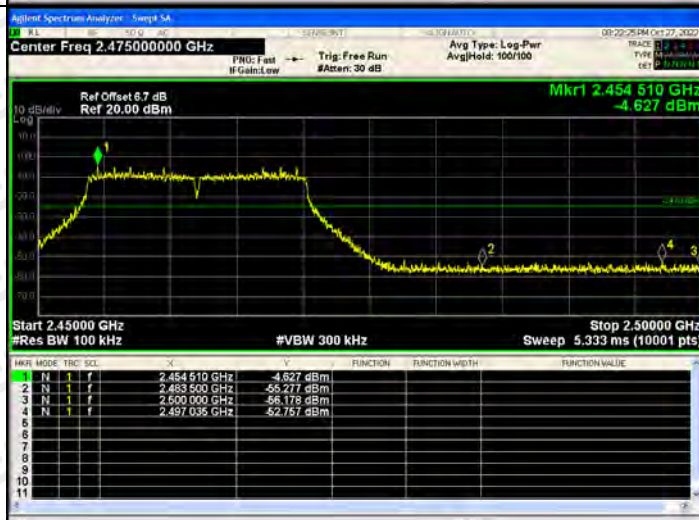

BAND EDGE Graphs

802.11n(HT20)/L
CH

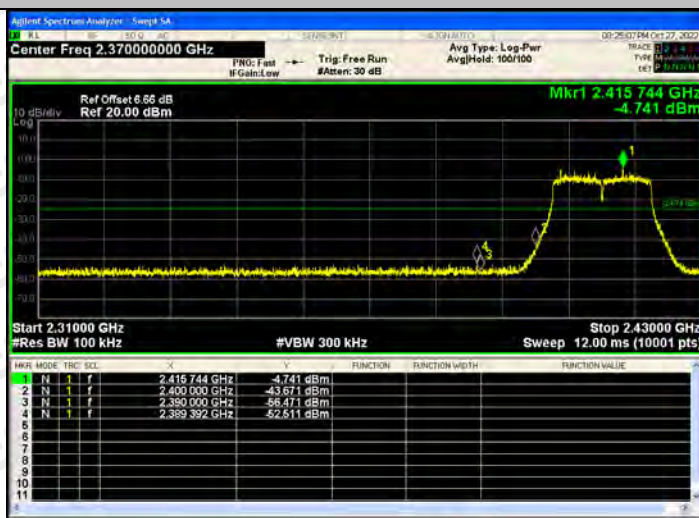


802.11n(HT20)/H
CH



BAND EDGE Graphs


802.11n(HT40)/L
CH

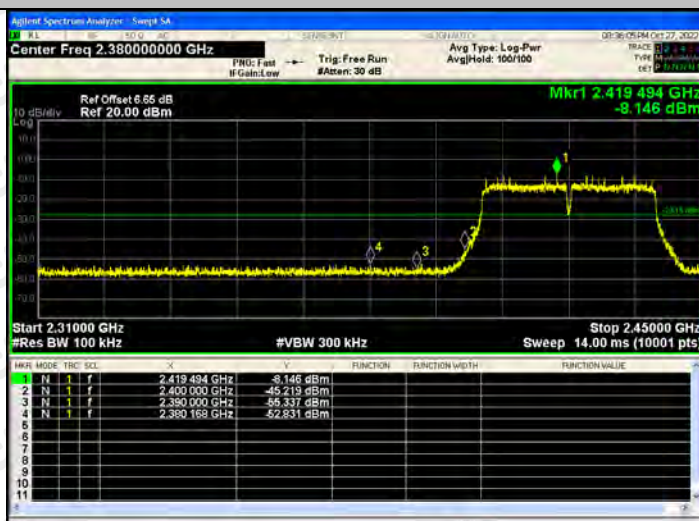


802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

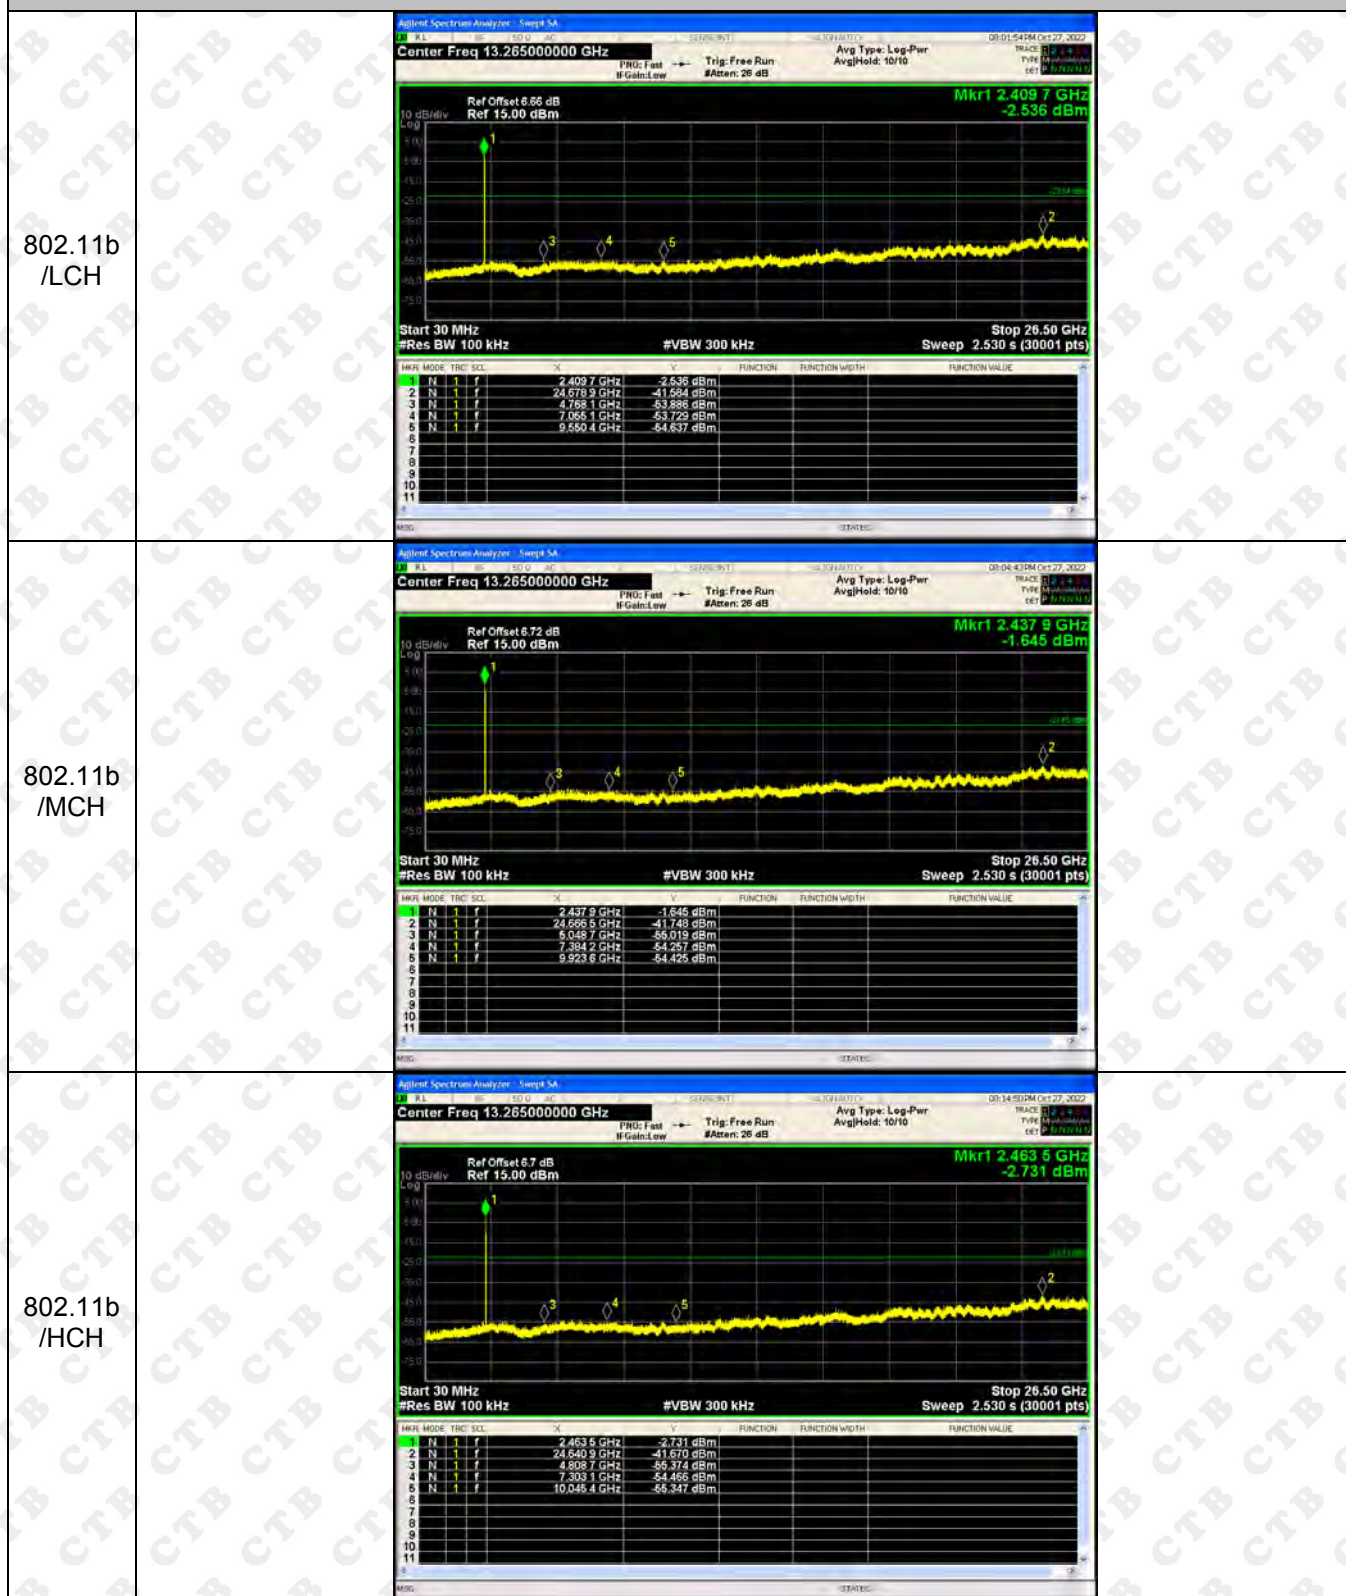


RF Conducted Spurious Emissions Graphs

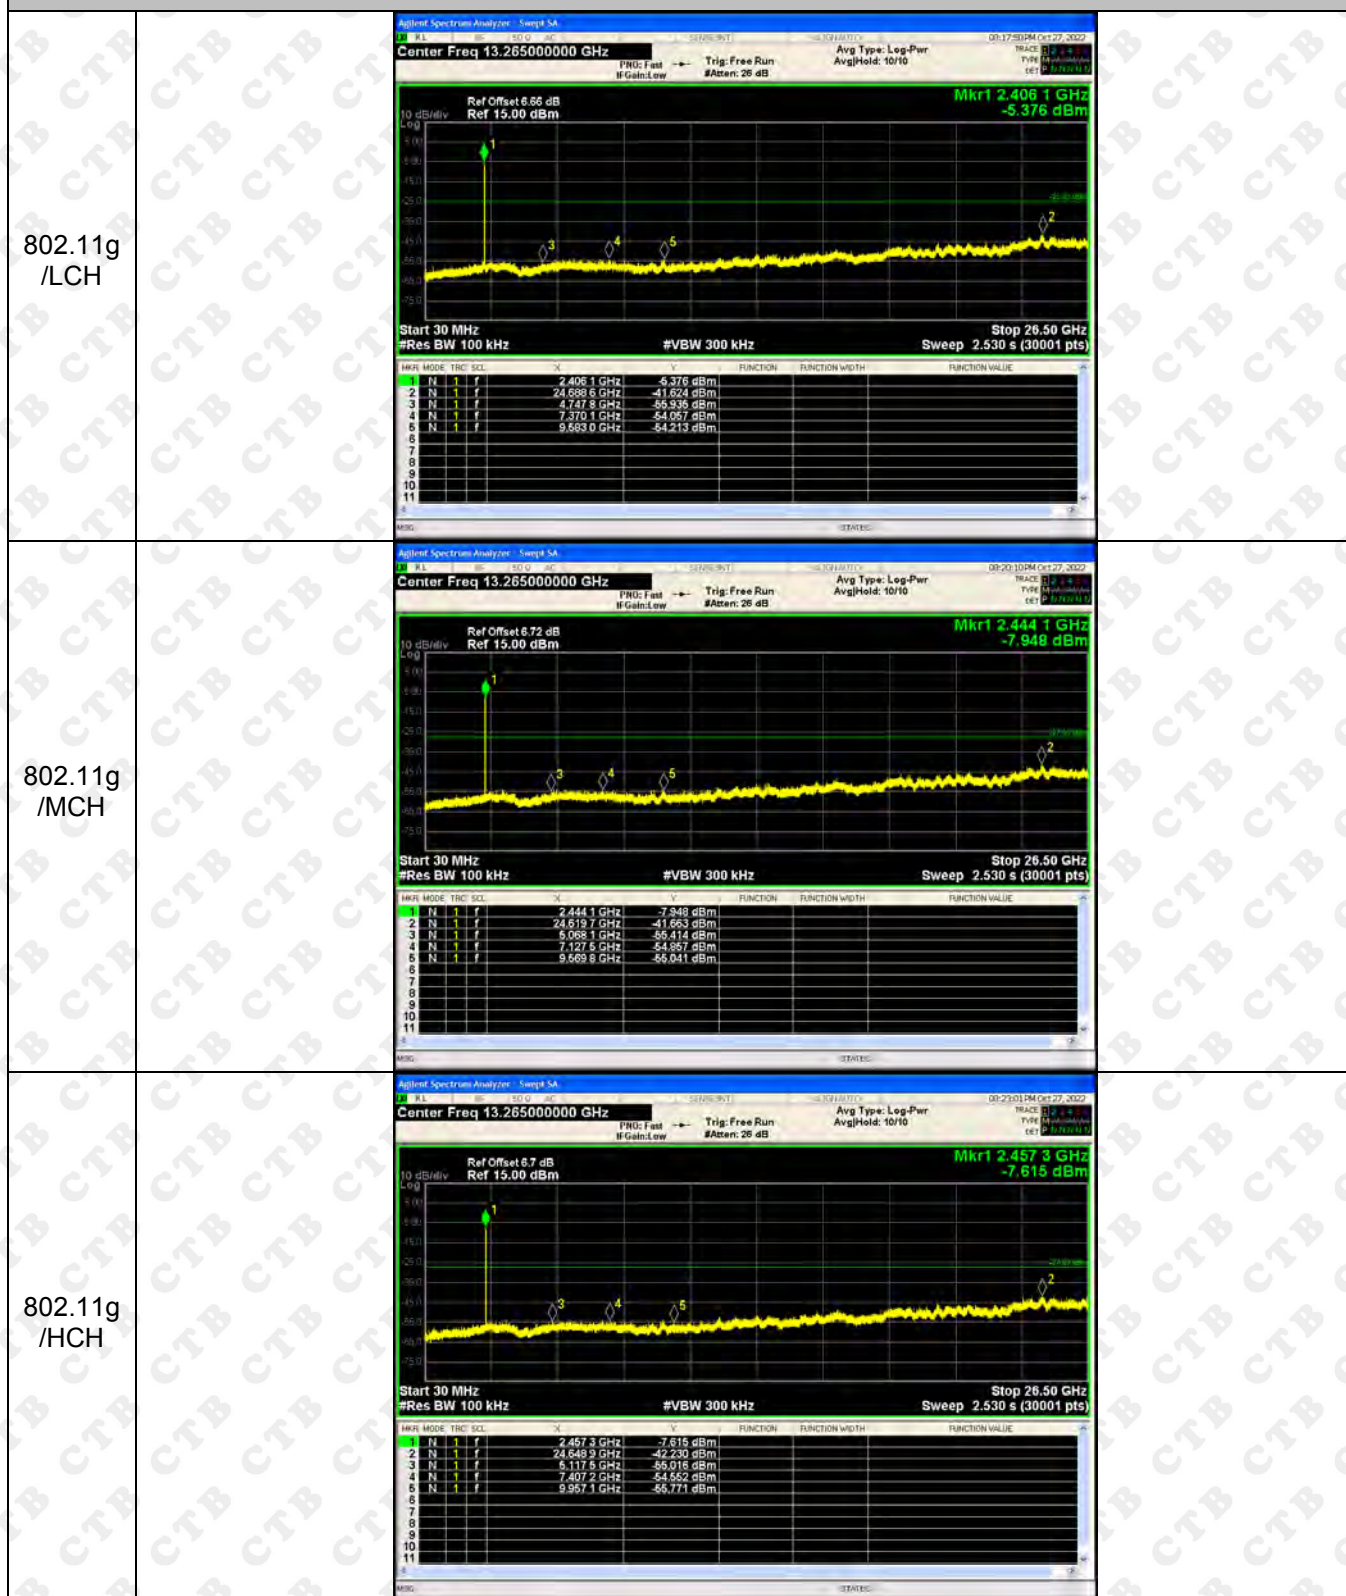

RF Conducted Spurious Emissions Graphs

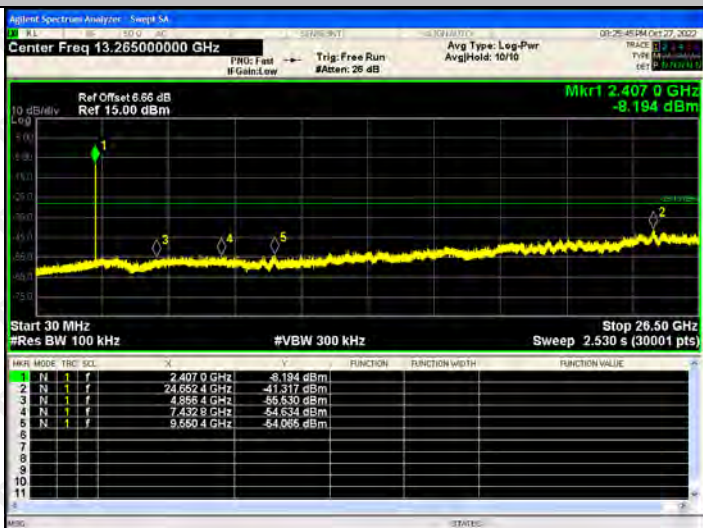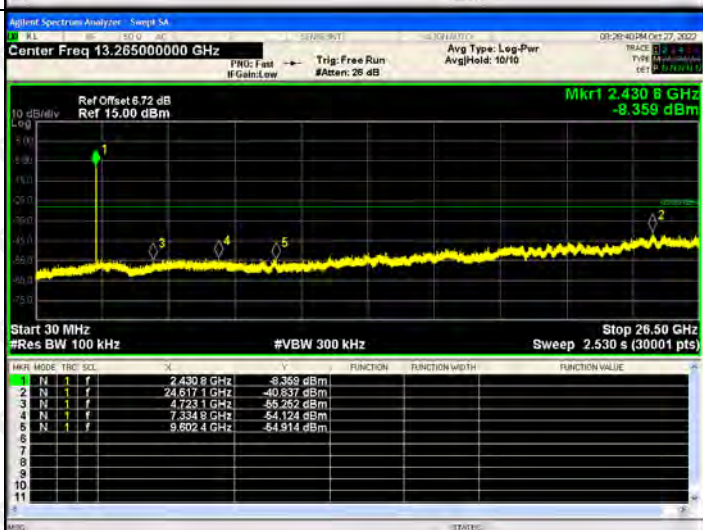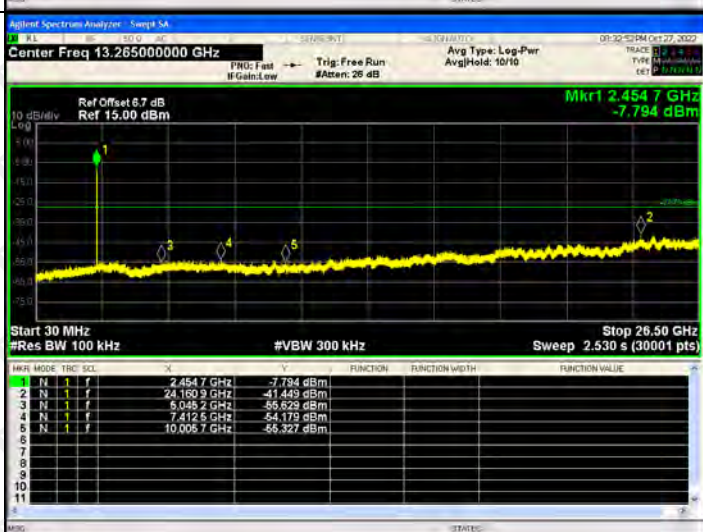RF Conducted Spurious Emissions Graphs																									
802.11n (HT20)/ LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.26500000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.407 0 GHz -8.194 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.407 0 GHz</td><td>-8.194 dBm</td></tr><tr><td>2</td><td>N</td><td>24.652 4 GHz</td><td>-41.317 dBm</td></tr><tr><td>3</td><td>N</td><td>4.858 4 GHz</td><td>-55.630 dBm</td></tr><tr><td>4</td><td>N</td><td>7.432 8 GHz</td><td>-54.634 dBm</td></tr><tr><td>5</td><td>N</td><td>9.550 4 GHz</td><td>-54.055 dBm</td></tr></tbody></table>	Mkr	Mode	Freq	Power	1	N	2.407 0 GHz	-8.194 dBm	2	N	24.652 4 GHz	-41.317 dBm	3	N	4.858 4 GHz	-55.630 dBm	4	N	7.432 8 GHz	-54.634 dBm	5	N	9.550 4 GHz	-54.055 dBm
Mkr	Mode	Freq	Power																						
1	N	2.407 0 GHz	-8.194 dBm																						
2	N	24.652 4 GHz	-41.317 dBm																						
3	N	4.858 4 GHz	-55.630 dBm																						
4	N	7.432 8 GHz	-54.634 dBm																						
5	N	9.550 4 GHz	-54.055 dBm																						
802.11 n(HT20) /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.26500000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.430 8 GHz -8.359 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.430 8 GHz</td><td>-8.359 dBm</td></tr><tr><td>2</td><td>N</td><td>24.617 1 GHz</td><td>-40.837 dBm</td></tr><tr><td>3</td><td>N</td><td>4.723 1 GHz</td><td>-55.252 dBm</td></tr><tr><td>4</td><td>N</td><td>7.334 8 GHz</td><td>-54.124 dBm</td></tr><tr><td>5</td><td>N</td><td>9.502 4 GHz</td><td>-54.914 dBm</td></tr></tbody></table>	Mkr	Mode	Freq	Power	1	N	2.430 8 GHz	-8.359 dBm	2	N	24.617 1 GHz	-40.837 dBm	3	N	4.723 1 GHz	-55.252 dBm	4	N	7.334 8 GHz	-54.124 dBm	5	N	9.502 4 GHz	-54.914 dBm
Mkr	Mode	Freq	Power																						
1	N	2.430 8 GHz	-8.359 dBm																						
2	N	24.617 1 GHz	-40.837 dBm																						
3	N	4.723 1 GHz	-55.252 dBm																						
4	N	7.334 8 GHz	-54.124 dBm																						
5	N	9.502 4 GHz	-54.914 dBm																						
802.11 n(HT20) /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.26500000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.454 7 GHz -7.794 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.454 7 GHz</td><td>-7.794 dBm</td></tr><tr><td>2</td><td>N</td><td>24.180 9 GHz</td><td>-41.449 dBm</td></tr><tr><td>3</td><td>N</td><td>5.048 2 GHz</td><td>-55.629 dBm</td></tr><tr><td>4</td><td>N</td><td>7.412 5 GHz</td><td>-54.179 dBm</td></tr><tr><td>5</td><td>N</td><td>10.008 7 GHz</td><td>-55.327 dBm</td></tr></tbody></table>	Mkr	Mode	Freq	Power	1	N	2.454 7 GHz	-7.794 dBm	2	N	24.180 9 GHz	-41.449 dBm	3	N	5.048 2 GHz	-55.629 dBm	4	N	7.412 5 GHz	-54.179 dBm	5	N	10.008 7 GHz	-55.327 dBm
Mkr	Mode	Freq	Power																						
1	N	2.454 7 GHz	-7.794 dBm																						
2	N	24.180 9 GHz	-41.449 dBm																						
3	N	5.048 2 GHz	-55.629 dBm																						
4	N	7.412 5 GHz	-54.179 dBm																						
5	N	10.008 7 GHz	-55.327 dBm																						


RF Conducted Spurious Emissions Graphs

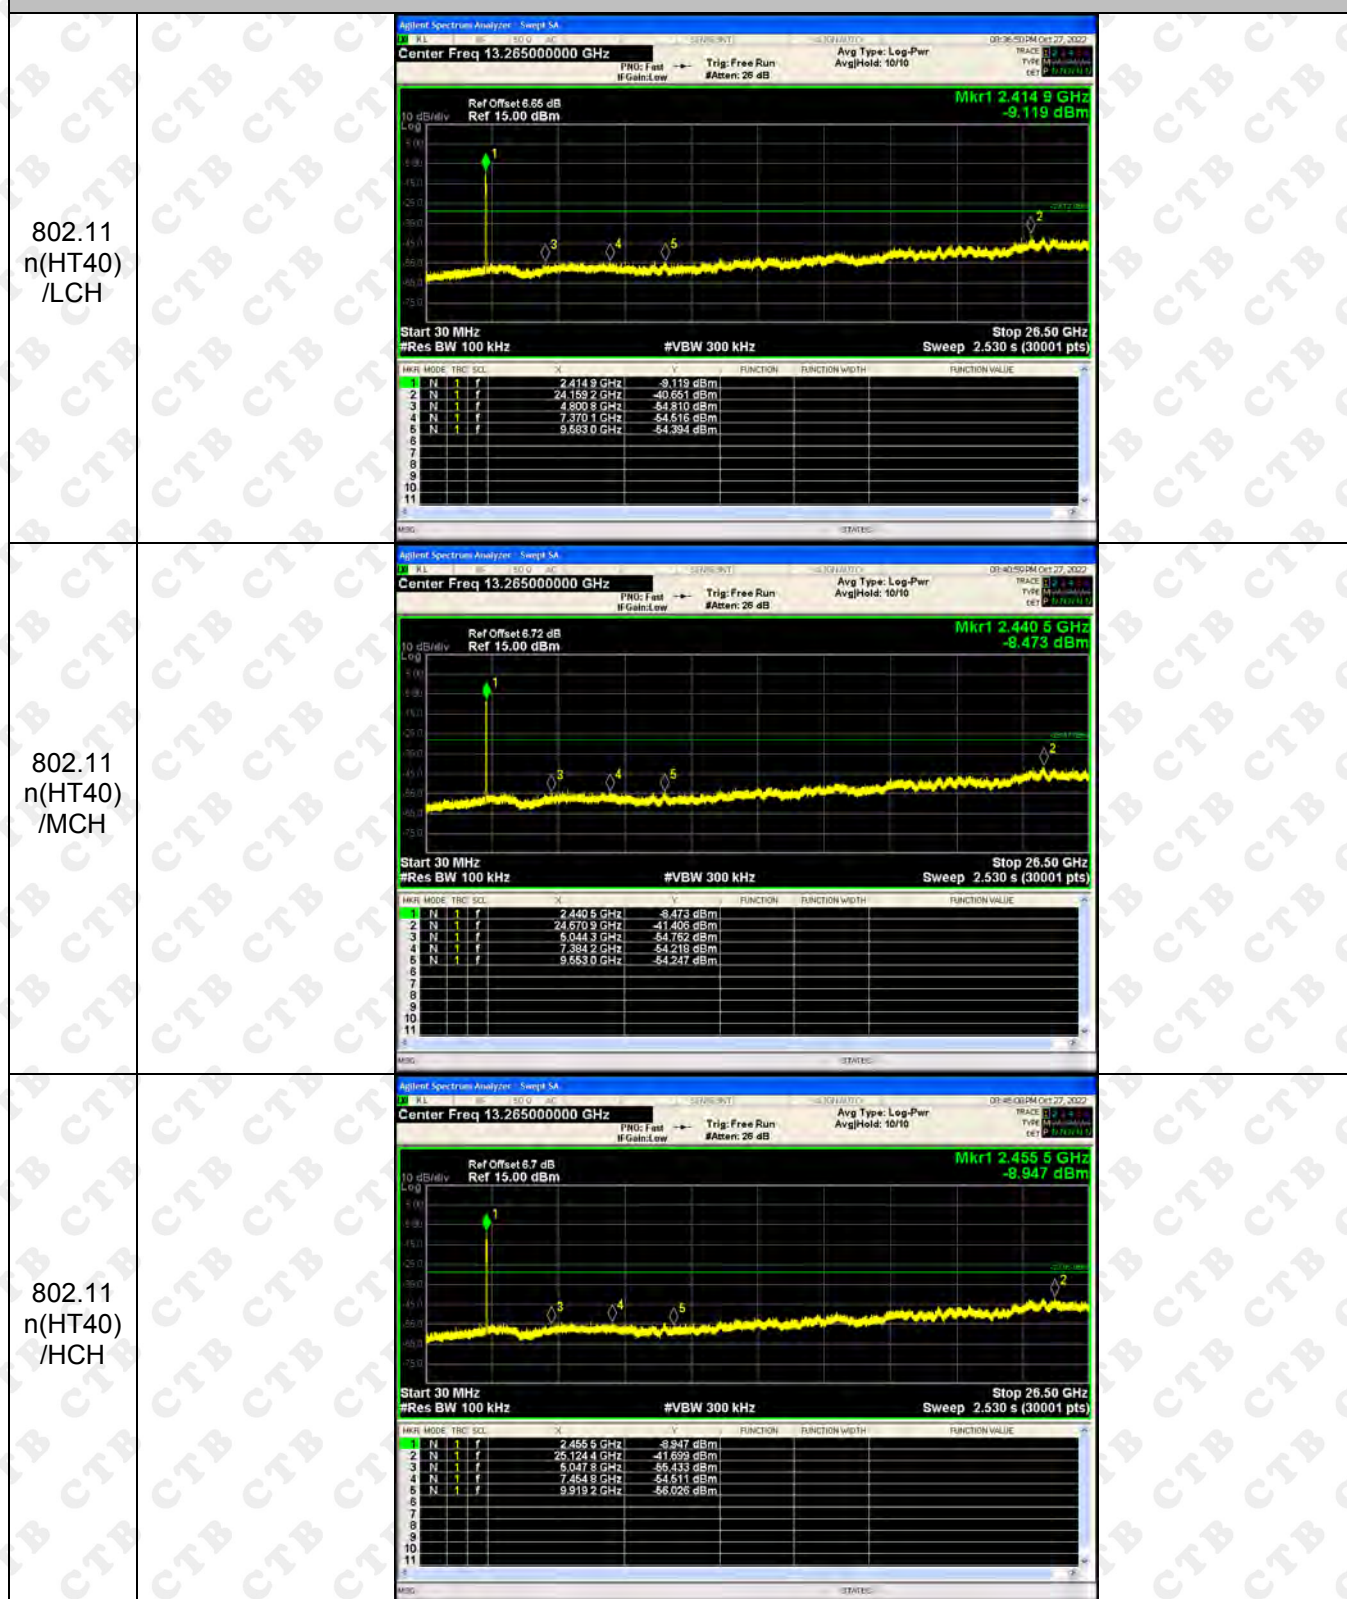


ANT3:

BAND EDGE Graphs

802.11b/LCH

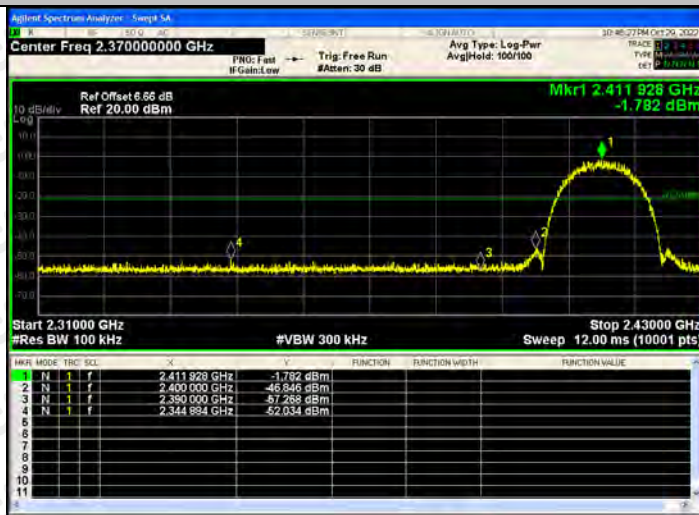


802.11b/HCH

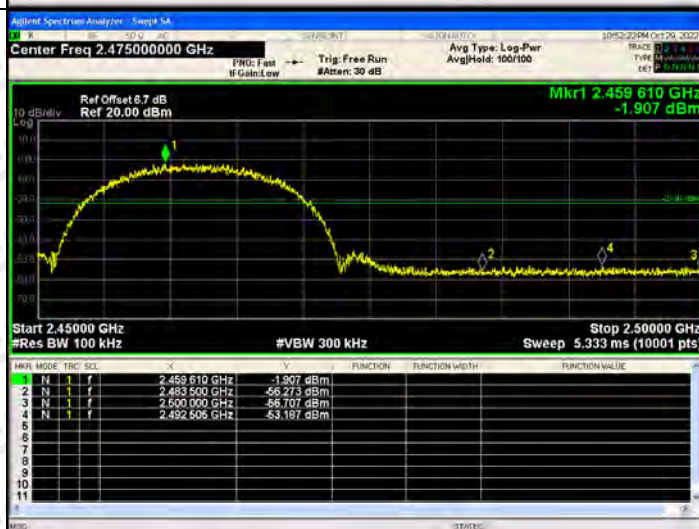


BAND EDGE Graphs

802.11g/LCH

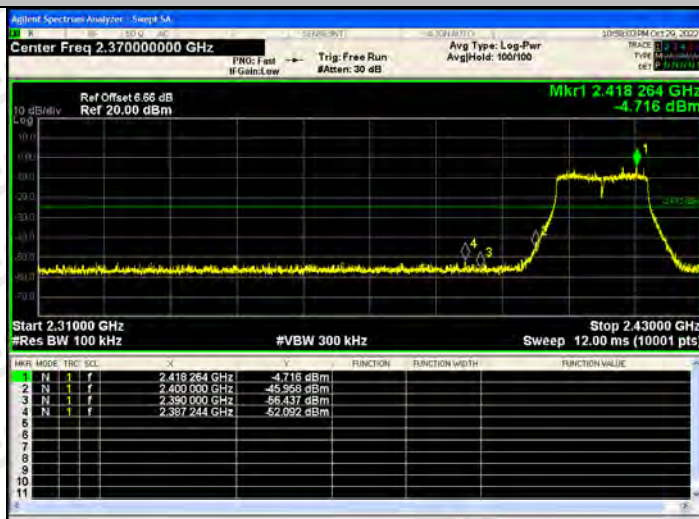


802.11g/HCH

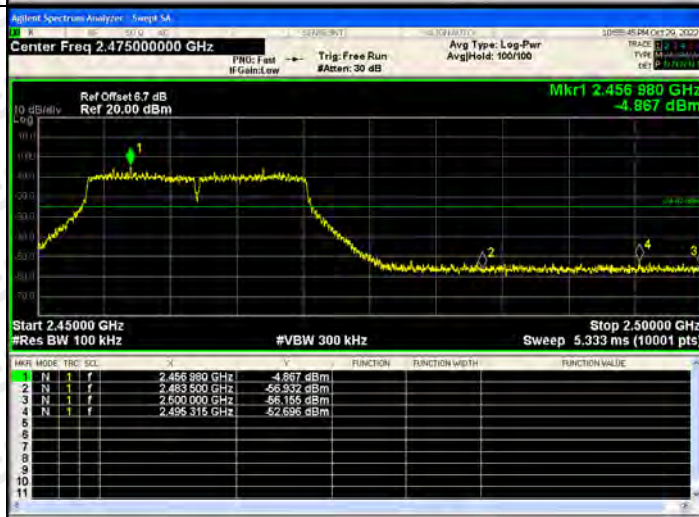

BAND EDGE Graphs

802.11n(HT20)/L
CH

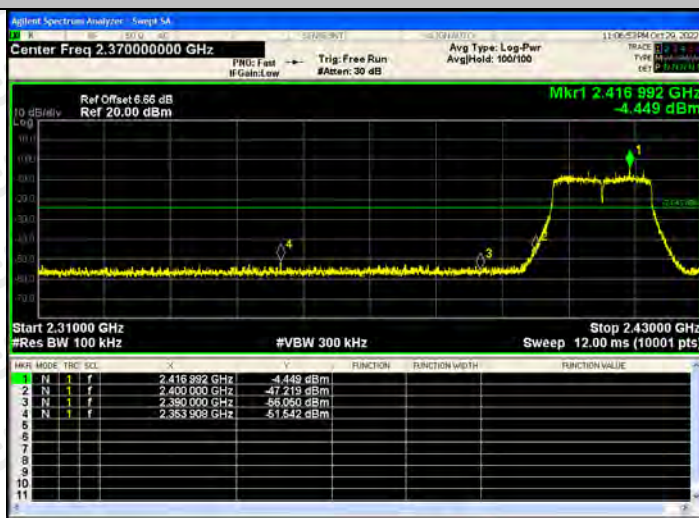


802.11n(HT20)/H
CH



BAND EDGE Graphs


802.11n(HT40)/L
CH

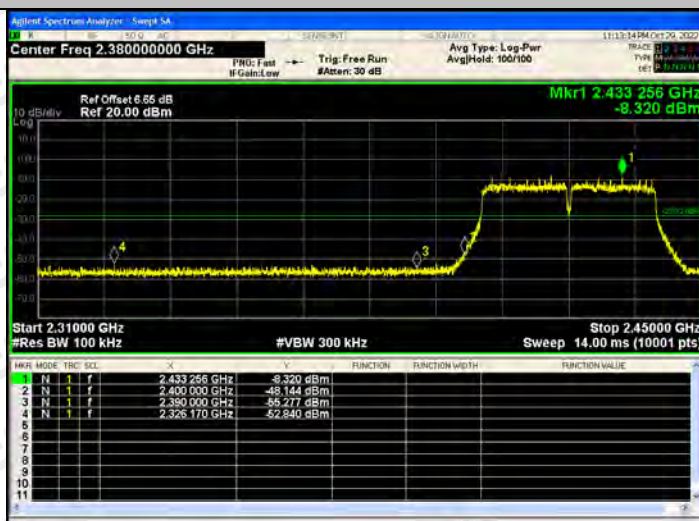


802.11n(HT40)/H
CH



RF Conducted Spurious Emissions Graphs

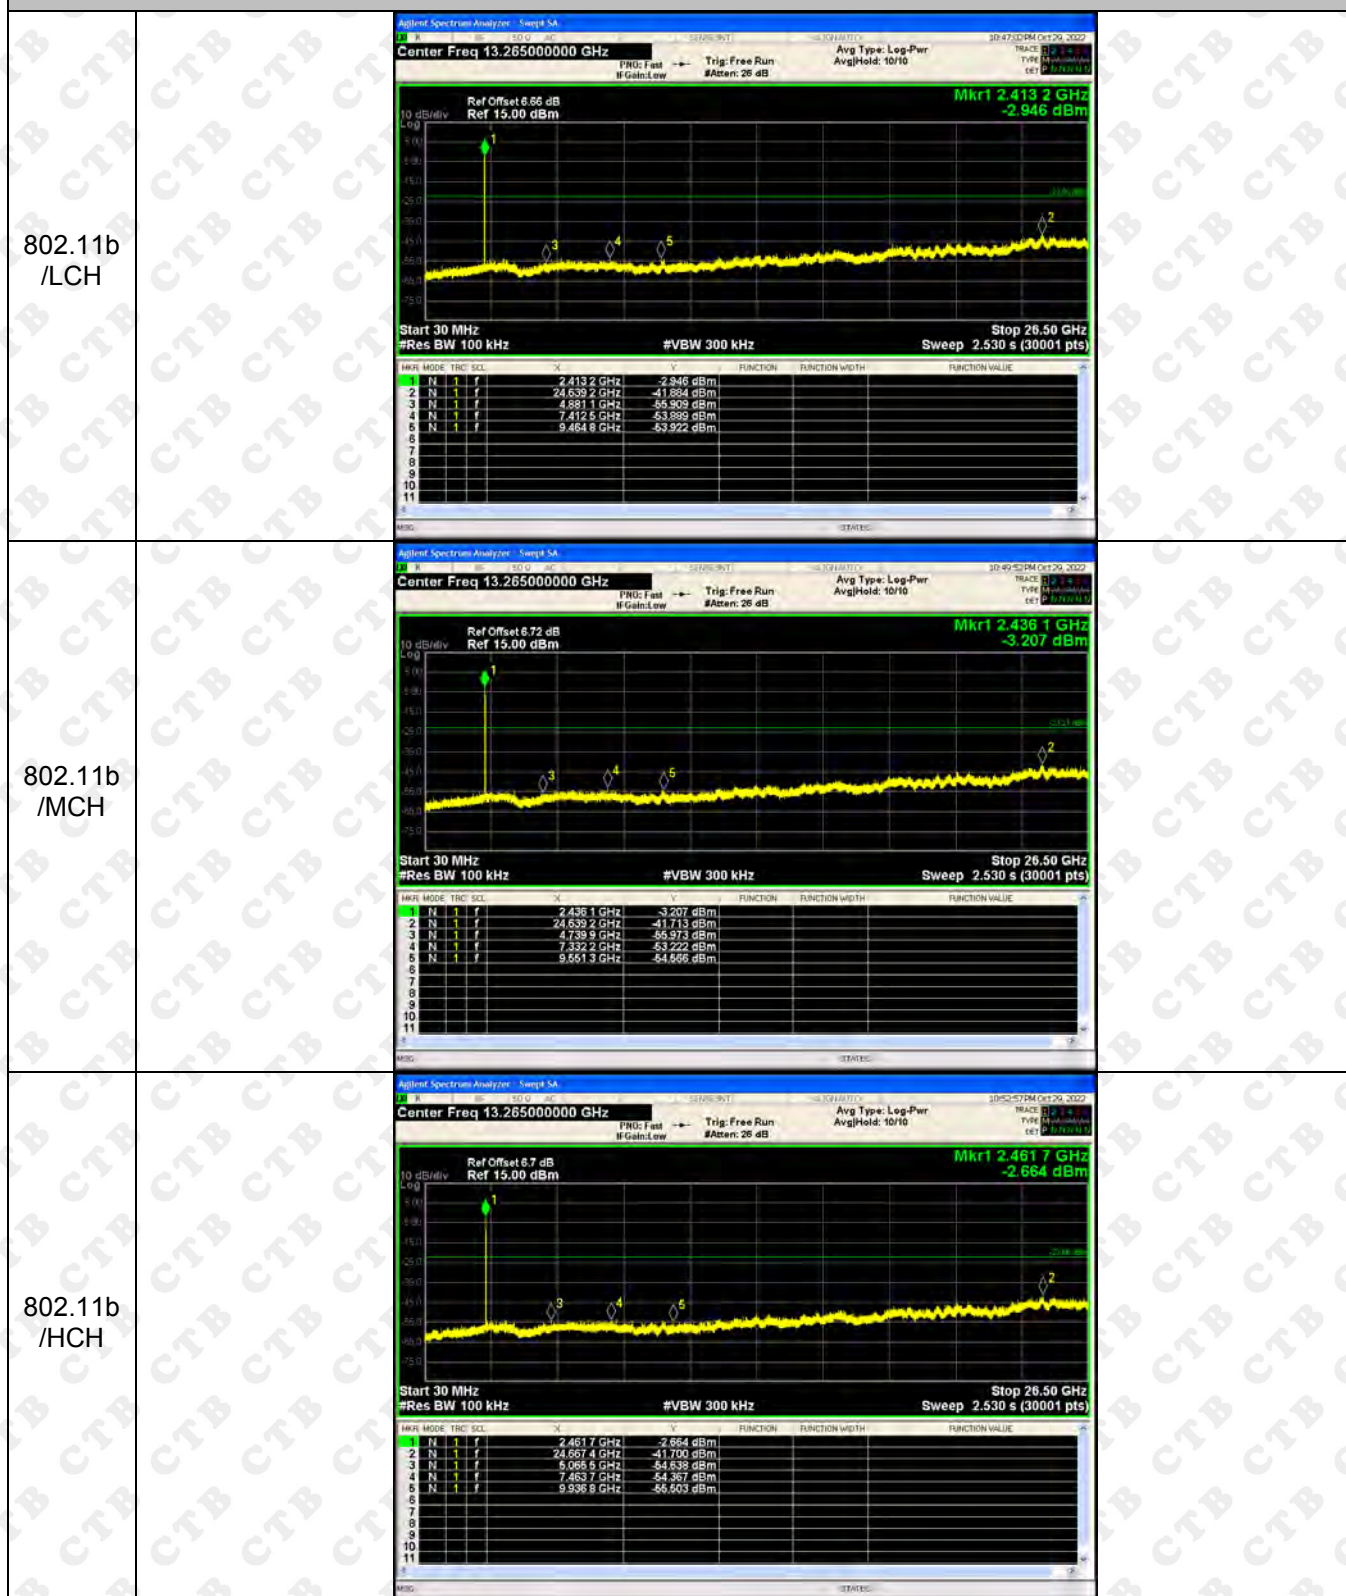

RF Conducted Spurious Emissions Graphs

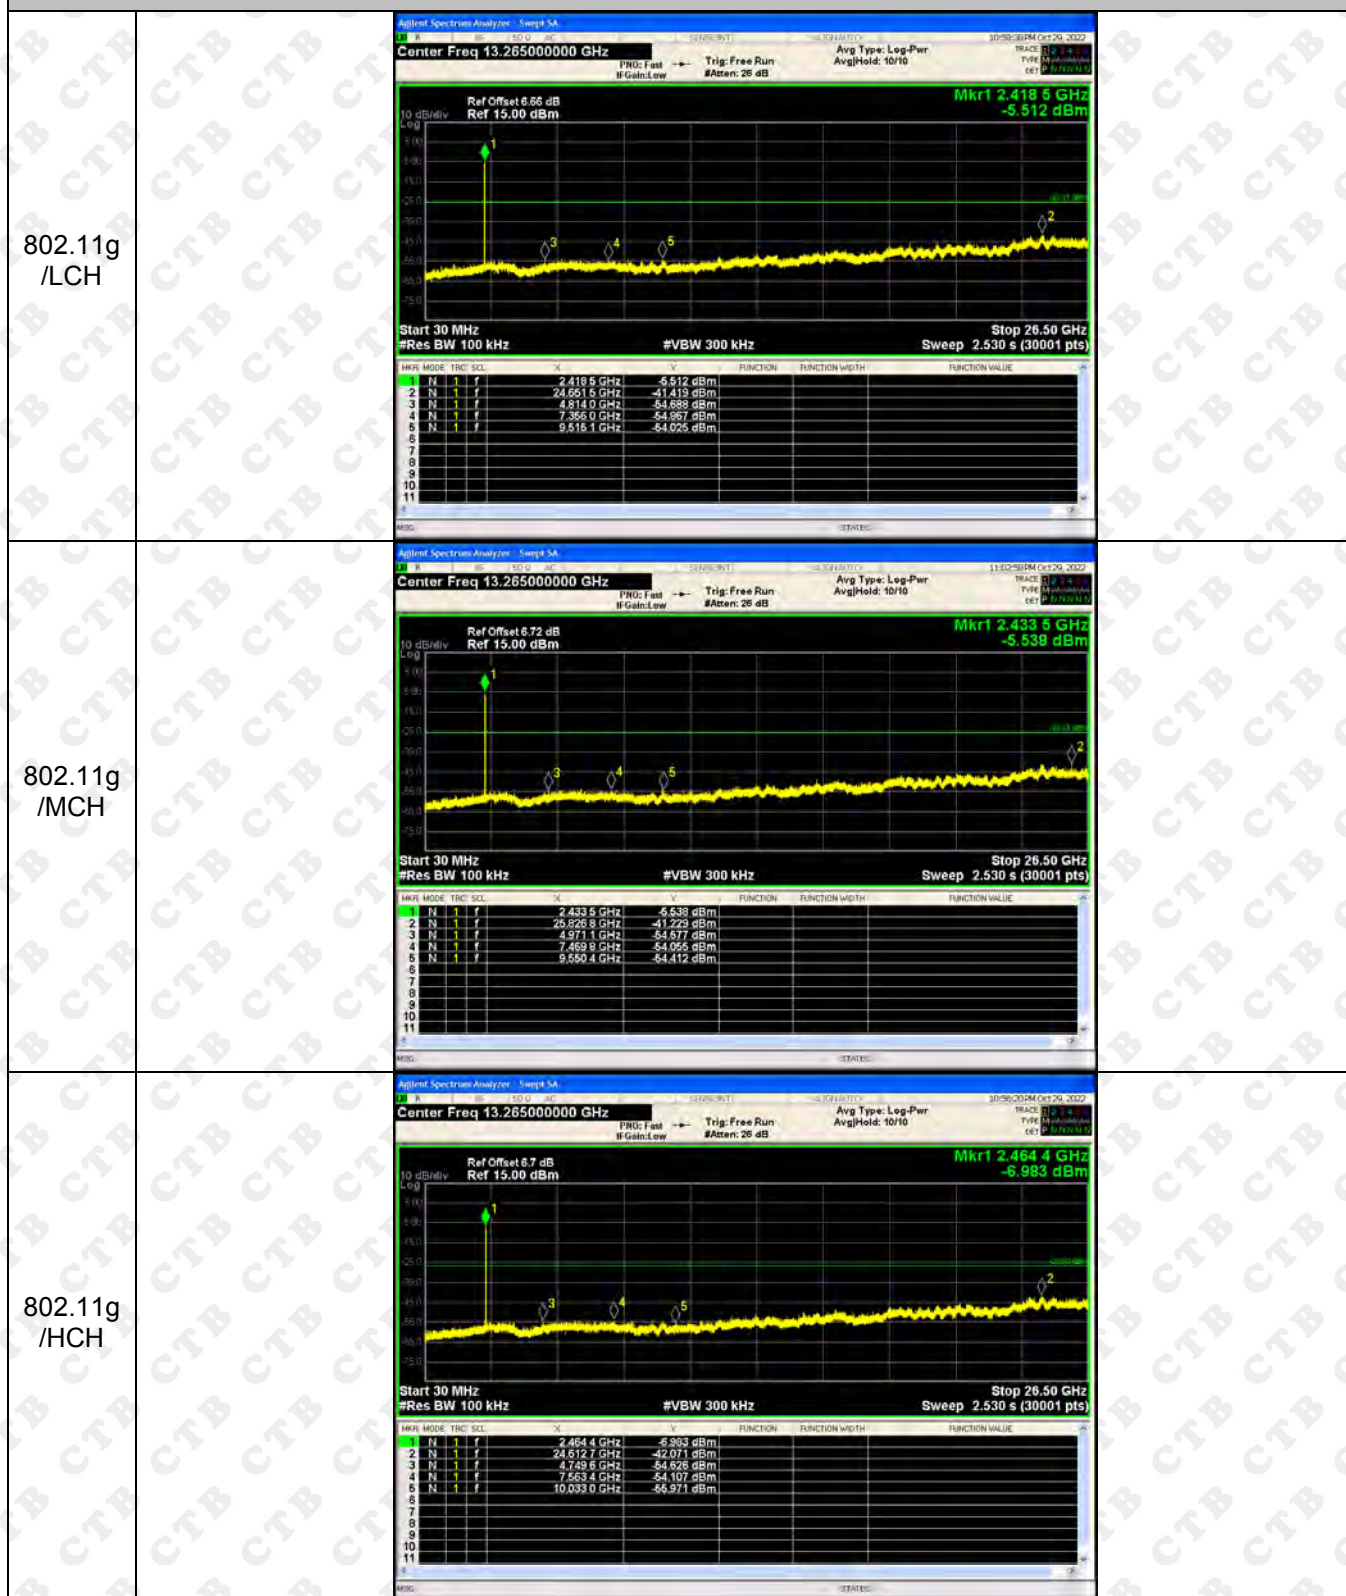

RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs




ANT4:

BAND EDGE Graphs

802.11b/LCH

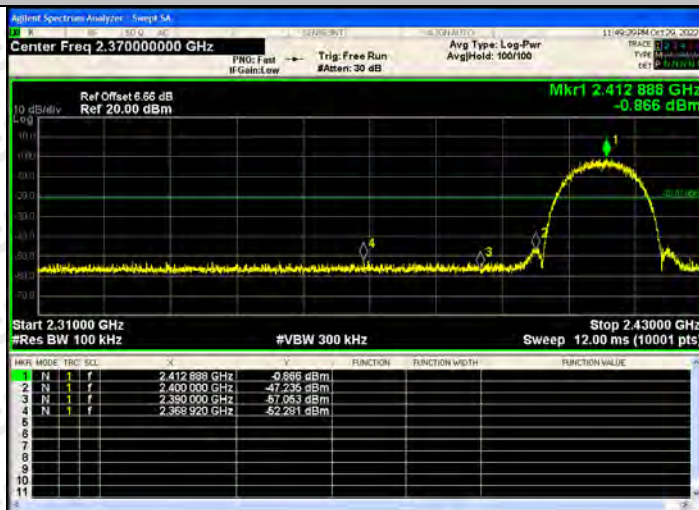


802.11b/HCH

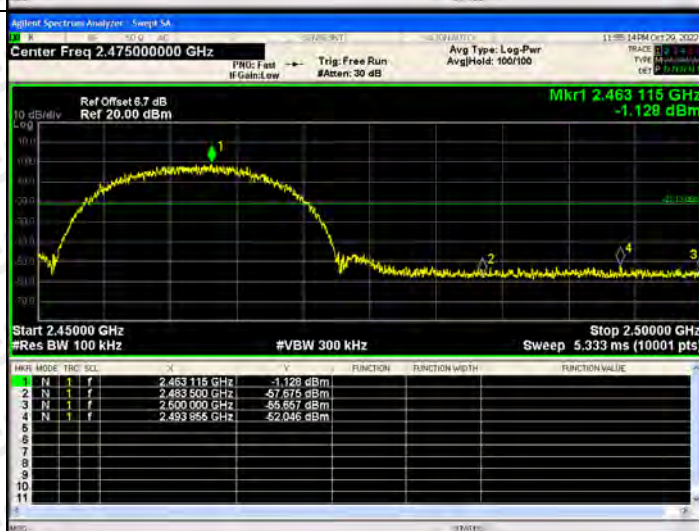


BAND EDGE Graphs

802.11g/LCH

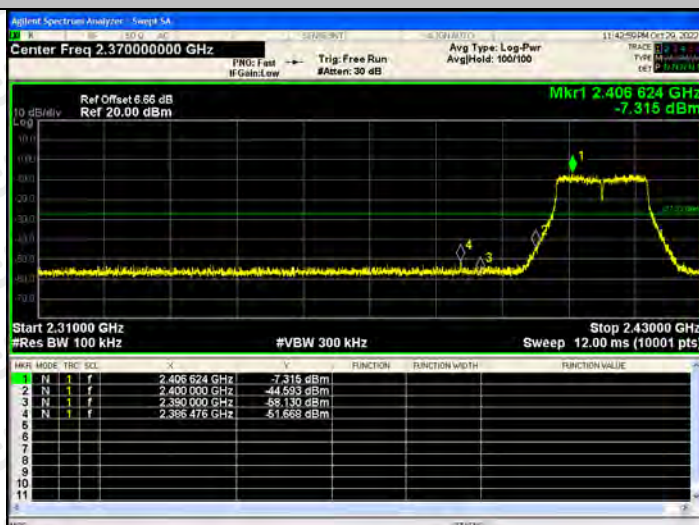


802.11g/HCH

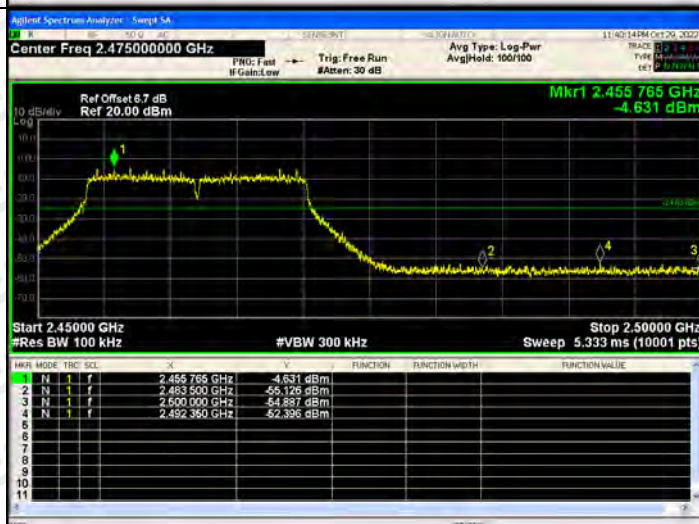


BAND EDGE Graphs

802.11n(HT20)/L
CH

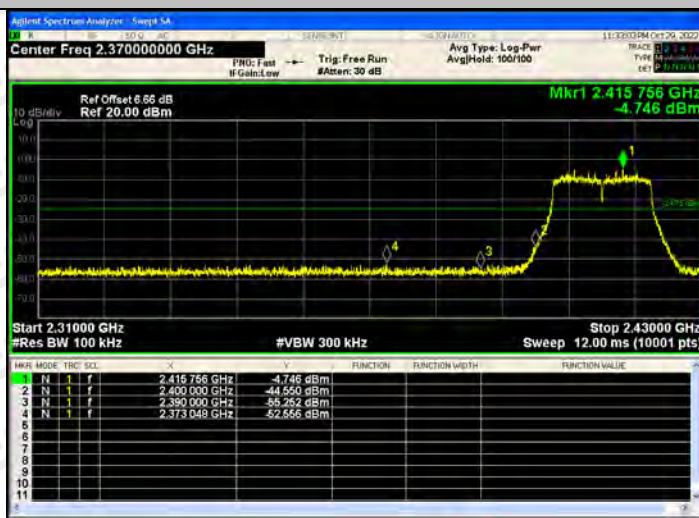


802.11n(HT20)/H
CH

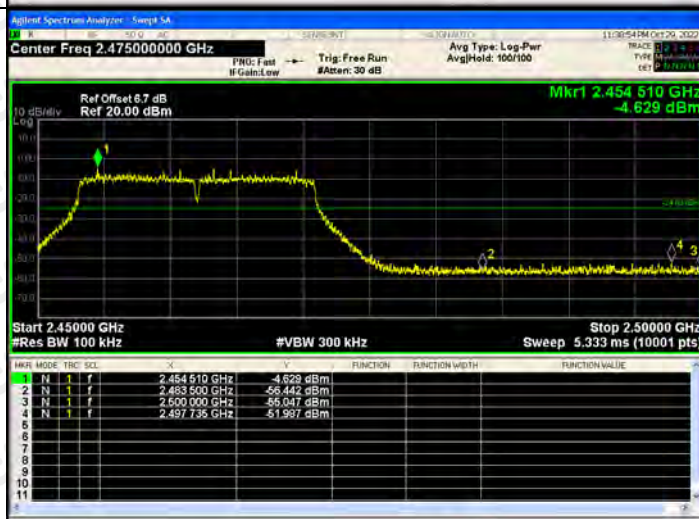

BAND EDGE Graphs


802.11n(HT40)/L
CH

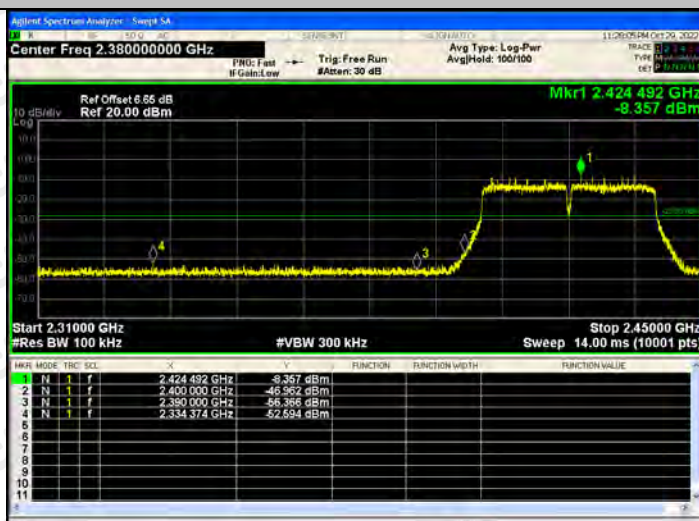


802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

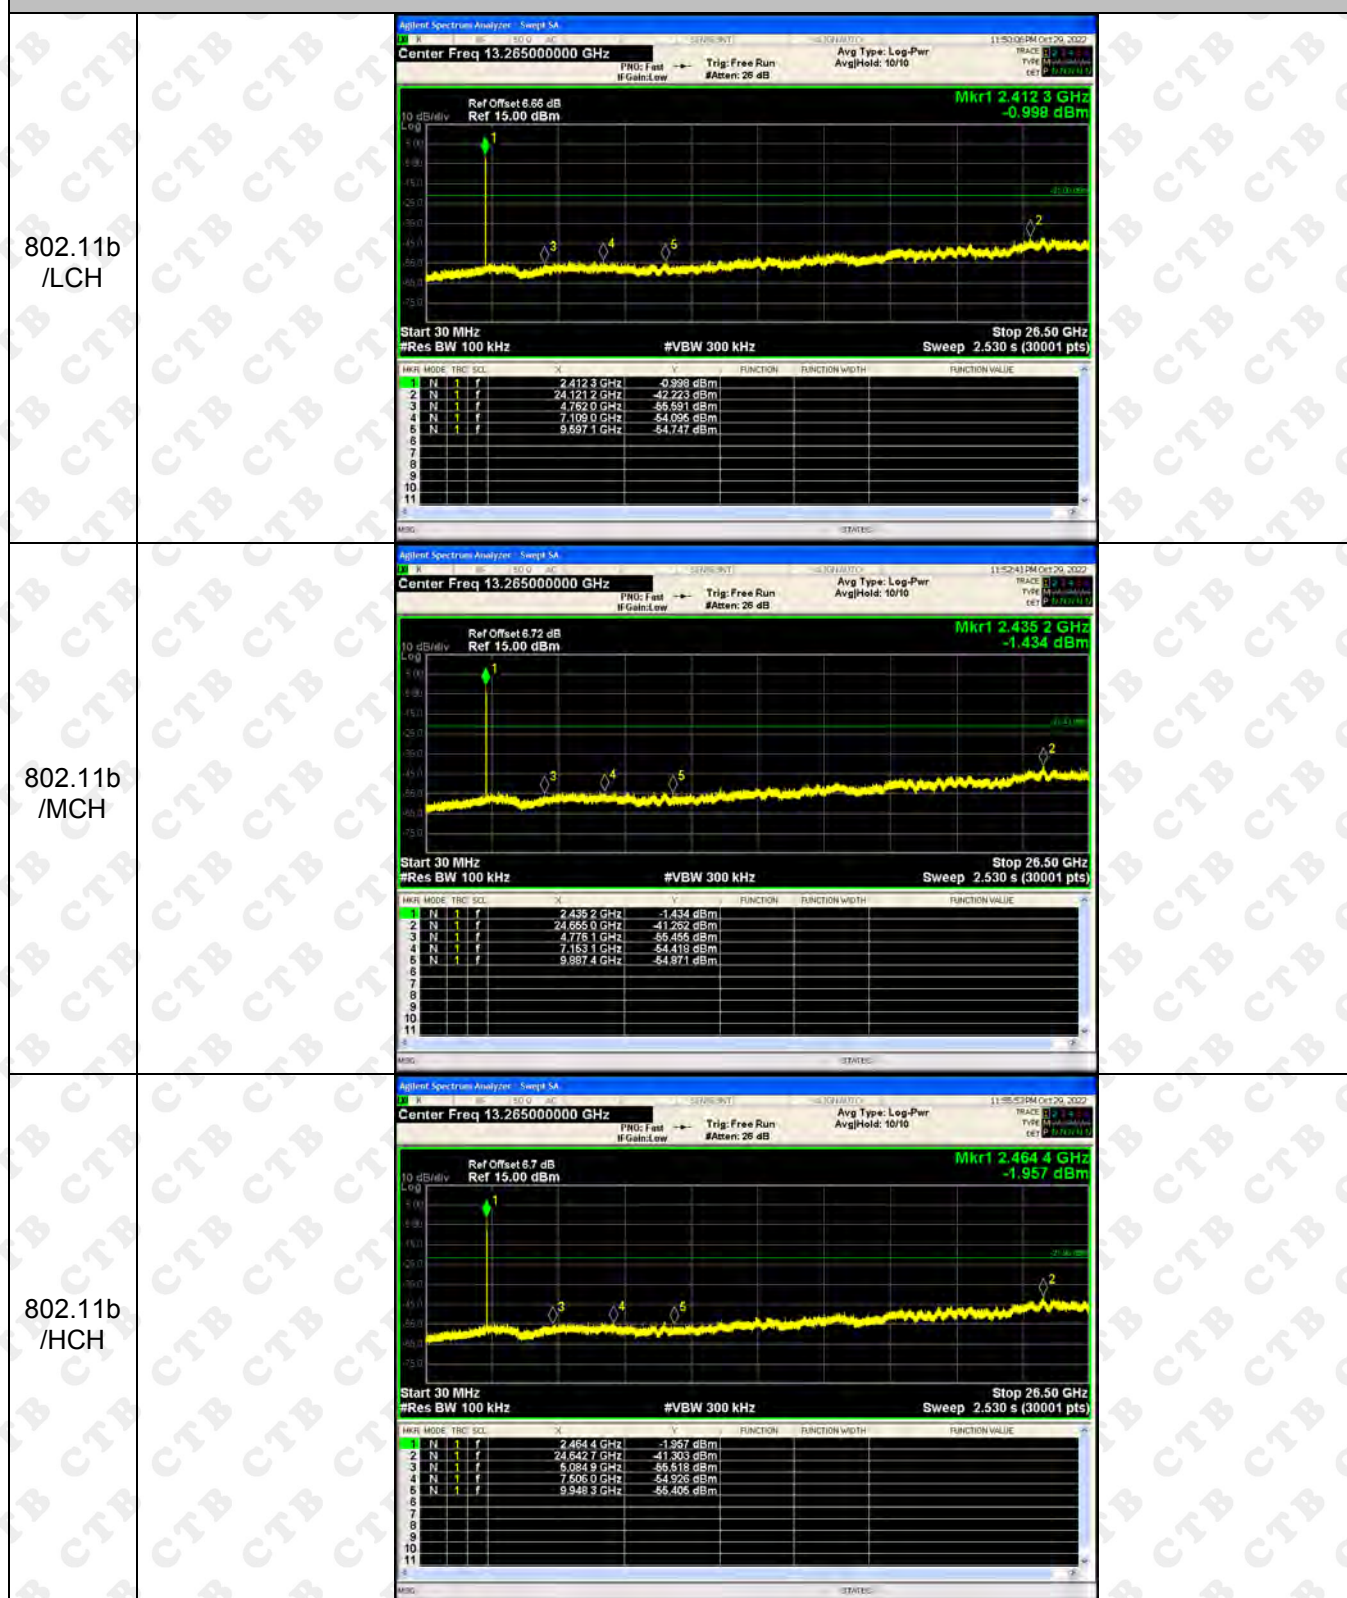

RF Conducted Spurious Emissions Graphs

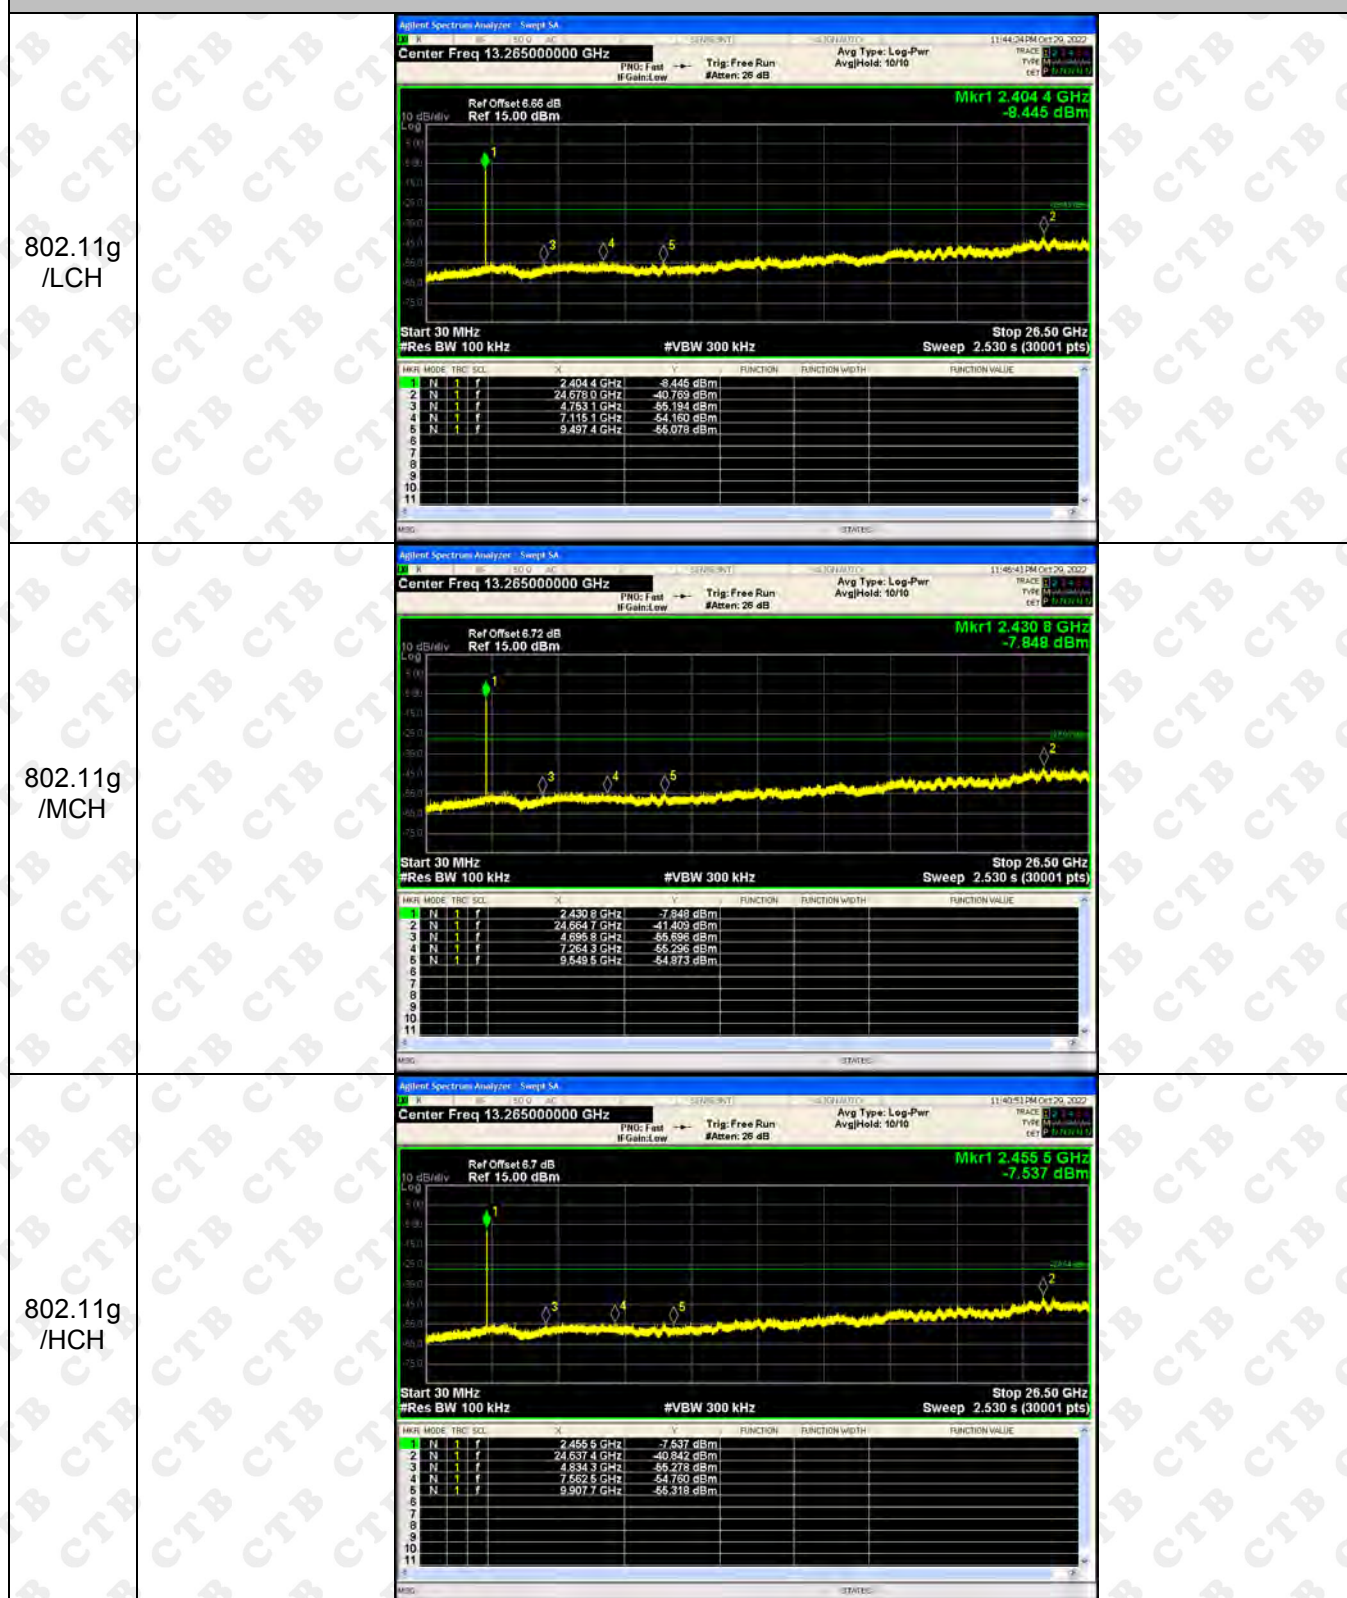

RF Conducted Spurious Emissions Graphs

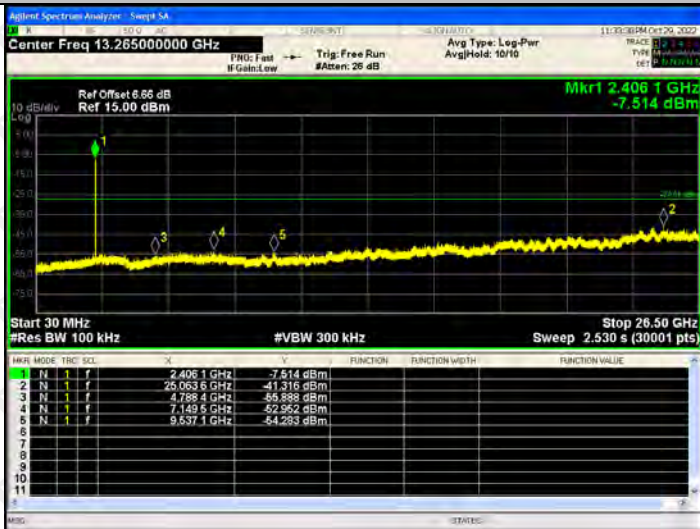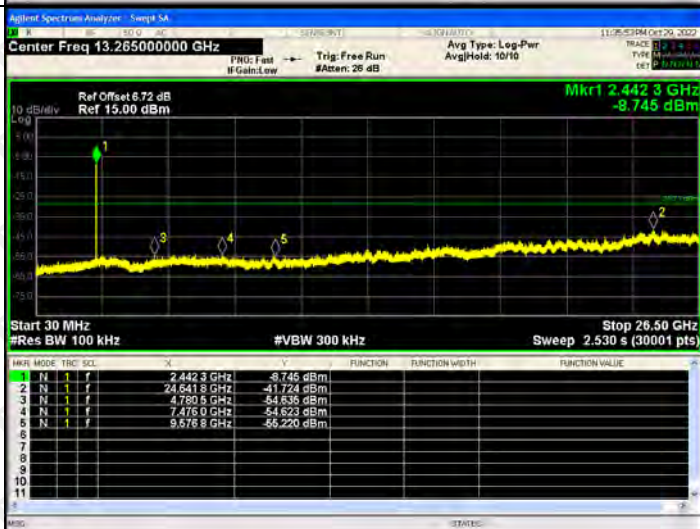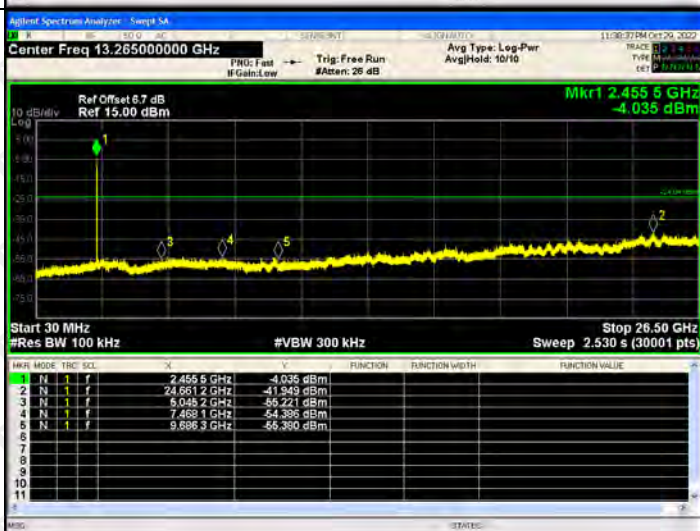
802.11n (HT20)/ LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.406 1 GHz -7.514 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>N</td><td>2.406 1 GHz</td><td>-7.514 dBm</td></tr><tr><td>2</td><td>N</td><td>25.063 6 GHz</td><td>-41.316 dBm</td></tr><tr><td>3</td><td>N</td><td>4.788 4 GHz</td><td>-55.888 dBm</td></tr><tr><td>4</td><td>N</td><td>7.149 5 GHz</td><td>-52.562 dBm</td></tr><tr><td>5</td><td>N</td><td>9.537 1 GHz</td><td>-54.255 dBm</td></tr></table>	Mkr	Mode	Freq	Power	1	N	2.406 1 GHz	-7.514 dBm	2	N	25.063 6 GHz	-41.316 dBm	3	N	4.788 4 GHz	-55.888 dBm	4	N	7.149 5 GHz	-52.562 dBm	5	N	9.537 1 GHz	-54.255 dBm
Mkr	Mode	Freq	Power																						
1	N	2.406 1 GHz	-7.514 dBm																						
2	N	25.063 6 GHz	-41.316 dBm																						
3	N	4.788 4 GHz	-55.888 dBm																						
4	N	7.149 5 GHz	-52.562 dBm																						
5	N	9.537 1 GHz	-54.255 dBm																						
802.11 n(HT20) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.442 3 GHz -8.746 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>N</td><td>2.442 3 GHz</td><td>-8.746 dBm</td></tr><tr><td>2</td><td>N</td><td>24.641 8 GHz</td><td>-41.724 dBm</td></tr><tr><td>3</td><td>N</td><td>4.780 5 GHz</td><td>-54.636 dBm</td></tr><tr><td>4</td><td>N</td><td>7.476 0 GHz</td><td>-54.623 dBm</td></tr><tr><td>5</td><td>N</td><td>9.576 8 GHz</td><td>-55.220 dBm</td></tr></table>	Mkr	Mode	Freq	Power	1	N	2.442 3 GHz	-8.746 dBm	2	N	24.641 8 GHz	-41.724 dBm	3	N	4.780 5 GHz	-54.636 dBm	4	N	7.476 0 GHz	-54.623 dBm	5	N	9.576 8 GHz	-55.220 dBm
Mkr	Mode	Freq	Power																						
1	N	2.442 3 GHz	-8.746 dBm																						
2	N	24.641 8 GHz	-41.724 dBm																						
3	N	4.780 5 GHz	-54.636 dBm																						
4	N	7.476 0 GHz	-54.623 dBm																						
5	N	9.576 8 GHz	-55.220 dBm																						
802.11 n(HT20) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.455 5 GHz -4.035 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>N</td><td>2.455 5 GHz</td><td>-4.035 dBm</td></tr><tr><td>2</td><td>N</td><td>24.661 2 GHz</td><td>-41.949 dBm</td></tr><tr><td>3</td><td>N</td><td>5.048 2 GHz</td><td>-55.221 dBm</td></tr><tr><td>4</td><td>N</td><td>7.468 1 GHz</td><td>-54.396 dBm</td></tr><tr><td>5</td><td>N</td><td>9.698 3 GHz</td><td>-55.300 dBm</td></tr></table>	Mkr	Mode	Freq	Power	1	N	2.455 5 GHz	-4.035 dBm	2	N	24.661 2 GHz	-41.949 dBm	3	N	5.048 2 GHz	-55.221 dBm	4	N	7.468 1 GHz	-54.396 dBm	5	N	9.698 3 GHz	-55.300 dBm
Mkr	Mode	Freq	Power																						
1	N	2.455 5 GHz	-4.035 dBm																						
2	N	24.661 2 GHz	-41.949 dBm																						
3	N	5.048 2 GHz	-55.221 dBm																						
4	N	7.468 1 GHz	-54.396 dBm																						
5	N	9.698 3 GHz	-55.300 dBm																						

RF Conducted Spurious Emissions Graphs



9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

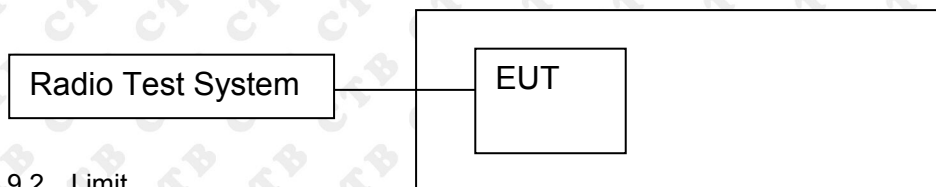

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Antenna	Maximum Output Power [dBm]	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	ANT1	14.333	/	30
		ANT2	14.407		
		ANT3	14.406		
		ANT4	14.675		
	MCH	ANT1	14.572	/	30
		ANT2	14.337		
		ANT3	14.236		
		ANT4	14.451		
	HCH	ANT1	14.191	/	30
		ANT2	13.702		
		ANT3	14.355		
		ANT4	14.668		
802.11g	LCH	ANT1	13.734	/	30
		ANT2	13.578		
		ANT3	13.689		
		ANT4	13.7		
	MCH	ANT1	13.51	/	30
		ANT2	13.406		
		ANT3	13.571		
		ANT4	13.466		
	HCH	ANT1	13.47	/	30
		ANT2	13.766		
		ANT3	13.362		
		ANT4	13.892		
802.11n(HT20)	LCH	ANT1	13.48	19.39	30
		ANT2	13.385		
		ANT3	13.363		
		ANT4	13.335		
	MCH	ANT1	13.453	19.38	30
		ANT2	13.364		
		ANT3	13.226		
		ANT4	13.377		
	HCH	ANT1	13.365	19.33	30
		ANT2	13.171		
		ANT3	13.104		
		ANT4	13.589		
802.11n(HT40)	LCH	ANT1	12.743	18.69	30
		ANT2	12.639		
		ANT3	12.61		
		ANT4	12.674		
	MCH	ANT1	12.538	18.56	30
		ANT2	12.463		
		ANT3	12.625		
		ANT4	12.528		
	HCH	ANT1	12.283	18.39	30
		ANT2	12.714		
		ANT3	12.345		
		ANT4	12.097		

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

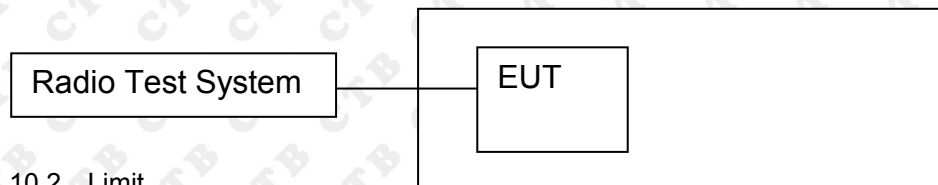

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.104	500	PASS
	MCH	11.027	500	PASS
	HCH	10.372	500	PASS
802.11g	LCH	16.34	500	PASS
	MCH	16.361	500	PASS
	HCH	16.353	500	PASS
802.11n(HT20)	LCH	17.605	500	PASS
	MCH	17.266	500	PASS
	HCH	17.317	500	PASS
802.11n(HT40)	LCH	35.337	500	PASS
	MCH	35.193	500	PASS
	HCH	35.081	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.505	500	PASS
	MCH	10.637	500	PASS
	HCH	10.469	500	PASS
802.11g	LCH	16.343	500	PASS
	MCH	16.321	500	PASS
	HCH	16.407	500	PASS
802.11n(HT20)	LCH	17.054	500	PASS
	MCH	17.188	500	PASS
	HCH	16.792	500	PASS
802.11n(HT40)	LCH	35.57	500	PASS
	MCH	35.403	500	PASS
	HCH	35.343	500	PASS

ANT3:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.151	500	PASS
	MCH	10.687	500	PASS
	HCH	10.242	500	PASS
802.11g	LCH	16.346	500	PASS
	MCH	16.33	500	PASS
	HCH	16.347	500	PASS
802.11n(HT20)	LCH	17.288	500	PASS
	MCH	17.329	500	PASS
	HCH	17.165	500	PASS
802.11n(HT40)	LCH	35.4	500	PASS
	MCH	35.208	500	PASS
	HCH	35.417	500	PASS

ANT4:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.033	500	PASS
	MCH	10.019	500	PASS
	HCH	10.97	500	PASS
802.11g	LCH	16.124	500	PASS
	MCH	16.352	500	PASS
	HCH	16.331	500	PASS
802.11n(HT20)	LCH	17.585	500	PASS
	MCH	17.541	500	PASS
	HCH	16.76	500	PASS
802.11n(HT40)	LCH	35.806	500	PASS
	MCH	35.235	500	PASS
	HCH	35.737	500	PASS

ANT1:


Test Graph:

Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.417069 GHz -9.4596 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.789 MHz Total Power: 15.5 dBm Transmit Freq Error: 16.753 kHz OBW Power: 99.00 % x dB Bandwidth: 10.10 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.442504 GHz -11.848 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 15.007 MHz Total Power: 15.8 dBm Transmit Freq Error: -9.838 kHz OBW Power: 99.00 % x dB Bandwidth: 11.03 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.467123 GHz -9.1044 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 14.862 MHz Total Power: 15.5 dBm Transmit Freq Error: -63.197 kHz OBW Power: 99.00 % x dB Bandwidth: 10.37 MHz x dB: -6.00 dB


802.11g/LCH





802.11g/MCH

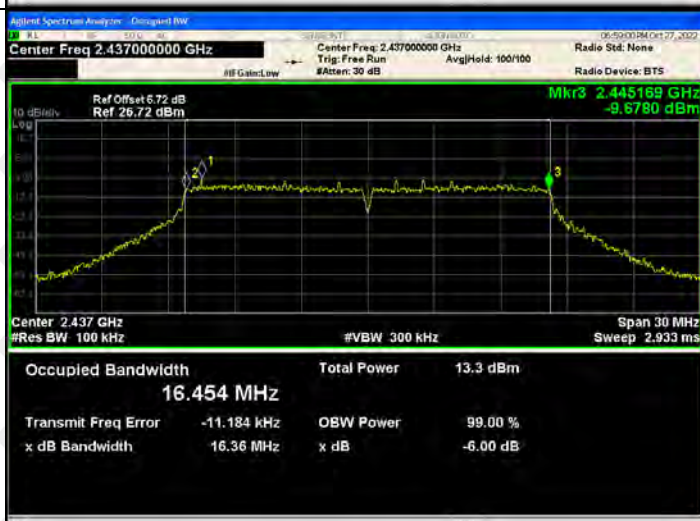

802.11g/HCH

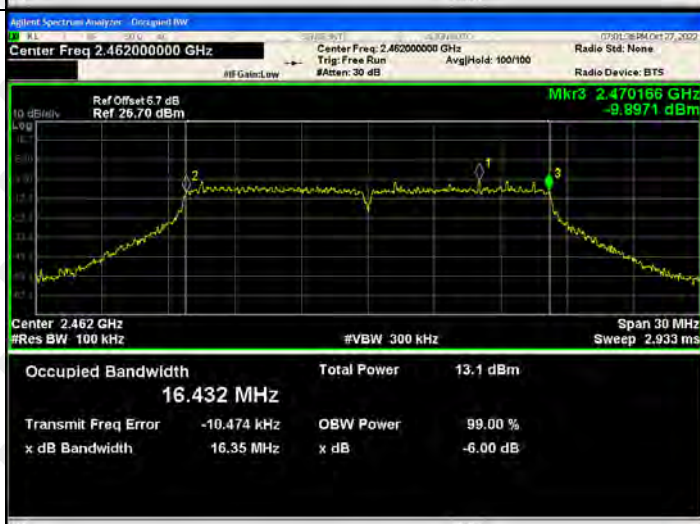


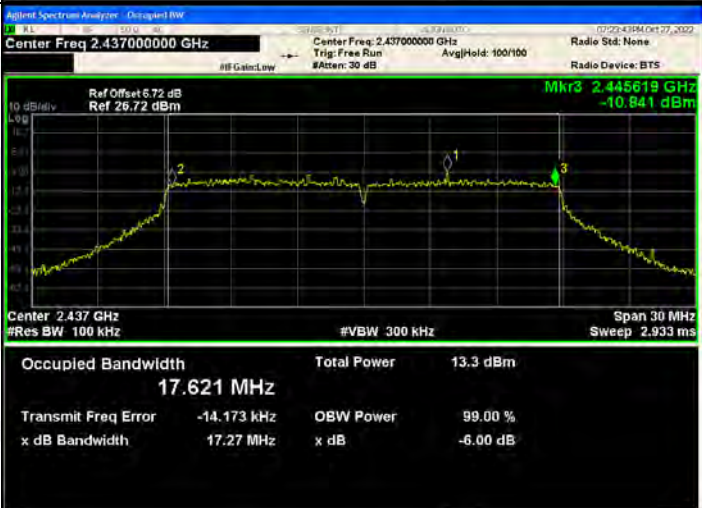802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.420793 GHz -10.210 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.620 MHz Total Power: 13.6 dBm Transmit Freq Error: -8.935 kHz OBW Power: 99.00 % x dB Bandwidth: 17.60 MHz x dB: -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.445619 GHz -10.841 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.621 MHz Total Power: 13.3 dBm Transmit Freq Error: -14.173 kHz OBW Power: 99.00 % x dB Bandwidth: 17.27 MHz x dB: -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.470652 GHz -11.510 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.600 MHz Total Power: 13.3 dBm Transmit Freq Error: -6.949 kHz OBW Power: 99.00 % x dB Bandwidth: 17.32 MHz x dB: -6.00 dB

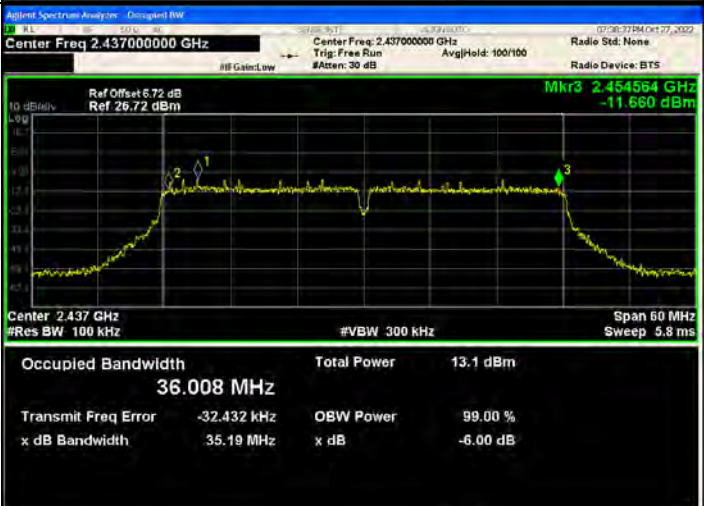
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 6.65 dB Ref: 26.65 dBm Mkr3: 2.43968 GHz -13.781 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.017 MHz Total Power: 13.6 dBm Transmit Freq Error: 11.368 kHz OBW Power: 99.00 % x dB Bandwidth: 35.34 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.454594 GHz -11.660 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.008 MHz Total Power: 13.1 dBm Transmit Freq Error: -32.432 kHz OBW Power: 99.00 % x dB Bandwidth: 35.19 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.469495 GHz -14.368 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.048 MHz Total Power: 11.7 dBm Transmit Freq Error: -45.071 kHz OBW Power: 99.00 % x dB Bandwidth: 35.08 MHz x dB: -6.00 dB

ANT2:


Test Graph:

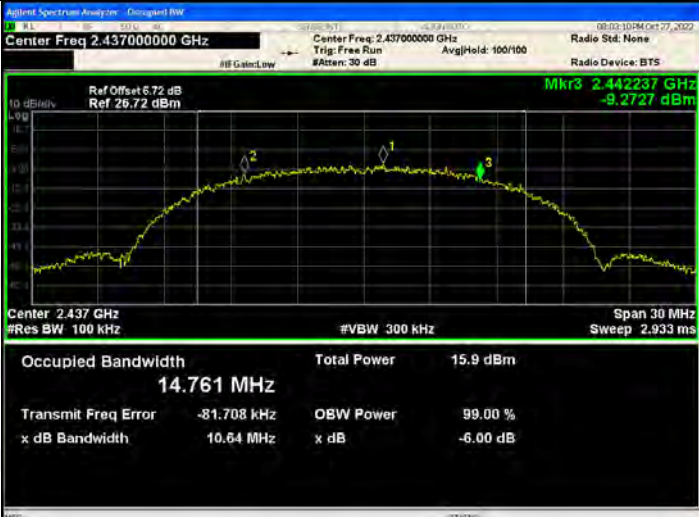Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 26.66 dBm Mkr3 2.417197 GHz -9.2531 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.820 MHz Total Power 15.6 dBm Transmit Freq Error -56.122 kHz OBW Power 99.00 % x dB Bandwidth 10.51 MHz x dB -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.442237 GHz -9.2727 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.761 MHz Total Power 15.9 dBm Transmit Freq Error -81.708 kHz OBW Power 99.00 % x dB Bandwidth 10.64 MHz x dB -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.467155 GHz -9.2344 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.852 MHz Total Power 15.2 dBm Transmit Freq Error -79.337 kHz OBW Power 99.00 % x dB Bandwidth 10.47 MHz x dB -6.00 dB


802.11g/LCH

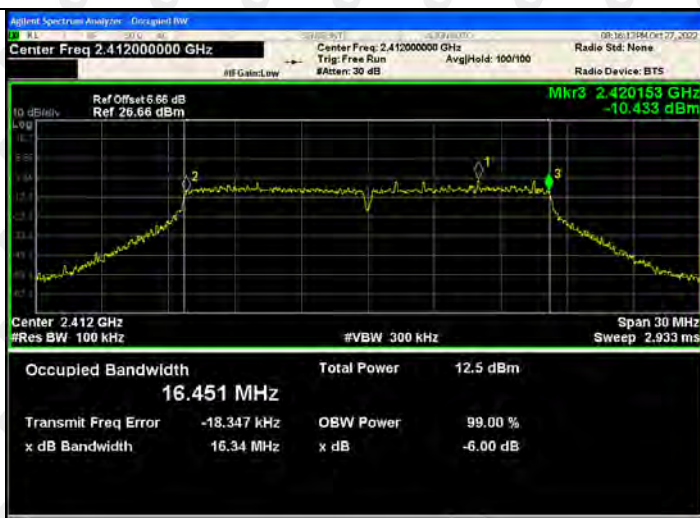

802.11g/MCH

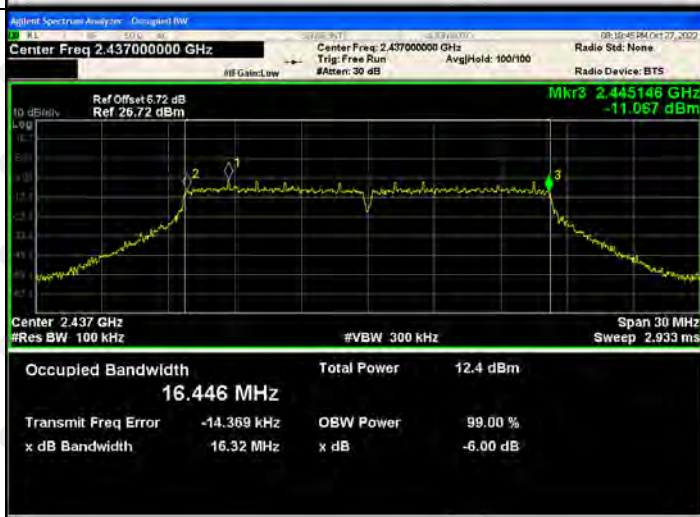

802.11g/HCH

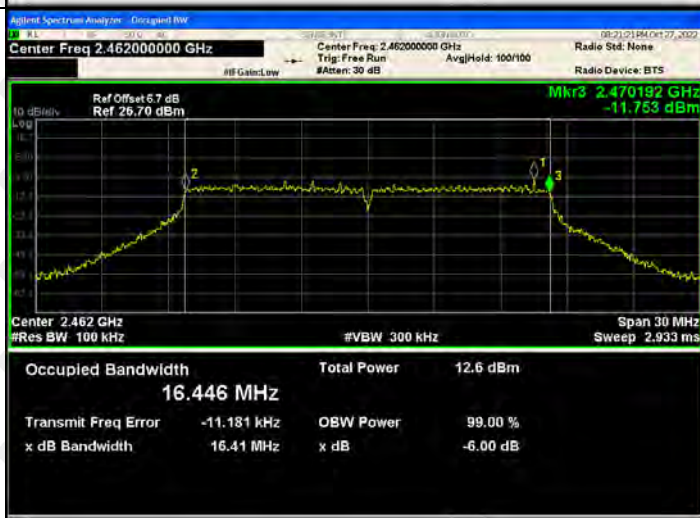

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 26.66 dBm Mkr3 2.420527 GHz -10.705 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.600 MHz Total Power 12.6 dBm Transmit Freq Error -492 Hz OBW Power 99.00 % x dB Bandwidth 17.05 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.445592 GHz -11.378 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.610 MHz Total Power 12.9 dBm Transmit Freq Error -1.568 kHz OBW Power 99.00 % x dB Bandwidth 17.19 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.470383 GHz -10.644 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.590 MHz Total Power 12.1 dBm Transmit Freq Error -13.594 kHz OBW Power 99.00 % x dB Bandwidth 16.79 MHz x dB -6.00 dB

802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 6.65 dB Ref: 26.65 dBm Mkr3: 2.439782 GHz -13.989 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.1 dBm</td></tr><tr><td>36.020 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-2.410 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>35.57 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.1 dBm	36.020 MHz			Transmit Freq Error	OBW Power	99.00 %	-2.410 kHz	x dB	-6.00 dB	x dB Bandwidth			35.57 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
36.020 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-2.410 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.57 MHz																			
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.454653 GHz -16.133 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.0 dBm</td></tr><tr><td>35.978 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-48.122 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>35.40 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.0 dBm	35.978 MHz			Transmit Freq Error	OBW Power	99.00 %	-48.122 kHz	x dB	-6.00 dB	x dB Bandwidth			35.40 MHz		
Occupied Bandwidth	Total Power	12.0 dBm																	
35.978 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-48.122 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.40 MHz																			
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.469653 GHz -14.235 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.1 dBm</td></tr><tr><td>36.042 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-18.656 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>35.34 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.1 dBm	36.042 MHz			Transmit Freq Error	OBW Power	99.00 %	-18.656 kHz	x dB	-6.00 dB	x dB Bandwidth			35.34 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
36.042 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-18.656 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.34 MHz																			

ANT3:
Test Graph:



802.11g/LCH








802.11g/MCH



802.11g/HCH

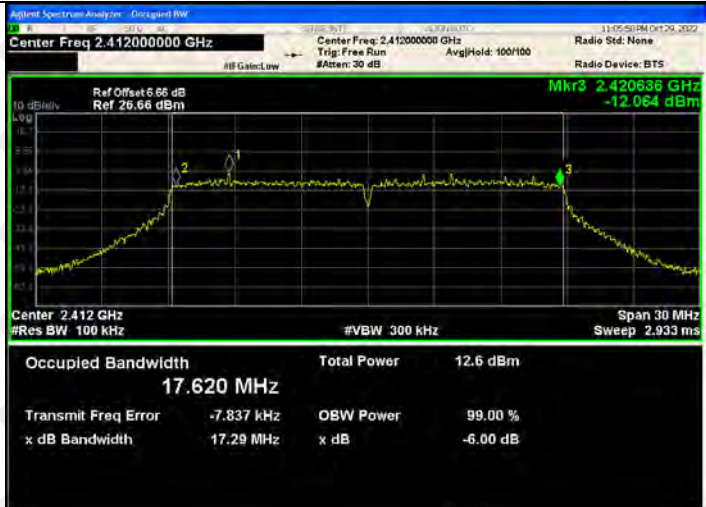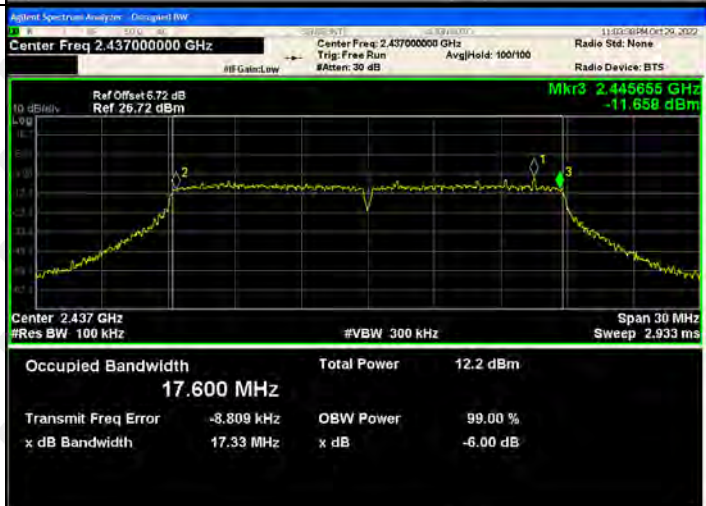


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.420636 GHz -12.064 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.6 dBm</td></tr><tr><td>17.620 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-7.837 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>17.29 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.6 dBm	17.620 MHz			Transmit Freq Error	OBW Power	99.00 %	-7.837 kHz	x dB	-6.00 dB	x dB Bandwidth			17.29 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
17.620 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-7.837 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.29 MHz																			
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.445655 GHz -11.658 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.2 dBm</td></tr><tr><td>17.600 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-8.809 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>17.33 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.2 dBm	17.600 MHz			Transmit Freq Error	OBW Power	99.00 %	-8.809 kHz	x dB	-6.00 dB	x dB Bandwidth			17.33 MHz		
Occupied Bandwidth	Total Power	12.2 dBm																	
17.600 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-8.809 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.33 MHz																			
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.470564 GHz -12.685 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.2 dBm</td></tr><tr><td>17.597 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-18.712 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>17.16 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.2 dBm	17.597 MHz			Transmit Freq Error	OBW Power	99.00 %	-18.712 kHz	x dB	-6.00 dB	x dB Bandwidth			17.16 MHz		
Occupied Bandwidth	Total Power	12.2 dBm																	
17.597 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-18.712 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.16 MHz																			

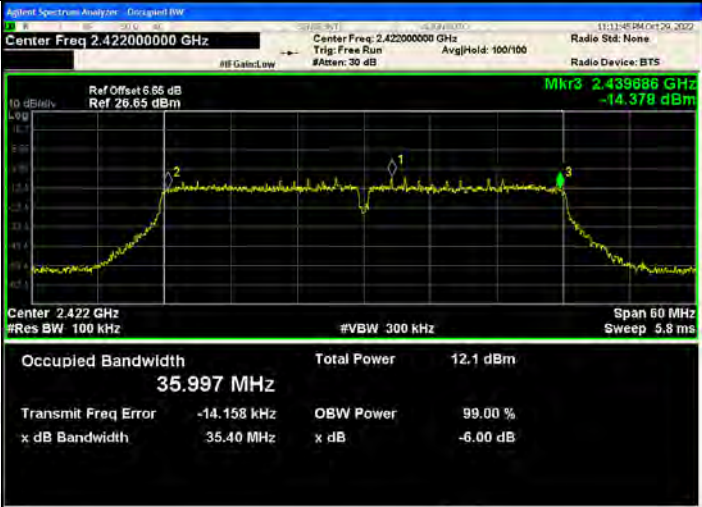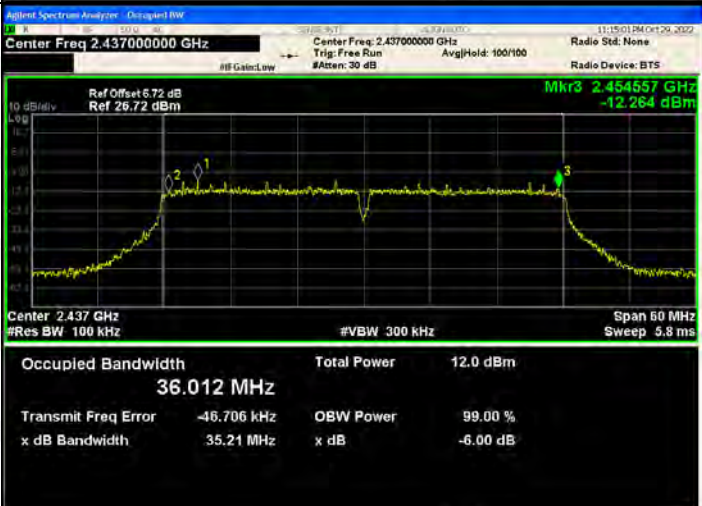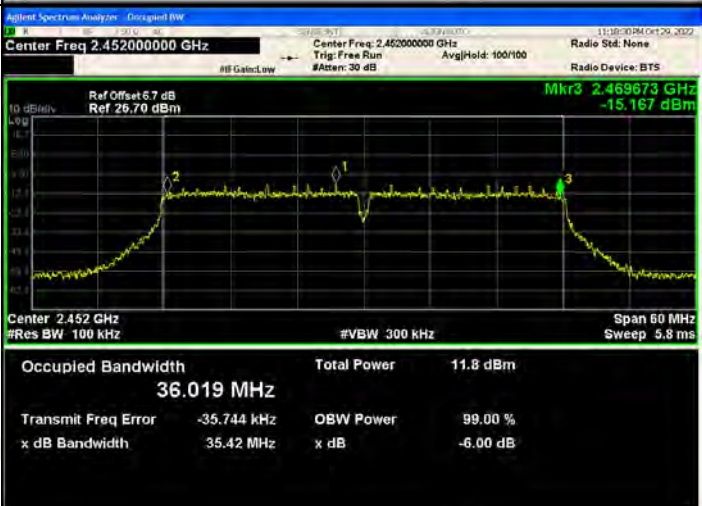802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Mkr3 2.439886 GHz -14.378 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.997 MHz Total Power 12.1 dBm Transmit Freq Error -14.158 kHz OBW Power 99.00 % x dB Bandwidth 35.40 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.454557 GHz -12.264 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.012 MHz Total Power 12.0 dBm Transmit Freq Error -46.706 kHz OBW Power 99.00 % x dB Bandwidth 35.21 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.469673 GHz -15.167 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.019 MHz Total Power 11.8 dBm Transmit Freq Error -35.744 kHz OBW Power 99.00 % x dB Bandwidth 35.42 MHz x dB -6.00 dB


ANT4:
Test Graph:




802.11g/LCH


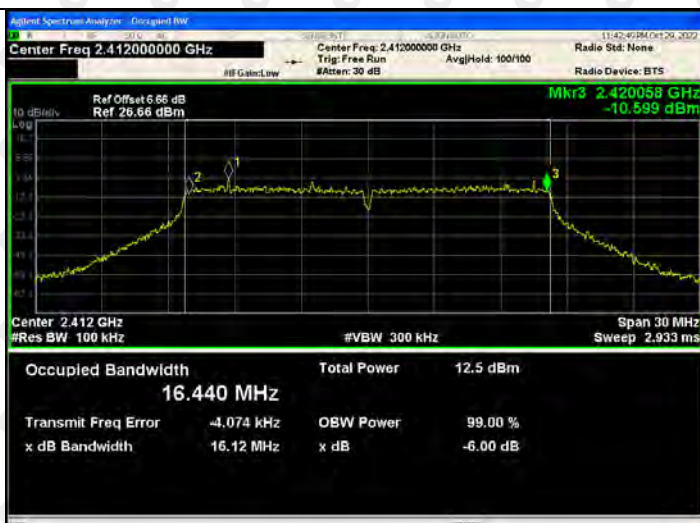




802.11g/MCH

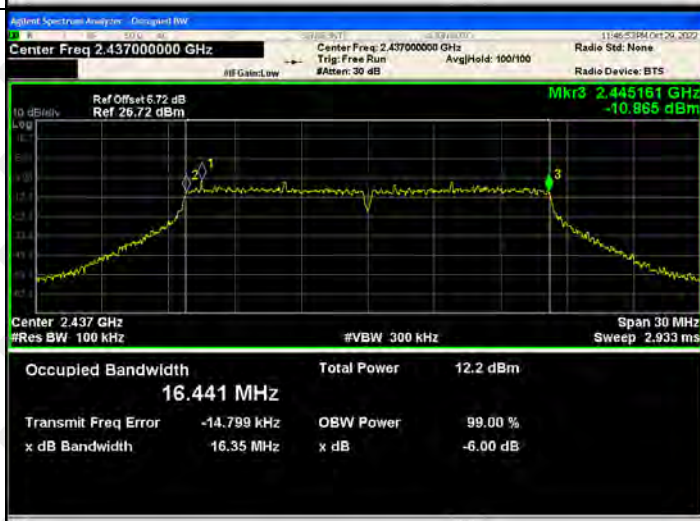

802.11g/HCH

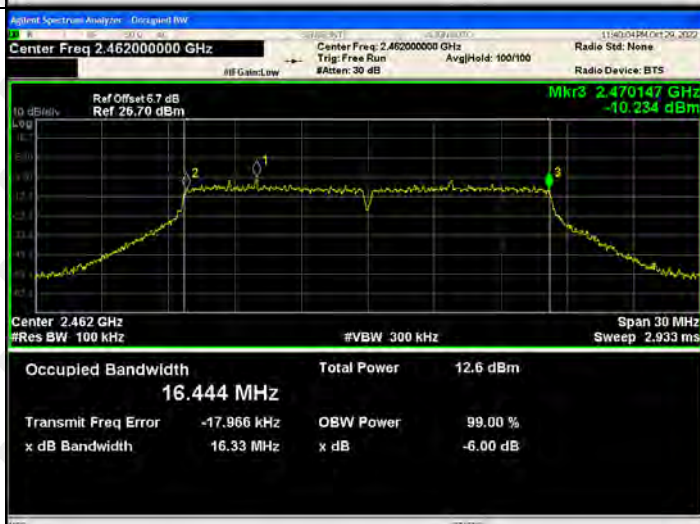


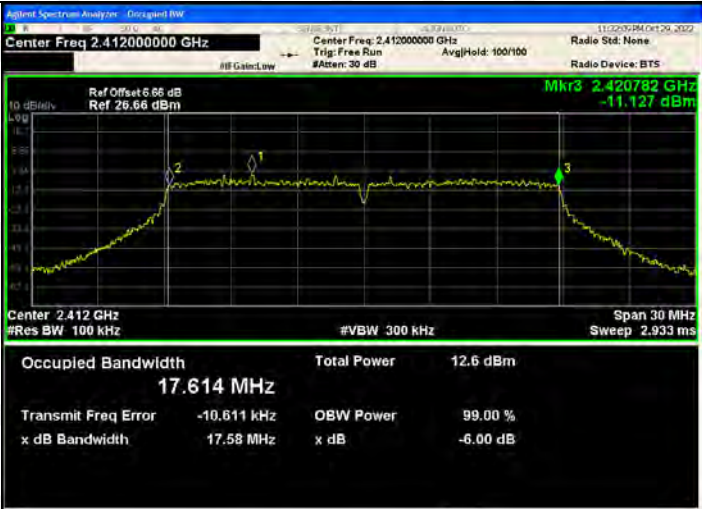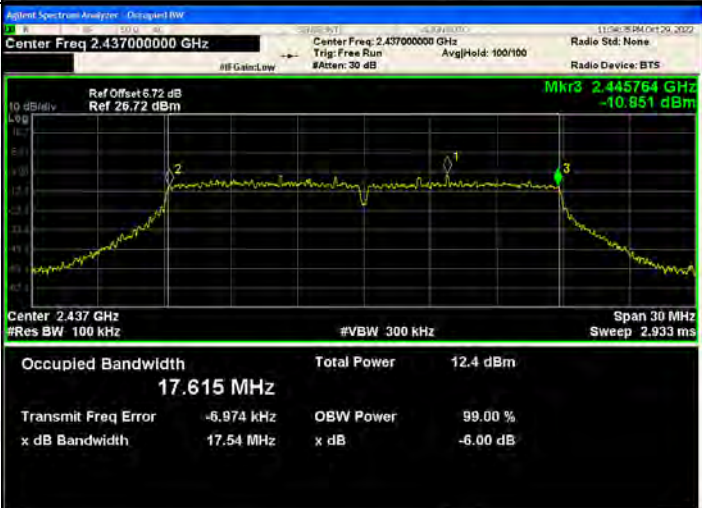802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

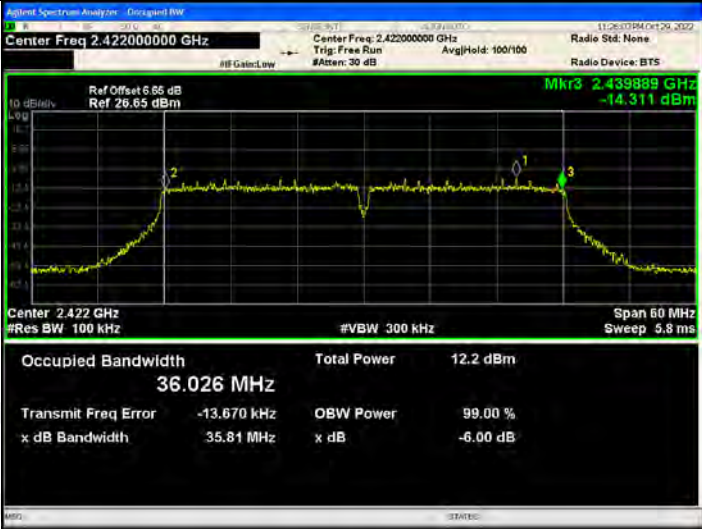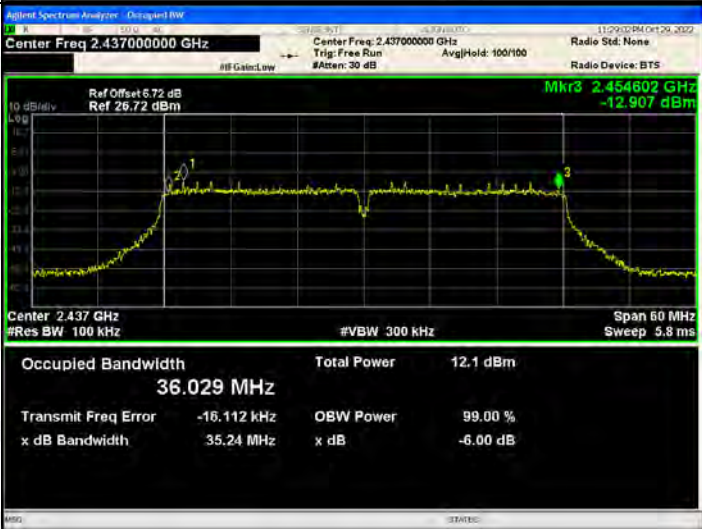802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 6.65 dB Ref: 26.65 dBm Mkr3: 2.439889 GHz -14.311 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.026 MHz Total Power: 12.2 dBm Transmit Freq Error: -13.670 kHz OBW Power: 99.00 % x dB Bandwidth: 35.81 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.454602 GHz -12.907 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.029 MHz Total Power: 12.1 dBm Transmit Freq Error: -16.112 kHz OBW Power: 99.00 % x dB Bandwidth: 35.24 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.469835 GHz -15.126 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.049 MHz Total Power: 11.6 dBm Transmit Freq Error: -33.350 kHz OBW Power: 99.00 % x dB Bandwidth: 35.74 MHz x dB: -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

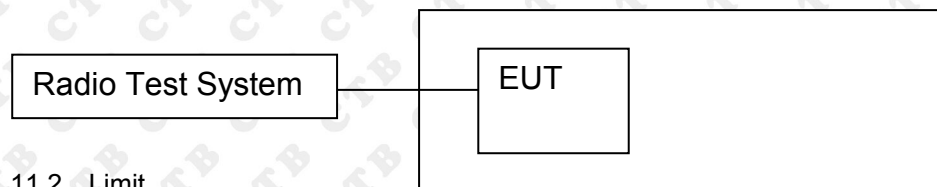

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Antenna	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	ANT1	-15.821	/	3.43
		ANT2	-15.427		
		ANT3	-15.791		
		ANT4	-14.625		
	MCH	ANT1	-15.11	/	3.43
		ANT2	-15.184		
		ANT3	-15.454		
		ANT4	-15.209		
	HCH	ANT1	-15.325	/	3.43
		ANT2	-16.561		
		ANT3	-15.74		
		ANT4	-14.929		
802.11g	LCH	ANT1	-18.134	/	3.43
		ANT2	-18.202		
		ANT3	-18.288		
		ANT4	-18.551		
	MCH	ANT1	-17.529	/	3.43
		ANT2	-18.294		
		ANT3	-18.893		
		ANT4	-19.35		
	HCH	ANT1	-17.714	/	3.43
		ANT2	-18.32		
		ANT3	-18.575		
		ANT4	-18.412		
802.11n(H T20)	LCH	ANT1	-17.425	-12.37	3.43
		ANT2	-18.605		
		ANT3	-19.03		
		ANT4	-18.696		
	MCH	ANT1	-17.214	-12.31	3.43
		ANT2	-18.342		
		ANT3	-19.125		
		ANT4	-18.905		
	HCH	ANT1	-18.864	-12.65	3.43
		ANT2	-18.217		
		ANT3	-19.081		
		ANT4	-18.569		
802.11n(H T40)	LCH	ANT1	-21.478	-16.24	3.43
		ANT2	-22.6		
		ANT3	-22.475		
		ANT4	-22.579		
	MCH	ANT1	-21.838	-16.38	3.43
		ANT2	-22.097		
		ANT3	-22.76		
		ANT4	-23.023		
	HCH	ANT1	-21.732	-16.89	3.43
		ANT2	-23.396		
		ANT3	-23.214		
		ANT4	-23.556		

ANT1: Test Graph

Graphs


802.11b /LCH





802.11b /MCH





802.11b/HCH

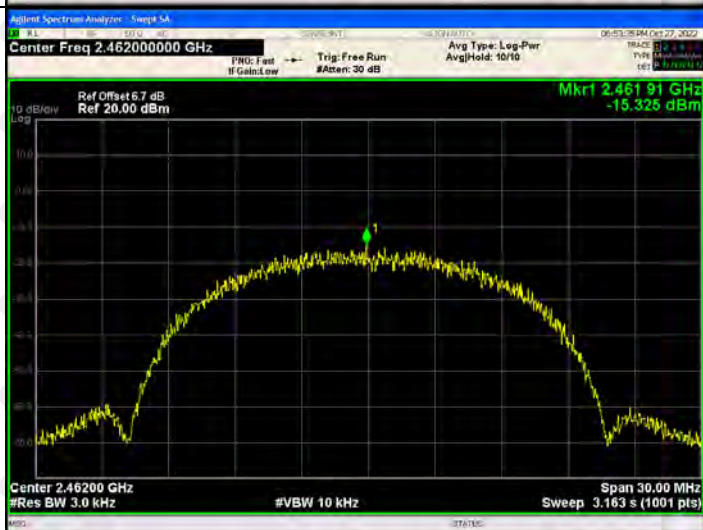

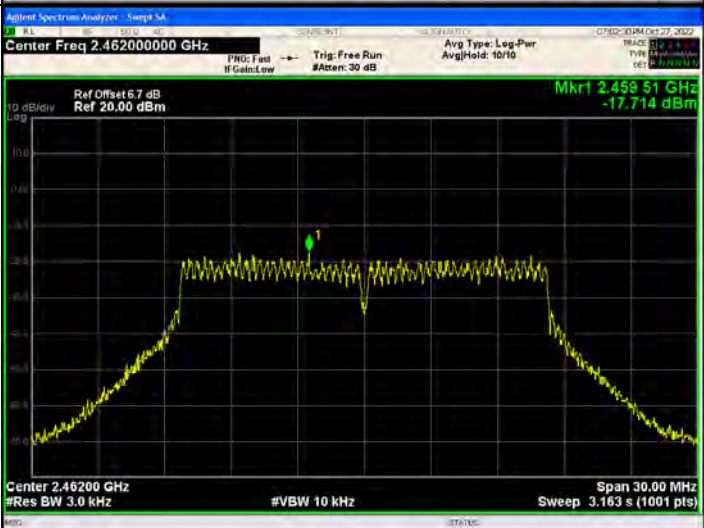802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

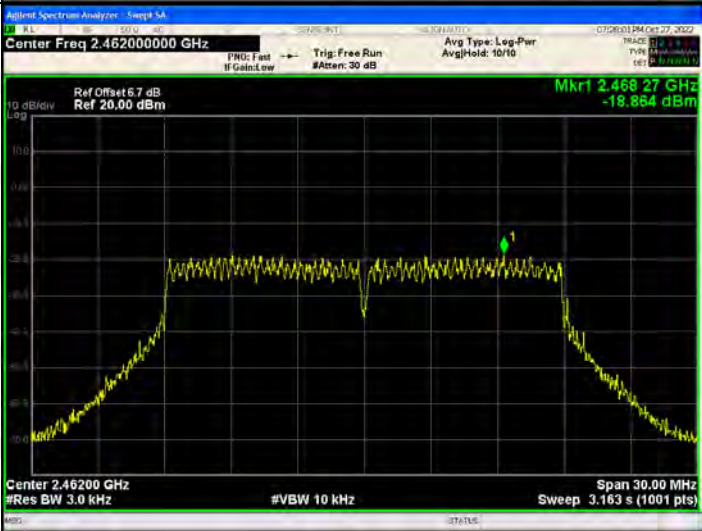802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

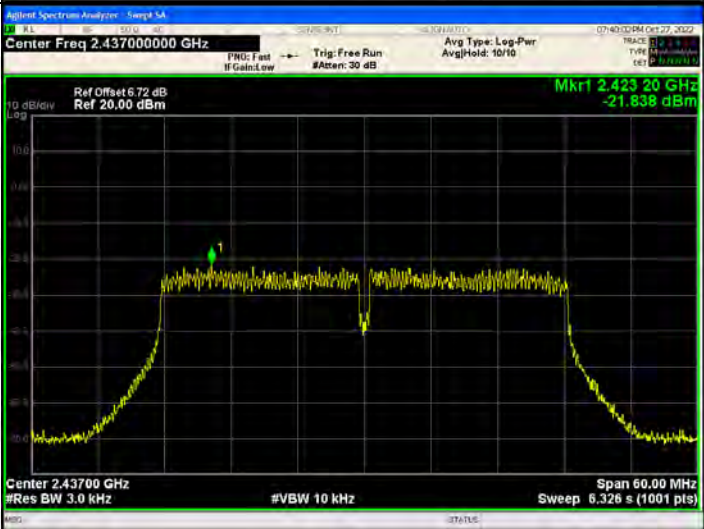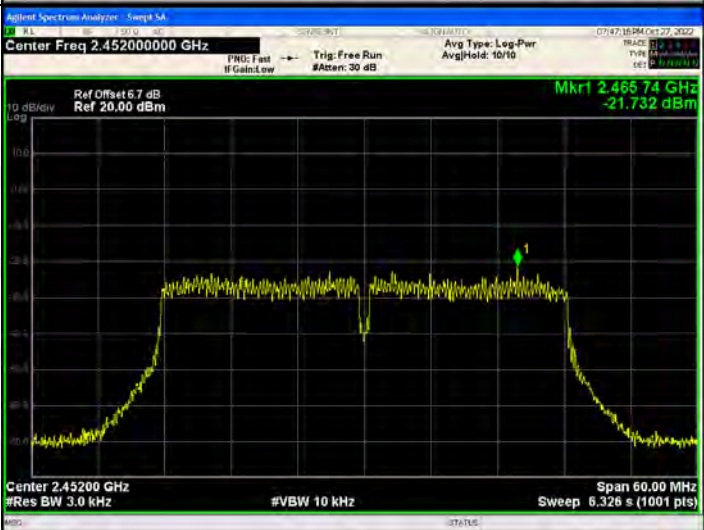802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT 2: Test Graph

Graphs


802.11b /LCH




802.11b /MCH



802.11b/HCH

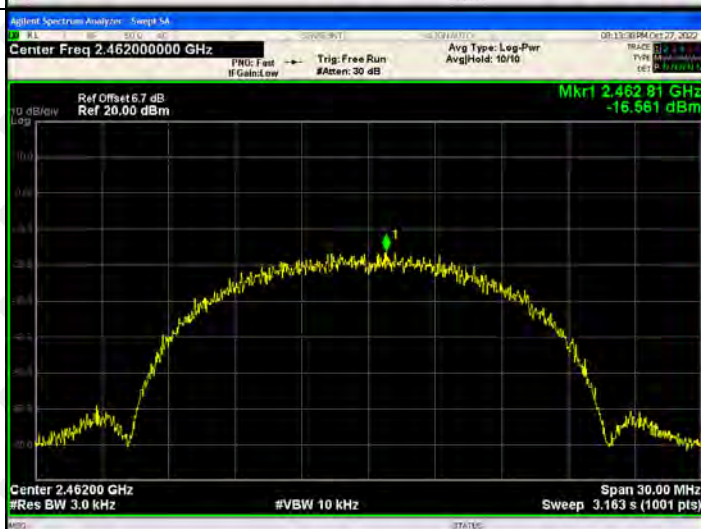

802.11g/LCH



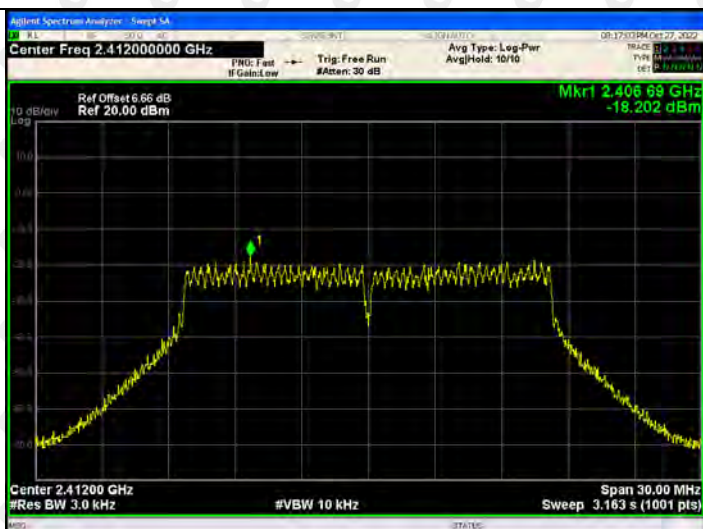




802.11g/MCH



802.11g/HCH

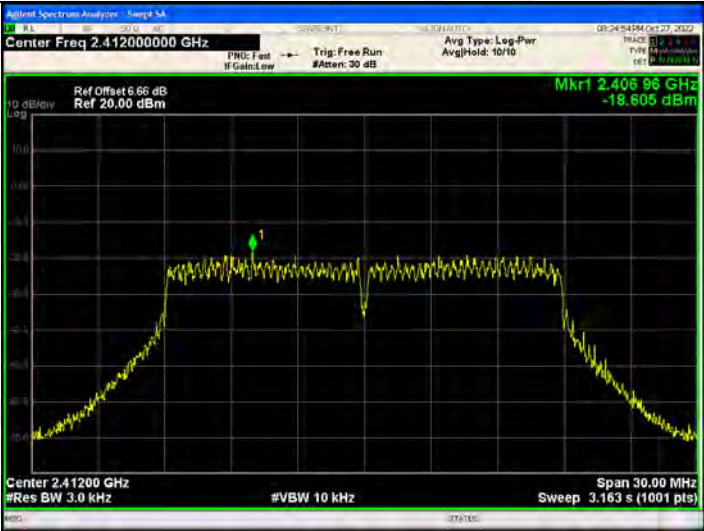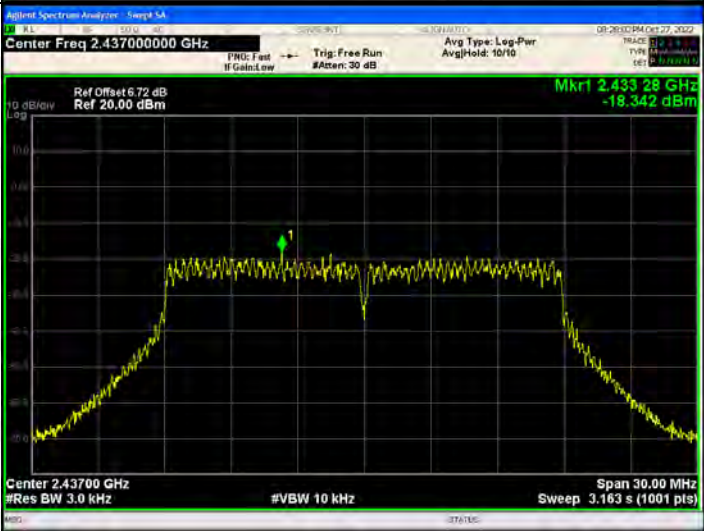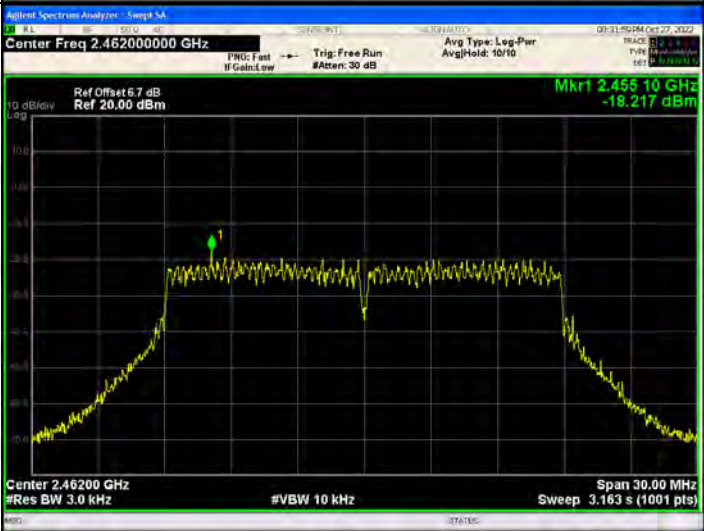

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.86 dB Ref 20.00 dBm Mkr1 2.406 96 GHz -18.605 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.433 28 GHz -18.342 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.455 10 GHz -18.217 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

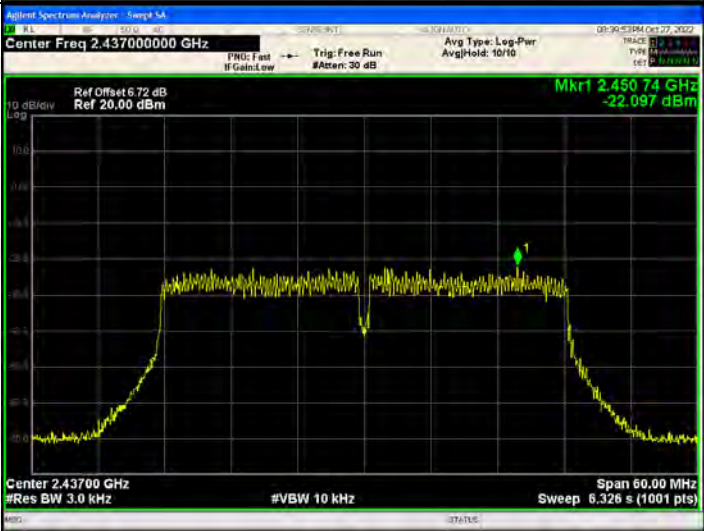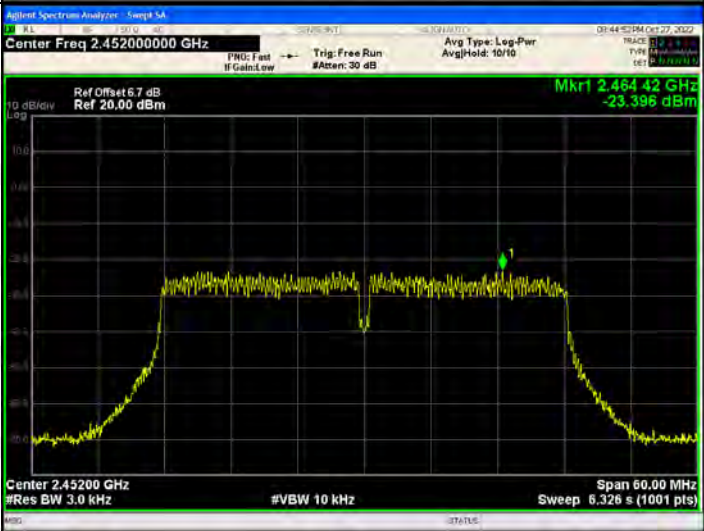802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT3: Test Graph

Graphs

802.11b /LCH






802.11b /MCH





802.11b/HCH



802.11g/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.86 dB Ref 20.00 dBm Mkr1 2.409 51 GHz -18.288 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.429 80 GHz -18.893 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.459 51 GHz -18.575 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

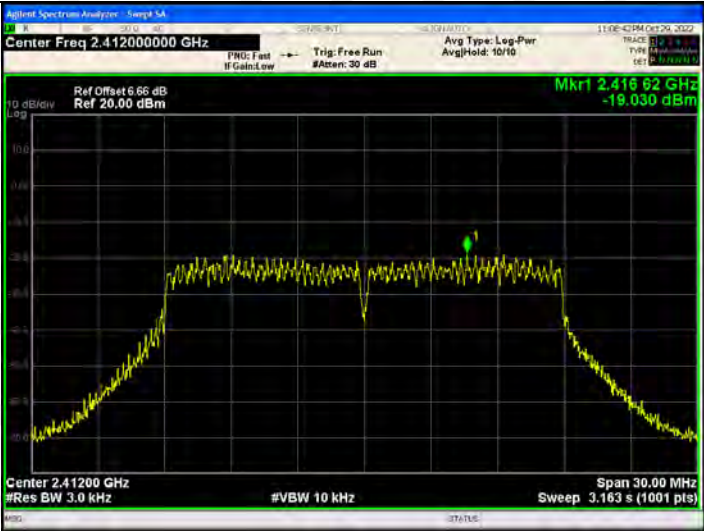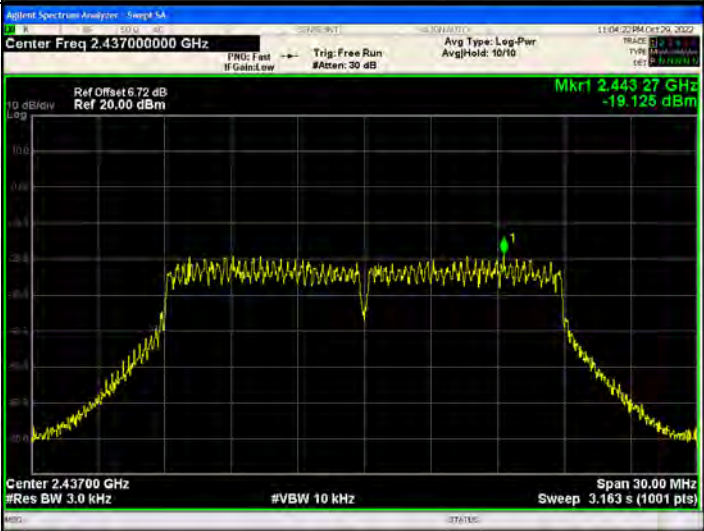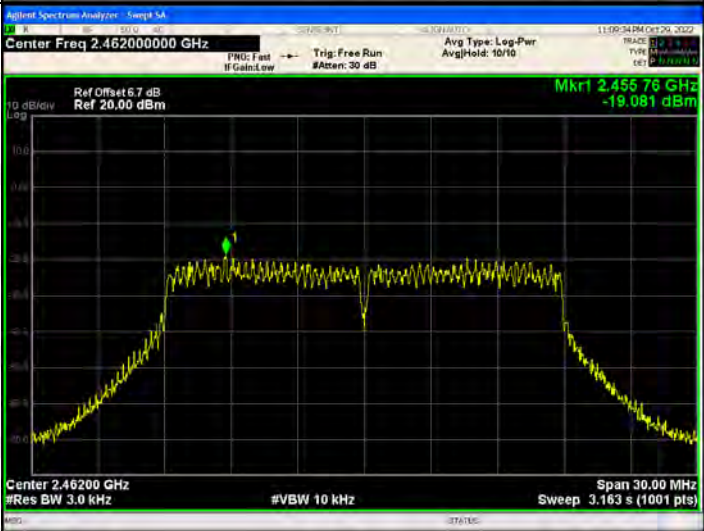802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.41662 GHz -19.030 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44327 GHz -19.125 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.45576 GHz -19.081 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

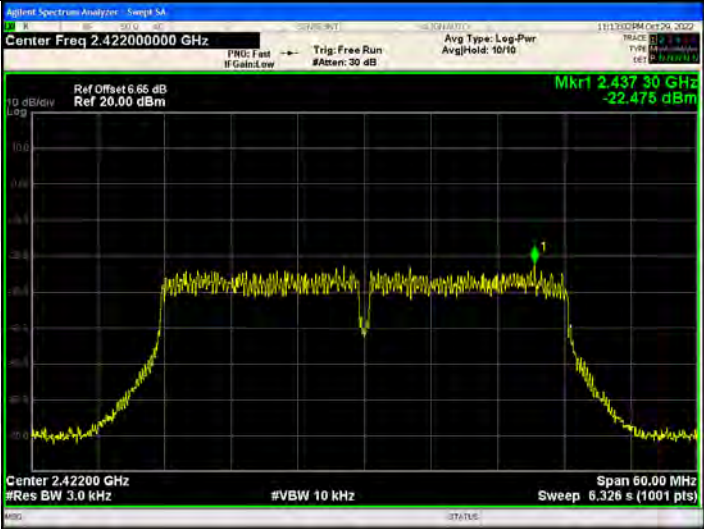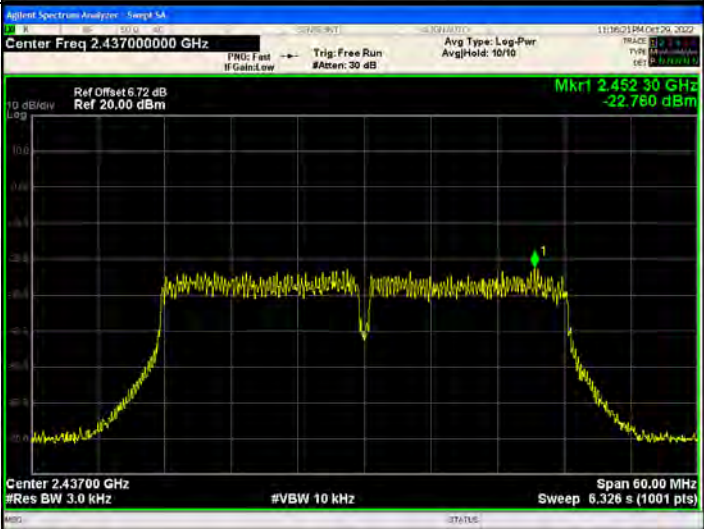802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT4: Test Graph

Graphs

802.11b /LCH






802.11b /MCH





802.11b/HCH

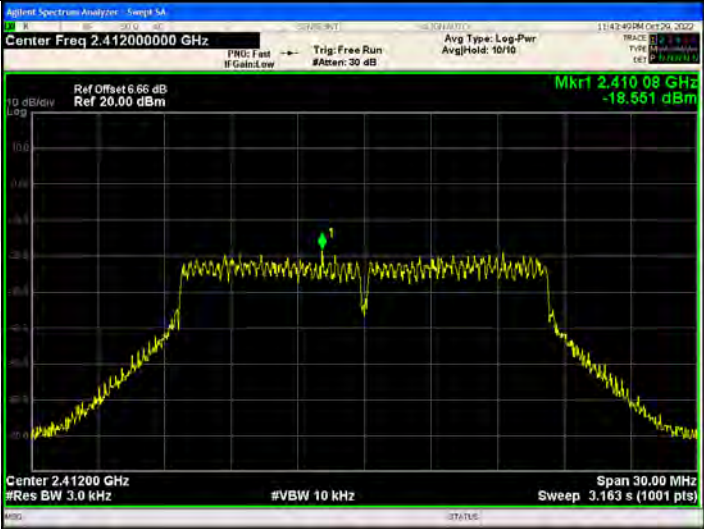

802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

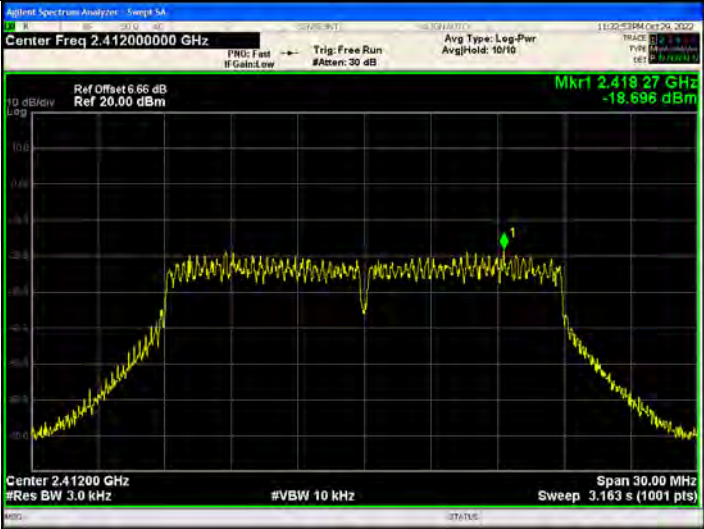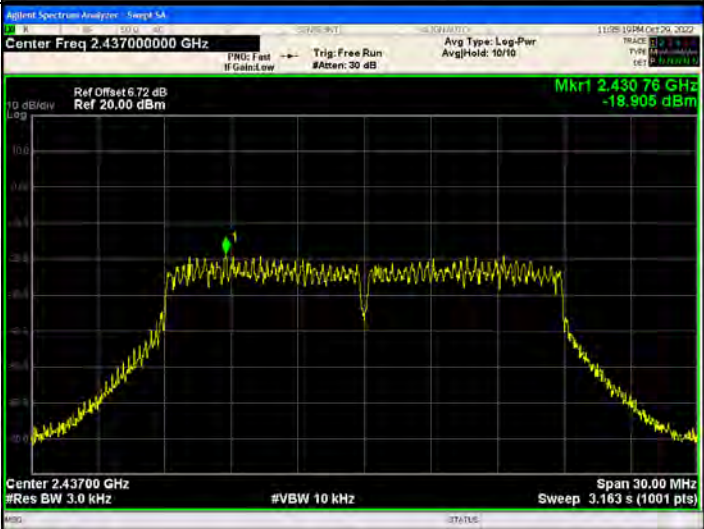802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.86 dB Ref 20.00 dBm Mkr1 2.418 27 GHz -18.696 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.430 76 GHz -18.905 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.455 76 GHz -18.569 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

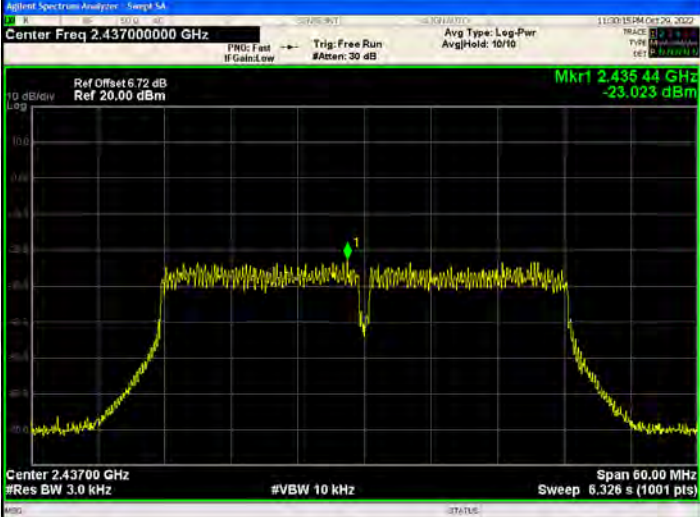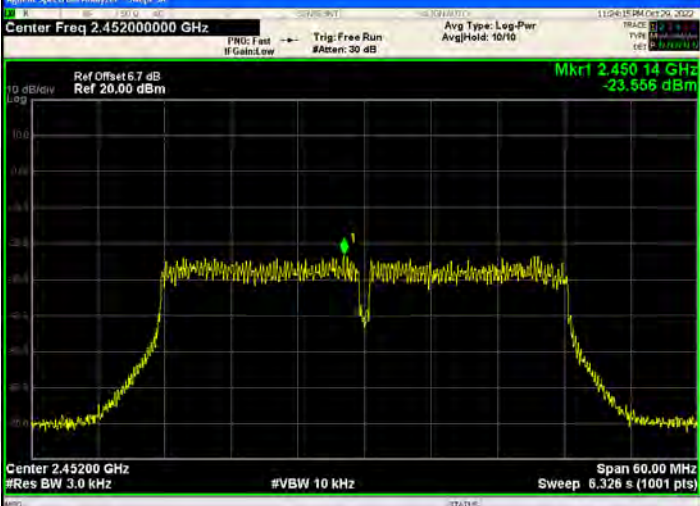802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 6.85 dB Ref 20.00 dBm Mkr1 2.43730 GHz -22.579 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.43544 GHz -23.023 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.45014 GHz -23.556 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is ANT1:4.55dBi, ANT2:4.55dBi, ANT3:4.55dBi, ANT4:4.55dBi.

13. EUT PHOTOGRAPHS

External Photos

EUT Photo 1




EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

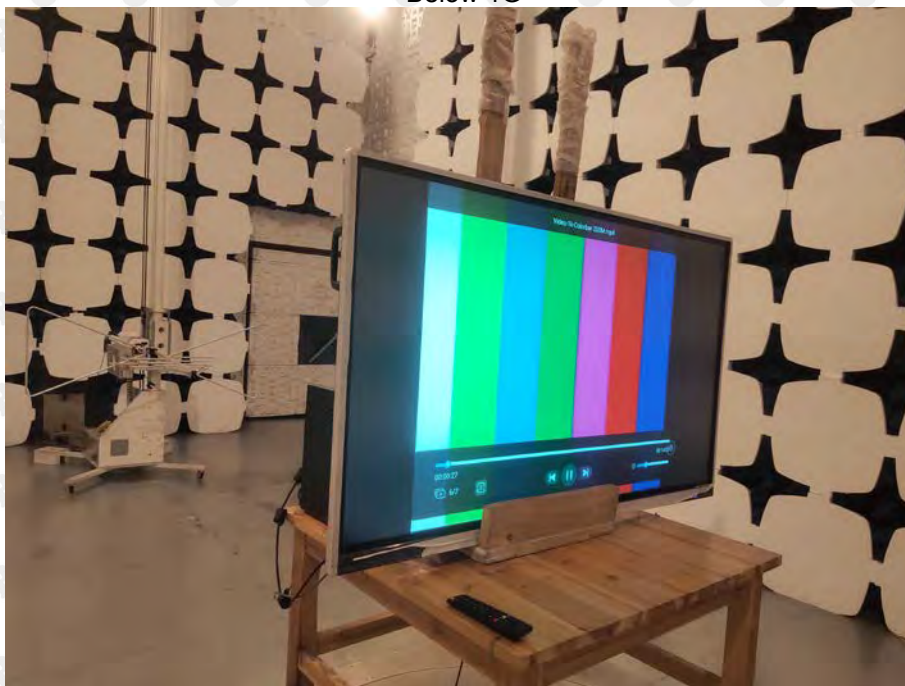

Above 1G



Conducted Emission



***** END OF REPORT *****