

# FCC RADIO TEST REPORT

**FCC ID: 2A386NEUROQ**

**Sample :** NeuroQ

**Trade Name :** N/A

**Main Model :** NeuroQ

**Additional Model :** WA-W, WA-N, WT-W, WT-N, WN-W, WN-N

**Report No. :** UNIA21121606ER-61

## Prepared for

NeoBeyondVision Inc.

12-290, No. 2, CAIDA Second Street, Nancai Town, Shunyi District,  
Beijing, China

## Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang  
Community, Xixiang Str, Bao'an District, Shenzhen, China

## TEST RESULT CERTIFICATION

**Applicant** ..... : NeoBeyondVision Inc.  
**Address** ..... : 12-290, No. 2, CAIDA Second Street, Nancai Town, Shunyi District, Beijing, China  
**Manufacturer** ..... : Beijing Diantong Wintronic Electronics CO. LTD  
**Address** ..... : Hulongguan International Information Park, Changping District, Liye street NO.9 Beijing, China. 102206

### Product description

**Product** ..... : NeuroQ  
**Trade Name** ..... : N/A  
**Model Name** ..... : NeuroQ, WA-W, WA-N, WT-W, WT-N, WN-W, WN-N  
**Test Methods** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.247  
 ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : Dec. 16, 2021 ~ Feb. 15, 2022  
**Date of Issue** ..... : Feb. 16, 2022  
**Test Result** ..... : Pass

Prepared by:

kahn.yang

Kahn yang/Editor



Reviewer:

Sky dong/Supervisor



Approved & Authorized Signer:

Liuze/Manager

## Table of Contents

## Page

|                                                          |    |
|----------------------------------------------------------|----|
| 1 TEST SUMMARY .....                                     | 5  |
| 2 GENERAL INFORMATION .....                              | 8  |
| 2.1 GENERAL DESCRIPTION OF EUT .....                     | 8  |
| 2.2 CARRIER FREQUENCY OF CHANNELS.....                   | 9  |
| 2.3 TEST MODE .....                                      | 9  |
| 2.4 TEST SETUP .....                                     | 10 |
| 2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL ..... | 10 |
| 2.6 MEASUREMENT INSTRUMENTS LIST .....                   | 11 |
| 3 CONDUCTED EMISSION.....                                | 12 |
| 3.1 TEST LIMIT .....                                     | 12 |
| 3.2 TEST SETUP .....                                     | 12 |
| 3.3 TEST PROCEDURE .....                                 | 13 |
| 3.4 TEST RESULT .....                                    | 13 |
| 4 RADIATED EMISSION.....                                 | 16 |
| 4.1 TEST LIMIT.....                                      | 16 |
| 4.2 TEST SETUP.....                                      | 17 |
| 4.3 TEST PROCEDURE .....                                 | 18 |
| 4.4 TEST RESULT .....                                    | 18 |
| 5 OCCUPIED BANDWIDTH.....                                | 41 |
| 5.1 TEST LIMIT.....                                      | 41 |
| 5.2 TEST PROCEDURE .....                                 | 41 |
| 5.3 EQUIPMENT USED .....                                 | 41 |
| 5.4 TEST RESULT .....                                    | 41 |
| 6 POWER SPECTRAL DENSITY .....                           | 50 |
| 6.1 TEST LIMIT.....                                      | 50 |
| 6.2 TEST PROCEDURE .....                                 | 50 |
| 6.3 EQUIPMENT USED .....                                 | 50 |
| 6.4 TEST RESULT .....                                    | 50 |
| 7 PEAK OUTPUT POWER .....                                | 59 |
| 7.1 TEST LIMIT.....                                      | 59 |
| 7.2 TEST PROCEDURE .....                                 | 59 |
| 7.3 EQUIPMENT USED.....                                  | 59 |
| 7.4 TEST RESULT .....                                    | 59 |
| 8 OUT OF BAND EMISSIONS.....                             | 60 |
| 8.1 TEST LIMIT.....                                      | 60 |

## Table of Contents

## Page

|                               |    |
|-------------------------------|----|
| 8.2 TEST SETUP .....          | 60 |
| 8.3 TEST PROCEDURE .....      | 60 |
| 8.4 TEST RESULT .....         | 60 |
| 9 ANTENNA REQUIREMENT .....   | 80 |
| 10 PHOTO OF TEST .....        | 80 |
| 10.1 RADIATED EMISSION .....  | 81 |
| 10.2 CONDUCTED EMISSION ..... | 82 |

## 1 TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

| ITEM                        | STANGARD              | RESULT    |
|-----------------------------|-----------------------|-----------|
| CONDUCTED EMISSION          | FCC Part 15.207       | N/A       |
| RADIATED EMISSION           | FCC Part 15.209(a)    | COMPLIANT |
| OCCUPIED BANDWIDTH          | FCC Part 15.247(a)(2) | COMPLIANT |
| POWER SPECTRAL DENSITY      | FCC Part 15.247(e)    | COMPLIANT |
| PEAK OUTPUT POWER           | FCC Part 15.247(b)    | COMPLIANT |
| OUT OF BAND EMISSIONS       | FCC Part 15.247(d)    | COMPLIANT |
| CONDUCTED SPURIOUS EMISSION | FCC Part 15.247(d)    | COMPLIANT |
| ANTENNA REQUIREMENT         | FCC Part 15.203       | COMPLIANT |

## 1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

### 1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

#### A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 150kHz               | 2.96    |      |
|           |        | 150kHz ~ 30MHz              | 2.44    |      |

#### B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 30MHz                | 2.50    |      |
|           |        | 30MHz ~ 1000MHz             | 4.80    |      |
|           |        | 1000MHz ~ 18000MHz          | 4.13    |      |

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                     |                                                                                                                                                       |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product:            | NeuroQ                                                                                                                                                |
| Trade Name:         | N/A                                                                                                                                                   |
| Main Model:         | NeuroQ                                                                                                                                                |
| Additional Model:   | WA-W, WA-N, WT-W, WT-N, WN-W, WN-N                                                                                                                    |
| Model Difference:   | All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: NeuroQ. |
| FCC ID:             | 2A386NEUROQ                                                                                                                                           |
| Antenna Type:       | SMA Antenna                                                                                                                                           |
| Antenna Gain:       | 2dBi                                                                                                                                                  |
| Frequency Range:    | 802.11b/g/n20: 2412~2462MHz<br>802.11n40: 2422~2452MHz                                                                                                |
| Number of Channels: | 802.11b/g/n20: 11CH<br>802.11n40: 7CH                                                                                                                 |
| Modulation Type:    | CCK, OFDM, DBPSK, DAPSK                                                                                                                               |
| Battery:            | N/A                                                                                                                                                   |
| Adapter:            | M/N: LX120200<br>Input: AC 100-240V, 50/60Hz<br>Output: DC 12V, 2.0A                                                                                  |
| Power Source:       | DC 12V from adapter with AC 120(240)V/60Hz                                                                                                            |

## 2.2 CARRIER FREQUENCY OF CHANNELS

| Channel List for 802.11b/g/n(HT20) |                 |         |                 |         |                 |         |                 |
|------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                            | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01                                 | 2412            | 04      | 2427            | 07      | 2442            | 10      | 2457            |
| 02                                 | 2417            | 05      | 2432            | 08      | 2447            | 11      | 2462            |
| 03                                 | 2422            | 06      | 2437            | 09      | 2452            |         |                 |

| Channel List for 802.11n(40MHz) |                 |         |                 |         |                 |         |                 |
|---------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                         | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 03                              | 2422            | 06      | 2437            | 09      | 2452            |         |                 |
| 04                              | 2427            | 07      | 2442            |         |                 |         |                 |
| 05                              | 2432            | 08      | 2447            |         |                 |         |                 |

## 2.3 TEST MODE


The EUT was programmed to be in continuously transmitting mode.

| Channel List for 802.11b/g/n(HT20) |             |                      |
|------------------------------------|-------------|----------------------|
| Test Channel                       | EUT Channel | Test Frequency (MHz) |
| Low                                | CH01        | 2412                 |
| Middle                             | CH06        | 2437                 |
| High                               | CH11        | 2462                 |

| Channel List for 802.11n(40MHz) |             |                      |
|---------------------------------|-------------|----------------------|
| Test Channel                    | EUT Channel | Test Frequency (MHz) |
| Low                             | CH03        | 2422                 |
| Middle                          | CH06        | 2437                 |
| High                            | CH09        | 2452                 |

## 2.4 TEST SETUP

Operation of EUT during Conducted and Radiation testing:



## 2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Note |
|------|-----------|-----------|----------------|------|
| E-1  | NeuroQ    | N/A       | NeuroQ         | N/A  |
|      |           |           |                |      |
|      |           |           |                |      |
|      |           |           |                |      |
|      |           |           |                |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.
3. “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.6 MEASUREMENT INSTRUMENTS LIST

| Item                             | Equipment                           | Manufacturer  | Model No.      | Serial No.    | Calibrated until |
|----------------------------------|-------------------------------------|---------------|----------------|---------------|------------------|
| Conduction Emissions Measurement |                                     |               |                |               |                  |
| 1                                | Conducted Emission Test Software    | EZ-EMC        | Ver.CCS-3A1-CE | N/A           | N/A              |
| 2                                | AMN                                 | Schwarzbeck   | NNLK8121       | 8121370       | 2022.09.22       |
| 3                                | AAN                                 | TESEQ         | T8-Cat6        | 38888         | 2022.09.22       |
| 4                                | Pulse Limiter                       | CYBRTEK       | EM5010         | E115010056    | 2022.05.17       |
| 5                                | EMI Test Receiver                   | Rohde&Schwarz | ESCI           | 101210        | 2022.09.22       |
| Radiated Emissions Measurement   |                                     |               |                |               |                  |
| 1                                | Radiated Emission Test Software     | EZ-EMC        | Ver.CCS-03A1   | N/A           | N/A              |
| 2                                | Horn Antenna                        | Sunol         | DRH-118        | A101415       | 2022.09.27       |
| 3                                | Broadband Hybrid Antenna            | Sunol         | JB1            | A090215       | 2022.03.01       |
| 4                                | PREAMP                              | HP            | 8449B          | 3008A00160    | 2022.09.22       |
| 5                                | PREAMP                              | HP            | 8447D          | 2944A07999    | 2022.05.17       |
| 6                                | EMI TEST RECEIVER                   | Rohde&Schwarz | ESR3           | 101891        | 2022.09.22       |
| 7                                | VECTOR Signal Generator             | Rohde&Schwarz | SMU200A        | 101521        | 2022.09.22       |
| 8                                | Signal Generator                    | Agilent       | E4421B         | MY4335105     | 2022.09.22       |
| 9                                | MXA Signal Analyzer                 | Agilent       | N9020A         | MY50510140    | 2022.09.22       |
| 10                               | MXA Signal Analyzer                 | Keysight      | N9020A         | MY51110104    | 2022.09.22       |
| 11                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO88 | 2022.05.17       |
| 12                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO89 | 2022.05.17       |
| 13                               | RF power divider                    | Anritsu       | K241B          | 992289        | 2022.09.22       |
| 14                               | Wideband radio communication tester | Rohde&Schwarz | CMW500         | 154987        | 2022.09.22       |
| 15                               | Active Loop Antenna                 | Com-Power     | AL-130R        | 10160009      | 2022.07.25       |
| 16                               | Broadband Hybrid Antennas           | Schwarzbeck   | VULB9163       | VULB9163#958  | 2022.09.22       |
| 17                               | Horn Antenna                        | Schwarzbeck   | BBHA9120D      | 9120D-1680    | 2022.05.23       |
| 18                               | Horn Antenna                        | A-INFOMW      | LB-180400-KF   | J211060660    | 2022.09.27       |
| 19                               | Microwave Broadband Preamplifier    | Schwarzbeck   | BBV 9721       | 100472        | 2022.09.22       |
| 20                               | Signal Generator                    | Agilent       | N5183A         | MY47420153    | 2022.09.22       |
| 21                               | Spectrum Analyzer                   | Rohde&Schwarz | FSP 40         | 100501        | 2022.09.22       |
| 22                               | Power Meter                         | KEYSIGHT      | N1911A         | MY50520168    | 2022.09.22       |
| 23                               | Frequency Meter                     | VICTOR        | VC2000         | 997406086     | 2022.09.22       |
| 24                               | DC Power Source                     | HYELEC        | HY5020E        | 055161818     | 2022.09.22       |

### 3 CONDUCTED EMISSION

#### 3.1 TEST LIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

| Frequency (MHz) | Maximum RF Line Voltage (dB $\mu$ V) |      |         |        |
|-----------------|--------------------------------------|------|---------|--------|
|                 | CLASS A                              |      | CLASS B |        |
|                 | Q.P.                                 | Ave. | Q.P.    | Ave.   |
| 0.15~0.50       | 79                                   | 66   | 66~56*  | 56~46* |
| 0.50~5.00       | 73                                   | 60   | 56      | 46     |
| 5.00~30.0       | 73                                   | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

#### 3.2 TEST SETUP

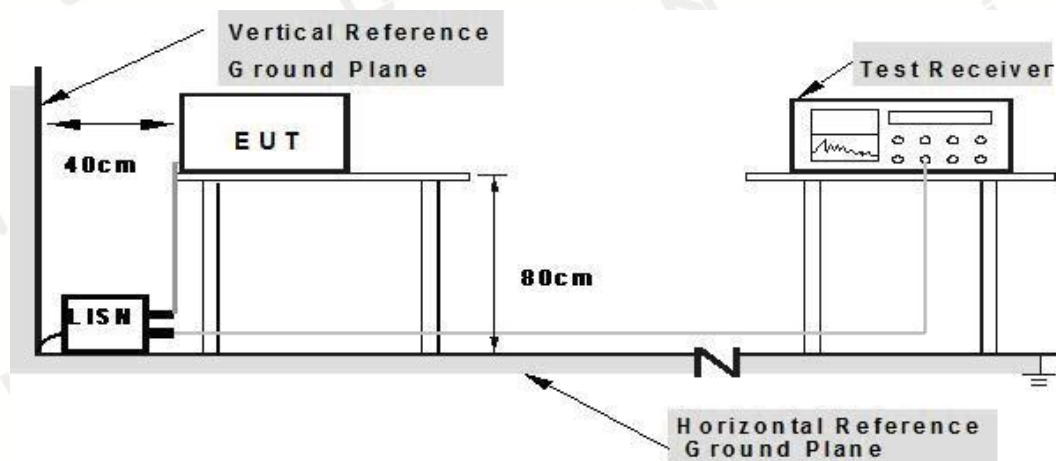

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.


### 3.4 TEST RESULT

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported.


|               |                                      |                    |         |
|---------------|--------------------------------------|--------------------|---------|
| Temperature:  | 24°C                                 | Relative Humidity: | 48%     |
| Test Date:    | Jan. 11, 2022                        | Pressure:          | 1010hPa |
| Test Voltage: | AC 120V, 60Hz                        | Phase:             | Line    |
| Test Mode:    | Transmitting mode of 802.11b 2412MHz |                    |         |

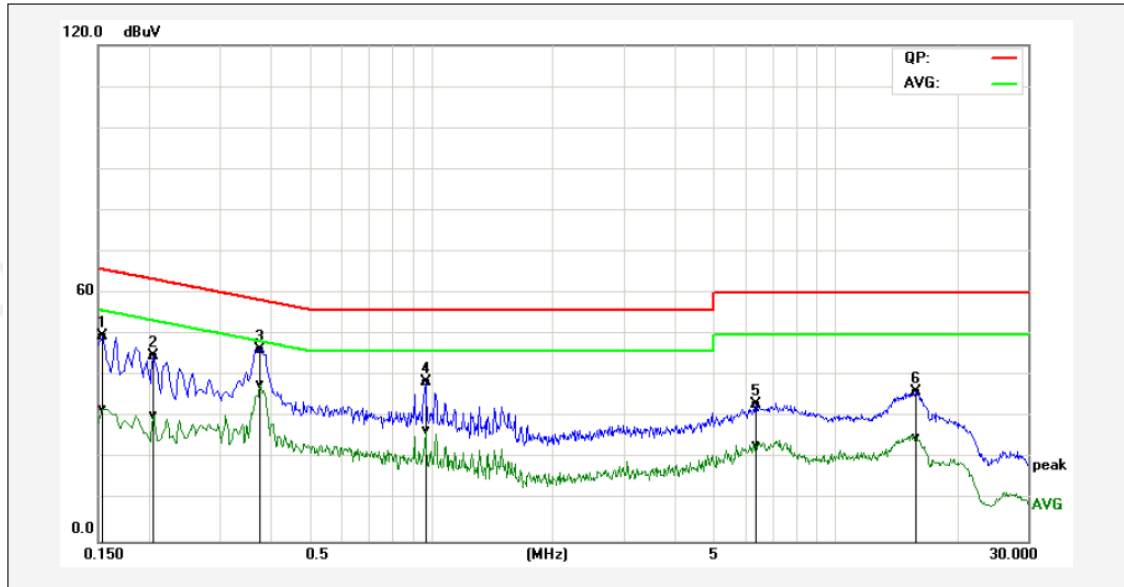

| No. | Frequency<br>(MHz) | QuasiPeak<br>reading<br>(dBuV) | Average<br>reading<br>(dBuV) | Correction<br>factor<br>(dB) | QuasiPeak<br>result<br>(dBuV) | Average<br>result<br>(dBuV) | QuasiPeak<br>limit<br>(dBuV) | Average<br>limit<br>(dBuV) | QuasiPeak<br>margin<br>(dB) | Average<br>margin<br>(dB) | Remark |
|-----|--------------------|--------------------------------|------------------------------|------------------------------|-------------------------------|-----------------------------|------------------------------|----------------------------|-----------------------------|---------------------------|--------|
| 1P  | 0.1539             | 39.66                          | 21.96                        | 10.01                        | 49.67                         | 31.97                       | 65.78                        | 55.79                      | -16.11                      | -23.82                    | Pass   |
| 2P  | 0.2060             | 34.82                          | 20.44                        | 10.03                        | 44.85                         | 30.47                       | 63.36                        | 53.37                      | -18.51                      | -22.90                    | Pass   |
| 3*  | 0.3780             | 36.42                          | 28.00                        | 9.99                         | 46.41                         | 37.99                       | 58.32                        | 48.32                      | -11.91                      | -10.33                    | Pass   |
| 4P  | 0.9700             | 28.50                          | 16.81                        | 10.02                        | 38.52                         | 26.83                       | 56.00                        | 46.00                      | -17.48                      | -19.17                    | Pass   |
| 5P  | 6.3620             | 22.96                          | 13.06                        | 10.07                        | 33.03                         | 23.13                       | 60.00                        | 50.00                      | -26.97                      | -26.87                    | Pass   |
| 6P  | 15.8300            | 25.82                          | 14.84                        | 10.31                        | 36.13                         | 25.15                       | 60.00                        | 50.00                      | -23.87                      | -24.85                    | Pass   |

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

|               |                                      |                    |         |
|---------------|--------------------------------------|--------------------|---------|
| Temperature:  | 24°C                                 | Relative Humidity: | 48%     |
| Test Date:    | Jan. 11, 2022                        | Pressure:          | 1010hPa |
| Test Voltage: | AC 120V, 60Hz                        | Phase:             | Neutral |
| Test Mode:    | Transmitting mode of 802.11b 2412MHz |                    |         |

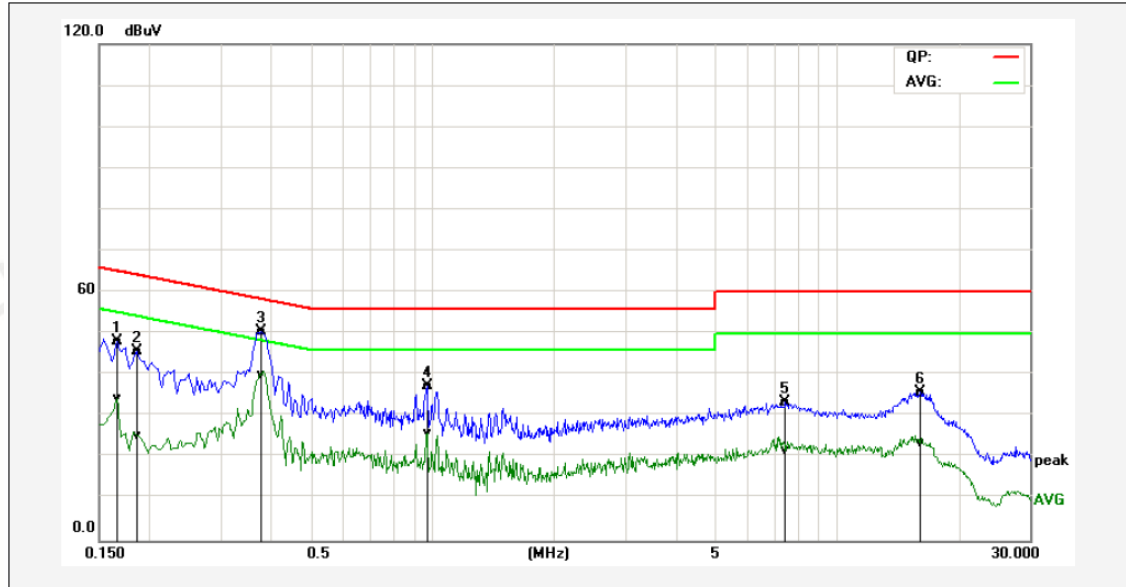

| No. | Frequency<br>(MHz) | QuasiPeak<br>reading<br>(dBuV) | Average<br>reading<br>(dBuV) | Correction<br>factor<br>(dB) | QuasiPeak<br>result<br>(dBuV) | Average<br>result<br>(dBuV) | QuasiPeak<br>limit<br>(dBuV) | Average<br>limit<br>(dBuV) | QuasiPeak<br>margin<br>(dB) | Average<br>margin<br>(dB) | Remark |
|-----|--------------------|--------------------------------|------------------------------|------------------------------|-------------------------------|-----------------------------|------------------------------|----------------------------|-----------------------------|---------------------------|--------|
| 1P  | 0.1660             | 38.04                          | 24.25                        | 10.02                        | 48.06                         | 34.27                       | 65.16                        | 55.16                      | -17.10                      | -20.89                    | Pass   |
| 2P  | 0.1860             | 35.73                          | 15.48                        | 10.02                        | 45.75                         | 25.50                       | 64.21                        | 54.21                      | -18.46                      | -28.71                    | Pass   |
| 3*  | 0.3780             | 40.49                          | 29.98                        | 9.99                         | 50.48                         | 39.97                       | 58.32                        | 48.32                      | -7.84                       | -8.35                     | Pass   |
| 4P  | 0.9700             | 27.27                          | 15.95                        | 10.02                        | 37.29                         | 25.97                       | 56.00                        | 46.00                      | -18.71                      | -20.03                    | Pass   |
| 5P  | 7.4780             | 23.25                          | 11.68                        | 10.07                        | 33.32                         | 21.75                       | 60.00                        | 50.00                      | -26.68                      | -28.25                    | Pass   |
| 6P  | 16.0700            | 25.59                          | 13.31                        | 10.37                        | 35.96                         | 23.68                       | 60.00                        | 50.00                      | -24.04                      | -26.32                    | Pass   |

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

## 4 RADIATED EMISSION

### 4.1 TEST LIMIT

For unintentional device, according to §15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency         | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m ) | Remark     | Measurement<br>distance (m) |
|-------------------|-------------------------------------|--------------------|------------|-----------------------------|
| 0.009MHz-0.490MHz | 2400/F (kHz)                        | -                  | Quasi-peak | 300                         |
| 0.490MHz-1.705MHz | 24000/F (kHz)                       | -                  | Quasi-peak | 30                          |
| 1.705MHz-30MHz    | 30                                  | -                  | Quasi-peak | 30                          |
| 30MHz-88MHz       | 100                                 | 40.0               | Quasi-peak | 3                           |
| 88MHz-216MHz      | 150                                 | 43.5               | Quasi-peak | 3                           |
| 216MHz-960MHz     | 200                                 | 46.0               | Quasi-peak | 3                           |
| 960MHz-1GHz       | 500                                 | 54.0               | Quasi-peak | 3                           |
| Above 1GHz        | 500                                 | 54.0               | Average    | 3                           |
|                   |                                     | 74.0               | Peak       | 3                           |


Limit calculation and transfer to 3m distance as showed in the following table:

| Frequency<br>(MHz) | Limit<br>(dBuV/m)                   | Distance<br>(m) |
|--------------------|-------------------------------------|-----------------|
| 0.009-0.490        | $20\log(2400/F(KHz))+40\log(300/3)$ | 3               |
| 0.490-1.705        | $20\log(24000/F(KHz))+40\log(30/3)$ | 3               |
| 1.705-30.0         | 69.5                                | 3               |
| 30-88              | 40.0                                | 3               |
| 88-216             | 43.5                                | 3               |
| 216-960            | 46.0                                | 3               |
| Above 960          | 54.0                                | 3               |


For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

## 4.2 TEST SETUP


### 1. Radiated Emission Test-Up Frequency Below 30MHz

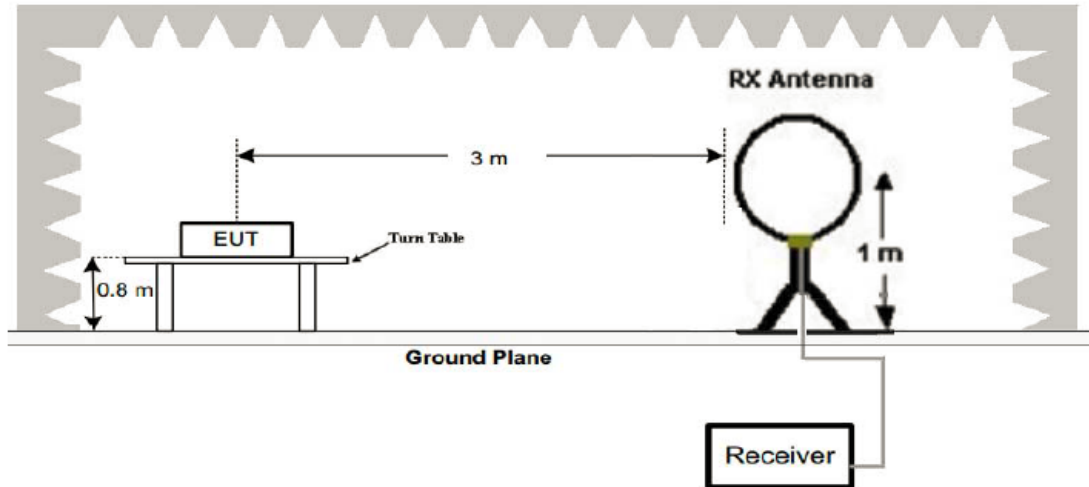

### 2. Radiated Emission Test-Up Frequency 30MHz~1GHz

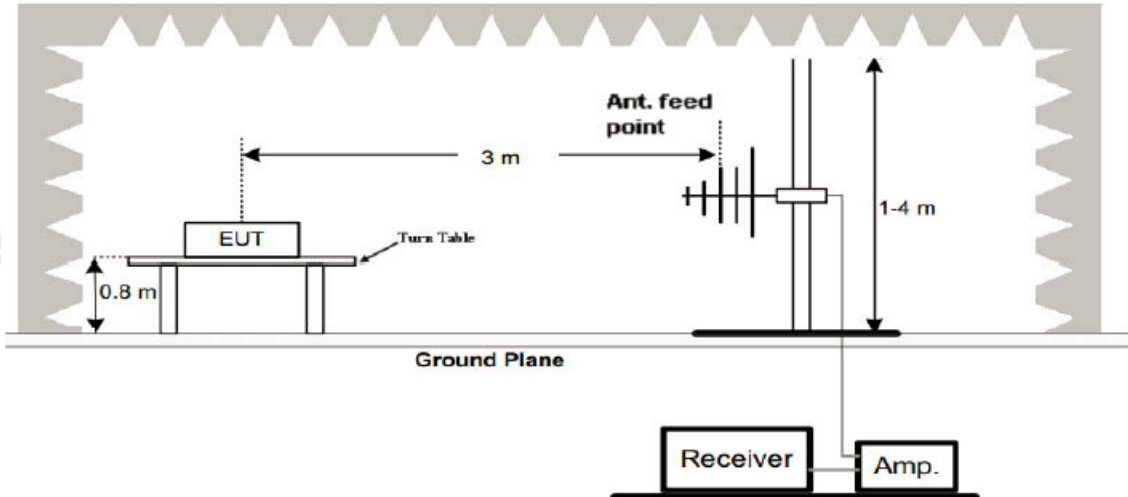

### 3. Radiated Emission Test-Up Frequency Above 1GHz

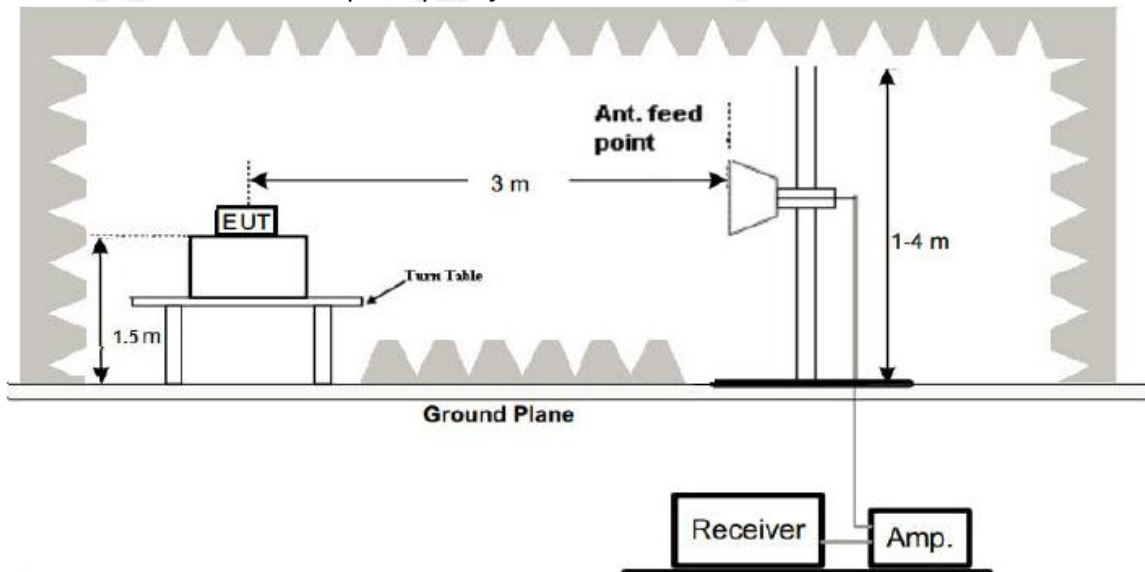

### 4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane.  
And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
  2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
  3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
  4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
  5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
  6. Repeat above procedures until the measurements for all frequencies are complete.
  7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).
- Note: For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.4 TEST RESULT


PASS

Remark:

1. All modes were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.

### Below 1GHz Test Results:


|               |                                      |                    |            |
|---------------|--------------------------------------|--------------------|------------|
| Temperature:  | 24°C                                 | Relative Humidity: | 48%        |
| Test Date:    | Jan. 28, 2022                        | Pressure:          | 1010hPa    |
| Test Voltage: | AC 120V, 60Hz                        | Phase:             | Horizontal |
| Test Mode:    | Transmitting mode of 802.11b 2412MHz |                    |            |

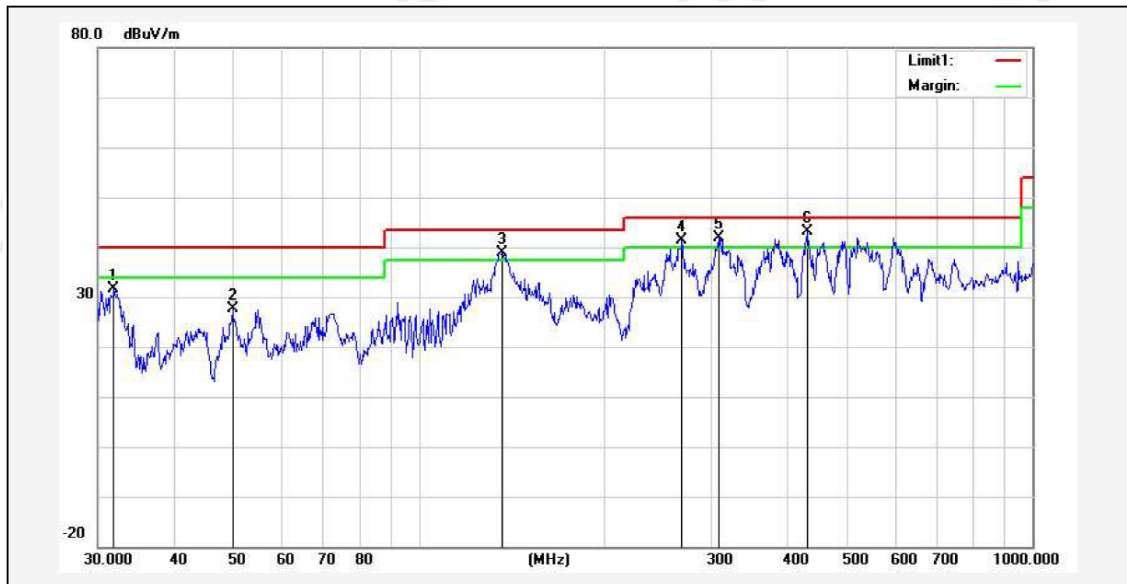

| No. | Frequency (MHz) | Reading (dBuV) | Correction factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (deg.) | Height (cm) | Remark |
|-----|-----------------|----------------|-------------------------|-----------------|----------------|-------------|---------------|-------------|--------|
| 1   | 31.8427         | 40.17          | -8.49                   | 31.68           | 40.00          | -8.32       | 50            | 100         | peak   |
| 2   | 49.7068         | 47.87          | -20.15                  | 27.72           | 40.00          | -12.28      | 60            | 100         | peak   |
| 3!  | 136.9391        | 54.85          | -16.02                  | 38.83           | 43.50          | -4.67       | 80            | 100         | peak   |
| 4!  | 268.4852        | 56.52          | -15.19                  | 41.33           | 46.00          | -4.67       | 100           | 100         | peak   |
| 5!  | 307.8312        | 56.72          | -14.74                  | 41.98           | 46.00          | -4.02       | 150           | 100         | peak   |
| 6*  | 429.5228        | 55.98          | -12.73                  | 43.25           | 46.00          | -2.75       | 180           | 100         | QP     |

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit  
Factor = Ant. Factor + Cable Loss – Pre-amplifier

|               |                                      |                    |          |
|---------------|--------------------------------------|--------------------|----------|
| Temperature:  | 24°C                                 | Relative Humidity: | 48%      |
| Test Date:    | Jan. 28, 2022                        | Pressure:          | 1010hPa  |
| Test Voltage: | AC 120V, 60Hz                        | Phase:             | Vertical |
| Test Mode:    | Transmitting mode of 802.11b 2412MHz |                    |          |

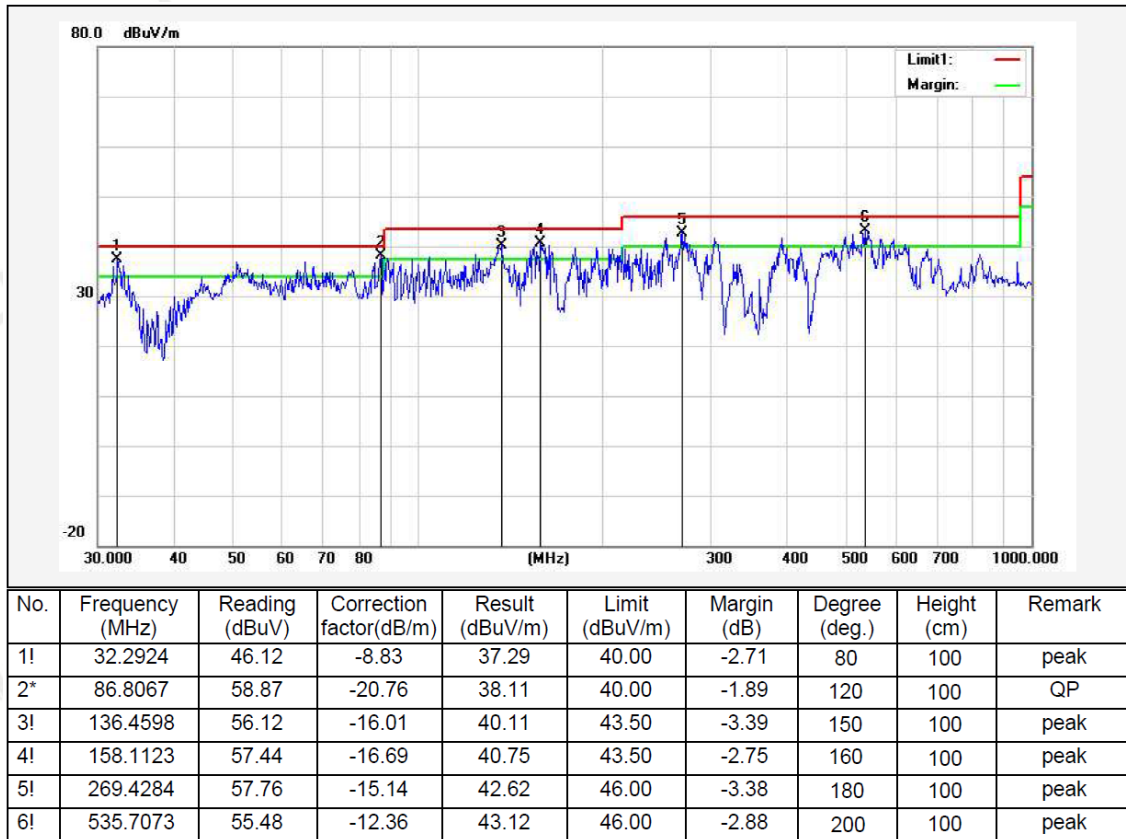

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit  
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, emission from 9kHz to 30MHz are more than 20dB below the limit, so it was not recorded in this report.
2. \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz.

### Above 1 GHz Test Results:

#### CH01 of 802.11b Mode (2412MHz):

##### Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824                                                                                          | 61.07                    | -3.64          | 57.43                      | 74                 | -16.57         | PK               |
| 4824                                                                                          | 50.13                    | -3.64          | 46.49                      | 54                 | -7.51          | AV               |
| 7236                                                                                          | 57.41                    | -0.95          | 56.46                      | 74                 | -17.54         | PK               |
| 7236                                                                                          | 46.79                    | -0.95          | 45.84                      | 54                 | -8.16          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

##### Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824                                                                                          | 60.75                    | -3.64          | 57.11                      | 74                 | -16.89         | PK               |
| 4824                                                                                          | 50.09                    | -3.64          | 46.45                      | 54                 | -7.55          | AV               |
| 7236                                                                                          | 57.20                    | -0.95          | 56.25                      | 74                 | -17.75         | PK               |
| 7236                                                                                          | 46.61                    | -0.95          | 45.66                      | 54                 | -8.34          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH06 of 802.11b Mode (2437MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 60.92                    | -3.51          | 57.41                      | 74                 | -16.59         | PK               |
| 4874                                                                                          | 50.03                    | -3.51          | 46.52                      | 54                 | -7.48          | AV               |
| 7311                                                                                          | 57.15                    | -0.82          | 56.33                      | 74                 | -17.67         | PK               |
| 7311                                                                                          | 46.60                    | -0.82          | 45.78                      | 54                 | -8.22          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 60.69                    | -3.51          | 57.18                      | 74                 | -16.82         | PK               |
| 4874                                                                                          | 49.75                    | -3.51          | 46.24                      | 54                 | -7.76          | AV               |
| 7311                                                                                          | 56.83                    | -0.82          | 56.01                      | 74                 | -17.99         | PK               |
| 7311                                                                                          | 46.57                    | -0.82          | 45.75                      | 54                 | -8.25          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH11 of 802.11b Mode (2462MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4924                                                                                          | 60.77                    | -3.43          | 57.34                      | 74                 | -16.66         | PK               |
| 4924                                                                                          | 49.83                    | -3.43          | 46.40                      | 54                 | -7.60          | AV               |
| 7386                                                                                          | 57.42                    | -0.75          | 56.67                      | 74                 | -17.33         | PK               |
| 7386                                                                                          | 46.55                    | -0.75          | 45.80                      | 54                 | -8.20          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4924                                                                                          | 61.03                    | -3.43          | 57.60                      | 74                 | -16.40         | PK               |
| 4924                                                                                          | 49.77                    | -3.43          | 46.34                      | 54                 | -7.66          | AV               |
| 7386                                                                                          | 56.85                    | -0.75          | 56.10                      | 74                 | -17.90         | PK               |
| 7386                                                                                          | 46.47                    | -0.75          | 45.72                      | 54                 | -8.28          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH01 of 802.11g Mode (2412MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824                                                                                          | 60.11                    | -3.64          | 56.47                      | 74                 | -17.53         | PK               |
| 4824                                                                                          | 50.12                    | -3.64          | 46.48                      | 54                 | -7.52          | AV               |
| 7236                                                                                          | 56.35                    | -0.95          | 55.40                      | 74                 | -18.60         | PK               |
| 7236                                                                                          | 46.52                    | -0.95          | 45.57                      | 54                 | -8.43          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824                                                                                          | 60.07                    | -3.64          | 56.43                      | 74                 | -17.57         | PK               |
| 4824                                                                                          | 50.10                    | -3.64          | 46.46                      | 54                 | -7.54          | AV               |
| 7236                                                                                          | 56.35                    | -0.95          | 55.40                      | 74                 | -18.60         | PK               |
| 7236                                                                                          | 46.40                    | -0.95          | 45.45                      | 54                 | -8.55          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH06 of 802.11g Mode (2437MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 60.16                    | -3.51          | 56.65                      | 74                 | -17.35         | PK               |
| 4874                                                                                          | 50.21                    | -3.51          | 46.70                      | 54                 | -7.30          | AV               |
| 7311                                                                                          | 56.19                    | -0.82          | 55.37                      | 74                 | -18.63         | PK               |
| 7311                                                                                          | 46.42                    | -0.82          | 45.60                      | 54                 | -8.40          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 60.02                    | -3.51          | 56.51                      | 74                 | -17.49         | PK               |
| 4874                                                                                          | 50.15                    | -3.51          | 46.64                      | 54                 | -7.36          | AV               |
| 7311                                                                                          | 56.27                    | -0.82          | 55.45                      | 74                 | -18.55         | PK               |
| 7311                                                                                          | 46.23                    | -0.82          | 45.41                      | 54                 | -8.59          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH11 of 802.11g Mode (2462MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4924                                                                                          | 59.97                    | -3.43          | 56.54                      | 74                 | -17.46         | PK               |
| 4924                                                                                          | 49.86                    | -3.43          | 46.43                      | 54                 | -7.57          | AV               |
| 7386                                                                                          | 56.31                    | -0.75          | 55.56                      | 74                 | -18.44         | PK               |
| 7386                                                                                          | 46.20                    | -0.75          | 45.45                      | 54                 | -8.55          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4924                                                                                          | 60.11                    | -3.43          | 56.68                      | 74                 | -17.32         | PK               |
| 4924                                                                                          | 49.87                    | -3.43          | 46.44                      | 54                 | -7.56          | AV               |
| 7386                                                                                          | 56.22                    | -0.75          | 55.47                      | 74                 | -18.53         | PK               |
| 7386                                                                                          | 46.33                    | -0.75          | 45.58                      | 54                 | -8.42          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH01 of 802.11n/HT20 Mode (2412MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824                                                                                          | 59.91                    | -3.64          | 56.27                      | 74                 | -17.73         | PK               |
| 4824                                                                                          | 49.87                    | -3.64          | 46.23                      | 54                 | -7.77          | AV               |
| 7236                                                                                          | 56.34                    | -0.95          | 55.39                      | 74                 | -18.61         | PK               |
| 7236                                                                                          | 46.52                    | -0.95          | 45.57                      | 54                 | -8.43          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4824                                                                                          | 60.12                    | -3.64          | 56.48                      | 74                 | -17.52         | PK               |
| 4824                                                                                          | 49.96                    | -3.64          | 46.32                      | 54                 | -7.68          | AV               |
| 7236                                                                                          | 56.22                    | -0.95          | 55.27                      | 74                 | -18.73         | PK               |
| 7236                                                                                          | 46.55                    | -0.95          | 45.60                      | 54                 | -8.40          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH06 of 802.11n/HT20 Mode (2437MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 59.85                    | -3.51          | 56.34                      | 74                 | -17.66         | PK               |
| 4874                                                                                          | 49.72                    | -3.51          | 46.21                      | 54                 | -7.79          | AV               |
| 7311                                                                                          | 56.23                    | -0.82          | 55.41                      | 74                 | -18.59         | PK               |
| 7311                                                                                          | 46.41                    | -0.82          | 45.59                      | 54                 | -8.41          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 59.91                    | -3.51          | 56.40                      | 74                 | -17.60         | PK               |
| 4874                                                                                          | 49.82                    | -3.51          | 46.31                      | 54                 | -7.69          | AV               |
| 7311                                                                                          | 56.17                    | -0.82          | 55.35                      | 74                 | -18.65         | PK               |
| 7311                                                                                          | 46.36                    | -0.82          | 45.54                      | 54                 | -8.46          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH11 of 802.11n/HT20 Mode (2462MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4924                                                                                          | 59.91                    | -3.43          | 56.48                      | 74                 | -17.52         | PK               |
| 4924                                                                                          | 49.89                    | -3.43          | 46.46                      | 54                 | -7.54          | AV               |
| 7386                                                                                          | 56.25                    | -0.75          | 55.50                      | 74                 | -18.50         | PK               |
| 7386                                                                                          | 46.37                    | -0.75          | 45.62                      | 54                 | -8.38          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4924                                                                                          | 59.77                    | -3.43          | 56.34                      | 74                 | -17.66         | PK               |
| 4924                                                                                          | 49.80                    | -3.43          | 46.37                      | 54                 | -7.63          | AV               |
| 7386                                                                                          | 56.42                    | -0.75          | 55.67                      | 74                 | -18.33         | PK               |
| 7386                                                                                          | 46.44                    | -0.75          | 45.69                      | 54                 | -8.31          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH03 of 802.11n/H40 Mode (2422MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4844                                                                                          | 60.05                    | -3.63          | 56.42                      | 74                 | -17.58         | PK               |
| 4844                                                                                          | 49.65                    | -3.63          | 46.02                      | 54                 | -7.98          | AV               |
| 7266                                                                                          | 56.10                    | -0.94          | 55.16                      | 74                 | -18.84         | PK               |
| 7266                                                                                          | 46.22                    | -0.94          | 45.28                      | 54                 | -8.72          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4844                                                                                          | 59.97                    | -3.63          | 56.34                      | 74                 | -17.66         | PK               |
| 4844                                                                                          | 49.67                    | -3.63          | 46.04                      | 54                 | -7.96          | AV               |
| 7266                                                                                          | 56.11                    | -0.94          | 55.17                      | 74                 | -18.83         | PK               |
| 7266                                                                                          | 46.28                    | -0.94          | 45.34                      | 54                 | -8.66          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

CH06 of 802.11n/H40 Mode (2437MHz):

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 59.97                    | -3.51          | 56.46                      | 74                 | -17.54         | PK               |
| 4874                                                                                          | 49.66                    | -3.51          | 46.15                      | 54                 | -7.85          | AV               |
| 7311                                                                                          | 56.17                    | -0.82          | 55.35                      | 74                 | -18.65         | PK               |
| 7311                                                                                          | 46.31                    | -0.82          | 45.49                      | 54                 | -8.51          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4874                                                                                          | 59.82                    | -3.51          | 56.31                      | 74                 | -17.69         | PK               |
| 4874                                                                                          | 49.59                    | -3.51          | 46.08                      | 54                 | -7.92          | AV               |
| 7311                                                                                          | 56.37                    | -0.82          | 55.55                      | 74                 | -18.45         | PK               |
| 7311                                                                                          | 46.18                    | -0.82          | 45.36                      | 54                 | -8.64          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

### CH09 of 802.11n/H40 Mode (2452MHz):

#### Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4904                                                                                          | 59.80                    | -3.43          | 56.37                      | 74                 | -17.63         | PK               |
| 4904                                                                                          | 49.56                    | -3.43          | 46.13                      | 54                 | -7.87          | AV               |
| 7356                                                                                          | 56.20                    | -0.75          | 55.45                      | 74                 | -18.55         | PK               |
| 7356                                                                                          | 46.27                    | -0.75          | 45.52                      | 54                 | -8.48          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

#### Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4904                                                                                          | 59.88                    | -3.43          | 56.45                      | 74                 | -17.55         | PK               |
| 4904                                                                                          | 49.60                    | -3.43          | 46.17                      | 54                 | -7.83          | AV               |
| 7356                                                                                          | 56.15                    | -0.75          | 55.40                      | 74                 | -18.60         | PK               |
| 7356                                                                                          | 46.17                    | -0.75          | 45.42                      | 54                 | -8.58          | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

#### Remark:

1. Measuring frequencies from 1 GHz to the 25 GHz.
2. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
3. \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
7. All modes of operation were investigated and the worst-case emissions are reported.

Operation Mode: CH01 of 802.11b Mode (2412MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.20                    | -5.81          | 51.39                      | 74                 | -22.61         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.77                    | -5.84          | 59.93                      | 74                 | -14.07         | PK               |
| 2390                                                                                          | 48.40                    | -5.84          | 42.56                      | 54                 | -11.44         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.14                    | -5.81          | 51.33                      | 74                 | -22.67         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.60                    | -5.84          | 59.76                      | 74                 | -14.24         | PK               |
| 2390                                                                                          | 48.37                    | -5.84          | 42.53                      | 54                 | -11.47         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Operation Mode: CH11 of 802.11b Mode (2462MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 56.88                    | -5.65          | 51.23                      | 74                 | -22.77         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 57.65                    | -5.72          | 51.93                      | 74                 | -22.07         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 57.20                    | -5.65          | 51.55                      | 74                 | -22.45         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 57.45                    | -5.72          | 51.73                      | 74                 | -22.27         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Operation Mode: CH01 of 802.11g Mode (2412MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.07                    | -5.81          | 51.26                      | 74                 | -22.74         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.60                    | -5.84          | 59.76                      | 74                 | -14.24         | PK               |
| 2390                                                                                          | 47.75                    | -5.84          | 41.91                      | 54                 | -12.09         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.30                    | -5.81          | 51.49                      | 74                 | -22.51         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.71                    | -5.84          | 59.87                      | 74                 | -14.13         | PK               |
| 2390                                                                                          | 47.68                    | -5.84          | 41.84                      | 54                 | -12.16         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Operation Mode: CH11 of 802.11g Mode (2462MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 56.67                    | -5.65          | 51.02                      | 74                 | -22.98         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 56.86                    | -5.72          | 51.14                      | 74                 | -22.86         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 56.70                    | -5.65          | 51.05                      | 74                 | -22.95         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 56.75                    | -5.72          | 51.03                      | 74                 | -22.97         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Operation Mode: CH01 of 802.11n/HT20 Mode (2412MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.05                    | -5.81          | 51.24                      | 74                 | -22.76         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.77                    | -5.84          | 59.93                      | 74                 | -14.07         | PK               |
| 2390                                                                                          | 47.75                    | -5.84          | 41.91                      | 54                 | -12.09         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.30                    | -5.81          | 51.49                      | 74                 | -22.51         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.80                    | -5.84          | 59.96                      | 74                 | -14.04         | PK               |
| 2390                                                                                          | 47.77                    | -5.84          | 41.93                      | 54                 | -12.07         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Operation Mode: CH11 of 802.11n/HT20 Mode (2462MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 56.85                    | -5.65          | 51.20                      | 74                 | -22.80         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 56.80                    | -5.72          | 51.08                      | 74                 | -22.92         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 57.10                    | -5.65          | 51.45                      | 74                 | -22.55         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 57.21                    | -5.72          | 51.49                      | 74                 | -22.51         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

## CH03 of 802.11n/H40 Mode (2422MHz)

## Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.11                    | -5.81          | 51.30                      | 74                 | -22.70         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.69                    | -5.84          | 59.85                      | 74                 | -14.15         | PK               |
| 2390                                                                                          | 47.58                    | -5.84          | 41.74                      | 54                 | -12.26         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

## Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310                                                                                          | 57.15                    | -5.81          | 51.34                      | 74                 | -22.66         | PK               |
| 2310                                                                                          | /                        | -5.81          | /                          | 54                 | /              | AV               |
| 2390                                                                                          | 65.57                    | -5.84          | 59.73                      | 74                 | -14.27         | PK               |
| 2390                                                                                          | 47.66                    | -5.84          | 41.82                      | 54                 | -12.18         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

## CH09 of 802.11n/H40 Mode (2452MHz)

## Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 57.08                    | -5.65          | 51.43                      | 74                 | -22.57         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 57.12                    | -5.72          | 51.40                      | 74                 | -22.60         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

## Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2483.5                                                                                        | 56.89                    | -5.65          | 51.24                      | 74                 | -22.76         | PK               |
| 2483.5                                                                                        | /                        | -5.65          | /                          | 54                 | /              | AV               |
| 2500                                                                                          | 56.90                    | -5.72          | 51.18                      | 74                 | -22.82         | PK               |
| 2500                                                                                          | /                        | -5.72          | /                          | 54                 | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |                  |

## 5 OCCUPIED BANDWIDTH

### 5.1 TEST LIMIT

| FCC Part15(15.247), Subpart C |           |                                         |                       |        |
|-------------------------------|-----------|-----------------------------------------|-----------------------|--------|
| Section                       | Test Item | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)                  | Bandwidth | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

### 5.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=100kHz, VBW=300kHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

### 5.3 EQUIPMENT USED


Same as Radiated Emission Measurement.

### 5.4 TEST RESULT


PASS

| TX 802.11b Mode |                     |                          |        |
|-----------------|---------------------|--------------------------|--------|
| Frequency (MHz) | 6dB Bandwidth (MHz) | Channel Separation (kHz) | Result |
| 2412            | 8.071               | $\geq 500$               | PASS   |
| 2437            | 8.088               | $\geq 500$               | PASS   |
| 2462            | 8.067               | $\geq 500$               | PASS   |


CH01: 2412MHz

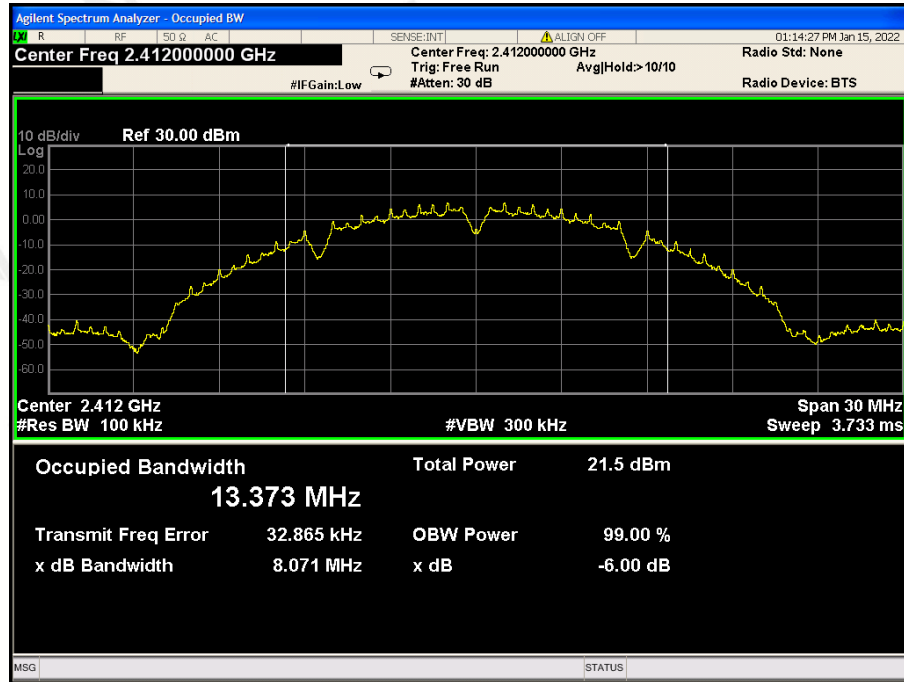

CH06: 2437MHz

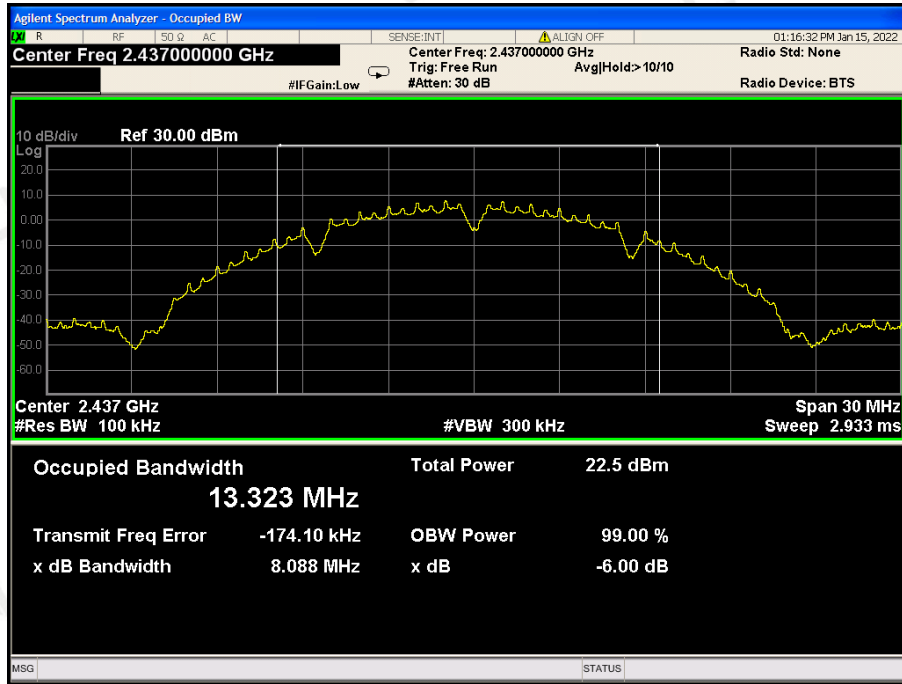


CH11: 2462MHz

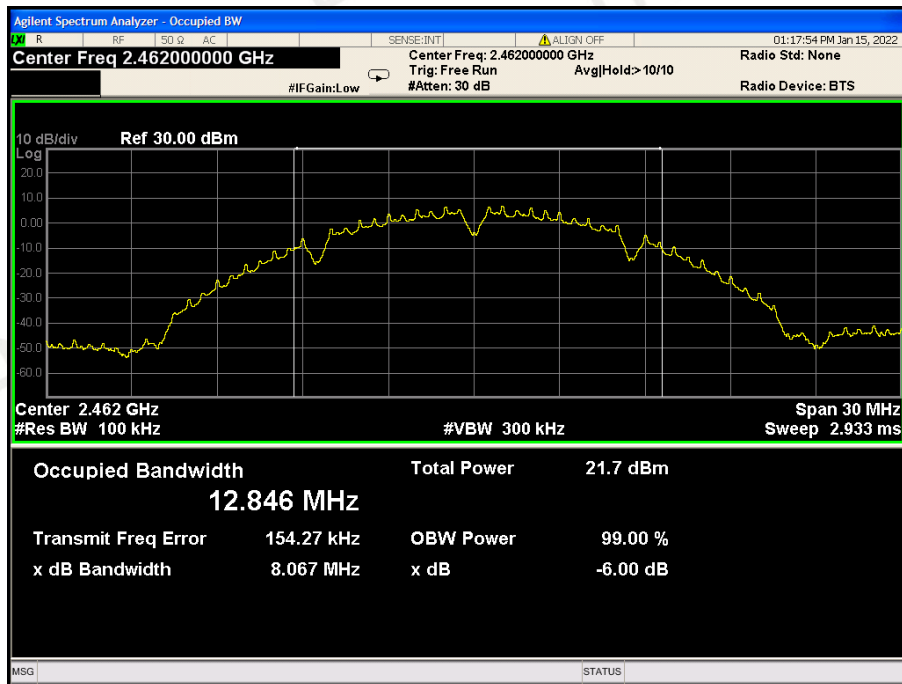


| TX 802.11g Mode |                     |                          |        |
|-----------------|---------------------|--------------------------|--------|
| Frequency (MHz) | 6dB Bandwidth (MHz) | Channel Separation (kHz) | Result |
| 2412            | 15.35               | $\geq 500$               | PASS   |
| 2437            | 15.35               | $\geq 500$               | PASS   |
| 2462            | 15.14               | $\geq 500$               | PASS   |


CH01: 2412MHz

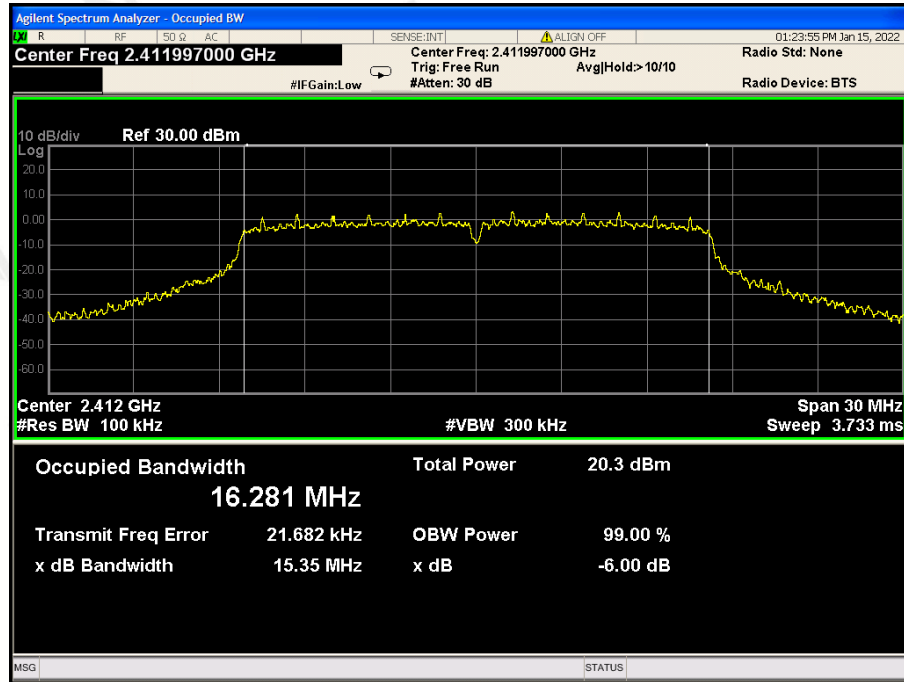

CH06: 2437MHz

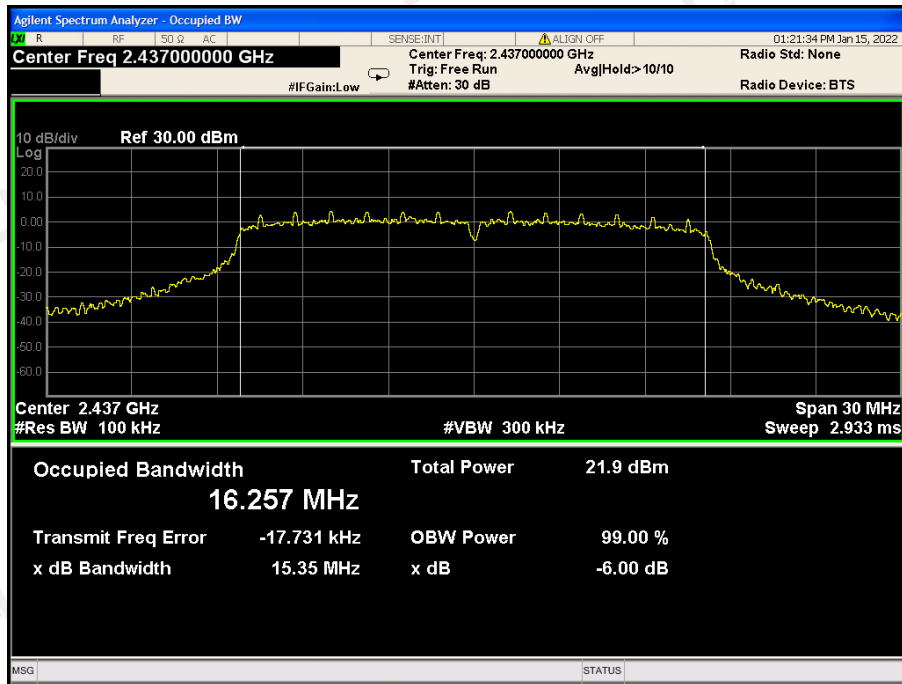


CH11: 2462MHz

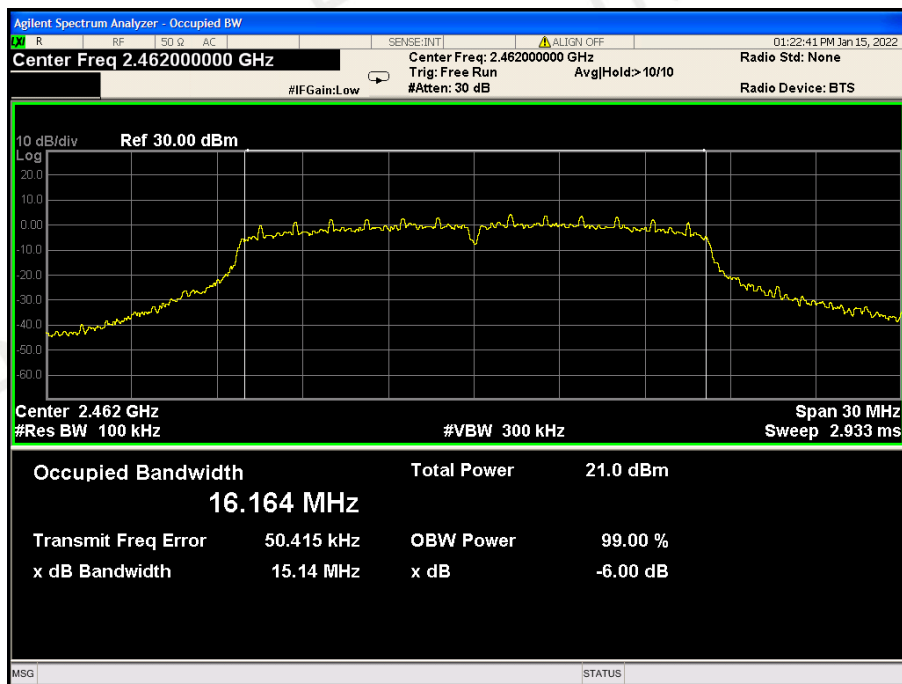


| TX 802.11n/HT20 Mode |                     |                          |        |
|----------------------|---------------------|--------------------------|--------|
| Frequency (MHz)      | 6dB Bandwidth (MHz) | Channel Separation (kHz) | Result |
| 2412                 | 15.45               | $\geq 500$               | PASS   |
| 2437                 | 15.47               | $\geq 500$               | PASS   |
| 2462                 | 15.13               | $\geq 500$               | PASS   |


CH01: 2412MHz

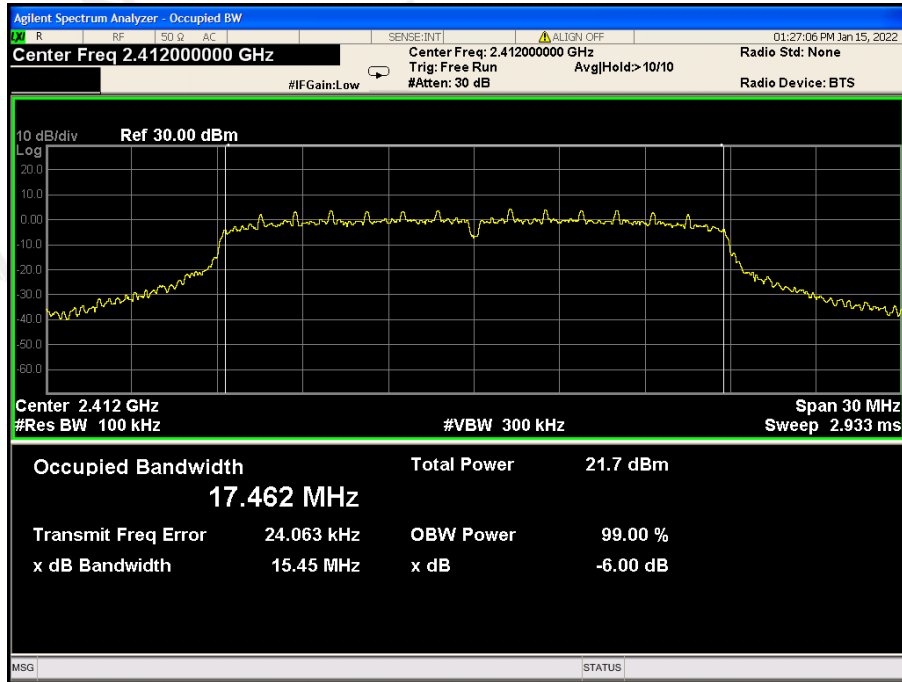

CH06: 2437MHz

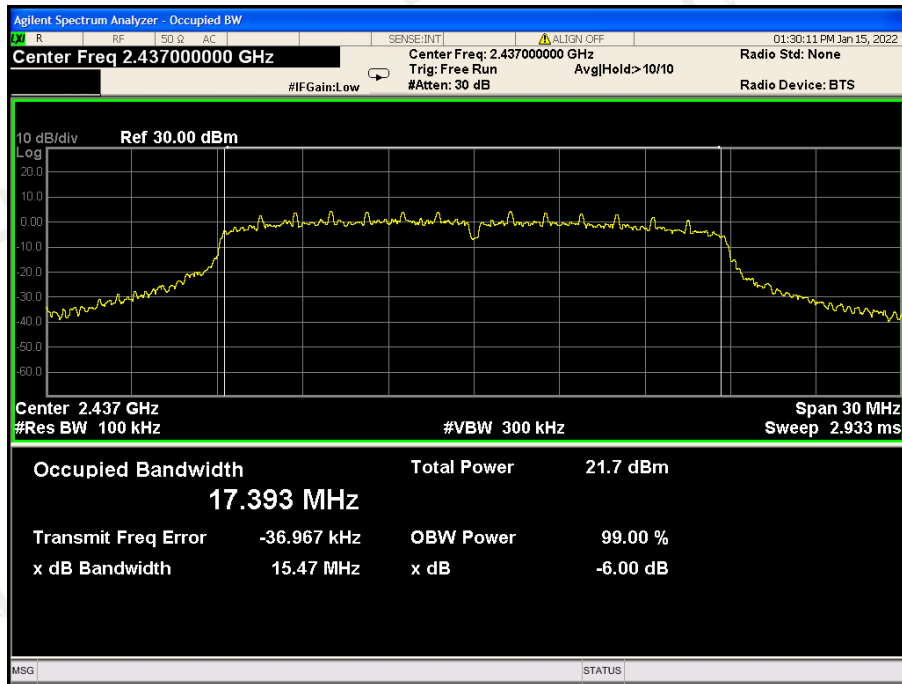


CH11: 2462MHz

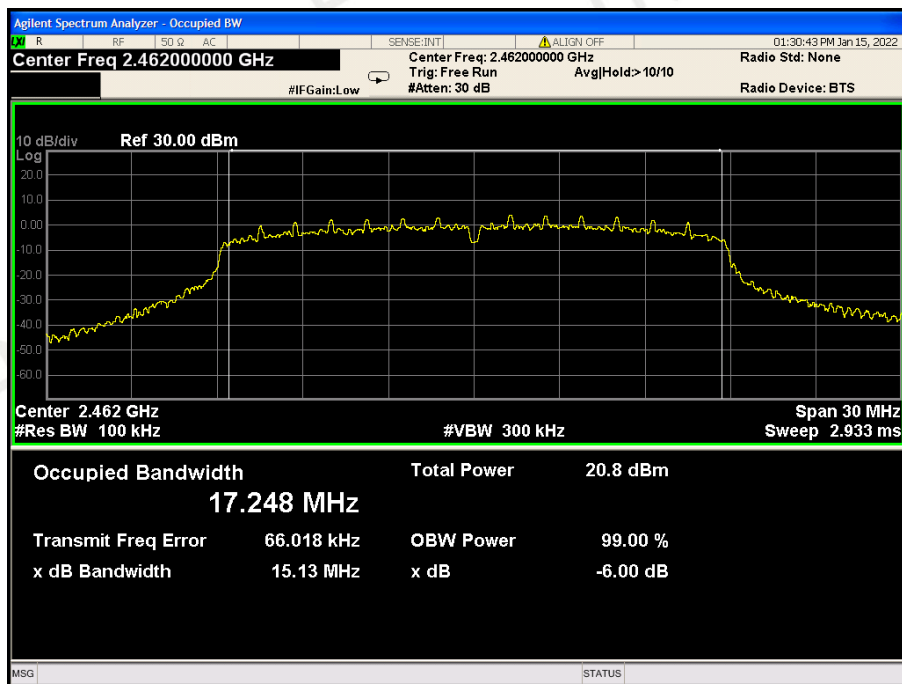


| TX 802.11n/HT40 Mode |                     |                          |        |
|----------------------|---------------------|--------------------------|--------|
| Frequency (MHz)      | 6dB Bandwidth (MHz) | Channel Separation (kHz) | Result |
| 2422                 | 35.12               | $\geq 500$               | PASS   |
| 2437                 | 35.14               | $\geq 500$               | PASS   |
| 2452                 | 35.14               | $\geq 500$               | PASS   |


CH03: 2422MHz

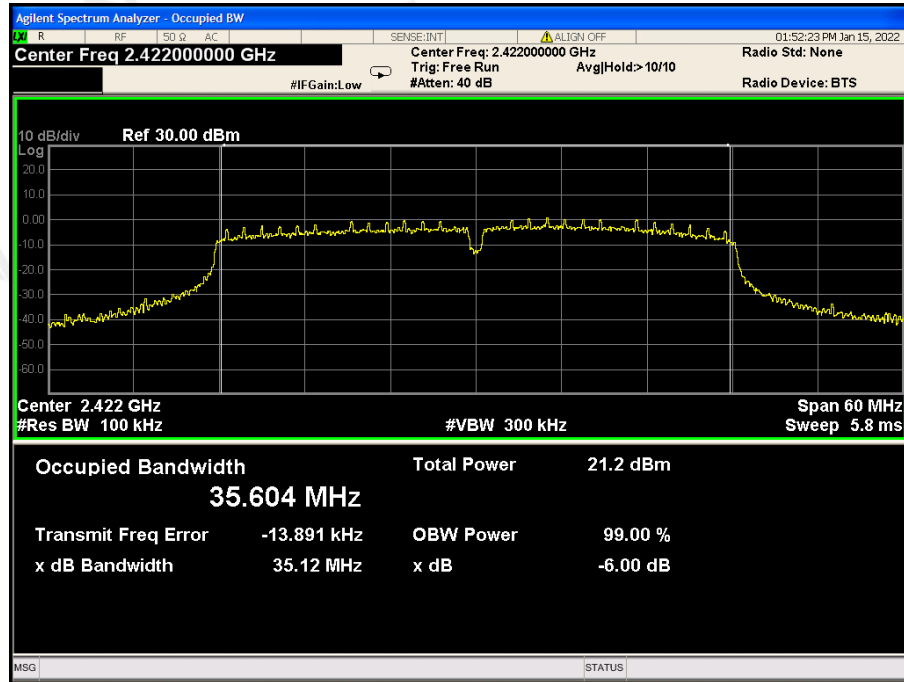

CH06: 2437MHz

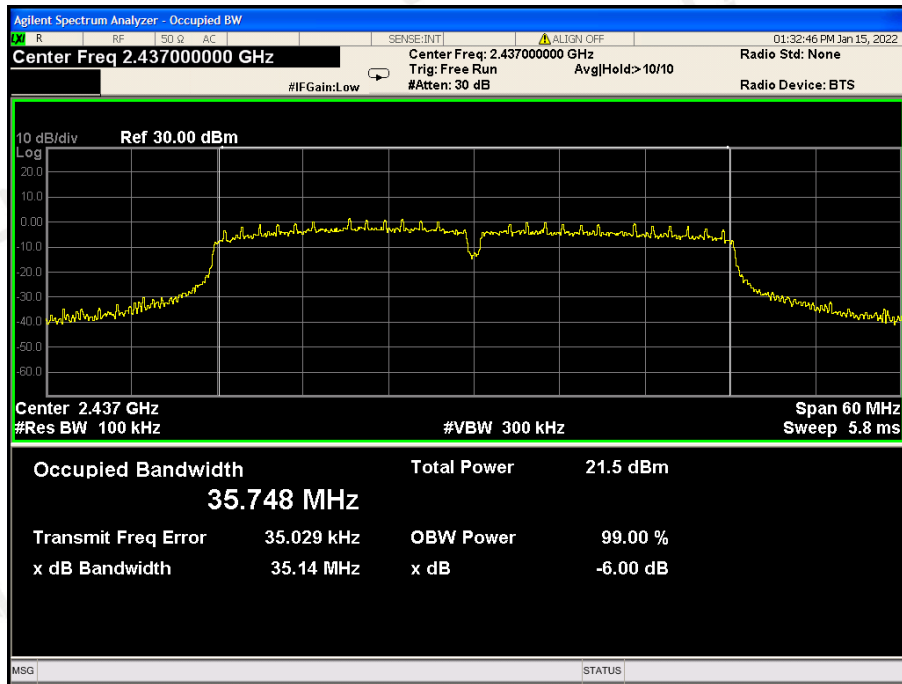

CH09: 2452MHz

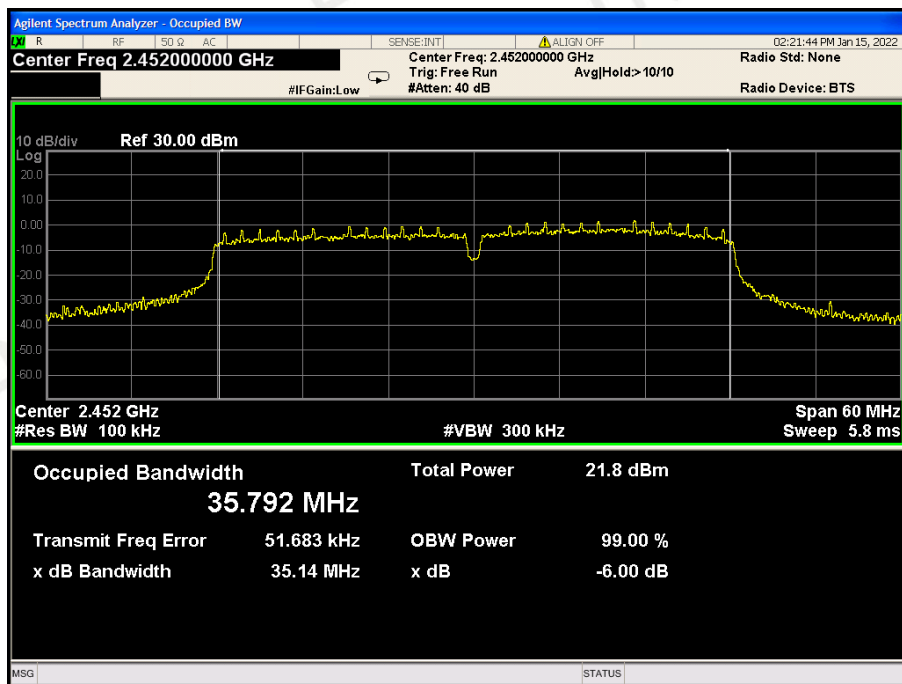

## 6 POWER SPECTRAL DENSITY

### 6.1 TEST LIMIT

| FCC Part15(15.247), Subpart C |                        |                     |                       |        |
|-------------------------------|------------------------|---------------------|-----------------------|--------|
| Section                       | Test Item              | Limit               | Frequency Range (MHz) | Result |
| 15.247                        | Power Spectral Density | 8 dBm (in any 3kHz) | 2400-2483.5           | PASS   |

### 6.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=3kHz, VBW=10kHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

### 6.3 EQUIPMENT USED


Same as Radiated Emission Measurement.

### 6.4 TEST RESULT


PASS

| TX 802.11b Mode |                          |                  |        |
|-----------------|--------------------------|------------------|--------|
| Frequency (MHz) | Power Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| 2412            | 7.229                    | 8                | PASS   |
| 2437            | 7.273                    | 8                | PASS   |
| 2462            | 6.695                    | 8                | PASS   |


CH01: 2412MHz

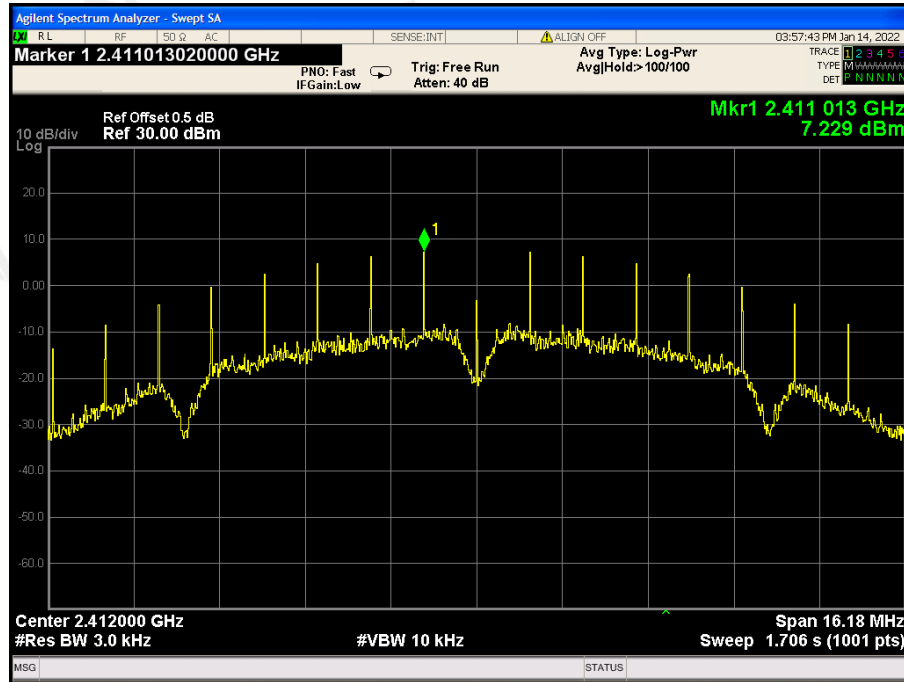

CH06: 2437MHz

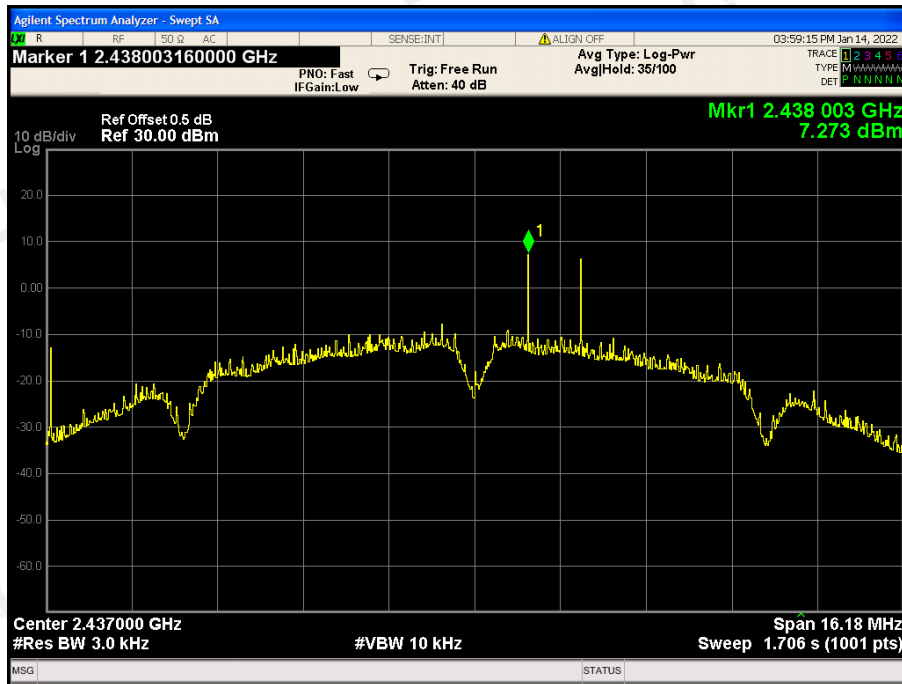


CH11: 2462MHz

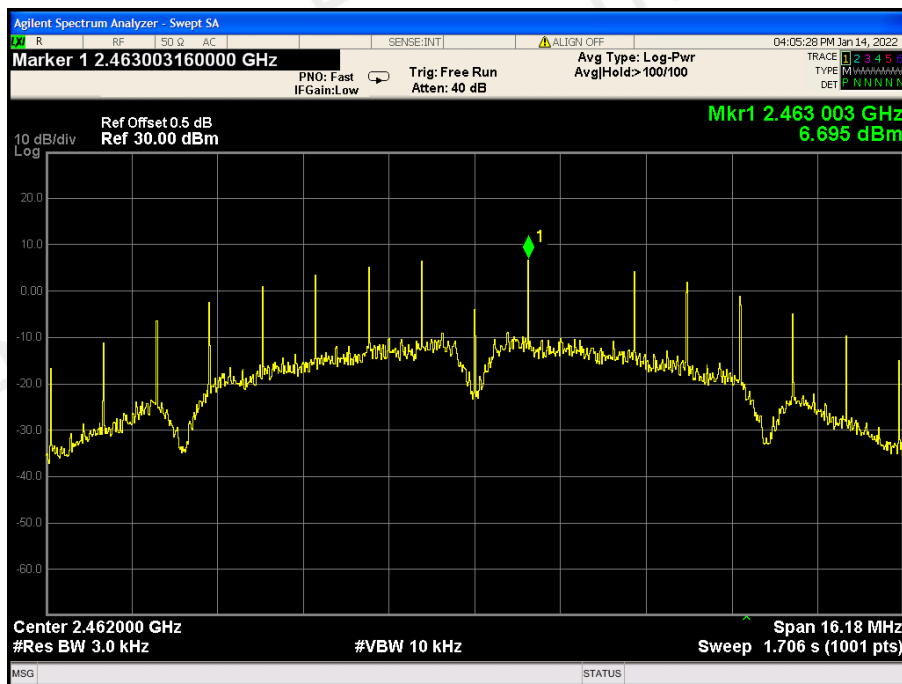


| TX 802.11g Mode |                          |                  |        |
|-----------------|--------------------------|------------------|--------|
| Frequency (MHz) | Power Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| 2412            | -11.943                  | 8                | PASS   |
| 2437            | -11.223                  | 8                | PASS   |
| 2462            | -13.269                  | 8                | PASS   |


CH01: 2412MHz

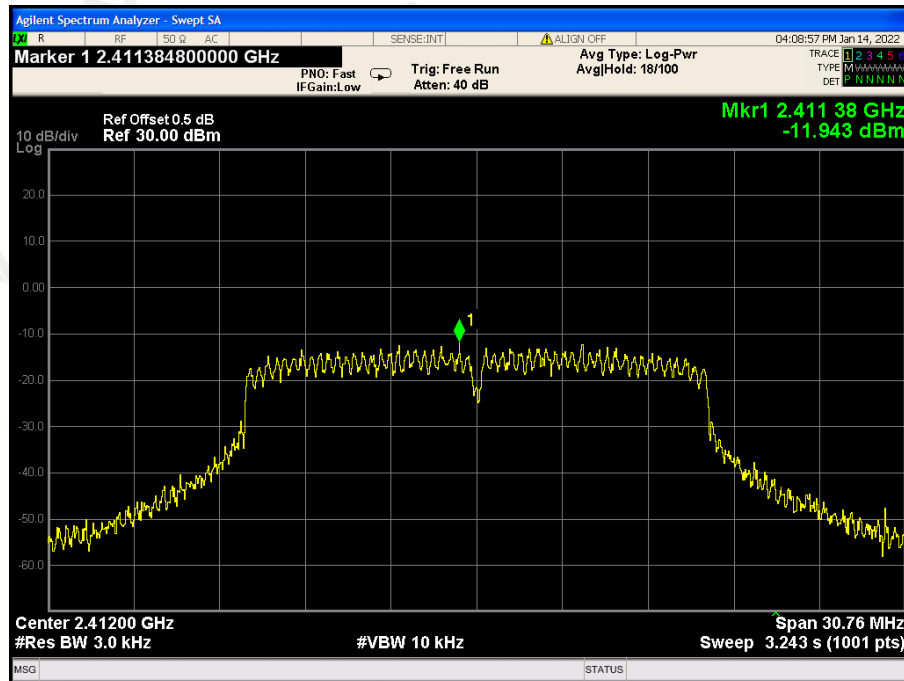

CH06: 2437MHz

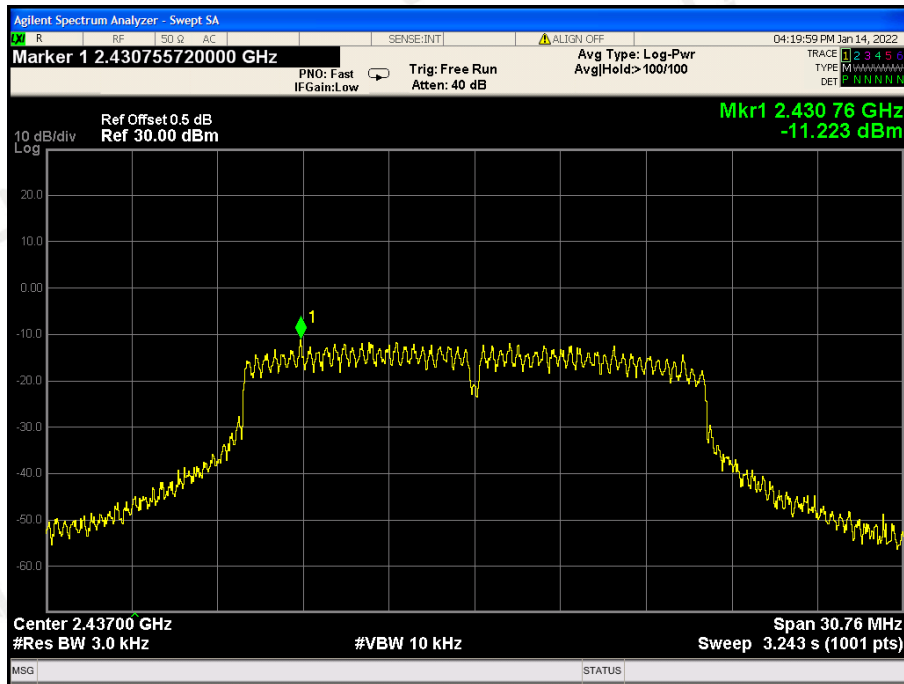


CH11: 2462MHz

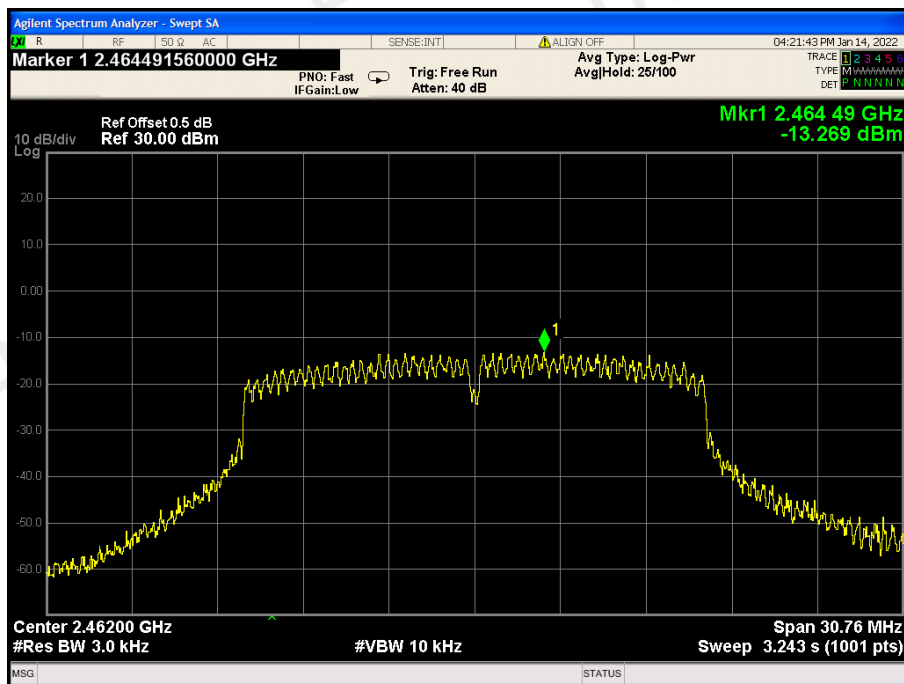


| TX 802.11n/HT20 Mode |                          |                  |        |
|----------------------|--------------------------|------------------|--------|
| Frequency (MHz)      | Power Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| 2412                 | -12.078                  | 8                | PASS   |
| 2437                 | -11.686                  | 8                | PASS   |
| 2462                 | -12.576                  | 8                | PASS   |


CH01: 2412MHz

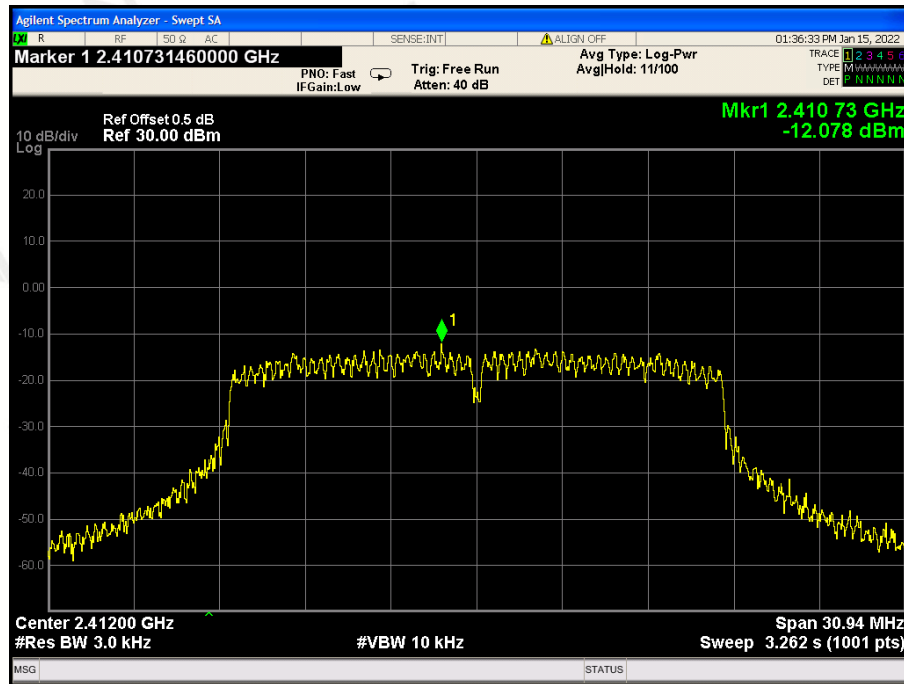

CH06: 2437MHz

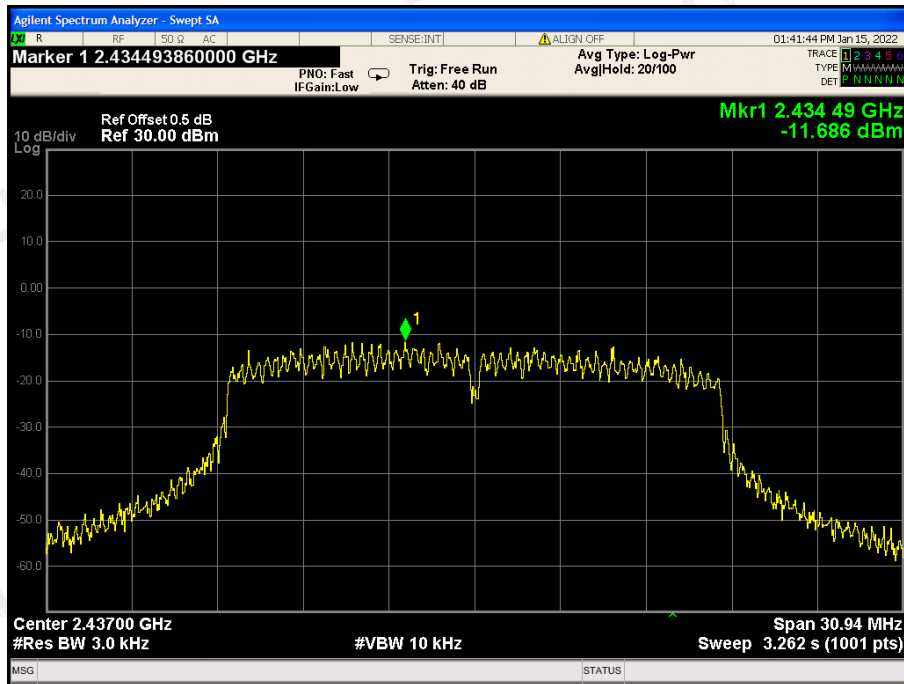


CH11: 2462MHz

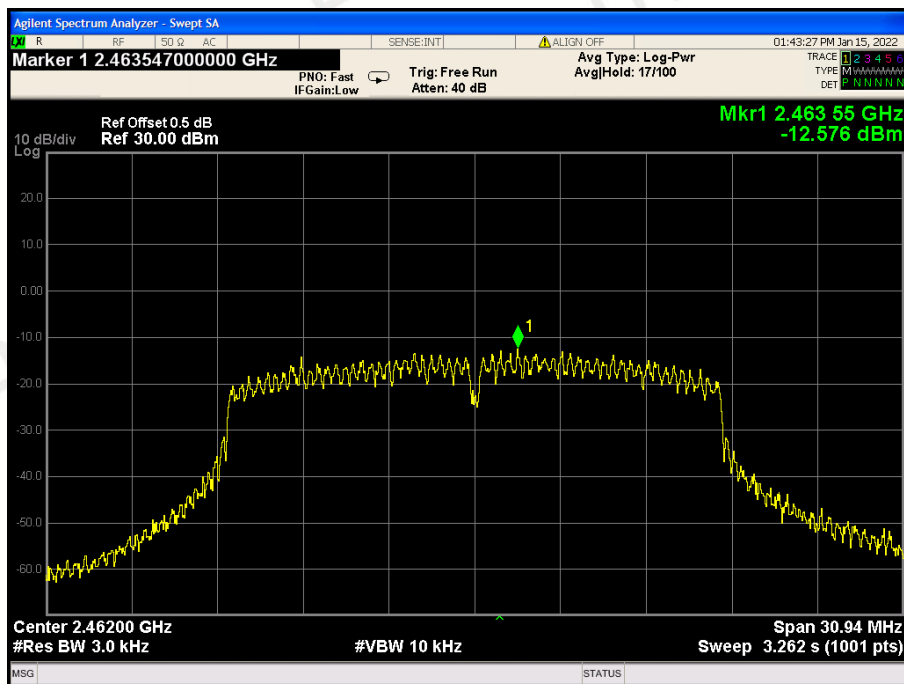


| TX 802.11n/HT40 Mode |                          |                  |        |
|----------------------|--------------------------|------------------|--------|
| Frequency (MHz)      | Power Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| 2422                 | -13.696                  | 8                | PASS   |
| 2437                 | -14.660                  | 8                | PASS   |
| 2452                 | -13.133                  | 8                | PASS   |


CH03: 2422MHz

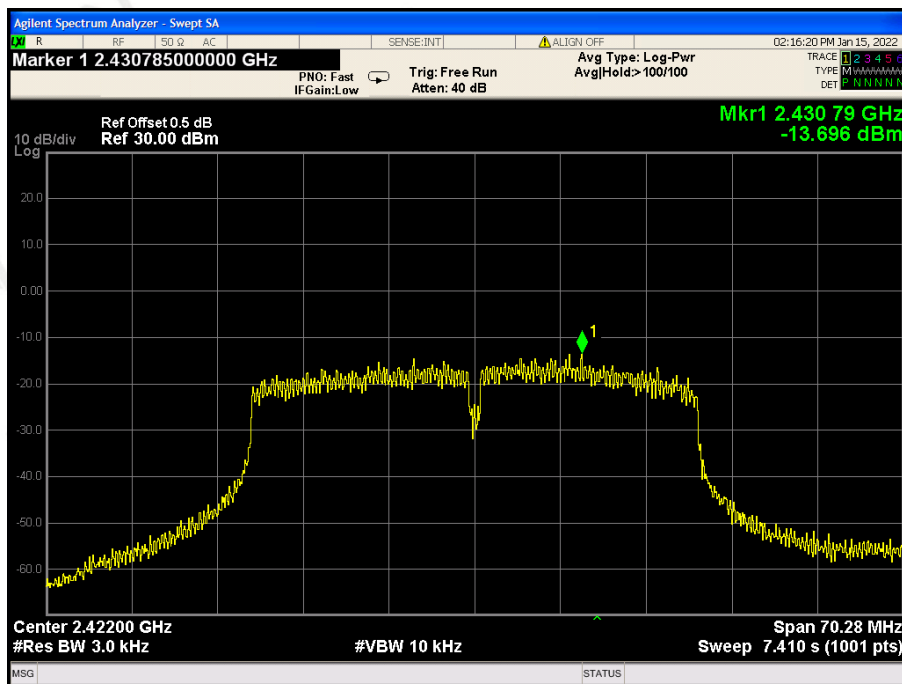

CH06: 2437MHz

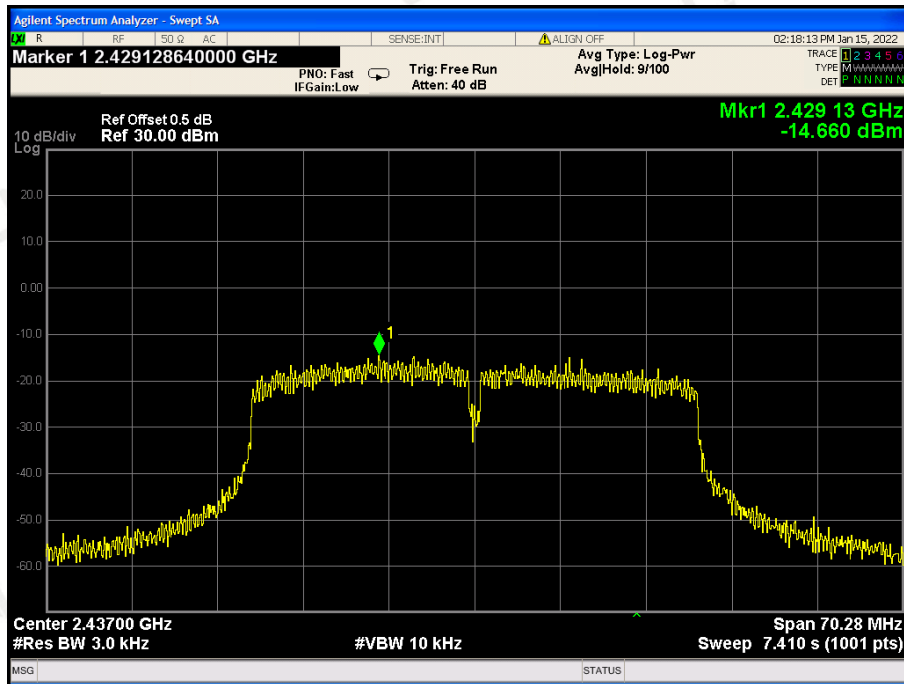

CH09: 2452MHz

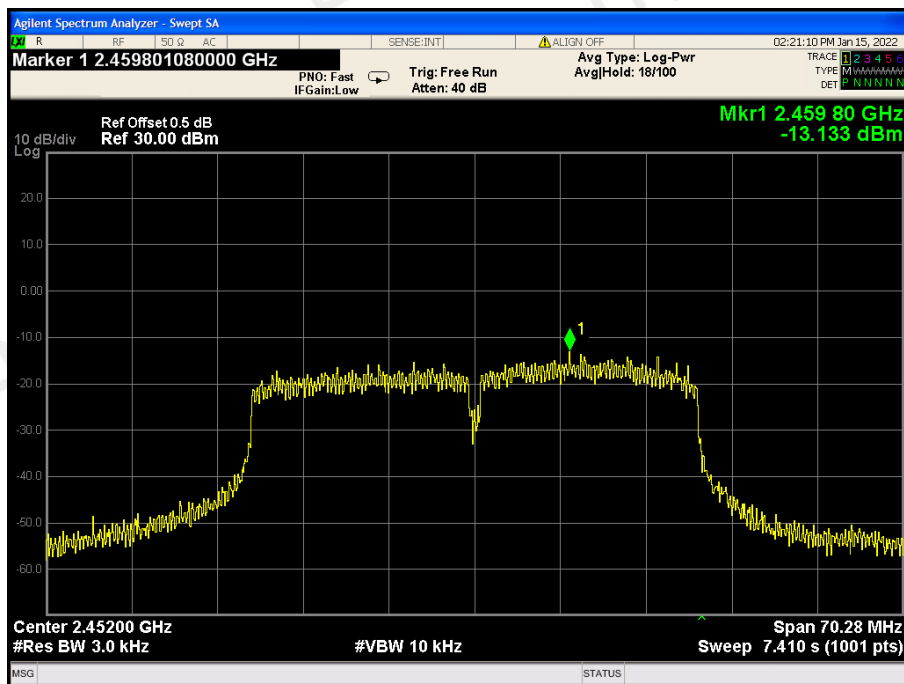

## 7 PEAK OUTPUT POWER

### 7.1 TEST LIMIT

| FCC Part15(15.247), Subpart C |                   |                 |                       |        |
|-------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                       | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                  | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

### 7.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The EUT was directly connected to the Power meter.

### 7.3 EQUIPMENT USED

Same as Radiated Emission Measurement.

### 7.4 TEST RESULT

PASS


| Test Mode    | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) | LIMIT (dBm) |
|--------------|-----------------|-------------------------------------------|-------------|
| 802.11b      | 2412            | 12.50                                     | 30          |
|              | 2437            | 12.36                                     | 30          |
|              | 2462            | 12.24                                     | 30          |
| 802.11g      | 2412            | 12.07                                     | 30          |
|              | 2437            | 12.10                                     | 30          |
|              | 2462            | 12.05                                     | 30          |
| 802.11n/HT20 | 2412            | 11.26                                     | 30          |
|              | 2437            | 11.17                                     | 30          |
|              | 2462            | 11.15                                     | 30          |
| 802.11n/HT40 | 2422            | 10.35                                     | 30          |
|              | 2437            | 10.33                                     | 30          |
|              | 2452            | 10.40                                     | 30          |

## 8 OUT OF BAND EMISSIONS

### 8.1 TEST LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 8.2 TEST SETUP

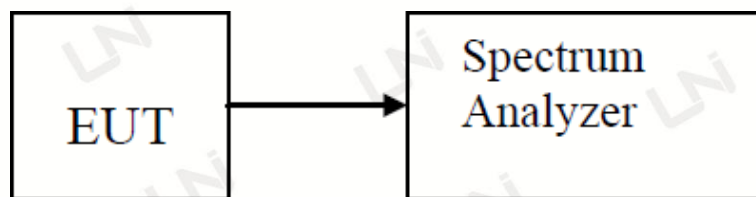

### 8.3 TEST PROCEDURE



1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100kHz, VBW=300kHz.
4. Set detected by the spectrum analyzer with peak detector.


### 8.4 TEST RESULT

PASS


TX 802.11b Mode:



CH01: 2412MHz

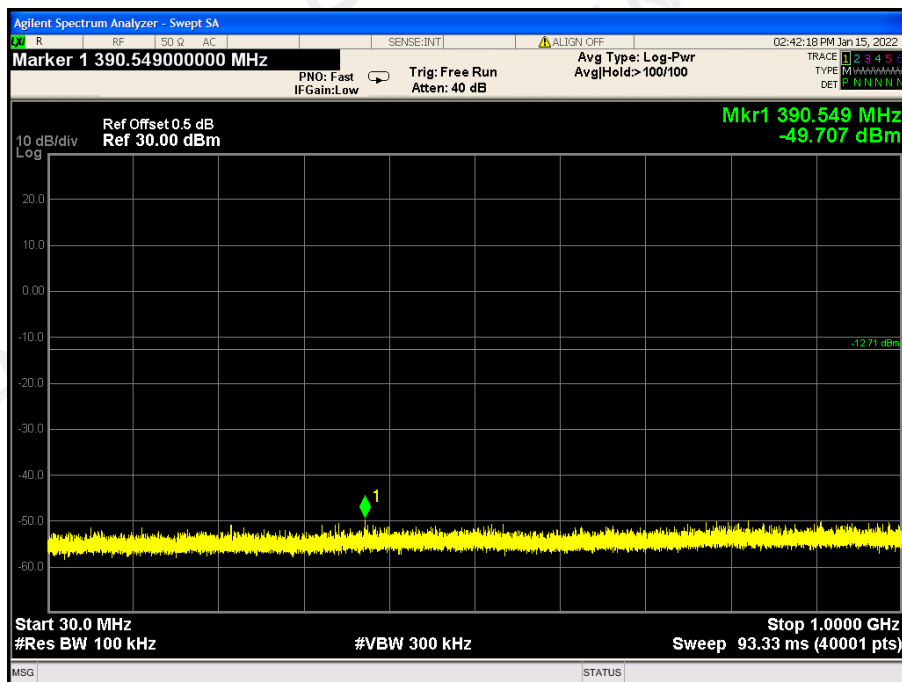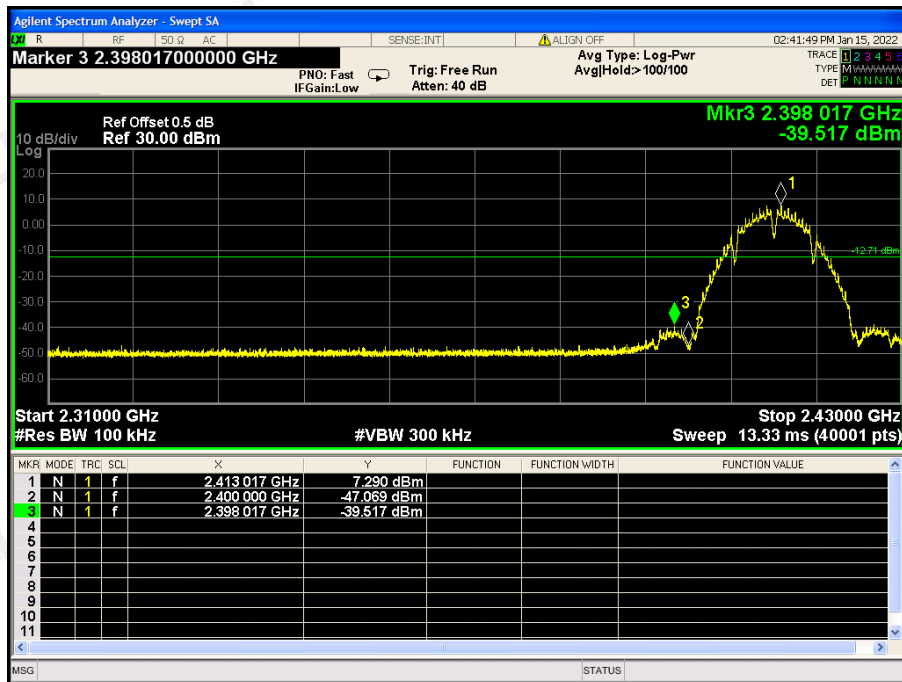


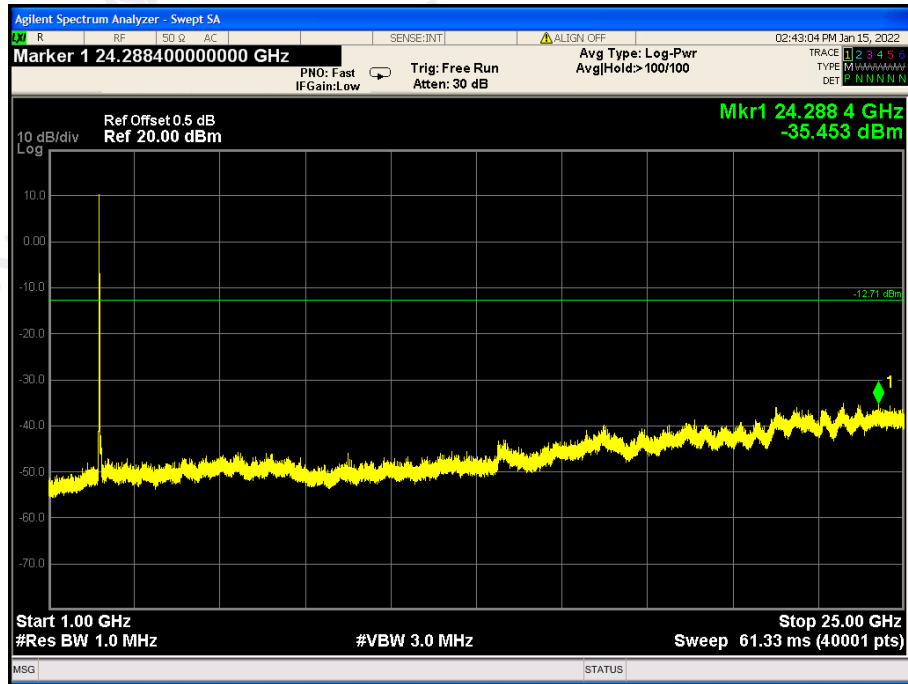



CH06: 2437MHz

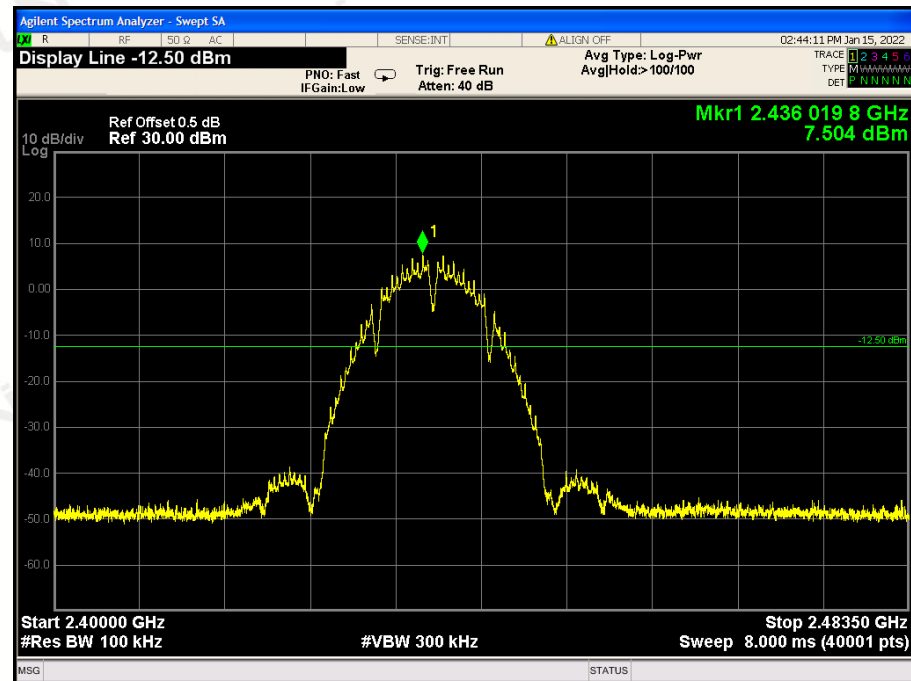

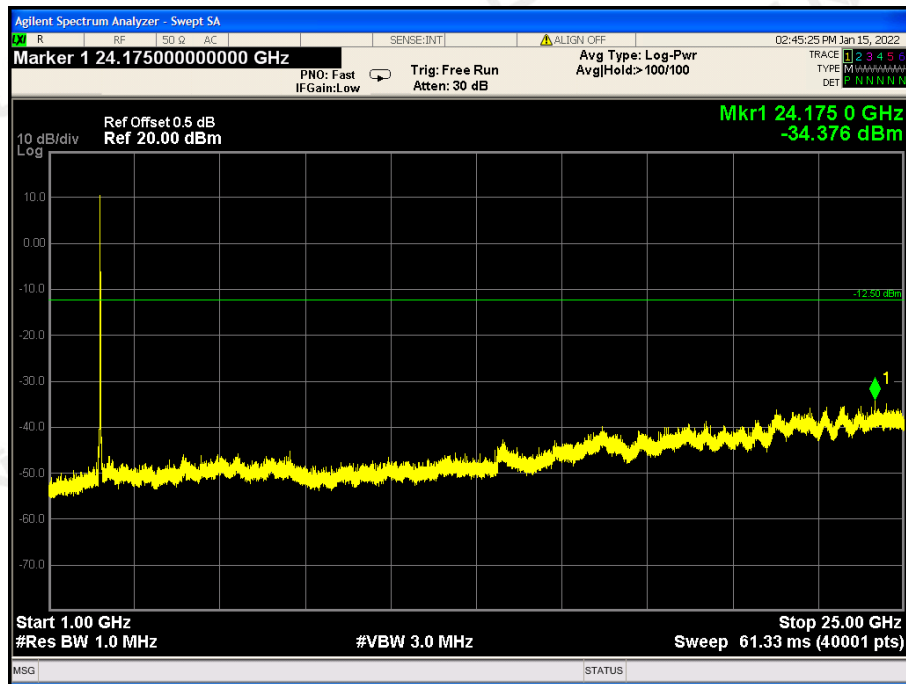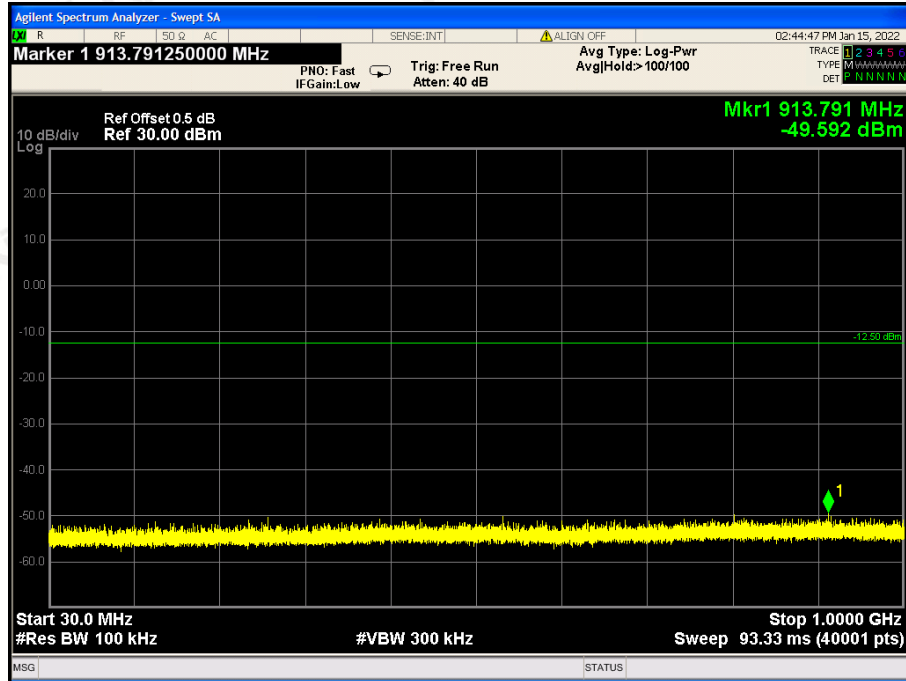


CH11: 2462MHz

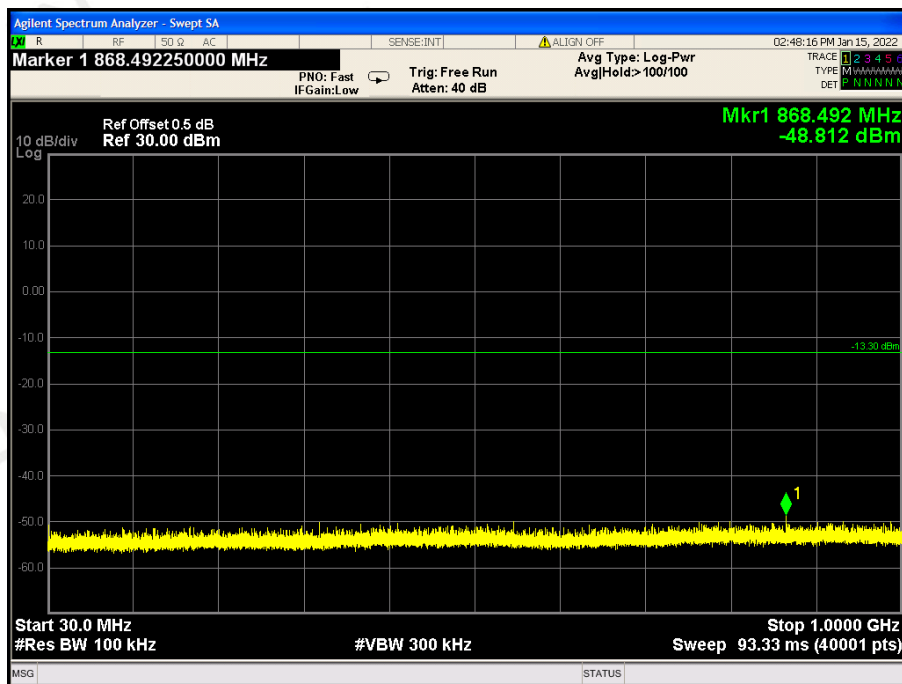
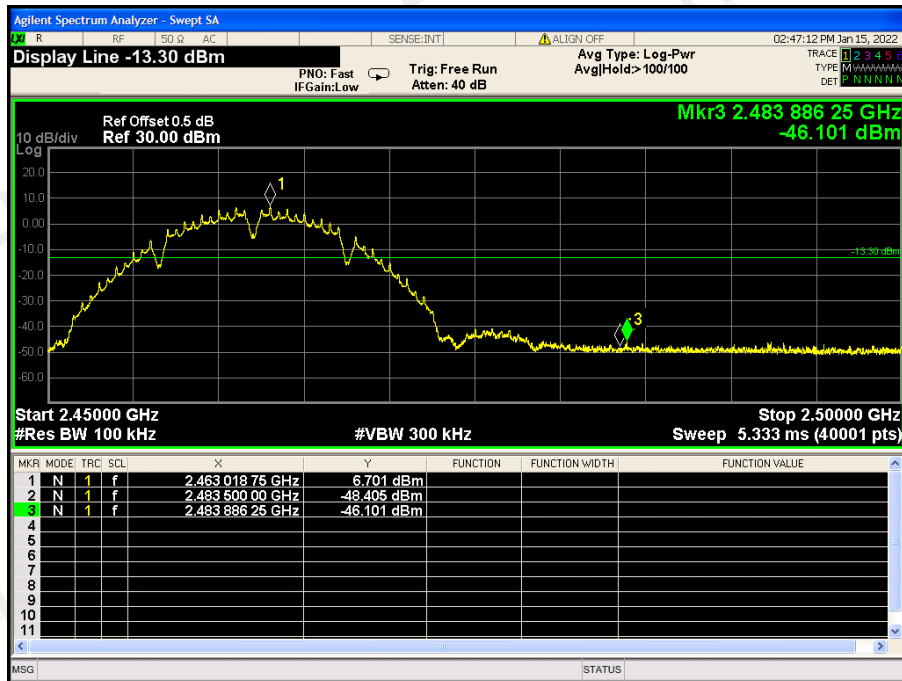


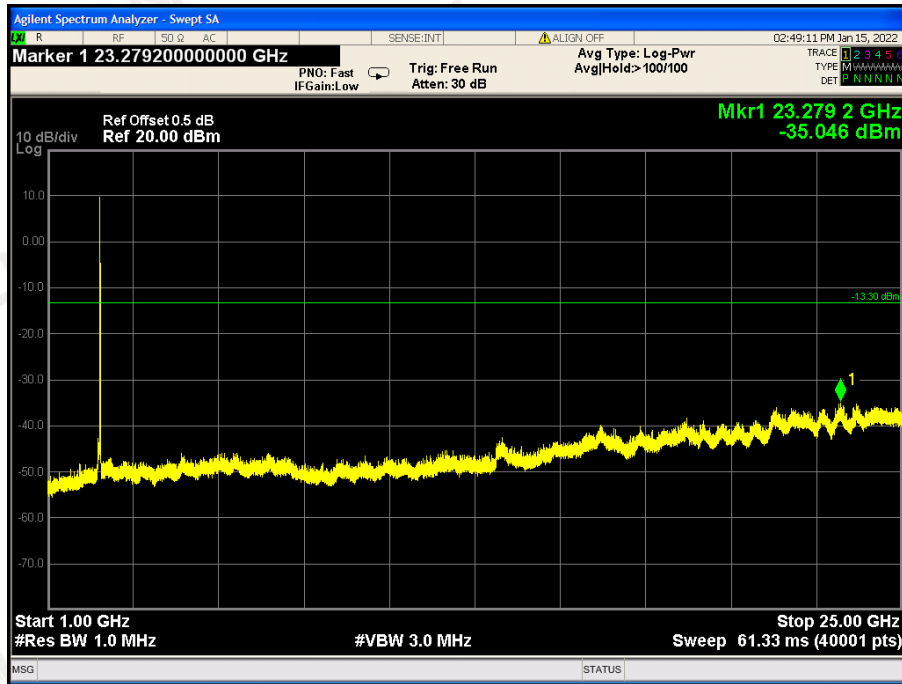



TX 802.11g Mode:


CH01: 2412MHz

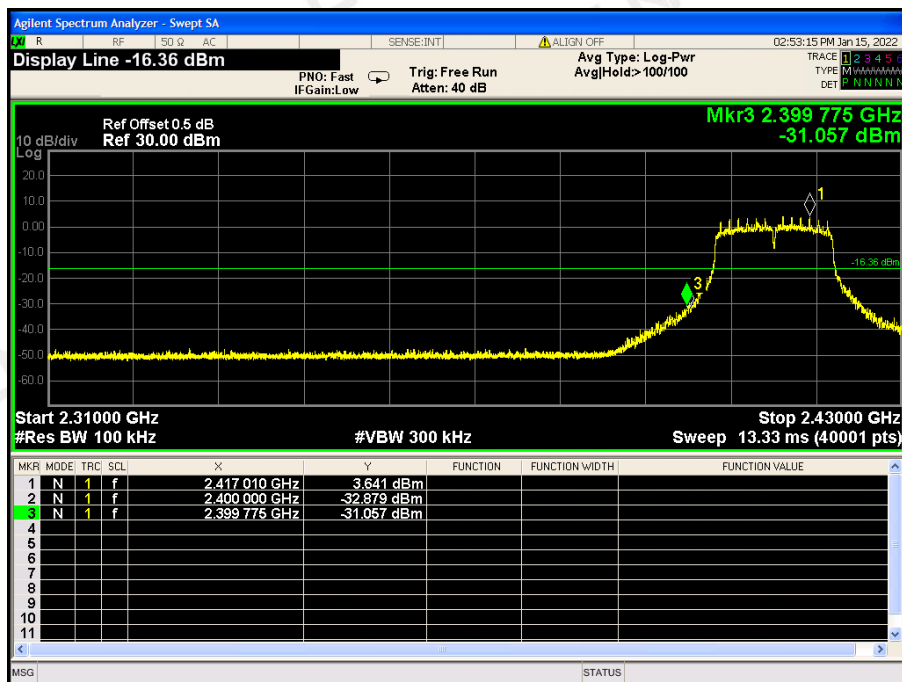

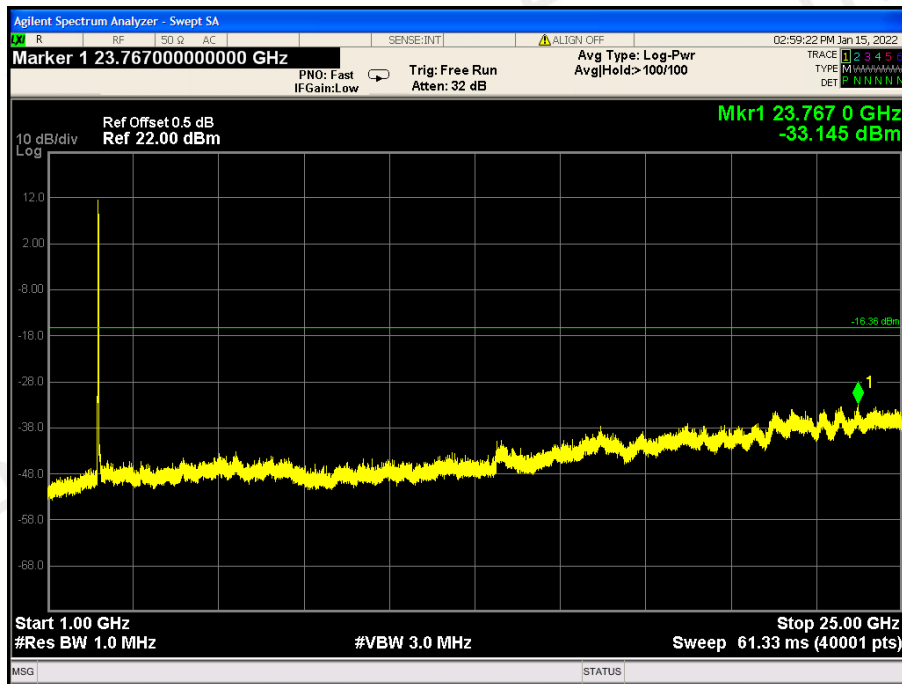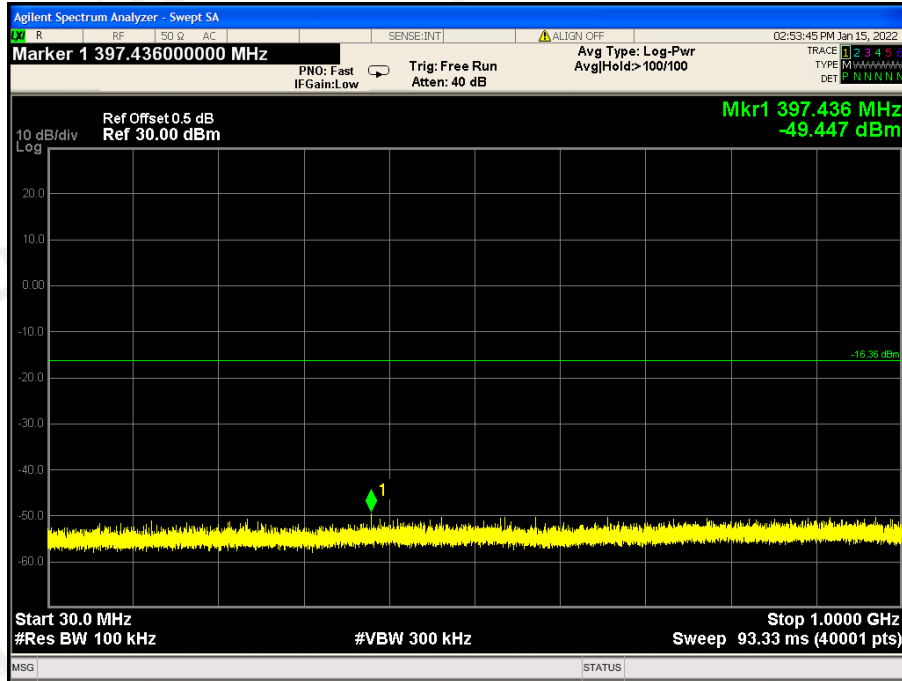




CH06: 2437MHz

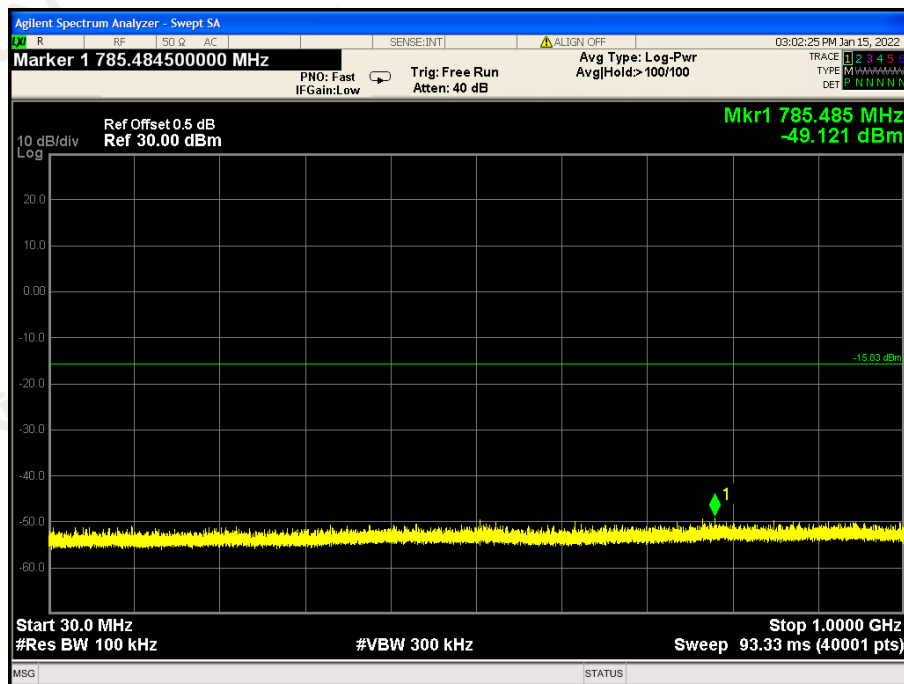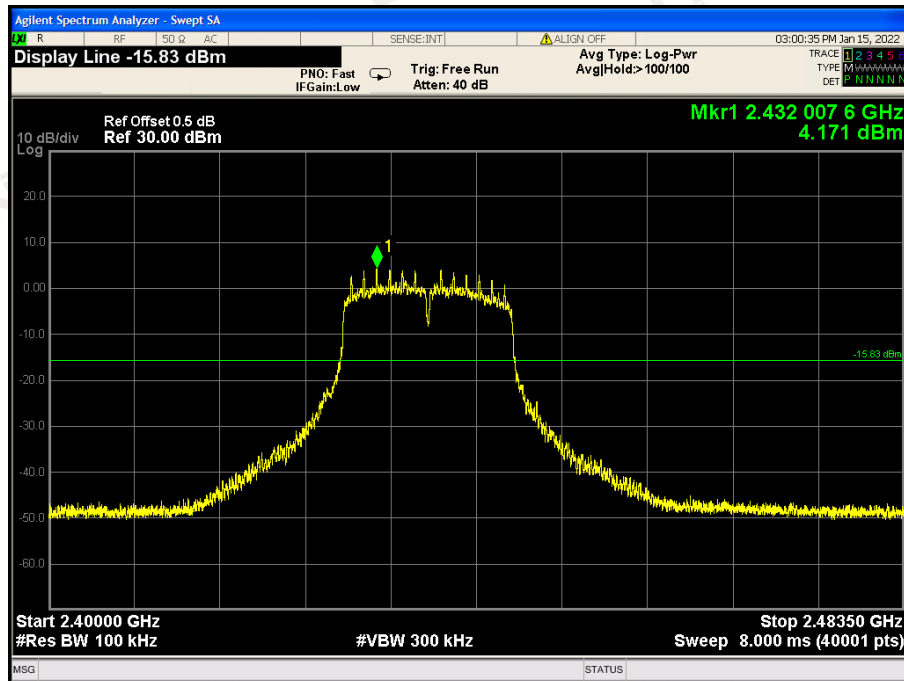

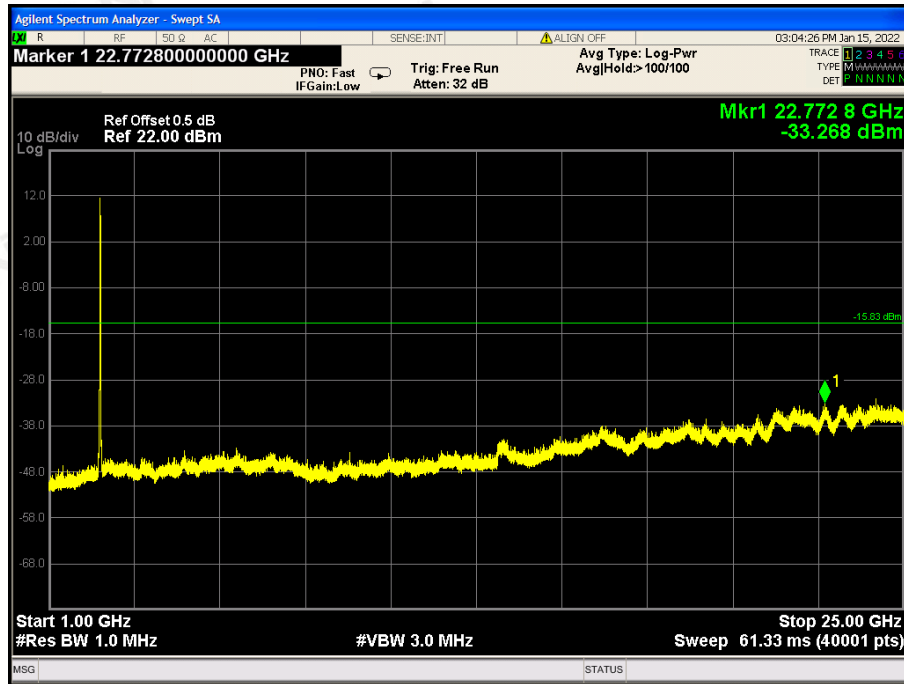



CH11: 2462MHz

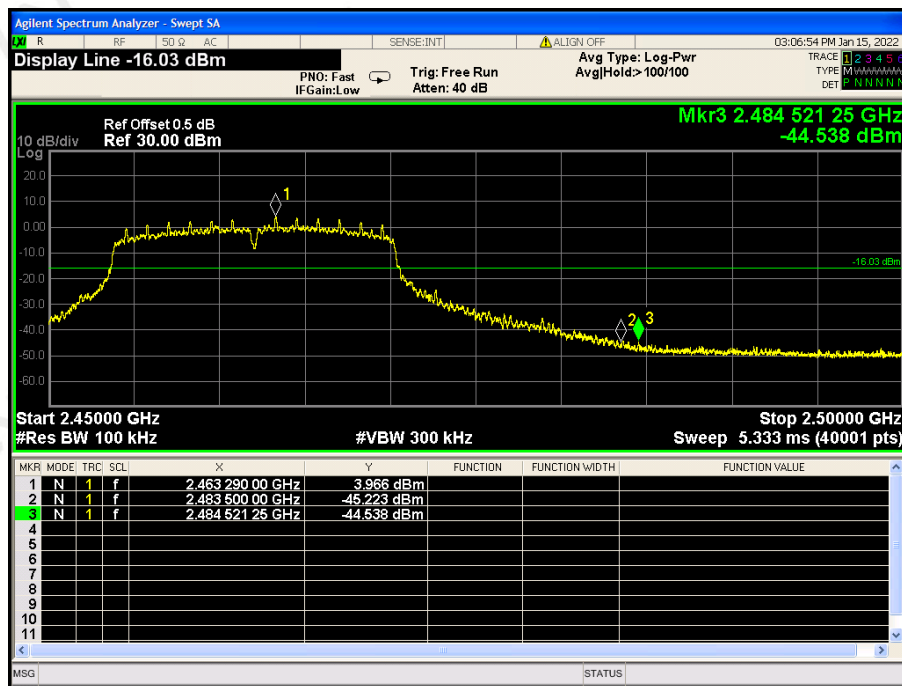


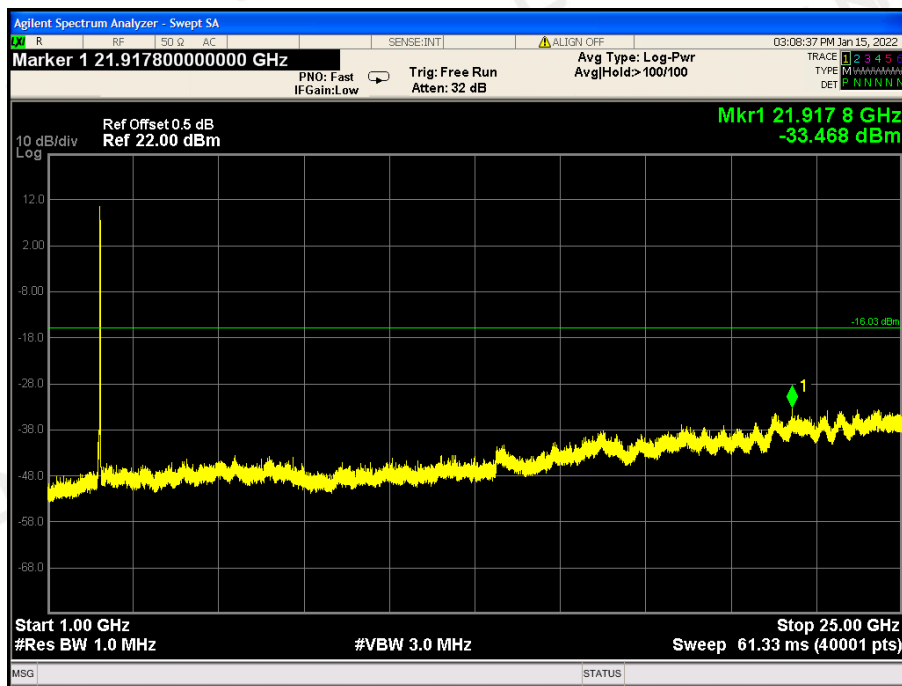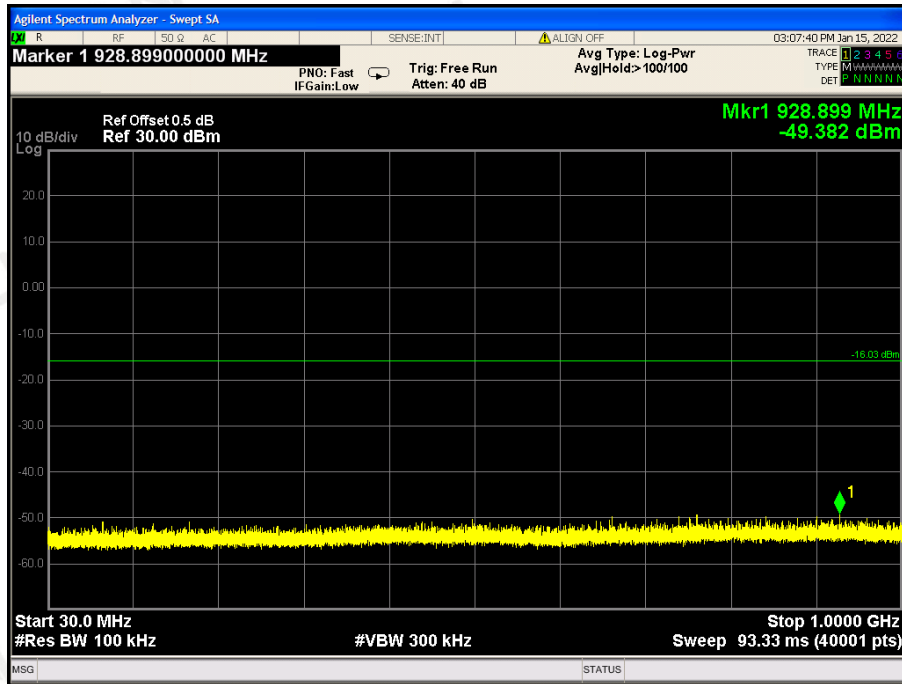


TX 802.11n/HT20 Mode:



CH01: 2412MHz

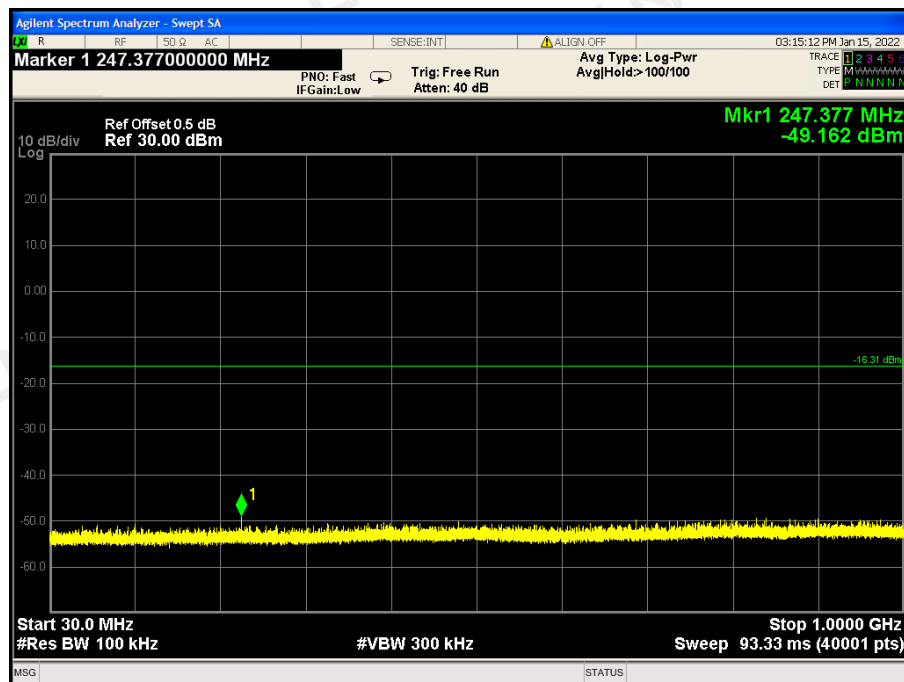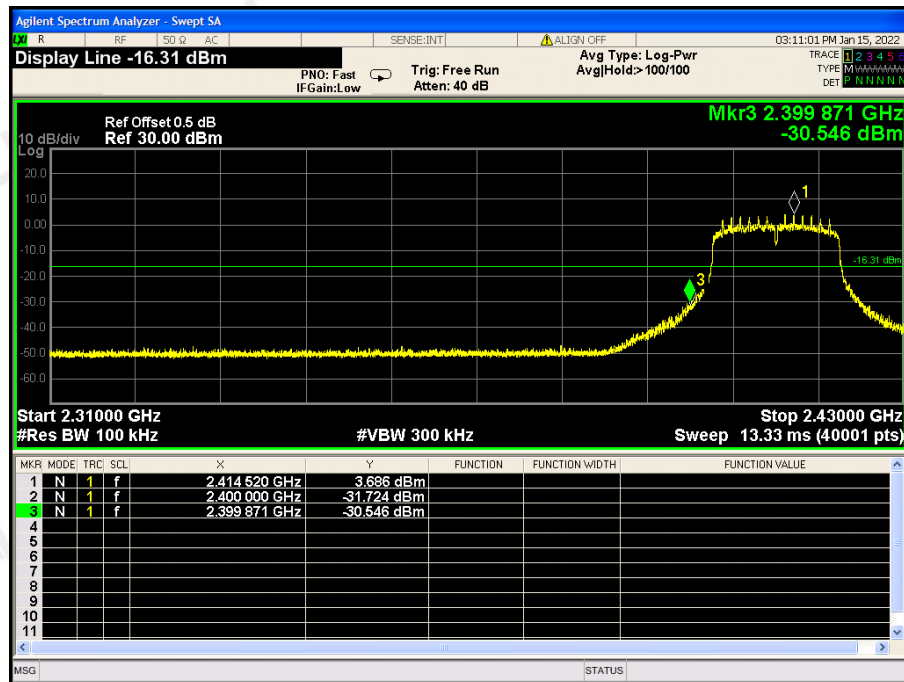


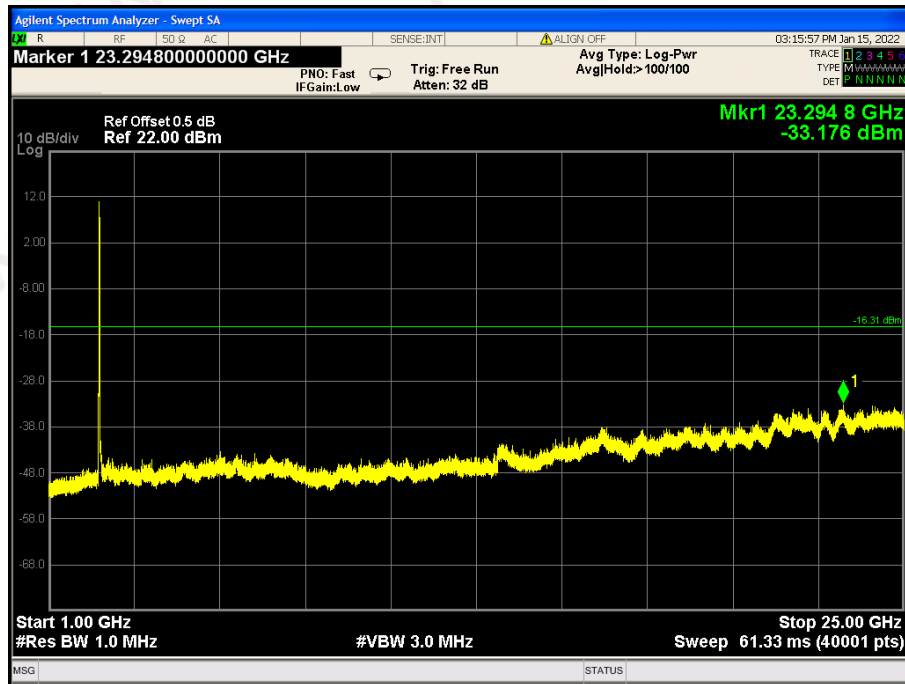



CH06: 2437MHz

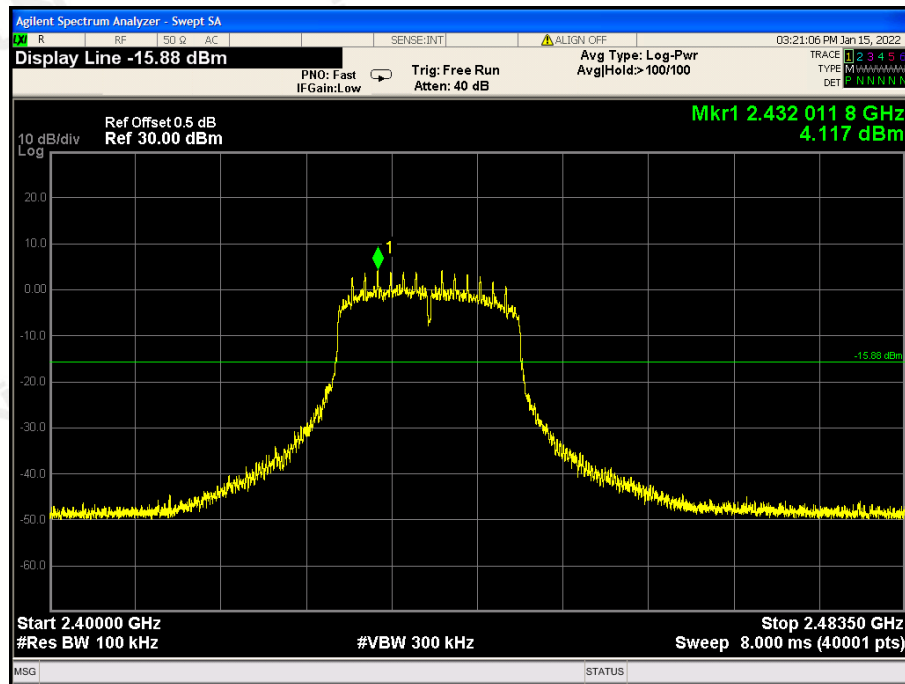

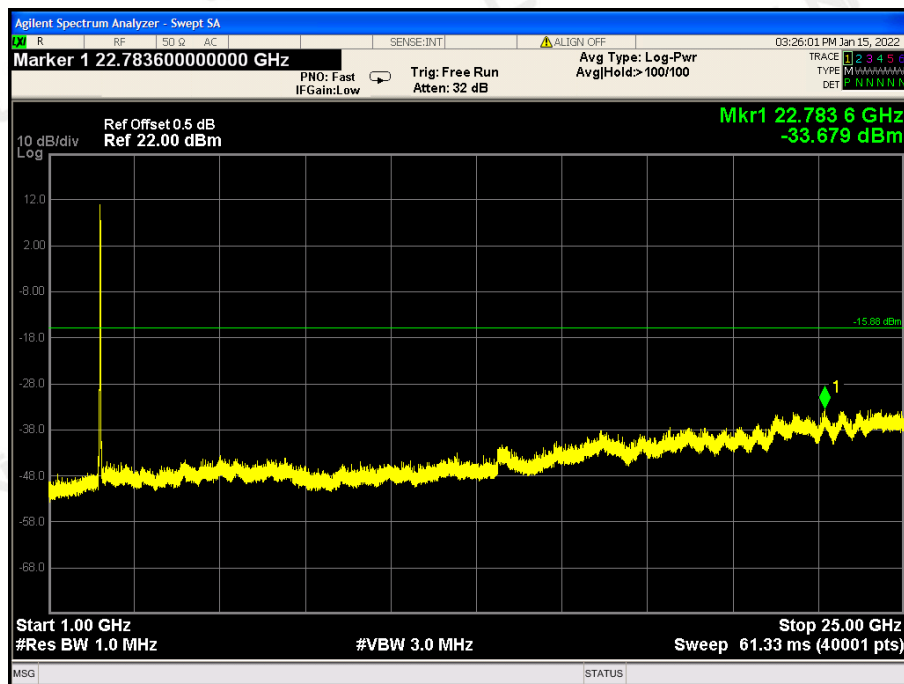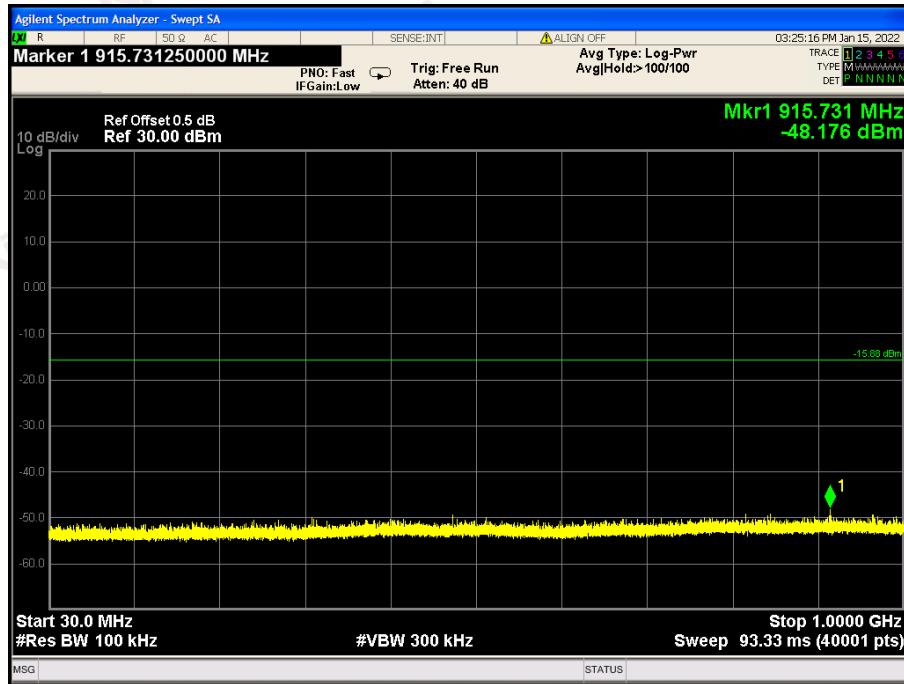



CH11: 2462MHz

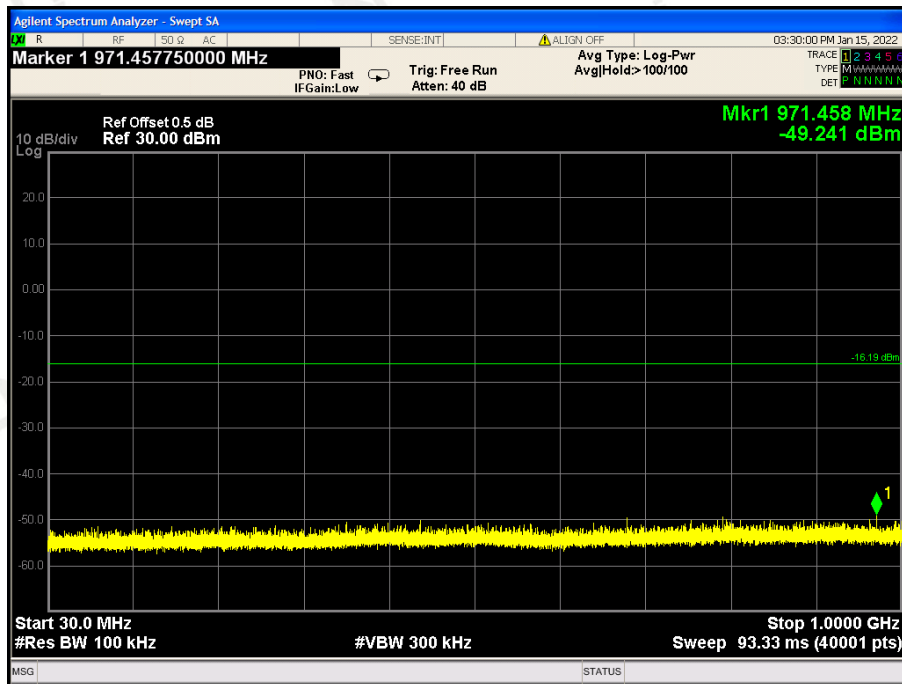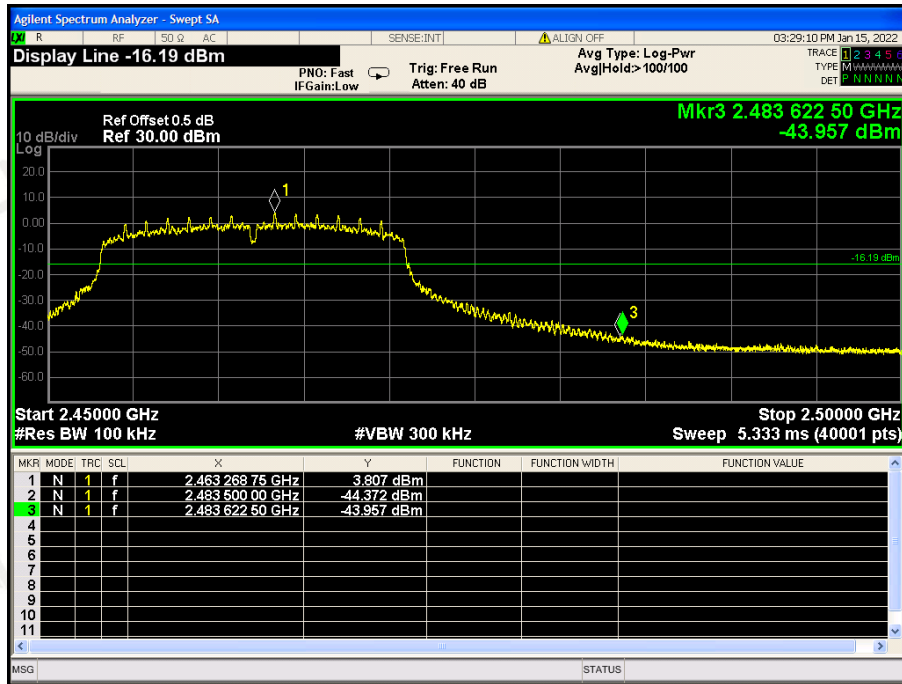


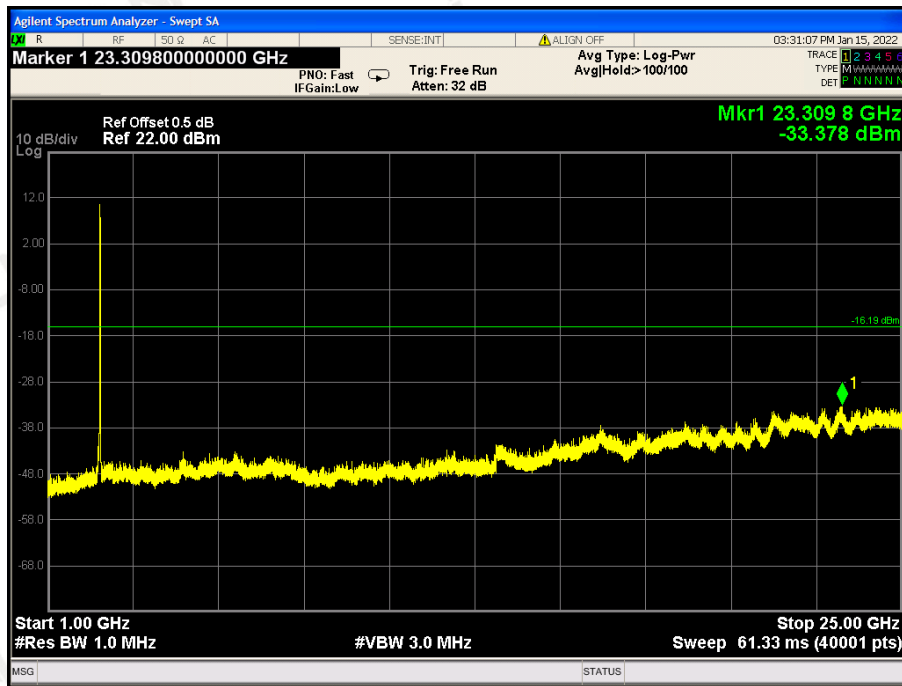


TX 802.11n/HT40 Mode:



CH03: 2422MHz

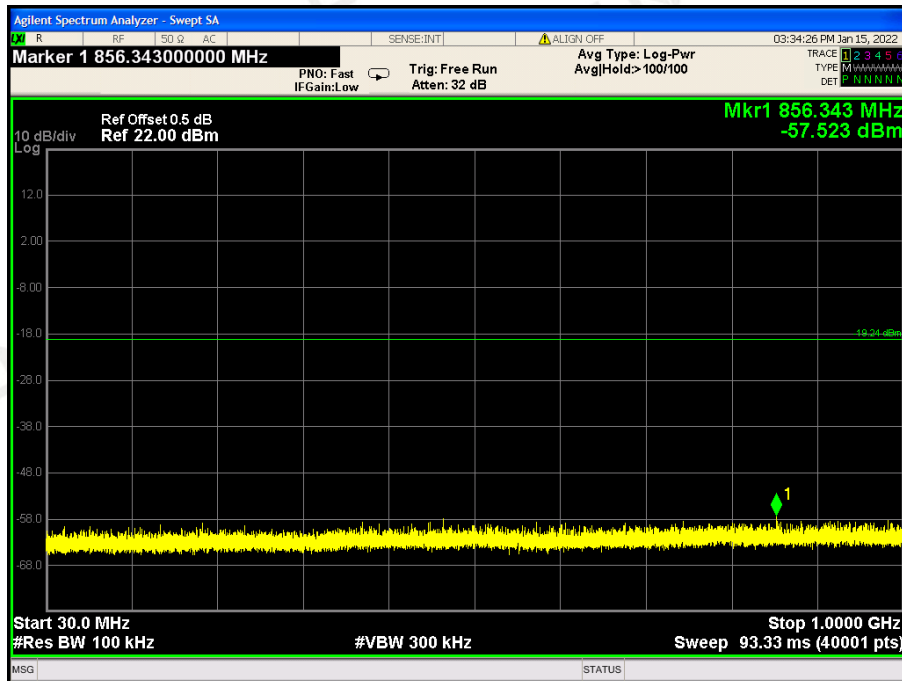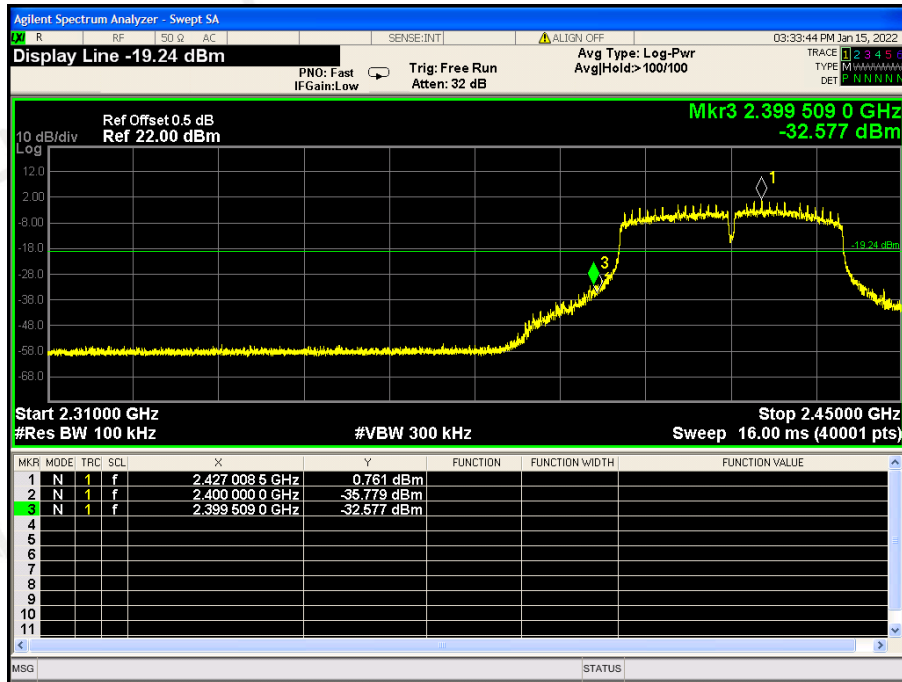

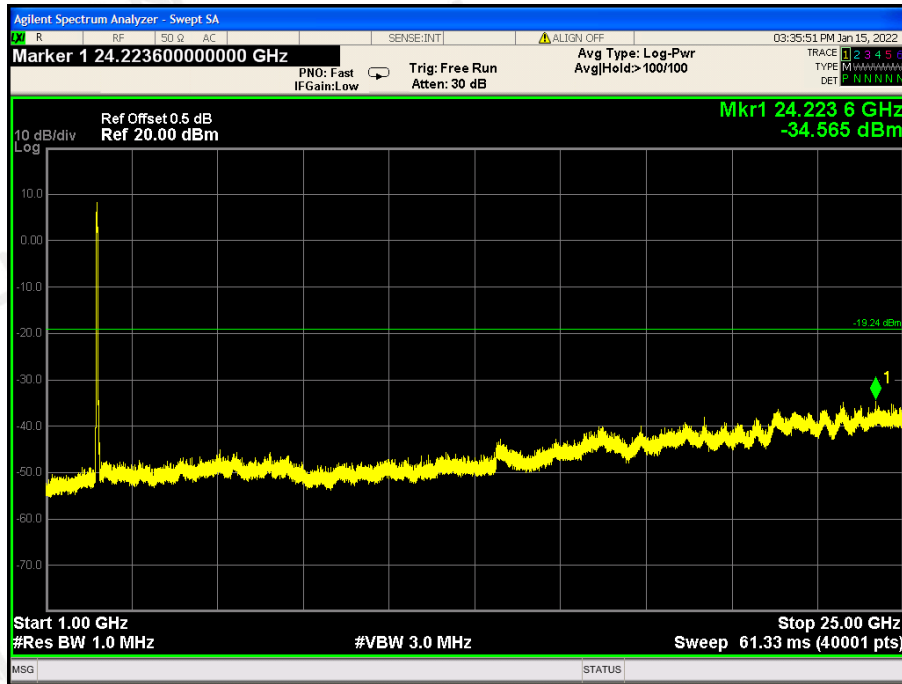



CH06: 2437MHz

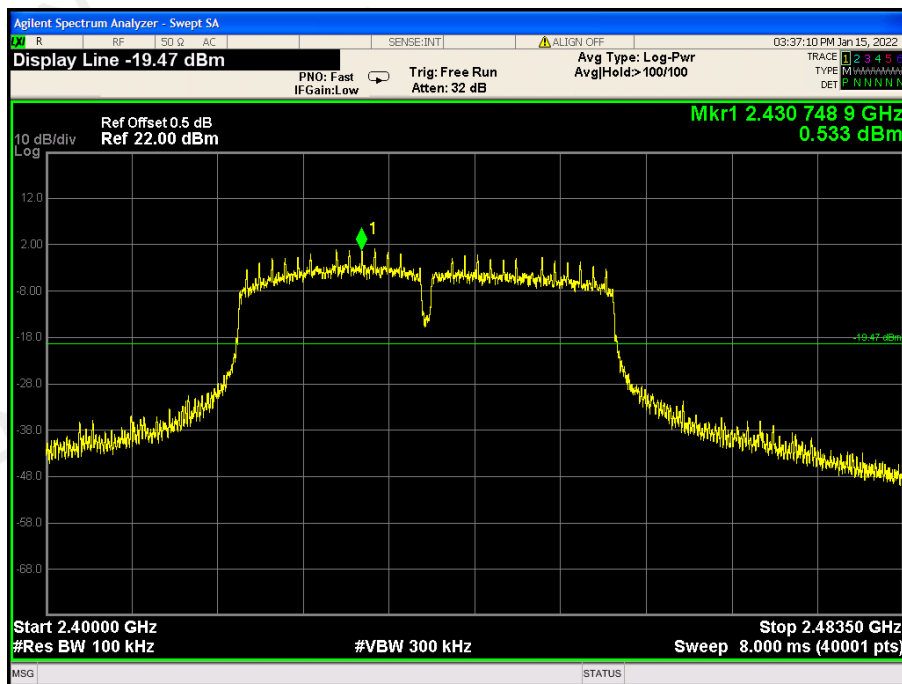

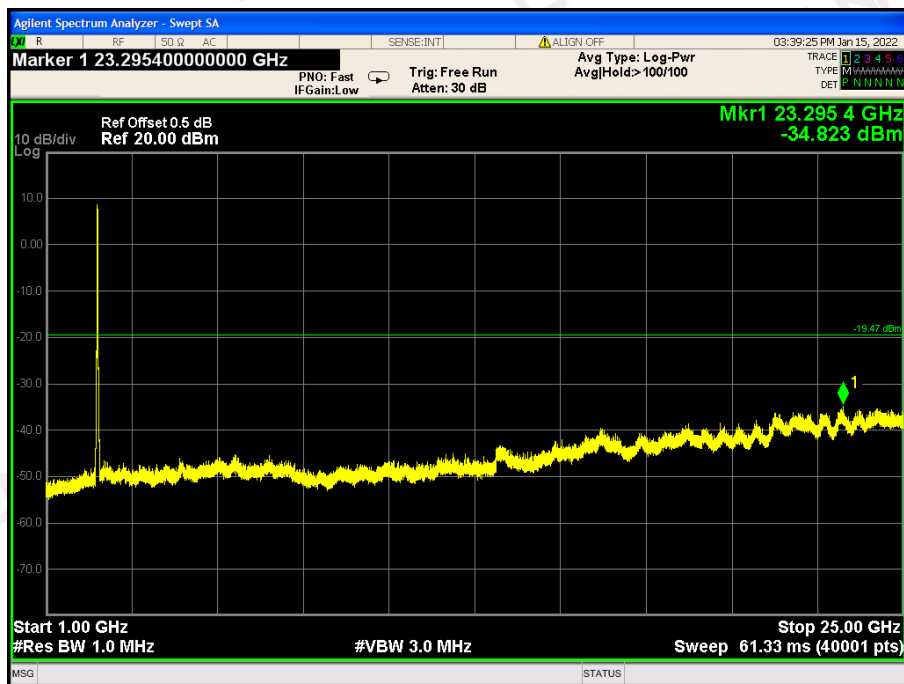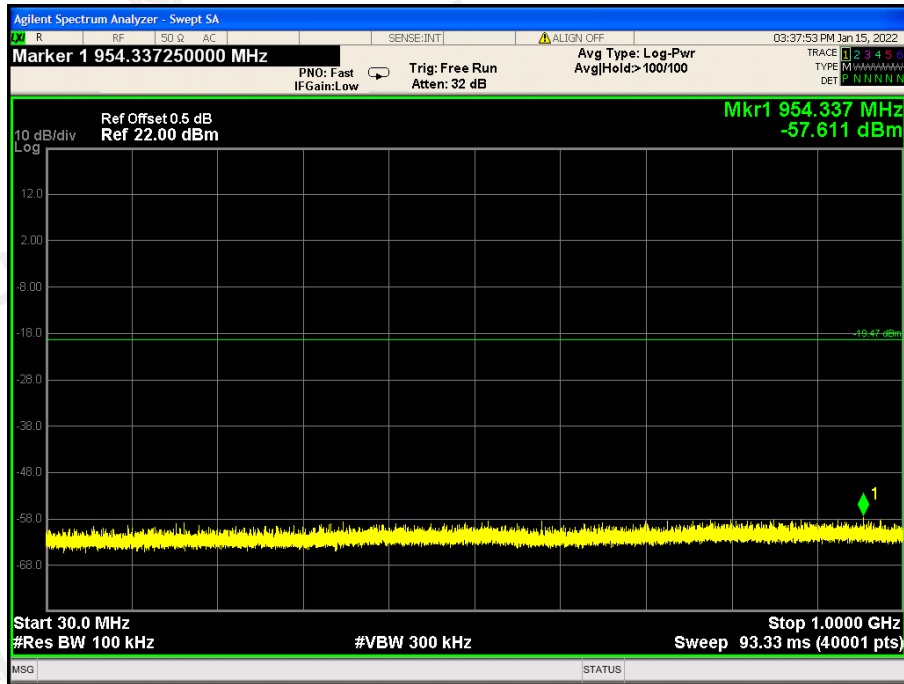

CH09: 2452MHz

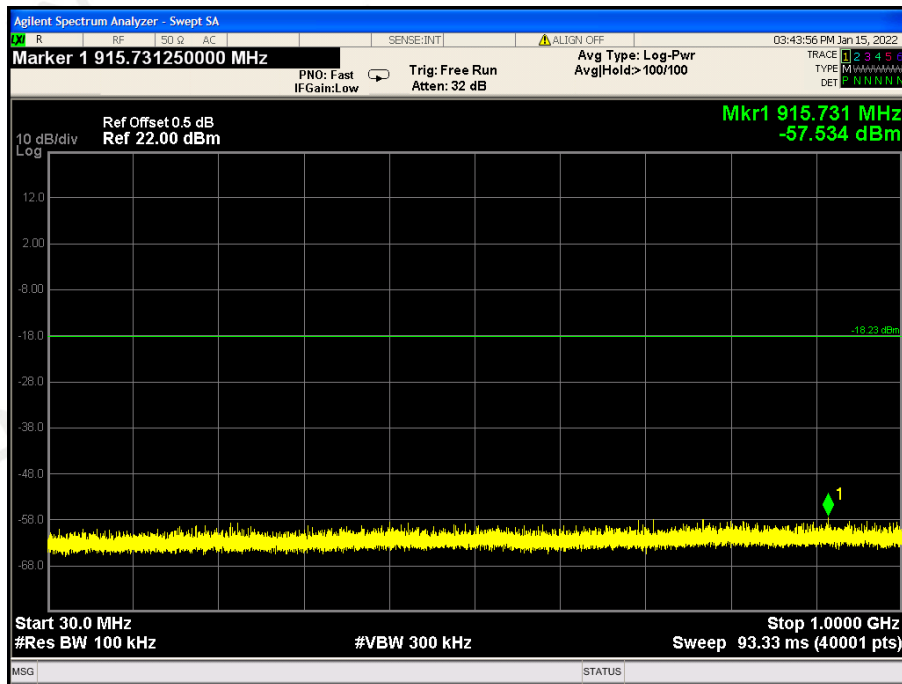

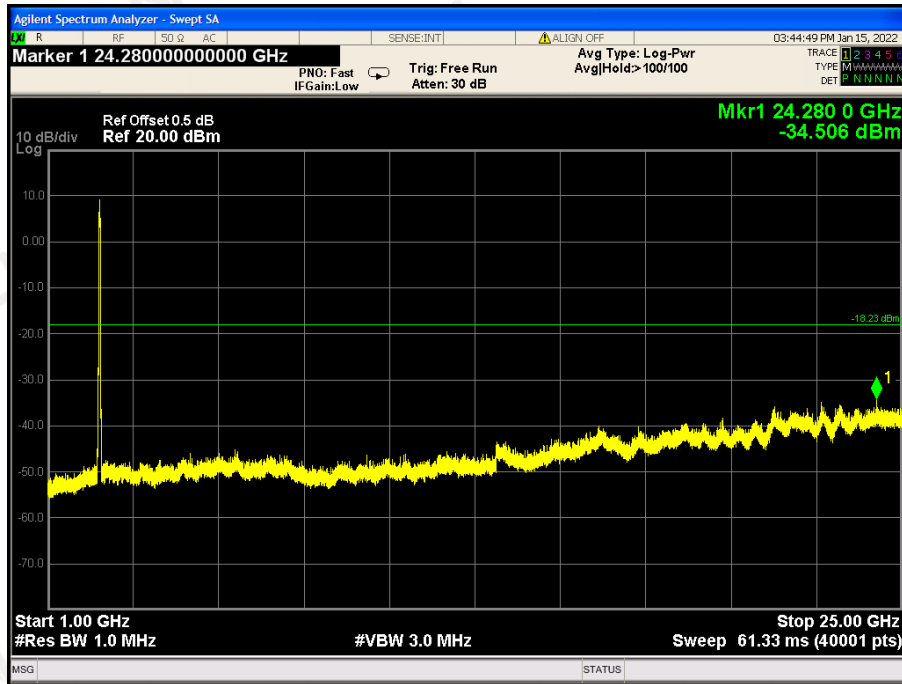

## 9 ANTENNA REQUIREMENT


### Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Connected Construction

The antenna used in this product is an SMA Antenna, The directional gains of antenna used for transmitting is 2dBi.

### ANTENNA:

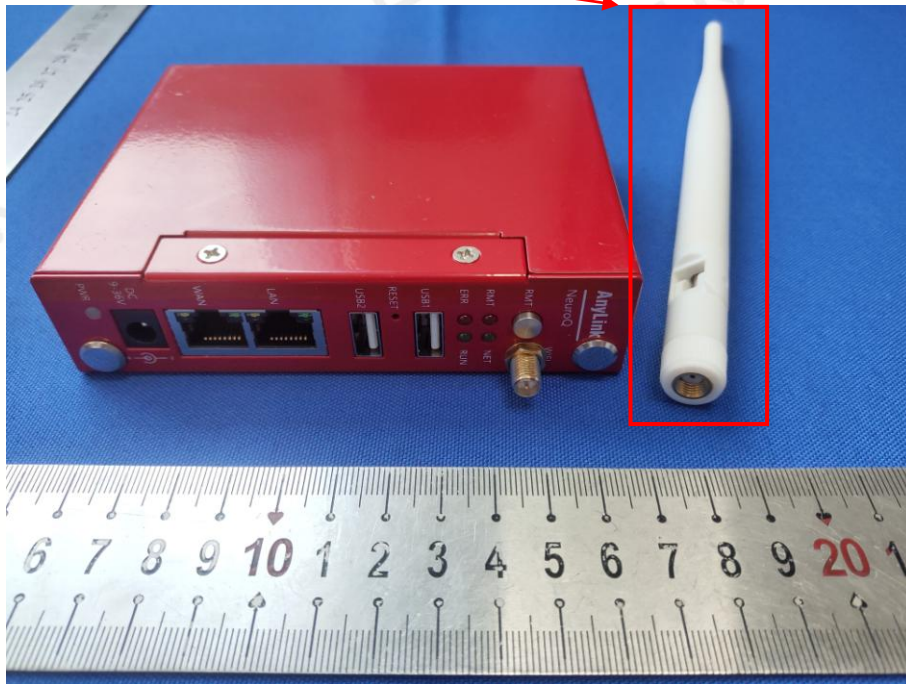

## 10 PHOTO OF TEST

### 10.1 RADIATED EMISSION



## 10.2 CONDUCTED EMISSION



\*\*\*End of Report\*\*\*