



Certificate #5055.02

TEST REPORT FOR BLUETOOTH TESTING

Report No.: SRTC2024-9004(F)-24031202(D)

Product Name: Auto EQ Bluetooth Audio Transmitter

Product ID: OTM-A01

Brand Name: ALPINE

Applicant: ALPINE ELECTRONICS MARKETING, INC.

Manufacturer: ALPINE ELECTRONICS MARKETING, INC.

Specification: FCC Part 15 Subpart C (2023)

FCC ID: 2A38M-OTMA01

The State Radio_monitoring_center Testing Center (SRTC)
15th Building, No.30Shixing Street, Shijingshan District, Beijing, P.R.China
Tel: 86-10-57996183 Fax: 86-10-57996388



CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	3
2.1 FINAL EQUIPMENT BUILD STATUS	3
2.2 DESCRIPTION OF TEST MODES	4
2.3 DUTY CYCLE OF TEST SIGNAL	6
ANT0	6
ANT1	6
2.4 EUT OPERATING CONDITIONS	6
2.5 SUPPORT EQUIPMENT	6
3 REFERENCE SPECIFICATION	6
4 KEY TO NOTES AND RESULT CODES	6
5 RESULT SUMMARY	7
6 TEST RESULT	9
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	24
APPENDIX B – TEST DATA OF RADIATED EMISSION	68

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Test Site 1:	15th Building, No.30 Shixing Street, Shijingshan District
Test Site 2:	No.80, Zhaojiachang, Beizang, Daxing District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	ALPINE ELECTRONICS MARKETING, INC.
Address:	1-7, Yukigaya-otsukamachi, Ota-ku, Tokyo, Japan
City:	Saitama
Country or Region:	Japan
Contacted person:	Keisuke Kitamoto
Tel:	81492581771
Email:	k-kitamoto@aoja.alpine.co.jp

1.4 Manufacturer's details

Company:	ALPINE ELECTRONICS MARKETING, INC.
Address:	1-7, Yukigaya-otsukamachi, Ota-ku, Tokyo, Japan
City:	Saitama
Country or Region:	Japan
Contacted person:	Keisuke Kitamoto
Tel:	81492581771
Email:	k-kitamoto@aoja.alpine.co.jp



1.5 Test Environment

Date of Receipt of test sample at SRTC:	2024/4/3
Testing Start Date:	2024/4/4
Testing End Date:	2024/5/17

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40
Maximum Extreme	60	---
Minimum Extreme	-20	---

Normal Supply Voltage (V d.c.):	5.0
Maximum Extreme Supply Voltage (V d.c.):	5.5
Minimum Extreme Supply Voltage (V d.c.):	4.5

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range:	2.402GHz~2.480GHz
Number of Channel:	79
Modulation Type:	GFSK, π /4DQPSK, 8DPSK
Duplex Mode:	TDD
Channel Spacing:	1MHz
Data Rate:	1Mbps, 2 Mbps, 3 Mbps
Power Supply:	DC supply
Software Revision:	1.0
Hardware Revision:	1.0
IMEI/SN:	W40400044A
Antenna type:	Refer to Note1
Antenna connector:	Refer to Note1

Note: This product contains two modules, ant1 is only used to receive

Antenna requirement (FCC Part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.



- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note1: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band	Antenna type	Connector Type
N/A	N/A	ANT0:3.92dBi ANT1:4.63dBi	2.4GHz~2.4835GHz	PCB Antenna	N/A

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

2.2Description of Test Modes

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	16	2418	32	2434	48	2450	64	2466
1	2403	17	2419	33	2435	49	2451	65	2467
2	2404	18	2420	34	2436	50	2452	66	2468
3	2405	19	2421	35	2437	51	2453	67	2469
4	2406	20	2422	36	2438	52	2454	68	2470
5	2407	21	2423	37	2439	53	2455	69	2471
6	2408	22	2424	38	2440	54	2456	70	2472
7	2409	23	2425	39	2441	55	2457	71	2473
8	2410	24	2426	40	2442	56	2458	72	2474
9	2411	25	2427	41	2443	57	2459	73	2475
10	2412	26	2428	42	2444	58	2460	74	2476
11	2413	27	2429	43	2445	59	2461	75	2477
12	2414	28	2430	44	2446	60	2462	76	2478
13	2415	29	2431	45	2447	61	2463	77	2479
14	2416	30	2432	46	2448	62	2464	78	2480
15	2417	31	2433	47	2449	63	2465		

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	-
GFSK, π/4DQPSK, 8DPSK	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with



antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	0, 39, 78	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

2.3 Duty Cycle of Test Signal

ANT0

Modulation Type	Duty Cycle	Correction Factor(dB)
GFSK(DH5)	98.40%	0.07
$\pi/4$ DQPSK(DH5)	98.50%	0.07
8DPSK(DH5)	98.40%	0.07

ANT1

Modulation Type	Duty Cycle	Correction Factor(dB)
GFSK(DH5)	98.20%	0.08
$\pi/4$ DQPSK(DH5)	97.80%	0.10
8DPSK(DH5)	98.20%	0.08

2.4 EUT operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:N/A

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part15 Subpart C	2023	Intentional radiators
ANSI C63.10	2020	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 v05r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.




5 RESULT SUMMARY

No.	Test case	Reference	Verdict	Test Site
1	20dB Bandwidth	15.247(a)(1)(iii)	Pass	1
2	Channel Separation	15.247(a)(1)	Pass	1
3	Peak Transmitter Output Power	15.247(b)(1)	Pass	1
4	Dwell Time	15.247(a)(1)(iii)	Pass	1
5	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass	1
6	Conducted out of band emission measurement	15.247(d)	Pass	1
7	Antenna requirement	15.203	Pass(refer to section 2.1)	1

Note: The device is designed according to specifications of SIG, So it has a full support to Medium access protocol and fully compliant with the KDB558074 standard. The device is compliant Pseudorandom hopping, Equal hopping frequency, receiver bandwidth synchronize and have same bandwidth with transmitted signal. And the ability to have adaptive hopping when encountering other signals.

Test Site 1: 15th Building, No.30 Shixing Street, Shijingshan District



This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested and Issued by: Mr. LiangXisheng 	Approved date: 20240517



No.	Test case	Reference	Verdict	Test Site
8	Band-edge	15.247(d)	Pass	2
9	Spurious Radiated Emissions	15.205/15.209	Pass	2
10	AC Power line Conducted Emission	15.207	Pass	2

Note: The device is designed according to specifications of SIG, So it has a full support to Medium access protocol and fully compliant with the KDB558074 standard. The device is compliant Pseudorandom hopping, Equal hopping frequency, receiver bandwidth synchronize and have same bandwidth with transmitted signal. And the ability to have adaptive hopping when encountering other signals.

Test Site 2: No.80, Zhaojiachang, Beizang, Daxing District

This Test Report Is Approved by: Mr. Liu Wei 	Review by: Mr. Guo Yu 
Tested and Issued by: Mr. Dong Qifeng 	Approved date: 20240517

6 TEST RESULT

6.1 20dB Bandwidth

6.1.1 Test limit

FCC Part15.247 (a.1.iii)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

6.1.3 Test settings

1.The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

2.RBW = 1 – 5% OBW

3.VBW $\geq 3 \times$ RBW

4.Reference level set to keep signal from exceeding maximum input mixer level for linear operation.


5.Detector = Peak

6.Trace mode = max hold

7.Sweep = auto couple

8.The trace was allowed to stabilize

6.1.4 Test Setup

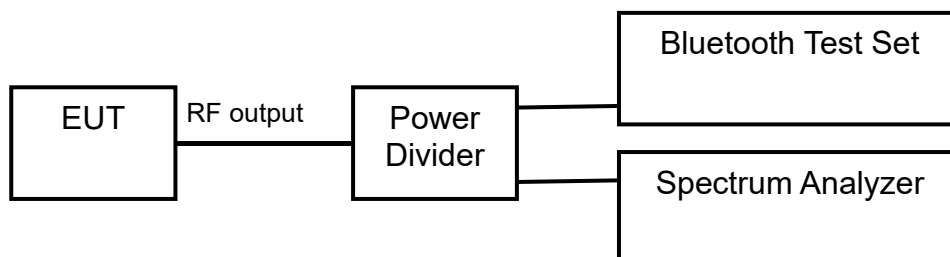

6.1.5 Test result

The test results are shown in Appendix A.

6.2 Channel Separation

6.2.1 Test limit

FCC Part15.247 (a)(1)

Measurement is made with EUT operating in hopping mode. The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

6.2.3 Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

6.2.4 Test Setup

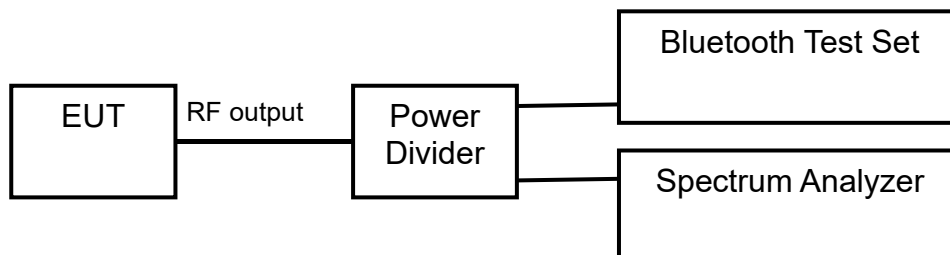

6.2.5 Test result

The test results are shown in Appendix A.

6.3 Peak Transmitter Output Power

6.3.1 Test limit

FCC Part15.247(b)(1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band:1watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30.0dBm	30.0dBm	30.0dBm

For all other frequency hopping systems in the 2400-2483.5 MHz band:0.125 watts.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	21.0dBm	21.0dBm	21.0dBm

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

6.3.3 Test Settings


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.3.4 Test Setup

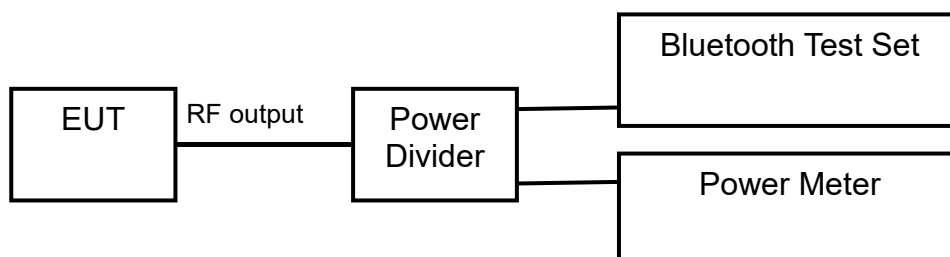

6.3.5 Test result

The test results are shown in Appendix A.

6.4 Dwell Time

6.4.1 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 31.6/ number of hopping channels with:

- hop rate = $1600/2 * 1/s$ for DH1 packets = 800
- hop rate = $1600/4 * 1/s$ for DH3 packets = 400
- hop rate = $1600/6 * 1/s$ for DH5 packets = 266.67
- Number of hopping channels = 79
- $31.6 s = 0.4$ seconds multiplied by the number of hopping channels = $0.4s * 79$

6.4.2 Test limit

FCC Part 15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.4.3 Test Settings

ANSI C63.10-2013 Section 7.8.4

1. Span = zero span, centered on a hopping channel
2. RBW $\leq$ channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

6.4.4 Test Setup

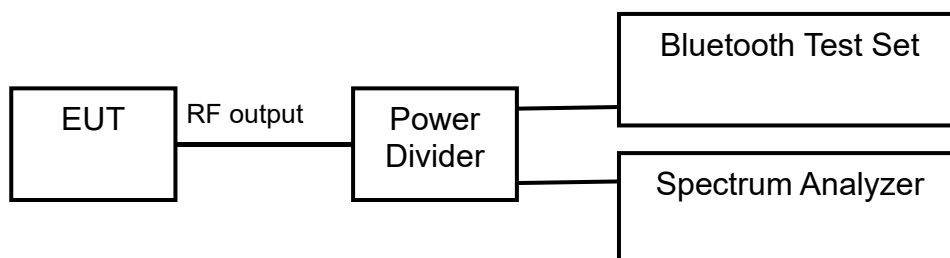

6.4.5 Test result

The test results are shown in Appendix A.

6.5 Number of Hopping Frequencies

6.5.1 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

6.5.2 Test limit

FCC Part15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.5.3 Test Settings

ANSI C63.10-2013 Section 7.8.3

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.5.4 Test Setup

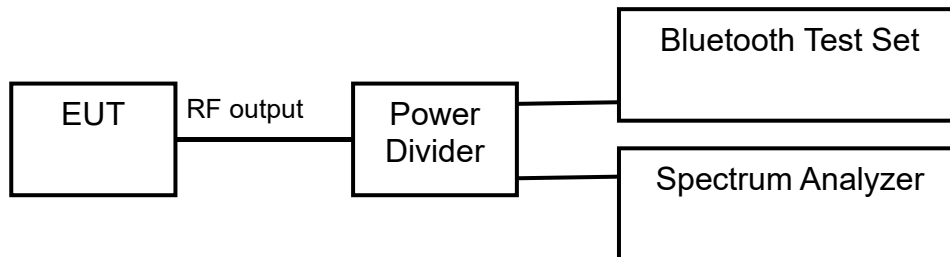

6.5.5 Test result

The test results are shown in Appendix A.

6.6 Conducted out of band emission measurement

6.6.1 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


6.6.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

6.6.3 Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 26GHz
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.6.4 Test Setup

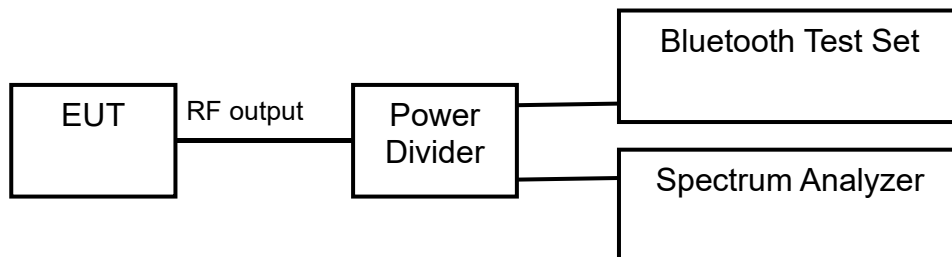

6.6.5 Test result

The test results are shown in Appendix A .

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

6.7 Band-edge measurement

6.7.1 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


6.7.2 Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

6.7.3 Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

6.7.4 Test Setup

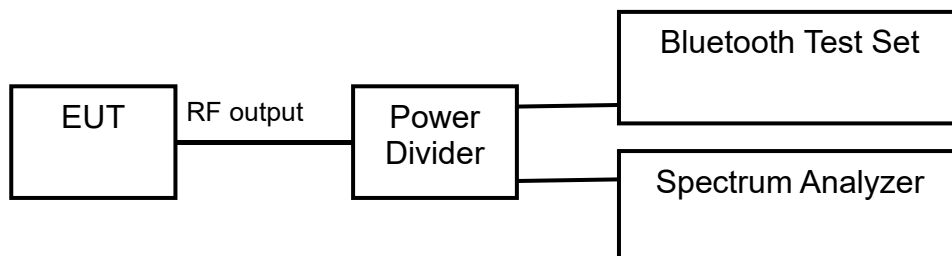

6.7.6 Test result

The test results are shown in Appendix A.

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

6.8 Spurious Radiated Emissions

6.8.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.8.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device.

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits



6.8.3 Test Procedure Used

KDB 558074 D01 v05r02 – Section 12.2.7

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.8.4 Test Settings**Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**

Frequency	Detector
< 1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.5 Test Setup


For Radiated emission below 30MHz

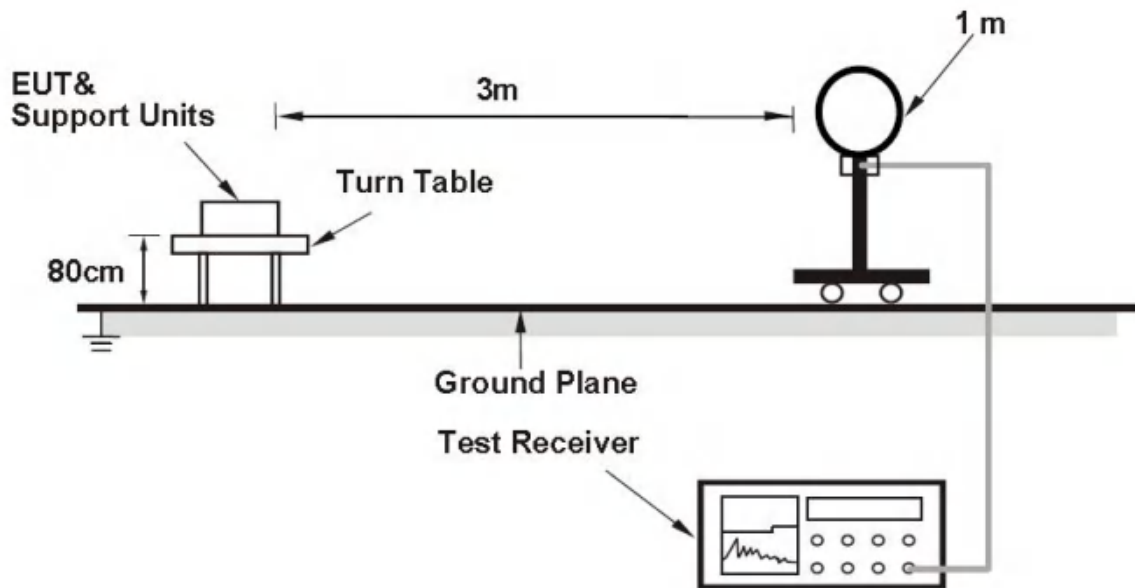

For Radiated emission 30MHz to 1GHz

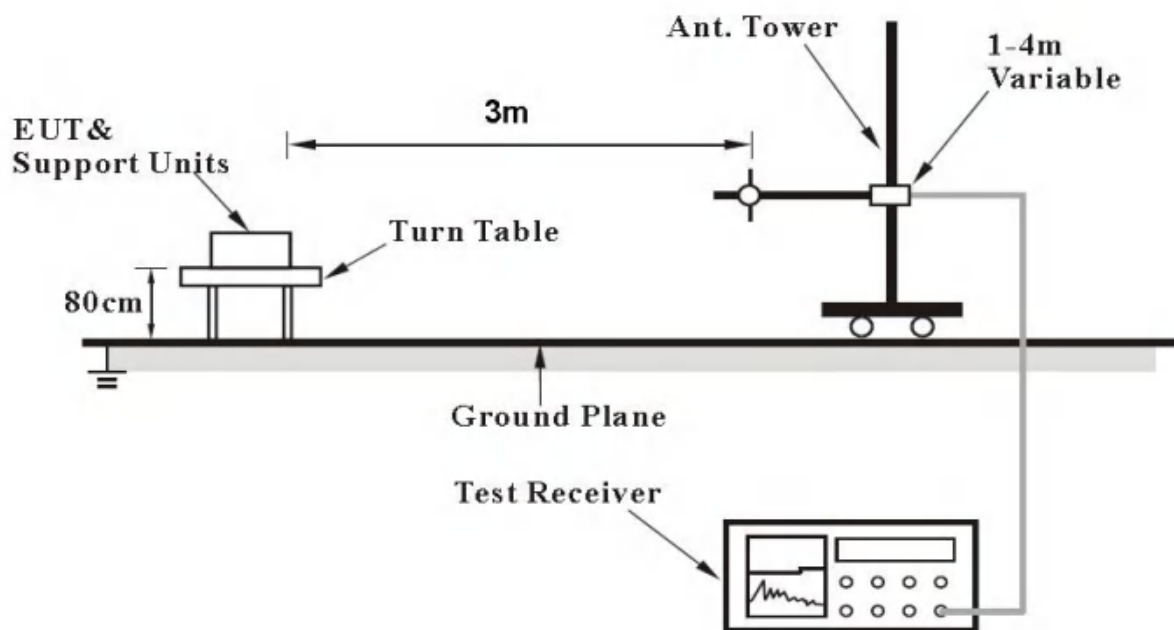

For Radiated emission above 1GHz

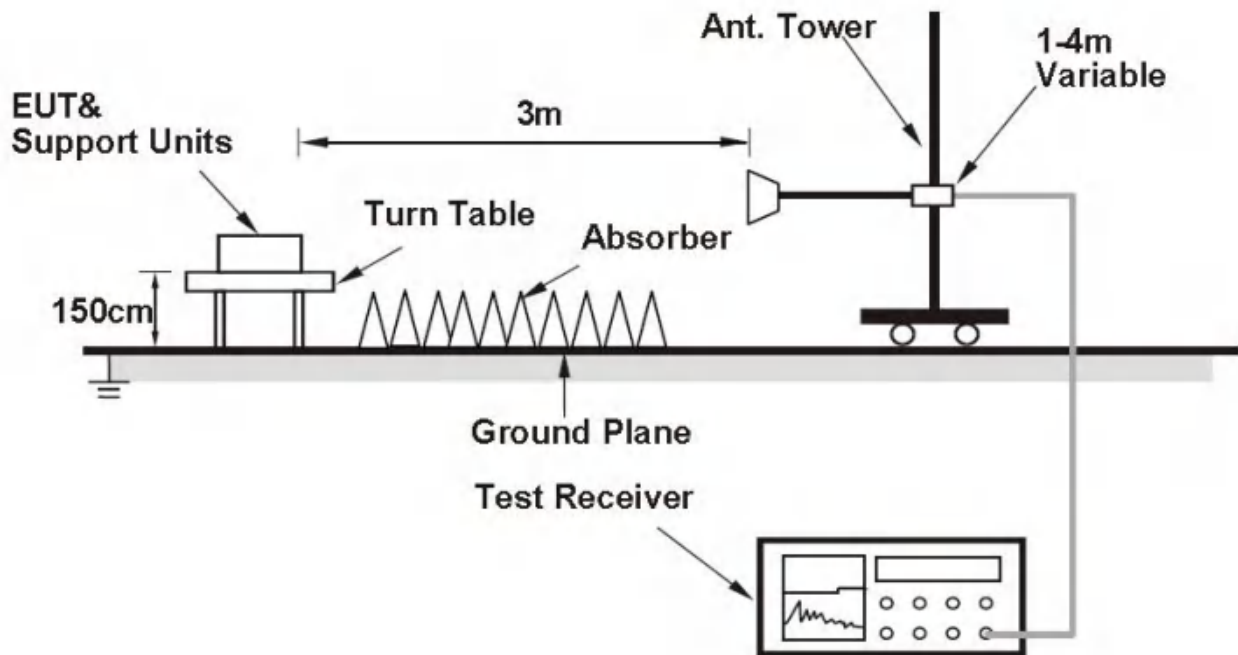

6.8.6 Test result

The test results are shown in Appendix B.

6.9 AC Power line Conducted Emission

6.9.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56 *	56 to 46 *
	56	46
	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013


6.9.2 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.9.3 Test Setup

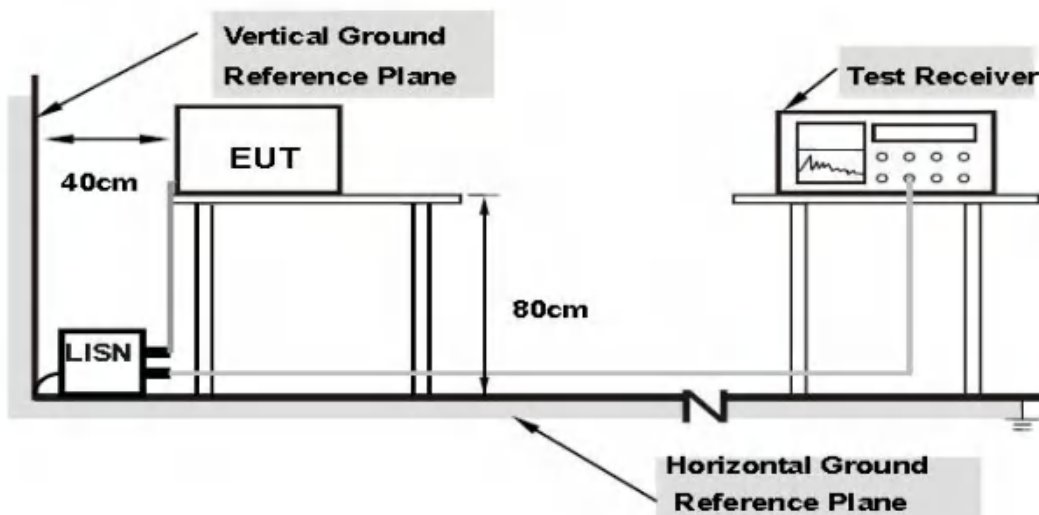

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.4 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2023.06.21	2024.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2024.03.06	2025.03.05
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2023.06.21	2024.06.20
4.	Power Divider / 11667A	HP	19632	2023.06.21	2024.06.20
5.	Signal Generator / SMBV100A	R&S	260910	2023.06.21	2024.06.20
6.	Temperature chamber / SH241	ESPEC	92013758	2023.06.21	2024.06.20
7.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
8.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
9.	Turn table Diameter:1m	FRANKONIA	----	----	----
10.	Turn table Diameter:5m	FRANKONIA	----	----	----
11.	Antenna master FAC(MA4.0)	MATURO	----	----	----
12.	Antenna master SAC(MA4.0)	MATURO	----	----	----
13.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
14.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2023.06.21	2024.06.20
15.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2023.06.21	2024.06.20
16.	Ultra log antenna / HL562	R&S	100016	2023.06.21	2024.06.20
17.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2023.06.21	2024.06.20
18.	EMI test receiver / ESI 40	R&S	100015	2023.06.21	2024.06.20
19.	EMI test receiver / ESCS30	R&S	100029	2023.06.21	2024.06.20
20.	Receive antenna / HL562	R&S	100167	2023.06.21	2024.06.20
21.	AMN / ENV216	R&S	3560.6550.12	2023.06.21	2024.06.20
22.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
23.	Notebook E470c	Lenovo	PF10UZW7	---	---
24.	Loop Antenna	R&S	100340	2023.08.21	2024.08.20
25.	FCC auto test system / RT9200BW-2	Radiosky	V2.05	/	/
26.	EMI test software / EMC32	R&S	V10.20.01	/	/

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

BT(ANT0 QCC3056)

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK(DH5)	2402	Fig.1	98.40%	0.07	3.92

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$


Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
$\pi/4$ DQPSK(2D H5)	2402	Fig.2	98.50%	0.07	3.92

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
8DPSK(3DH5)	2402	Fig.3	98.40%	0.07	3.92

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode: GFSK(DH5)

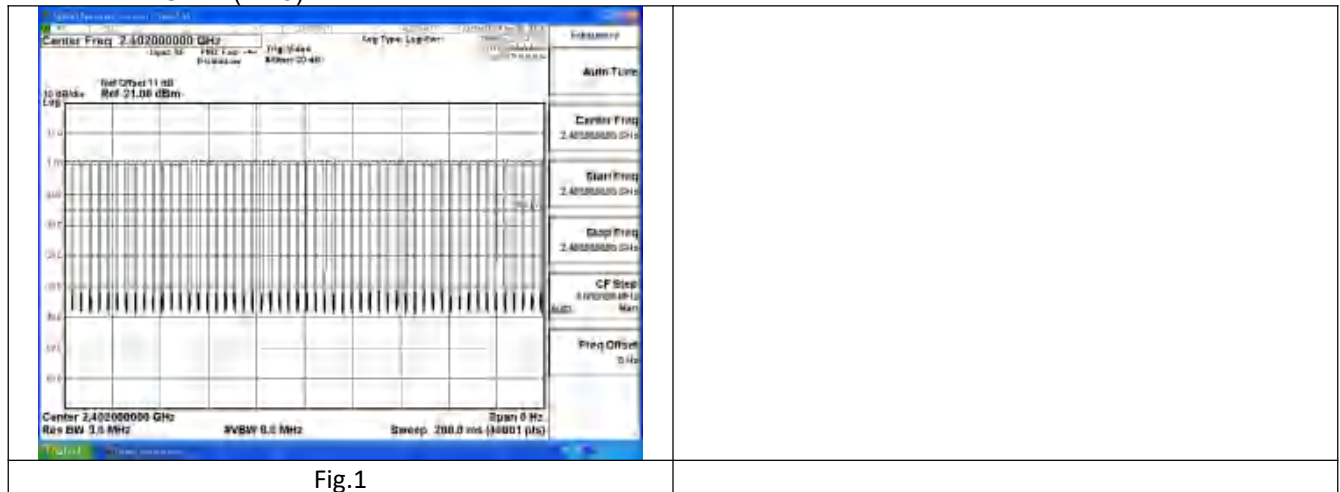

Test Mode: π /4DQPSK(2DH5)

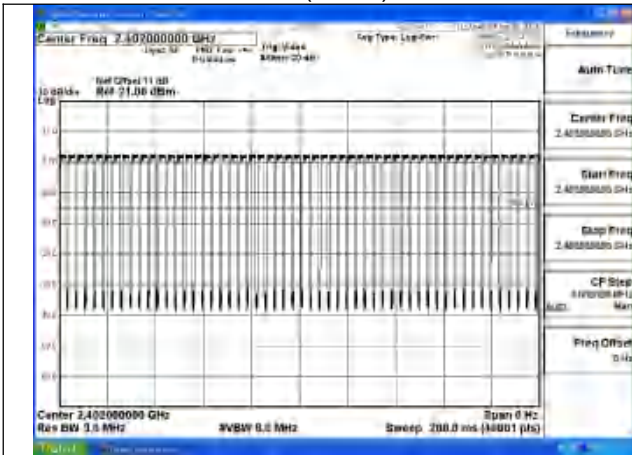


Fig.2

Test Mode: 8DPSK(3DH5)

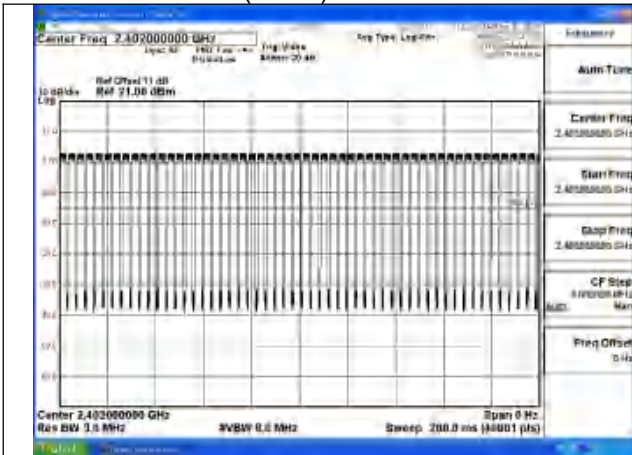


Fig.3



2 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	0.81	0.82	0.87
$\pi/4$ DQPSK(2DH5)	3.75	3.22	3.30
8DPSK(3DH5)	3.85	3.88	3.97

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	-0.61	0.35	-3.25
$\pi/4$ DQPSK(2DH5)	-2.29	0.05	-1.76
8DPSK(3DH5)	-2.34	-1.62	0.58

EIRP

Modulation type	Peak EIRP (dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	4.73	4.74	4.79
$\pi/4$ DQPSK(2DH5)	7.67	7.14	7.22
8DPSK(3DH5)	7.77	7.80	7.89

Modulation type	Average EIRP (dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	3.31	4.27	0.67
$\pi/4$ DQPSK(2DH5)	1.63	3.97	2.16
8DPSK(3DH5)	1.58	2.30	4.50

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)




3 Occupied Bandwidth 20dB Bandwidth

Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
GFSK(DH5)	2402	952.0
GFSK(DH5)	2441	964.2
GFSK(DH5)	2480	946.7

Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
$\pi/4$ DQPSK(2DH5)	2402	1353.3
$\pi/4$ DQPSK(2DH5)	2441	1351.5
$\pi/4$ DQPSK(2DH5)	2480	1354.8


Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
8DPSK(3DH5)	2402	1356.8
8DPSK(3DH5)	2441	1348.0
8DPSK(3DH5)	2480	1362.8

Test Mode: GFSK(DH5)

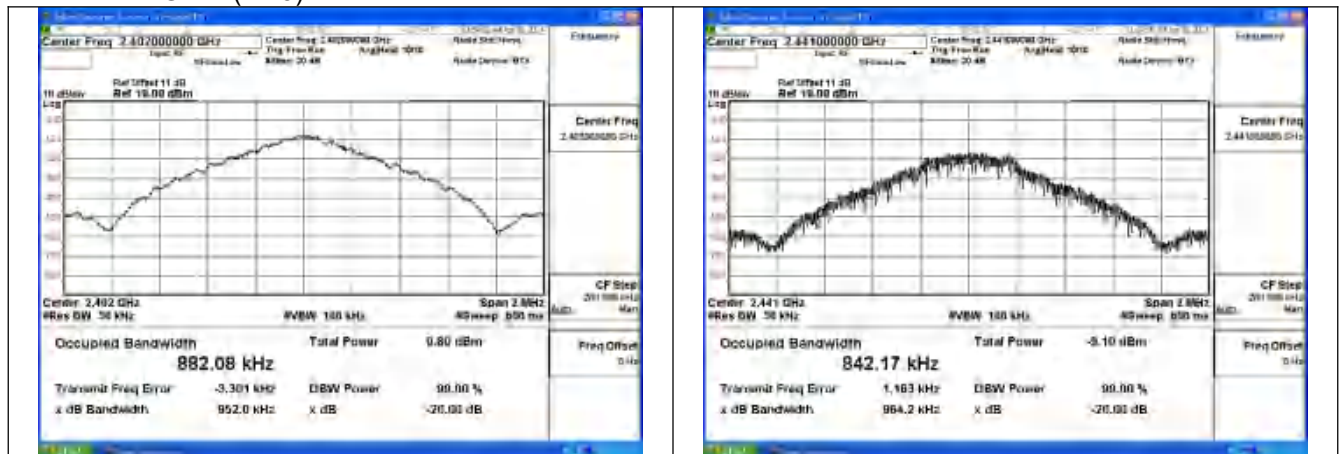

Test Mode:GFSK(DH5) 2402MHz


Test Mode:GFSK(DH5) 2441MHz

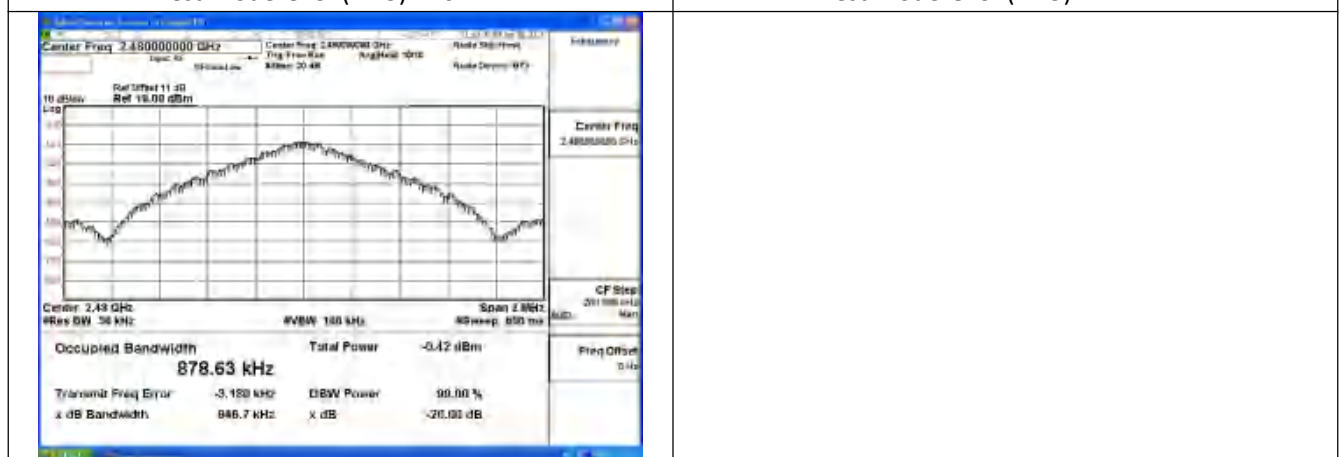


Test Mode:GFSK(DH5) 2480MHz



Test Mode: $\pi/4$ DQPSK(2DH5)

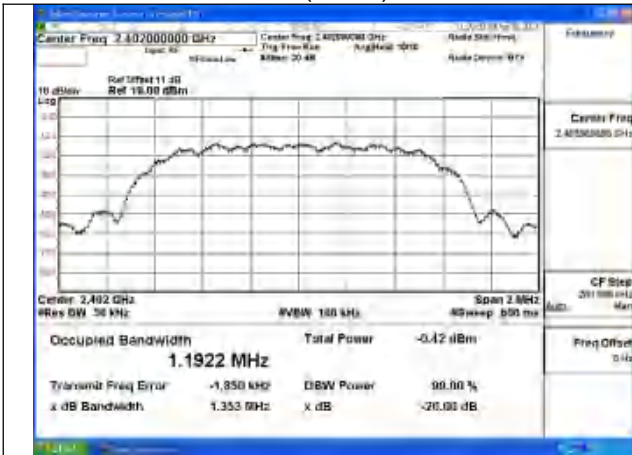

Test Mode: $\pi/4$ DQPSK(2DH5) 2402MHz

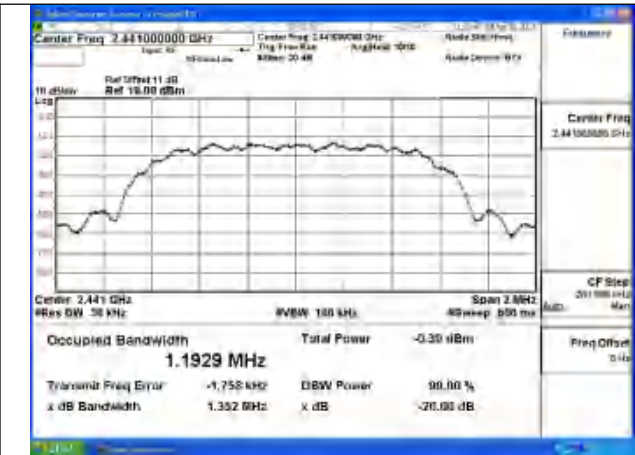


Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz




Test Mode: $\pi/4$ DQPSK(2DH5) 2480MHz


Test Mode: 8DPSK(3DH5)

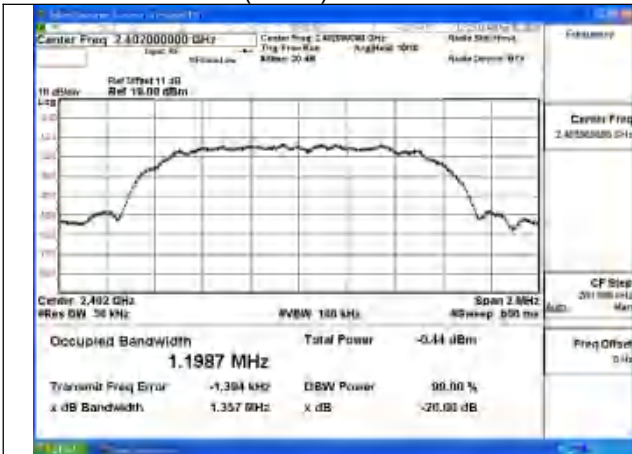

Test Mode:8DPSK(3DH5) 2402MHz

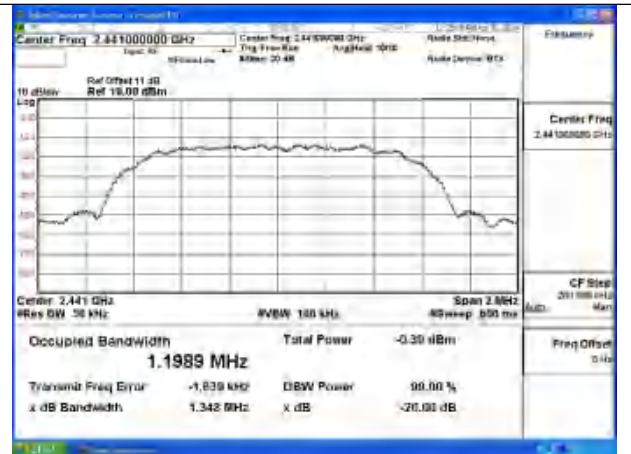

Test Mode:8DPSK(3DH5) 2441MHz

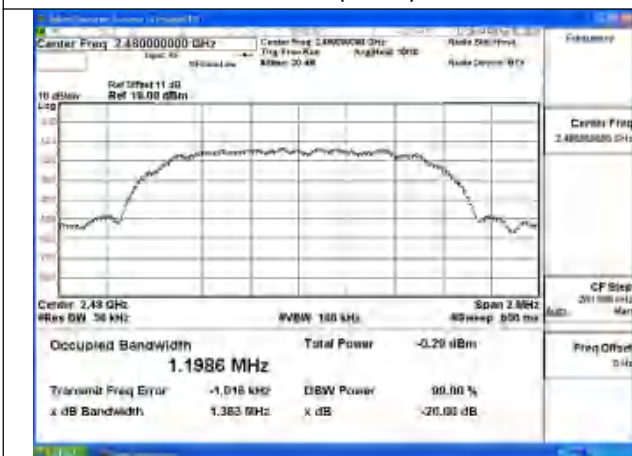

Test Mode:8DPSK(3DH5) 2480MHz




99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK(DH5)	2402	882.6
GFSK(DH5)	2441	842.1
GFSK(DH5)	2480	878.1


Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
$\pi/4$ DQPSK(2DH5)	2402	1192.0
$\pi/4$ DQPSK(2DH5)	2441	1193.4
$\pi/4$ DQPSK(2DH5)	2480	1192.8

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
8DPSK(3DH5)	2402	1199.0
8DPSK(3DH5)	2441	1199.0
8DPSK(3DH5)	2480	1198.8

Test Mode: GFSK(DH5)

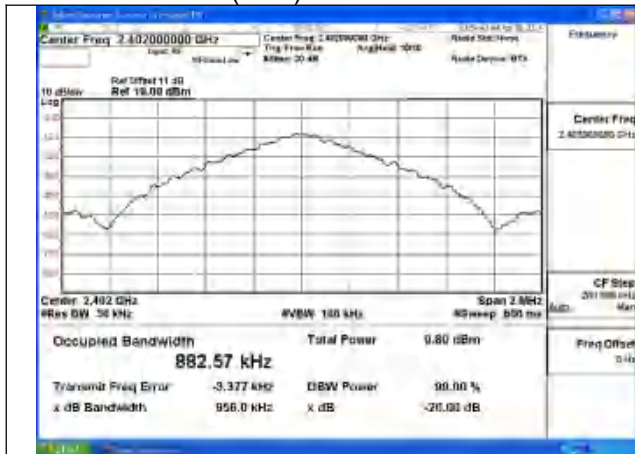

Test Mode:GFSK(DH5) 2402MHz

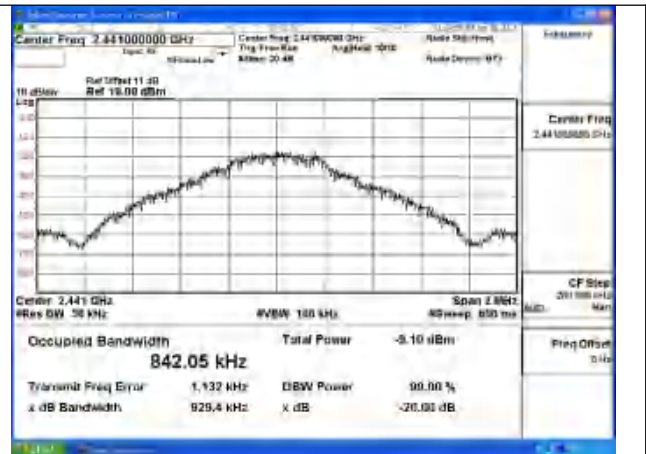


Test Mode:GFSK(DH5) 2441MHz




Test Mode:GFSK(DH5) 2480MHz




Test Mode: $\pi/4$ DQPSK(2DH5)

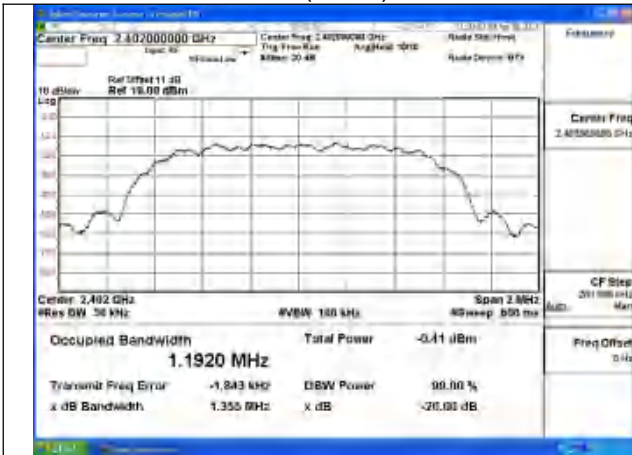


Test Mode: $\pi/4$ DQPSK(2DH5) 2402MHz

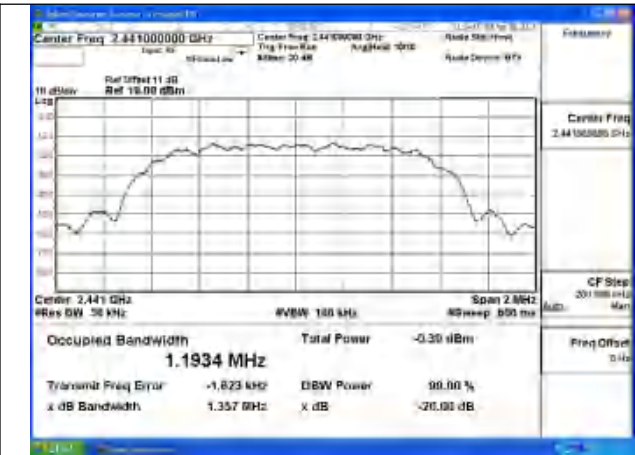

Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz

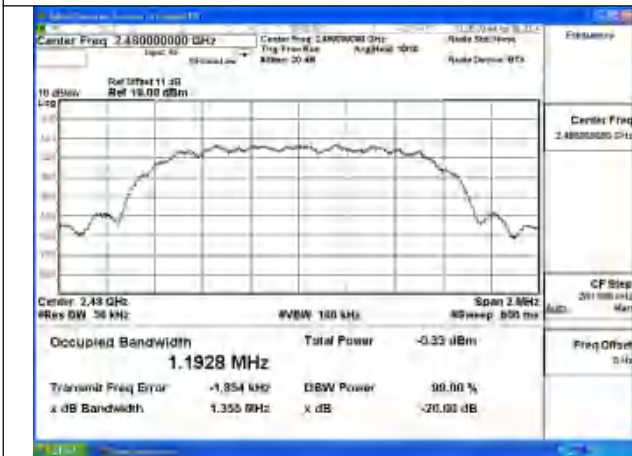

Test Mode: $\pi/4$ DQPSK(2DH5) 2480MHz

[illegible]

The screenshot shows a Spectrum Analyzer interface. The main display is a frequency plot with a peak at 1.1990 MHz. The plot has a grid and a scale from 10 dBm to 130 dBm. The peak is labeled with its frequency and power.

Key parameters displayed include:

- Center Freq:** 2.441000000 GHz
- Span:** 2 MHz
- Res BW:** 50 kHz
- VBW:** 100 kHz
- dBm:** -0.10 dBm
- Occupied Bandwidth:** 1.1990 MHz
- Total Power:** -0.10 dBm
- Transmit Freq Error:** -1.448 kHz
- dBV Power:** 99.00 %
- x dB Bandwidth:** 1.350 MHz
- x dB:** -20.00 dB

Parameter	Value
Center Freq	2.441000000 GHz
Span	2 MHz
Res BW	50 kHz
VBW	100 kHz
dBm	-0.10 dBm
Occupied Bandwidth	1.1990 MHz
Total Power	-0.10 dBm
Transmit Freq Error	-1.448 kHz
dBV Power	99.00 %
x dB Bandwidth	1.350 MHz
x dB	-20.00 dB

1.2 GHz to 3.0 GHz

Center Freq 2.480000000 GHz

Input 40

Center Freq 2.480000000 GHz

Trig From Bus

Amplitude 10 dB

Radio State: Off

Radio Device: W7

10 dBm

Ref 15.00 dBm

Span 2 MHz

Center 2.48 GHz

#Res BW 50 kHz

#VBW 100 kHz

#Sweep 500 ms

Occupied Bandwidth

1.1988 MHz

Total Power

-0.29 dBm

Transmit Freq Error

-1.476 kHz

dBm Power

99.00 %

x dB Bandwidth

1.355 MHz

x dB

-20.00 dB

CF Step

201.000 kHz


Frag Offset

0 kHz


[illegible]



4 Hopping Frequency Separation Channel separation

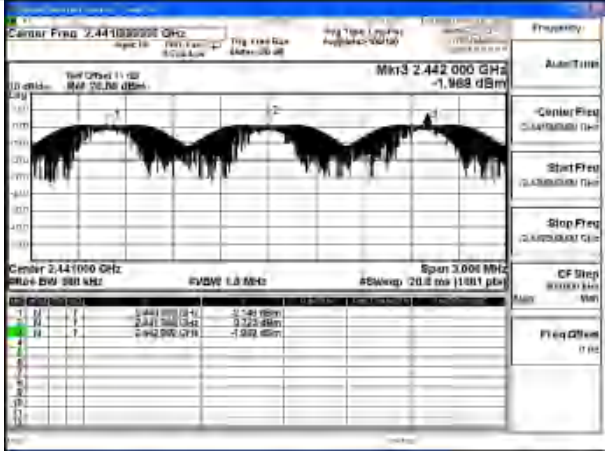
Test Mode	Op-mode	Channel separation (MHz)
GFSK(DH5)	Hopping mode	1
		

Number of Hopping Frequencies

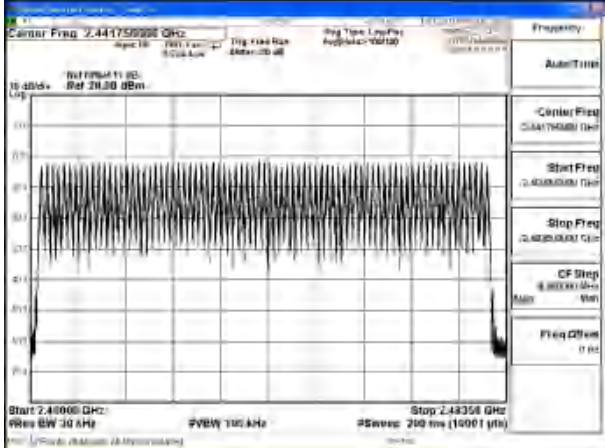
Test Mode	Op-mode	Result
GFSK(DH5)	Hopping mode	79
		



Channel separation

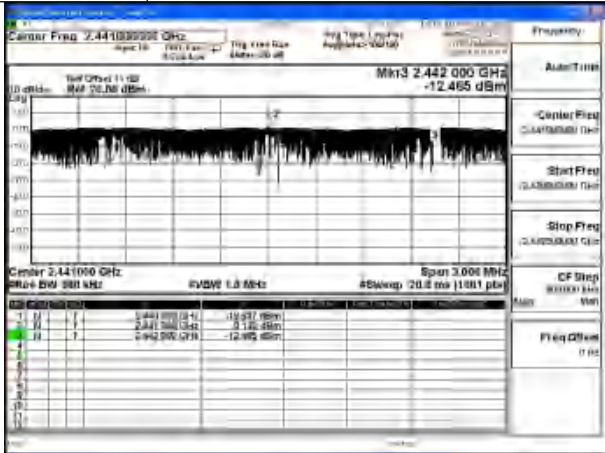
Test Mode	Op-mode	Channel separation (MHz)
$\pi/4$ DQPSK(2DH5)	Hopping mode	1
		

Number of Hopping Frequencies

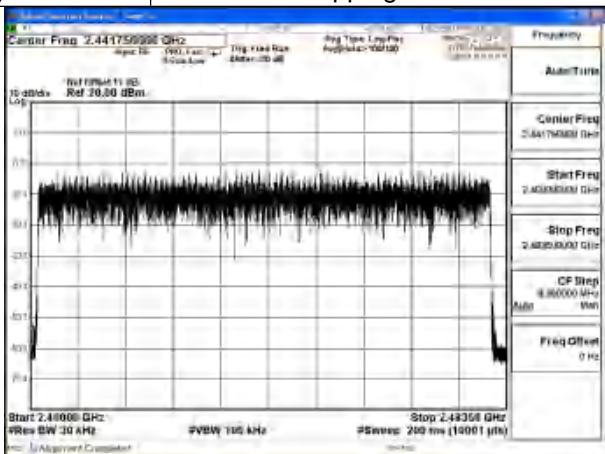
Test Mode	Op-mode	Result
$\pi/4$ DQPSK(2DH5)	Hopping mode	79
		



Channel separation

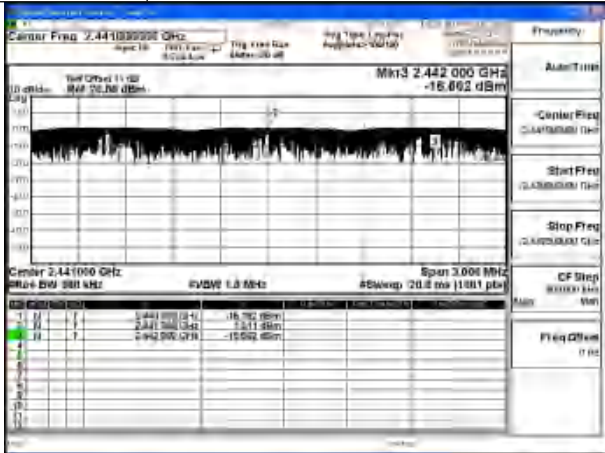Test Mode	Op-mode	Channel separation (MHz)
8DPSK(3DH5)	Hopping mode	1
		

Number of Hopping Frequencies

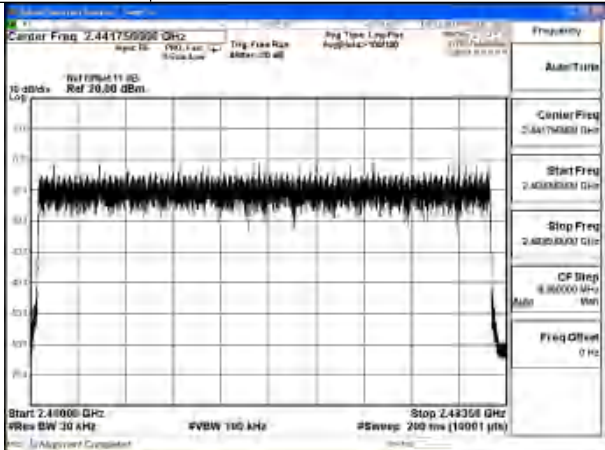Test Mode	Op-mode	Result
8DPSK(3DH5)	Hopping mode	79
		



5 Dwell Time


Test Mode	Packet type	Time slot length(μ S)	Dwell time	Dwell time(ms)
GFSK(DH1)	DH1	381	Time slot length *31.6*16000/2/79	121.9
GFSK(DH3)	DH3	1610	Time slot length *31.6*16000/4/79	257.6
GFSK(DH5)	DH5	2870	Time slot length *31.6*16000/6/79	306.1

Test Mode	Packet type	Time slot length(μ S)	Dwell time	Dwell time(ms)
π /4DQPSK(2DH1)	2DH1	384	Time slot length *31.6*16000/2/79	122.9
π /4DQPSK(2DH3)	2DH3	1620	Time slot length *31.6*16000/4/79	259.2
π /4DQPSK(2DH5)	2DH5	2870	Time slot length *31.6*16000/6/79	306.1


Test Mode	Packet type	Time slot length(μ S)	Dwell time	Dwell time(ms)
8DPSK(3DH1)	3DH1	370	Time slot length *31.6*16000/2/79	118.4
8DPSK(3DH3)	3DH3	1620	Time slot length *31.6*16000/4/79	259.2
8DPSK(3DH5)	3DH5	2870	Time slot length *31.6*16000/6/79	306.1




Test Mode: GFSK(DH5)

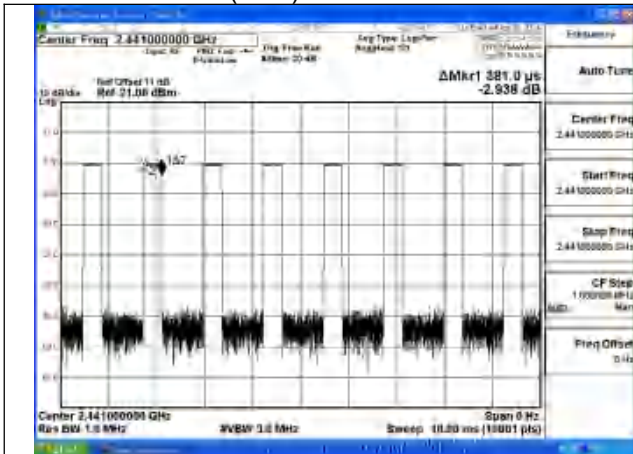

Test Mode:GFSK(DH1) 2441MHz

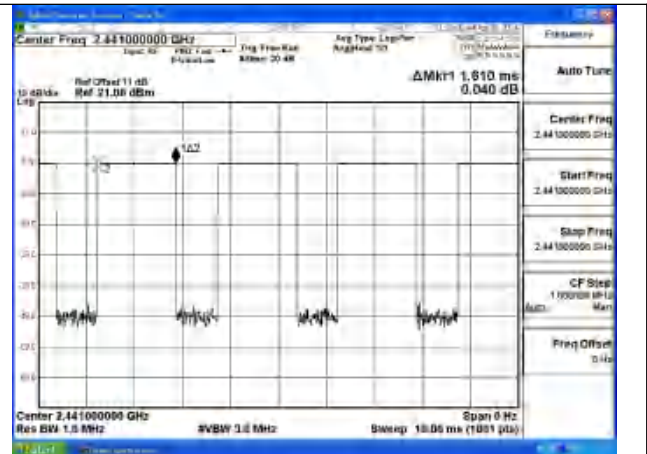


Test Mode:GFSK(DH3) 2441MHz

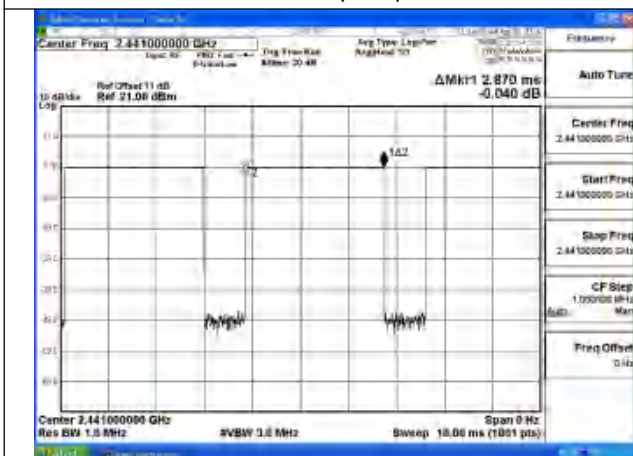


Test Mode:GFSK(DH5) 2441MHz




Test Mode: $\pi/4$ DQPSK(2DH5)

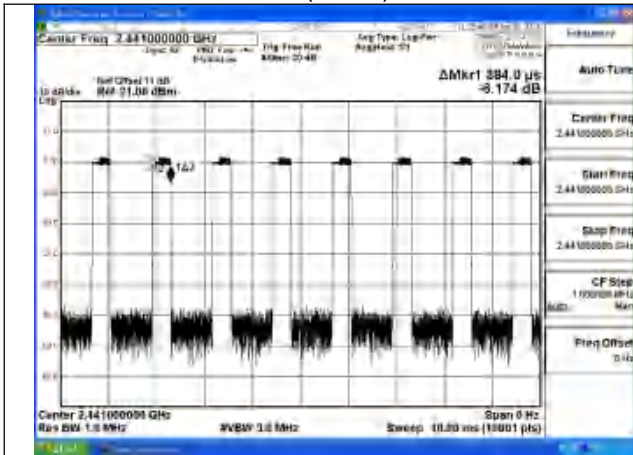


Test Mode: $\pi/4$ DQPSK(2DH1) 2441MHz

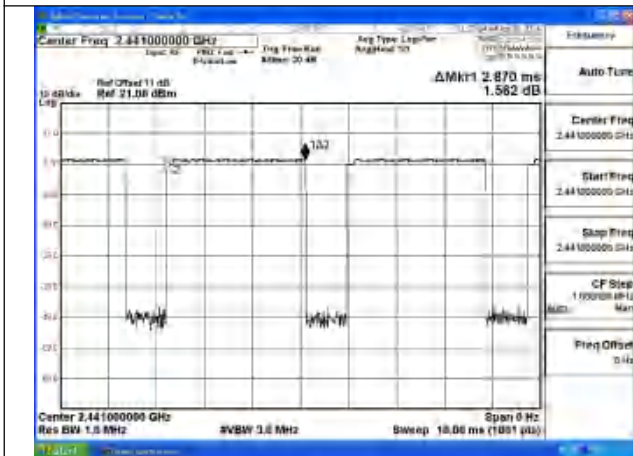

Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz

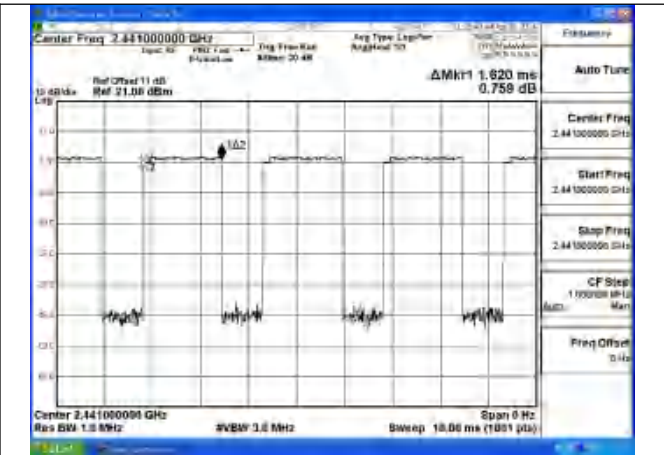


Test Mode: $\pi/4$ DQPSK(2DH3) 2441MHz







Test Mode: 8DPSK(3DH5)

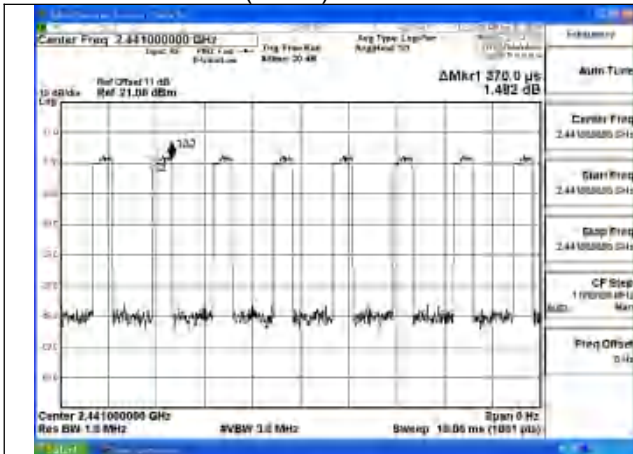

Test Mode:8DPSK(3DH1) 2441MHz

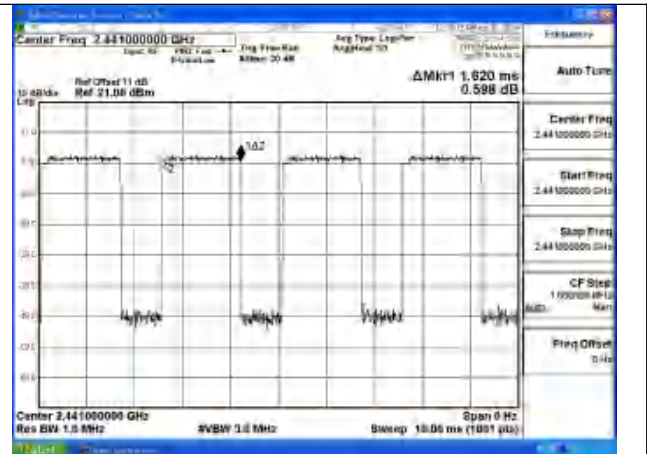


Test Mode:8DPSK(3DH3) 2441MHz

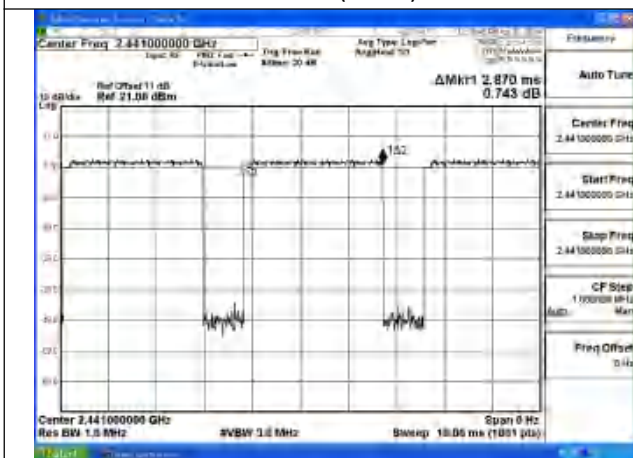

Test Mode:8DPSK(3DH5) 2441MHz


6 Conducted Out of band emission measurement

Test Mode: GFSK

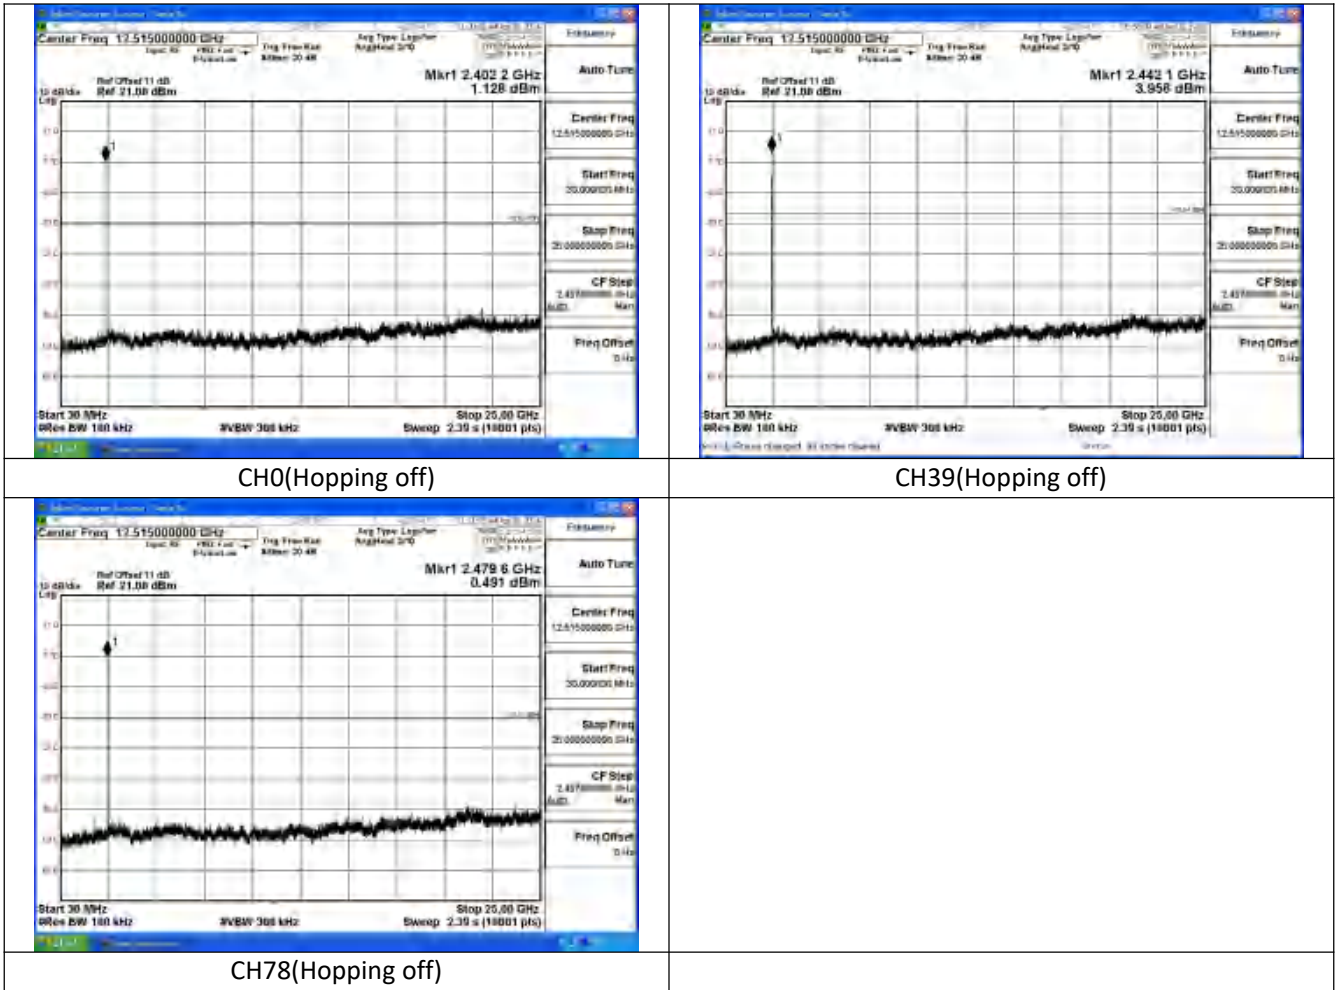





Test Mode: π /4DQPSK

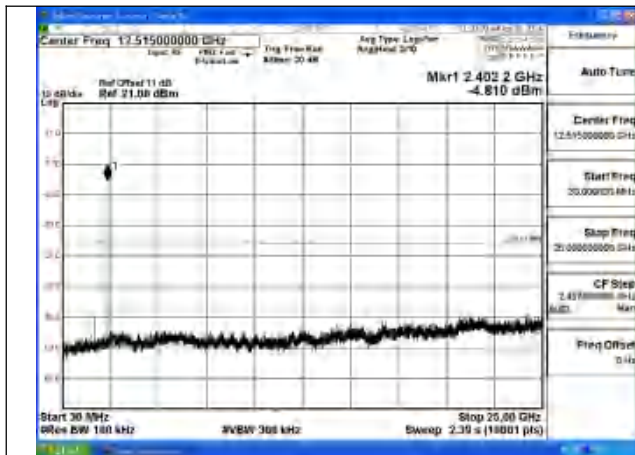

CH0(Hopping off)

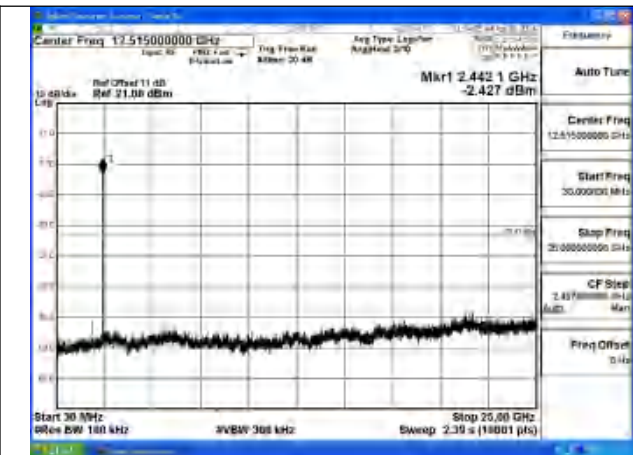


CH39(Hopping off)

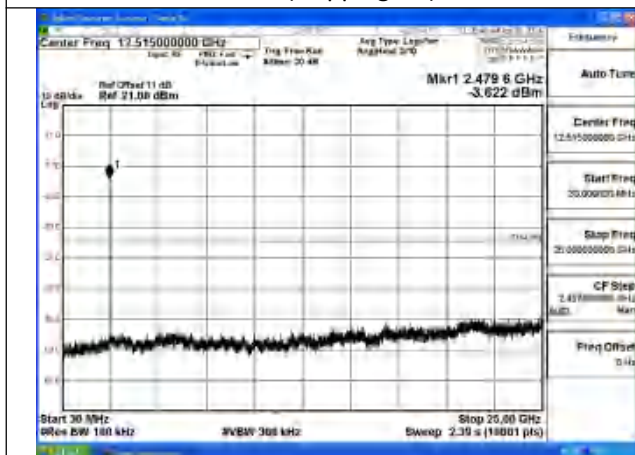

CH78(Hopping off)



Test Mode: 8DPSK

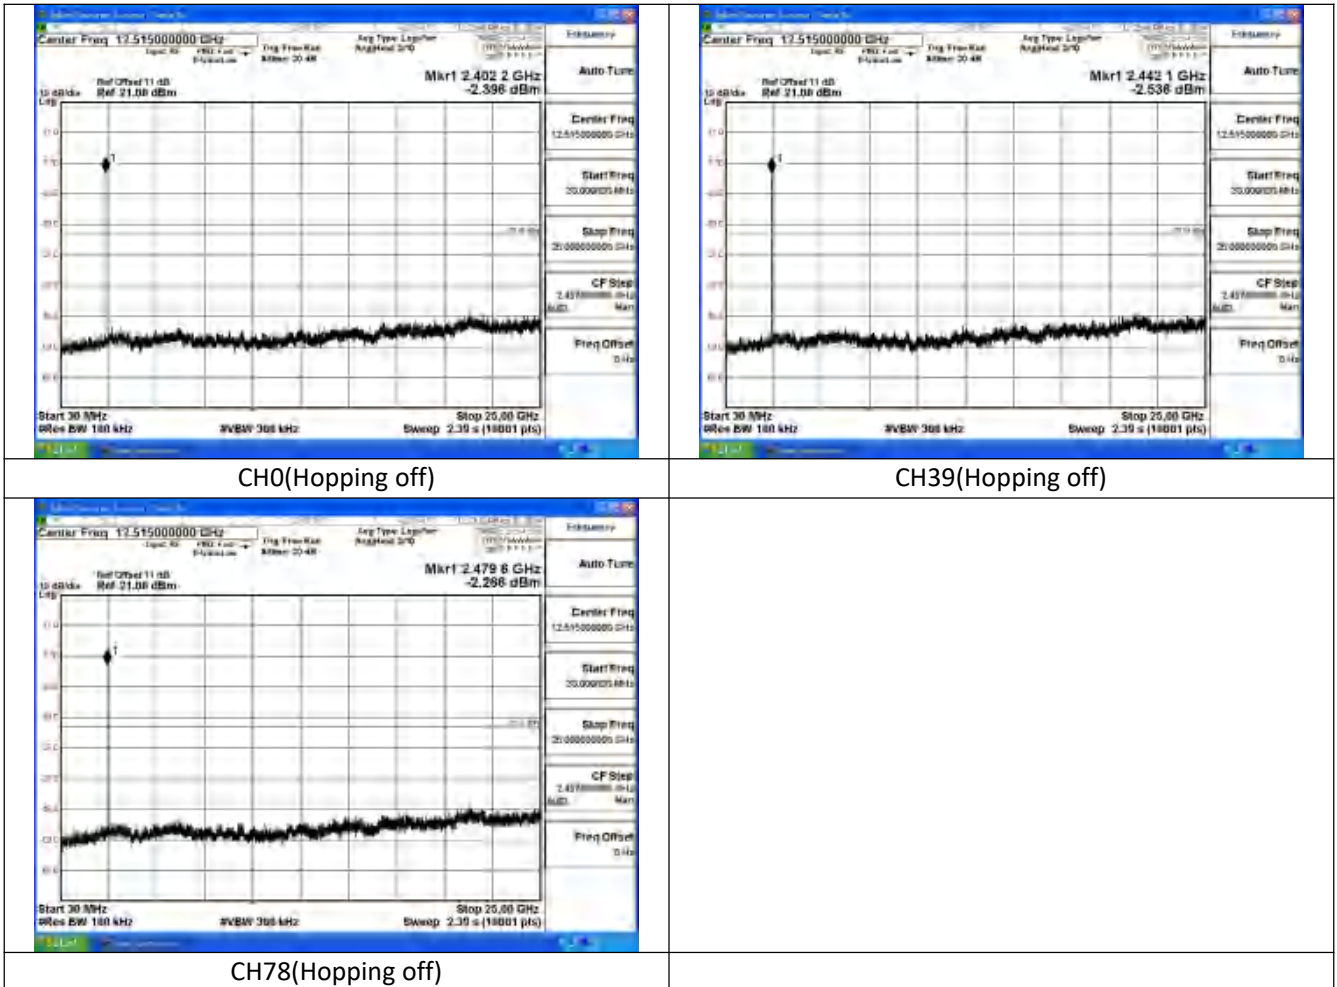

7 Band Edge measurement

Test Mode: GFSK



CH0(Hopping off)



CH0(Hopping on)



CH78(Hopping off)



CH78(Hopping on)



Test Mode: π /4DQPSK



CH0(Hopping off)



CH0(Hopping on)



CH78(Hopping off)



CH78(Hopping on)



Test Mode: 8DPSK



CH0(Hopping off)



CH0(Hopping on)



CH78(Hopping off)



CH78(Hopping on)

BT(ANT1 QCC3044)

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK(DH5)	2402	Fig.1	98.20%	0.08	4.63

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$


Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
$\pi/4$ DQPSK(2D H5)	2402	Fig.2	97.80%	0.10	4.63

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
8DPSK(3DH5)	2402	Fig.3	98.20%	0.08	4.63

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode: GFSK(DH5)

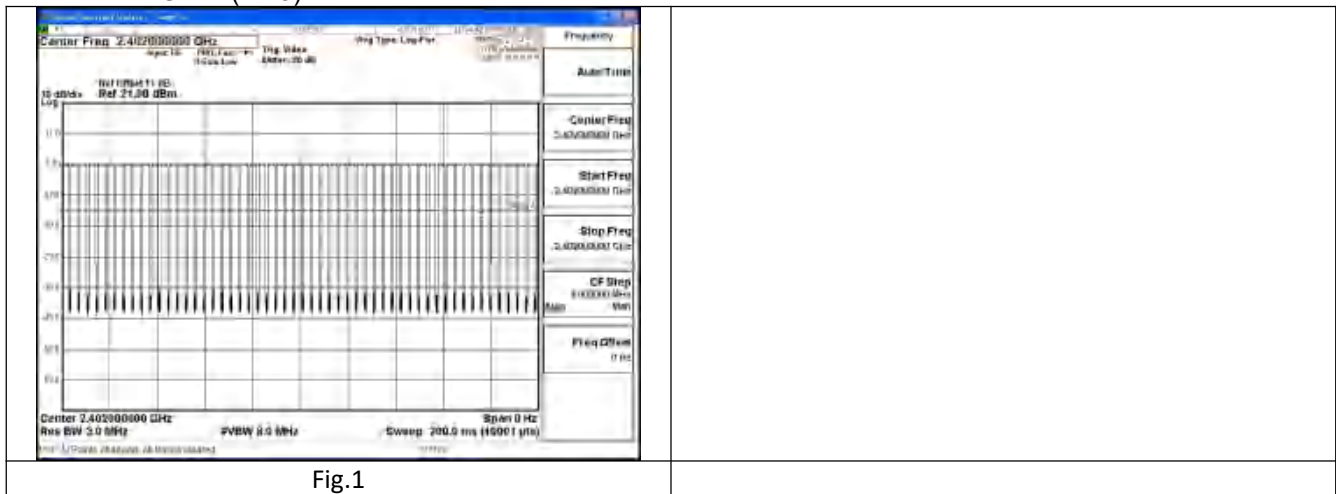



Test Mode: π /4DQPSK(2DH5)

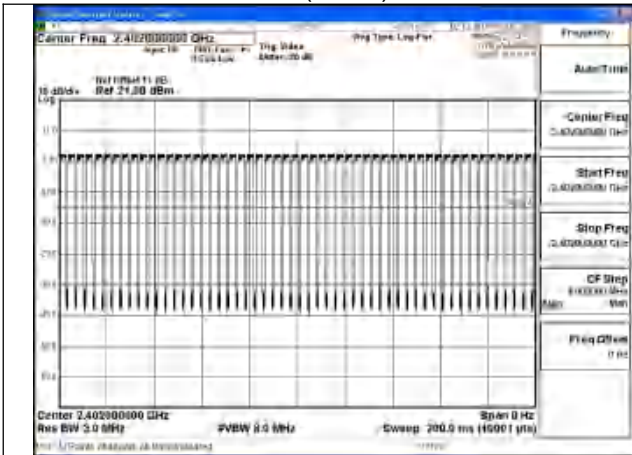


Fig.2

Test Mode: 8DPSK(3DH5)

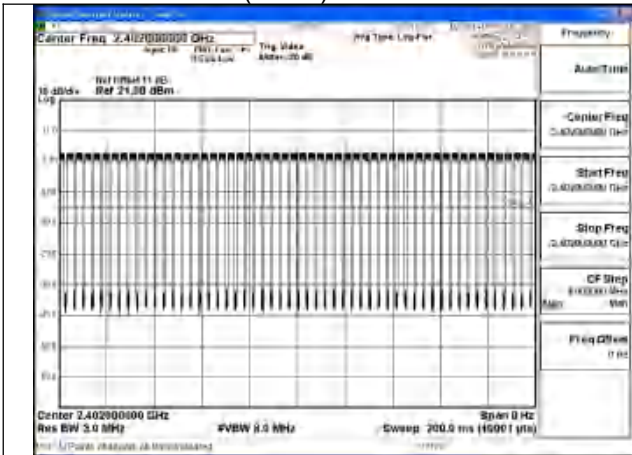


Fig.3



2 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	0.73	0.73	0.85
$\pi/4$ DQPSK(2DH5)	3.12	3.13	3.26
8DPSK(3DH5)	3.65	3.71	3.80

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	-2.05	-3.78	-0.70
$\pi/4$ DQPSK(2DH5)	0.01	-1.22	-0.91
8DPSK(3DH5)	0.21	0.77	-1.15

EIRP

Modulation type	Peak EIRP (dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	5.36	5.36	5.48
$\pi/4$ DQPSK(2DH5)	7.75	7.76	7.89
8DPSK(3DH5)	8.28	8.34	8.44

Modulation type	Average EIRP (dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	2.58	0.85	3.93
$\pi/4$ DQPSK(2DH5)	4.64	3.41	3.72
8DPSK(3DH5)	4.84	5.40	3.48

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)




3 Occupied Bandwidth 20dB Bandwidth

Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
GFSK(DH5)	2402	956.2
GFSK(DH5)	2441	955.2
GFSK(DH5)	2480	941.0

Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
$\pi/4$ DQPSK(2DH5)	2402	1357.1
$\pi/4$ DQPSK(2DH5)	2441	1353.0
$\pi/4$ DQPSK(2DH5)	2480	1354.4


Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
8DPSK(3DH5)	2402	1361.9
8DPSK(3DH5)	2441	1354.8
8DPSK(3DH5)	2480	1358.1

Test Mode: GFSK(DH5)

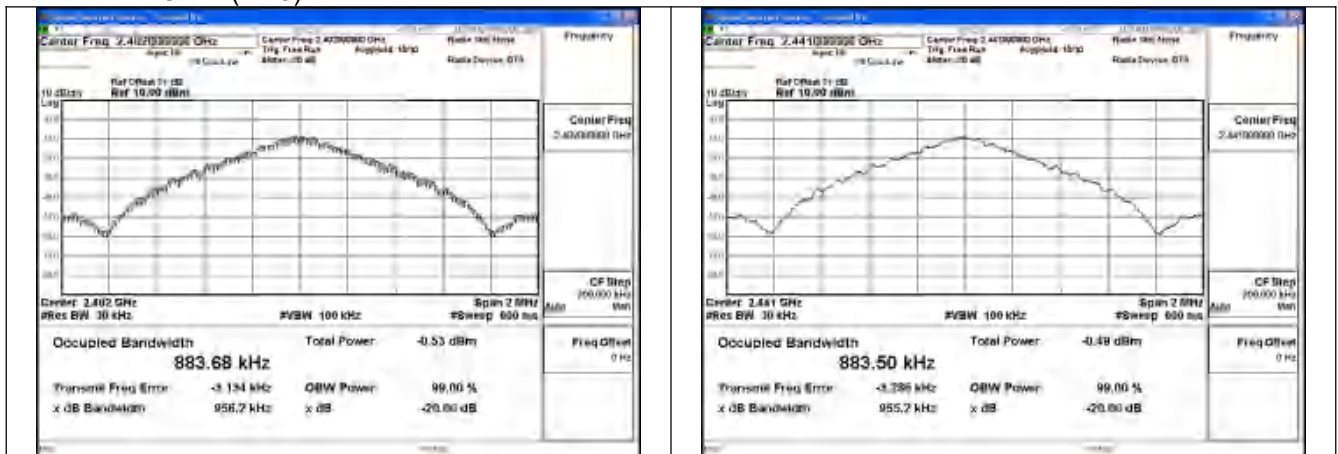

Test Mode:GFSK(DH5) 2402MHz


Test Mode:GFSK(DH5) 2441MHz

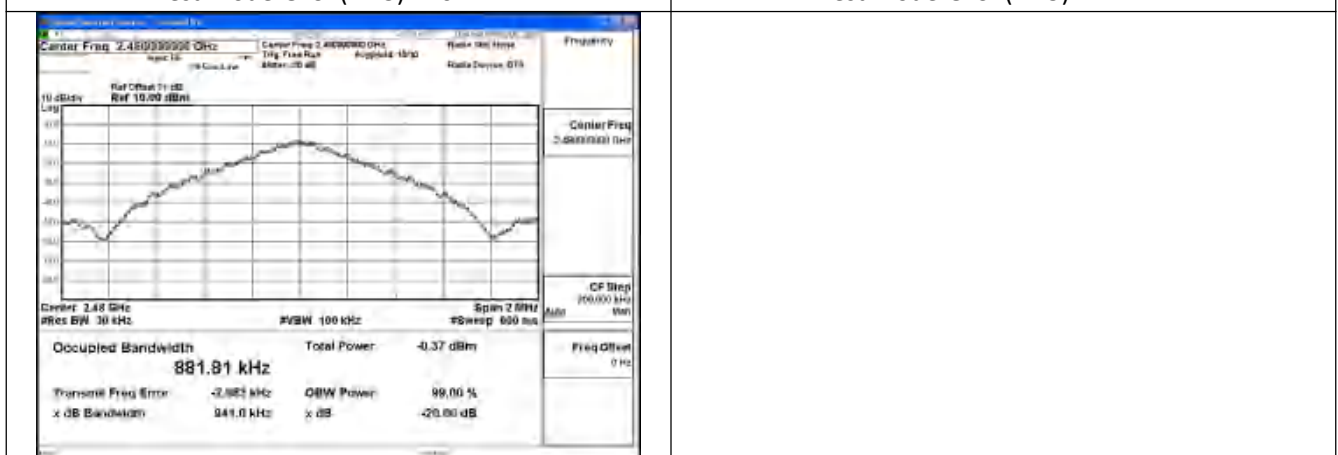


Test Mode:GFSK(DH5) 2480MHz




Test Mode: $\pi/4$ DQPSK(2DH5)

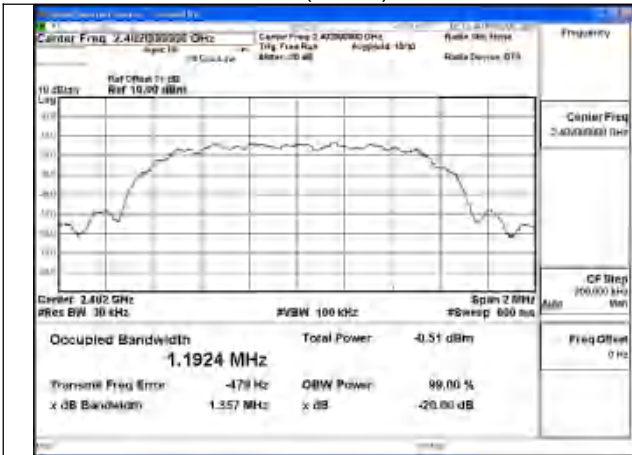

Test Mode: $\pi/4$ DQPSK(2DH5) 2402MHz

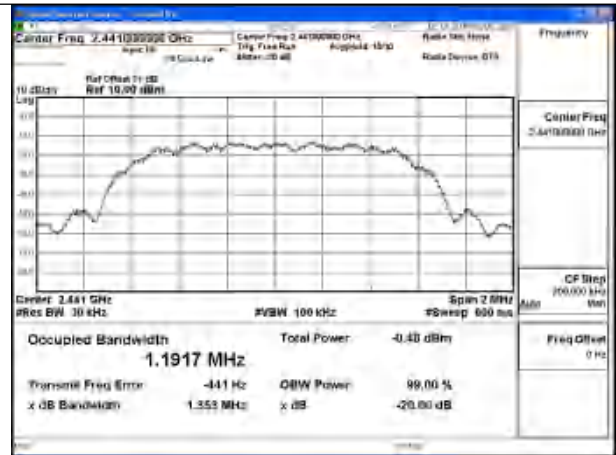


Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz

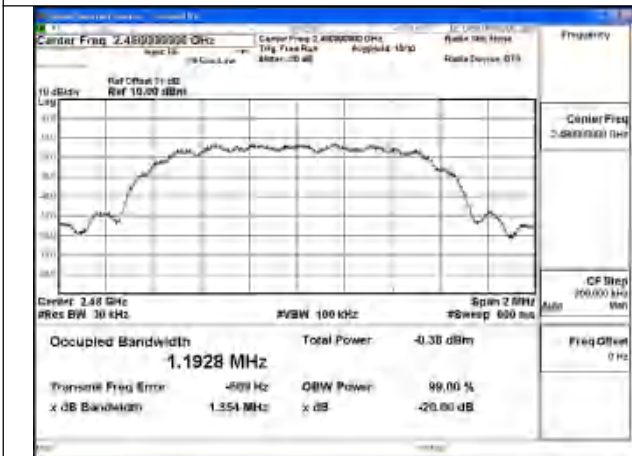


Test Mode: $\pi/4$ DQPSK(2DH5) 2480MHz




Test Mode: 8DPSK(3DH5)

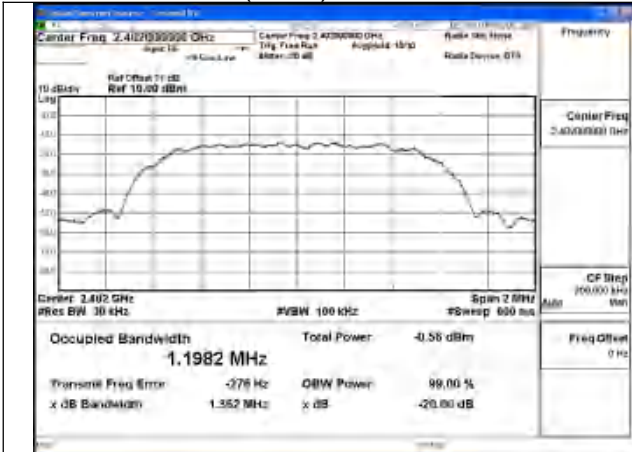

Test Mode:8DPSK(3DH5) 2402MHz

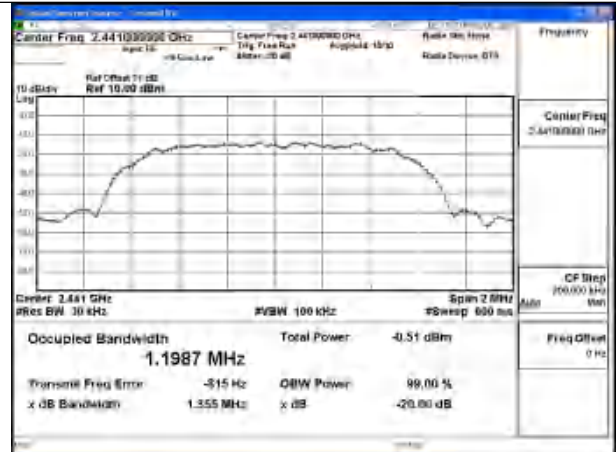

Test Mode:8DPSK(3DH5) 2441MHz

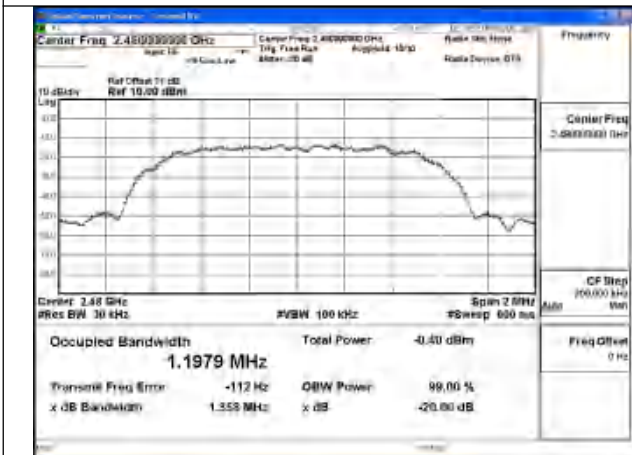

Test Mode:8DPSK(3DH5) 2480MHz




99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK(DH5)	2402	884.7
GFSK(DH5)	2441	883.1
GFSK(DH5)	2480	881.2

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
$\pi/4$ DQPSK(2DH5)	2402	1191.7
$\pi/4$ DQPSK(2DH5)	2441	1192.3
$\pi/4$ DQPSK(2DH5)	2480	1193.0


Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
8DPSK(3DH5)	2402	1198.5
8DPSK(3DH5)	2441	1198.7
8DPSK(3DH5)	2480	1197.7

Test Mode: GFSK(DH5)

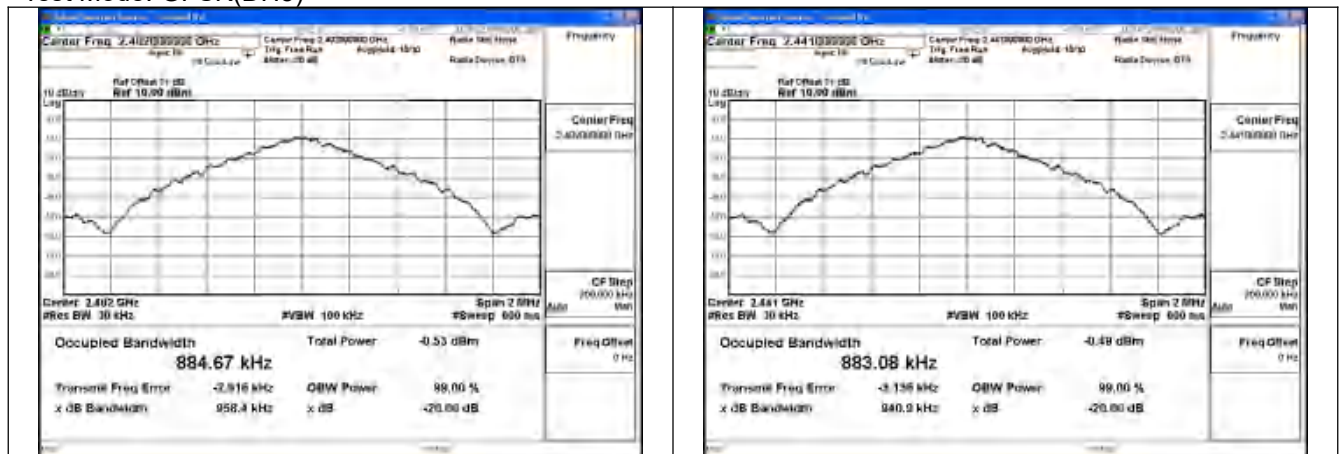

Test Mode:GFSK(DH5) 2402MHz


Test Mode:GFSK(DH5) 2441MHz

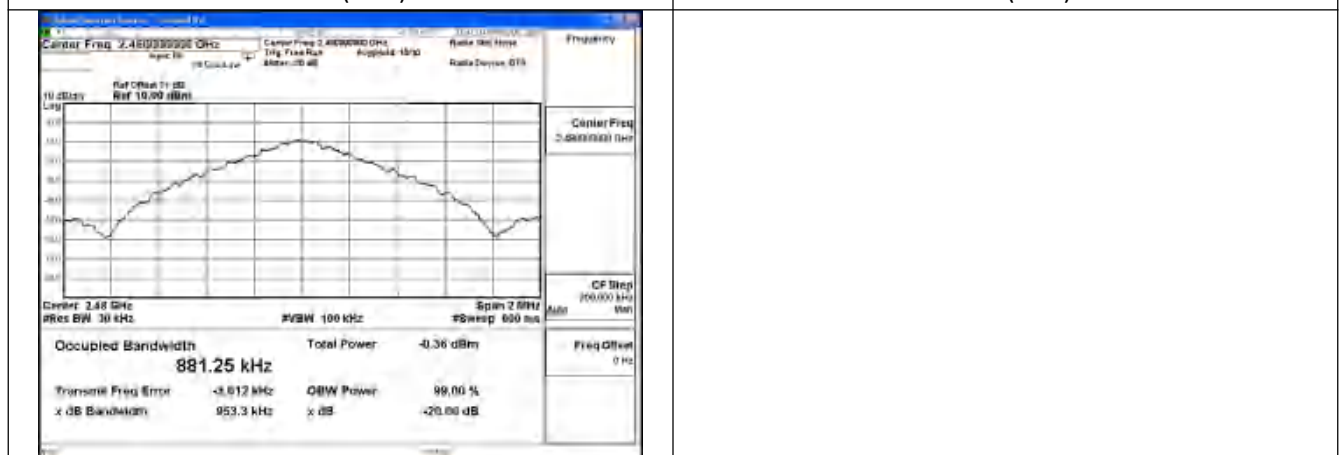


Test Mode:GFSK(DH5) 2480MHz




Test Mode: $\pi/4$ DQPSK(2DH5)

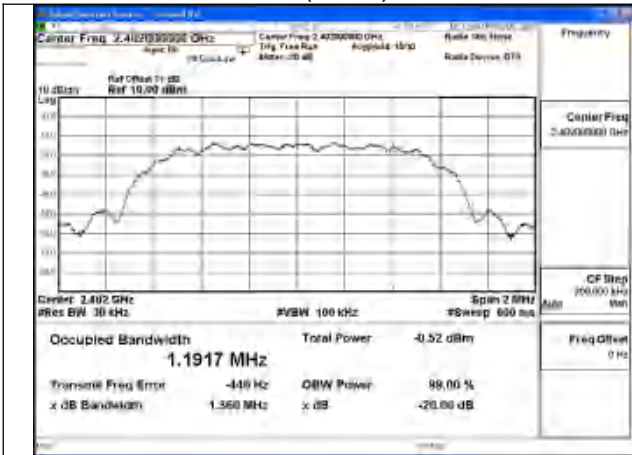

Test Mode: $\pi/4$ DQPSK(2DH5) 2402MHz

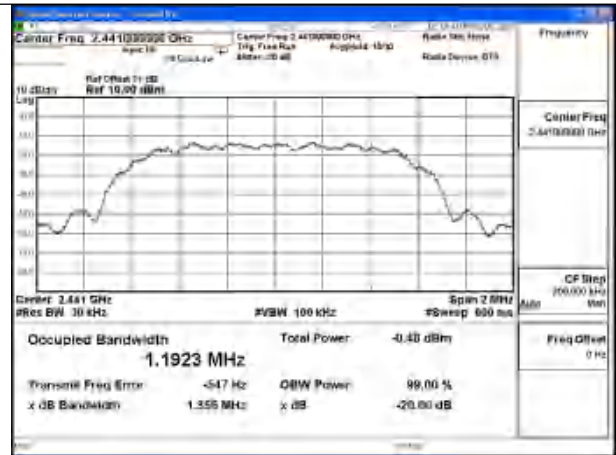


Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz

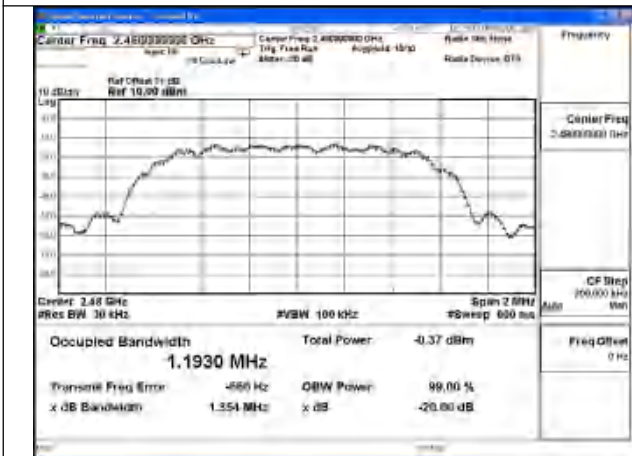


Test Mode: $\pi/4$ DQPSK(2DH5) 2480MHz




Test Mode: 8DPSK(3DH5)

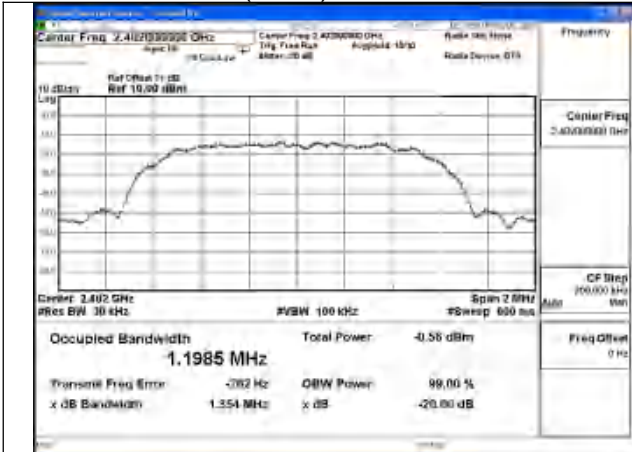

Test Mode:8DPSK(3DH5) 2402MHz

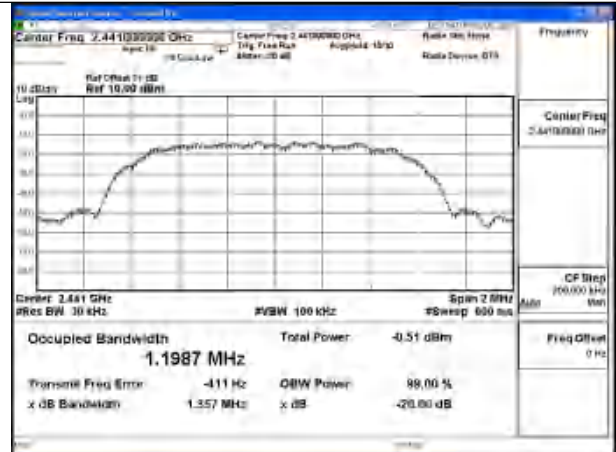


Test Mode:8DPSK(3DH5) 2441MHz

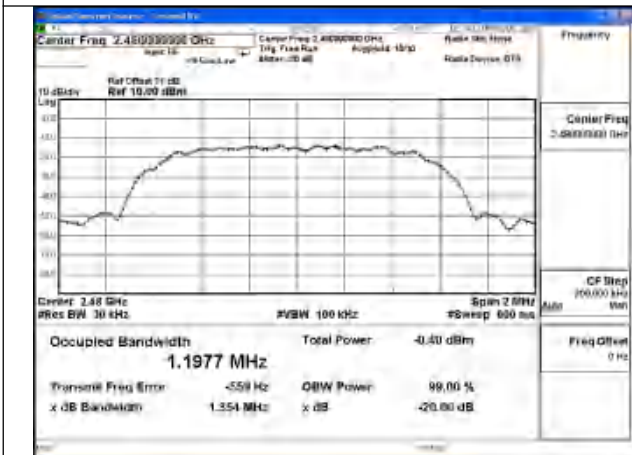


Test Mode:8DPSK(3DH5) 2480MHz



4 Hopping Frequency Separation Channel separation

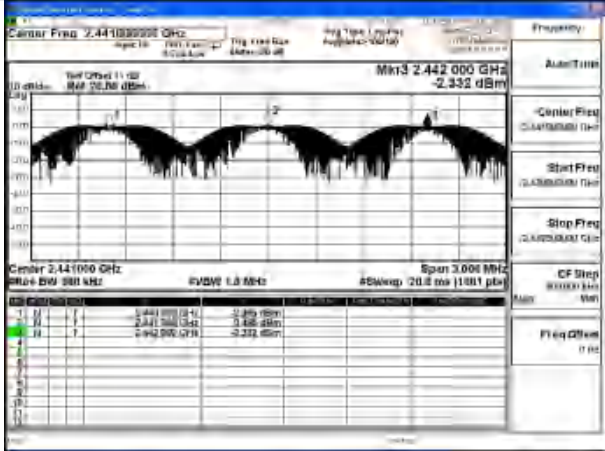
Test Mode	Op-mode	Channel separation (MHz)
GFSK(DH5)	Hopping mode	1
		

Number of Hopping Frequencies

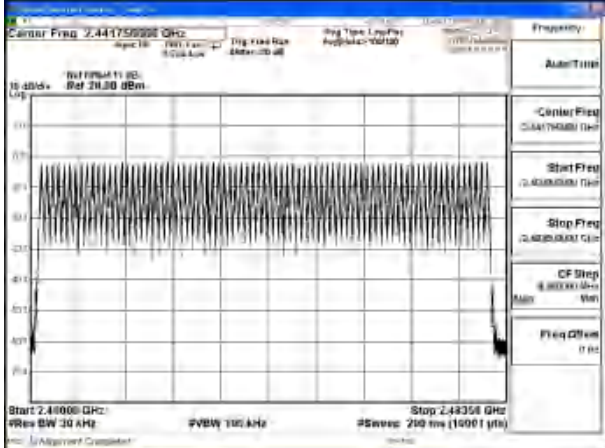
Test Mode	Op-mode	Result
GFSK(DH5)	Hopping mode	79
		



Channel separation

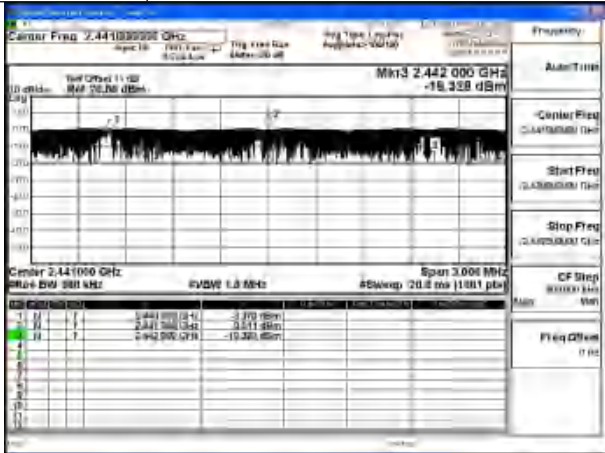Test Mode	Op-mode	Channel separation (MHz)
$\pi/4$ DQPSK(2DH5)	Hopping mode	1
		

Number of Hopping Frequencies

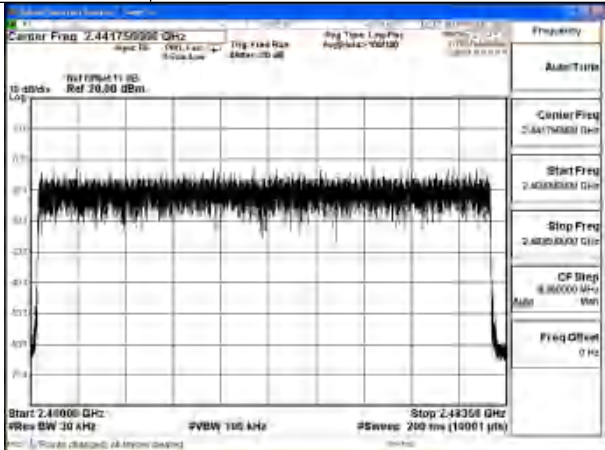Test Mode	Op-mode	Result
$\pi/4$ DQPSK(2DH5)	Hopping mode	79
		



Channel separation

Test Mode	Op-mode	Channel separation (MHz)
8DPSK(3DH5)	Hopping mode	1

Number of Hopping Frequencies

Test Mode	Op-mode	Result
8DPSK(3DH5)	Hopping mode	79




5 Dwell Time

Test Mode	Packet type	Time slot length(μ S)	Dwell time	Dwell time(ms)
GFSK(DH1)	DH1	381	Time slot length *31.6*16000/2/79	121.9
GFSK(DH3)	DH3	1620	Time slot length *31.6*16000/4/79	259.2
GFSK(DH5)	DH5	2860	Time slot length *31.6*16000/6/79	305.1


Test Mode	Packet type	Time slot length(μ S)	Dwell time	Dwell time(ms)
π /4DQPSK(2DH1)	2DH1	383	Time slot length *31.6*16000/2/79	122.6
π /4DQPSK(2DH3)	2DH3	1620	Time slot length *31.6*16000/4/79	259.2
π /4DQPSK(2DH5)	2DH5	2870	Time slot length *31.6*16000/6/79	306.1

Test Mode	Packet type	Time slot length(μ S)	Dwell time	Dwell time(ms)
8DPSK(3DH1)	3DH1	370	Time slot length *31.6*16000/2/79	118.4
8DPSK(3DH3)	3DH3	1620	Time slot length *31.6*16000/4/79	259.2
8DPSK(3DH5)	3DH5	2870	Time slot length *31.6*16000/6/79	306.1


Test Mode: GFSK(DH5)

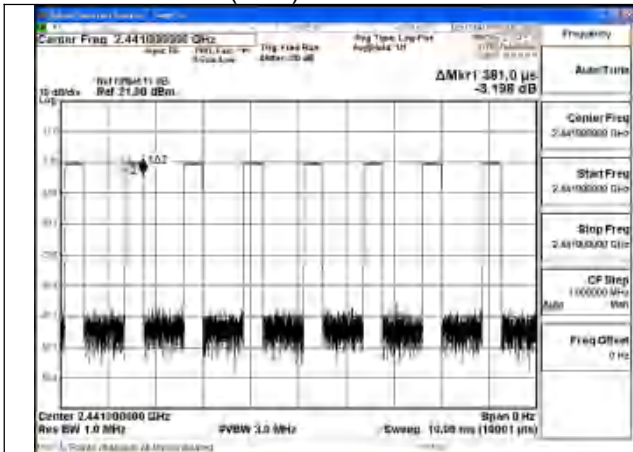

Test Mode:GFSK(DH1) 2441MHz

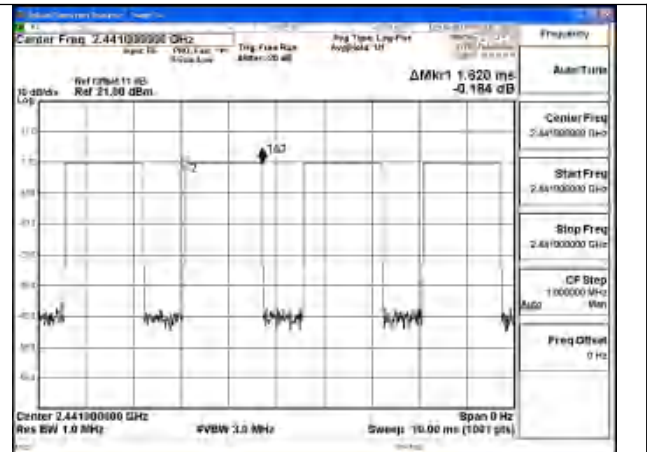


Test Mode:GFSK(DH3) 2441MHz

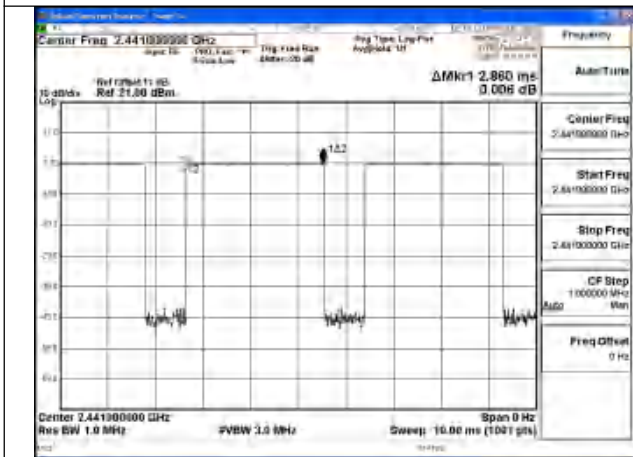


Test Mode:GFSK(DH5) 2441MHz


Test Mode: $\pi/4$ DQPSK(2DH5)

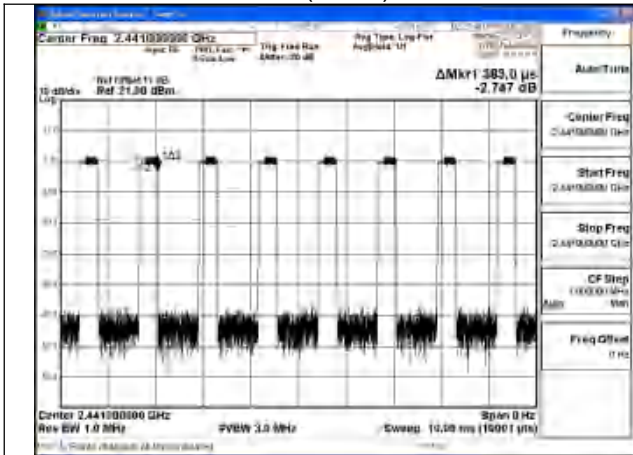


Test Mode: $\pi/4$ DQPSK(2DH1) 2441MHz

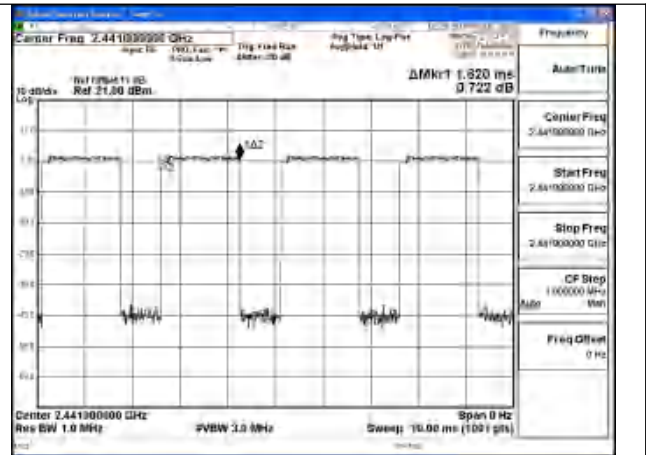

Test Mode: $\pi/4$ DQPSK(2DH3) 2441MHz

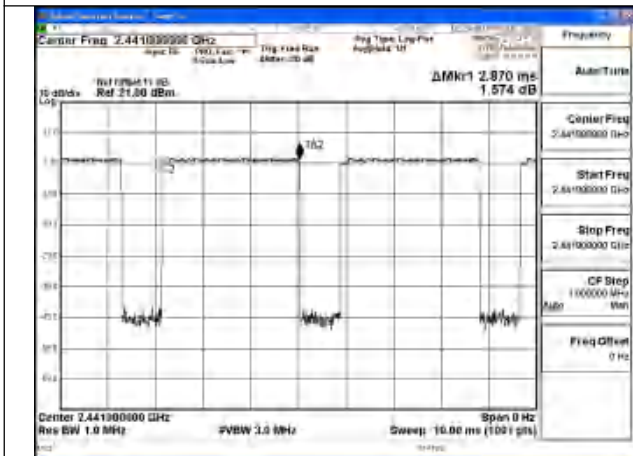

Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz



Center Freq: 2.441000000 GHz

Span: 3.0 MHz

Res BW: 1.0 MHz

Sweep: 10.00 ms (1001 pts)

Span: 8 MHz

F1: 2.441000000 GHz

Ref Offset: 11 dB

Ref: 21.00 dBm

ΔMkr1: 370.0 μs

1.400 dB

Xc

Center 2.441000000 GHz

Res BW 1.0 MHz

Span 8 MHz

Sweep 10.00 ms (1001 pts)

Autotune

Center Freq

2.441000000 GHz

Span

3.0 MHz

Res BW

1.0 MHz

Sweep

10.00 ms (1001 pts)

F1

2.441000000 GHz

F2

2.441000000 GHz

CP Mode

0.000000

Marker

1.400 dB

Peak Offset

11.00 dB

Center Freq 2.441000000 GHz

Span 0 Hz

Res BW 1.0 MHz

AVBW 3.0 MHz

BW Sweep 10.00 ns (1001 pts)

Ref Offset 11 dB

Ref 21.00 dBm

ΔMHz 1.020 ns

0.004 GB

1.02

X3

Center Freq 2.441000000 GHz

Span 0 Hz

Ref Offset 11 dB

Ref 21.00 dBm

ΔMHz 1.020 ns

0.004 GB

1.02

X3

Center Freq 2.441000000 GHz

Ref Offset 11 dB

Ref 21.06 dBm

DMkr1 2.870 ms

2.010 dB

Center 2.441000000 GHz

Span 8 Hz

Res BW 1.0 MHz


#VBW 3.0 MHz

Sweep 10.00 ns (1001 pts)

[illegible]


6 Conducted Out of band emission measurement

Test Mode: GFSK

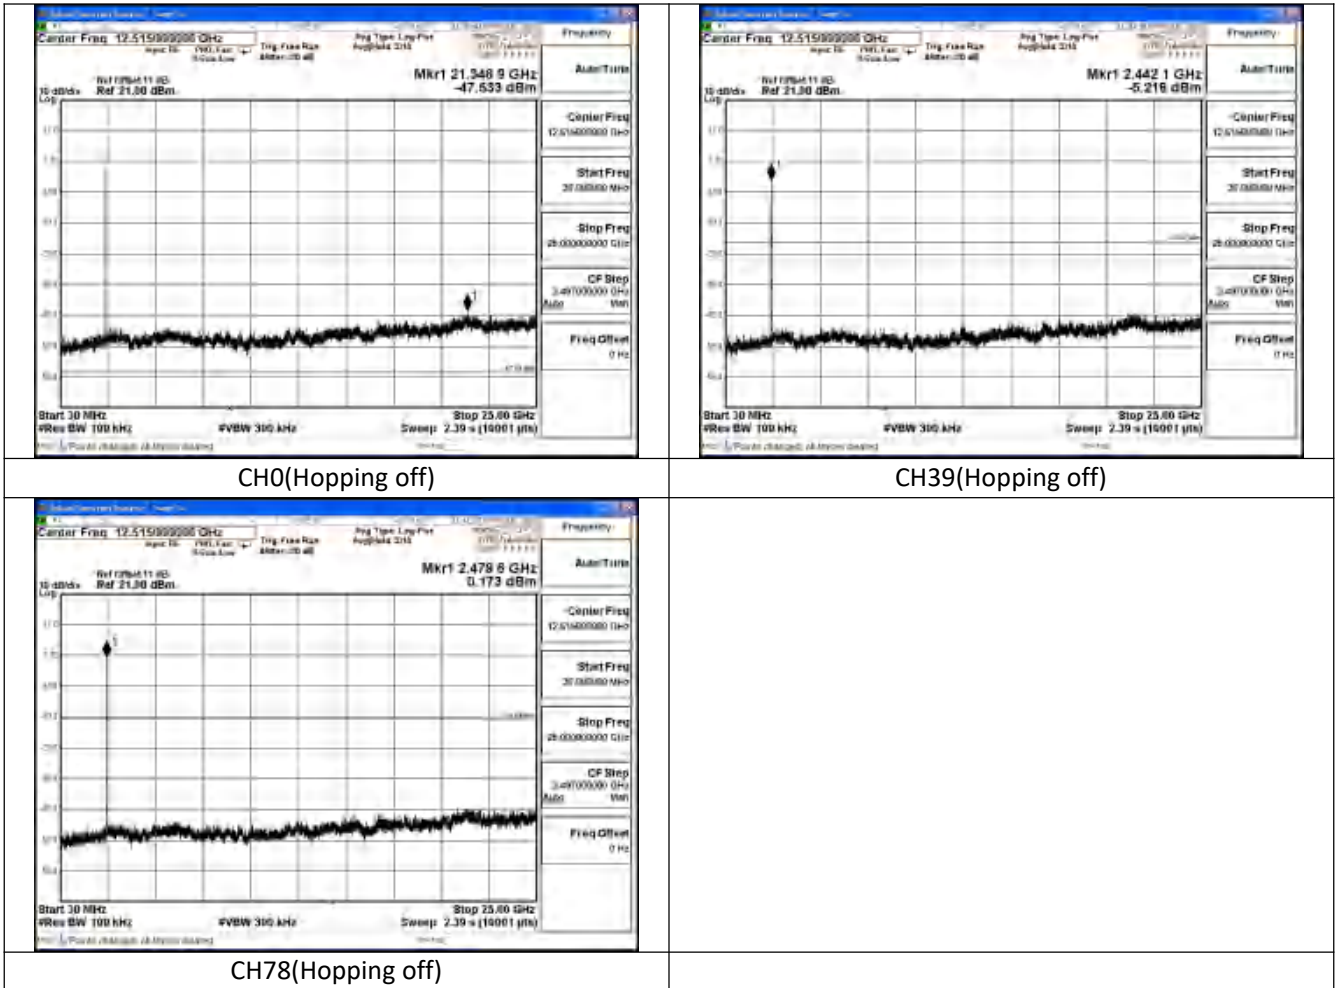





Test Mode: π /4DQPSK

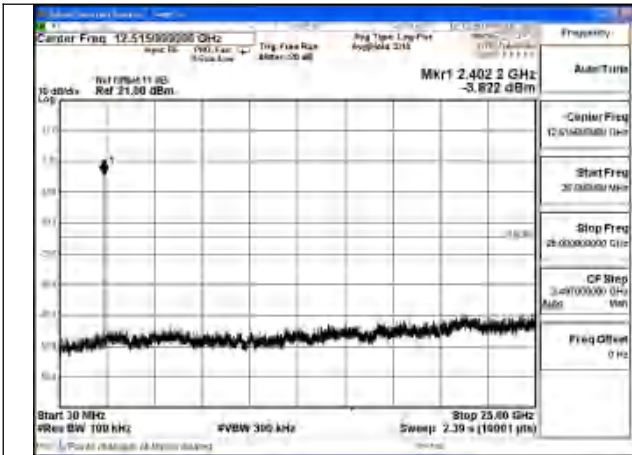

CH0(Hopping off)

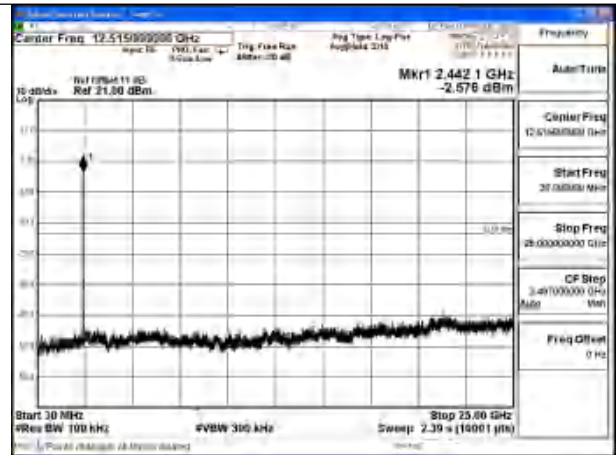


CH39(Hopping off)

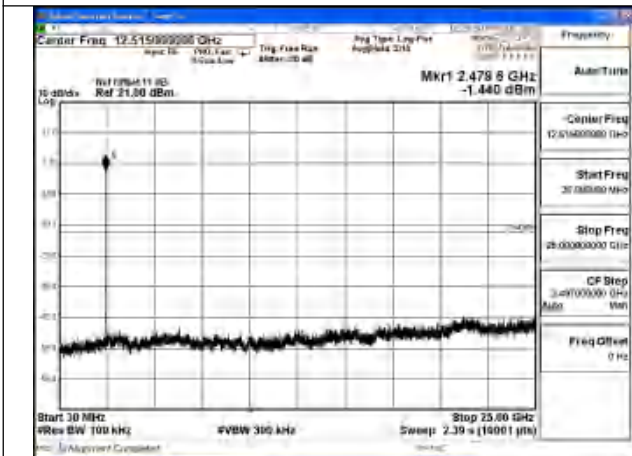


CH78(Hopping off)




Test Mode: 8DPSK

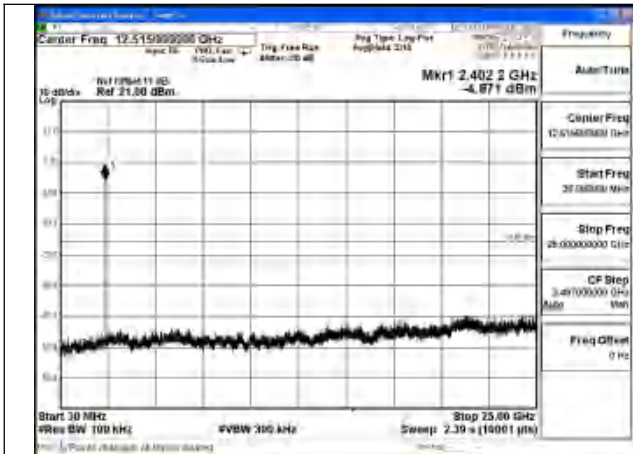

CH0(Hopping off)

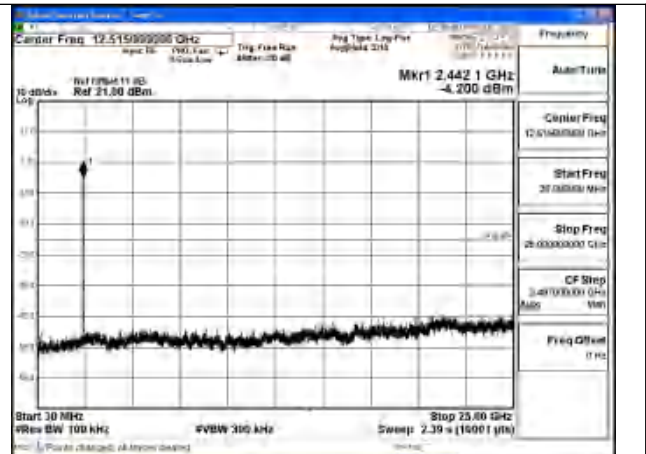

CH39(Hopping off)

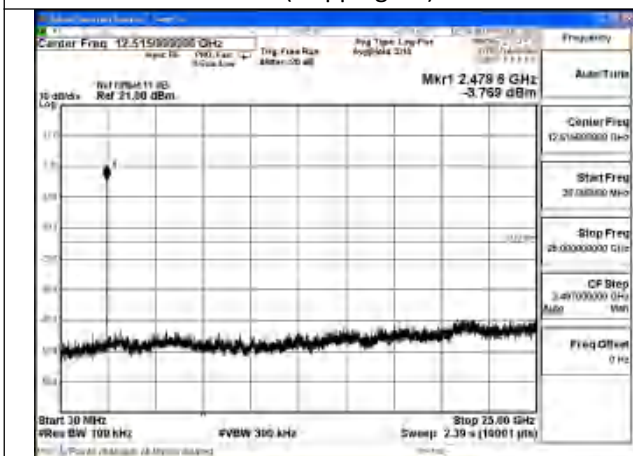

CH78(Hopping off)

8 Test Mode: GFSK



CH0(Hopping on)



CH78(Hopping on)




Test Mode: π /4DQPSK




CH0(Hopping off)



CH0(Hopping on)

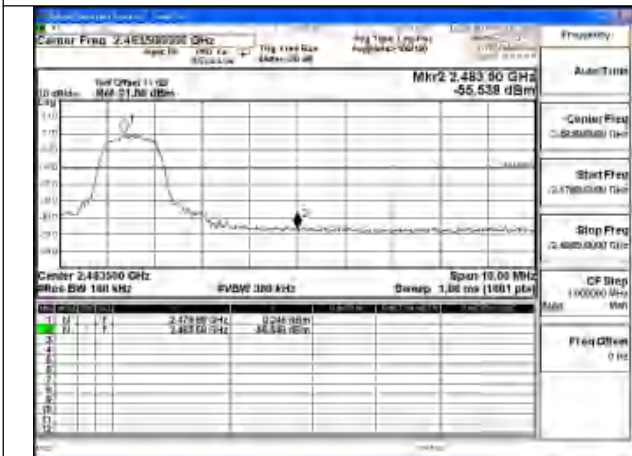

CH78(Hopping off)

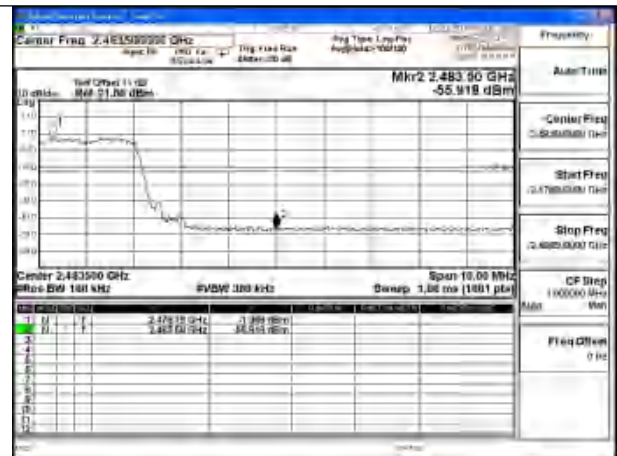


CH78(Hopping on)



Test Mode: 8DPSK



CH0(Hopping off)

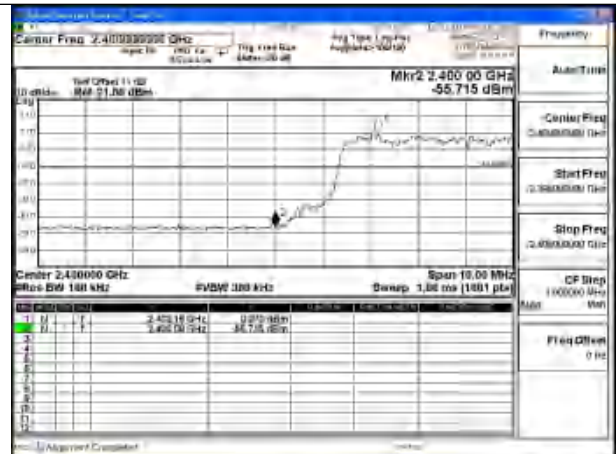

CH0(Hopping on)



CH78(Hopping off)



CH78(Hopping on)

APPENDIX B – TEST DATA OF RADIATED EMISSION


Note: The worst channel results are reflected in the report.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

Note: This product contains two modules, ant1 is only used to receive

Radiated Emission Band Edge

Results of IC: QCC3044

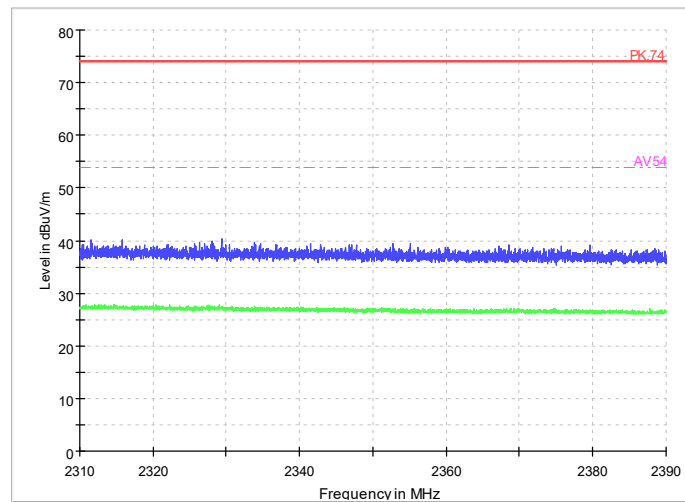


Radiated Emission Band Edge

Channel No.:0

Test Mode: GFSK

Polarization: V

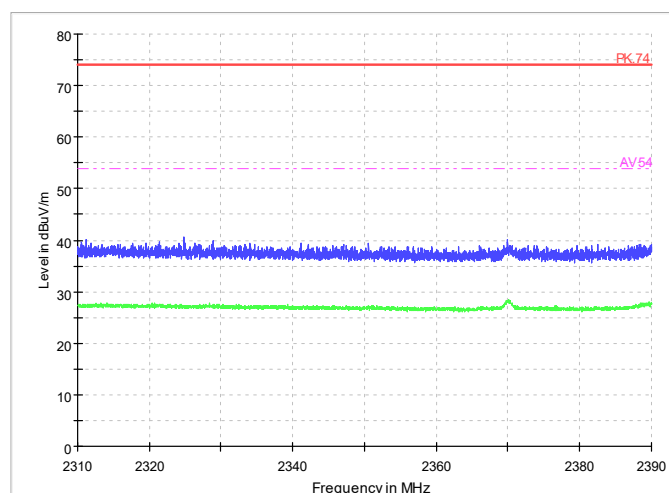


Radiated Emission Band Edge


Channel No.:0

Test Mode: GFSK


Polarization: H

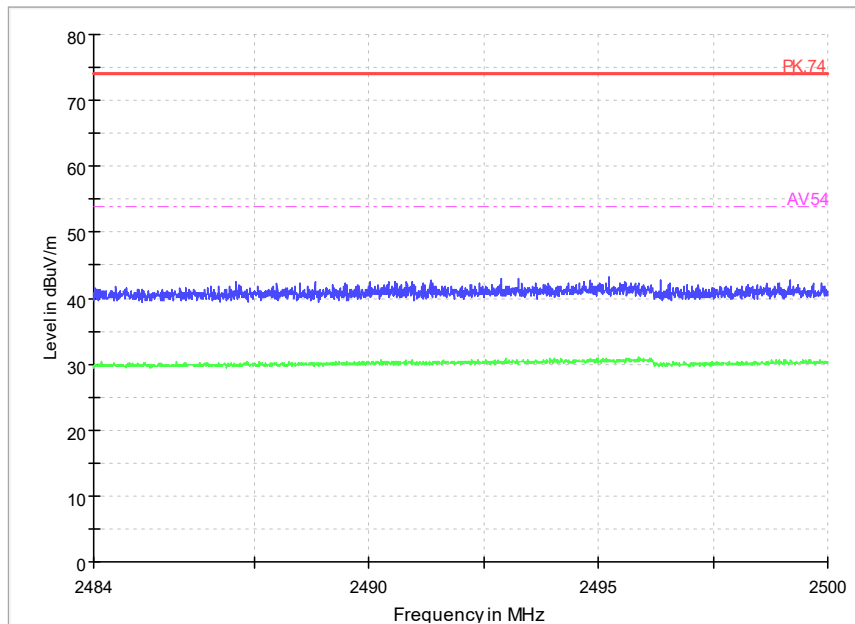


Radiated Emission Band Edge
Channel No.:78
Test Mode: GFSK
Polarization: V

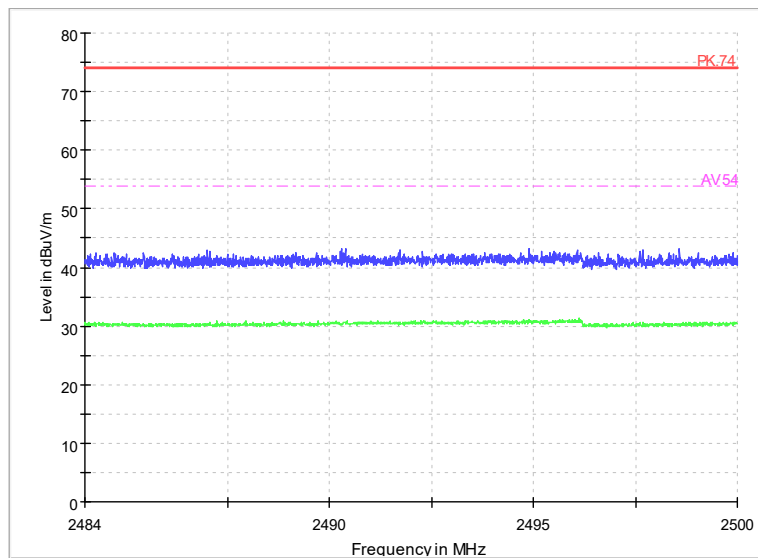


Radiated Emission Band Edge
Channel No.:78
Test Mode: GFSK
Polarization: H

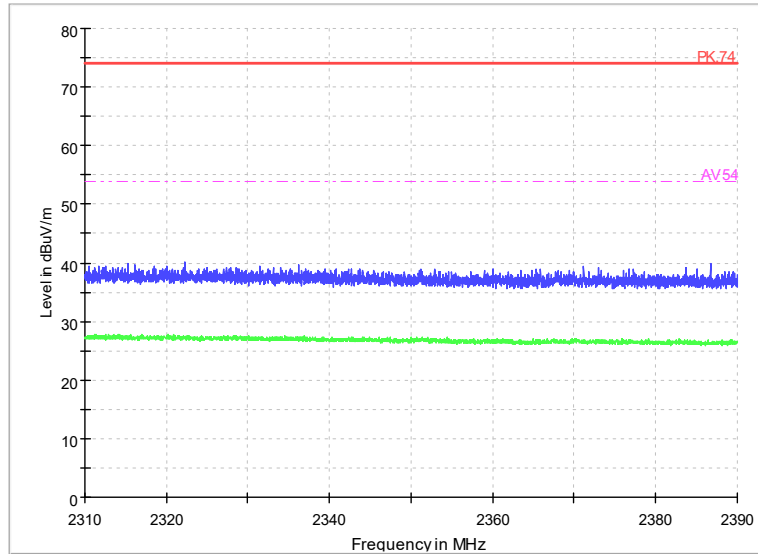


Radiated Emission Band Edge
Channel No.:0
Test Mode: $\pi/4$ DQPSK
Polarization: V

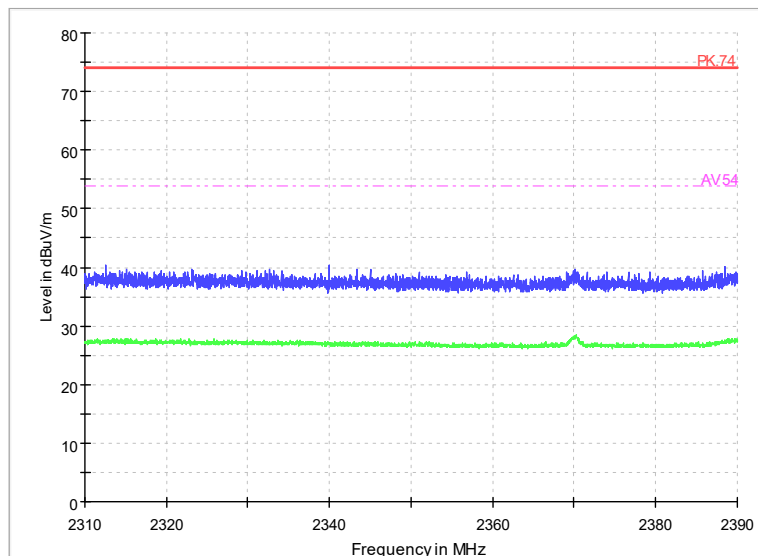


Radiated Emission Band Edge
Channel No.:0
Test Mode: $\pi/4$ DQPSK
Polarization: H

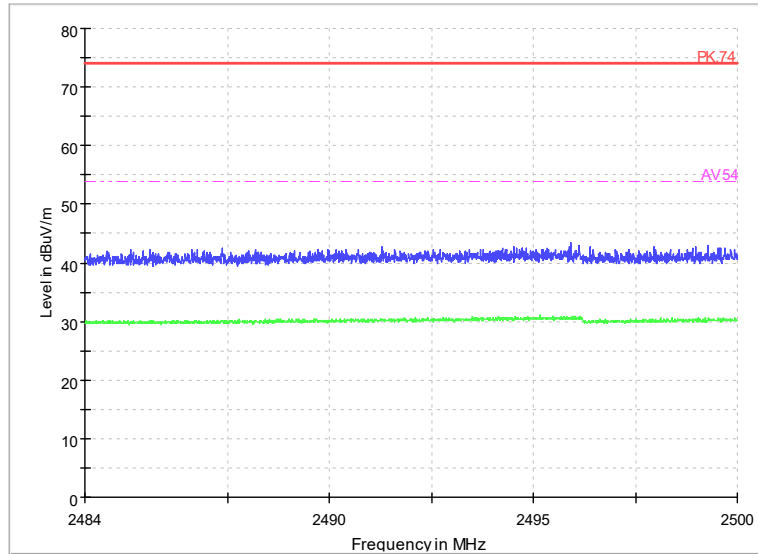


Radiated Emission Band Edge
Channel No.:78
Test Mode: $\pi/4$ DQPSK
Polarization: V

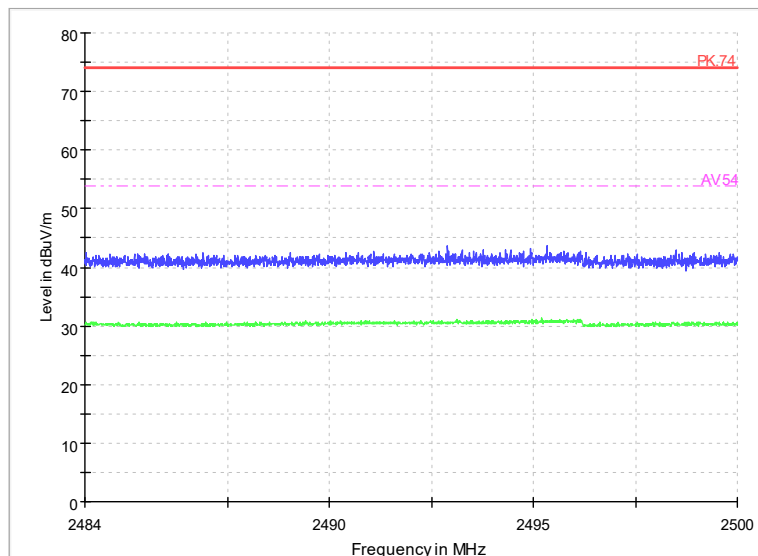


Radiated Emission Band Edge
Channel No.:78
Test Mode: $\pi/4$ DQPSK
Polarization: H

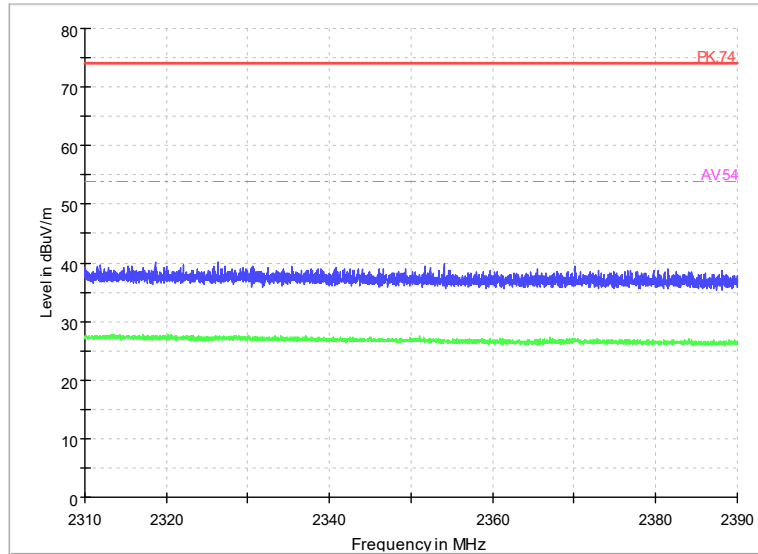


Radiated Emission Band Edge
Channel No.:0
Test Mode: 8DPSK
Polarization: V

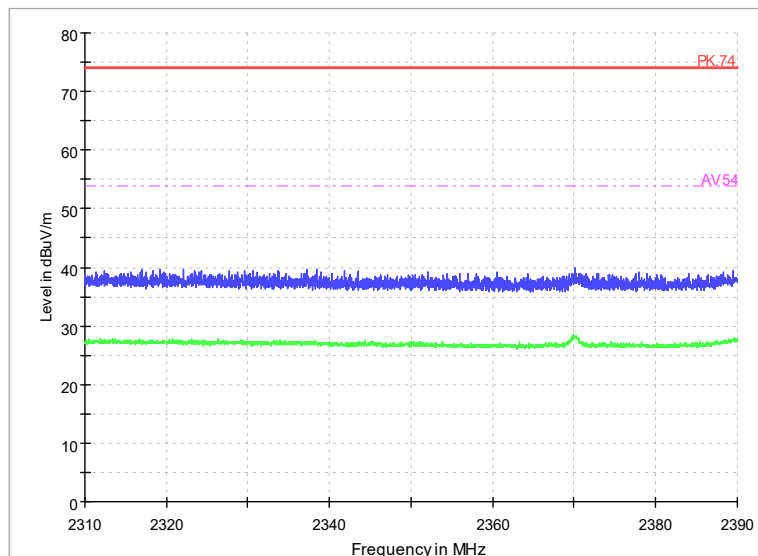

Radiated Emission Band Edge
Channel No.:0
Test Mode: 8DPSK
Polarization: H

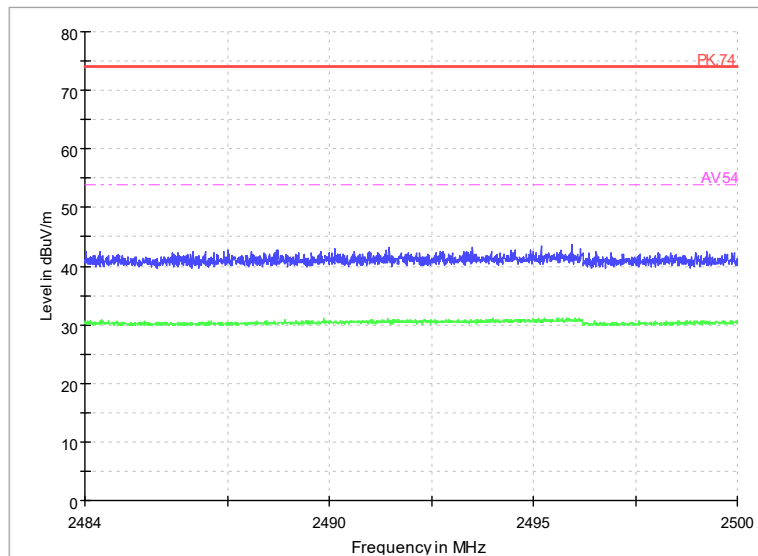


Radiated Emission Band Edge
Channel No.:78
Test Mode: 8DPSK
Polarization: V

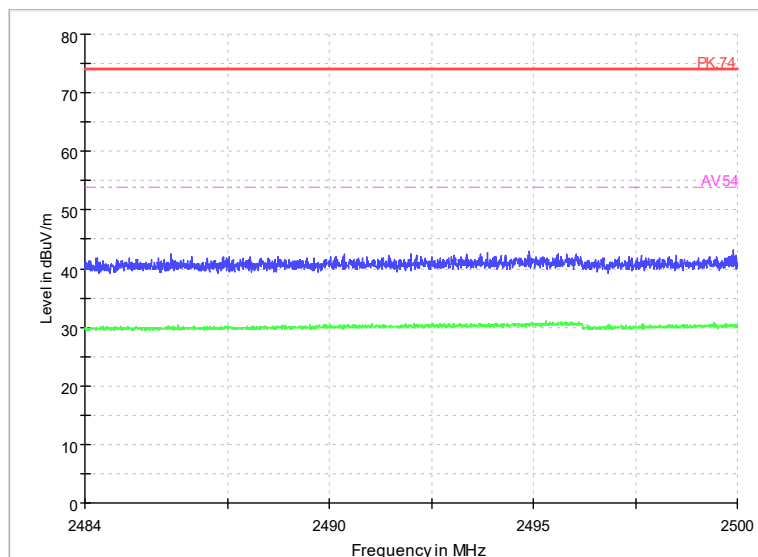

Radiated Emission Band Edge
Channel No.:78
Test Mode: 8DPSK
Polarization: H




Results of IC: QCC3056

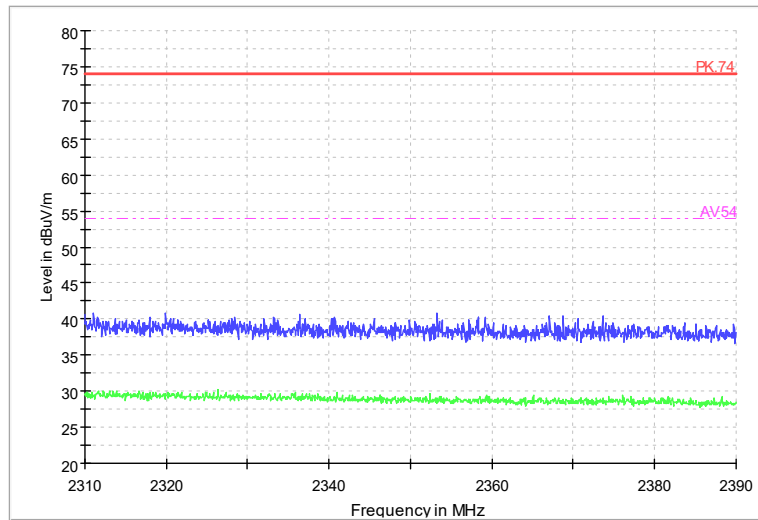


Comment

Radiated Emission Band Edge
Channel No.:0
Test Mode: GFSK
Polarization: V

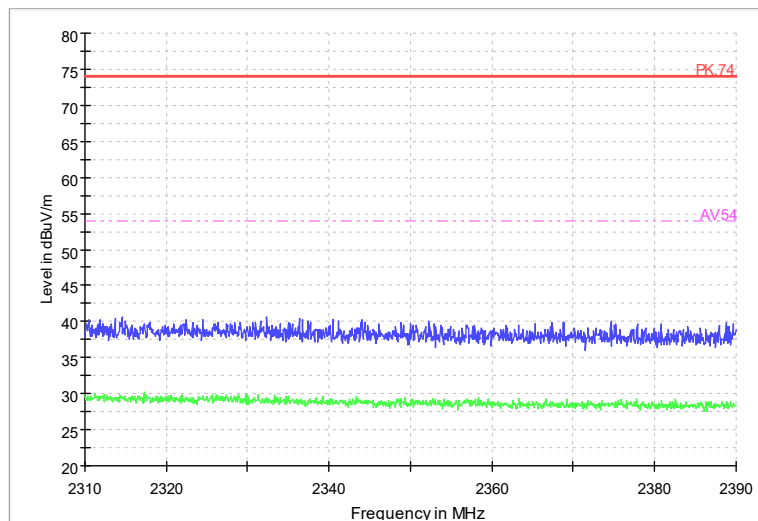


Comment

Radiated Emission Band Edge
Channel No.:0
Test Mode: GFSK
Polarization: H

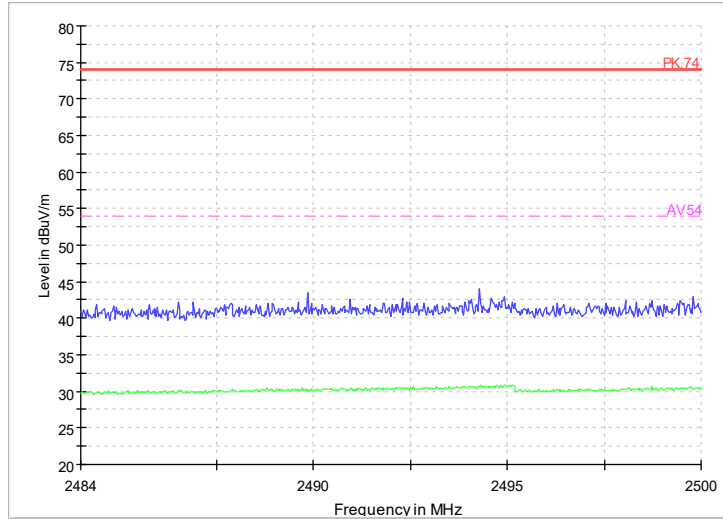


Comment

Radiated Emission Band Edge
Channel No.:78
Test Mode: GFSK
Polarization: V

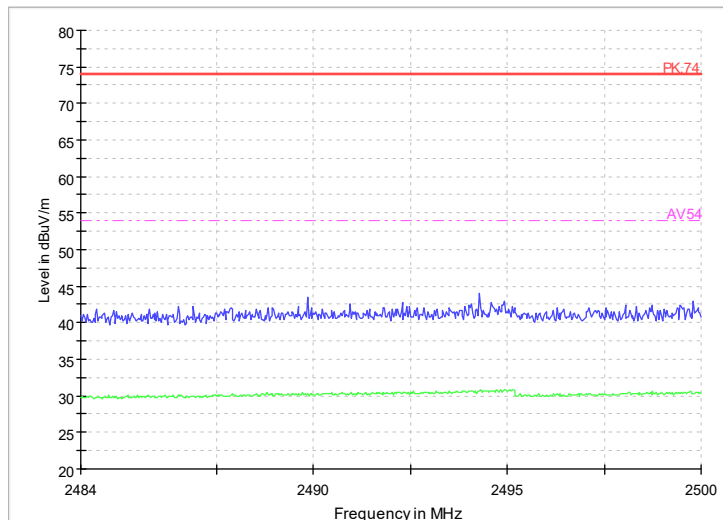


Comment

Radiated Emission Band Edge
Channel No.:78
Test Mode: GFSK
Polarization: H

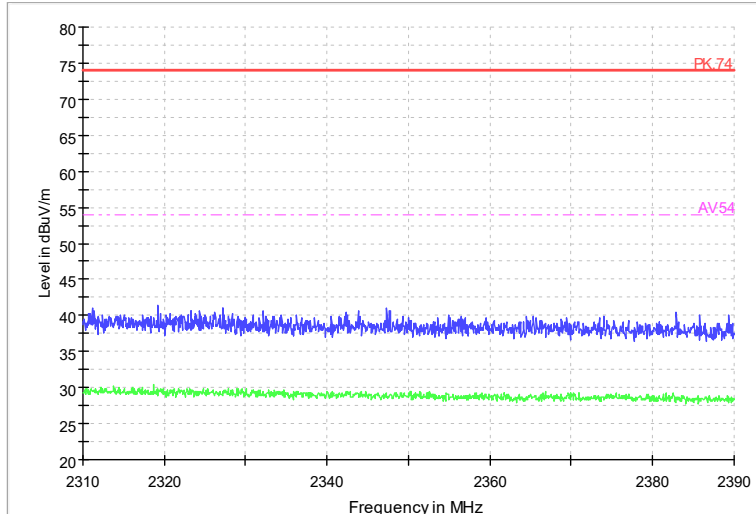


Comment

Radiated Emission Band Edge
Channel No.:0
Test Mode: $\pi/4$ DQPSK
Polarization: V

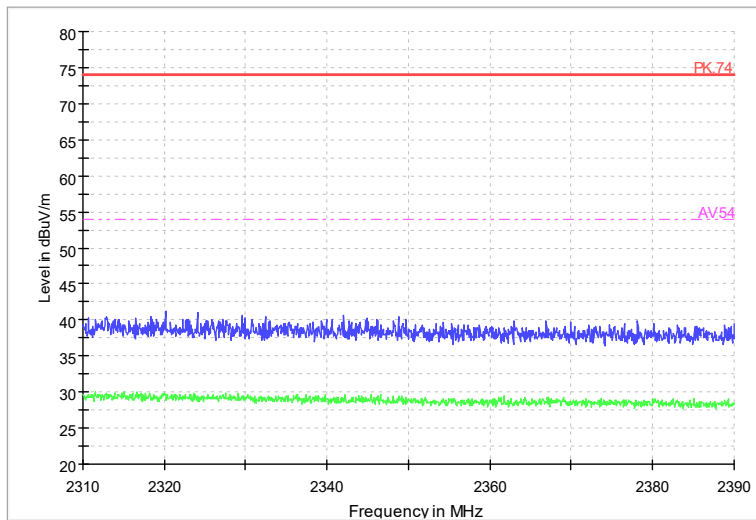


Comment

Radiated Emission Band Edge
Channel No.:0
Test Mode: $\pi/4$ DQPSK
Polarization: H

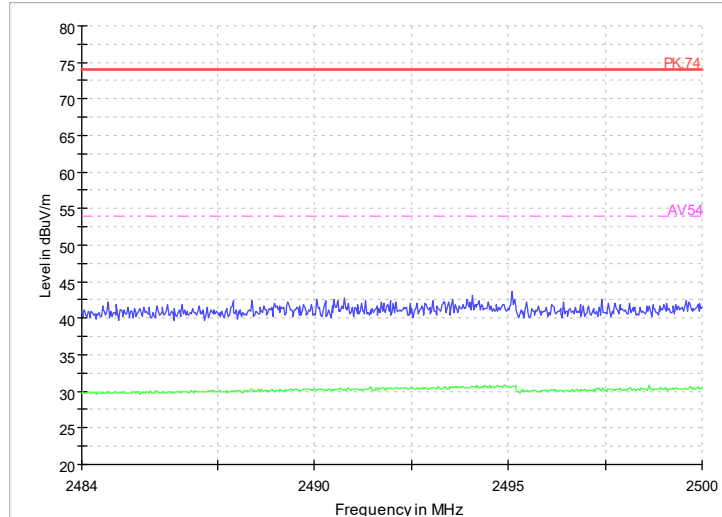


Comment

Radiated Emission Band Edge
Channel No.:78
Test Mode: $\pi/4$ DQPSK
Polarization: V

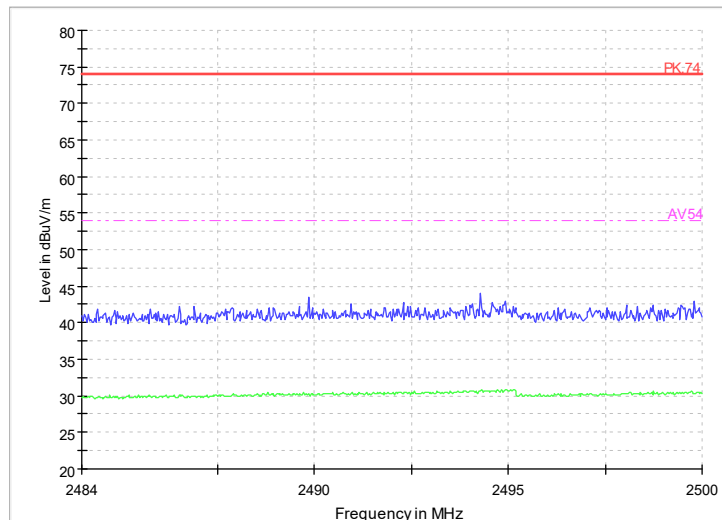


Comment

Radiated Emission Band Edge
Channel No.:78
Test Mode: $\pi/4$ DQPSK
Polarization: H

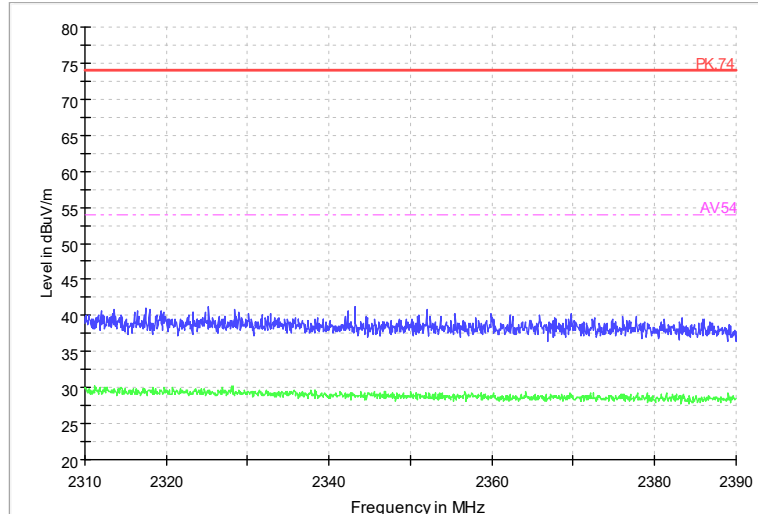


Comment

Radiated Emission Band Edge
Channel No.:0
Test Mode: 8DPSK
Polarization: V

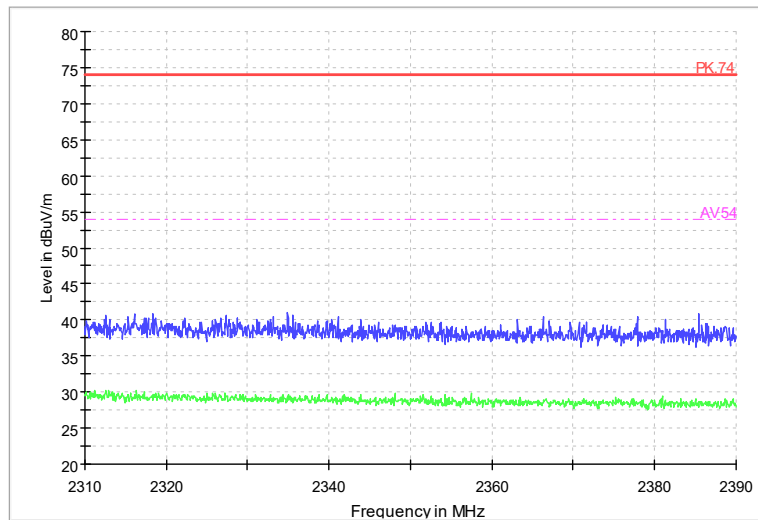


Comment

Radiated Emission Band Edge
Channel No.:0
Test Mode: 8DPSK
Polarization: H

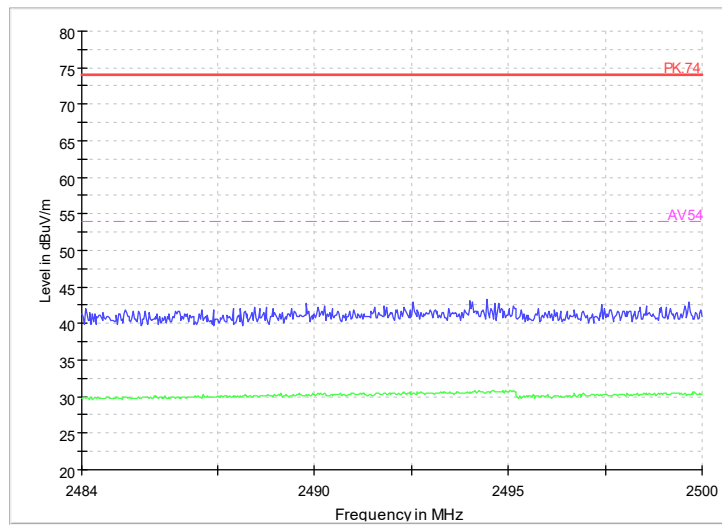

Comment

Radiated Emission Band Edge
Channel No.:78
Test Mode: 8DPSK
Polarization: V

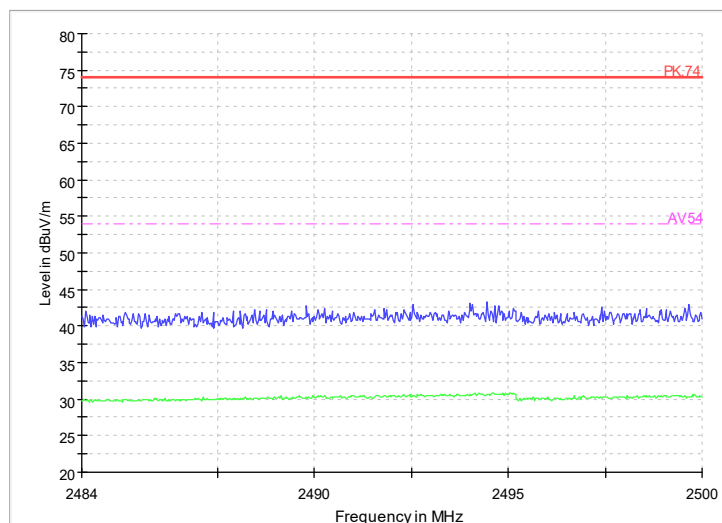

Comment

Radiated Emission Band Edge
Channel No.:78
Test Mode: 8DPSK
Polarization: H

Sample Calculations

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

Note: The worst antenna is ANT1, worst result is reflected in the report

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result = $P_{mea} + A_{Rpl}$

Sample calculation: $(13.90 \text{ dB}\mu\text{V/m}) = (33.80 \text{ dB}\mu\text{V}) + (-19.9 \text{ dB/m})$, the corresponding frequency is 35.723000MHz.

The worst case attitude: The mobile lay down.

Results of IC: QCC3044

For GFSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
35.723000	13.90	40.00	26.10	-19.9	33.80	V
95.960000	21.75	43.50	21.75	-19.7	41.45	V
98.239500	11.99	43.50	31.51	-19.5	31.49	V
303.976500	16.37	46.00	29.63	-17.0	33.37	V
495.988000	18.34	46.00	27.66	-12.3	30.64	V
936.998500	16.67	46.00	29.33	-5.1	21.77	V

For $\pi/4$ DQPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
40.524500	13.32	40.00	26.68	-19.1	32.42	V
95.960000	21.67	43.50	21.83	-19.7	41.37	V
98.239500	11.92	43.50	31.58	-19.5	31.42	V
303.976500	16.37	46.00	29.63	-17.0	33.37	V
495.988000	18.35	46.00	27.65	-12.3	30.65	V
943.982500	19.88	46.00	26.12	-5.1	24.98	V

For 8DPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
40.233500	13.46	40.00	26.54	-19.1	32.56	V
95.960000	22.00	43.50	21.50	-19.7	41.70	V
98.288000	13.56	43.50	29.94	-19.5	33.06	V
303.976500	16.38	46.00	29.62	-17.0	33.38	V
495.988000	18.33	46.00	27.67	-12.3	30.63	V
931.760500	16.38	46.00	29.62	-5.2	21.58	V

For GFSK

Channel No.:39



Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
35.044000	13.29	40.00	26.71	-20.0	33.29	V
95.960000	21.49	43.50	22.01	-19.7	41.19	V
98.288000	13.39	43.50	30.11	-19.5	32.89	V
303.976500	16.37	46.00	29.63	-17.0	33.37	V
495.988000	18.38	46.00	27.62	-12.3	30.68	V
944.031000	19.57	46.00	26.43	-5.1	24.67	V

For $\pi/4$ DQPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
36.693000	11.13	40.00	28.87	-19.7	30.83	V
95.960000	23.01	43.50	20.49	-19.7	42.71	V
96.881500	12.58	43.50	30.92	-19.6	32.18	V
303.976500	16.40	46.00	29.60	-17.0	33.40	V
367.996500	18.67	46.00	27.33	-15.2	33.87	V
915.222000	16.22	46.00	29.78	-5.3	21.52	V

For 8DPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
32.764500	13.24	40.00	26.76	-20.4	33.64	V
85.969000	15.75	40.00	24.25	-20.8	36.55	V
98.288000	13.46	43.50	30.04	-19.5	32.96	V
303.976500	16.40	46.00	29.60	-17.0	33.40	V
495.988000	18.34	46.00	27.66	-12.3	30.64	V
921.478500	16.23	46.00	29.77	-5.3	21.53	V

For GFSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
34.898500	12.49	40.00	27.51	-20.0	32.49	V
95.960000	22.89	43.50	20.61	-19.7	42.59	V
97.415000	12.27	43.50	31.23	-19.6	31.87	V
303.976500	16.38	46.00	29.62	-17.0	33.38	V
495.988000	18.29	46.00	27.71	-12.3	30.59	V
922.012000	16.14	46.00	29.86	-5.3	21.44	V

For $\pi/4$ DQPSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
32.425000	15.01	40.00	24.99	-20.4	35.41	V
95.960000	23.27	43.50	20.23	-19.7	42.97	V
98.239500	12.33	43.50	31.17	-19.5	31.83	V

207.995000	17.81	43.50	25.69	-19.7	37.51	V
527.998000	18.28	46.00	27.72	-11.7	29.98	V
959.987500	20.87	46.00	25.13	-5.0	25.87	V

For 8DPSK

Channel No.:78

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
36.887000	6.61	40.00	33.39	-19.4	26.01	V
58.081500	4.39	40.00	35.61	-18.6	22.99	V
96.930000	6.41	43.50	37.09	-19.7	26.11	V
286.468000	3.33	46.00	42.67	-16.4	19.73	V
535.224500	10.82	46.00	35.18	-10.0	20.82	V
928.026000	16.24	46.00	29.76	-2.9	19.14	V

Results of IC: QCC3056

For GFSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
49.080500	15.44	40.00	24.56	-18.7	34.14	V
84.086500	12.13	40.00	27.87	-20.9	33.03	V
109.423000	20.73	43.50	22.77	-19.3	40.03	V
303.937000	7.36	46.00	38.64	-16.1	23.46	V
552.679000	12.08	46.00	33.92	-9.8	21.88	V
888.307500	17.26	46.00	28.74	-3.9	21.16	V

For $\pi/4$ DQPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
48.992000	15.25	40.00	24.75	-18.7	33.95	V
76.520500	11.69	40.00	28.31	-21.8	33.49	V
109.366000	20.62	43.50	22.88	-19.3	39.92	V
278.214000	6.14	46.00	39.86	-16.9	23.04	V
541.963000	11.96	46.00	34.04	-10.0	21.96	V
927.968500	17.58	46.00	28.42	-3.4	20.98	V

For 8DPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
48.844000	15.26	40.00	24.74	-18.7	33.96	V
79.983500	12.01	40.00	28.00	-21.8	33.81	V
109.258000	20.57	43.50	22.93	-19.3	39.87	V
287.994000	6.12	46.00	39.88	-16.6	22.72	V
552.890000	12.08	46.00	33.92	-9.7	21.78	V
920.157500	17.42	46.00	28.58	-3.4	20.82	V

For GFSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
48.869500	15.29	40.00	24.71	-18.7	33.99	V
76.782500	13.19	40.00	26.81	-21.8	34.99	V
109.486000	20.66	43.50	22.84	-19.3	39.96	V
198.700500	3.88	43.50	39.62	-19.3	23.18	V
507.405500	11.41	46.00	34.59	-10.8	22.21	V
940.599000	17.53	46.00	28.47	-3.3	20.83	V

For $\pi/4$ DQPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
48.593000	14.95	40.00	25.05	-18.7	33.65	V
70.637500	12.83	40.00	27.17	-22.0	34.83	V
105.791500	20.39	43.50	23.11	-19.2	39.59	V
294.867500	6.29	46.00	39.71	-16.4	22.69	V
527.958500	12.32	46.00	33.68	-10.4	22.72	V
910.491500	17.26	46.00	28.74	-3.5	20.76	V

For 8DPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
48.869500	15.10	40.00	24.90	-18.7	15.10	V
70.663000	12.92	40.00	27.08	-22.0	12.92	V
107.531500	20.24	43.50	23.26	-19.2	20.24	V
309.814000	7.26	46.00	38.74	-15.9	7.26	V
544.571000	12.15	46.00	33.85	-9.9	12.15	V
904.483500	17.21	46.00	28.79	-3.6	17.21	V

For GFSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
48.918000	15.39	40.00	24.61	-18.7	34.09	V
84.456500	12.73	40.00	27.27	-20.8	33.53	V
109.477500	20.75	43.50	22.75	-19.3	40.05	V
303.996500	8.23	46.00	37.77	-16.1	24.33	V
543.672500	12.11	46.00	33.89	-9.9	22.01	V
949.260000	17.76	46.00	28.24	-3.2	20.96	V

For $\pi/4$ DQPSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
-----------------	-----------------	----------------	-------------	-------------	-------------	----------




48.849000	14.90	40.00	25.10	-18.7	33.60	V
84.725500	12.06	40.00	27.94	-20.7	32.76	V
109.334500	20.51	43.50	22.99	-19.3	39.81	V
193.268500	3.80	43.50	39.70	-19.7	23.50	V
530.440500	11.77	46.00	34.23	-10.3	22.07	V
898.701000	17.35	46.00	28.65	-3.7	21.05	V

For 8DPSK

Channel No.:78

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	ARpl (dB/m)	Pmea (dBuV)	Polarity
49.009000	15.39	40.00	24.61	-18.7	34.09	V
84.474500	12.77	40.00	27.23	-20.8	33.57	V
107.514500	20.23	43.50	23.27	-19.2	39.43	V
295.546500	6.36	46.00	39.64	-16.4	22.76	V
483.132500	10.97	46.00	35.03	-11.4	22.37	V
932.841500	17.46	46.00	28.54	-3.3	20.76	V

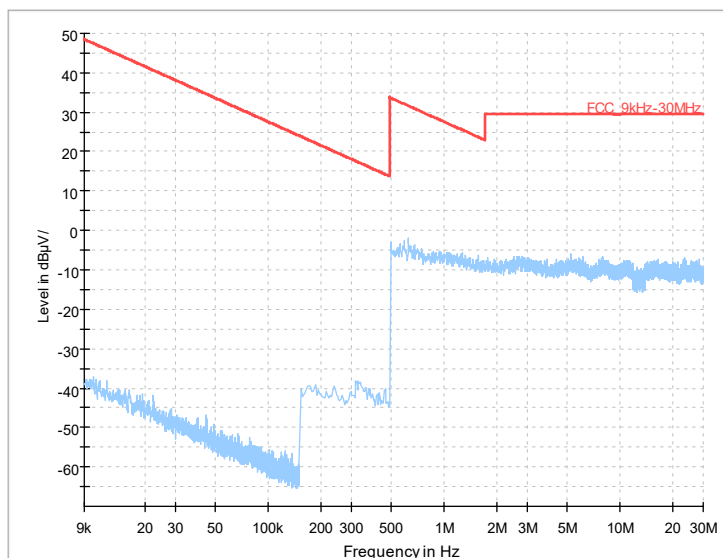


Frequency Range: 9kHz -30MHz

Detector: QP mode


Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.

Results of IC: QCC3044

Carrier frequency (MHz): 2402
Channel No.:0

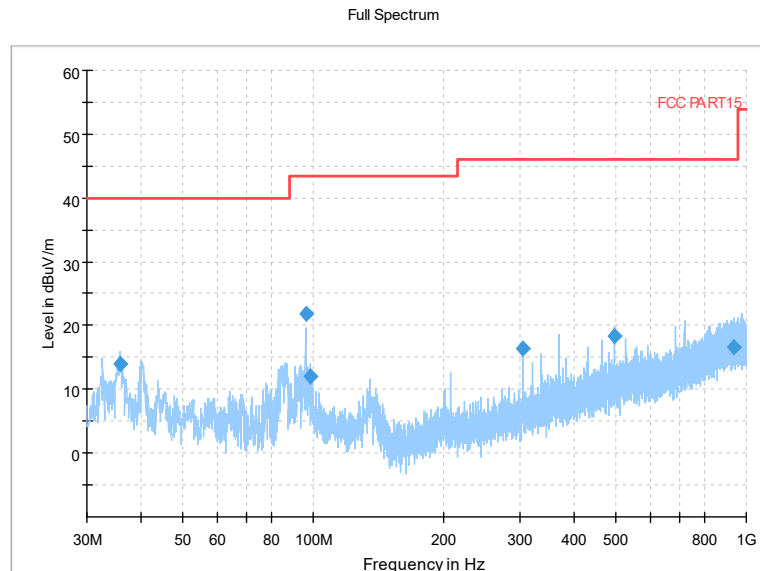


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

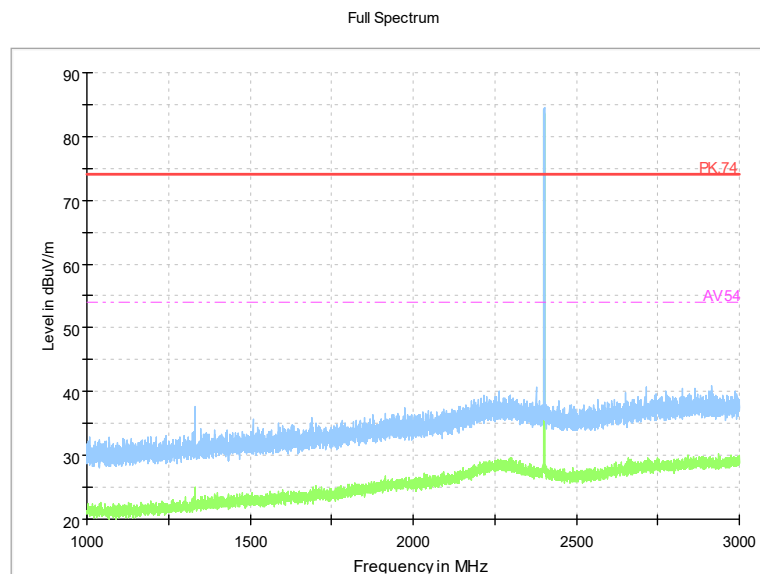


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

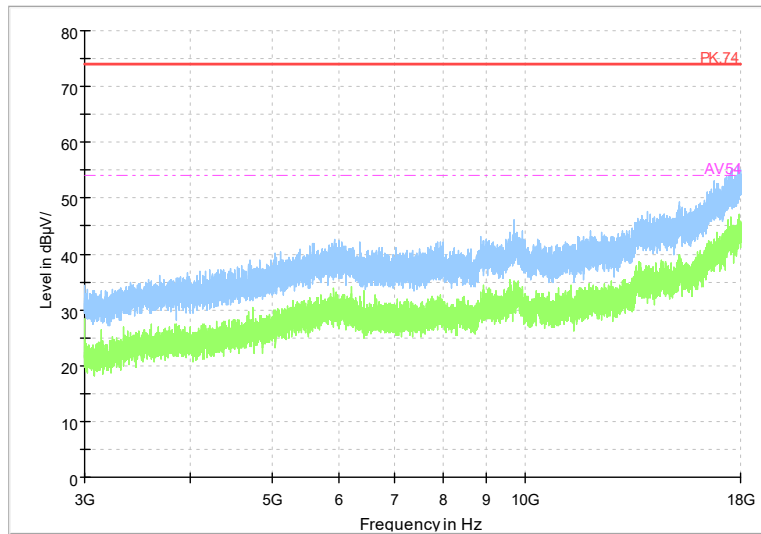


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

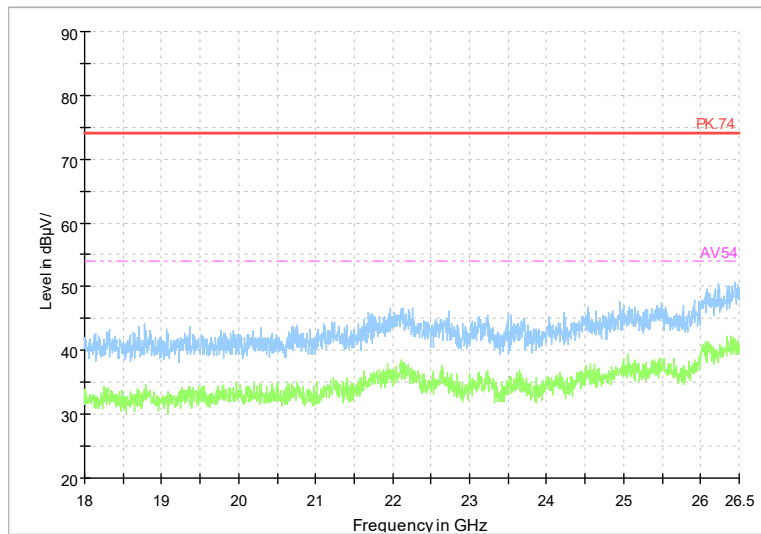


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

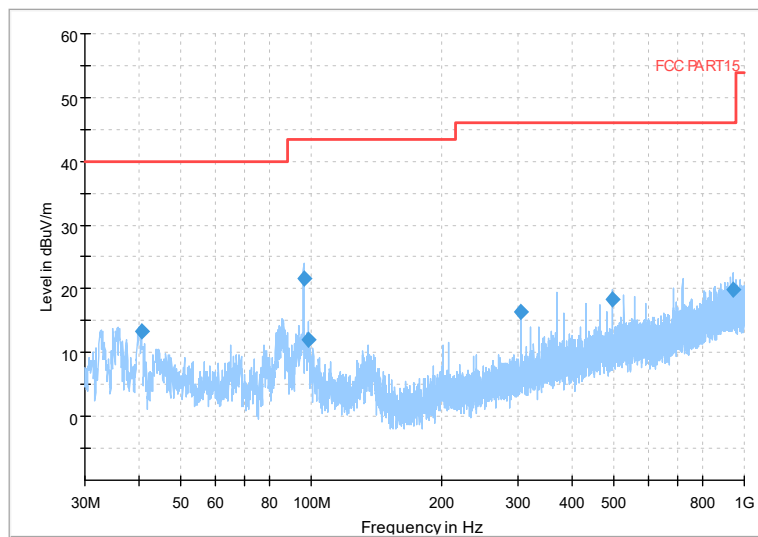


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

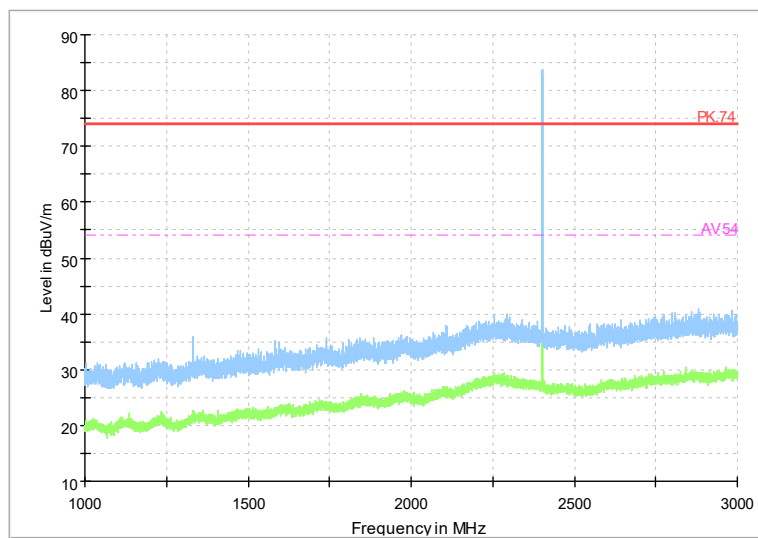


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

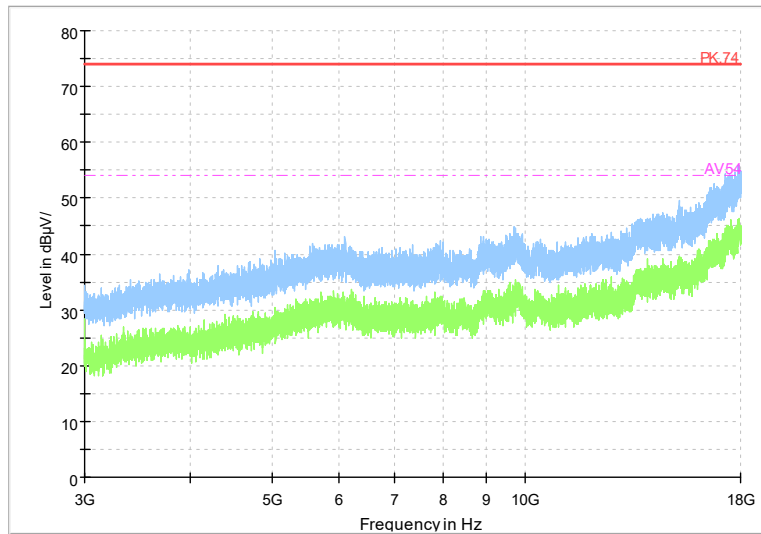


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

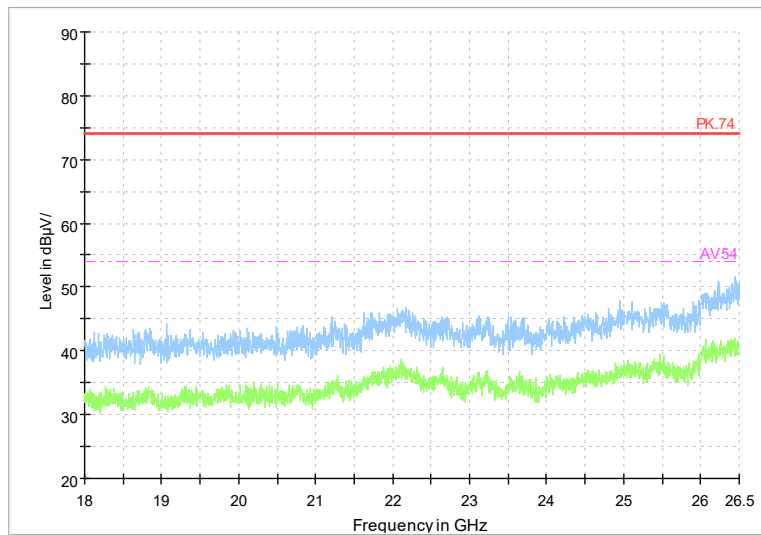


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

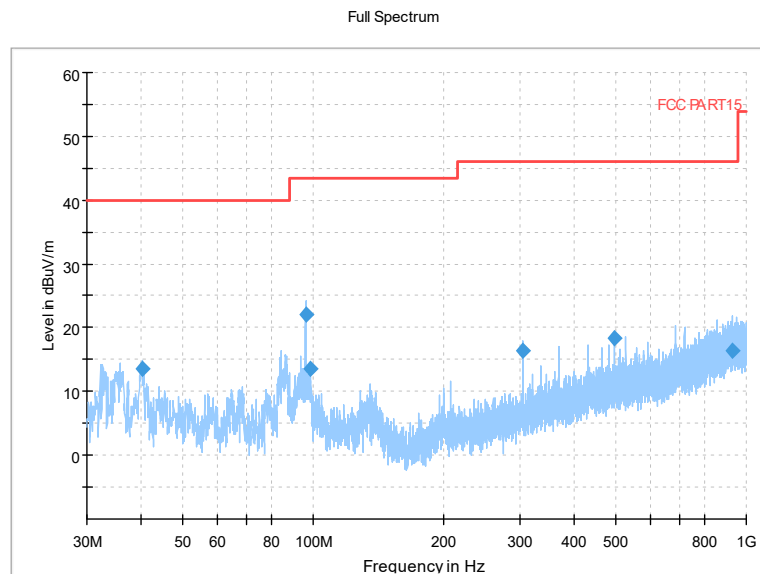


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

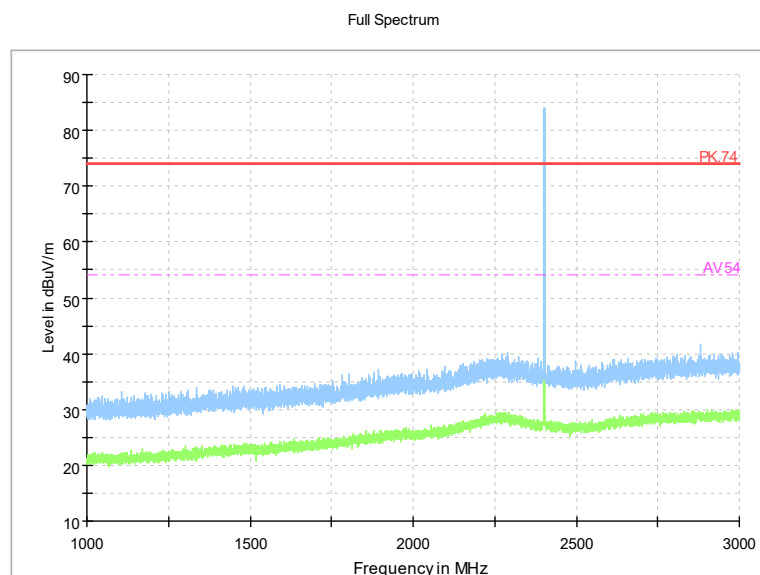

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

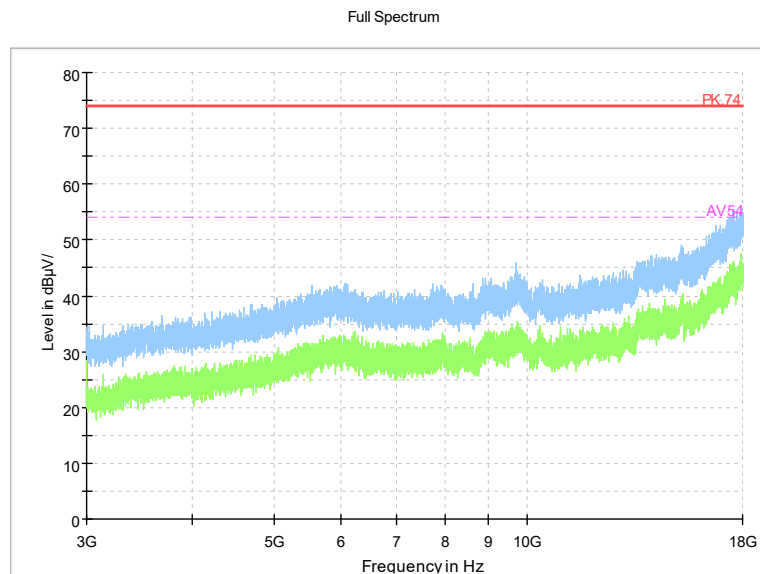


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

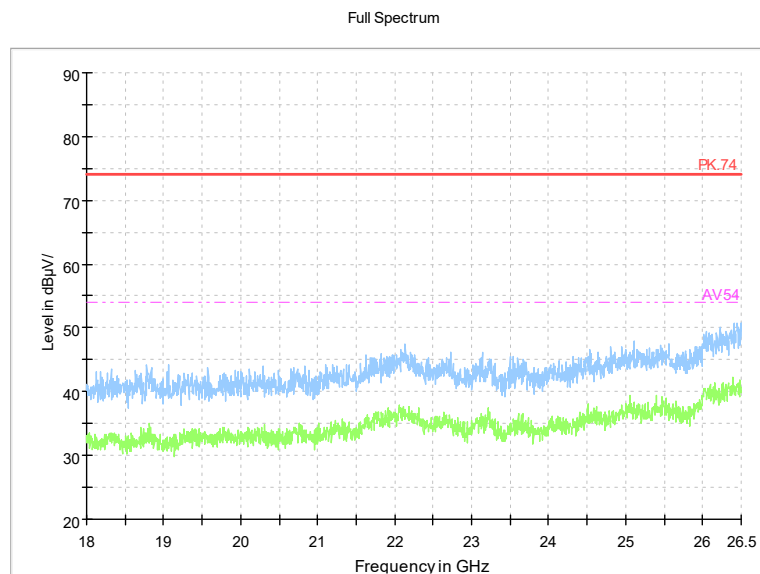


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Carrier frequency (MHz): 2441

Channel No.:39

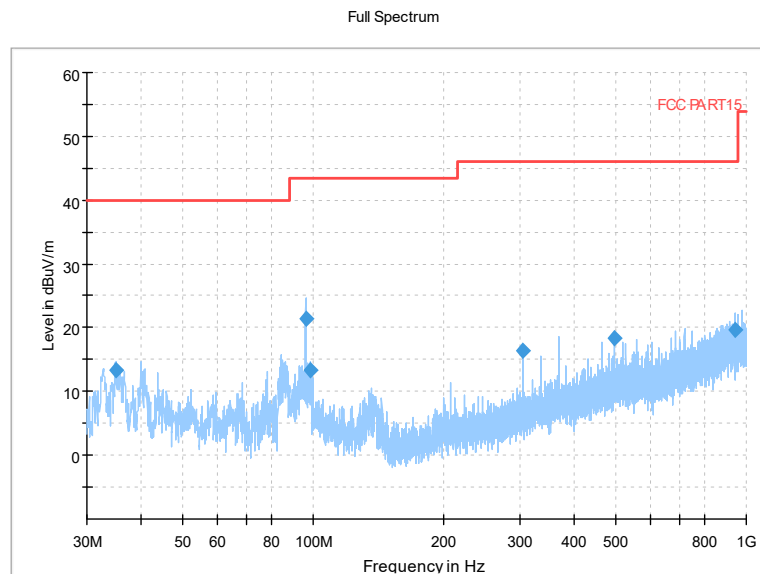


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

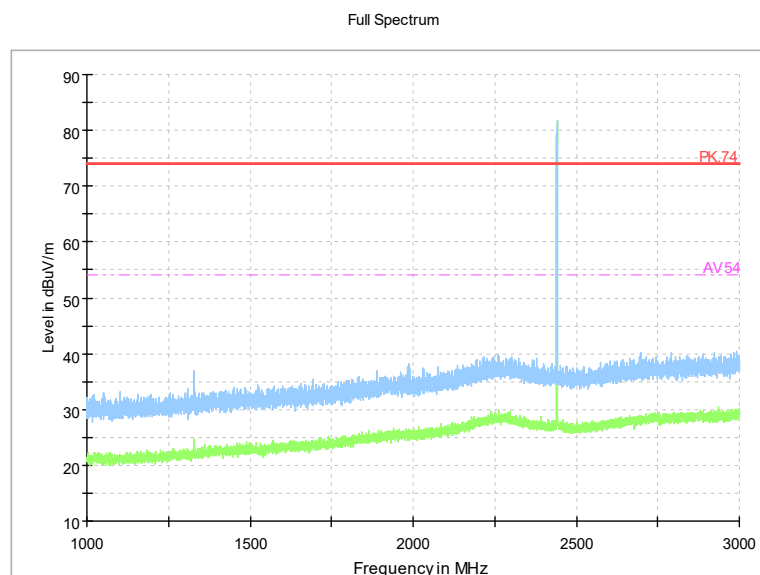


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

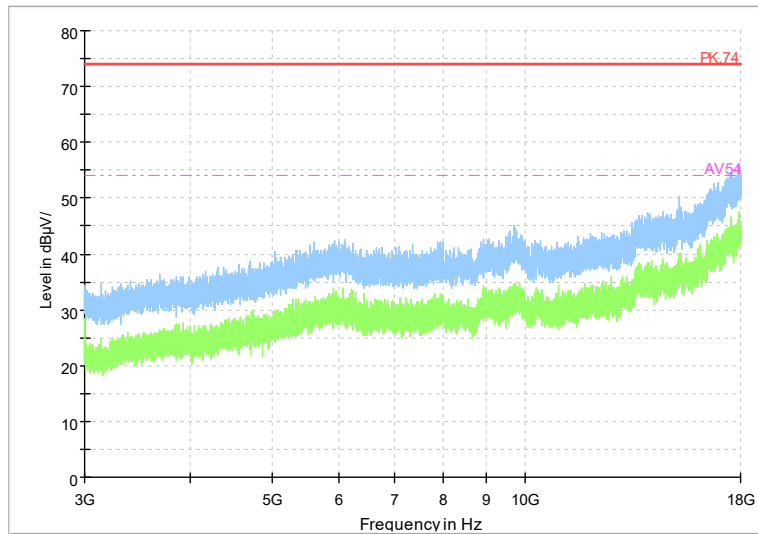


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

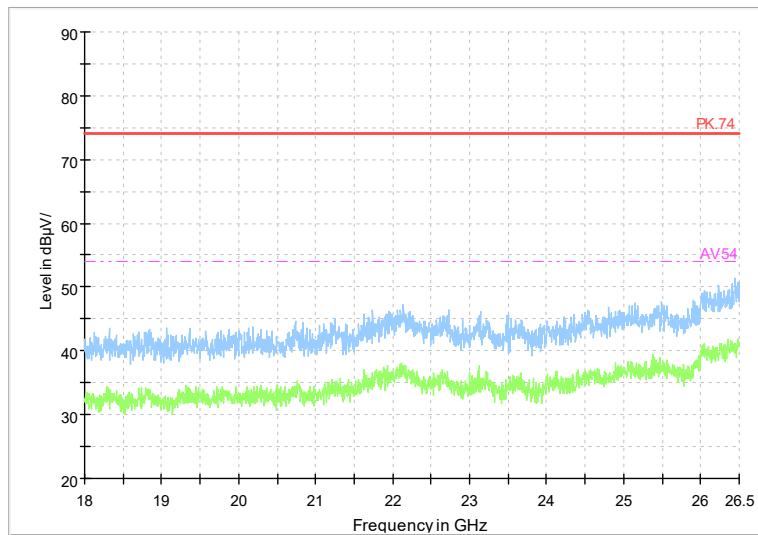

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: GFSK

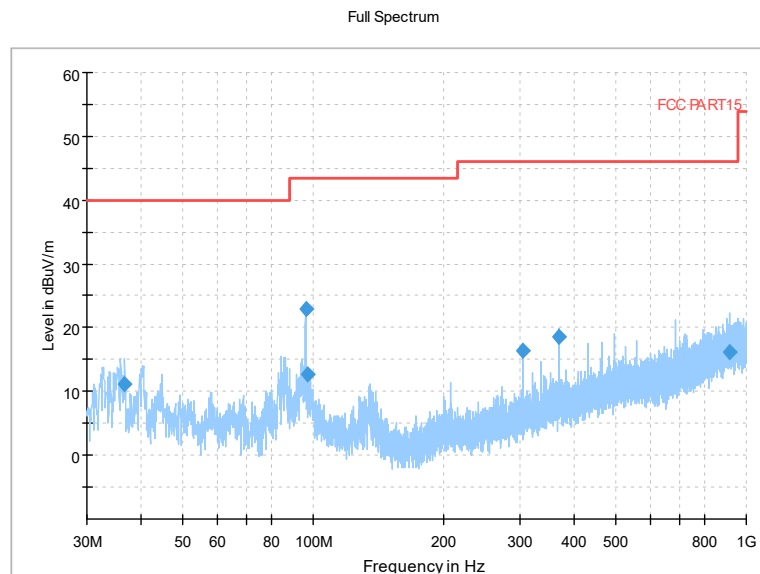


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

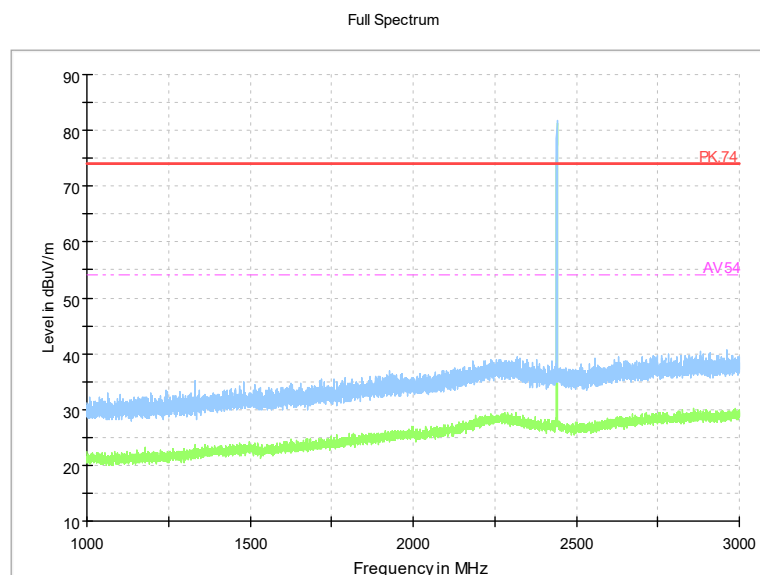


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

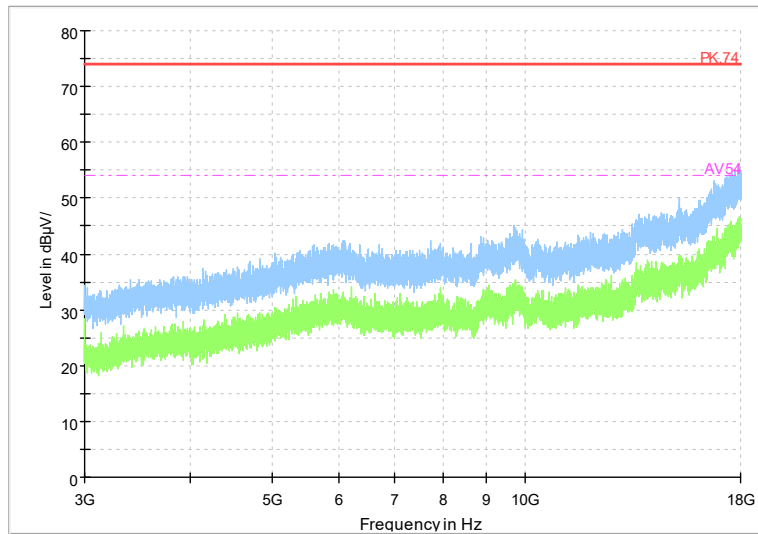


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

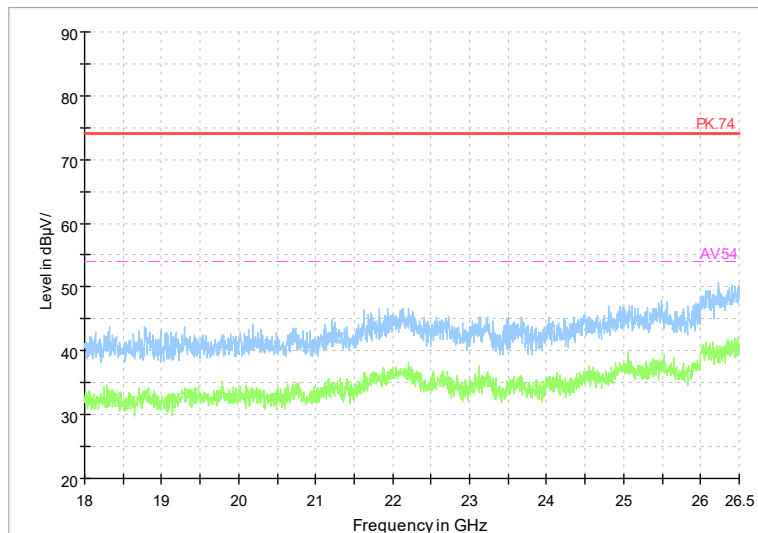


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

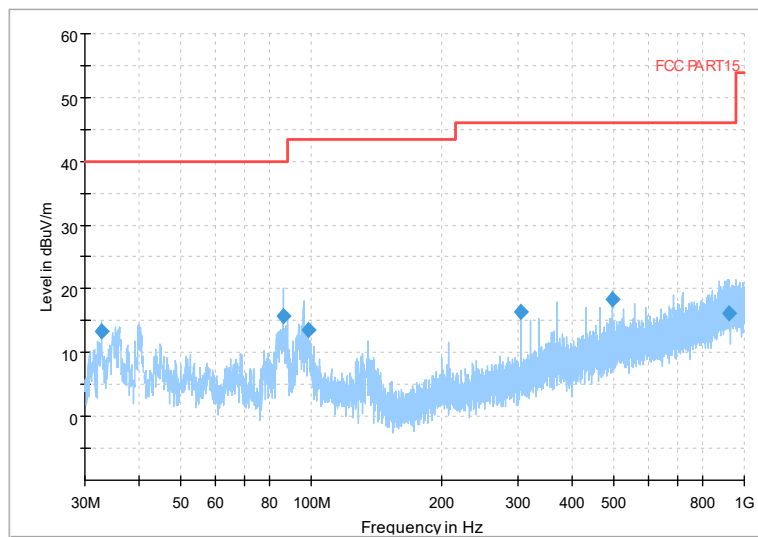


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

Full Spectrum

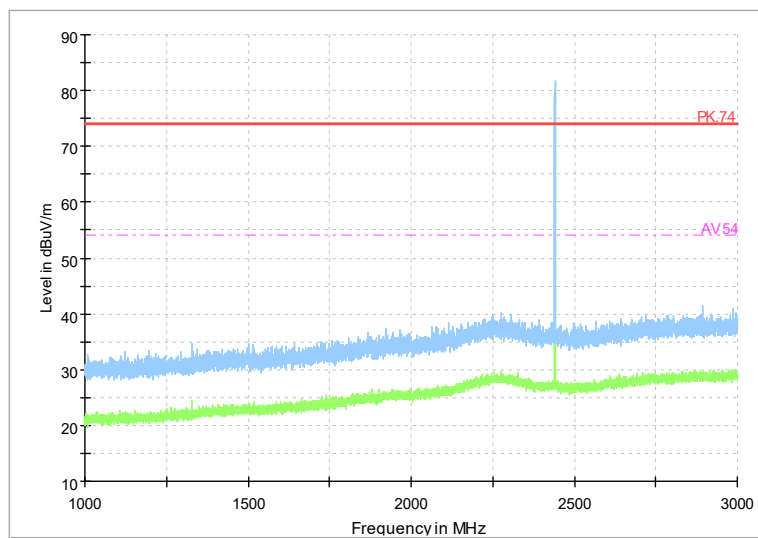


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

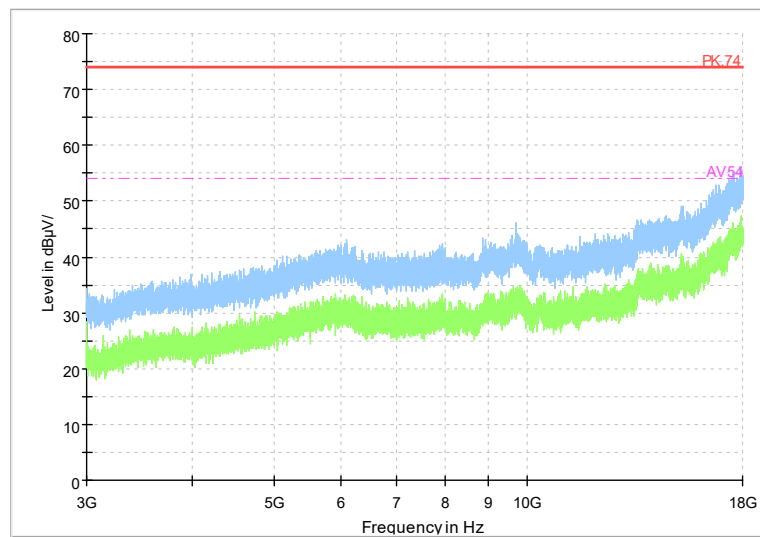


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

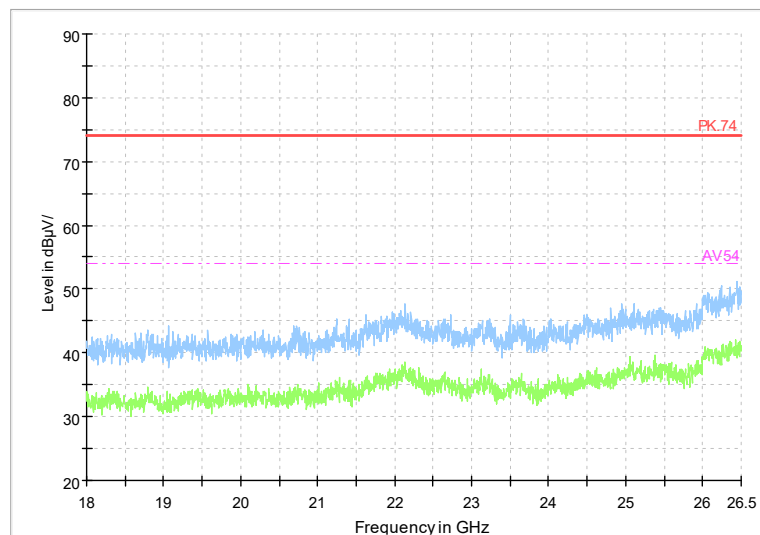


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Carrier frequency (MHz): 2480
Channel No.:78

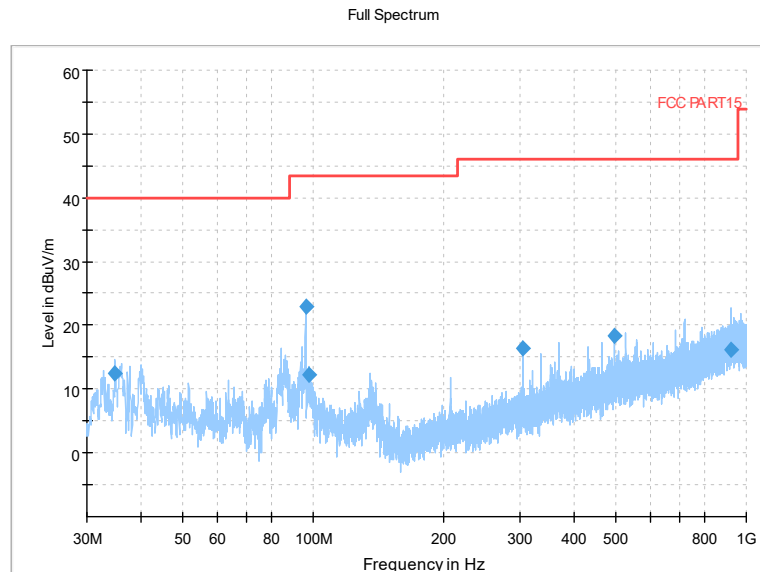


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

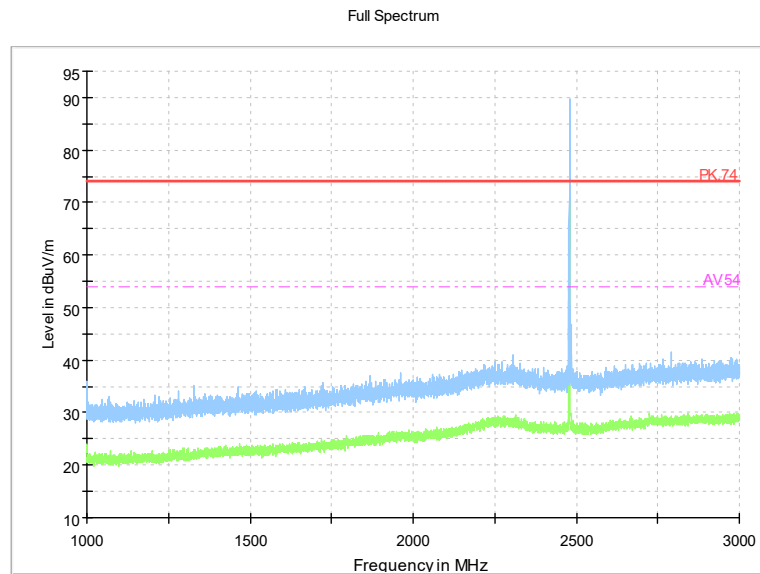


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

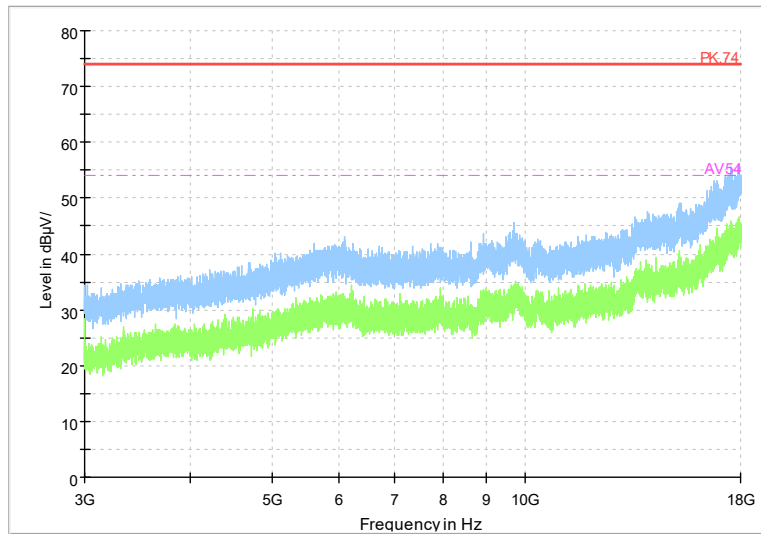


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

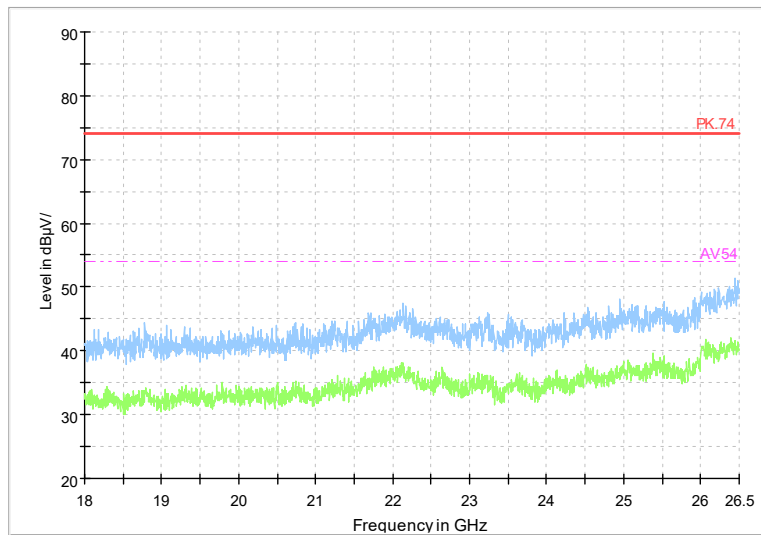


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

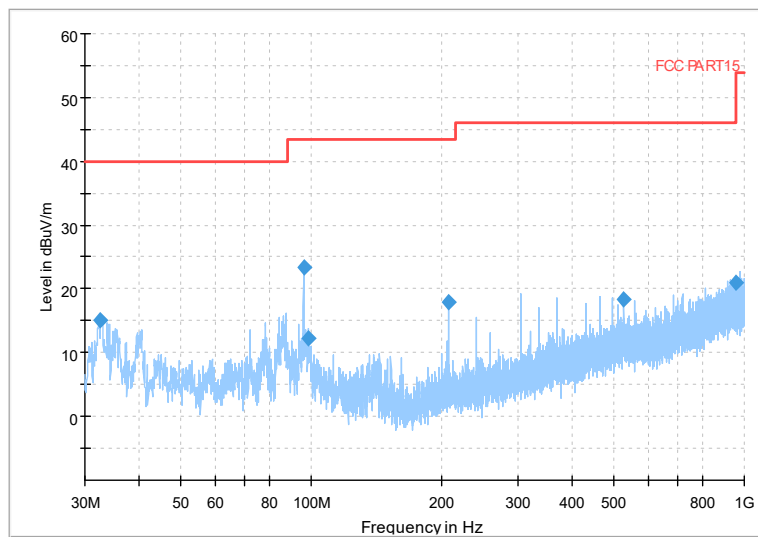


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

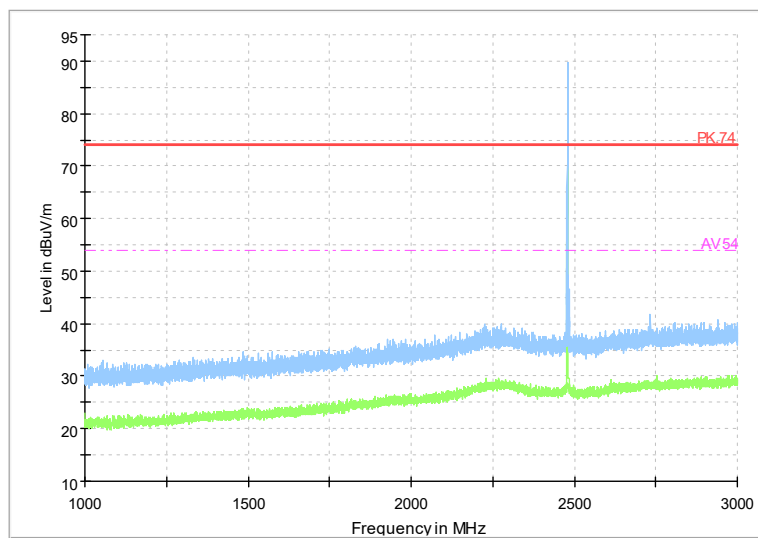


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

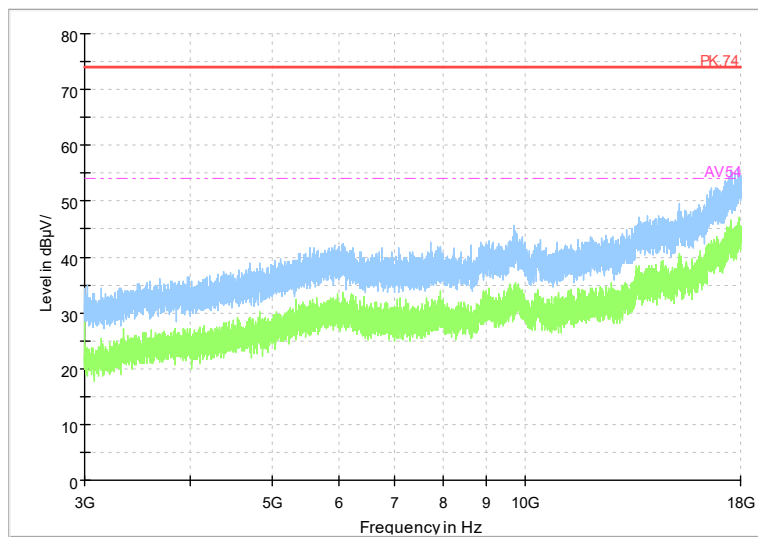


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

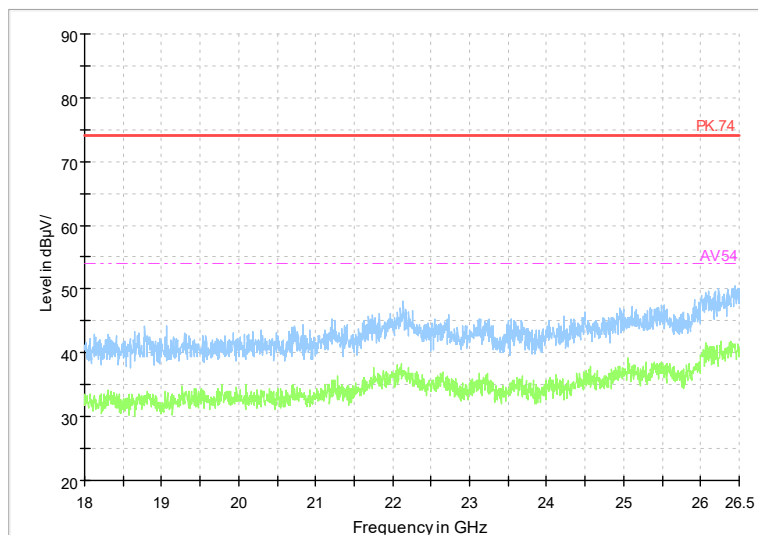

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

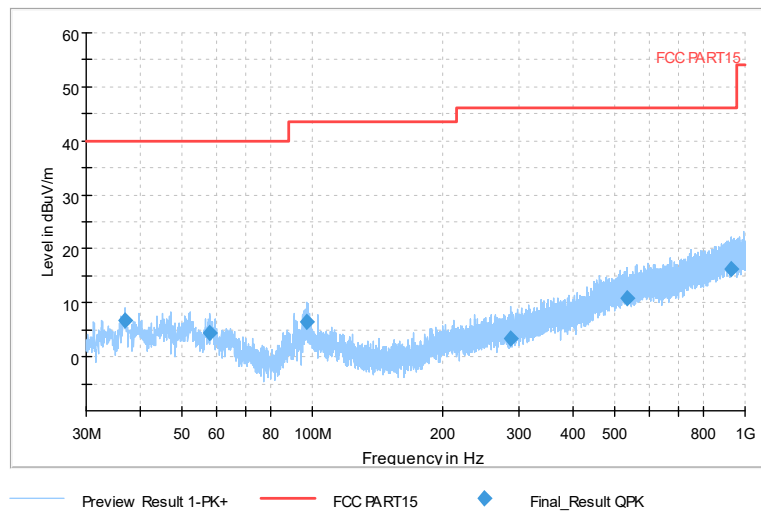

Comment


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

Full Spectrum

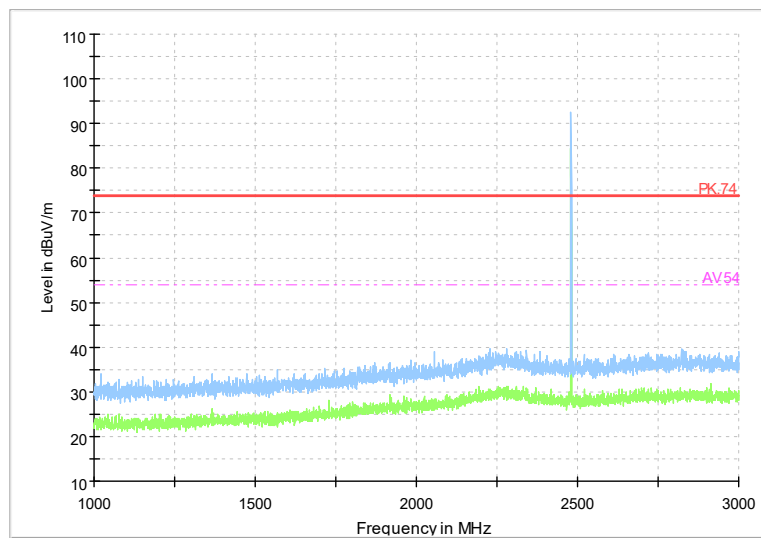


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

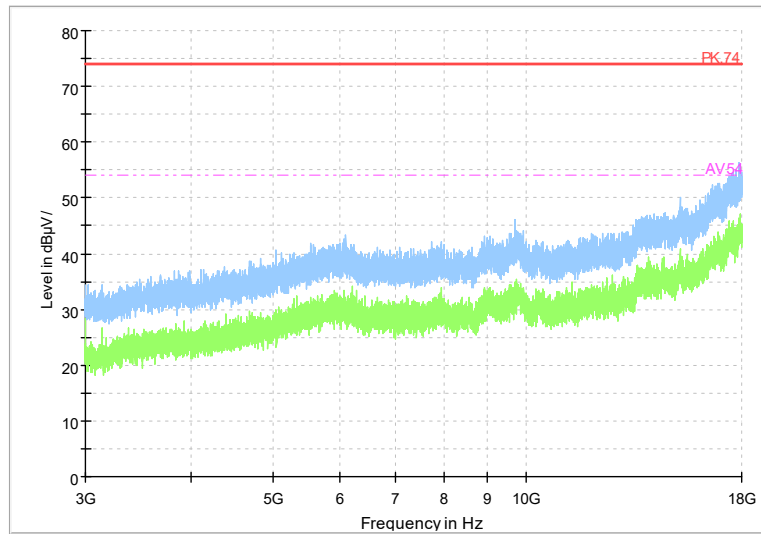

Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

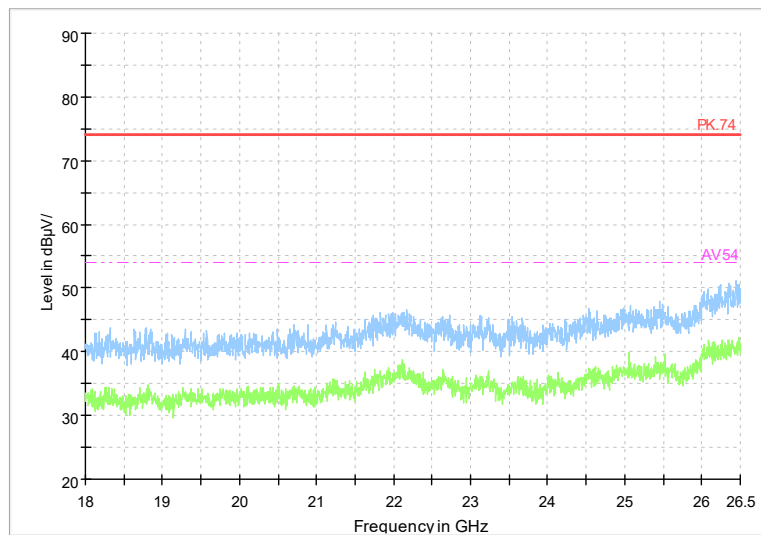


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Results of IC: QCC3056

Carrier frequency (MHz): 2402

Channel No.:0

Full Spectrum

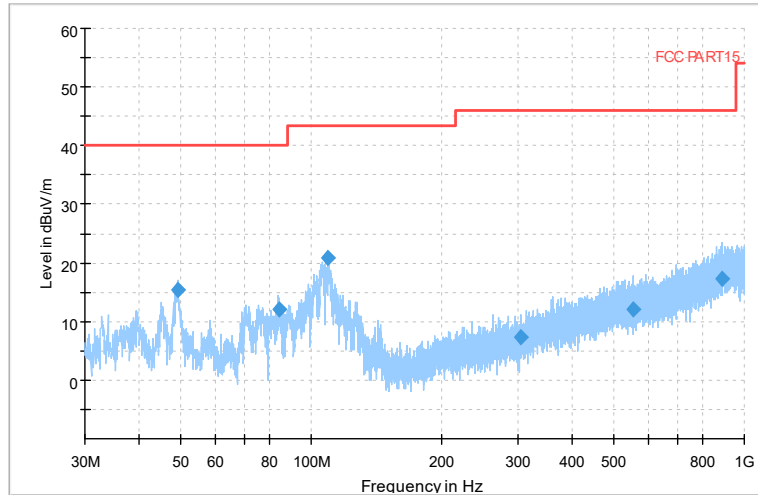


Comment

Frequency Range: 30MHz-1000MHz

Detector: QP mode

Modulation type: GFSK

Full Spectrum

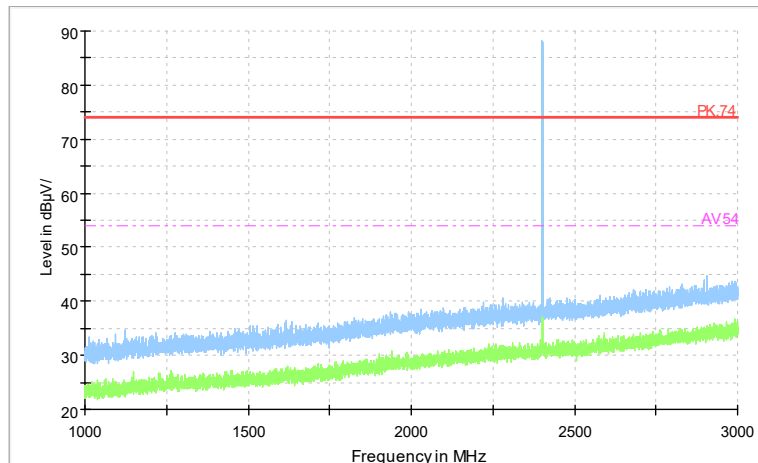

Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV.54


Comment

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK

Full Spectrum

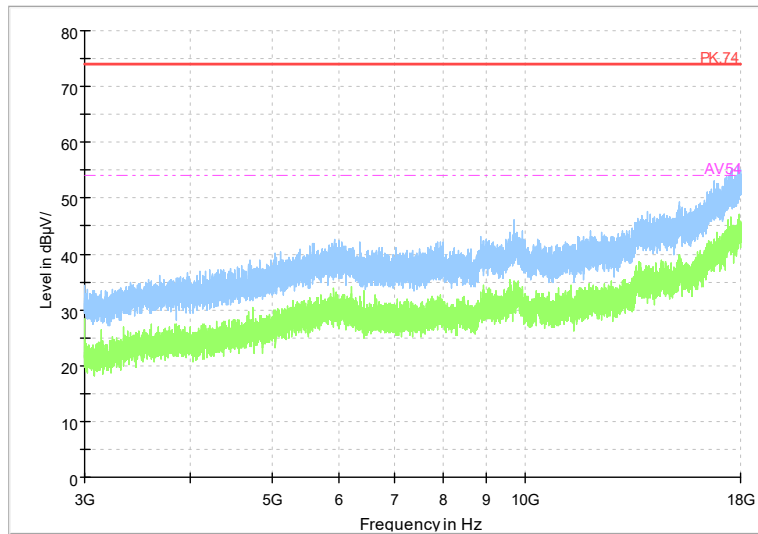


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

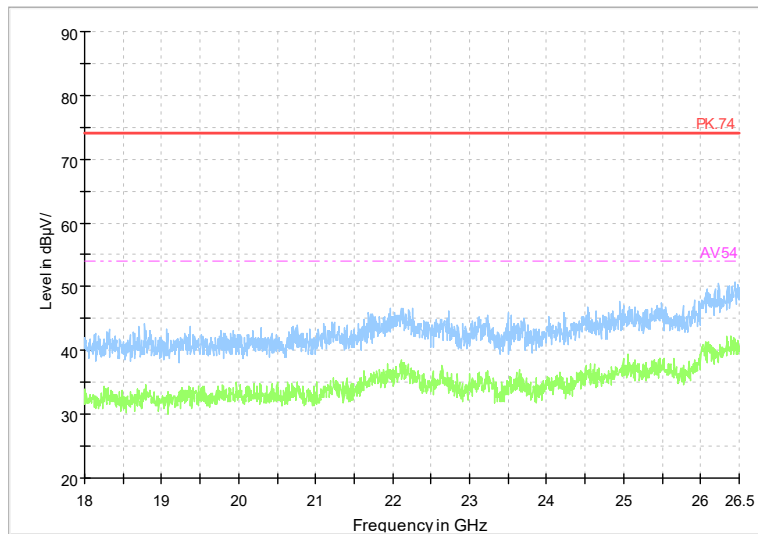

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

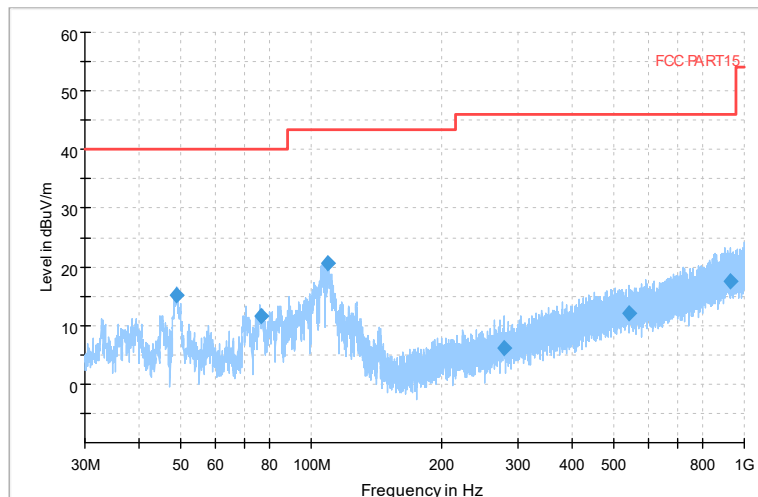

Comment

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

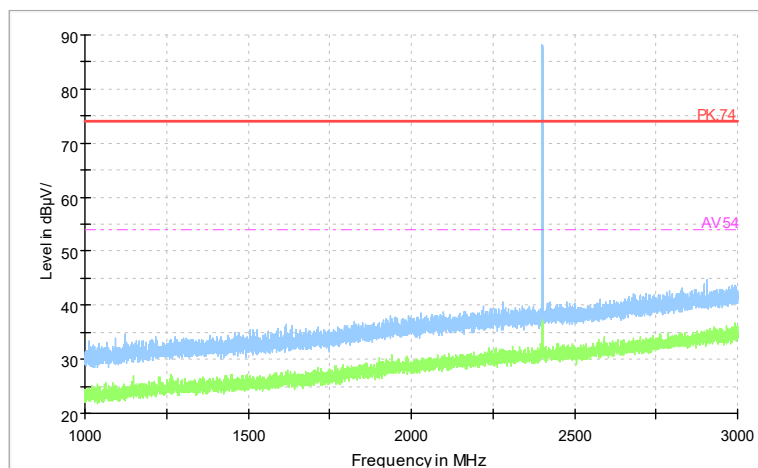


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

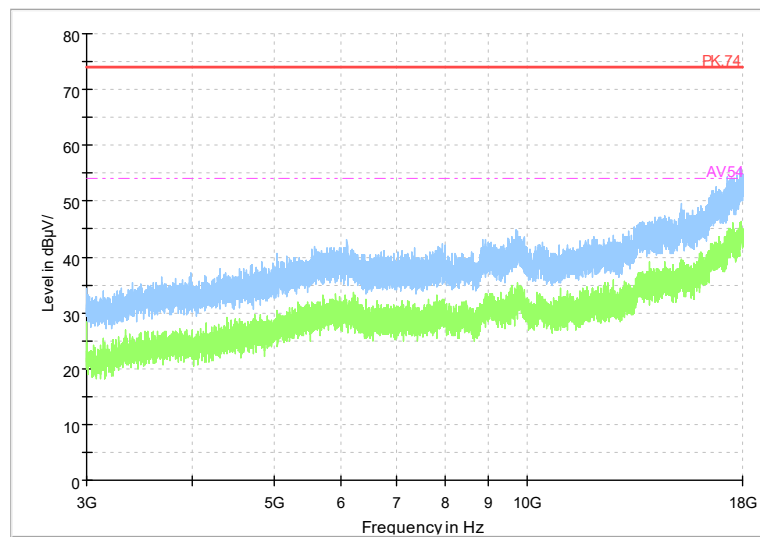


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

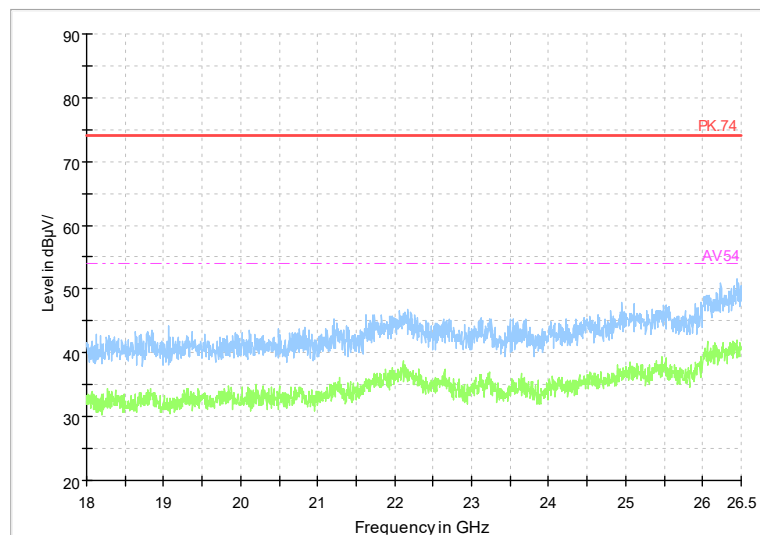

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

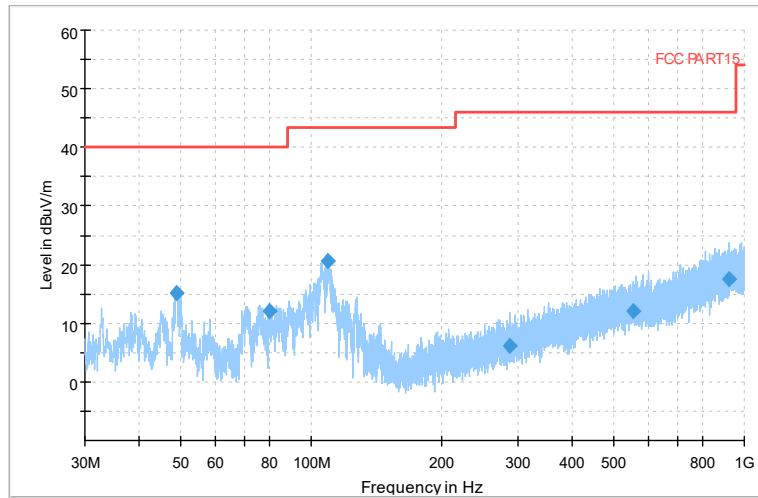

Comment

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK


Full Spectrum

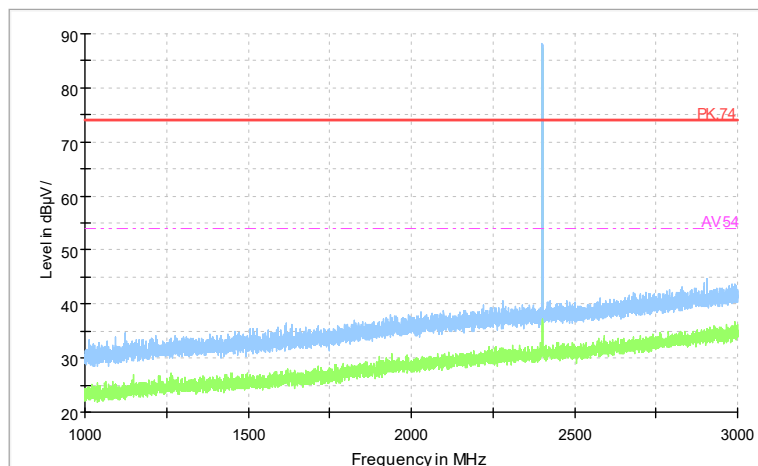


Preview Result 2-AVG Preview Result 1-PK+ PK 74 AV 54

Comment

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

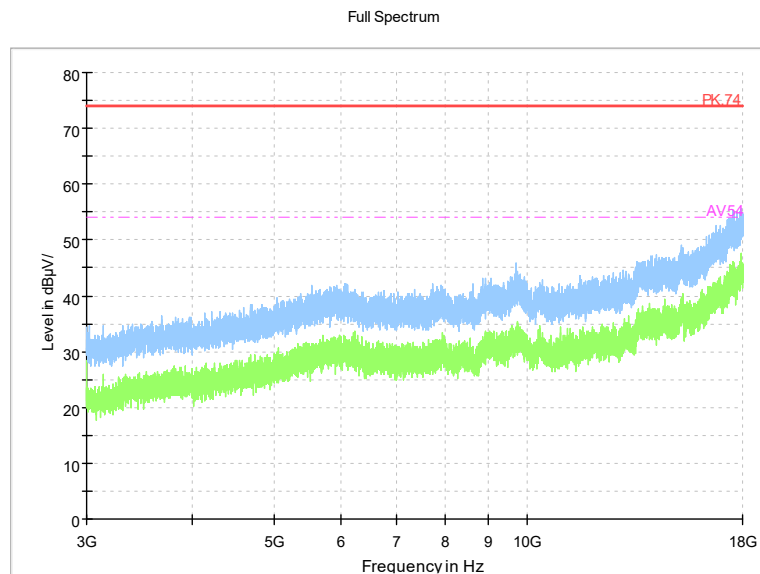

Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

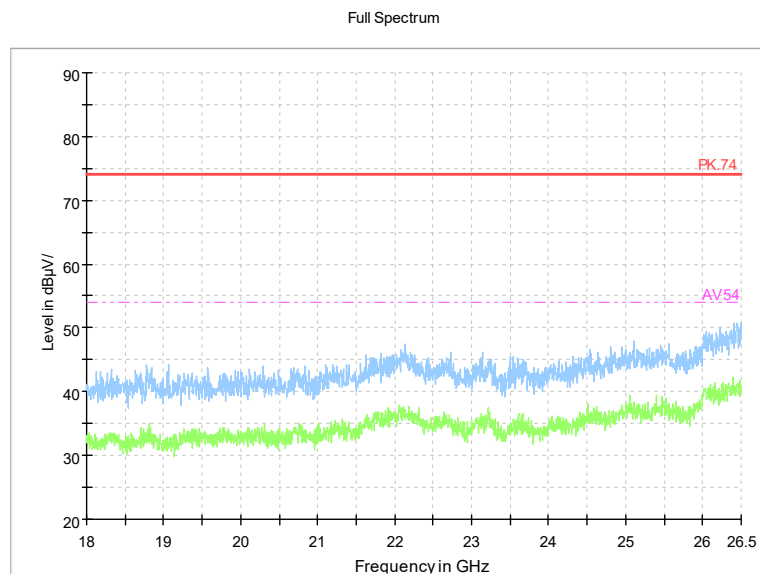


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Carrier frequency (MHz): 2441

Channel No.:39


Full Spectrum

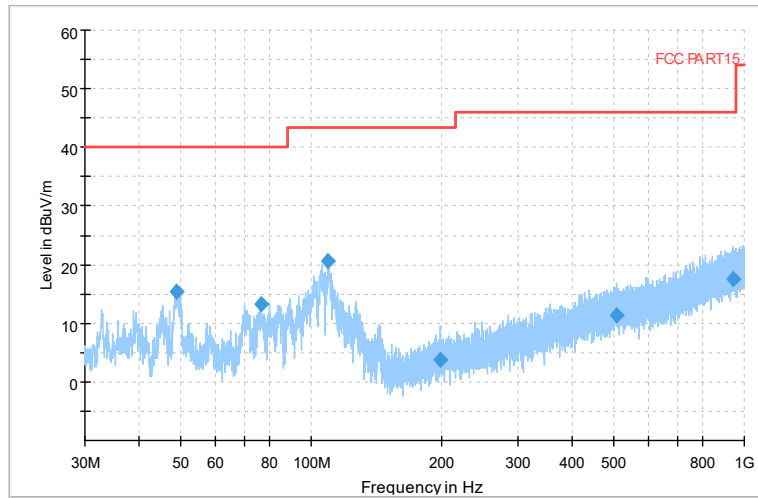

Comment

Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

Full Spectrum

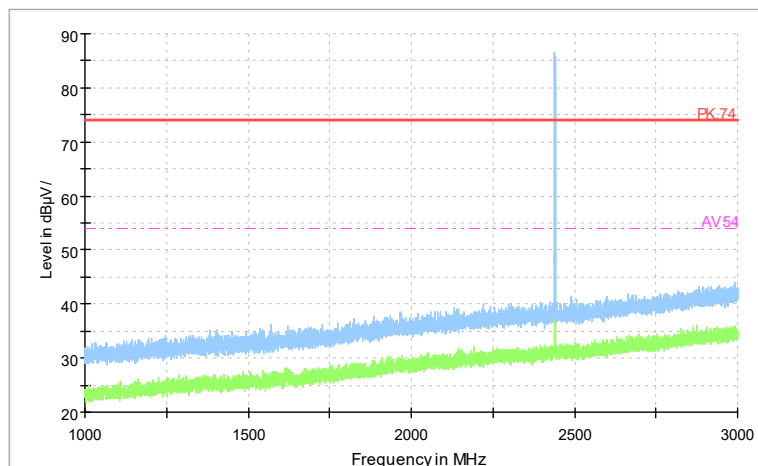


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

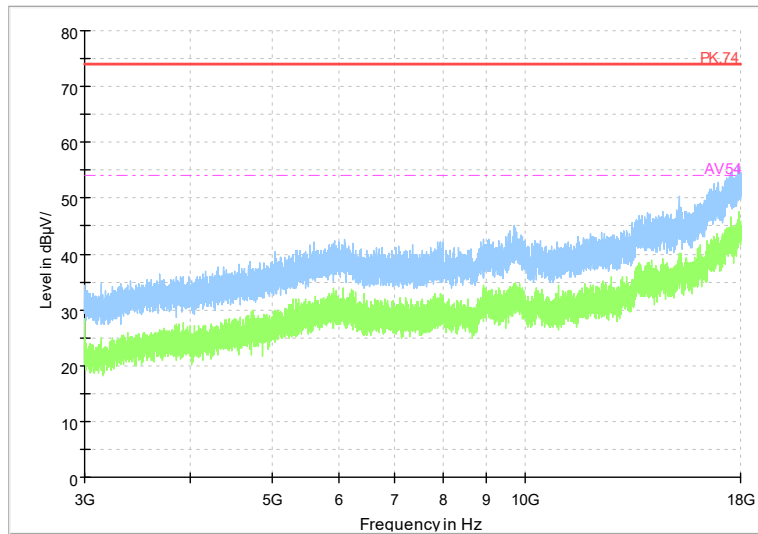


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

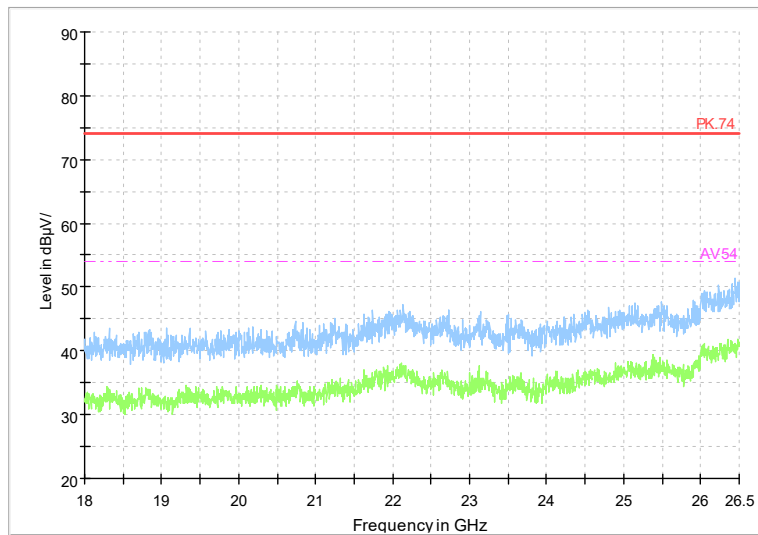

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

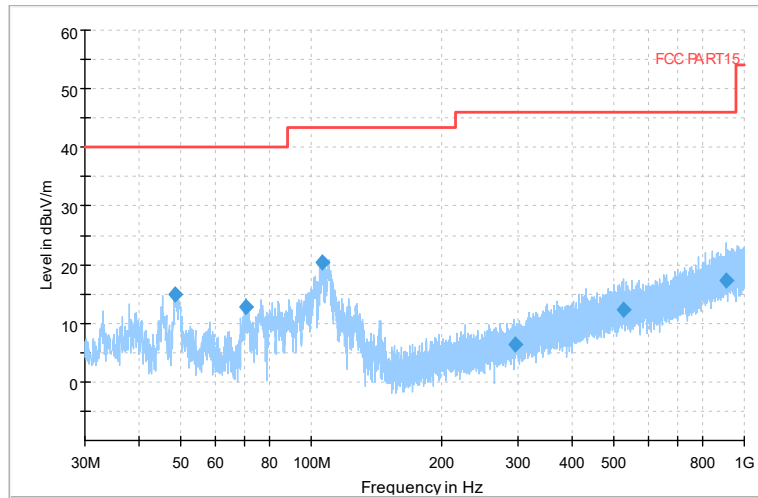

Comment

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

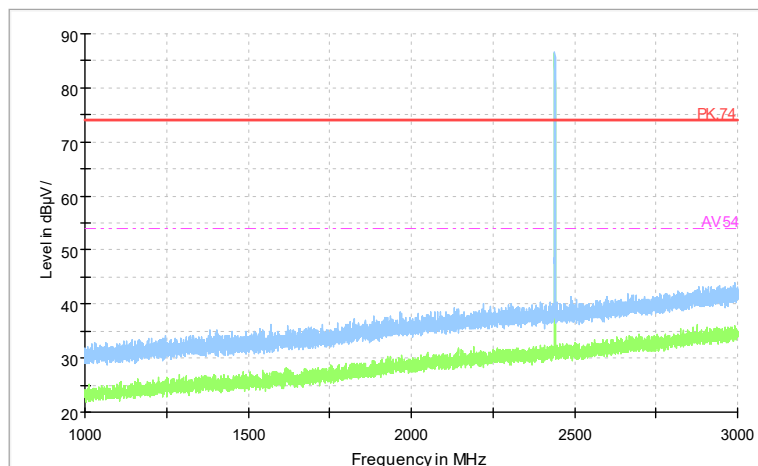


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV.54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

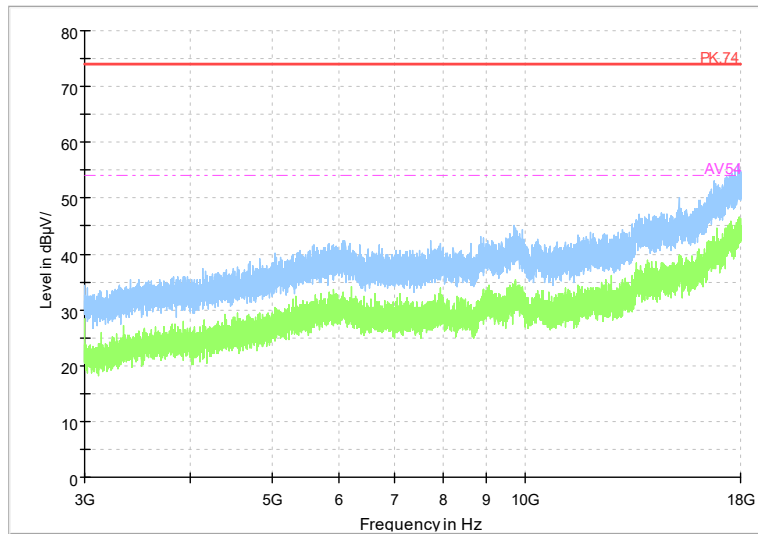


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

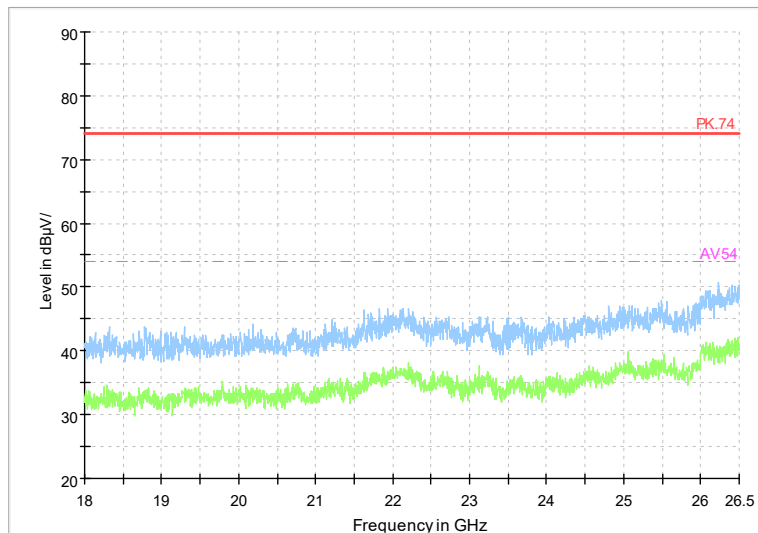

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

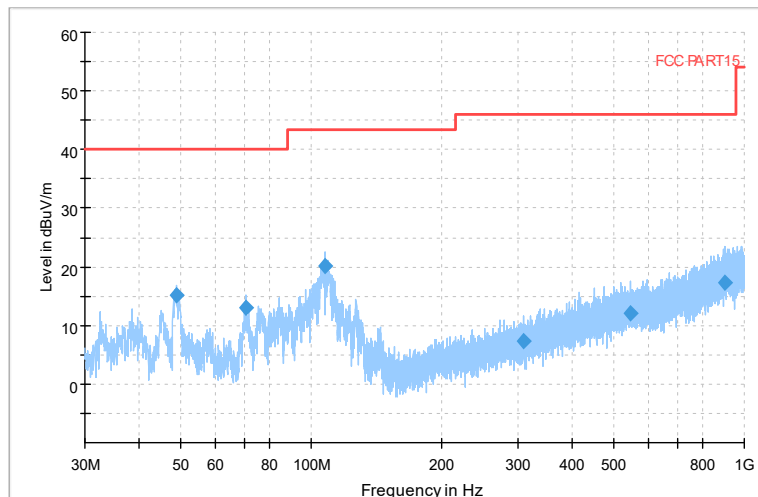

Comment

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

Full Spectrum

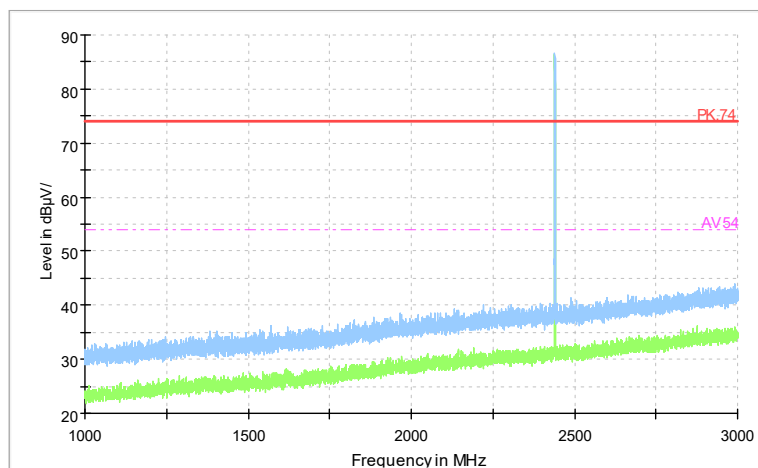


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV.54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

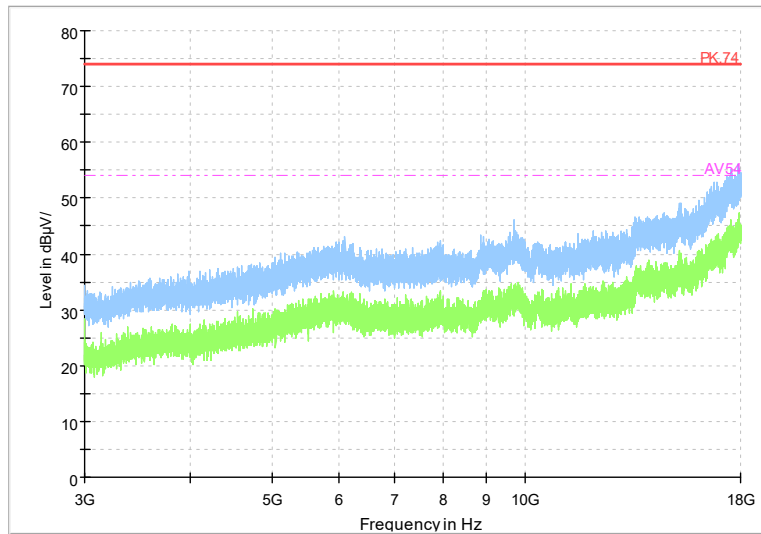

Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

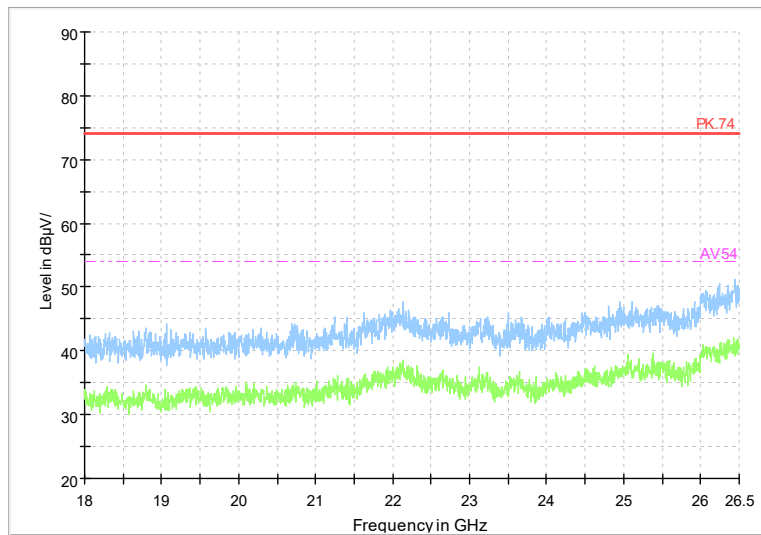


Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK



Carrier frequency (MHz): 2480
Channel No.:78


Full Spectrum

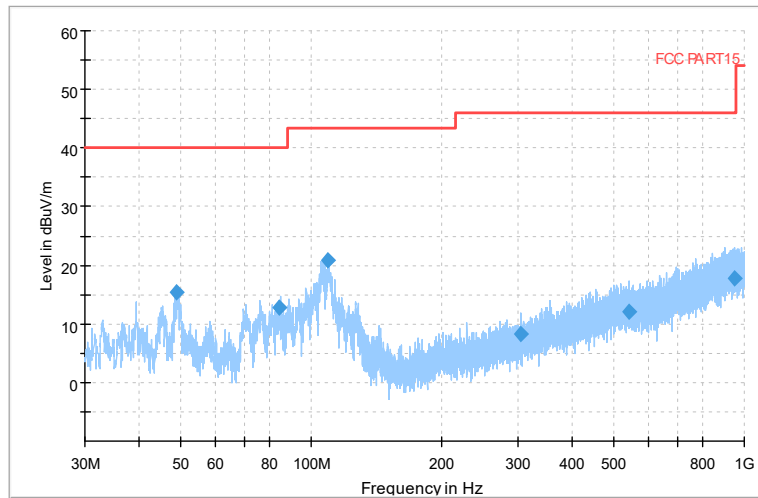

Comment

Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

Full Spectrum

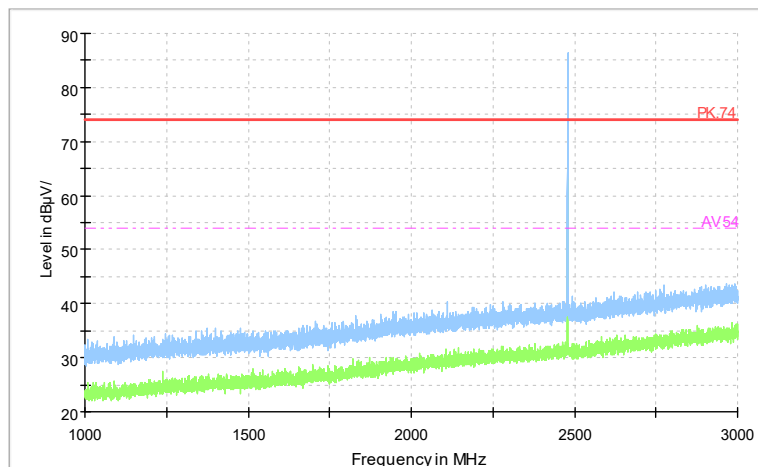


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

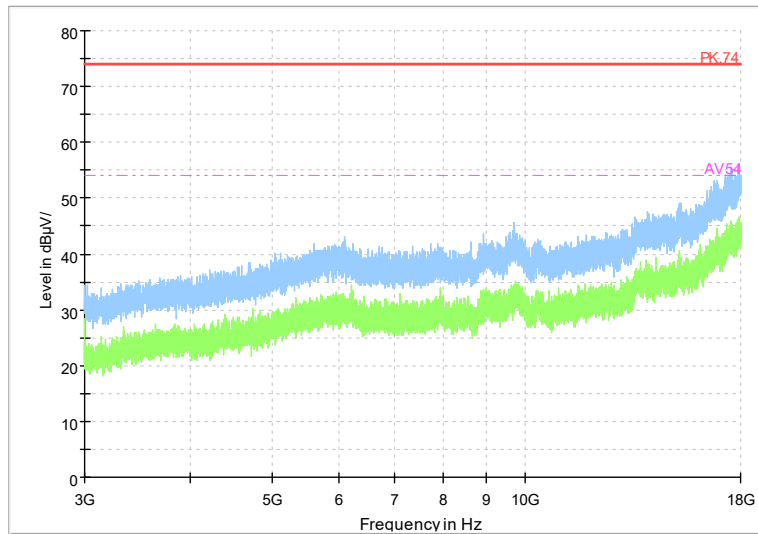


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

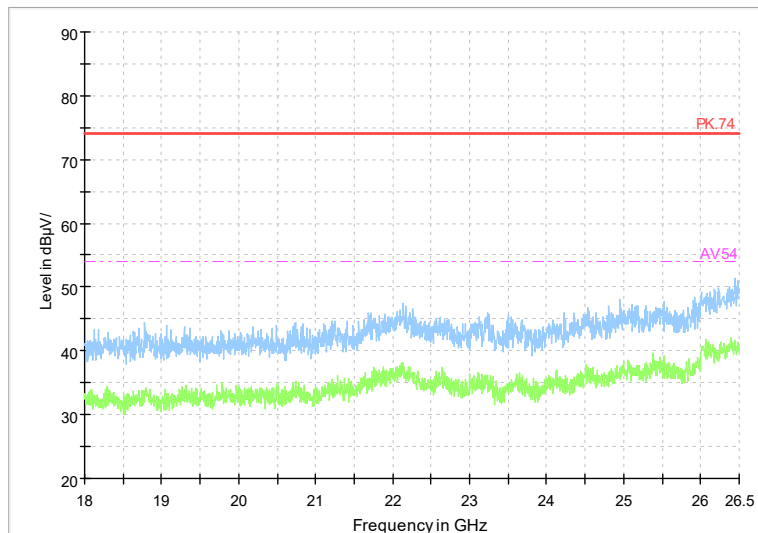

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

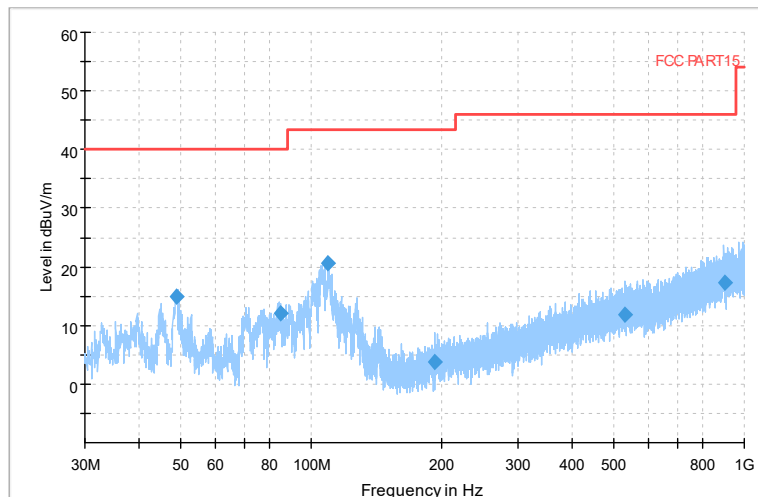

Comment

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

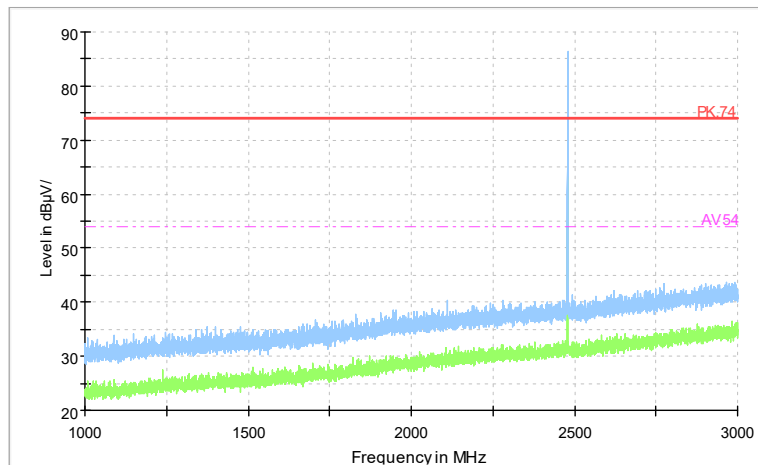


Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

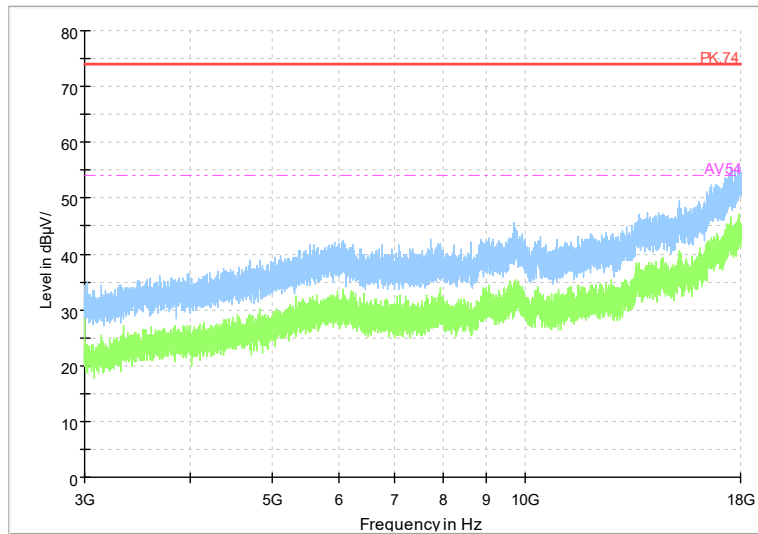


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

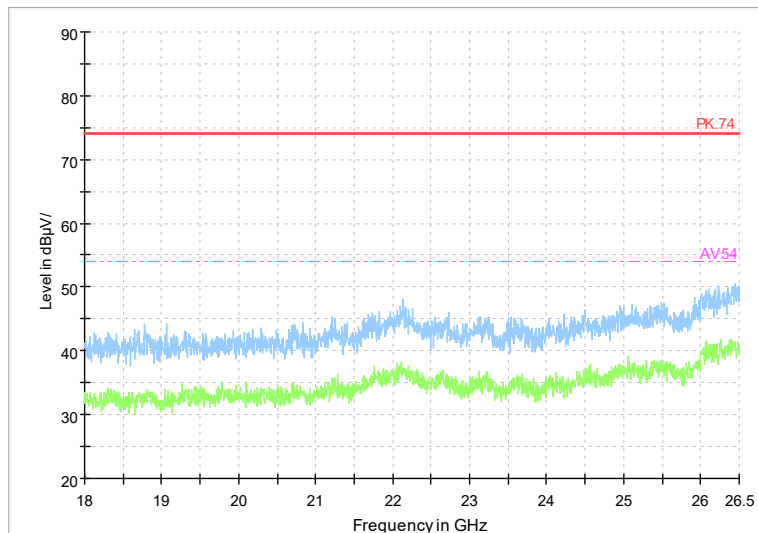

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

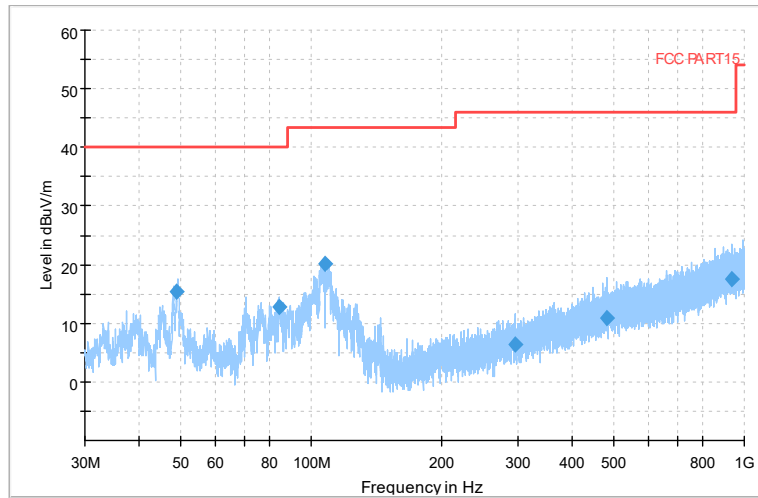

Comment

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

Full Spectrum

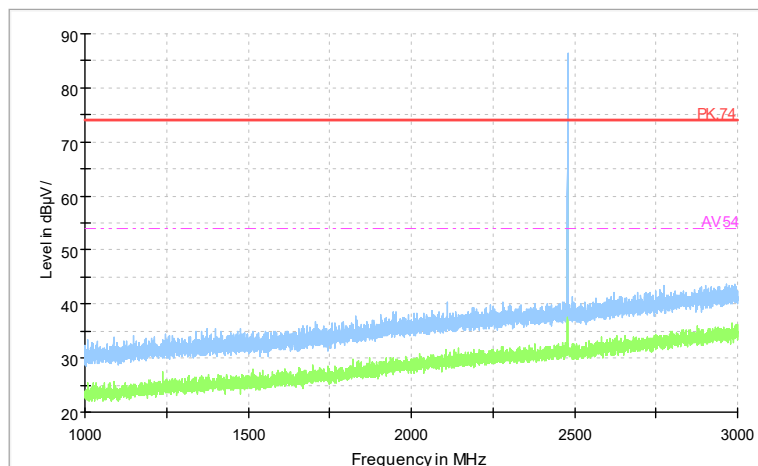


Preview Result 2-AVG Preview Result 1-PK+ PK 74 AV 54

Comment


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

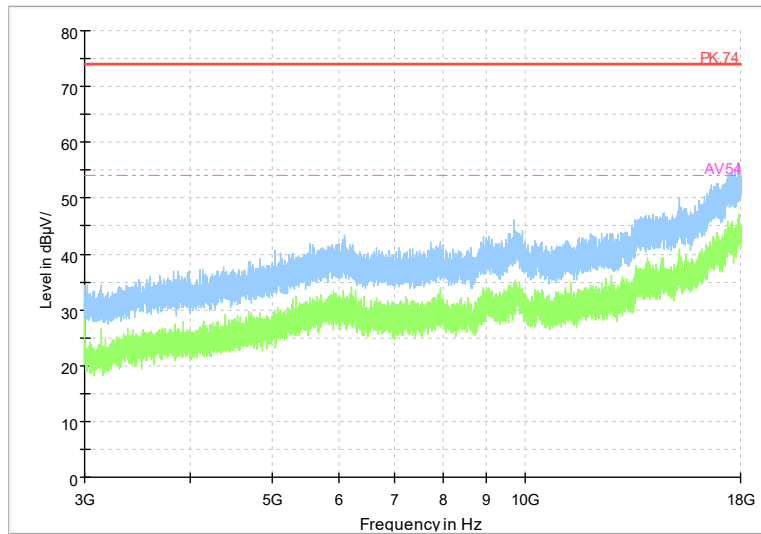

Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

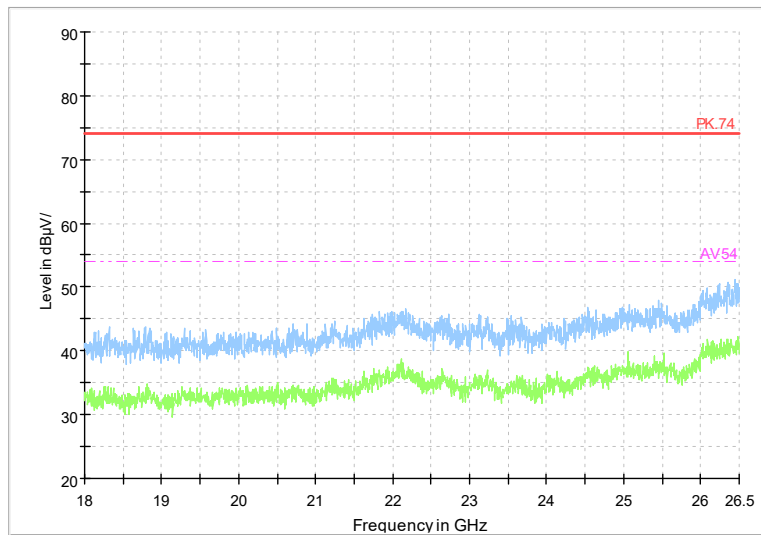

Frequency Range: 18GHz- 26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(30.52 \text{ dB}\mu\text{V}) = (0.82 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$, the corresponding frequency is 0.150000MHz.

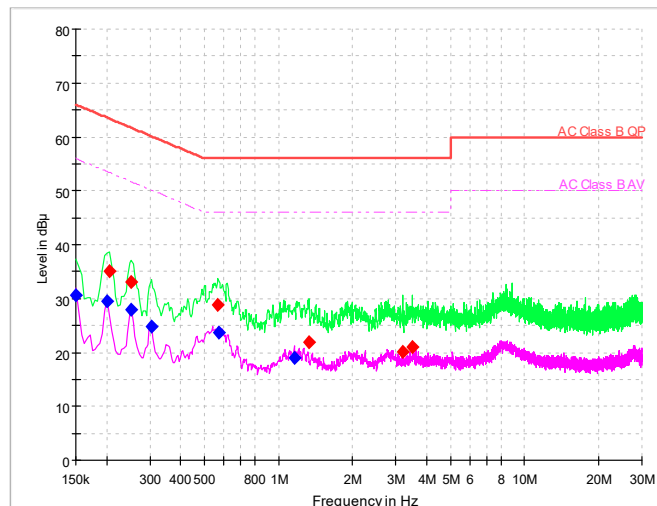

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	Quasi Peak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea Quasi Peak (dBμV)	Pmea Average (dBμV)
0.150000	---	30.52	56.00	25.48	N	29.7	---	0.82
0.201171	---	29.60	53.56	23.97	N	29.7	---	-0.1
0.205436	35.08	---	63.39	28.31	L1	29.8	5.28	---
0.252343	33.03	---	61.68	28.65	N	29.7	3.33	---
0.252343	---	27.87	51.68	23.81	N	29.7	---	-1.83
0.303514	---	24.82	50.15	25.32	N	29.7	---	-4.88
0.567900	28.81	---	56.00	27.19	L1	29.8	-0.99	---
0.572164	---	23.71	46.00	22.29	L1	29.8	---	-6.09
1.156371	---	18.94	46.00	27.06	L1	29.8	---	-10.86
1.331207	21.94	---	56.00	34.06	L1	29.8	-7.86	---
3.198964	20.14	---	56.00	35.86	L1	29.9	-9.76	---
3.505993	20.91	---	56.00	35.09	N	29.8	-8.89	---

---End of Test Report---