
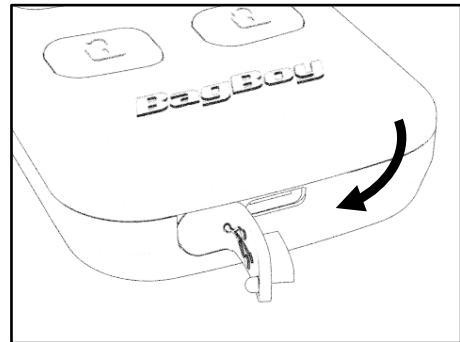


VOLT Remote

BagBoy

Remote Control

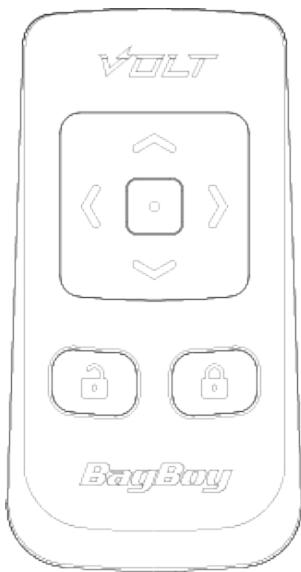

Charging

- Before using the Remote, please make sure that it is fully charged.
- The Remote contains a rechargeable lithium battery. Charge the Remote with the provided USB cable, and the charging port is located under the rubber cover located at the bottom of the remote.
- The blue LED light flashes when charging is in progress, and it will remain solid when fully charged.
- When the battery level of the Remote is low, the blue LED and the red LED will start to flash at the same time. And the low battery icon of the remote will display on the display screen.
- When the battery is completely drained, no LED lights will light up when any button is pressed.
- The keypad will be locked while charging.
- A full charging process takes about 3 hours.

Remote Control


Operating Remote

1 Forward Button

- The starting speed is level 2. Each tap increases 1 speed level, maximum is level 9.
- Press and hold the Forward Button to speed up the motor quickly.(accelerate to level 9 in 3 seconds)

2 Down Button

- When the brakes are activated, press and hold Down Button to move the cart in reverse.
- While moving forward, every time you tap the Down Button, the speed will be reduced by 1 level, and the minimum speed is level 1.

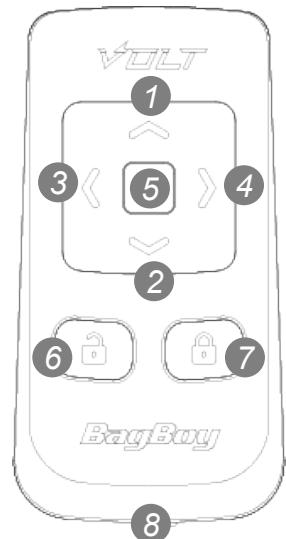

3&4 Left / Right Button

- Tap the Left / Right Button, then the cart will turn slightly and continue to move forward.(no matter if the cart is moving or not)
- Press and hold the Left / Right Button, then the cart will keep turning left / right until release the button.

5 Stop Button

- The cart stops when pressed in any state

6 Unlock Button

- If the remote control keys are locked, press the Unlock Button to unlock the keypads.
- Press any button when the keypad unlocked, the blue LED will light up.

7 Lock Button

- Press the Lock Button to limit and prevent unexpected control.
- Press any button when the keypad locked, the red LED will light up.

6+7 Unlock + Lock Button

- Press these two buttons at the same time to activate the pairing mode.

8 Charging Port

- USB-C port
- The keypad will be locked while charging

Pairing Your Cart

1. Press and hold the Lock & Unlock buttons on the remote at the same time until the blue and red LED blink alternately. Then the remote will enter into the pairing mode and continue sending the pairing signal for 60 seconds.
2. When the pairing is complete, you can press and hold the Unlock Button for 3 seconds to exit the pairing mode.
**The remote will automatically exit the pairing mode after 60 seconds.*
3. The keypad of the Remote will be locked during the pairing mode except for the Unlock Button.



| States | Description of LED lights |
|-----------------------|---|
| Low battery | The blue and red LED keep flashing. |
| Battery fully charged | The blue LED stays on. |
| Battery is charging | The blue LED keeps flashing. |
| Ready to pair | The blue LED and red LED flash separately. |
| Keypad is locked | The blue LED lights up while pressing any button. |
| Keypad is unlocked | The red LED lights up while pressing any button. |

FCC Compliance Statement

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- Any changes or modifications not expressly approved by BagBoy for compliance could void the user's authority to operate this equipment.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.
- This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Instructions , may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- This product has demonstrated EMC compliance under conditions that included the use of compliant peripheral devices and shielded cables between system components. It is important that you use compliant peripheral devices and shielded cables between system components to reduce the possibility of causing interference to radios, televisions, and other electronic devices.
- FCC Radiation Exposure Statement:
 - This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.
 - This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
- Responsible party (contact for FCC matters only):
Dynamic Brands
2701 Emerywood Pkwy., Ste. 200
Richmond, VA 23294
USA
(804) 726-1343