


Site: AC1	Time: 2019/11/09 - 04:07
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode) with DAP645-RW	

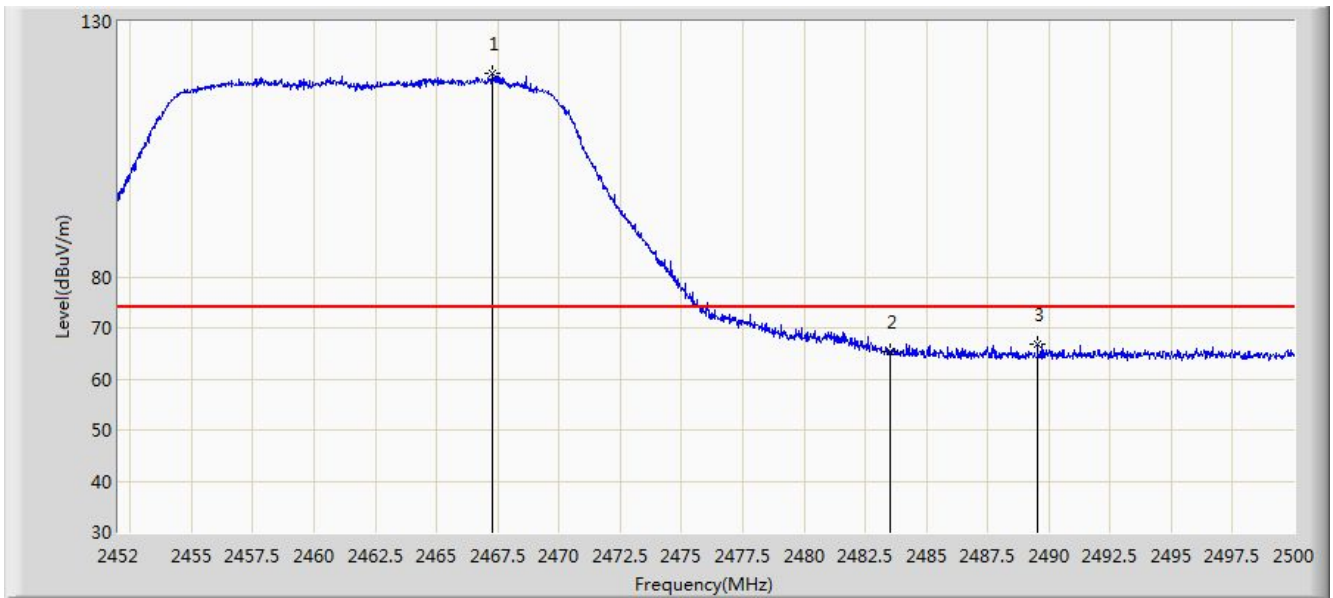


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.264	119.822	87.444	N/A	N/A	32.377	PK
2			2483.500	65.491	33.076	-8.509	74.000	32.416	PK
3			2489.536	66.929	34.502	-7.071	74.000	32.428	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:10
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode) with DAP645-RW	

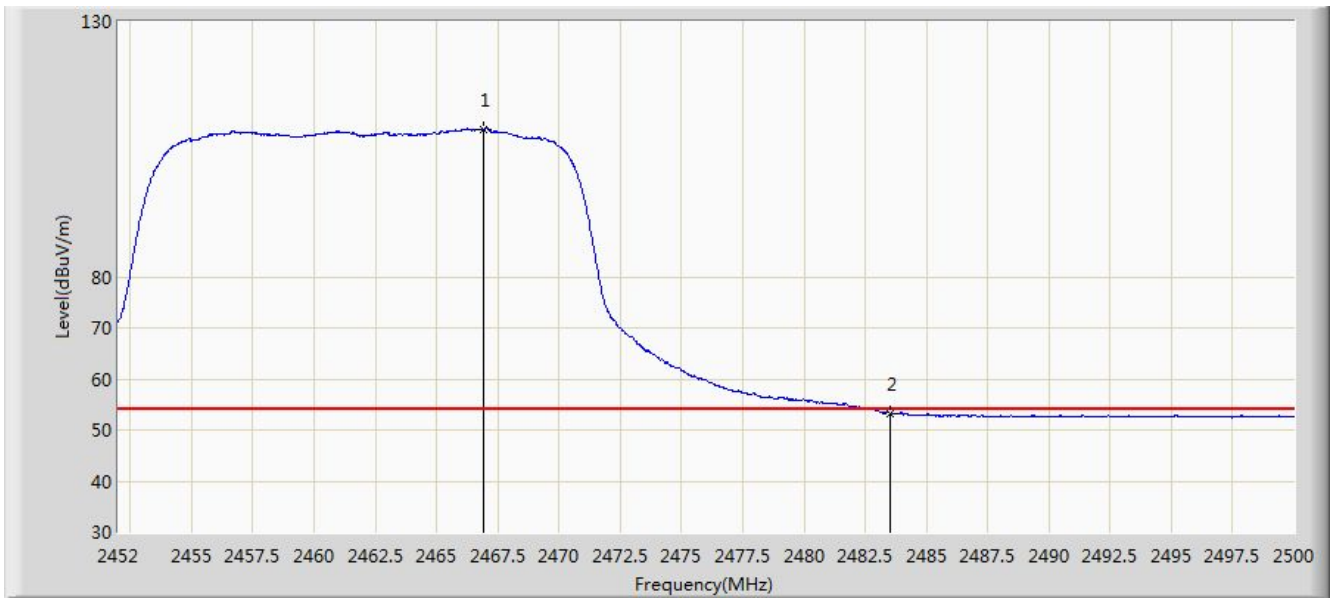


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2466.904	108.766	76.389	N/A	N/A	32.377	AV
2			2483.500	53.330	20.915	-0.670	54.000	32.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:22
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

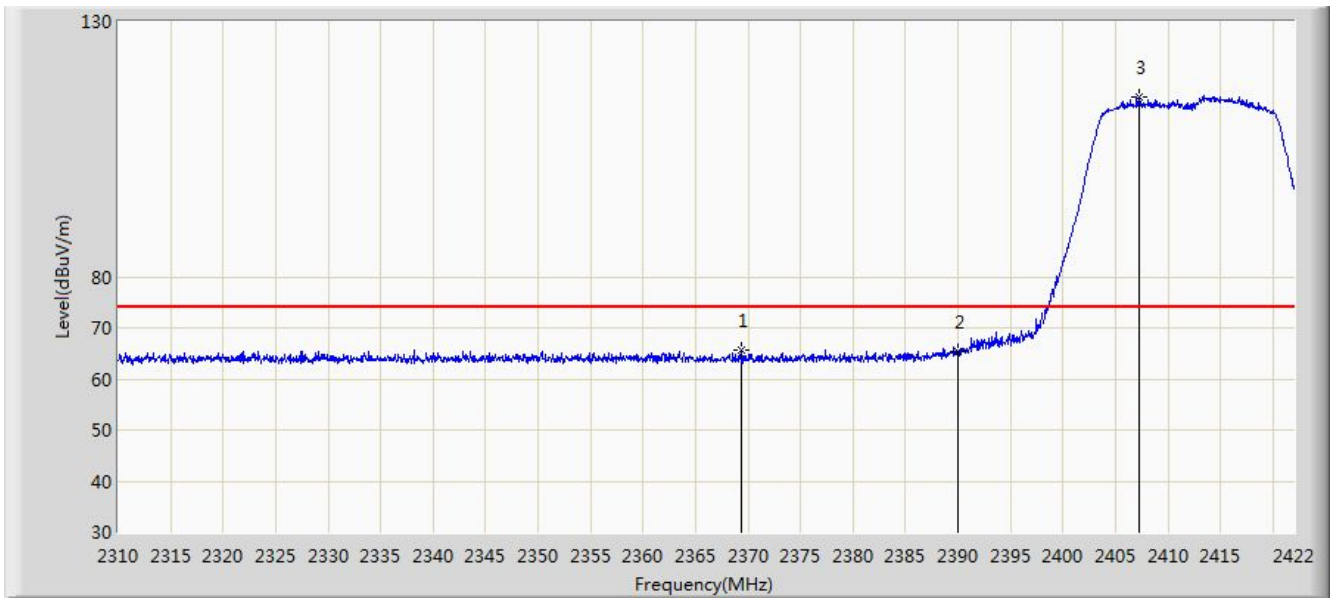


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.416	65.658	33.204	-8.342	74.000	32.453	PK
2			2390.000	65.443	33.030	-8.557	74.000	32.413	PK
3		*	2407.216	115.358	82.968	N/A	N/A	32.390	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:24
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

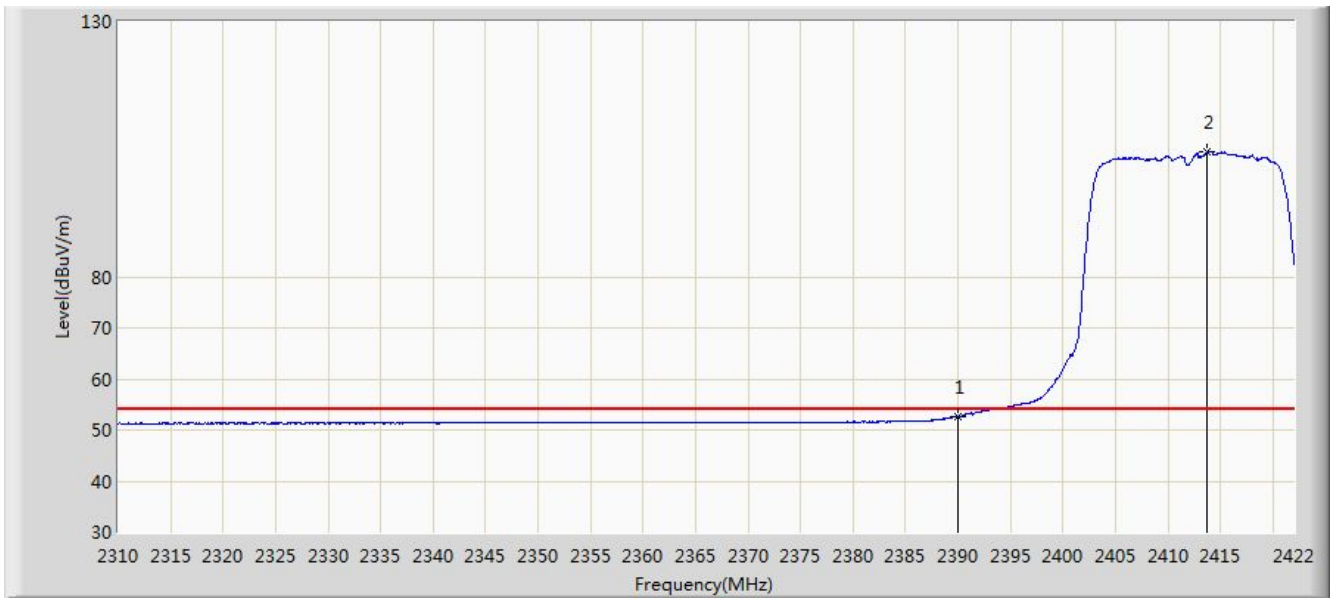


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.535	20.122	-1.465	54.000	32.413	AV
2		*	2413.768	104.387	72.005	N/A	N/A	32.382	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:20
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

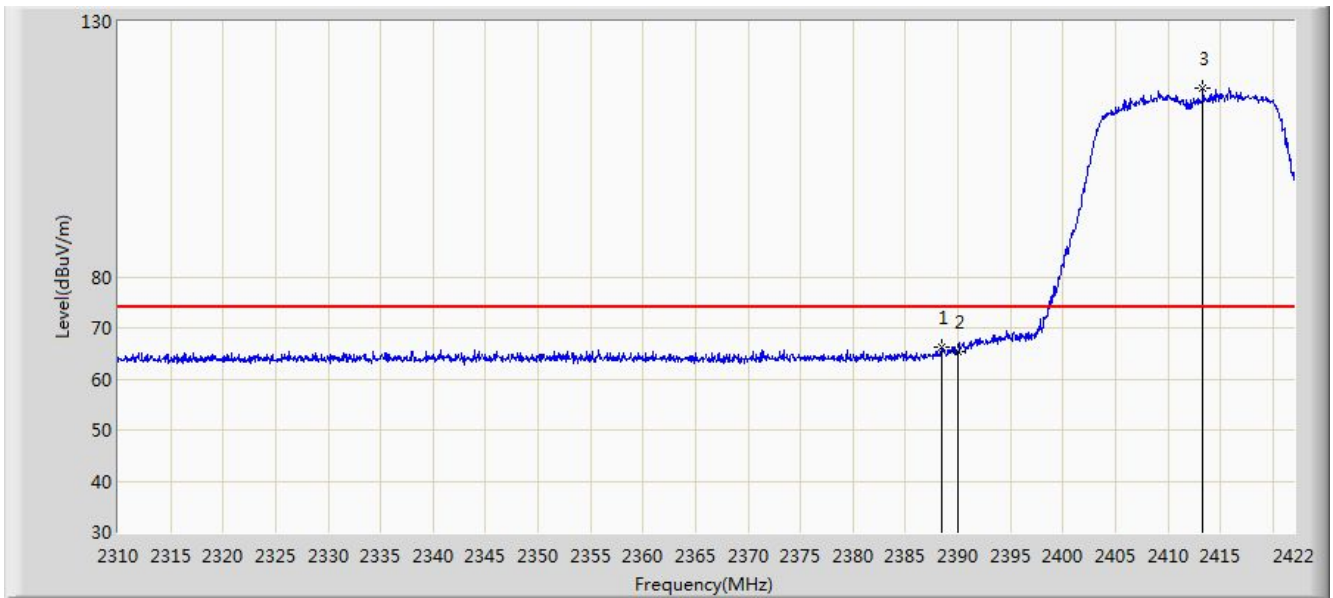


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.400	66.248	33.832	-7.752	74.000	32.416	PK
2			2390.000	65.344	32.931	-8.656	74.000	32.413	PK
3		*	2413.320	116.985	84.602	N/A	N/A	32.383	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:19
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

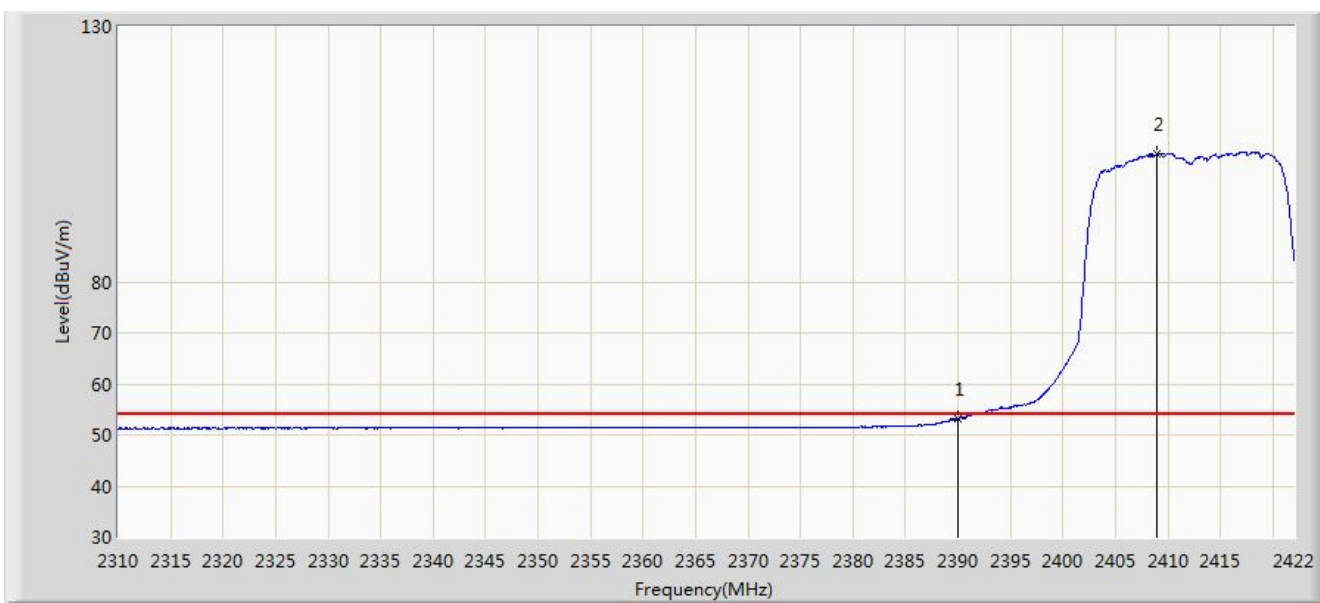


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.287	20.874	-0.713	54.000	32.413	AV
2		*	2408.896	105.016	72.628	N/A	N/A	32.387	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:30
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

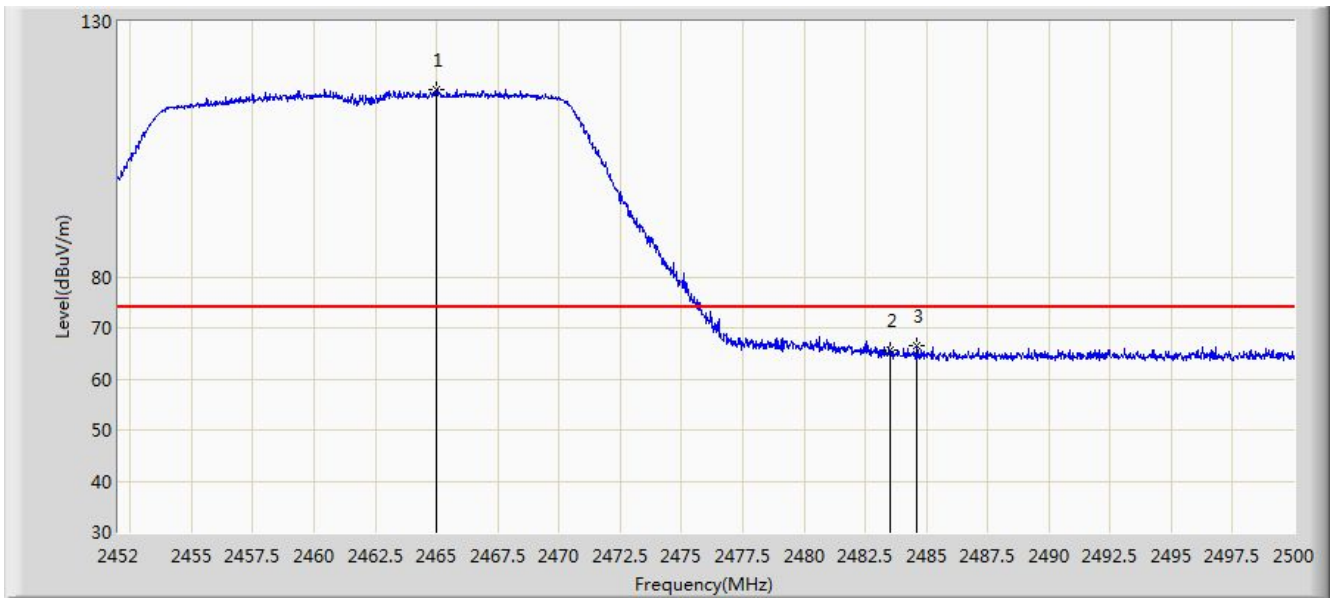


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.984	116.695	84.323	N/A	N/A	32.372	PK
2			2483.500	65.747	33.332	-8.253	74.000	32.416	PK
3			2484.616	66.511	34.093	-7.489	74.000	32.418	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:30
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

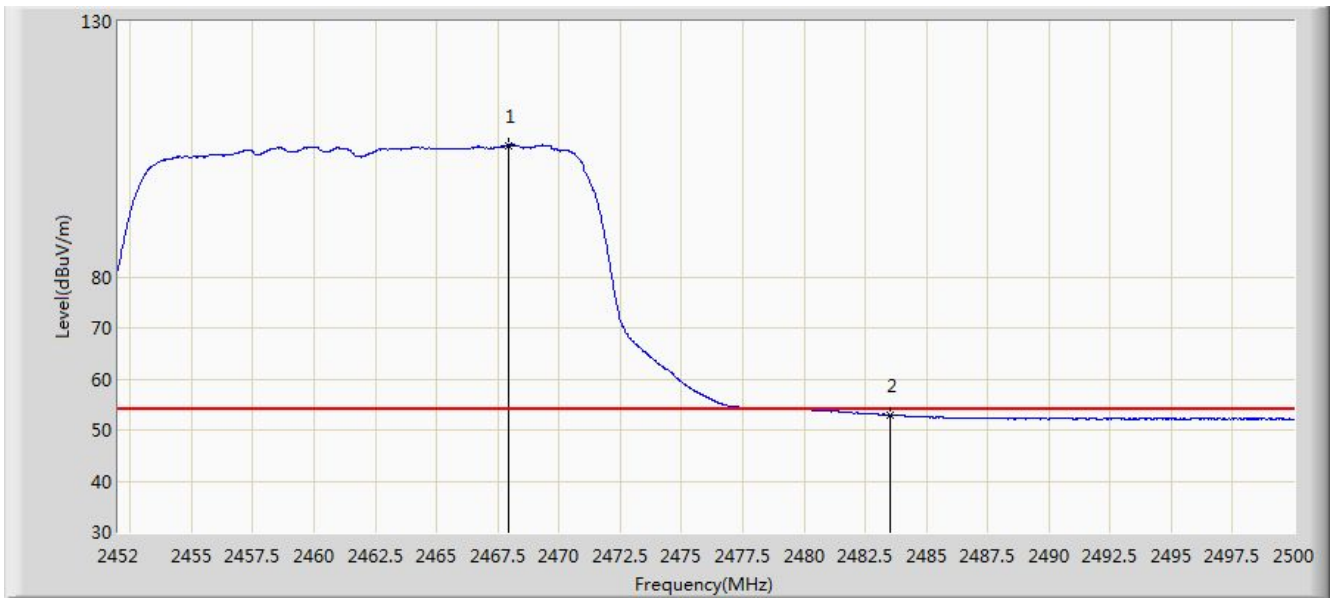


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.960	105.797	73.418	N/A	N/A	32.380	AV
2			2483.500	52.912	20.497	-1.088	54.000	32.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:26
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

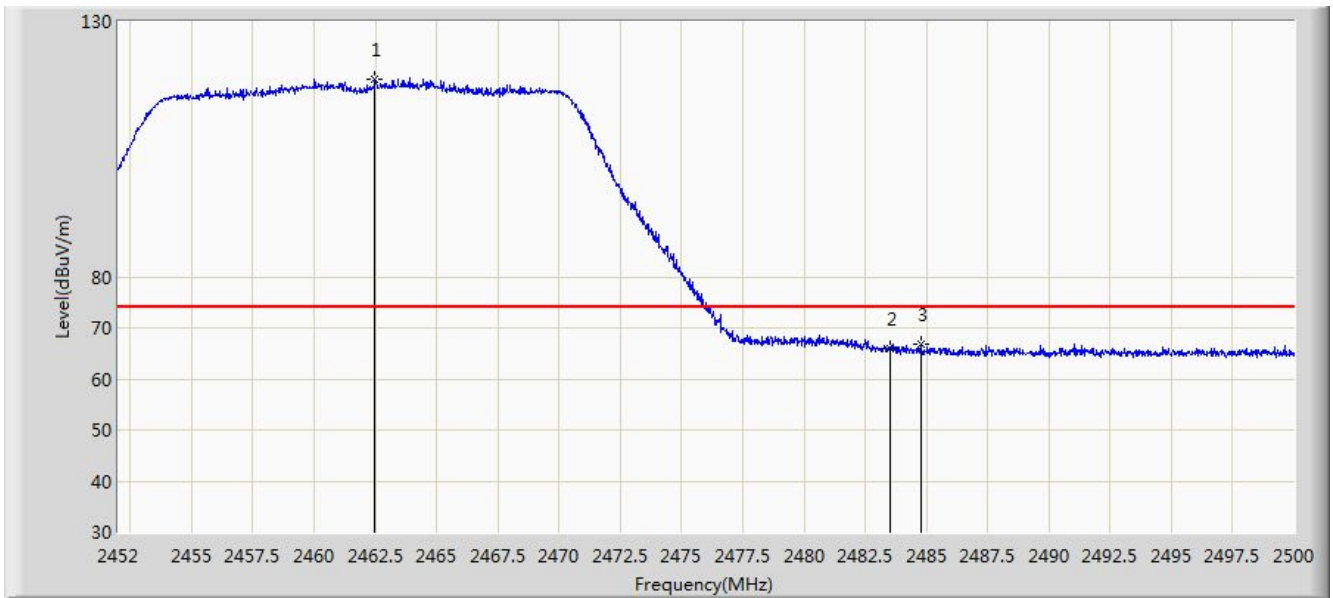


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.488	118.789	86.422	N/A	N/A	32.367	PK
2			2483.500	66.019	33.604	-7.981	74.000	32.416	PK
3			2484.784	66.826	34.408	-7.174	74.000	32.418	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:29
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

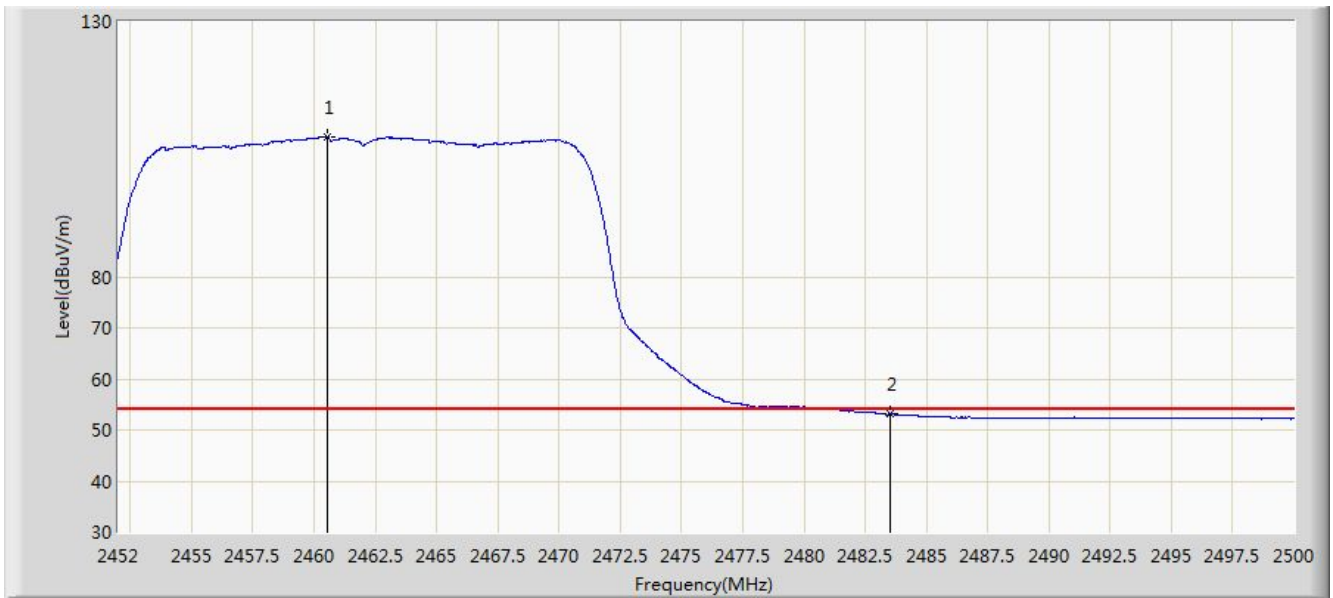


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.568	107.399	75.035	N/A	N/A	32.364	AV
2			2483.500	53.106	20.691	-0.894	54.000	32.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:40
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

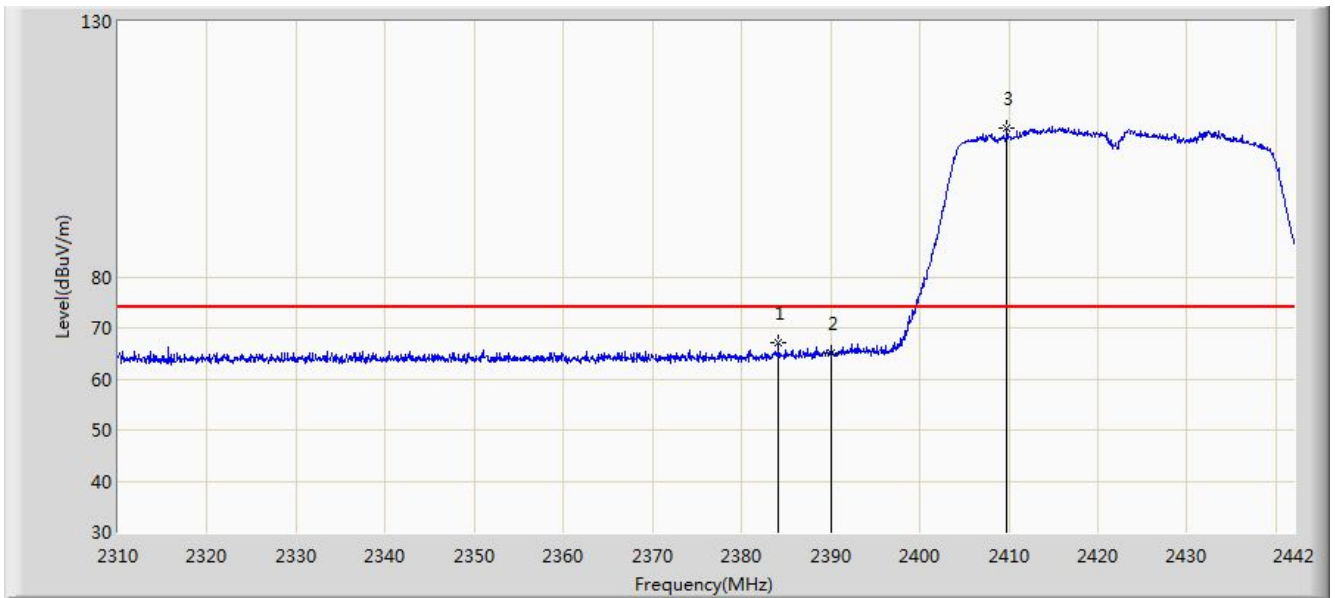


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.118	67.144	34.720	-6.856	74.000	32.423	PK
2			2390.000	65.020	32.607	-8.980	74.000	32.413	PK
3		*	2409.792	109.211	76.824	N/A	N/A	32.386	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:42
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

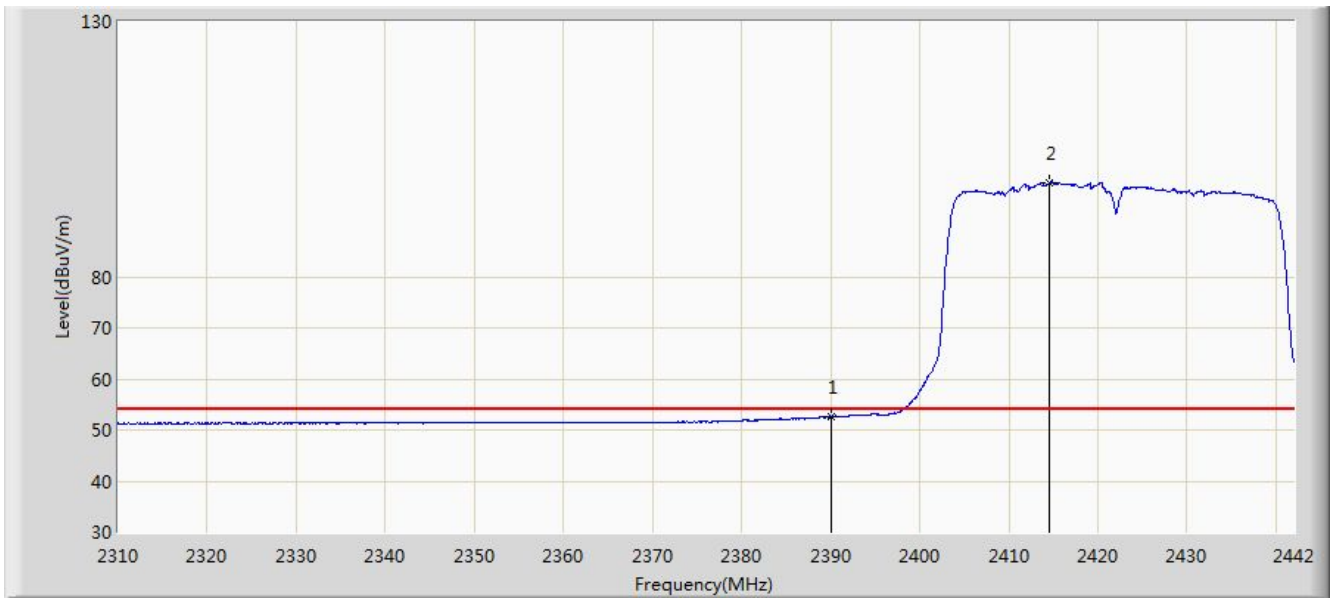


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.630	20.217	-1.370	54.000	32.413	AV
2		*	2414.610	98.494	66.113	N/A	N/A	32.381	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:39
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

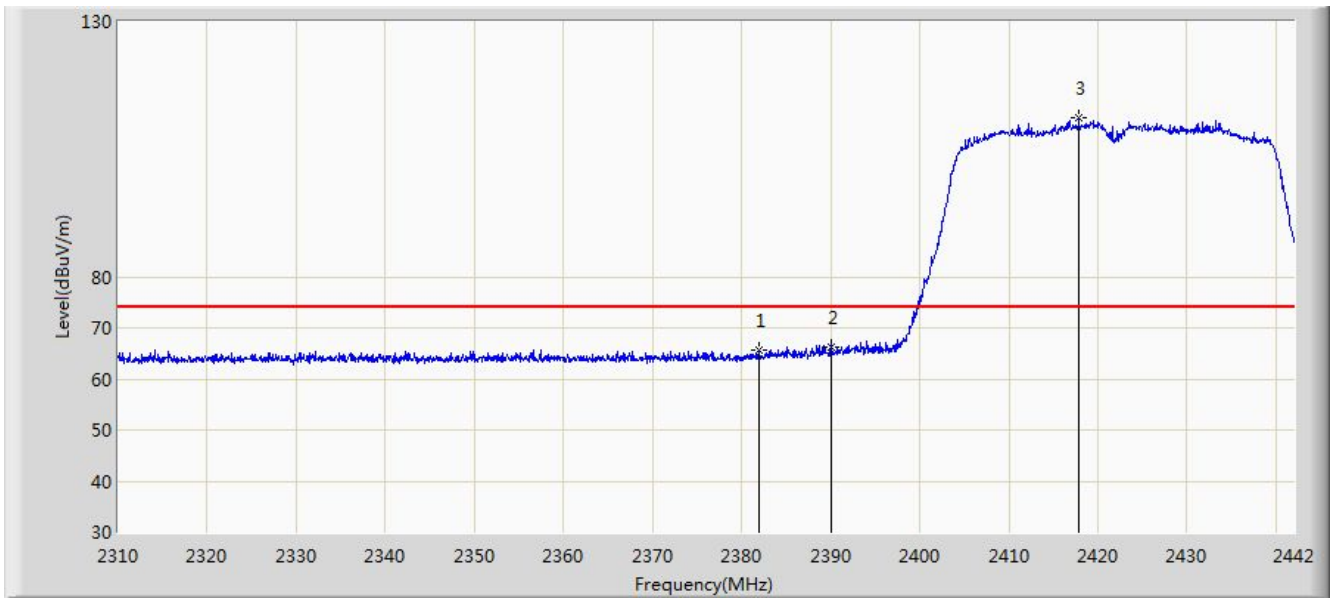


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.874	65.752	33.324	-8.248	74.000	32.428	PK
2			2390.000	66.096	33.683	-7.904	74.000	32.413	PK
3		*	2417.844	111.076	78.698	N/A	N/A	32.377	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:37
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

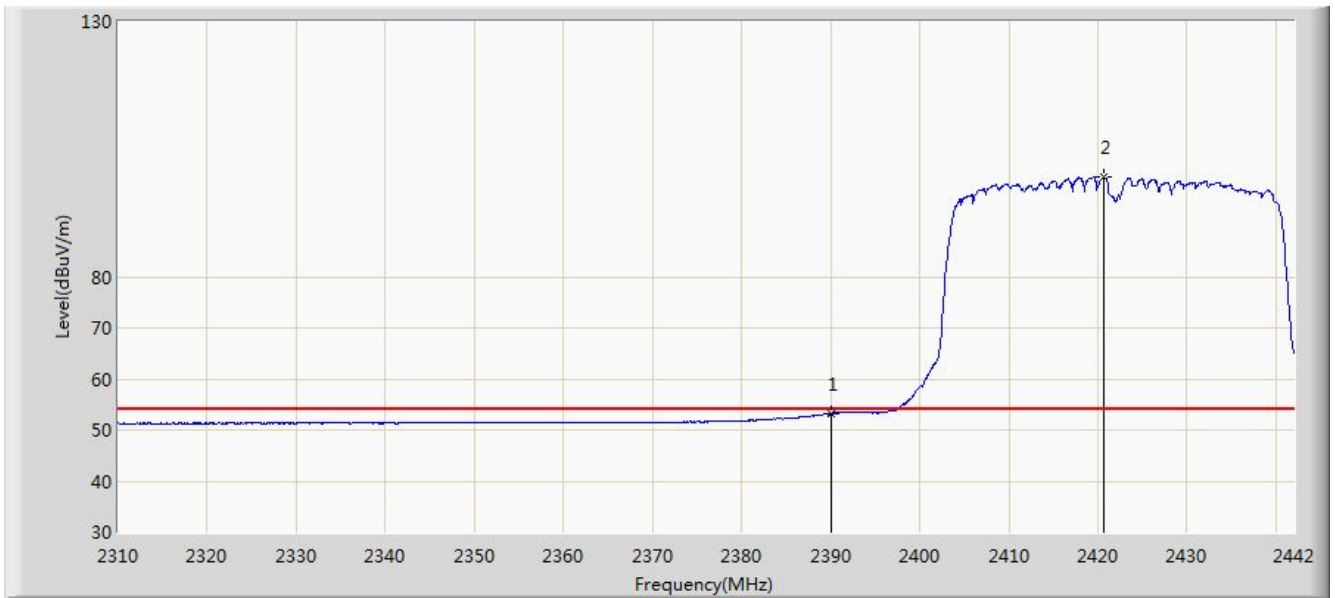


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.241	20.828	-0.759	54.000	32.413	AV
2		*	2420.682	99.424	67.050	N/A	N/A	32.374	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:55
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

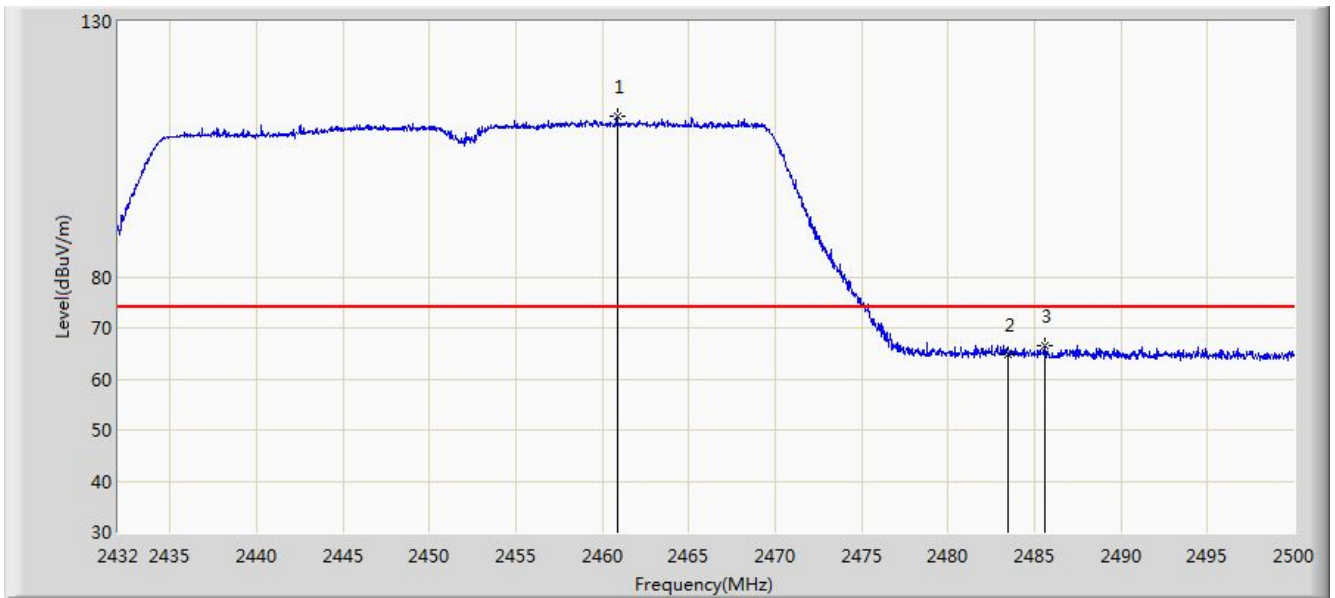


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.866	111.509	79.145	N/A	N/A	32.364	PK
2			2483.500	64.816	32.401	-9.184	74.000	32.416	PK
3			2485.618	66.612	34.192	-7.388	74.000	32.419	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:56
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

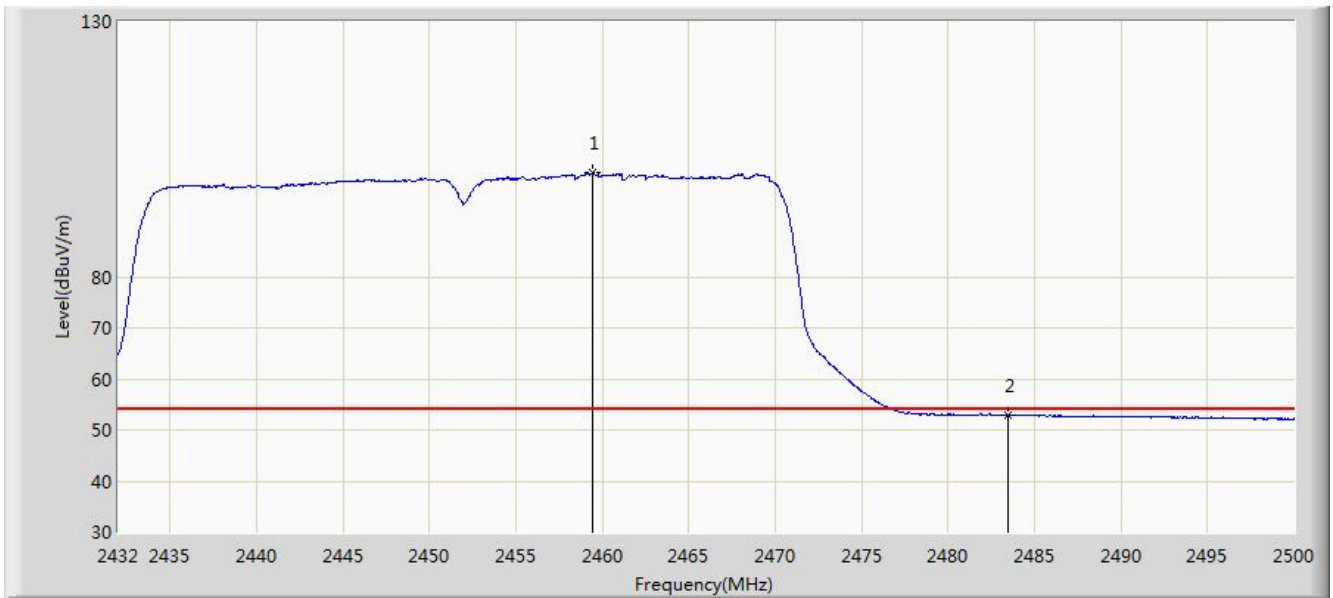


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.438	100.390	68.029	N/A	N/A	32.361	AV
2			2483.500	52.886	20.471	-1.114	54.000	32.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:54
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

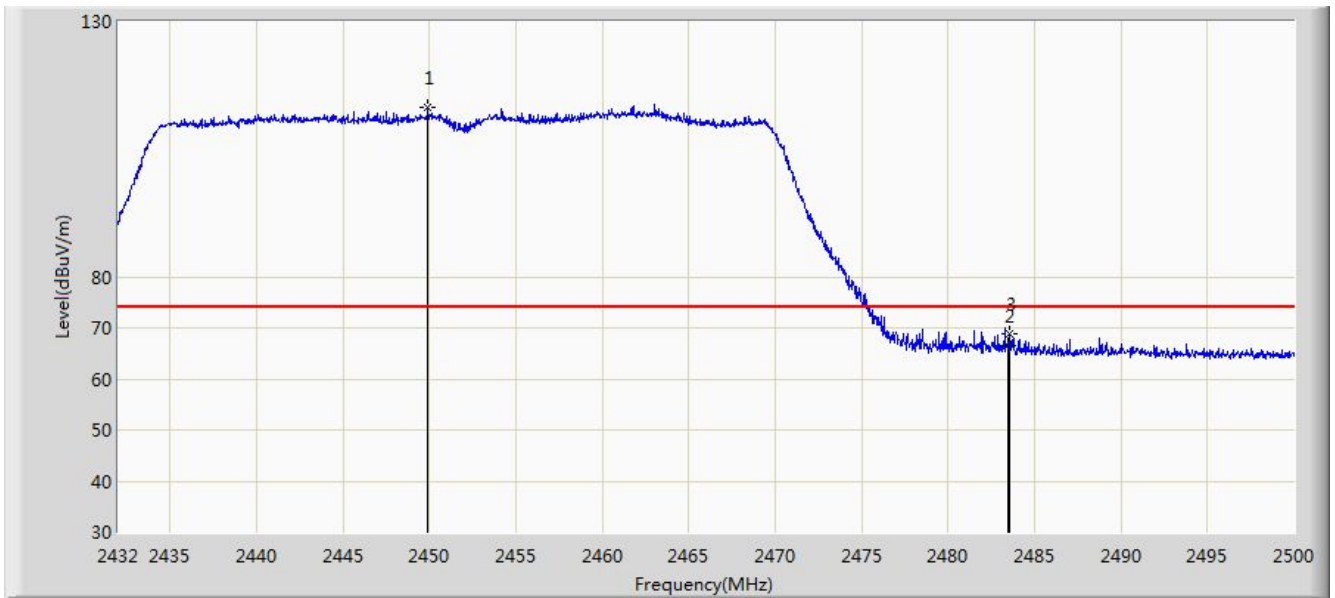


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.918	113.234	80.891	N/A	N/A	32.343	PK
2			2483.500	66.564	34.149	-7.436	74.000	32.416	PK
3			2483.578	68.774	36.358	-5.226	74.000	32.416	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/11/09 - 04:47
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

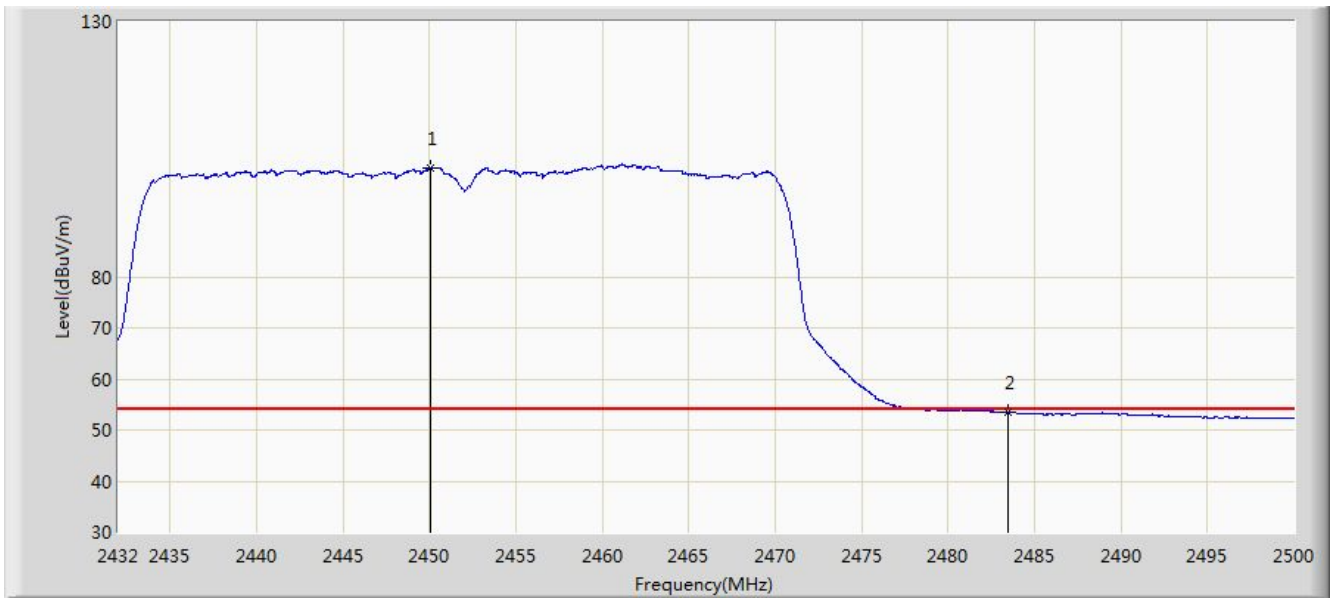


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.088	101.296	68.952	N/A	N/A	32.344	AV
2			2483.500	53.430	21.015	-0.570	54.000	32.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:25
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

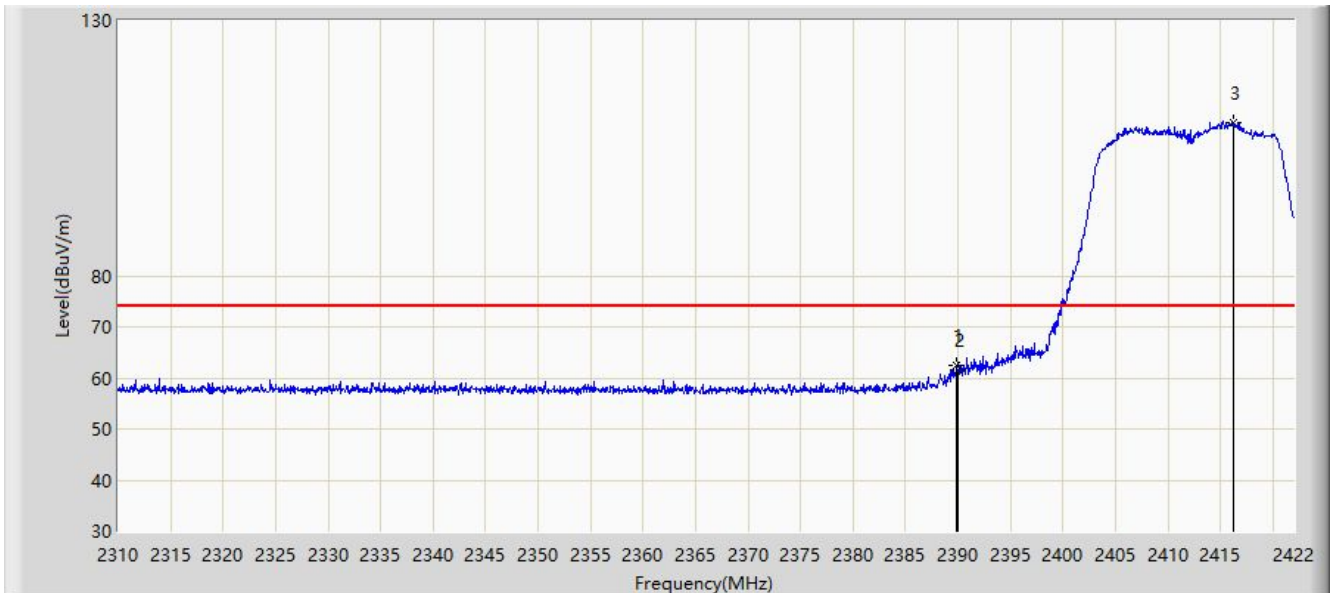


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	62.591	30.106	-11.409	74.000	32.485	PK
2			2390.000	61.490	29.005	-12.510	74.000	32.485	PK
3		*	2416.288	110.072	77.576	N/A	N/A	32.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:38
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

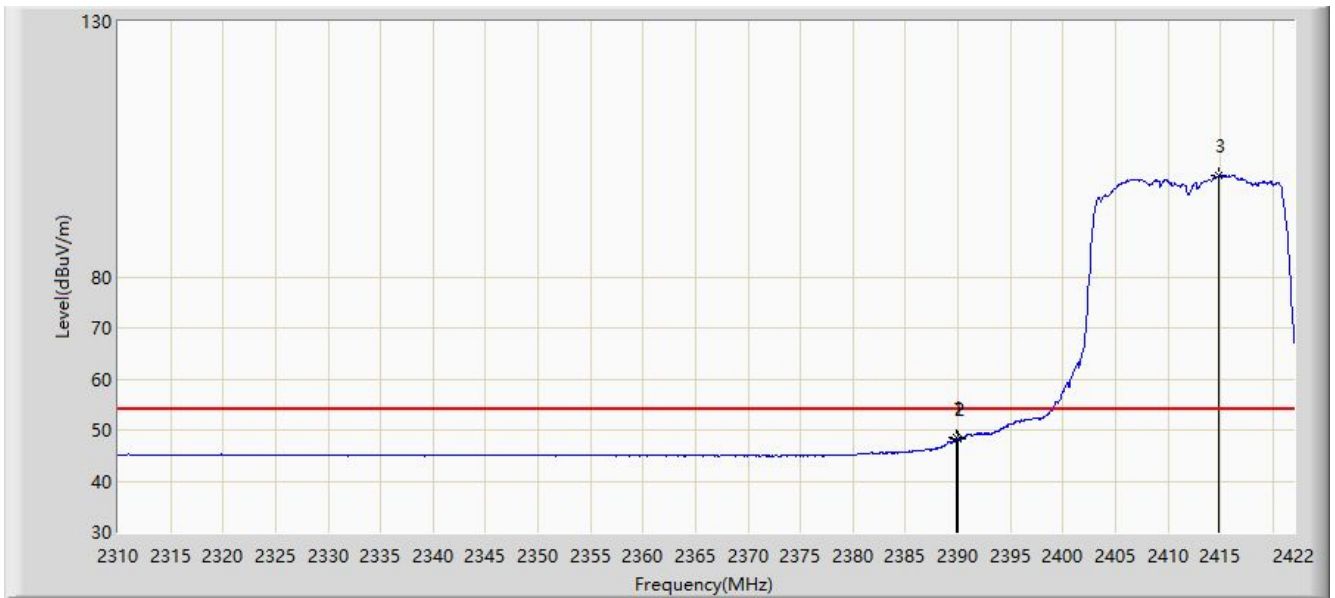


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	48.472	15.987	-5.528	54.000	32.485	AV
2			2390.000	48.321	15.836	-5.679	54.000	32.485	AV
3		*	2414.888	99.753	67.245	N/A	N/A	32.508	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:43
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

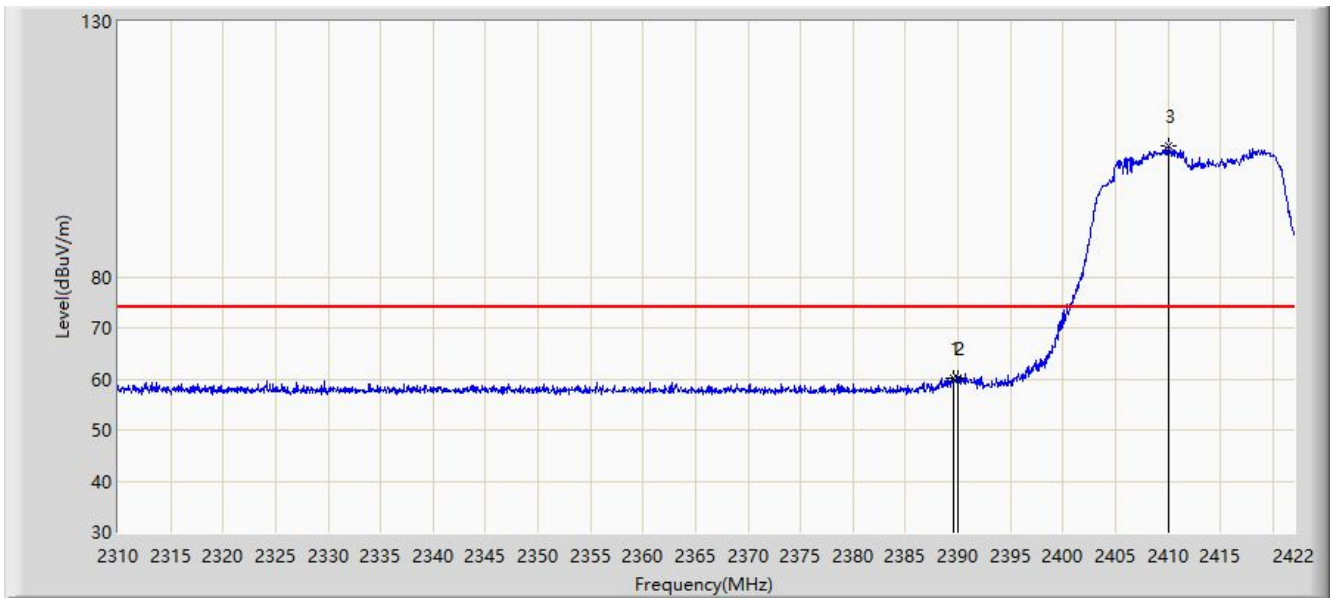


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.632	60.251	27.766	-13.749	74.000	32.485	PK
2			2390.000	60.035	27.550	-13.965	74.000	32.485	PK
3		*	2410.072	105.520	72.982	N/A	N/A	32.538	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:49
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

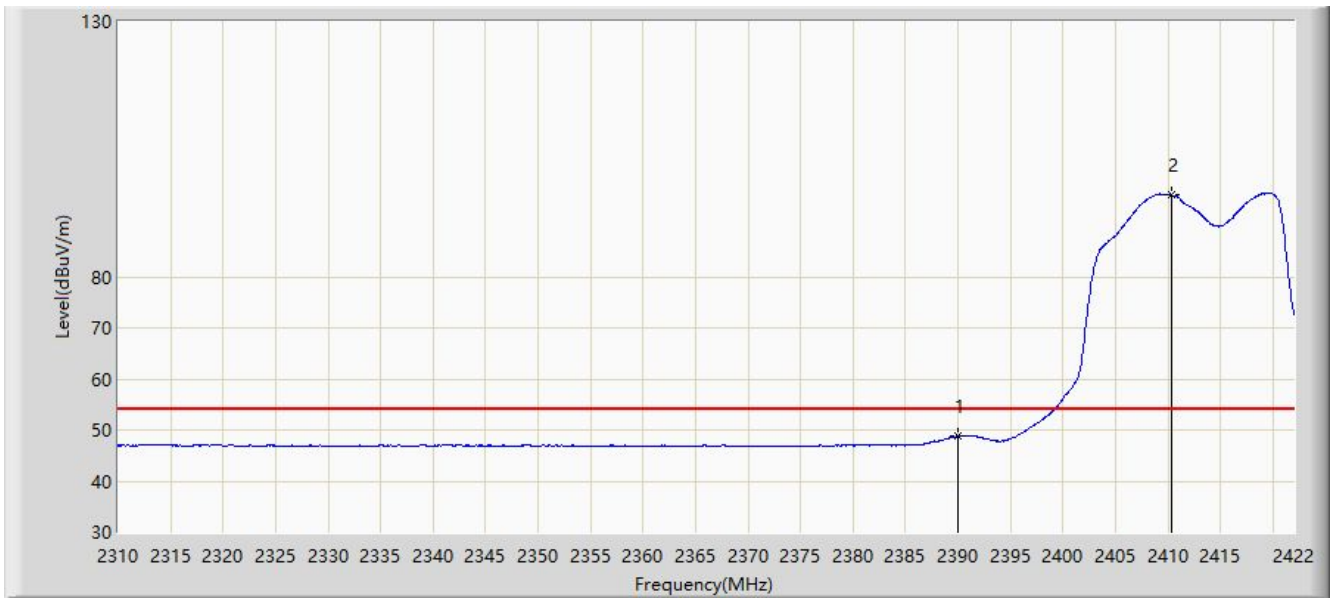


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.741	16.256	-5.259	54.000	32.485	AV
2		*	2410.352	96.055	63.516	N/A	N/A	32.539	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:50
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

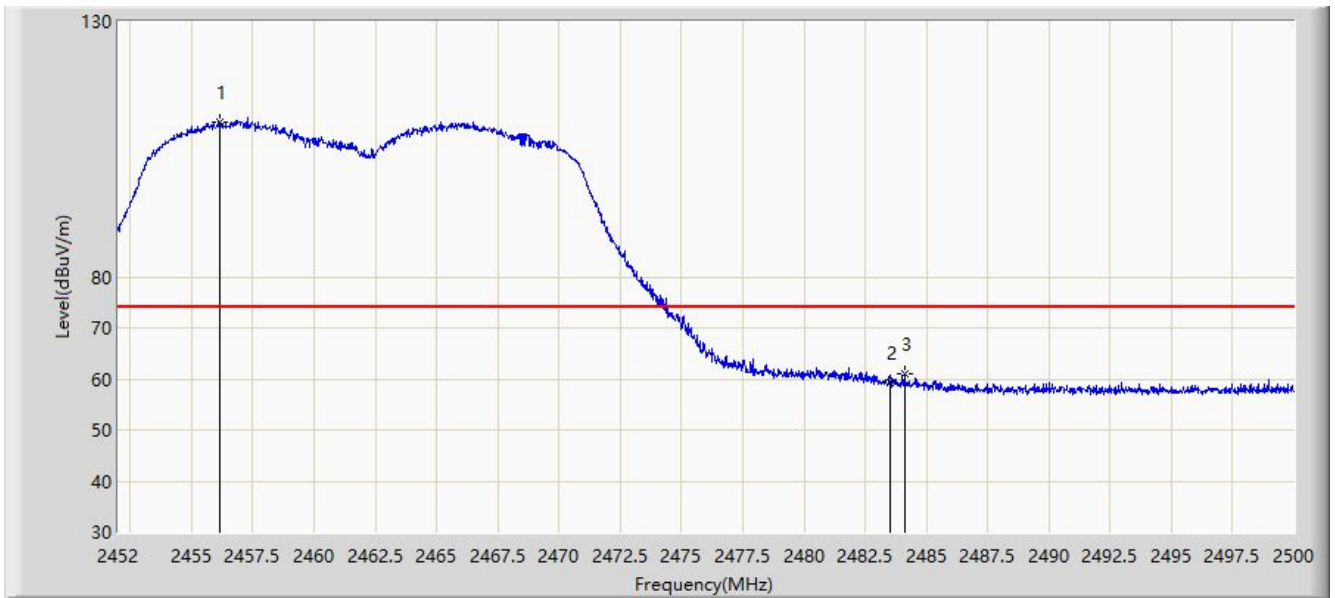


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.152	110.280	77.959	N/A	N/A	32.321	PK
2			2483.500	59.391	27.016	-14.609	74.000	32.375	PK
3			2484.112	61.144	28.771	-12.856	74.000	32.373	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:55
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

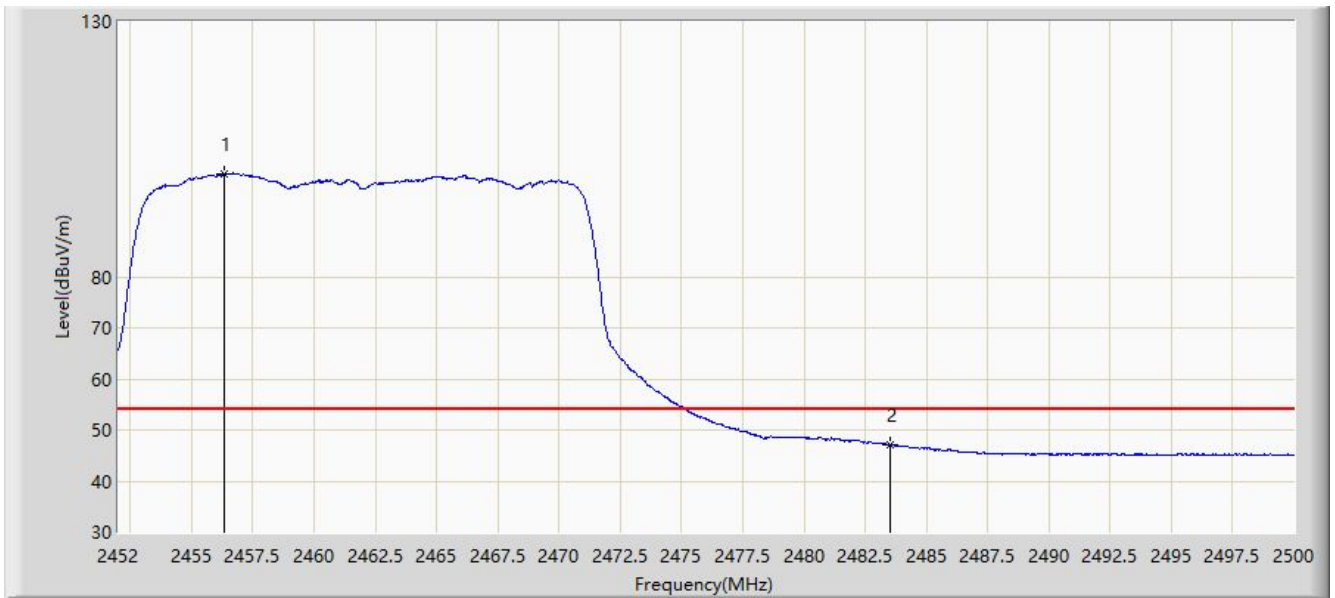


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.344	100.046	67.725	N/A	N/A	32.321	AV
2			2483.500	47.007	14.632	-6.993	54.000	32.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:56
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

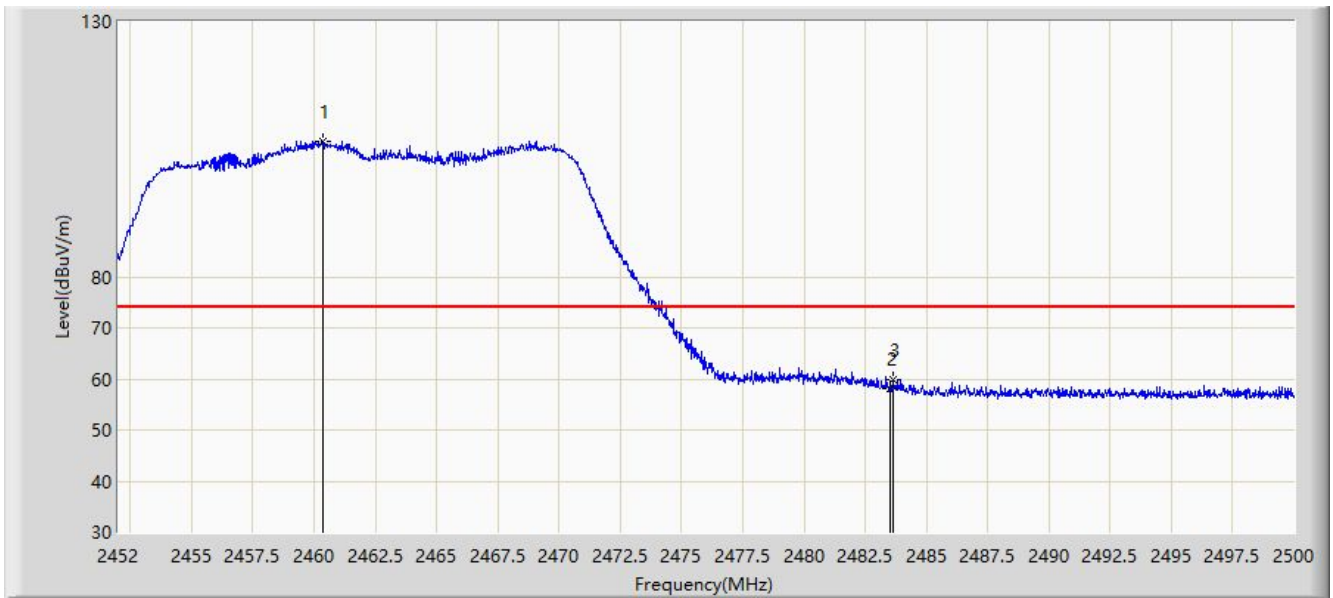


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.376	106.646	74.327	N/A	N/A	32.319	PK
2			2483.500	58.092	25.717	-15.908	74.000	32.375	PK
3			2483.656	59.964	27.590	-14.036	74.000	32.374	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 02:57
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

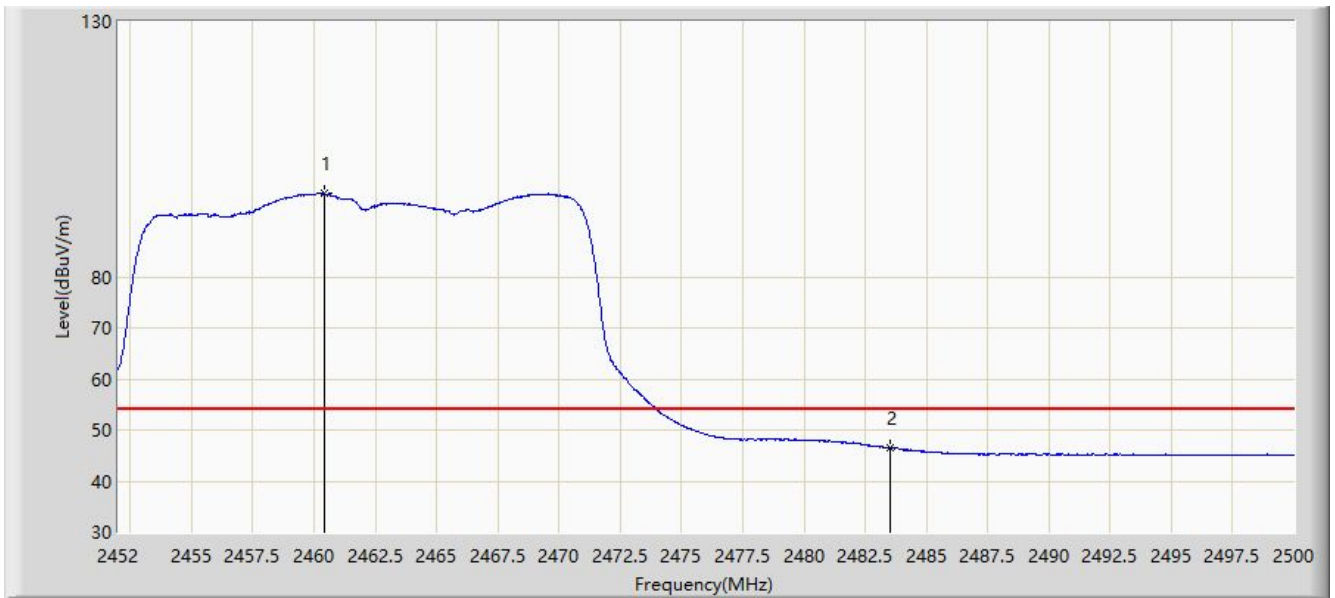


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.424	96.322	64.003	N/A	N/A	32.319	AV
2			2483.500	46.512	14.137	-7.488	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:00
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

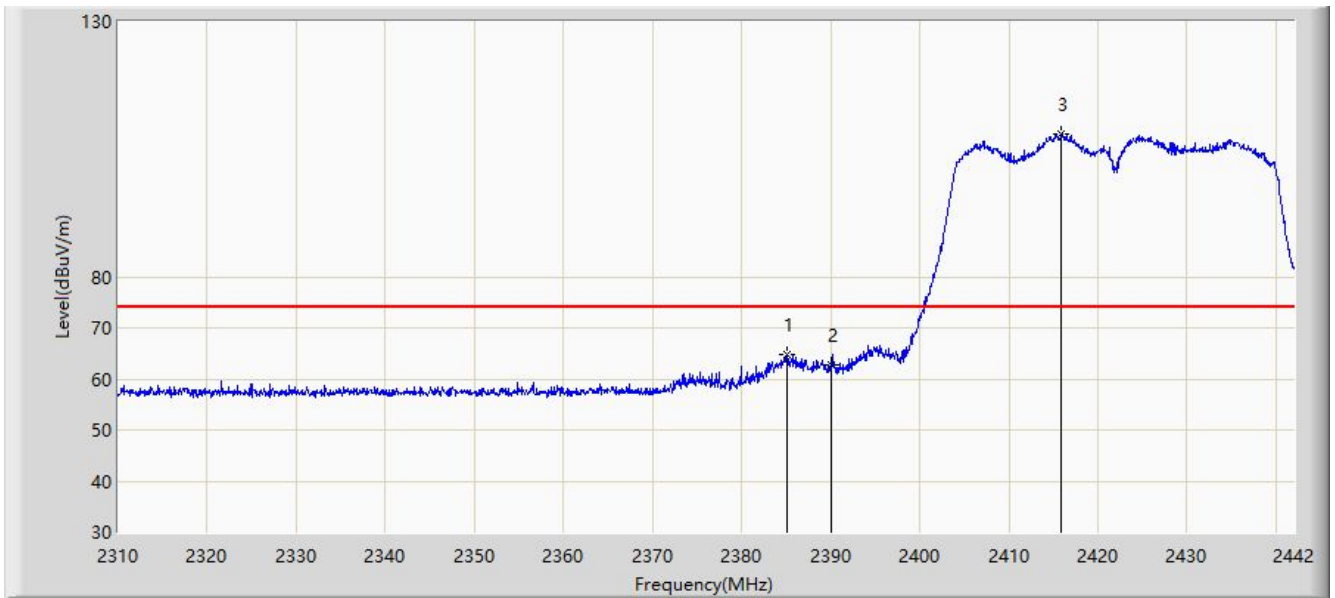


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.042	64.661	32.181	-9.339	74.000	32.480	PK
2			2390.000	62.650	30.165	-11.350	74.000	32.485	PK
3		*	2415.930	107.985	75.486	N/A	N/A	32.498	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:03
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

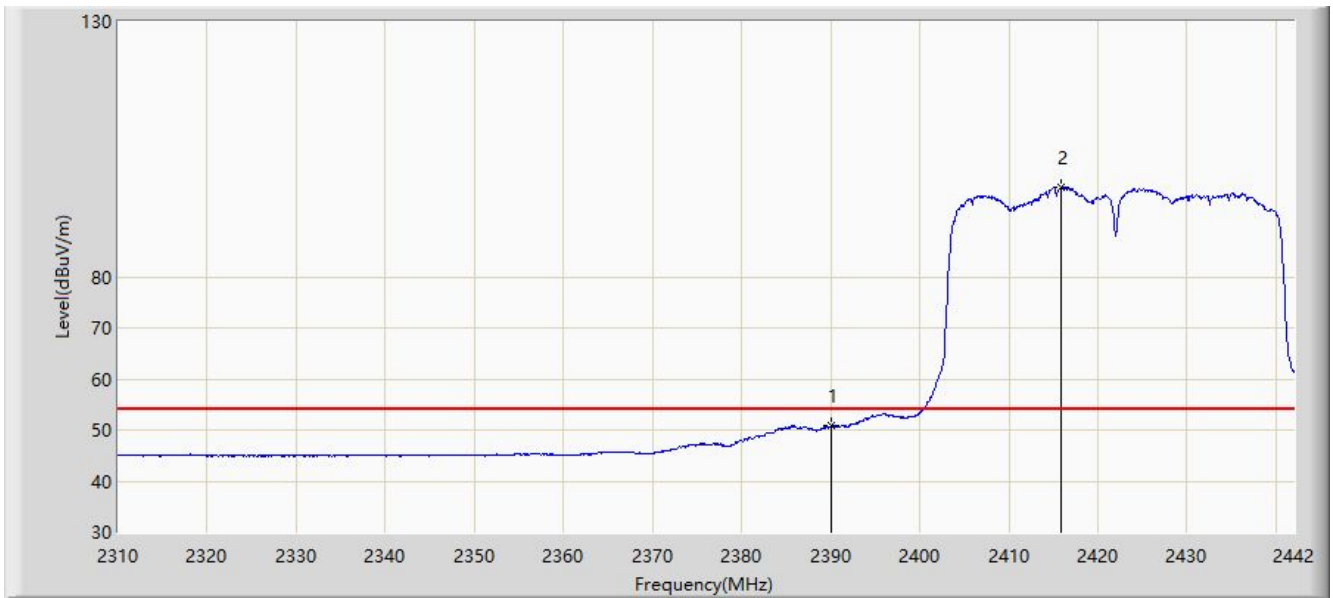


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.815	18.330	-3.185	54.000	32.485	AV
2		*	2415.930	97.607	65.108	N/A	N/A	32.498	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:04
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

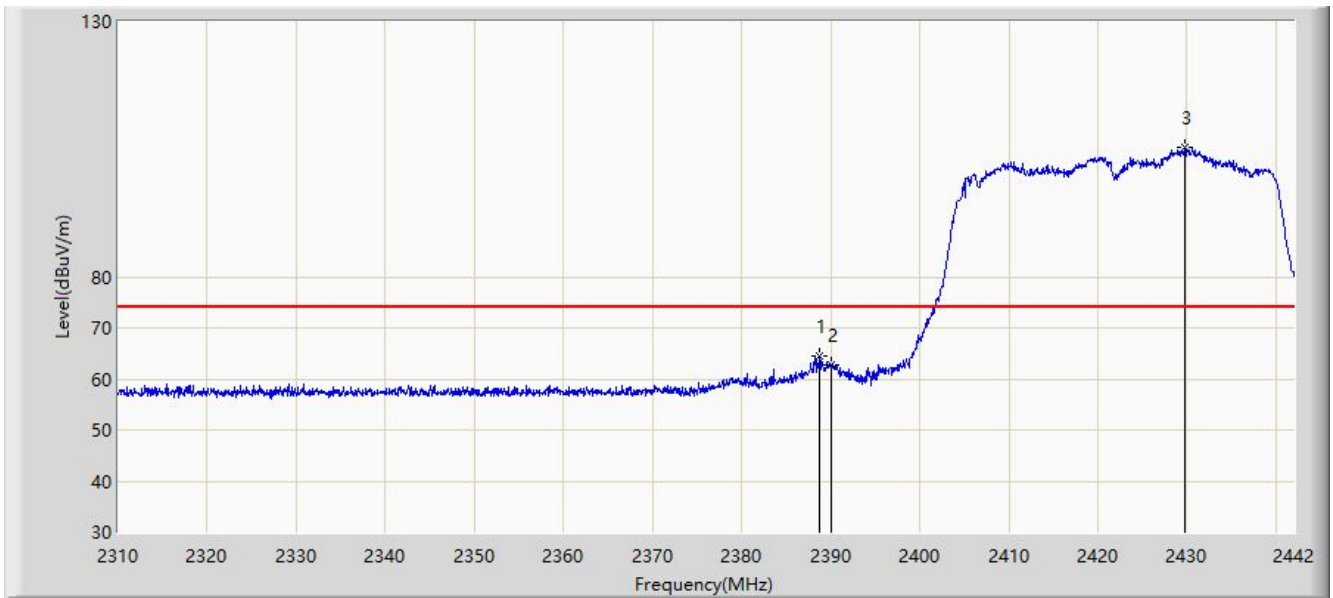


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.738	64.626	32.142	-9.374	74.000	32.484	PK
2			2390.000	62.807	30.322	-11.193	74.000	32.485	PK
3		*	2429.790	105.419	73.031	N/A	N/A	32.388	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:06
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

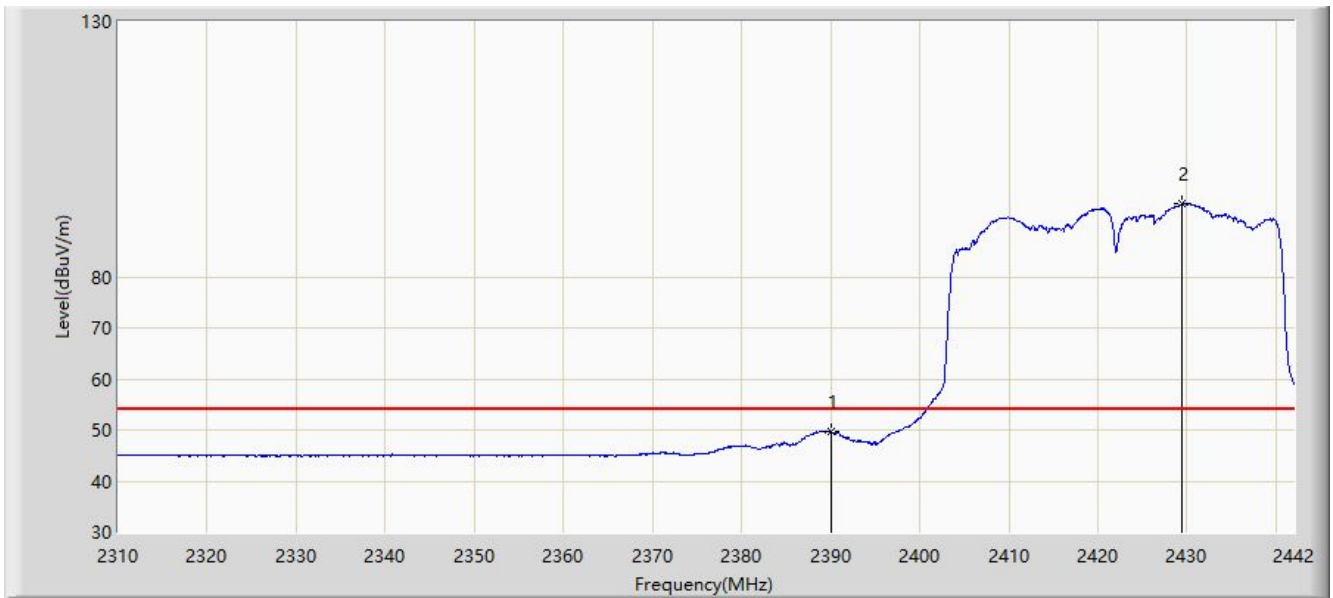


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.693	17.208	-4.307	54.000	32.485	AV
2		*	2429.394	94.340	62.992	N/A	N/A	31.348	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:09
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

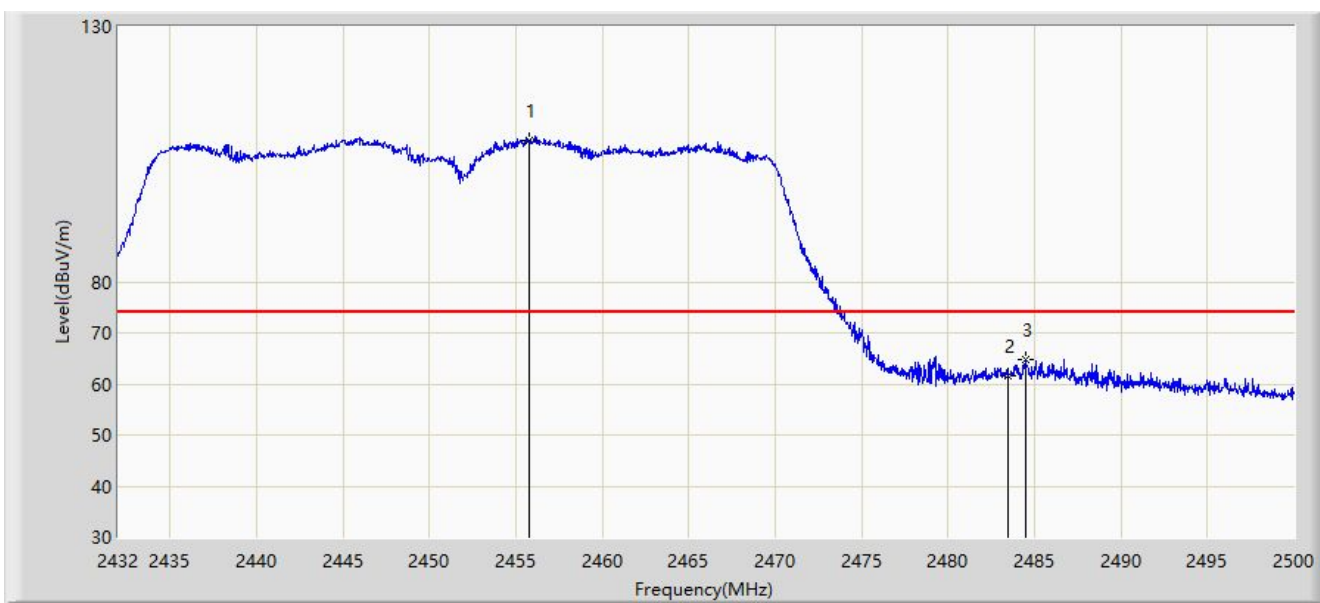


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.732	107.805	75.483	N/A	N/A	32.322	PK
2			2483.500	61.605	29.230	-12.395	74.000	32.375	PK
3			2484.496	64.664	32.292	-9.336	74.000	32.372	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:10
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

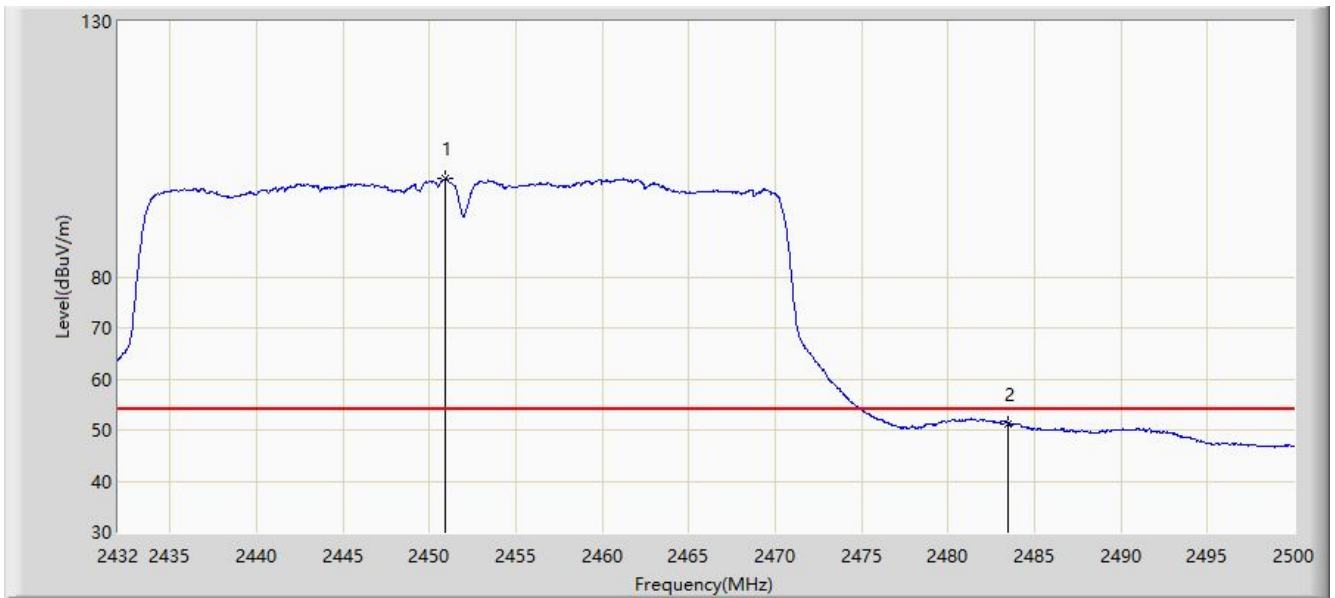


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.904	99.186	66.861	N/A	N/A	32.325	AV
2			2483.500	51.220	18.845	-2.780	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:13
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

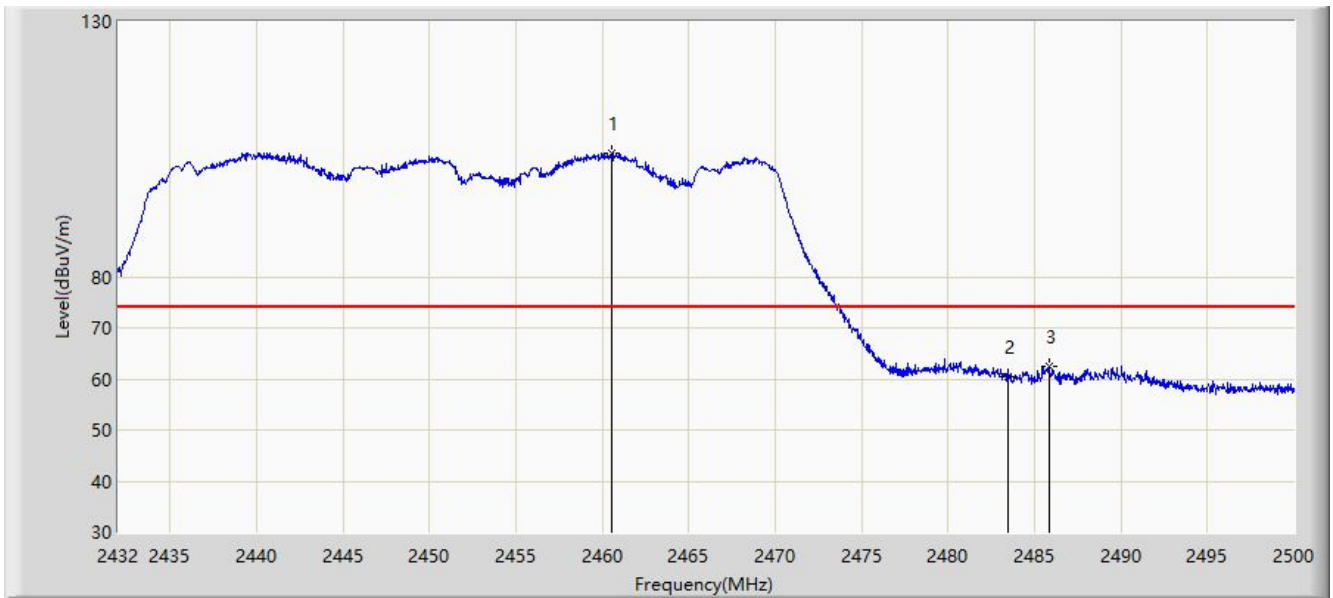


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.526	104.099	71.780	N/A	N/A	32.319	PK
2			2483.500	60.334	27.959	-13.666	74.000	32.375	PK
3			2485.822	62.540	30.171	-11.460	74.000	32.369	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/26 - 03:16
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

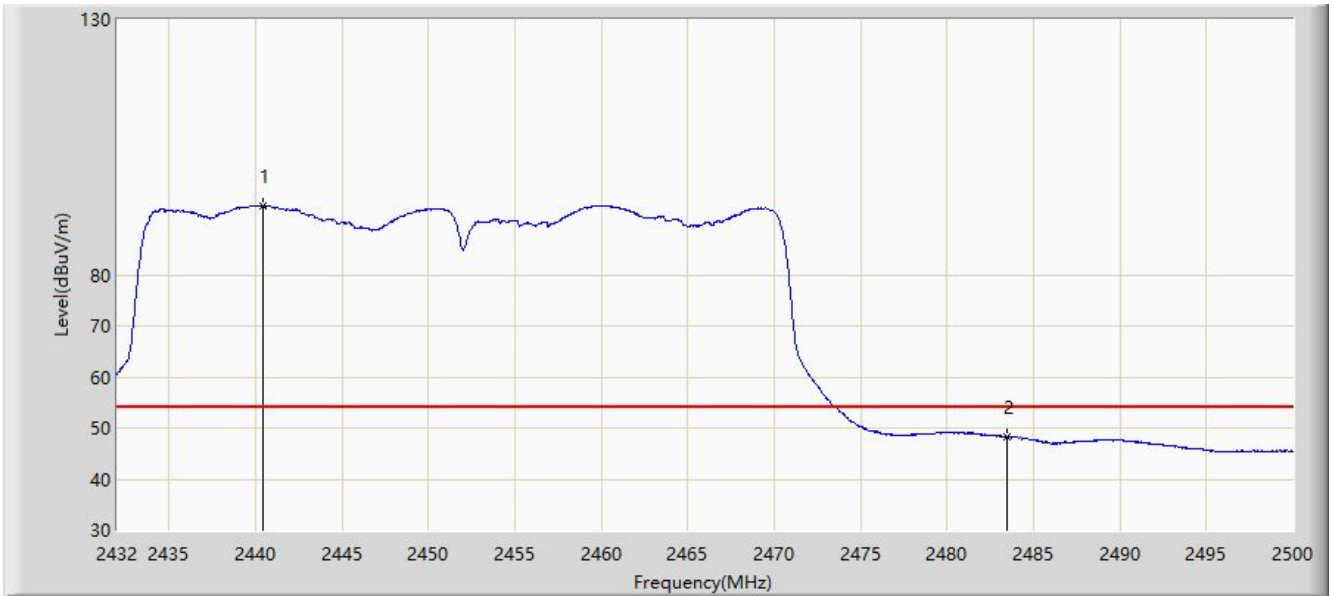


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2440.432	93.574	61.228	N/A	N/A	32.346	AV
2			2483.500	48.283	15.908	-5.717	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 20:41
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

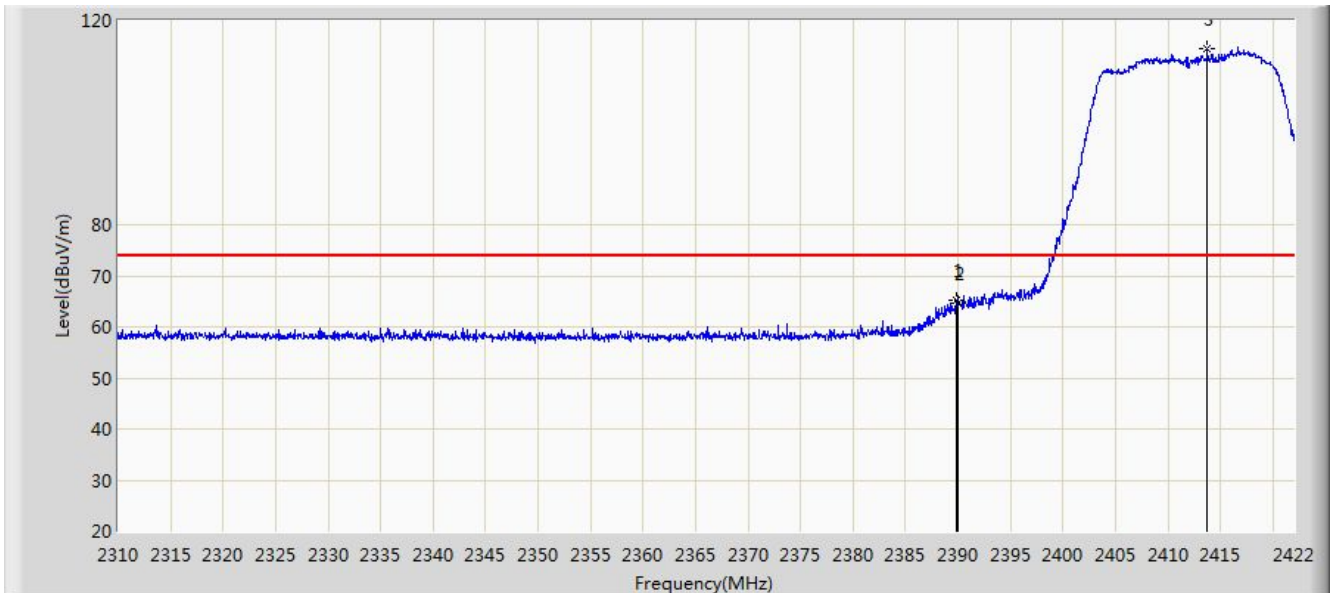


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	65.102	33.653	-8.898	74.000	31.448	PK
2			2390.000	64.658	33.209	-9.342	74.000	31.449	PK
3		*	2413.768	114.512	83.128	N/A	N/A	31.384	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 20:46
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

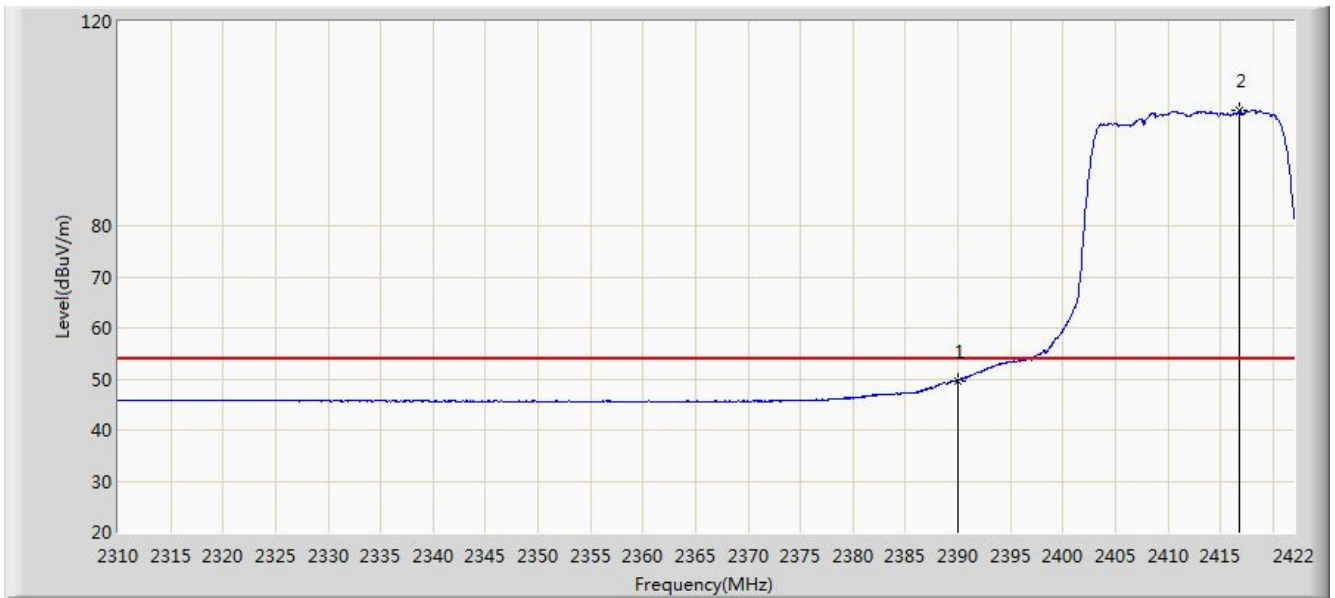


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.706	18.257	-4.294	54.000	31.449	AV
2		*	2416.848	102.468	71.092	N/A	N/A	31.376	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 20:57
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

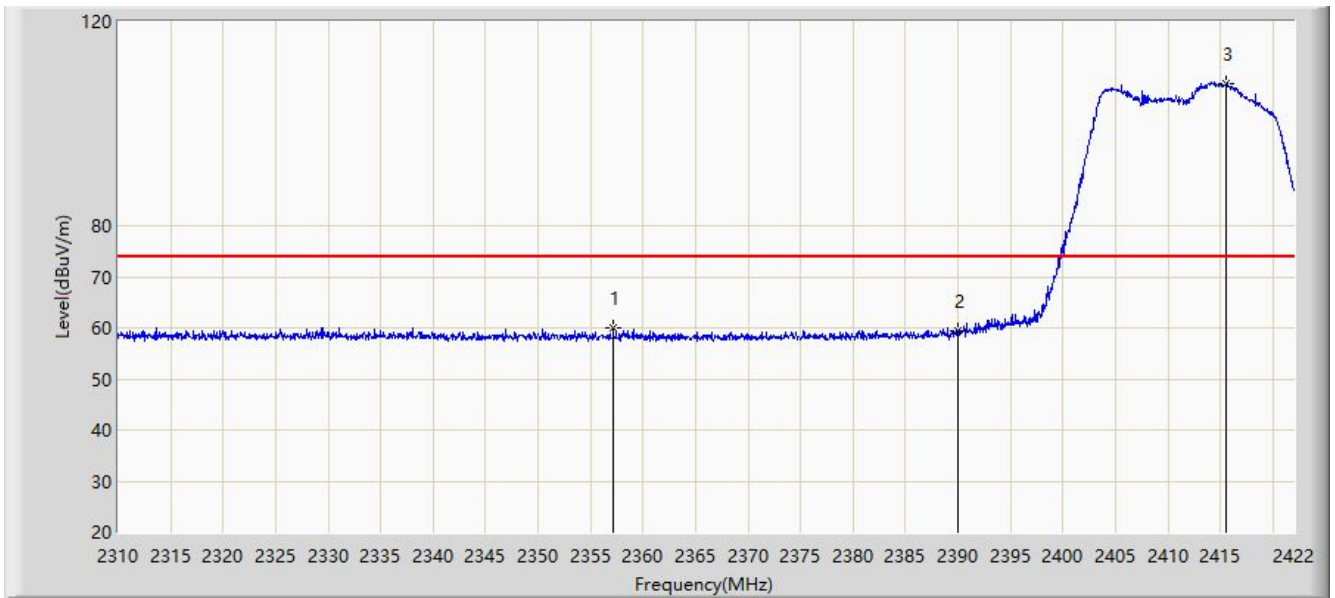


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2357.152	60.016	27.840	-13.984	74.000	32.176	PK
2			2390.000	59.495	27.409	-14.505	74.000	32.086	PK
3		*	2415.560	107.743	75.675	N/A	N/A	32.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:00
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP645-RW	

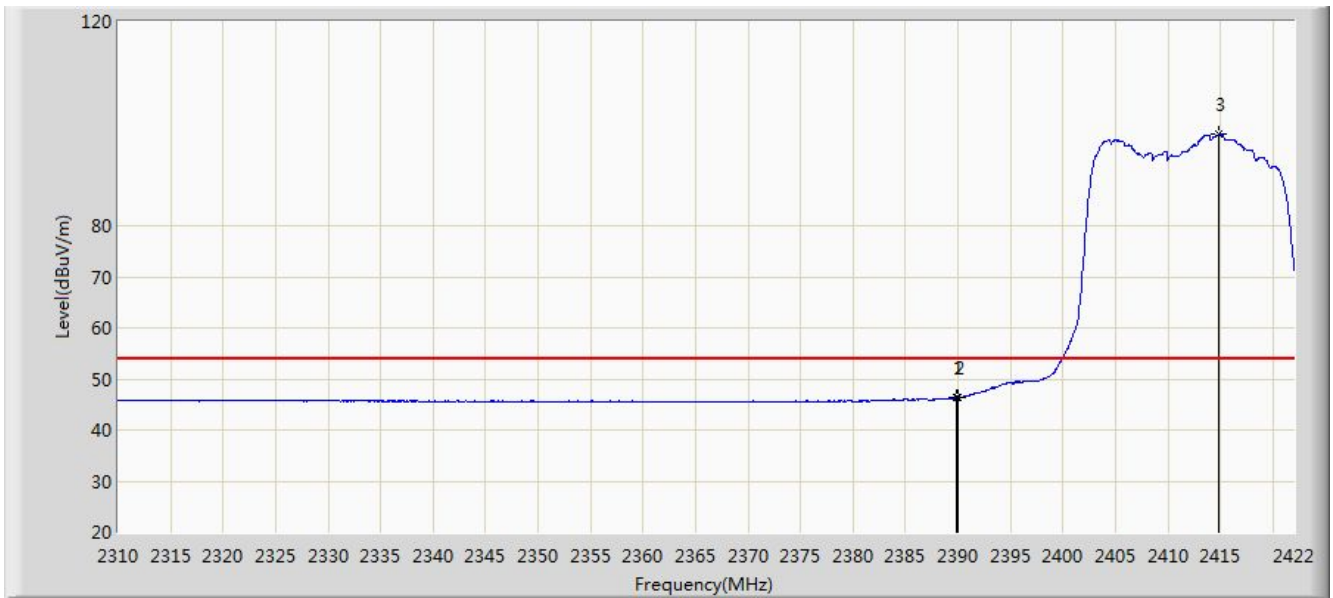


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	46.394	14.945	-7.606	54.000	31.448	AV
2			2390.000	46.309	14.860	-7.691	54.000	31.449	AV
3		*	2414.888	97.859	66.478	N/A	N/A	31.381	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:03
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

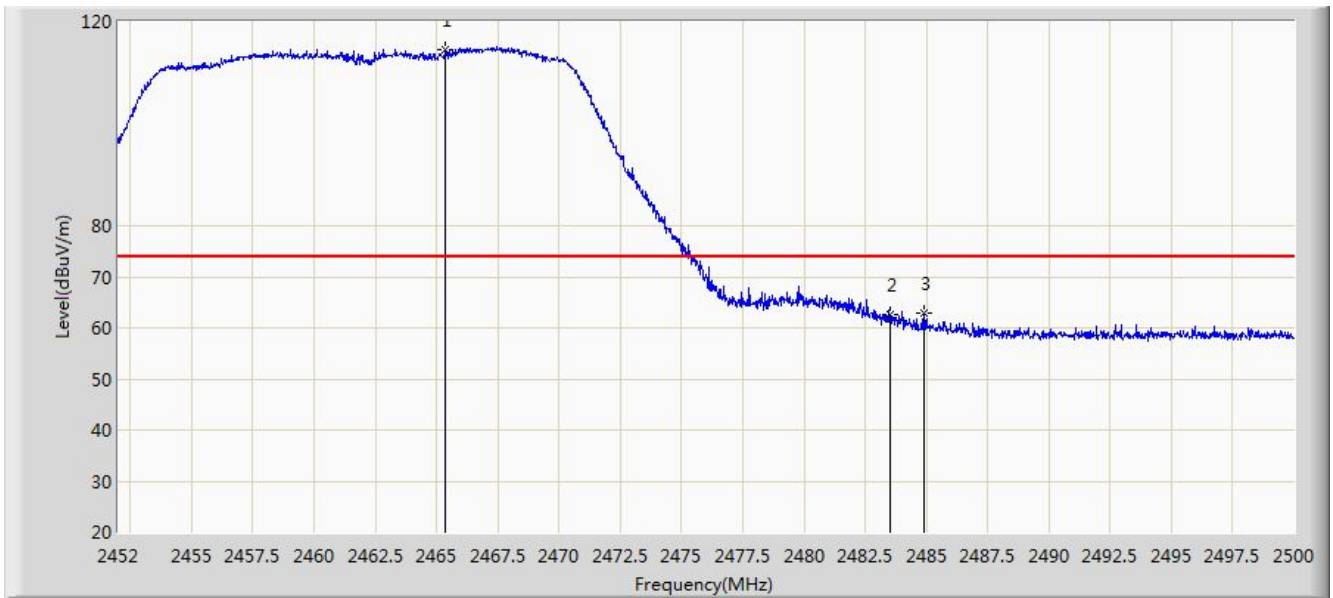


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.368	114.425	83.072	N/A	N/A	31.353	PK
2			2483.500	62.485	31.082	-11.515	74.000	31.403	PK
3			2484.928	63.036	31.628	-10.964	74.000	31.407	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:05
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

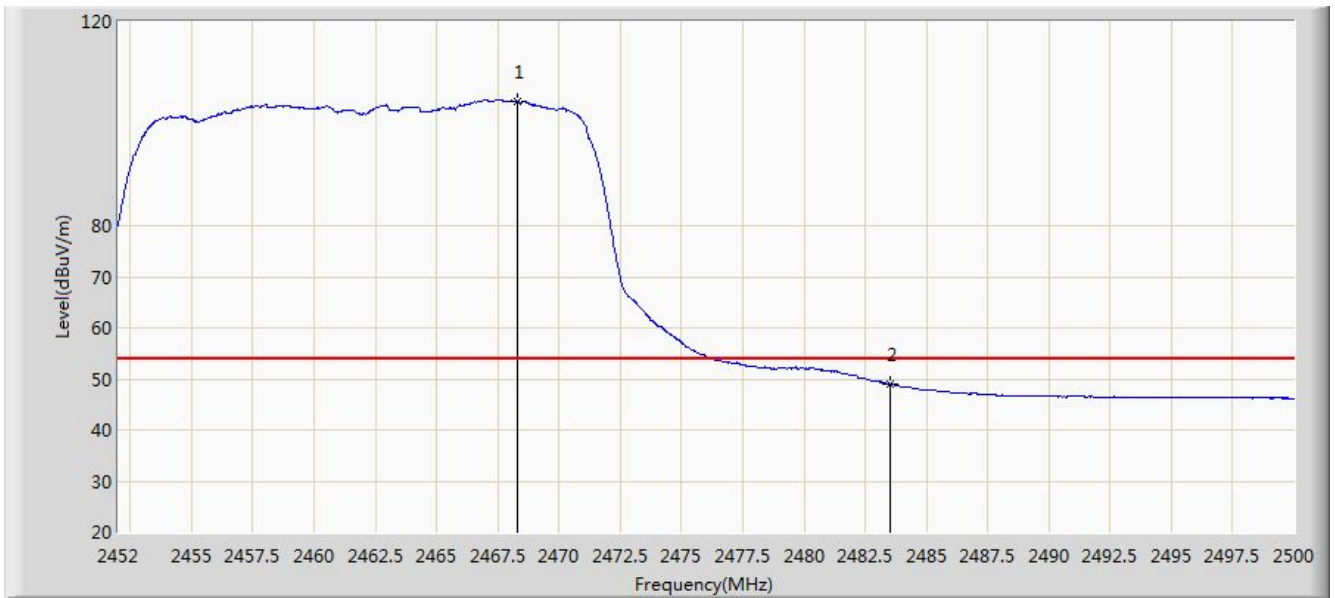


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.320	104.335	72.974	N/A	N/A	31.360	AV
2			2483.500	48.951	17.548	-5.049	54.000	31.403	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:06
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP645-RW	

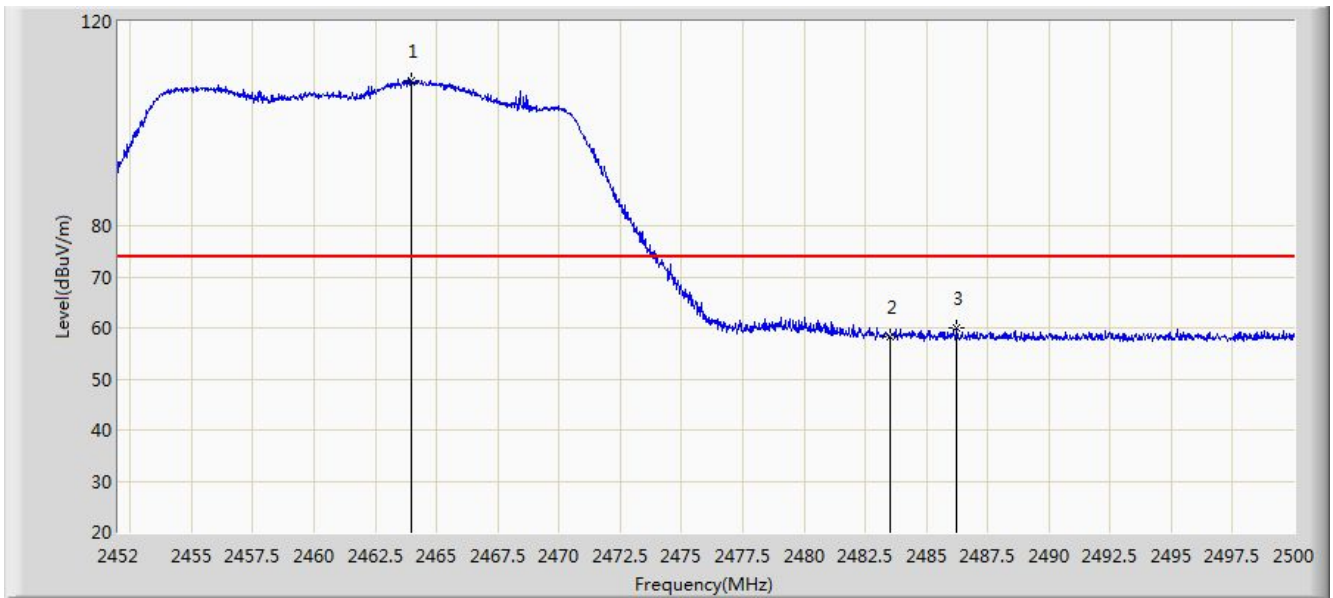

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.952	108.425	77.075	N/A	N/A	31.349	PK
2			2483.500	58.241	26.838	-15.759	74.000	31.403	PK
3			2486.224	59.874	28.462	-14.126	74.000	31.412	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:08
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP645-RW	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.360	98.202	66.851	N/A	N/A	31.351	AV
2			2483.500	46.425	15.022	-7.575	54.000	31.403	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:10
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

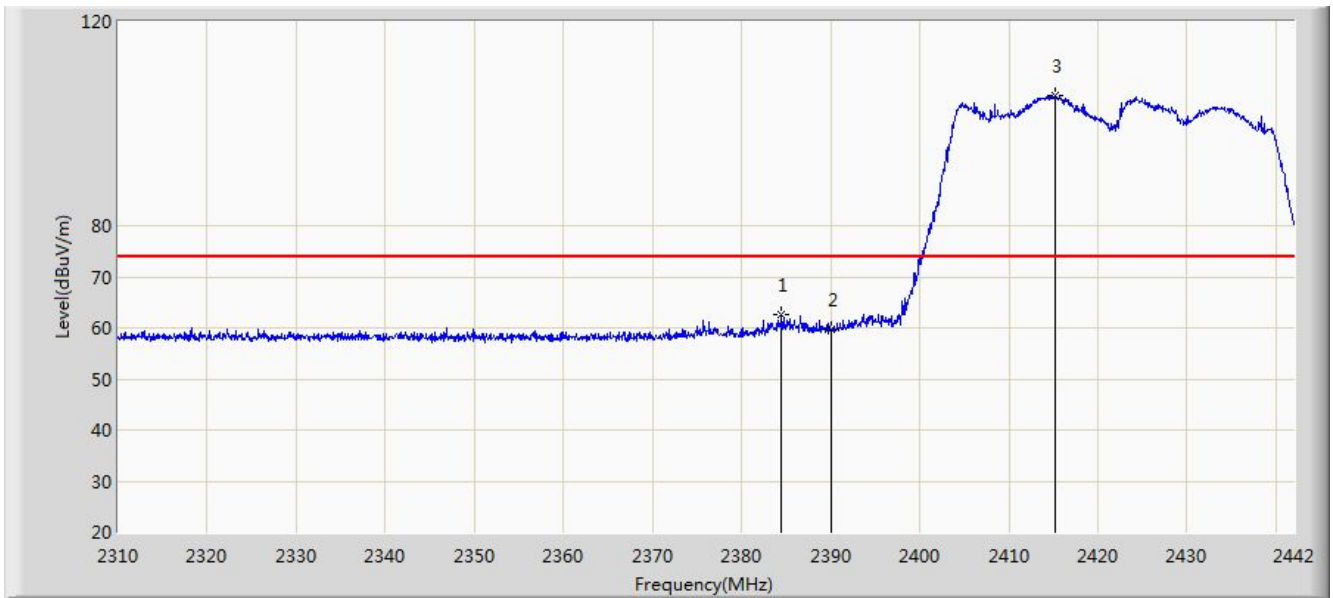


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.514	62.602	31.154	-11.398	74.000	31.448	PK
2			2390.000	59.638	28.189	-14.362	74.000	31.449	PK
3		*	2415.270	105.585	74.205	N/A	N/A	31.380	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:12
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

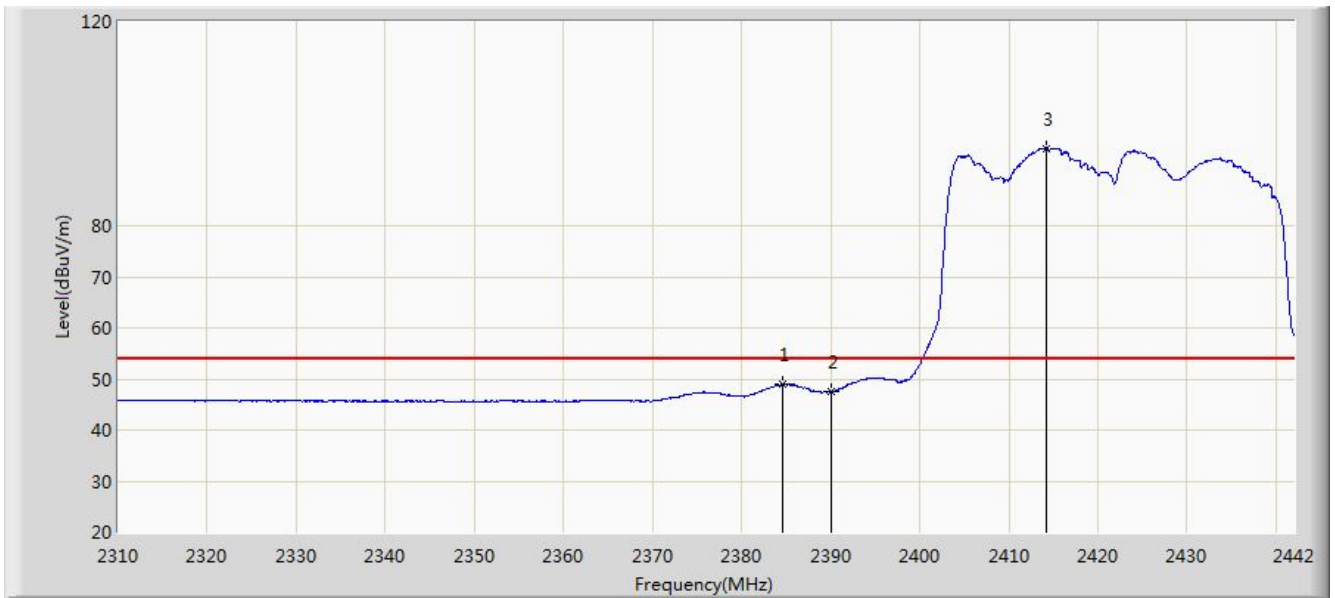


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.646	48.914	17.466	-5.086	54.000	31.448	AV
2			2390.000	47.526	16.077	-6.474	54.000	31.449	AV
3		*	2414.148	95.005	63.622	N/A	N/A	31.383	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:18
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

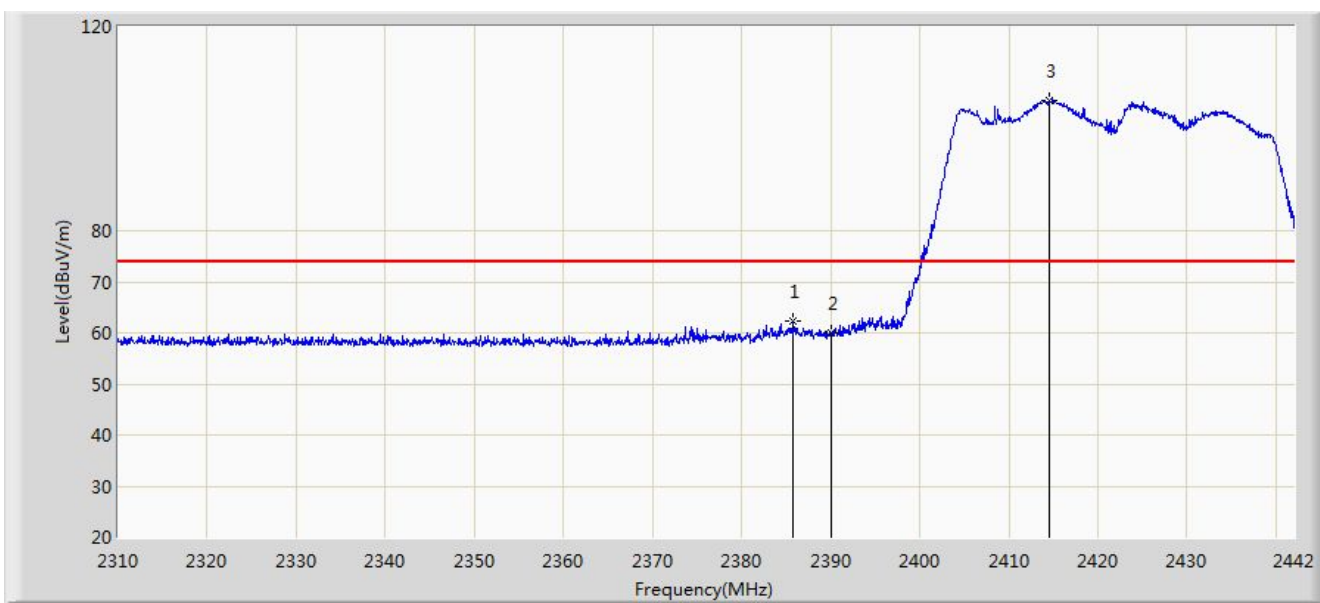


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.834	62.395	30.947	-11.605	74.000	31.448	PK
2			2390.000	60.057	28.608	-13.943	74.000	31.449	PK
3		*	2414.544	105.635	74.253	N/A	N/A	31.382	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:22
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP645-RW	

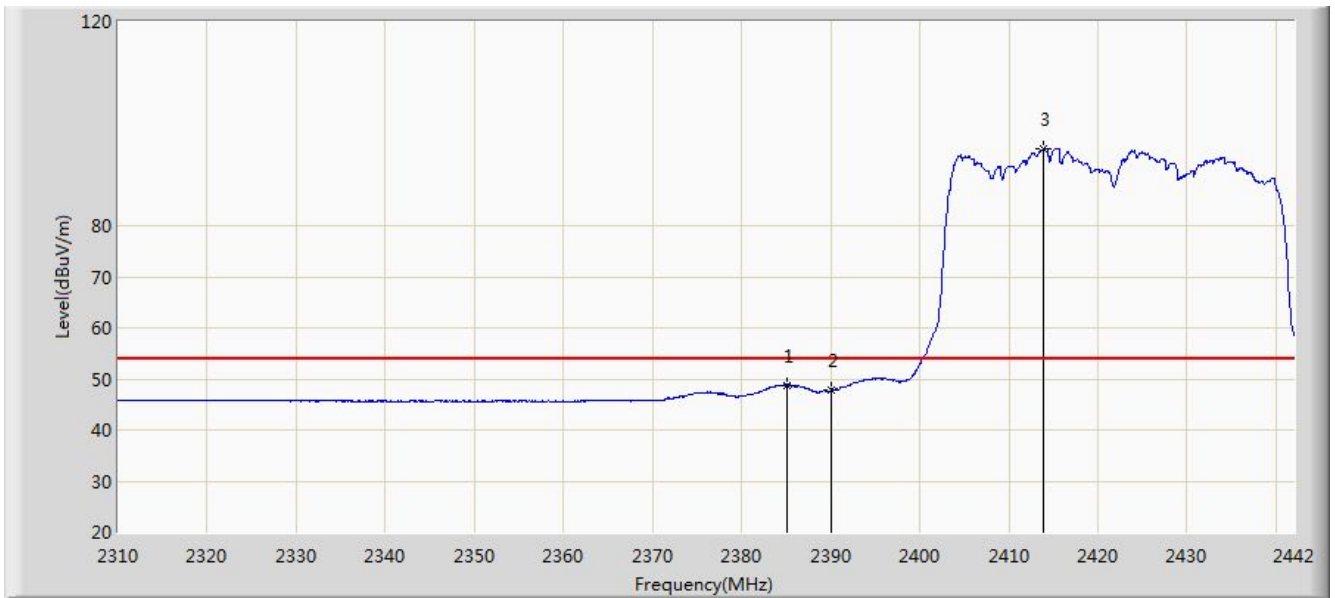


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.042	48.813	17.365	-5.187	54.000	31.448	AV
2			2390.000	47.755	16.306	-6.245	54.000	31.449	AV
3		*	2413.950	95.121	63.738	N/A	N/A	31.383	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:23
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

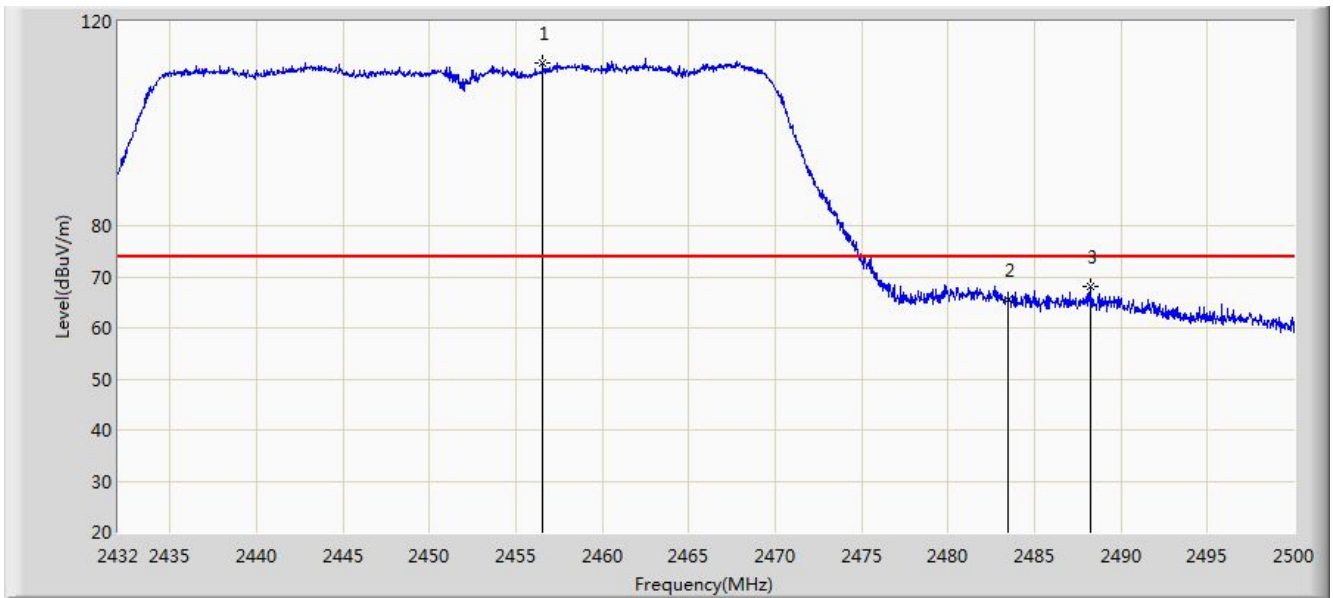


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.582	111.883	80.545	N/A	N/A	31.337	PK
2			2483.500	65.449	34.046	-8.551	74.000	31.403	PK
3			2488.202	68.208	36.789	-5.792	74.000	31.419	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:26
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

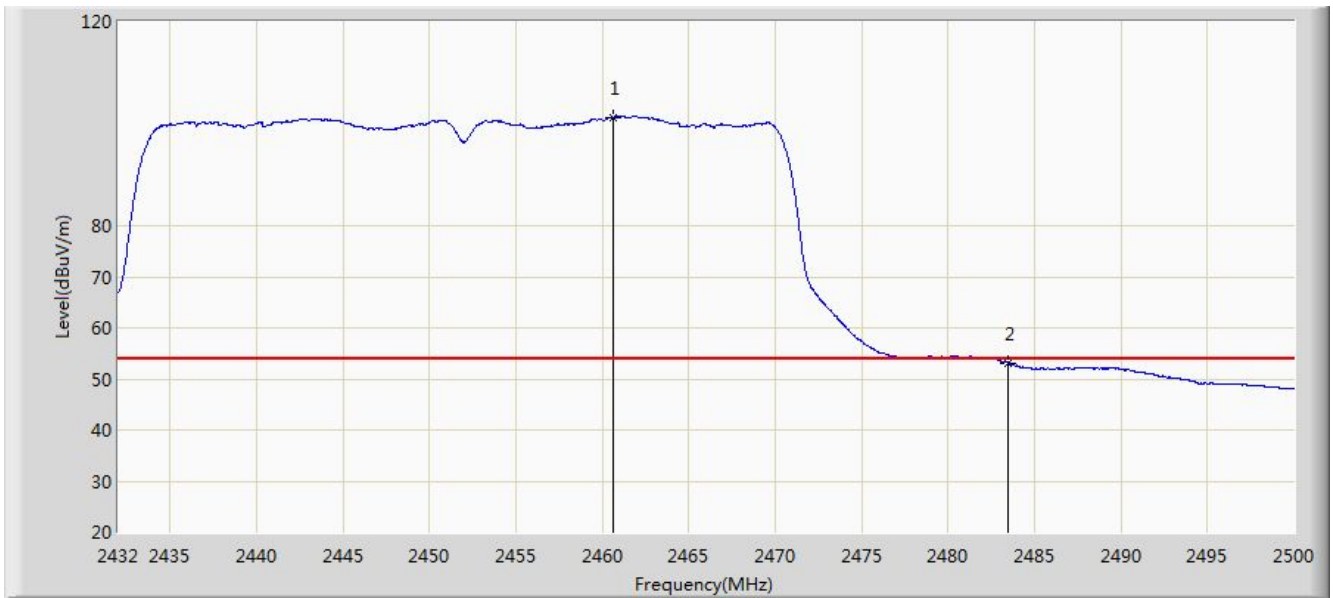


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.628	101.230	69.886	N/A	N/A	31.344	AV
2			2483.500	53.035	21.632	-0.965	54.000	31.403	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:36
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

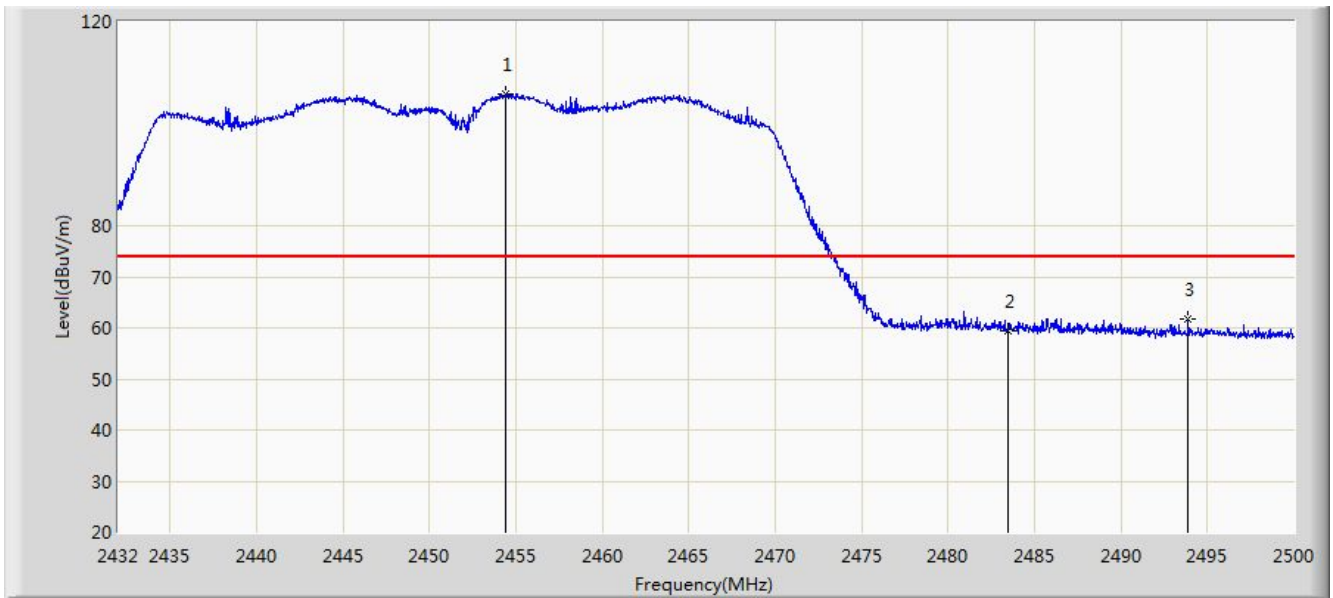


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.440	105.700	74.365	N/A	N/A	31.335	PK
2			2483.500	59.558	28.155	-14.442	74.000	31.403	PK
3			2493.880	61.616	30.178	-12.384	74.000	31.438	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/11 - 21:38
Limit: FCC_Part15.209_RSE (3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP645-RW	

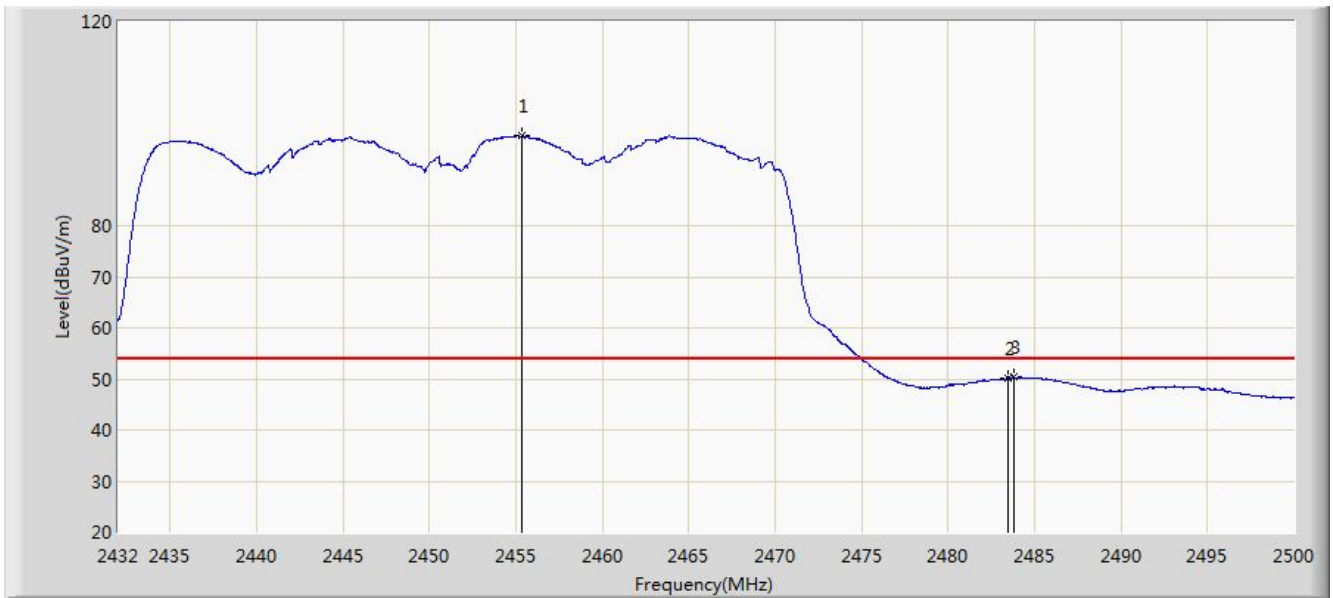


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.324	97.548	66.212	N/A	N/A	31.336	AV
2			2483.500	50.214	18.811	-3.786	54.000	31.403	AV
3			2483.782	50.338	18.934	-3.662	54.000	31.404	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 09:54
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with DAP645-RW Scan Antenna	

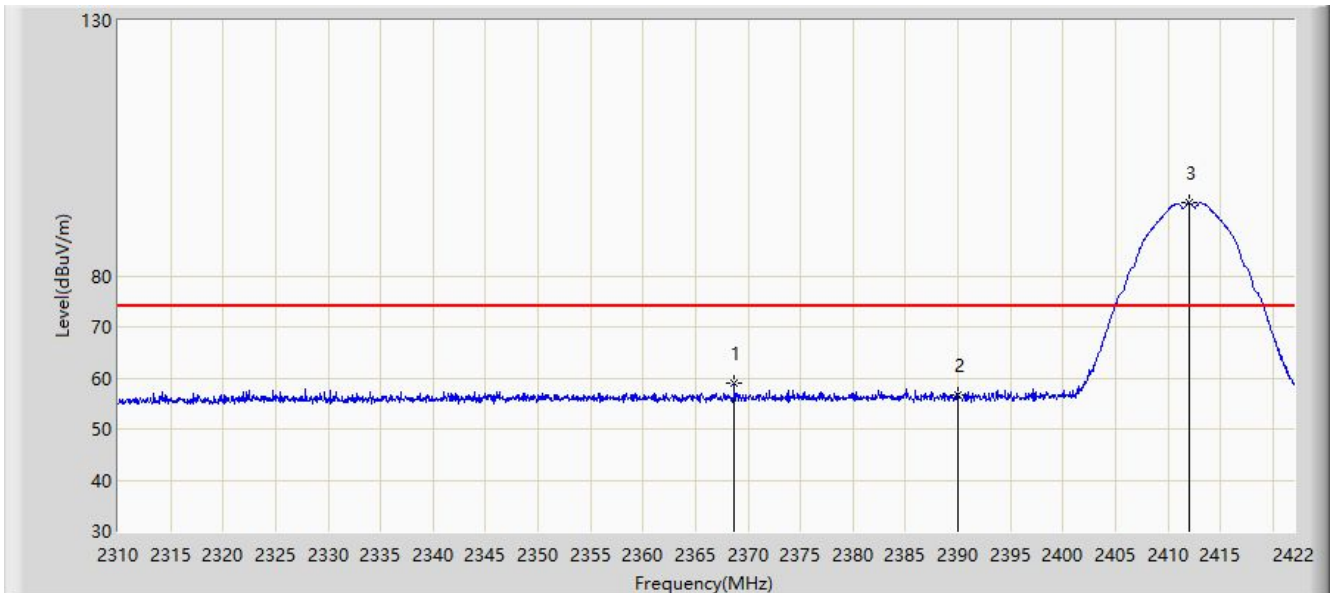


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.688	58.843	26.318	-15.157	74.000	32.526	PK
2			2390.000	56.561	24.076	-17.439	74.000	32.485	PK
3		*	2412.032	94.295	61.763	N/A	N/A	32.532	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:23
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with DAP645-RW Scan Antenna	

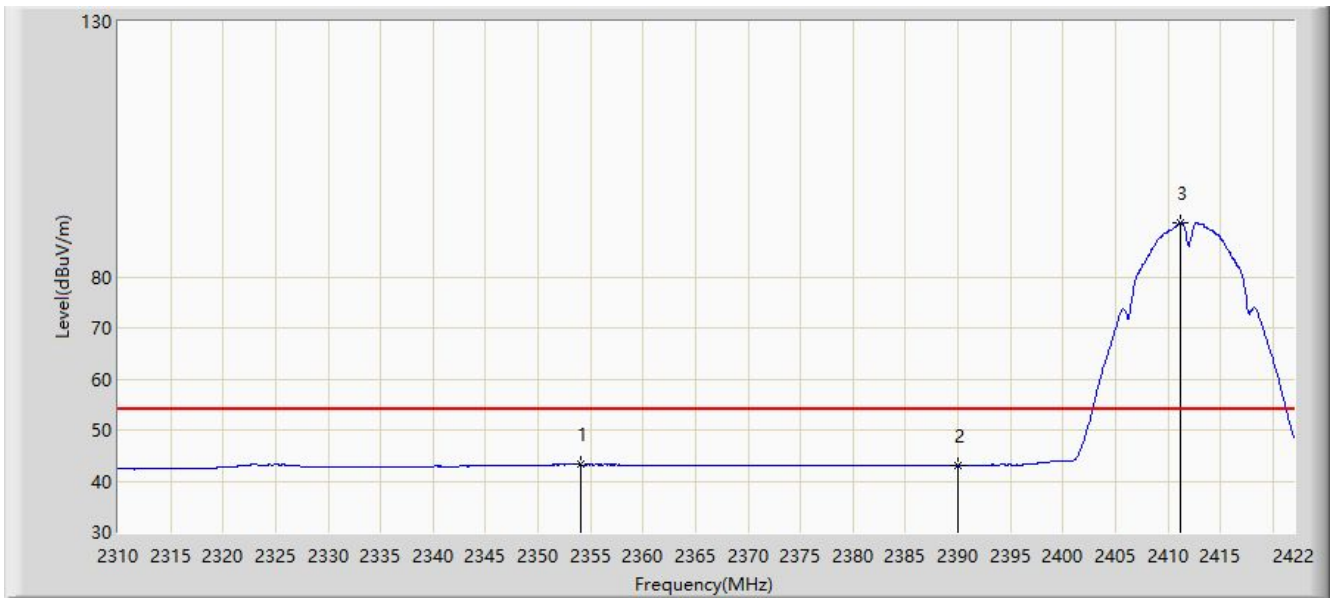


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2354.016	43.217	10.621	-10.783	54.000	32.597	AV
2			2390.000	43.073	10.588	-10.927	54.000	32.485	AV
3		*	2411.136	90.639	58.099	N/A	N/A	32.540	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:24
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with DAP645-RW Scan Antenna	

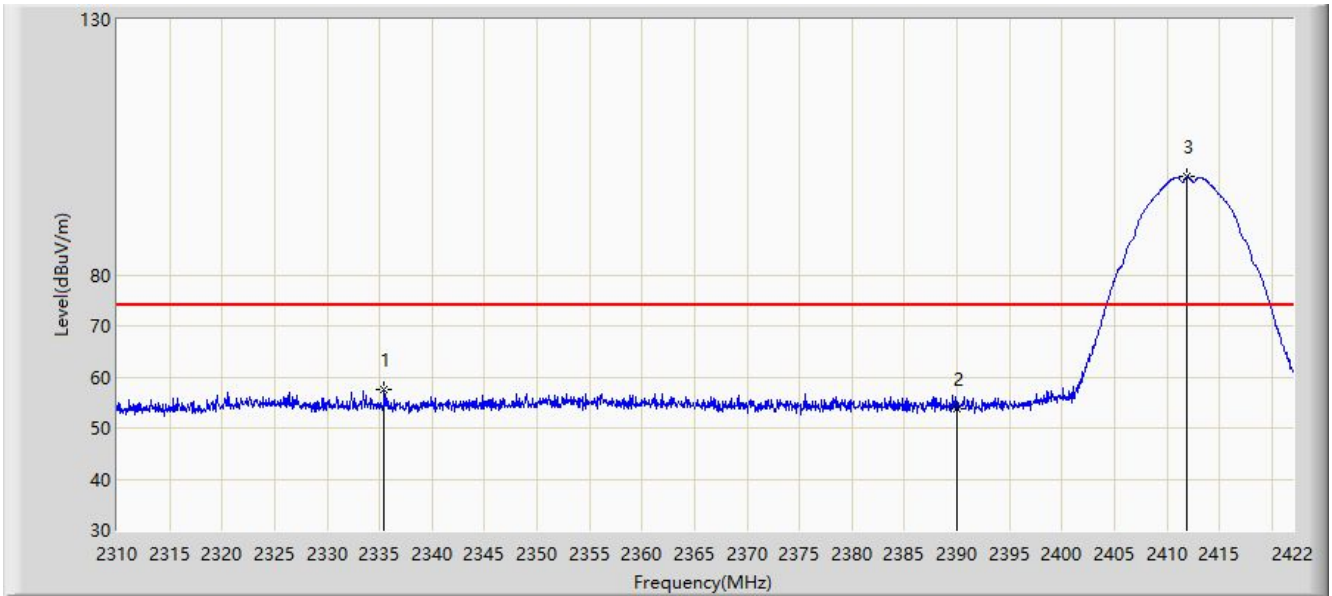


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2335.424	57.562	24.955	-16.438	74.000	32.607	PK
2			2390.000	53.816	21.331	-20.184	74.000	32.485	PK
3		*	2411.920	99.131	66.598	N/A	N/A	32.533	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:25
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with DAP645-RW Scan Antenna	

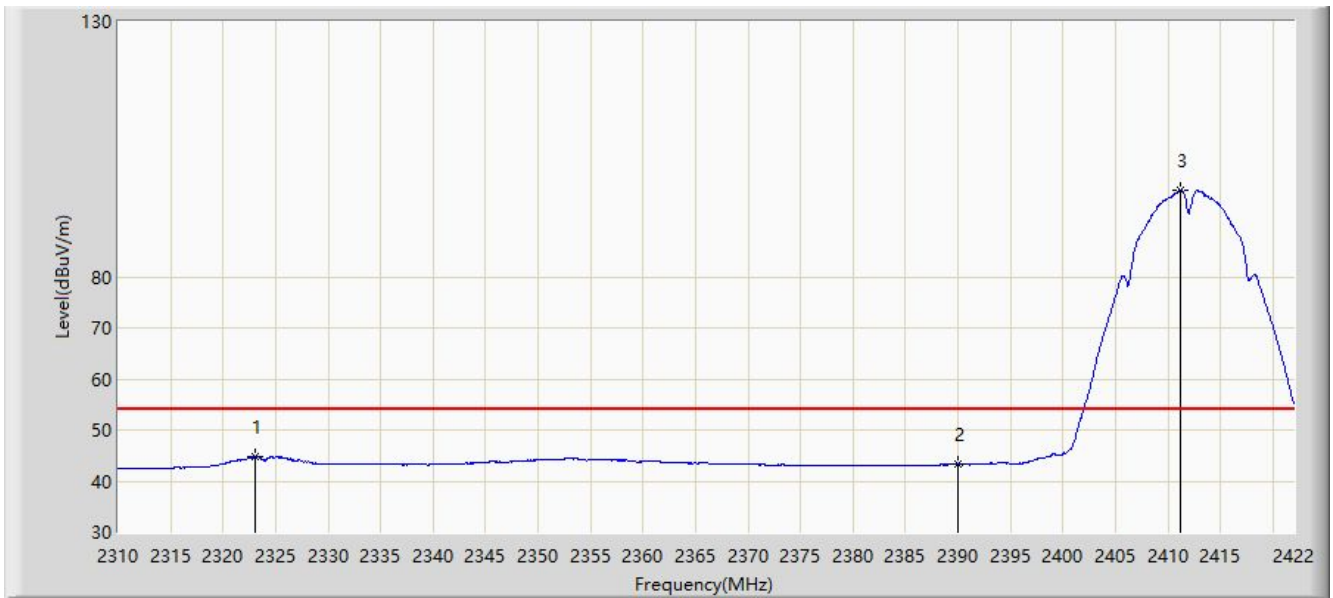


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2322.992	44.822	12.224	-9.178	54.000	32.598	AV
2			2390.000	43.193	10.708	-10.807	54.000	32.485	AV
3		*	2411.136	97.044	64.504	N/A	N/A	32.540	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:30
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with DAP645-RW Scan Antenna	

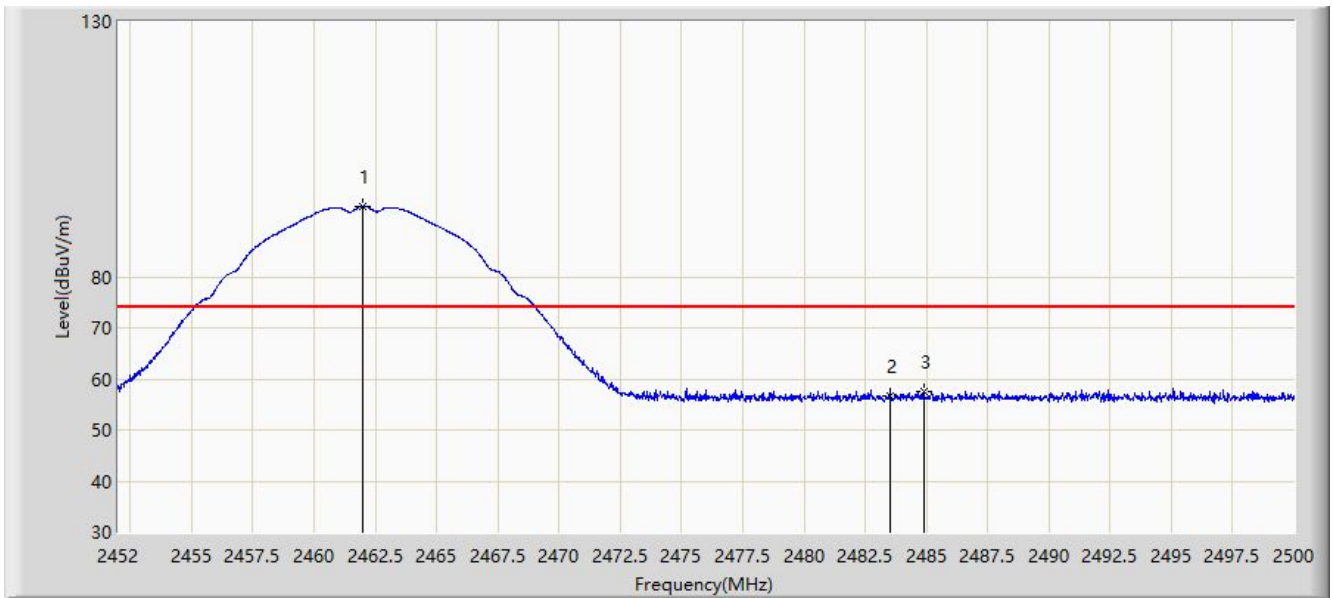

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	93.897	61.579	N/A	N/A	32.318	PK
2			2483.500	56.787	24.412	-17.213	74.000	32.375	PK
3			2484.880	57.599	25.227	-16.401	74.000	32.372	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:35
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with DAP645-RW Scan Antenna	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.704	90.129	57.808	N/A	N/A	32.321	AV
2			2483.500	43.372	10.997	-10.628	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:37
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with DAP645-RW Scan Antenna	

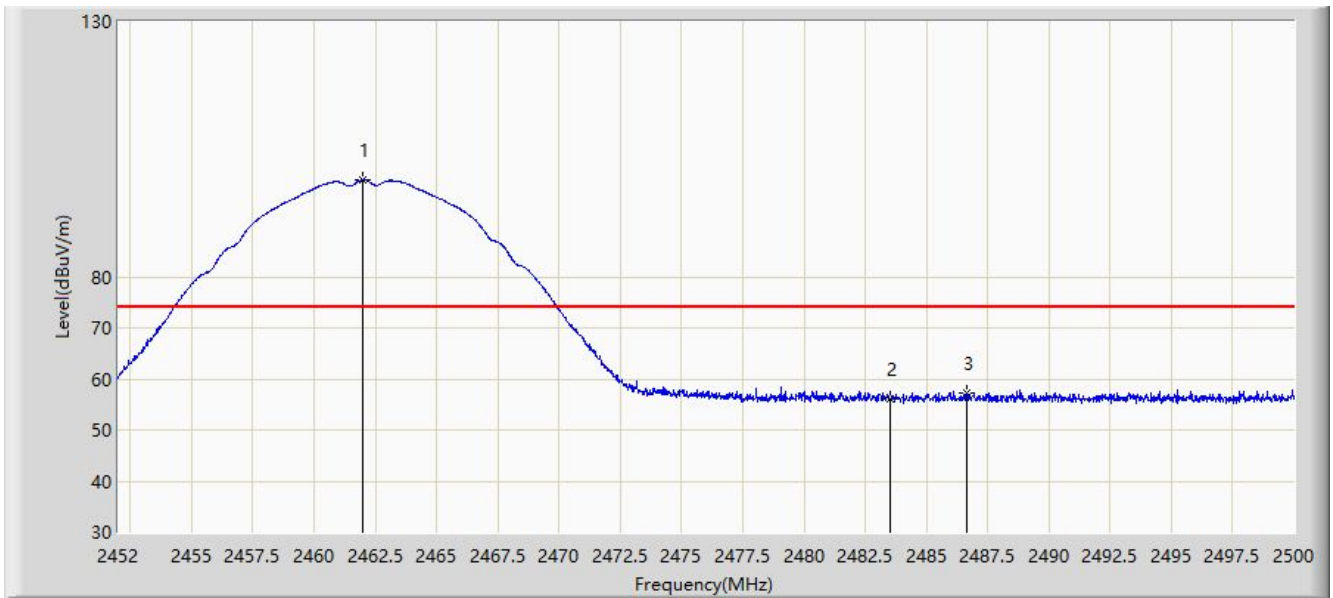


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	98.931	66.613	N/A	N/A	32.318	PK
2			2483.500	56.011	23.636	-17.989	74.000	32.375	PK
3			2486.632	57.311	24.944	-16.689	74.000	32.367	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:39
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with DAP645-RW Scan Antenna	

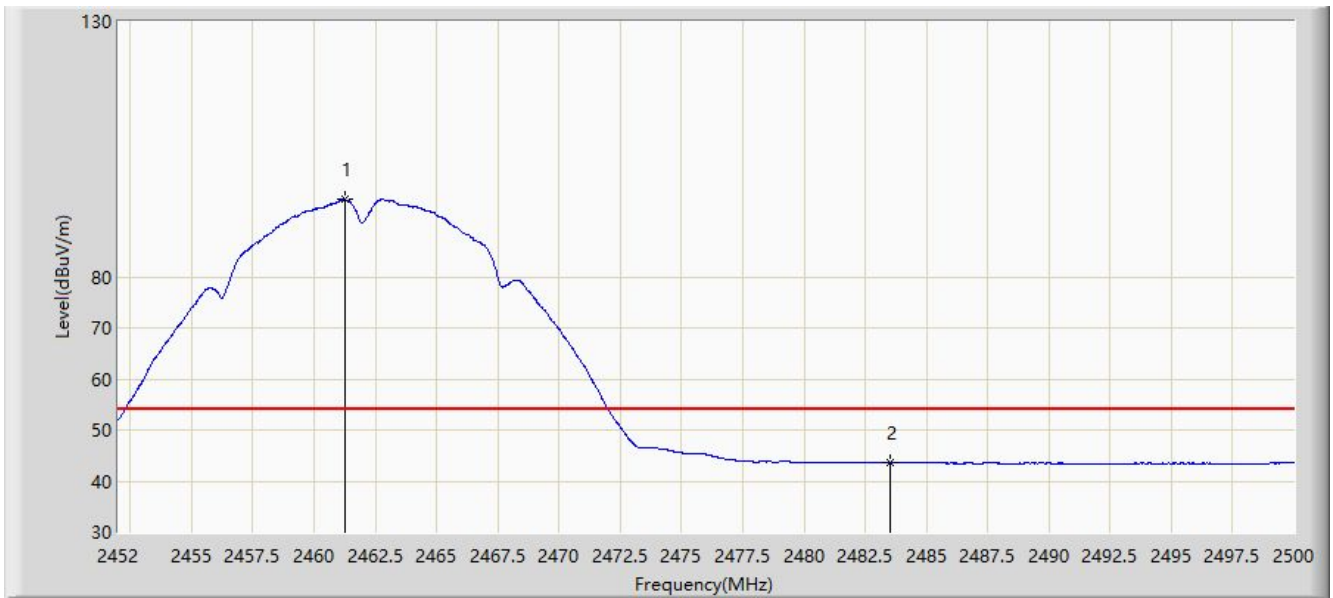


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	95.116	62.798	N/A	N/A	32.318	AV
2			2483.500	43.707	11.332	-10.293	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:40
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with DAP645-RW Scan Antenna	

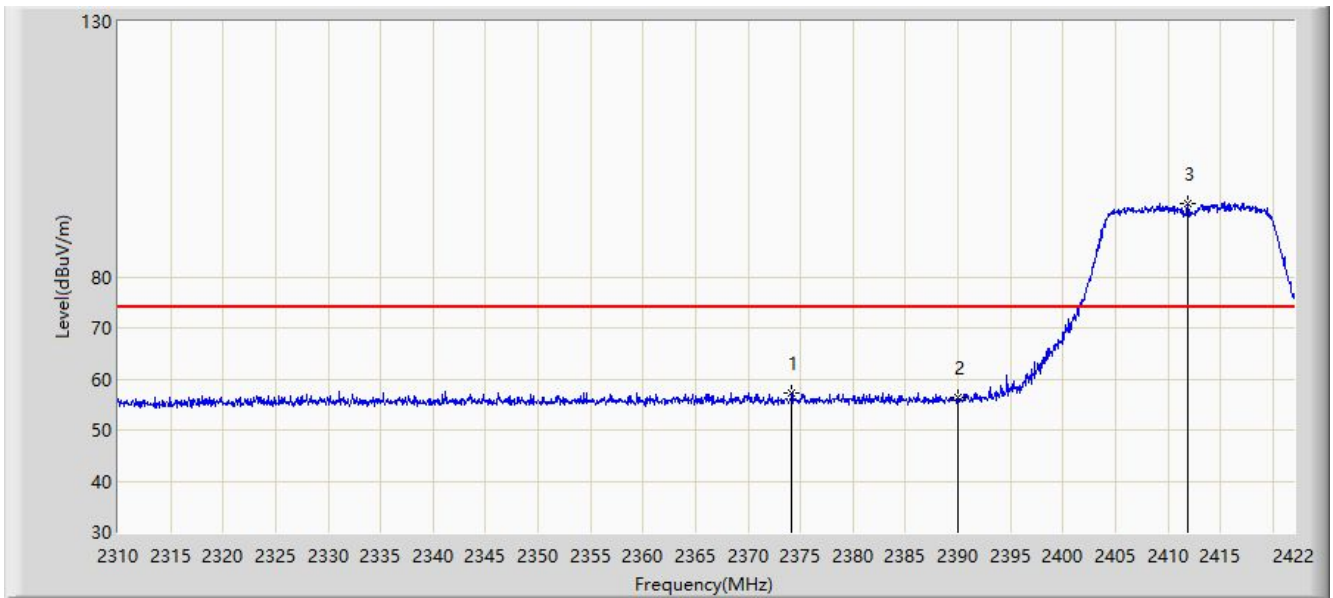


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.176	57.262	24.772	-16.738	74.000	32.490	PK
2			2390.000	56.234	23.749	-17.766	74.000	32.485	PK
3		*	2411.920	94.376	61.843	N/A	N/A	32.533	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:44
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with DAP645-RW Scan Antenna	

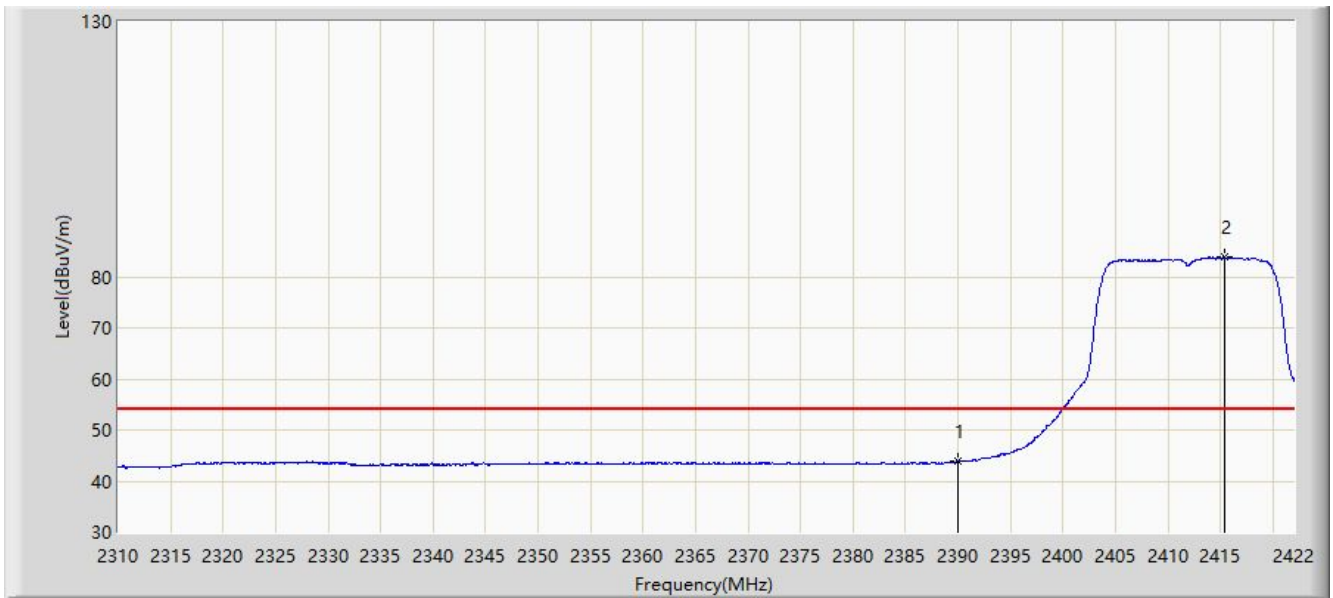


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.839	11.354	-10.161	54.000	32.485	AV
2		*	2415.392	83.890	51.387	N/A	N/A	32.503	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:46
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with DAP645-RW Scan Antenna	

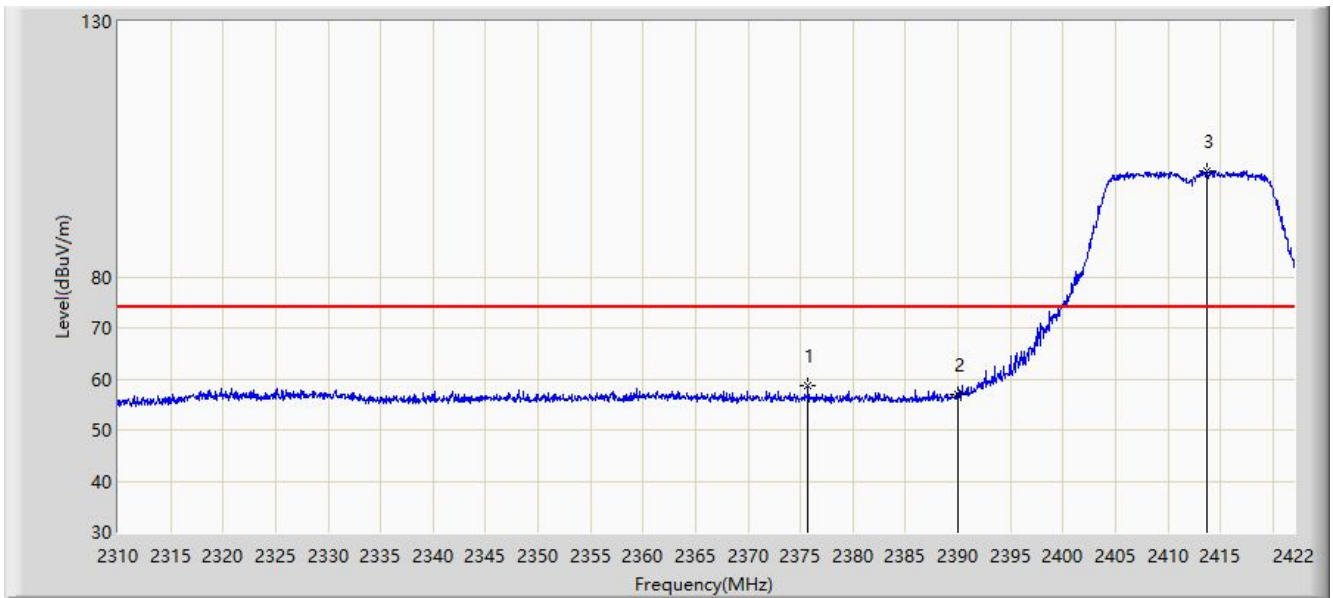


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.744	58.816	26.336	-15.184	74.000	32.480	PK
2			2390.000	57.078	24.593	-16.922	74.000	32.485	PK
3		*	2413.656	100.737	68.219	N/A	N/A	32.518	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:49
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with DAP645-RW Scan Antenna	

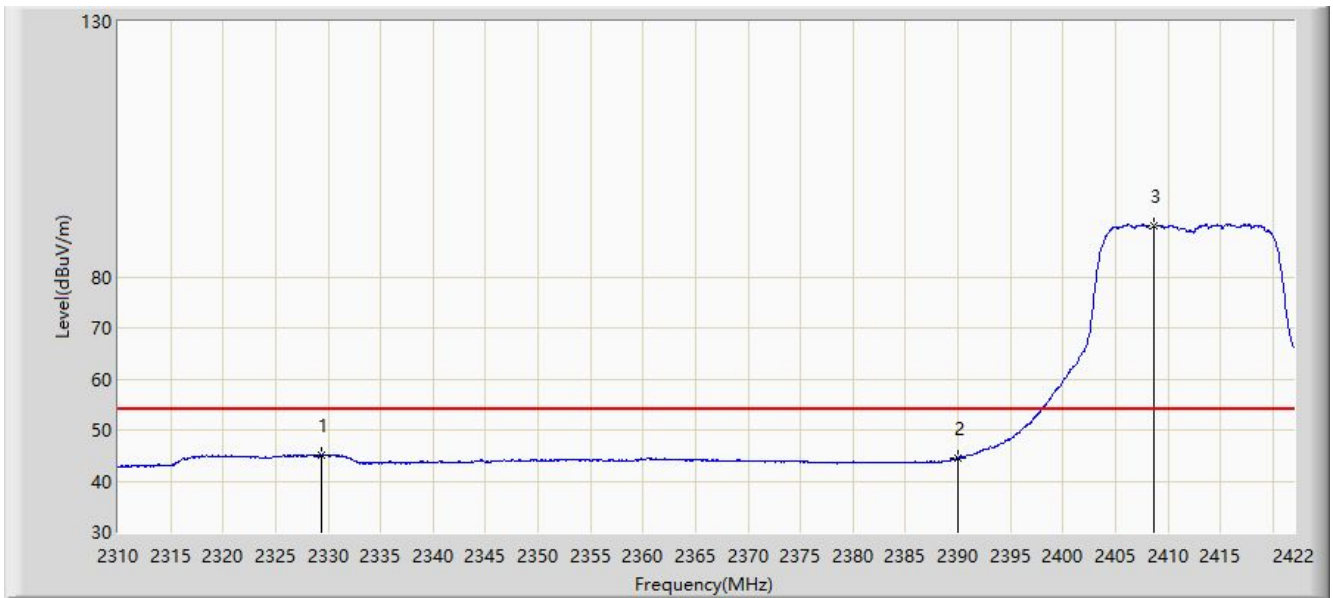


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.432	45.093	12.501	-8.907	54.000	32.592	AV
2			2390.000	44.401	11.916	-9.599	54.000	32.485	AV
3		*	2408.728	90.101	57.567	N/A	N/A	32.534	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:52
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with DAP645-RW Scan Antenna	

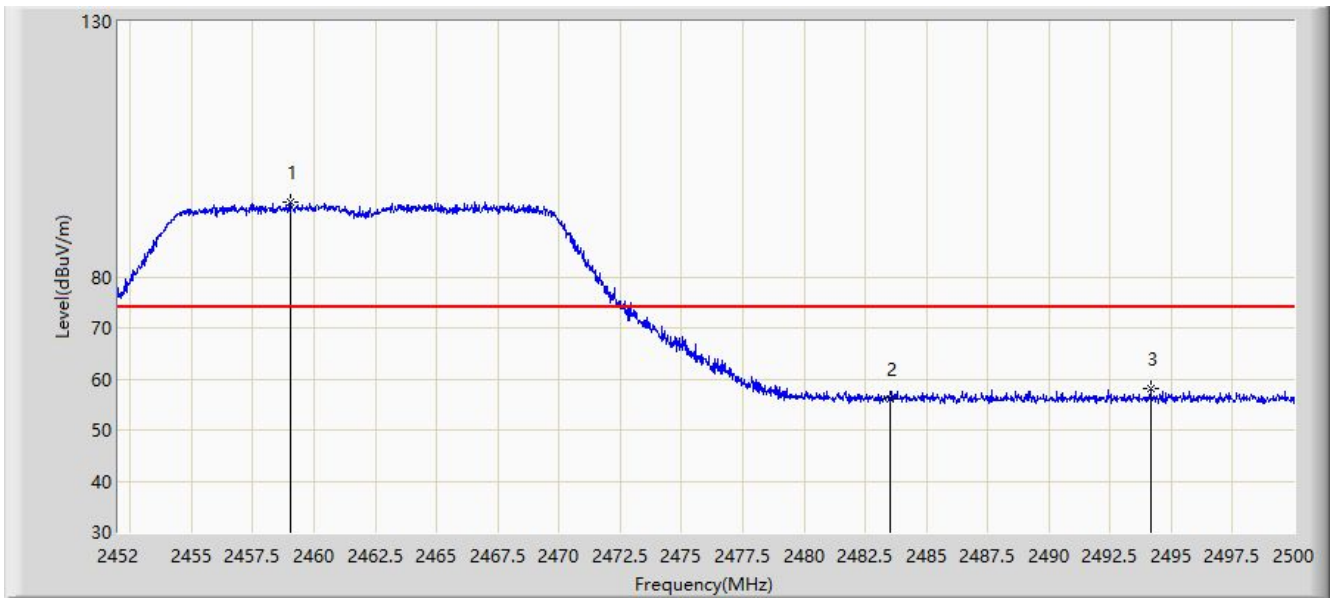


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.056	94.634	62.314	N/A	N/A	32.320	PK
2			2483.500	56.194	23.819	-17.806	74.000	32.375	PK
3			2494.144	58.129	25.779	-15.871	74.000	32.350	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:55
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with DAP645-RW Scan Antenna	

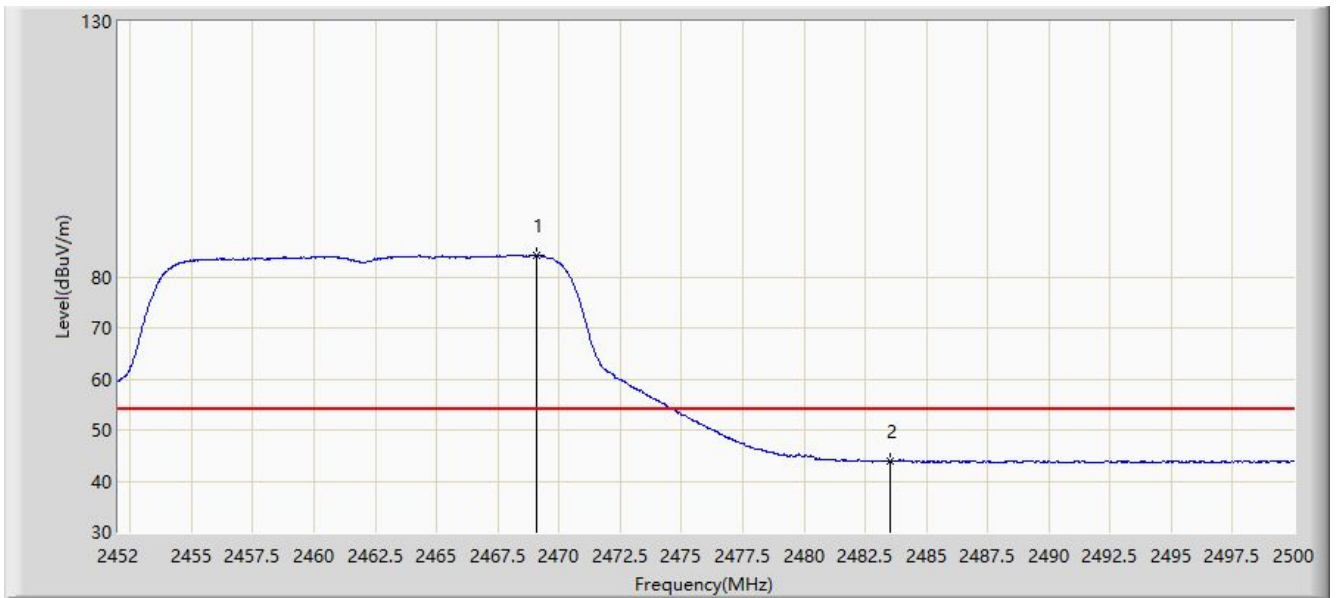


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.064	84.252	51.906	N/A	N/A	32.346	AV
2			2483.500	43.794	11.419	-10.206	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:56
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with DAP645-RW Scan Antenna	

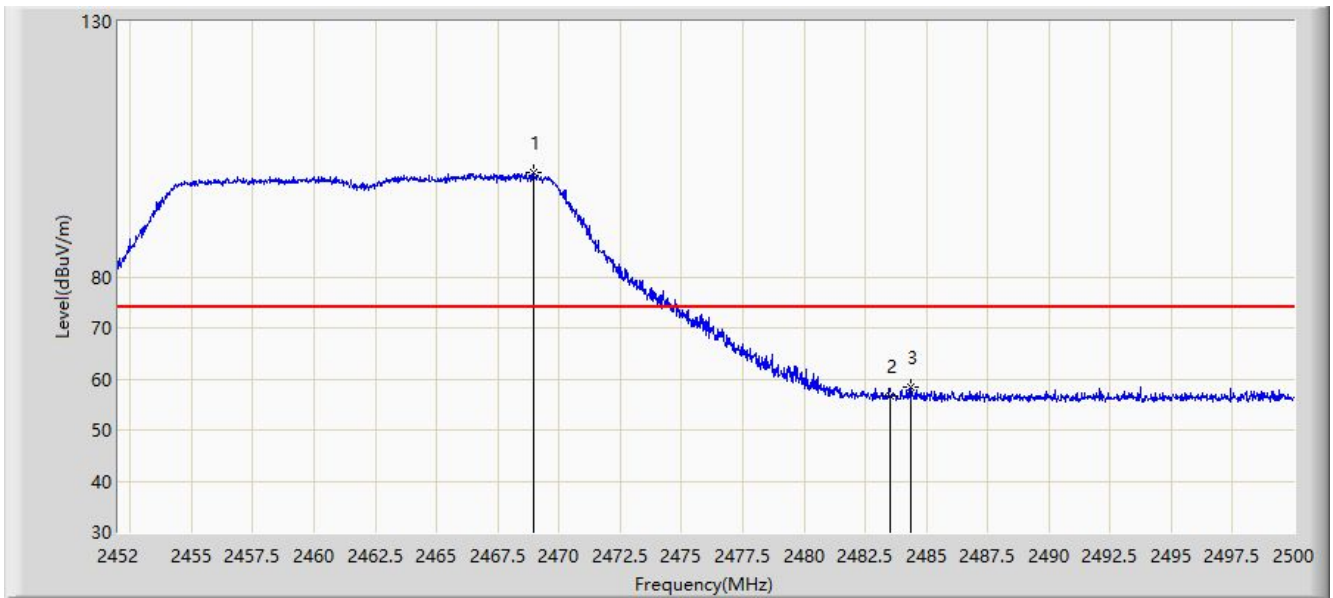


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.992	100.406	68.060	N/A	N/A	32.346	PK
2			2483.500	56.648	24.273	-17.352	74.000	32.375	PK
3			2484.376	58.502	26.129	-15.498	74.000	32.373	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/01/20 - 10:58
Limit: FCC_Part15.209_RSE (3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with DAP645-RW Scan Antenna	

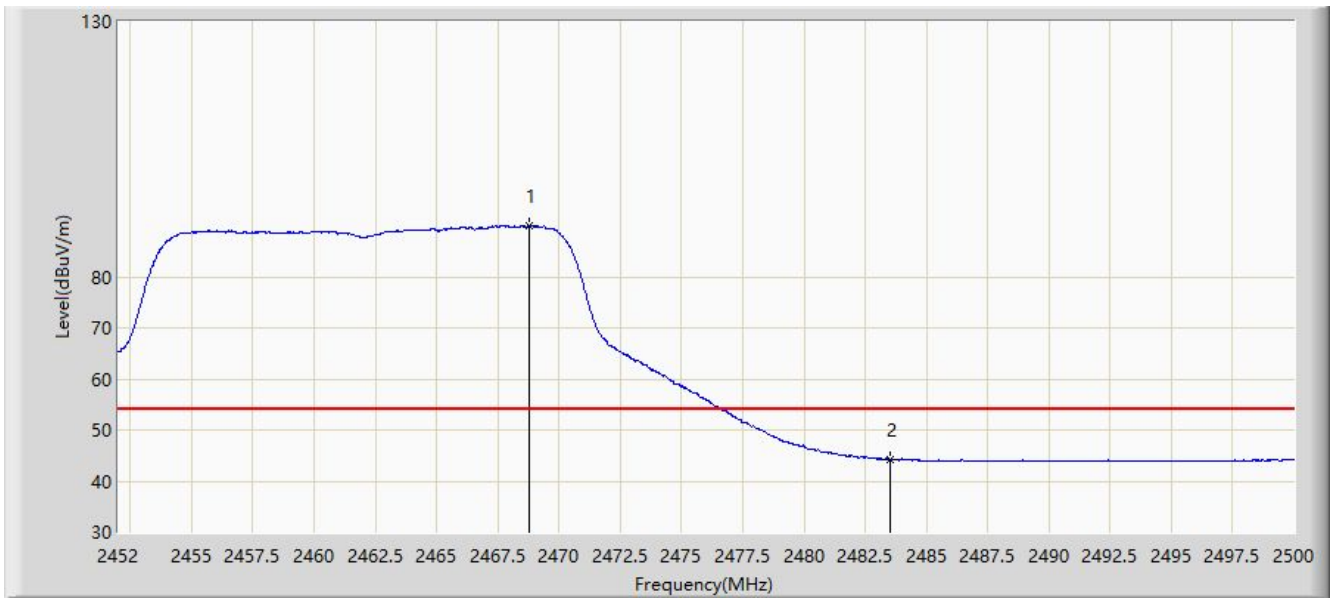


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.776	89.916	57.571	N/A	N/A	32.345	AV
2			2483.500	44.218	11.843	-9.782	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:11
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP646-RW	

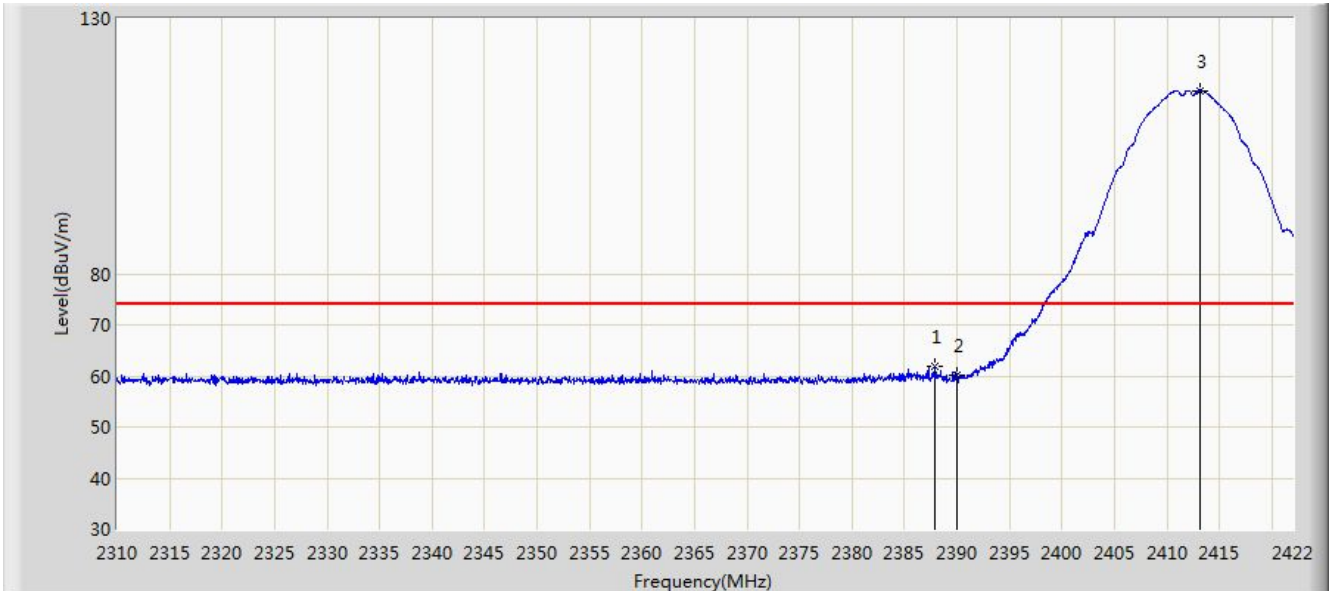


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.840	61.932	29.859	-12.068	74.000	32.073	PK
2			2390.000	60.085	28.013	-13.915	74.000	32.072	PK
3		*	2413.208	115.938	83.851	N/A	N/A	32.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:18
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP646-RW	

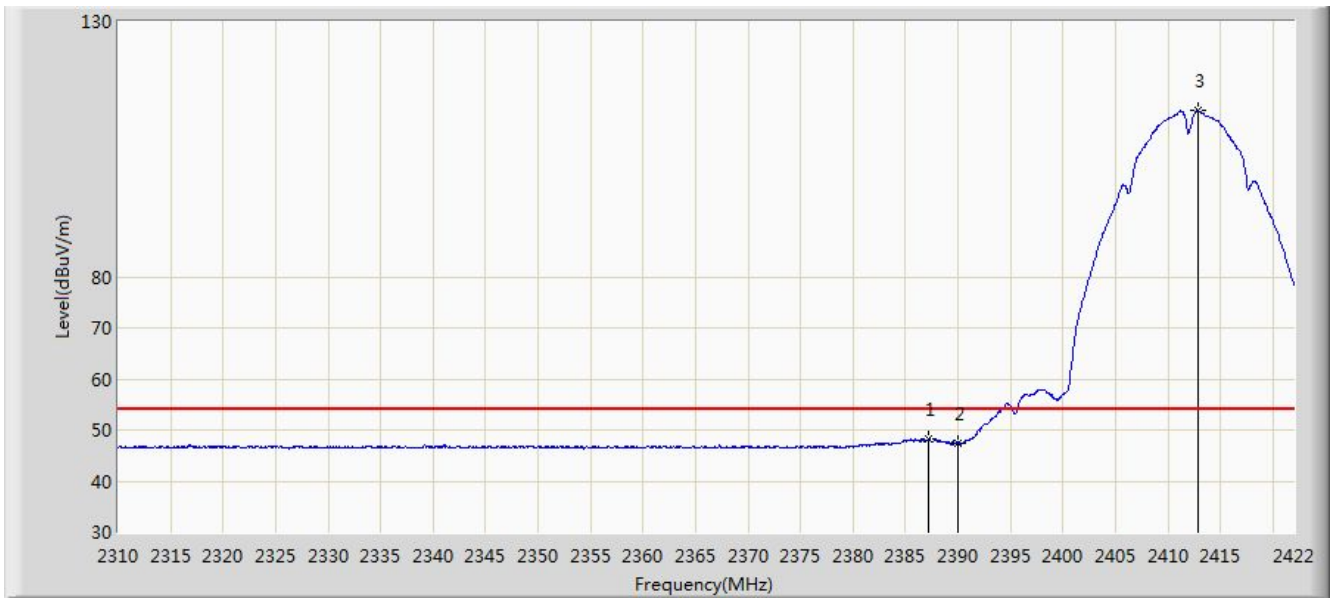


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.224	48.319	16.246	-5.681	54.000	32.073	AV
2			2390.000	47.485	15.413	-6.515	54.000	32.072	AV
3	X	*	2412.872	112.497	80.411	N/A	N/A	32.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:21
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP646-RW	

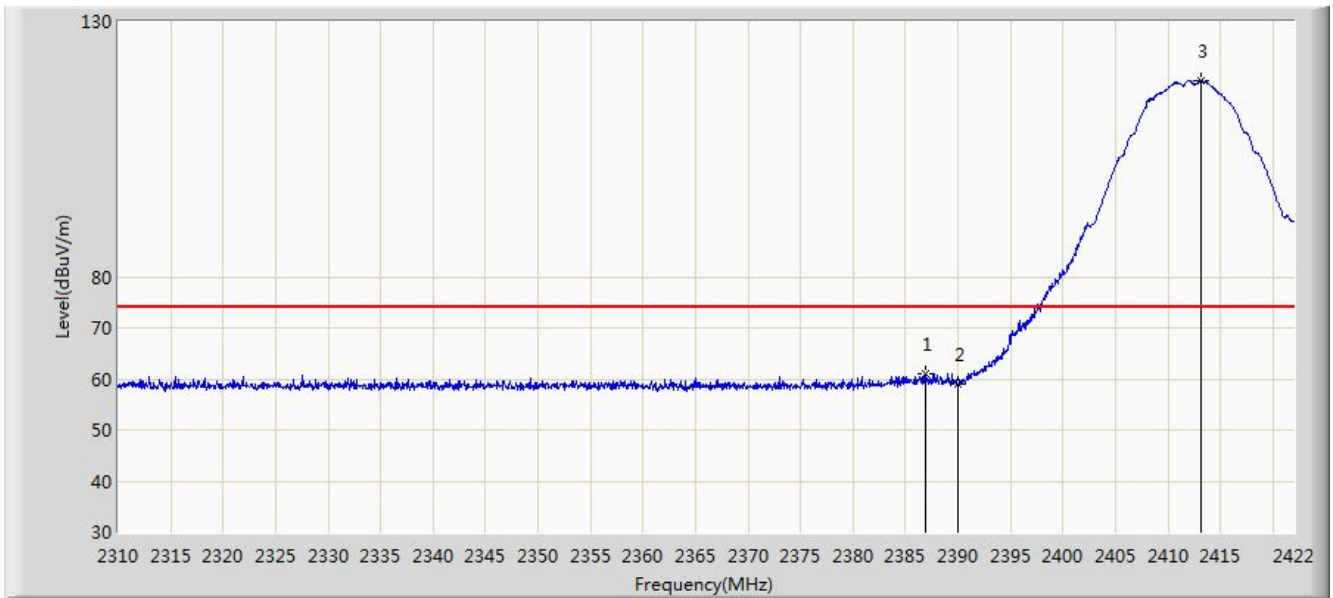


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.944	61.105	29.032	-12.895	74.000	32.073	PK
2			2390.000	59.052	26.980	-14.948	74.000	32.072	PK
3		*	2413.208	118.380	86.293	N/A	N/A	32.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:23
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP646-RW	

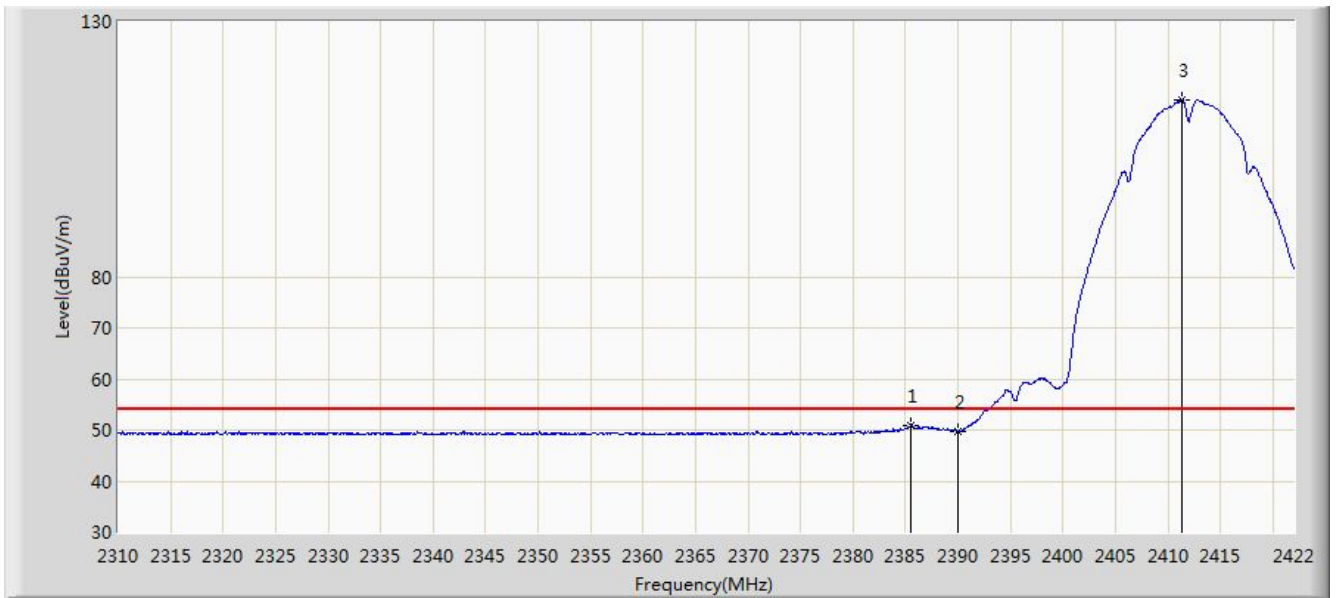


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.488	50.963	18.890	-3.037	54.000	32.073	AV
2			2390.000	49.811	17.739	-4.189	54.000	32.072	AV
3	X	*	2411.304	114.722	82.640	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:28
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP646-RW	

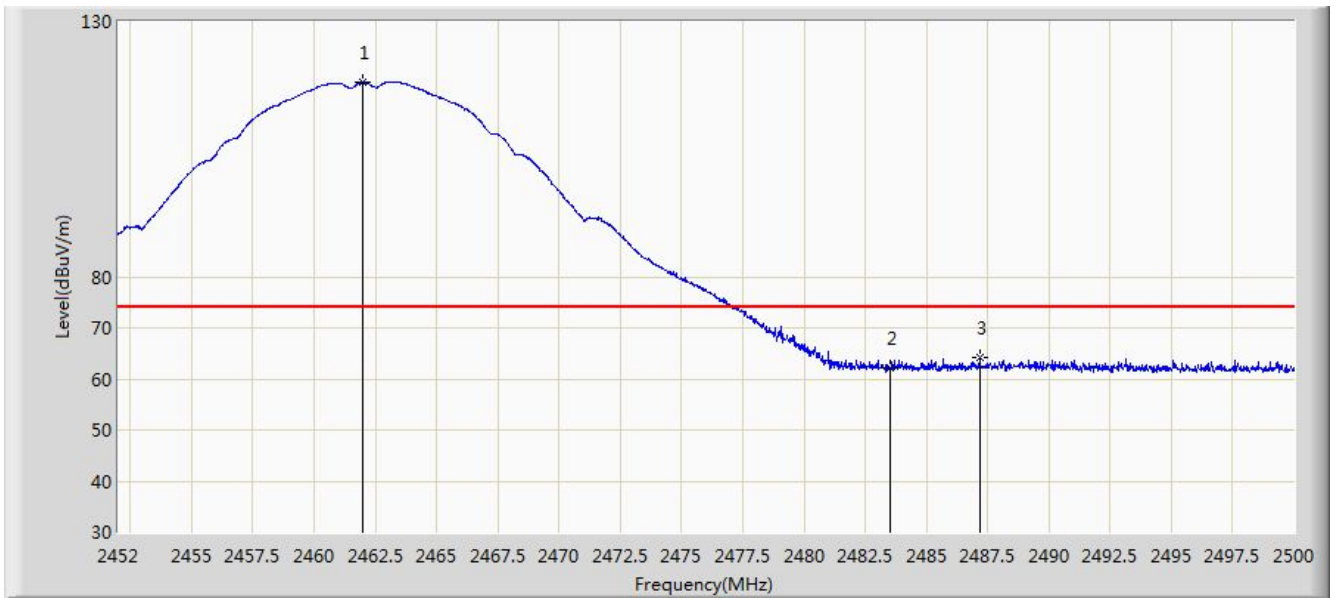


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.960	118.051	85.970	N/A	N/A	32.081	PK
2			2483.500	62.061	30.024	-11.939	74.000	32.037	PK
3			2487.160	64.112	32.082	-9.888	74.000	32.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:33
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP646-RW	

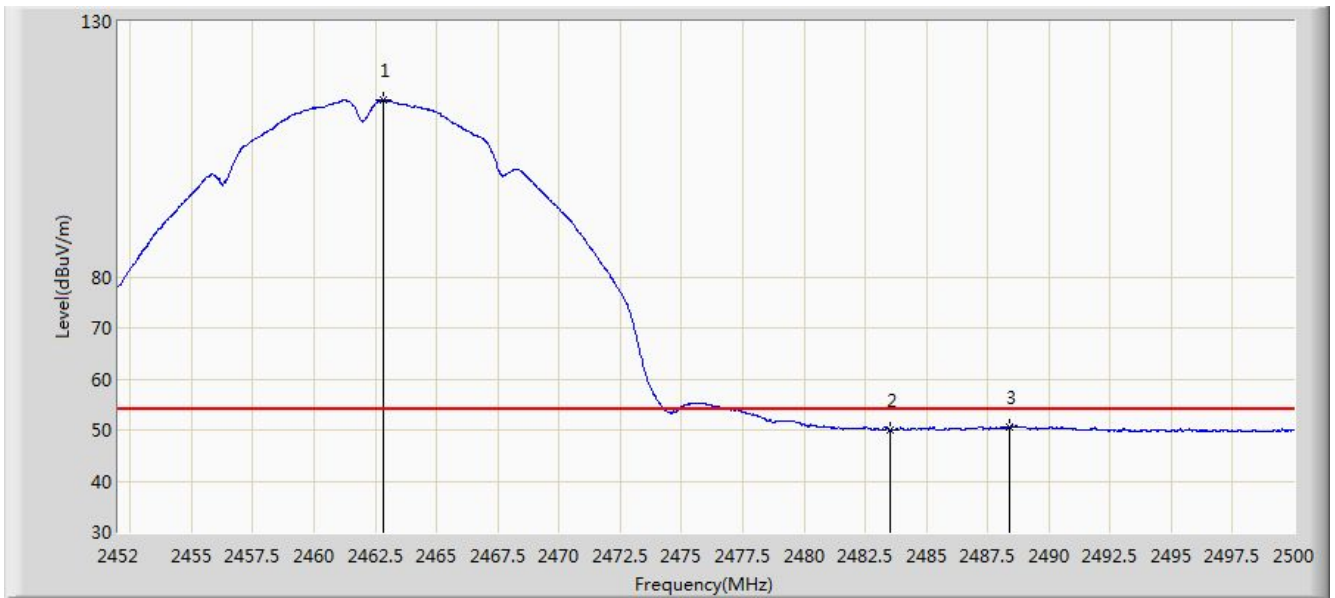


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2462.824	114.689	82.610	N/A	N/A	32.079	AV
2			2483.500	50.027	17.990	-3.973	54.000	32.037	AV
3			2488.384	50.697	18.669	-3.303	54.000	32.028	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:34
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP646-RW	

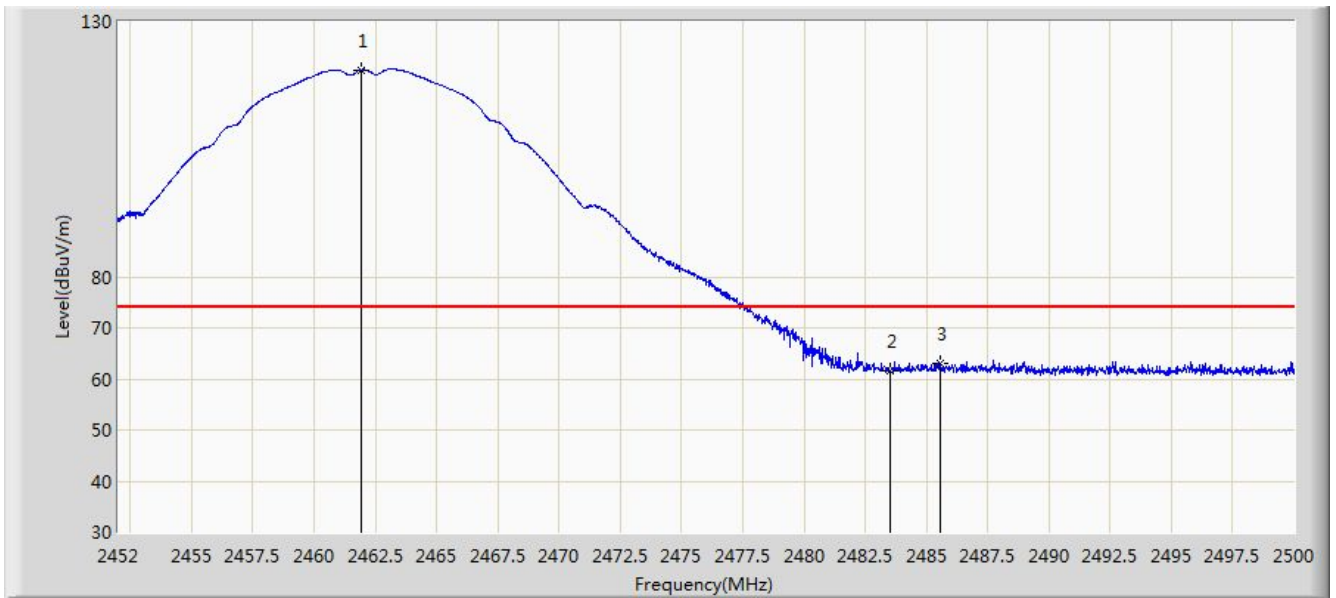

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.936	120.530	88.449	N/A	N/A	32.080	PK
2			2483.500	61.676	29.639	-12.324	74.000	32.037	PK
3			2485.576	63.099	31.066	-10.901	74.000	32.033	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:36
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP646-RW	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2461.312	115.096	83.016	N/A	N/A	32.080	AV
2			2483.500	47.840	15.803	-6.160	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:57
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode) with DAP646-RW	

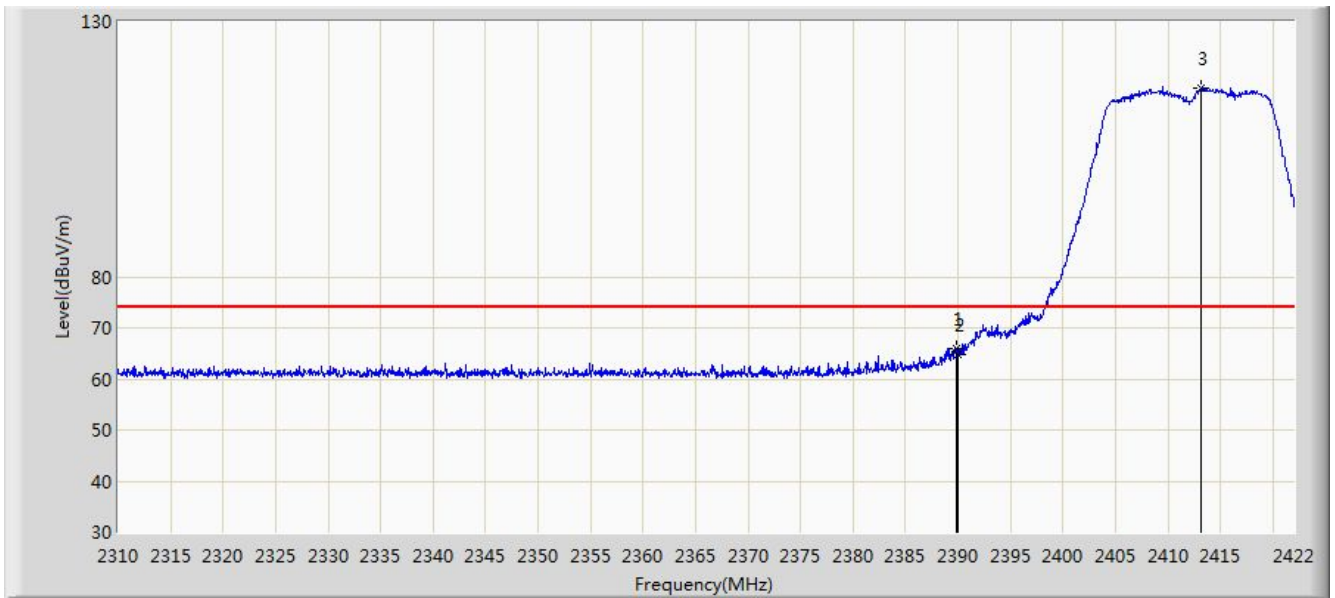


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	66.068	33.996	-7.932	74.000	32.072	PK
2			2390.000	64.737	32.665	-9.263	74.000	32.072	PK
3		*	2413.152	116.880	84.794	N/A	N/A	32.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:58
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode) with DAP646-RW	

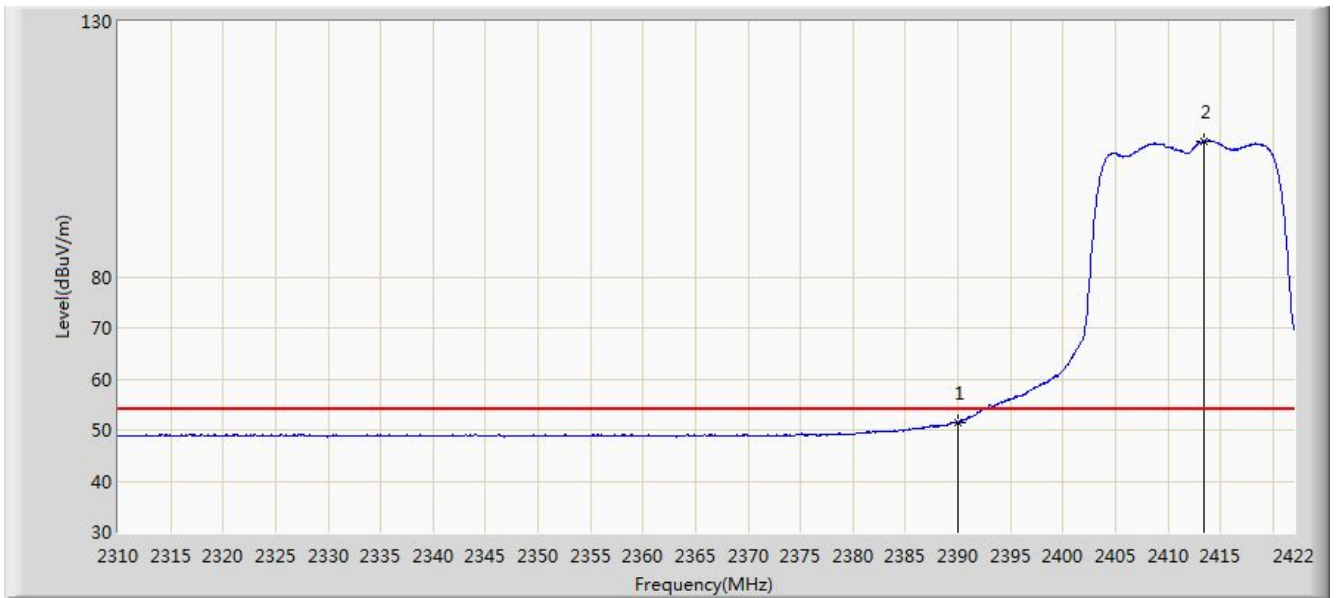


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.499	19.427	-2.501	54.000	32.072	AV
2		*	2413.488	106.605	74.518	N/A	N/A	32.087	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:55
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode) with DAP646-RW	

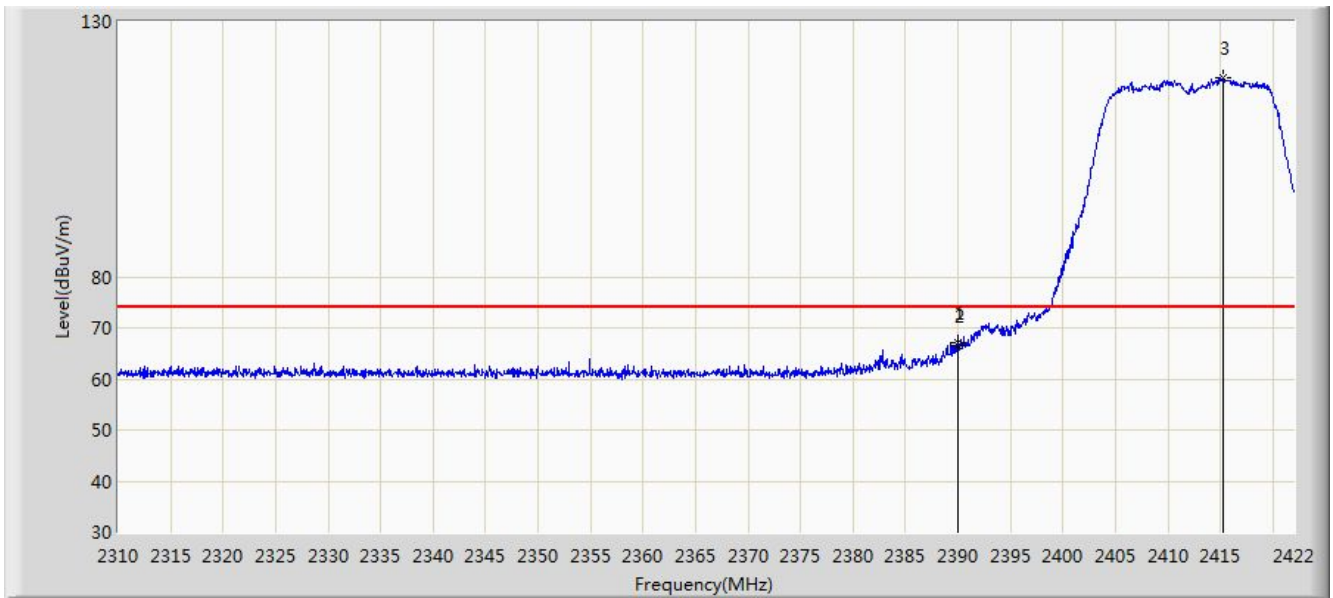


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	66.984	34.912	-7.016	74.000	32.072	PK
2			2390.000	66.459	34.387	-7.541	74.000	32.072	PK
3		*	2415.280	118.865	86.773	N/A	N/A	32.092	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 01:53
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode) with DAP646-RW	

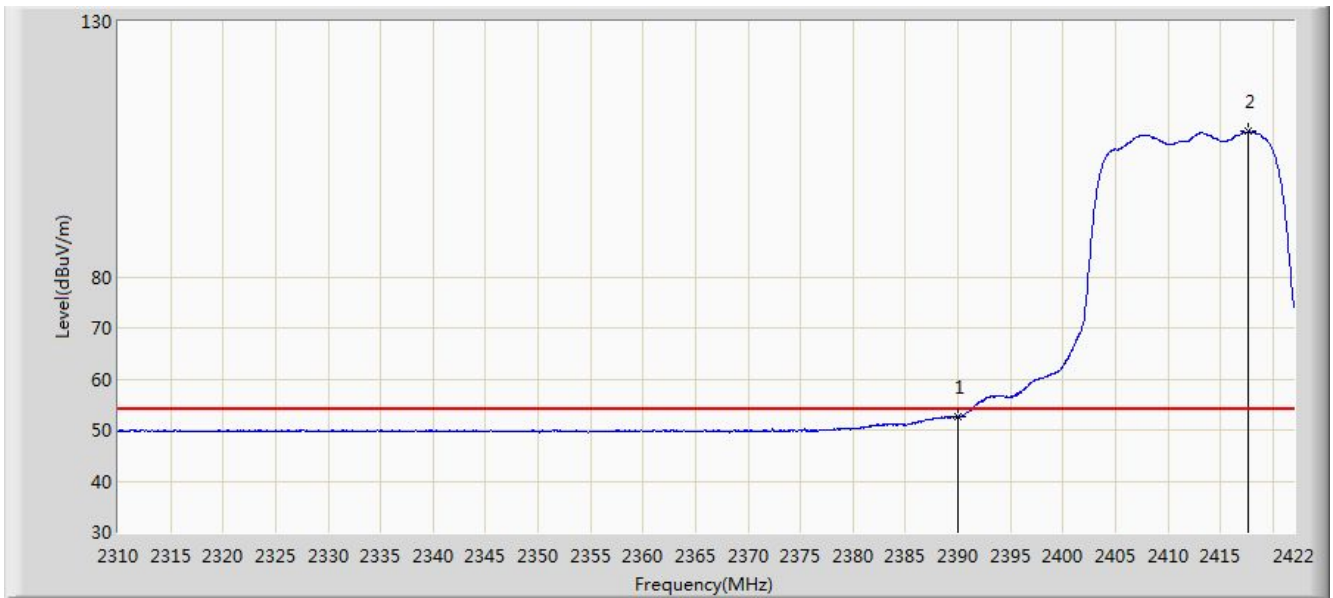


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.471	20.399	-1.529	54.000	32.072	AV
2	X	*	2417.632	108.440	76.342	N/A	N/A	32.098	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:10
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode) with DAP646-RW	

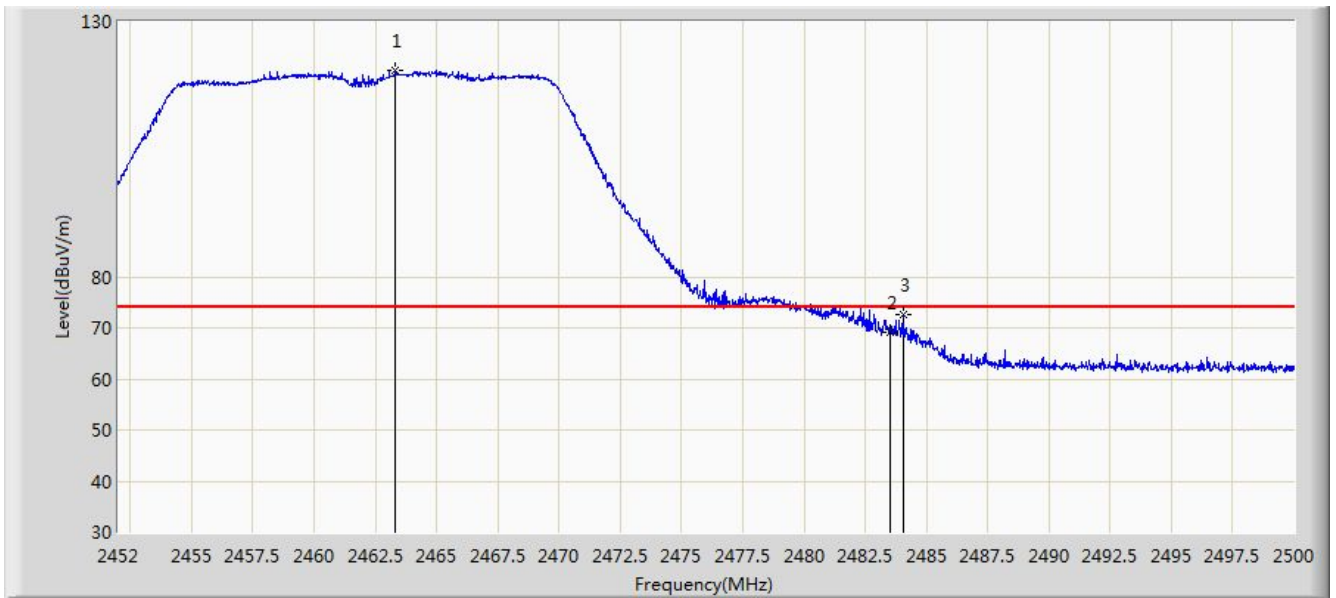


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.304	120.539	88.461	N/A	N/A	32.078	PK
2			2483.500	69.259	37.222	-4.741	74.000	32.037	PK
3			2484.040	72.648	40.612	-1.352	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:12
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode) with DAP646-RW	

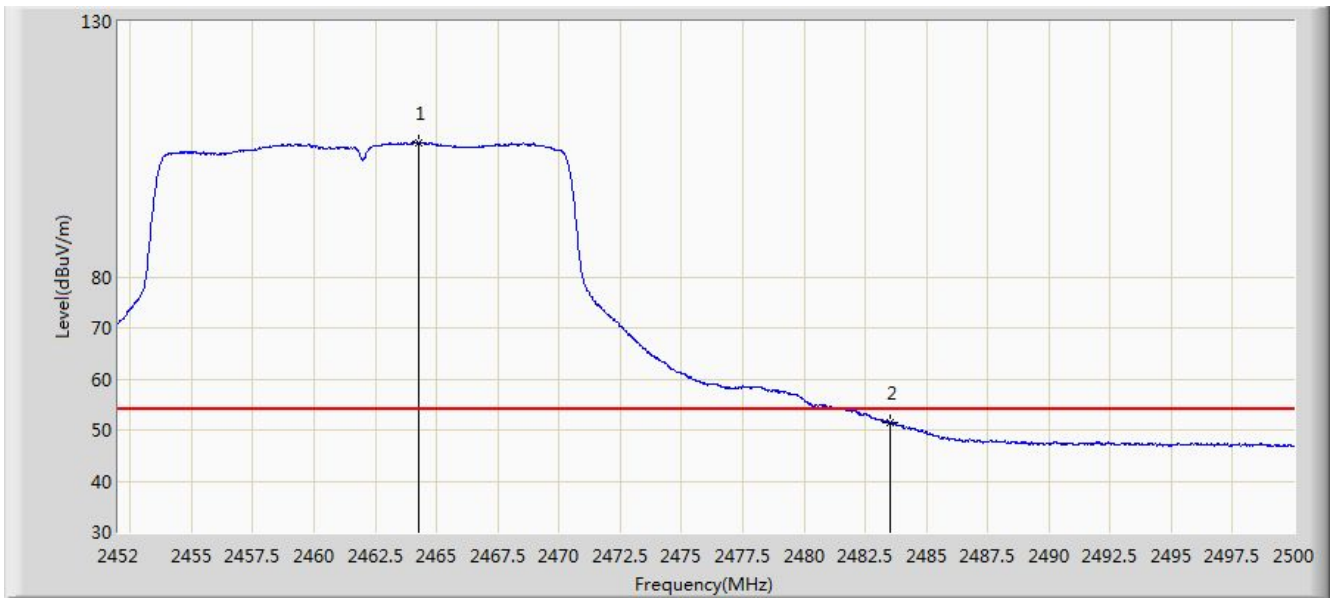


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.264	106.243	74.167	N/A	N/A	32.076	AV
2			2483.500	51.424	19.387	-2.576	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:07
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode) with DAP646-RW	

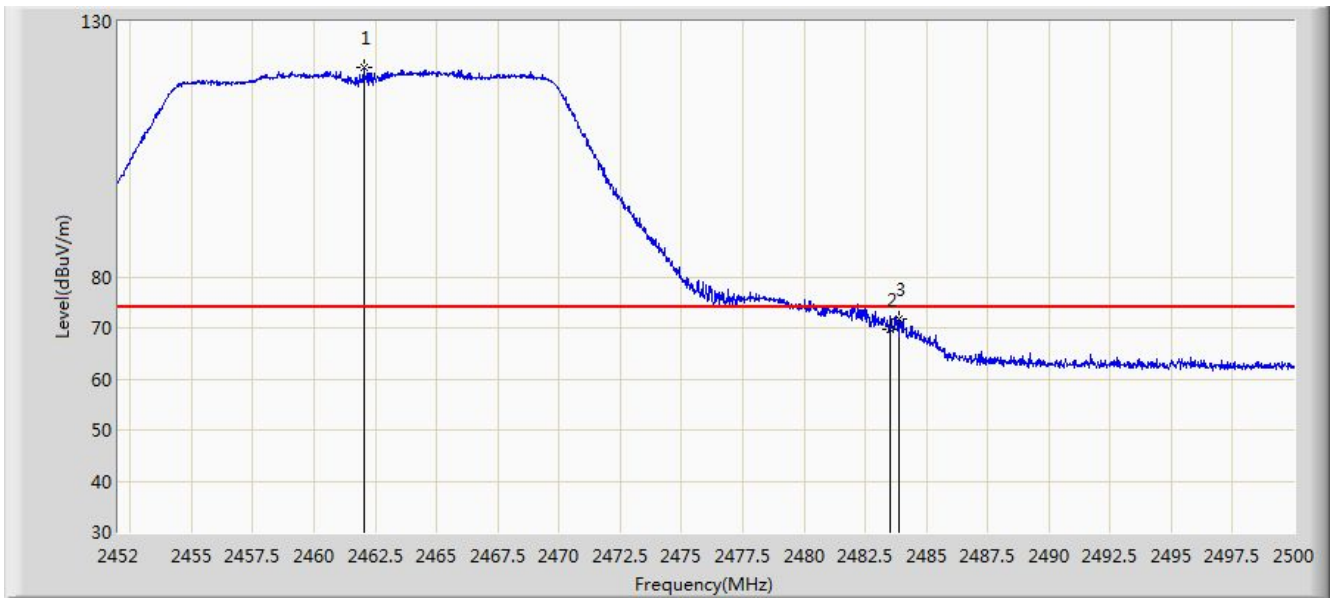


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.032	121.063	88.982	N/A	N/A	32.081	PK
2			2483.500	69.674	37.637	-4.326	74.000	32.037	PK
3			2483.872	71.874	39.838	-2.126	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:05
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode) with DAP646-RW	

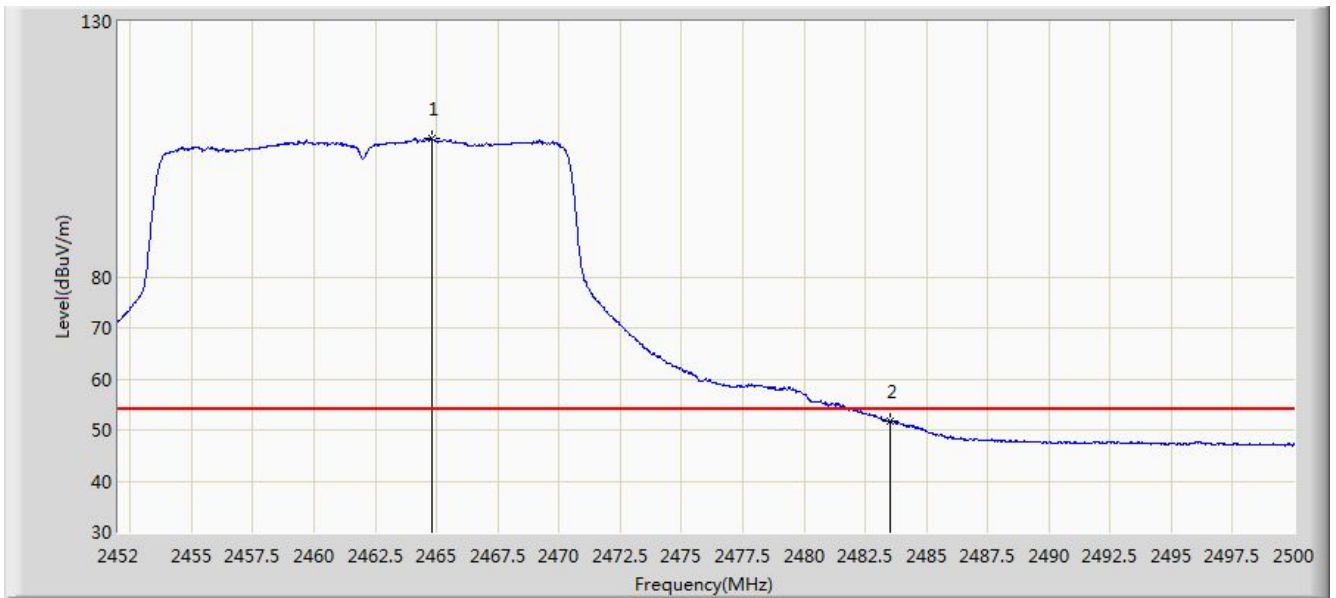


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.792	107.181	75.106	N/A	N/A	32.075	AV
2			2483.500	51.780	19.743	-2.220	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:29
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

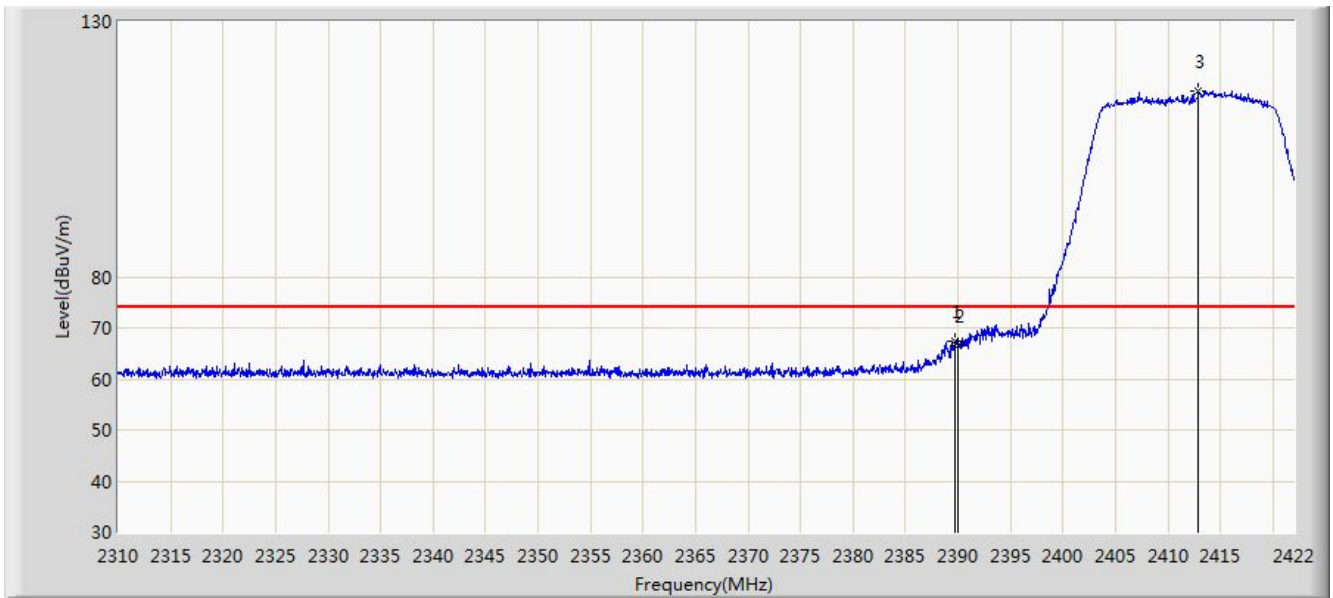


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.744	67.488	35.416	-6.512	74.000	32.072	PK
2			2390.000	66.508	34.436	-7.492	74.000	32.072	PK
3		*	2412.872	116.302	84.216	N/A	N/A	32.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:31
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

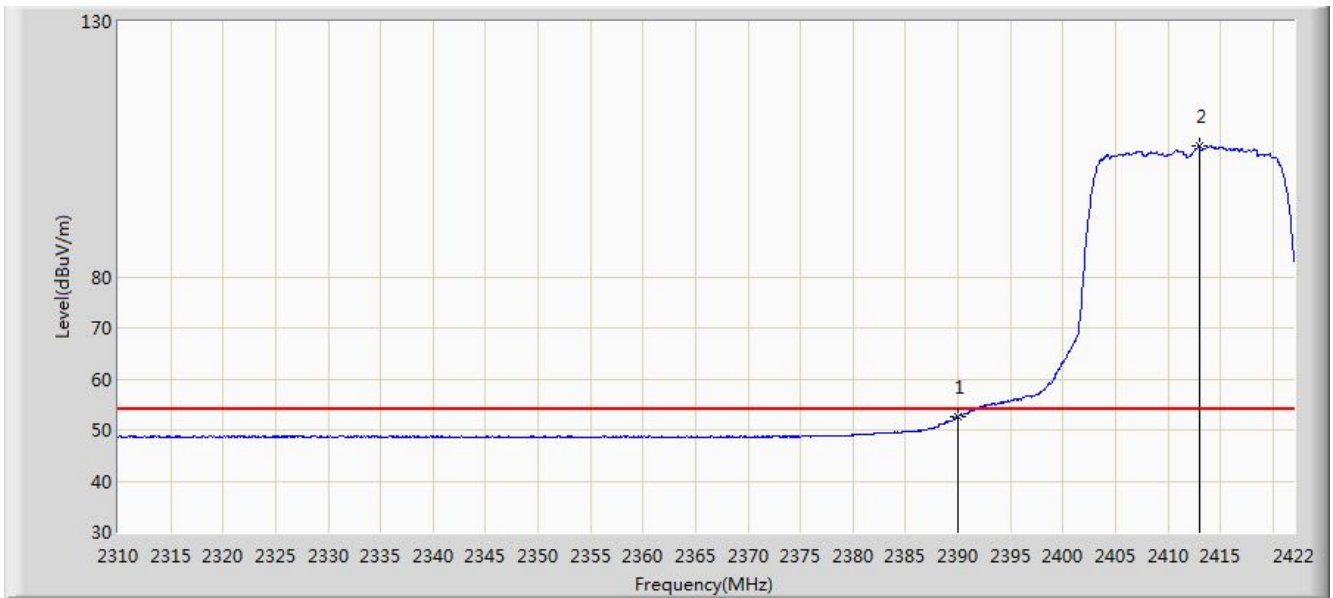


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.641	20.569	-1.359	54.000	32.072	AV
2		*	2412.984	105.656	73.570	N/A	N/A	32.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:27
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

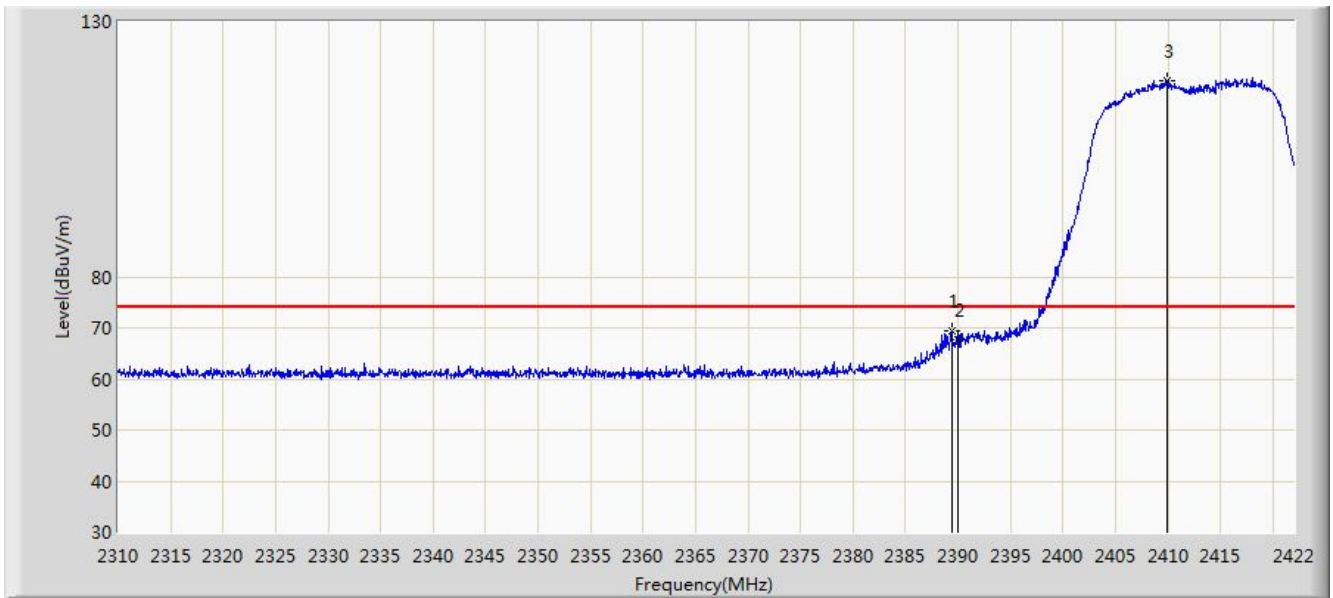


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.408	69.357	37.285	-4.643	74.000	32.072	PK
2			2390.000	67.570	35.498	-6.430	74.000	32.072	PK
3		*	2409.960	118.443	86.363	N/A	N/A	32.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:26
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

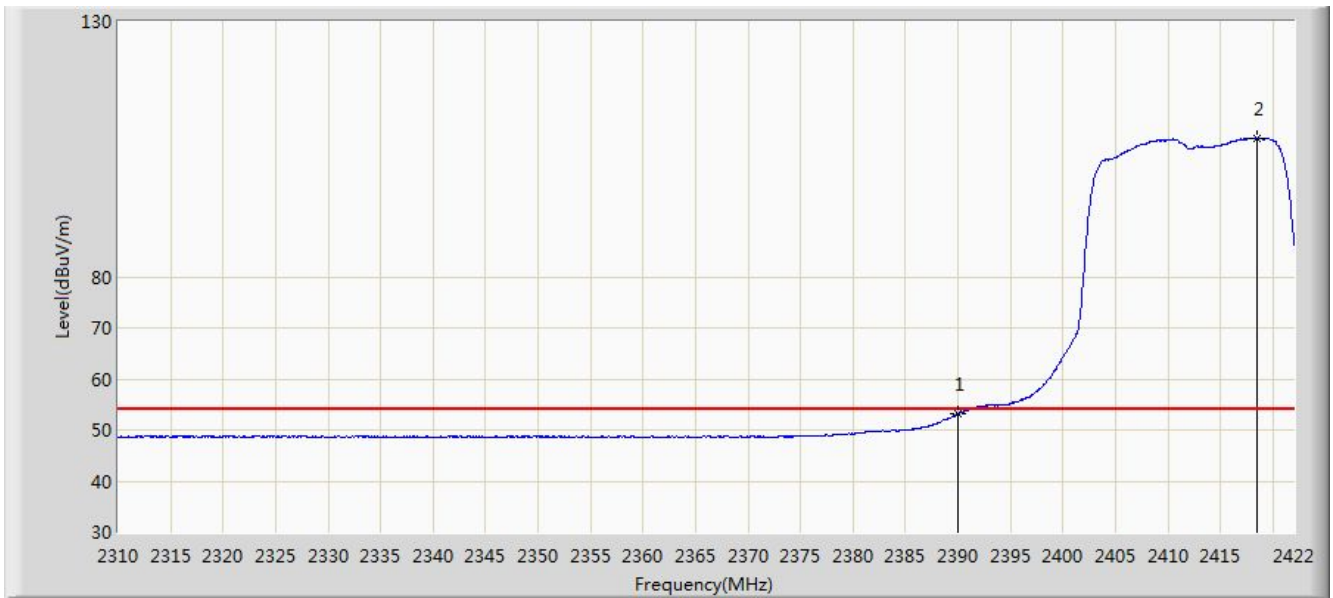


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.177	21.105	-0.823	54.000	32.072	AV
2		*	2418.528	107.222	75.121	N/A	N/A	32.101	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:43
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

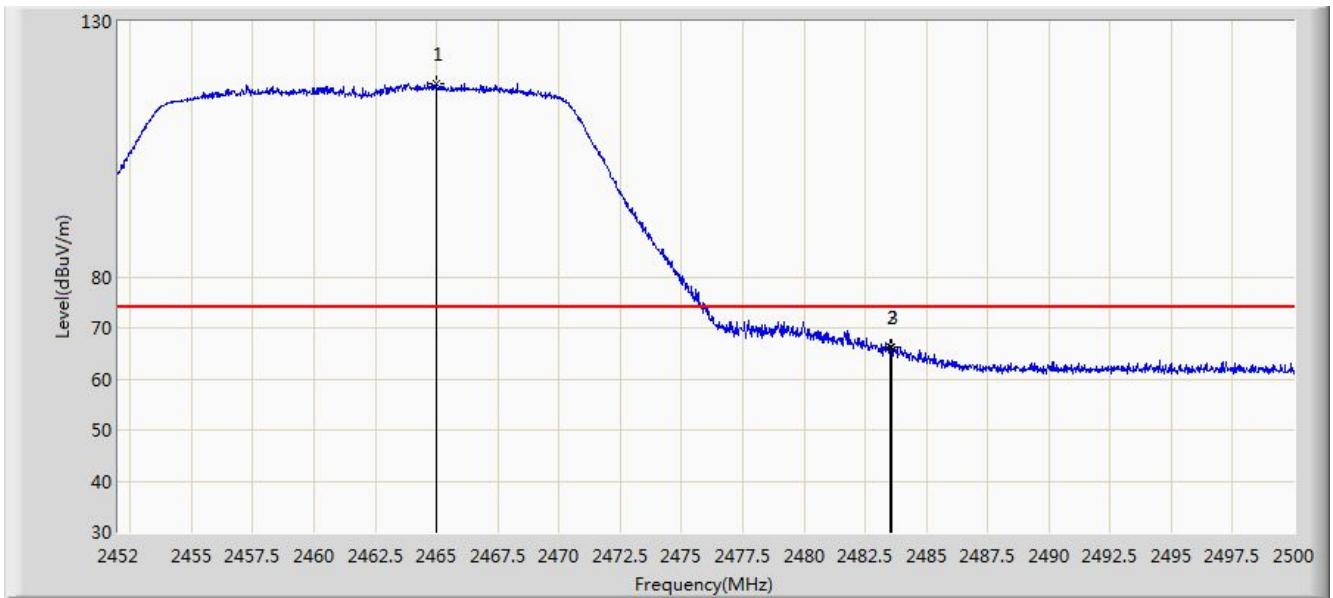


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.008	117.893	85.819	N/A	N/A	32.075	PK
2			2483.500	66.214	34.177	-7.786	74.000	32.037	PK
3			2483.608	66.295	34.258	-7.705	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:46
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

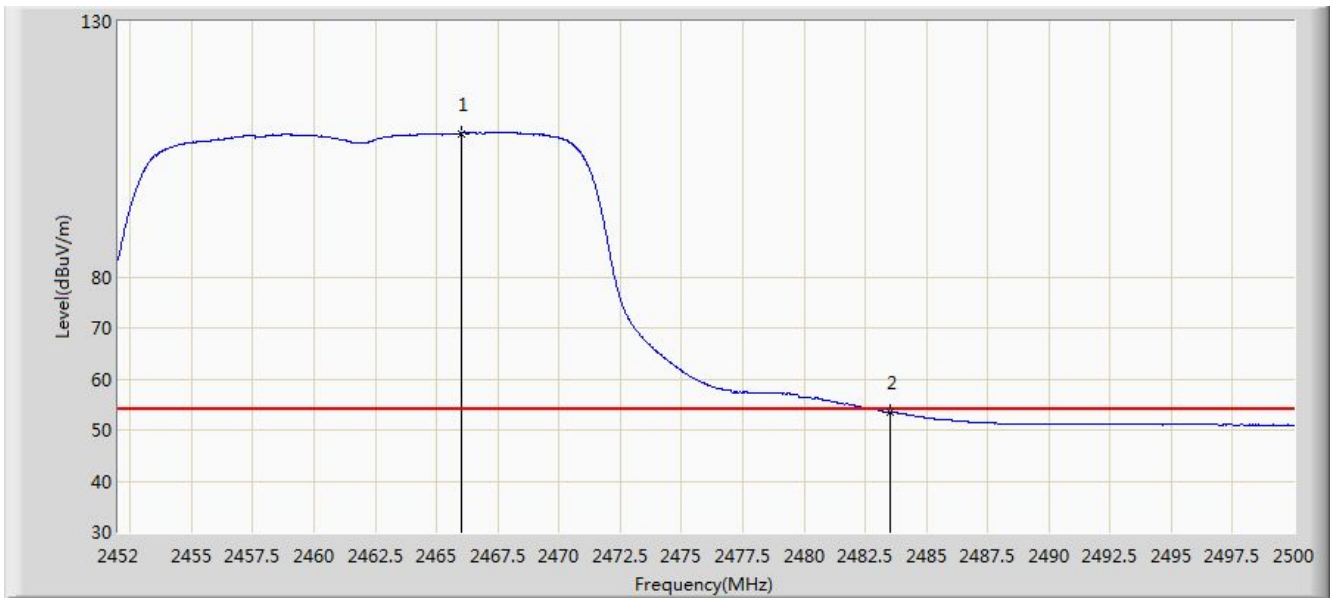


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2465.992	108.109	76.037	N/A	N/A	32.072	AV
2			2483.500	53.487	21.450	-0.513	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:42
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

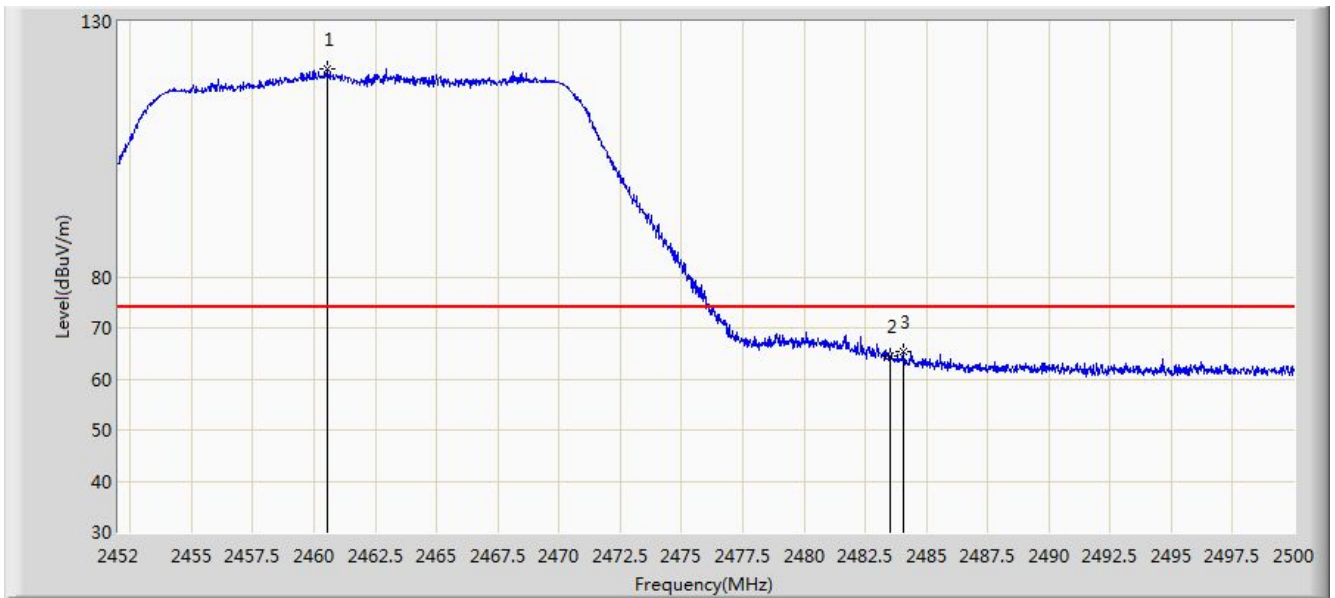


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.520	120.805	88.725	N/A	N/A	32.080	PK
2			2483.500	64.539	32.502	-9.461	74.000	32.037	PK
3			2484.040	65.239	33.203	-8.761	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:40
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

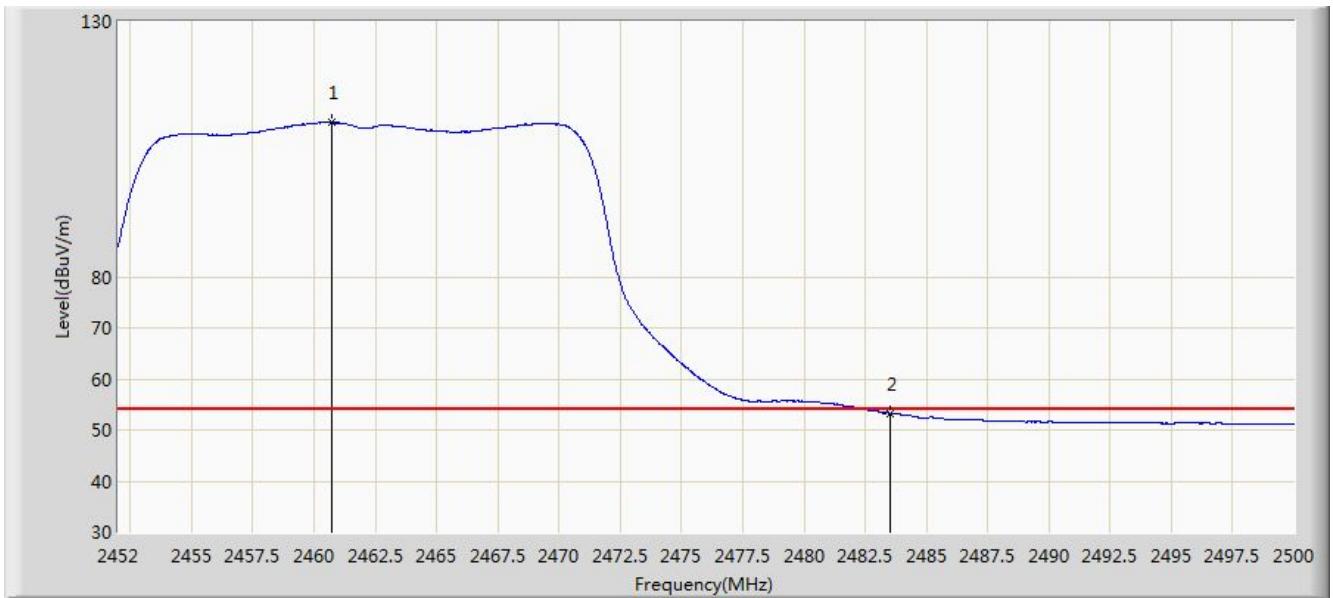


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2460.736	110.294	78.214	N/A	N/A	32.081	AV
2			2483.500	53.234	21.197	-0.766	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:03
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

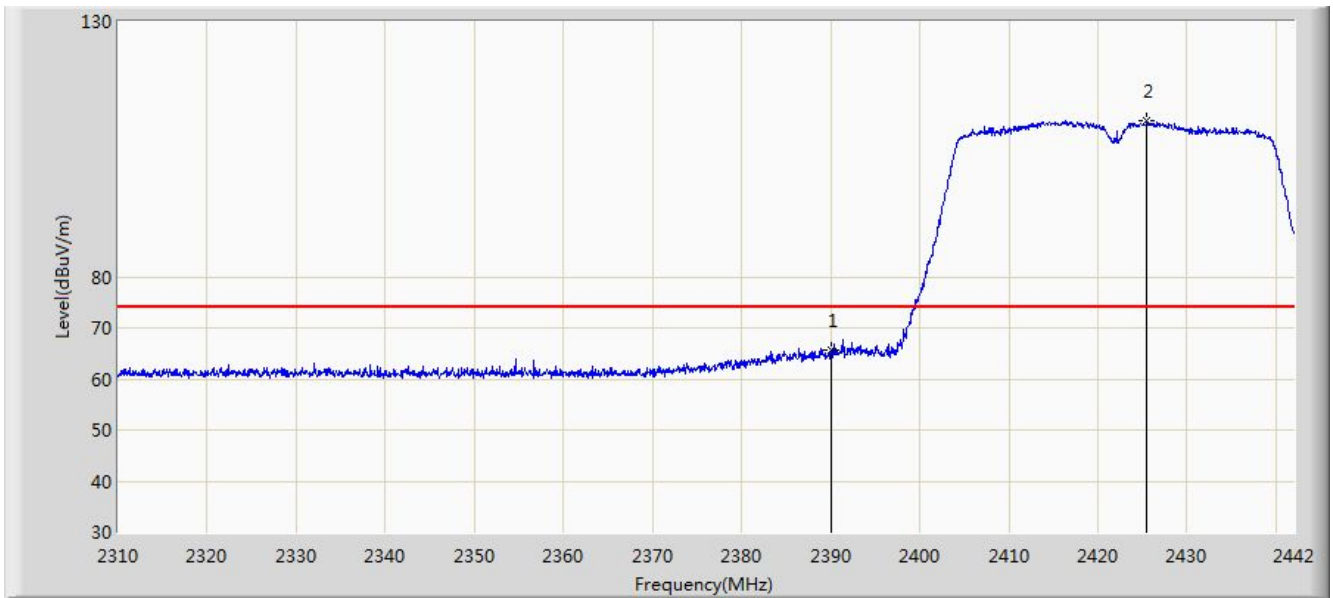


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.595	33.523	-8.405	74.000	32.072	PK
2		*	2425.500	110.503	78.384	N/A	N/A	32.119	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:05
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

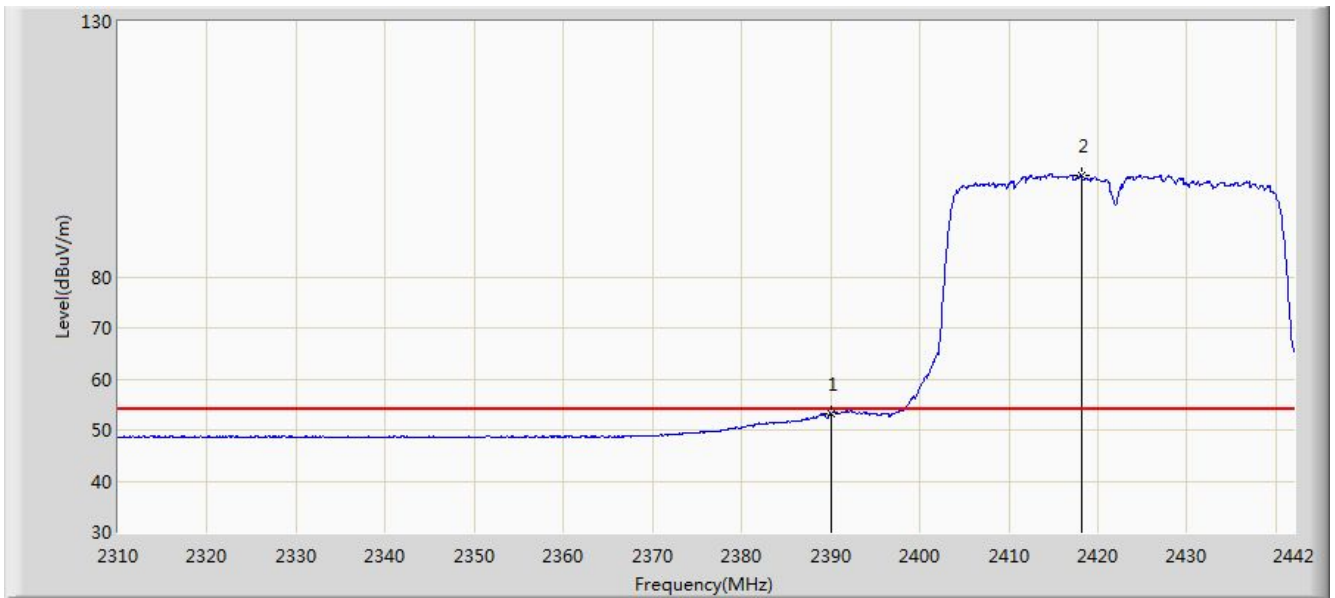


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.136	21.064	-0.864	54.000	32.072	AV
2		*	2418.108	99.769	67.669	N/A	N/A	32.099	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:02
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

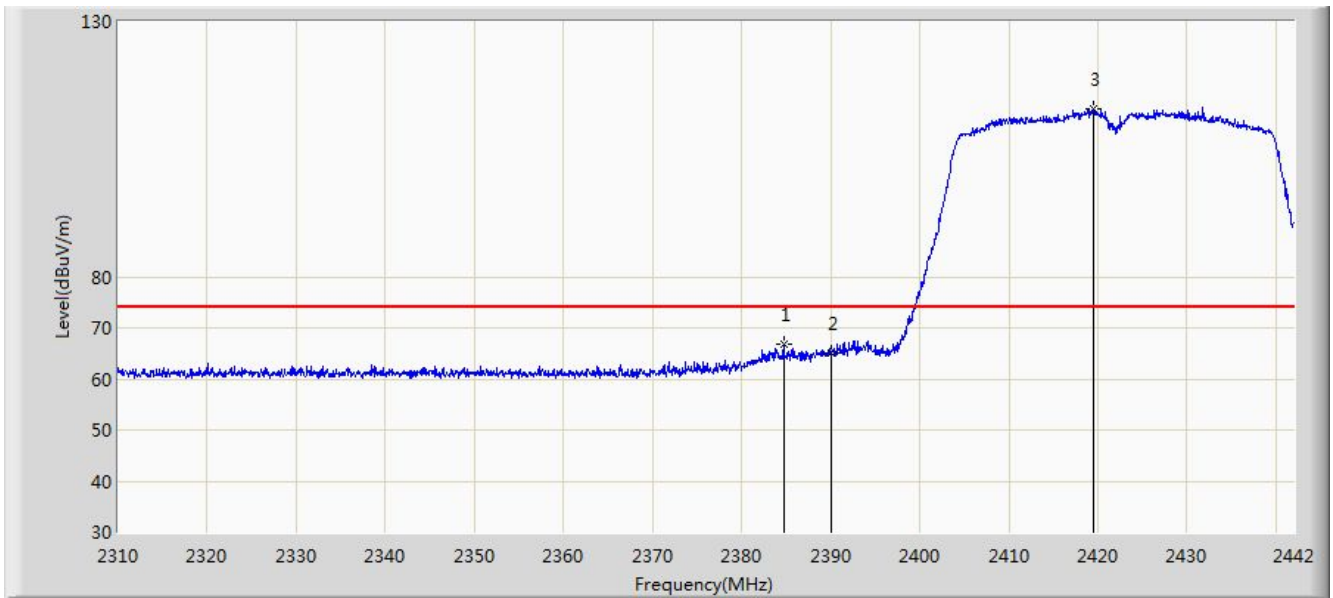


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.712	66.737	34.663	-7.263	74.000	32.074	PK
2			2390.000	64.941	32.869	-9.059	74.000	32.072	PK
3		*	2419.560	112.847	80.744	N/A	N/A	32.103	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 02:57
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

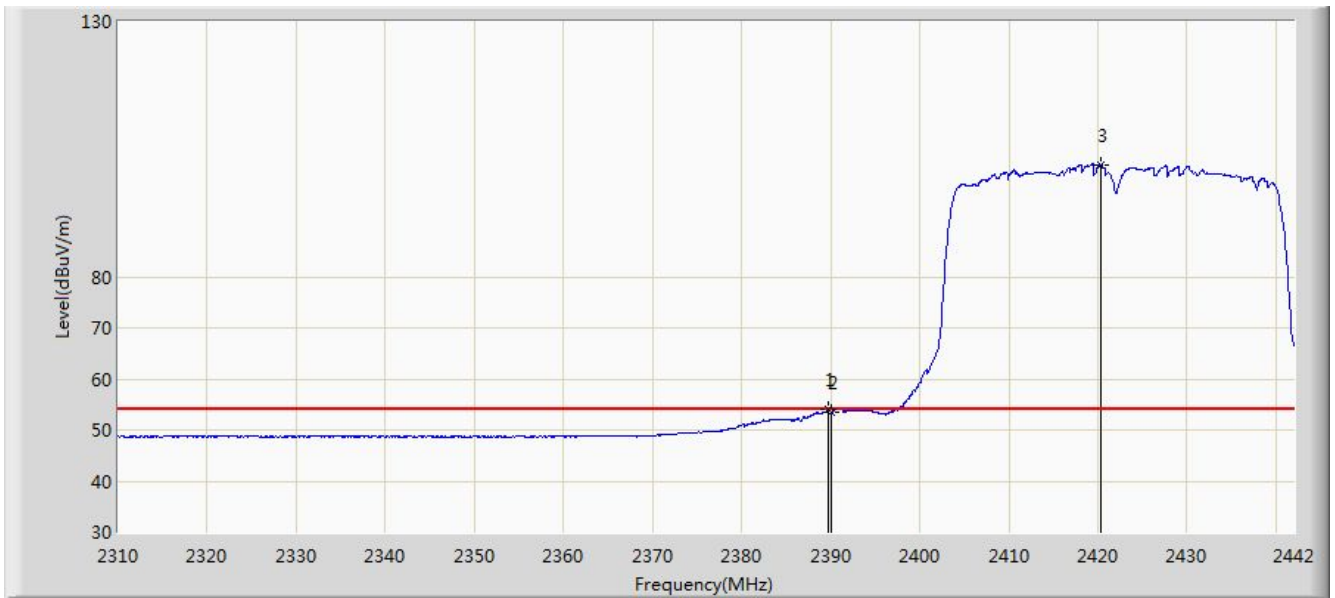


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.794	53.942	21.870	-0.058	54.000	32.072	AV
2			2390.000	53.380	21.308	-0.620	54.000	32.072	AV
3		*	2420.352	101.970	69.865	N/A	N/A	32.105	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:13
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

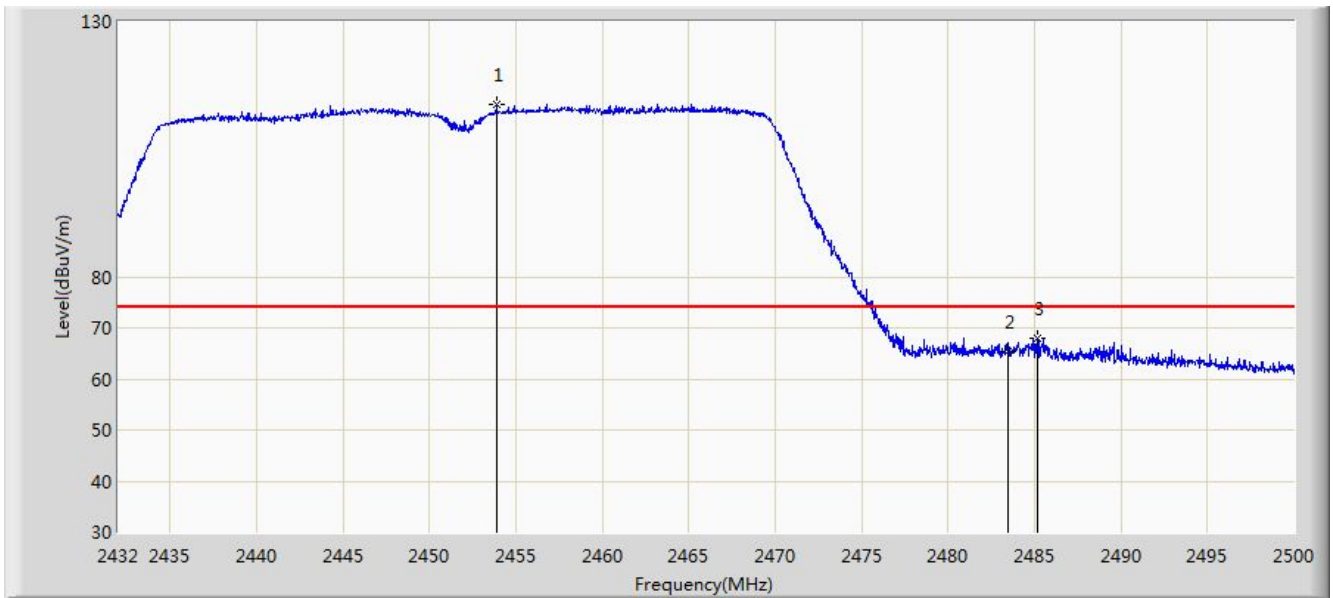


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.896	113.824	81.747	N/A	N/A	32.077	PK
2			2483.500	65.247	33.210	-8.753	74.000	32.037	PK
3			2485.210	67.864	35.830	-6.136	74.000	32.034	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:14
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

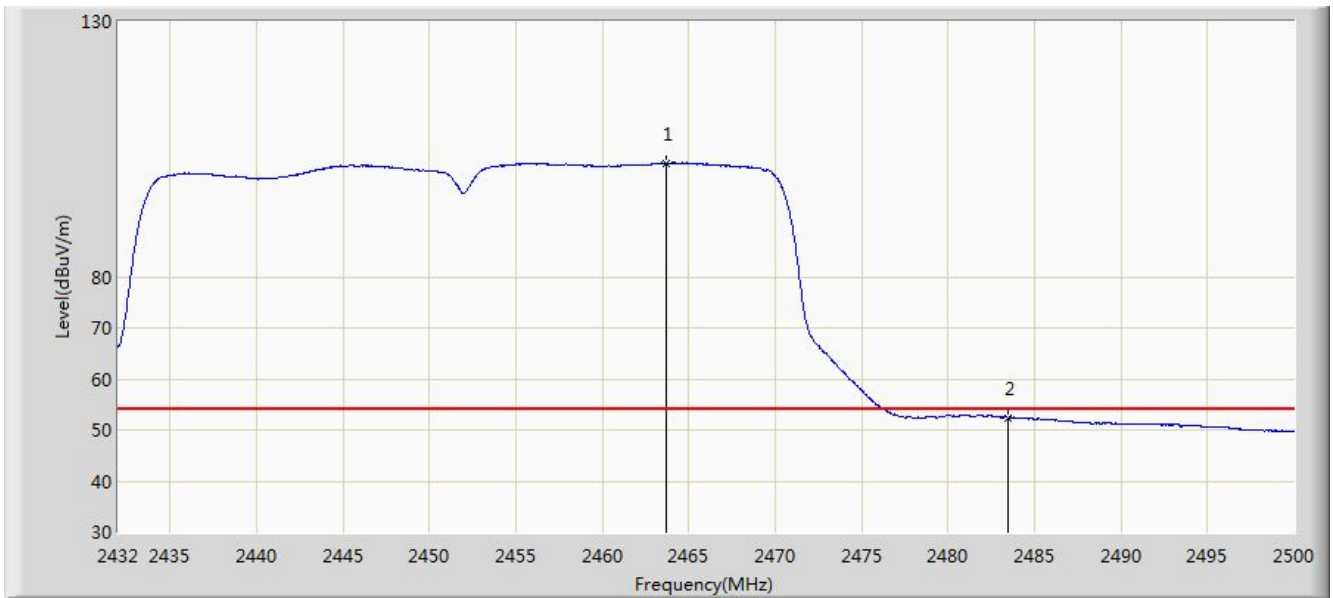


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.722	102.235	70.158	N/A	N/A	32.077	AV
2			2483.500	52.411	20.374	-1.589	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:11
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

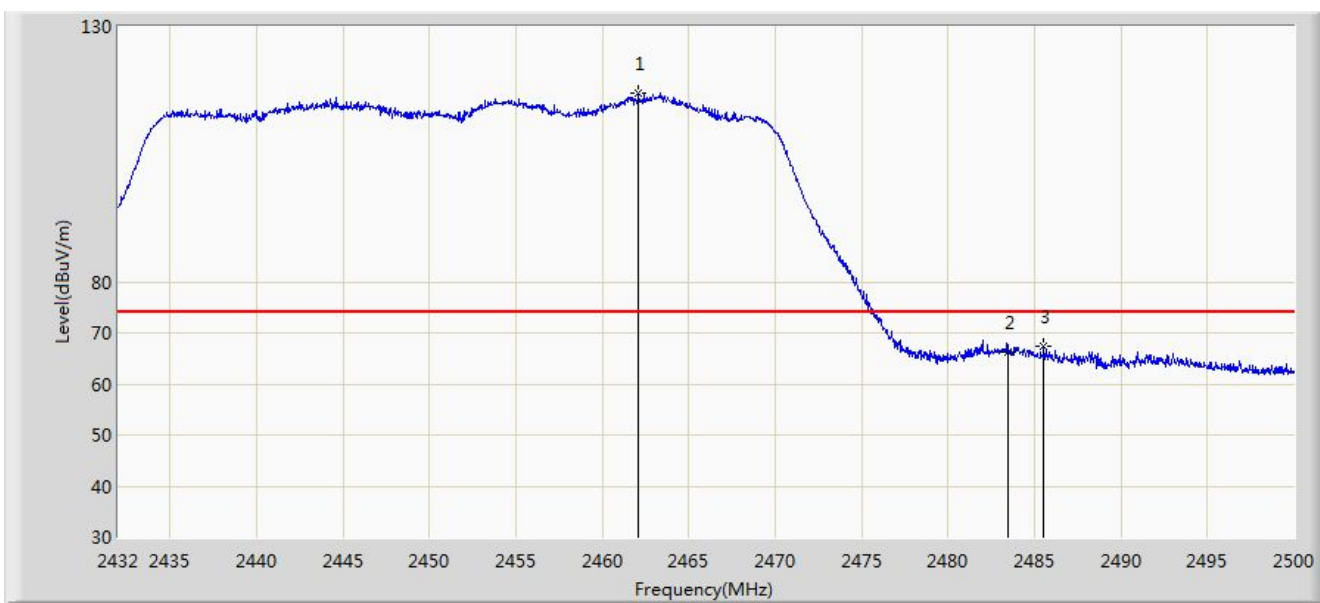


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.090	117.099	85.019	N/A	N/A	32.081	PK
2			2483.500	66.114	34.077	-7.886	74.000	32.037	PK
3			2485.550	67.337	35.304	-6.663	74.000	32.033	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/08 - 03:10
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

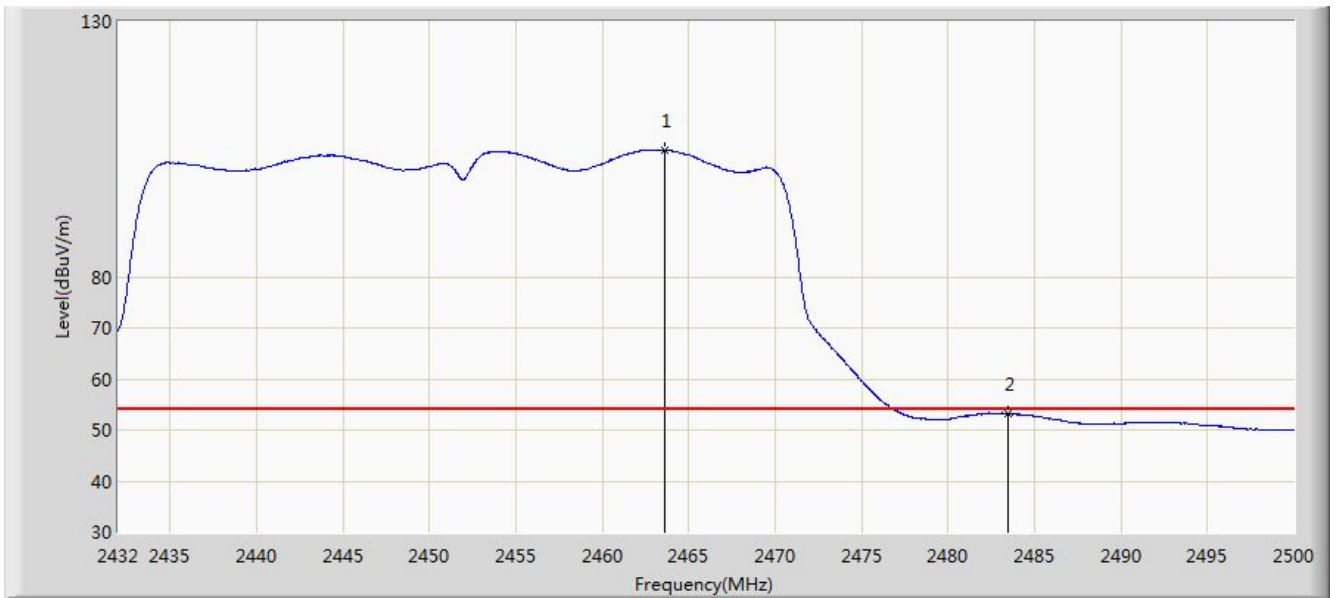


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.586	104.851	72.774	N/A	N/A	32.077	AV
2			2483.500	53.258	21.221	-0.742	54.000	32.037	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 02:45
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

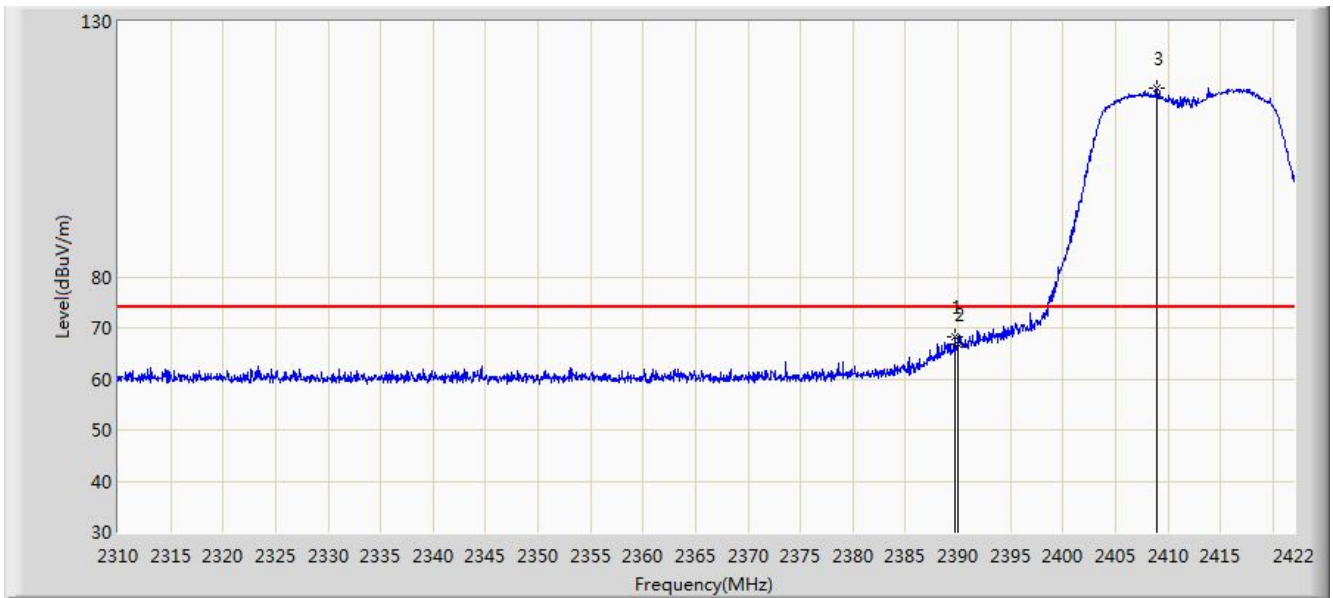


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.688	68.170	36.098	-5.830	74.000	32.072	PK
2			2390.000	66.872	34.800	-7.128	74.000	32.072	PK
3		*	2408.896	116.886	84.806	N/A	N/A	32.079	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 02:44
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

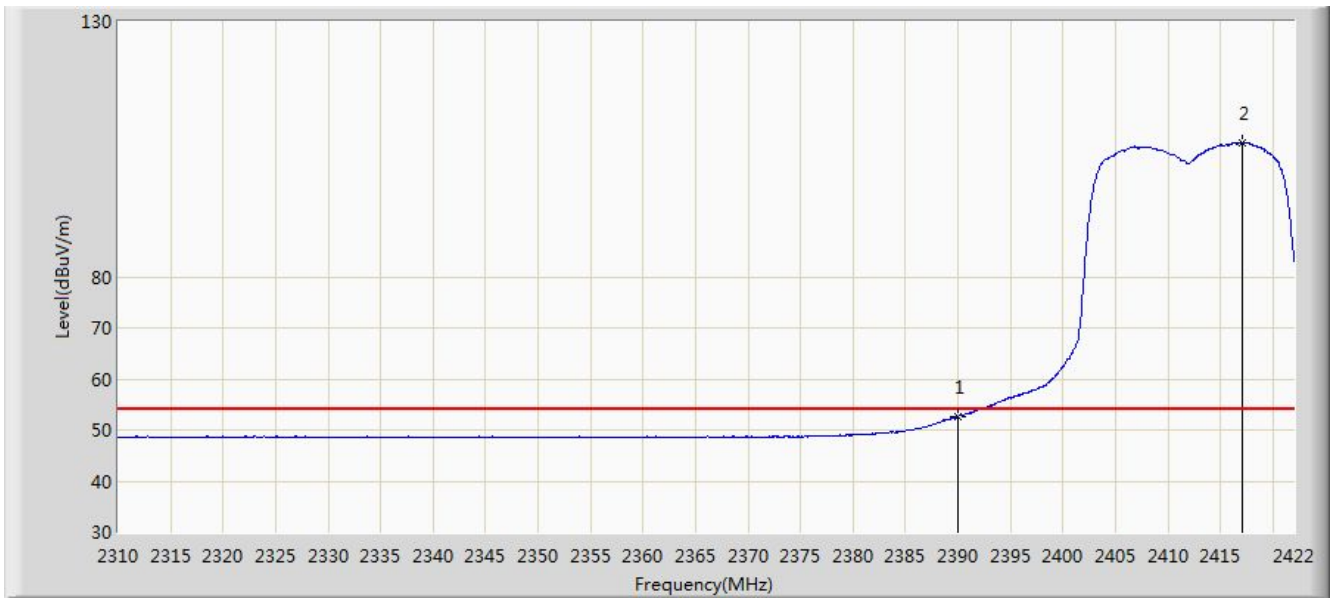

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.684	20.612	-1.316	54.000	32.072	AV
2		*	2417.072	106.261	74.164	N/A	N/A	32.096	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)