


Site: AC1	Time: 2020/01/09 - 02:46
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

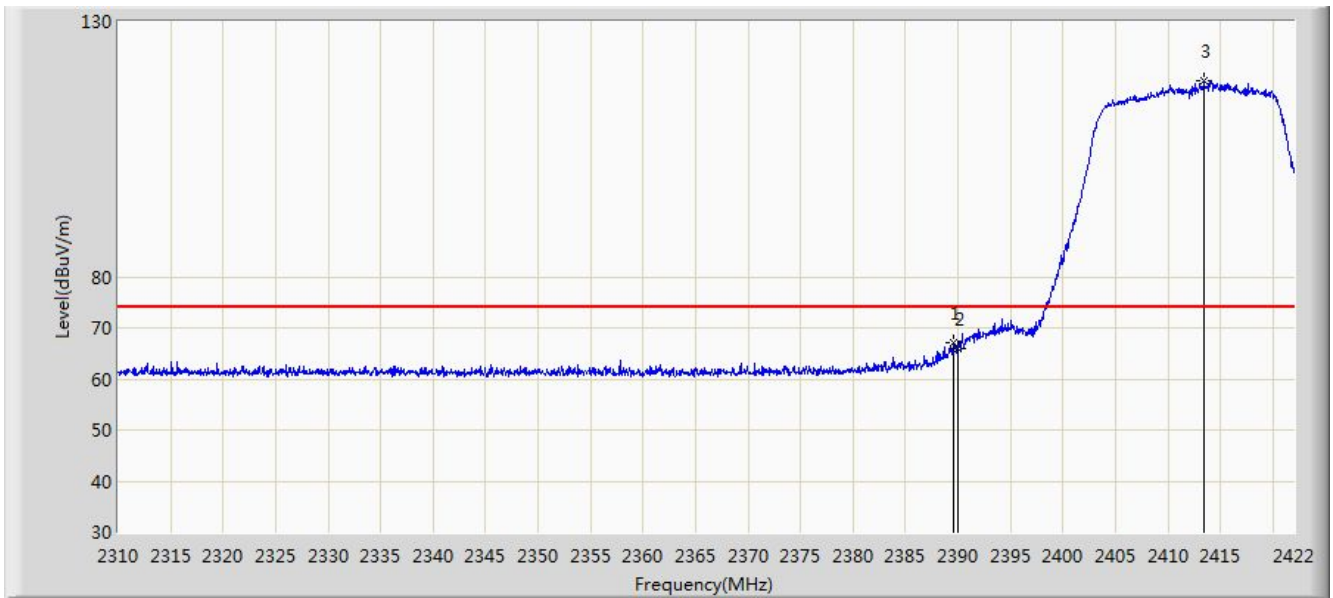


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	67.061	34.989	-6.939	74.000	32.072	PK
2			2390.000	66.078	34.006	-7.922	74.000	32.072	PK
3		*	2413.432	118.404	86.317	N/A	N/A	32.087	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 02:48
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

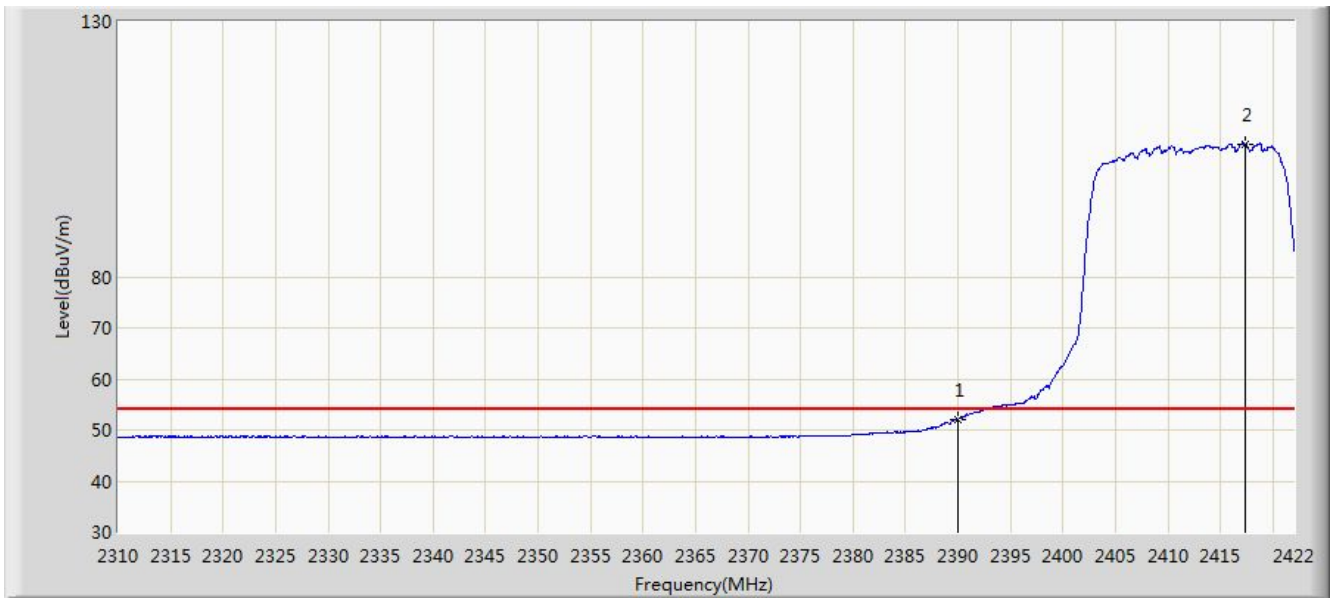


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.111	20.039	-1.889	54.000	32.072	AV
2		*	2417.408	106.079	73.981	N/A	N/A	32.098	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:09
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

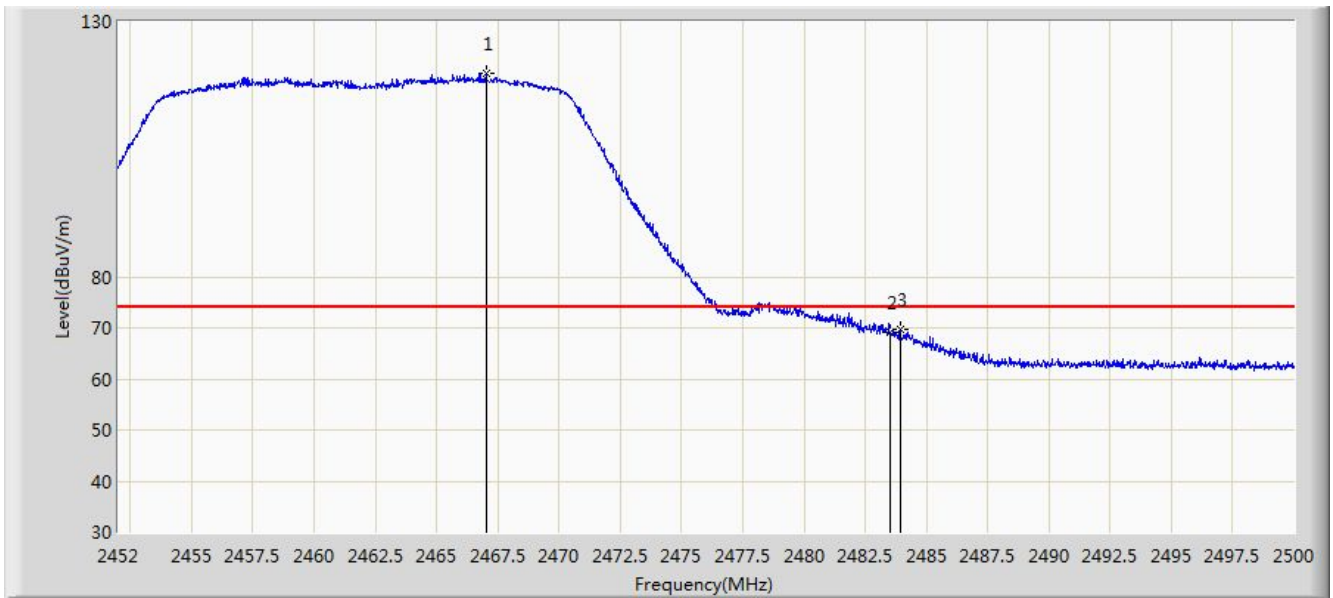


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.024	119.910	87.840	N/A	N/A	32.070	PK
2			2483.500	69.092	37.055	-4.908	74.000	32.037	PK
3			2483.920	69.688	37.652	-4.312	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:14
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

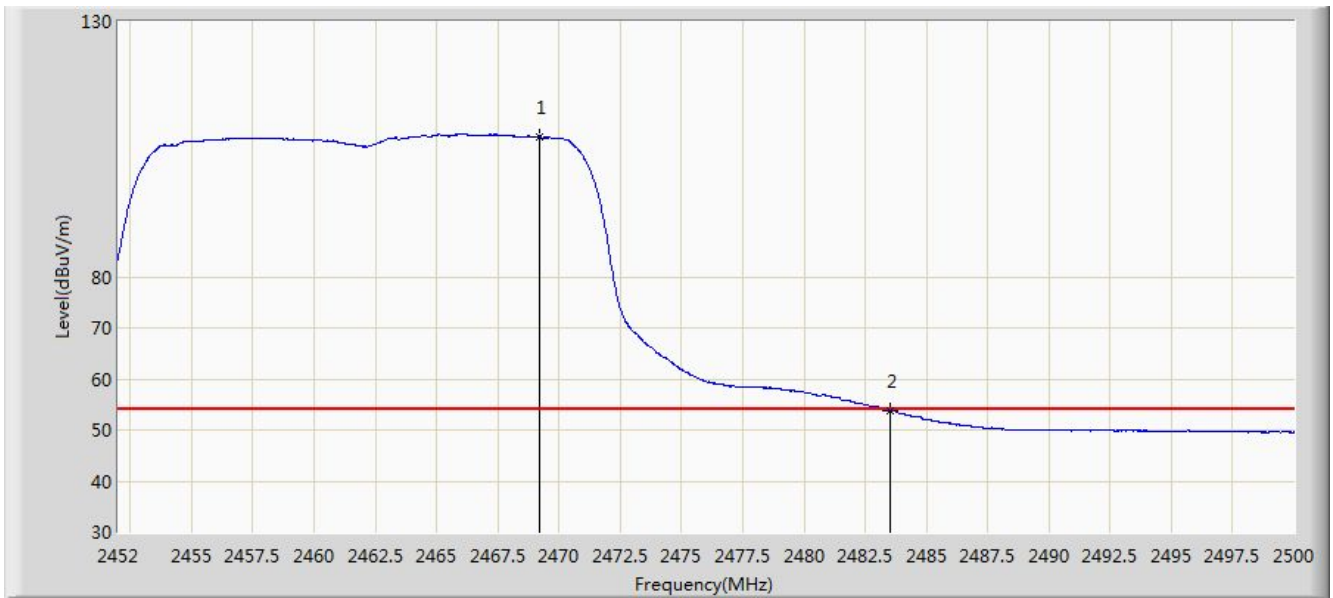


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.208	107.527	75.461	N/A	N/A	32.066	AV
2			2483.500	53.714	21.677	-0.286	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:02
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

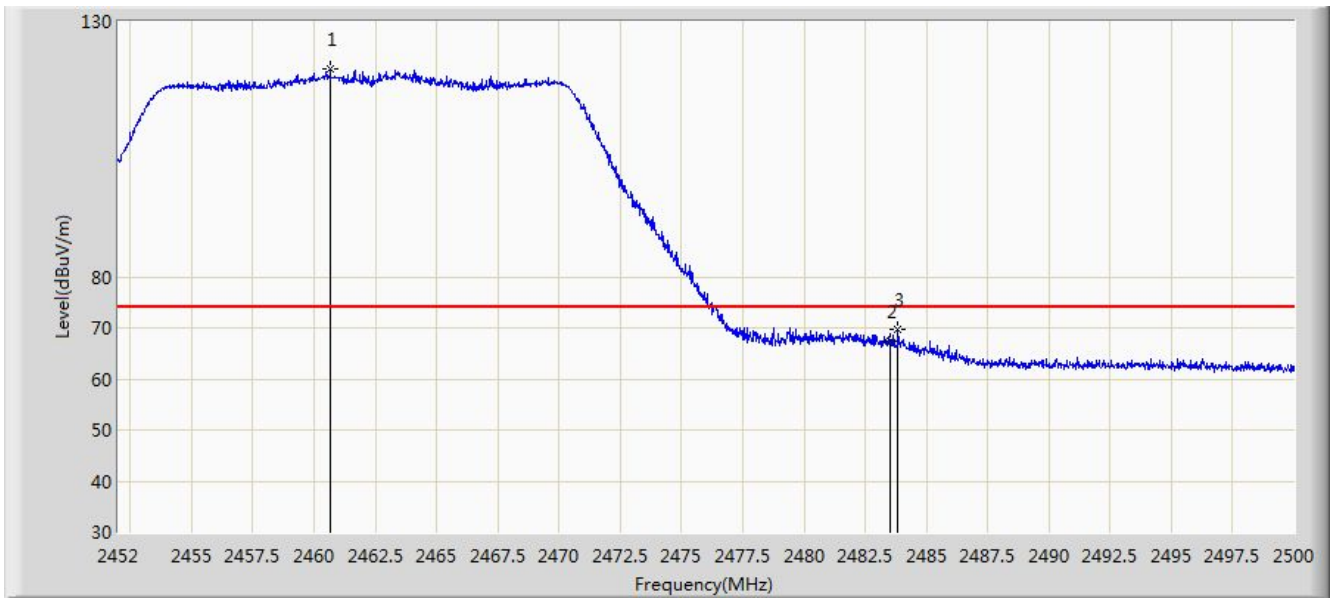


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.664	120.683	88.603	N/A	N/A	32.080	PK
2			2483.500	67.257	35.220	-6.743	74.000	32.037	PK
3			2483.848	69.776	37.740	-4.224	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:04
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

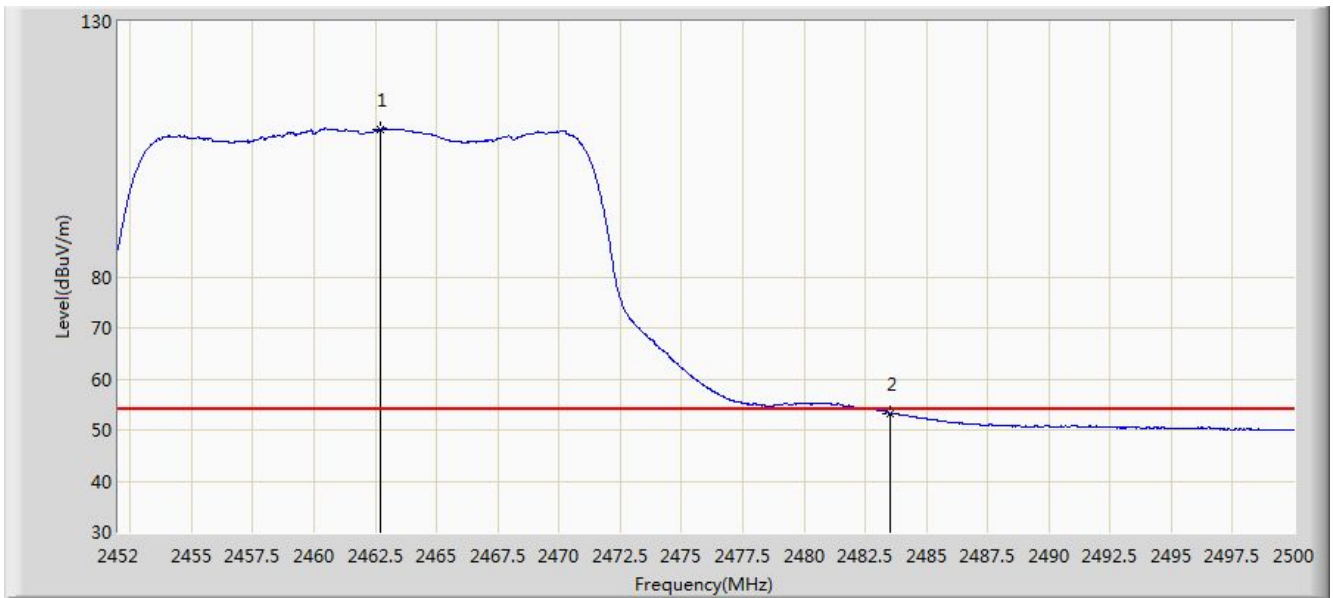


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2462.728	108.817	76.738	N/A	N/A	32.079	AV
2			2483.500	53.302	21.265	-0.698	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:28
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

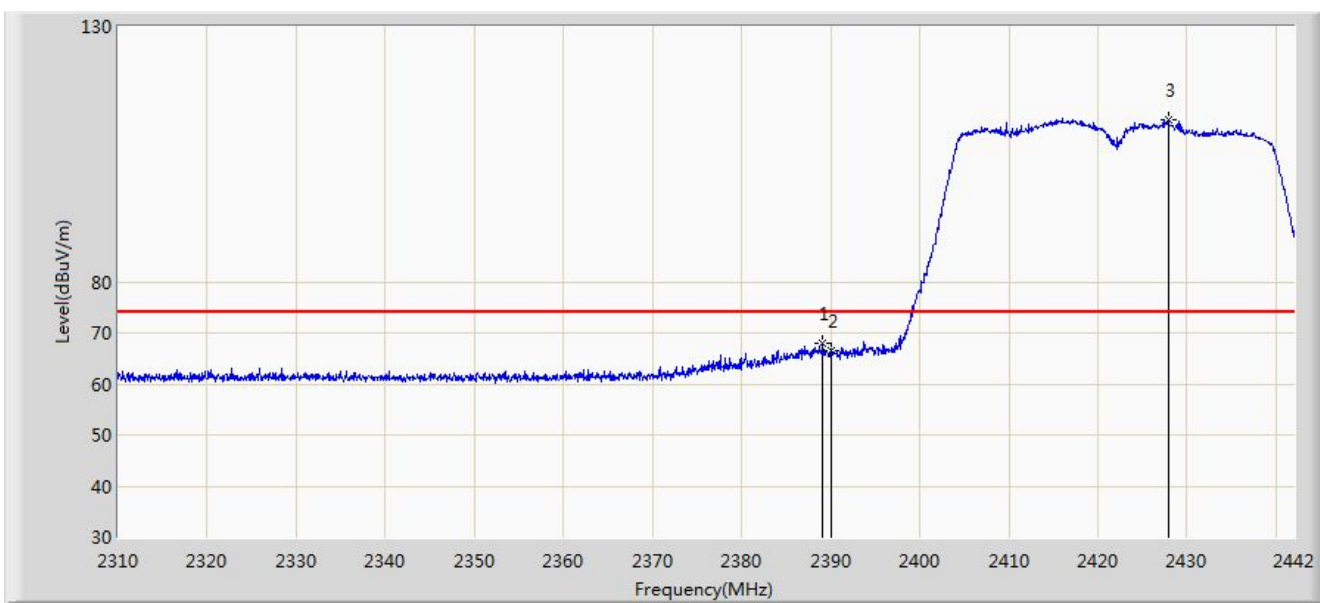


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.134	67.841	35.769	-6.159	74.000	32.072	PK
2			2390.000	66.382	34.310	-7.618	74.000	32.072	PK
3		*	2427.876	111.738	79.613	N/A	N/A	32.125	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:29
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

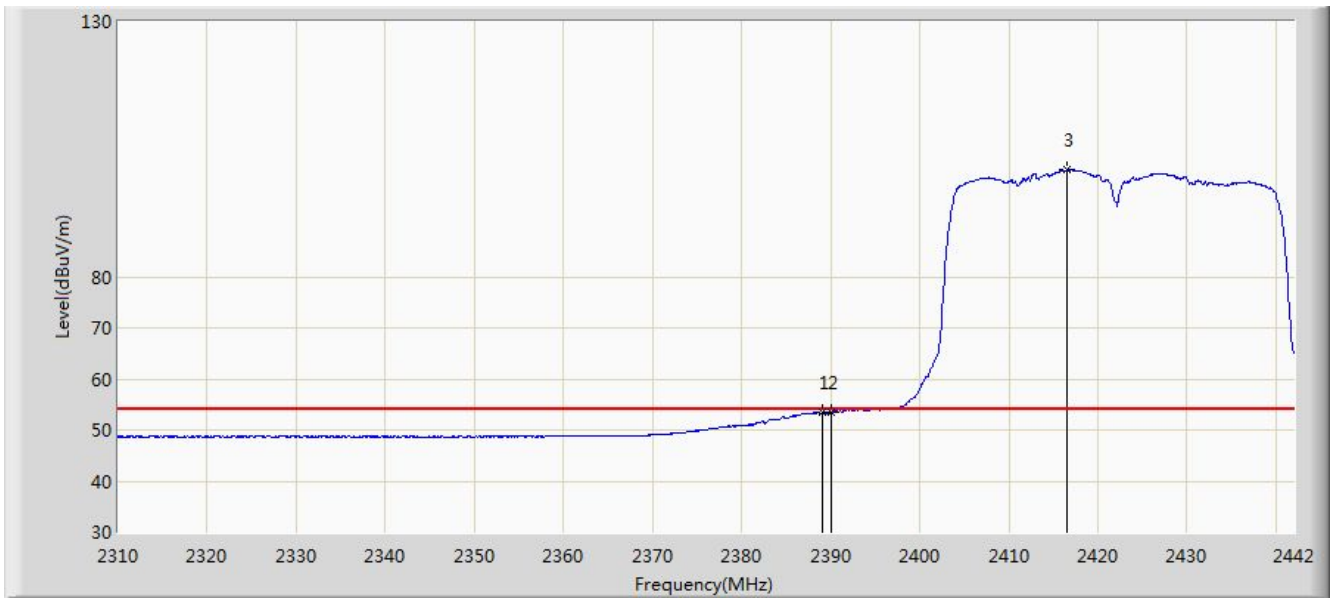


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.134	53.563	21.491	-0.437	54.000	32.072	AV
2			2390.000	53.467	21.395	-0.533	54.000	32.072	AV
3		*	2416.590	100.968	68.872	N/A	N/A	32.095	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:24
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

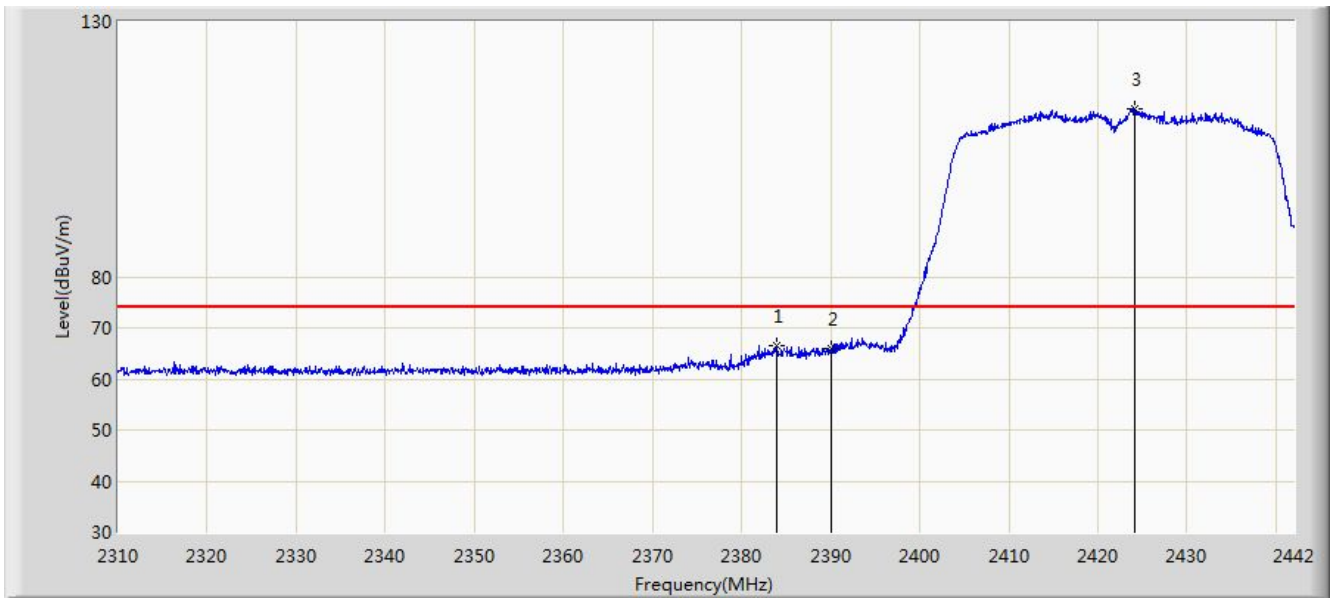


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.920	66.557	34.483	-7.443	74.000	32.074	PK
2			2390.000	65.830	33.758	-8.170	74.000	32.072	PK
3		*	2424.180	112.855	80.739	N/A	N/A	32.116	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:22
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

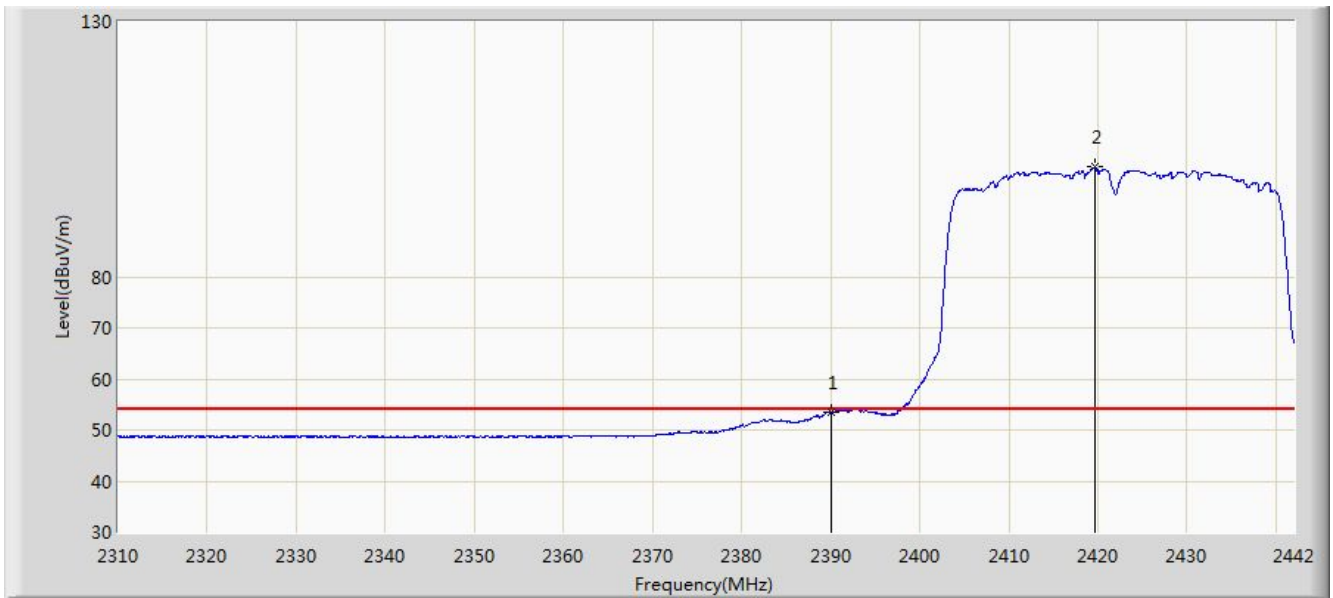


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.481	21.409	-0.519	54.000	32.072	AV
2		*	2419.692	101.598	69.494	N/A	N/A	32.103	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/29 - 16:15
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By POE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

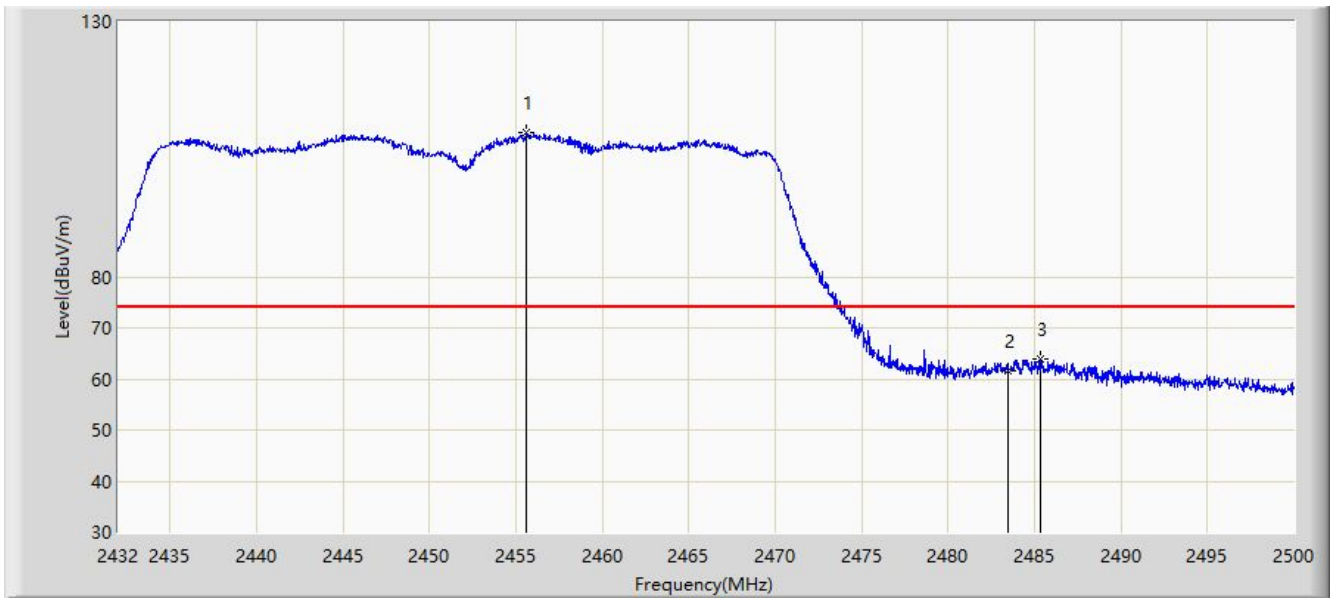


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2455.630	108.378	76.056	N/A	N/A	32.322	PK
2			2483.500	61.605	29.230	-12.395	74.000	32.375	PK
3			2485.312	63.828	31.457	-10.172	74.000	32.371	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/29 - 16:18
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By POE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

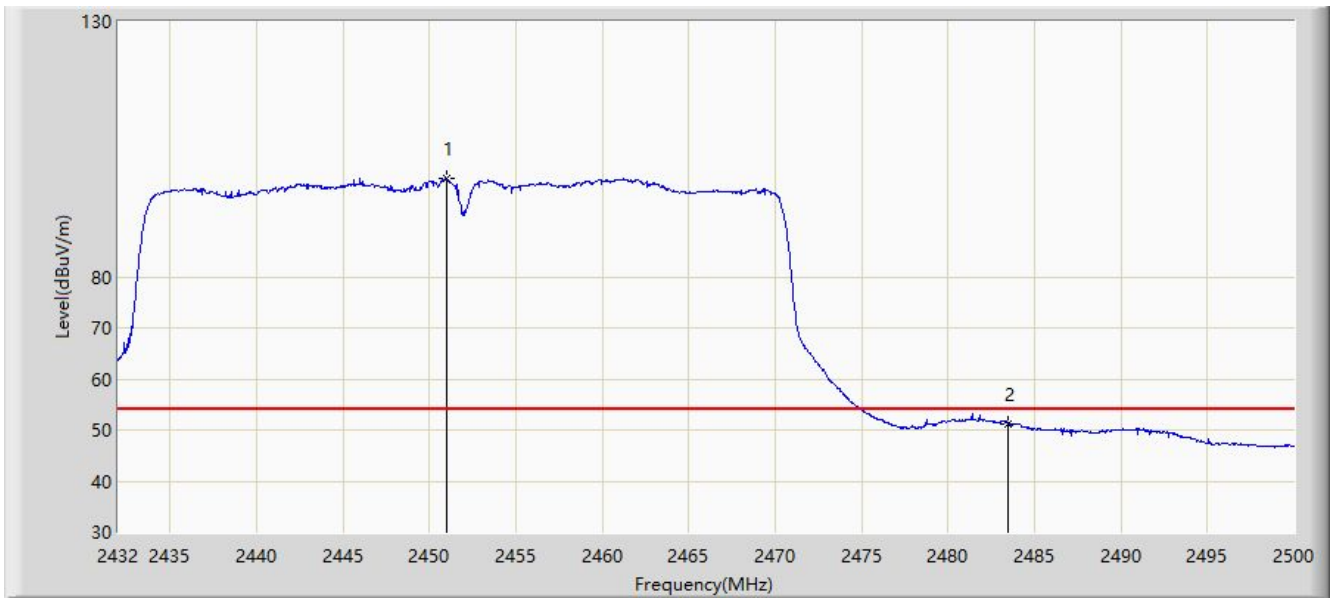


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2451.006	99.187	66.863	N/A	N/A	32.324	AV
2			2483.500	51.220	18.845	-2.780	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/29 - 16:33
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By POE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

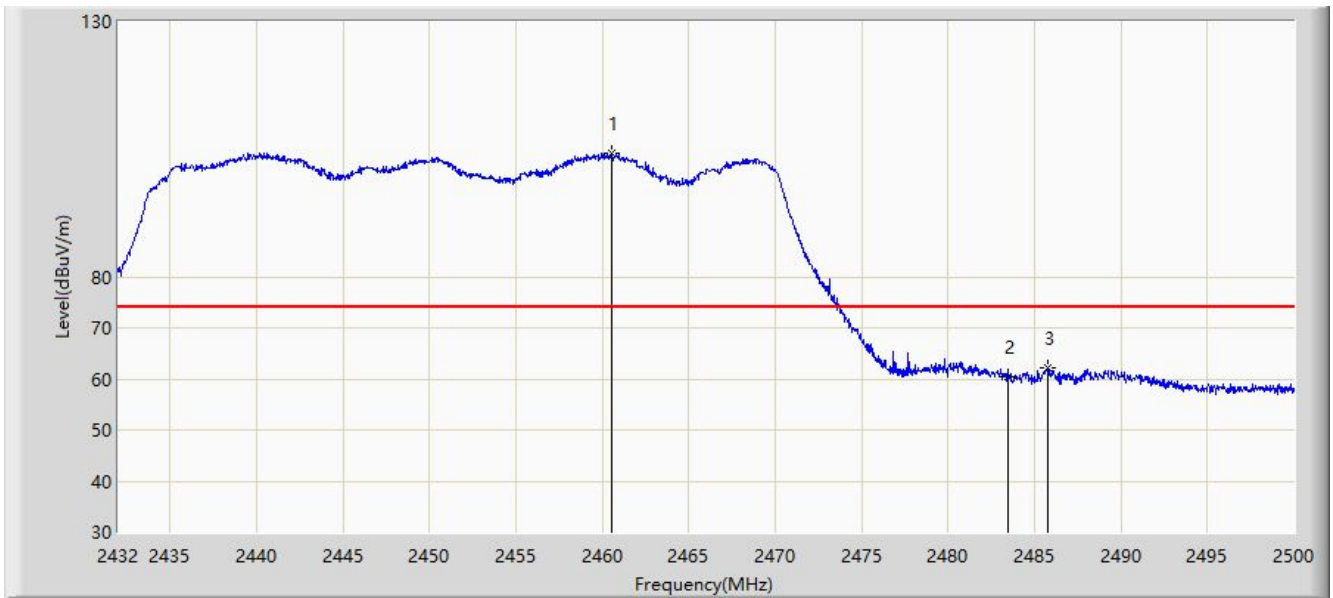


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2460.526	104.099	71.780	N/A	N/A	32.319	PK
2			2483.500	60.334	27.959	-13.666	74.000	32.375	PK
3			2485.754	62.083	29.713	-11.917	74.000	32.370	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/29 - 16:35
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By POE
Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

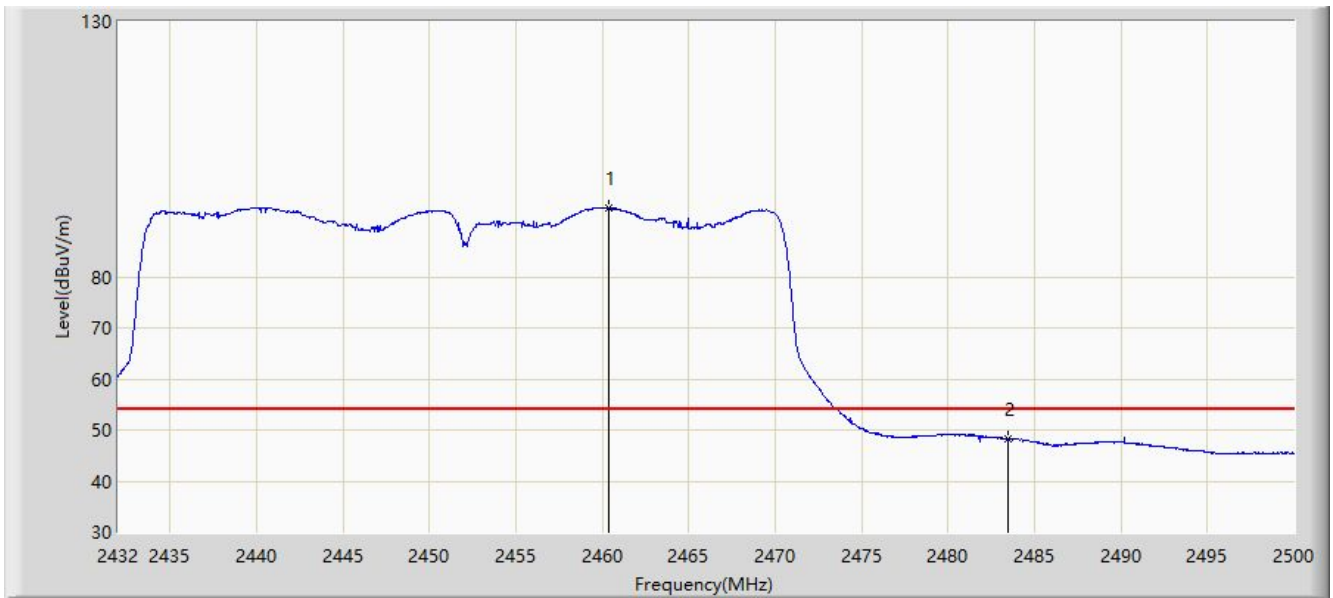


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2460.390	93.529	61.210	N/A	N/A	32.319	AV
2			2483.500	48.283	15.908	-5.717	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:54
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

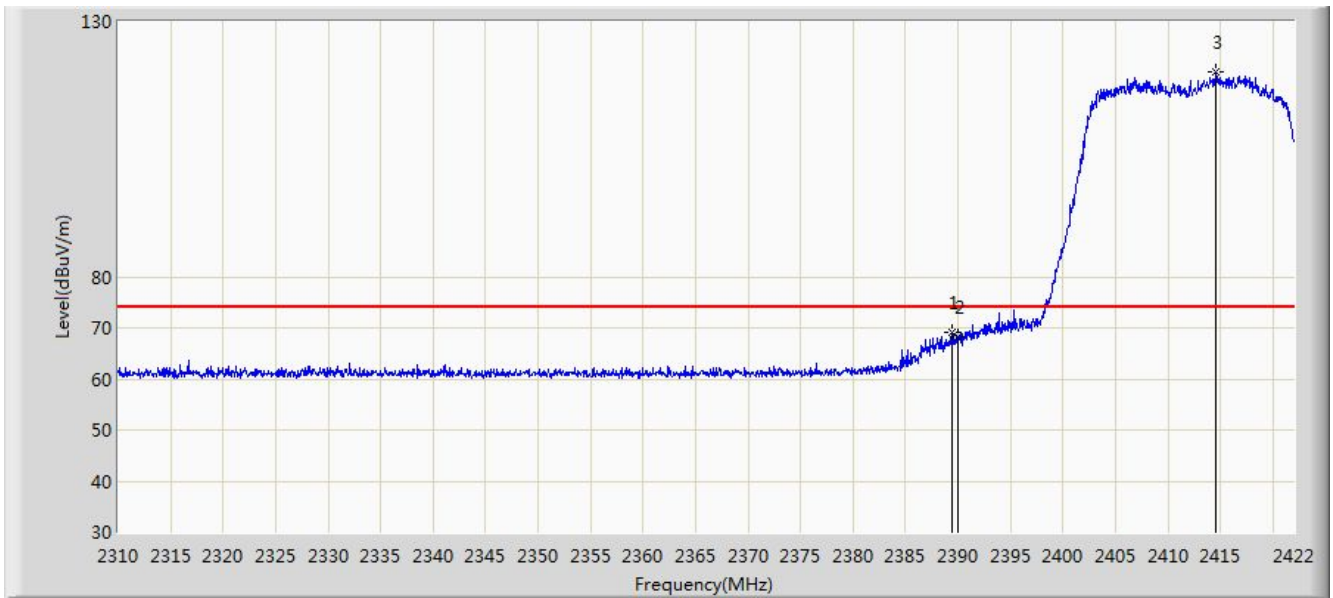


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	69.083	37.011	-4.917	74.000	32.072	PK
2			2390.000	68.129	36.057	-5.871	74.000	32.072	PK
3		*	2414.608	120.117	88.027	N/A	N/A	32.091	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:56
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

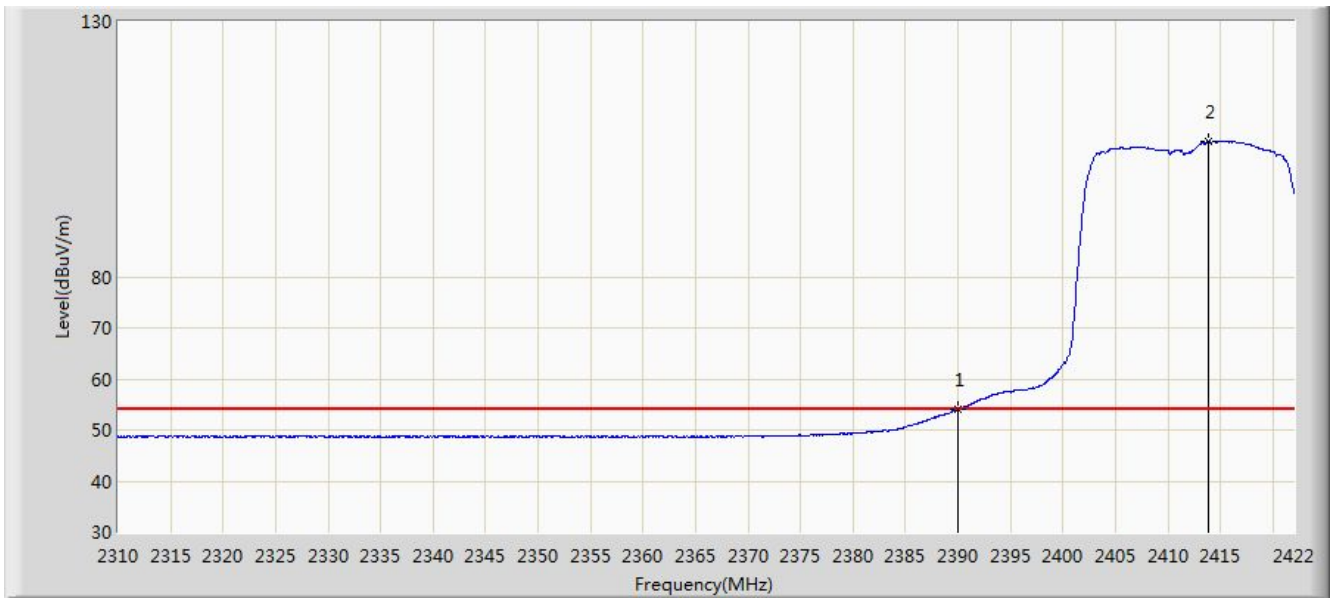


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.977	21.905	-0.023	54.000	32.072	AV
2		*	2413.880	106.561	74.473	N/A	N/A	32.088	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:52
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

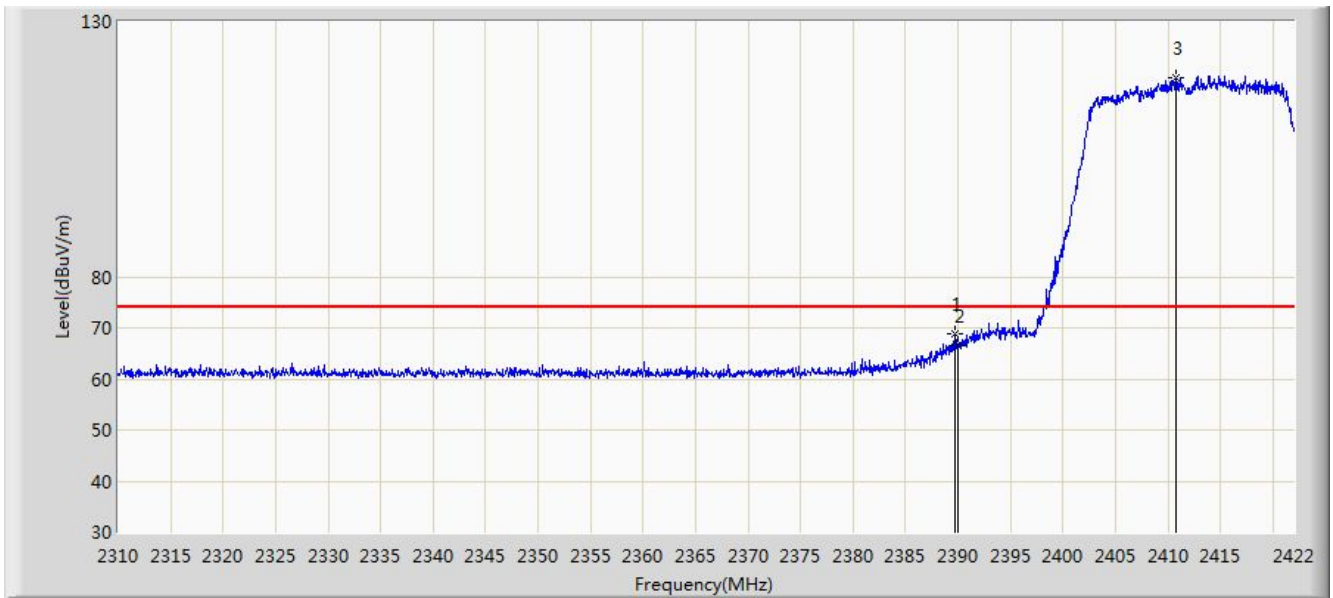


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.744	68.894	36.822	-5.106	74.000	32.072	PK
2			2390.000	66.547	34.475	-7.453	74.000	32.072	PK
3		*	2410.800	119.124	87.043	N/A	N/A	32.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 03:50
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode) with DAP646-RW	

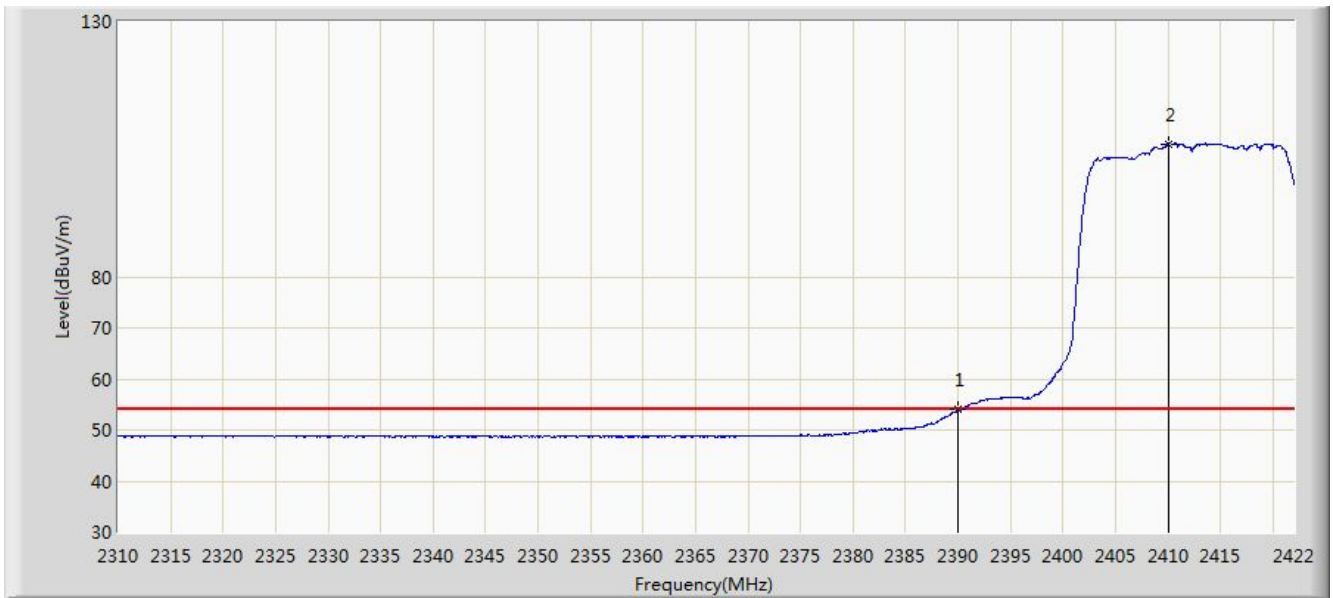


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.954	21.882	-0.046	54.000	32.072	AV
2		*	2410.072	106.030	73.950	N/A	N/A	32.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:33
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

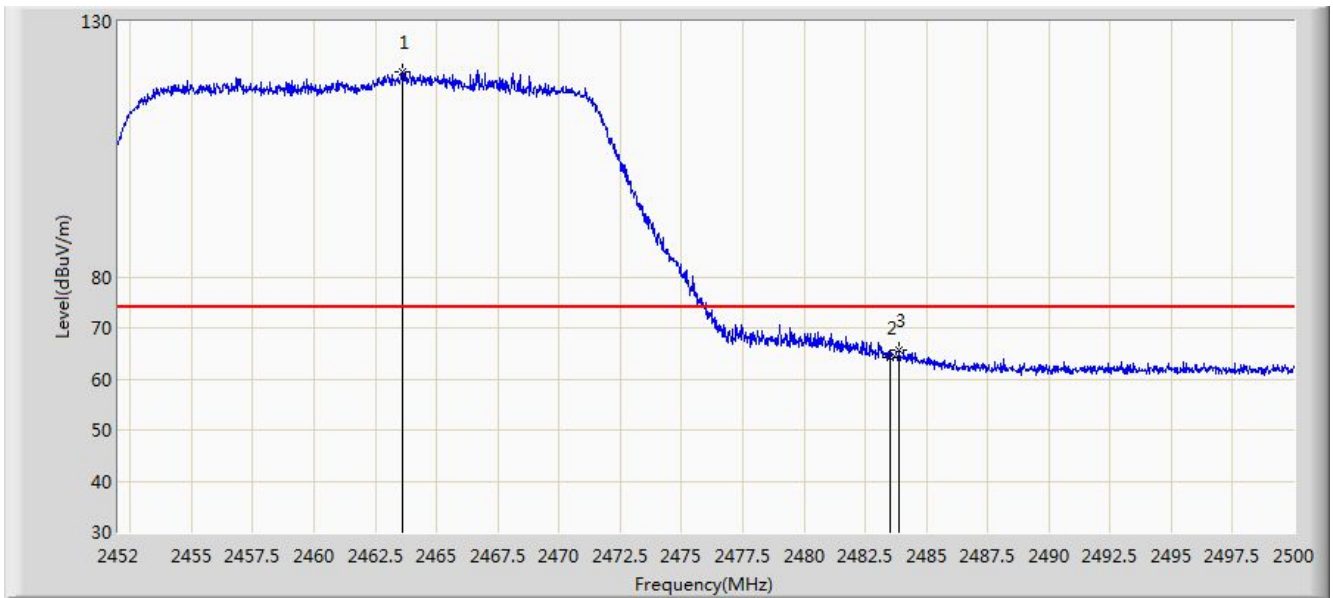


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.592	120.228	88.151	N/A	N/A	32.077	PK
2			2483.500	64.328	32.291	-9.672	74.000	32.037	PK
3			2483.872	65.734	33.698	-8.266	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:34
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

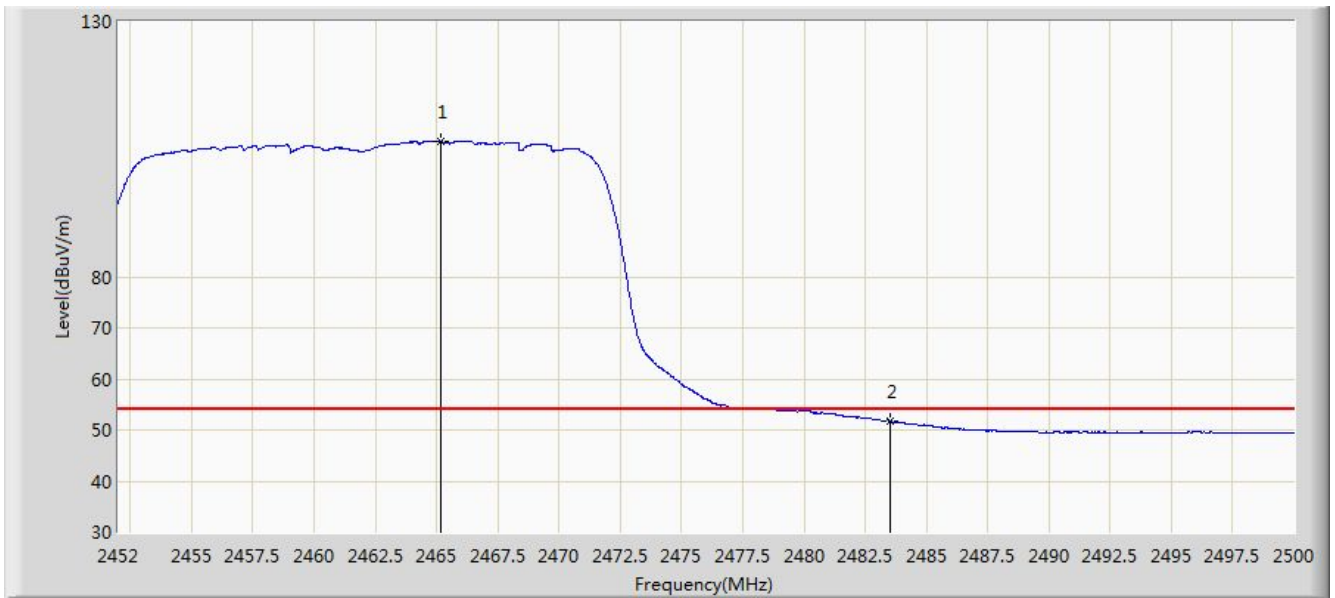


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.176	106.562	74.488	N/A	N/A	32.074	AV
2			2483.500	51.737	19.700	-2.263	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:30
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

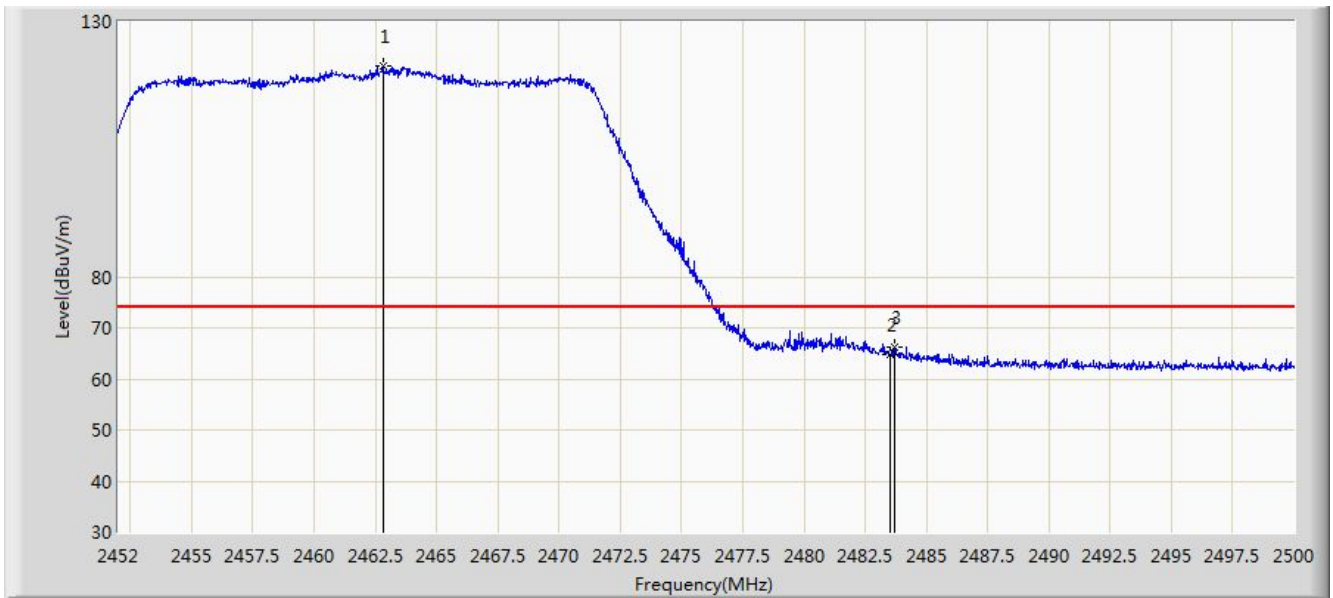


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.800	121.319	89.240	N/A	N/A	32.079	PK
2			2483.500	64.878	32.841	-9.122	74.000	32.037	PK
3			2483.680	66.228	34.191	-7.772	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:17
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode) with DAP646-RW	

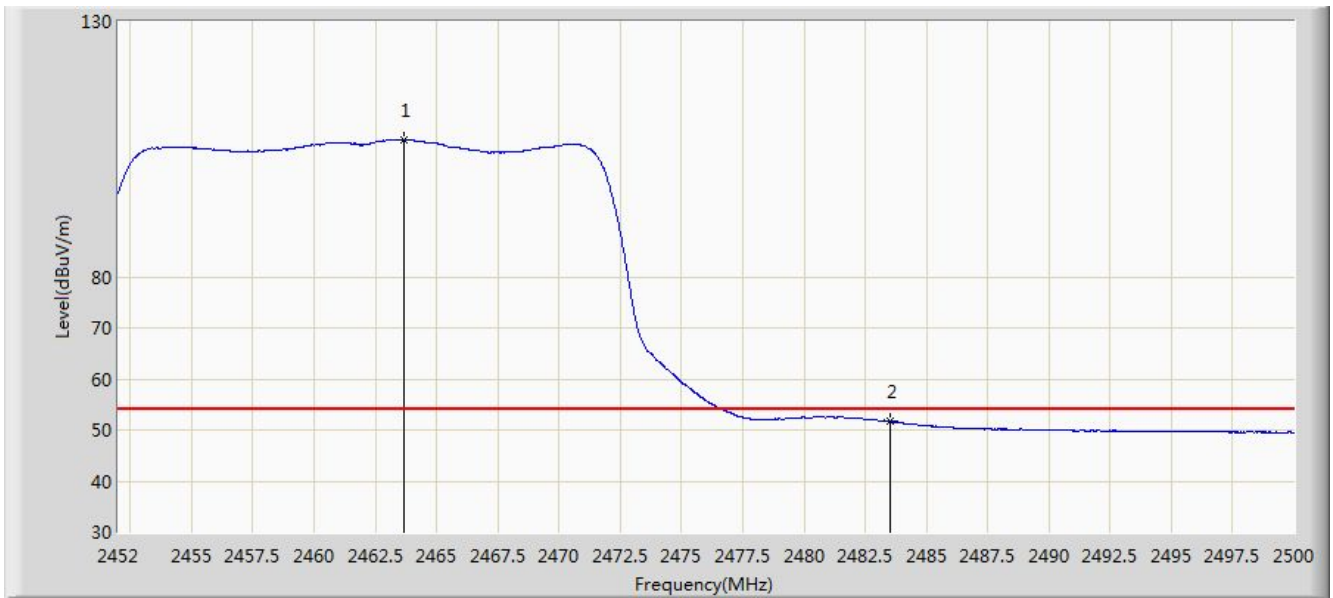


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.688	106.895	74.818	N/A	N/A	32.077	AV
2			2483.500	51.619	19.582	-2.381	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:47
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

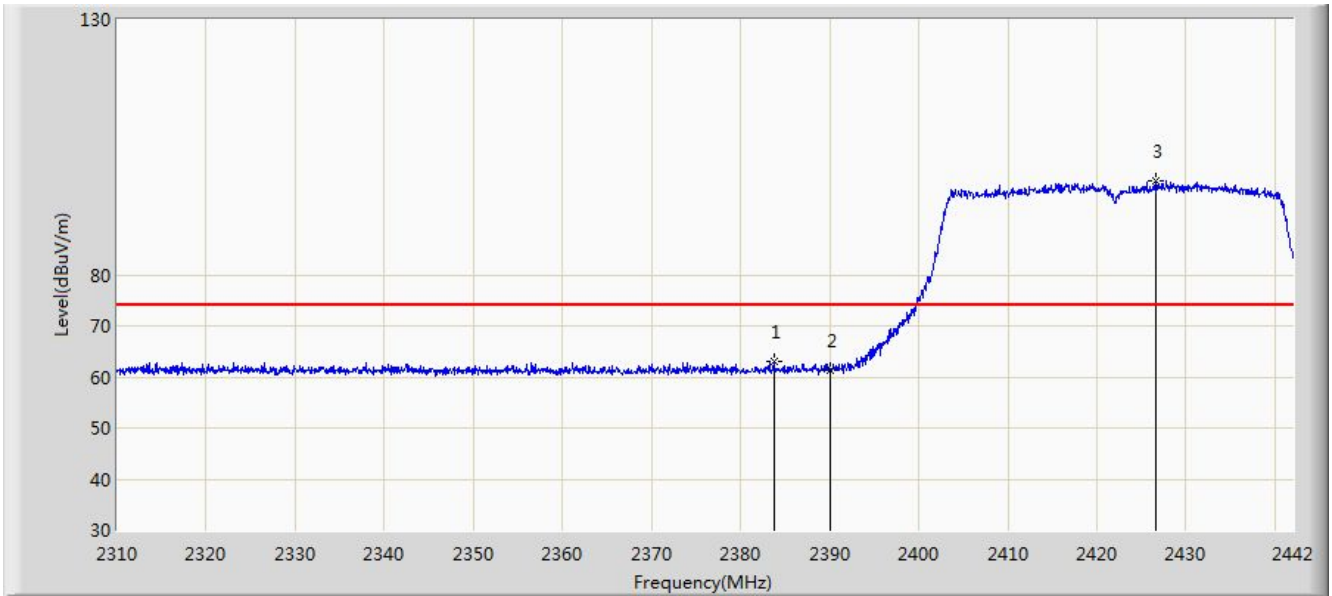


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.788	63.069	30.995	-10.931	74.000	32.074	PK
2			2390.000	61.260	29.188	-12.740	74.000	32.072	PK
3		*	2426.556	98.419	66.297	N/A	N/A	32.122	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:49
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

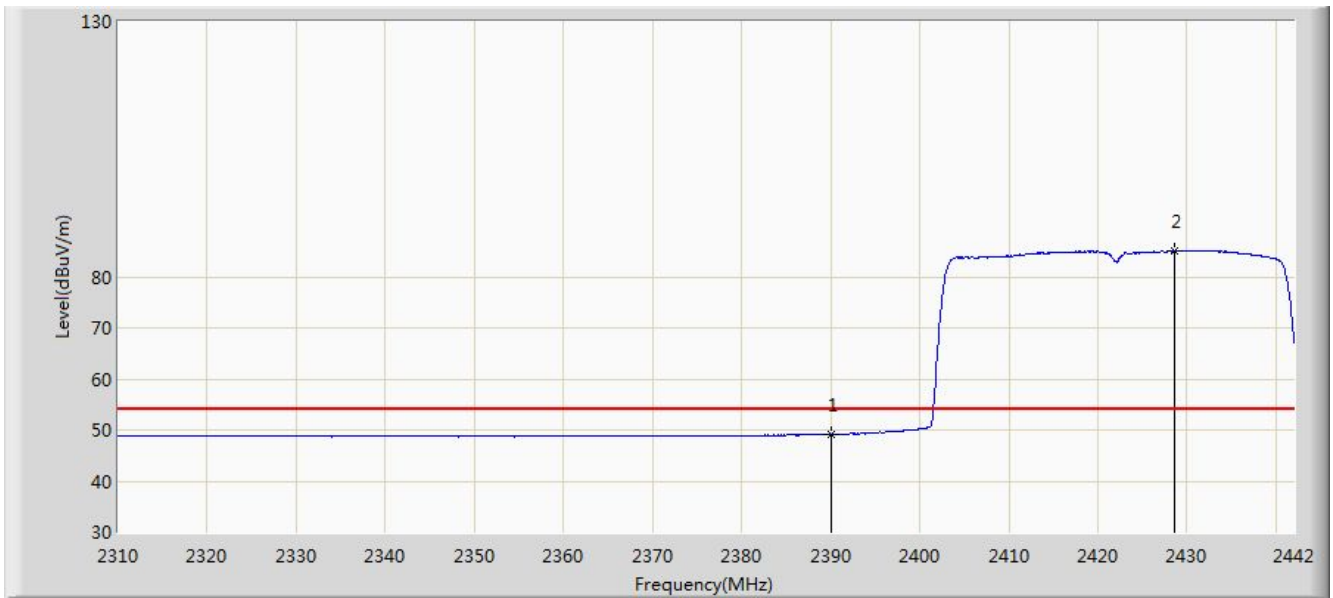


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.086	17.014	-4.914	54.000	32.072	AV
2		*	2428.668	85.164	53.040	N/A	N/A	32.123	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:45
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

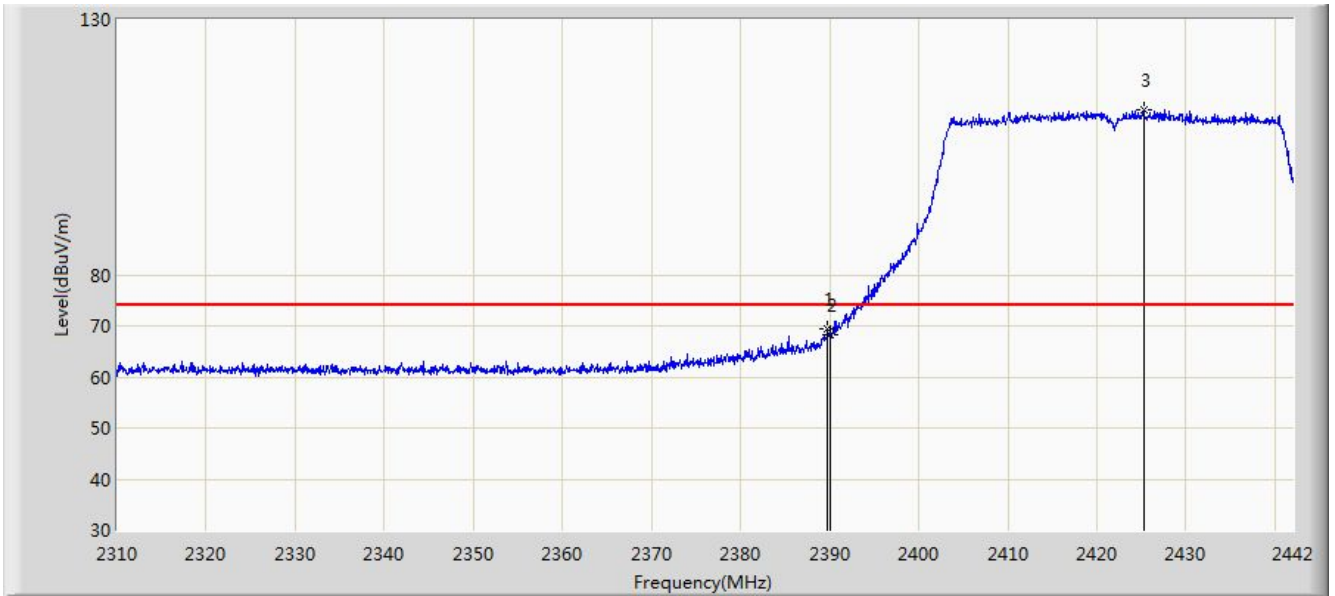


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.728	69.359	37.287	-4.641	74.000	32.072	PK
2			2390.000	68.149	36.077	-5.851	74.000	32.072	PK
3		*	2425.236	112.205	80.087	N/A	N/A	32.118	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 21:44
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode) with DAP646-RW	

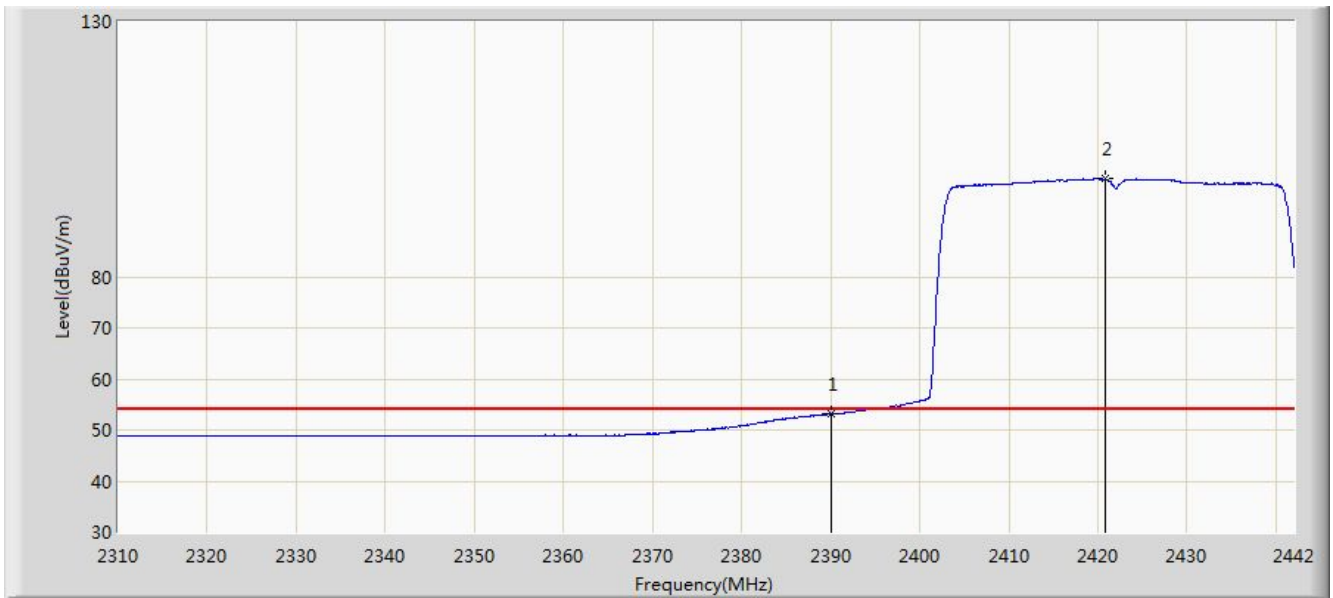


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.094	21.022	-0.906	54.000	32.072	AV
2		*	2420.814	99.145	67.038	N/A	N/A	32.107	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 22:11
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

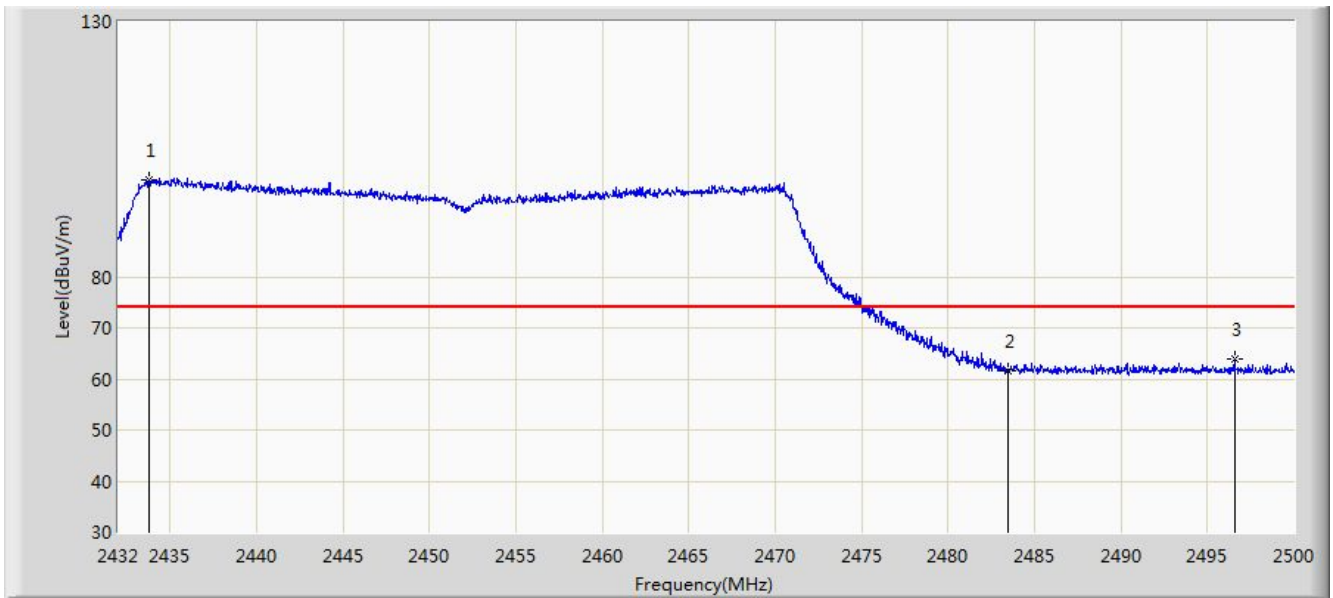


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2433.802	99.110	67.002	N/A	N/A	32.108	PK
2			2483.500	61.623	29.586	-12.377	74.000	32.037	PK
3			2496.566	63.861	31.846	-10.139	74.000	32.014	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 22:14
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

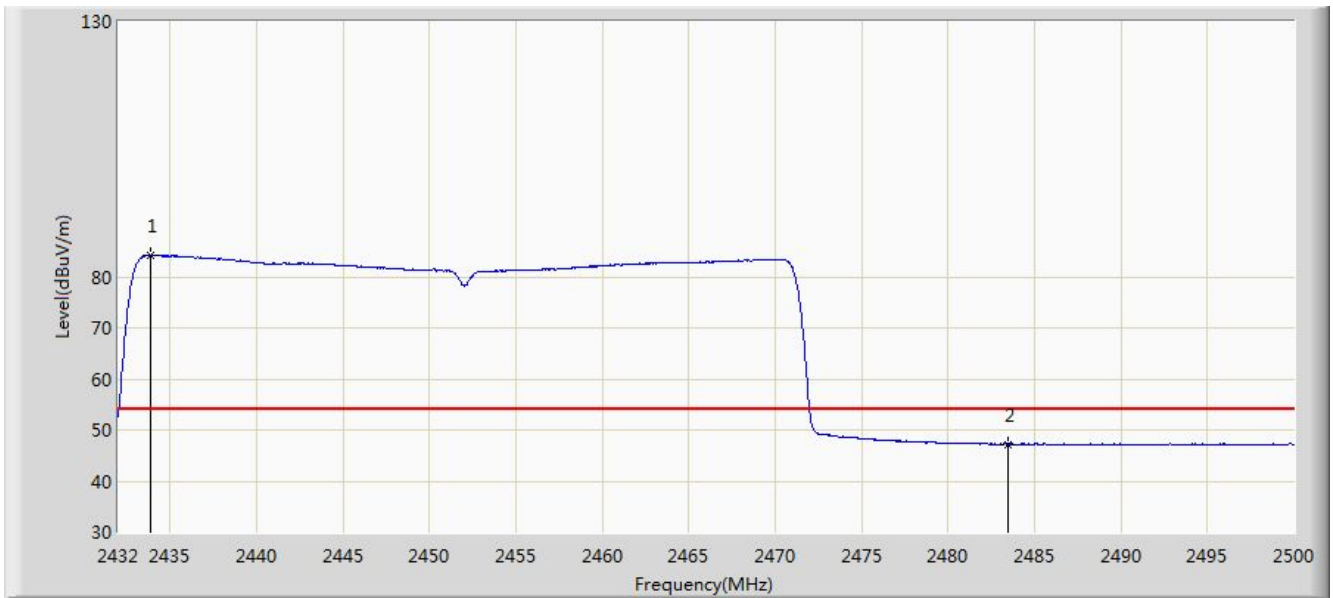


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2433.836	84.229	52.121	N/A	N/A	32.108	AV
2			2483.500	47.194	15.157	-6.806	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 22:06
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

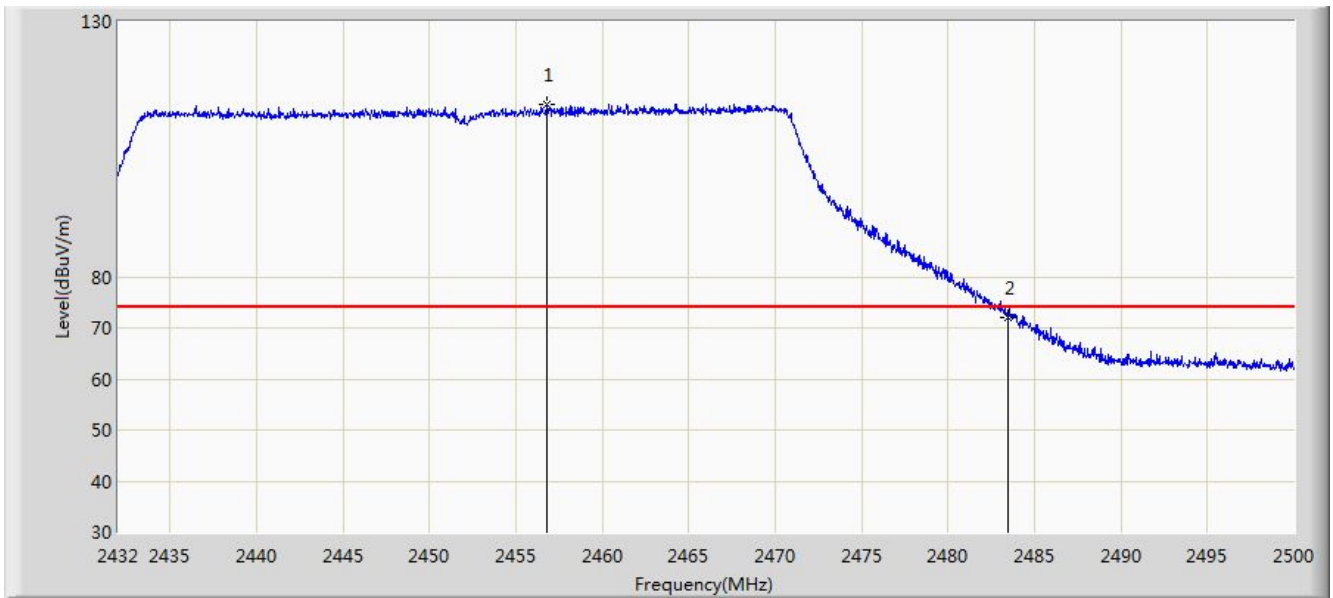


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.786	113.702	81.346	N/A	N/A	32.357	PK
2			2483.500	71.933	39.896	-2.067	74.000	32.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/09 - 22:09
Limit: FCC_Part15.209_RSE (3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode) with DAP646-RW	

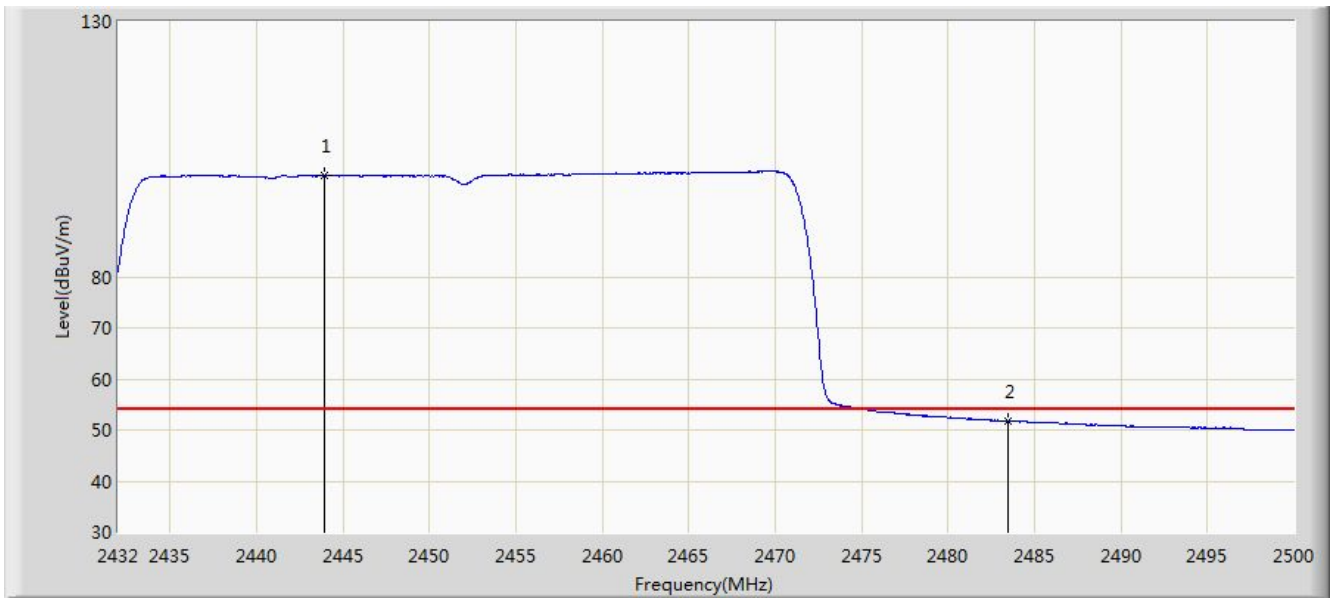


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.900	99.827	67.750	N/A	N/A	32.076	AV
2			2483.500	51.771	19.734	-2.229	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:26
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

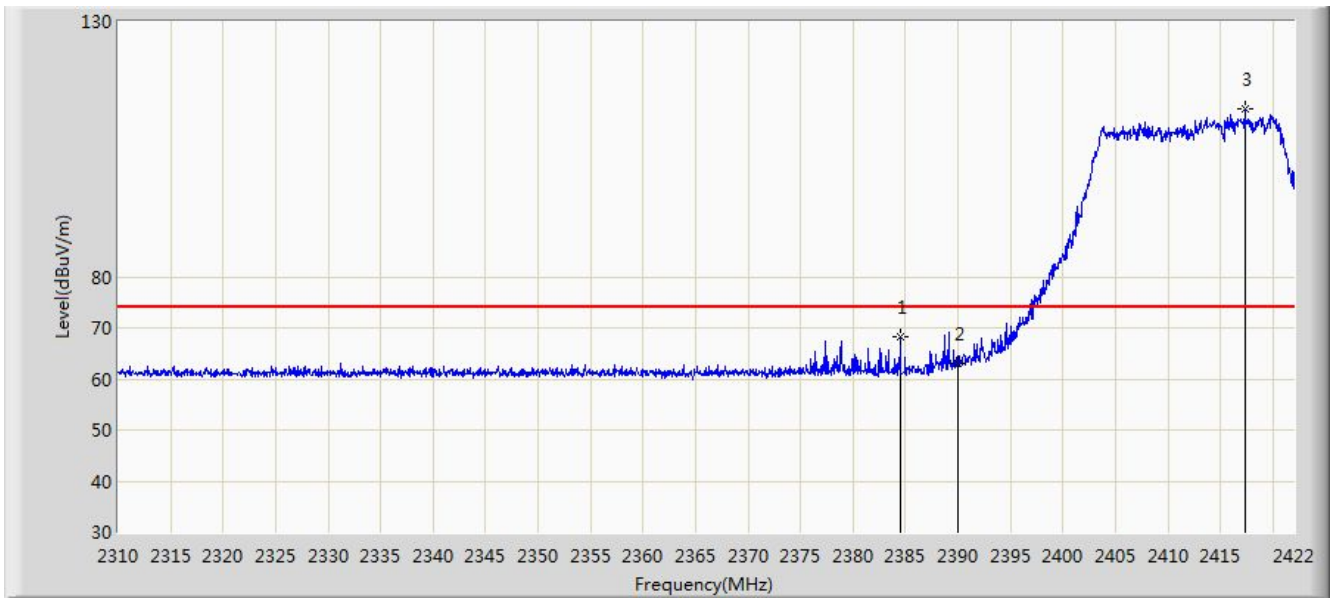


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.536	68.165	36.091	-5.835	74.000	32.074	PK
2			2390.000	63.098	31.026	-10.902	74.000	32.072	PK
3		*	2417.352	113.018	80.920	N/A	N/A	32.097	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:27
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

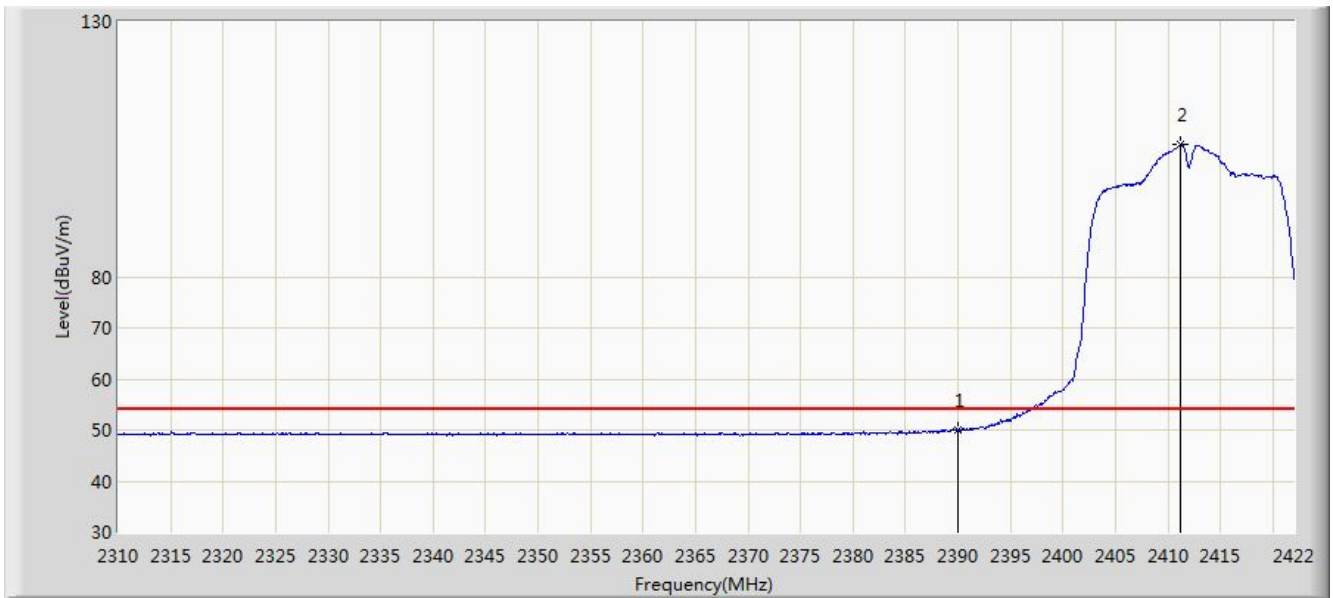


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.891	17.819	-4.109	54.000	32.072	AV
2		*	2411.248	105.961	73.880	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:22
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

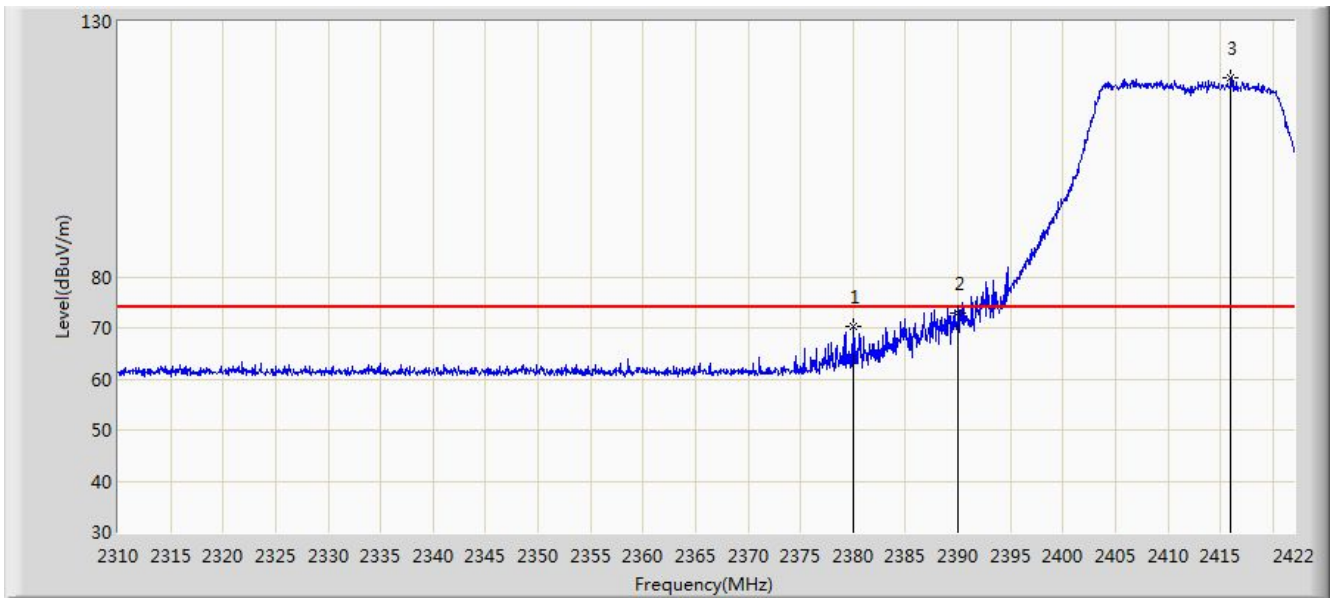


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.000	70.345	38.270	-3.655	74.000	32.075	PK
2			2390.000	72.906	40.834	-1.094	74.000	32.072	PK
3		*	2416.008	118.956	86.862	N/A	N/A	32.094	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:18
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

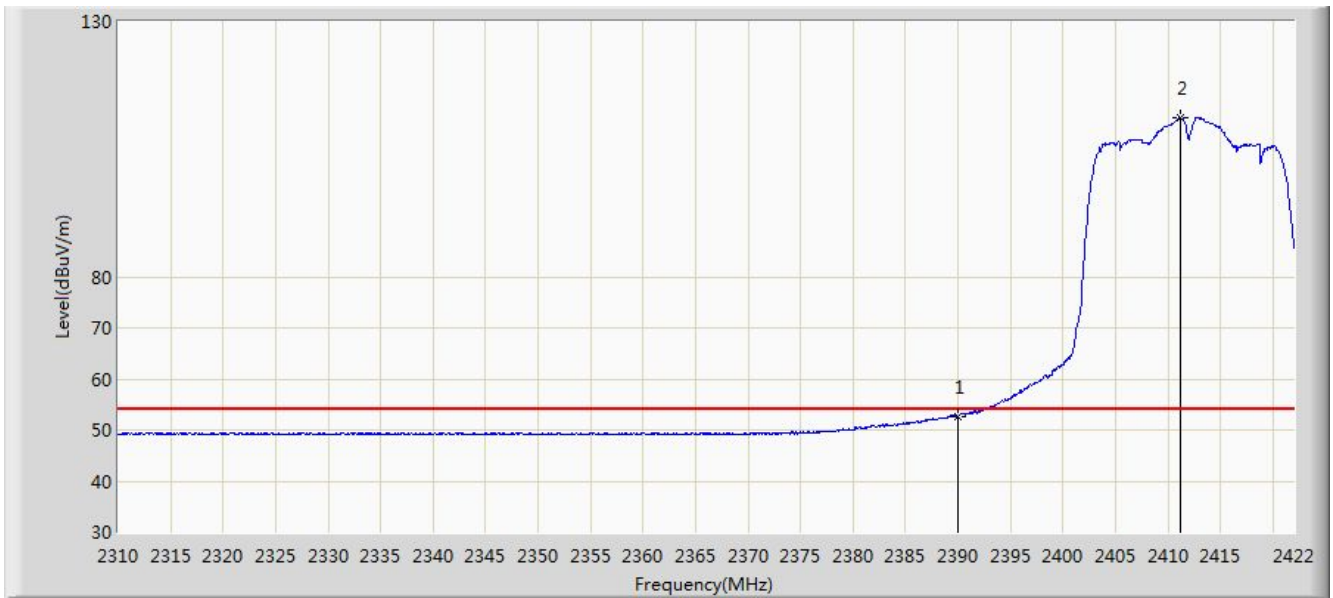


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.681	20.609	-1.319	54.000	32.072	AV
2	X	*	2411.192	111.242	79.161	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:41
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

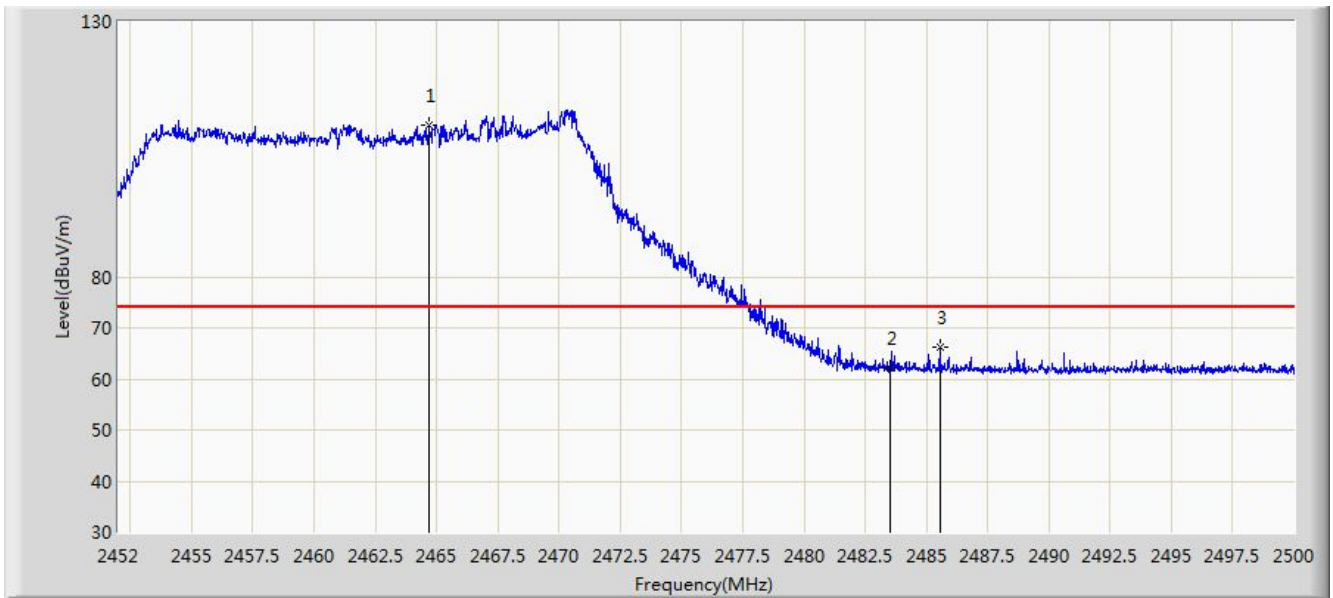


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.720	109.776	77.701	N/A	N/A	32.075	PK
2			2483.500	62.205	30.168	-11.795	74.000	32.037	PK
3			2485.552	66.355	34.322	-7.645	74.000	32.033	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:43
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

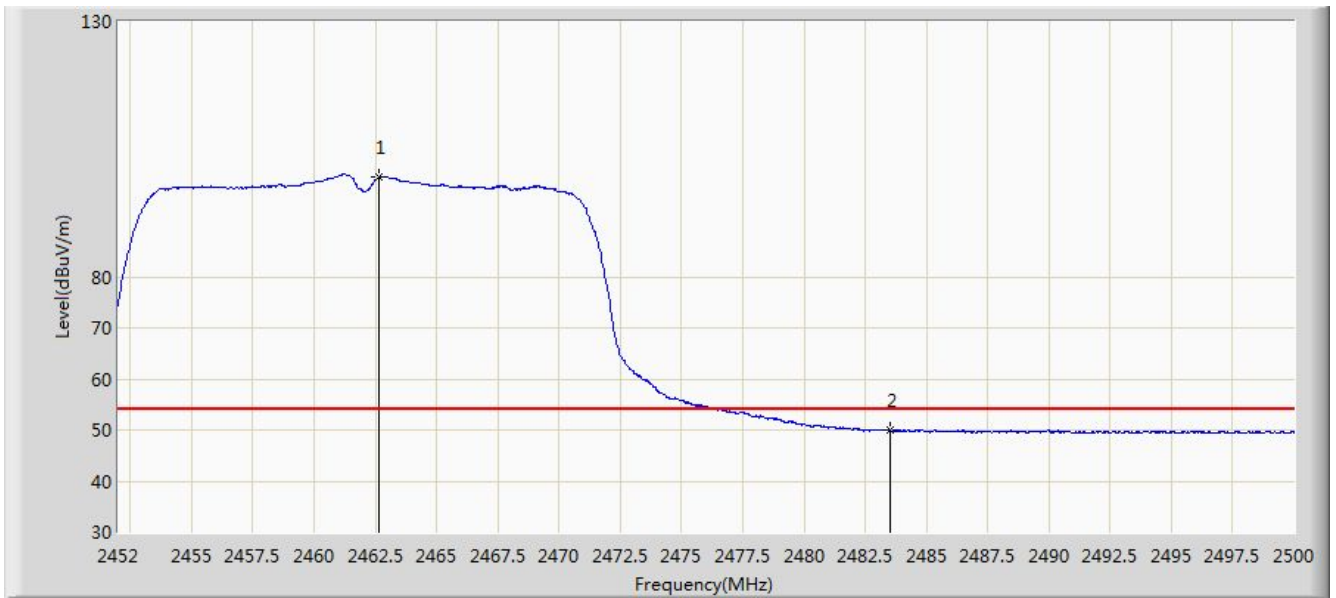


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.632	99.448	67.369	N/A	N/A	32.079	AV
2			2483.500	49.900	17.863	-4.100	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:40
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

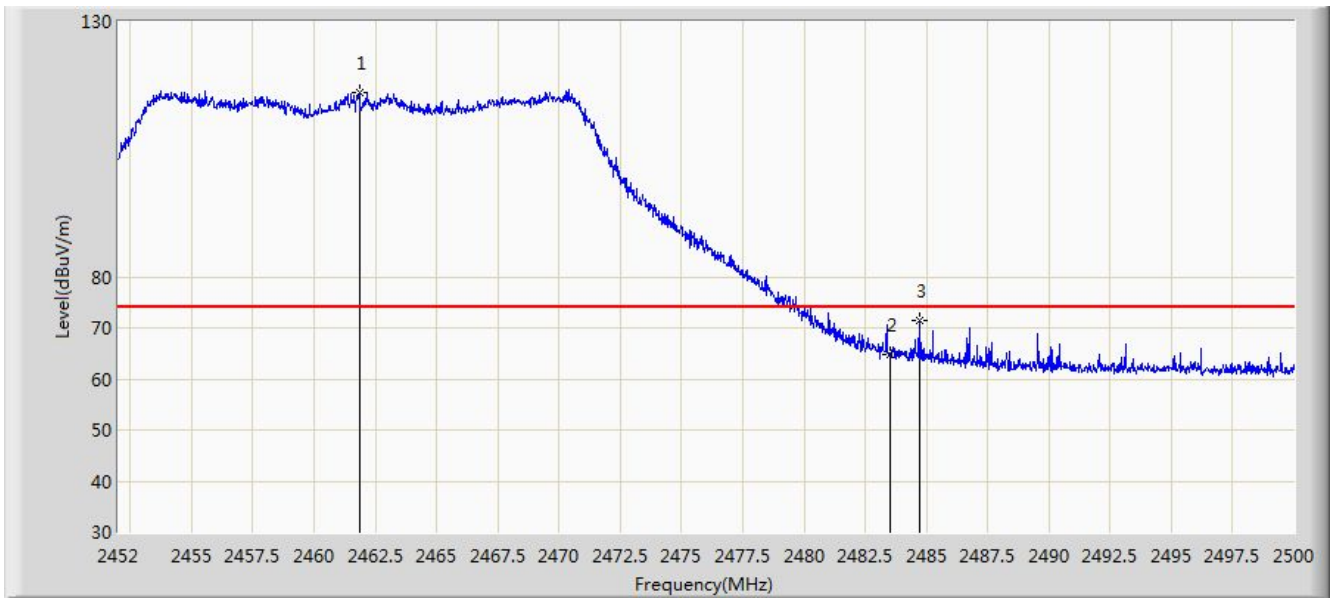


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.840	116.195	84.114	N/A	N/A	32.080	PK
2			2483.500	64.691	32.654	-9.309	74.000	32.037	PK
3			2484.712	71.422	39.387	-2.578	74.000	32.035	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/12/29 - 00:36
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

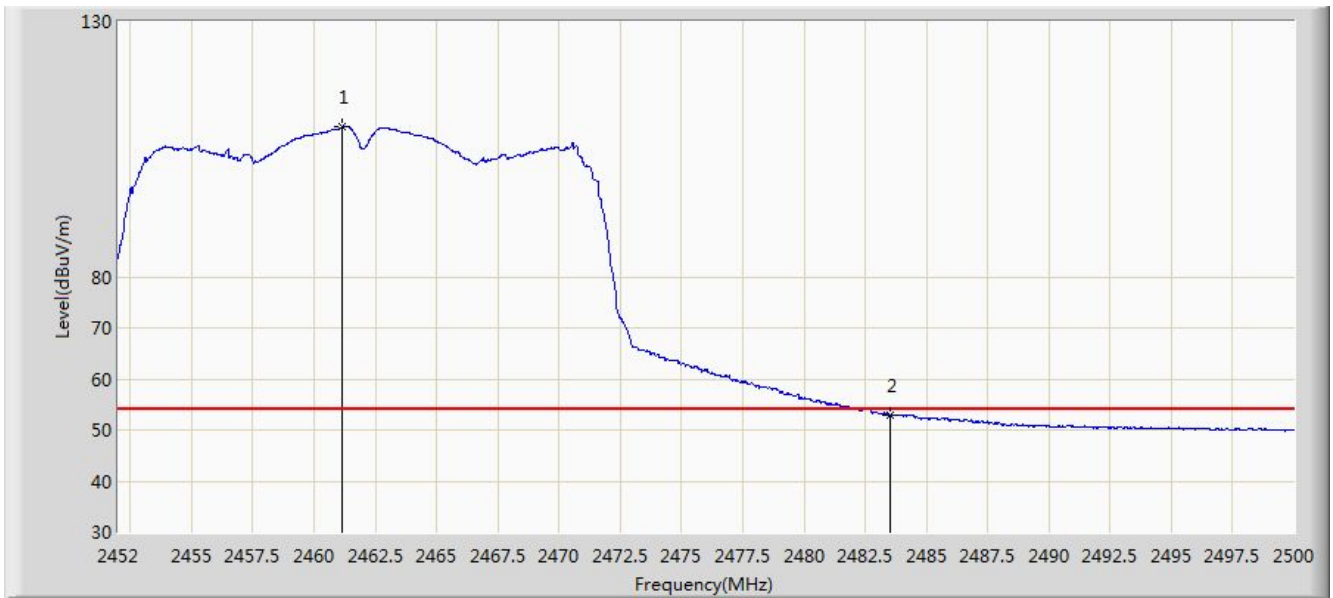


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2461.168	109.358	77.278	N/A	N/A	32.081	AV
2			2483.500	52.965	20.928	-1.035	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:14
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

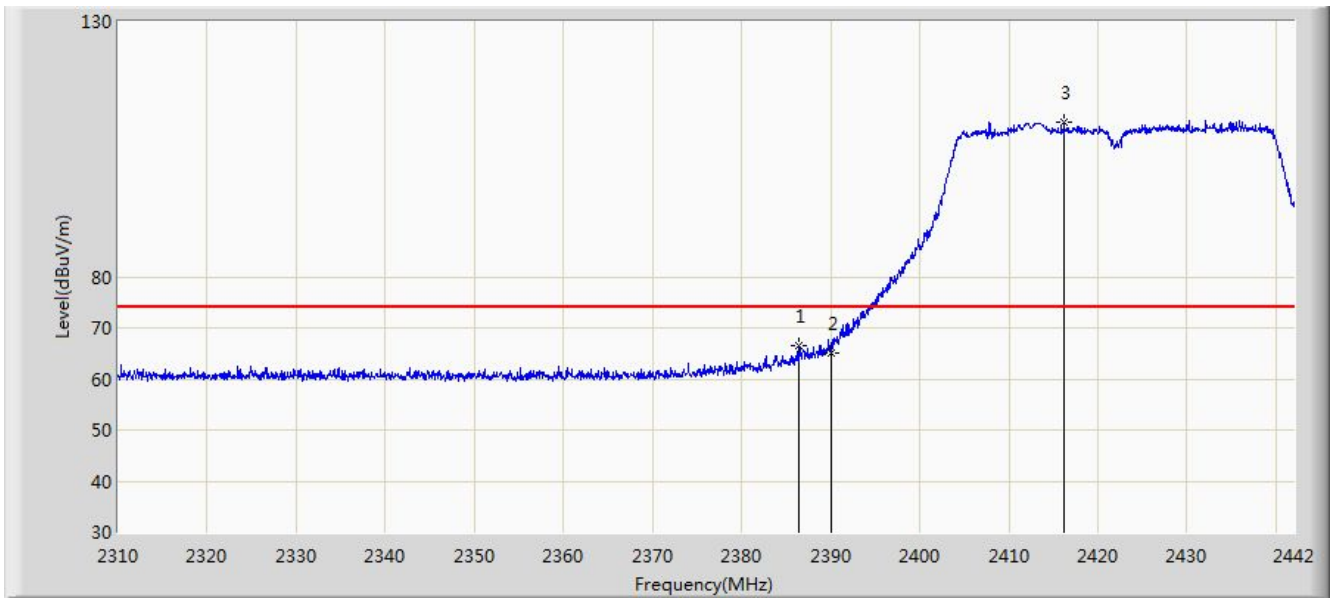


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.494	66.393	34.320	-7.607	74.000	32.073	PK
2			2390.000	65.202	33.130	-8.798	74.000	32.072	PK
3		*	2416.194	110.324	78.230	N/A	N/A	32.095	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:06
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

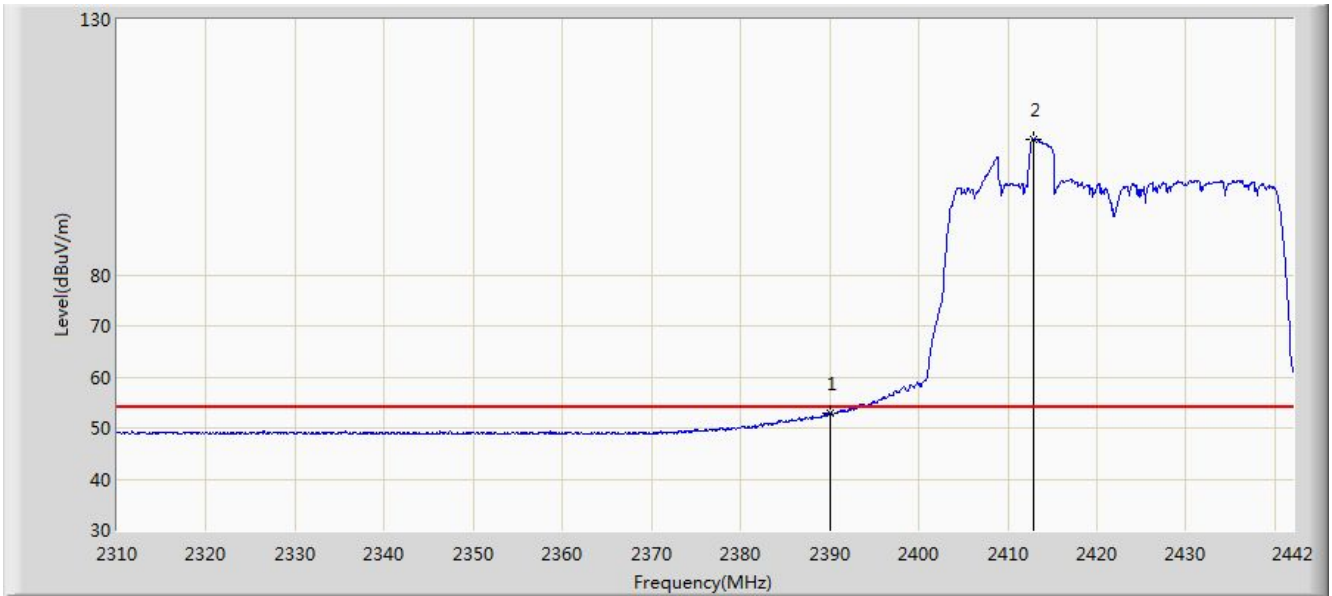


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.823	20.751	-1.177	54.000	32.072	AV
2		*	2412.828	106.570	74.484	N/A	N/A	32.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:14
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

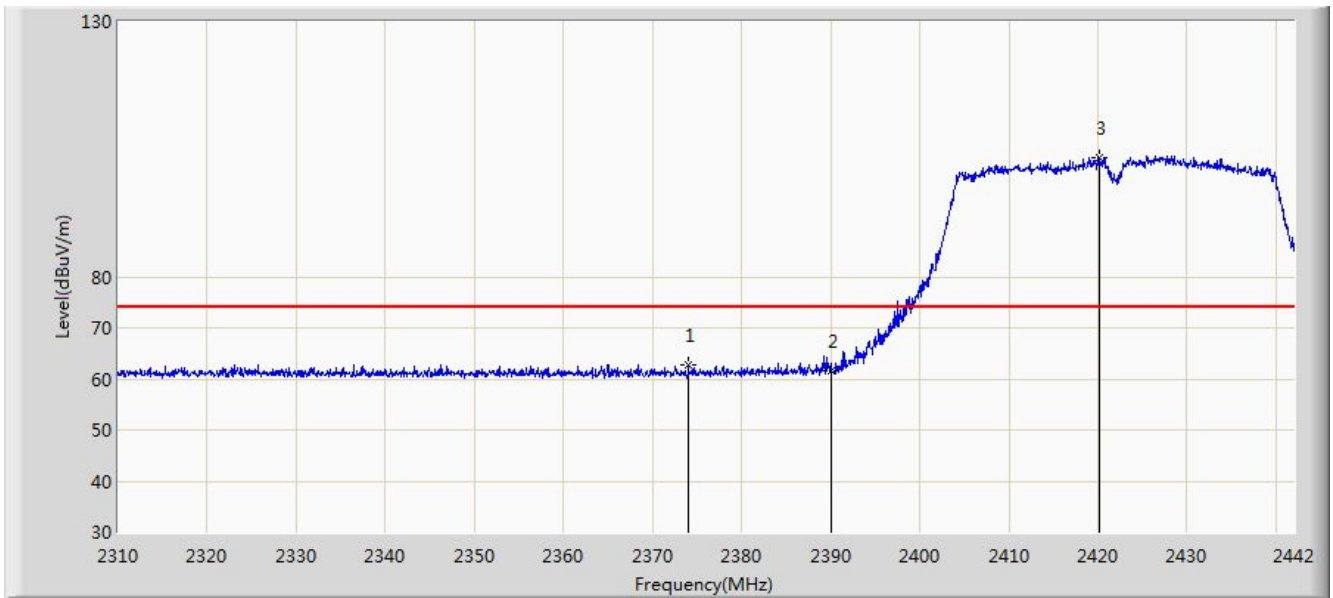


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.020	62.840	30.756	-11.160	74.000	32.084	PK
2			2390.000	61.732	29.660	-12.268	74.000	32.072	PK
3		*	2420.220	103.285	71.180	N/A	N/A	32.105	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:15
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

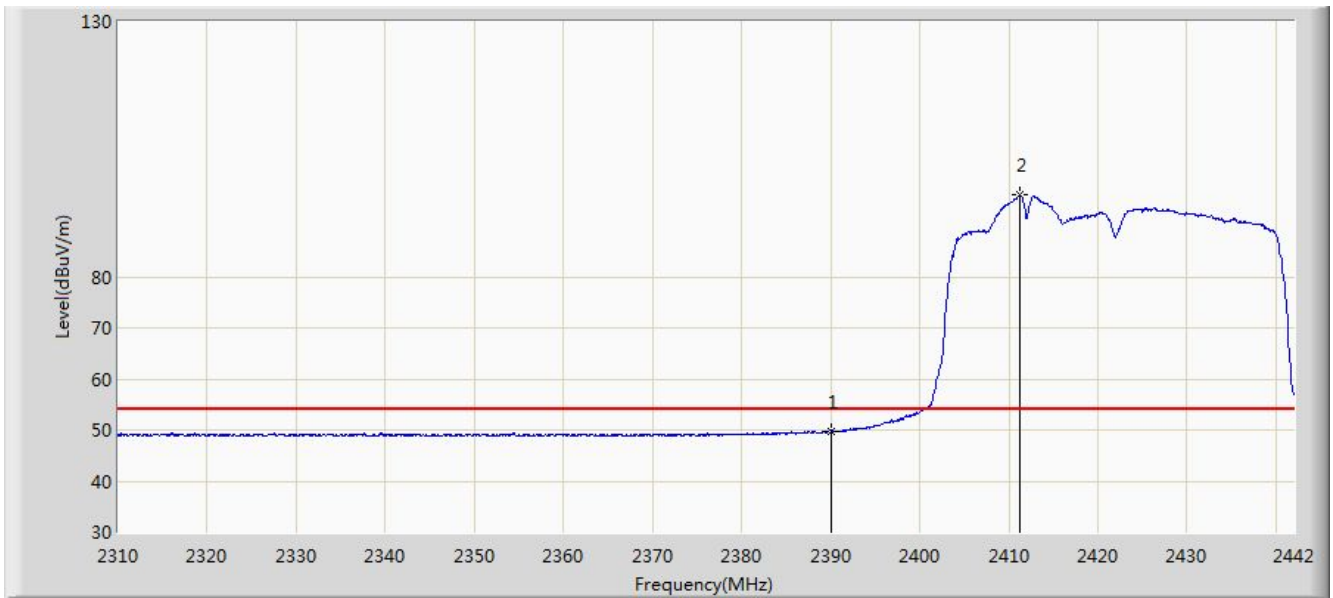


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.853	17.781	-4.147	54.000	32.072	AV
2		*	2411.244	96.006	63.925	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:17
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

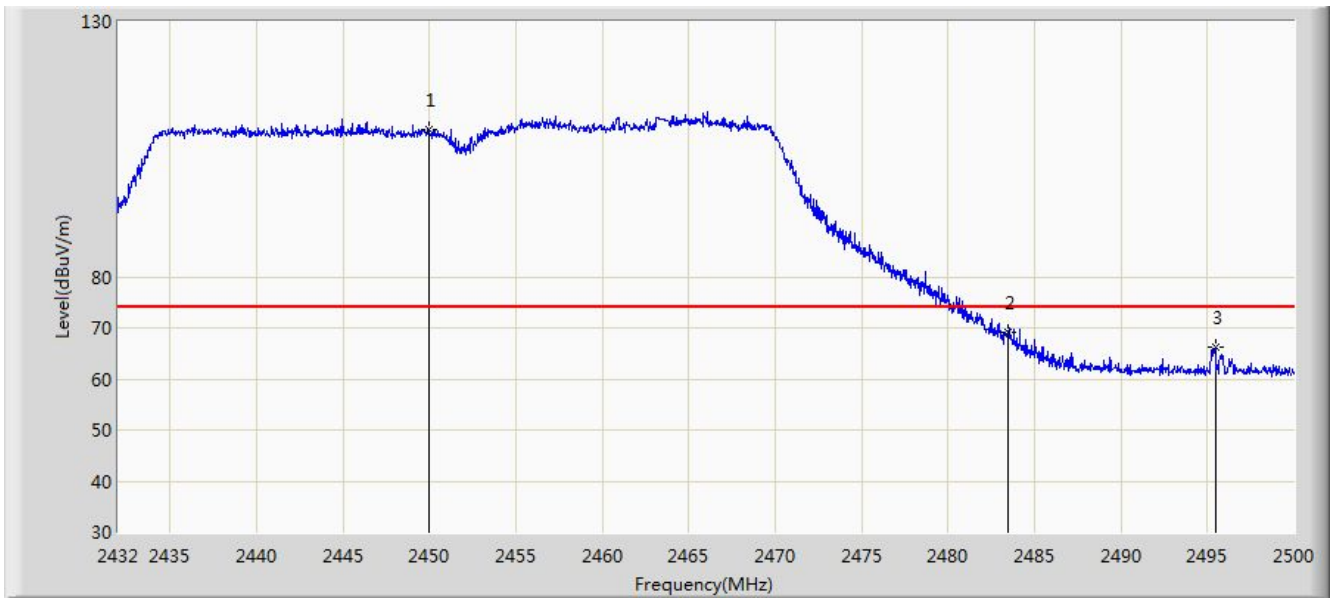


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.986	108.881	76.805	N/A	N/A	32.076	PK
2			2483.500	69.164	37.127	-4.836	74.000	32.037	PK
3			2495.444	66.107	34.093	-7.893	74.000	32.015	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:22
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

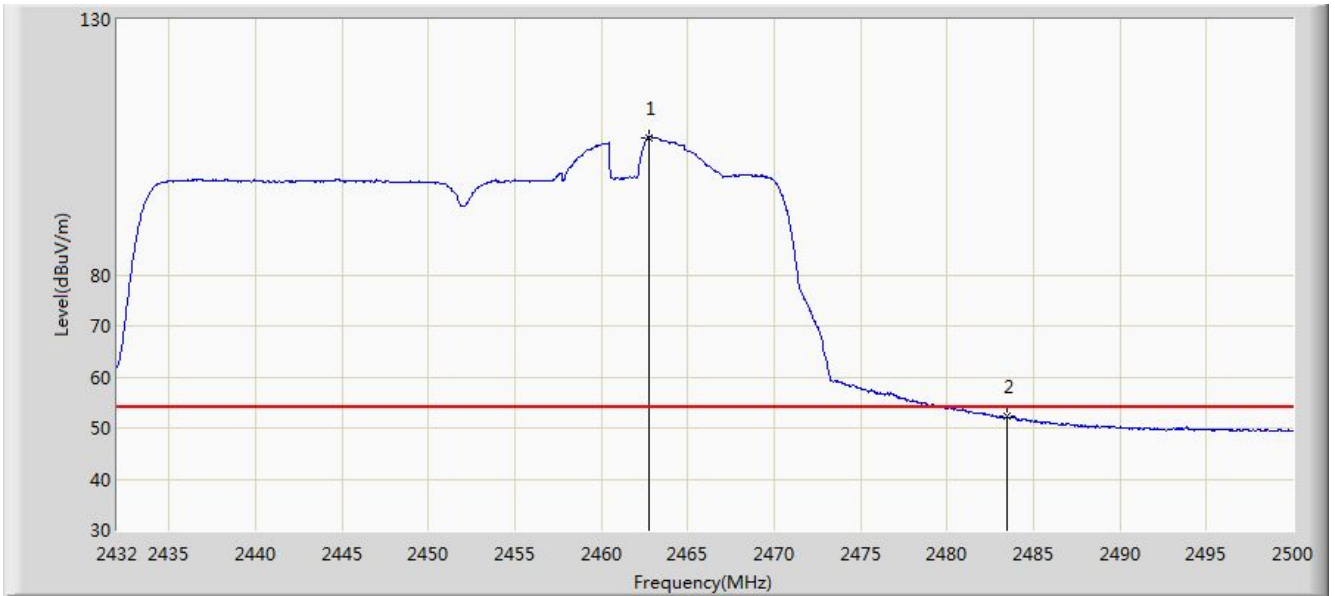


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.736	106.951	74.872	N/A	N/A	32.079	AV
2			2483.500	52.198	20.161	-1.802	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:25
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

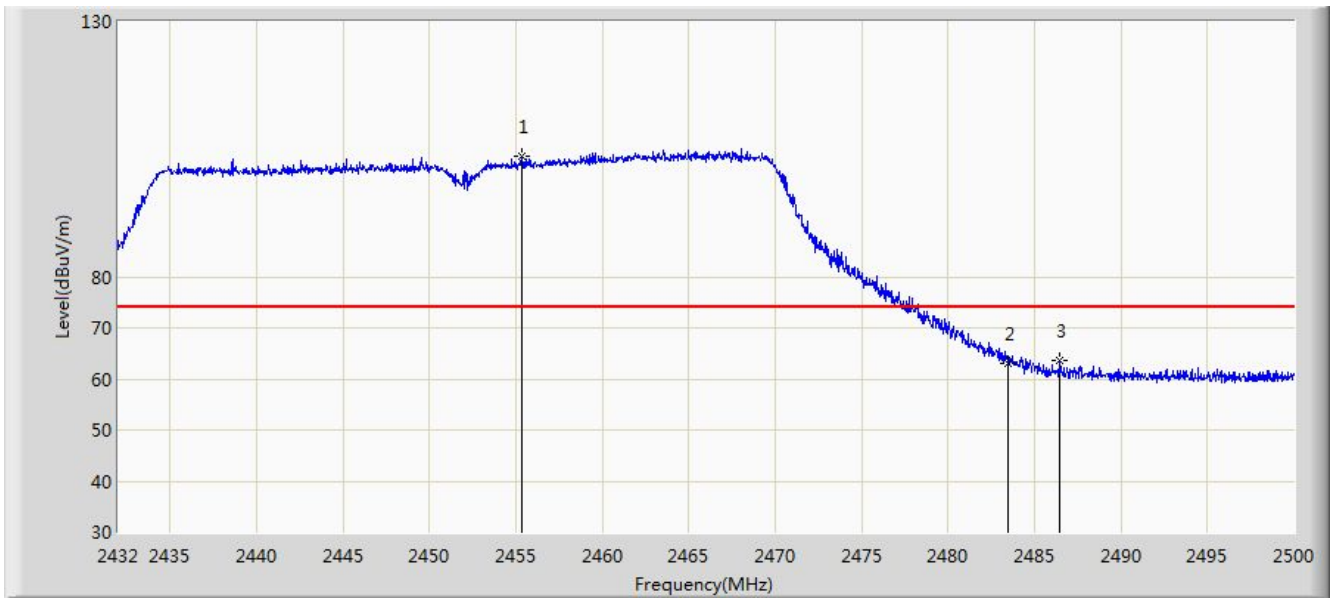


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.358	103.648	71.570	N/A	N/A	32.078	PK
2			2483.500	63.114	31.077	-10.886	74.000	32.037	PK
3			2486.468	63.656	31.625	-10.344	74.000	32.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:28
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

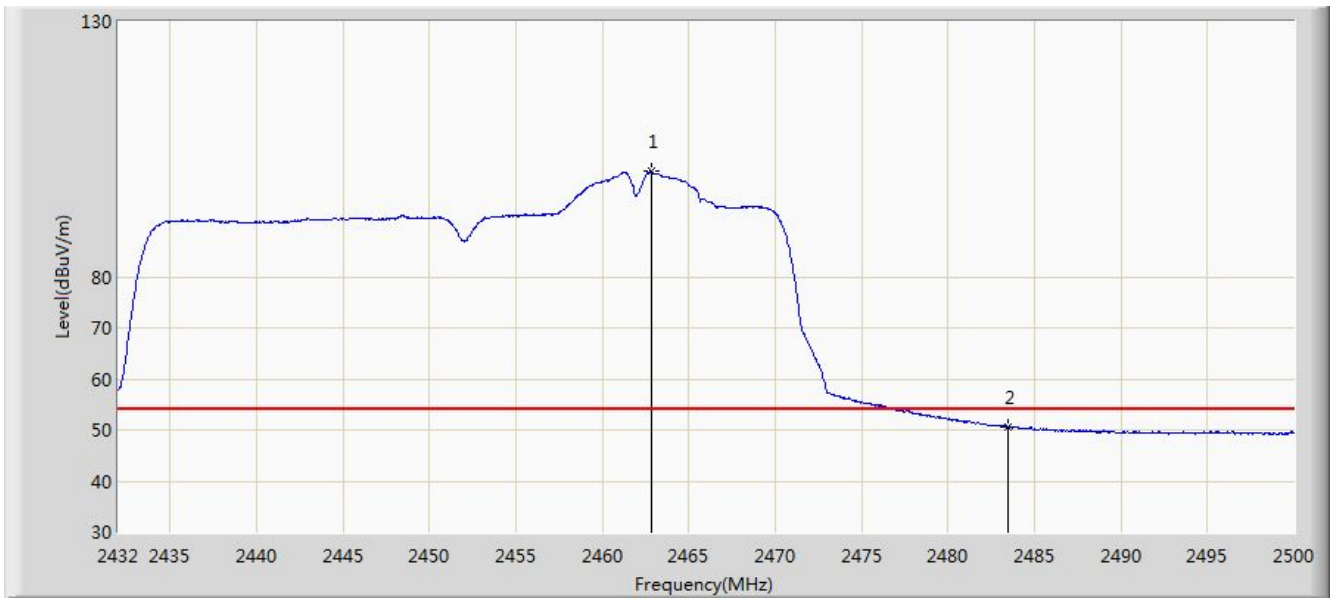


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.838	100.593	68.514	N/A	N/A	32.079	AV
2			2483.500	50.495	18.458	-3.505	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:48
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

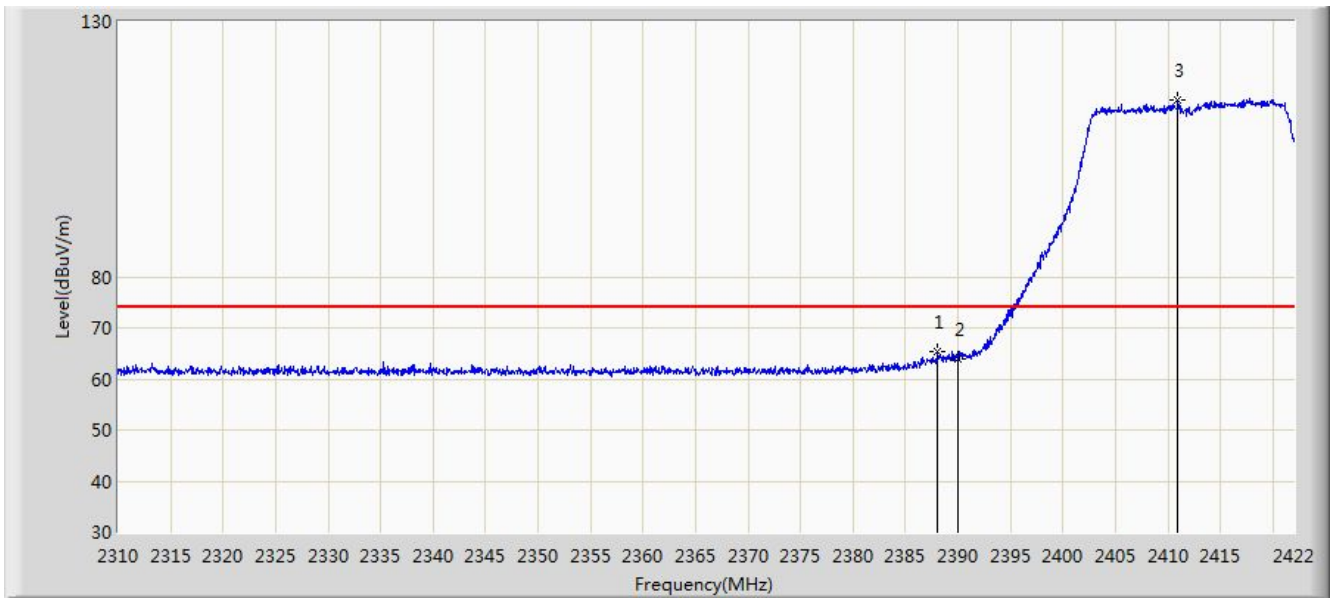


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.064	65.355	33.282	-8.645	74.000	32.072	PK
2			2390.000	63.980	31.908	-10.020	74.000	32.072	PK
3		*	2410.968	114.755	82.674	N/A	N/A	32.081	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:56
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

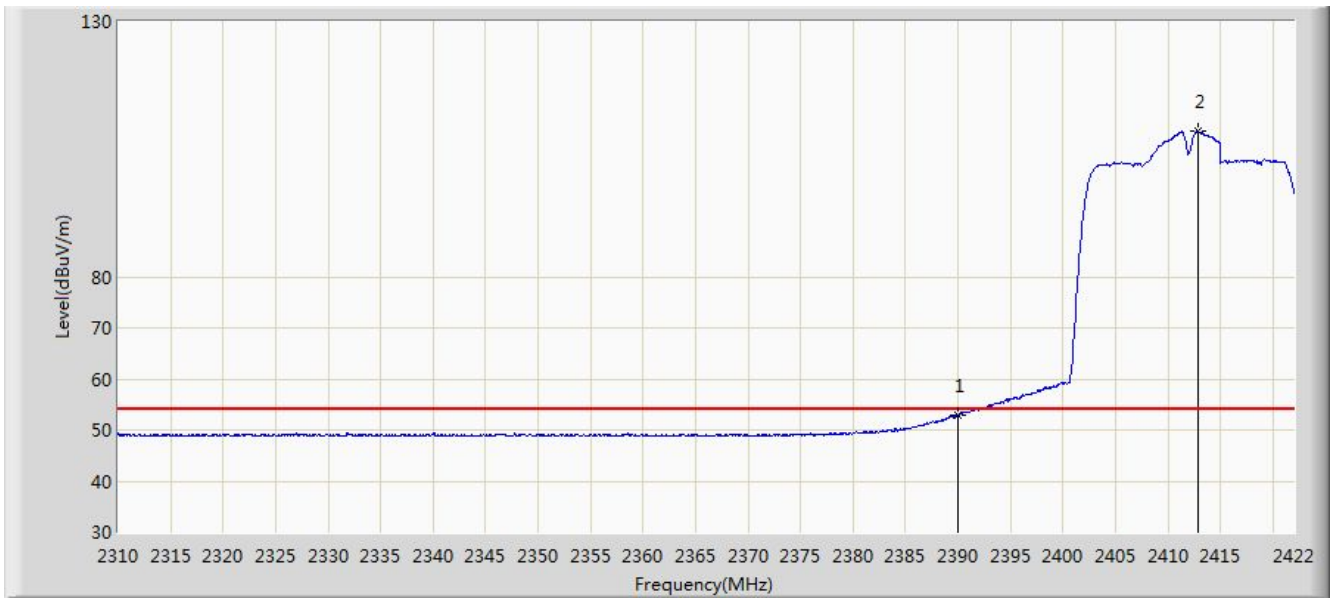


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.840	20.768	-1.160	54.000	32.072	AV
2	X	*	2412.872	108.524	76.438	N/A	N/A	32.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:57
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

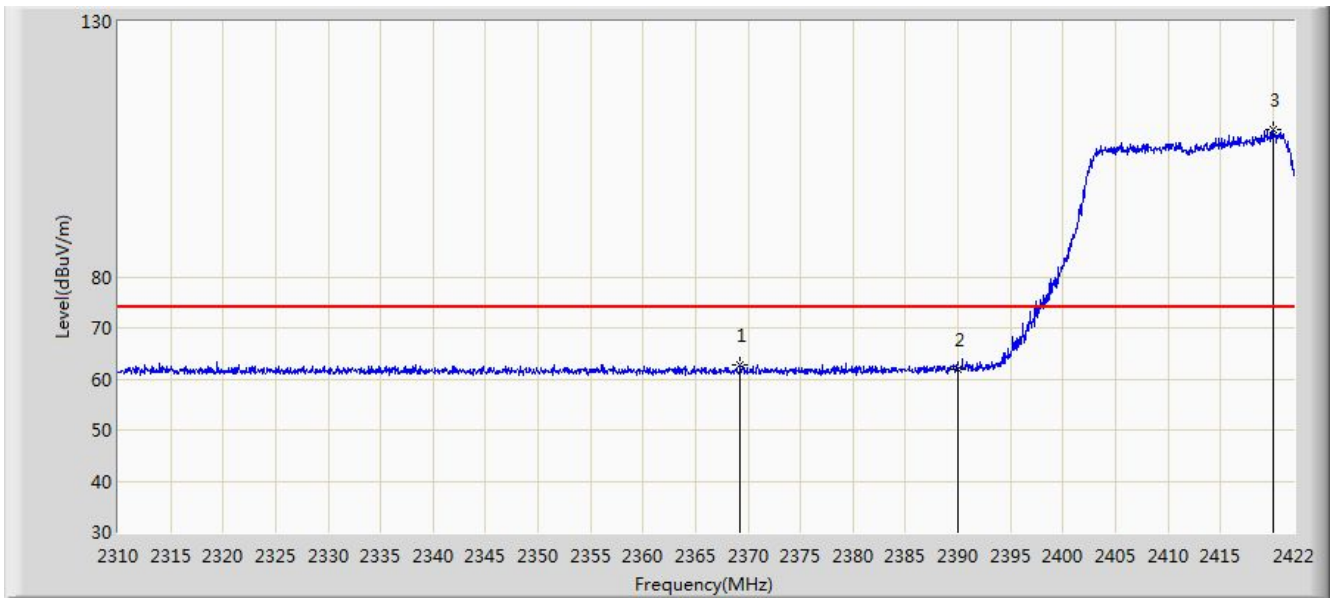


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.248	62.688	30.234	-11.312	74.000	32.454	PK
2			2390.000	61.985	29.572	-12.015	74.000	32.413	PK
3		*	2419.984	108.950	76.846	N/A	N/A	32.105	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:02
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

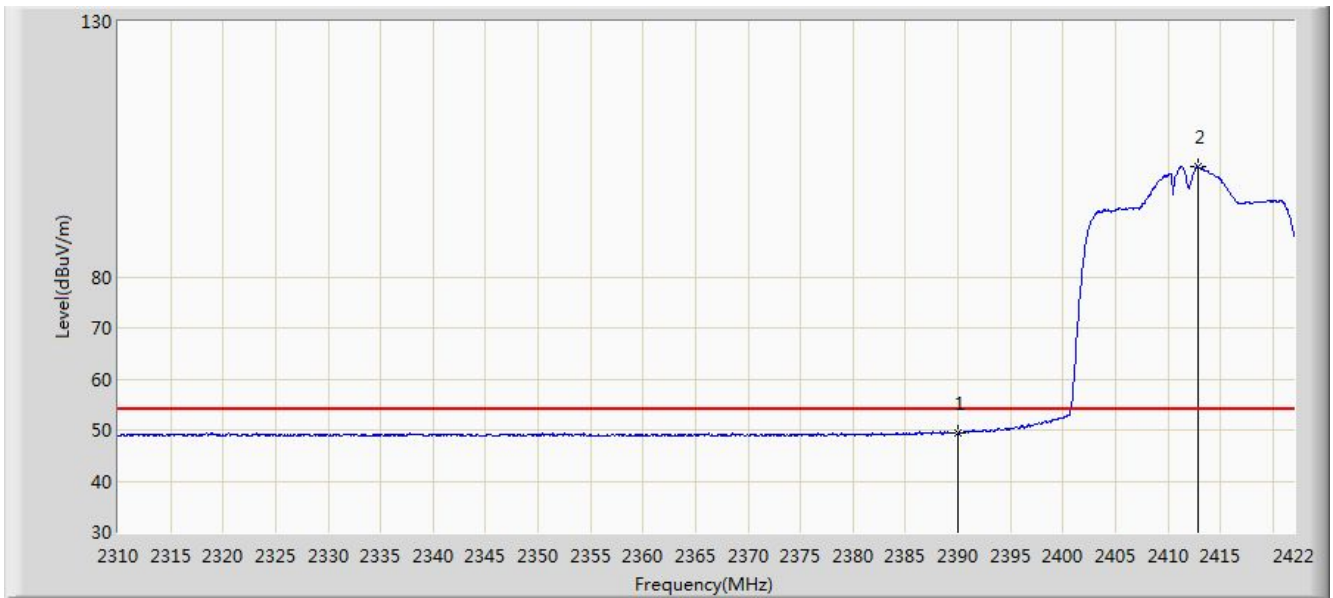


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.432	17.360	-4.568	54.000	32.072	AV
2		*	2412.816	101.585	69.499	N/A	N/A	32.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:04
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

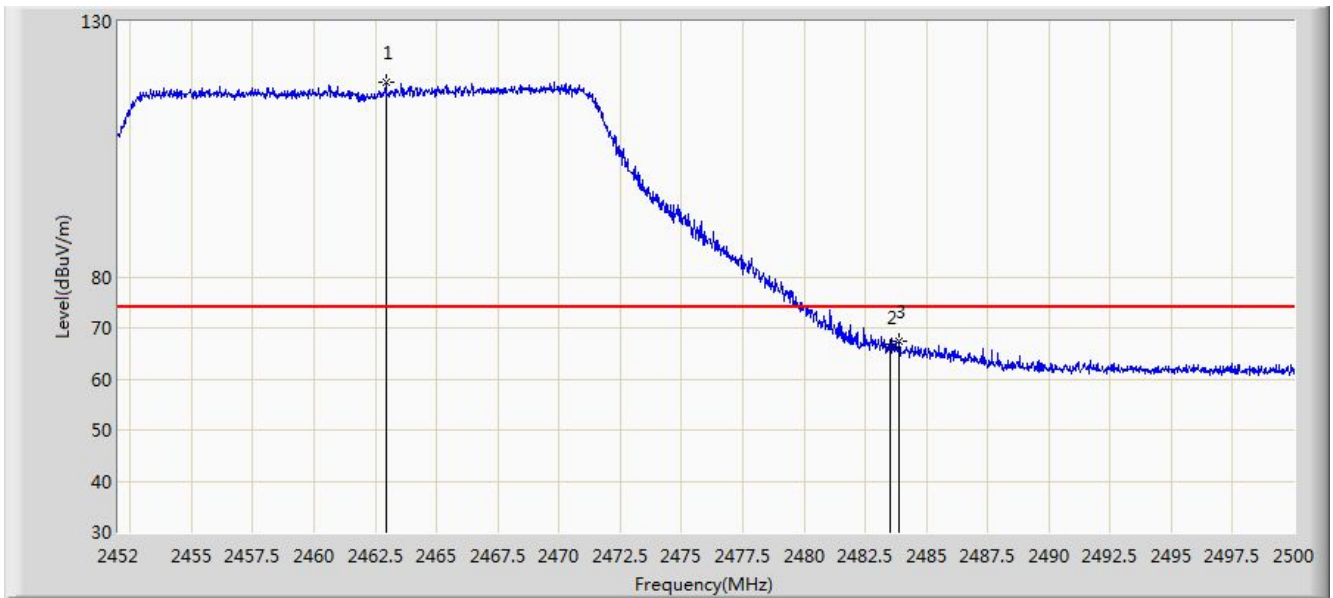


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.920	118.155	86.076	N/A	N/A	32.079	PK
2			2483.500	66.184	34.147	-7.816	74.000	32.037	PK
3			2483.896	67.316	35.280	-6.684	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:07
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

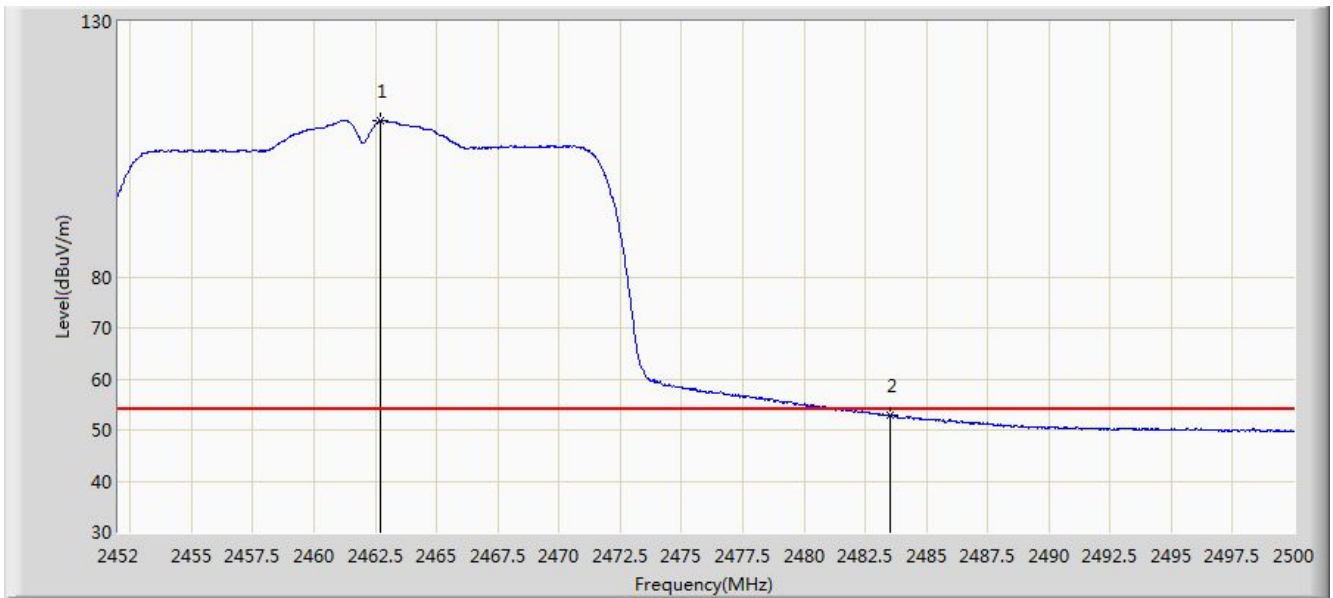


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2462.728	110.604	78.525	N/A	N/A	32.079	AV
2			2483.500	52.813	20.776	-1.187	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:08
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

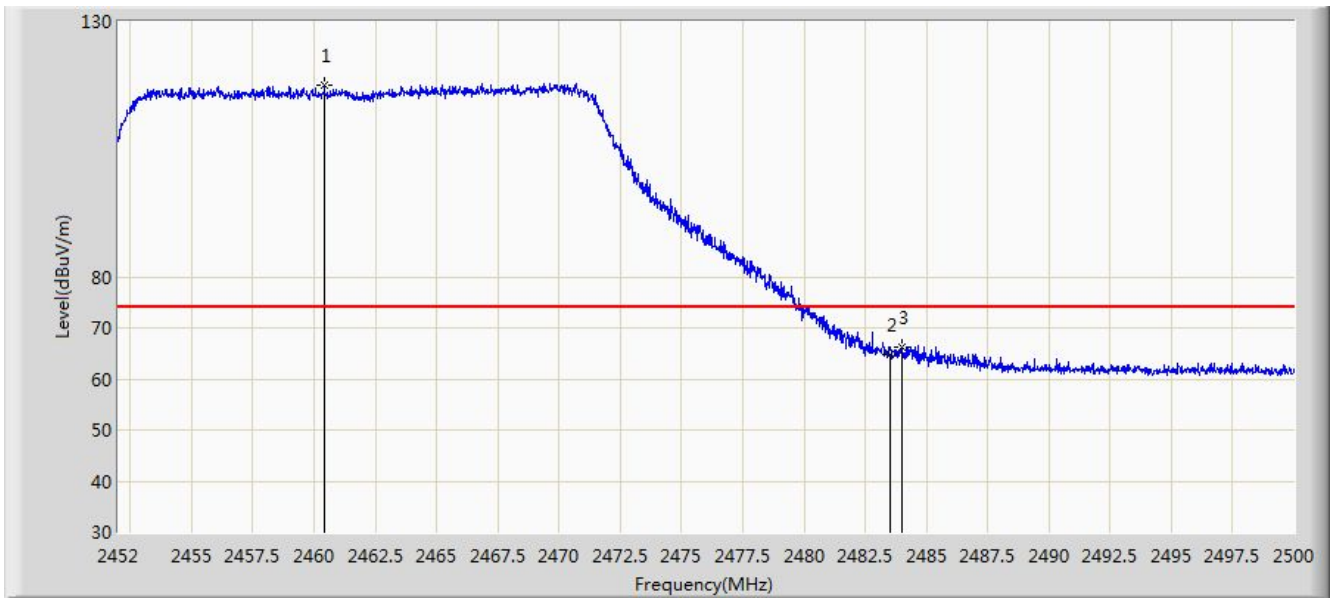


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.424	117.600	85.520	N/A	N/A	32.080	PK
2			2483.500	64.924	32.887	-9.076	74.000	32.037	PK
3			2483.992	66.188	34.152	-7.812	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:09
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

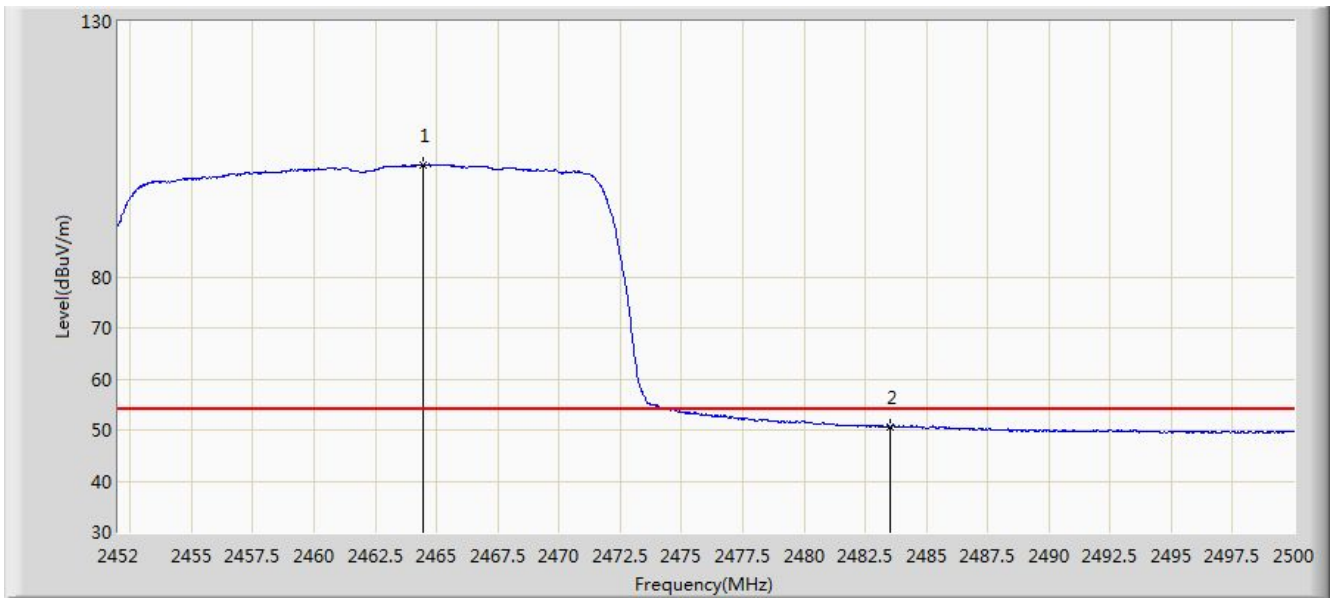


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.480	101.929	69.854	N/A	N/A	32.075	AV
2			2483.500	50.633	18.596	-3.367	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:33
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

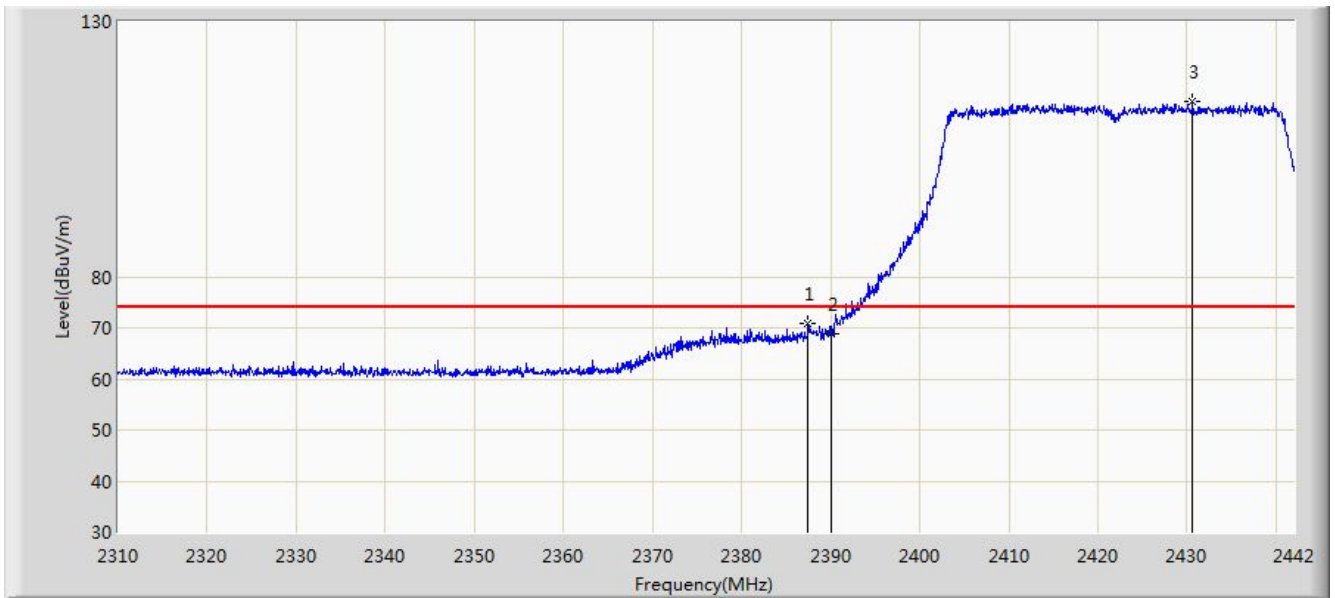


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.484	70.788	38.715	-3.212	74.000	32.073	PK
2			2390.000	68.817	36.745	-5.183	74.000	32.072	PK
3		*	2430.582	114.489	82.371	N/A	N/A	32.118	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:37
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

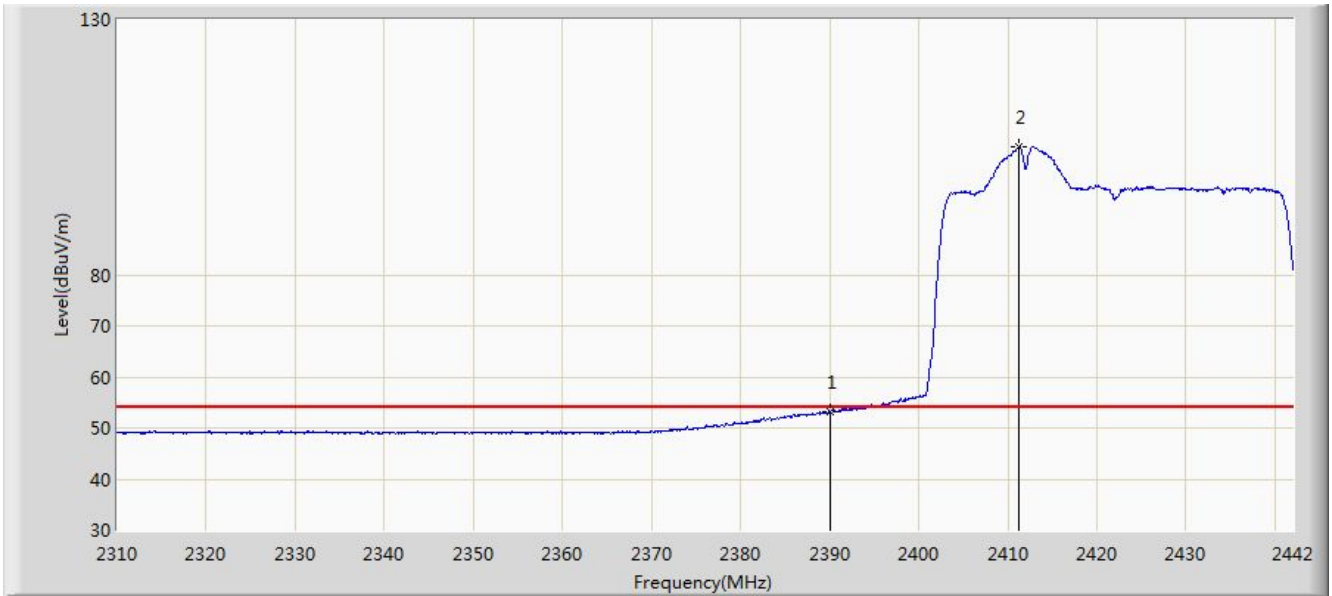


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.050	20.978	-0.950	54.000	32.072	AV
2		*	2411.244	105.038	72.957	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:39
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

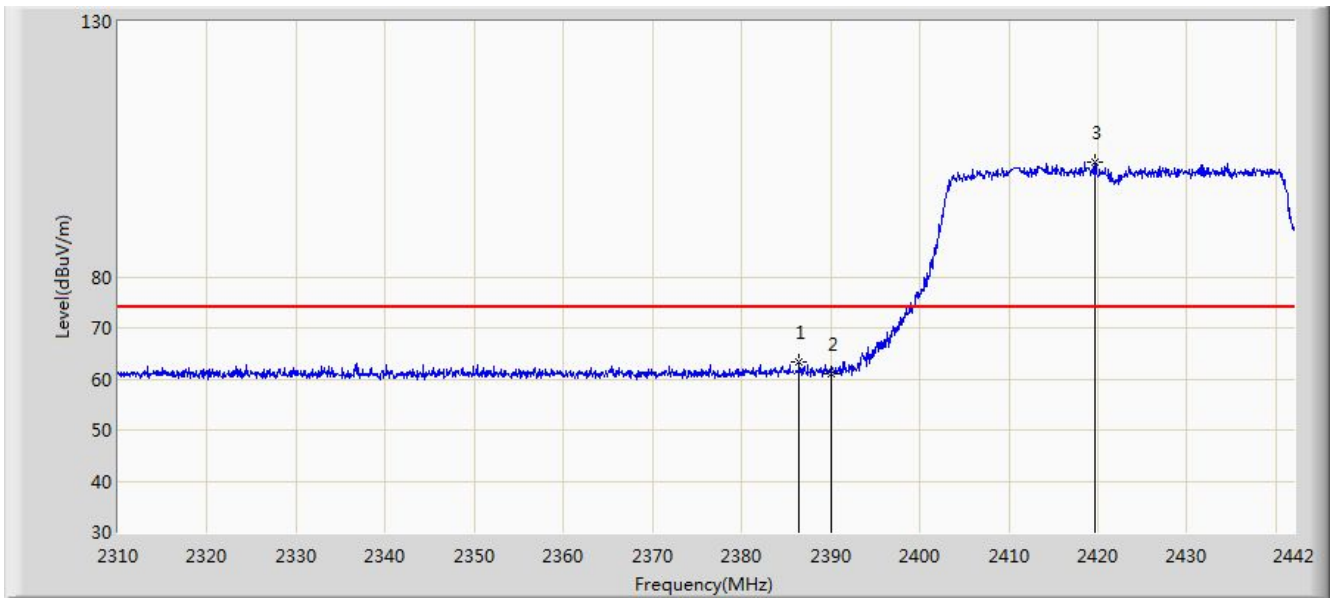


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.494	63.349	31.276	-10.651	74.000	32.073	PK
2			2390.000	61.038	28.966	-12.962	74.000	32.072	PK
3		*	2419.692	102.590	70.486	N/A	N/A	32.103	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:41
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

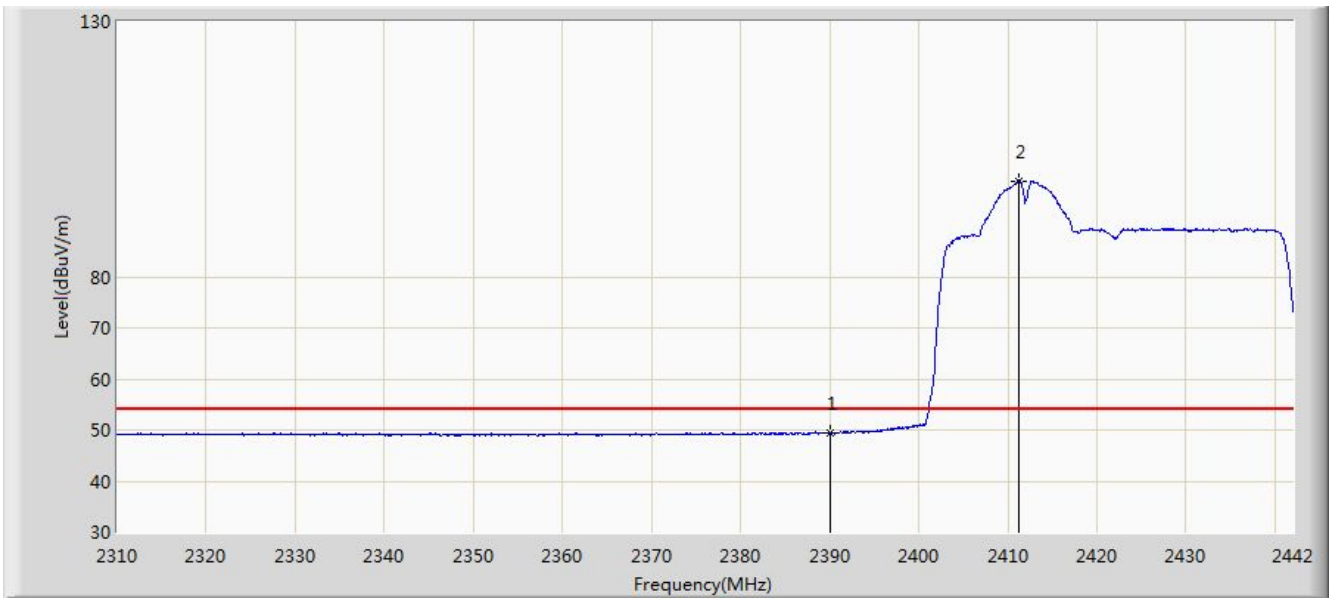


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.331	17.259	-4.669	54.000	32.072	AV
2		*	2411.178	98.812	66.731	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:42
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

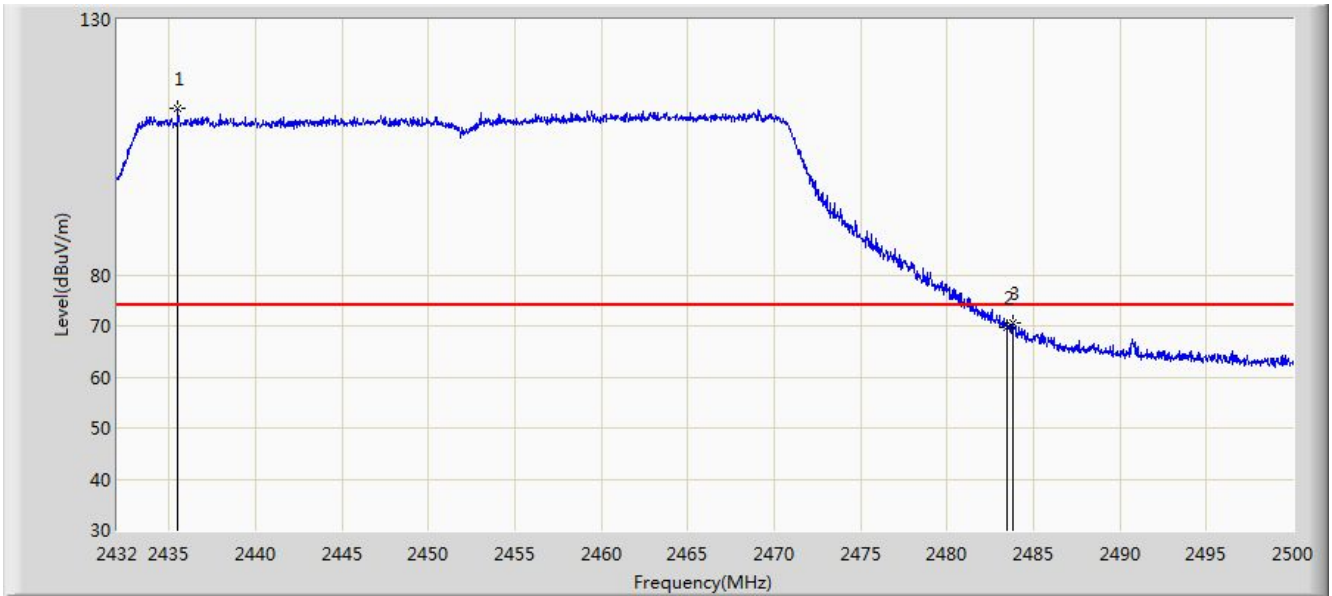


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2435.536	112.525	80.422	N/A	N/A	32.103	PK
2			2483.500	69.602	37.565	-4.398	74.000	32.037	PK
3			2483.782	70.526	38.490	-3.474	74.000	32.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:47
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

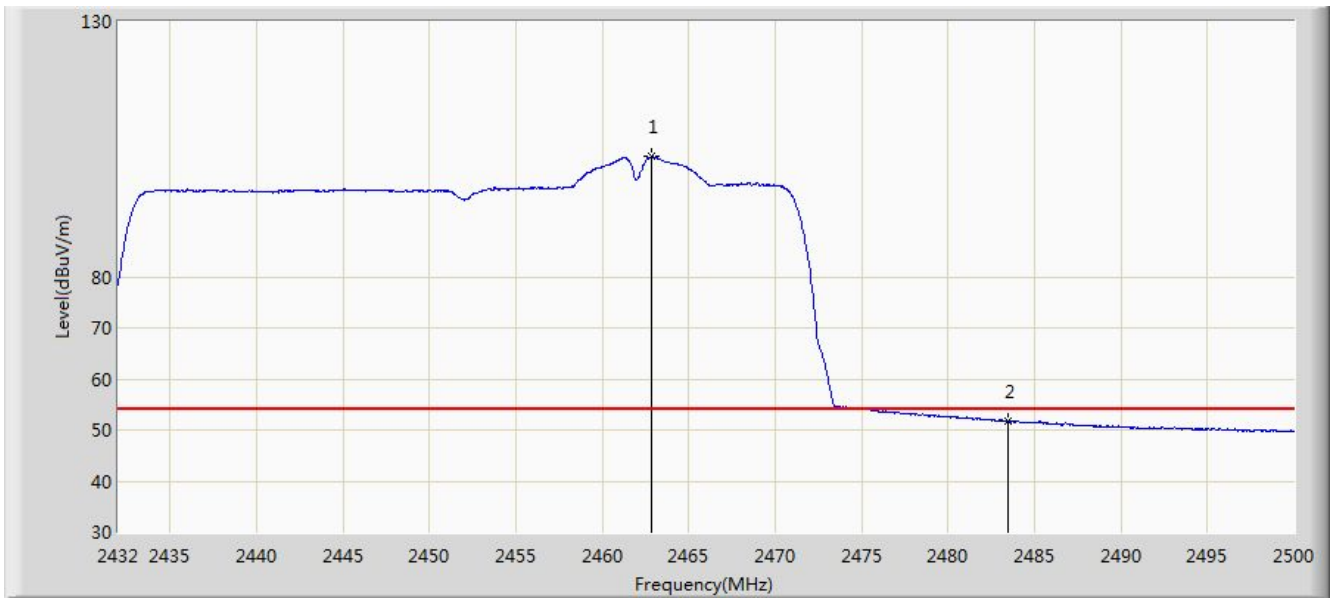


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.838	103.521	71.442	N/A	N/A	32.079	AV
2			2483.500	51.656	19.619	-2.344	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:53
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

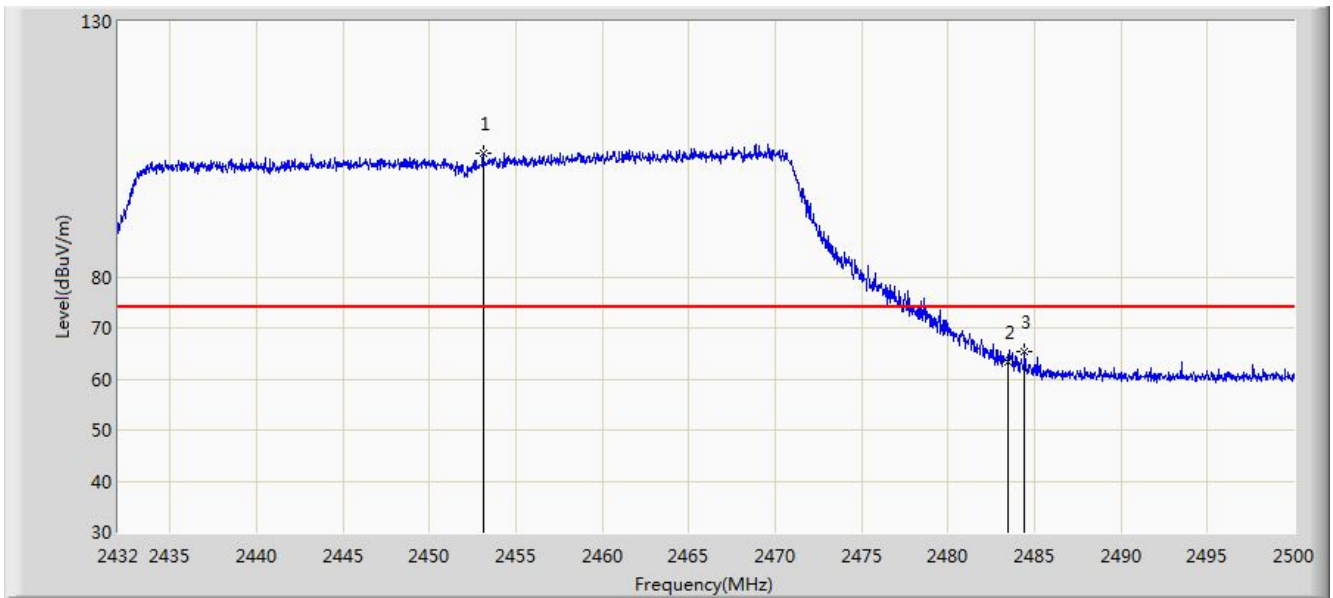


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.114	104.167	72.090	N/A	N/A	32.077	PK
2			2483.500	63.300	31.263	-10.700	74.000	32.037	PK
3			2484.428	65.446	33.411	-8.554	74.000	32.035	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 21:55
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11VHT40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

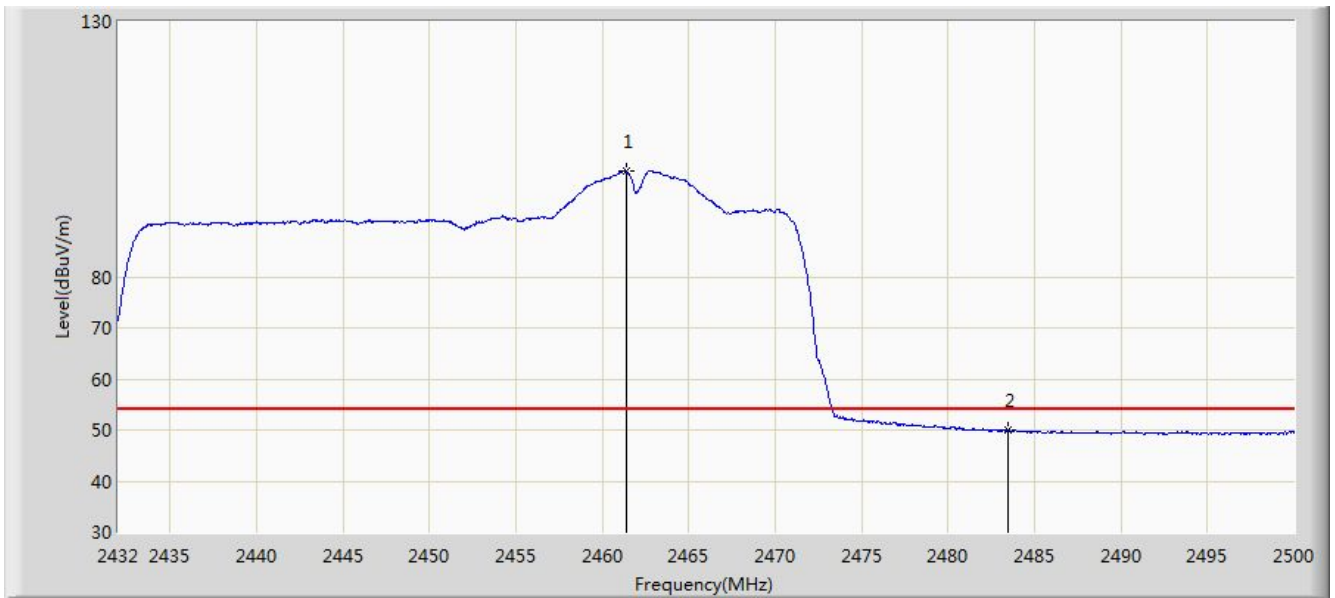


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.376	100.715	68.635	N/A	N/A	32.080	AV
2			2483.500	49.858	17.821	-4.142	54.000	32.037	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:39
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

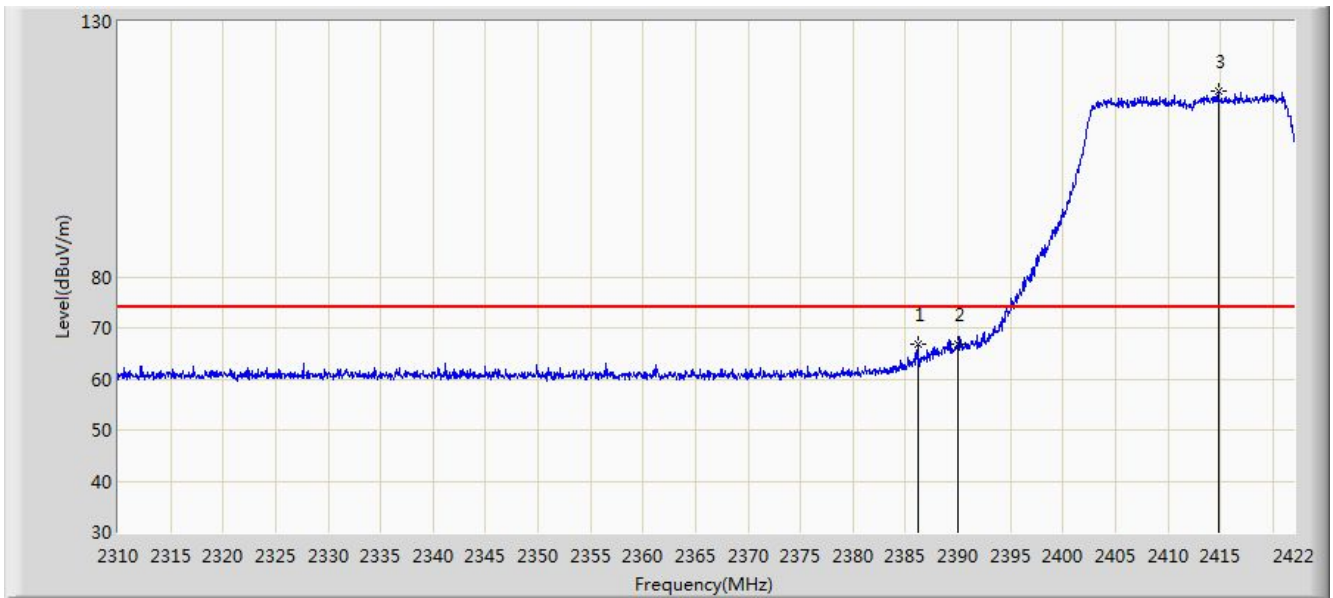


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.160	66.673	34.600	-7.327	74.000	32.074	PK
2			2390.000	66.775	34.703	-7.225	74.000	32.072	PK
3		*	2414.832	116.255	84.164	N/A	N/A	32.091	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:38
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

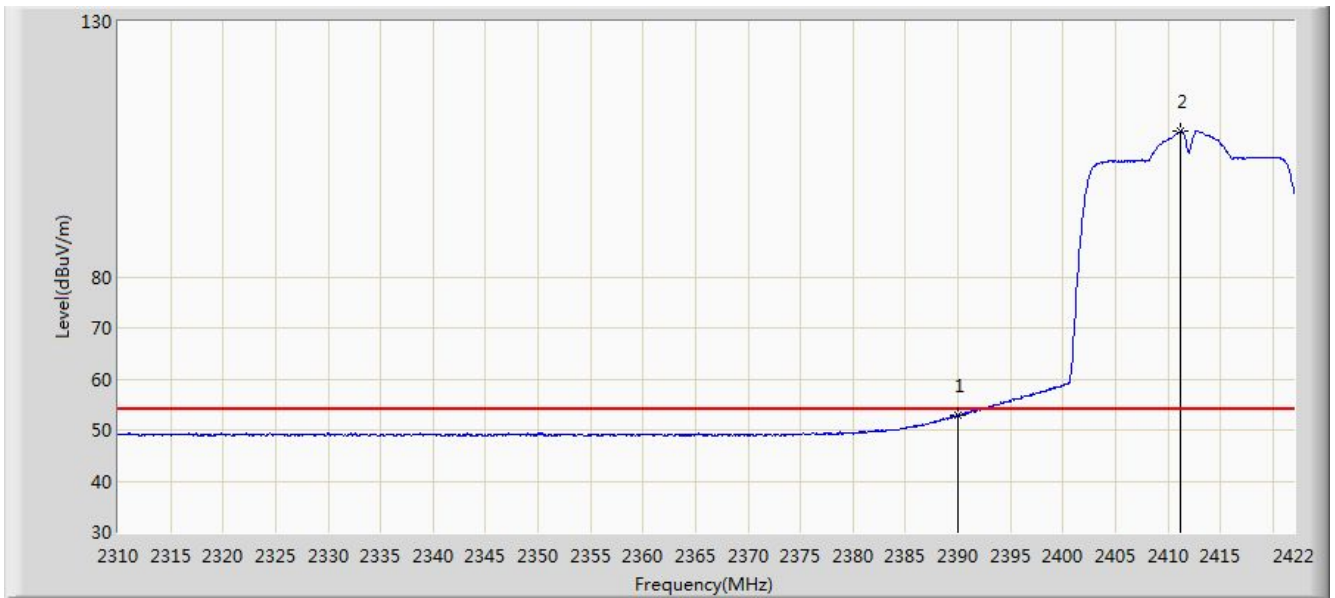


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.774	20.702	-1.226	54.000	32.072	AV
2	X	*	2411.136	108.487	76.406	N/A	N/A	32.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:40
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

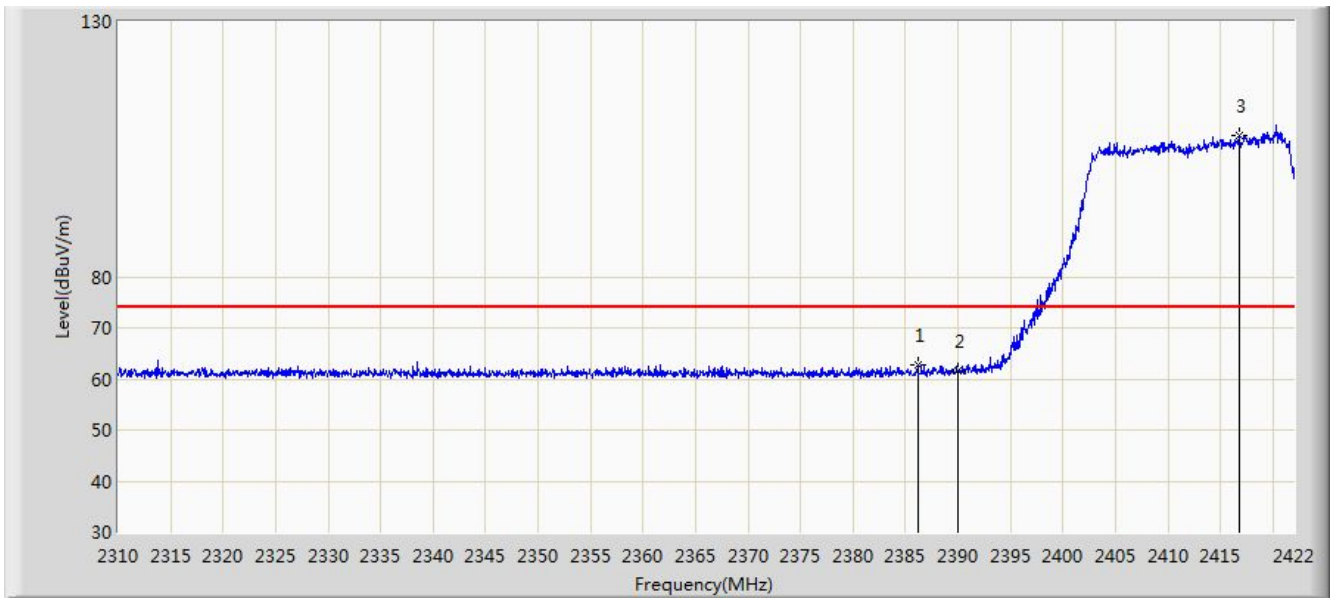


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.160	62.713	30.640	-11.287	74.000	32.074	PK
2			2390.000	61.505	29.433	-12.495	74.000	32.072	PK
3		*	2416.792	107.781	75.685	N/A	N/A	32.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:42
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode) with DAP646-RW	

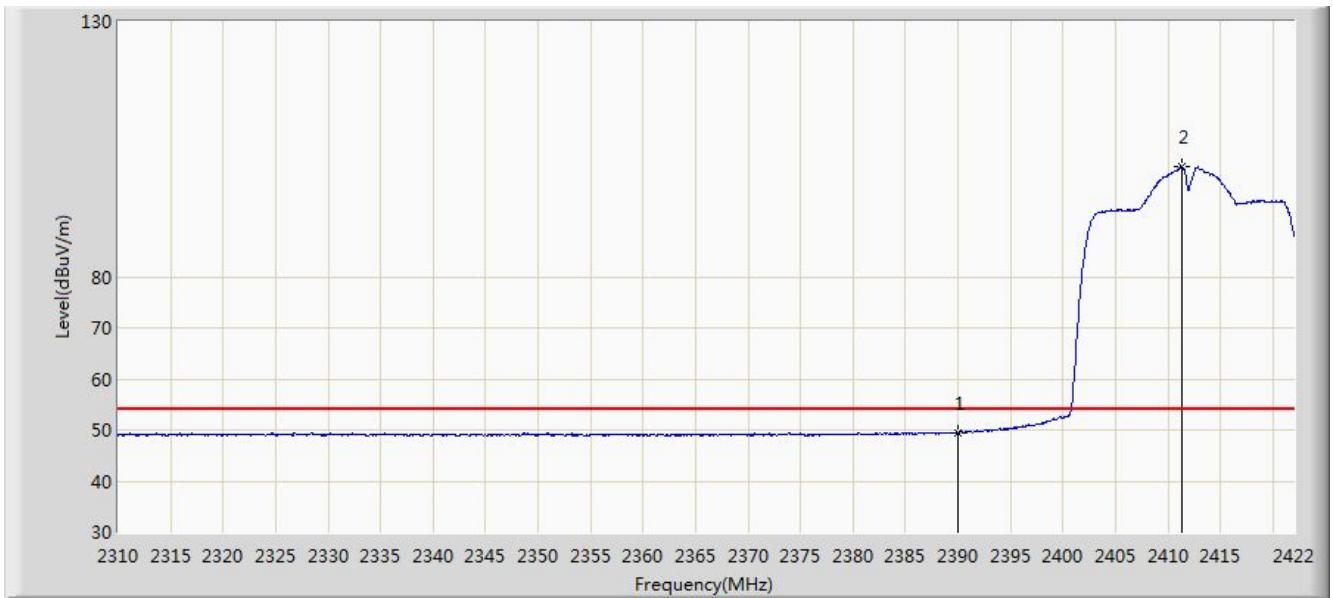


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.513	17.441	-4.487	54.000	32.072	AV
2		*	2411.304	101.597	69.515	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:43
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

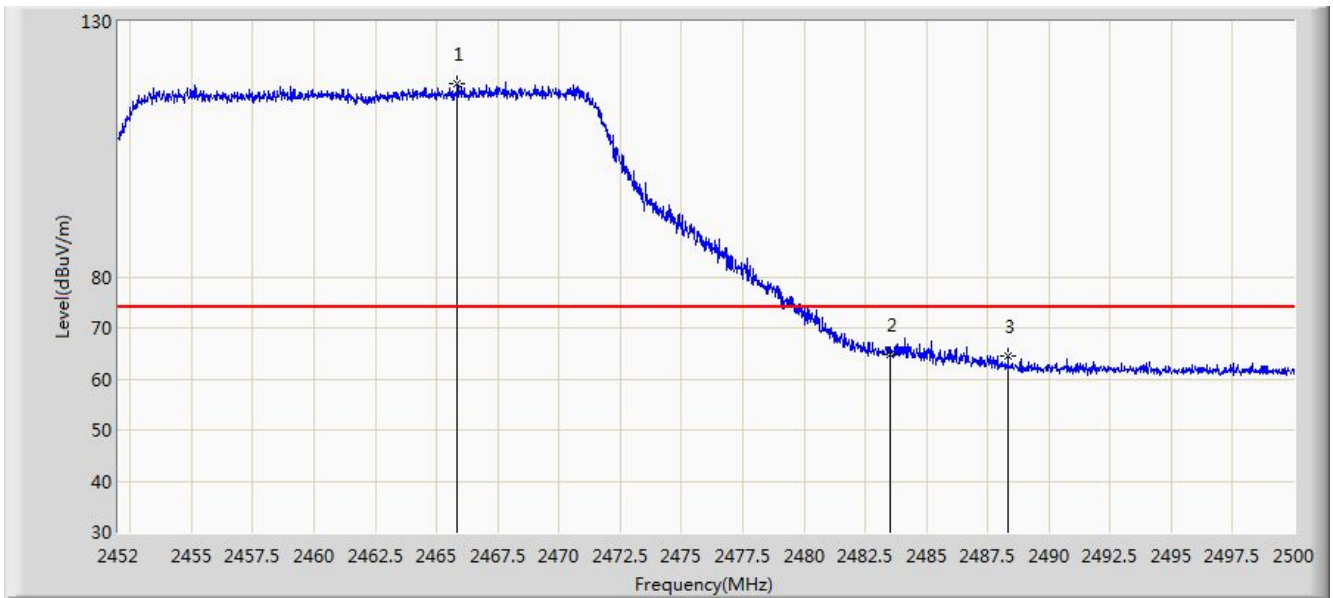


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.848	117.801	85.728	N/A	N/A	32.073	PK
2			2483.500	64.878	32.841	-9.122	74.000	32.037	PK
3			2488.336	64.587	32.559	-9.413	74.000	32.028	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:47
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

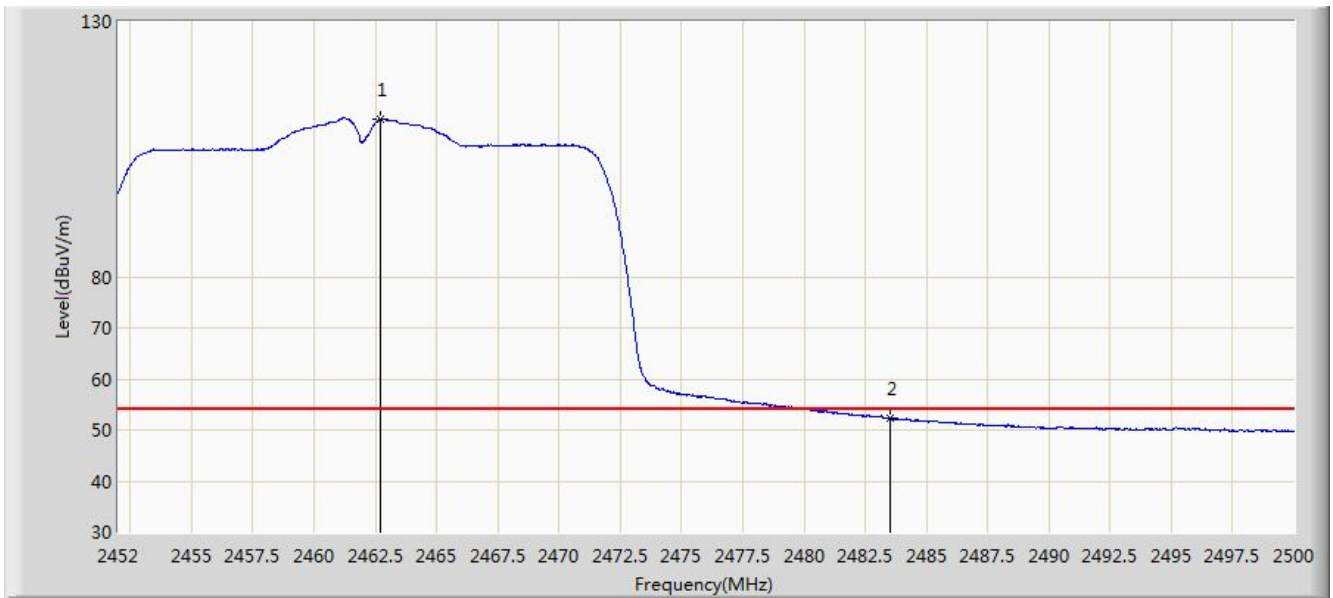


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2462.728	110.922	78.843	N/A	N/A	32.079	AV
2			2483.500	52.202	20.165	-1.798	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:49
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

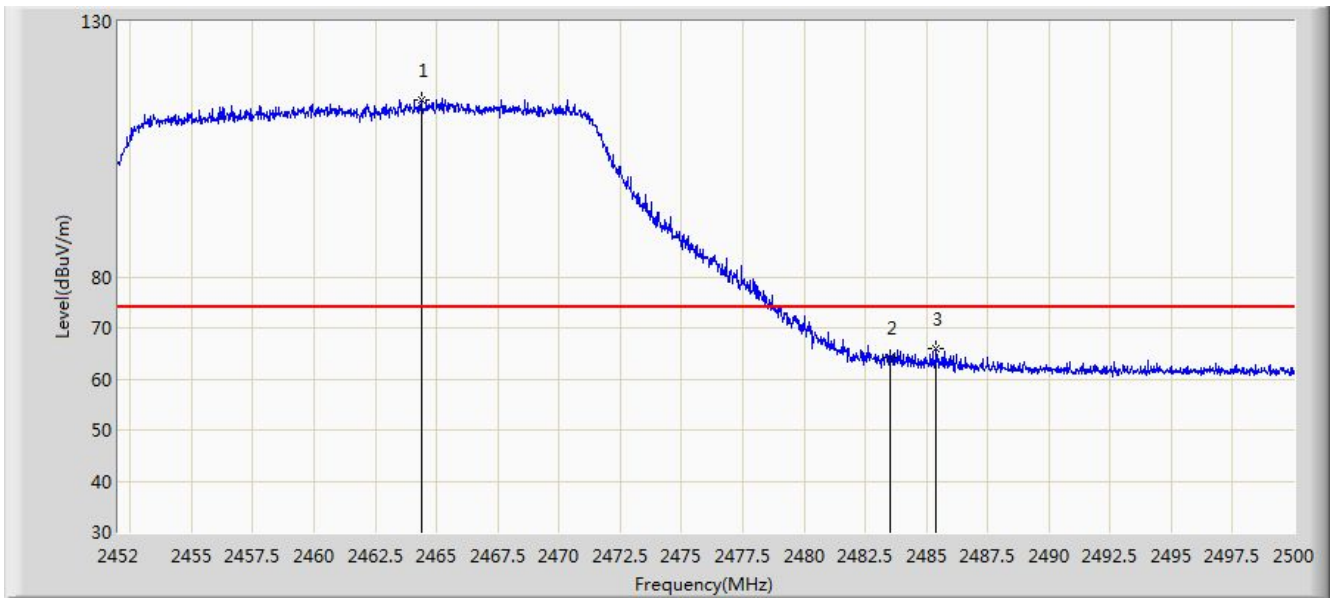


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.384	114.719	82.643	N/A	N/A	32.075	PK
2			2483.500	64.222	32.185	-9.778	74.000	32.037	PK
3			2485.408	65.986	33.953	-8.014	74.000	32.033	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:50
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode) with DAP646-RW	

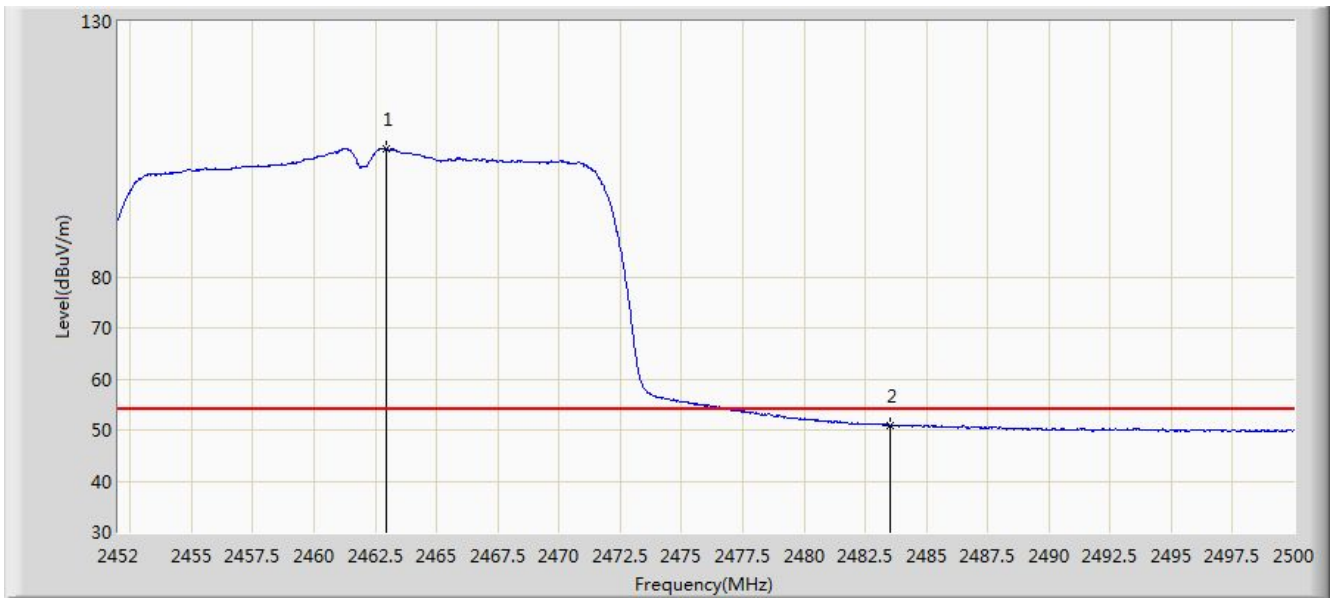


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.944	105.075	72.996	N/A	N/A	32.079	AV
2			2483.500	50.835	18.798	-3.165	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:16
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

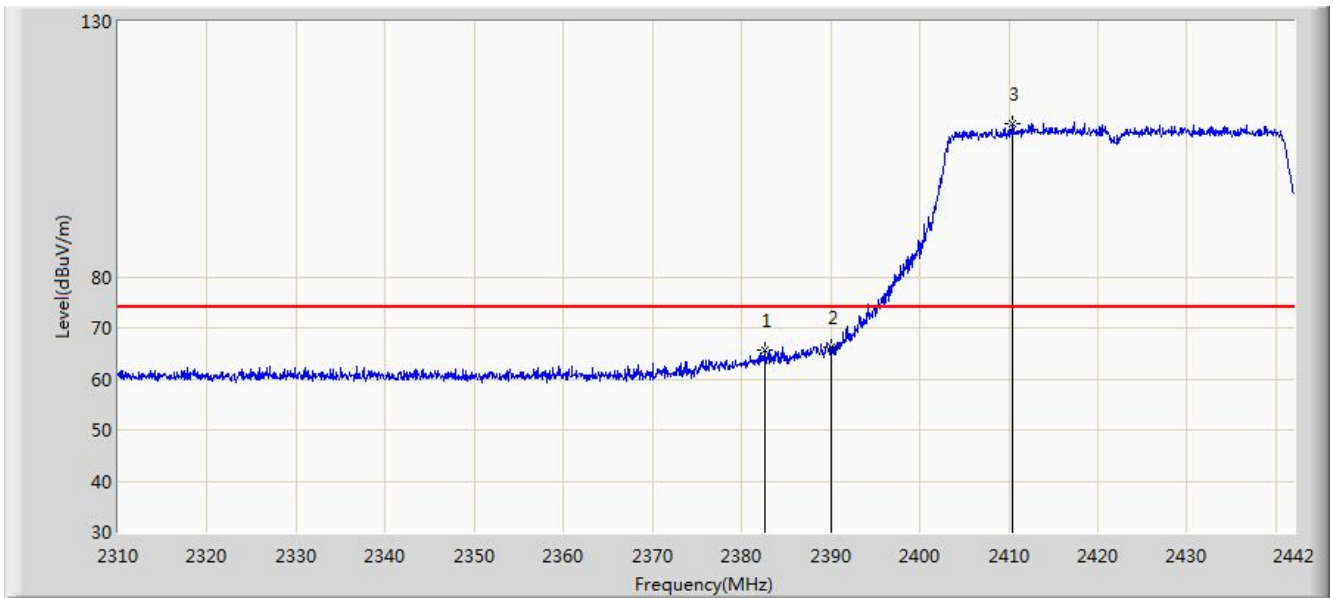


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.666	65.743	33.669	-8.257	74.000	32.074	PK
2			2390.000	66.220	34.148	-7.780	74.000	32.072	PK
3		*	2410.386	110.074	77.994	N/A	N/A	32.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 19:58
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

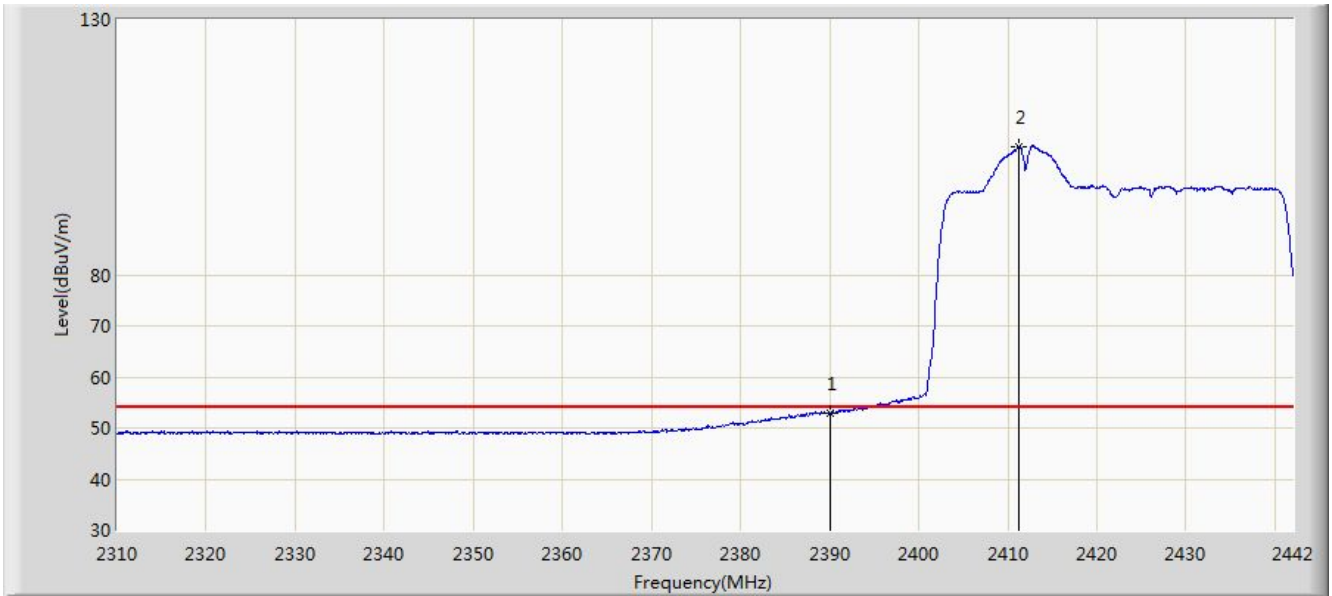


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.822	20.750	-1.178	54.000	32.072	AV
2		*	2411.310	105.138	73.056	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:16
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

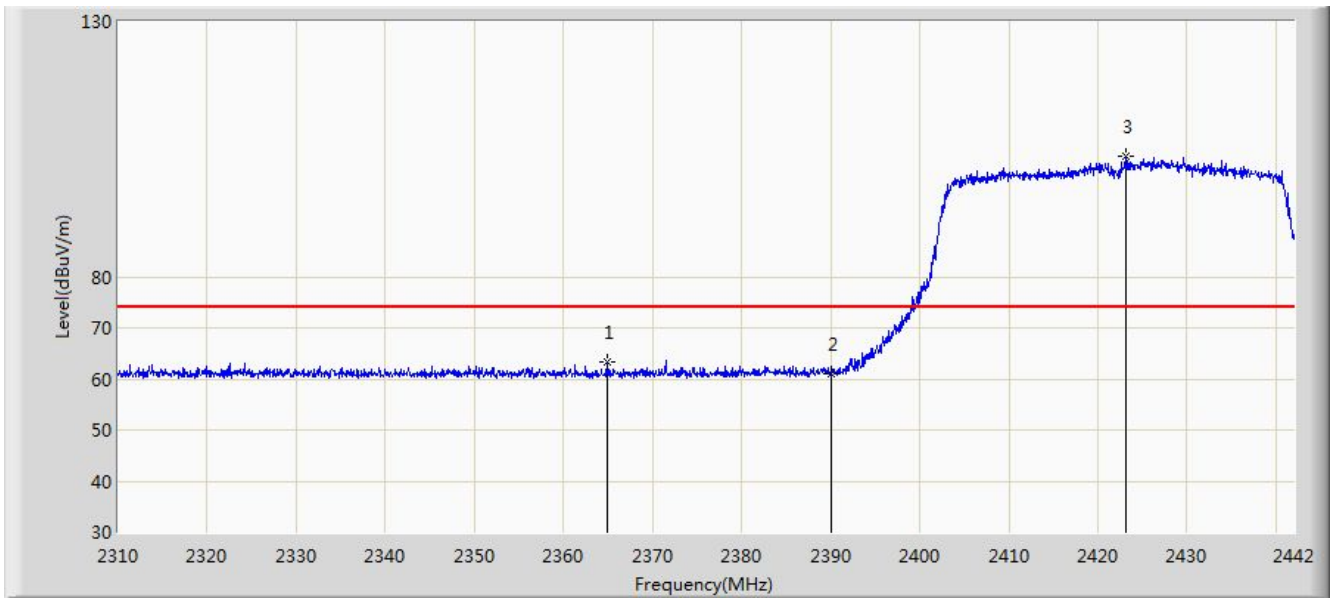


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2364.978	63.314	31.205	-10.686	74.000	32.109	PK
2			2390.000	61.034	28.962	-12.966	74.000	32.072	PK
3		*	2423.124	103.481	71.368	N/A	N/A	32.113	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:18
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode) with DAP646-RW	

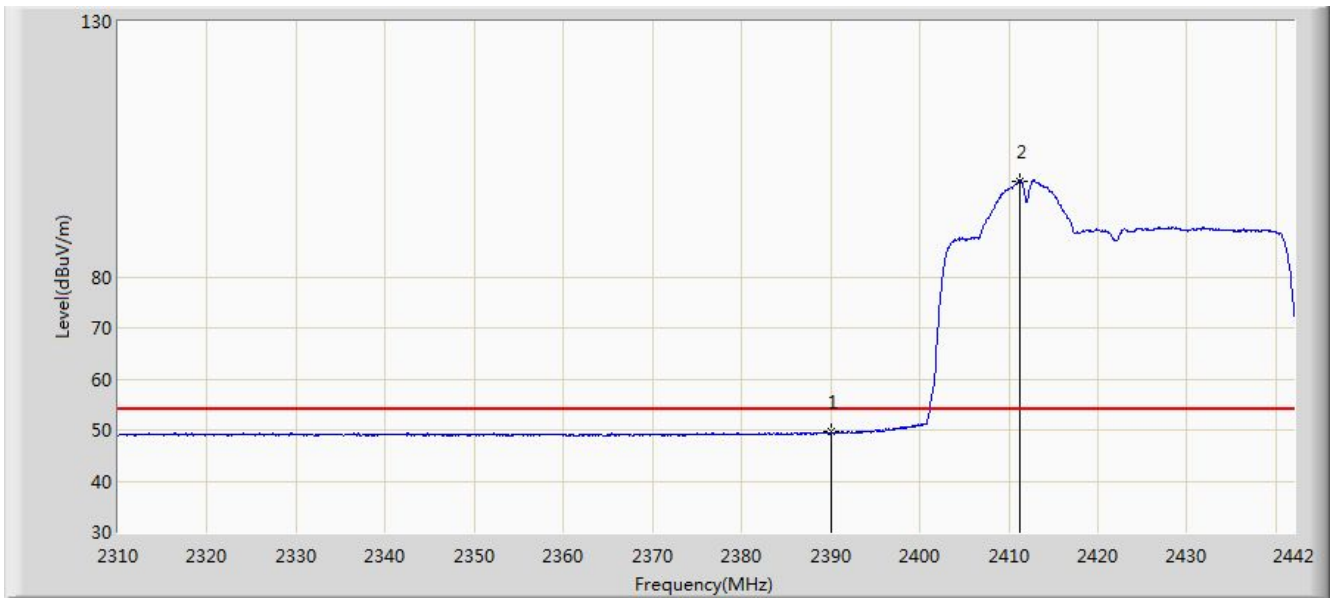


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.566	17.494	-4.434	54.000	32.072	AV
2		*	2411.178	98.828	66.747	N/A	N/A	32.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:27
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

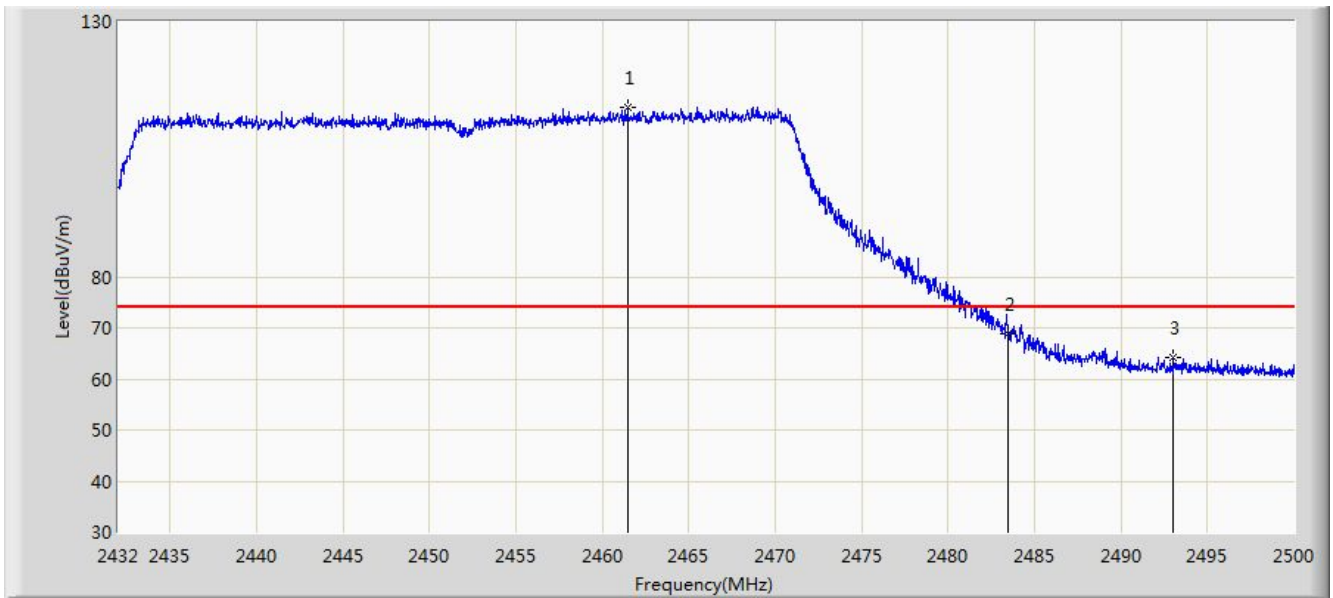


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.444	113.226	81.146	N/A	N/A	32.080	PK
2			2483.500	68.774	36.737	-5.226	74.000	32.037	PK
3			2493.030	64.297	32.278	-9.703	74.000	32.019	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:26
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

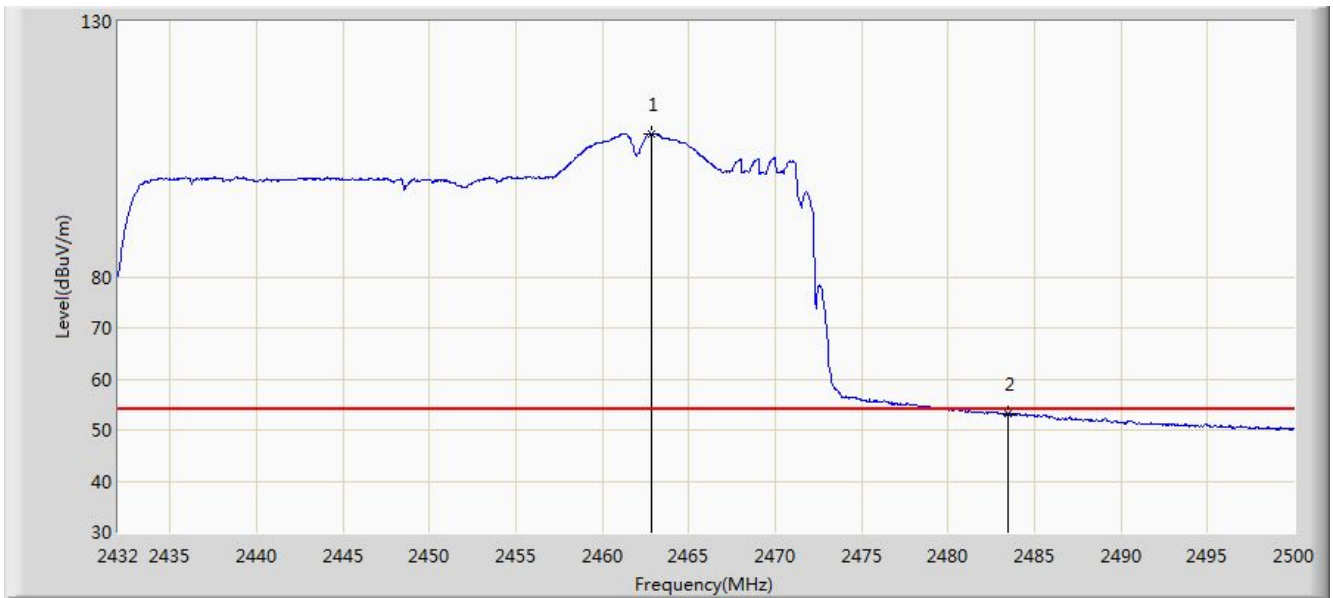


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2462.872	108.108	76.029	N/A	N/A	32.079	AV
2			2483.500	53.182	21.145	-0.818	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:27
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

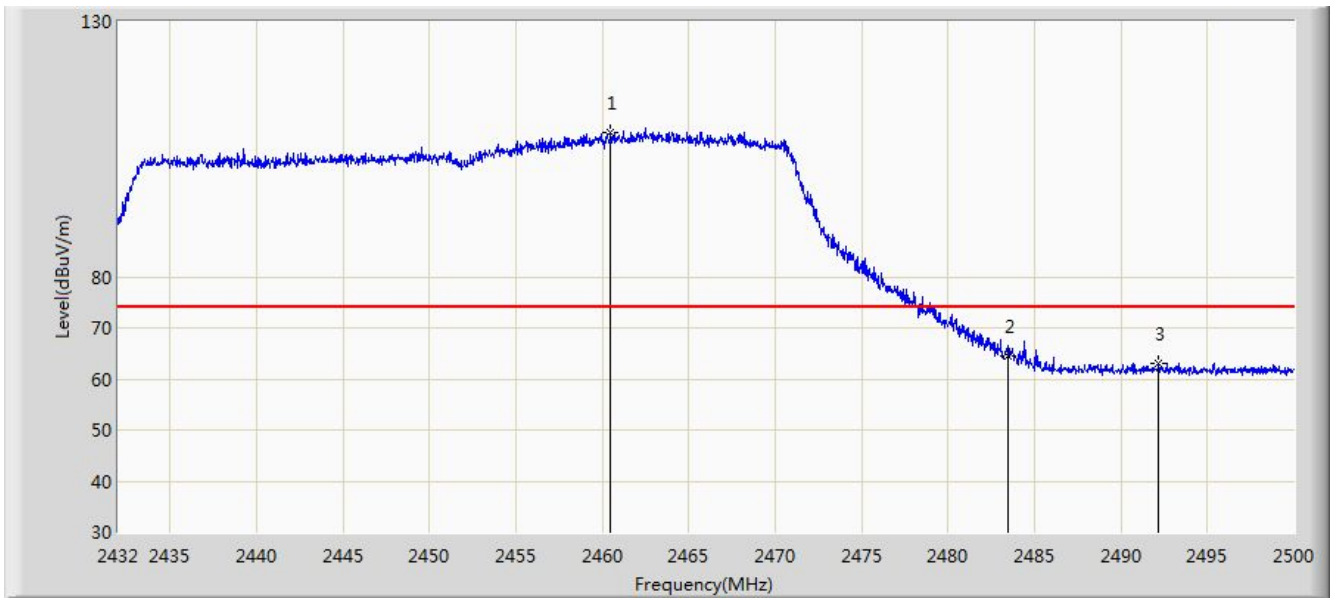


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.492	108.298	76.218	N/A	N/A	32.080	PK
2			2483.500	64.419	32.382	-9.581	74.000	32.037	PK
3			2492.180	63.103	31.082	-10.897	74.000	32.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/01/07 - 20:29
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode) with DAP646-RW	

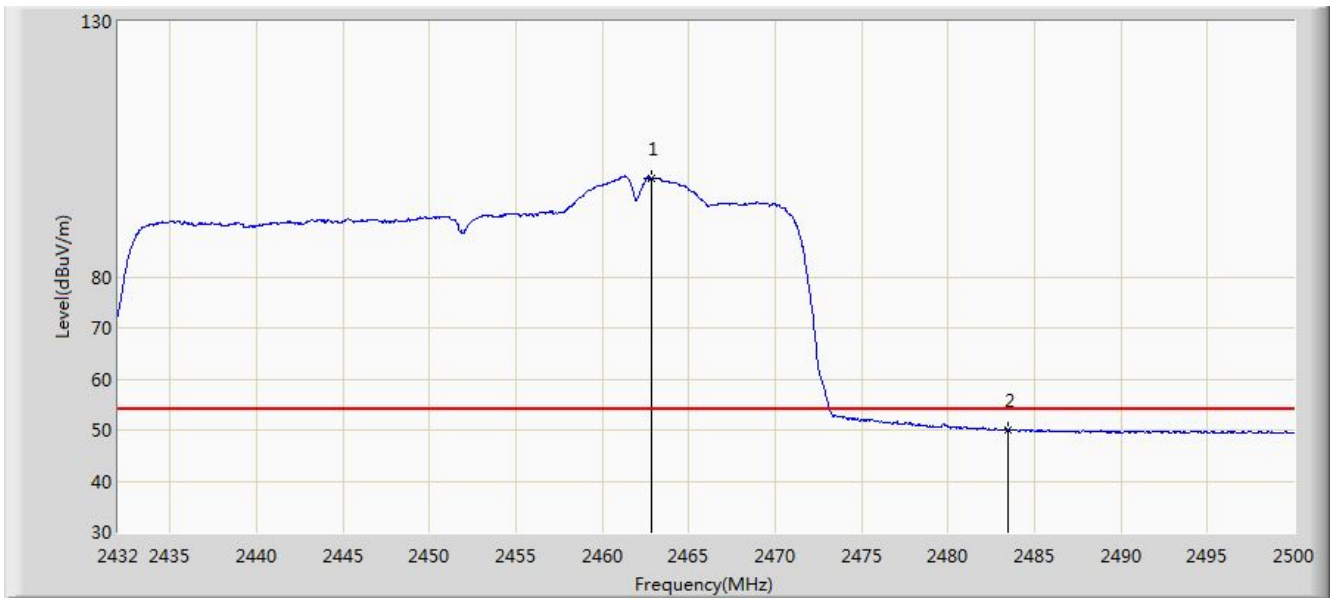


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.838	99.416	67.337	N/A	N/A	32.079	AV
2			2483.500	50.019	17.982	-3.981	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 10:25
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with DAP646-RW Scan Antenna	

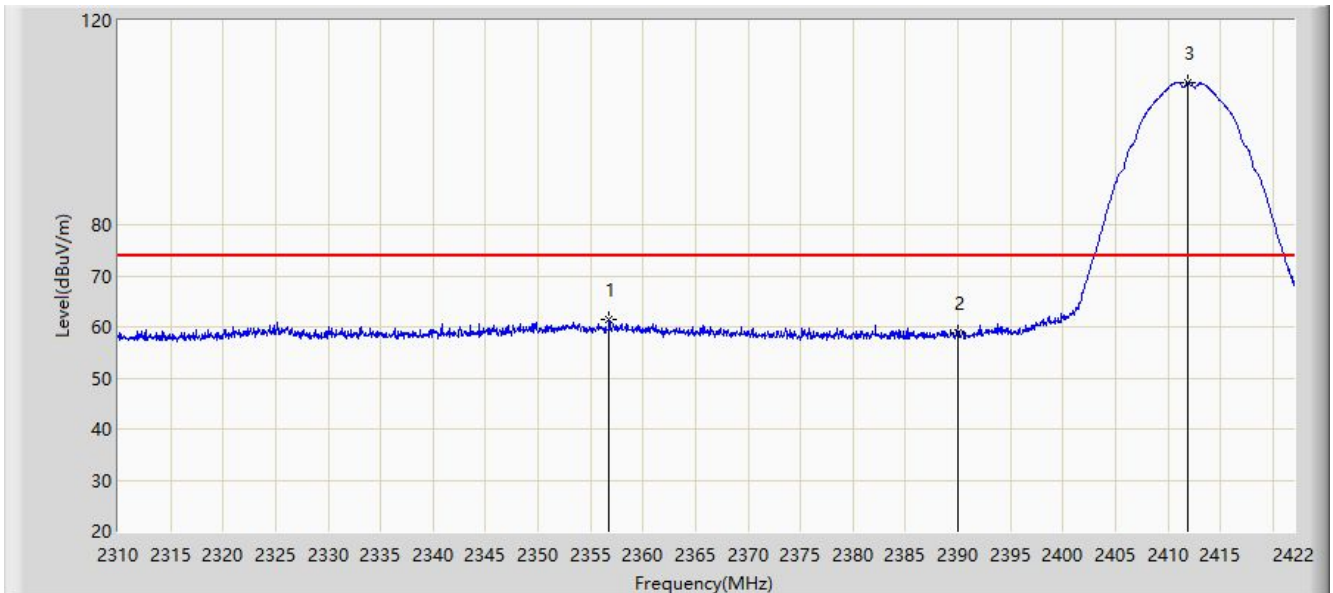


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2356.760	61.453	28.324	-12.547	74.000	33.129	PK
2			2390.000	58.939	25.859	-15.061	74.000	33.080	PK
3		*	2411.864	107.809	74.709	N/A	N/A	33.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:03
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with DAP646-RW Scan Antenna	

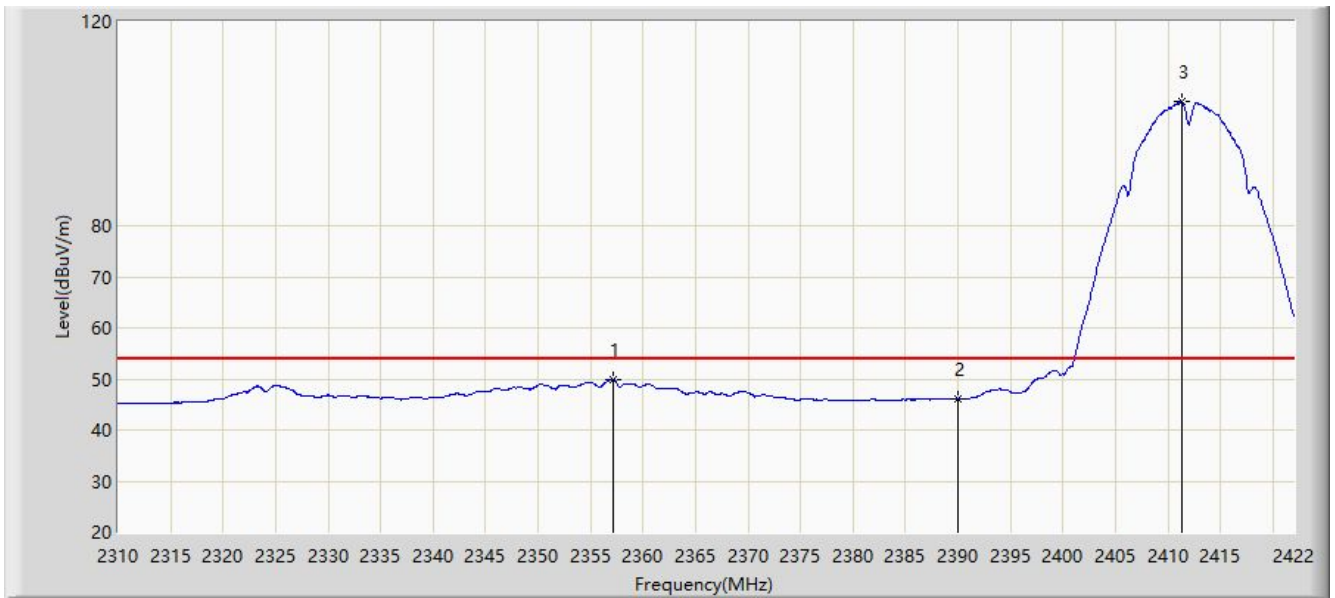


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2357.152	49.737	16.607	-4.263	54.000	33.131	AV
2			2390.000	46.057	12.977	-7.943	54.000	33.080	AV
3		*	2411.304	104.406	71.306	N/A	N/A	33.100	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:07
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with DAP646-RW Scan Antenna	

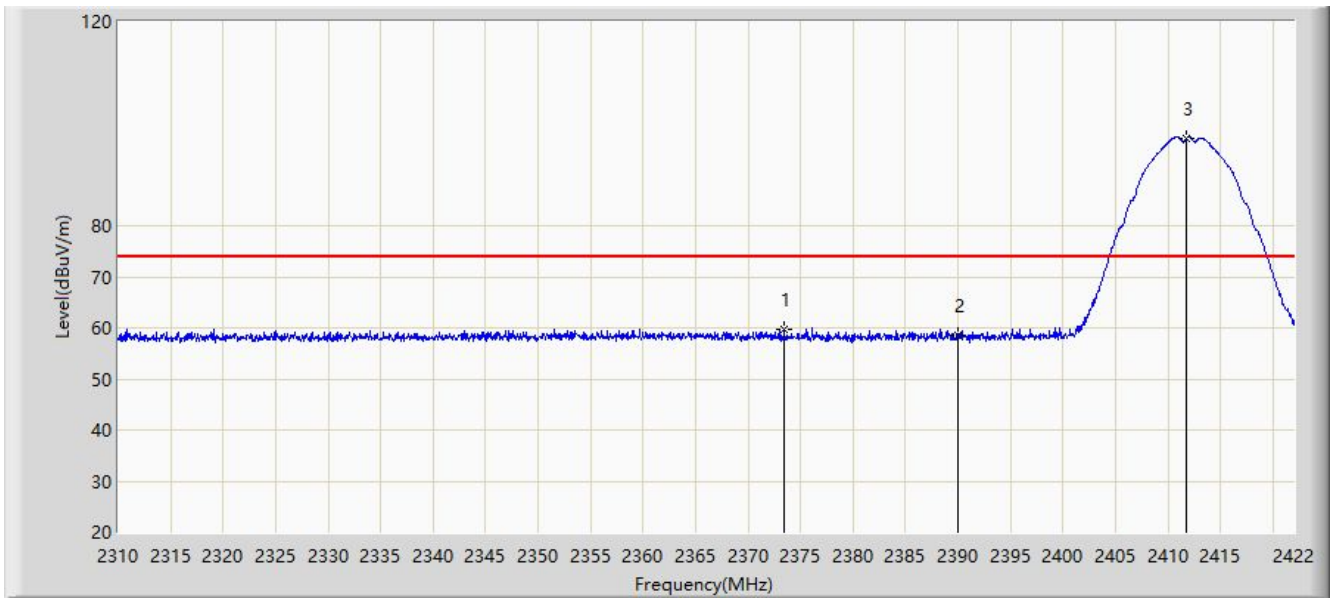


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.448	59.602	26.490	-14.398	74.000	33.112	PK
2			2390.000	58.491	25.411	-15.509	74.000	33.080	PK
3		*	2411.808	97.221	64.121	N/A	N/A	33.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:08
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with DAP646-RW Scan Antenna	

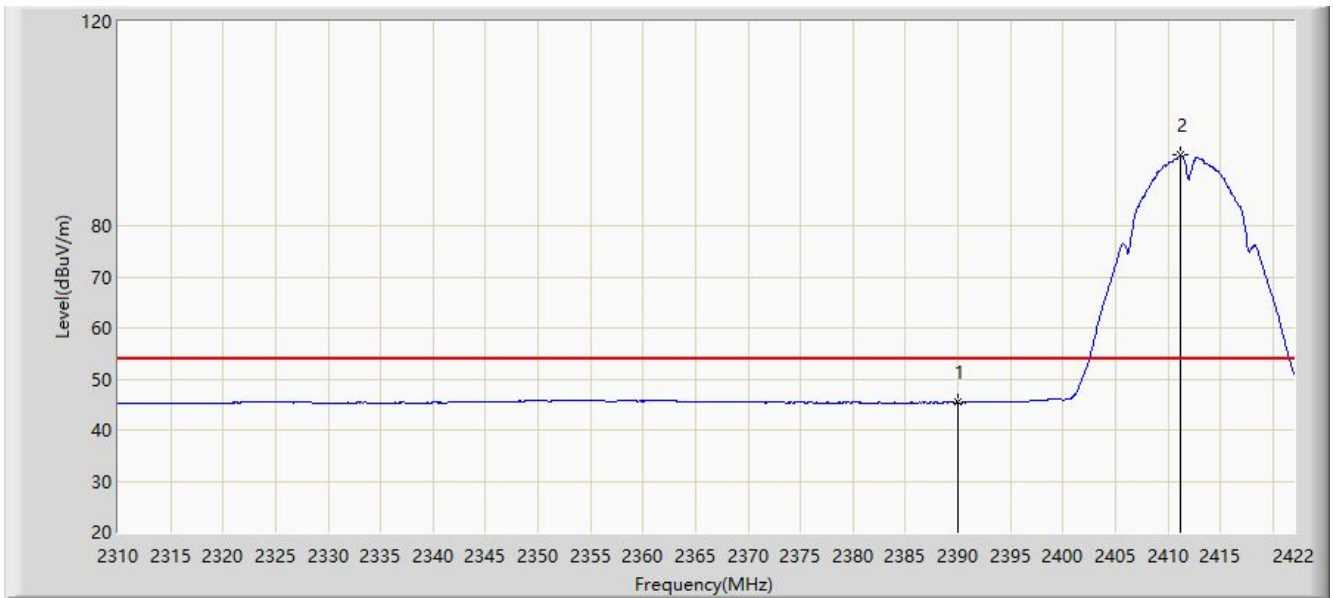


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.367	12.287	-8.633	54.000	33.080	AV
2		*	2411.192	93.808	60.708	N/A	N/A	33.100	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:11
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with DAP646-RW Scan Antenna	

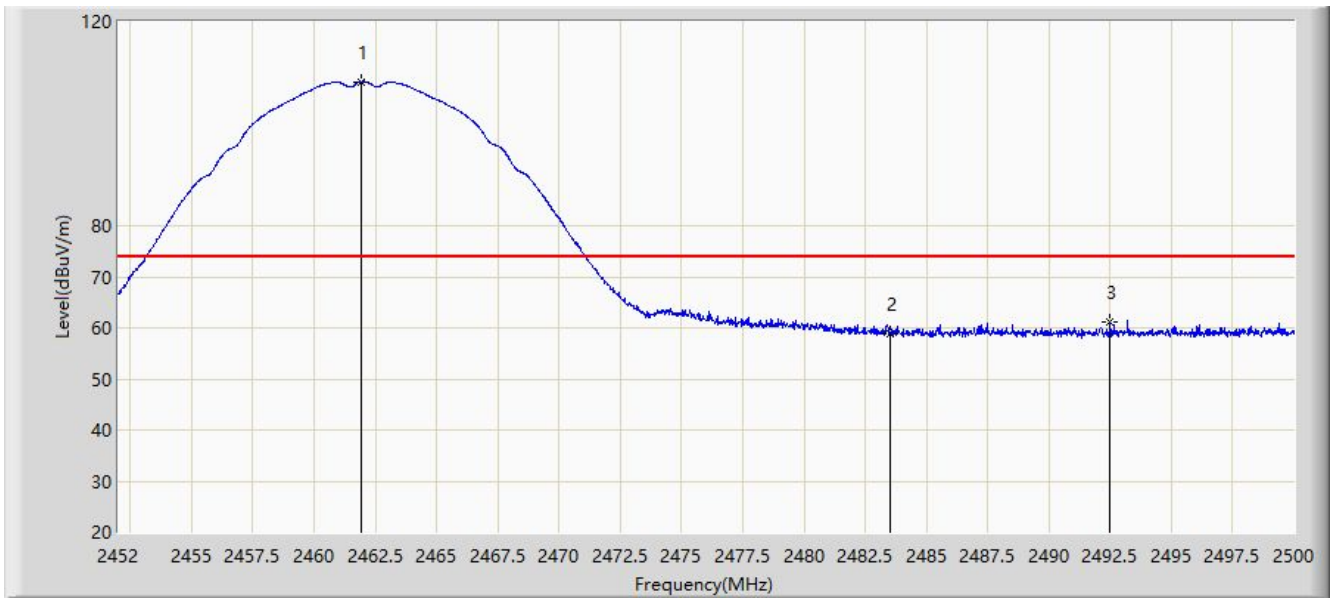


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	108.215	75.162	N/A	N/A	33.053	PK
2			2483.500	58.967	25.925	-15.033	74.000	33.042	PK
3			2492.488	61.244	28.206	-12.756	74.000	33.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:14
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with DAP646-RW Scan Antenna	

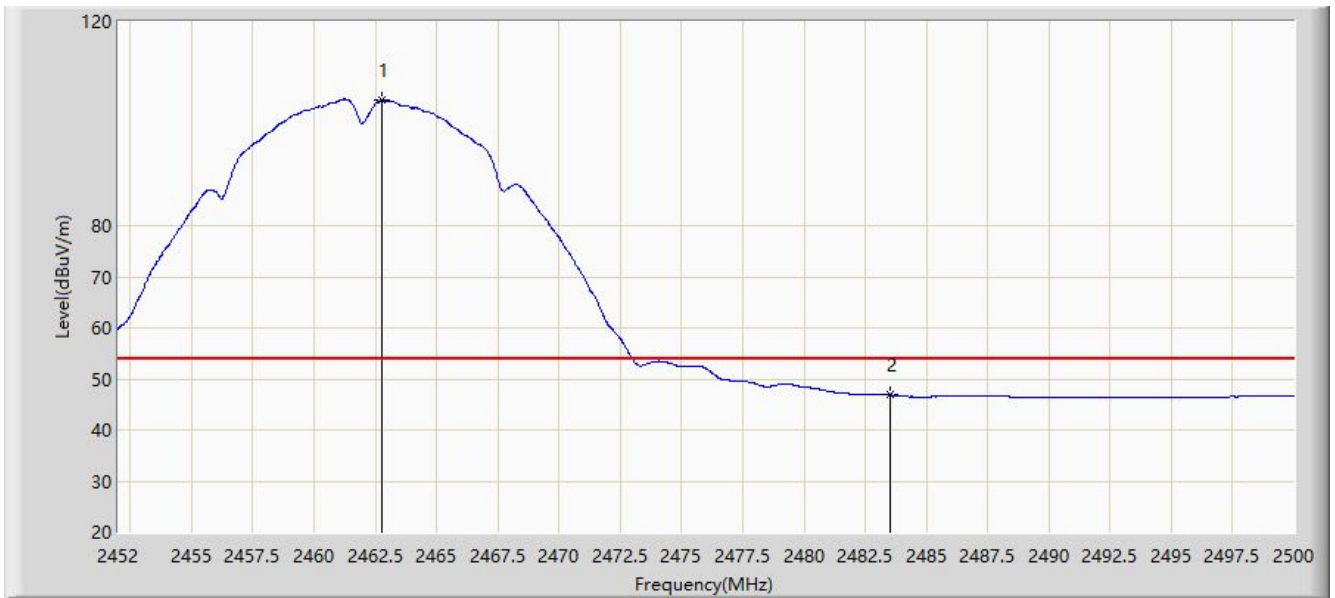


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.752	104.628	71.575	N/A	N/A	33.053	AV
2			2483.500	46.883	13.841	-7.117	54.000	33.042	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:15
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with DAP646-RW Scan Antenna	

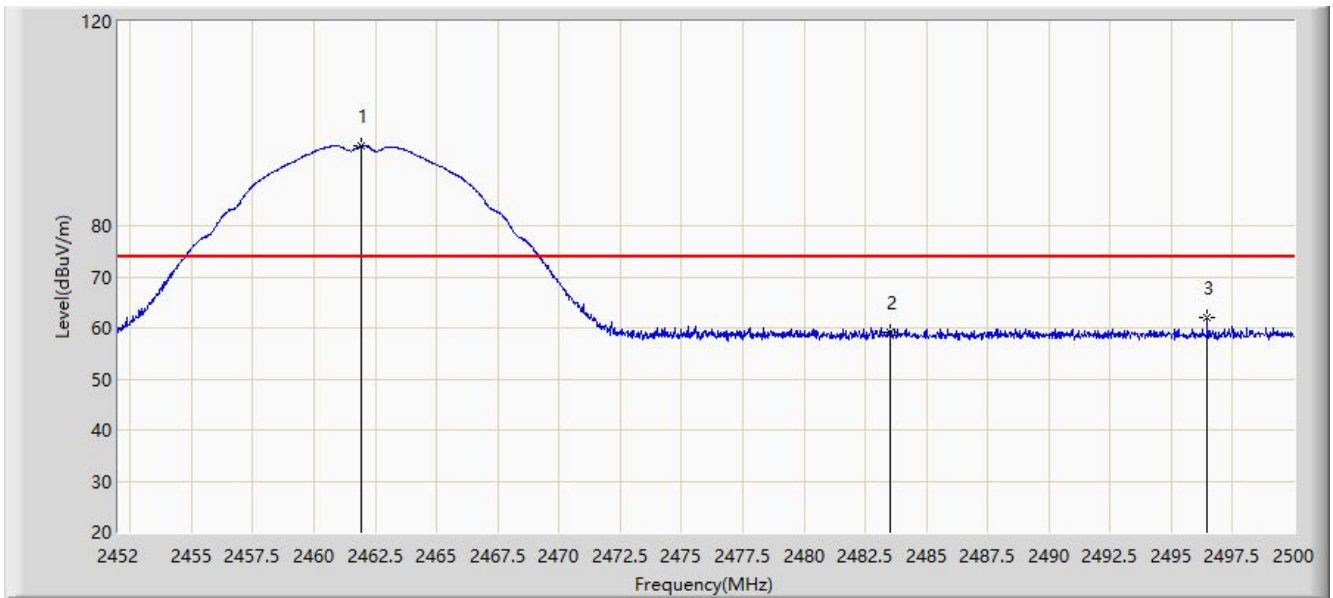

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	95.649	62.596	N/A	N/A	33.053	PK
2			2483.500	59.192	26.150	-14.808	74.000	33.042	PK
3			2496.448	62.003	28.967	-11.997	74.000	33.035	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:16
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with DAP646-RW Scan Antenna	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.800	91.932	58.879	N/A	N/A	33.053	AV
2			2483.500	45.910	12.868	-8.090	54.000	33.042	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:18
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with DAP646-RW Scan Antenna	

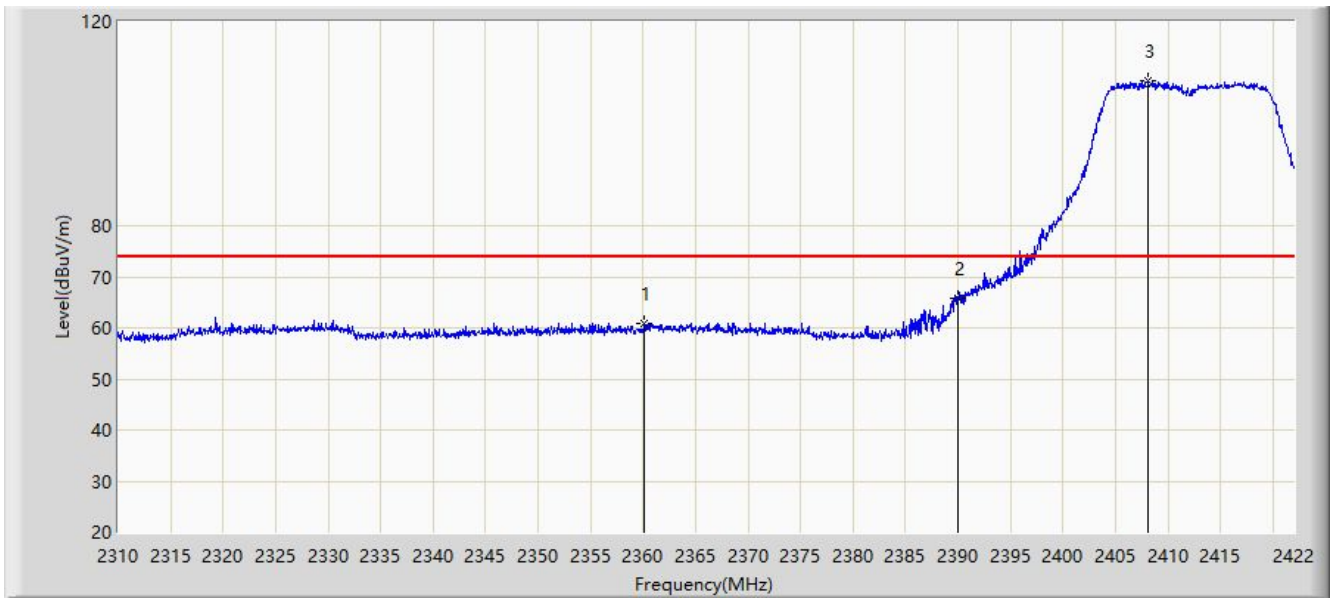


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.120	60.991	27.851	-13.009	74.000	33.140	PK
2			2390.000	65.817	32.737	-8.183	74.000	33.080	PK
3		*	2408.112	108.304	75.208	N/A	N/A	33.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:19
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with DAP646-RW Scan Antenna	

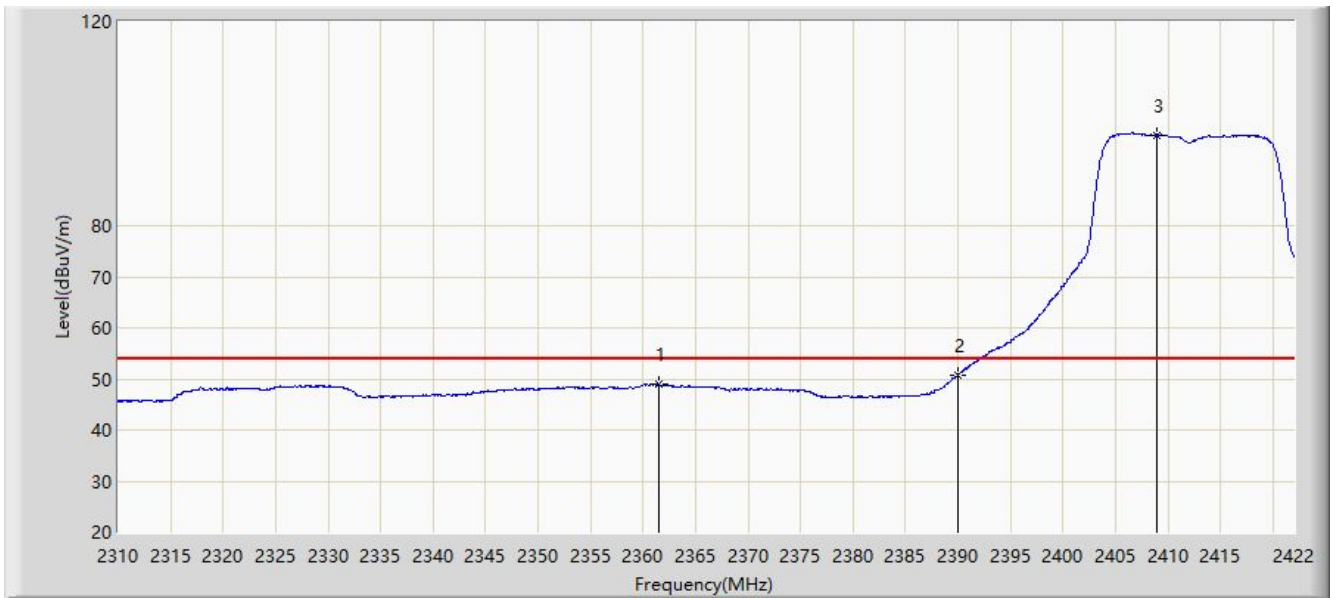


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.464	49.046	15.909	-4.954	54.000	33.137	AV
2			2390.000	50.785	17.705	-3.215	54.000	33.080	AV
3		*	2408.896	97.798	64.701	N/A	N/A	33.096	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:22
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with DAP646-RW Scan Antenna	

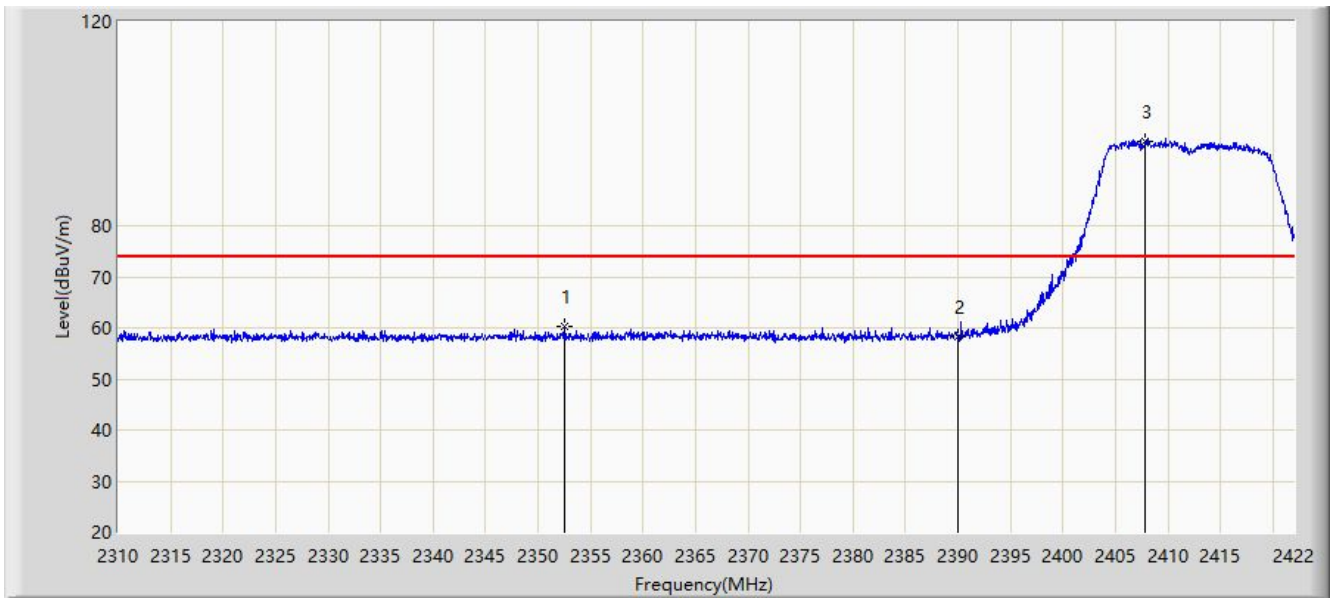


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2352.504	60.232	27.117	-13.768	74.000	33.115	PK
2			2390.000	58.242	25.162	-15.758	74.000	33.080	PK
3		*	2407.888	96.652	63.557	N/A	N/A	33.095	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:24
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with DAP646-RW Scan Antenna	

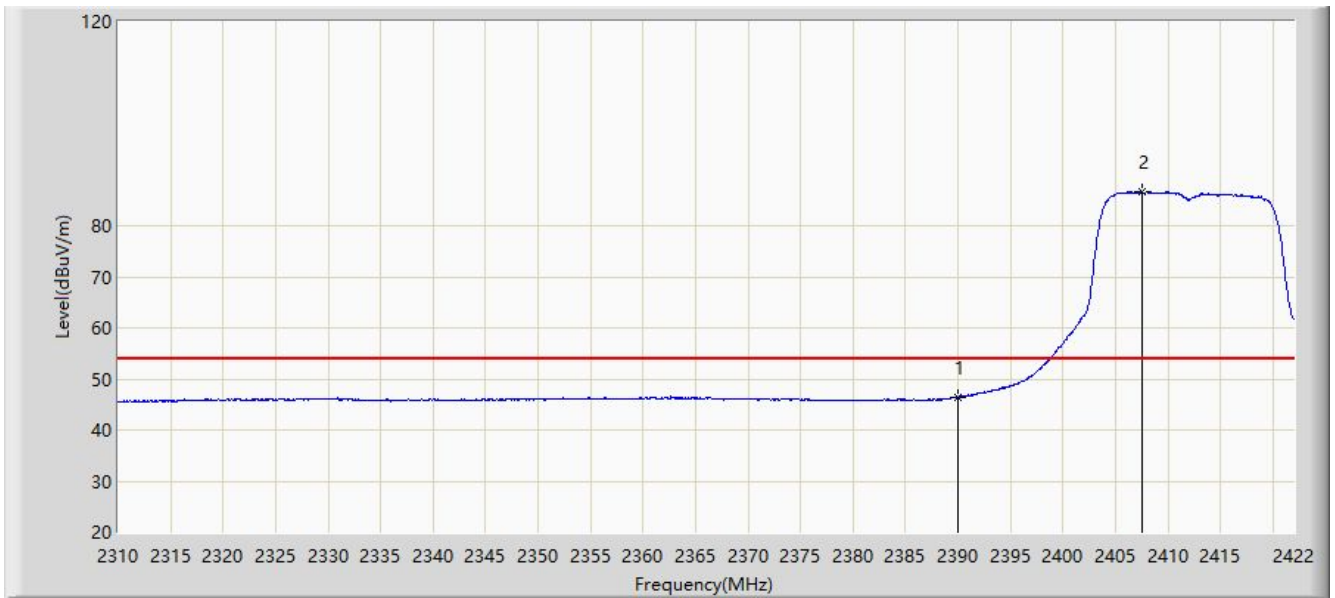


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.477	13.397	-7.523	54.000	33.080	AV
2		*	2407.496	86.722	53.627	N/A	N/A	33.095	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:29
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with DAP646-RW Scan Antenna	

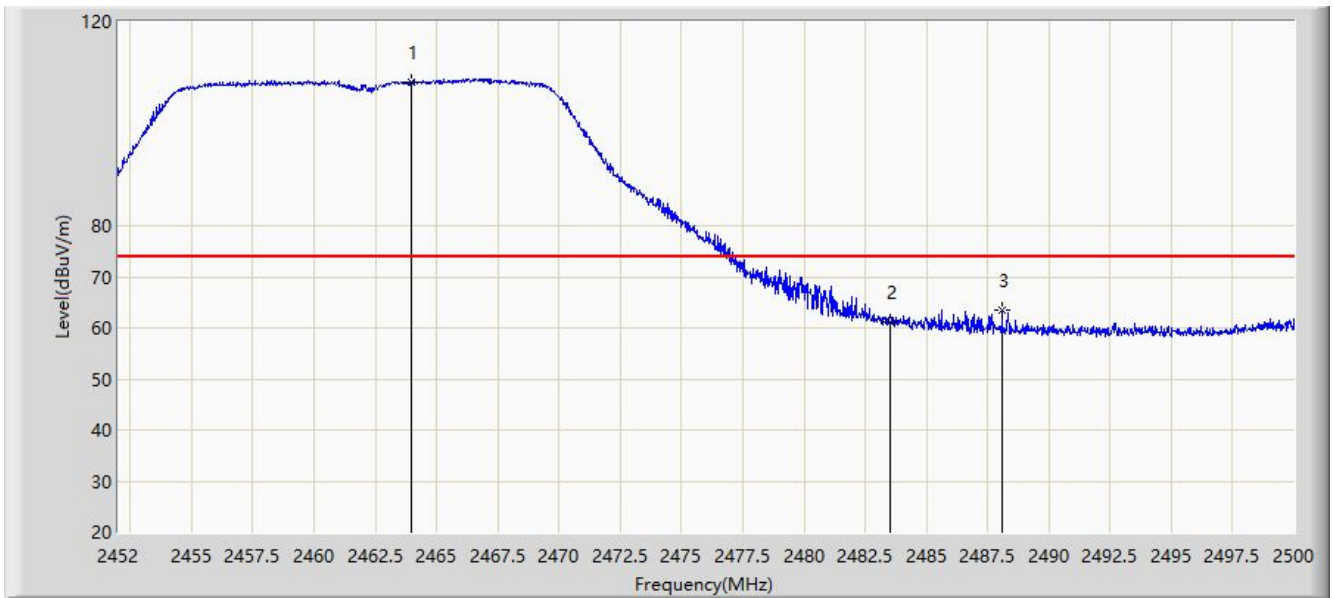


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.952	108.109	75.057	N/A	N/A	33.052	PK
2			2483.500	61.020	27.978	-12.980	74.000	33.042	PK
3			2488.096	63.395	30.355	-10.605	74.000	33.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:31
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with DAP646-RW Scan Antenna	

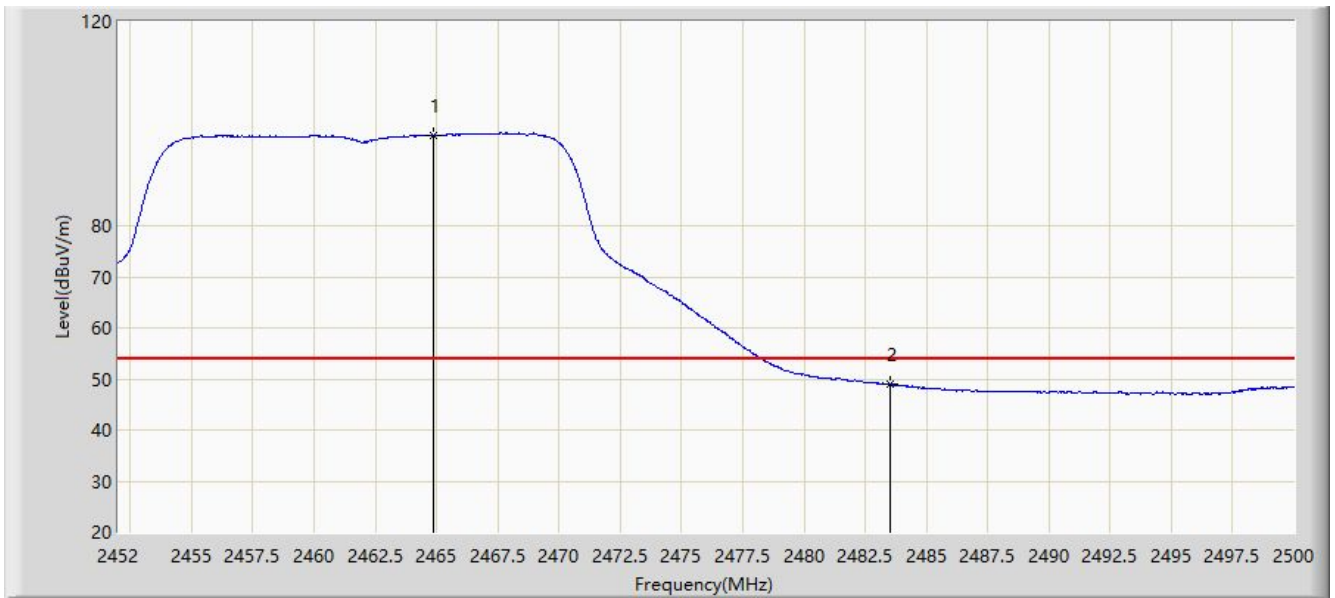


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.864	97.814	64.762	N/A	N/A	33.052	AV
2			2483.500	48.938	15.896	-5.062	54.000	33.042	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:32
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with DAP646-RW Scan Antenna	

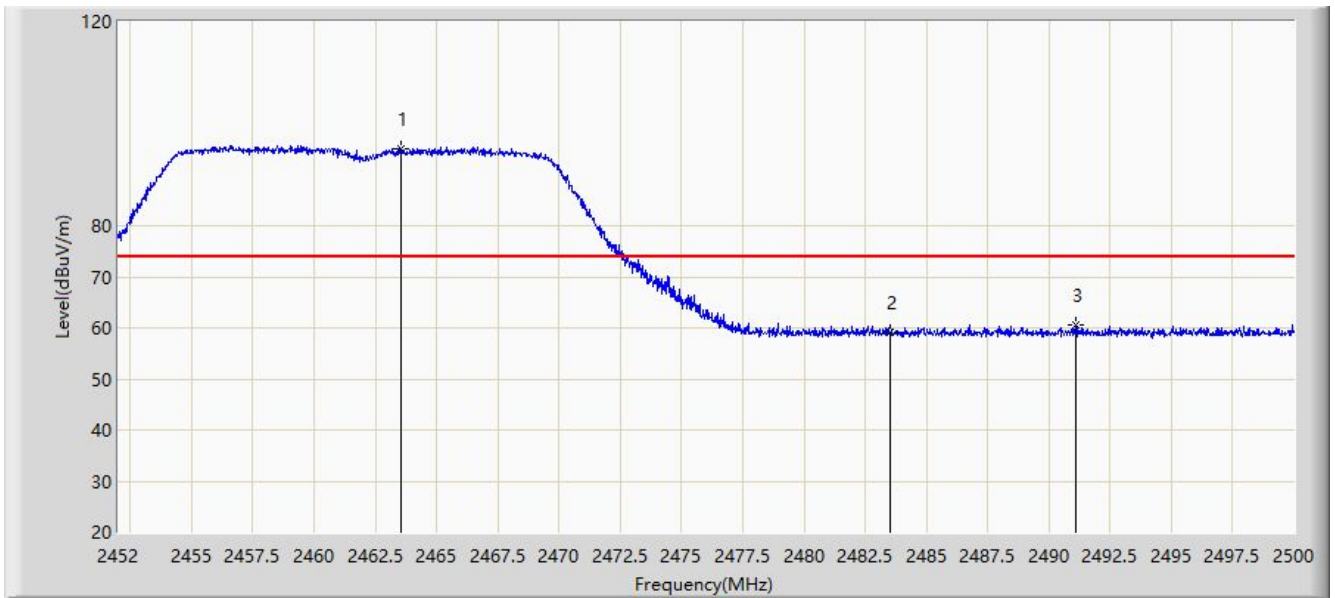


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.544	95.074	62.021	N/A	N/A	33.052	PK
2			2483.500	59.219	26.177	-14.781	74.000	33.042	PK
3			2491.072	60.579	27.540	-13.421	74.000	33.039	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/03/01 - 11:36
Limit: FCC_Part15.209_RSE (3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with DAP646-RW Scan Antenna	

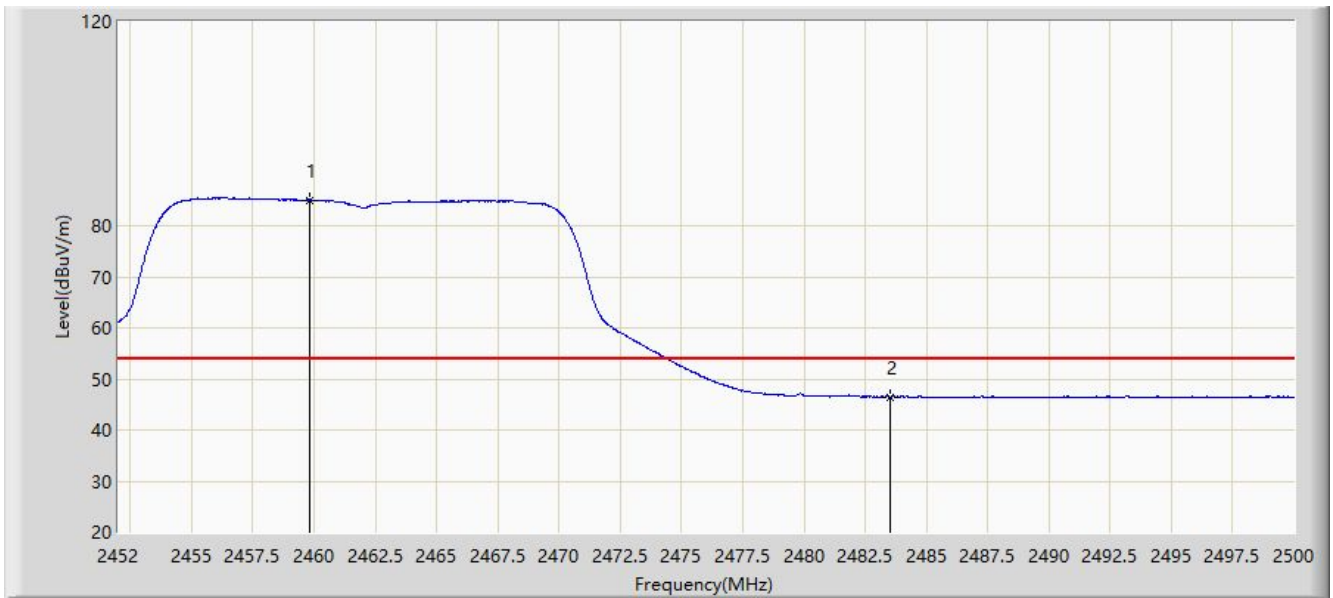


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.848	85.072	52.018	N/A	N/A	33.054	AV
2			2483.500	46.447	13.405	-7.553	54.000	33.042	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:28
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP647-RW	

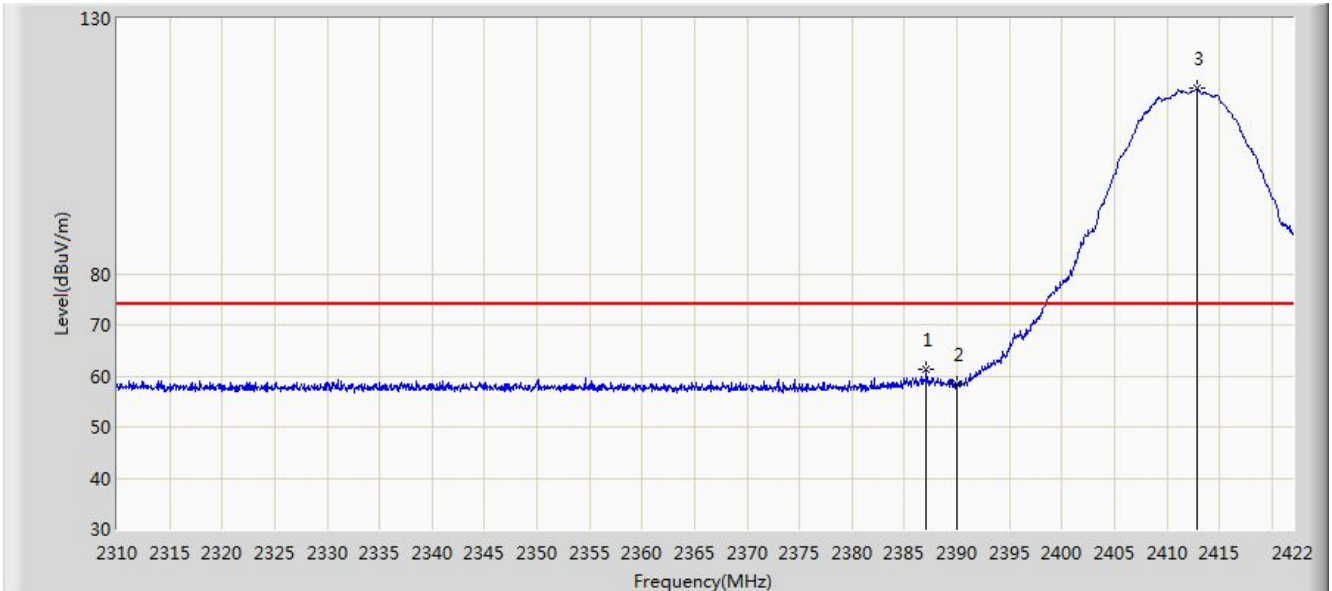


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.112	61.184	28.702	-12.816	74.000	32.482	PK
2			2390.000	58.334	25.849	-15.666	74.000	32.485	PK
3		*	2412.872	116.300	83.775	N/A	N/A	32.525	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:35
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP647-RW	

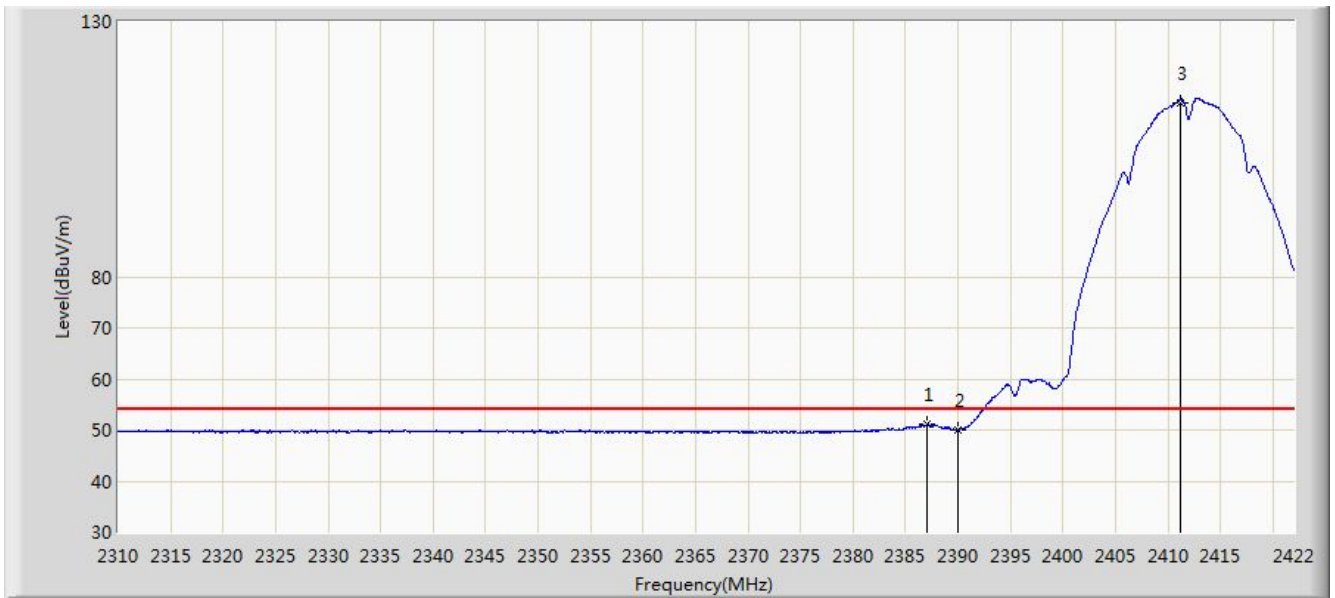


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.112	51.137	18.655	-2.863	54.000	32.482	AV
2			2390.000	50.028	17.543	-3.972	54.000	32.485	AV
3	X	*	2411.248	114.015	81.476	N/A	N/A	32.539	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:41
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP647-RW	

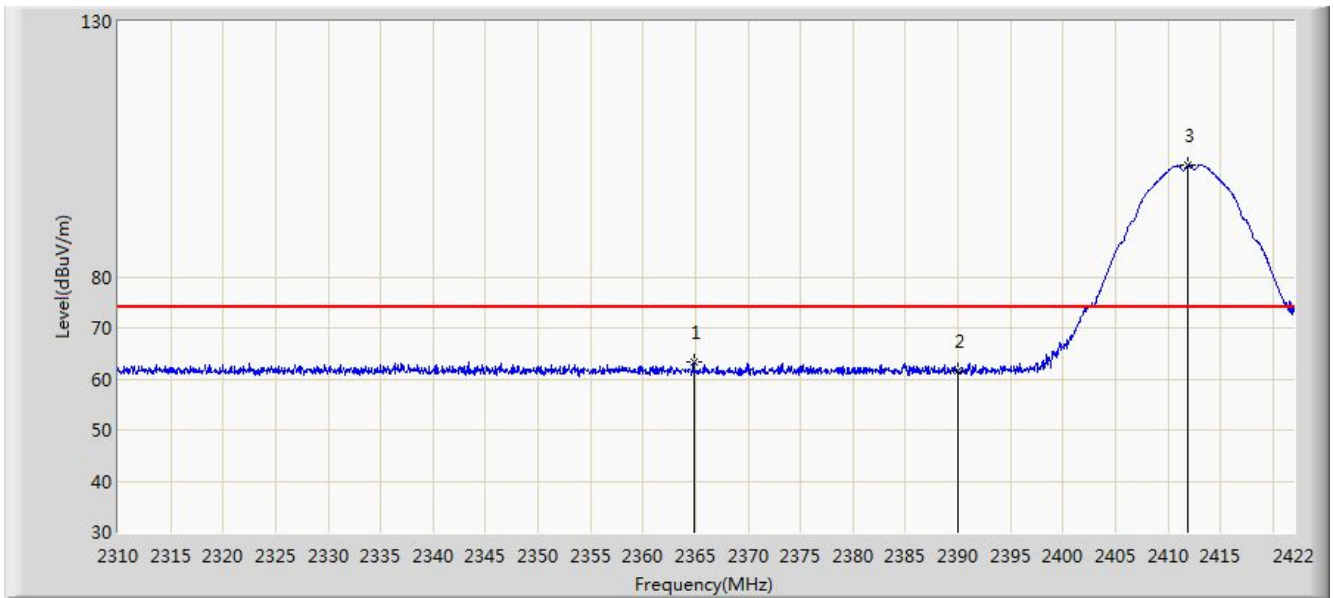


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2364.880	63.337	30.787	-10.663	74.000	32.550	PK
2			2390.000	61.614	29.129	-12.386	74.000	32.485	PK
3		*	2411.920	101.905	69.372	N/A	N/A	32.533	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:44
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode) with DAP647-RW	

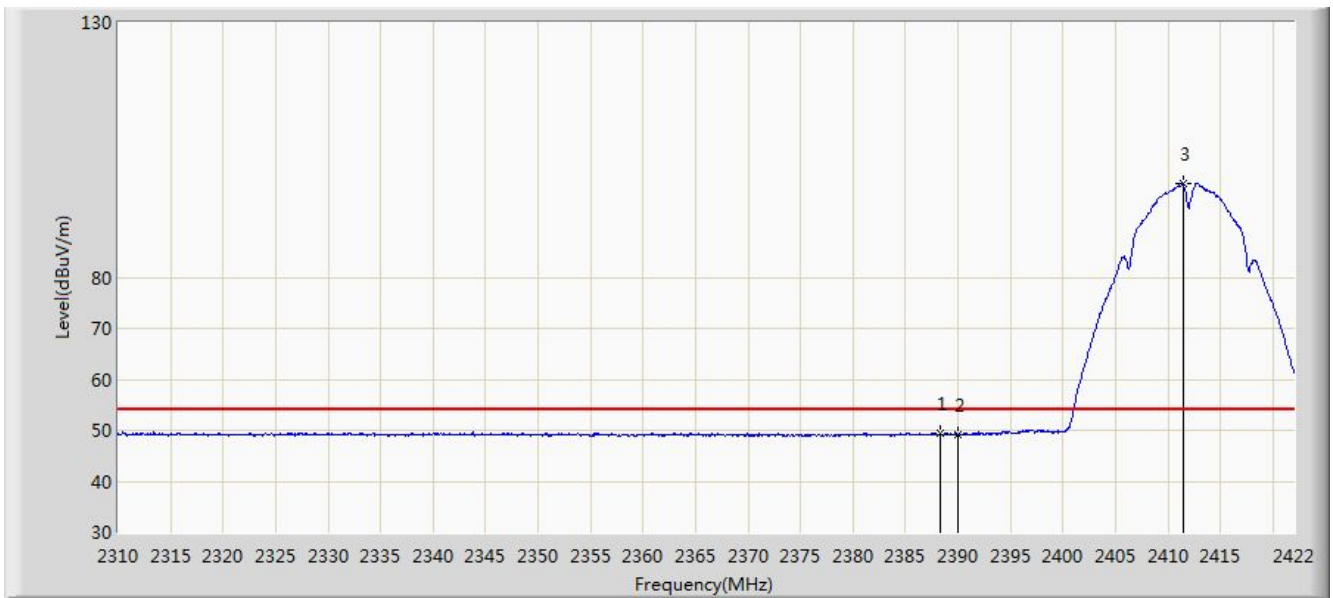


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.344	49.418	16.935	-4.582	54.000	32.483	AV
2			2390.000	49.140	16.655	-4.860	54.000	32.485	AV
3		*	2411.416	98.321	65.784	N/A	N/A	32.538	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:45
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP647-RW	

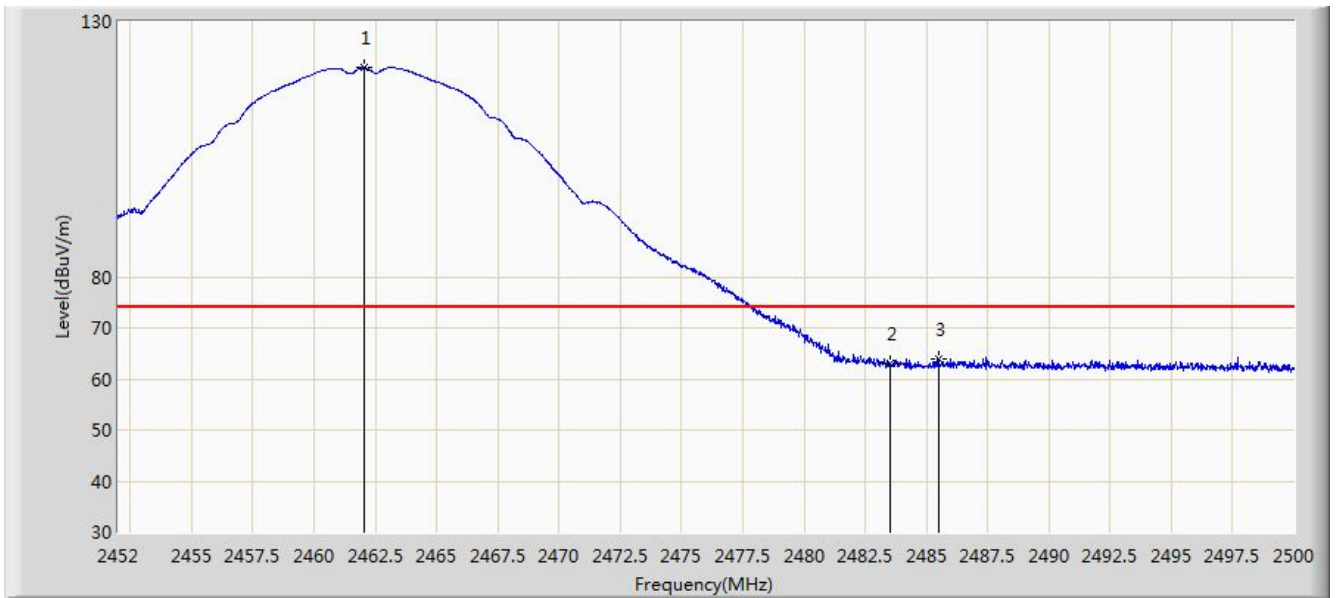


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.056	120.891	88.573	N/A	N/A	32.318	PK
2			2483.500	62.948	30.573	-11.052	74.000	32.375	PK
3			2485.480	64.009	31.639	-9.991	74.000	32.370	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:53
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP647-RW	

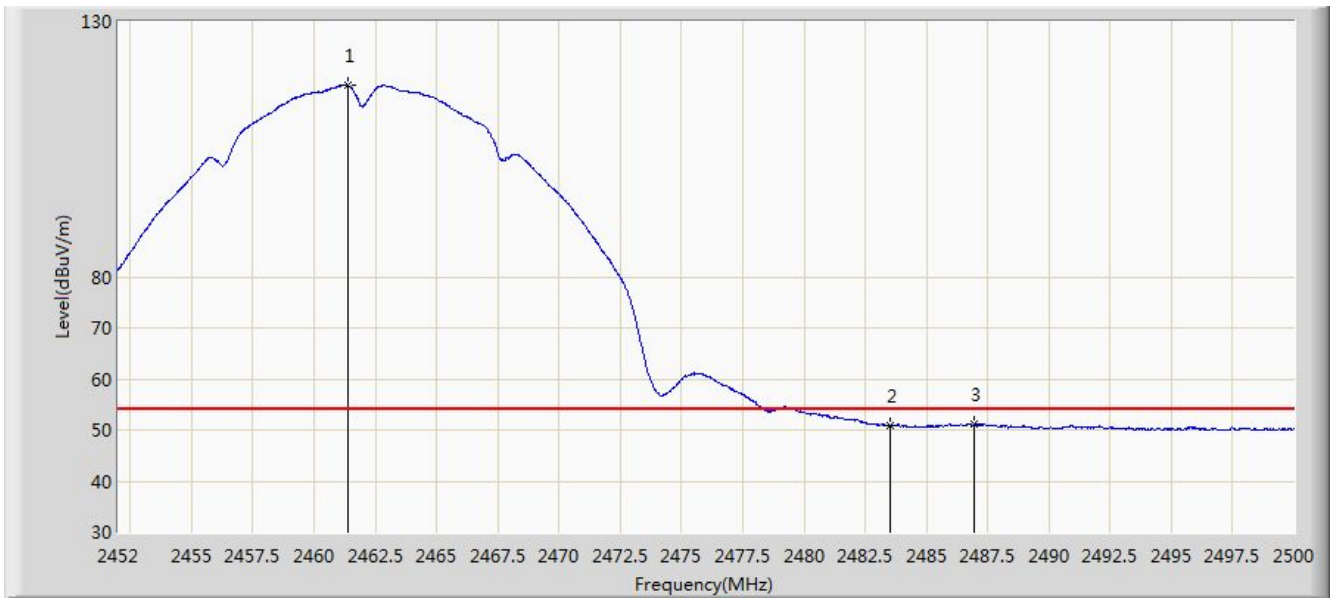


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2461.384	117.448	85.130	N/A	N/A	32.318	AV
2			2483.500	50.803	18.428	-3.197	54.000	32.375	AV
3			2486.920	51.053	18.686	-2.947	54.000	32.367	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2019/11/23 - 12:54
Limit: FCC_Part15.209_RSE (3m)	Engineer: Kyrie Xie
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode) with DAP647-RW	

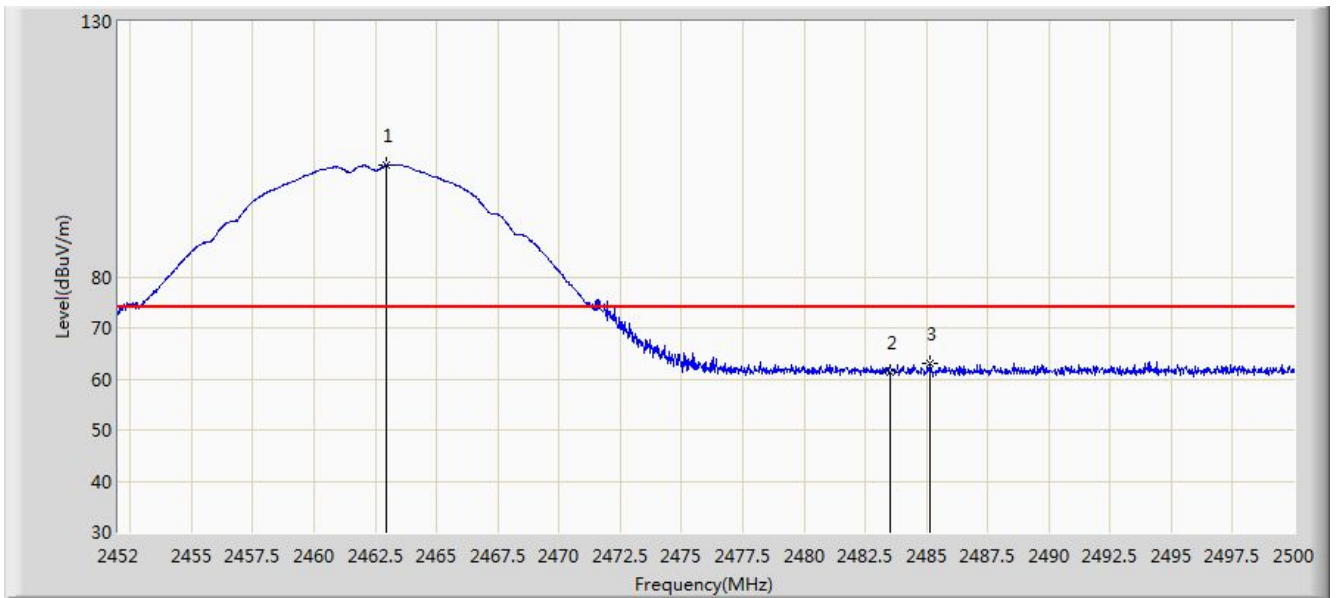

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.968	101.913	69.591	N/A	N/A	32.322	PK
2			2483.500	61.384	29.009	-12.616	74.000	32.375	PK
3			2485.120	62.906	30.535	-11.094	74.000	32.371	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)