


Site: AC2	Time: 2020/03/07 - 02:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

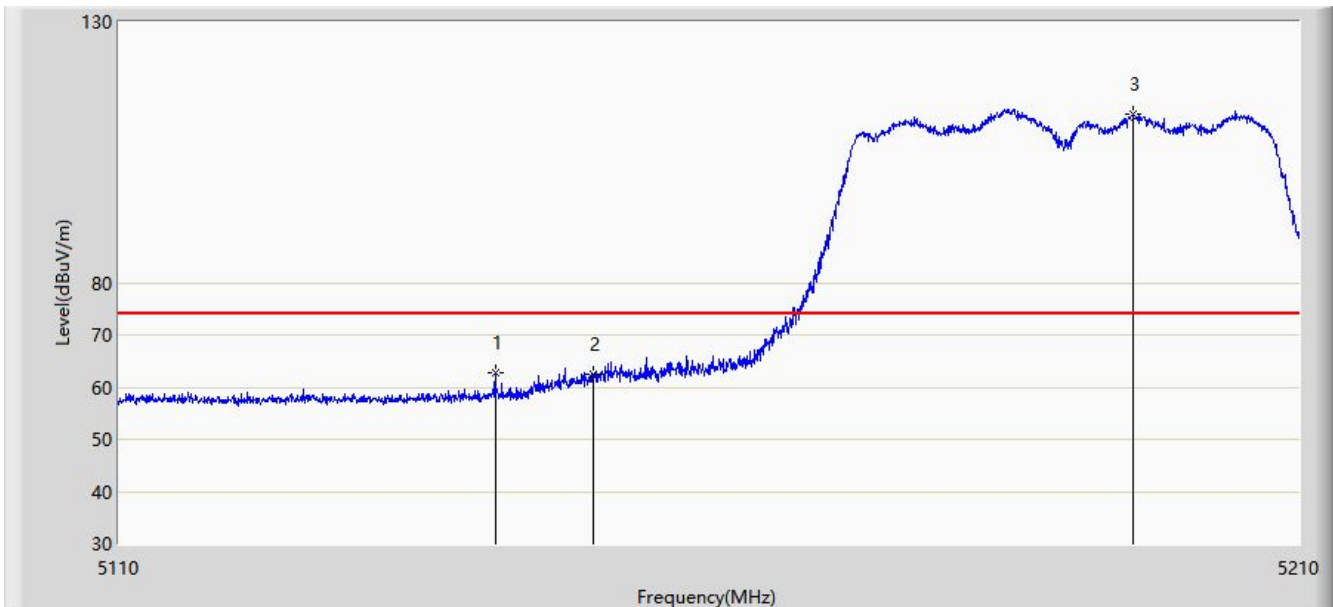


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.700	62.711	58.290	-11.289	74.000	4.421	PK
2			5150.000	62.552	58.110	-11.448	74.000	4.442	PK
3		*	5195.850	112.214	107.908	N/A	N/A	4.306	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

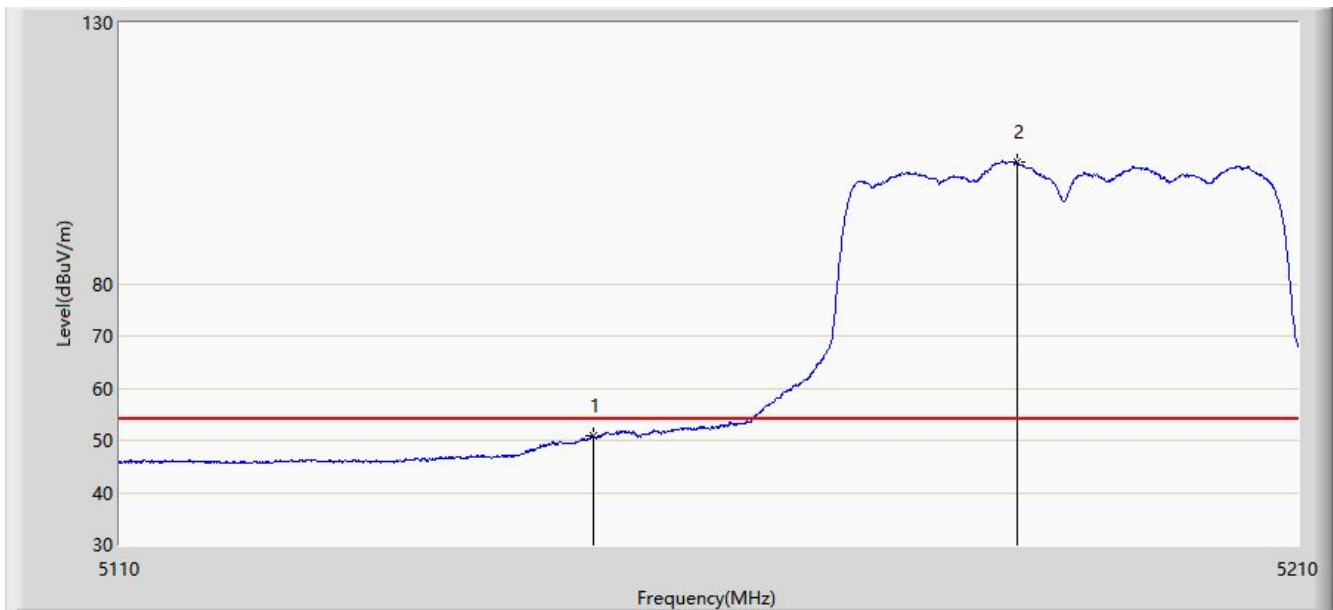


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.961	46.519	-3.039	54.000	4.442	AV
2		*	5186.000	103.281	98.860	N/A	N/A	4.421	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

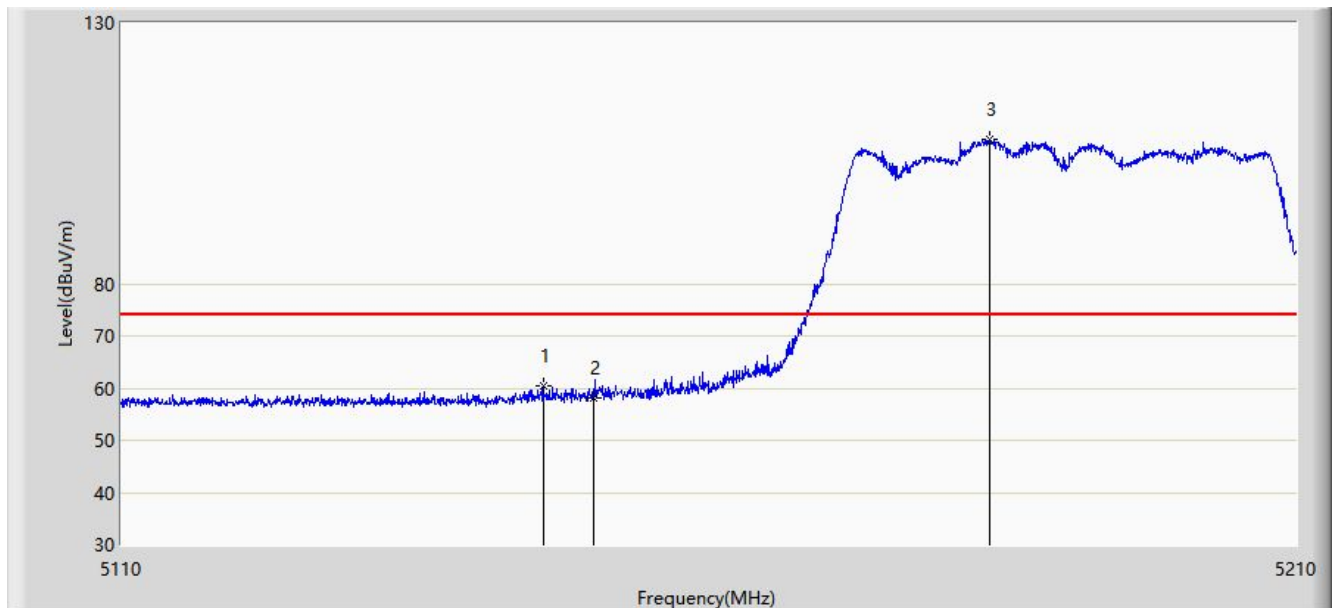


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.750	60.294	55.874	-13.706	74.000	4.420	PK
2			5150.000	58.162	53.720	-15.838	74.000	4.442	PK
3		*	5183.800	107.574	103.127	N/A	N/A	4.447	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

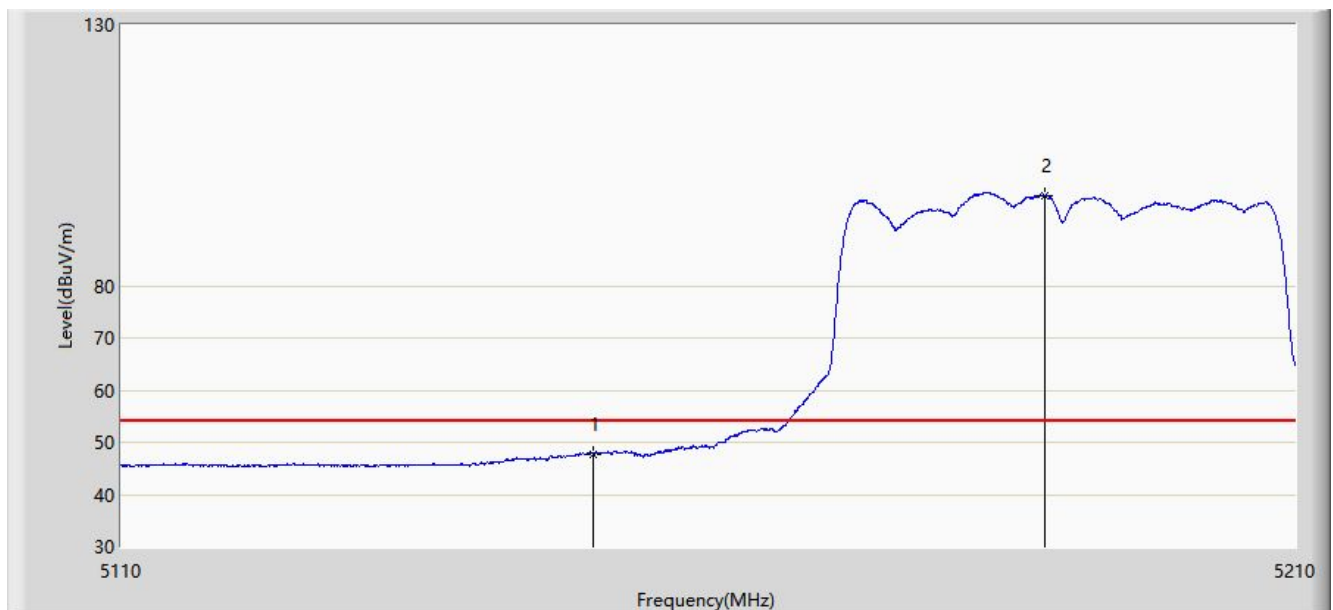


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.598	43.156	-6.402	54.000	4.442	AV
2		*	5188.500	97.380	92.988	N/A	N/A	4.393	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with DAP645-RW	

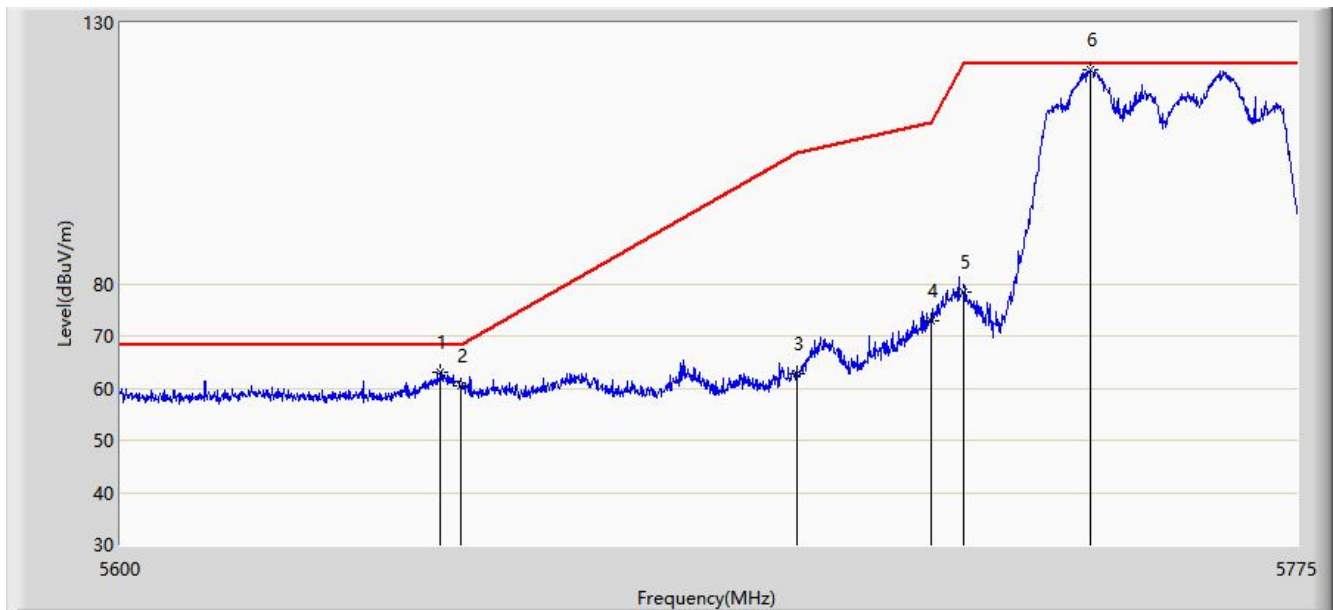


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5647.075	63.160	57.872	-5.040	68.200	5.289	PK
2			5650.000	60.412	55.076	-7.788	68.200	5.336	PK
3			5700.000	62.678	57.360	-42.522	105.200	5.318	PK
4			5720.000	72.792	67.318	-38.008	110.800	5.474	PK
5			5725.000	78.371	72.893	-43.829	122.200	5.478	PK
6		*	5743.850	120.976	115.392	N/A	N/A	5.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:36
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with DAP645-RW	

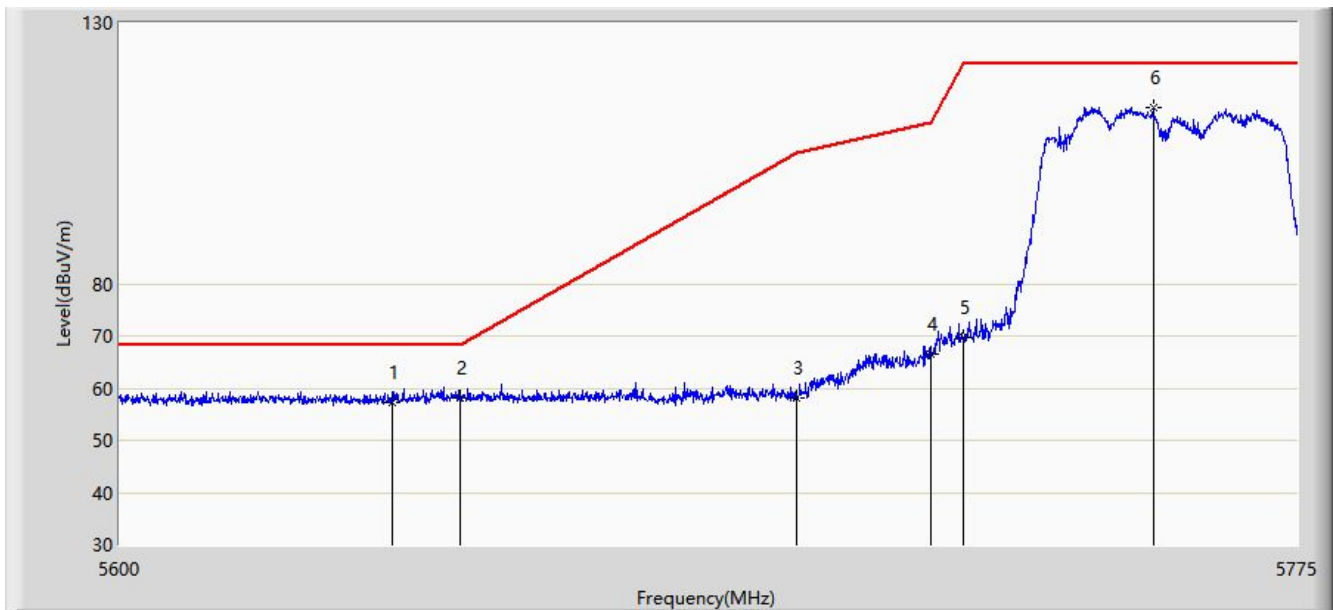


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5640.163	57.237	52.047	-10.963	68.200	5.190	PK
2			5650.000	58.176	52.840	-10.024	68.200	5.336	PK
3			5700.000	58.169	52.851	-47.031	105.200	5.318	PK
4			5720.000	66.592	61.118	-44.208	110.800	5.474	PK
5			5725.000	69.749	64.271	-52.451	122.200	5.478	PK
6		*	5753.388	113.794	108.022	N/A	N/A	5.772	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with DAP645-RW	

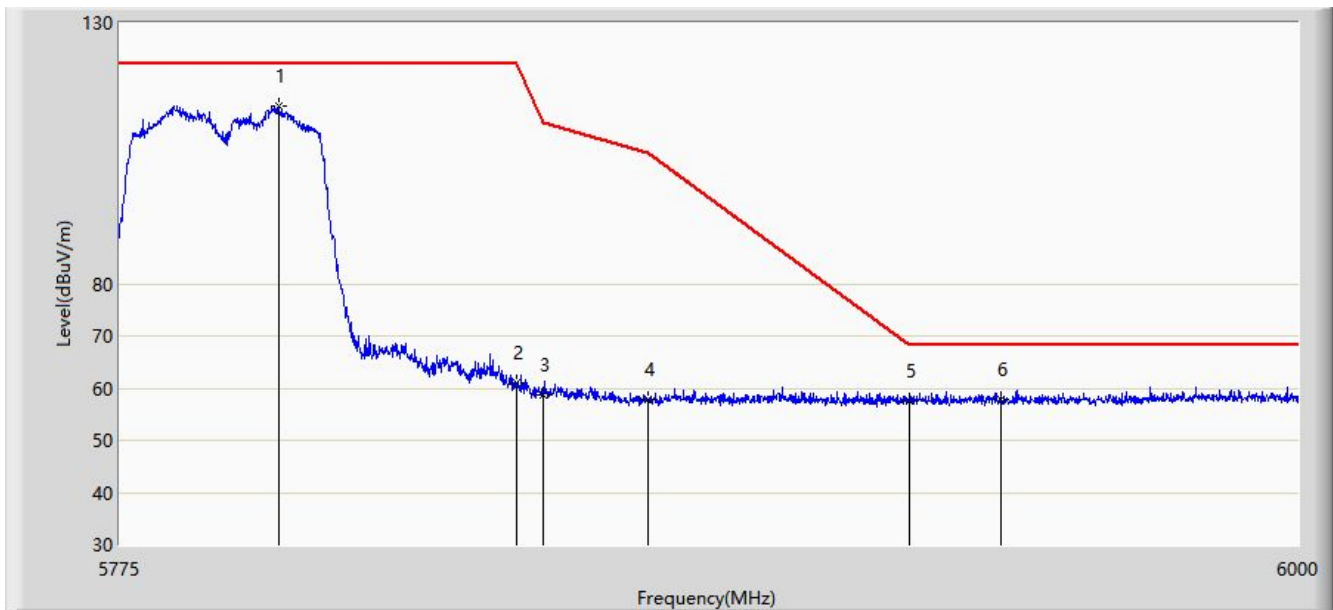


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5805.038	114.015	108.145	N/A	N/A	5.870	PK
2			5850.000	60.882	54.913	-61.318	122.200	5.968	PK
3			5855.000	58.737	52.762	-52.063	110.800	5.975	PK
4			5875.000	57.949	51.936	-47.251	105.200	6.013	PK
5			5925.000	57.656	51.521	-10.544	68.200	6.136	PK
6			5942.513	57.683	51.593	-10.517	68.200	6.091	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with DAP645-RW	

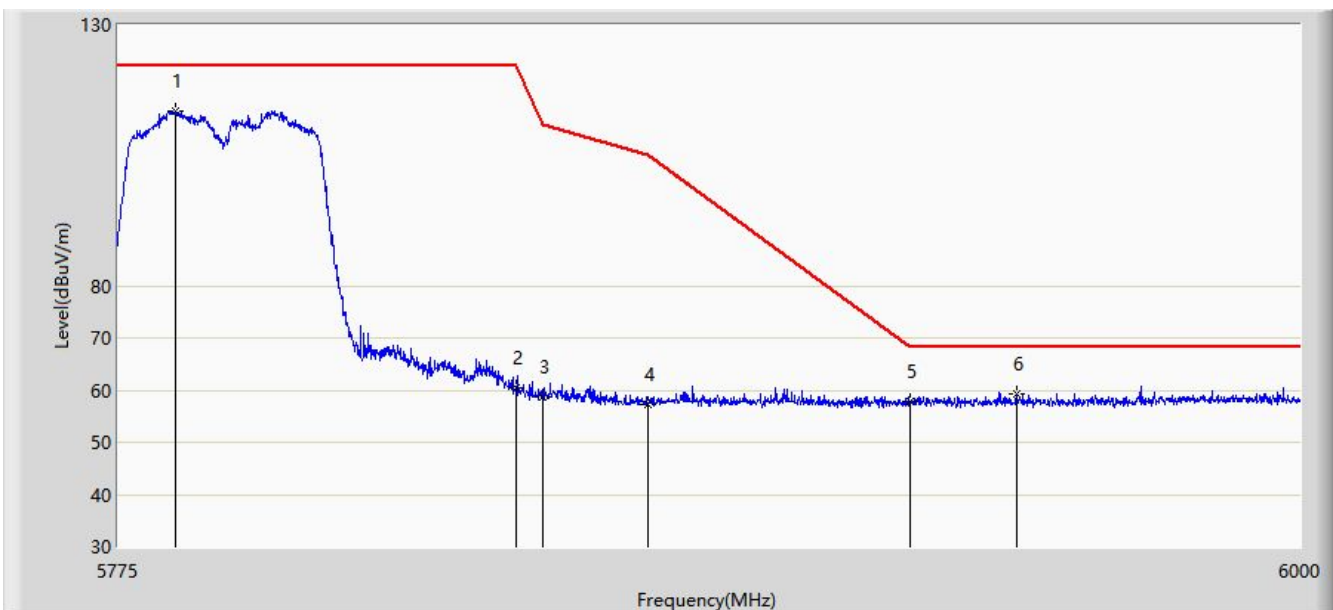


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.687	113.592	107.811	N/A	N/A	5.780	PK
2			5850.000	60.508	54.539	-61.692	122.200	5.968	PK
3			5855.000	58.583	52.608	-52.217	110.800	5.975	PK
4			5875.000	57.294	51.281	-47.906	105.200	6.013	PK
5			5925.000	57.830	51.695	-10.370	68.200	6.136	PK
6			5945.437	59.350	53.275	-8.850	68.200	6.074	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP645-RW	

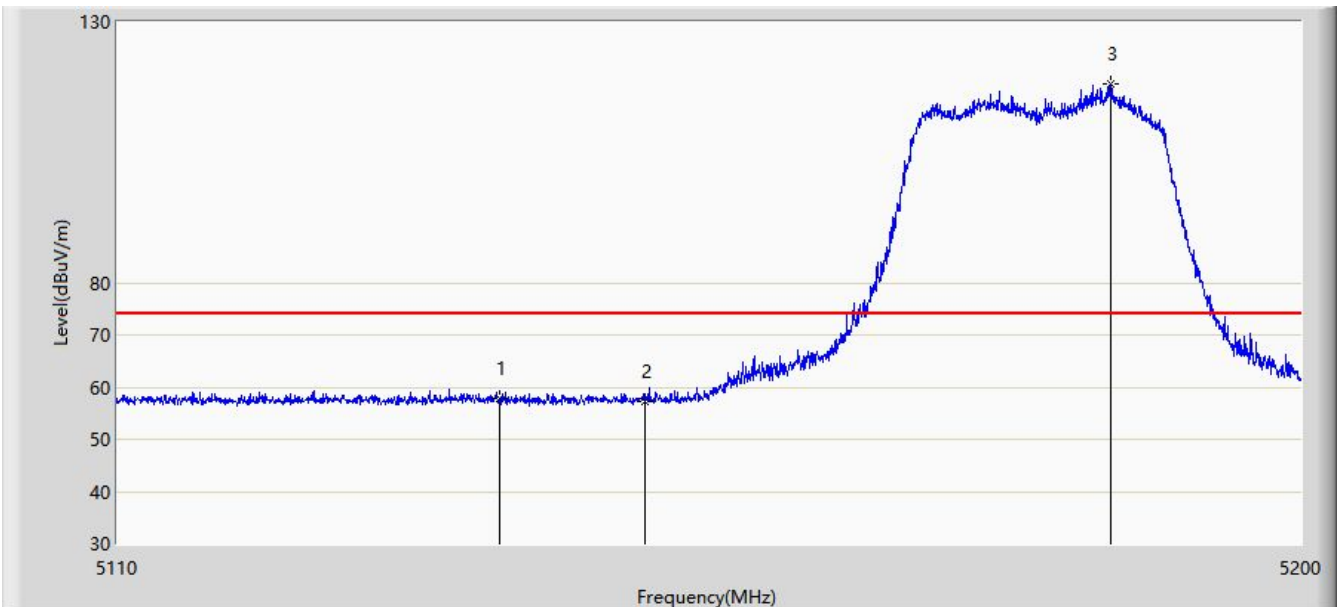


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.935	57.967	53.546	-16.033	74.000	4.421	PK
2			5150.000	57.201	52.759	-16.799	74.000	4.442	PK
3		*	5185.510	118.219	113.792	N/A	N/A	4.426	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP645-RW	

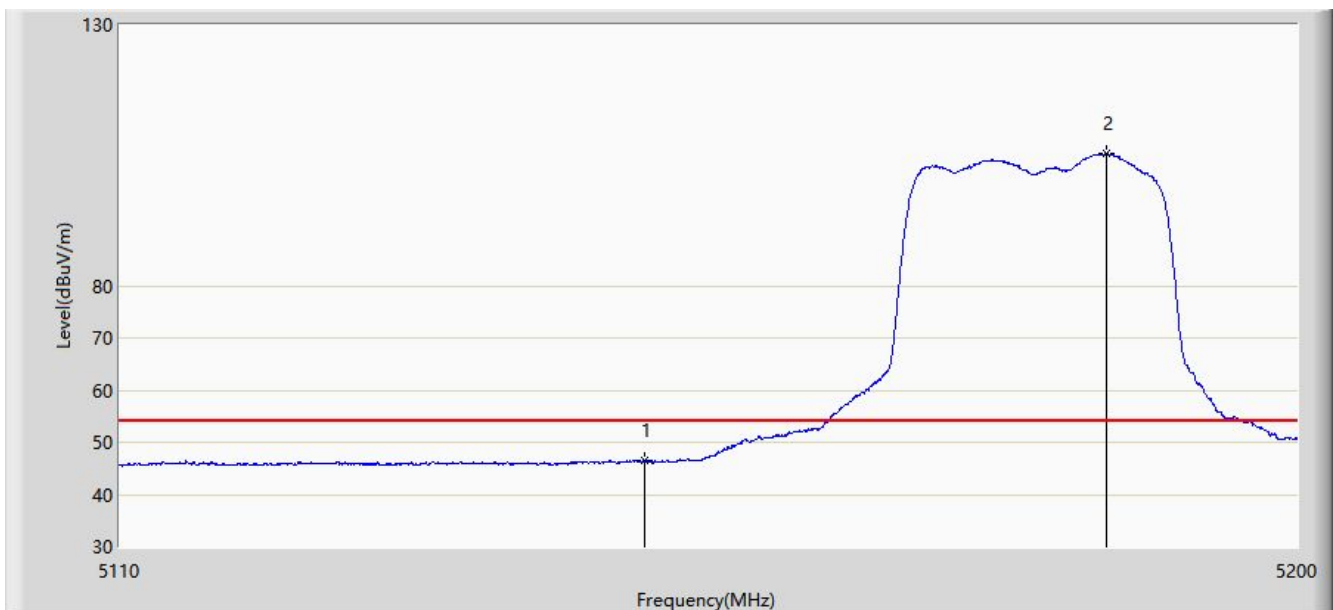


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.429	41.987	-7.571	54.000	4.442	AV
2		*	5185.375	105.316	100.888	N/A	N/A	4.428	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP645-RW	

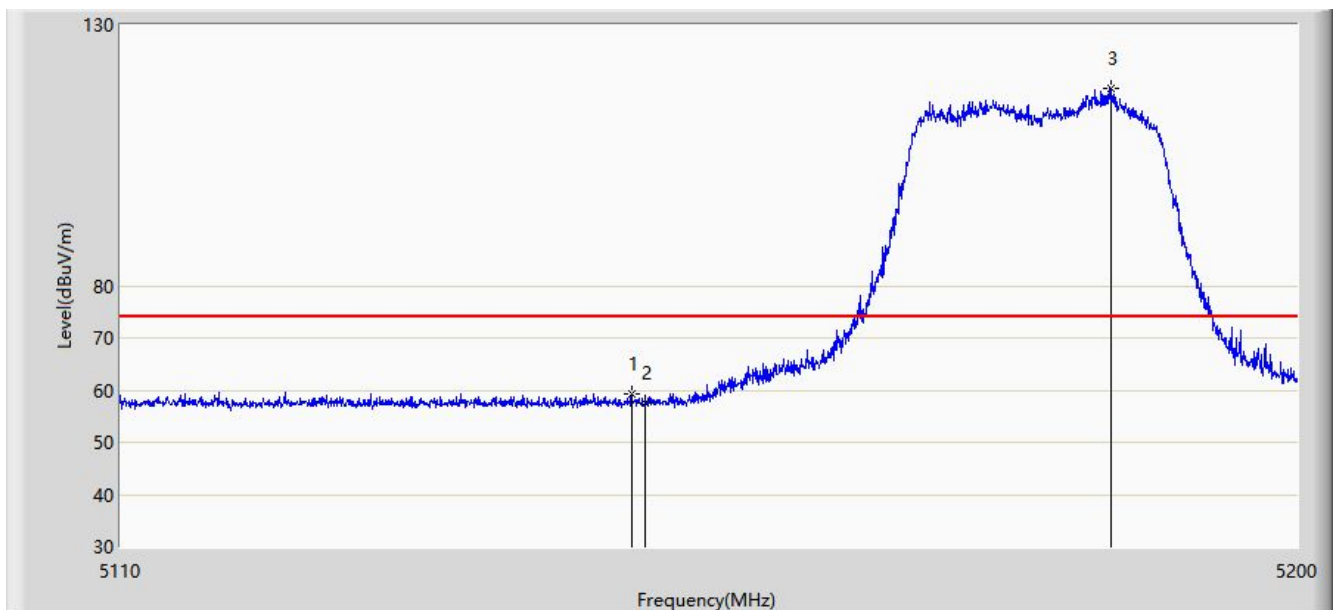


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.925	59.294	54.864	-14.706	74.000	4.430	PK
2			5150.000	57.670	53.228	-16.330	74.000	4.442	PK
3		*	5185.690	117.895	113.470	N/A	N/A	4.426	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP645-RW	

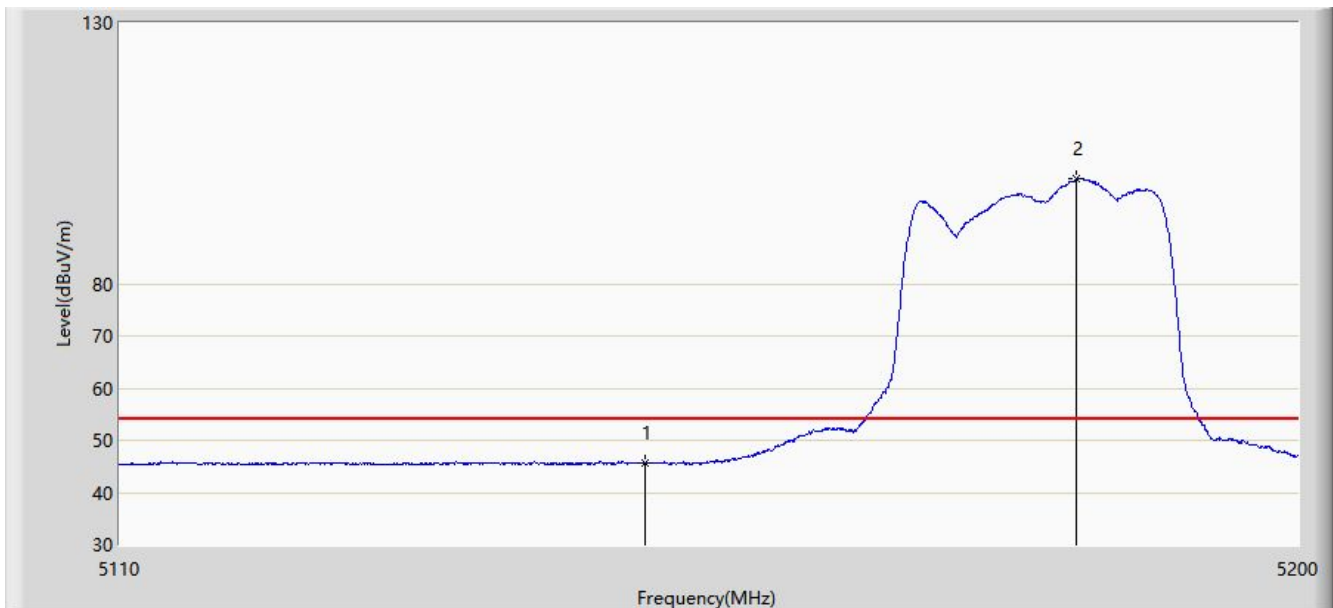


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.599	41.157	-8.401	54.000	4.442	AV
2		*	5182.945	100.063	95.606	N/A	N/A	4.456	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with DAP645-RW	

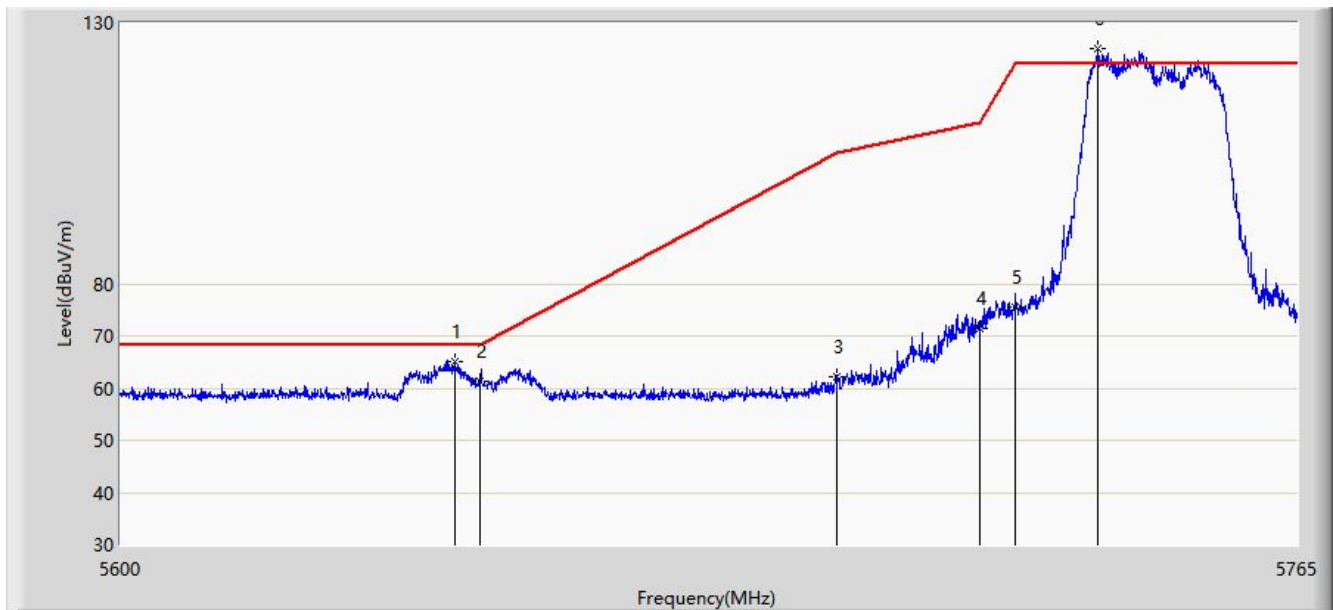


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5646.530	65.189	59.910	-3.011	68.200	5.280	PK
2			5650.000	61.206	55.870	-6.994	68.200	5.336	PK
3			5700.000	62.246	56.928	-42.954	105.200	5.318	PK
4			5720.000	71.393	65.919	-39.407	110.800	5.474	PK
5			5725.000	75.368	69.890	-46.832	122.200	5.478	PK
6		*	5736.703	124.931	119.396	N/A	N/A	5.535	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:14
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with DAP645-RW	

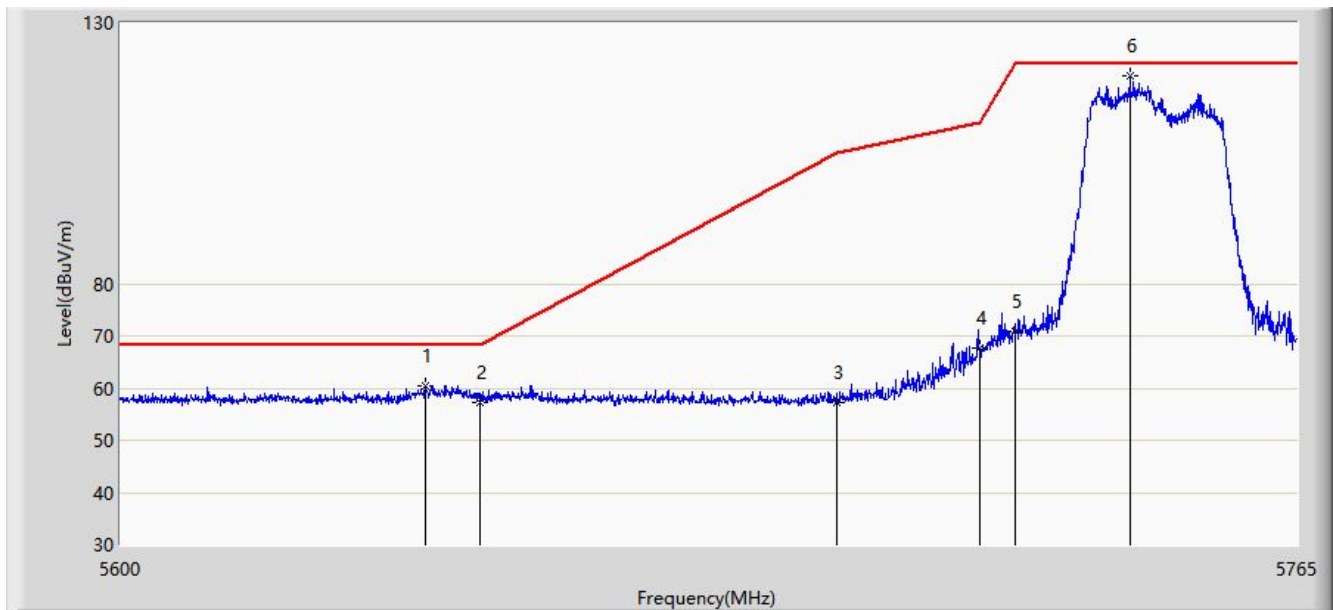


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5642.240	60.384	55.175	-7.816	68.200	5.210	PK
2			5650.000	57.215	51.879	-10.985	68.200	5.336	PK
3			5700.000	57.203	51.885	-47.997	105.200	5.318	PK
4			5720.000	67.563	62.089	-43.237	110.800	5.474	PK
5			5725.000	70.964	65.486	-51.236	122.200	5.478	PK
6		*	5741.322	119.762	114.203	N/A	N/A	5.560	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with DAP645-RW	

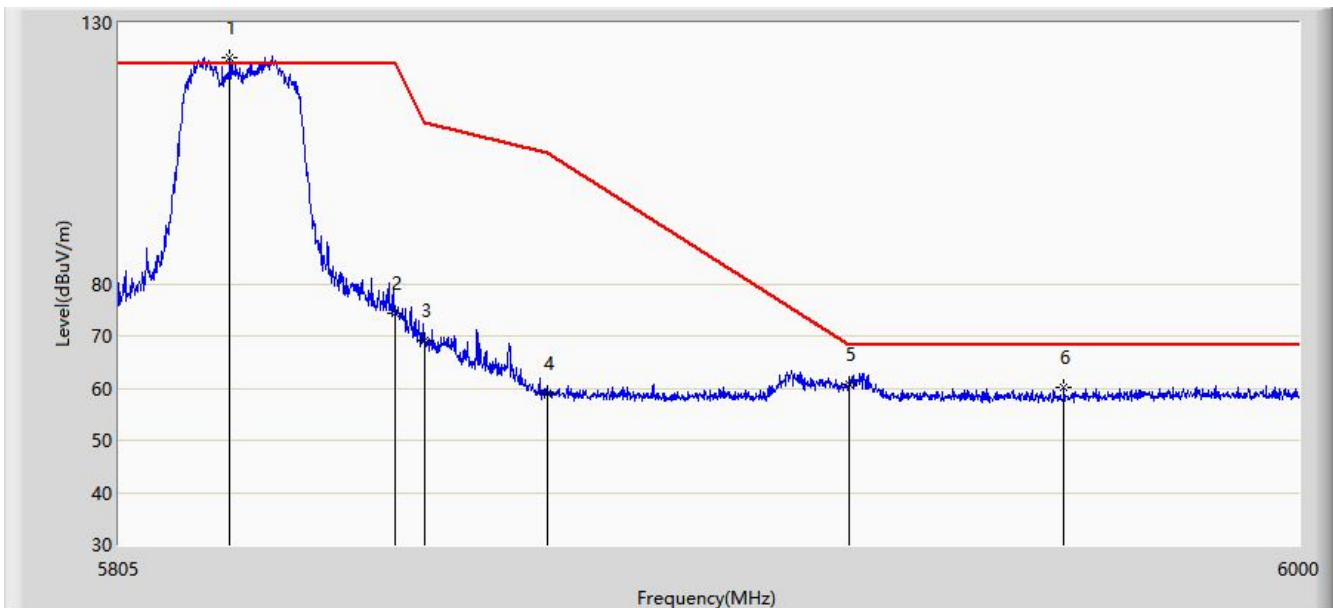


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.038	123.205	117.421	N/A	N/A	5.784	PK
2			5850.000	74.435	68.466	-47.765	122.200	5.968	PK
3			5855.000	69.182	63.207	-41.618	110.800	5.975	PK
4			5875.000	59.039	53.026	-46.161	105.200	6.013	PK
5			5925.000	60.664	54.529	-7.536	68.200	6.136	PK
6			5960.708	60.221	54.230	-7.979	68.200	5.990	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with DAP645-RW	

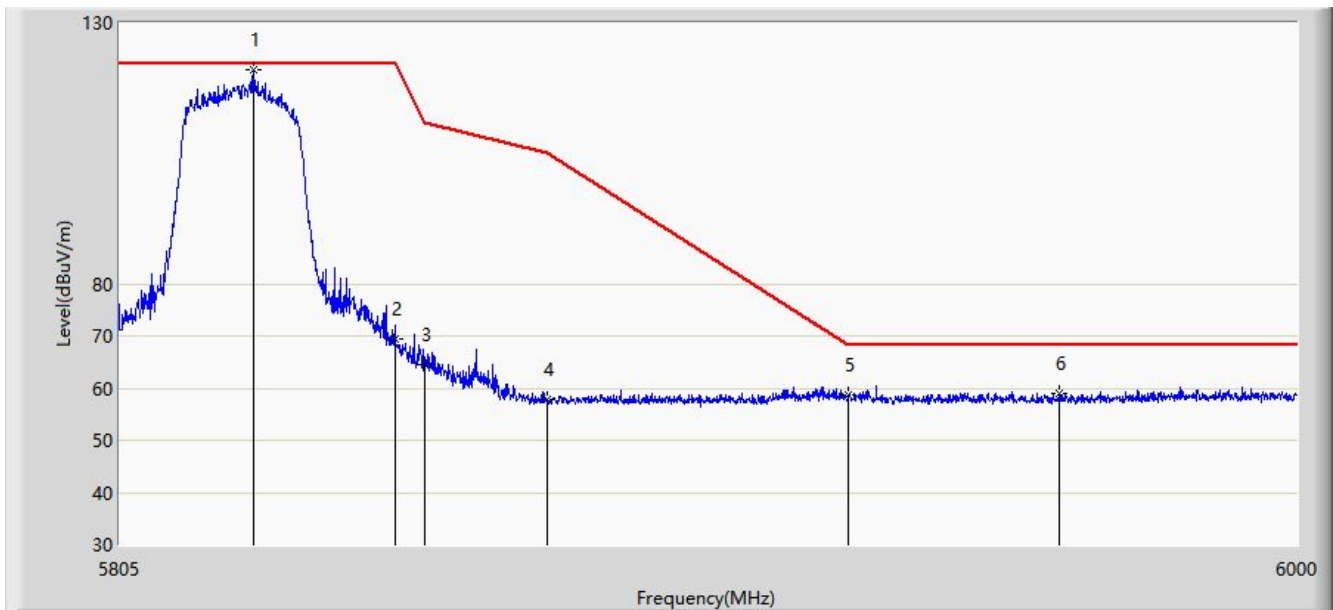


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5826.840	120.961	115.208	N/A	N/A	5.753	PK
2			5850.000	69.303	63.334	-52.897	122.200	5.968	PK
3			5855.000	64.619	58.644	-46.181	110.800	5.975	PK
4			5875.000	57.890	51.877	-47.310	105.200	6.013	PK
5			5925.000	58.570	52.435	-9.630	68.200	6.136	PK
6			5960.123	59.073	53.079	-9.127	68.200	5.994	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

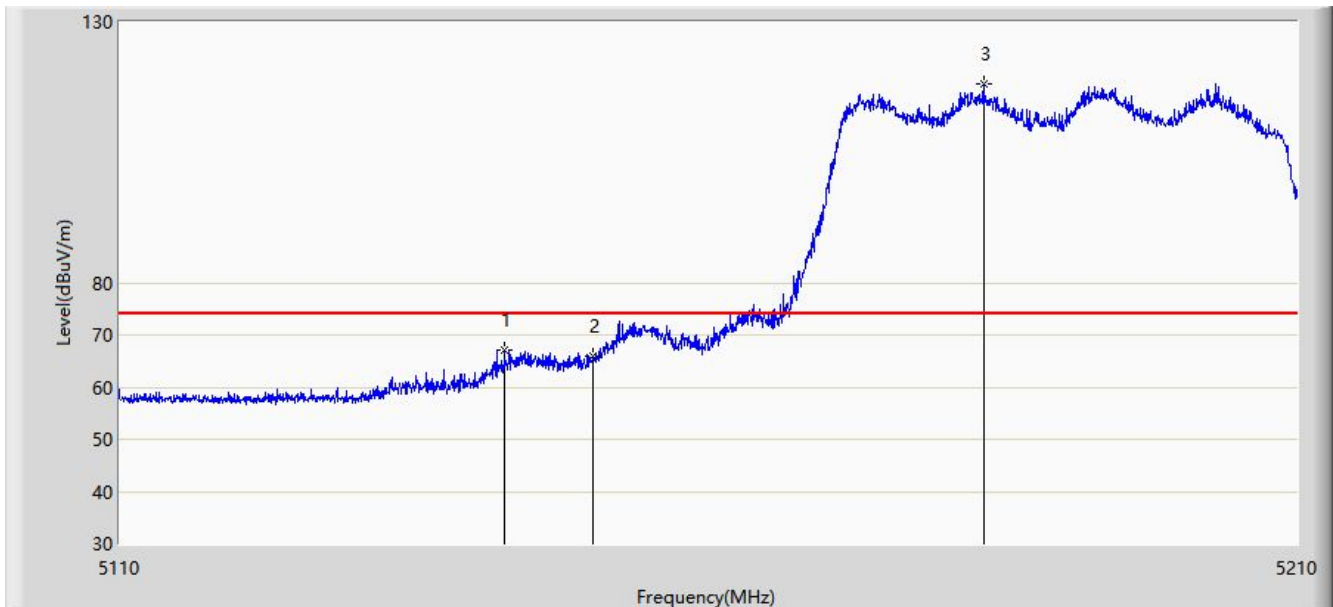


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.500	67.207	62.787	-6.793	74.000	4.421	PK
2			5150.000	65.913	61.471	-8.087	74.000	4.442	PK
3		*	5183.200	118.120	113.666	N/A	N/A	4.454	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

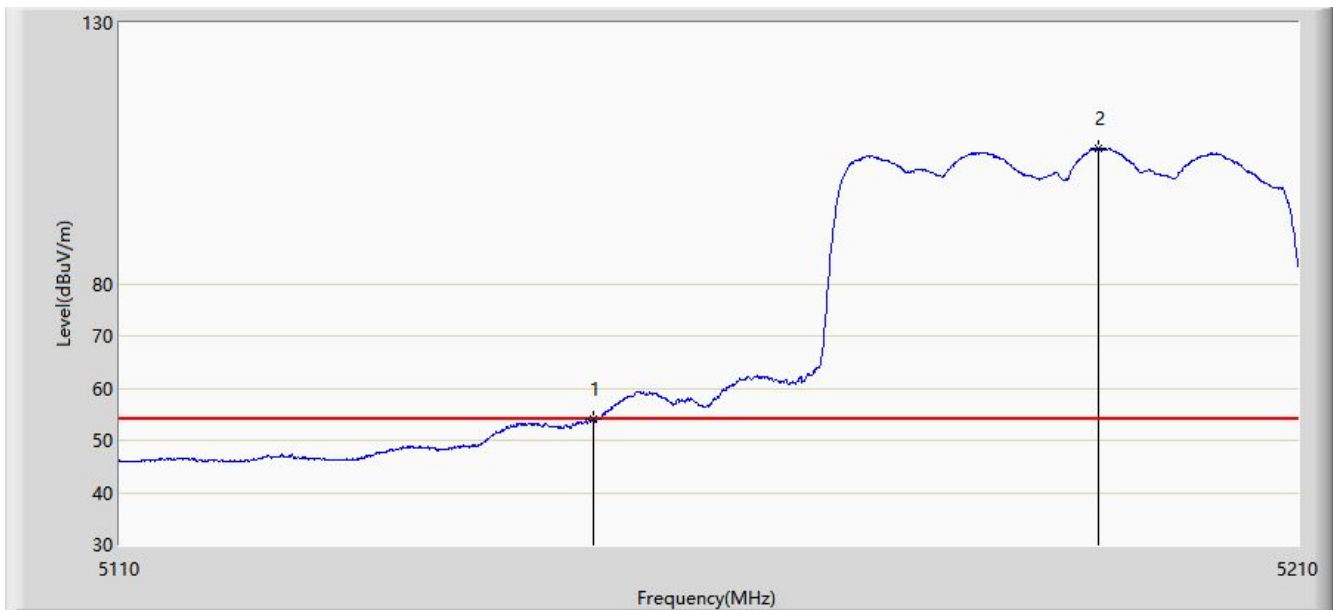


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.930	49.488	-0.070	54.000	4.442	AV
2		*	5192.950	105.934	101.594	N/A	N/A	4.339	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

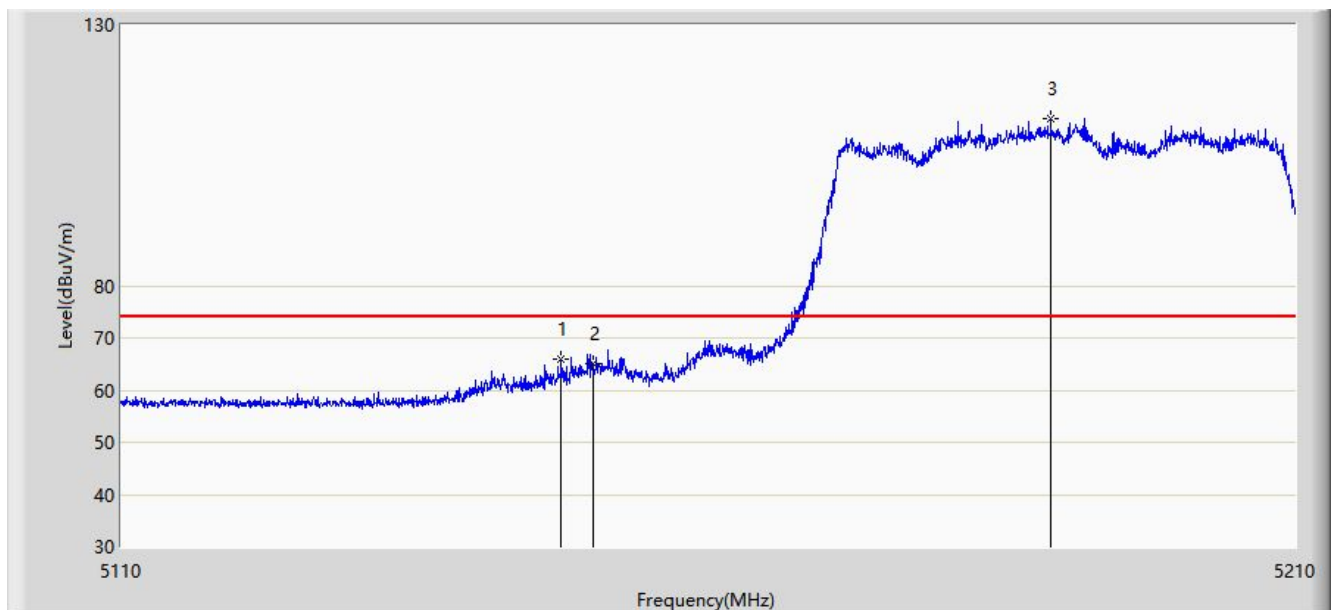


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.300	65.896	61.476	-8.104	74.000	4.421	PK
2			5150.000	64.980	60.538	-9.020	74.000	4.442	PK
3		*	5189.050	112.138	107.753	N/A	N/A	4.386	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with DAP645-RW	

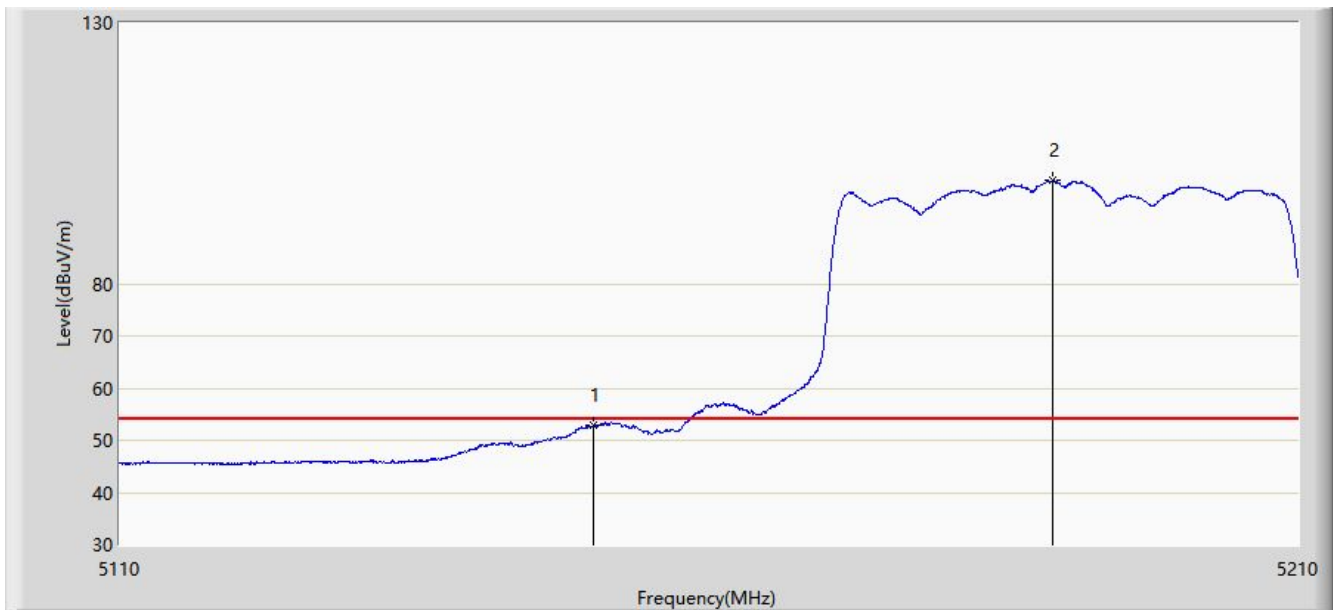


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.791	48.349	-1.209	54.000	4.442	AV
2		*	5189.000	99.799	95.413	N/A	N/A	4.386	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with DAP645-RW	

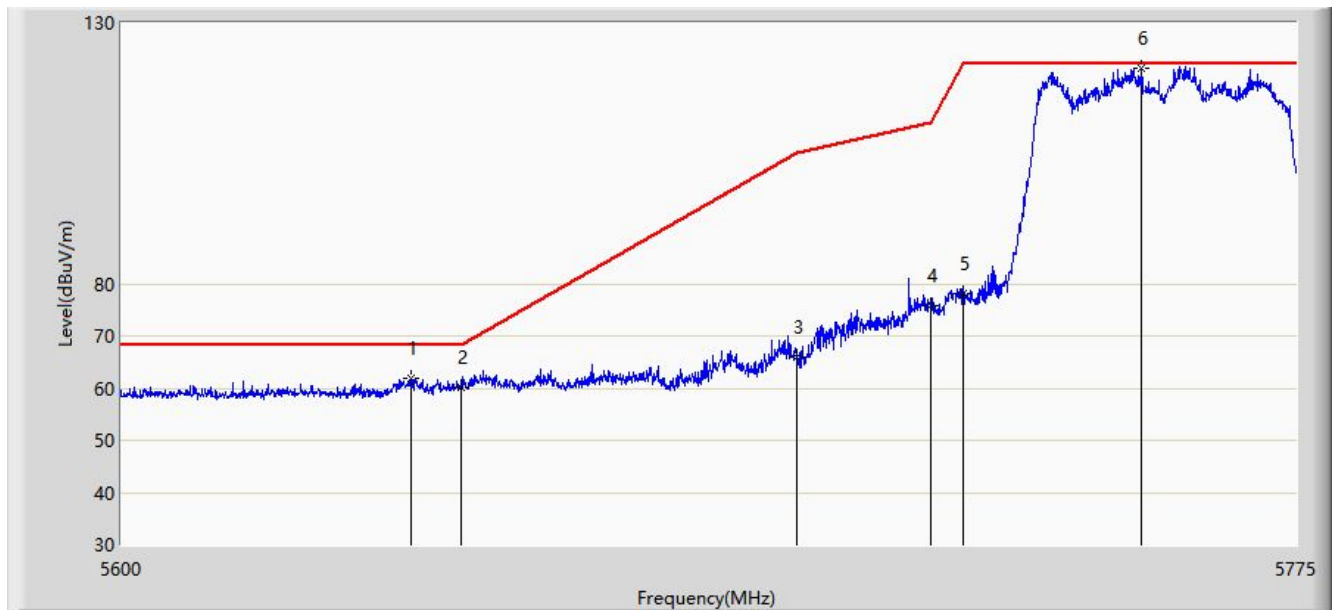


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5642.788	61.791	56.573	-6.409	68.200	5.219	PK
2			5650.000	60.103	54.767	-8.097	68.200	5.336	PK
3			5700.000	66.085	60.767	-39.115	105.200	5.318	PK
4			5720.000	75.795	70.321	-35.005	110.800	5.474	PK
5			5725.000	78.177	72.699	-44.023	122.200	5.478	PK
6		*	5751.725	121.301	115.562	N/A	N/A	5.739	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with DAP645-RW	

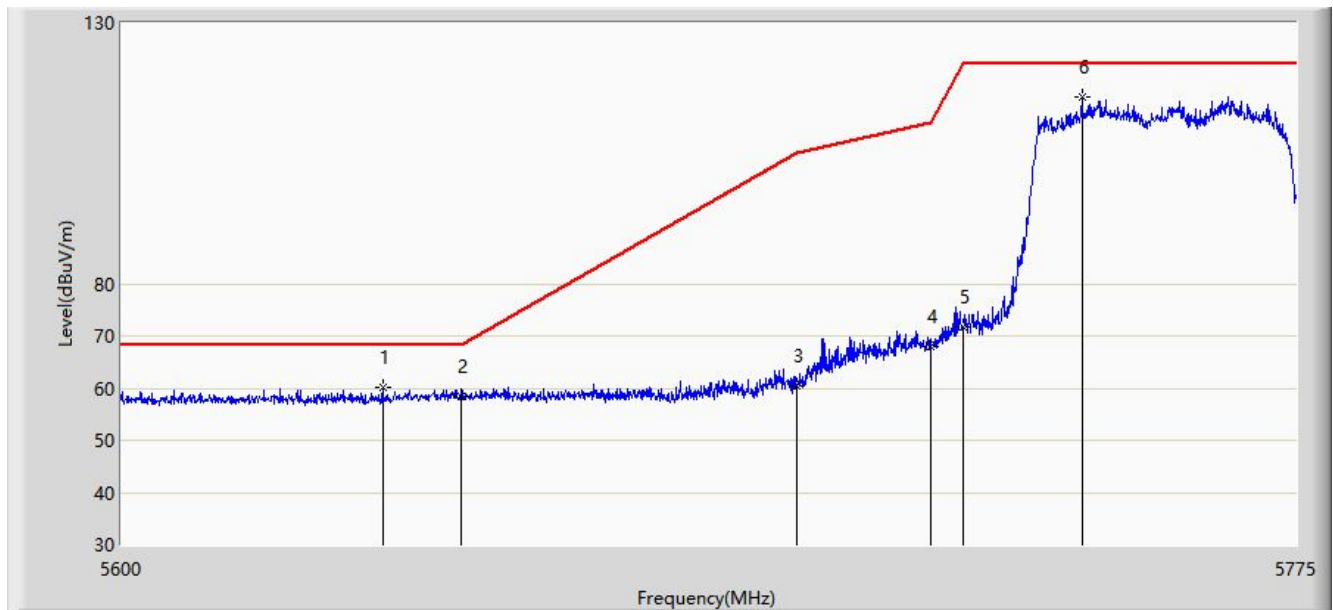


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.500	60.090	54.900	-8.110	68.200	5.190	PK
2			5650.000	58.289	52.953	-9.911	68.200	5.336	PK
3			5700.000	60.362	55.044	-44.838	105.200	5.318	PK
4			5720.000	67.894	62.420	-42.906	110.800	5.474	PK
5			5725.000	71.771	66.293	-50.429	122.200	5.478	PK
6		*	5742.712	115.726	110.160	N/A	N/A	5.567	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with DAP645-RW	

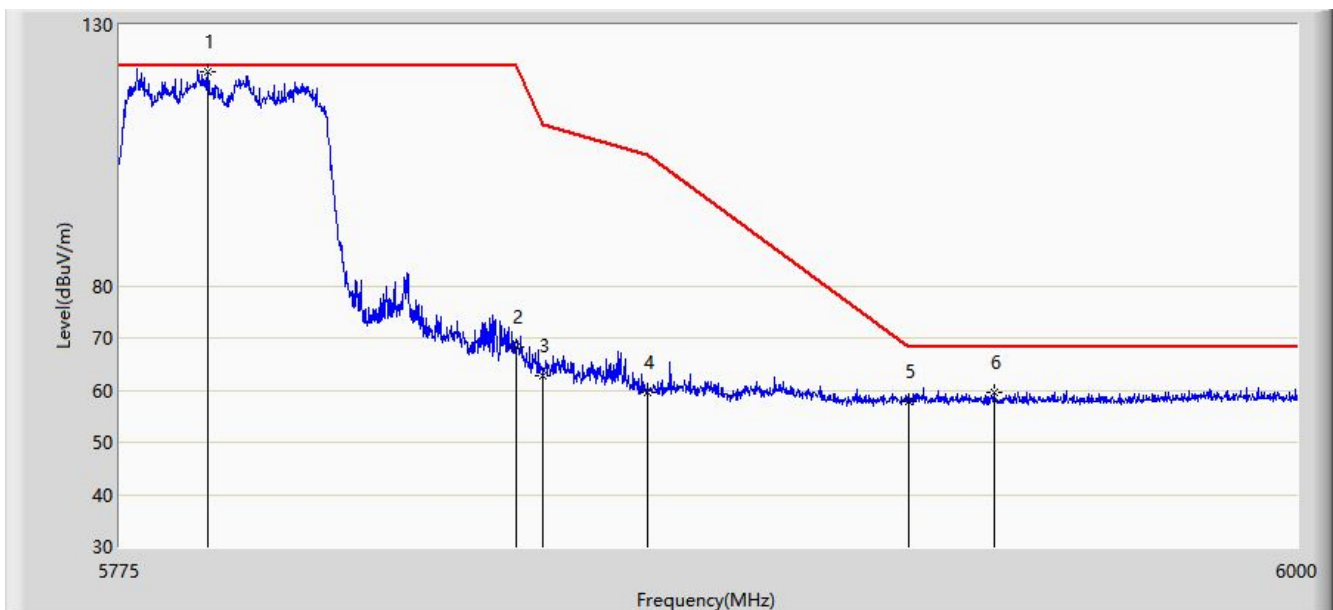


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5791.650	121.150	115.323	N/A	N/A	5.827	PK
2			5850.000	68.370	62.401	-53.830	122.200	5.968	PK
3			5855.000	62.757	56.782	-48.043	110.800	5.975	PK
4			5875.000	59.571	53.558	-45.629	105.200	6.013	PK
5			5925.000	57.886	51.751	-10.314	68.200	6.136	PK
6			5941.275	59.628	53.531	-8.572	68.200	6.097	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with DAP645-RW	

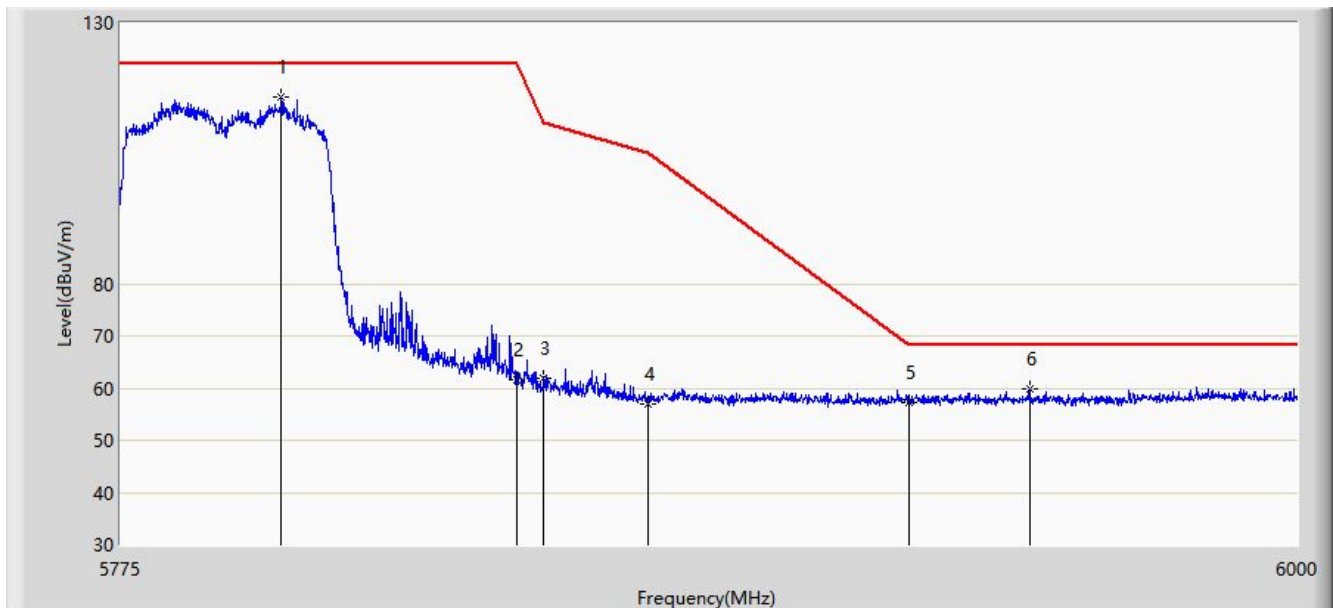


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5805.263	115.814	109.944	N/A	N/A	5.871	PK
2			5850.000	61.686	55.717	-60.514	122.200	5.968	PK
3			5855.000	61.967	55.992	-48.833	110.800	5.975	PK
4			5875.000	56.940	50.927	-48.260	105.200	6.013	PK
5			5925.000	57.306	51.171	-10.894	68.200	6.136	PK
6			5948.138	59.981	53.921	-8.219	68.200	6.060	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP645-RW	

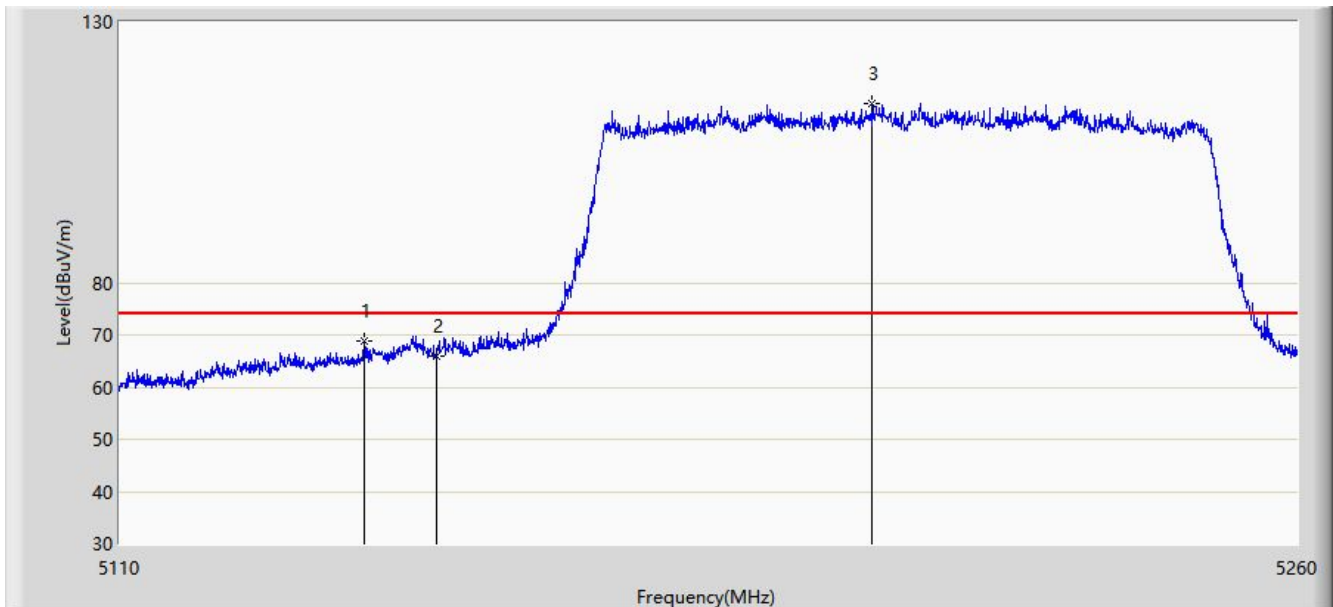


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.900	68.714	64.293	-5.286	74.000	4.420	PK
2			5150.000	65.886	61.444	-8.114	74.000	4.442	PK
3		*	5205.400	114.339	110.111	N/A	N/A	4.228	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP645-RW	

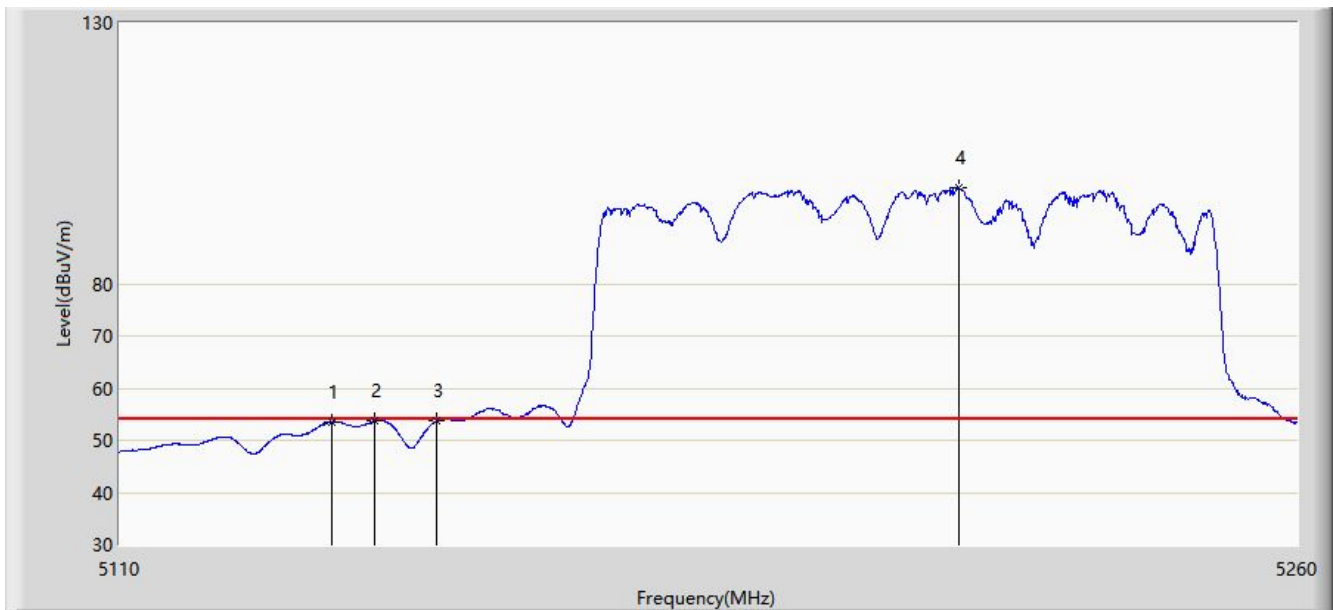


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.775	53.568	49.147	-0.432	54.000	4.420	AV
2			5142.100	53.769	49.349	-0.231	54.000	4.421	AV
3			5150.000	53.717	49.275	-0.283	54.000	4.442	AV
4		*	5216.500	98.402	94.253	N/A	N/A	4.148	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP645-RW	

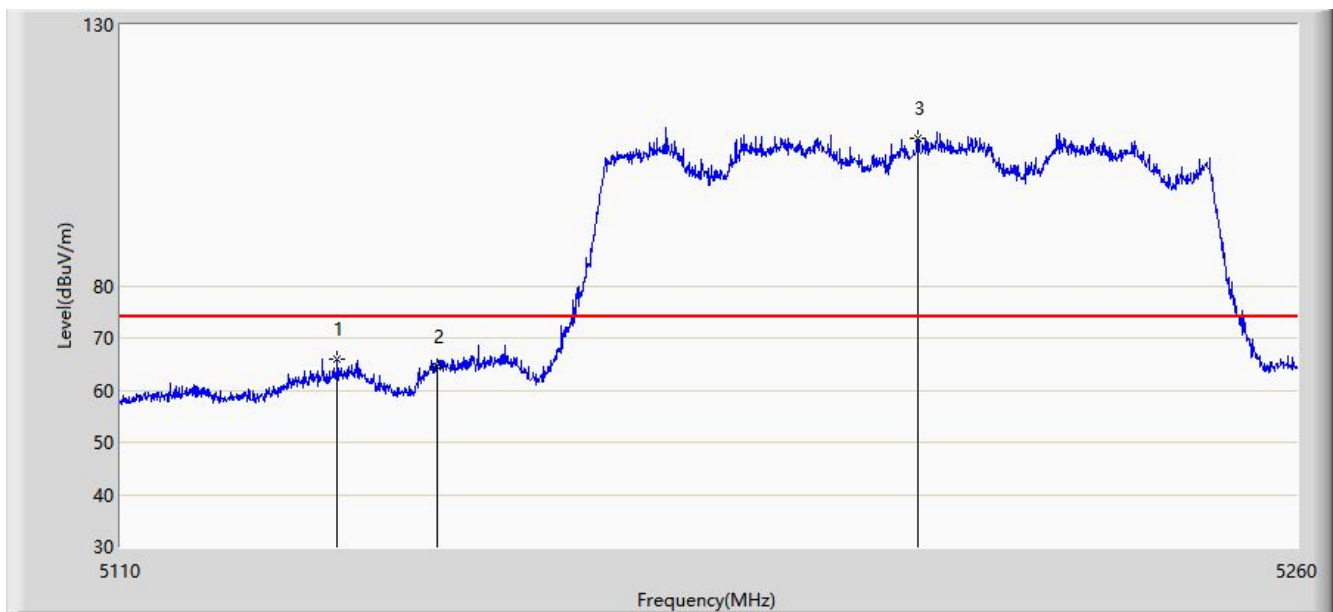


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.375	66.064	61.643	-7.936	74.000	4.421	PK
2			5150.000	64.546	60.104	-9.454	74.000	4.442	PK
3		*	5211.250	108.150	103.959	N/A	N/A	4.191	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP645-RW	

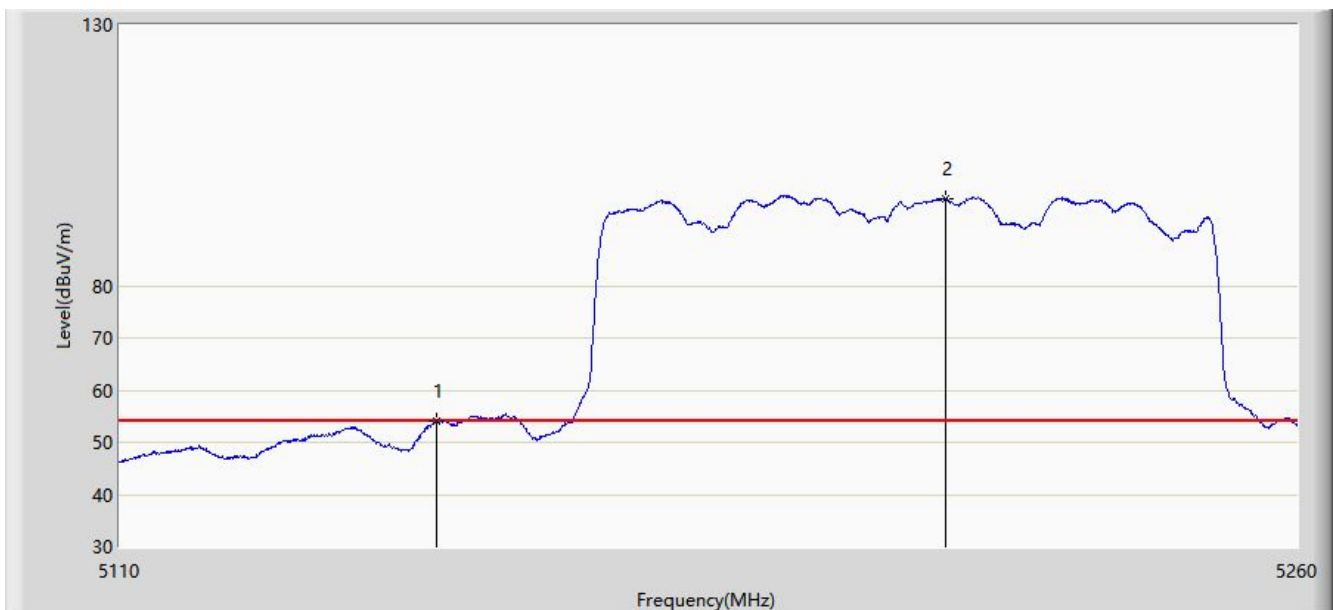


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.914	49.472	-0.086	54.000	4.442	AV
2		*	5214.850	96.646	92.478	N/A	N/A	4.168	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with DAP645-RW	

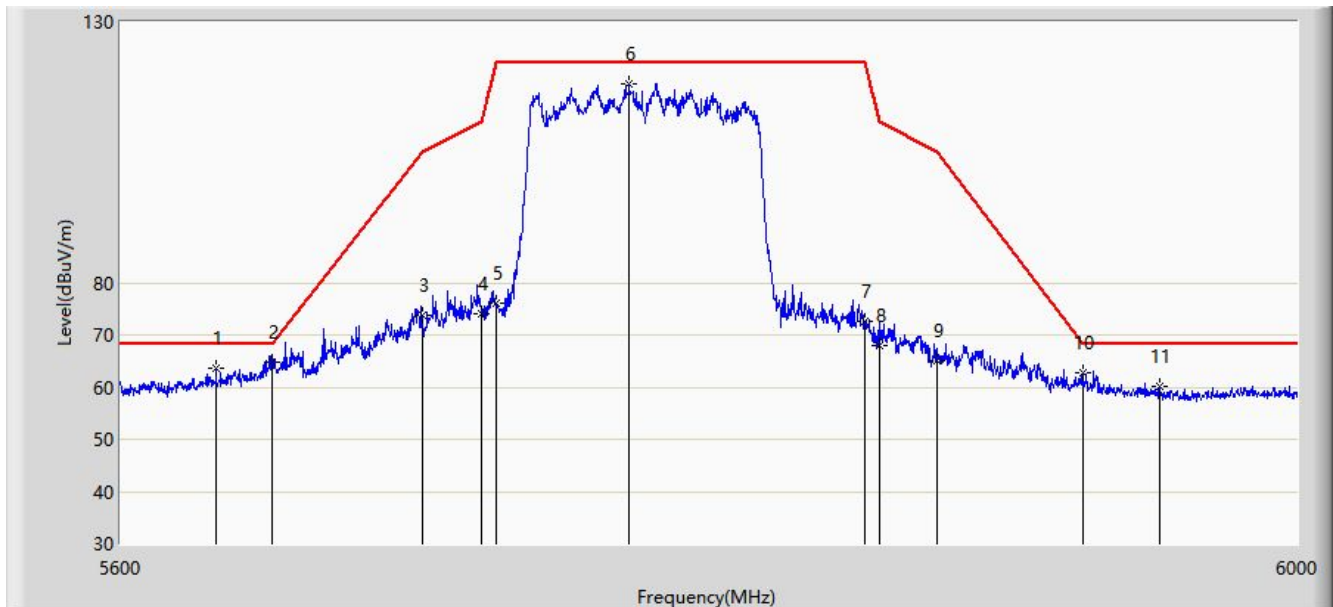


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.600	63.760	58.566	-4.440	68.200	5.194	PK
2		*	5650.000	64.699	59.363	-3.501	68.200	5.336	PK
3			5700.000	73.837	68.519	-31.363	105.200	5.318	PK
4			5720.000	73.923	68.449	-36.877	110.800	5.474	PK
5			5725.000	76.048	70.570	-46.152	122.200	5.478	PK
6			5769.600	118.029	112.234	N/A	N/A	5.795	PK
7			5850.000	72.527	66.558	-49.673	122.200	5.968	PK
8			5855.000	68.075	62.100	-42.725	110.800	5.975	PK
9			5875.000	64.991	58.978	-40.209	105.200	6.013	PK
10			5925.000	62.642	56.507	-5.558	68.200	6.136	PK
11			5952.000	60.009	53.970	-8.191	68.200	6.039	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 03:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with DAP645-RW	

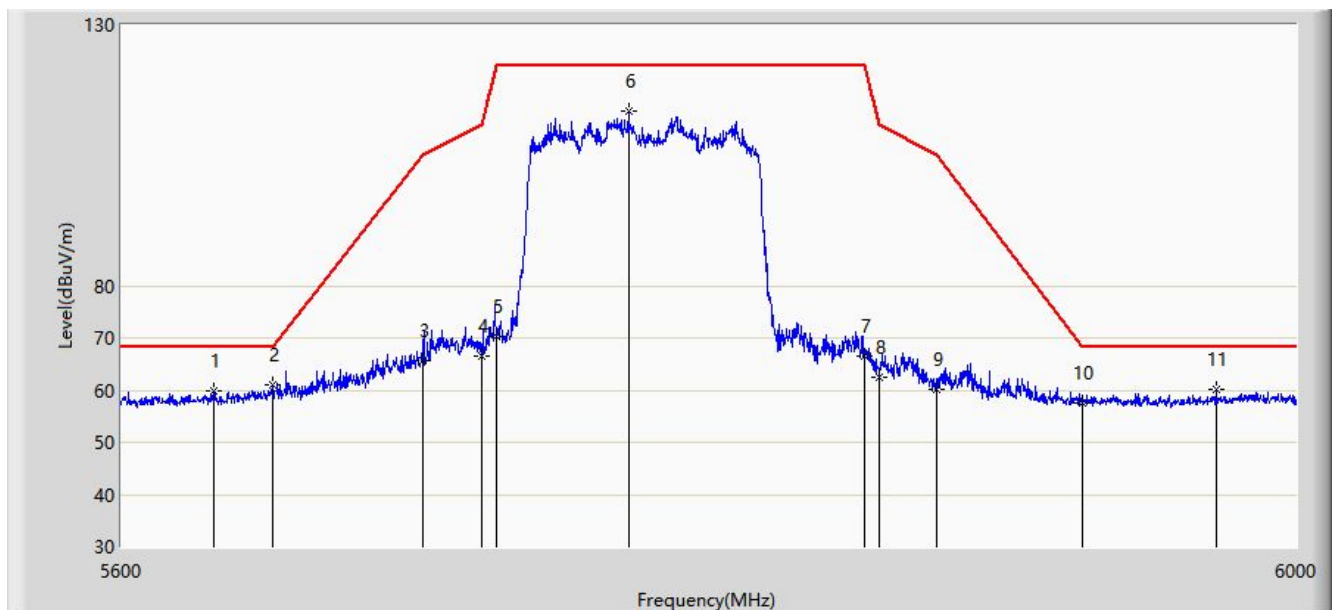


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5630.400	59.906	54.712	-8.294	68.200	5.194	PK
2		*	5650.000	61.111	55.775	-7.089	68.200	5.336	PK
3			5700.000	65.670	60.352	-39.530	105.200	5.318	PK
4			5720.000	66.535	61.061	-44.265	110.800	5.474	PK
5			5725.000	70.361	64.883	-51.839	122.200	5.478	PK
6			5769.400	113.485	107.688	N/A	N/A	5.797	PK
7			5850.000	66.394	60.425	-55.806	122.200	5.968	PK
8			5855.000	62.534	56.559	-48.266	110.800	5.975	PK
9			5875.000	60.050	54.037	-45.150	105.200	6.013	PK
10			5925.000	57.561	51.426	-10.639	68.200	6.136	PK
11			5971.800	60.194	53.983	-8.006	68.200	6.211	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with DAP645-RW - Scan Antenna	

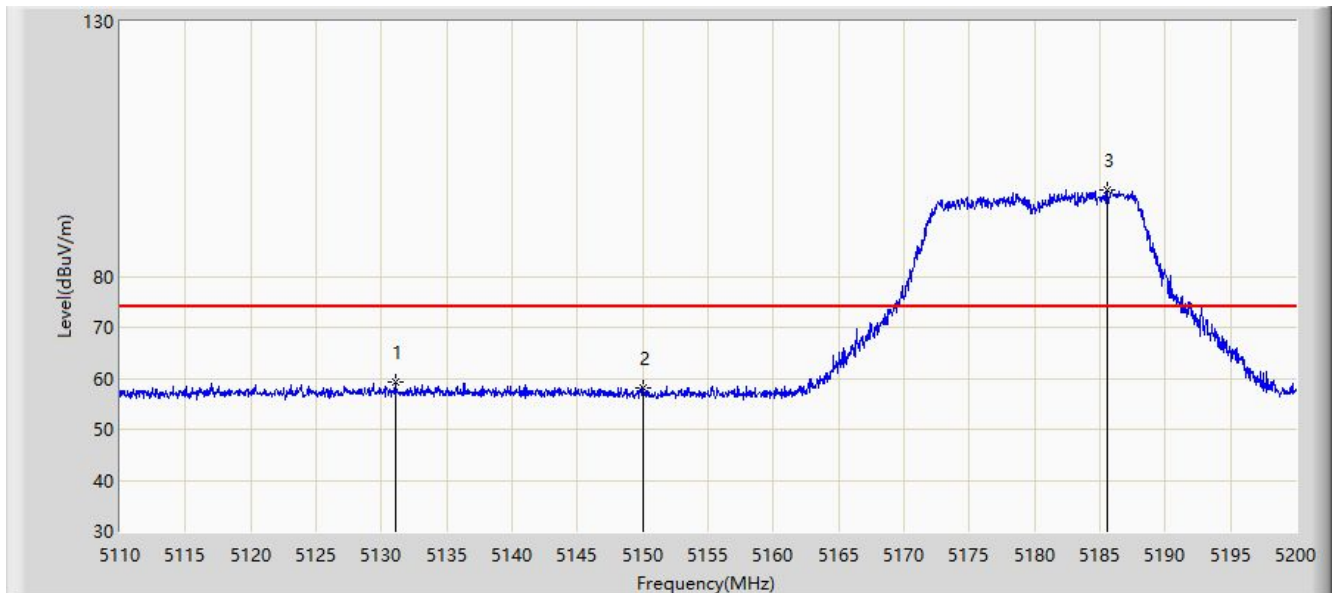


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.060	59.399	54.977	-14.601	74.000	4.422	PK
2			5150.000	58.027	53.585	-15.973	74.000	4.442	PK
3		*	5185.510	97.063	92.636	N/A	N/A	4.426	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with DAP645-RW - Scan Antenna	

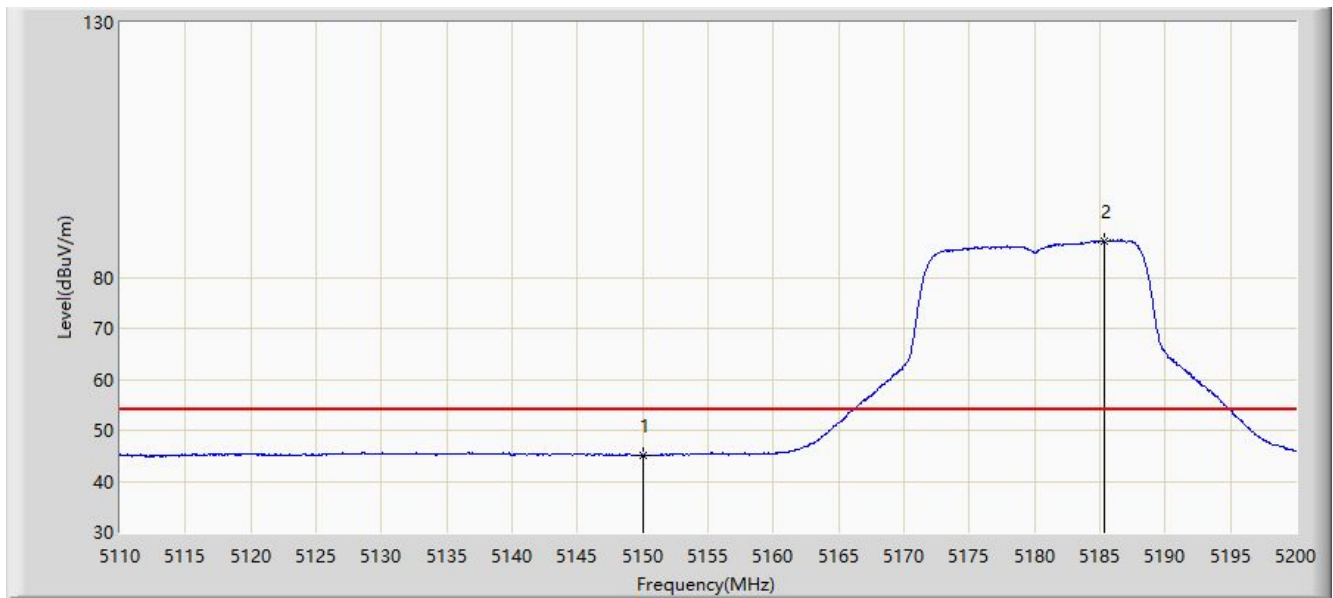


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.082	40.640	-8.918	54.000	4.442	AV
2		*	5185.375	87.019	82.591	N/A	N/A	4.428	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with DAP645-RW - Scan Antenna	

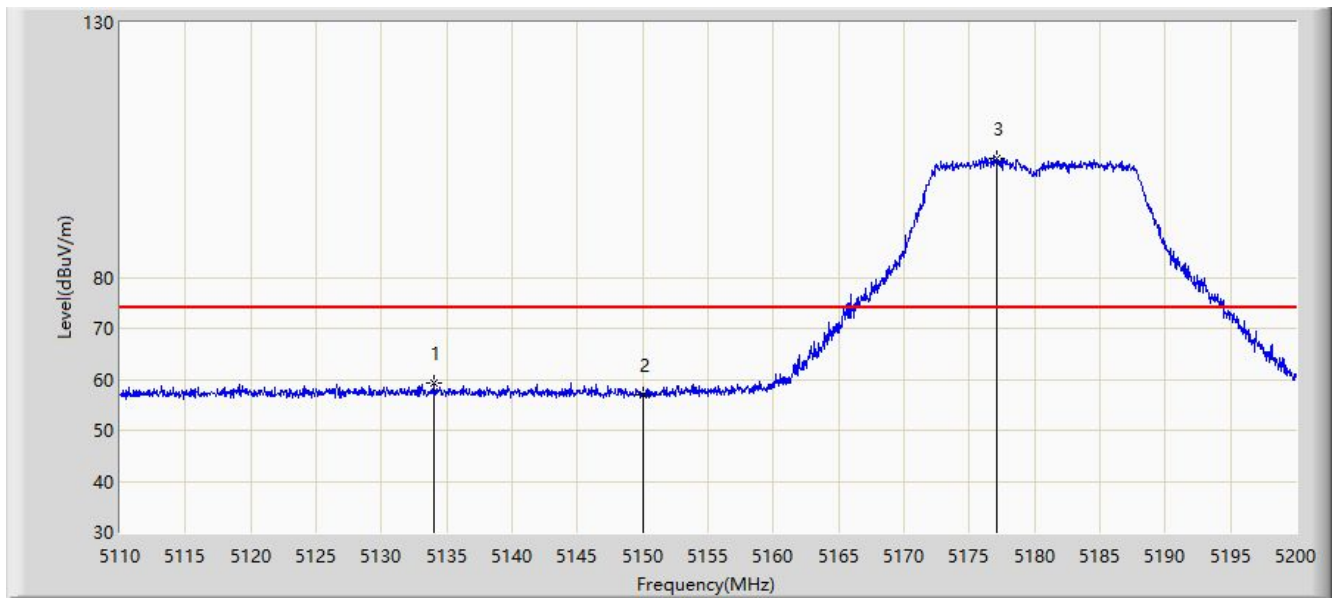


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.030	59.212	54.790	-14.788	74.000	4.421	PK
2			5150.000	57.099	52.657	-16.901	74.000	4.442	PK
3		*	5177.050	103.451	98.941	N/A	N/A	4.510	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with DAP645-RW - Scan Antenna	

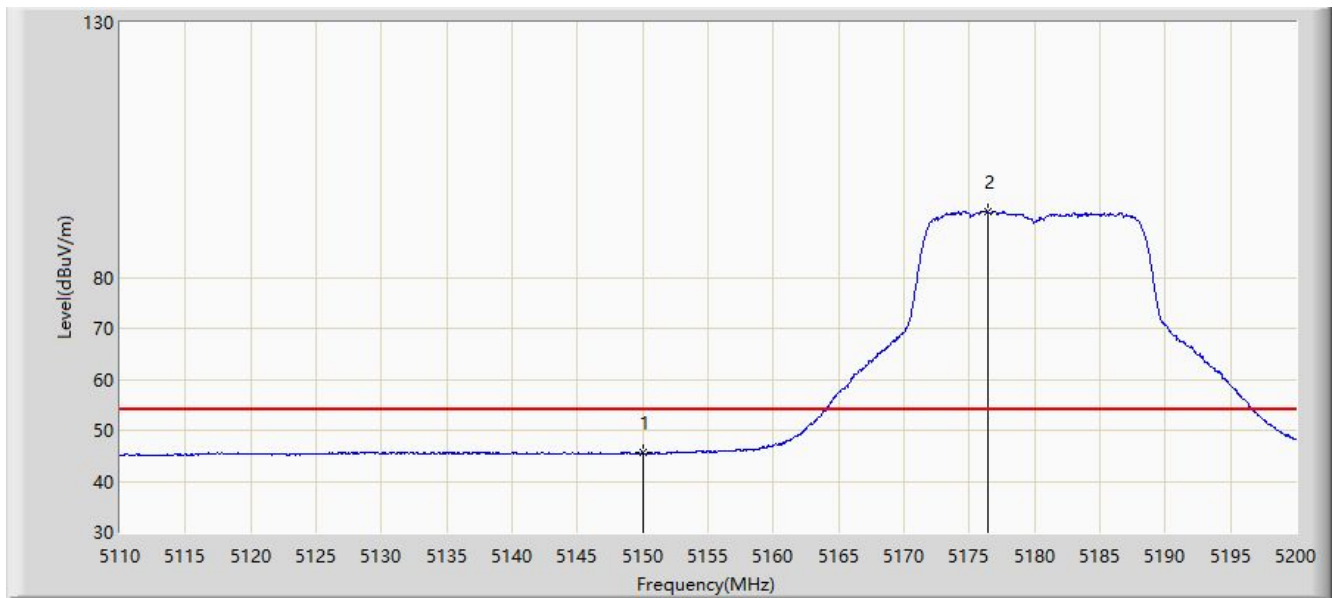


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.592	41.150	-8.408	54.000	4.442	AV
2		*	5176.420	92.895	88.380	N/A	N/A	4.516	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with DAP645-RW - Scan Antenna	

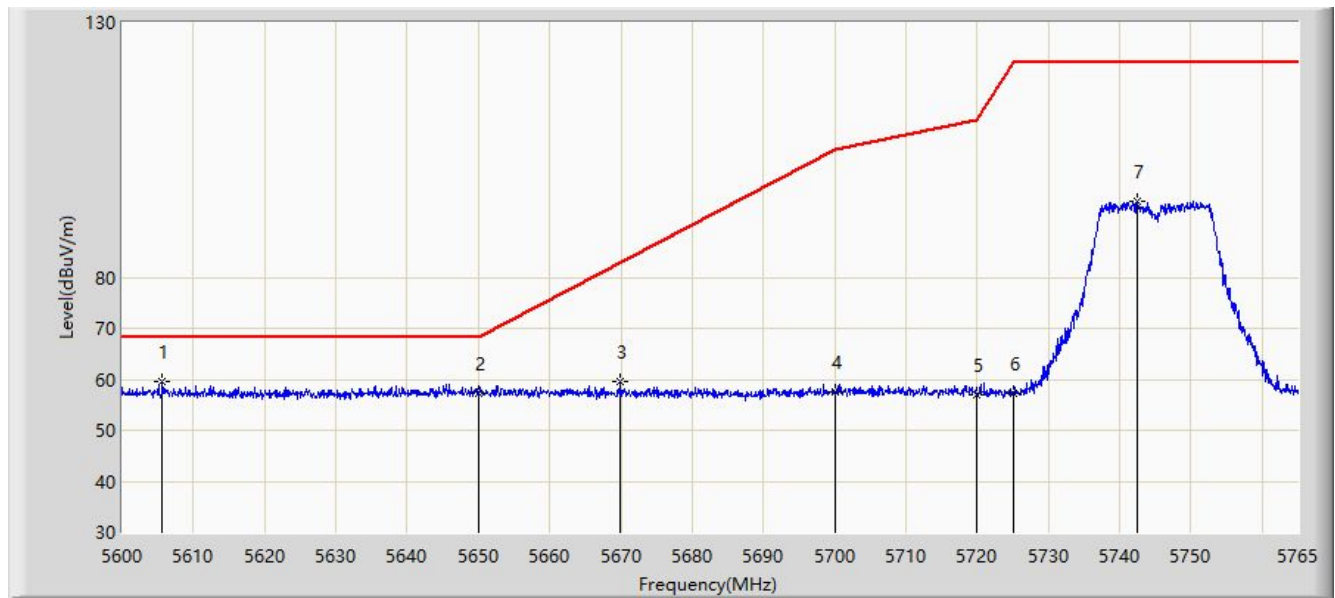


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5605.610	59.463	54.545	-8.737	68.200	4.917	PK
2			5650.000	57.362	52.026	-10.838	68.200	5.336	PK
3			5669.960	59.490	54.054	-23.520	83.010	5.436	PK
4			5700.000	57.461	52.143	-47.739	105.200	5.318	PK
5			5720.000	56.886	51.412	-53.914	110.800	5.474	PK
6			5725.000	57.375	51.897	-64.825	122.200	5.478	PK
7			5742.478	94.943	89.378	N/A	N/A	5.566	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with DAP645-RW - Scan Antenna	

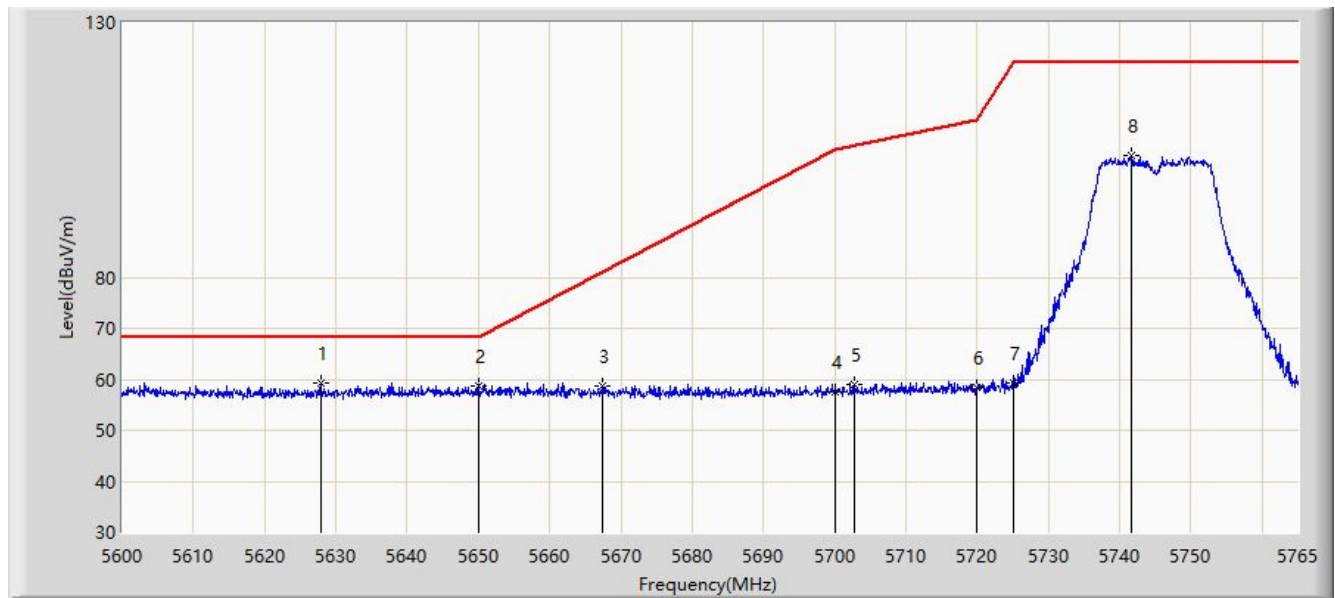


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5627.885	59.366	54.170	-8.834	68.200	5.195	PK
2			5650.000	58.777	53.441	-9.423	68.200	5.336	PK
3			5667.402	58.764	53.322	-22.350	81.114	5.442	PK
4			5700.000	57.650	52.332	-47.550	105.200	5.318	PK
5			5702.712	59.120	53.758	-46.840	105.961	5.362	PK
6			5720.000	58.399	52.925	-52.401	110.800	5.474	PK
7			5725.000	59.384	53.906	-62.816	122.200	5.478	PK
8			5741.570	103.872	98.312	N/A	N/A	5.561	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with DAP645-RW - Scan Antenna	

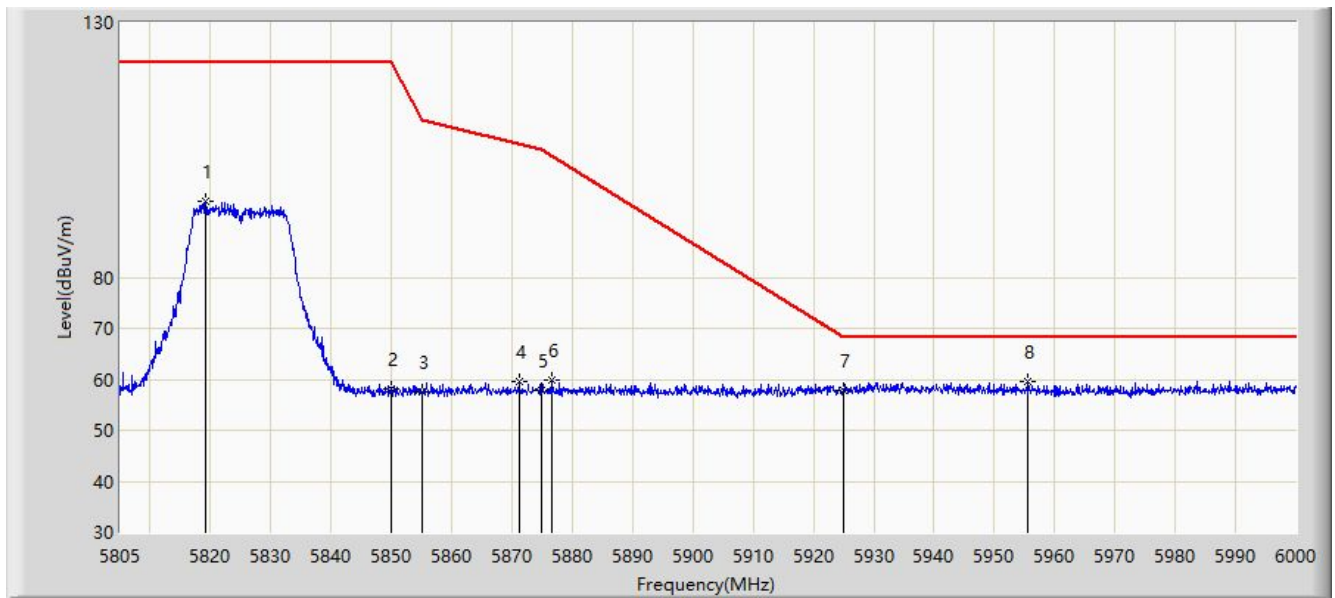


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5819.235	94.797	88.982	N/A	N/A	5.814	PK
2			5850.000	58.167	52.198	-64.033	122.200	5.968	PK
3			5855.000	57.612	51.637	-53.188	110.800	5.975	PK
4			5871.105	59.427	53.423	-46.862	106.289	6.004	PK
5			5875.000	57.902	51.889	-47.298	105.200	6.013	PK
6			5876.663	59.931	53.914	-44.033	103.964	6.017	PK
7			5925.000	57.948	51.813	-10.252	68.200	6.136	PK
8		*	5955.638	59.680	53.661	-8.520	68.200	6.018	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/01/20 - 11:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with DAP645-RW - Scan Antenna	

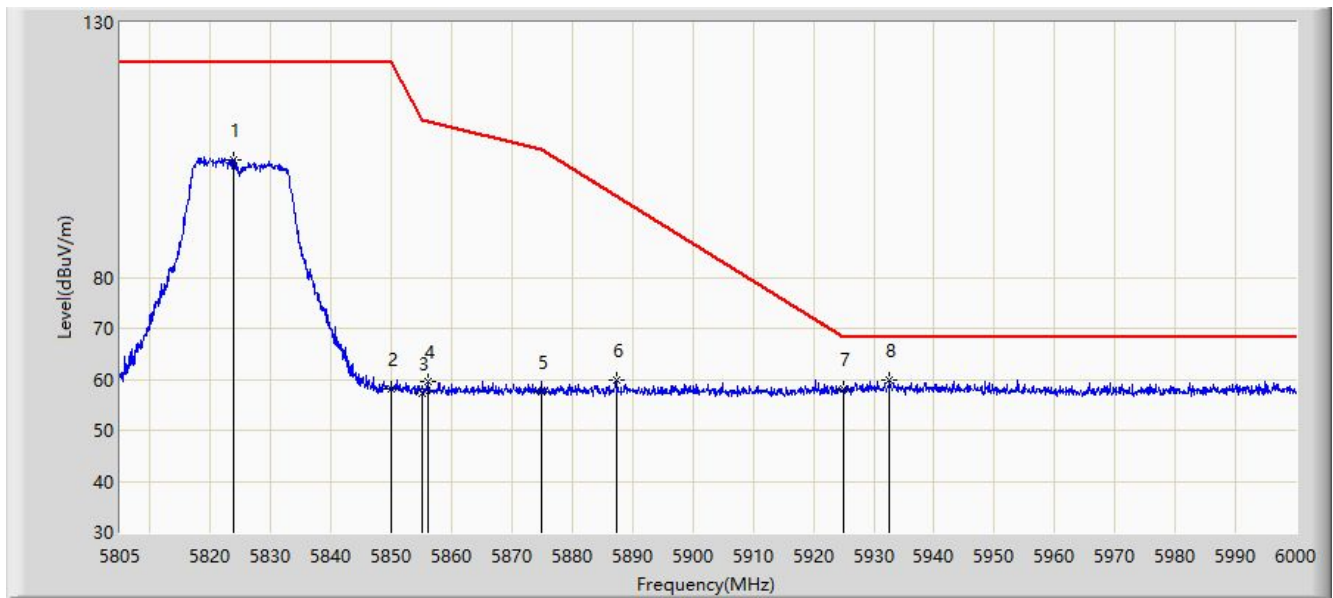


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.915	103.152	97.375	N/A	N/A	5.777	PK
2			5850.000	58.132	52.163	-64.068	122.200	5.968	PK
3			5855.000	57.340	51.365	-53.460	110.800	5.975	PK
4			5856.090	59.608	53.632	-50.886	110.494	5.977	PK
5			5875.000	57.402	51.389	-47.798	105.200	6.013	PK
6			5887.290	59.723	53.697	-36.353	96.076	6.027	PK
7			5925.000	58.079	51.944	-10.121	68.200	6.136	PK
8		*	5932.627	59.713	53.569	-8.487	68.200	6.144	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 07:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with DAP646-RW	

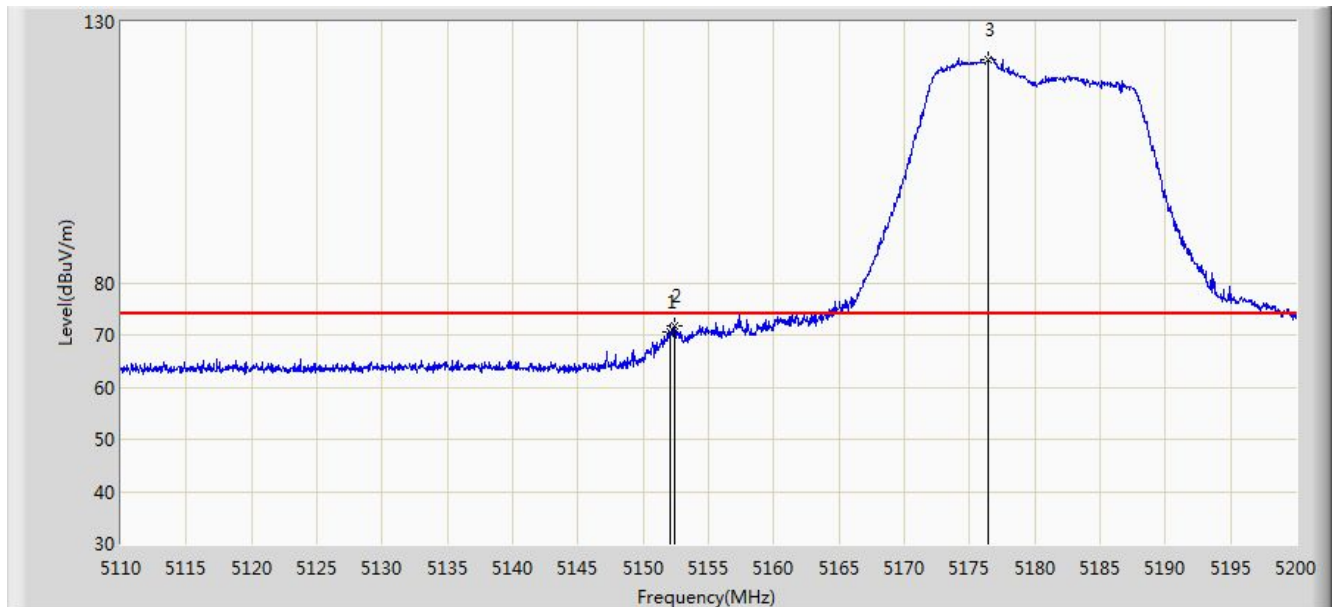


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5152.030	70.630	64.226	-3.370	74.000	6.404	PK
2			5152.435	71.665	65.260	-2.335	74.000	6.404	PK
3		*	5176.420	122.824	116.289	N/A	N/A	6.535	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 07:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with DAP646-RW	

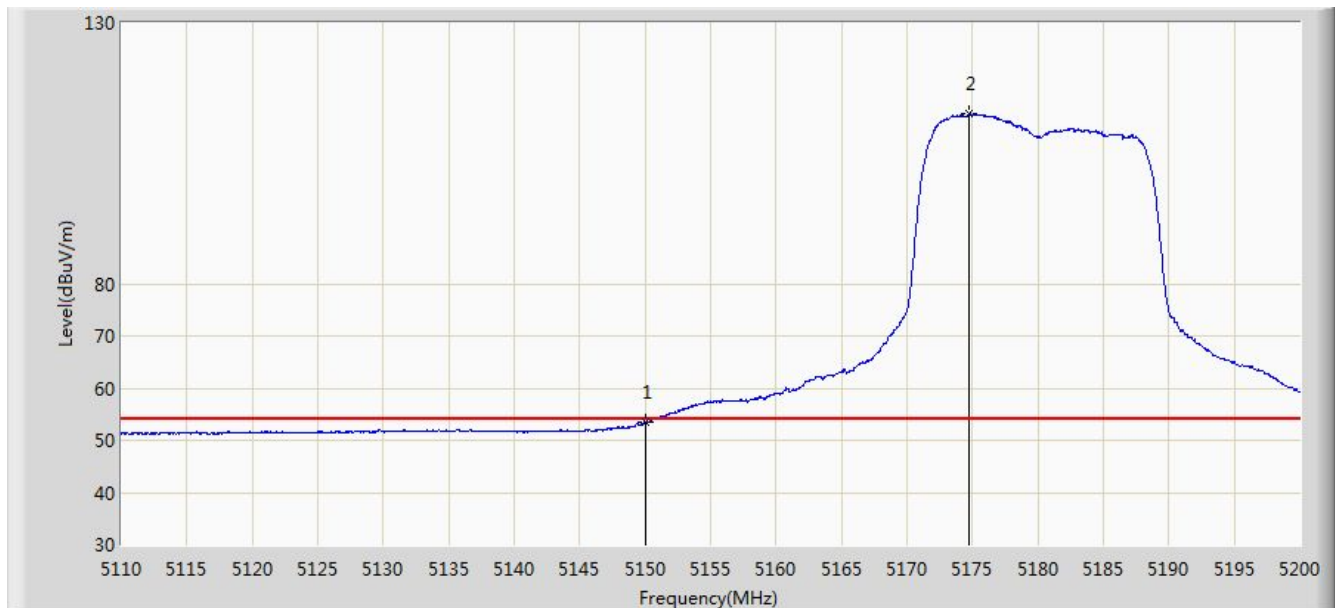


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.373	46.976	-0.627	54.000	6.398	AV
2	X	*	5174.710	112.501	105.982	N/A	N/A	6.518	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 07:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with DAP646-RW	

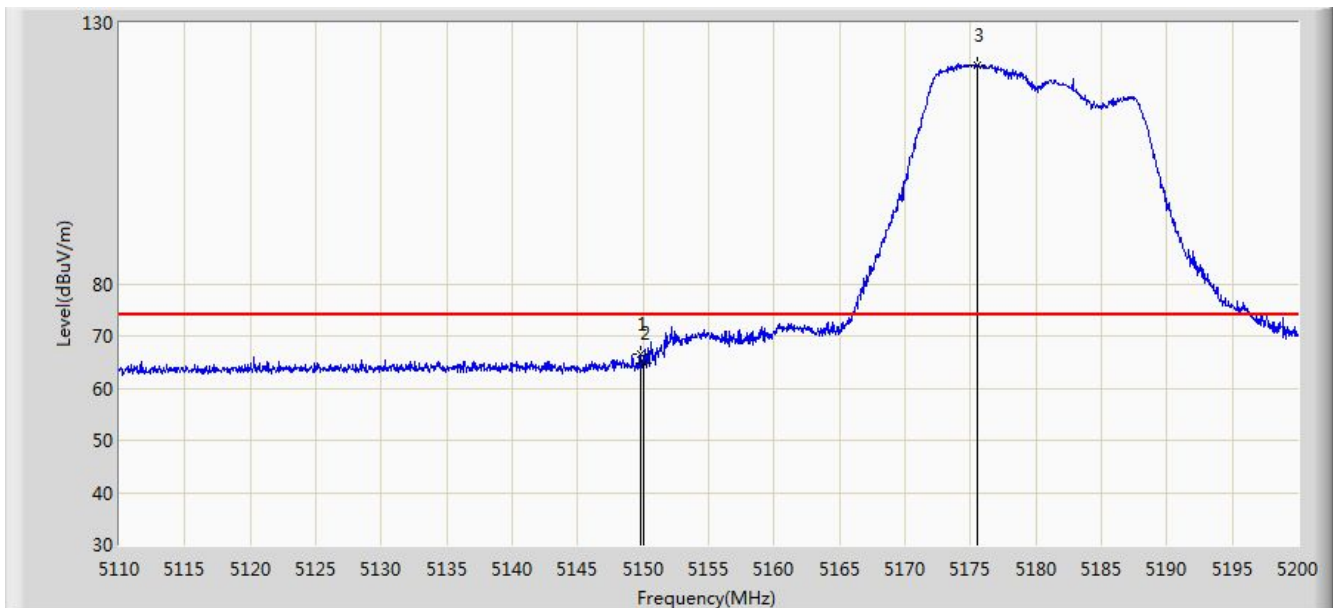


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.780	66.520	60.123	-7.480	74.000	6.396	PK
2			5150.000	64.781	58.384	-9.219	74.000	6.398	PK
3		*	5175.565	121.829	115.302	N/A	N/A	6.527	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 07:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with DAP646-RW	

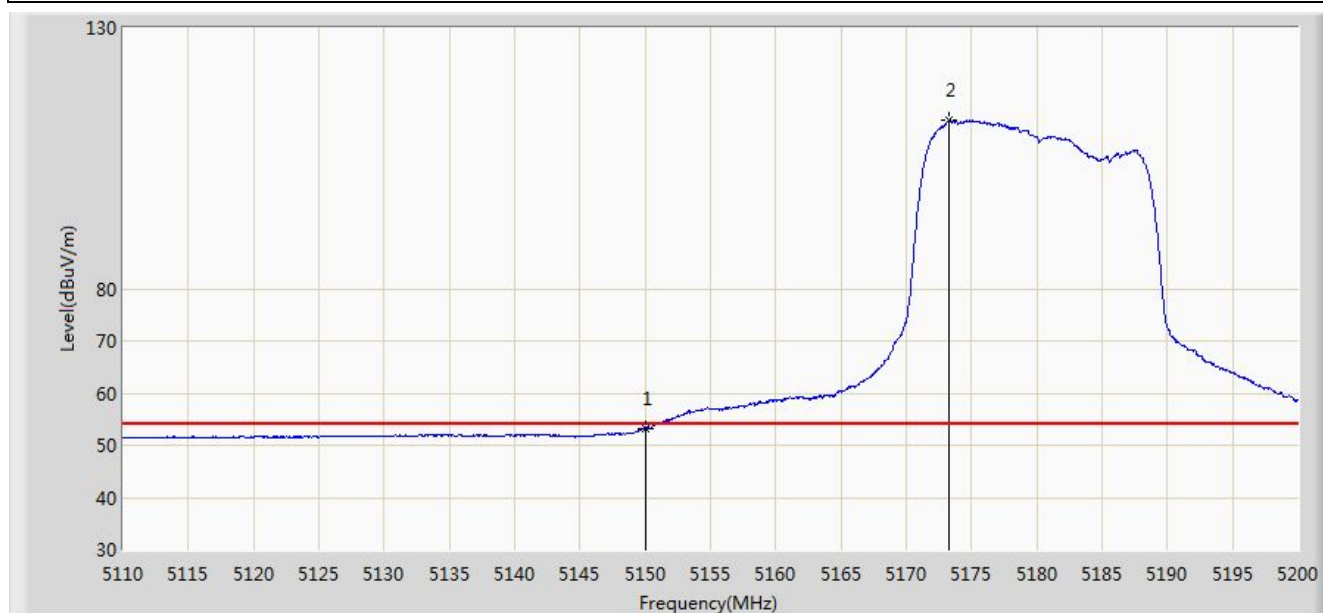


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.333	46.936	-0.667	54.000	6.398	AV
2	X	*	5173.270	112.235	105.730	N/A	N/A	6.504	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode) with DAP646-RW	

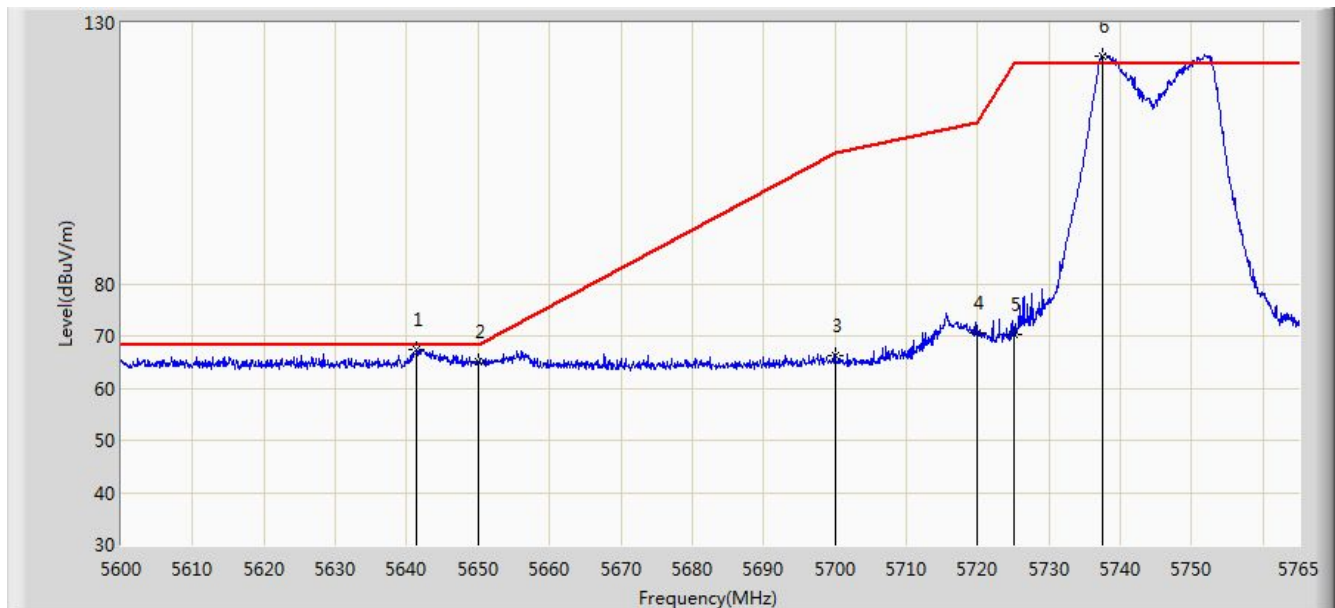


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.333	67.441	60.610	-0.759	68.200	6.831	PK
2			5650.000	64.941	58.148	-3.259	68.200	6.793	PK
3			5700.000	66.289	59.380	-38.911	105.200	6.909	PK
4			5720.000	70.463	63.559	-40.337	110.800	6.904	PK
5			5725.000	70.377	63.510	-51.823	122.200	6.867	PK
6		*	5737.445	123.645	116.706	N/A	N/A	6.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode) with DAP646-RW	

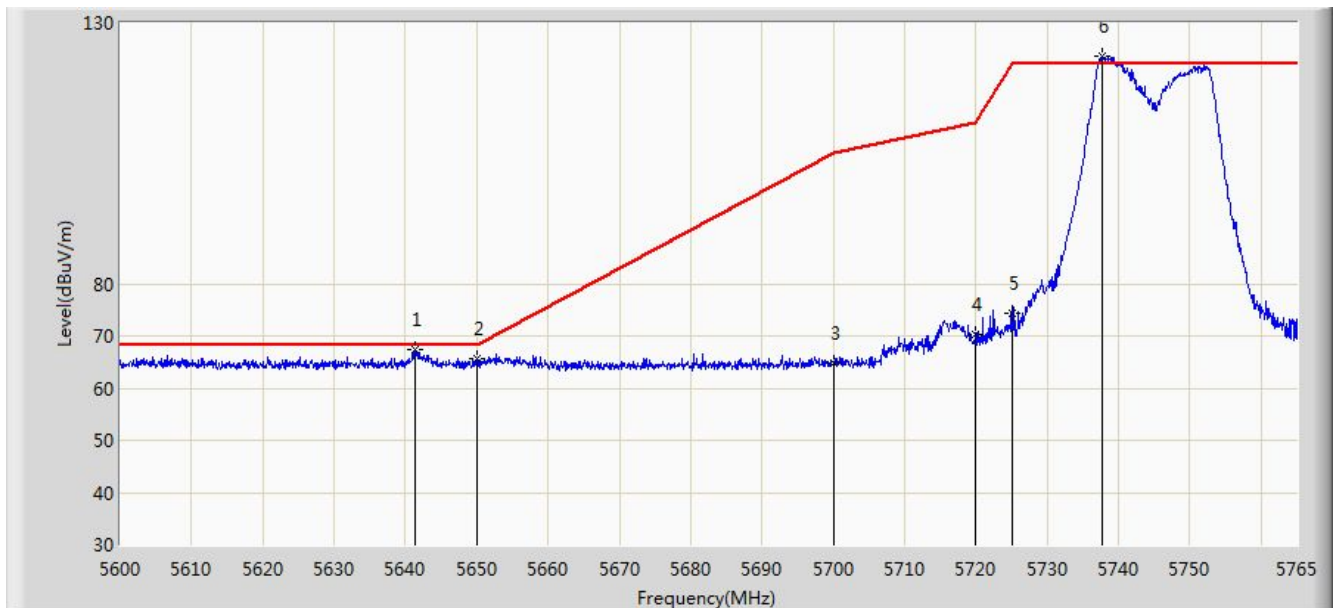


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.250	67.497	60.666	-0.703	68.200	6.830	PK
2			5650.000	65.571	58.778	-2.629	68.200	6.793	PK
3			5700.000	64.850	57.941	-40.350	105.200	6.909	PK
4			5720.000	70.264	63.360	-40.536	110.800	6.904	PK
5			5725.000	74.286	67.419	-47.914	122.200	6.867	PK
6		*	5737.692	123.653	116.713	N/A	N/A	6.941	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode) with DAP646-RW	

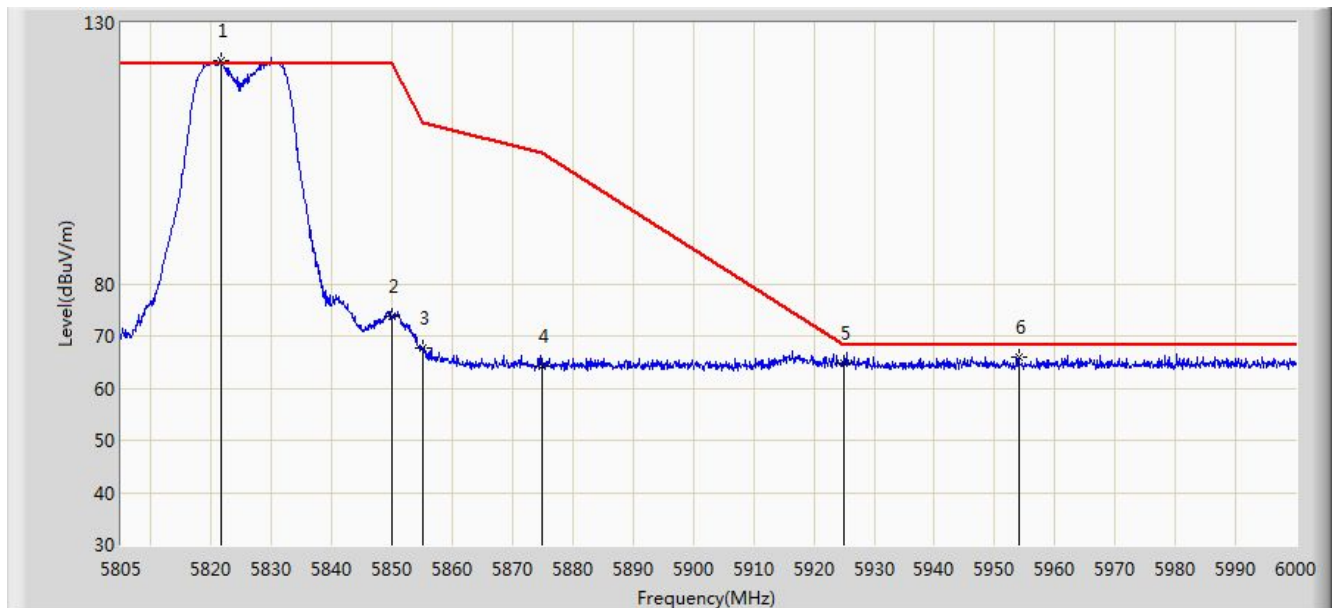


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.575	122.716	115.427	N/A	N/A	7.289	PK
2			5850.000	73.653	66.323	-48.547	122.200	7.331	PK
3			5855.000	67.655	60.327	-43.145	110.800	7.327	PK
4			5875.000	64.191	56.777	-41.009	105.200	7.414	PK
5			5925.000	64.826	57.526	-3.374	68.200	7.299	PK
6			5954.078	66.020	58.566	-2.180	68.200	7.454	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:36
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode) with DAP646-RW	

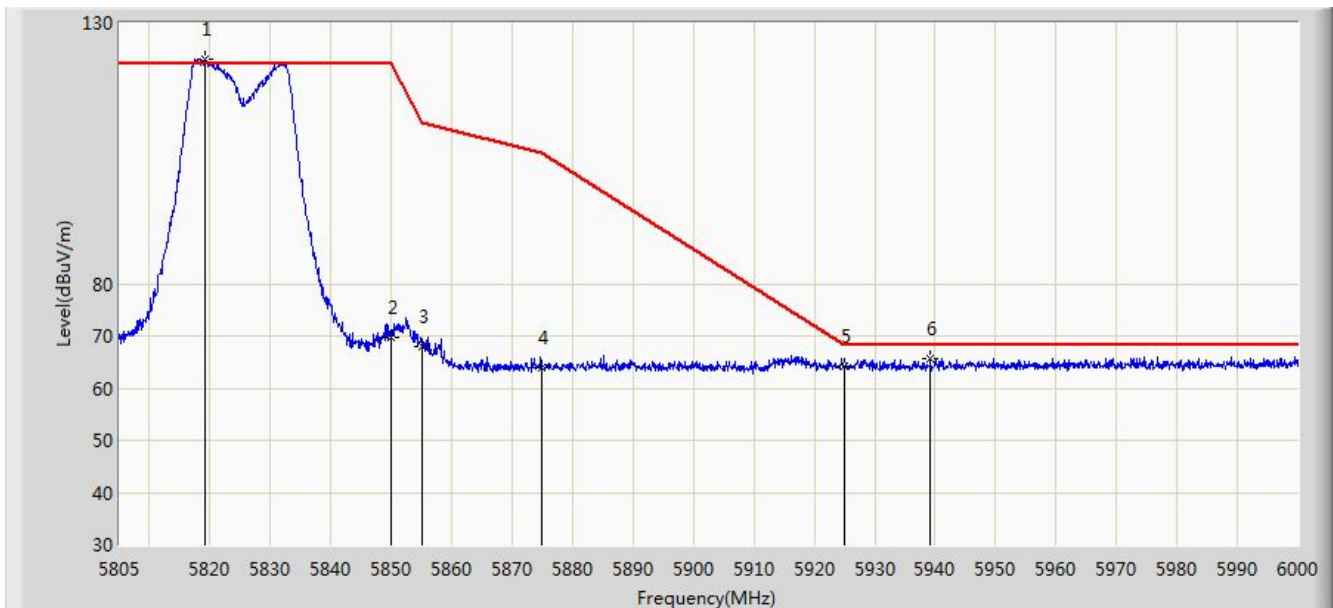


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.138	123.049	115.797	N/A	N/A	7.252	PK
2			5850.000	69.687	62.357	-52.513	122.200	7.331	PK
3			5855.000	68.021	60.693	-42.779	110.800	7.327	PK
4			5875.000	63.881	56.467	-41.319	105.200	7.414	PK
5			5925.000	64.076	56.776	-4.124	68.200	7.299	PK
6			5939.257	65.572	58.159	-2.628	68.200	7.413	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 11:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

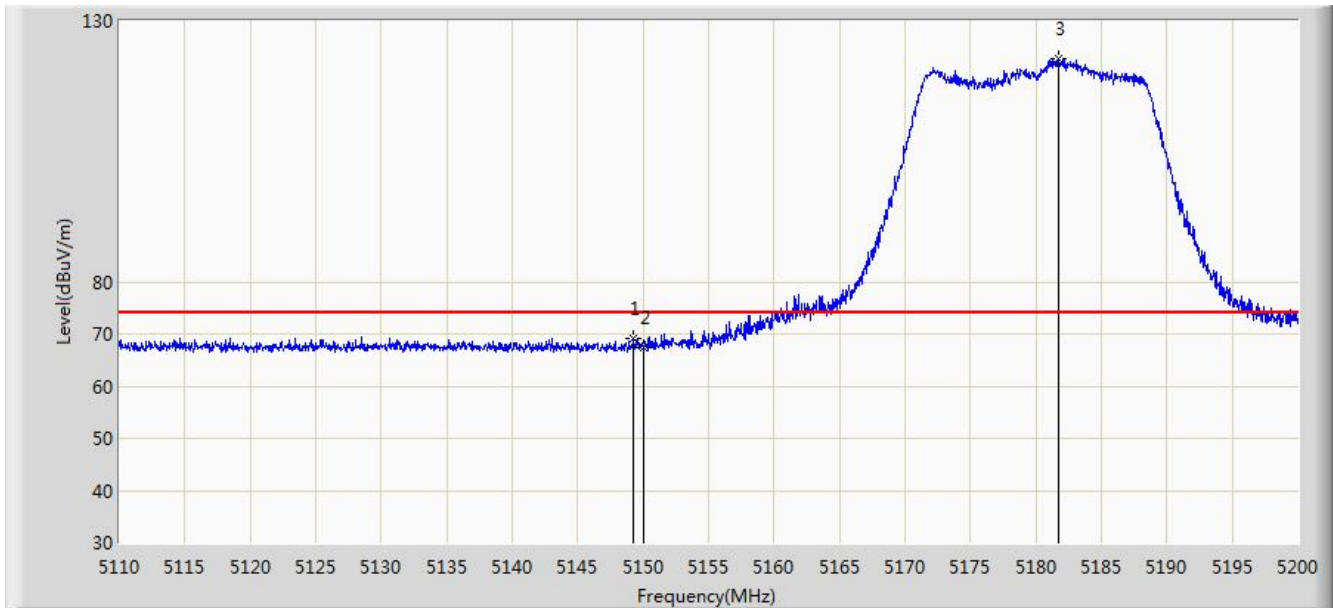


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.285	69.036	62.641	-4.964	74.000	6.395	PK
2			5150.000	67.290	60.893	-6.710	74.000	6.398	PK
3		*	5181.730	122.848	116.261	N/A	N/A	6.586	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 11:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

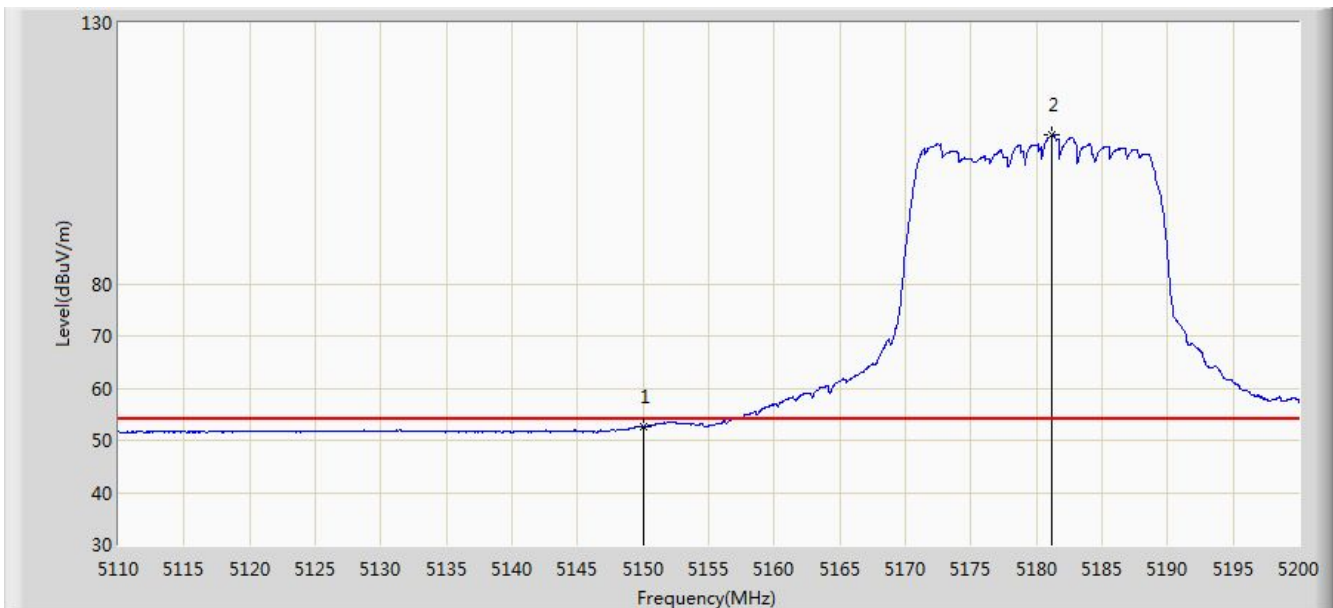


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.625	46.228	-1.375	54.000	6.398	AV
2	X	*	5181.145	108.448	101.867	N/A	N/A	6.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

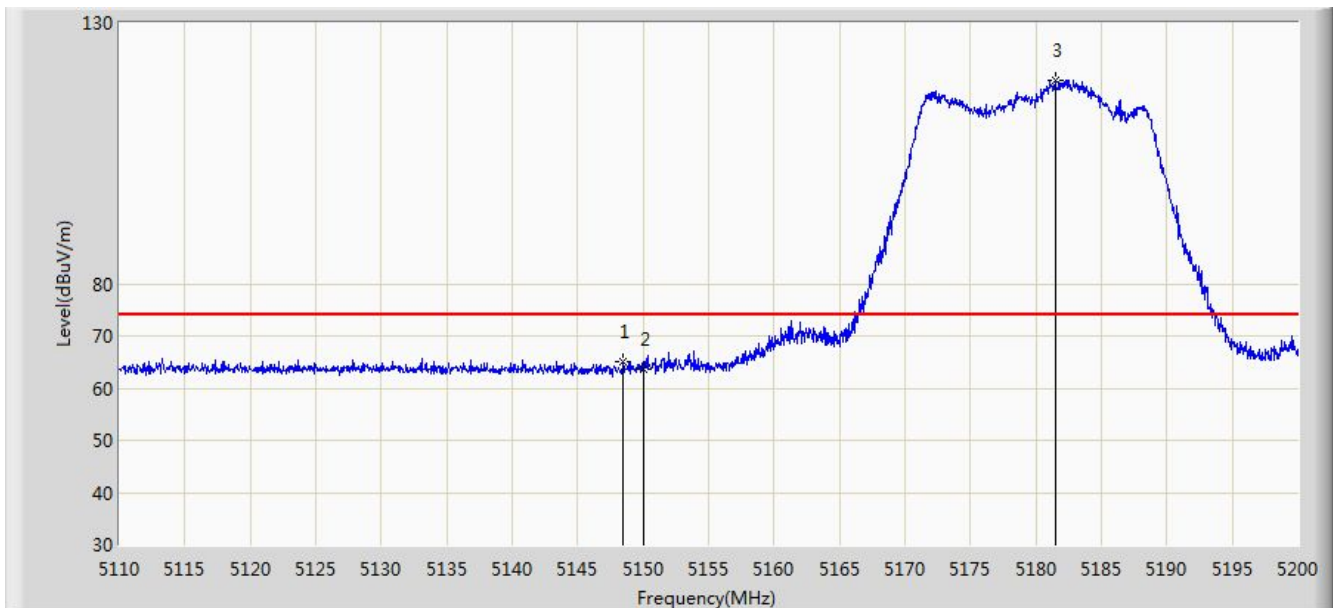


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.475	64.973	58.581	-9.027	74.000	6.392	PK
2			5150.000	63.492	57.095	-10.508	74.000	6.398	PK
3		*	5181.460	118.987	112.403	N/A	N/A	6.583	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:09
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

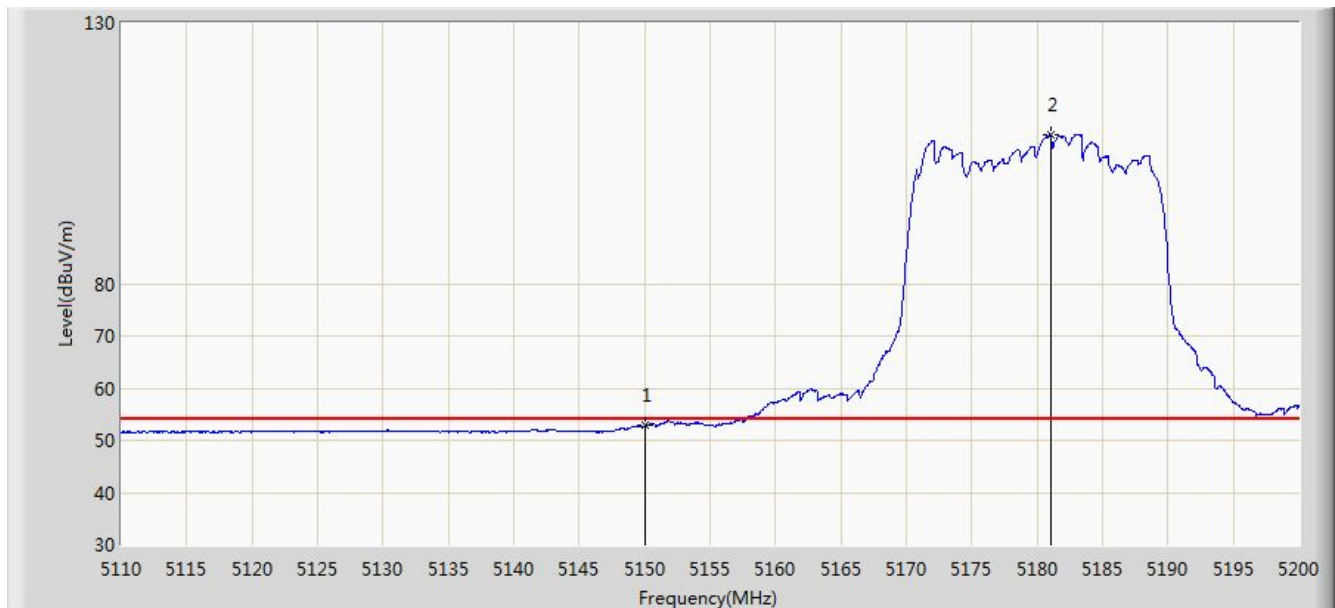


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.792	46.395	-1.208	54.000	6.398	AV
2	X	*	5181.055	108.620	102.040	N/A	N/A	6.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode) with DAP646-RW	

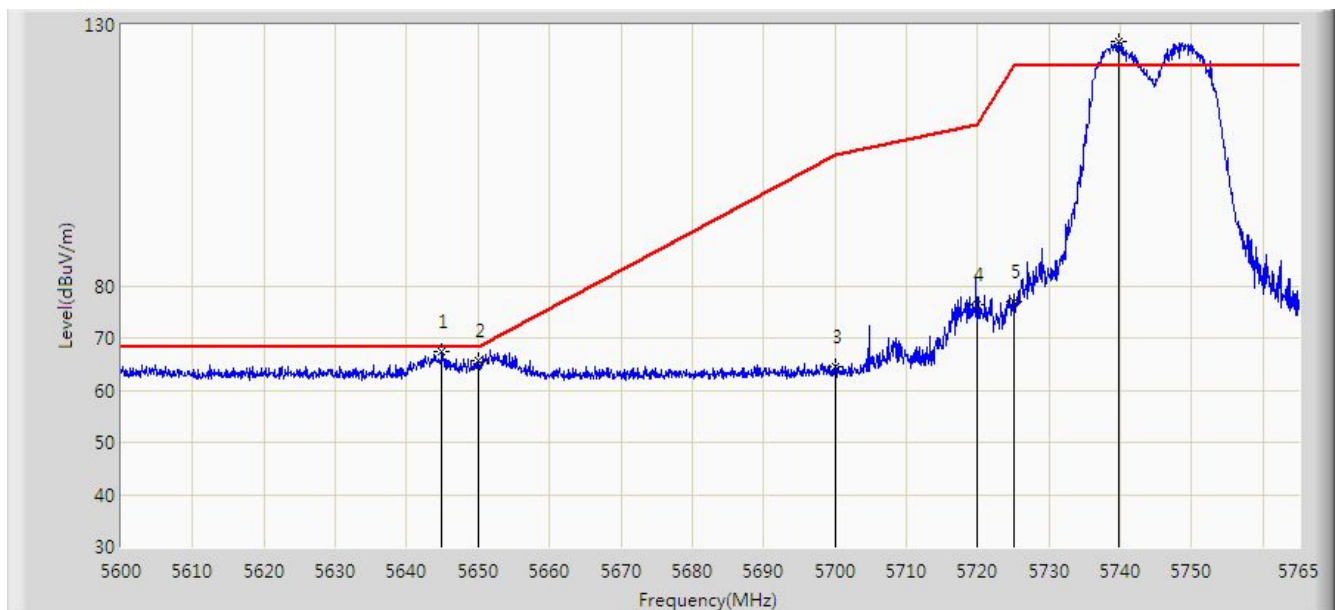


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.880	67.496	60.681	-0.704	68.200	6.815	PK
2			5650.000	65.581	58.788	-2.619	68.200	6.793	PK
3			5700.000	64.526	57.617	-40.674	105.200	6.909	PK
4			5720.000	76.397	69.493	-34.403	110.800	6.904	PK
5			5725.000	77.042	70.175	-45.158	122.200	6.867	PK
6		*	5739.672	126.774	126.774	N/A	N/A	0.000	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode) with DAP646-RW	

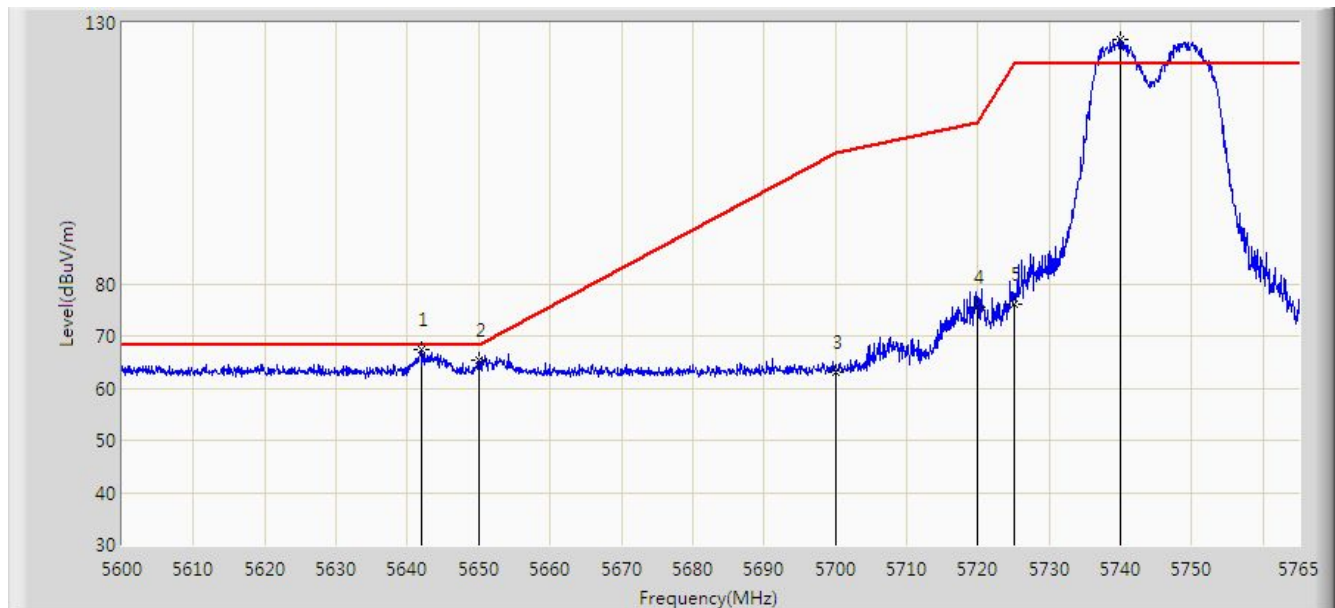


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.910	67.312	60.484	-0.888	68.200	6.828	PK
2			5650.000	65.224	58.431	-2.976	68.200	6.793	PK
3			5700.000	63.156	56.247	-42.044	105.200	6.909	PK
4			5720.000	75.615	68.711	-35.185	110.800	6.904	PK
5			5725.000	76.037	69.170	-46.163	122.200	6.867	PK
6		*	5739.920	126.838	126.838	N/A	N/A	0.000	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:50
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode) with DAP646-RW	

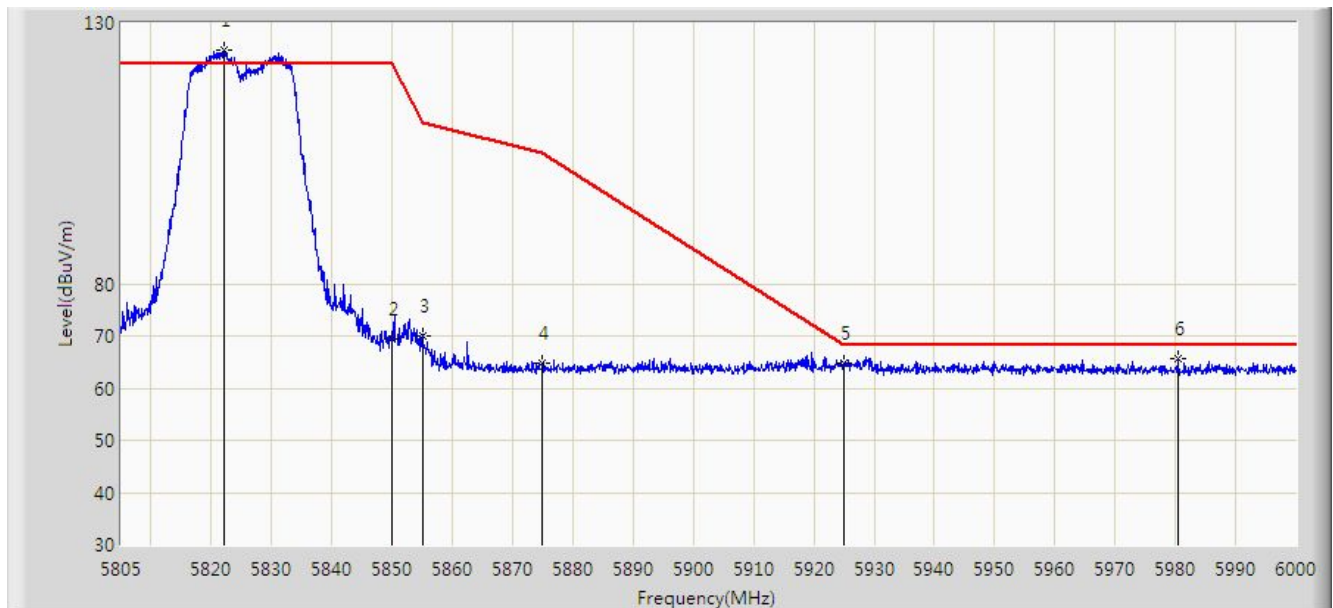


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.062	124.869	117.573	N/A	N/A	7.296	PK
2			5850.000	69.409	62.079	-52.791	122.200	7.331	PK
3			5855.000	70.001	62.673	-40.799	110.800	7.327	PK
4			5875.000	64.706	57.292	-40.494	105.200	7.414	PK
5			5925.000	64.645	57.345	-3.555	68.200	7.299	PK
6			5980.402	65.651	65.651	-2.549	68.200	0.000	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode) with DAP646-RW	

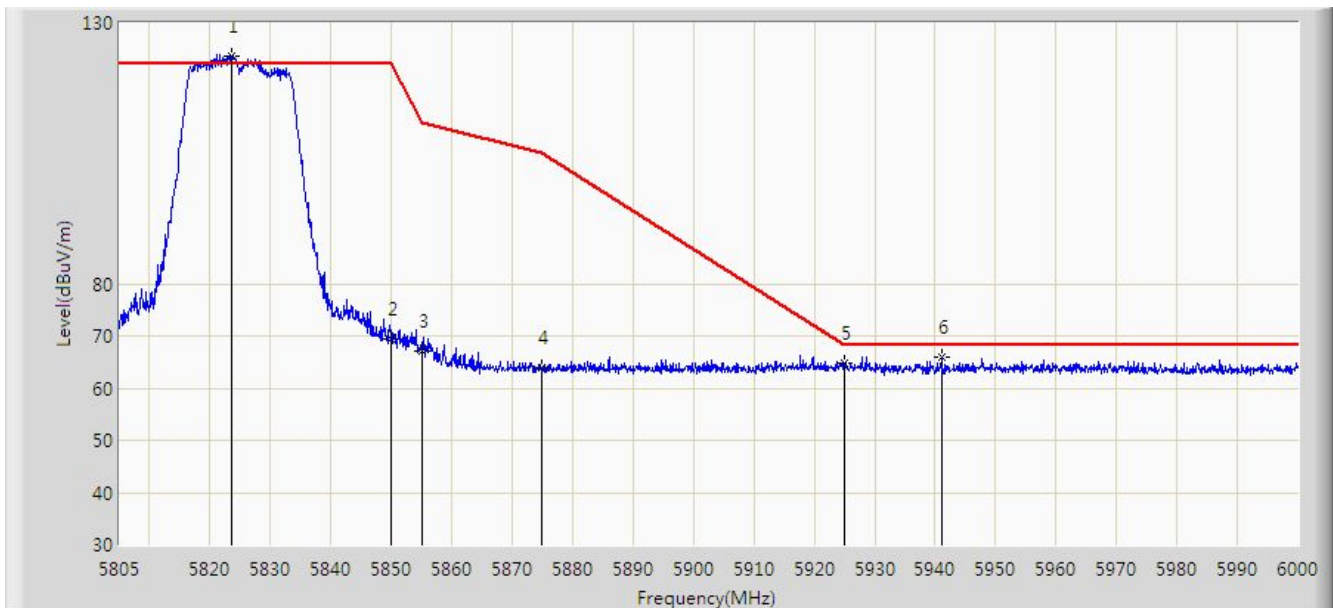


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.623	123.746	116.426	N/A	N/A	7.320	PK
2			5850.000	69.339	62.009	-52.861	122.200	7.331	PK
3			5855.000	67.141	59.813	-43.659	110.800	7.327	PK
4			5875.000	63.793	56.379	-41.407	105.200	7.414	PK
5			5925.000	64.723	57.423	-3.477	68.200	7.299	PK
6			5941.110	65.993	65.993	-2.207	68.200	0.000	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

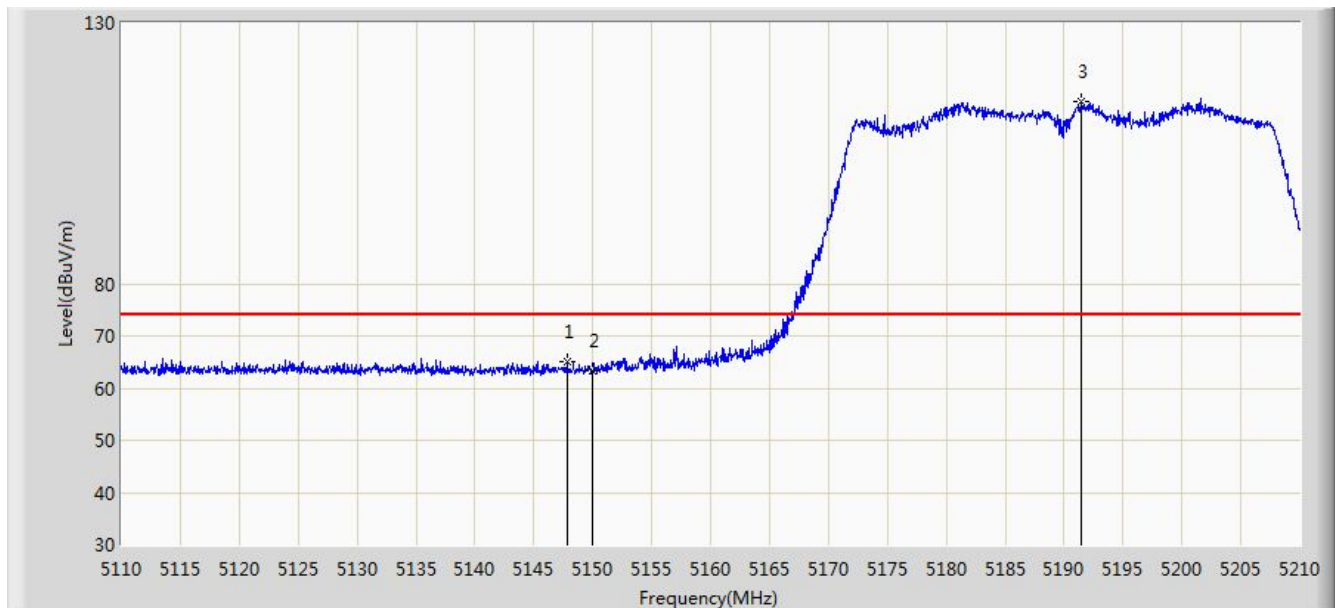


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.800	65.068	58.674	-8.932	74.000	6.394	PK
2			5150.000	63.275	56.878	-10.725	74.000	6.398	PK
3		*	5191.500	115.036	108.541	N/A	N/A	6.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

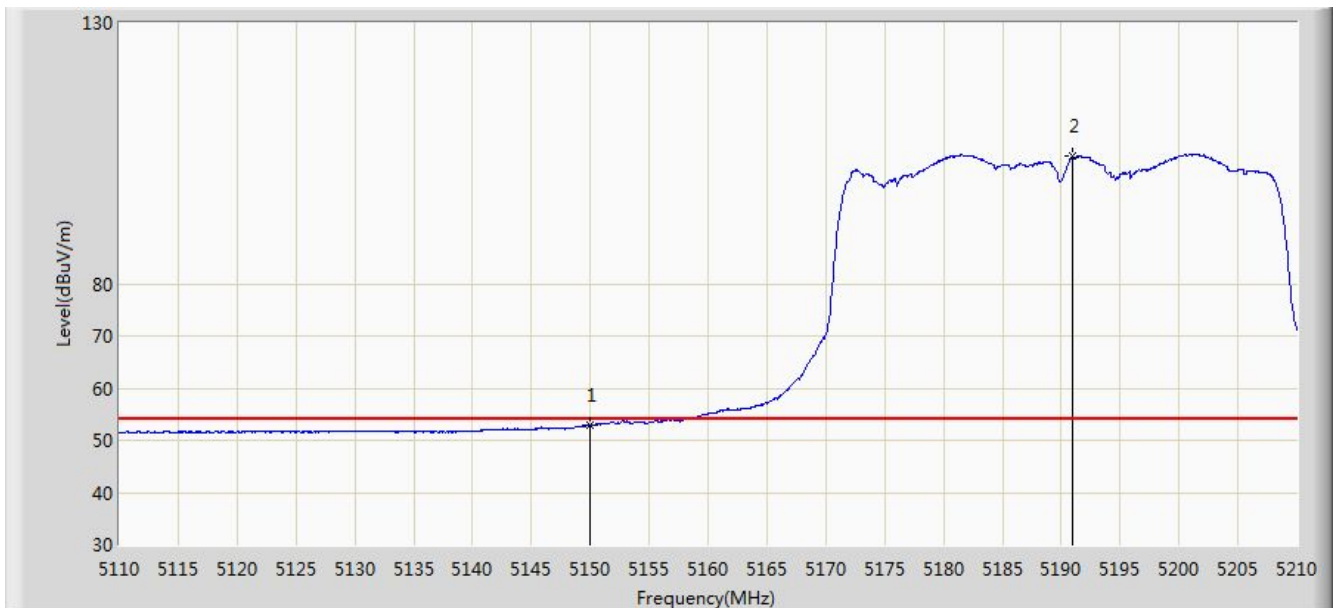


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.859	46.462	-1.141	54.000	6.398	AV
2		*	5190.950	104.467	97.966	N/A	N/A	6.501	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

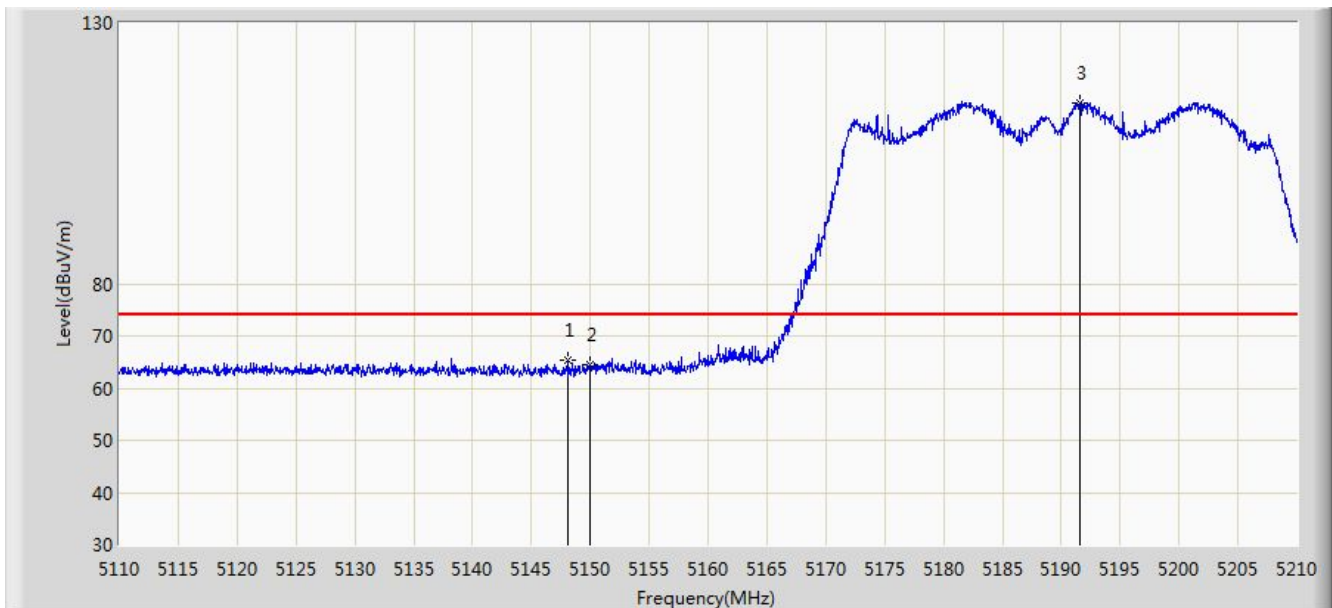


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.150	65.291	58.900	-8.709	74.000	6.391	PK
2			5150.000	64.604	58.207	-9.396	74.000	6.398	PK
3		*	5191.550	114.734	108.239	N/A	N/A	6.495	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

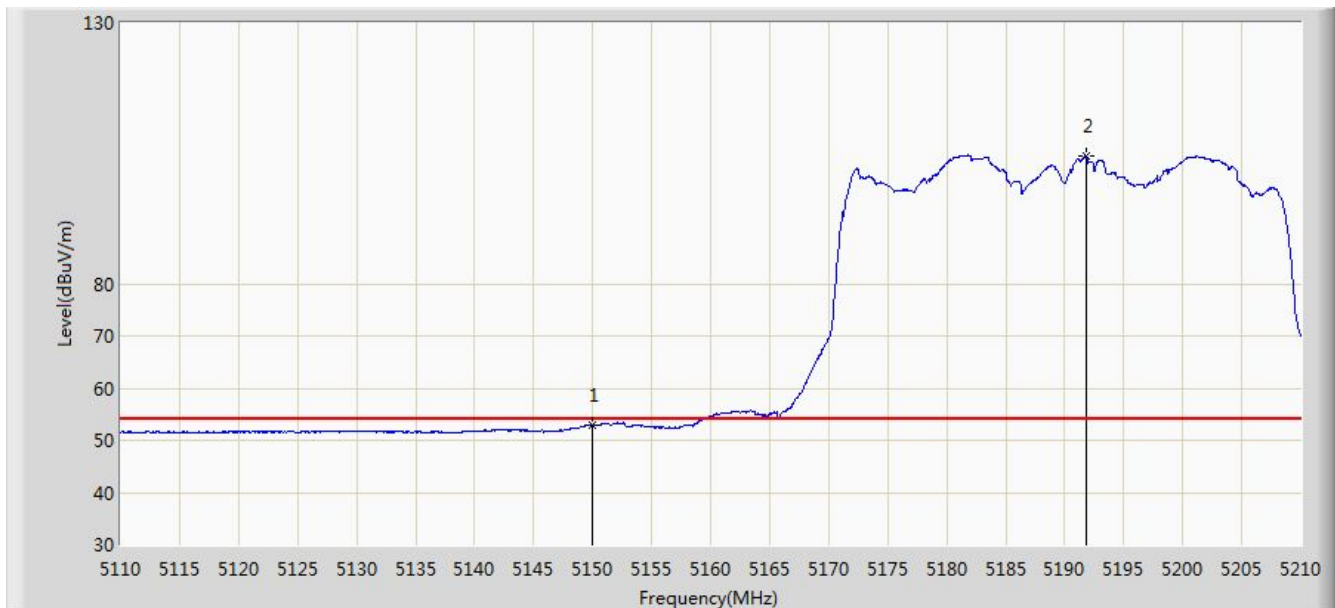


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.840	46.443	-1.160	54.000	6.398	AV
2		*	5191.850	104.516	98.024	N/A	N/A	6.492	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with DAP646-RW	

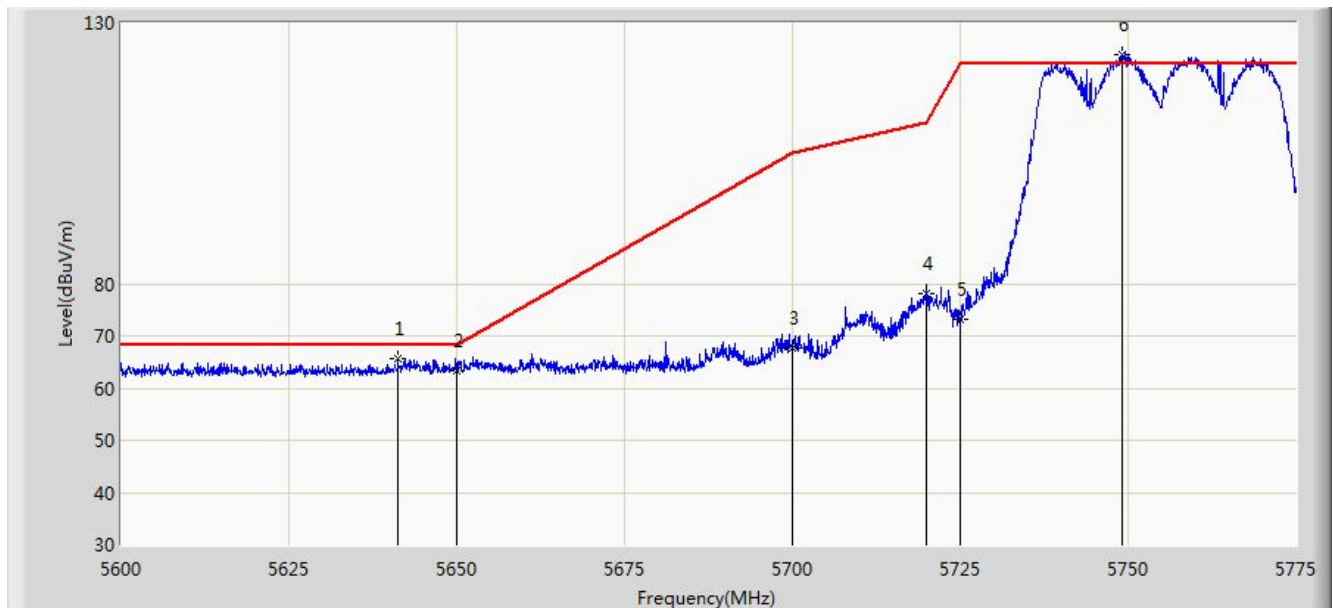


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.212	65.564	58.733	-2.636	68.200	6.831	PK
2			5650.000	63.318	56.525	-4.882	68.200	6.793	PK
3			5700.000	67.737	60.828	-37.463	105.200	6.909	PK
4			5720.000	78.220	71.316	-32.580	110.800	6.904	PK
5			5725.000	73.230	66.363	-48.970	122.200	6.867	PK
6		*	5749.100	123.955	116.905	N/A	N/A	7.050	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with DAP646-RW	

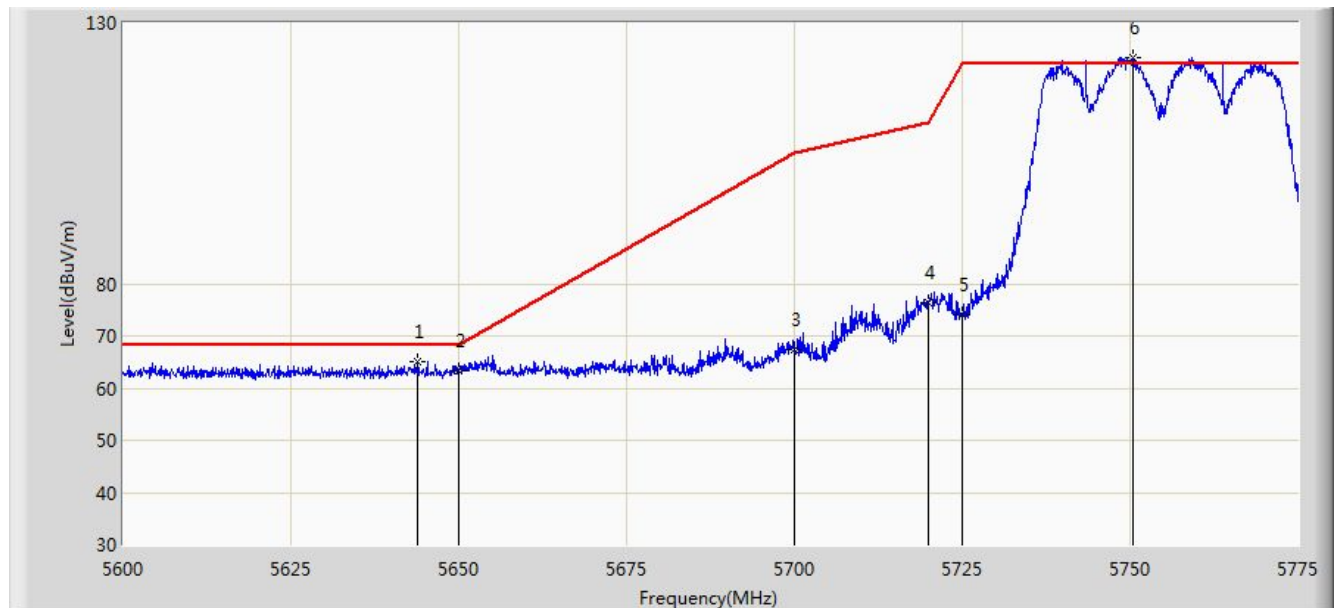


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.750	64.979	58.159	-3.221	68.200	6.820	PK
2			5650.000	63.477	56.684	-4.723	68.200	6.793	PK
3			5700.000	67.363	60.454	-37.837	105.200	6.909	PK
4			5720.000	76.258	69.354	-34.542	110.800	6.904	PK
5			5725.000	74.000	67.133	-48.200	122.200	6.867	PK
6		*	5750.500	123.355	116.288	N/A	N/A	7.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with DAP646-RW	

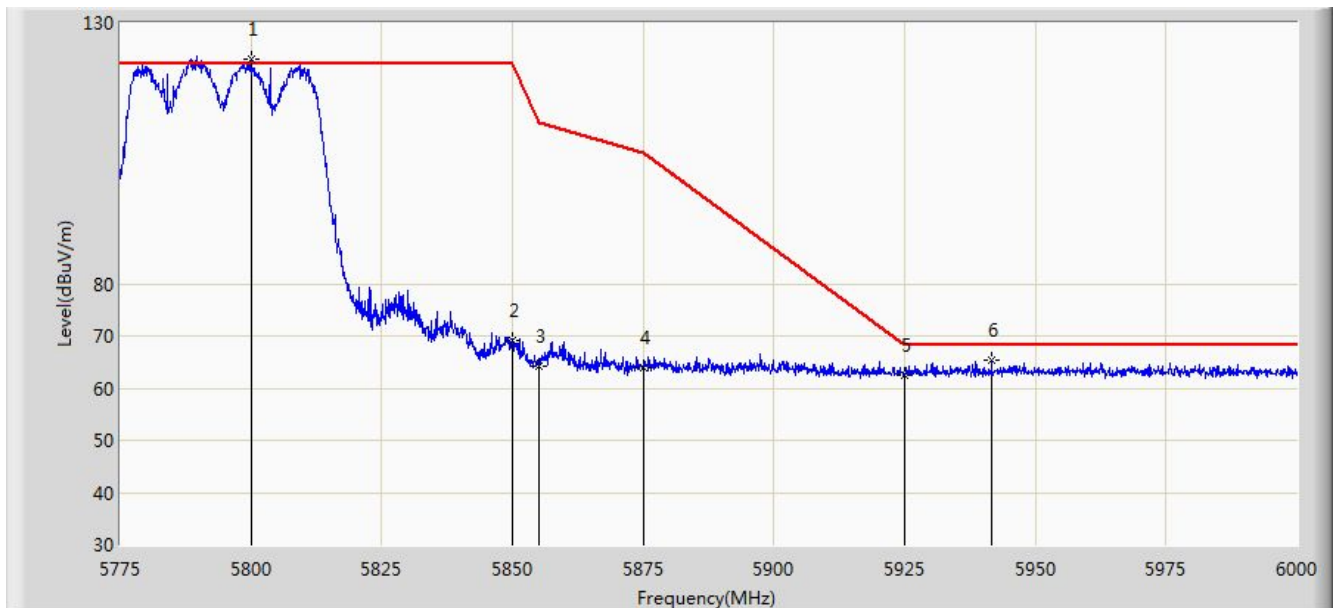


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5799.975	122.905	115.839	N/A	N/A	7.066	PK
2			5850.000	69.000	61.670	-53.200	122.200	7.331	PK
3			5855.000	64.262	56.934	-46.538	110.800	7.327	PK
4			5875.000	63.872	56.458	-41.328	105.200	7.414	PK
5			5925.000	62.460	55.160	-5.740	68.200	7.299	PK
6			5941.612	65.371	57.930	-2.829	68.200	7.441	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with DAP646-RW	

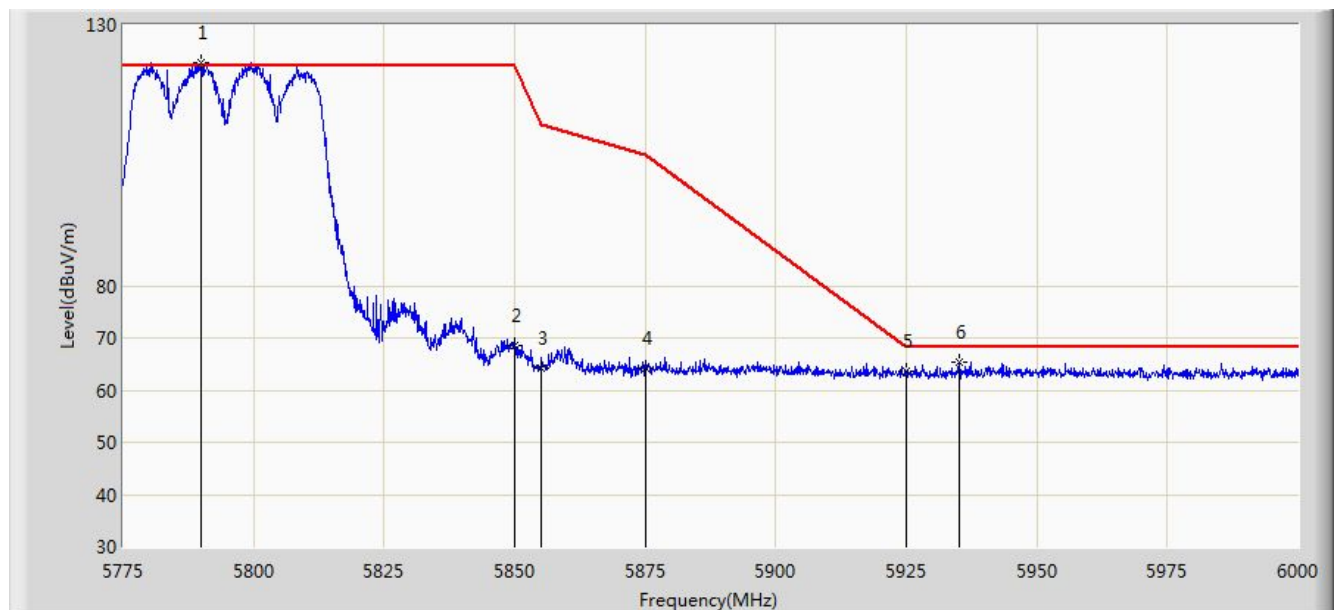


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5789.850	122.700	115.628	N/A	N/A	7.072	PK
2			5850.000	68.495	61.165	-53.705	122.200	7.331	PK
3			5855.000	64.068	56.740	-46.732	110.800	7.327	PK
4			5875.000	64.328	56.914	-40.872	105.200	7.414	PK
5			5925.000	63.575	56.275	-4.625	68.200	7.299	PK
6			5935.087	65.221	57.858	-2.979	68.200	7.363	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

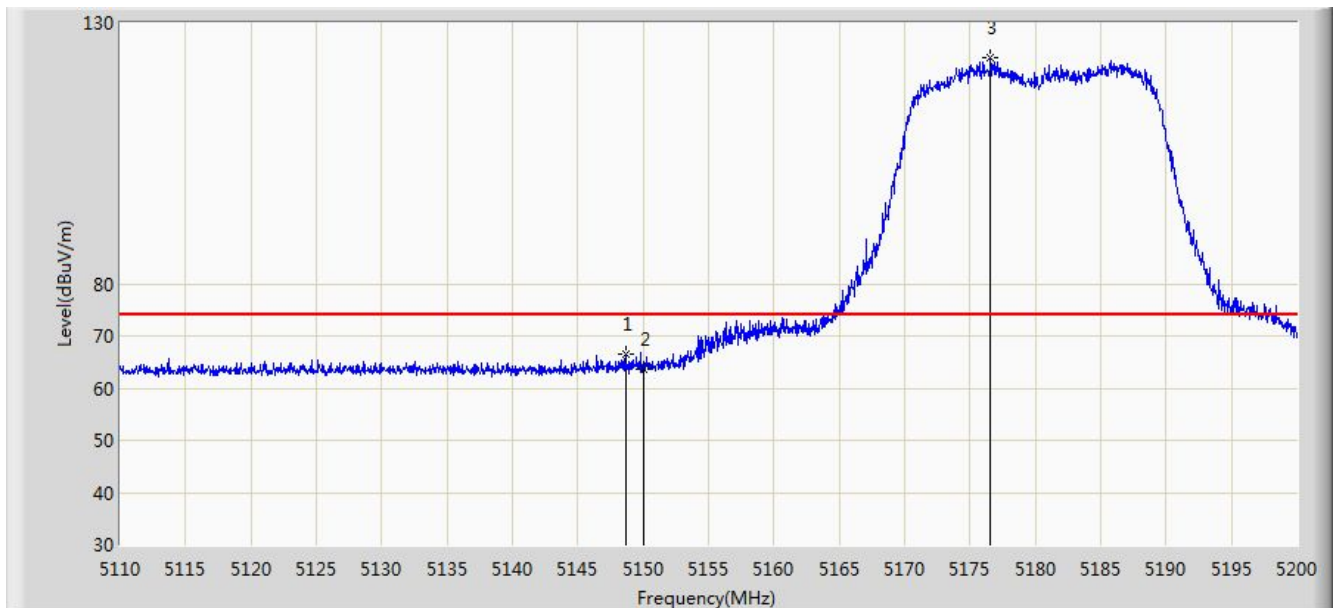


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.655	66.506	60.113	-7.494	74.000	6.393	PK
2			5150.000	63.671	57.274	-10.329	74.000	6.398	PK
3		*	5176.555	123.195	116.658	N/A	N/A	6.536	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

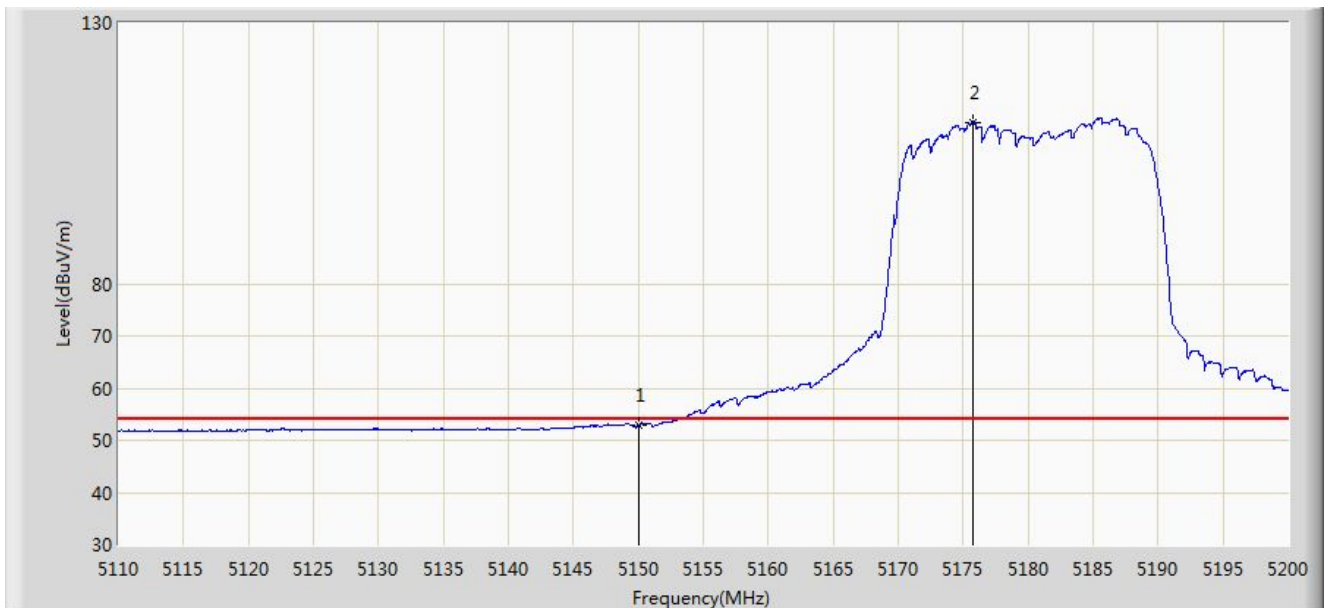


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.979	46.582	-1.021	54.000	6.398	AV
2	X	*	5175.700	110.972	104.444	N/A	N/A	6.528	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP646-RW	

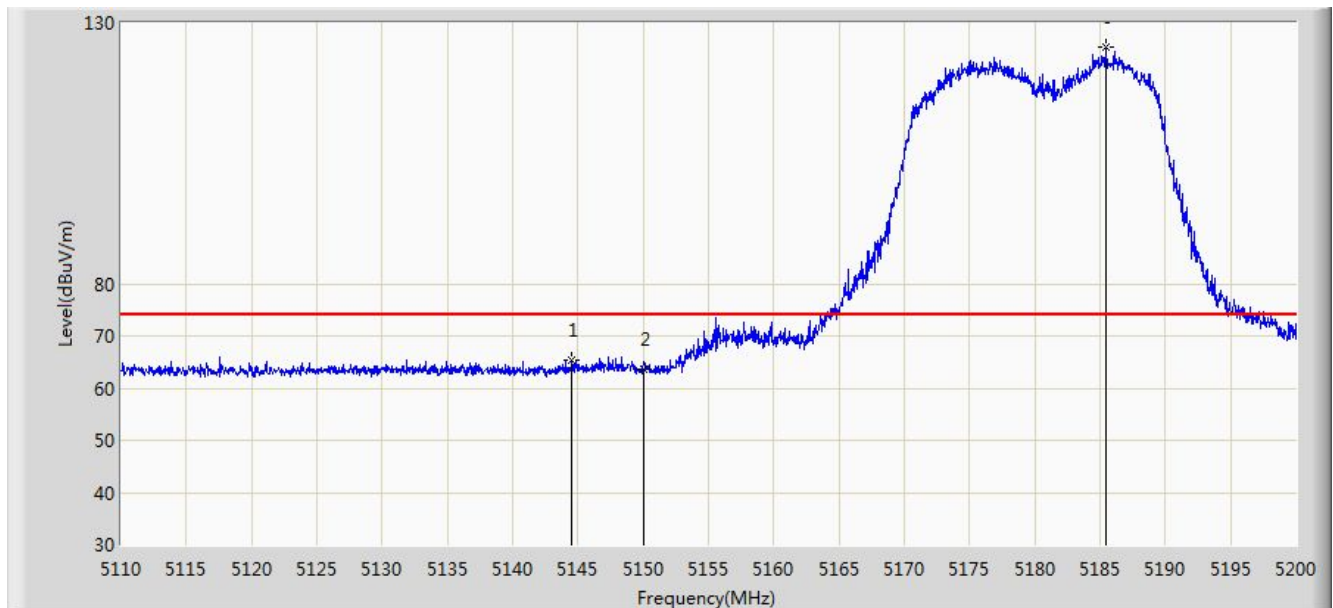

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.560	65.314	58.871	-8.686	74.000	6.443	PK
2			5150.000	63.696	57.299	-10.304	74.000	6.398	PK
3		*	5185.420	125.410	118.855	N/A	N/A	6.555	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with DAP646-RW	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.546	46.149	-1.454	54.000	6.398	AV
2	X	*	5185.240	111.856	105.299	N/A	N/A	6.557	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with DAP646-RW	

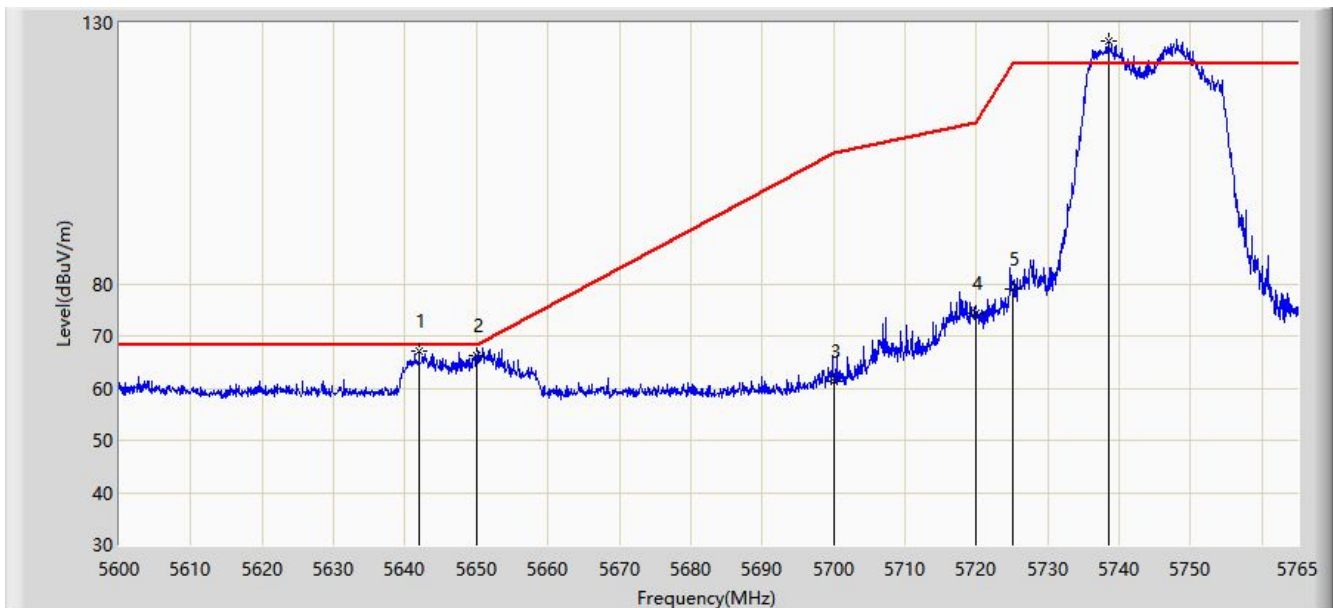


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.993	66.981	61.776	-1.219	68.200	5.205	PK
2			5650.000	66.210	60.874	-1.990	68.200	5.336	PK
3			5700.000	61.255	55.937	-43.945	105.200	5.318	PK
4			5720.000	74.457	68.983	-36.343	110.800	5.474	PK
5			5725.000	78.944	73.466	-43.256	122.200	5.478	PK
6		*	5738.518	126.663	121.119	N/A	N/A	5.544	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with DAP646-RW	

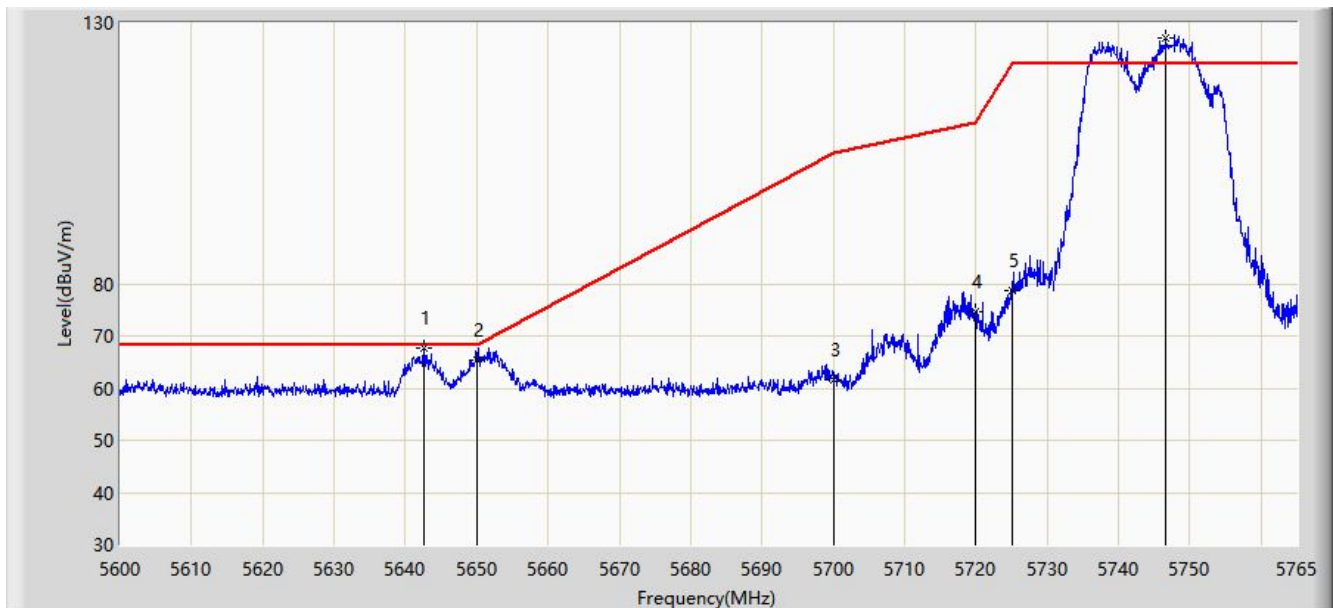


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5642.570	67.537	62.322	-0.663	68.200	5.215	PK
2			5650.000	65.308	59.972	-2.892	68.200	5.336	PK
3			5700.000	61.689	56.371	-43.511	105.200	5.318	PK
4			5720.000	74.597	69.123	-36.203	110.800	5.474	PK
5			5725.000	78.752	73.274	-43.448	122.200	5.478	PK
6		*	5746.685	127.068	121.428	N/A	N/A	5.640	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with DAP646-RW	

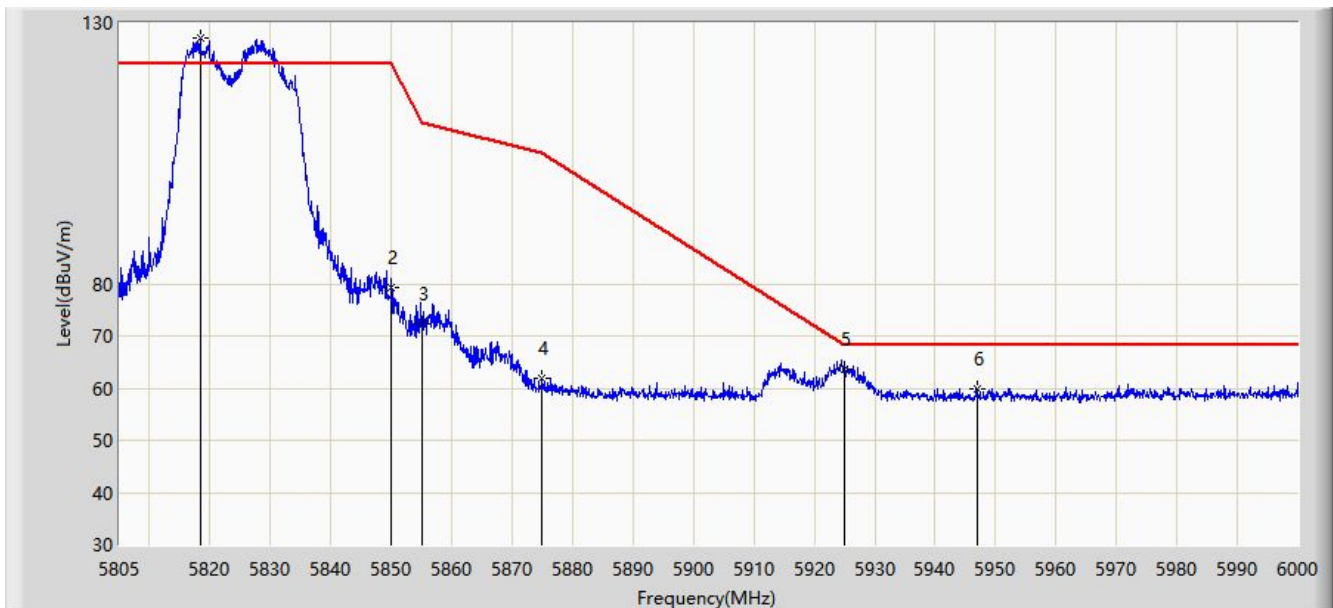


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.357	126.985	121.163	N/A	N/A	5.823	PK
2			5850.000	79.398	73.429	-42.802	122.200	5.968	PK
3			5855.000	72.258	66.283	-38.542	110.800	5.975	PK
4			5875.000	61.840	55.827	-43.360	105.200	6.013	PK
5			5925.000	63.712	57.577	-4.488	68.200	6.136	PK
6			5947.058	59.967	53.901	-8.233	68.200	6.066	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with DAP646-RW	

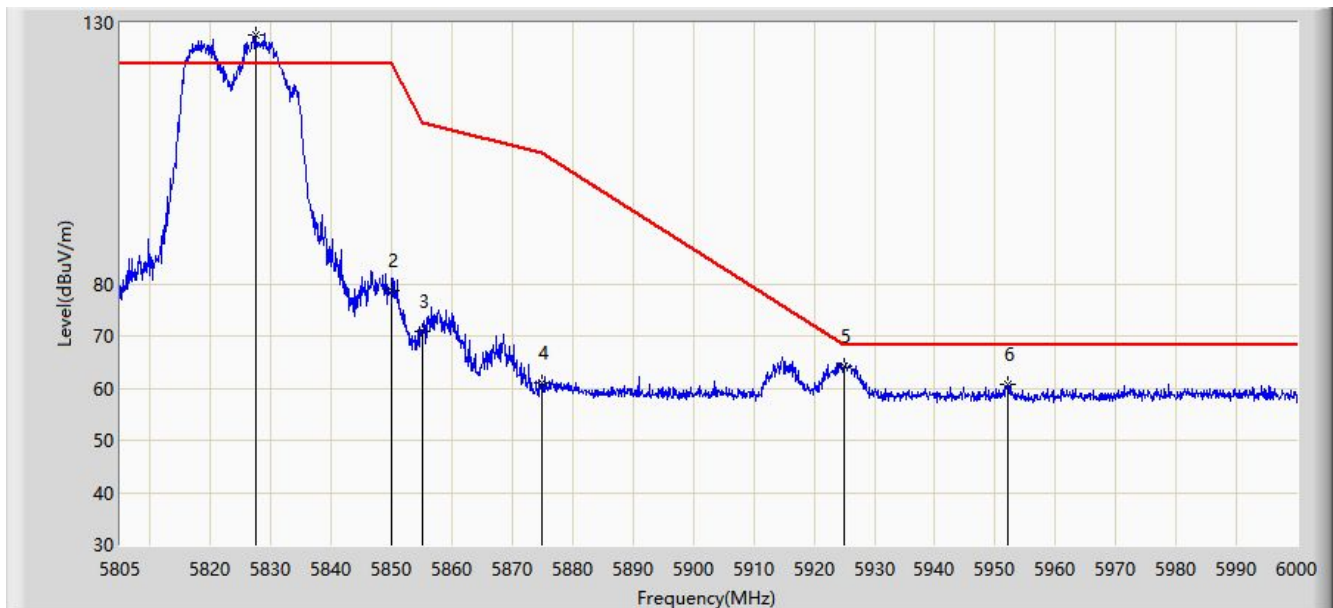


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.425	127.739	121.991	N/A	N/A	5.748	PK
2			5850.000	78.821	72.852	-43.379	122.200	5.968	PK
3			5855.000	71.014	65.039	-39.786	110.800	5.975	PK
4			5875.000	60.922	54.909	-44.278	105.200	6.013	PK
5			5925.000	64.320	58.185	-3.880	68.200	6.136	PK
6			5952.030	60.797	54.759	-7.403	68.200	6.039	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:36
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

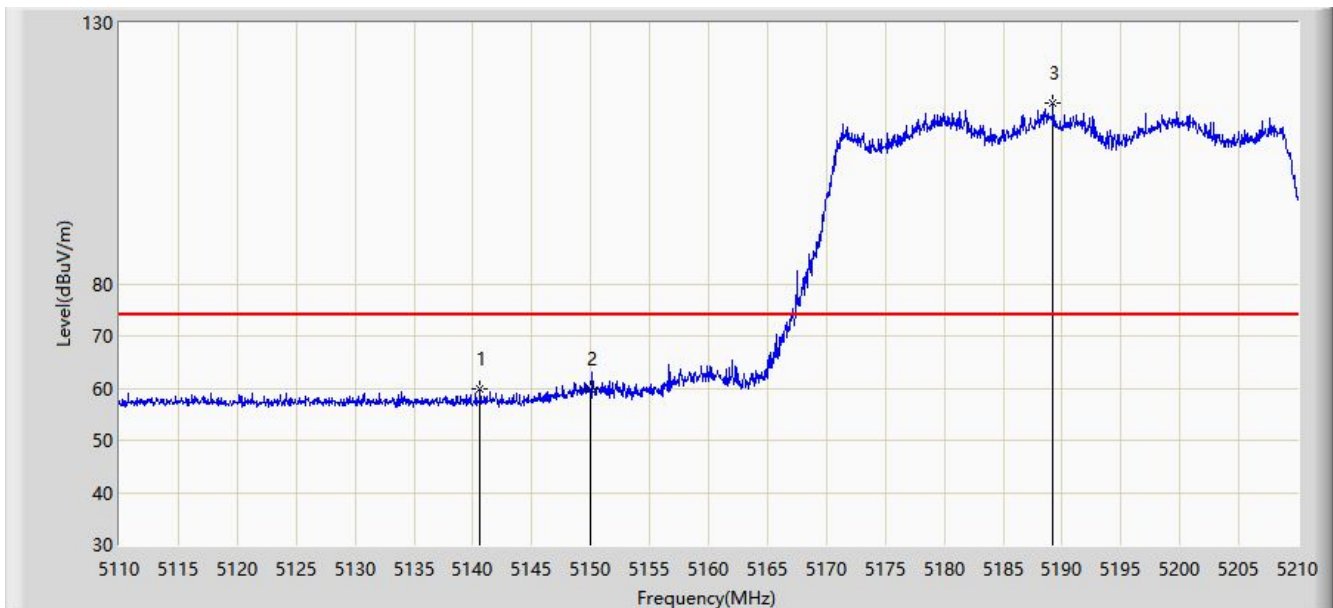


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.600	59.778	55.357	-14.222	74.000	4.420	PK
2			5150.000	59.718	55.276	-14.282	74.000	4.442	PK
3		*	5189.250	114.724	110.341	N/A	N/A	4.383	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

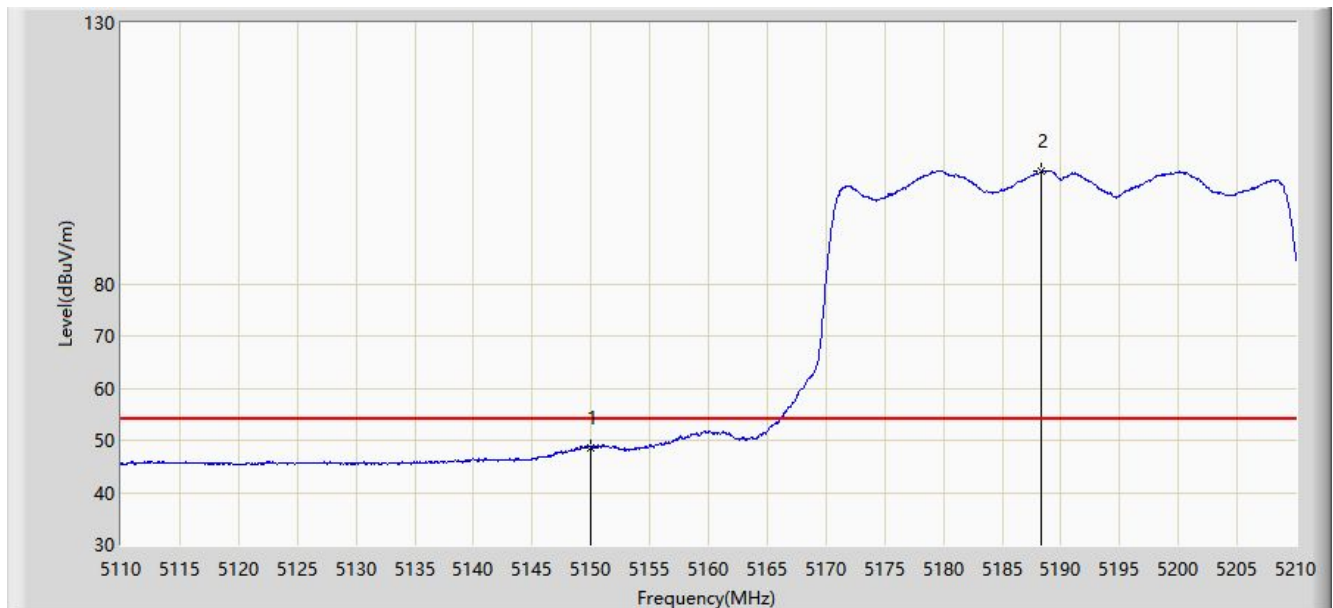


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.611	44.169	-5.389	54.000	4.442	AV
2		*	5188.350	101.598	97.205	N/A	N/A	4.393	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

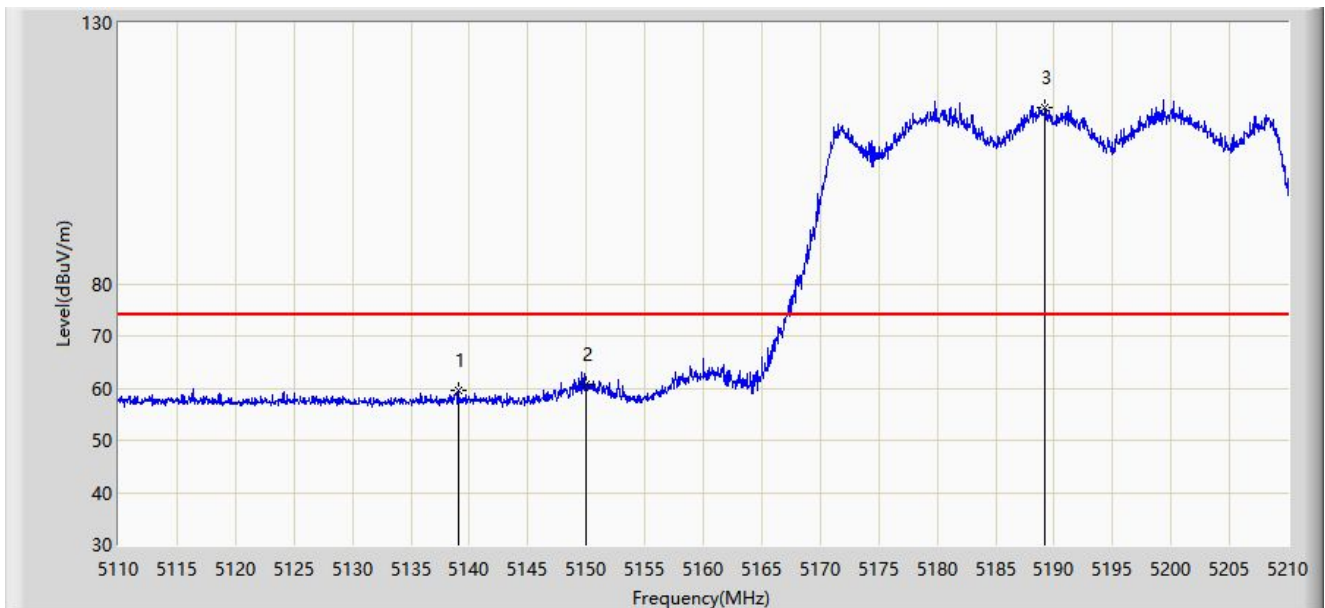


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.100	59.522	55.101	-14.478	74.000	4.421	PK
2			5150.000	60.635	56.193	-13.365	74.000	4.442	PK
3		*	5189.250	113.891	109.508	N/A	N/A	4.383	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with DAP646-RW	

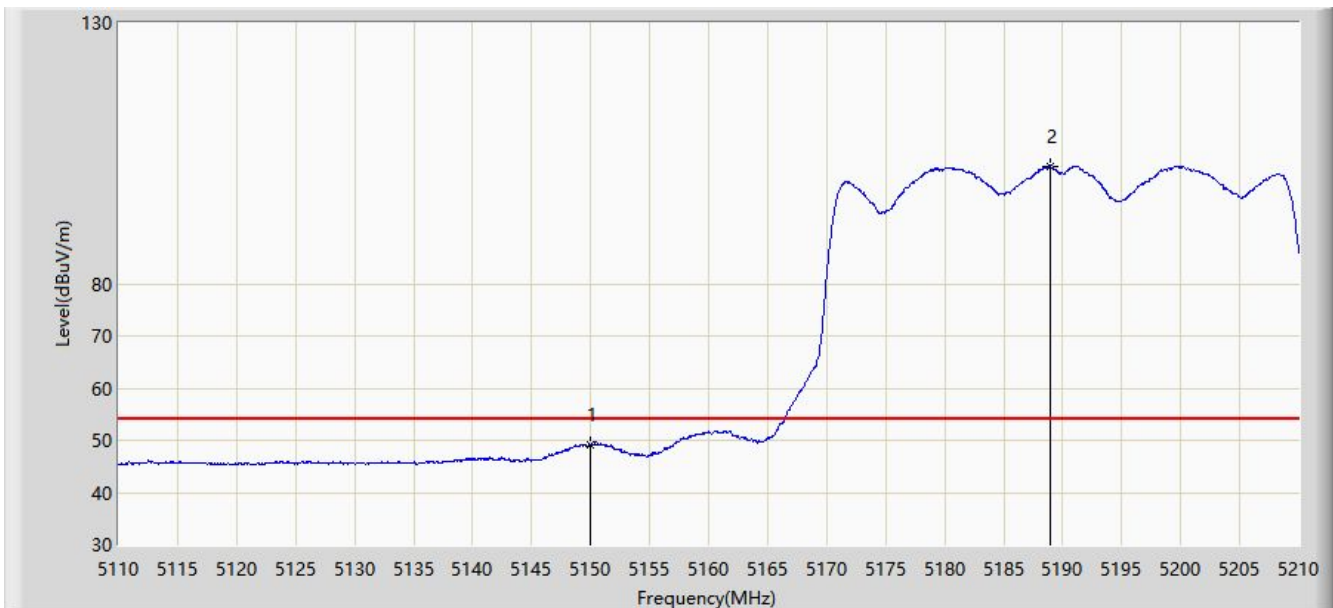


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.254	44.812	-4.746	54.000	4.442	AV
2		*	5188.950	102.608	98.222	N/A	N/A	4.386	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with DAP646-RW	

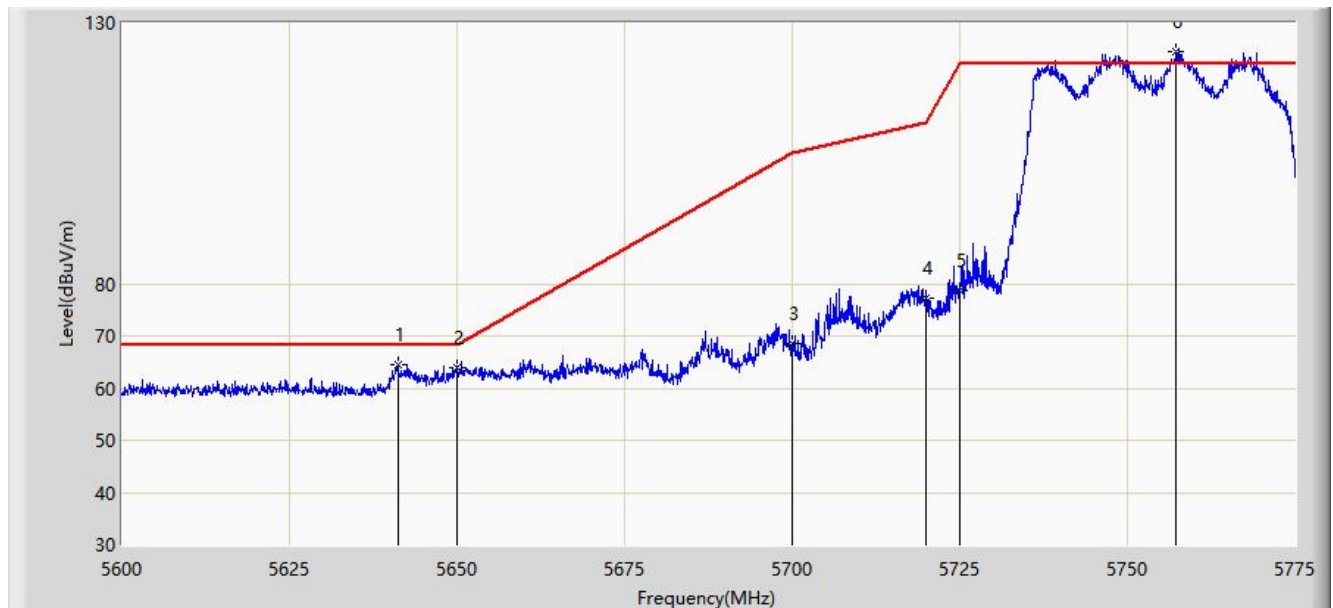


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.125	64.433	59.242	-3.767	68.200	5.191	PK
2			5650.000	63.906	58.570	-4.294	68.200	5.336	PK
3			5700.000	68.432	63.114	-36.768	105.200	5.318	PK
4			5720.000	77.207	71.733	-33.593	110.800	5.474	PK
5			5725.000	78.667	73.189	-43.533	122.200	5.478	PK
6		*	5757.237	124.356	118.508	N/A	N/A	5.848	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with DAP646-RW	

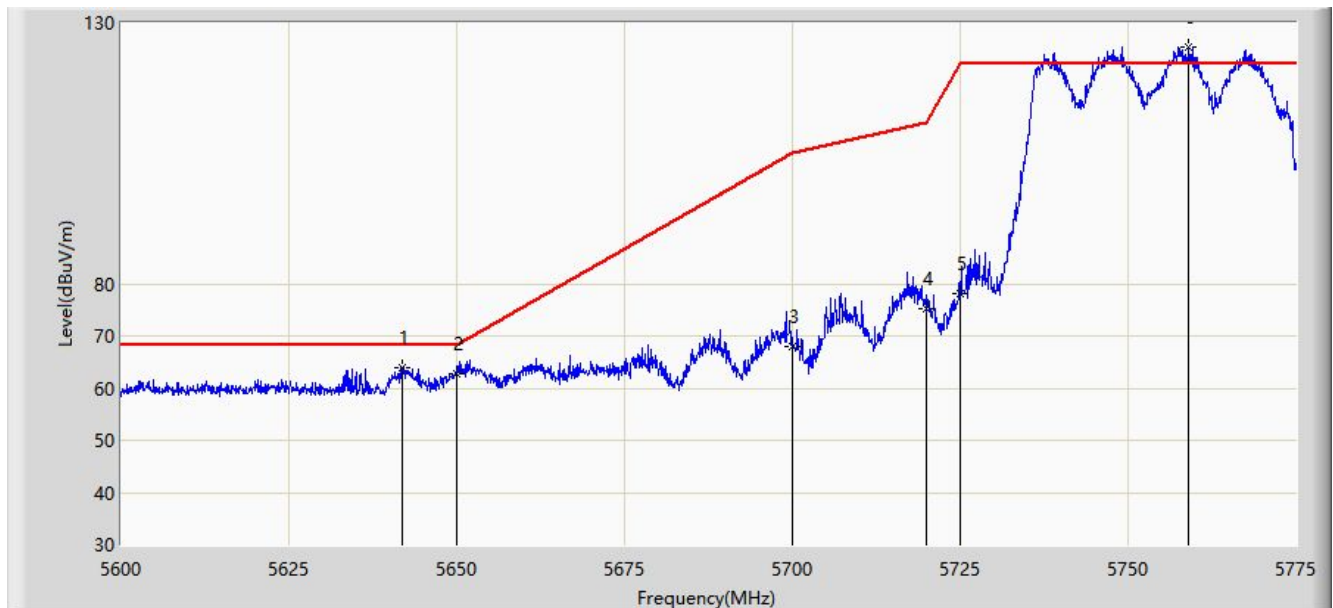


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.913	64.049	58.845	-4.151	68.200	5.205	PK
2			5650.000	62.850	57.514	-5.350	68.200	5.336	PK
3			5700.000	67.989	62.671	-37.211	105.200	5.318	PK
4			5720.000	75.238	69.764	-35.562	110.800	5.474	PK
5			5725.000	78.050	72.572	-44.150	122.200	5.478	PK
6		*	5758.987	125.238	119.356	N/A	N/A	5.882	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with DAP646-RW	

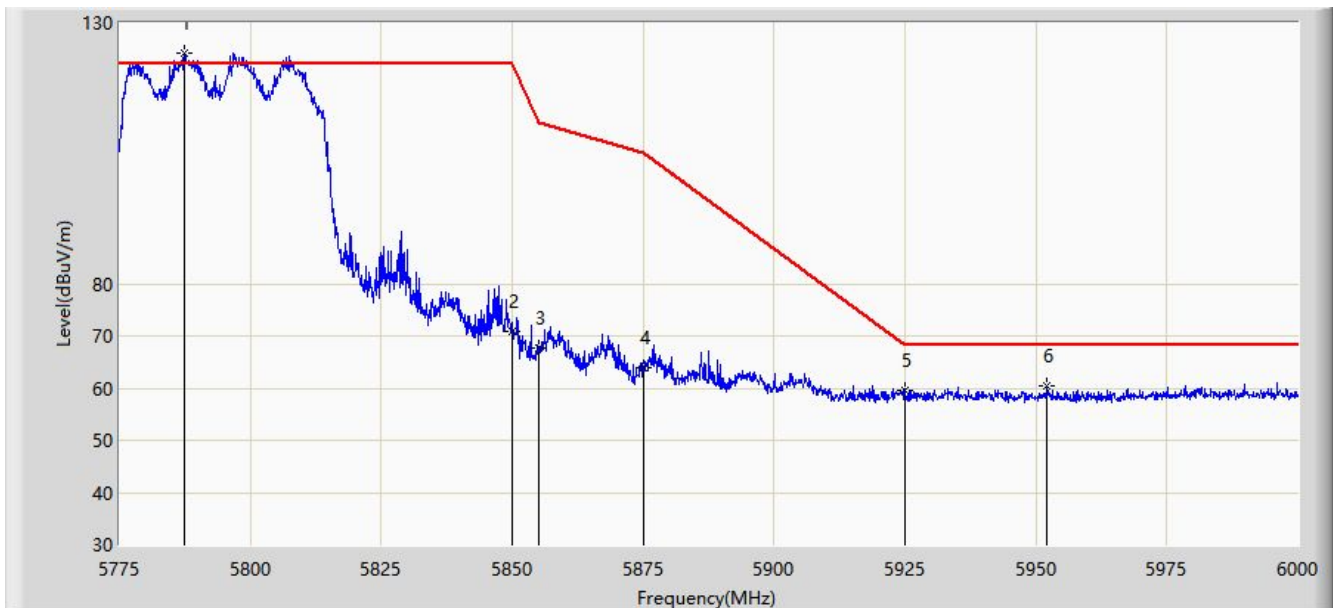


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.487	124.229	118.434	N/A	N/A	5.795	PK
2			5850.000	71.011	65.042	-51.189	122.200	5.968	PK
3			5855.000	67.806	61.831	-42.994	110.800	5.975	PK
4			5875.000	63.978	57.965	-41.222	105.200	6.013	PK
5			5925.000	59.488	53.353	-8.712	68.200	6.136	PK
6			5952.187	60.321	54.283	-7.879	68.200	6.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with DAP646-RW	

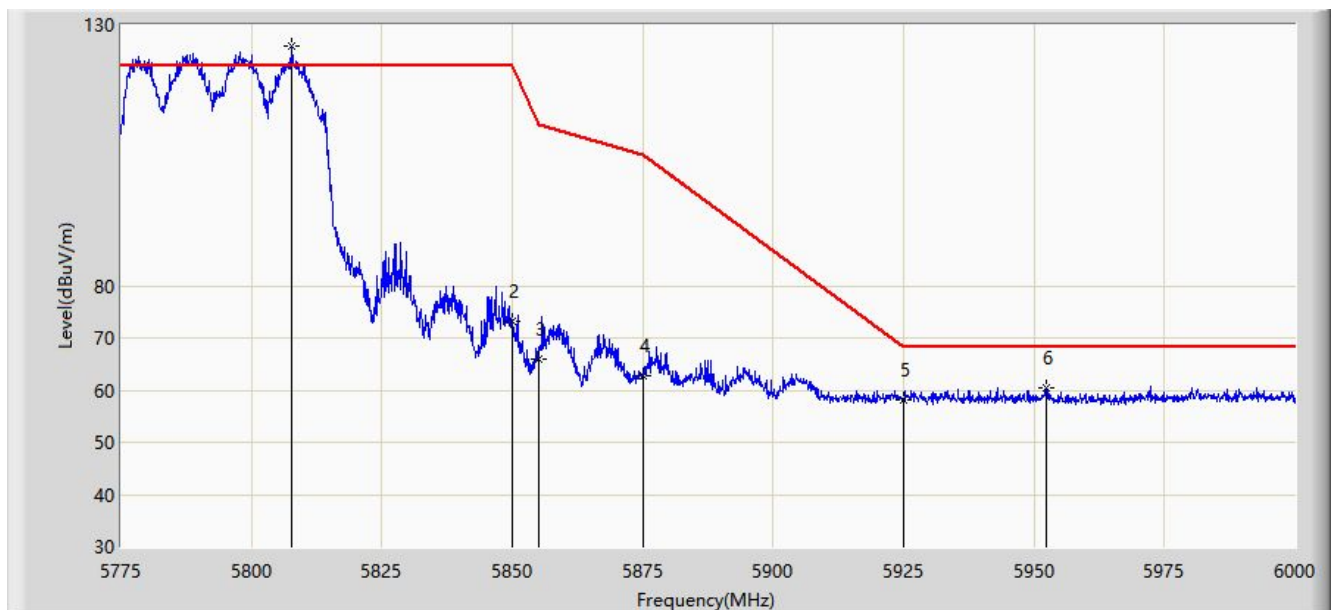


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5807.737	125.975	120.099	N/A	N/A	5.876	PK
2			5850.000	73.133	67.164	-49.067	122.200	5.968	PK
3			5855.000	66.005	60.030	-44.795	110.800	5.975	PK
4			5875.000	62.723	56.710	-42.477	105.200	6.013	PK
5			5925.000	58.130	51.995	-10.070	68.200	6.136	PK
6			5952.300	60.575	54.538	-7.625	68.200	6.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP646-RW	

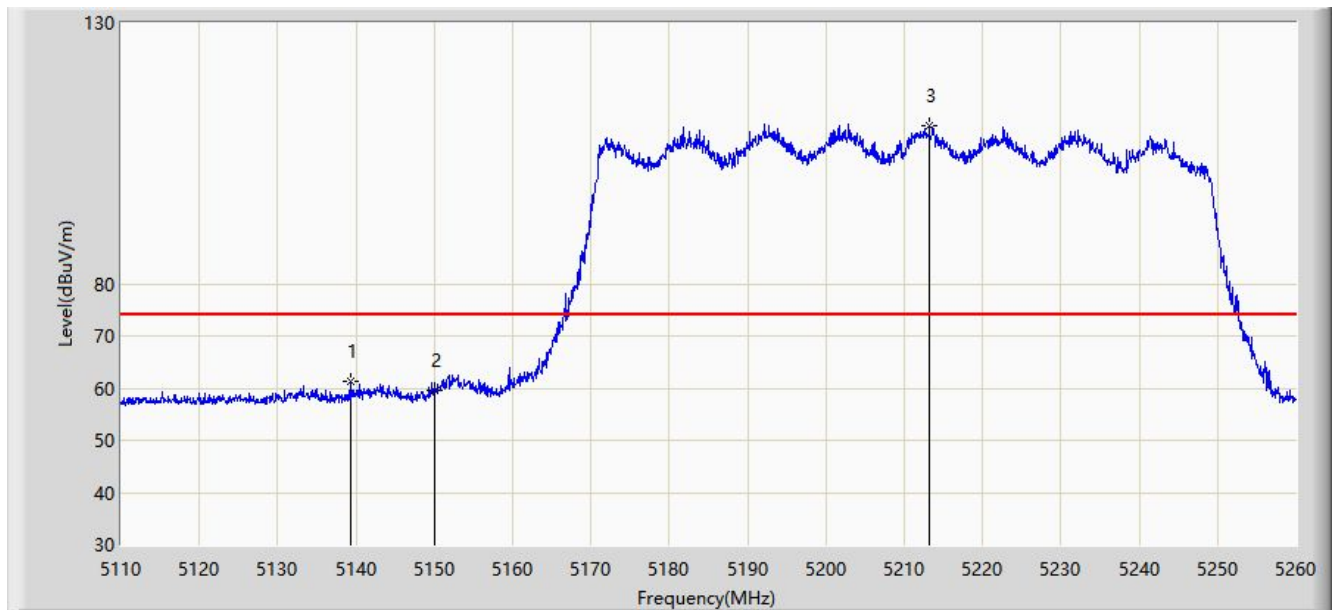


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.400	61.364	56.943	-12.636	74.000	4.421	PK
2			5150.000	59.591	55.149	-14.409	74.000	4.442	PK
3		*	5213.200	110.414	106.236	N/A	N/A	4.178	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP646-RW	

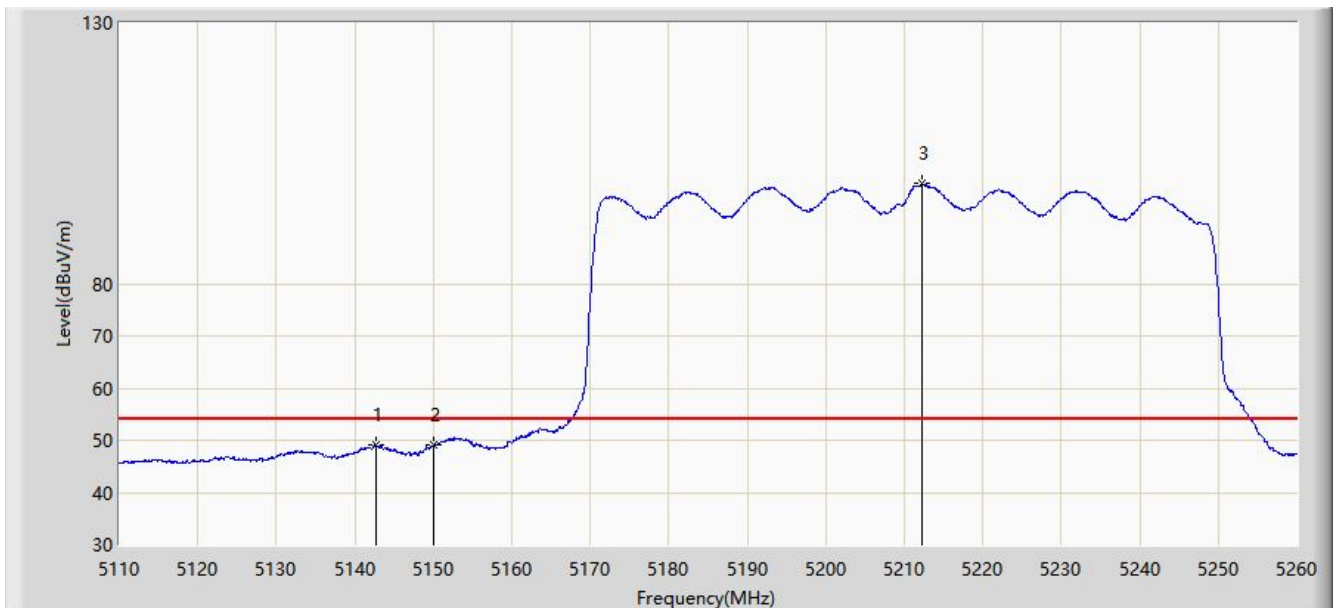


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.625	49.072	44.652	-4.928	54.000	4.421	AV
2			5150.000	49.014	44.572	-4.986	54.000	4.442	AV
3		*	5212.300	99.151	94.967	N/A	N/A	4.185	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP646-RW	

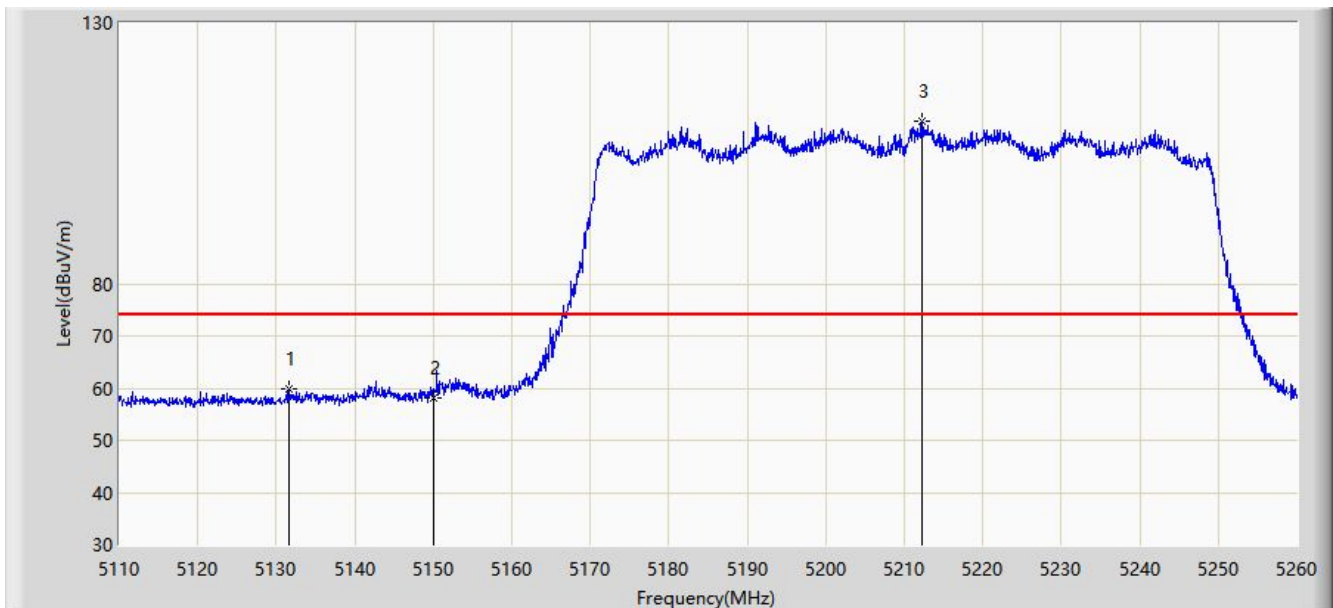


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.525	59.714	55.292	-14.286	74.000	4.422	PK
2			5150.000	58.237	53.795	-15.763	74.000	4.442	PK
3		*	5212.300	111.223	107.039	N/A	N/A	4.185	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with DAP646-RW	

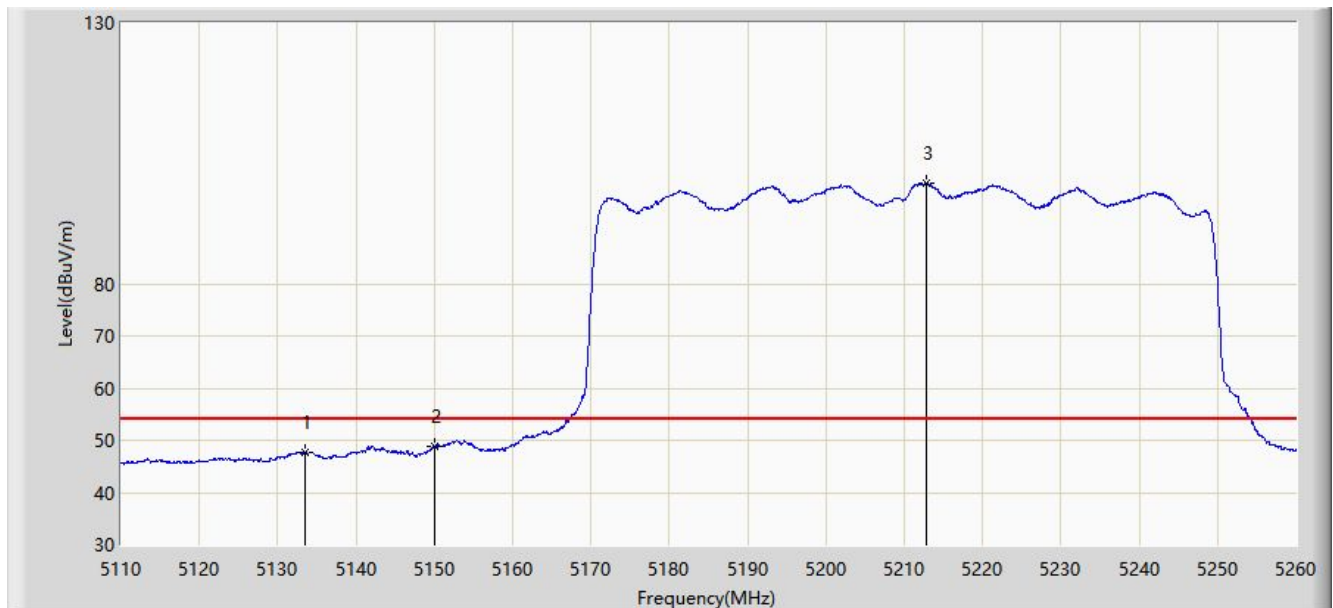


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.475	47.703	43.281	-6.297	54.000	4.422	AV
2			5150.000	48.801	44.359	-5.199	54.000	4.442	AV
3		*	5212.825	99.277	95.096	N/A	N/A	4.181	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with DAP646-RW	

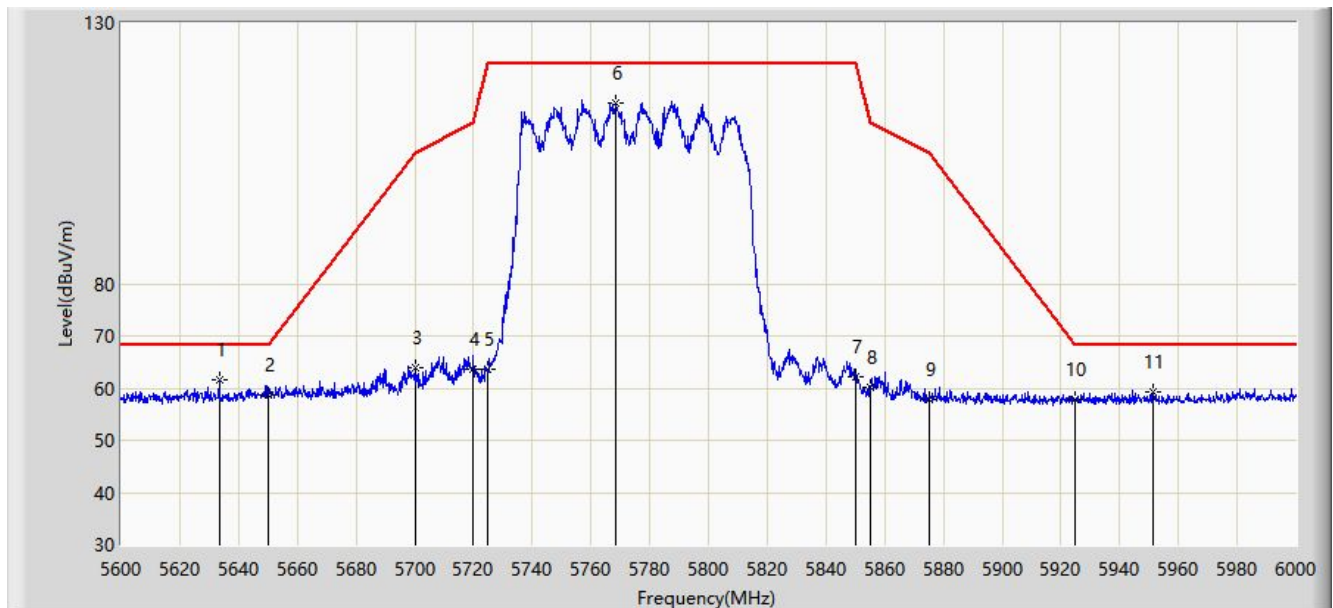


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.400	61.477	56.284	-6.723	68.200	5.193	PK
2			5650.000	58.791	53.455	-9.409	68.200	5.336	PK
3			5700.000	63.910	58.592	-41.290	105.200	5.318	PK
4			5720.000	63.548	58.074	-47.252	110.800	5.474	PK
5			5725.000	63.546	58.068	-58.654	122.200	5.478	PK
6			5768.400	114.769	108.961	N/A	N/A	5.809	PK
7			5850.000	62.239	56.270	-59.961	122.200	5.968	PK
8			5855.000	60.001	54.026	-50.799	110.800	5.975	PK
9			5875.000	57.761	51.748	-47.439	105.200	6.013	PK
10			5925.000	57.958	51.823	-10.242	68.200	6.136	PK
11			5951.400	59.349	53.307	-8.851	68.200	6.042	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with DAP646-RW	

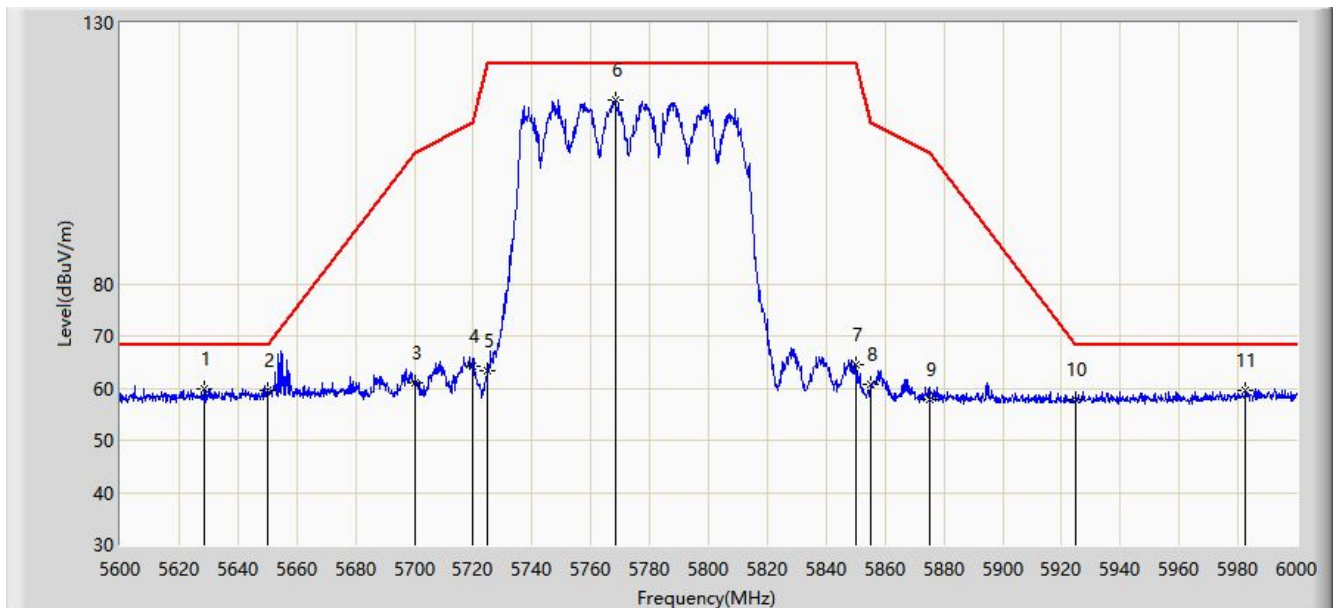


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5628.800	59.869	54.674	-8.331	68.200	5.195	PK
2			5650.000	59.454	54.118	-8.746	68.200	5.336	PK
3			5700.000	61.102	55.784	-44.098	105.200	5.318	PK
4			5720.000	64.188	58.714	-46.612	110.800	5.474	PK
5			5725.000	63.277	57.799	-58.923	122.200	5.478	PK
6		*	5768.400	115.130	109.322	N/A	N/A	5.809	PK
7			5850.000	64.517	58.548	-57.683	122.200	5.968	PK
8			5855.000	60.847	54.872	-49.953	110.800	5.975	PK
9			5875.000	57.694	51.681	-47.506	105.200	6.013	PK
10			5925.000	57.852	51.717	-10.348	68.200	6.136	PK
11			5982.600	59.679	53.198	-8.521	68.200	6.482	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 01:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

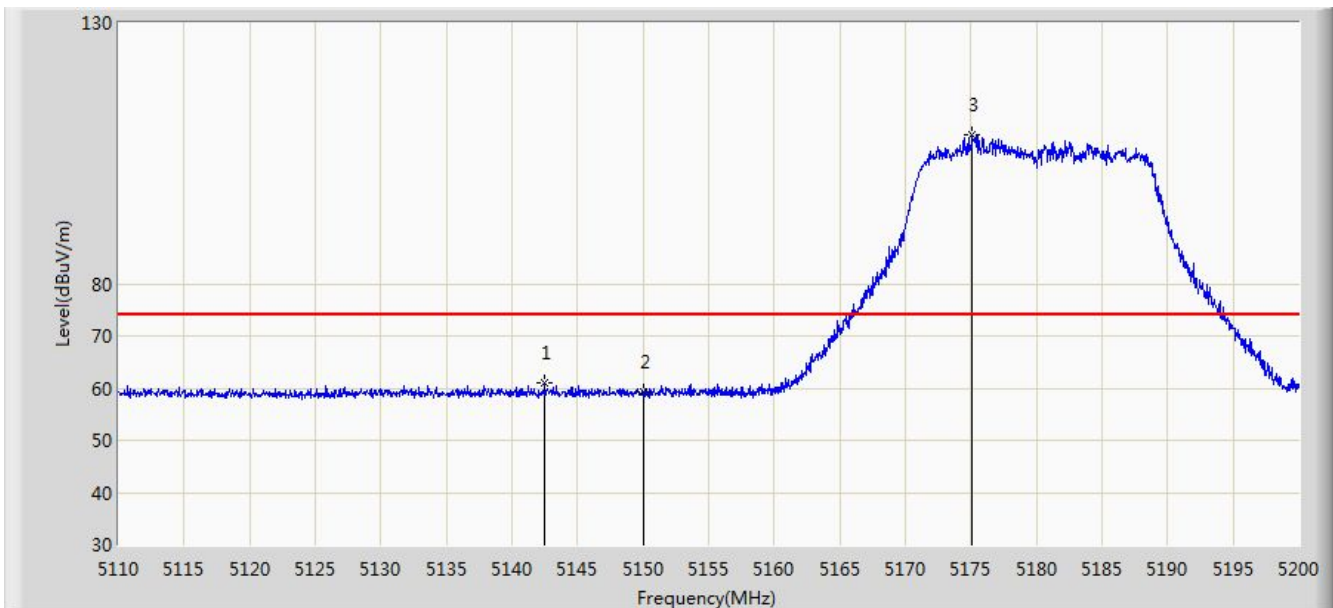


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.535	60.919	54.106	-13.081	74.000	6.813	PK
2			5150.000	59.310	52.511	-14.690	74.000	6.799	PK
3		*	5175.070	108.640	101.824	N/A	N/A	6.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 01:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

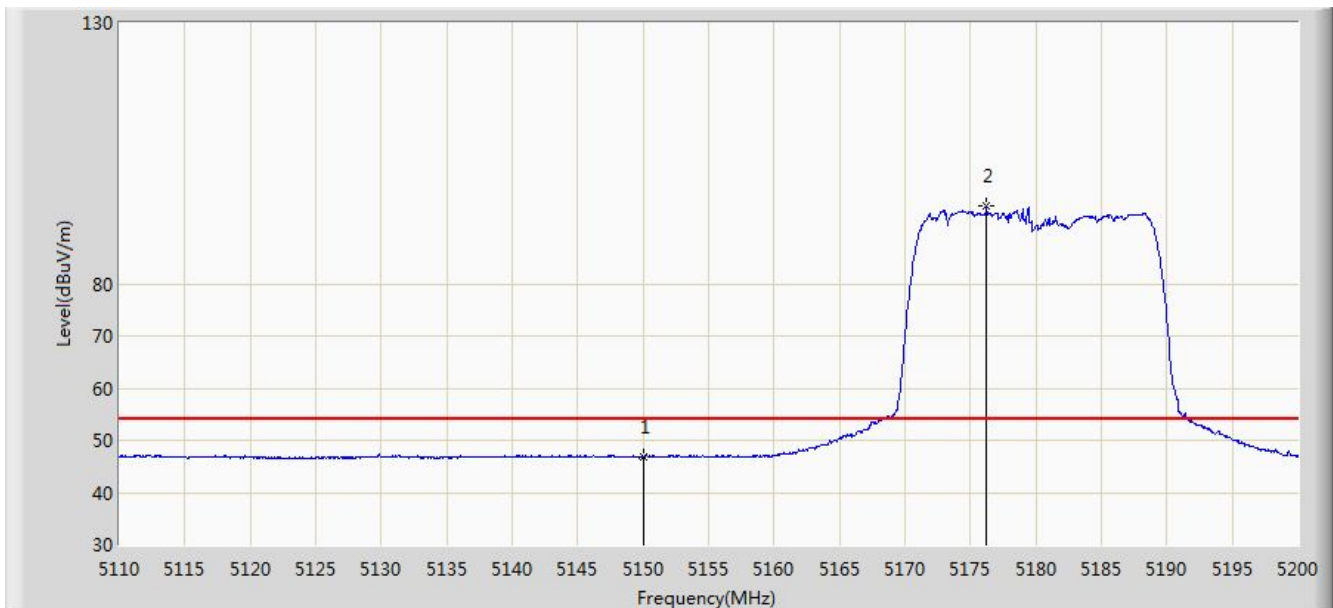


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.810	40.011	-7.190	54.000	6.799	AV
2		*	5176.240	94.982	88.171	N/A	N/A	6.812	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 01:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

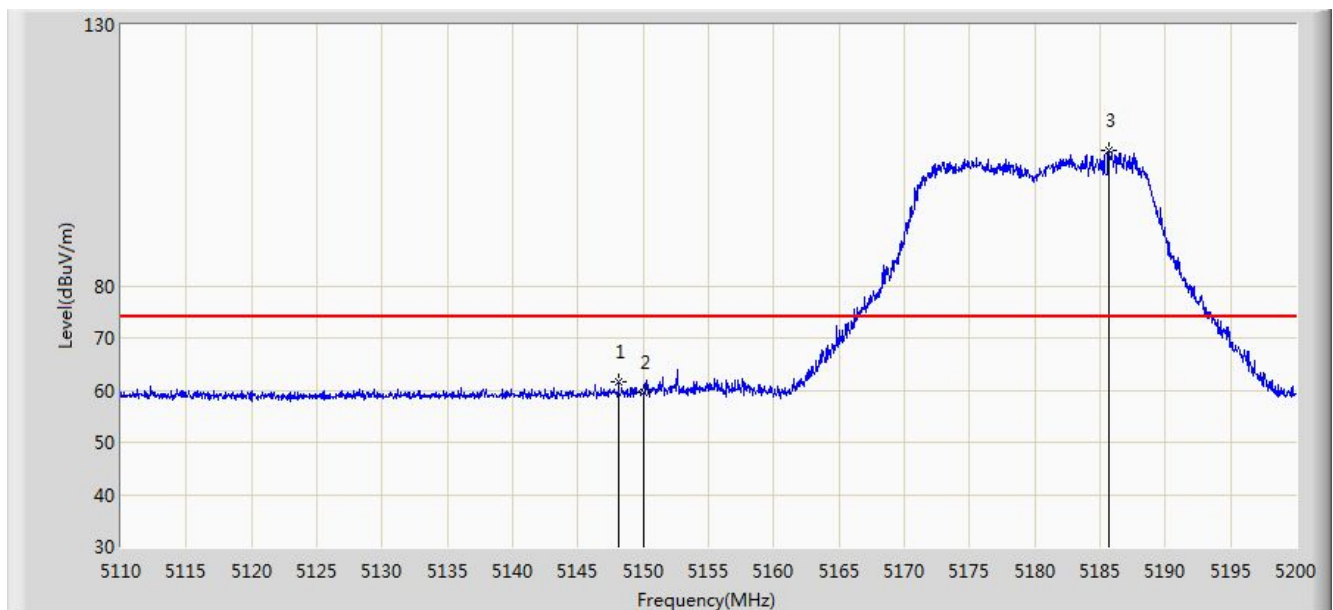


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.115	61.616	54.824	-12.384	74.000	6.793	PK
2			5150.000	59.699	52.900	-14.301	74.000	6.799	PK
3		*	5185.690	106.023	99.291	N/A	N/A	6.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

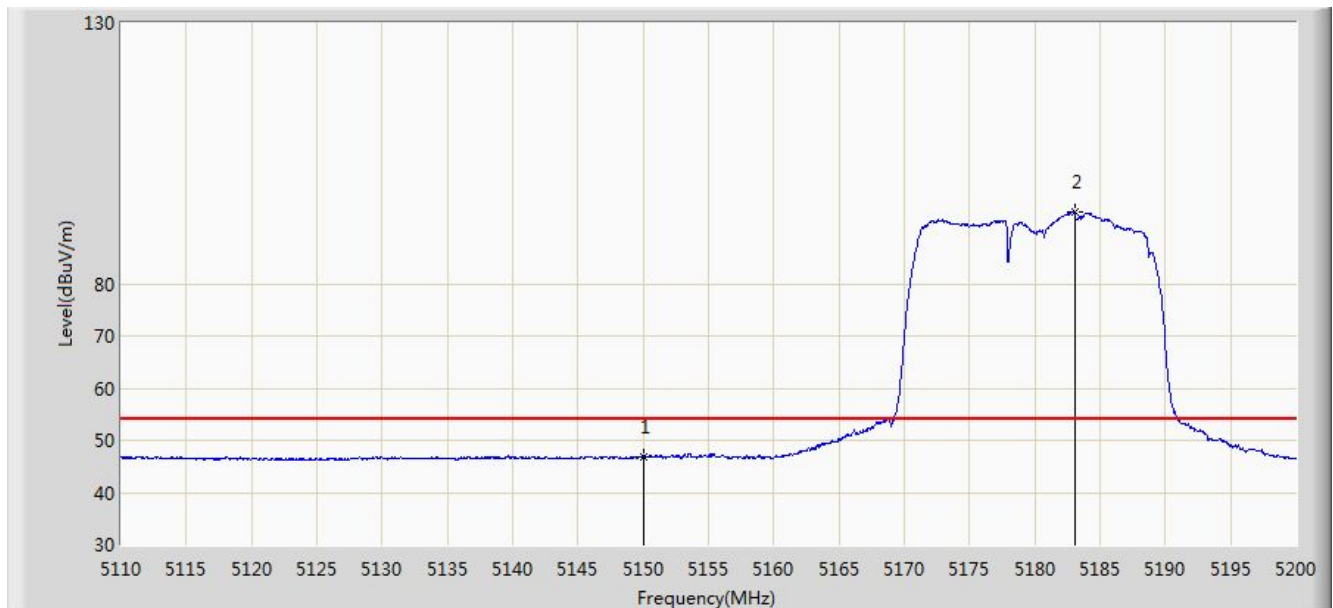


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.834	40.035	-7.166	54.000	6.799	AV
2		*	5183.035	93.667	86.894	N/A	N/A	6.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (Beamforming Mode) with DAP646-RW	

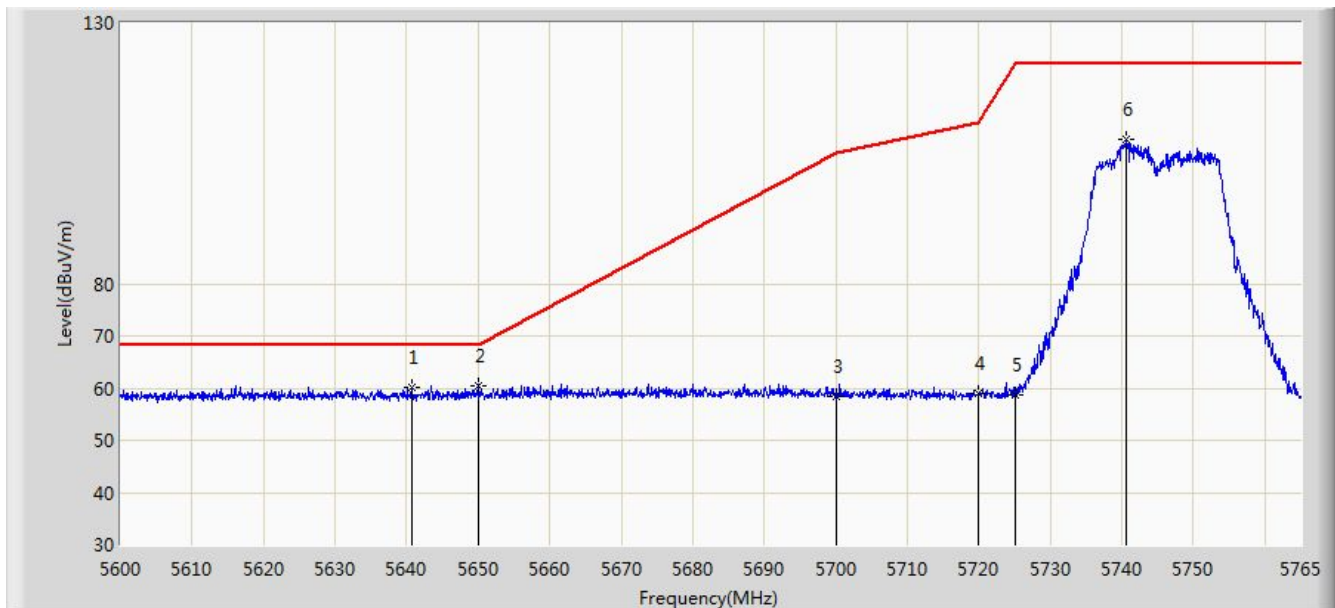


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5640.755	60.064	53.115	-8.136	68.200	6.949	PK
2		*	5650.000	60.518	53.378	-7.682	68.200	7.140	PK
3			5700.000	58.419	51.204	-46.781	105.200	7.215	PK
4			5720.000	59.021	51.748	-51.779	110.800	7.273	PK
5			5725.000	58.589	51.257	-63.611	122.200	7.332	PK
6			5740.580	107.544	100.113	N/A	N/A	7.431	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (Beamforming Mode) with DAP646-RW	

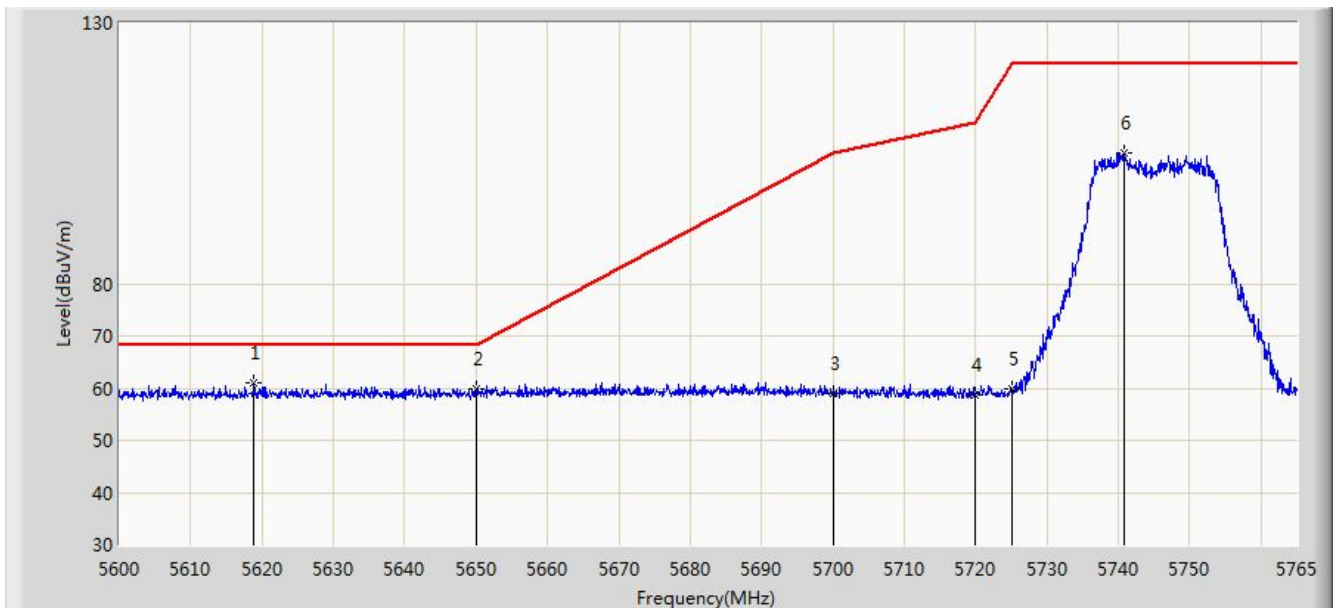


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5618.810	60.928	53.884	-7.272	68.200	7.045	PK
2			5650.000	59.911	52.771	-8.289	68.200	7.140	PK
3			5700.000	58.956	51.741	-46.244	105.200	7.215	PK
4			5720.000	58.795	51.522	-52.005	110.800	7.273	PK
5			5725.000	59.848	52.516	-62.352	122.200	7.332	PK
6			5740.745	105.027	97.595	N/A	N/A	7.432	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (Beamforming Mode) with DAP646-RW	

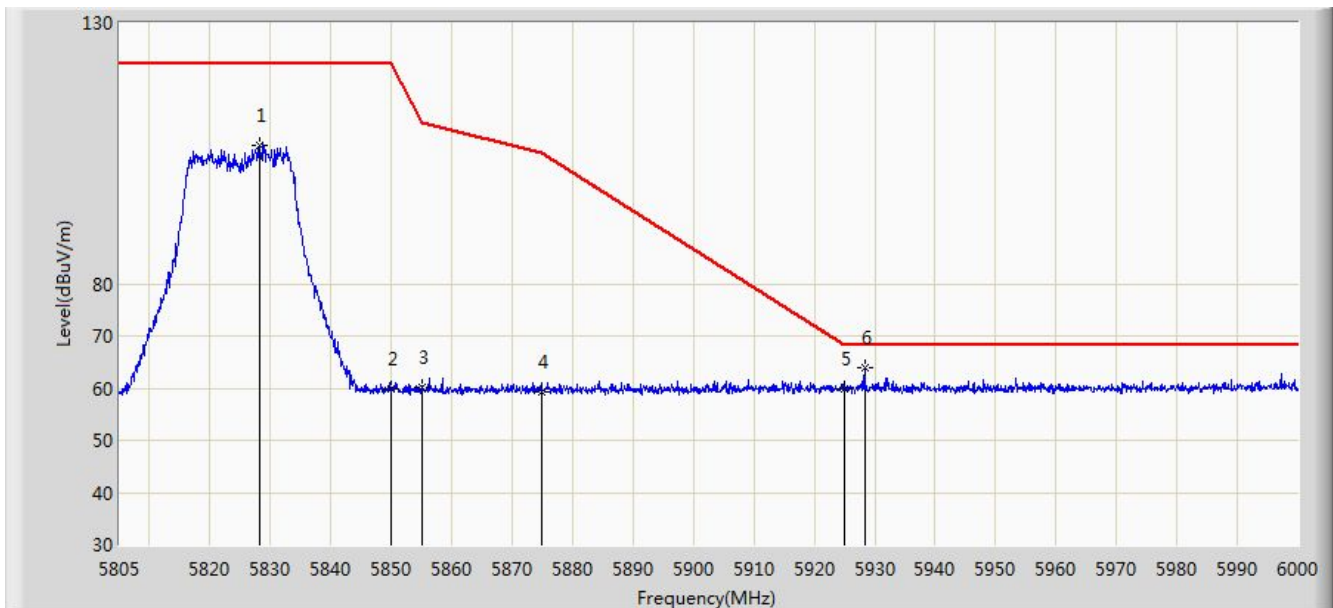


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5828.107	106.621	98.854	N/A	N/A	7.767	PK
2			5850.000	59.962	52.270	-62.238	122.200	7.692	PK
3			5855.000	60.287	52.643	-50.513	110.800	7.644	PK
4			5875.000	59.182	51.580	-46.018	105.200	7.602	PK
5			5925.000	59.860	52.034	-8.340	68.200	7.826	PK
6		*	5928.337	63.923	56.113	-4.277	68.200	7.810	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (Beamforming Mode) with DAP646-RW	

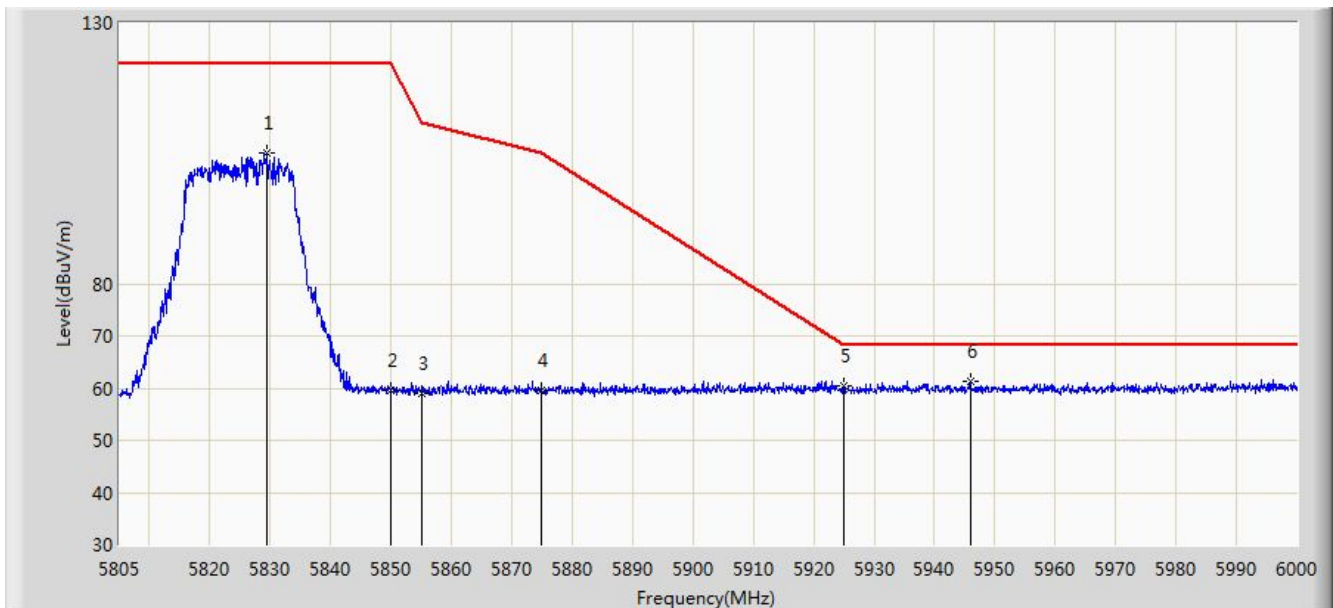


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5829.473	105.006	97.241	N/A	N/A	7.764	PK
2			5850.000	59.582	51.890	-62.618	122.200	7.692	PK
3			5855.000	58.997	51.353	-51.803	110.800	7.644	PK
4			5875.000	59.428	51.826	-45.772	105.200	7.602	PK
5			5925.000	60.379	52.553	-7.821	68.200	7.826	PK
6		*	5945.985	61.280	53.591	-6.920	68.200	7.689	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with DAP646-RW	

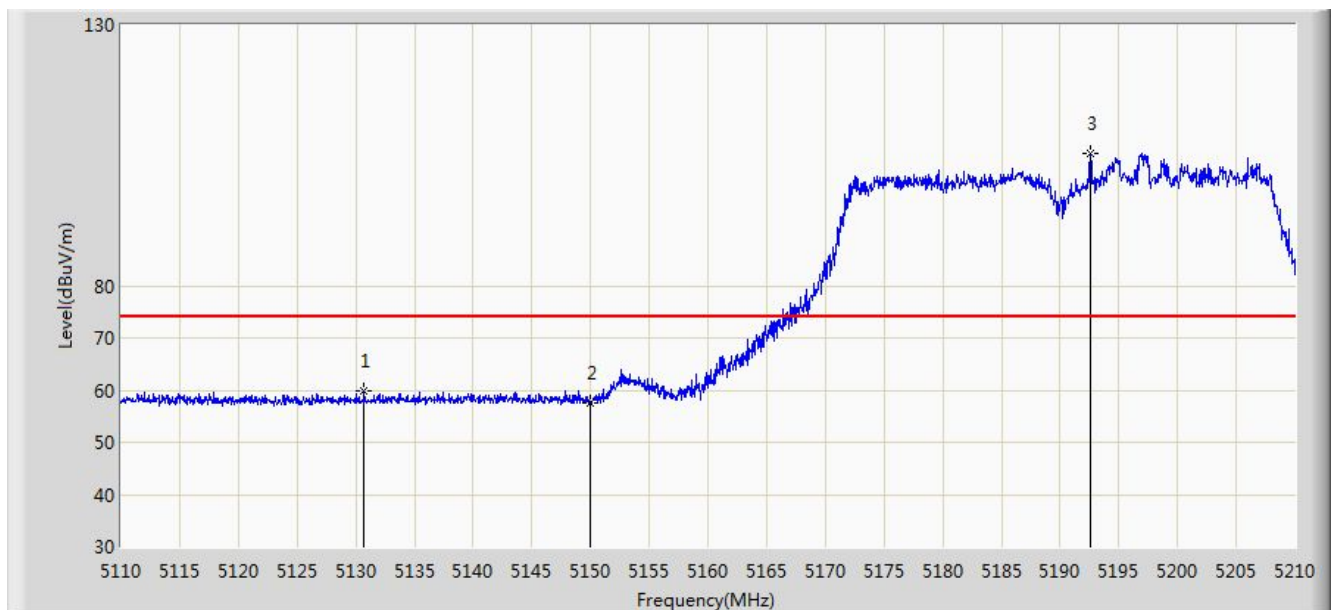


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.700	59.826	52.972	-14.174	74.000	6.854	PK
2			5150.000	57.544	50.745	-16.456	74.000	6.799	PK
3		*	5192.600	105.444	98.818	N/A	N/A	6.626	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with DAP646-RW	

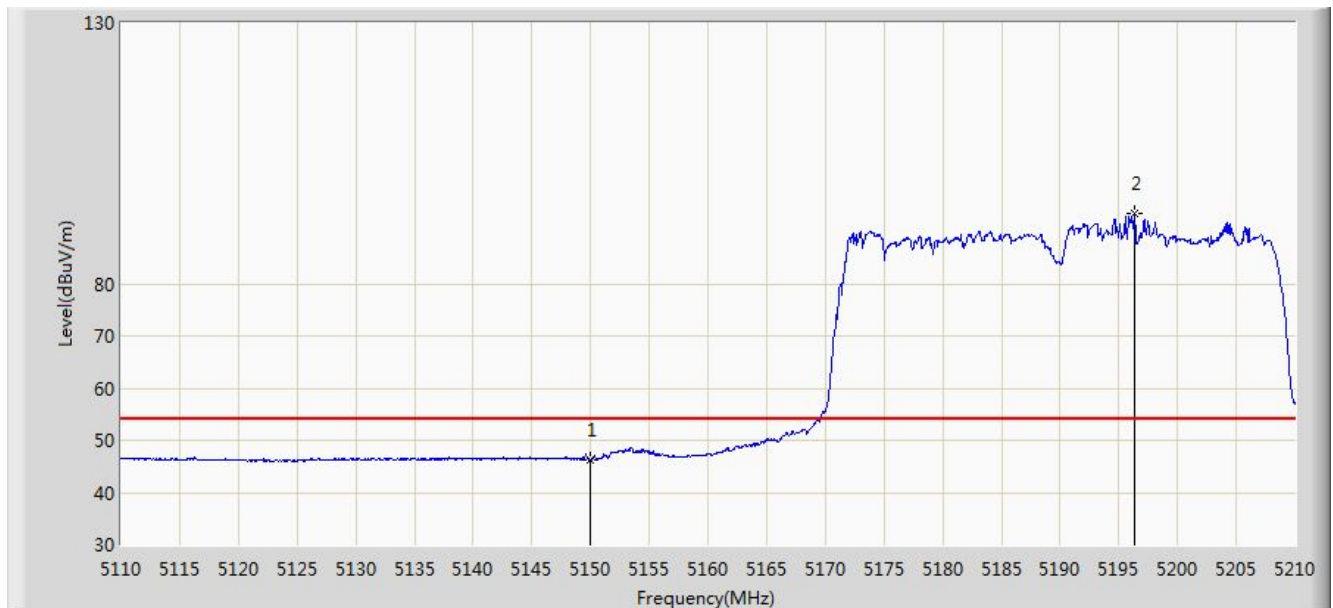


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.278	39.479	-7.722	54.000	6.799	AV
2		*	5196.350	93.563	86.995	N/A	N/A	6.568	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with DAP646-RW	

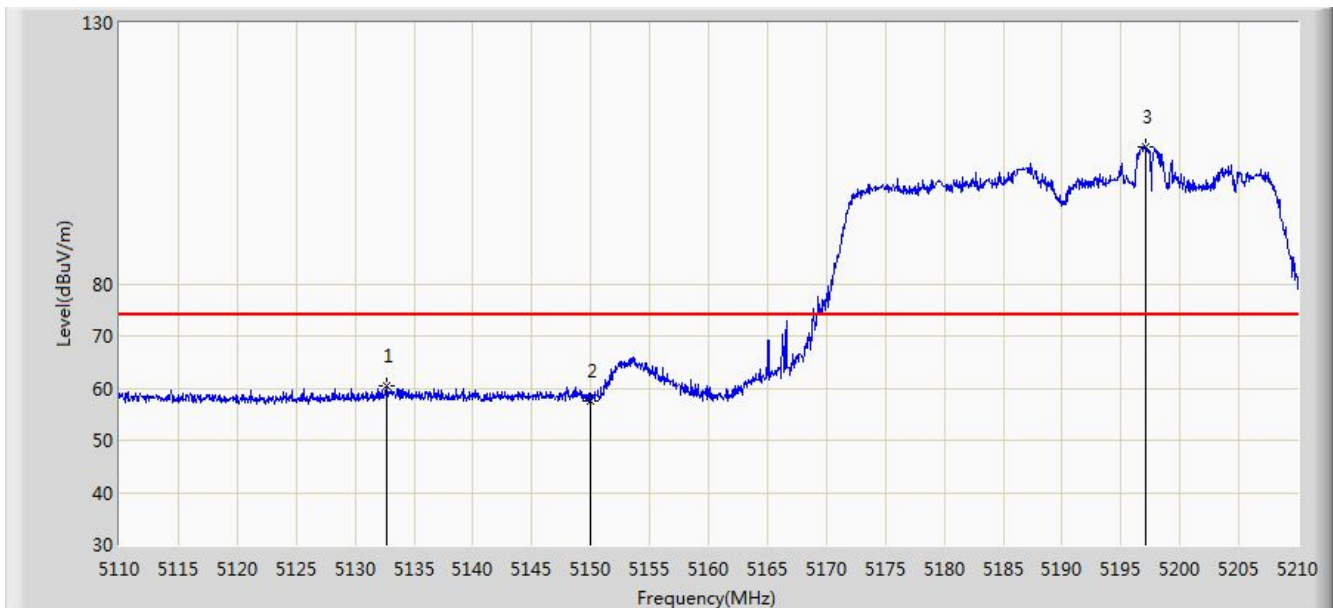


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.650	60.453	53.601	-13.547	74.000	6.852	PK
2			5150.000	57.563	50.764	-16.437	74.000	6.799	PK
3		*	5197.050	106.321	99.764	N/A	N/A	6.557	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with DAP646-RW	

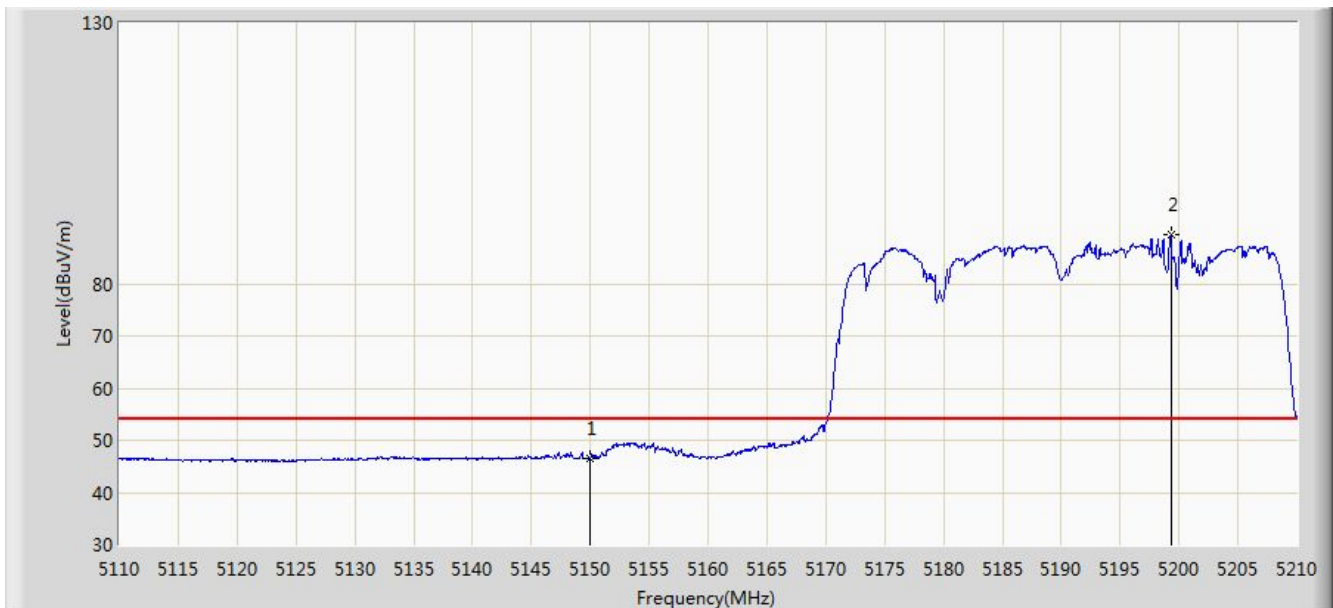


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.493	39.694	-7.507	54.000	6.799	AV
2		*	5199.300	89.369	82.844	N/A	N/A	6.525	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 03:03
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (Beamforming Mode) with DAP646-RW	

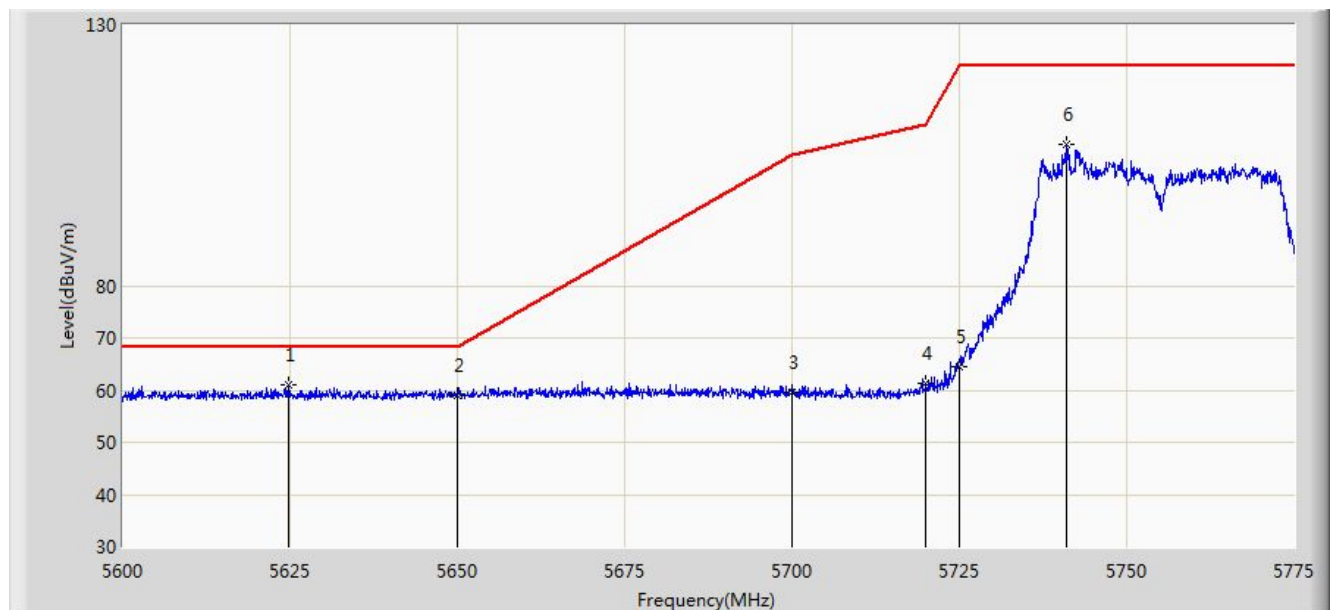


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5624.850	61.096	54.069	-7.104	68.200	7.027	PK
2			5650.000	58.998	51.858	-9.202	68.200	7.140	PK
3			5700.000	59.610	52.395	-45.590	105.200	7.215	PK
4			5720.000	61.264	53.991	-49.536	110.800	7.273	PK
5			5725.000	64.467	57.135	-57.733	122.200	7.332	PK
6			5740.962	107.208	99.775	N/A	N/A	7.433	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 03:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (Beamforming Mode) with DAP646-RW	

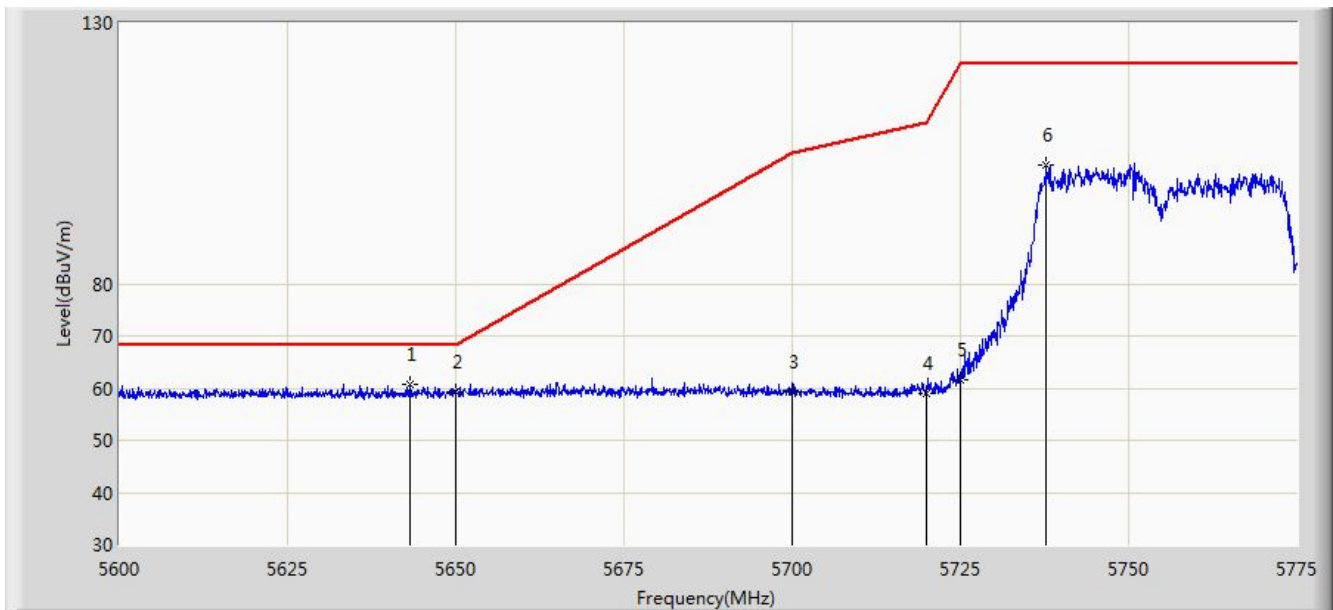


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.225	60.737	53.742	-7.463	68.200	6.995	PK
2			5650.000	59.255	52.115	-8.945	68.200	7.140	PK
3			5700.000	59.233	52.018	-45.967	105.200	7.215	PK
4			5720.000	59.091	51.818	-51.709	110.800	7.273	PK
5			5725.000	61.681	54.349	-60.519	122.200	7.332	PK
6			5737.812	102.726	95.312	N/A	N/A	7.414	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 03:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (Beamforming Mode) with DAP646-RW	

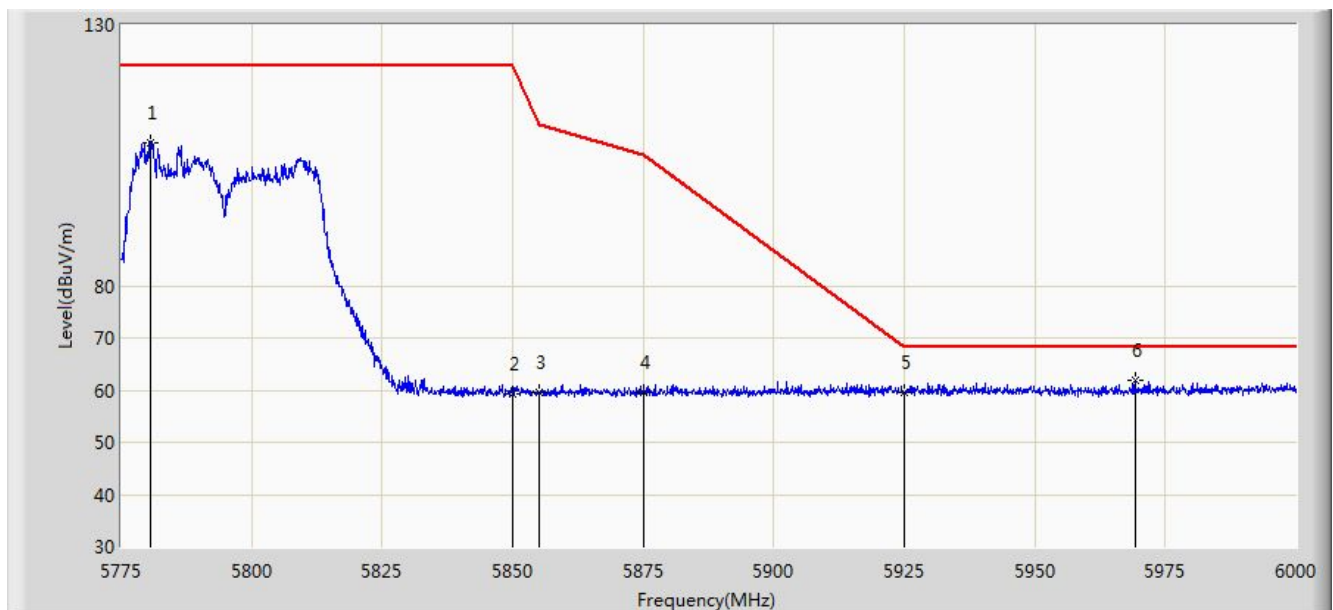


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5780.513	107.506	99.962	N/A	N/A	7.544	PK
2			5850.000	59.213	51.521	-62.987	122.200	7.692	PK
3			5855.000	59.647	52.003	-51.153	110.800	7.644	PK
4			5875.000	59.583	51.981	-45.617	105.200	7.602	PK
5			5925.000	59.427	51.601	-8.773	68.200	7.826	PK
6		*	5969.175	61.855	54.212	-6.345	68.200	7.643	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 03:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (Beamforming Mode) with DAP646-RW	

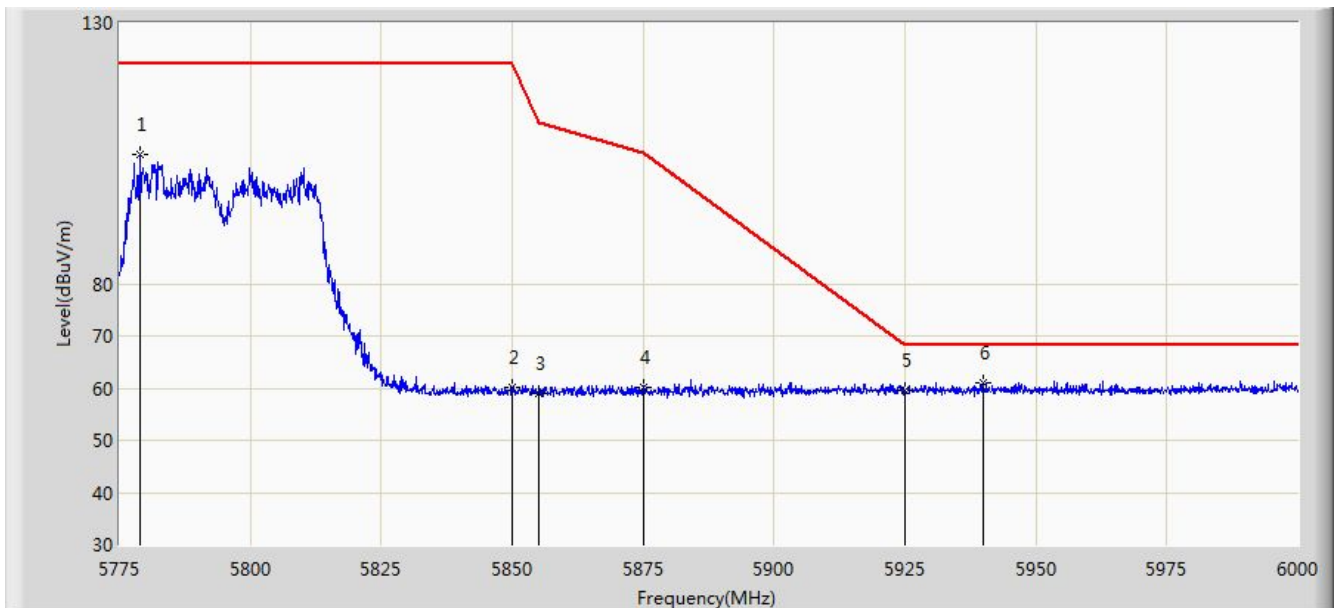


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5778.937	104.715	97.165	N/A	N/A	7.550	PK
2			5850.000	60.050	52.358	-62.150	122.200	7.692	PK
3			5855.000	59.121	51.477	-51.679	110.800	7.644	PK
4			5875.000	60.263	52.661	-44.937	105.200	7.602	PK
5			5925.000	59.522	51.696	-8.678	68.200	7.826	PK
6		*	5939.925	60.921	53.189	-7.279	68.200	7.731	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

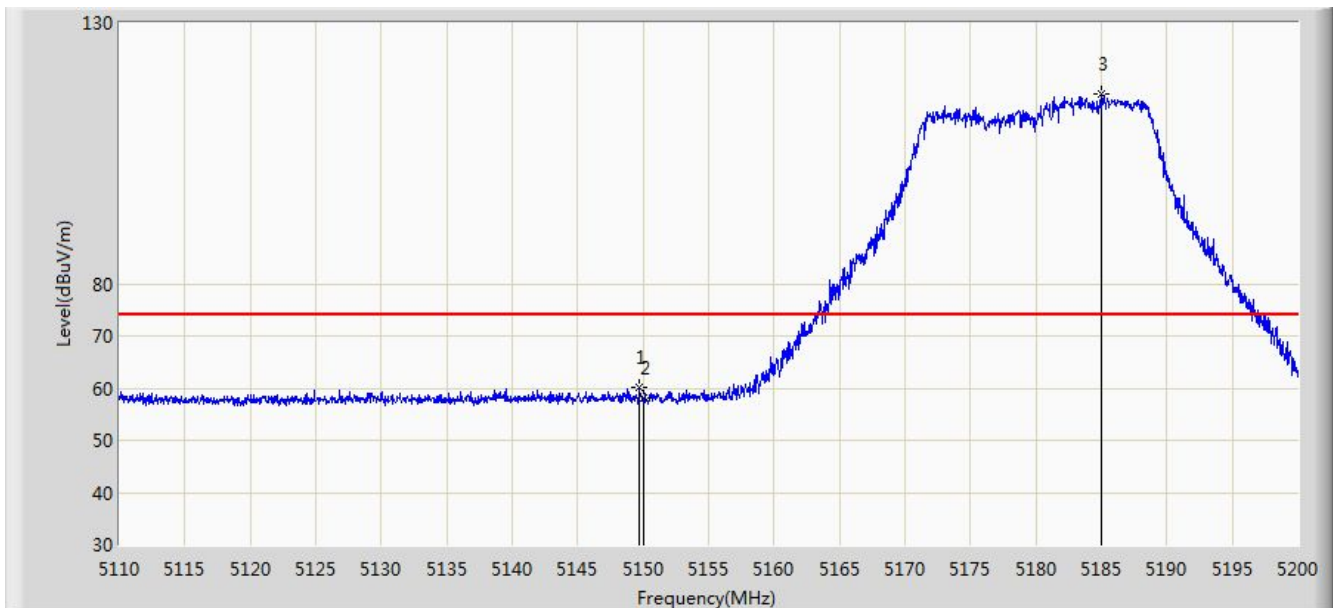


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.690	60.234	53.436	-13.766	74.000	6.798	PK
2			5150.000	58.175	51.376	-15.825	74.000	6.799	PK
3		*	5184.970	116.456	109.713	N/A	N/A	6.743	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

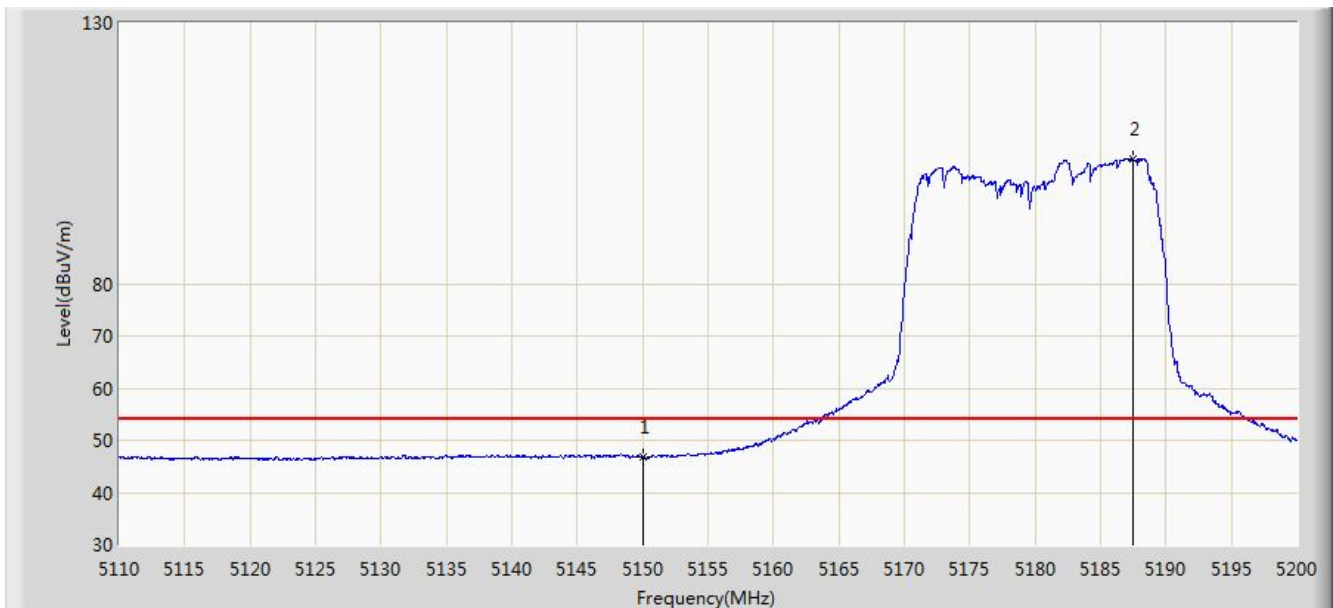


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.814	40.015	-7.186	54.000	6.799	AV
2		*	5187.490	103.829	97.124	N/A	N/A	6.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

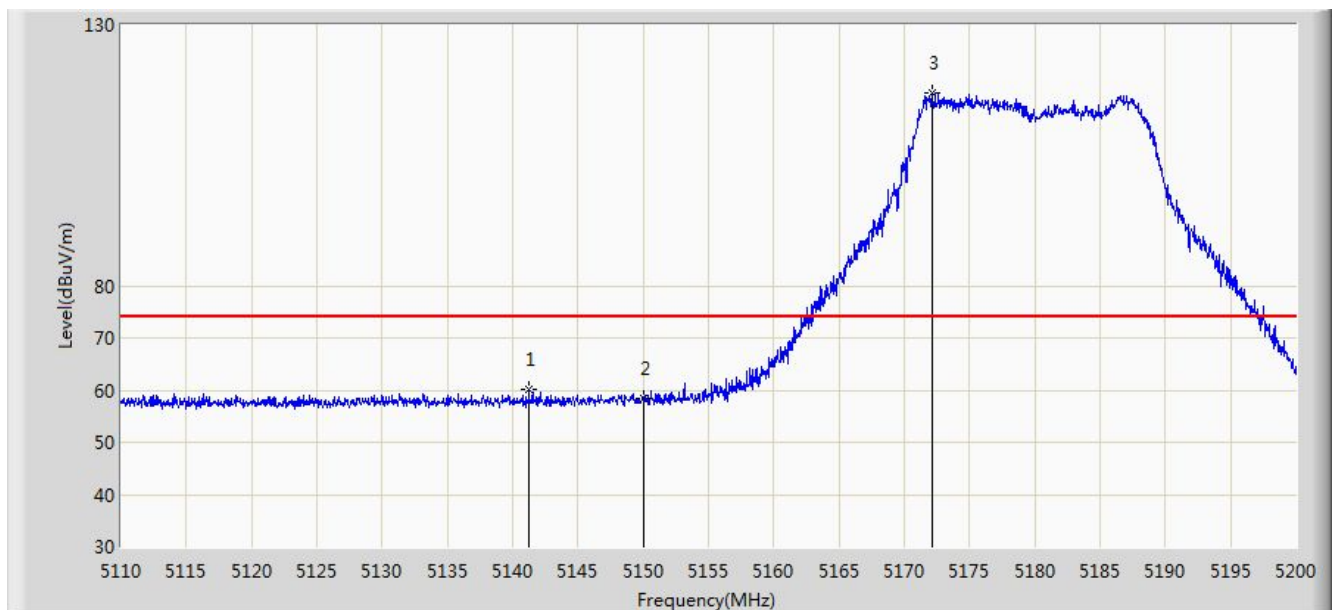


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.230	60.017	53.199	-13.983	74.000	6.818	PK
2			5150.000	58.513	51.714	-15.487	74.000	6.799	PK
3		*	5172.190	116.817	109.990	N/A	N/A	6.827	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (Beamforming Mode) with DAP646-RW	

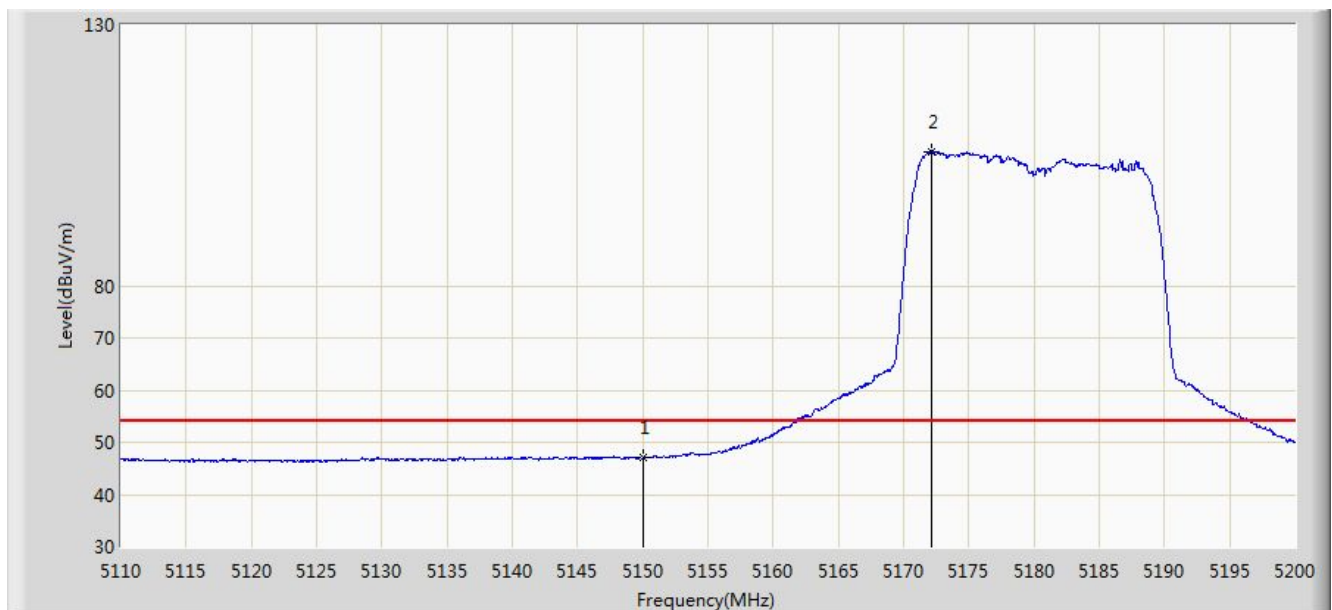


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.164	40.365	-6.836	54.000	6.799	AV
2		*	5172.100	105.788	98.961	N/A	N/A	6.827	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 05:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (Beamforming Mode) with DAP646-RW	

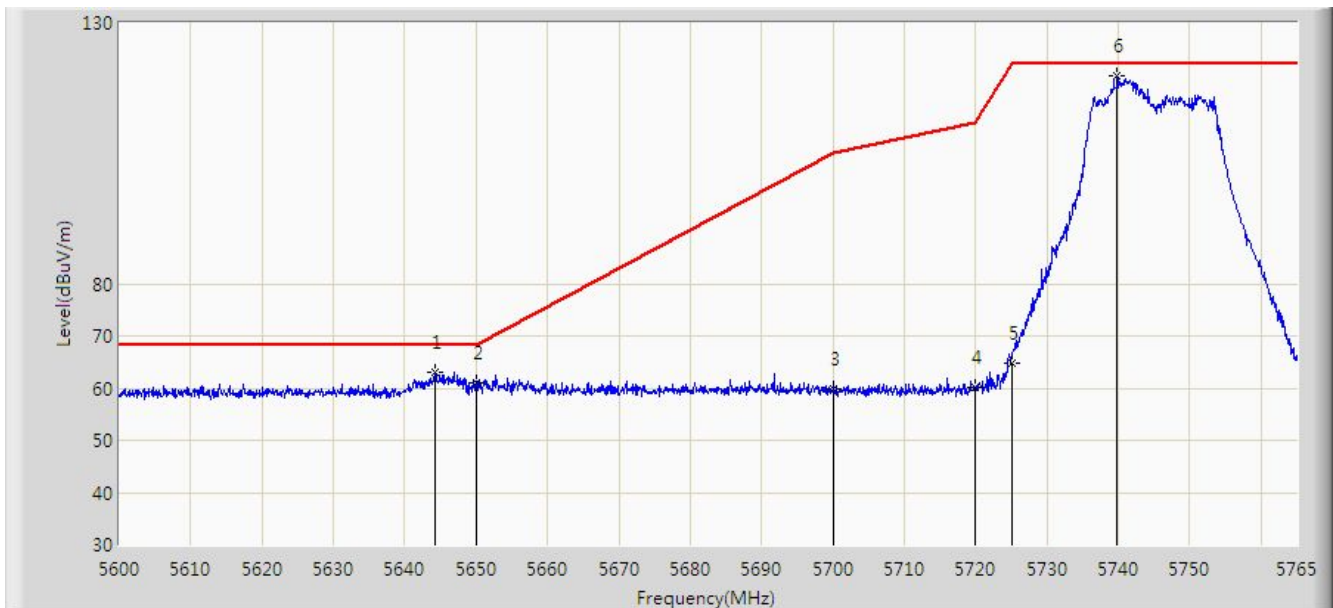


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.220	62.908	55.892	-5.292	68.200	7.016	PK
2			5650.000	61.089	53.949	-7.111	68.200	7.140	PK
3			5700.000	59.952	52.737	-45.248	105.200	7.215	PK
4			5720.000	60.062	52.789	-50.738	110.800	7.273	PK
5			5725.000	64.904	57.572	-57.296	122.200	7.332	PK
6		*	5739.837	119.802	112.376	N/A	N/A	7.427	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 05:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (Beamforming Mode) with DAP646-RW	

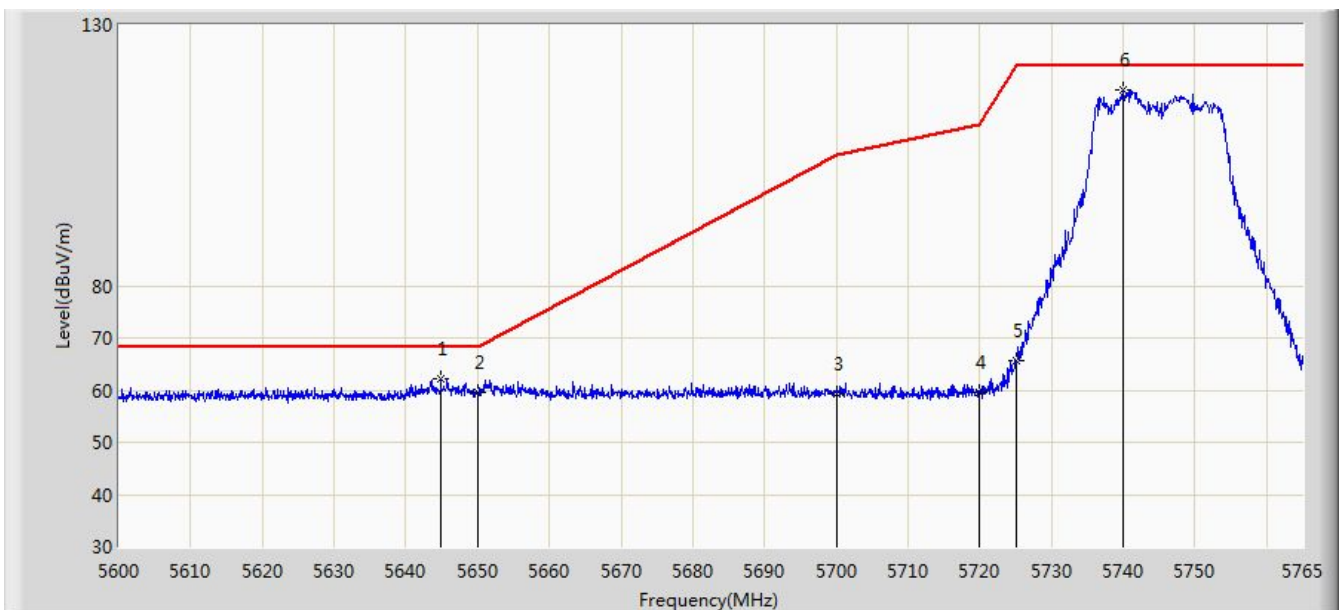


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.880	62.238	55.208	-5.962	68.200	7.030	PK
2			5650.000	59.692	52.552	-8.508	68.200	7.140	PK
3			5700.000	59.380	52.165	-45.820	105.200	7.215	PK
4			5720.000	59.454	52.181	-51.346	110.800	7.273	PK
5			5725.000	65.634	58.302	-56.566	122.200	7.332	PK
6		*	5739.920	117.435	110.008	N/A	N/A	7.427	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 05:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (Beamforming Mode) with DAP646-RW	

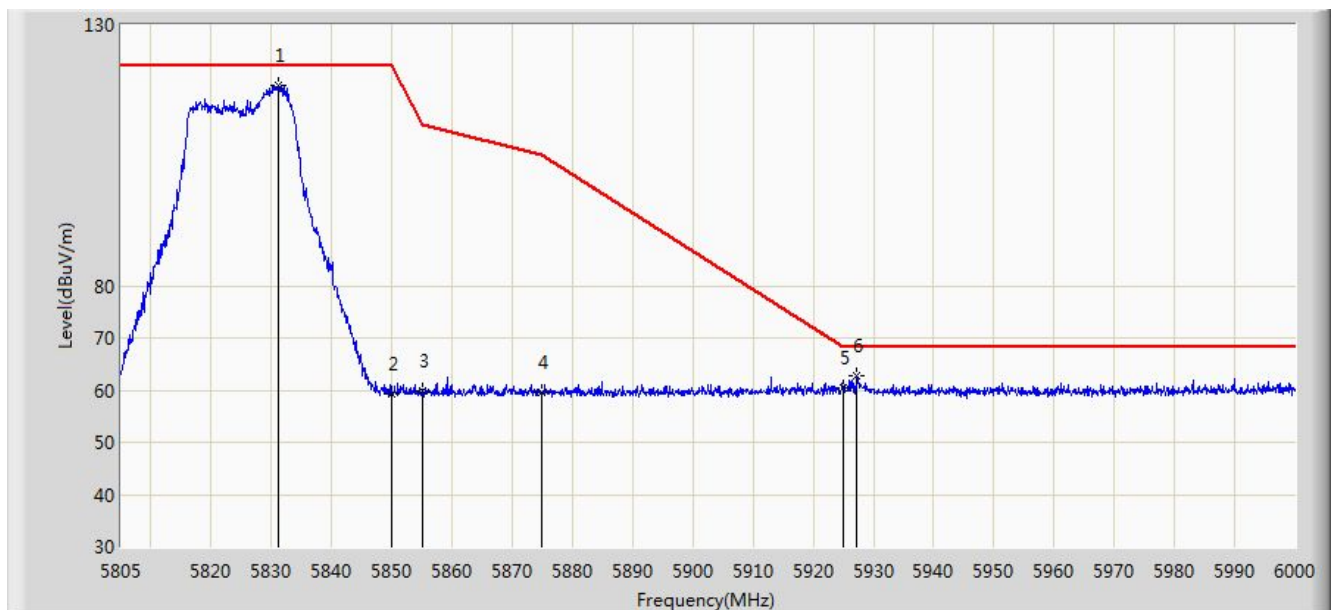


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.033	118.549	110.787	N/A	N/A	7.763	PK
2			5850.000	59.387	51.695	-62.813	122.200	7.692	PK
3			5855.000	59.974	52.330	-50.826	110.800	7.644	PK
4			5875.000	59.631	52.029	-45.569	105.200	7.602	PK
5			5925.000	60.422	52.596	-7.778	68.200	7.826	PK
6			5927.167	62.686	54.870	-5.514	68.200	7.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)


Site: AC1	Time: 2019/12/28 - 05:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (Beamforming Mode) with DAP646-RW	

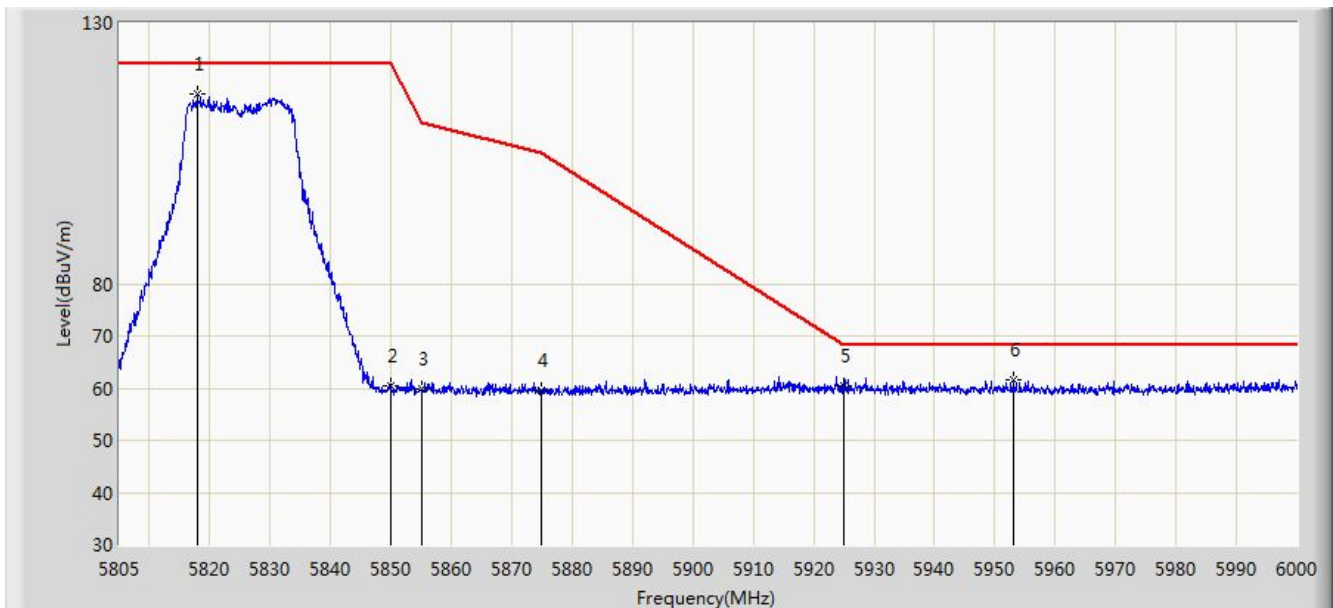

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 05:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (Beamforming Mode) with DAP646-RW	

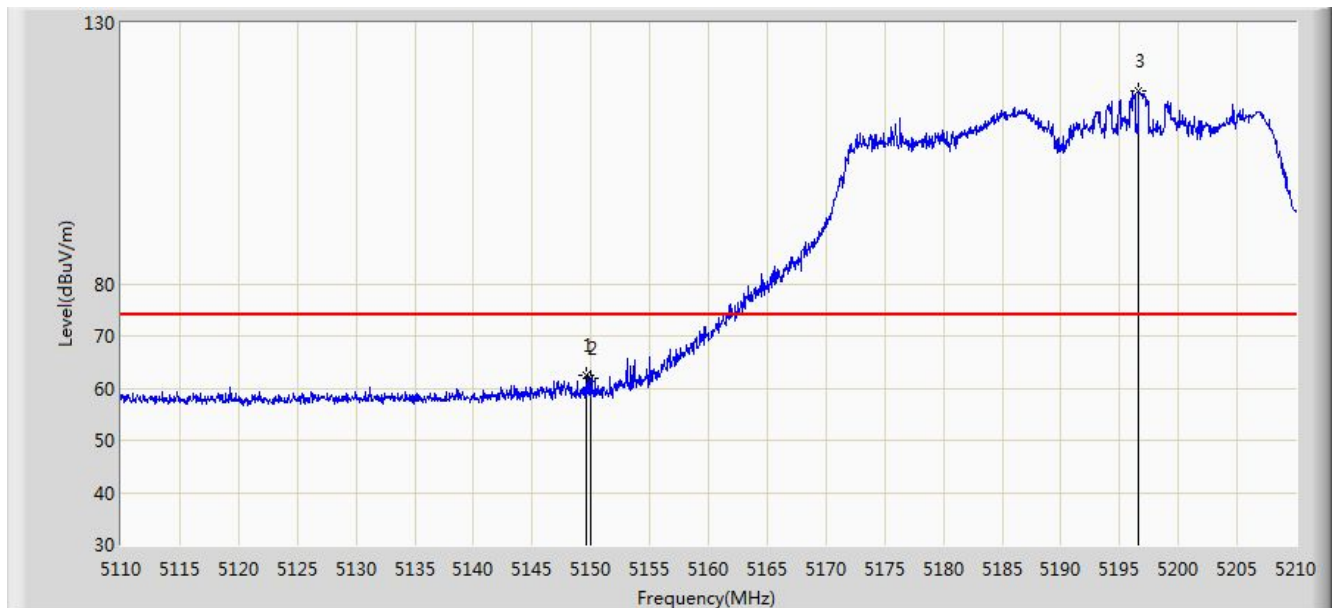

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.600	62.504	55.706	-11.496	74.000	6.798	PK
2			5150.000	61.841	55.042	-12.159	74.000	6.799	PK
3		*	5196.650	116.961	110.398	N/A	N/A	6.564	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)