


Site: AC2	Time: 2019/11/16 - 17:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290 MHz with DAP645-RW	

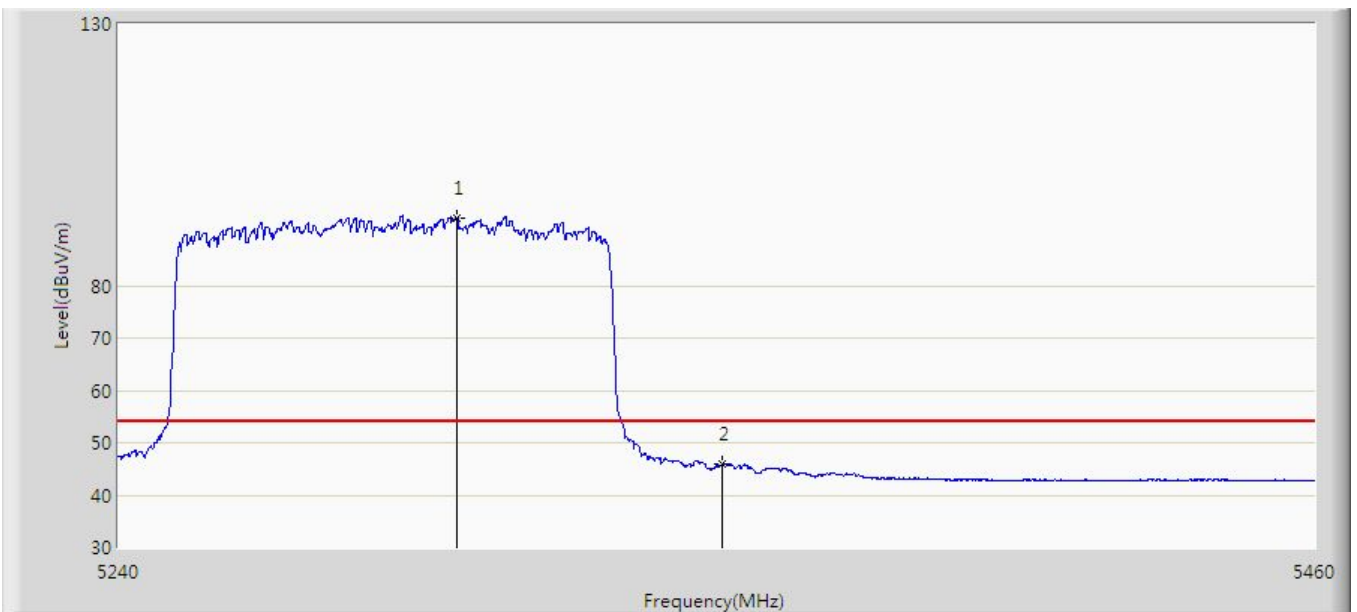


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.270	93.009	88.591	N/A	N/A	4.418	AV
2			5350.000	45.837	41.660	-8.163	54.000	4.177	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 17:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290 MHz with DAP645-RW	

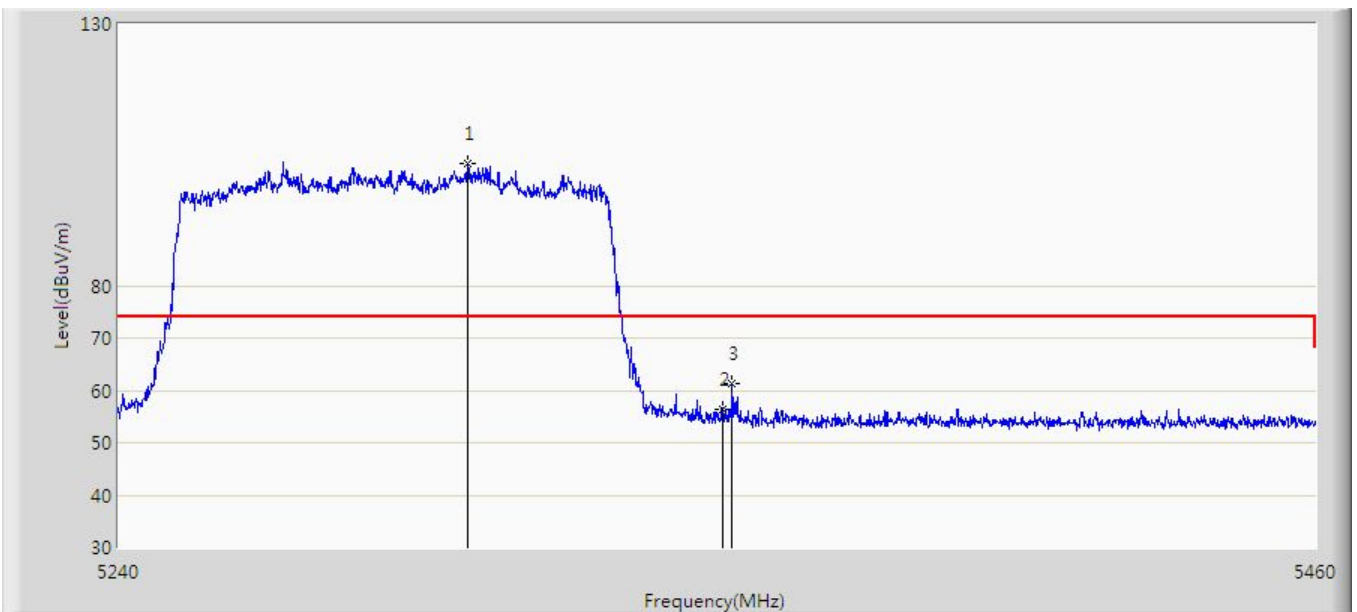


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.250	103.388	99.011	N/A	N/A	4.377	PK
2			5350.000	56.513	52.336	-17.487	74.000	4.177	PK
3			5351.760	61.238	57.049	-12.762	74.000	4.189	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 17:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290 MHz with DAP645-RW	

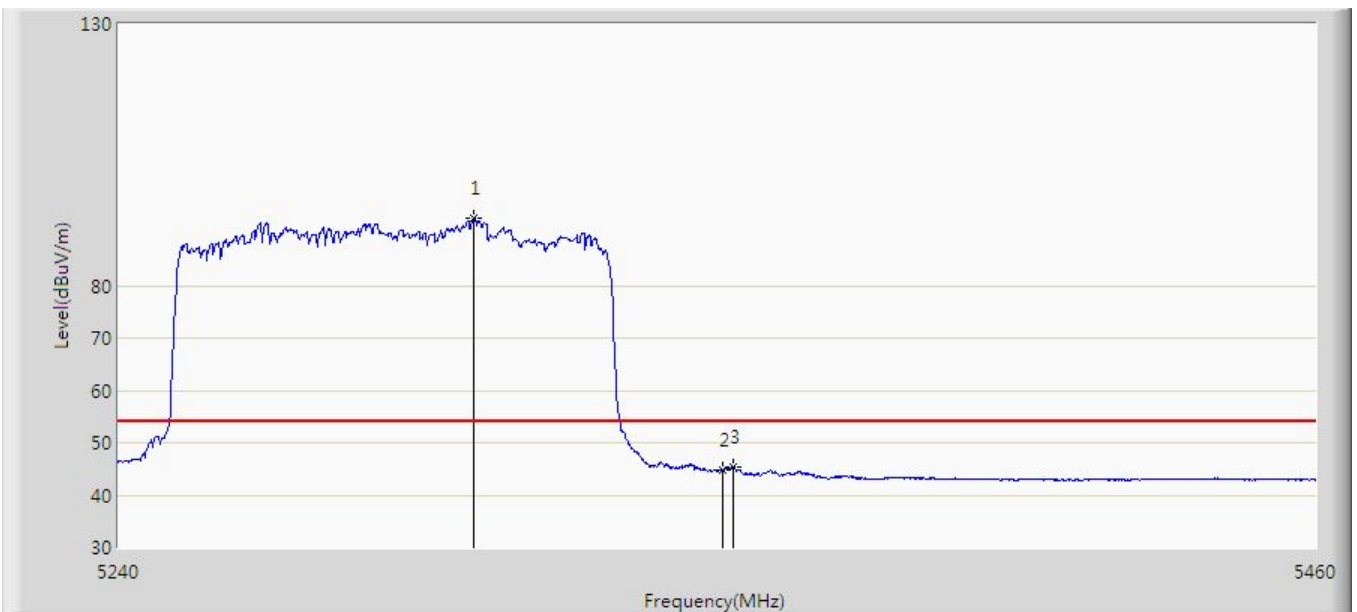


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5304.460	92.892	88.540	N/A	N/A	4.352	AV
2			5350.000	44.853	40.676	-9.147	54.000	4.177	AV
3			5351.980	45.479	41.288	-8.521	54.000	4.191	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 18:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530 MHz with DAP645-RW	

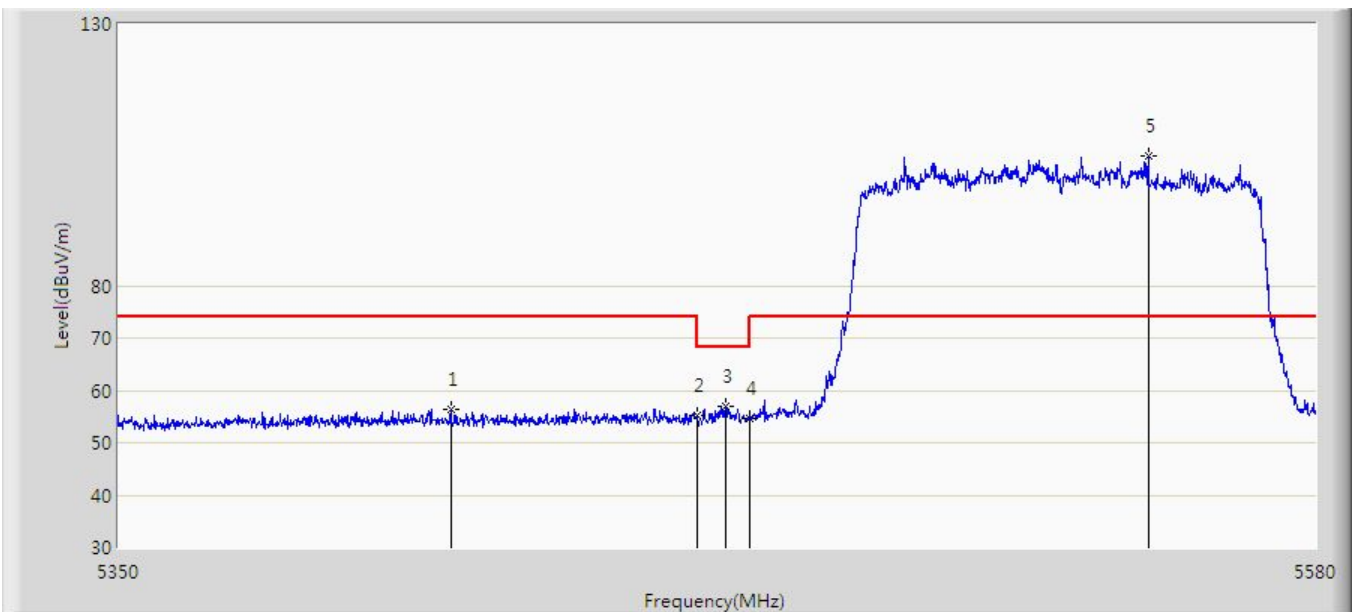


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5412.905	56.291	51.635	-17.709	74.000	4.655	PK
2			5460.000	55.104	50.664	-18.896	74.000	4.440	PK
3			5465.575	56.917	52.468	-11.283	68.200	4.448	PK
4			5470.000	54.754	50.298	-13.446	68.200	4.455	PK
5		*	5547.455	104.859	100.087	N/A	N/A	4.771	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 18:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530 MHz with DAP645-RW	

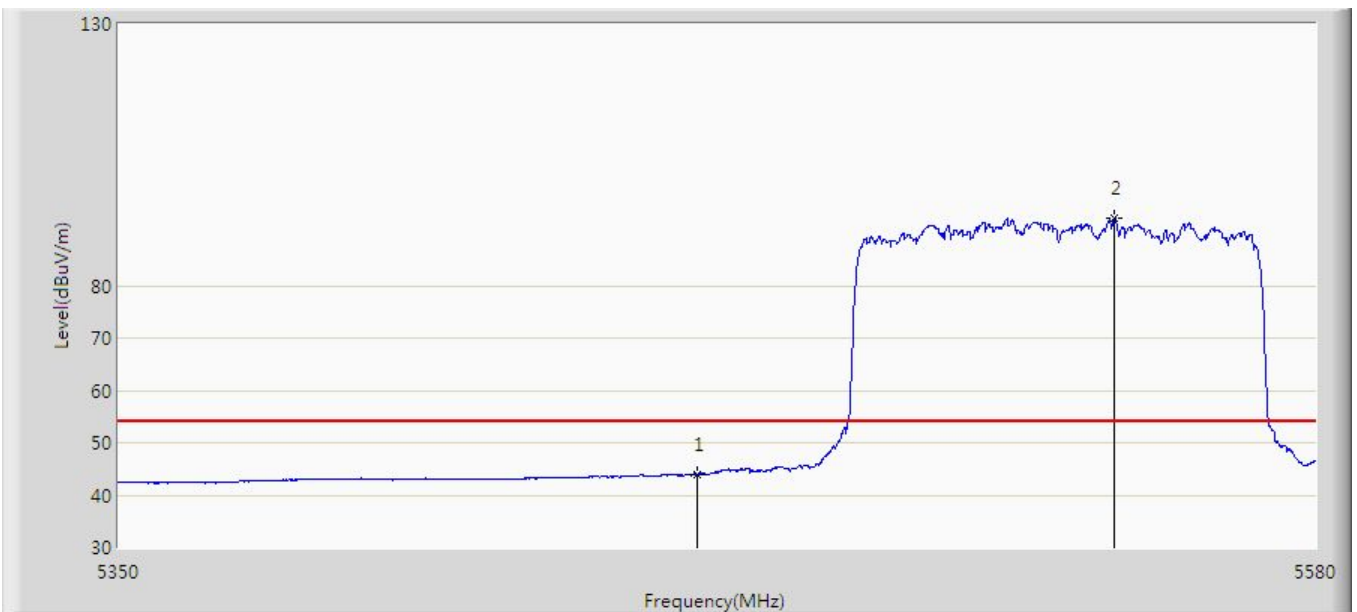


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	43.846	39.406	-10.154	54.000	4.440	AV
2		*	5540.785	92.984	88.087	N/A	N/A	4.896	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 18:03
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530 MHz with DAP645-RW	

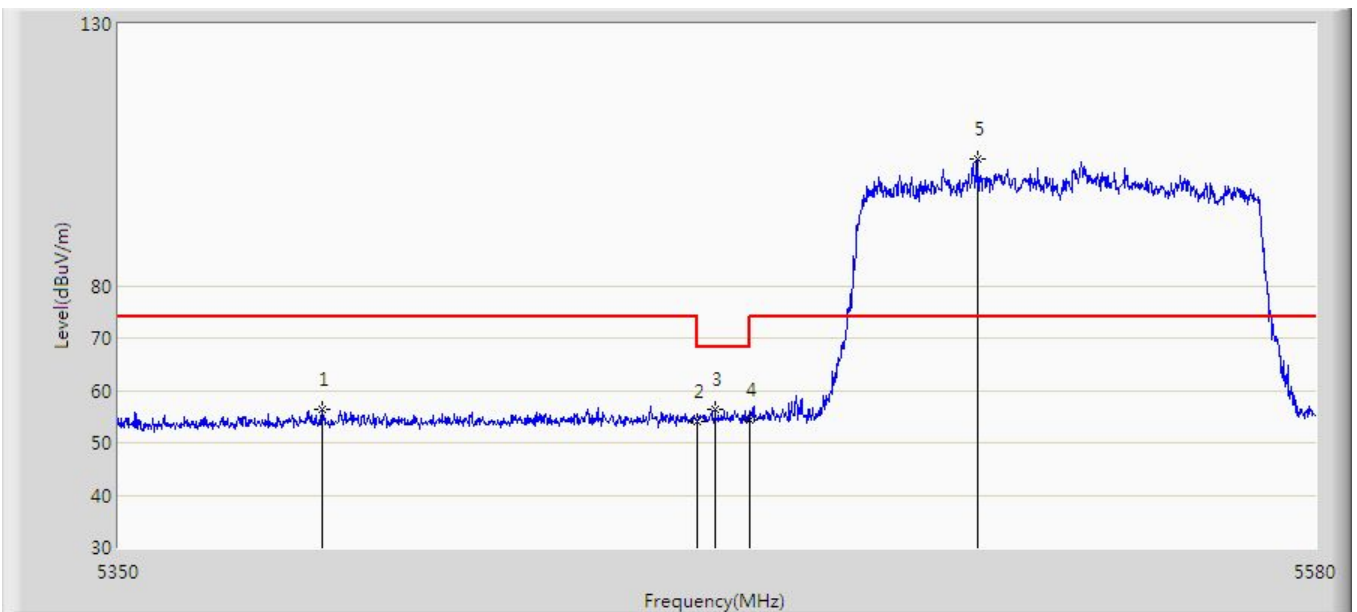


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5388.410	56.334	51.715	-17.666	74.000	4.620	PK
2			5460.000	54.093	49.653	-19.907	74.000	4.440	PK
3			5463.505	56.412	51.967	-11.788	68.200	4.445	PK
4			5470.000	54.265	49.809	-13.935	68.200	4.455	PK
5		*	5514.105	104.202	99.549	N/A	N/A	4.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 18:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530 MHz with DAP645-RW	

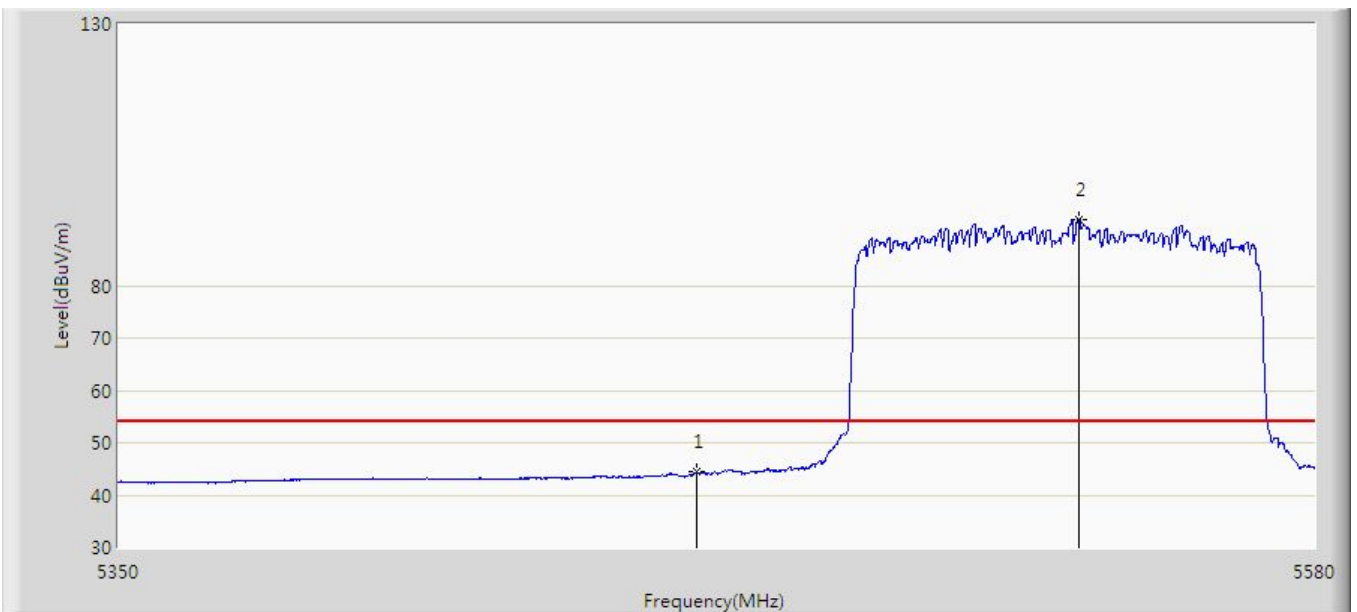


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.354	39.914	-9.646	54.000	4.440	AV
2		*	5534.000	92.615	87.710	N/A	N/A	4.905	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 18:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610 MHz with DAP645-RW	

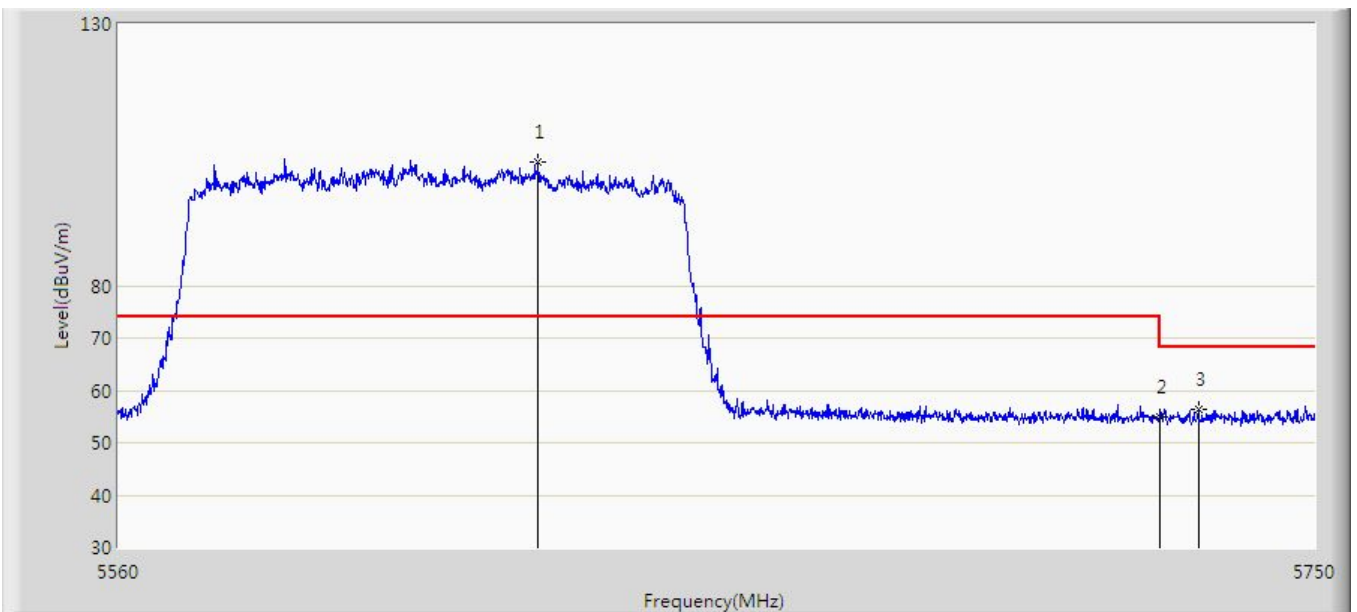


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5626.025	103.531	98.334	N/A	N/A	5.197	PK
2			5725.000	54.806	49.328	-13.394	68.200	5.478	PK
3			5731.285	56.283	50.777	-11.917	68.200	5.507	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/11/16 - 18:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610 MHz with DAP645-RW	

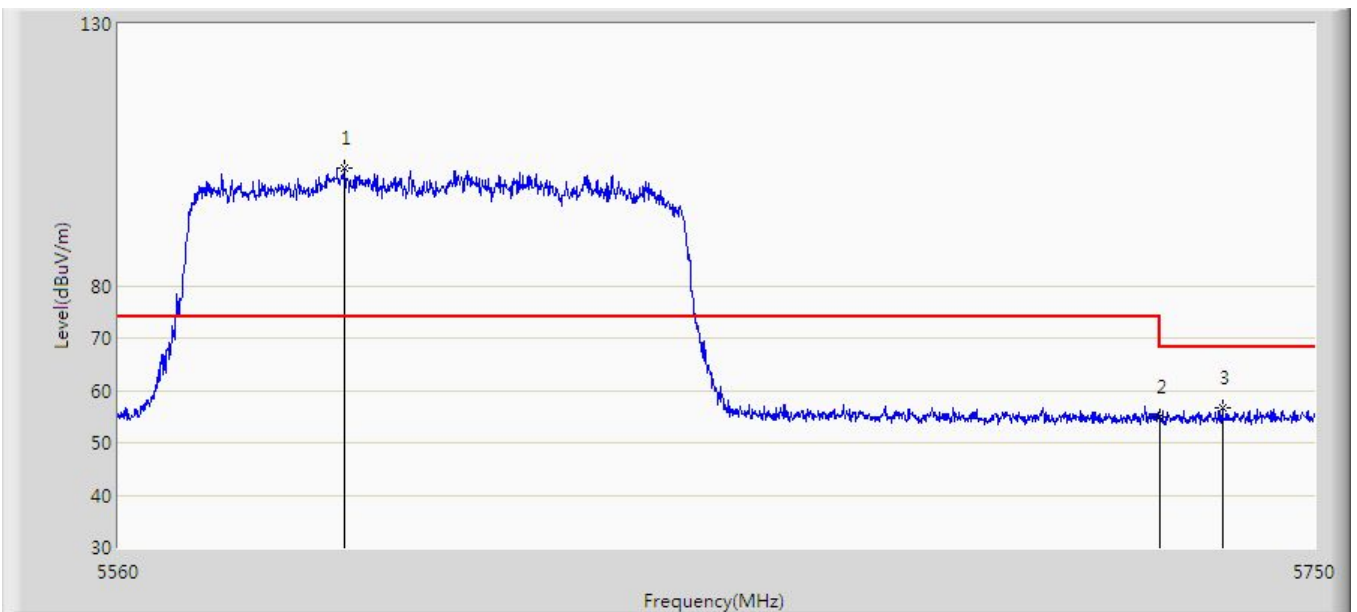


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5595.530	102.544	97.738	N/A	N/A	4.806	PK
2			5725.000	54.850	49.372	-13.350	68.200	5.478	PK
3			5735.275	56.705	51.178	-11.495	68.200	5.528	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP645-RW	

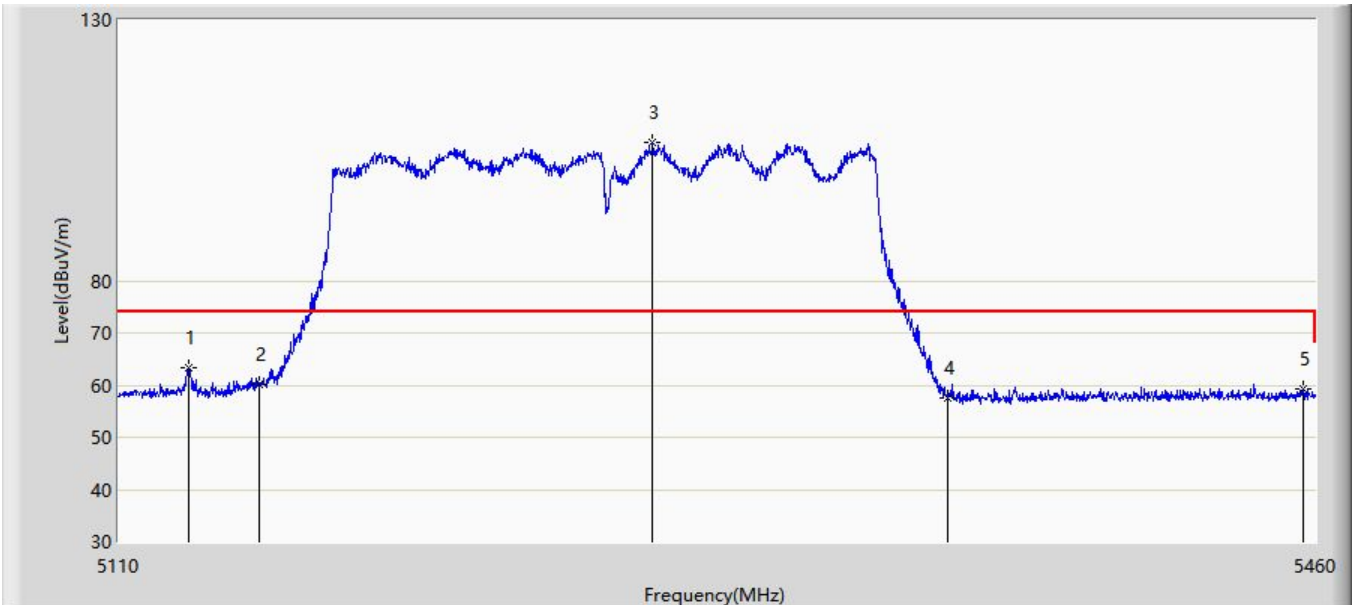


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.775	63.414	58.985	-10.586	74.000	4.430	PK
2			5150.000	60.105	55.663	-13.895	74.000	4.442	PK
3		*	5263.475	106.570	102.401	N/A	N/A	4.169	PK
4			5350.000	57.428	53.251	-16.572	74.000	4.177	PK
5			5456.150	59.369	54.935	-14.631	74.000	4.434	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP645-RW	

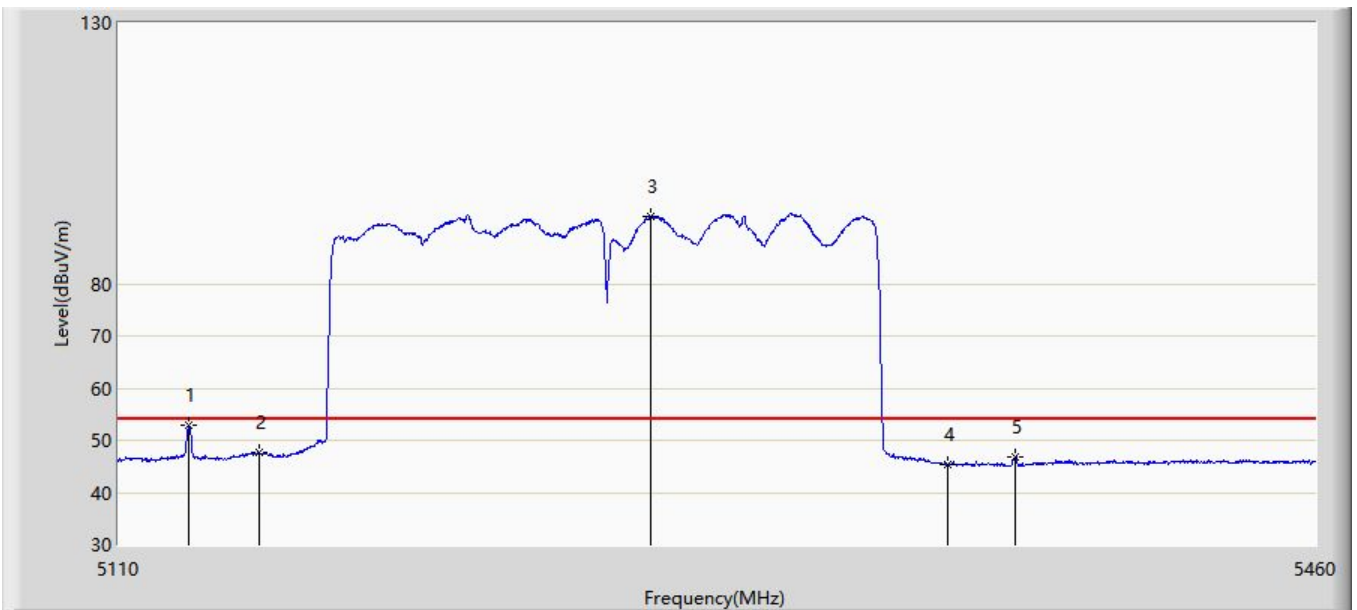


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.950	53.024	48.596	-0.976	54.000	4.429	AV
2			5150.000	47.774	43.332	-6.226	54.000	4.442	AV
3		*	5262.775	92.910	88.747	N/A	N/A	4.162	AV
4			5350.000	45.487	41.310	-8.513	54.000	4.177	AV
5			5370.050	46.807	42.539	-7.193	54.000	4.268	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP645-RW	

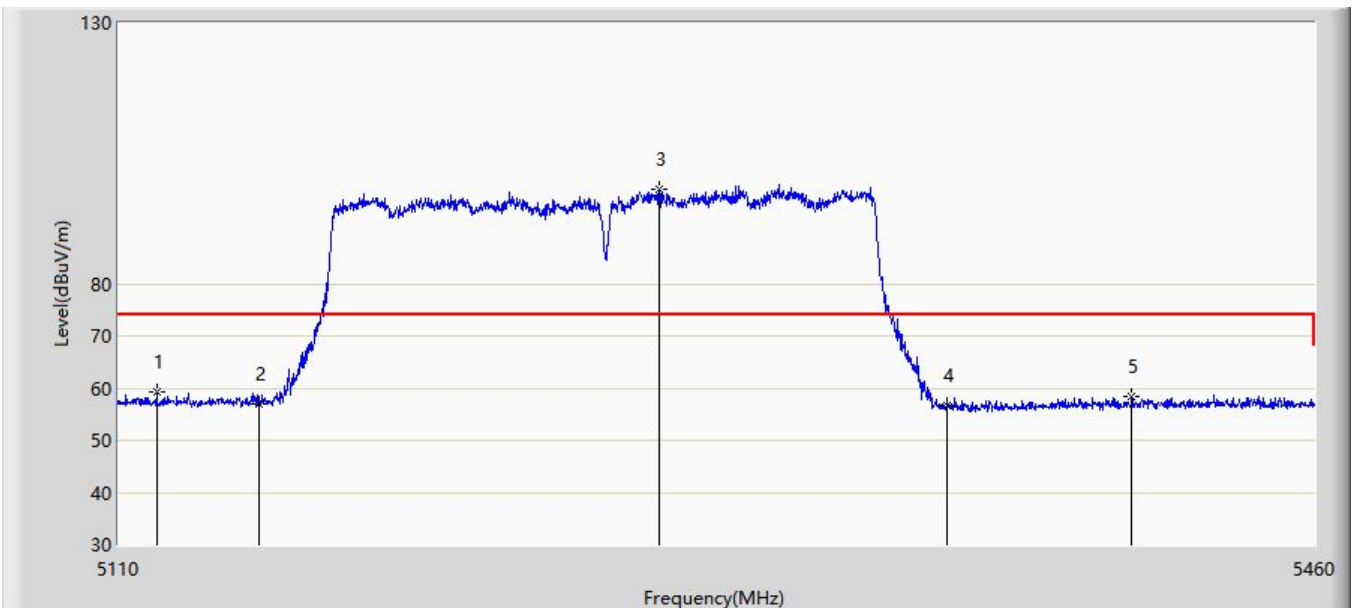


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5120.850	59.236	54.752	-14.764	74.000	4.484	PK
2			5150.000	57.074	52.632	-16.926	74.000	4.442	PK
3		*	5265.400	98.128	93.939	N/A	N/A	4.189	PK
4			5350.000	56.649	52.472	-17.351	74.000	4.177	PK
5			5405.050	58.308	53.642	-15.692	74.000	4.666	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP645-RW	

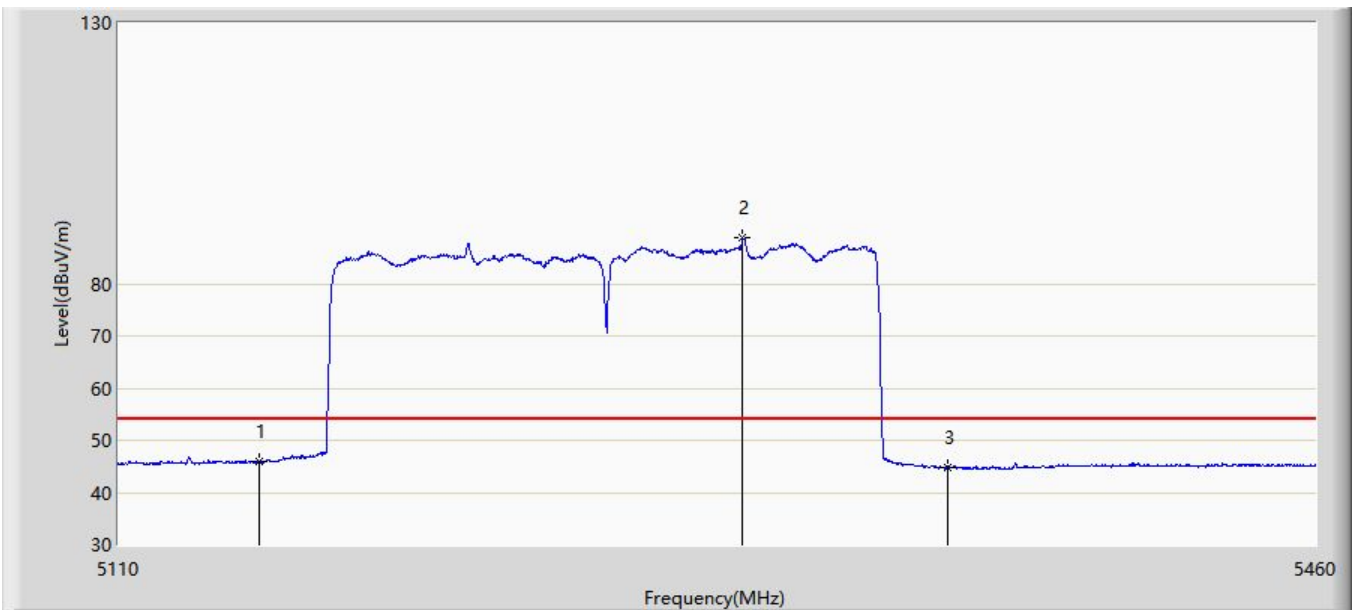


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.969	41.527	-8.031	54.000	4.442	AV
2		*	5289.725	88.906	84.546	N/A	N/A	4.360	AV
3			5350.000	44.811	40.634	-9.189	54.000	4.177	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP645-RW	

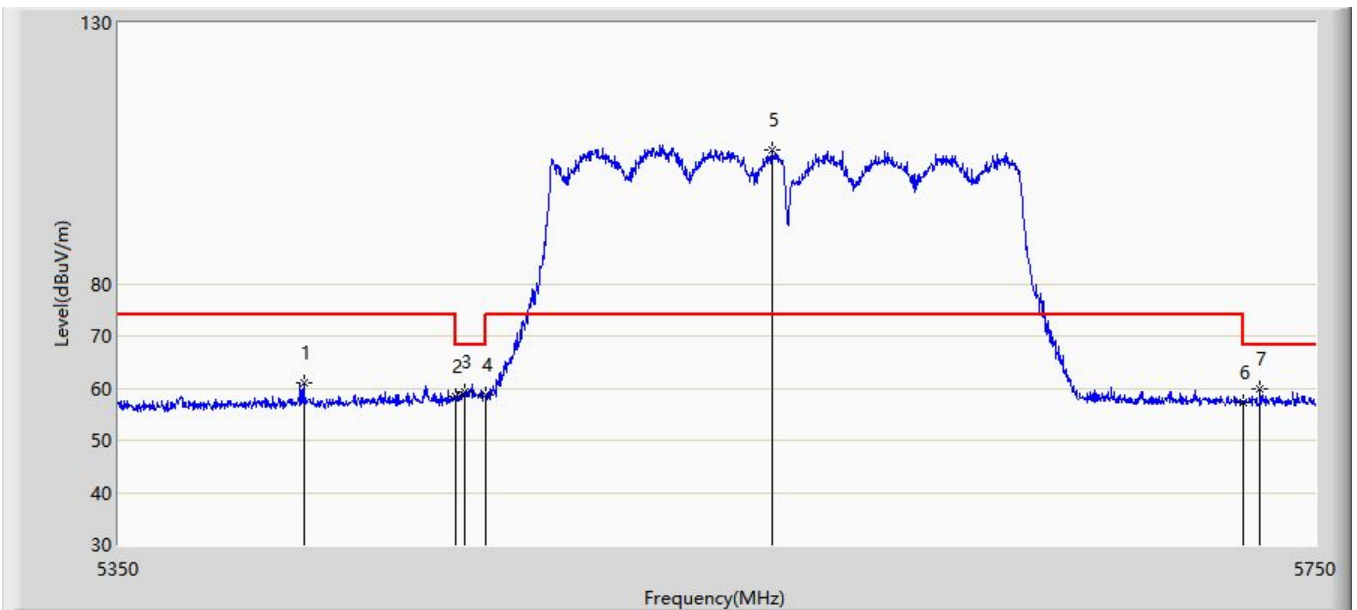


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5410.200	61.068	56.409	-12.932	74.000	4.659	PK
2			5460.000	58.523	54.083	-15.477	74.000	4.440	PK
3			5462.600	59.292	54.848	-8.908	68.200	4.444	PK
4			5470.000	58.601	54.145	-9.599	68.200	4.455	PK
5		*	5565.200	105.581	100.868	N/A	N/A	4.713	PK
6			5725.000	57.149	51.671	-11.051	68.200	5.478	PK
7			5730.800	59.864	54.360	-8.336	68.200	5.503	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP645-RW	

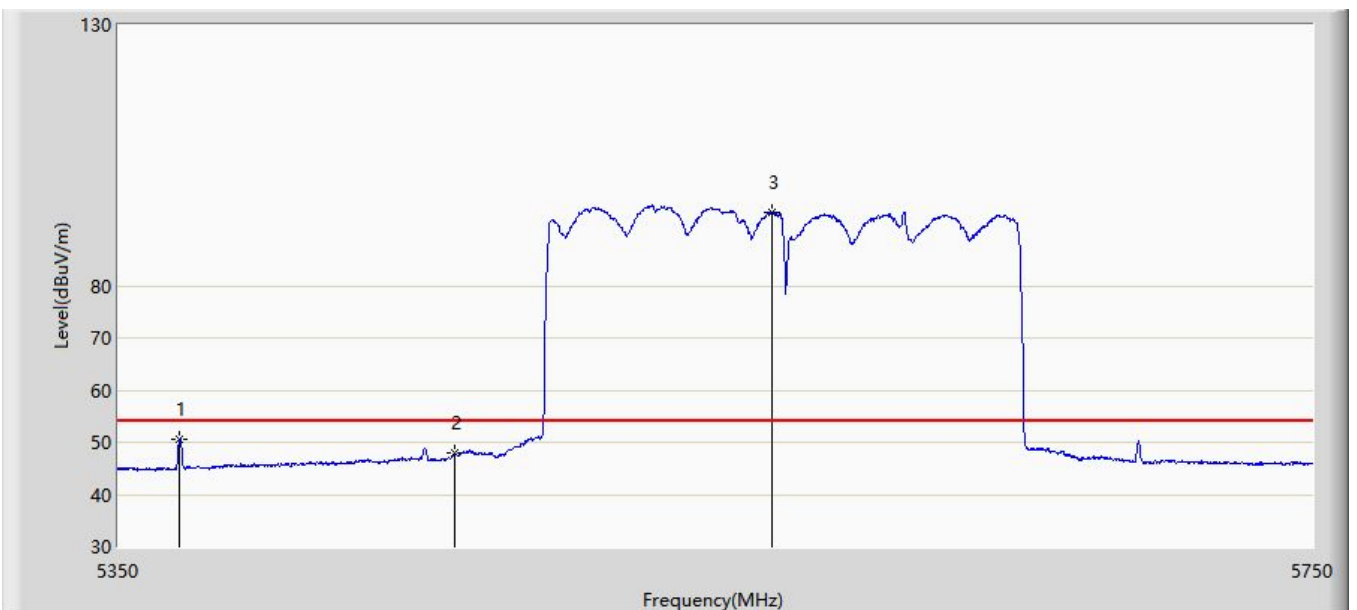


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5370.000	50.577	46.310	-3.423	54.000	4.267	AV
2			5460.000	47.832	43.392	-6.168	54.000	4.440	AV
3		*	5565.600	94.175	89.458	N/A	N/A	4.718	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP645-RW	

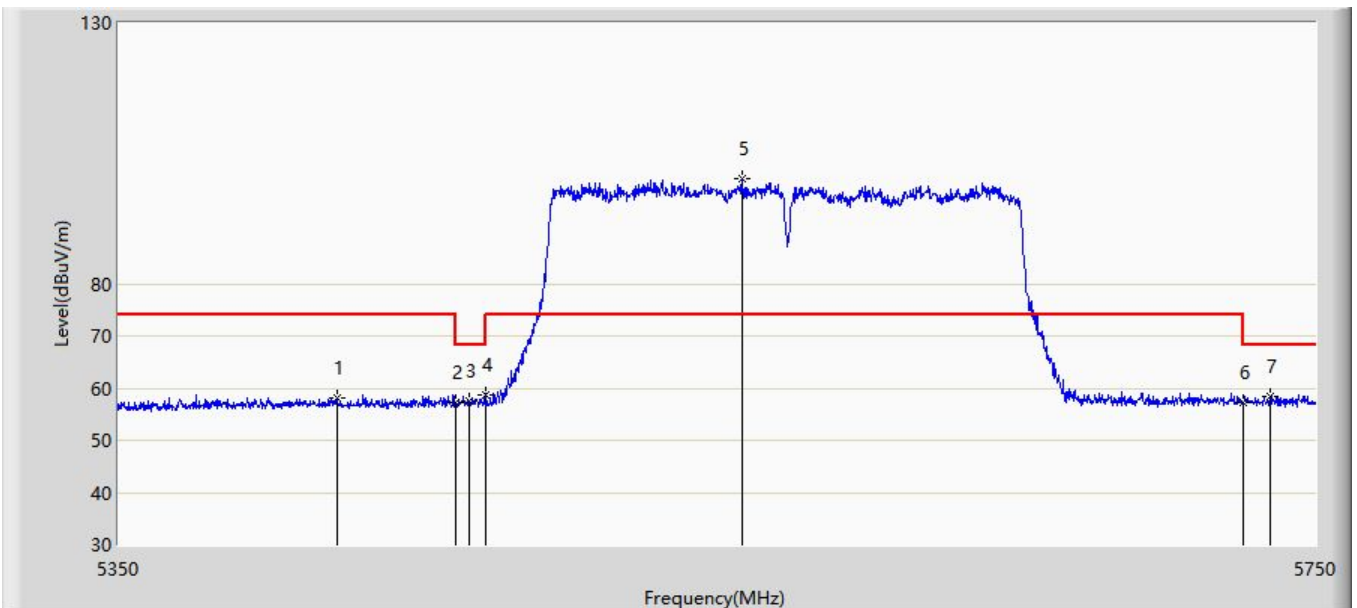


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5420.800	58.107	53.457	-15.893	74.000	4.650	PK
2			5460.000	57.385	52.945	-16.615	74.000	4.440	PK
3			5464.200	57.637	53.190	-10.563	68.200	4.446	PK
4			5470.000	58.836	54.380	-9.364	68.200	4.455	PK
5		*	5554.800	100.114	95.480	N/A	N/A	4.633	PK
6			5725.000	57.168	51.690	-11.032	68.200	5.478	PK
7			5734.200	58.511	52.989	-9.689	68.200	5.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 02:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP645-RW	

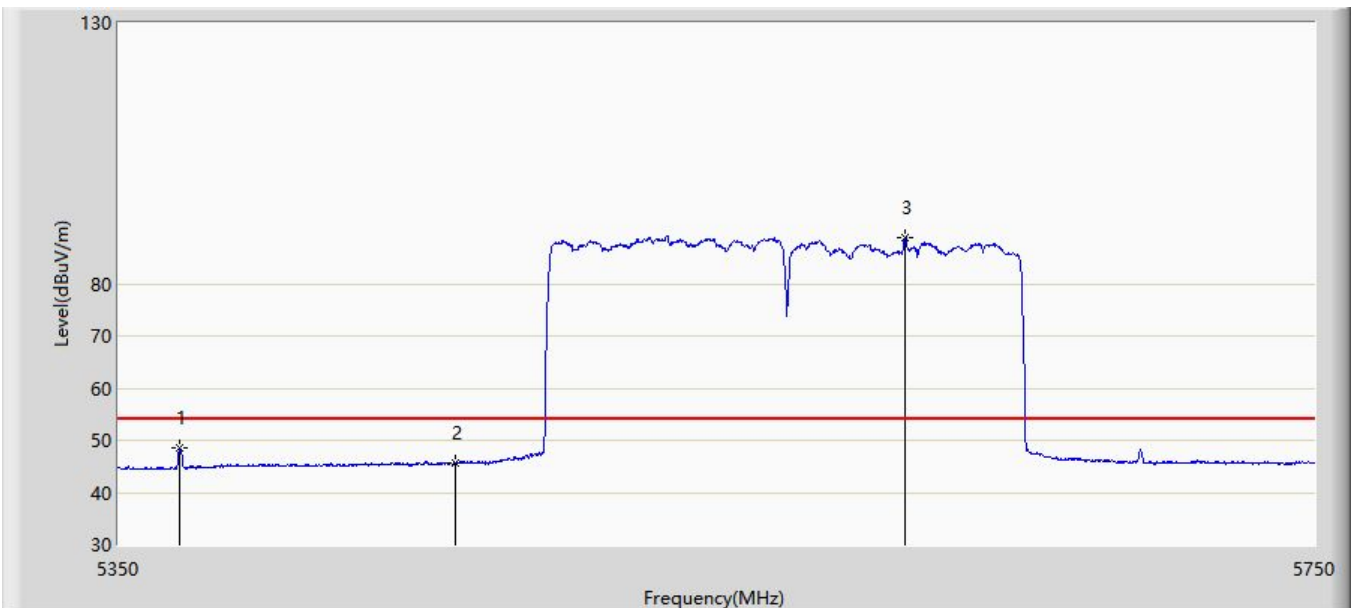


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5370.000	48.419	44.152	-5.581	54.000	4.267	AV
2			5460.000	45.637	41.197	-8.363	54.000	4.440	AV
3		*	5610.000	88.925	83.945	N/A	N/A	4.979	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:09
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with DAP646-RW CDD Mode	

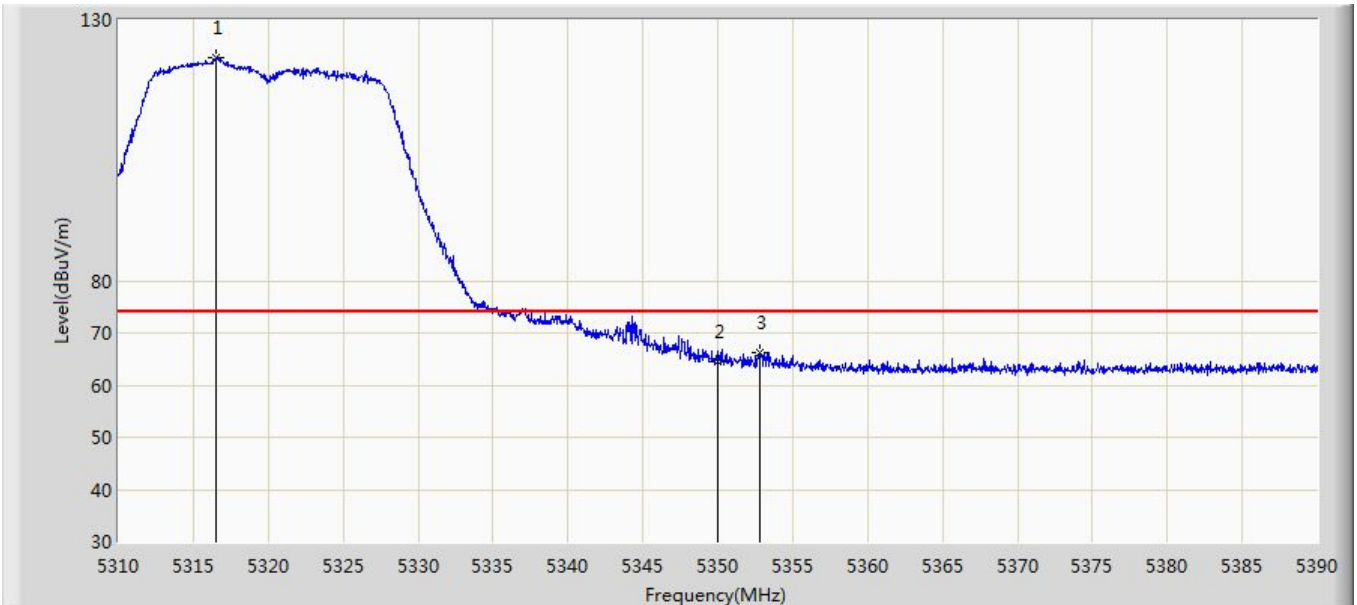


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.560	122.768	116.425	N/A	N/A	6.344	PK
2			5350.000	64.425	58.098	-9.575	74.000	6.327	PK
3			5352.840	66.204	59.871	-7.796	74.000	6.333	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with DAP646-RW CDD Mode	

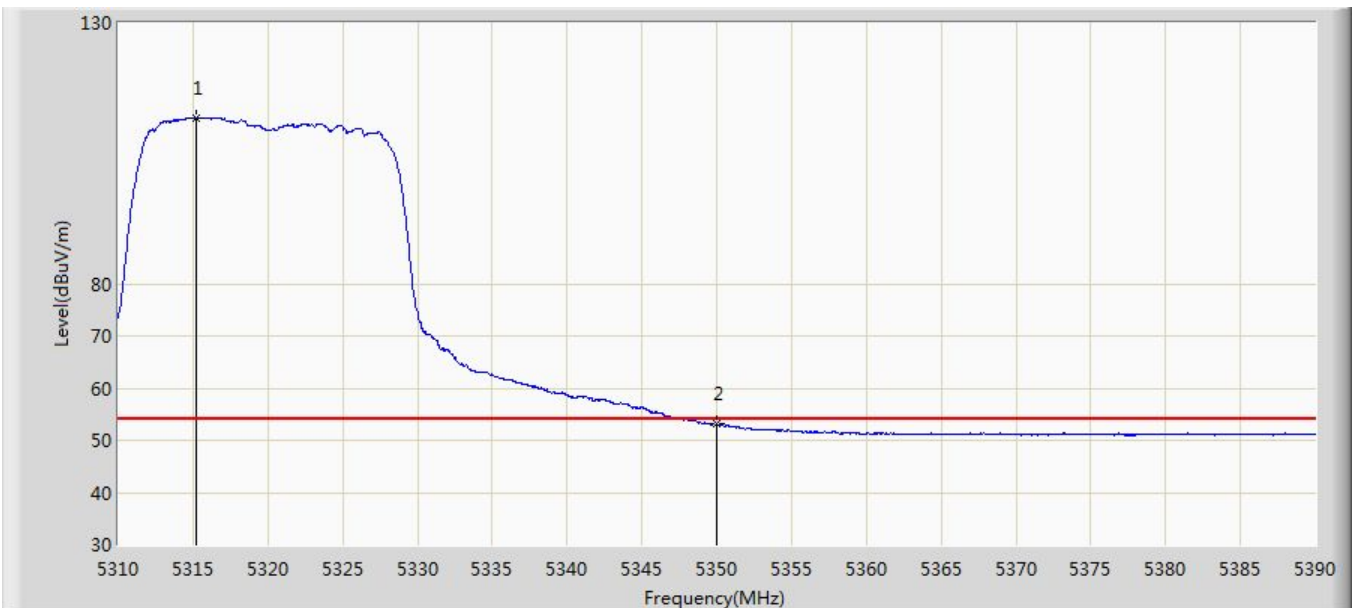


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	5315.200	111.853	105.515	N/A	N/A	6.337	AV
2			5350.000	53.218	46.891	-0.782	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with DAP646-RW CDD Mode	

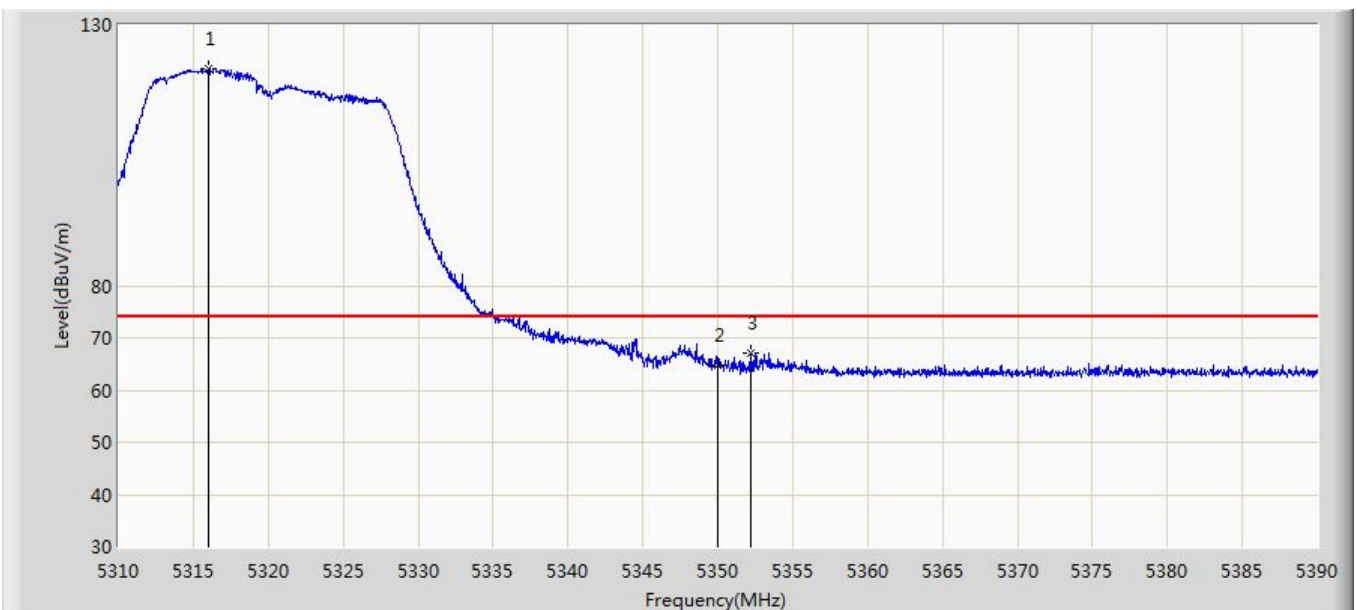


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.000	121.528	115.187	N/A	N/A	6.342	PK
2			5350.000	64.729	58.402	-9.271	74.000	6.327	PK
3			5352.160	67.240	60.912	-6.760	74.000	6.327	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with DAP646-RW CDD Mode	

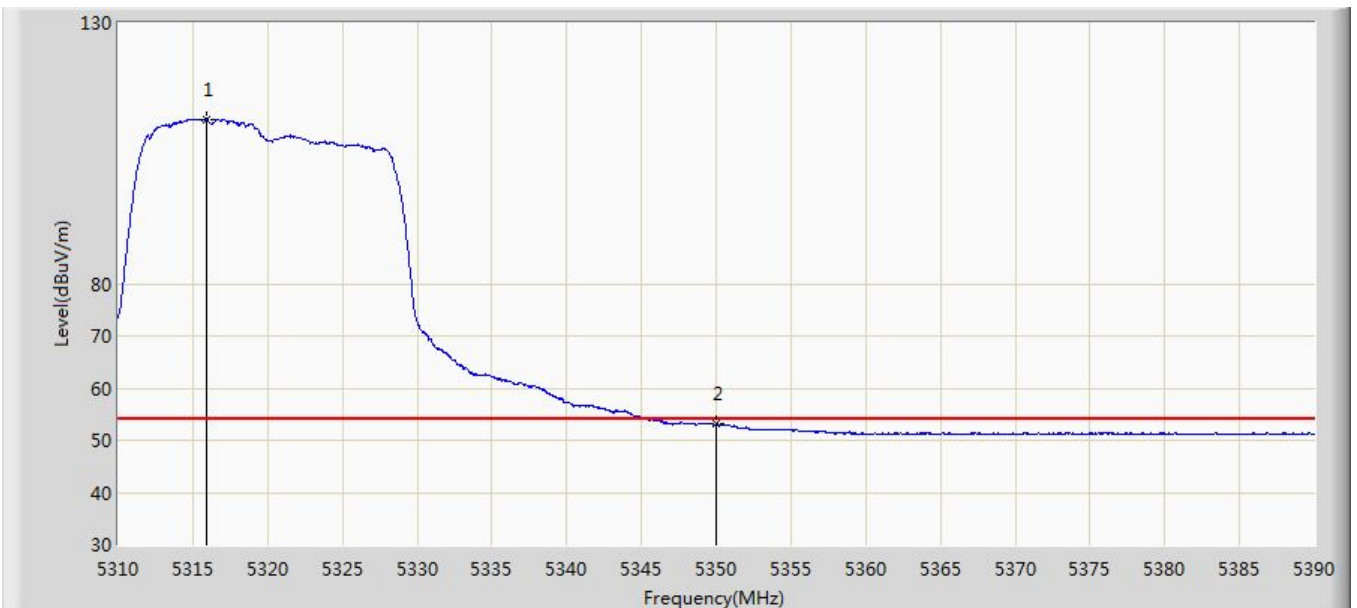


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	5315.880	111.562	105.222	N/A	N/A	6.340	AV
2			5350.000	53.121	46.794	-0.879	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with DAP646-RW CDD Mode	

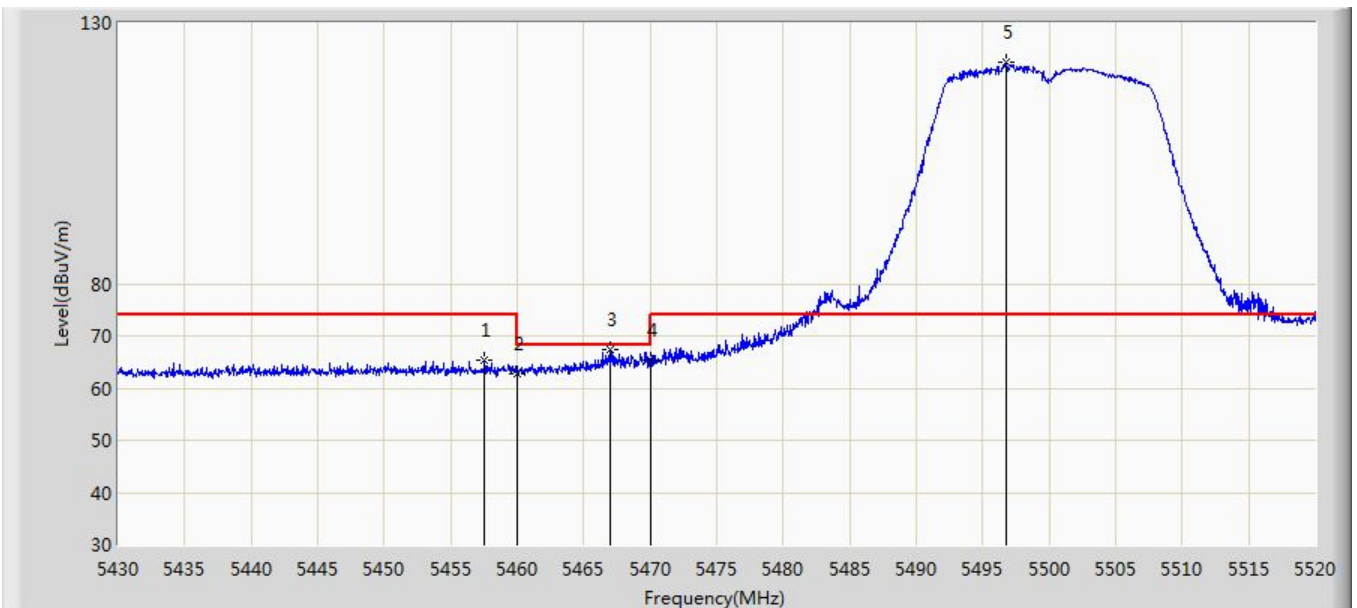


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.540	65.247	58.623	-8.753	74.000	6.623	PK
2			5460.000	62.836	56.224	-11.164	74.000	6.612	PK
3			5466.945	67.396	60.815	-0.804	68.200	6.580	PK
4			5470.000	65.506	58.939	-2.694	68.200	6.567	PK
5		*	5496.780	122.415	115.731	N/A	N/A	6.684	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with DAP646-RW CDD Mode	

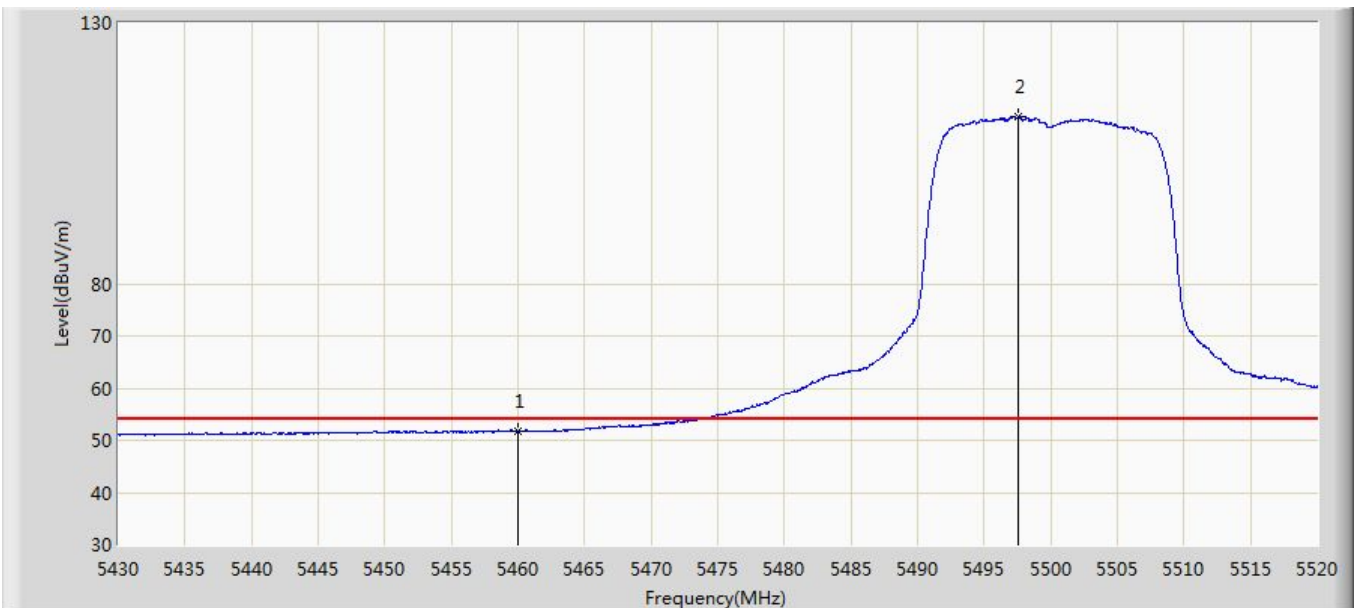


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.801	45.189	-2.199	54.000	6.612	AV
2	X	*	5497.545	112.011	105.321	N/A	N/A	6.690	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with DAP646-RW CDD Mode	

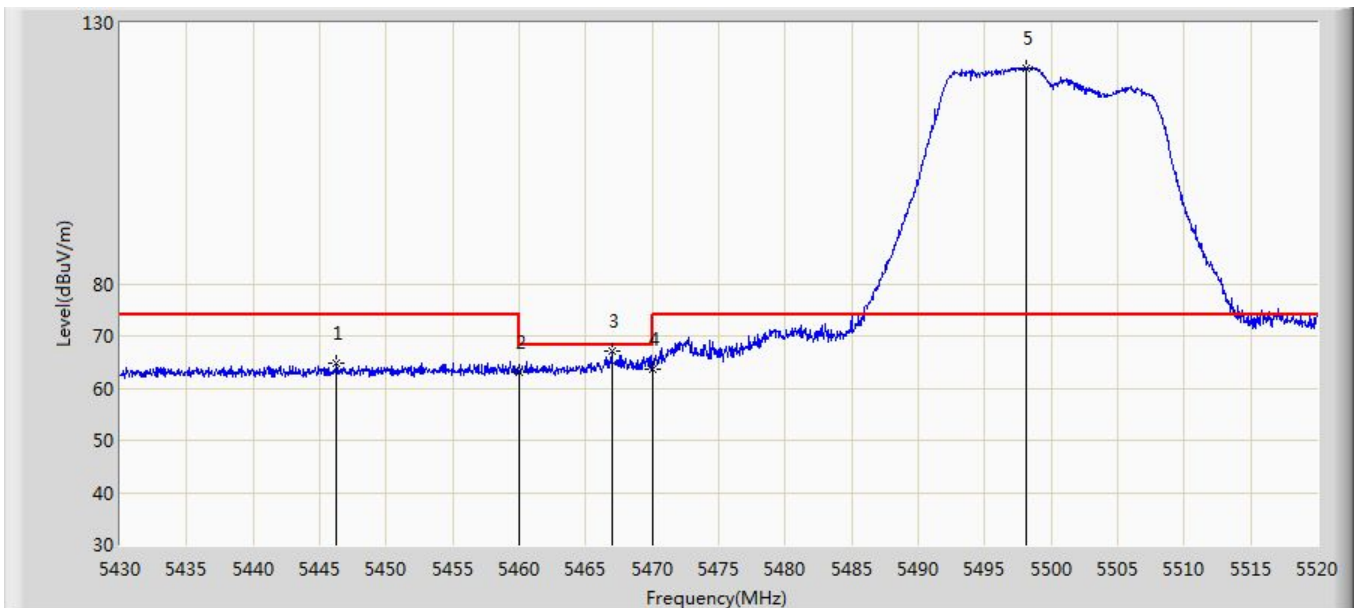


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.290	64.916	58.308	-9.084	74.000	6.608	PK
2			5460.000	63.089	56.477	-10.911	74.000	6.612	PK
3			5466.945	67.076	60.495	-1.124	68.200	6.580	PK
4			5470.000	63.667	57.100	-4.533	68.200	6.567	PK
5		*	5498.175	121.215	114.521	N/A	N/A	6.694	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with DAP646-RW CDD Mode	

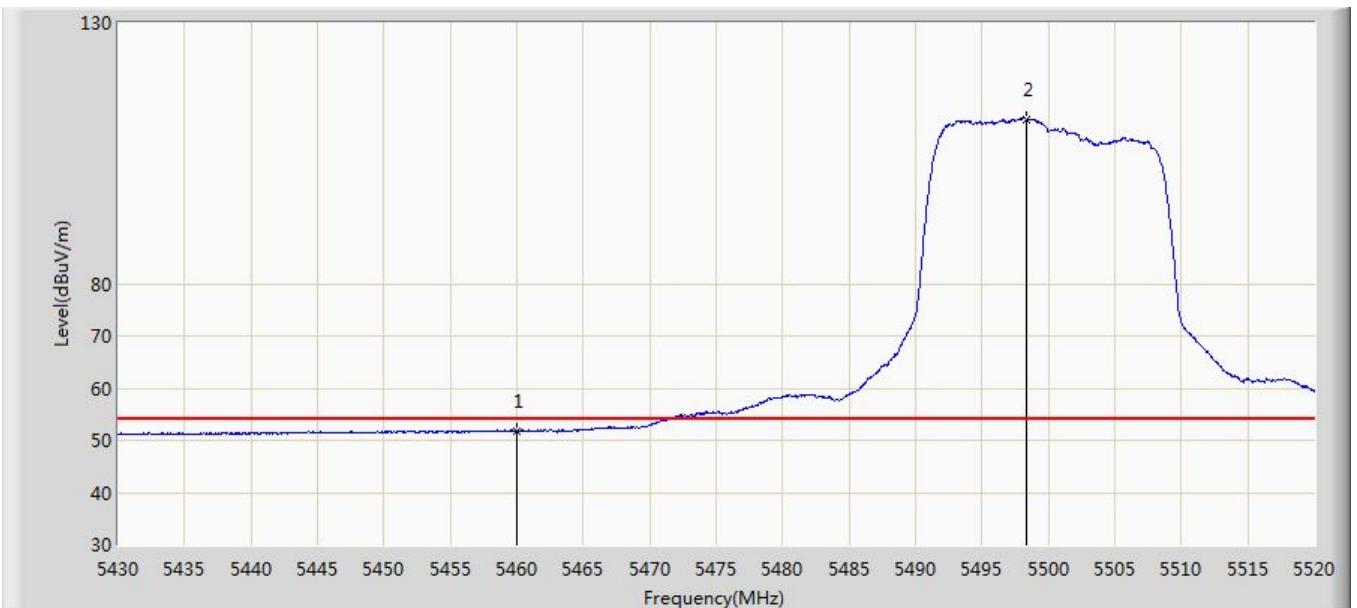


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.776	45.164	-2.224	54.000	6.612	AV
2	X	*	5498.400	111.583	104.887	N/A	N/A	6.696	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with DAP646-RW CDD Mode	

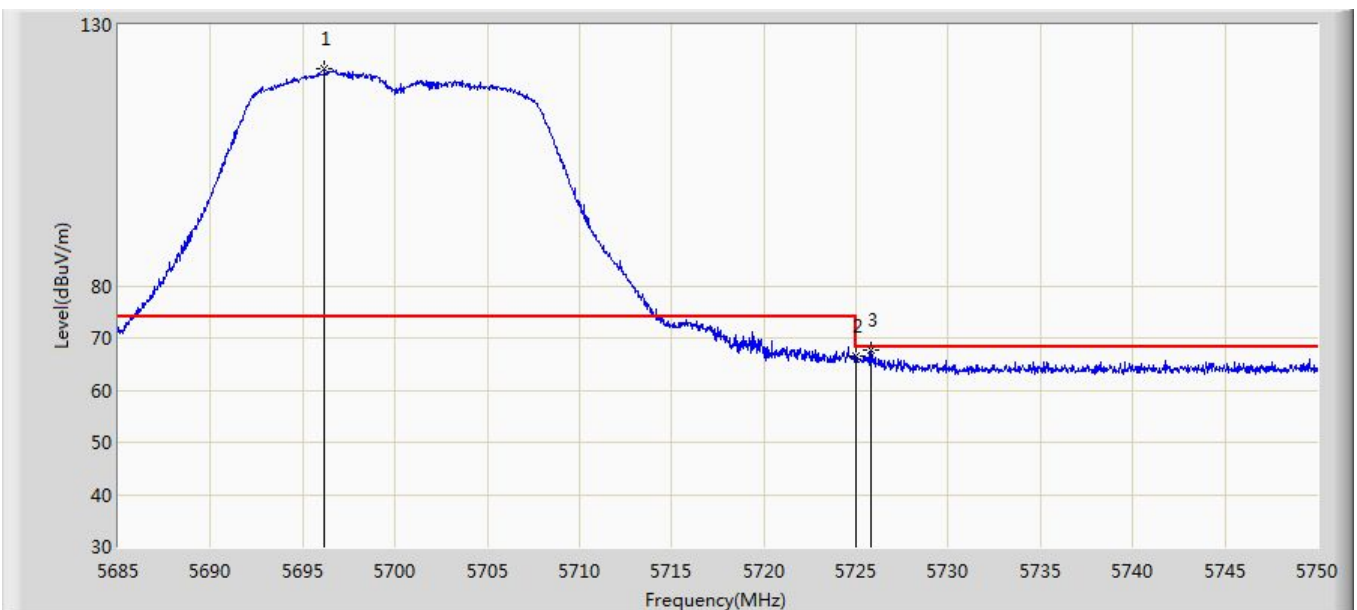


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.180	121.695	114.815	N/A	N/A	6.880	PK
2			5725.000	66.557	59.690	-1.643	68.200	6.867	PK
3			5725.820	67.610	60.749	-0.590	68.200	6.861	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/09 - 08:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with DAP646-RW CDD Mode	

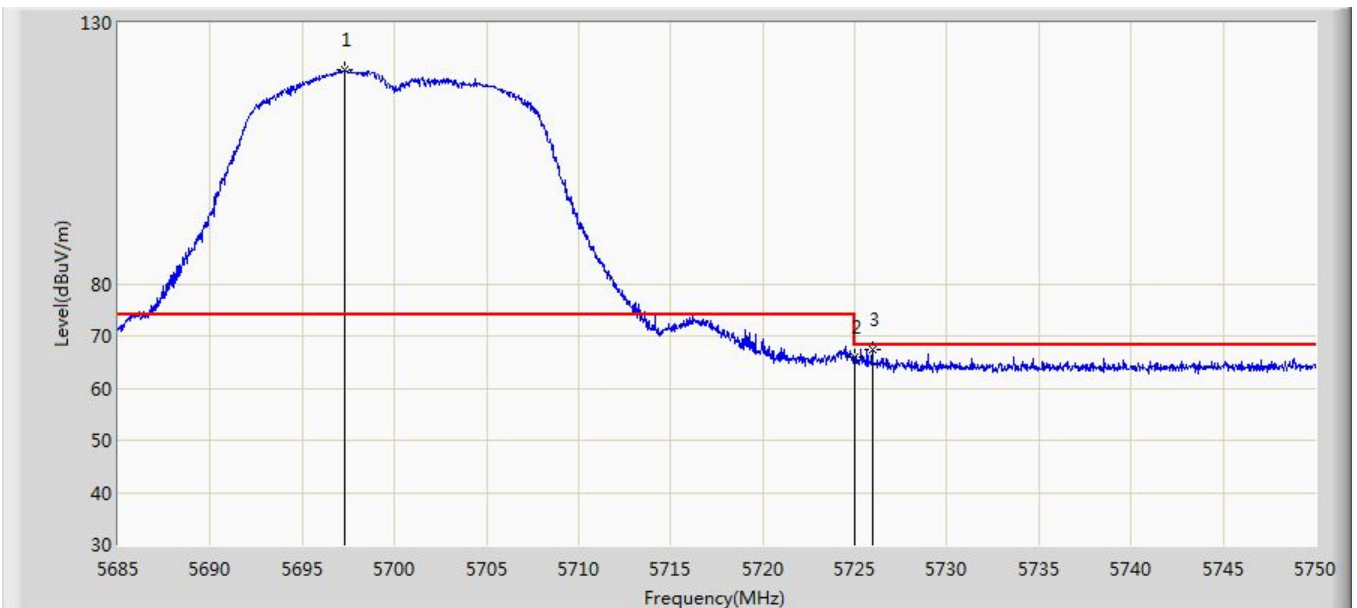


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.285	121.124	114.236	N/A	N/A	6.888	PK
2			5725.000	65.952	59.085	-2.248	68.200	6.867	PK
3			5725.950	67.505	60.645	-0.695	68.200	6.861	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW CDD Mode	

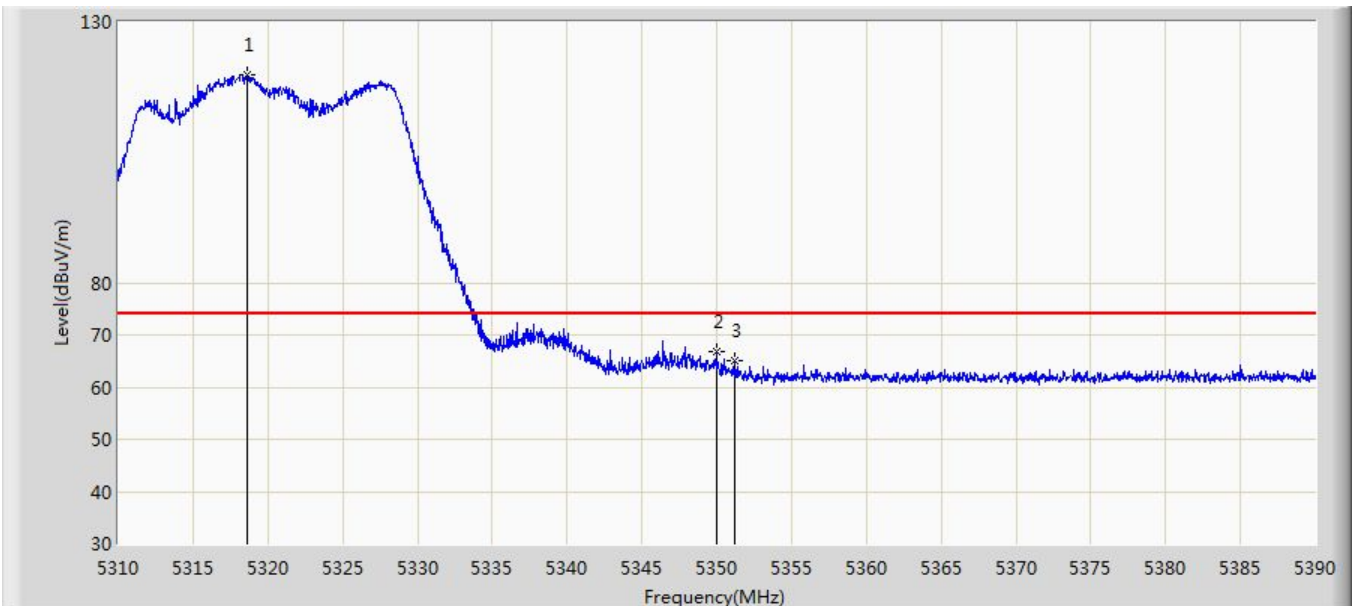


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.600	119.886	113.538	N/A	N/A	6.349	PK
2			5350.000	66.873	60.546	-7.127	74.000	6.327	PK
3			5351.240	65.099	58.772	-8.901	74.000	6.326	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW CDD Mode	

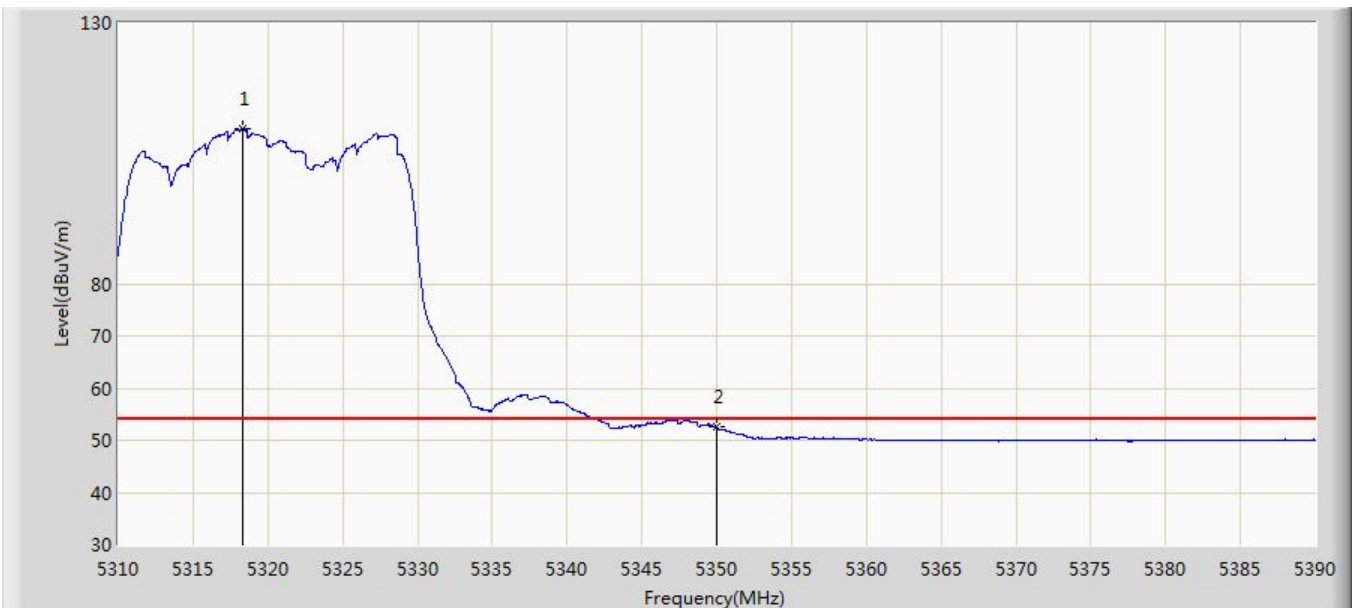


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	5318.320	109.775	103.426	N/A	N/A	6.349	AV
2			5350.000	52.570	46.243	-1.430	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW CDD Mode	

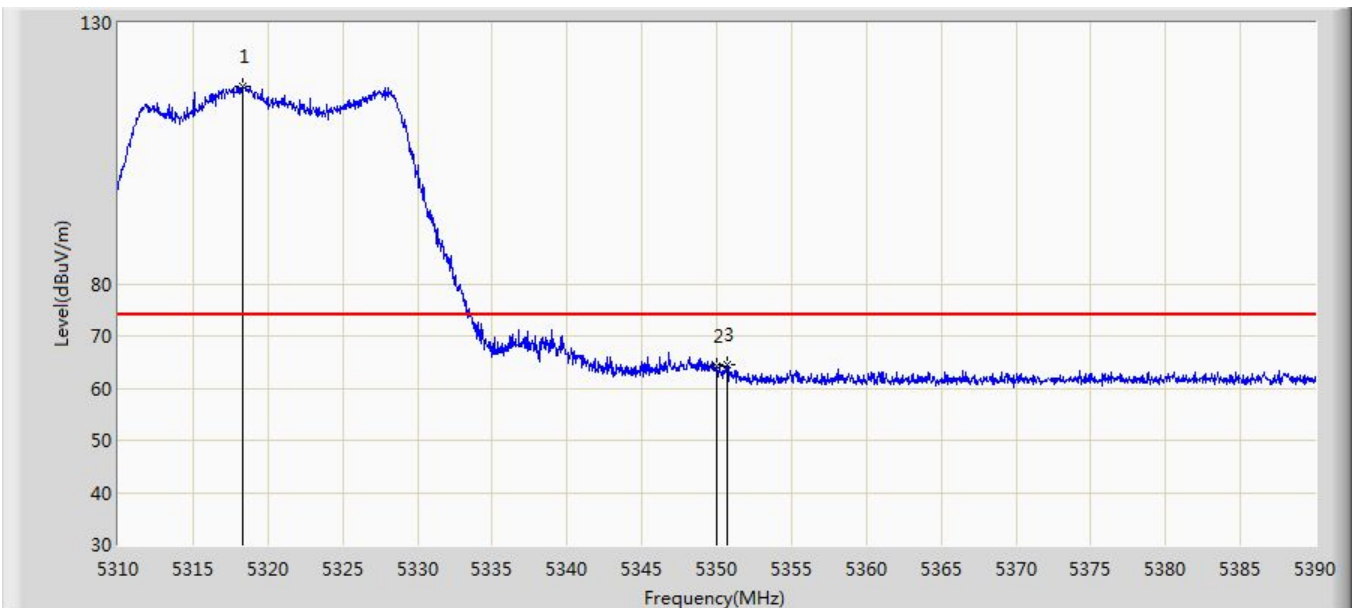


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.280	117.776	111.427	N/A	N/A	6.349	PK
2			5350.000	64.197	57.870	-9.803	74.000	6.327	PK
3			5350.680	64.379	58.052	-9.621	74.000	6.326	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW CDD Mode	

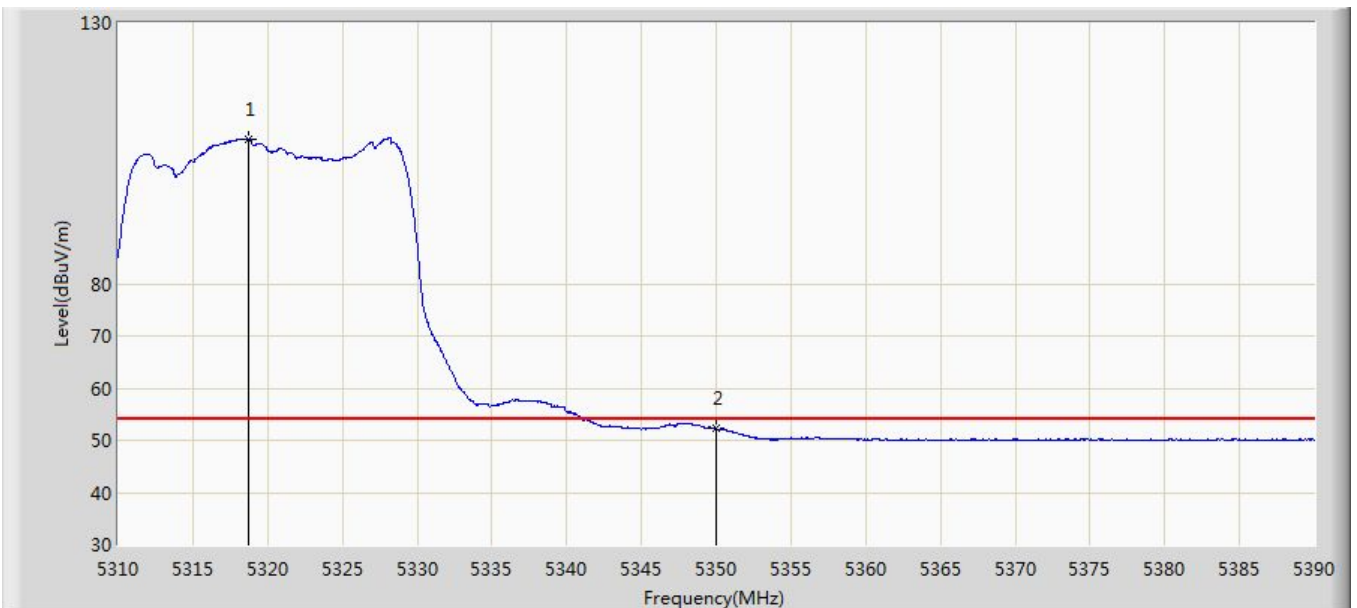


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.720	107.796	101.448	N/A	N/A	6.348	AV
2			5350.000	52.229	45.902	-1.771	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW CDD Mode	

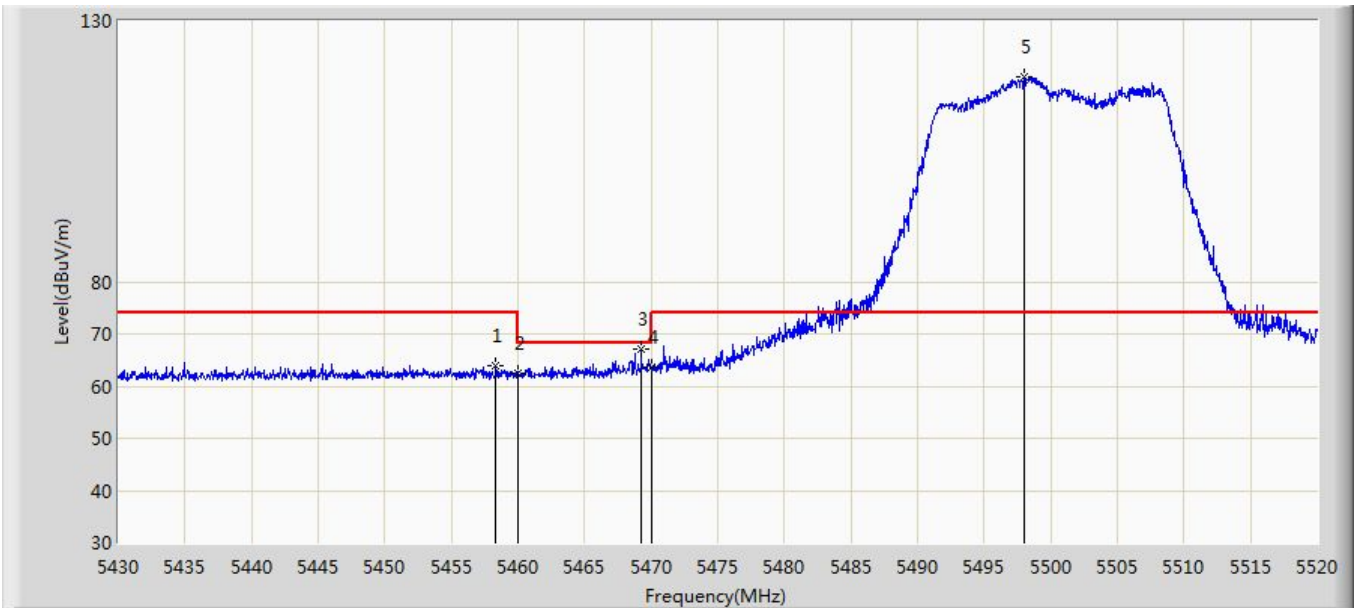


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.350	63.932	57.312	-10.068	74.000	6.620	PK
2			5460.000	62.579	55.967	-11.421	74.000	6.612	PK
3			5469.240	67.061	60.491	-1.139	68.200	6.570	PK
4			5470.000	63.592	57.025	-4.608	68.200	6.567	PK
5		*	5498.040	119.266	112.573	N/A	N/A	6.693	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW CDD Mode	

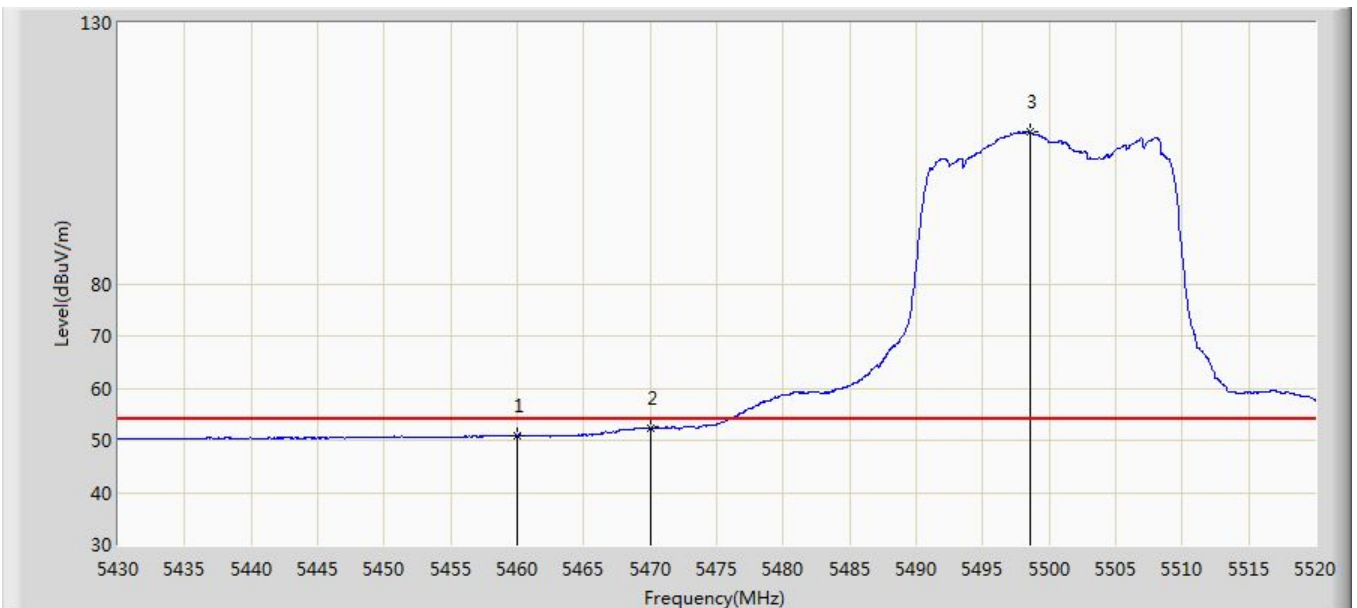


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.883	44.271	-3.117	54.000	6.612	AV
2			5470.000	52.395	45.828	-1.605	54.000	6.567	AV
3	X	*	5498.535	109.232	102.535	N/A	N/A	6.697	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW CDD Mode	

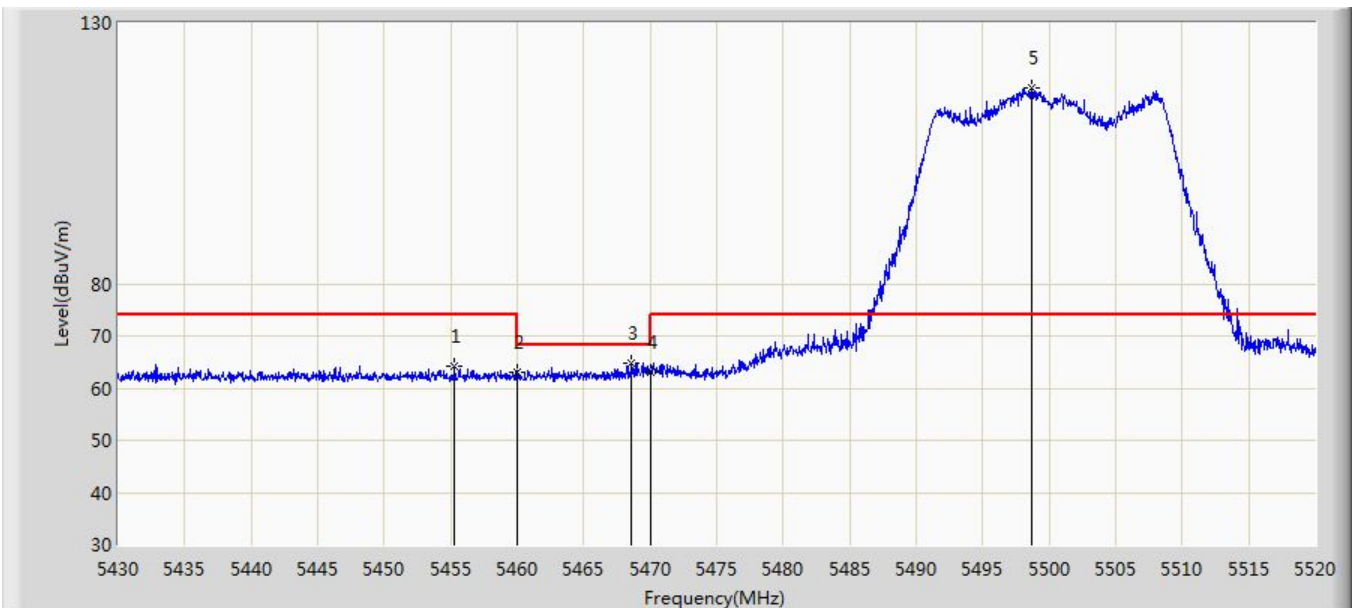


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.290	64.246	57.612	-9.754	74.000	6.634	PK
2			5460.000	63.106	56.494	-10.894	74.000	6.612	PK
3			5468.610	64.660	58.087	-3.540	68.200	6.574	PK
4			5470.000	62.957	56.390	-5.243	68.200	6.567	PK
5		*	5498.715	117.591	110.893	N/A	N/A	6.698	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW CDD Mode	

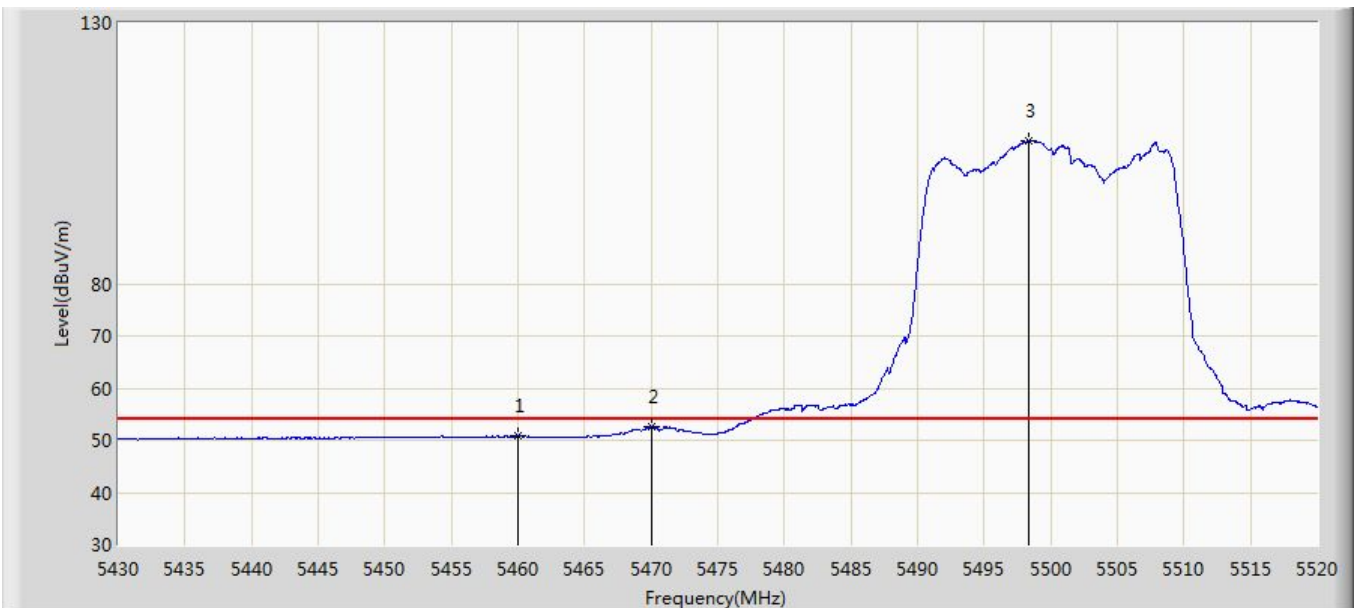


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.760	44.148	-3.240	54.000	6.612	AV
2			5470.000	52.577	46.010	-1.423	54.000	6.567	AV
3		*	5498.355	107.506	100.810	N/A	N/A	6.696	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with DAP646-RW CDD Mode	

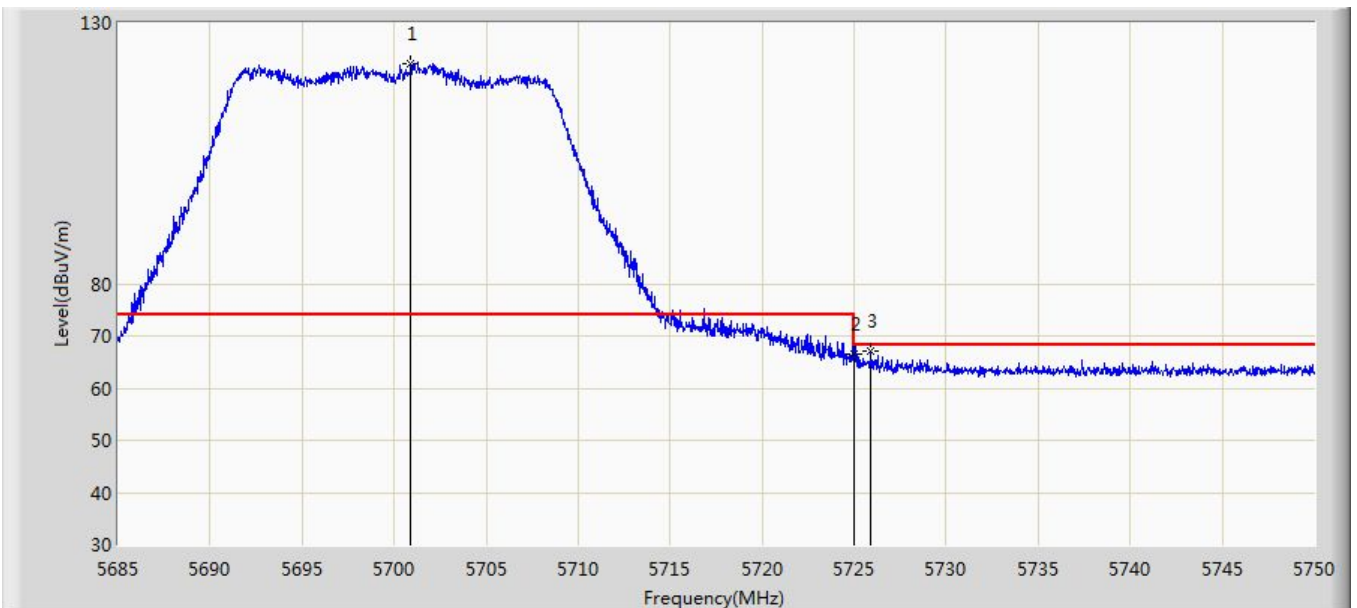


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5700.893	122.234	115.319	N/A	N/A	6.915	PK
2			5725.000	66.513	59.646	-1.687	68.200	6.867	PK
3			5725.917	67.010	60.150	-1.190	68.200	6.860	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 13:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with DAP646-RW CDD Mode	

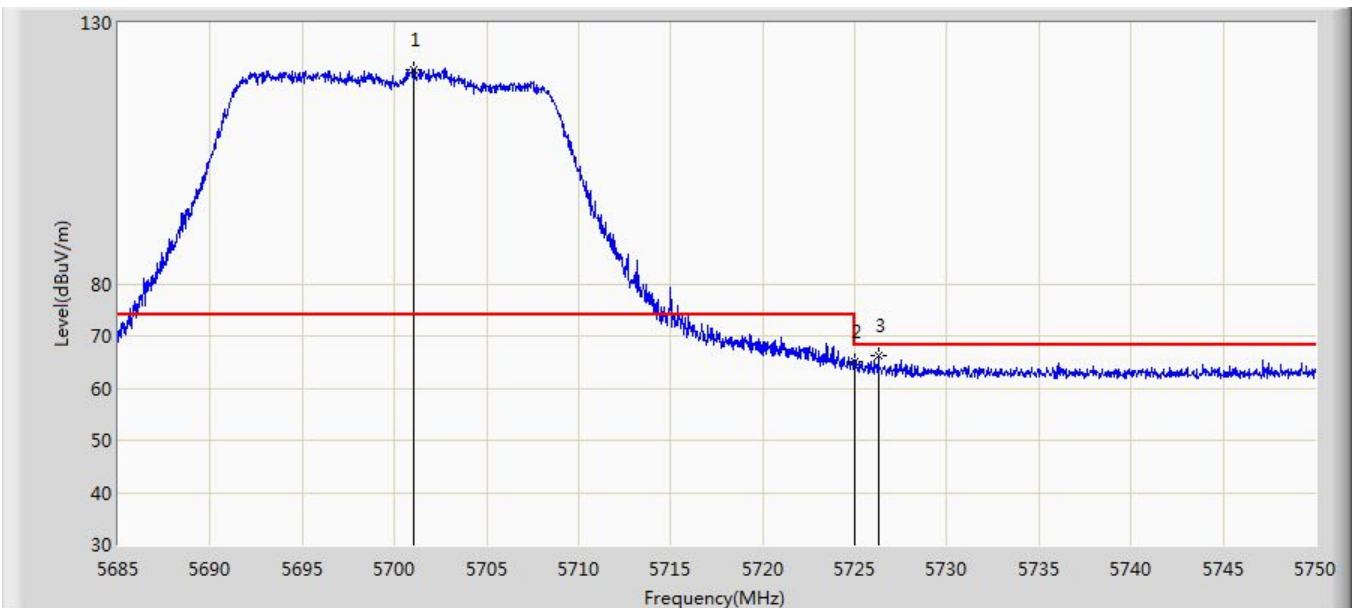


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.087	121.149	114.232	N/A	N/A	6.916	PK
2			5725.000	65.210	58.343	-2.990	68.200	6.867	PK
3			5726.275	66.237	59.375	-1.963	68.200	6.862	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW CDD Mode	

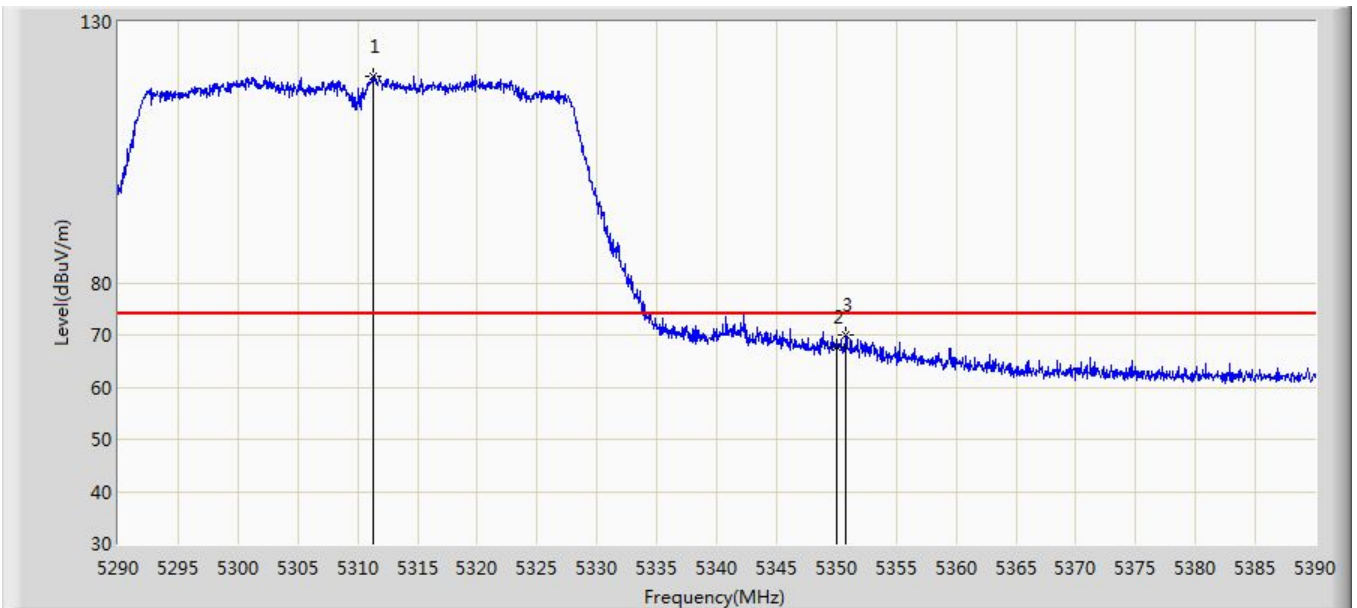


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.300	119.610	113.287	N/A	N/A	6.324	PK
2			5350.000	67.757	61.430	-6.243	74.000	6.327	PK
3			5350.750	70.015	63.688	-3.985	74.000	6.326	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW CDD Mode	

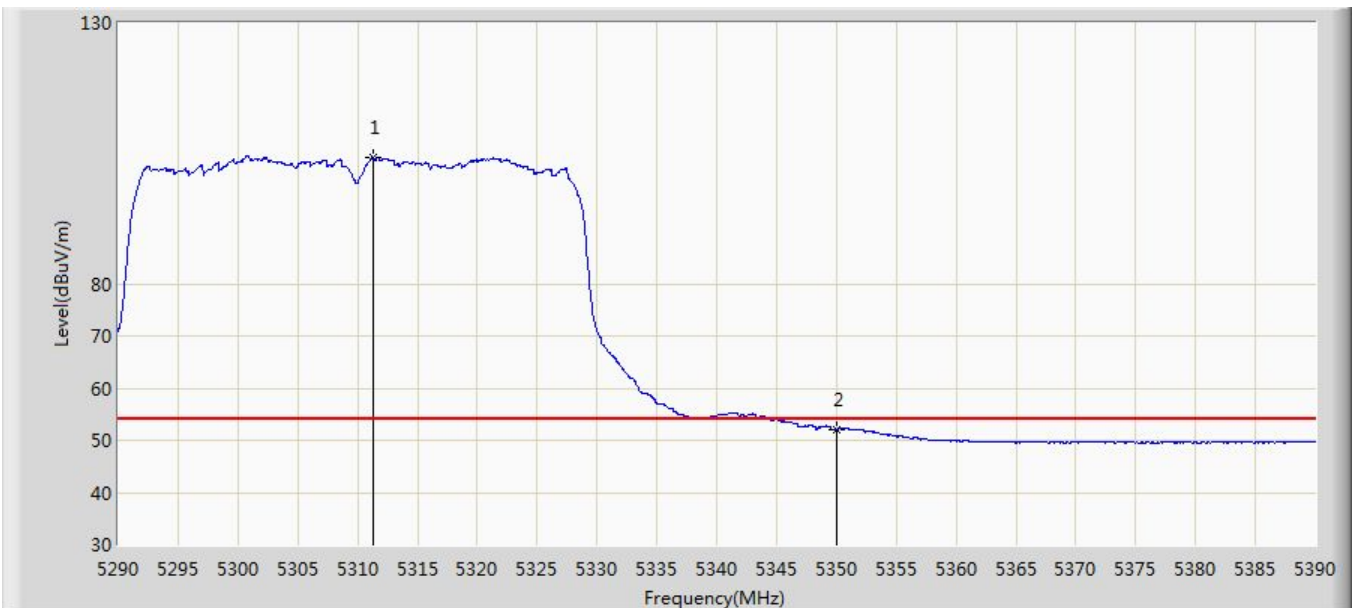


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.250	104.275	97.952	N/A	N/A	6.324	AV
2			5350.000	52.042	45.715	-1.958	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW CDD Mode	

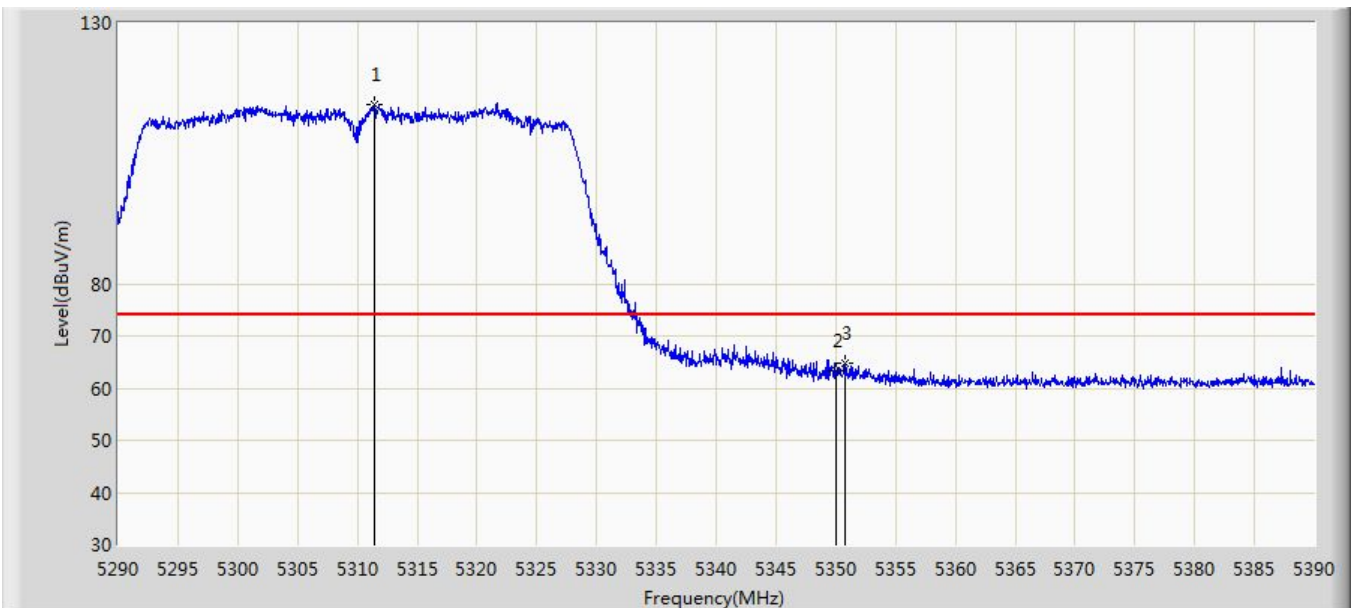


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.400	114.385	108.061	N/A	N/A	6.323	PK
2			5350.000	63.266	56.939	-10.734	74.000	6.327	PK
3			5350.800	64.853	58.526	-9.147	74.000	6.327	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW CDD Mode	

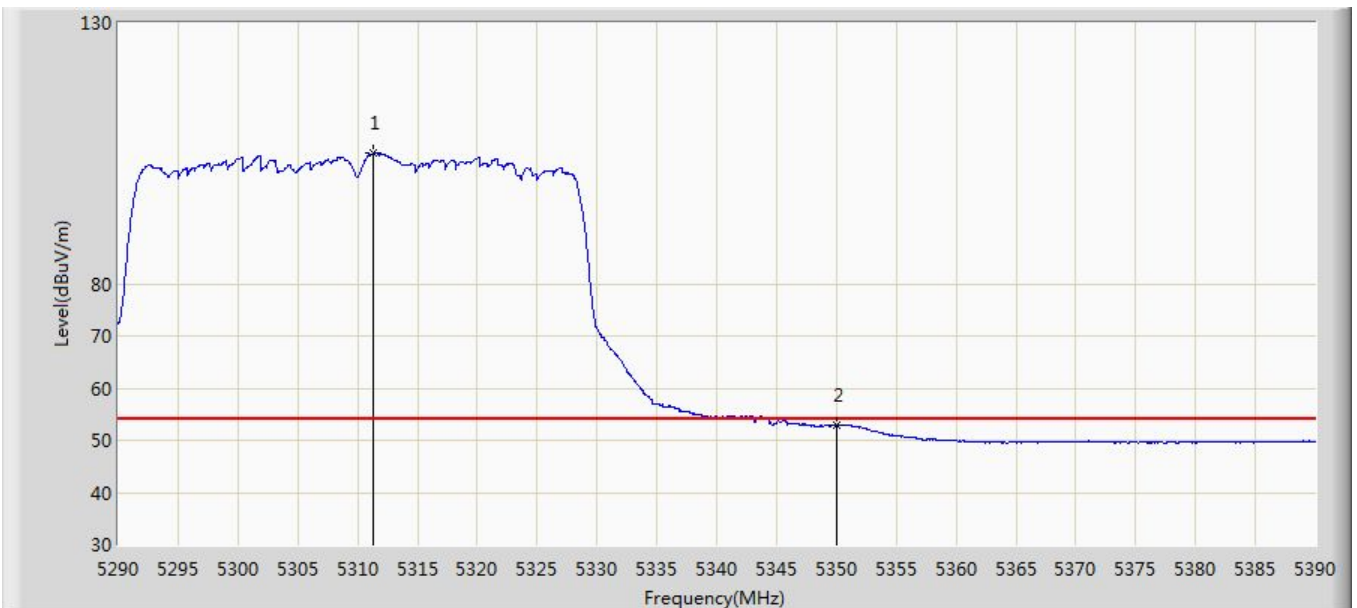


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.350	105.059	98.736	N/A	N/A	6.324	AV
2			5350.000	52.769	46.442	-1.231	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW CDD Mode	

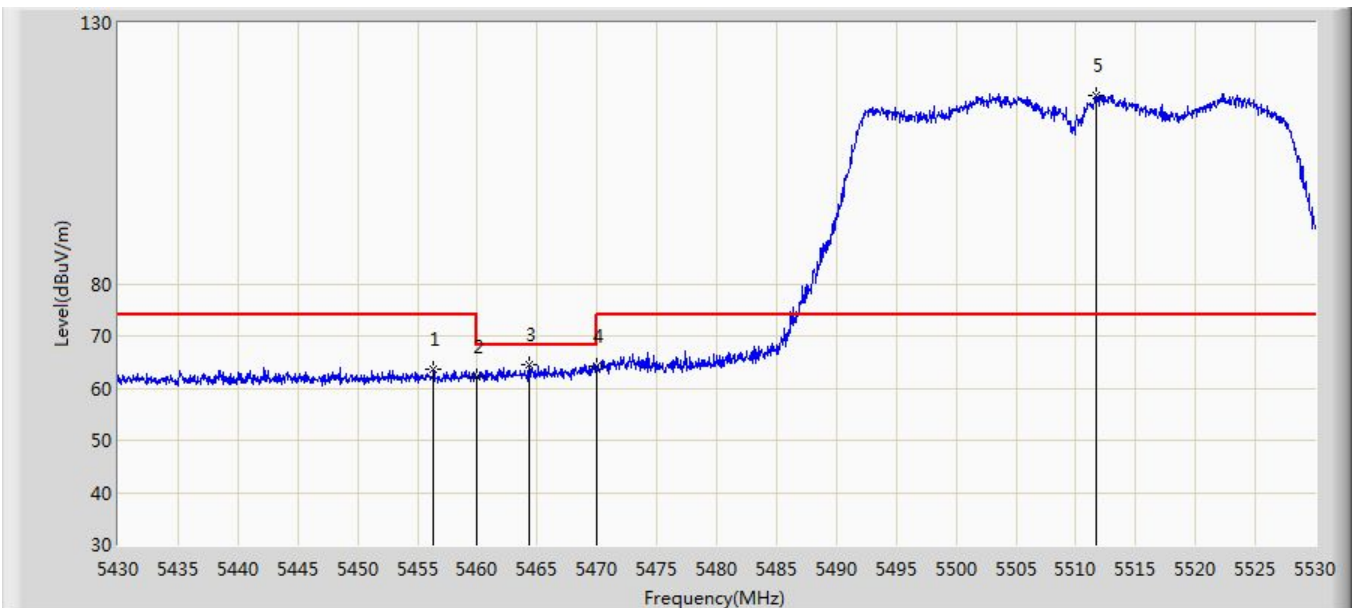


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.350	63.507	56.878	-10.493	74.000	6.629	PK
2			5460.000	62.314	55.702	-11.686	74.000	6.612	PK
3			5464.300	64.488	57.895	-3.712	68.200	6.593	PK
4			5470.000	64.129	57.562	-4.071	68.200	6.567	PK
5		*	5511.650	116.214	109.486	N/A	N/A	6.728	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW CDD Mode	

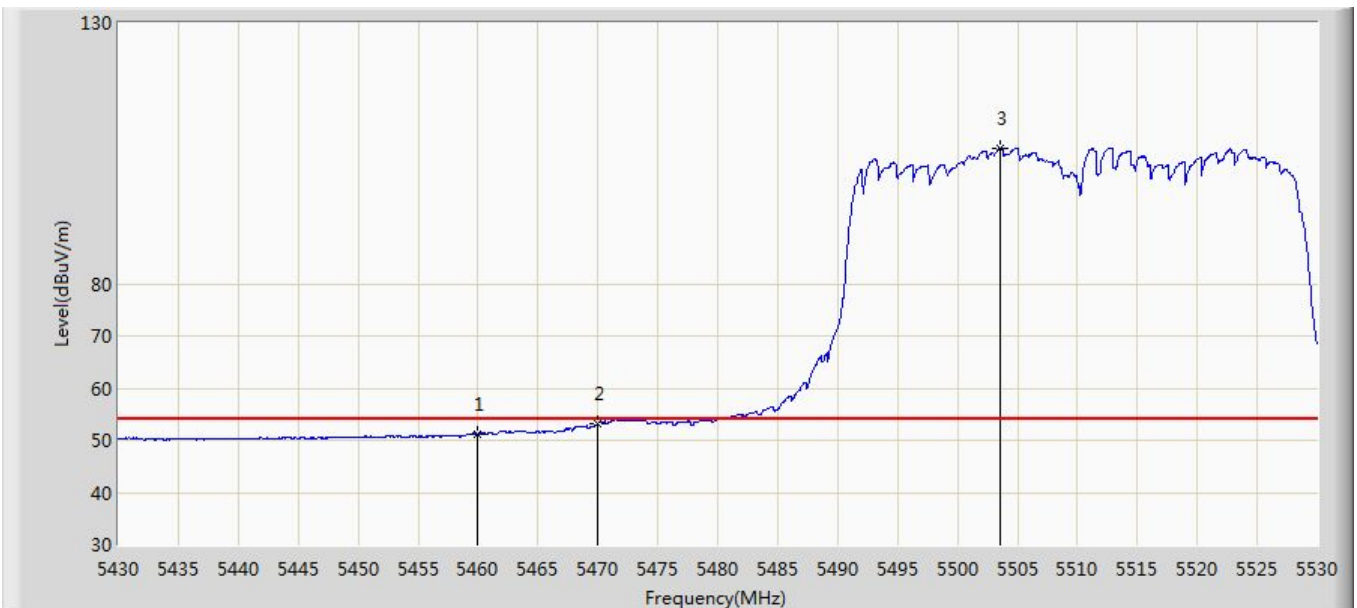


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.191	44.579	-2.809	54.000	6.612	AV
2			5470.000	53.300	46.733	-0.700	54.000	6.567	AV
3		*	5503.550	105.948	99.215	N/A	N/A	6.733	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW CDD Mode	

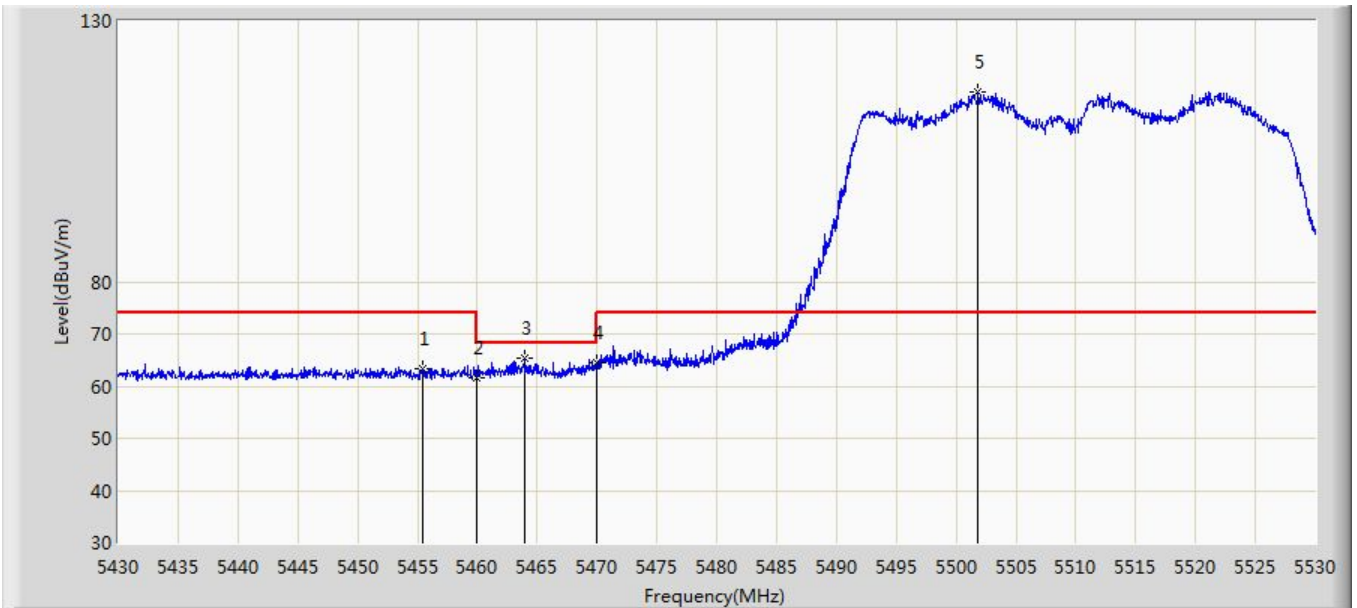


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.450	63.226	56.593	-10.774	74.000	6.633	PK
2			5460.000	61.704	55.092	-12.296	74.000	6.612	PK
3			5464.000	65.371	58.777	-2.829	68.200	6.594	PK
4			5470.000	64.540	57.973	-3.660	68.200	6.567	PK
5		*	5501.800	116.257	109.536	N/A	N/A	6.720	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW CDD Mode	

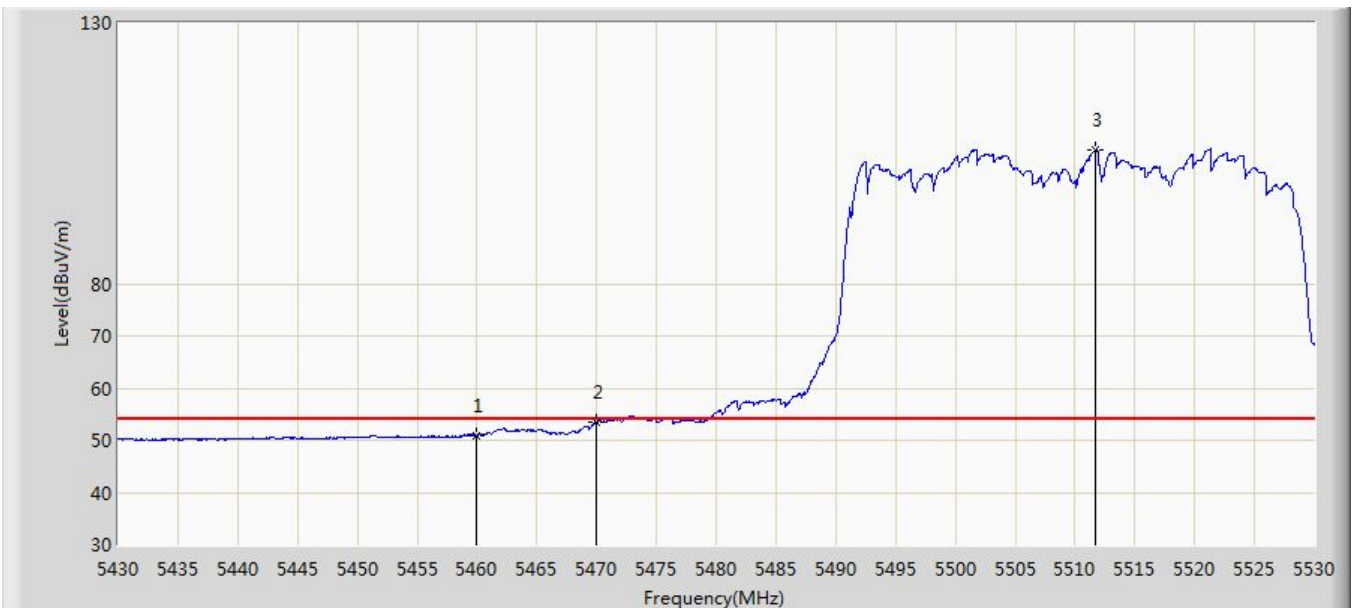


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.847	44.235	-3.153	54.000	6.612	AV
2			5470.000	53.427	46.860	-0.573	54.000	6.567	AV
3		*	5511.700	105.629	98.901	N/A	N/A	6.728	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with DAP646-RW CDD Mode	

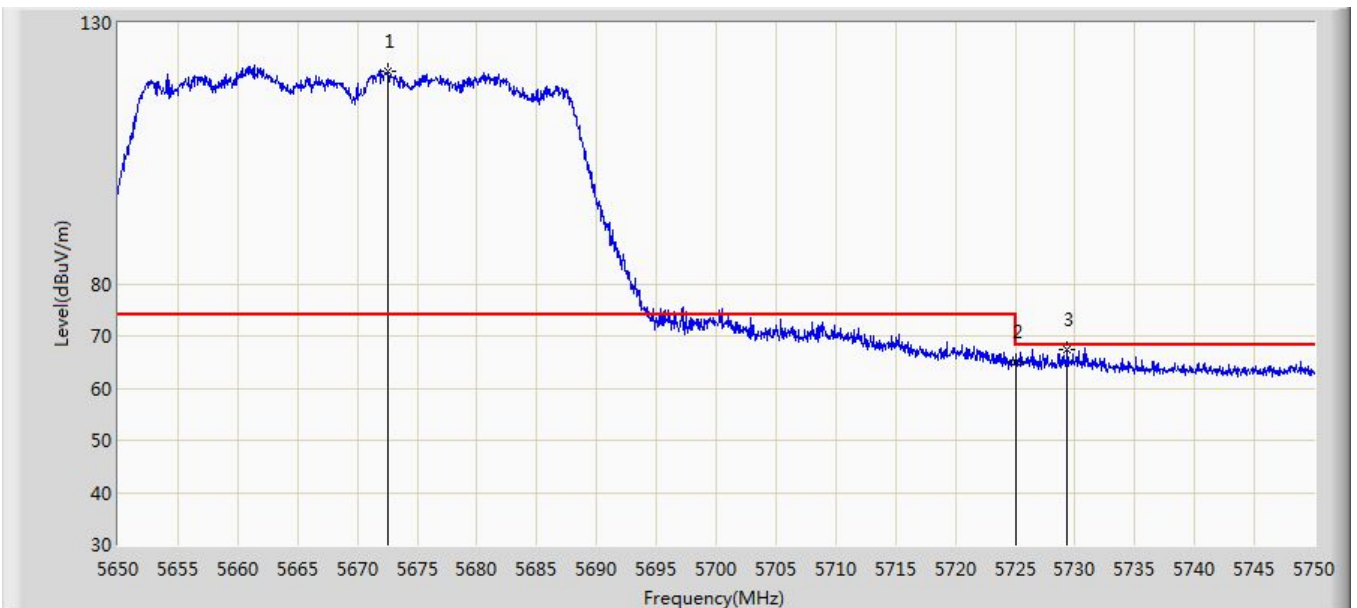


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.500	120.689	113.969	N/A	N/A	6.720	PK
2			5725.000	65.109	58.242	-3.091	68.200	6.867	PK
3			5729.350	67.512	60.629	-0.688	68.200	6.884	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 14:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with DAP646-RW CDD Mode	

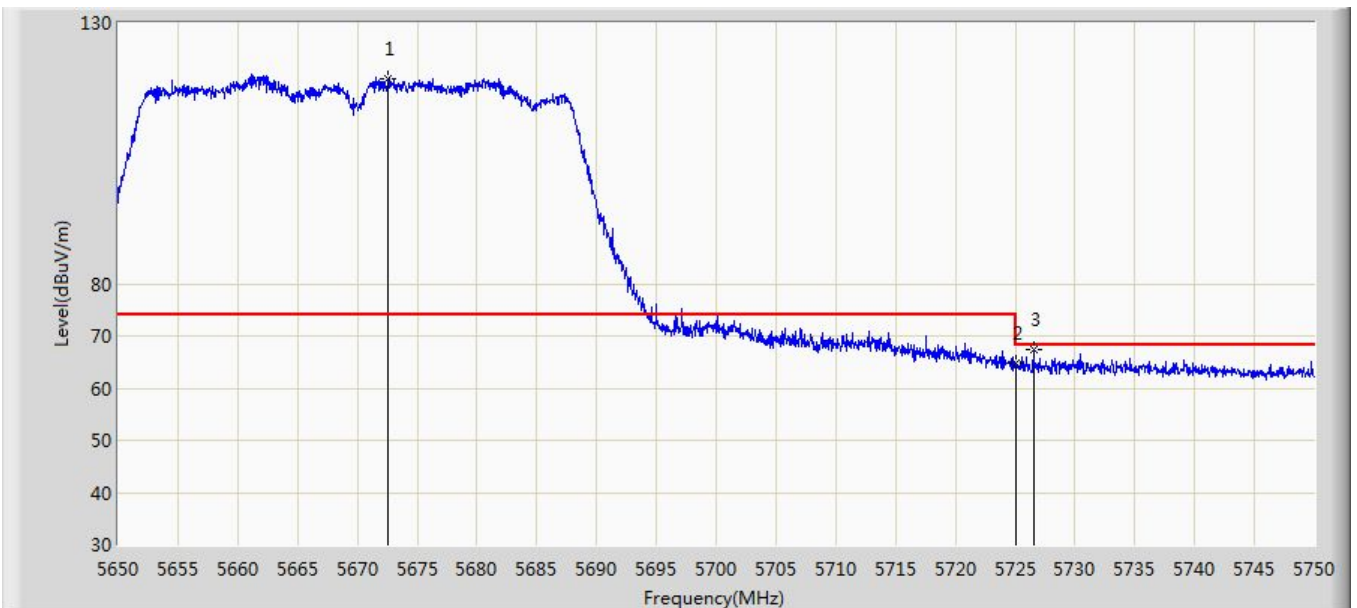


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.550	119.373	112.653	N/A	N/A	6.720	PK
2			5725.000	64.864	57.997	-3.336	68.200	6.867	PK
3			5726.550	67.247	60.383	-0.953	68.200	6.864	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW CDD Mode	

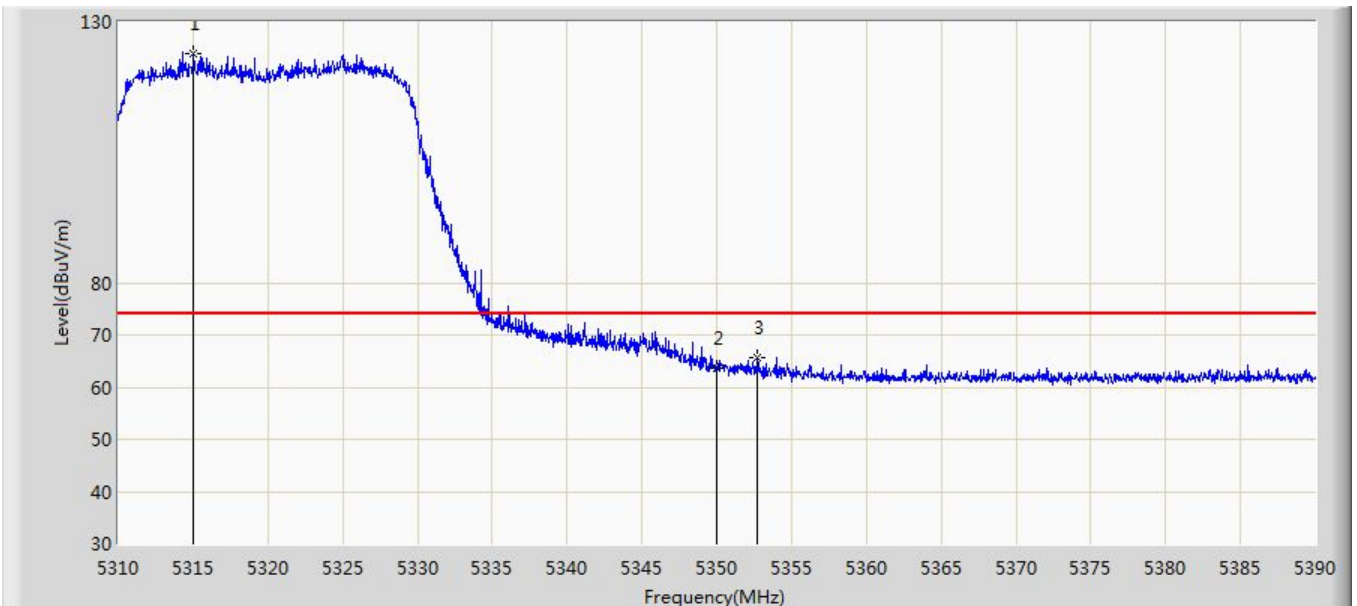


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.040	123.991	117.654	N/A	N/A	6.338	PK
2			5350.000	63.641	57.314	-10.359	74.000	6.327	PK
3			5352.720	65.705	59.373	-8.295	74.000	6.332	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW CDD Mode	

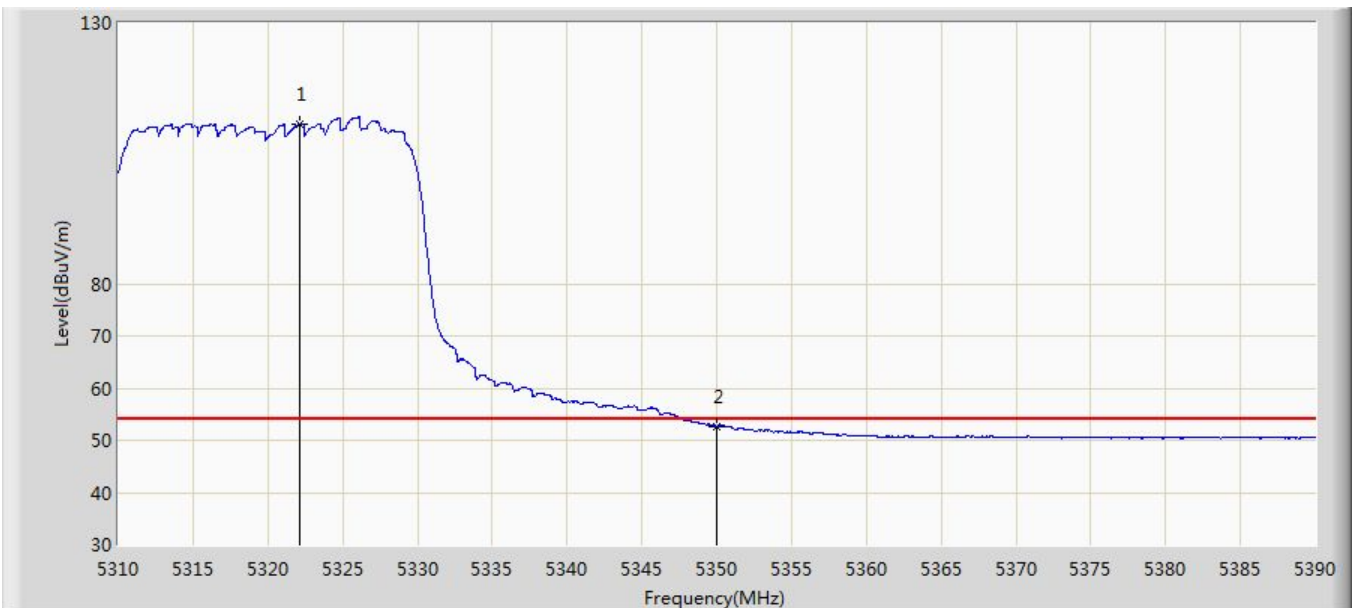


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	5322.160	110.630	104.285	N/A	N/A	6.345	AV
2			5350.000	52.538	46.211	-1.462	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW CDD Mode	

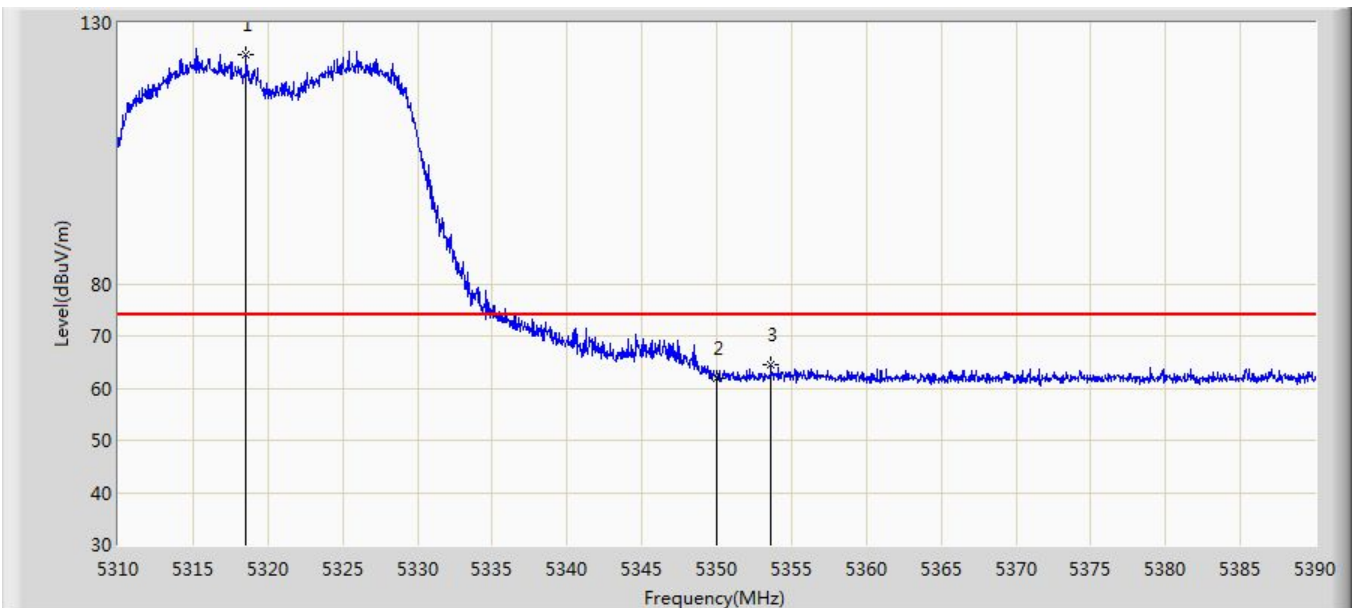


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.560	123.976	117.627	N/A	N/A	6.348	PK
2			5350.000	62.021	55.694	-11.979	74.000	6.327	PK
3			5353.600	64.447	58.109	-9.553	74.000	6.337	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/11/10 - 17:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW CDD Mode	

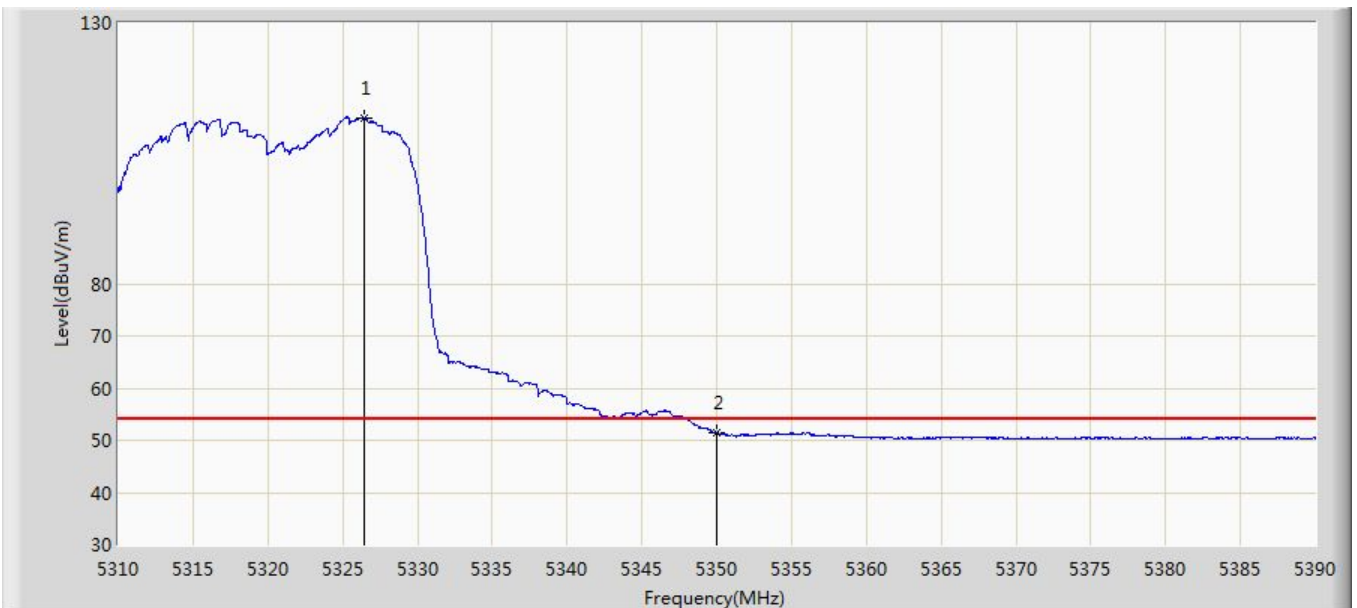


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	5326.440	111.845	105.505	N/A	N/A	6.340	AV
2			5350.000	51.423	45.096	-2.577	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with DAP646-RW CDD Mode	

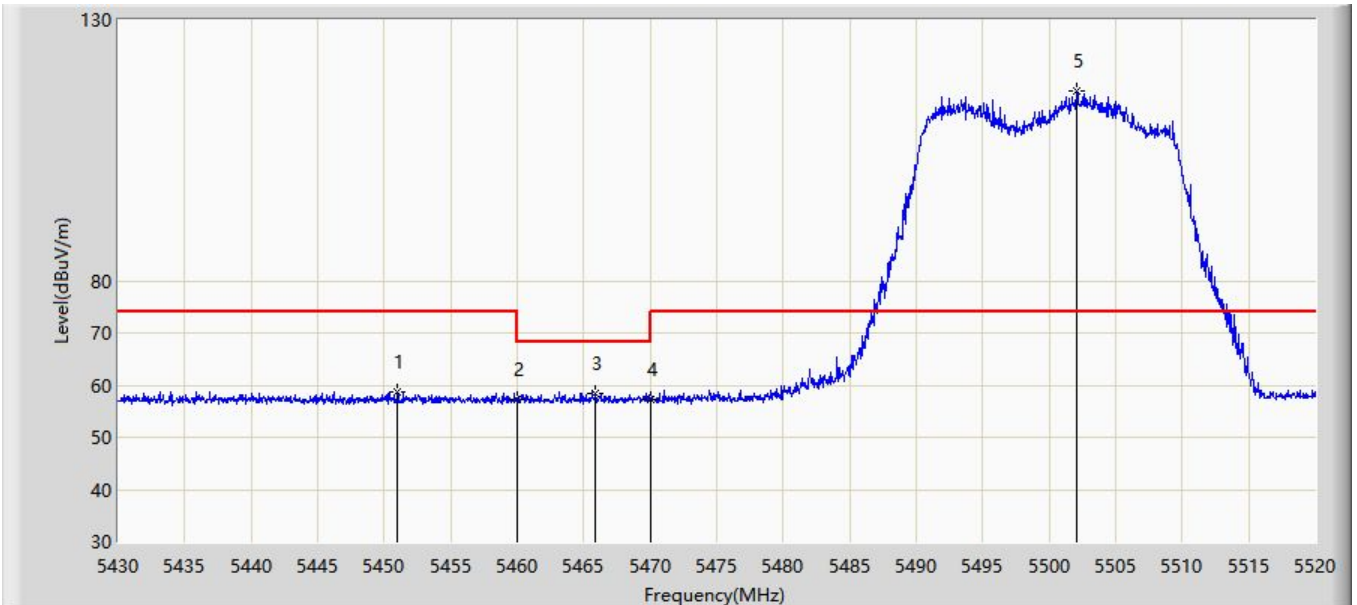


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.015	58.773	54.294	-15.227	74.000	4.479	PK
2			5460.000	57.189	52.749	-16.811	74.000	4.440	PK
3			5465.865	58.525	54.076	-9.675	68.200	4.449	PK
4			5470.000	57.310	52.854	-10.890	68.200	4.455	PK
5		*	5502.090	116.348	111.890	N/A	N/A	4.458	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with DAP646-RW CDD Mode	

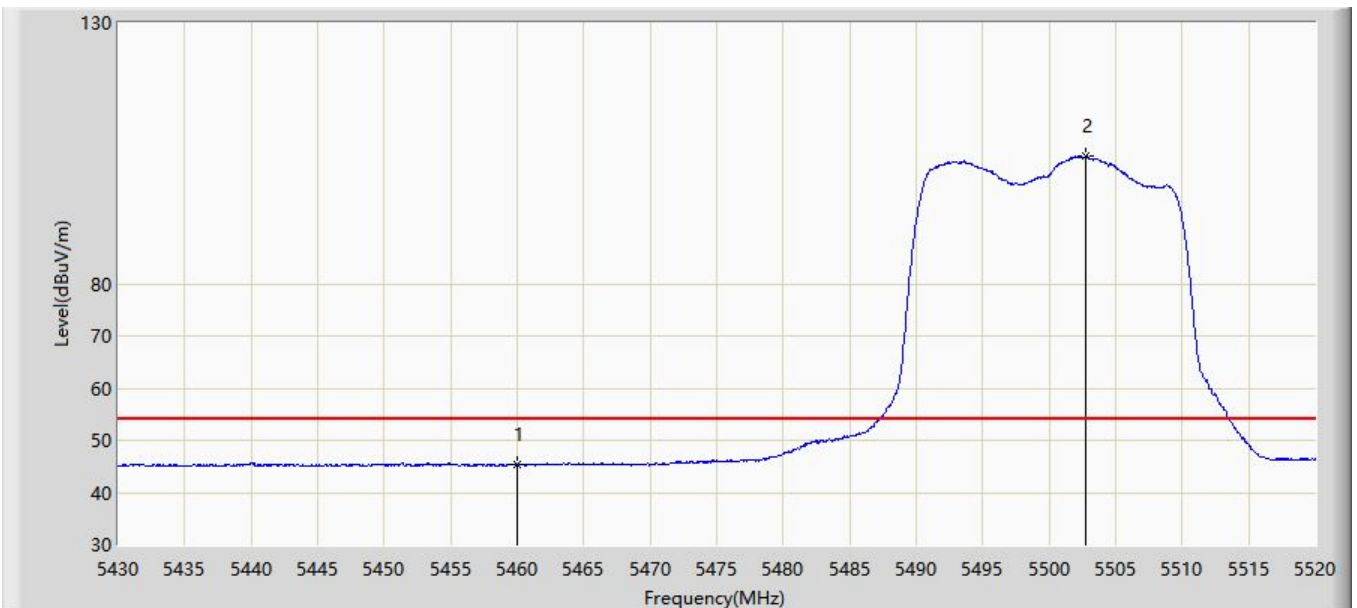


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.261	40.821	-8.739	54.000	4.440	AV
2		*	5502.765	104.425	99.974	N/A	N/A	4.452	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with DAP646-RW CDD Mode	

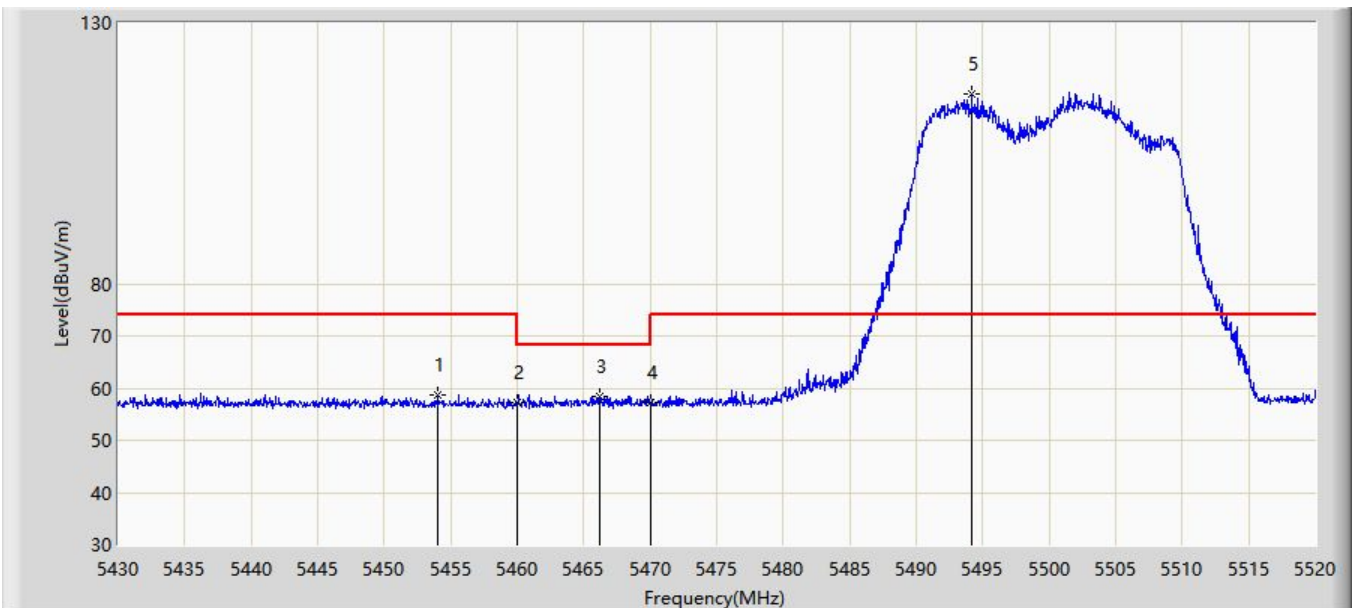


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.075	58.746	54.315	-15.254	74.000	4.430	PK
2			5460.000	57.132	52.692	-16.868	74.000	4.440	PK
3			5466.225	58.472	54.022	-9.728	68.200	4.449	PK
4			5470.000	57.308	52.852	-10.892	68.200	4.455	PK
5		*	5494.170	116.518	111.988	N/A	N/A	4.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with DAP646-RW CDD Mode	

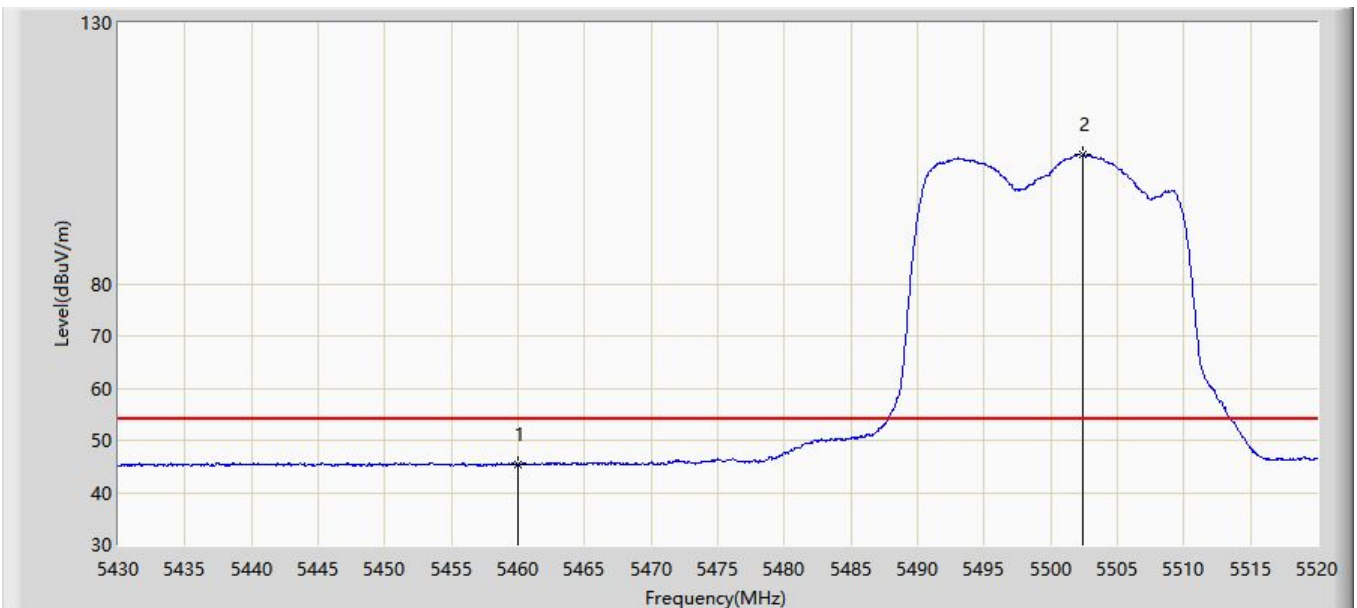


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.433	40.993	-8.567	54.000	4.440	AV
2		*	5502.405	104.710	100.255	N/A	N/A	4.454	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:24
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with DAP646-RW CDD Mode	

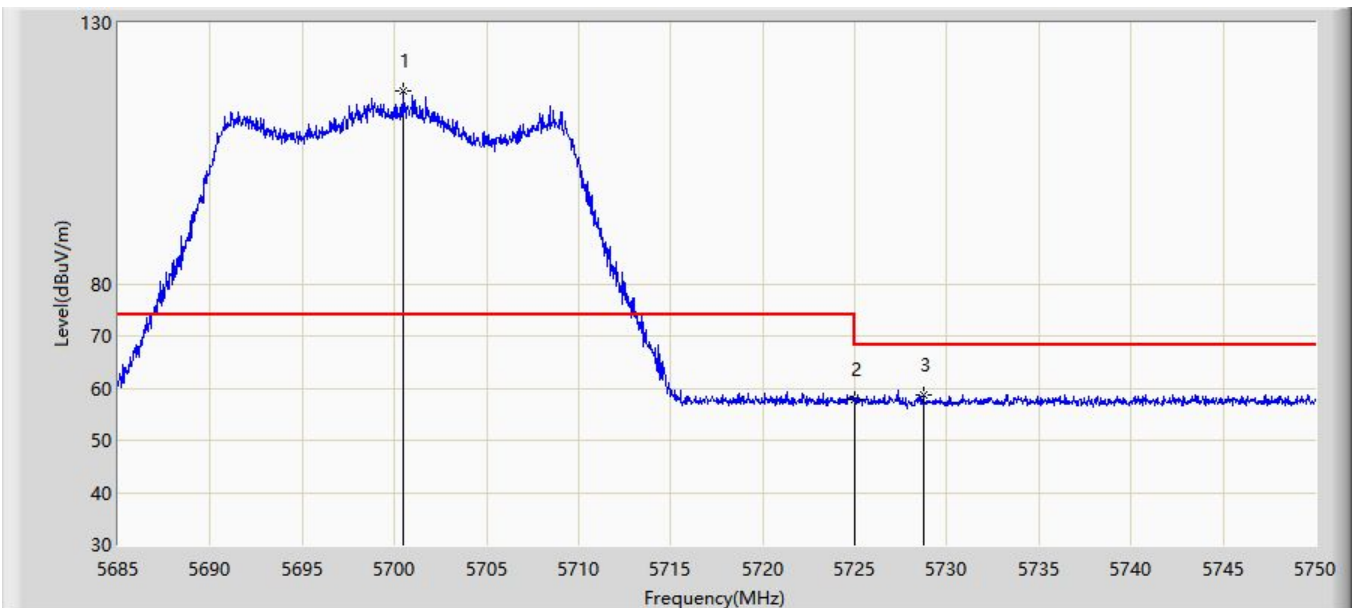


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5700.437	117.038	111.713	N/A	N/A	5.326	PK
2			5725.000	57.872	52.394	-10.328	68.200	5.478	PK
3			5728.712	58.800	53.307	-9.400	68.200	5.493	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with DAP646-RW CDD Mode	

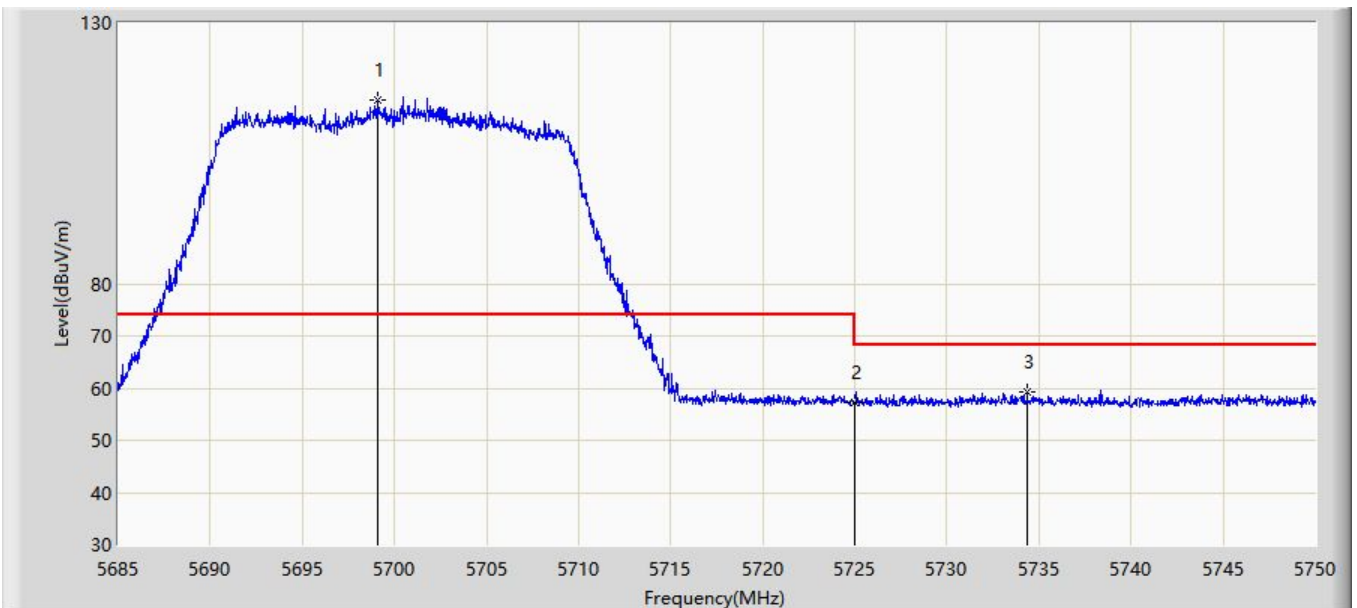


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5699.072	115.118	109.815	N/A	N/A	5.303	PK
2			5725.000	57.168	51.690	-11.032	68.200	5.478	PK
3			5734.368	59.208	53.685	-8.992	68.200	5.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz with DAP646-RW CDD Mode	

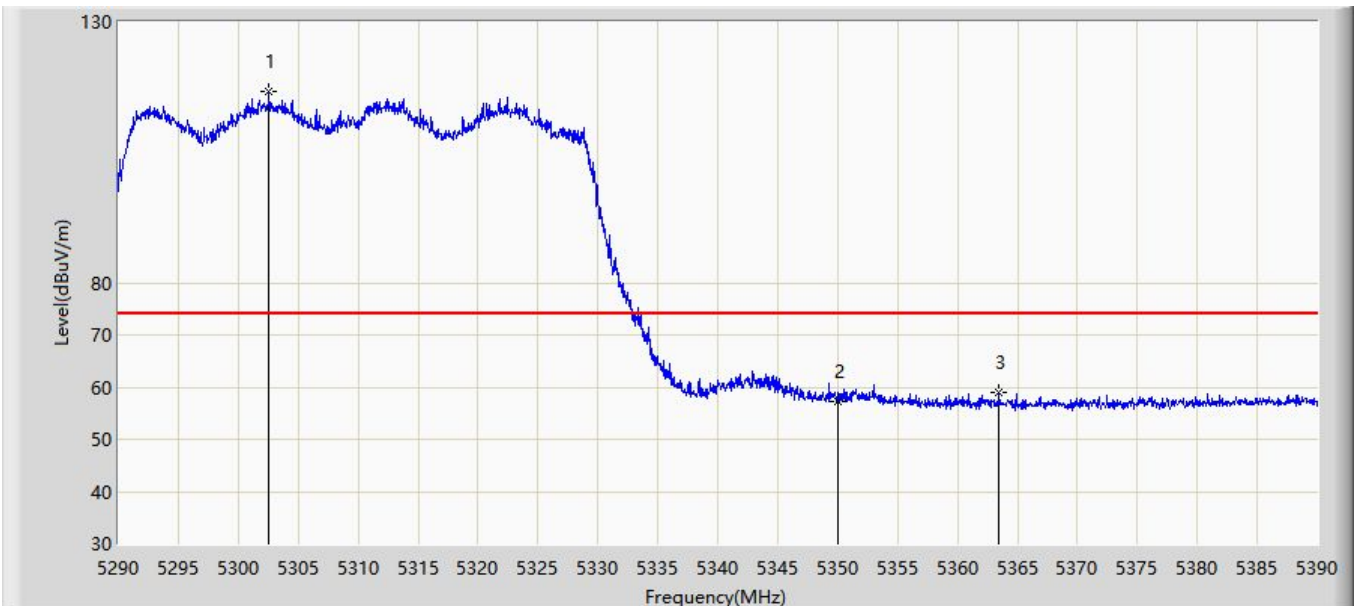


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.550	116.550	112.159	N/A	N/A	4.391	PK
2			5350.000	57.253	53.076	-16.747	74.000	4.177	PK
3			5363.450	58.842	54.615	-15.158	74.000	4.228	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz with DAP646-RW CDD Mode	

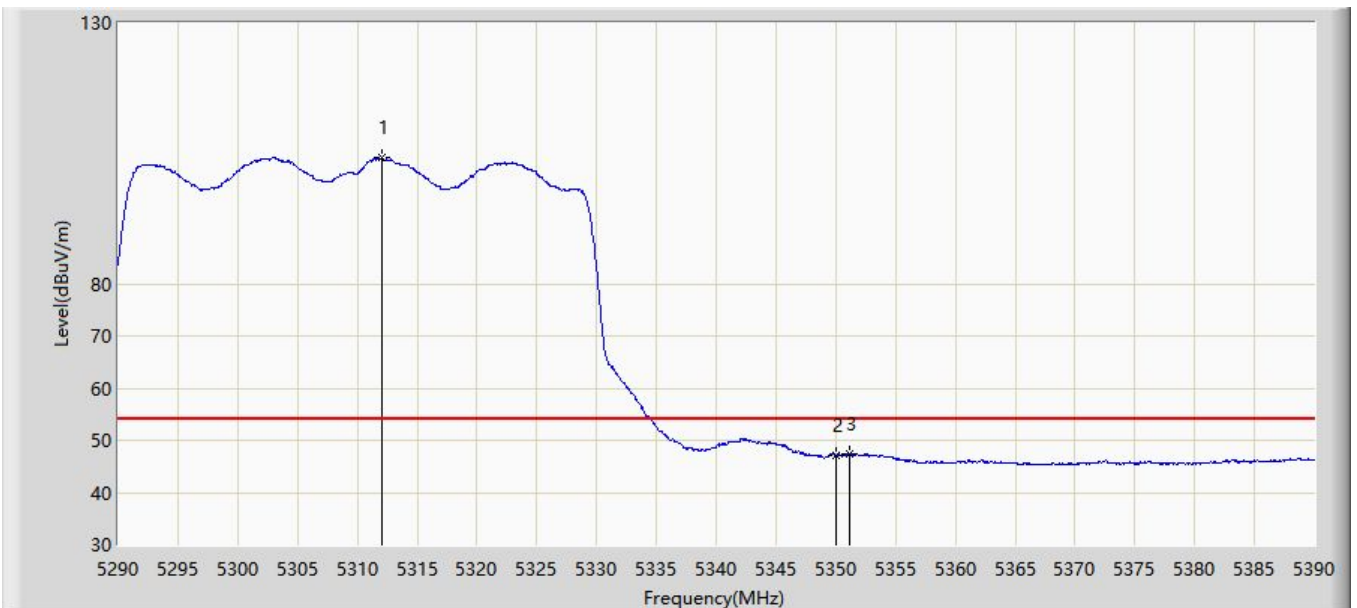


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.050	104.091	99.896	N/A	N/A	4.194	AV
2			5350.000	47.068	42.891	-6.932	54.000	4.177	AV
3			5351.150	47.420	43.235	-6.580	54.000	4.185	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz with DAP646-RW CDD Mode	

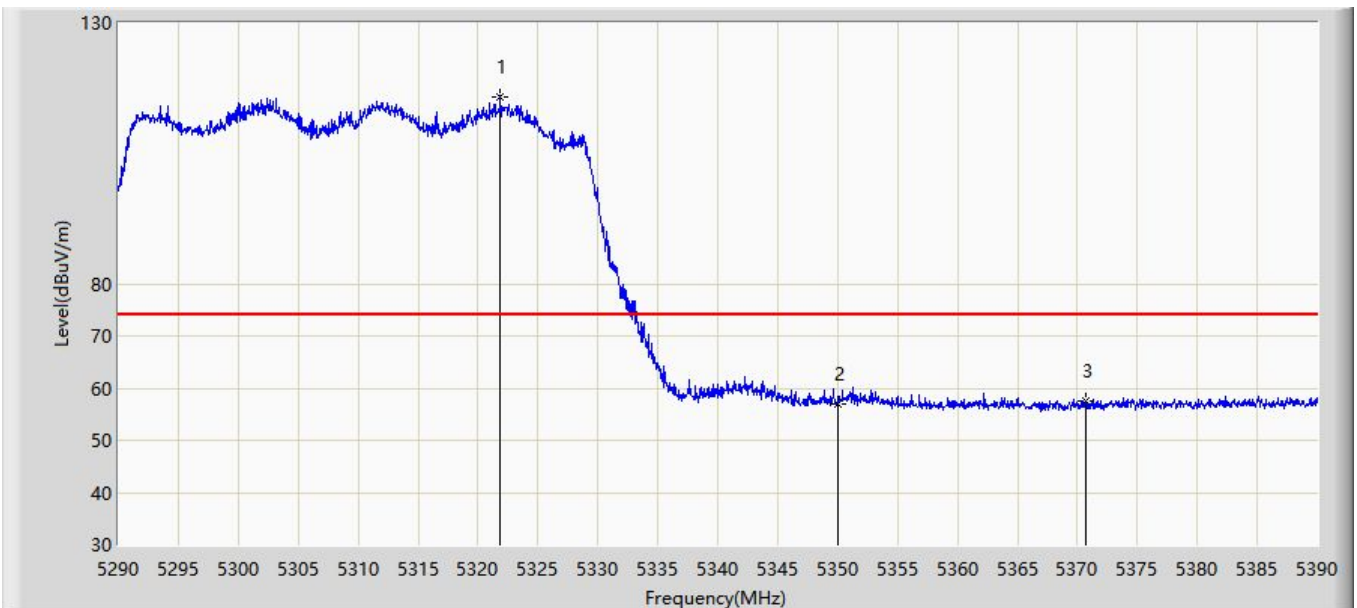


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.850	115.942	111.870	N/A	N/A	4.073	PK
2			5350.000	56.996	52.819	-17.004	74.000	4.177	PK
3			5370.650	57.417	53.136	-16.583	74.000	4.280	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:45
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz with DAP646-RW CDD Mode	

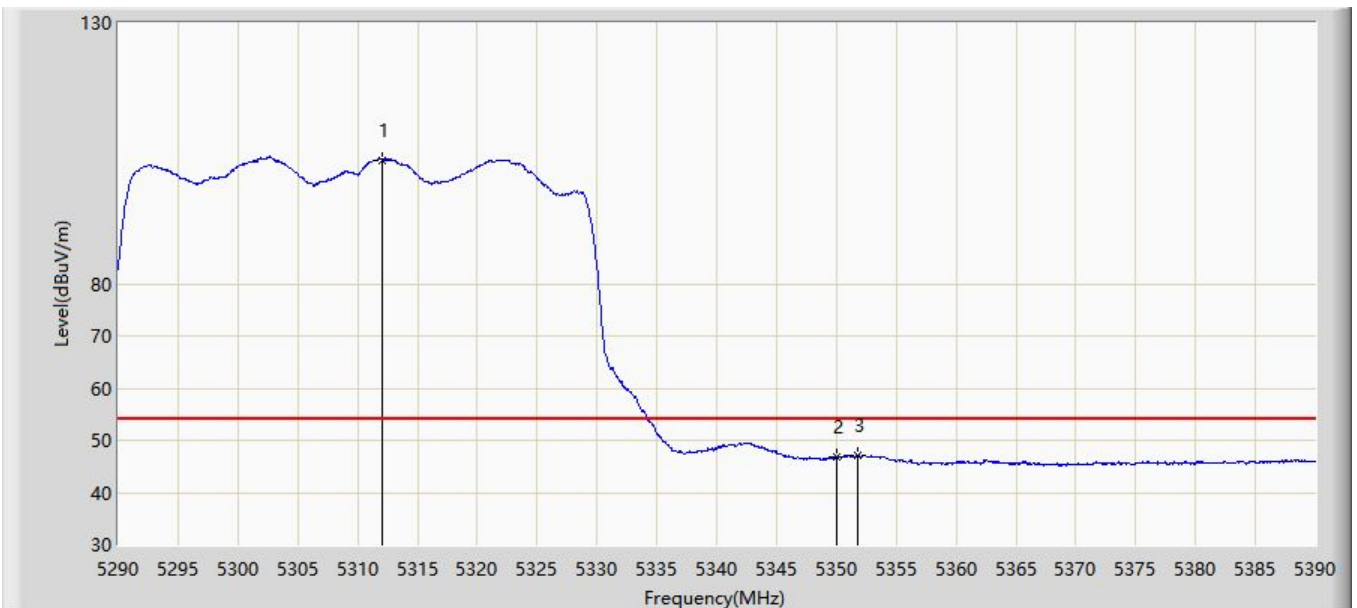


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.050	103.706	99.511	N/A	N/A	4.194	AV
2			5350.000	46.906	42.729	-7.094	54.000	4.177	AV
3			5351.800	47.219	43.030	-6.781	54.000	4.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz with DAP646-RW CDD Mode	

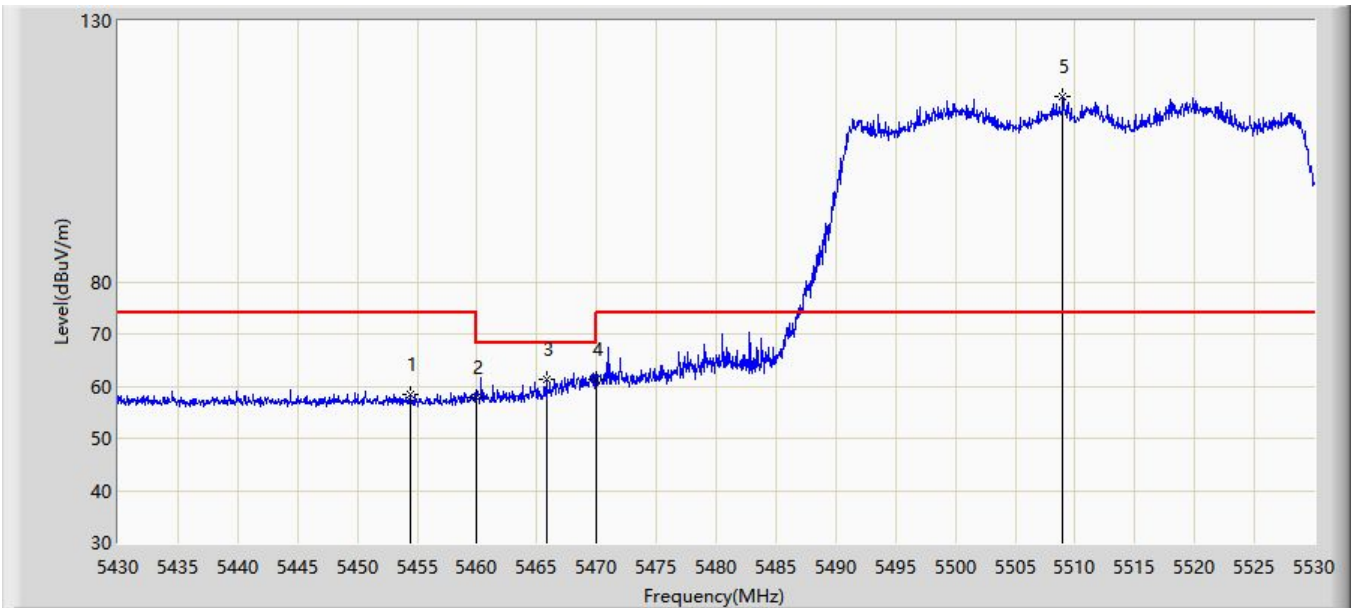


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.400	58.333	53.902	-15.667	74.000	4.431	PK
2			5460.000	57.683	53.243	-16.317	74.000	4.440	PK
3			5465.800	61.363	56.914	-6.837	68.200	4.449	PK
4			5470.000	61.316	56.860	-6.884	68.200	4.455	PK
5		*	5509.000	115.458	110.930	N/A	N/A	4.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz with DAP646-RW CDD Mode	

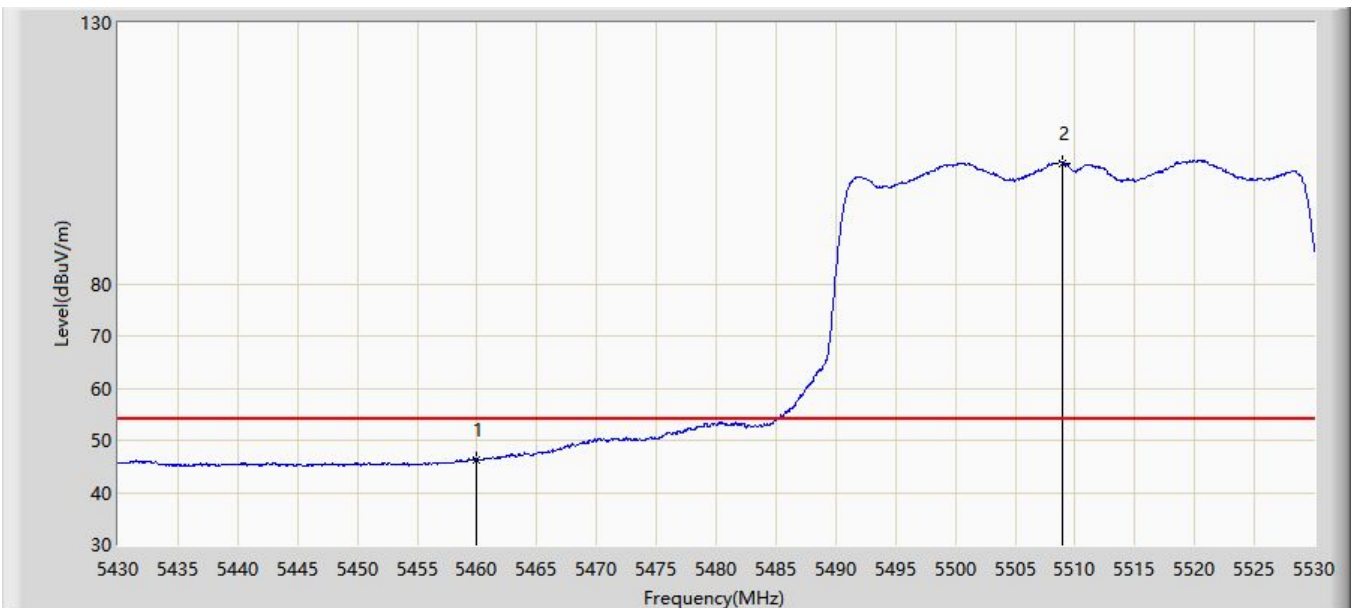


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.250	41.810	-7.750	54.000	4.440	AV
2		*	5508.950	103.179	98.652	N/A	N/A	4.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz with DAP646-RW CDD Mode	

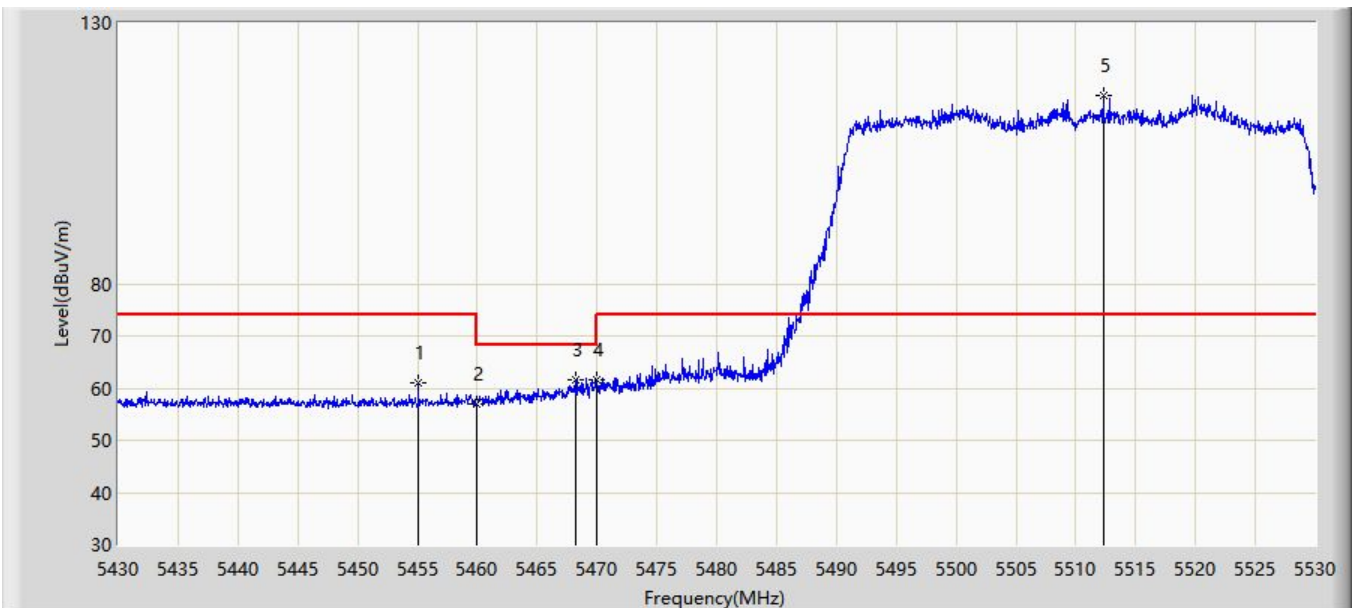


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.050	61.147	56.715	-12.853	74.000	4.432	PK
2			5460.000	57.049	52.609	-16.951	74.000	4.440	PK
3			5468.250	61.648	57.195	-6.552	68.200	4.453	PK
4			5470.000	61.476	57.020	-6.724	68.200	4.455	PK
5		*	5512.300	115.981	111.372	N/A	N/A	4.609	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:50
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz with DAP646-RW CDD Mode	

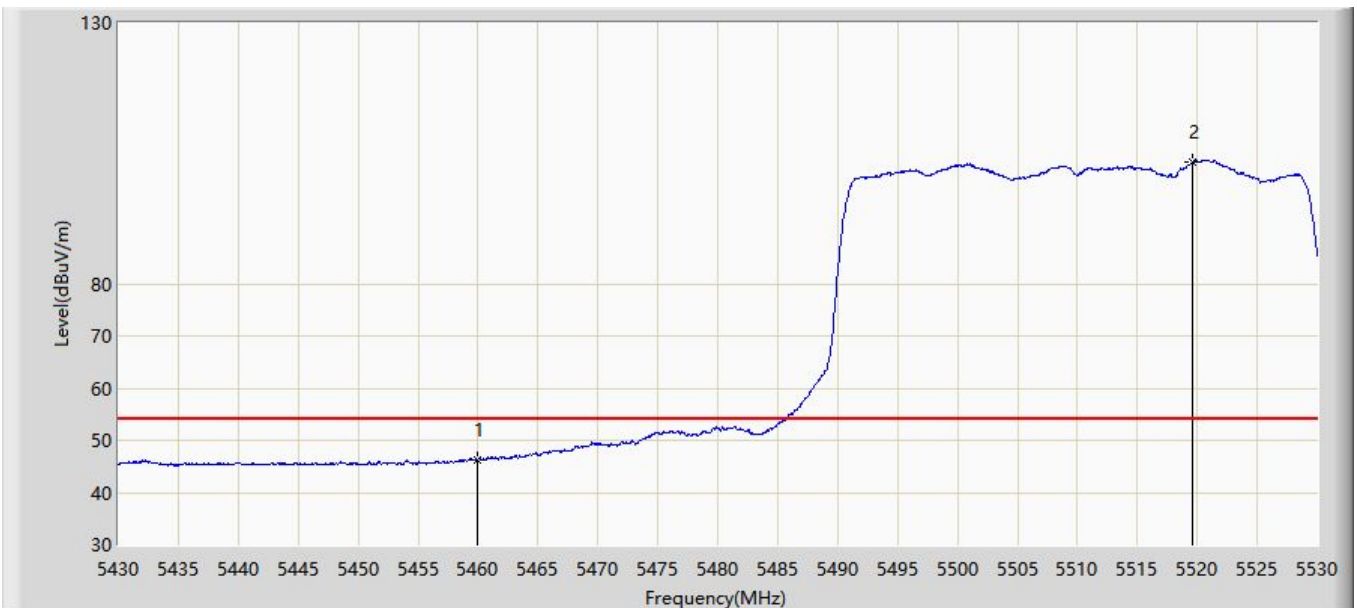


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.242	41.802	-7.758	54.000	4.440	AV
2		*	5519.650	103.448	98.661	N/A	N/A	4.788	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz with DAP646-RW CDD Mode	

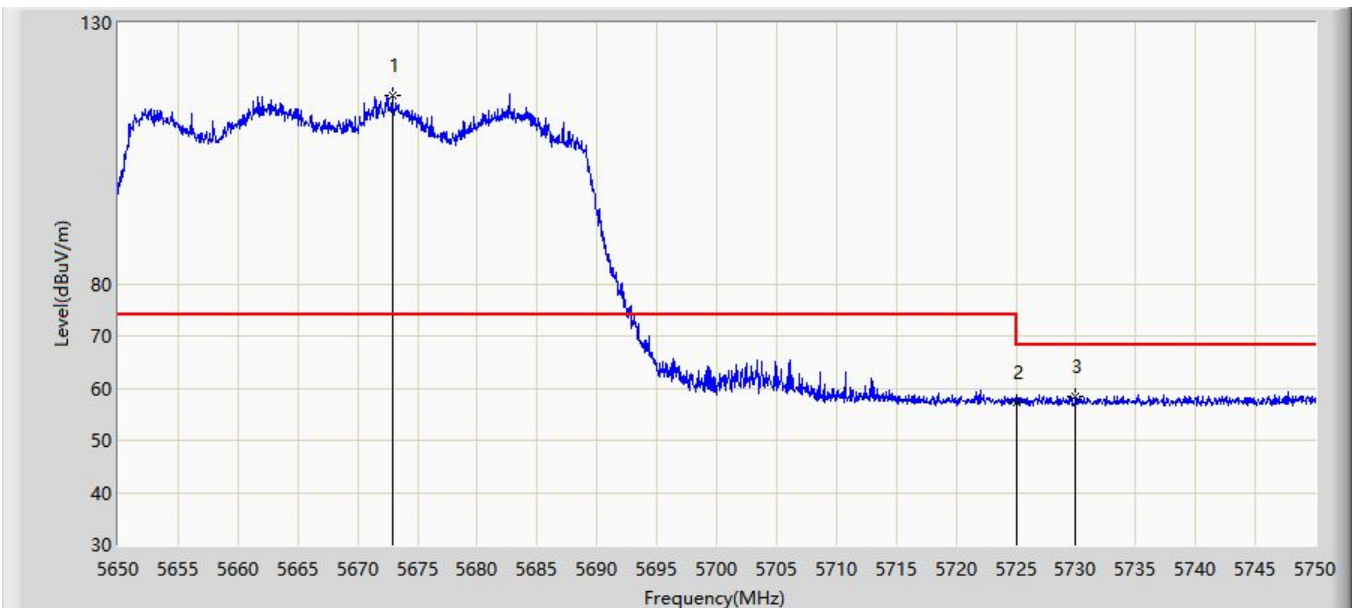


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.900	116.151	110.723	N/A	N/A	5.428	PK
2			5725.000	57.386	51.908	-10.814	68.200	5.478	PK
3			5729.950	58.508	53.009	-9.692	68.200	5.499	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 00:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz with DAP646-RW CDD Mode	

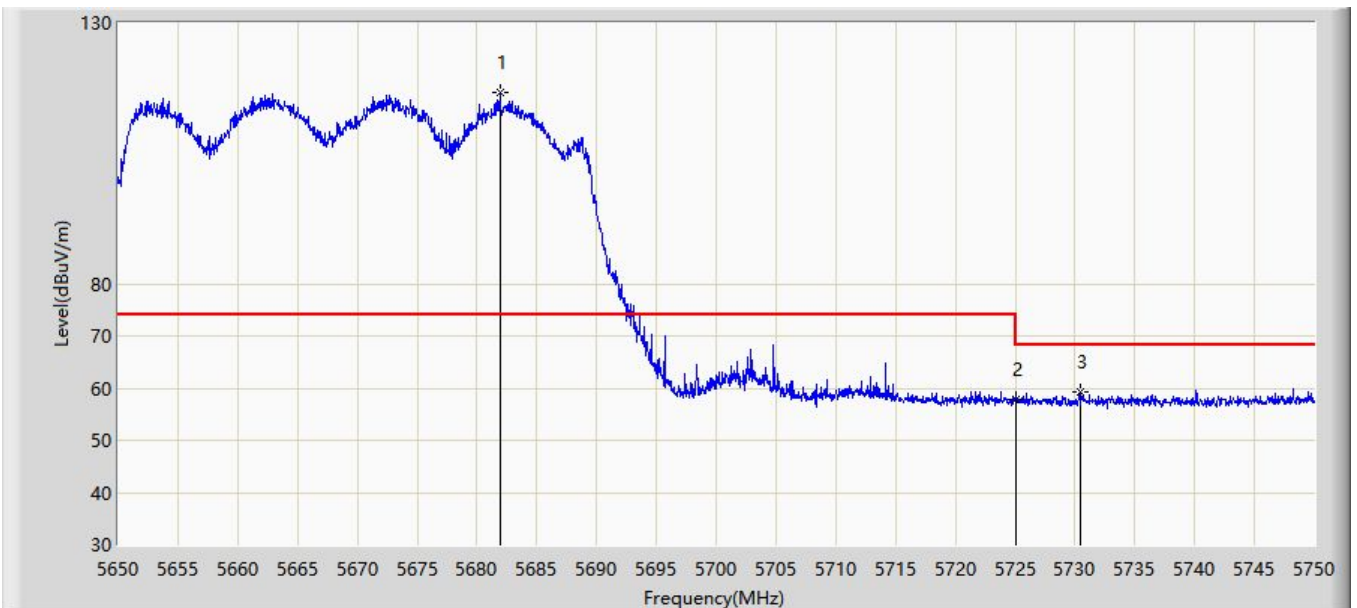


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5681.900	116.670	111.343	N/A	N/A	5.326	PK
2			5725.000	57.898	52.420	-10.302	68.200	5.478	PK
3			5730.400	59.303	53.801	-8.897	68.200	5.502	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:04
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with DAP646-RW CDD Mode	

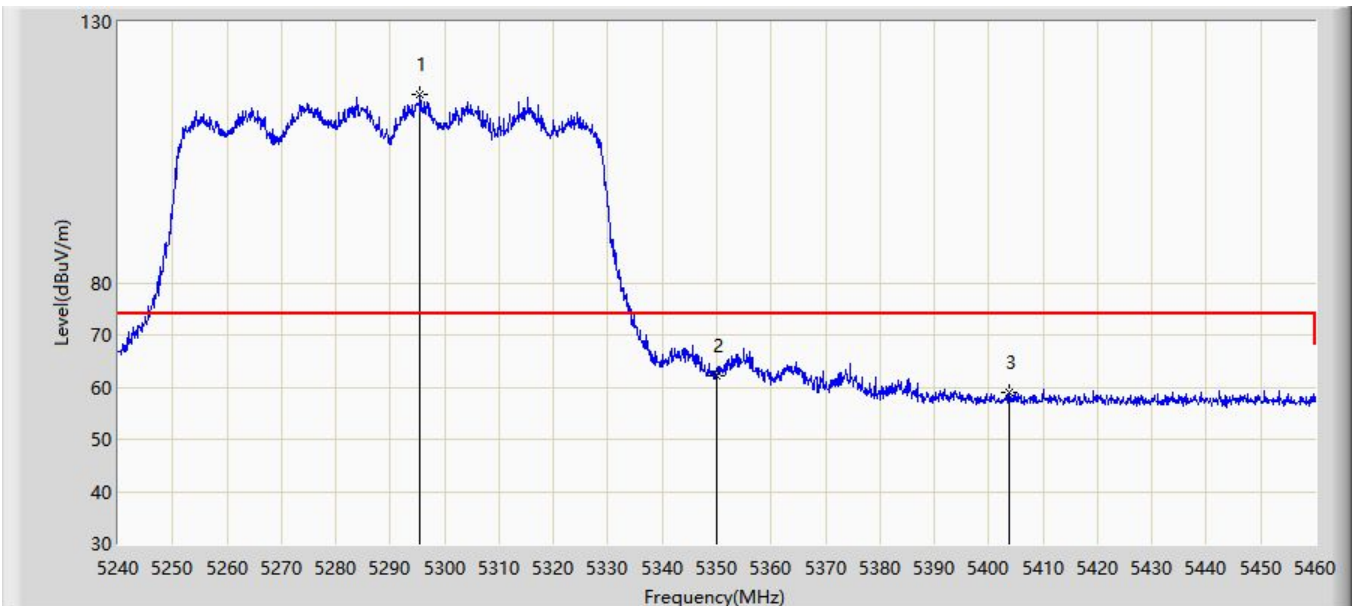


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.550	116.034	111.642	N/A	N/A	4.392	PK
2			5350.000	62.056	57.879	-11.944	74.000	4.177	PK
3			5403.680	59.117	54.450	-14.883	74.000	4.667	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with DAP646-RW CDD Mode	

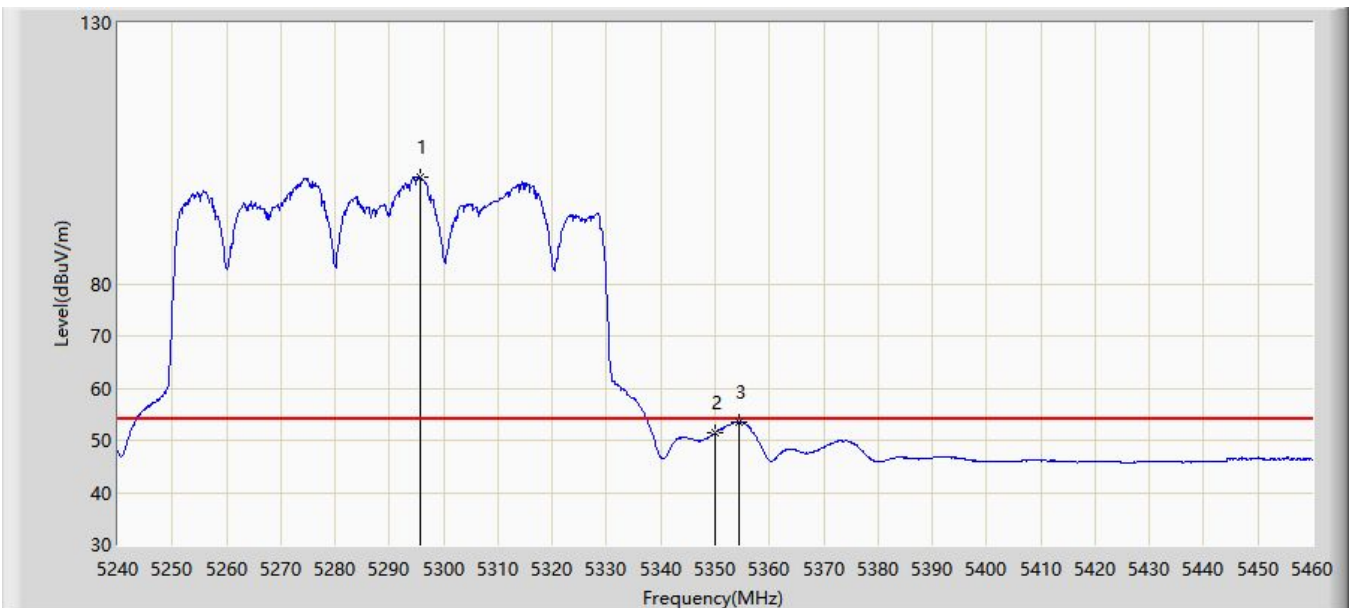


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.660	100.509	96.116	N/A	N/A	4.393	AV
2			5350.000	51.473	47.296	-2.527	54.000	4.177	AV
3			5354.510	53.450	49.251	-0.550	54.000	4.199	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with DAP646-RW CDD Mode	

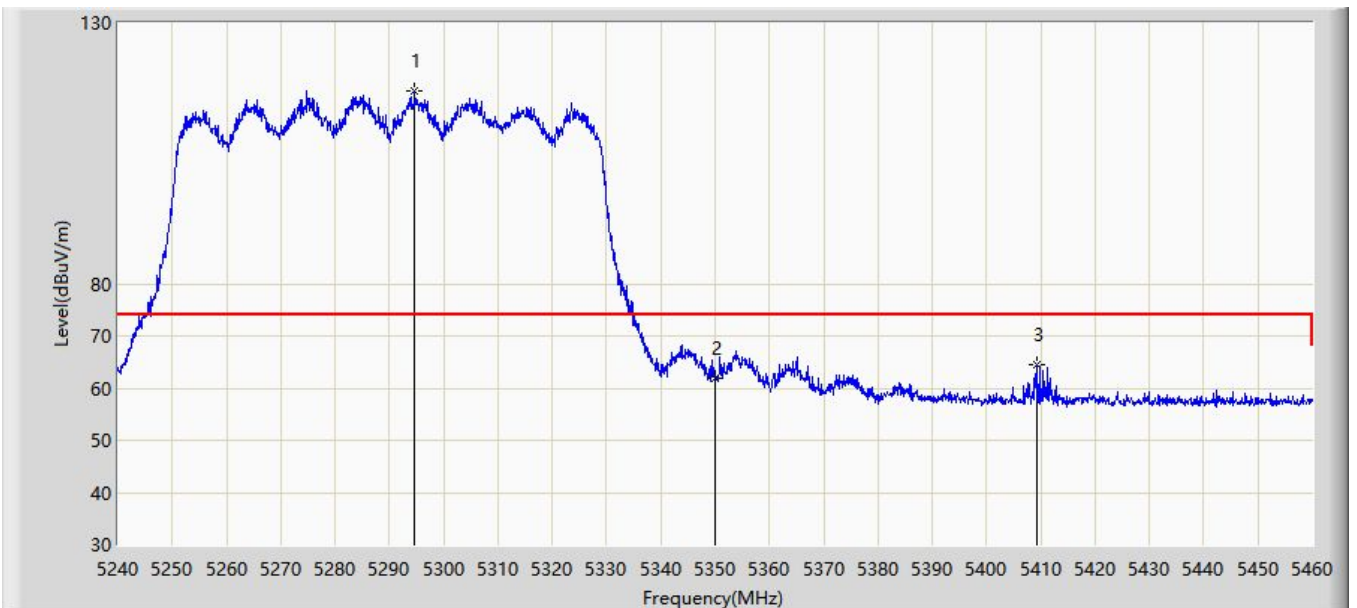


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.670	116.965	112.577	N/A	N/A	4.388	PK
2			5350.000	61.981	57.804	-12.019	74.000	4.177	PK
3			5409.180	64.623	59.963	-9.377	74.000	4.660	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with DAP646-RW CDD Mode	

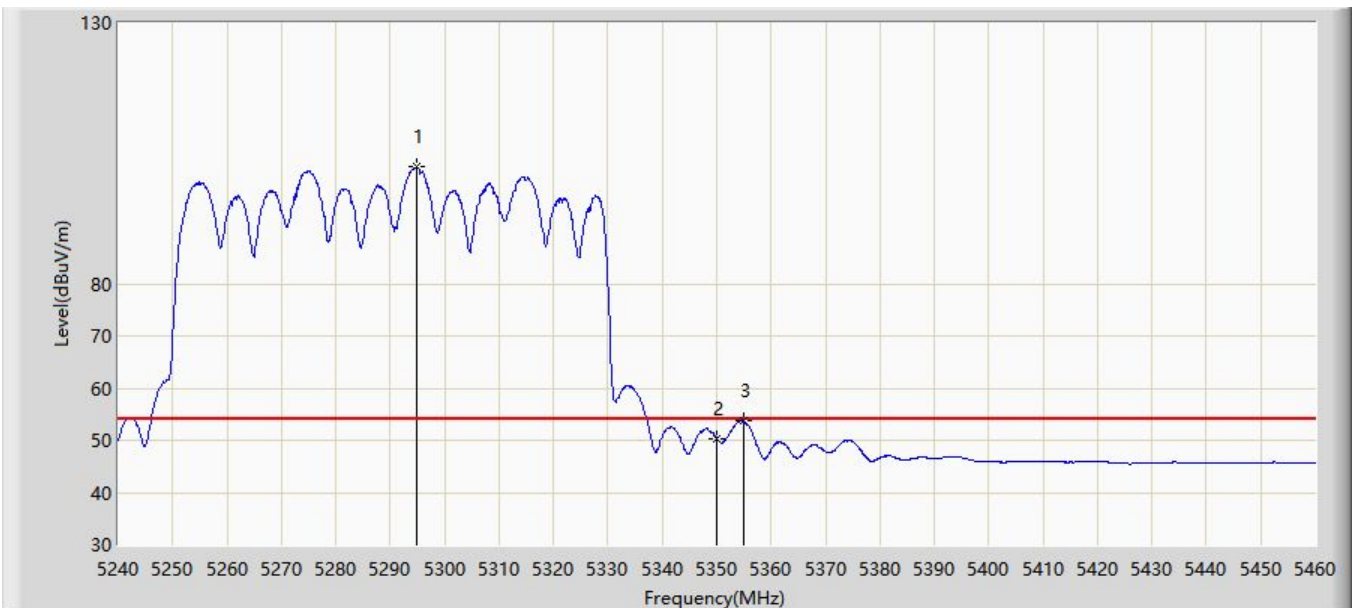


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.780	102.322	97.934	N/A	N/A	4.388	AV
2			5350.000	50.289	46.112	-3.711	54.000	4.177	AV
3			5354.840	53.638	49.438	-0.362	54.000	4.201	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with DAP646-RW CDD Mode	

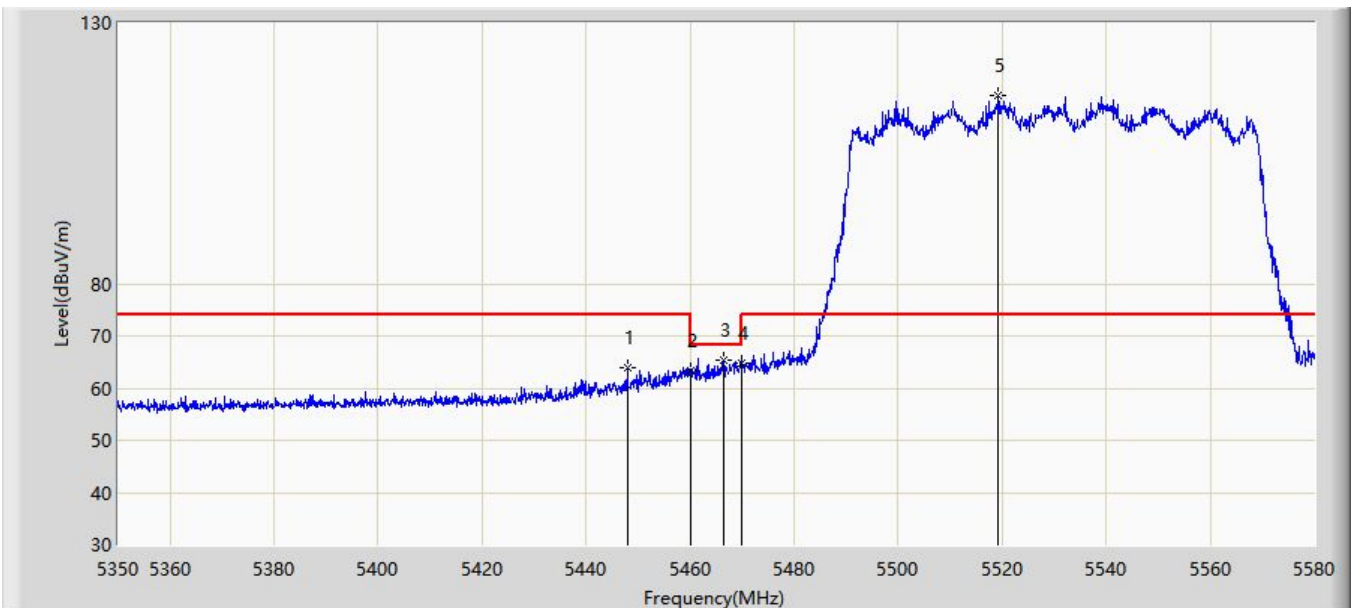


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.865	63.878	59.347	-10.122	74.000	4.531	PK
2			5460.000	63.477	59.037	-10.523	74.000	4.440	PK
3			5466.495	65.337	60.887	-2.863	68.200	4.451	PK
4			5470.000	64.776	60.320	-3.424	68.200	4.455	PK
5		*	5519.280	116.186	111.408	N/A	N/A	4.778	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with DAP646-RW CDD Mode	

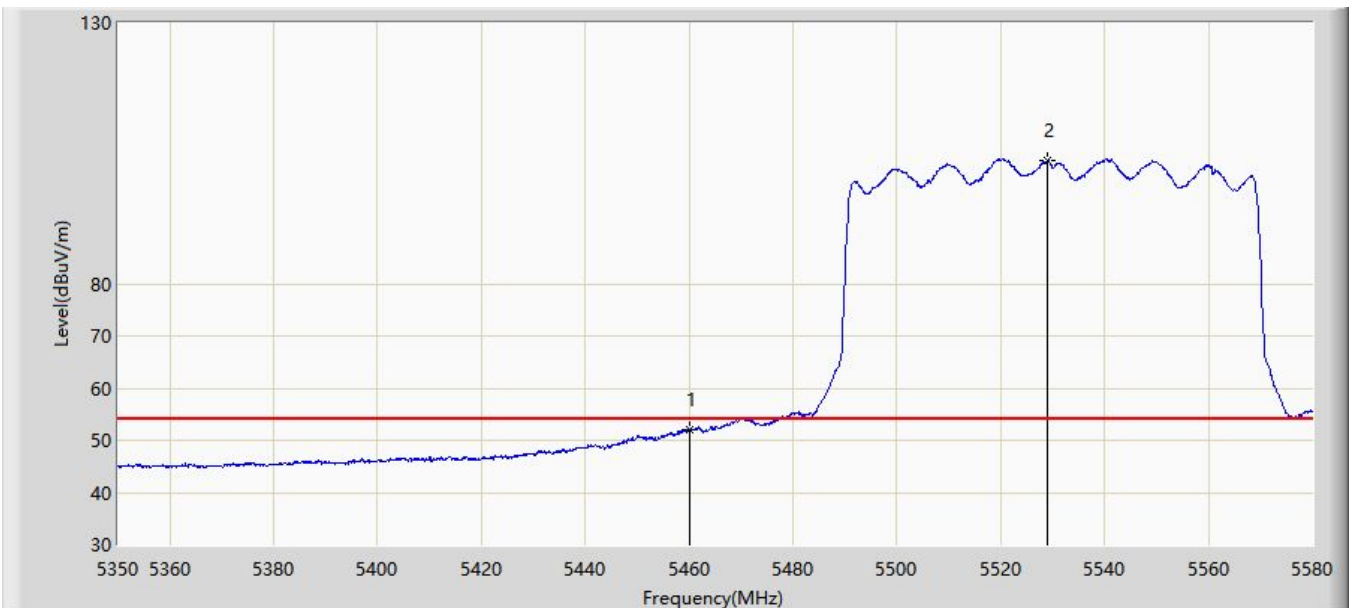


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	52.122	47.682	-1.878	54.000	4.440	AV
2		*	5528.940	103.650	98.770	N/A	N/A	4.879	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with DAP646-RW CDD Mode	

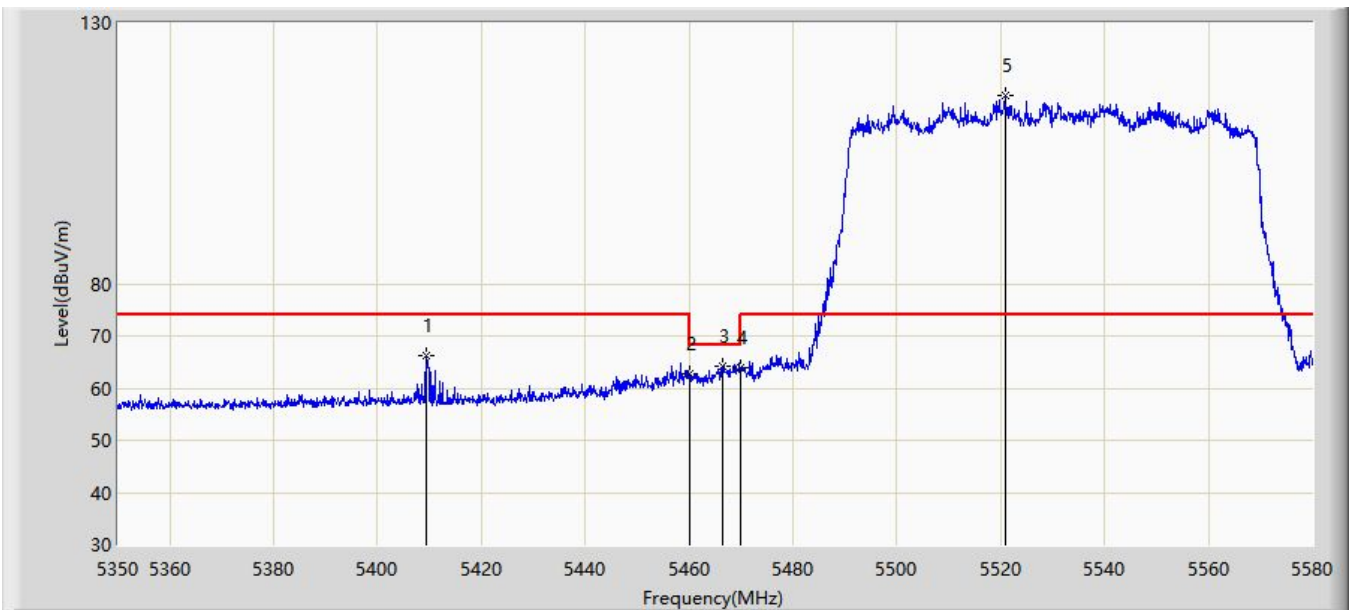


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5409.455	66.294	61.634	-7.706	74.000	4.660	PK
2			5460.000	62.818	58.378	-11.182	74.000	4.440	PK
3			5466.380	64.067	59.617	-4.133	68.200	4.450	PK
4			5470.000	63.852	59.396	-4.348	68.200	4.455	PK
5		*	5520.775	116.099	111.284	N/A	N/A	4.815	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with DAP646-RW CDD Mode	

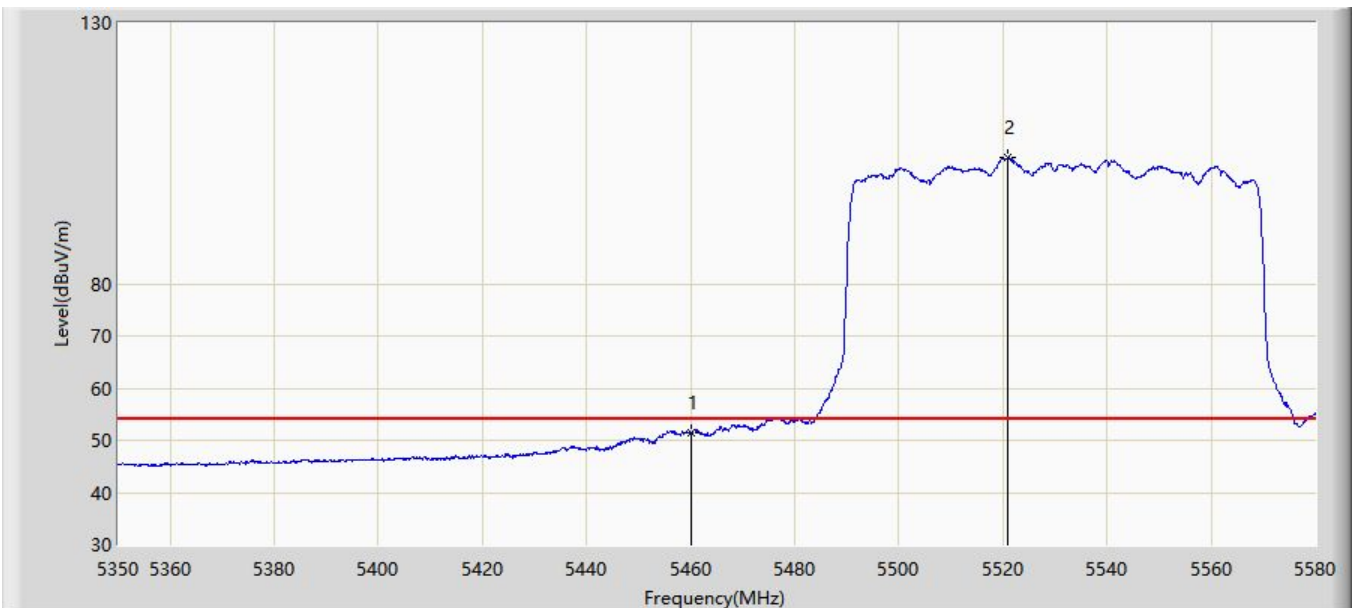


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.516	47.076	-2.484	54.000	4.440	AV
2		*	5520.890	104.113	99.295	N/A	N/A	4.818	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with DAP646-RW CDD Mode	

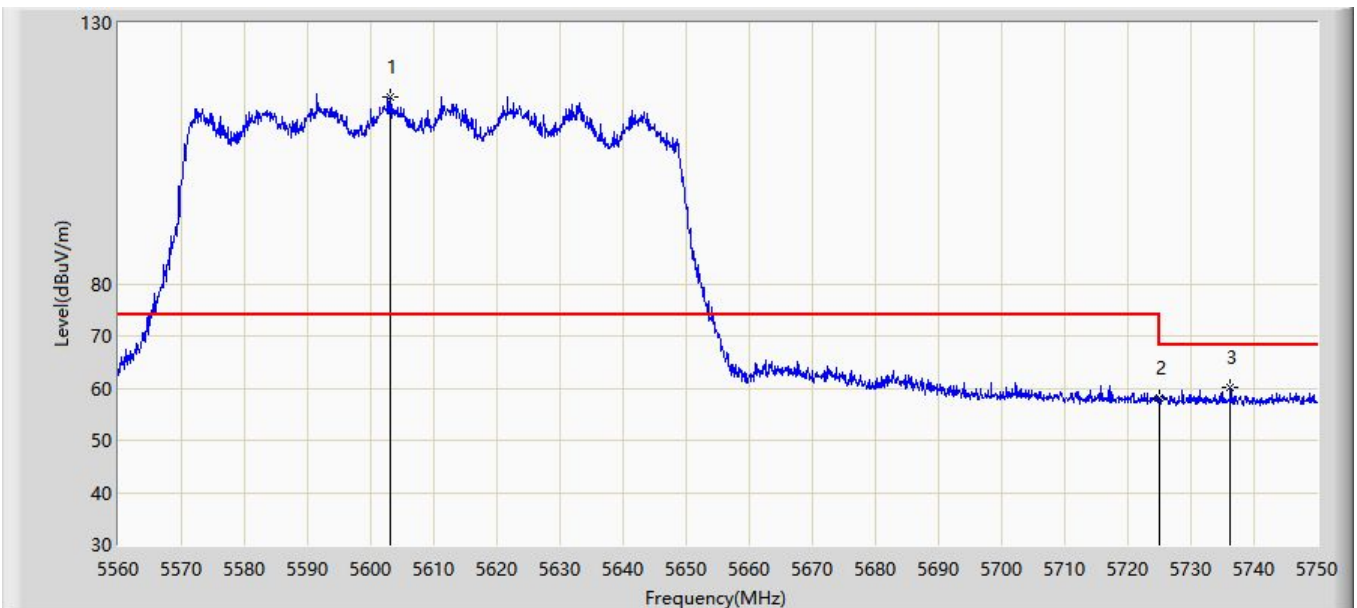


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5603.035	115.793	110.904	N/A	N/A	4.889	PK
2			5725.000	58.073	52.595	-10.127	68.200	5.478	PK
3			5736.225	60.005	54.473	-8.195	68.200	5.532	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/03/07 - 01:16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dillon Diao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with DAP646-RW CDD Mode	

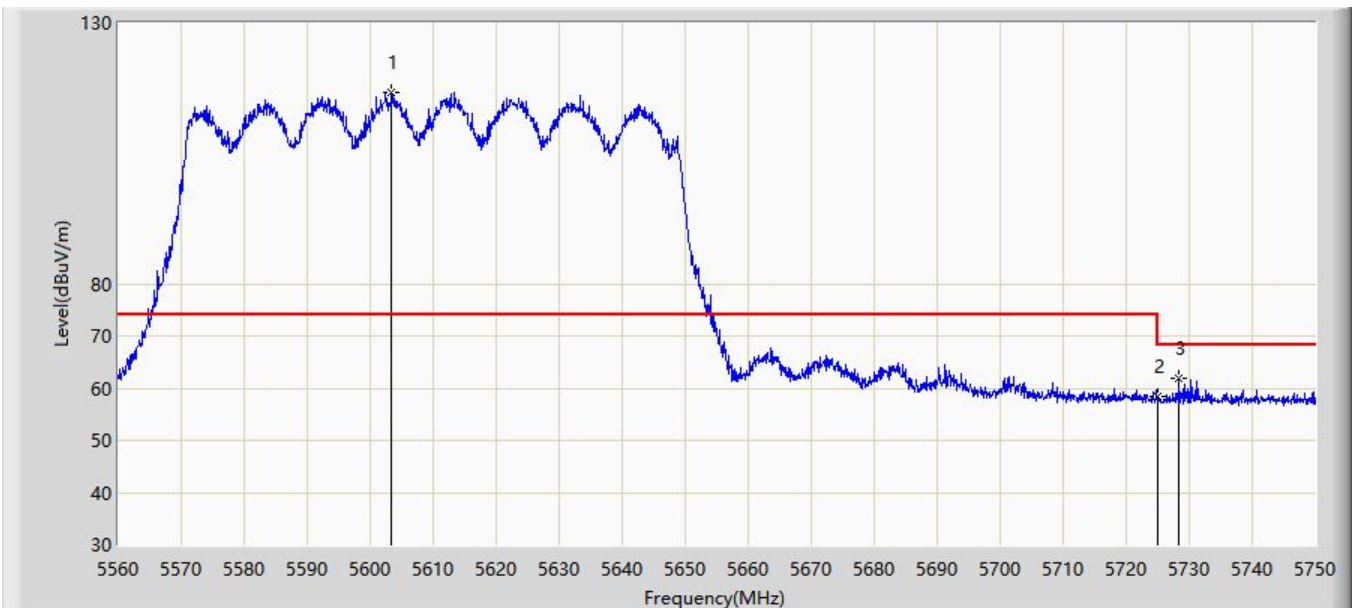


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5603.320	116.724	111.832	N/A	N/A	4.892	PK
2			5725.000	58.268	52.790	-9.932	68.200	5.478	PK
3			5728.435	61.765	56.273	-6.435	68.200	5.492	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 07:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP646-RW CDD Mode	

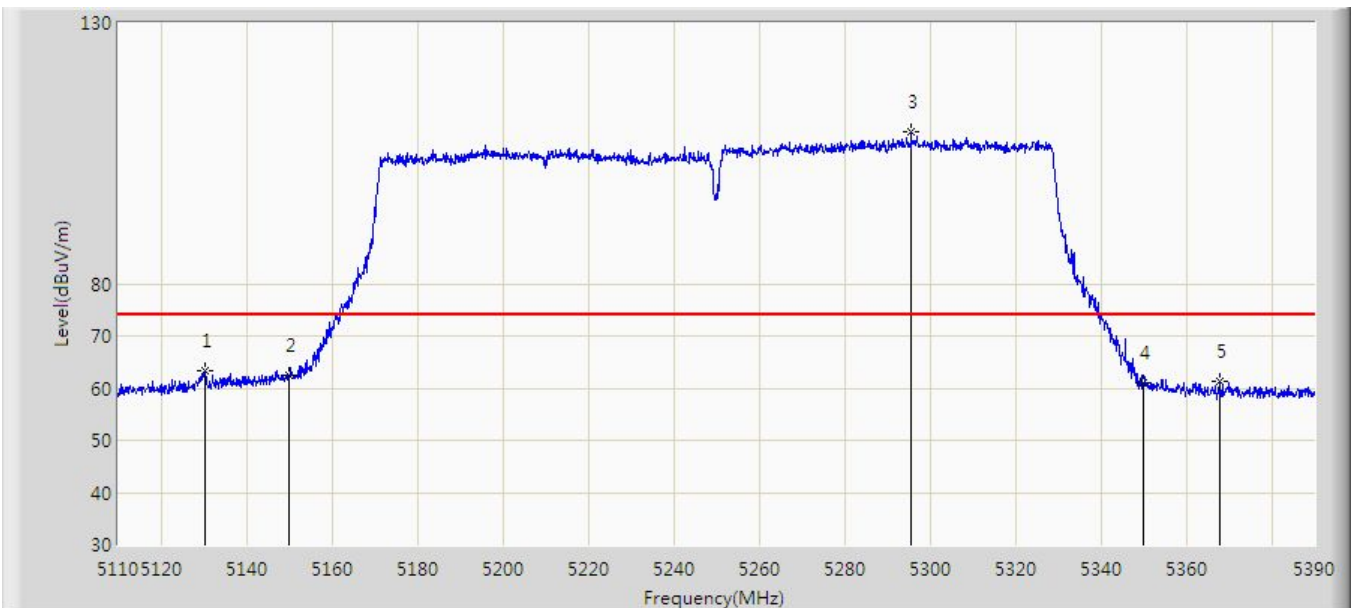


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.300	63.449	59.023	-10.551	74.000	4.426	PK
2			5150.000	62.331	57.889	-11.669	74.000	4.442	PK
3		*	5295.640	109.020	104.627	N/A	N/A	4.393	PK
4			5350.000	60.924	56.747	-13.076	74.000	4.177	PK
5			5367.740	61.349	57.108	-12.651	74.000	4.241	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 07:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP646-RW CDD Mode	

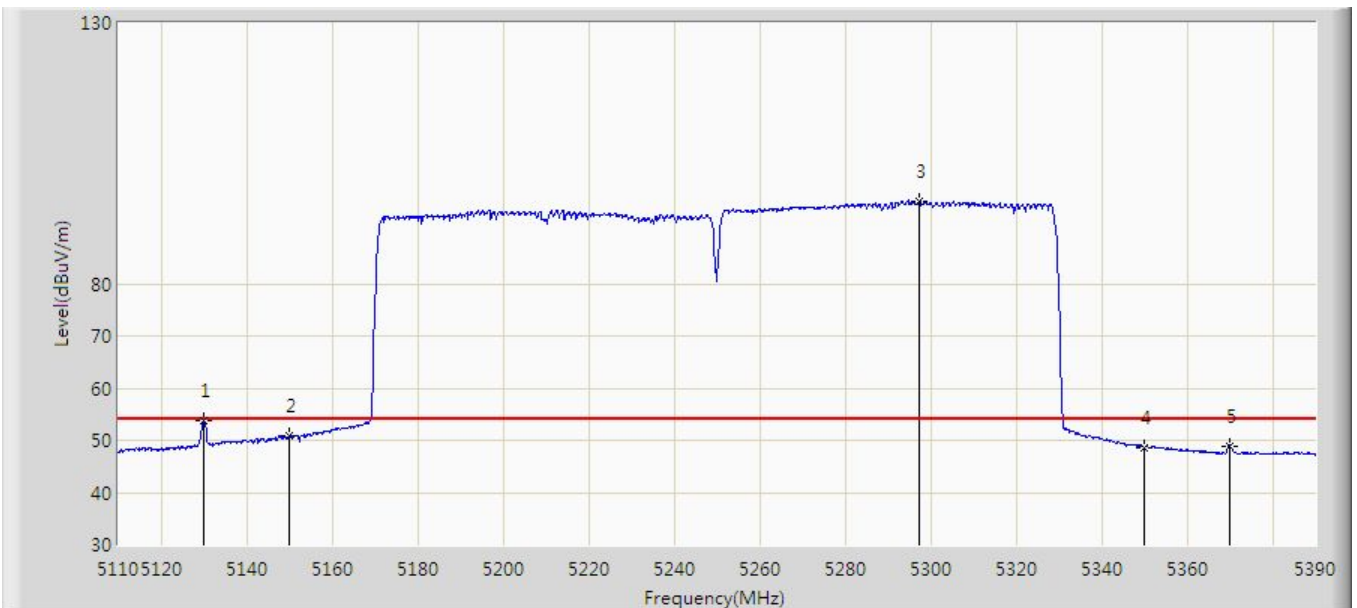


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.020	53.818	49.390	-0.182	54.000	4.428	AV
2			5150.000	50.739	46.297	-3.261	54.000	4.442	AV
3		*	5297.460	95.688	91.285	N/A	N/A	4.403	AV
4			5350.000	48.691	44.514	-5.309	54.000	4.177	AV
5			5369.840	48.864	44.601	-5.136	54.000	4.263	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 07:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP646-RW CDD Mode	

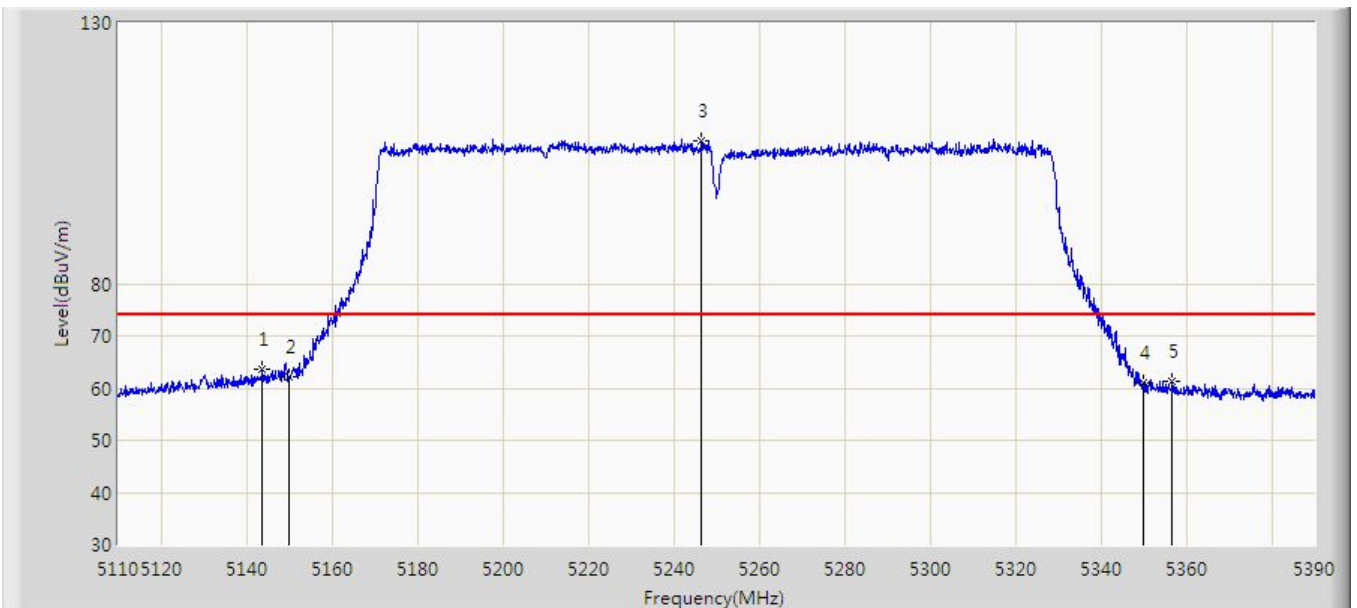


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.740	63.528	59.108	-10.472	74.000	4.420	PK
2			5150.000	62.083	57.641	-11.917	74.000	4.442	PK
3		*	5246.640	107.451	103.469	N/A	N/A	3.982	PK
4			5350.000	61.054	56.877	-12.946	74.000	4.177	PK
5			5356.680	61.338	57.132	-12.662	74.000	4.206	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 07:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz with DAP646-RW CDD Mode	

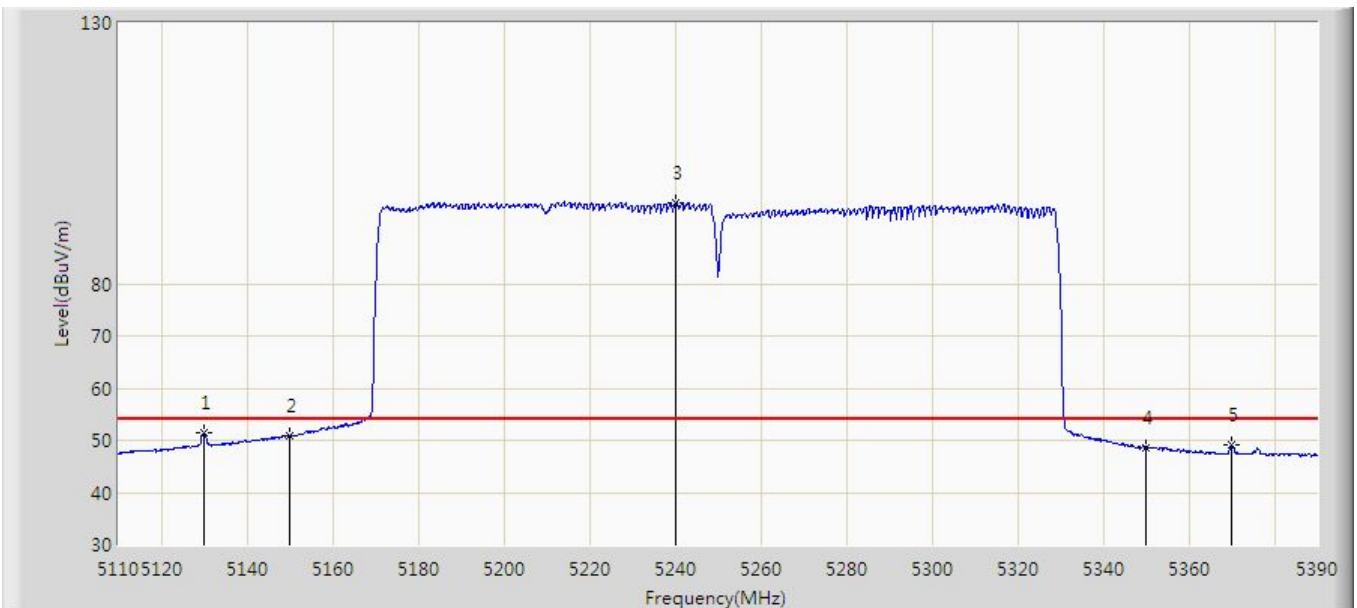


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.880	51.398	46.969	-2.602	54.000	4.429	AV
2			5150.000	50.880	46.438	-3.120	54.000	4.442	AV
3		*	5240.340	95.416	91.534	N/A	N/A	3.882	AV
4			5350.000	48.649	44.472	-5.351	54.000	4.177	AV
5			5369.840	49.022	44.759	-4.978	54.000	4.263	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 08:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP646-RW CDD Mode	

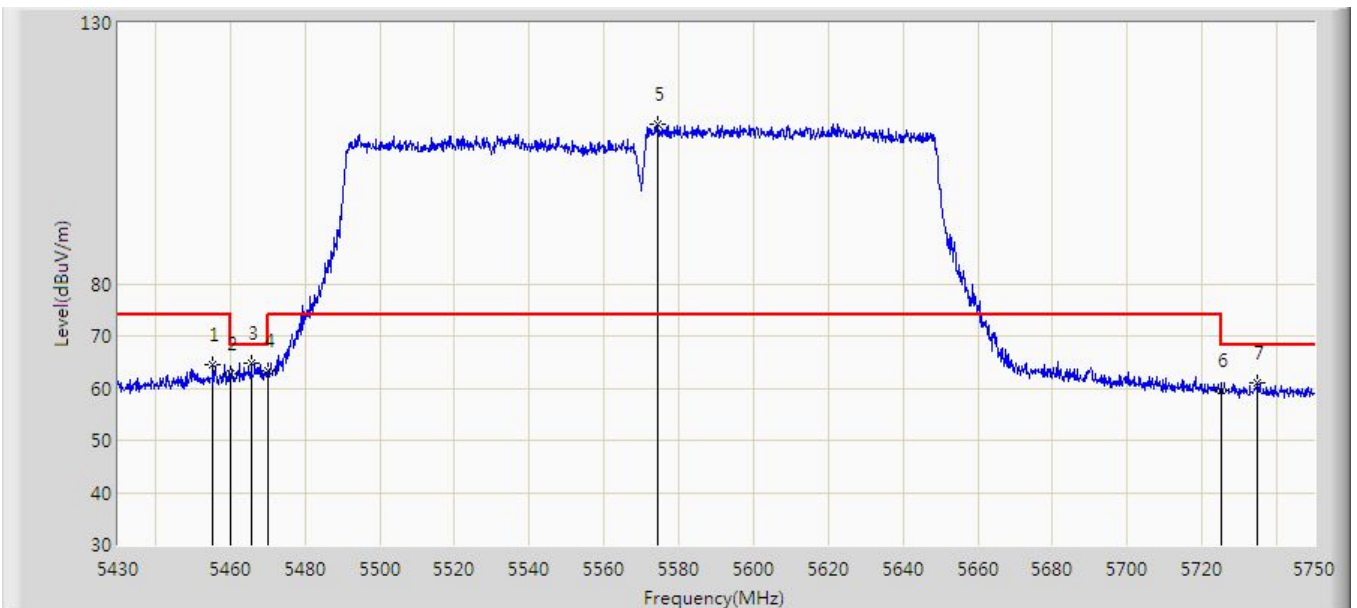


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.440	64.474	60.041	-9.526	74.000	4.433	PK
2			5460.000	62.726	58.286	-11.274	74.000	4.440	PK
3			5465.680	64.766	60.317	-3.434	68.200	4.449	PK
4			5470.000	63.469	59.013	-4.731	68.200	4.455	PK
5		*	5574.320	110.610	105.815	N/A	N/A	4.795	PK
6			5725.000	59.453	53.975	-8.747	68.200	5.478	PK
7			5734.800	60.879	55.354	-7.321	68.200	5.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 08:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP646-RW CDD Mode	

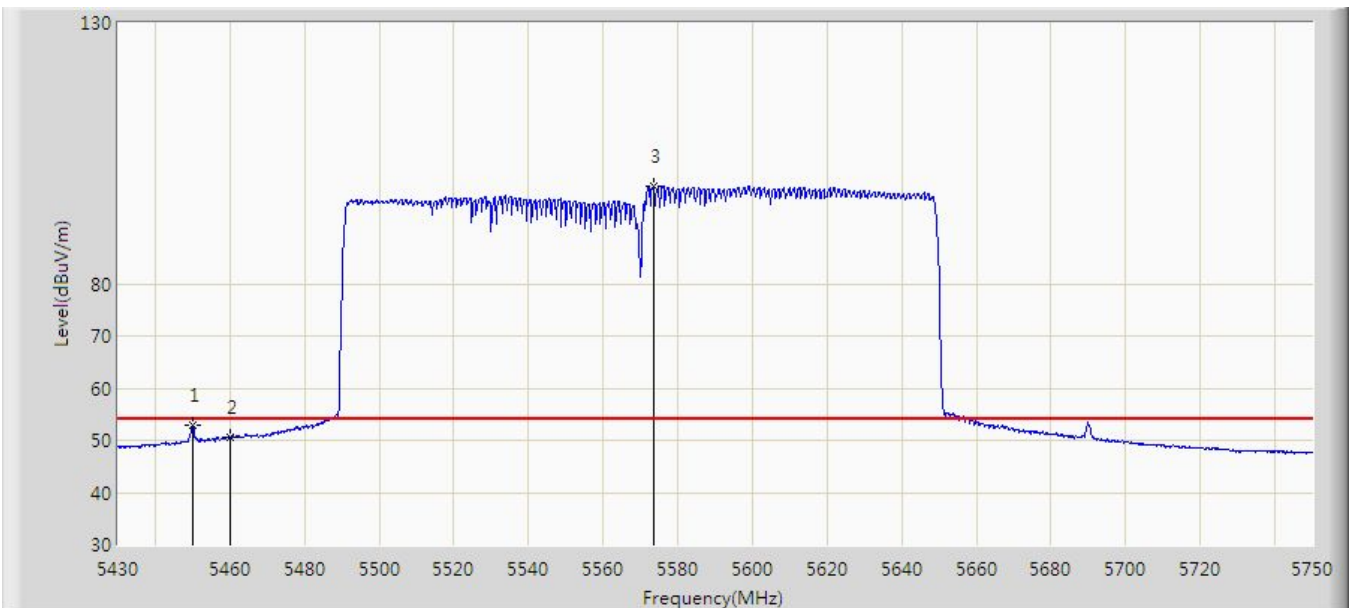


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.000	52.902	48.406	-1.098	54.000	4.495	AV
2			5460.000	50.510	46.070	-3.490	54.000	4.440	AV
3		*	5573.360	98.573	93.775	N/A	N/A	4.797	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 08:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP646-RW CDD Mode	

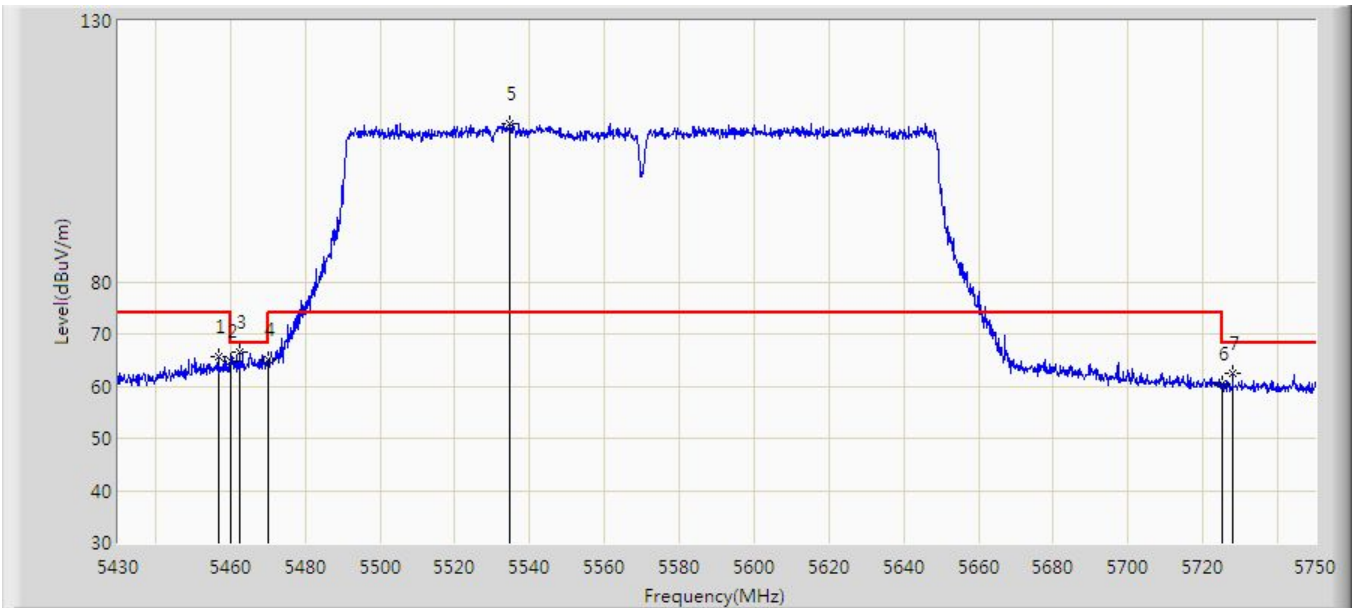


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.880	65.612	61.177	-8.388	74.000	4.435	PK
2			5460.000	64.745	60.305	-9.255	74.000	4.440	PK
3			5462.480	66.385	61.941	-1.815	68.200	4.443	PK
4			5470.000	65.178	60.722	-3.022	68.200	4.455	PK
5		*	5534.800	110.349	105.440	N/A	N/A	4.909	PK
6			5725.000	60.301	54.823	-7.899	68.200	5.478	PK
7			5727.920	62.423	56.934	-5.777	68.200	5.489	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/17 - 08:09
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz with DAP646-RW CDD Mode	

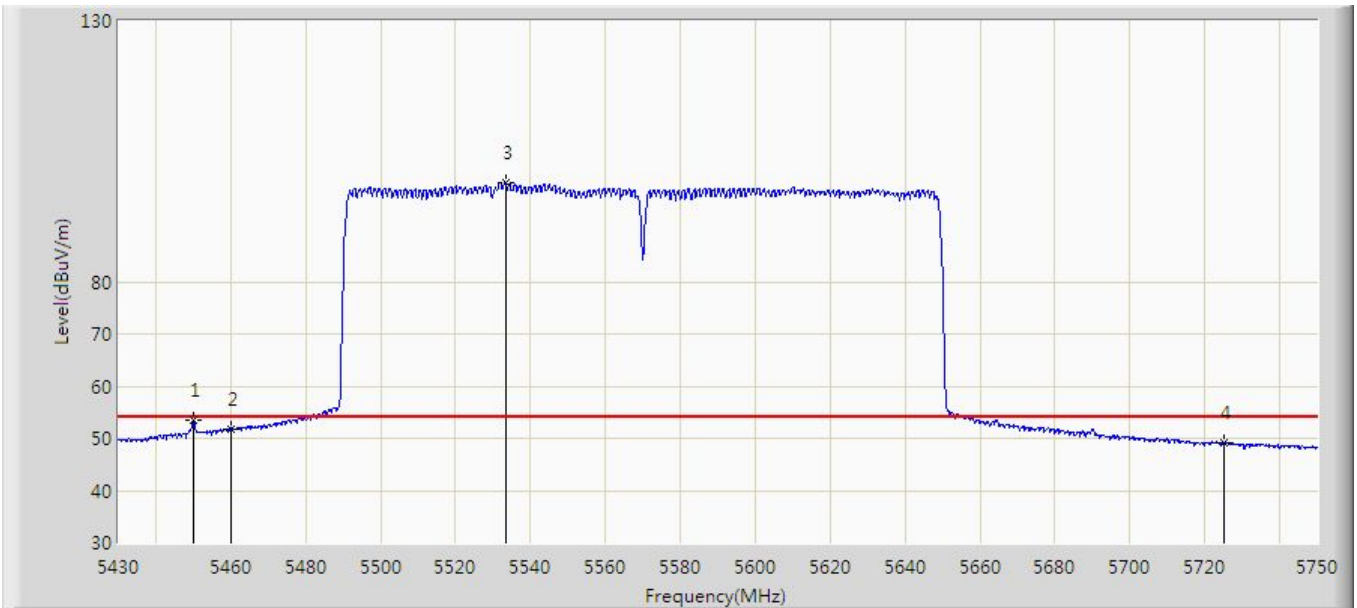


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.000	53.467	48.971	-0.533	54.000	4.495	AV
2			5460.000	51.739	47.299	-2.261	54.000	4.440	AV
3		*	5533.360	98.843	93.941	N/A	N/A	4.902	AV
4			5725.000	49.069	43.591	-4.931	54.000	5.478	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

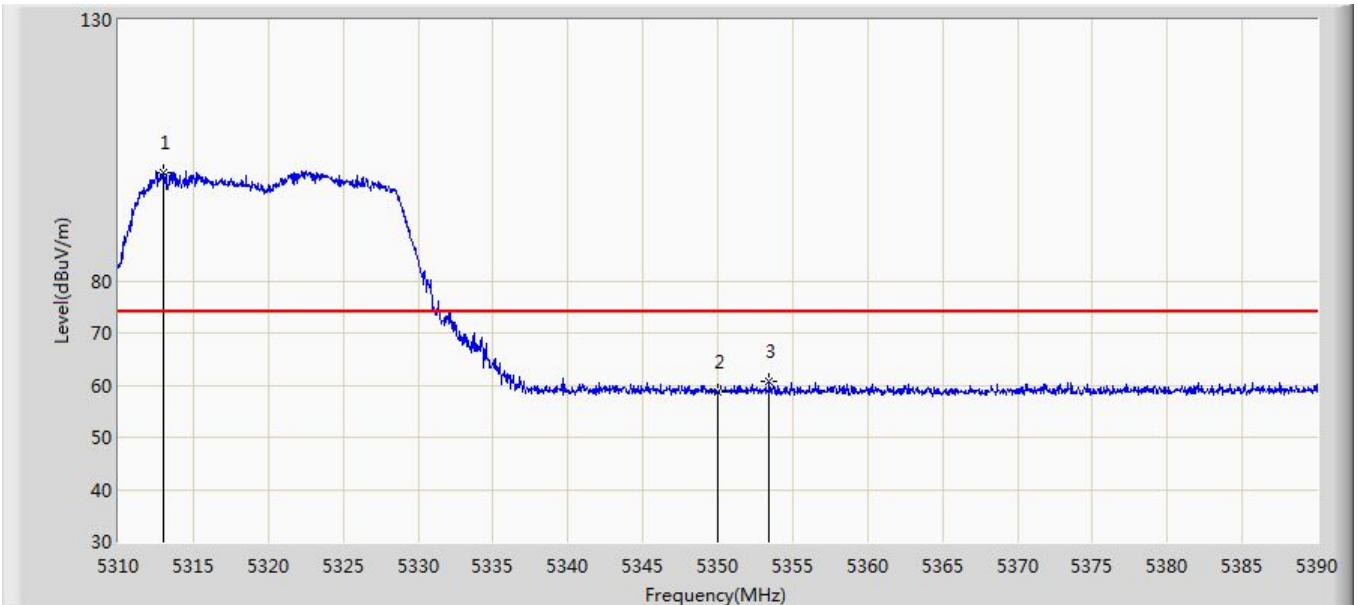


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.040	100.706	94.087	N/A	N/A	6.619	PK
2			5350.000	58.677	52.049	-15.323	74.000	6.629	PK
3			5353.440	60.673	54.060	-13.327	74.000	6.613	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

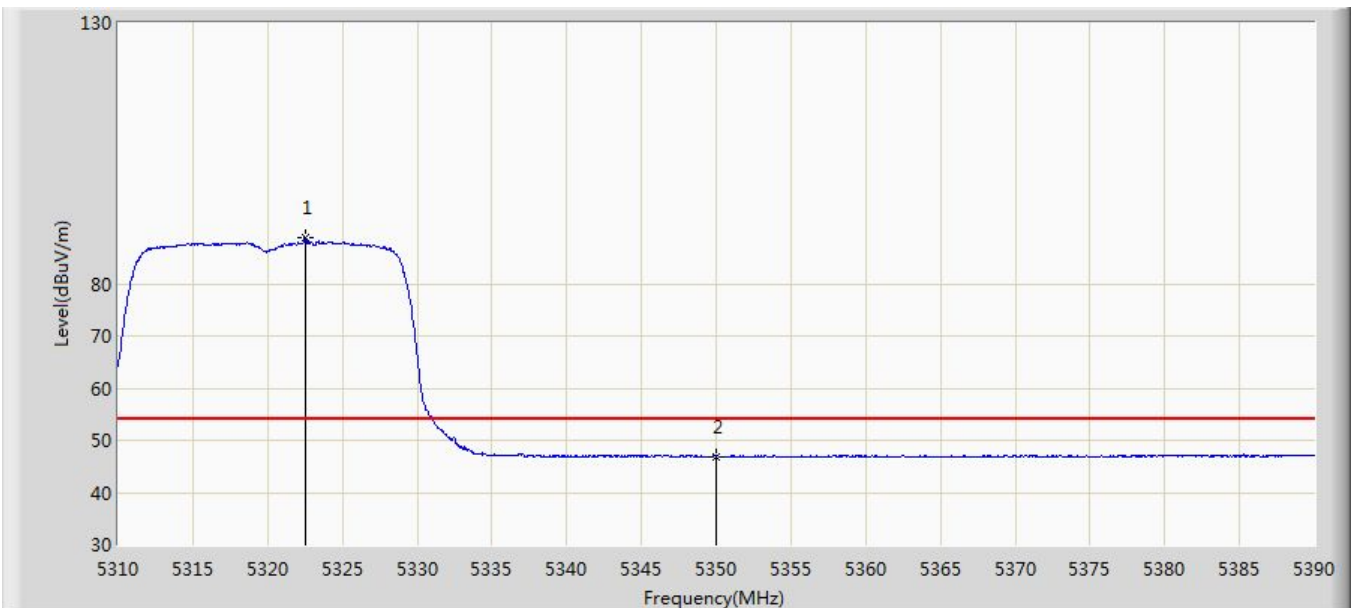


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.520	88.853	82.213	N/A	N/A	6.640	AV
2			5350.000	46.831	40.203	-7.169	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

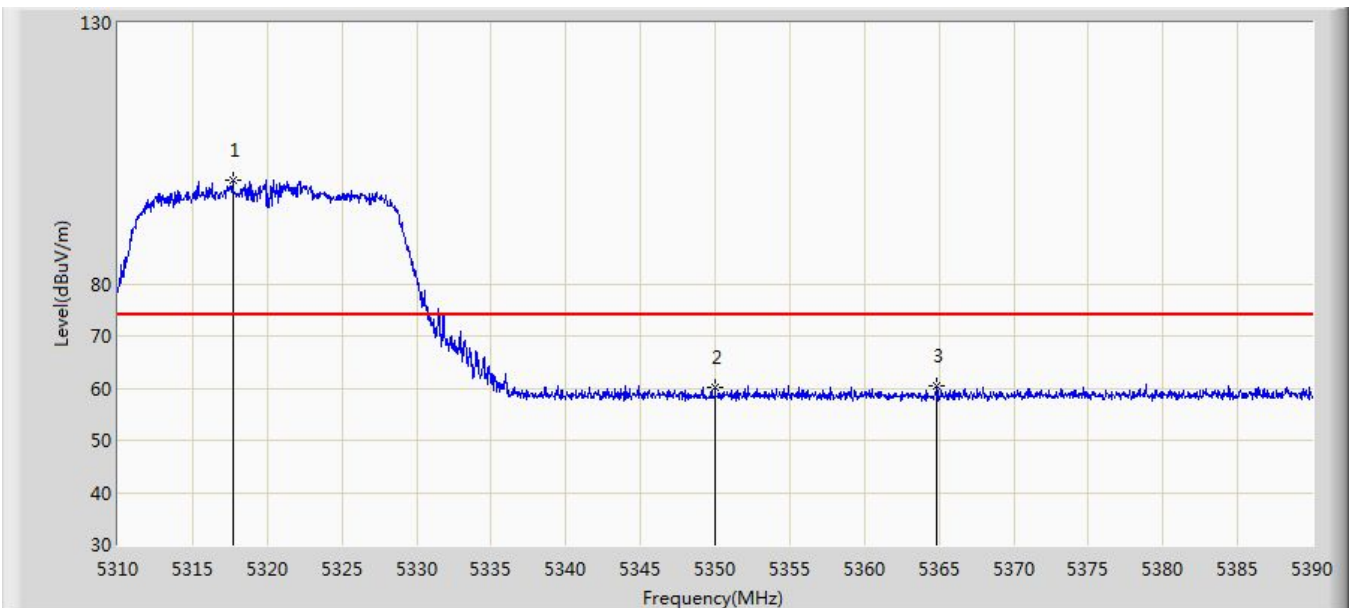


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.680	99.744	93.135	N/A	N/A	6.610	PK
2			5350.000	60.106	53.478	-13.894	74.000	6.629	PK
3			5364.880	60.424	53.826	-13.576	74.000	6.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

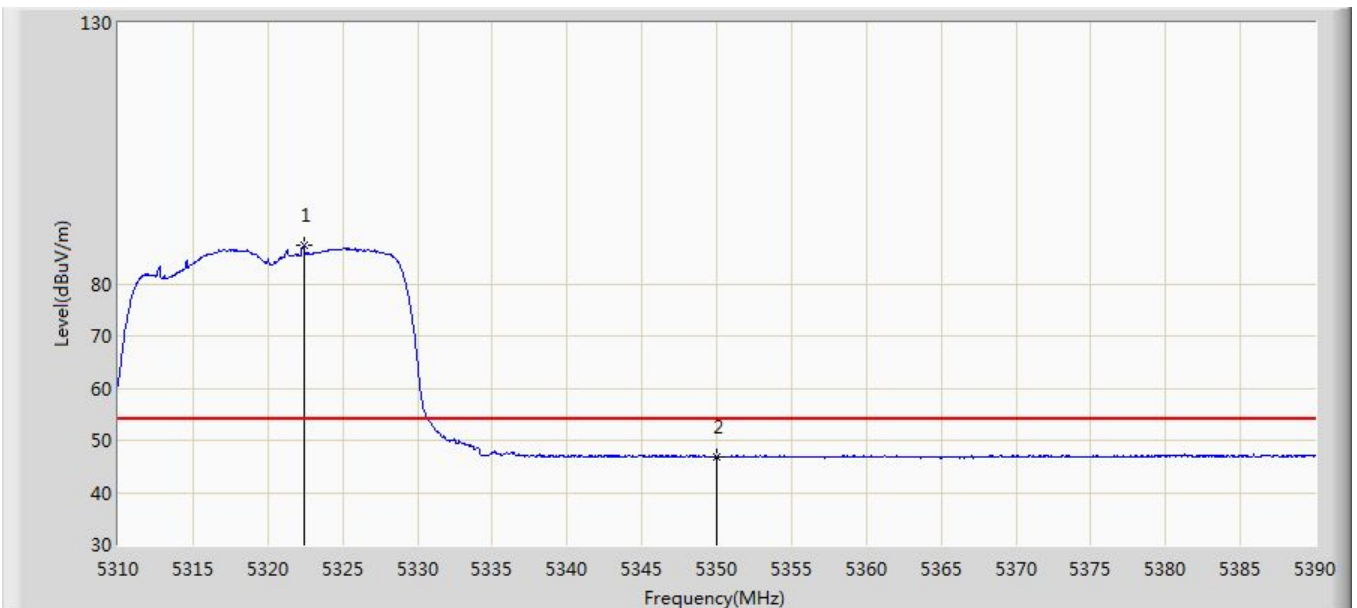


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.400	87.319	80.680	N/A	N/A	6.639	AV
2			5350.000	46.900	40.272	-7.100	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW Beam-Forming Mode	

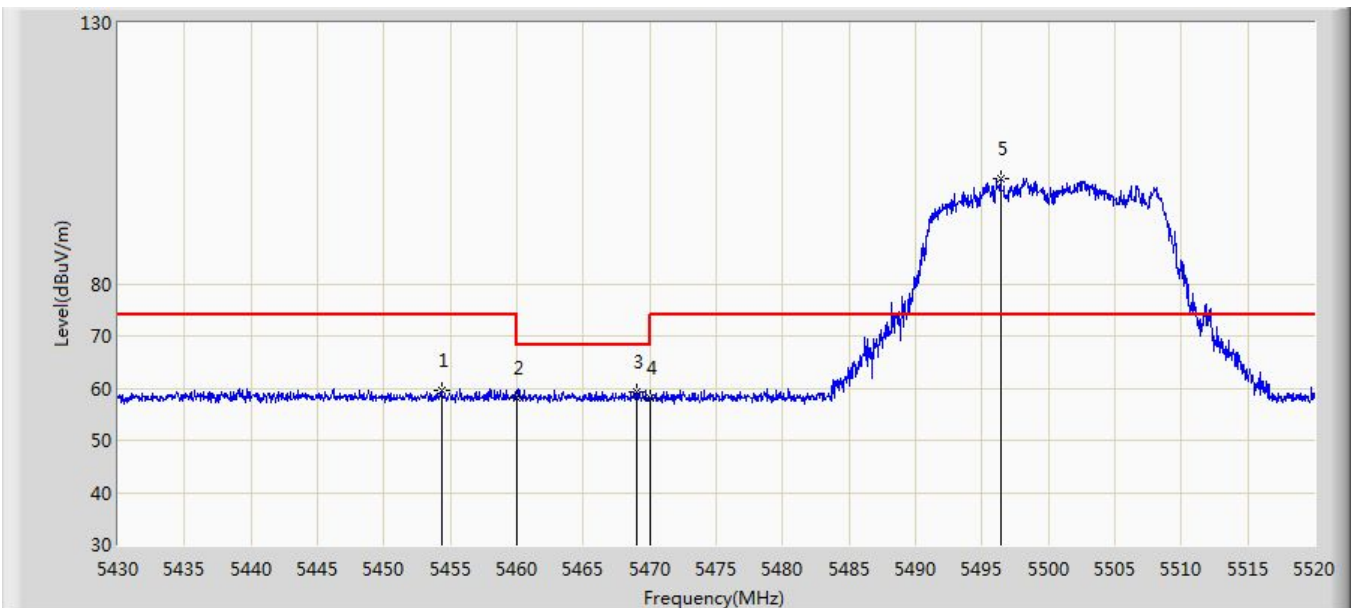


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.345	59.709	52.754	-14.291	74.000	6.955	PK
2			5460.000	57.973	50.996	-16.027	74.000	6.978	PK
3			5468.970	59.349	52.336	-8.851	68.200	7.014	PK
4			5470.000	58.147	51.130	-10.053	68.200	7.016	PK
5		*	5496.375	100.205	92.975	N/A	N/A	7.229	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW Beam-Forming Mode	

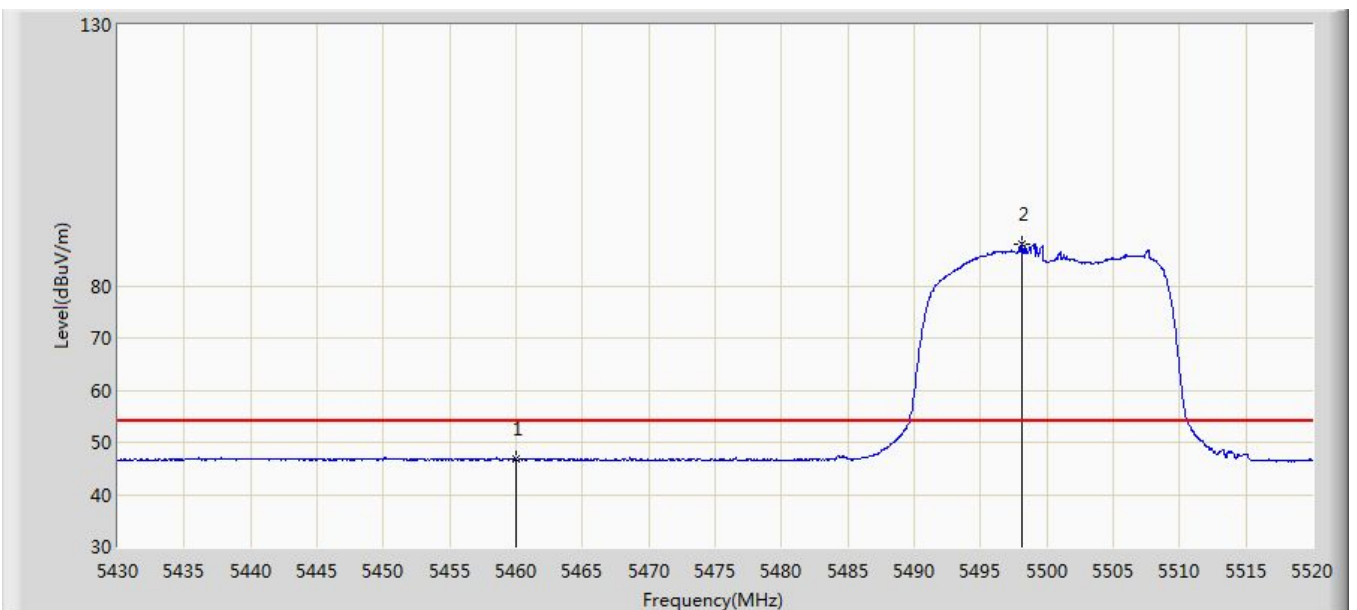


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.710	39.733	-7.290	54.000	6.978	AV
2		*	5498.085	87.933	80.685	N/A	N/A	7.248	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW Beam-Forming Mode	

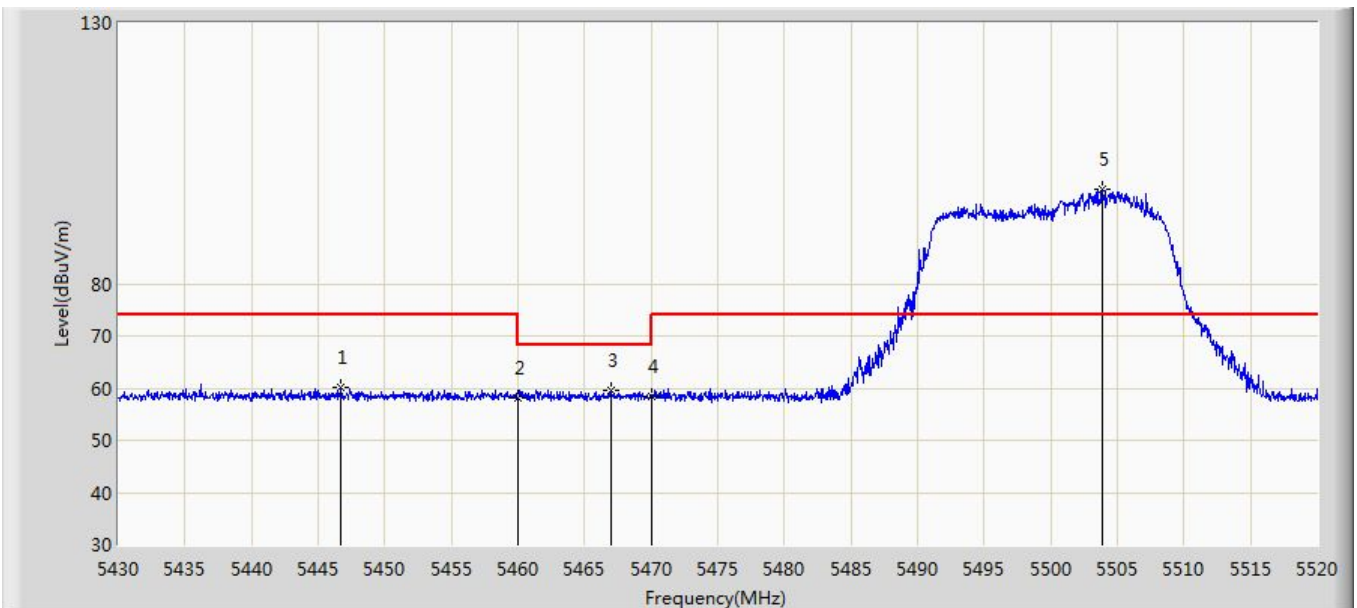


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.740	60.028	53.048	-13.972	74.000	6.981	PK
2			5460.000	58.103	51.126	-15.897	74.000	6.978	PK
3			5466.945	59.503	52.498	-8.697	68.200	7.006	PK
4			5470.000	58.480	51.463	-9.720	68.200	7.016	PK
5		*	5503.890	98.010	90.700	N/A	N/A	7.309	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with DAP646-RW Beam-Forming Mode	

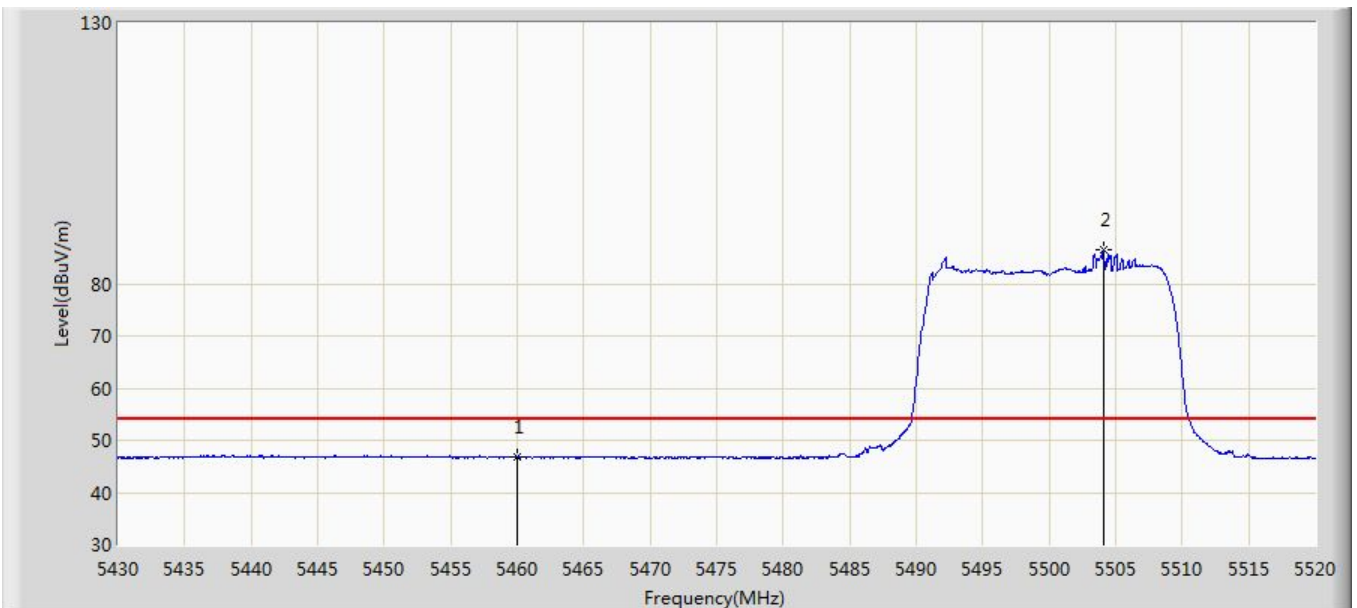


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.723	39.746	-7.277	54.000	6.978	AV
2		*	5504.070	86.424	79.112	N/A	N/A	7.312	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with DAP646-RW Beam-Forming Mode	

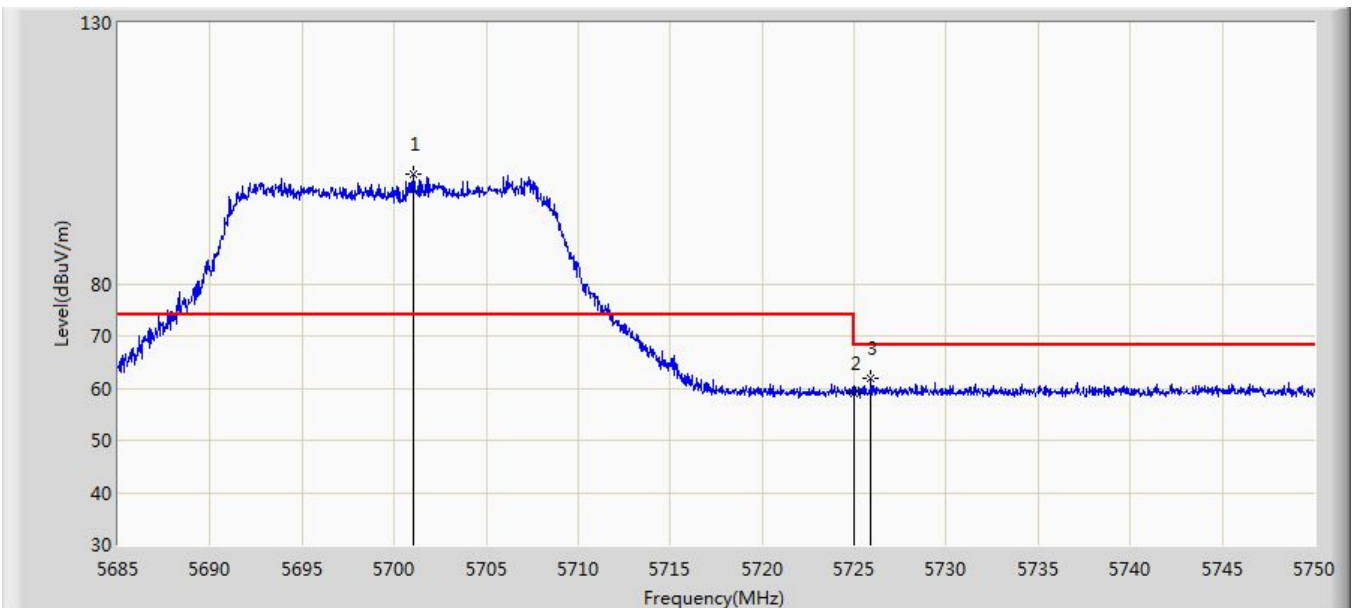


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.022	100.946	93.739	N/A	N/A	7.207	PK
2			5725.000	58.977	51.645	-9.223	68.200	7.332	PK
3			5725.917	61.957	54.614	-6.243	68.200	7.343	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with DAP646-RW Beam-Forming Mode	

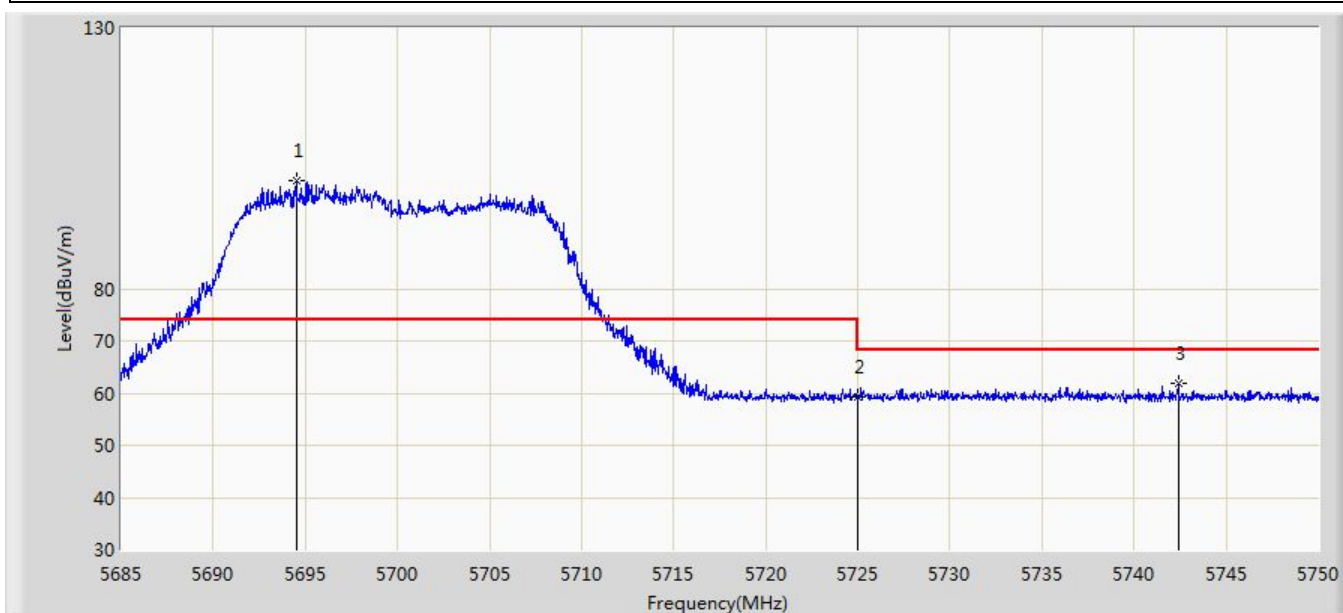


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.522	100.634	93.375	N/A	N/A	7.260	PK
2			5725.000	59.297	51.965	-8.903	68.200	7.332	PK
3			5742.395	62.022	54.580	-6.178	68.200	7.442	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW Beam-Forming Mode	

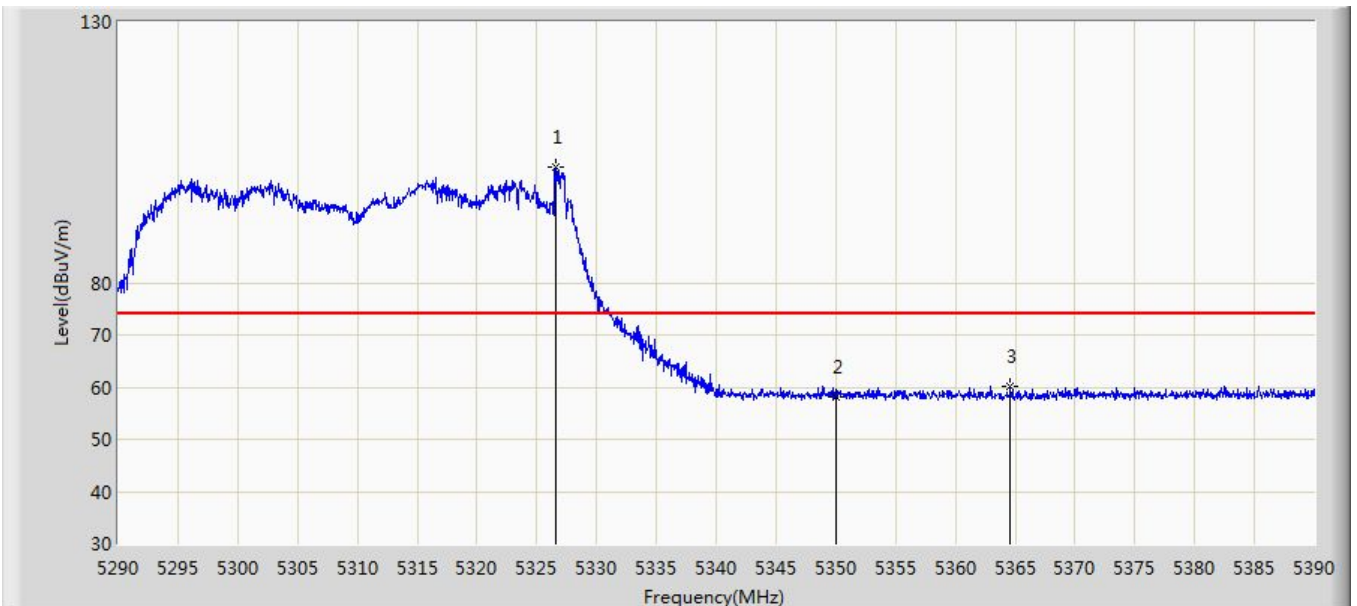


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.550	102.127	95.459	N/A	N/A	6.669	PK
2			5350.000	58.249	51.621	-15.751	74.000	6.629	PK
3			5364.600	60.030	53.432	-13.970	74.000	6.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW Beam-Forming Mode	

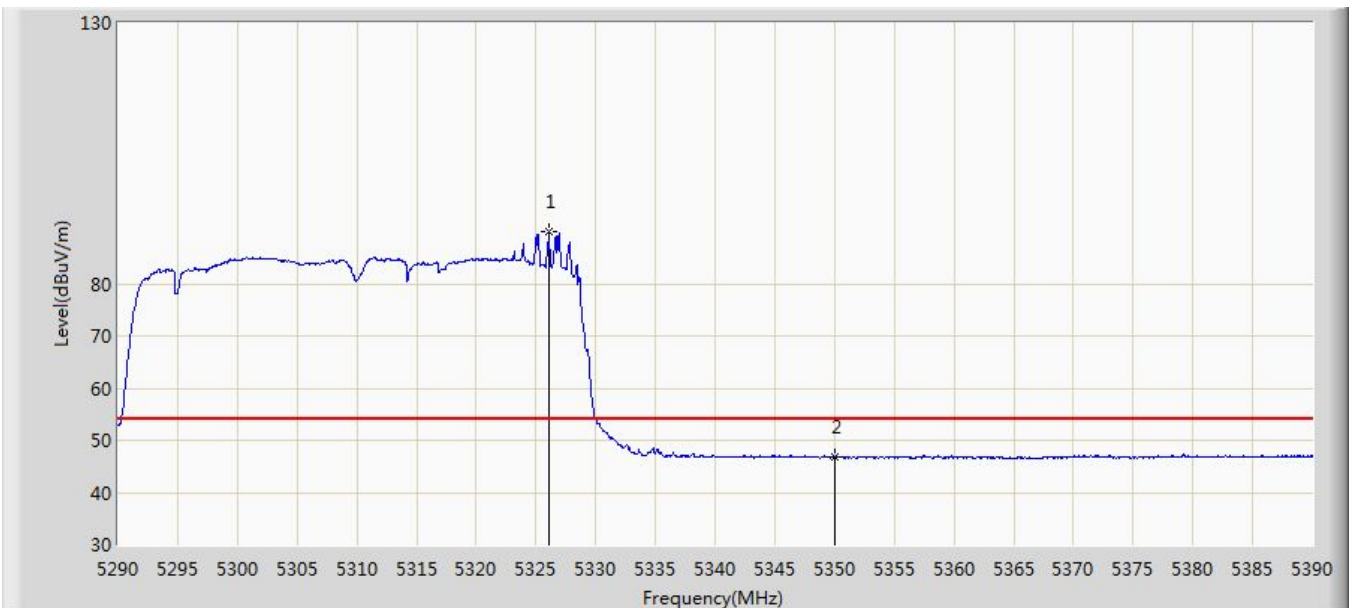


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.150	89.914	83.249	N/A	N/A	6.665	AV
2			5350.000	46.710	40.082	-7.290	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW Beam-Forming Mode	

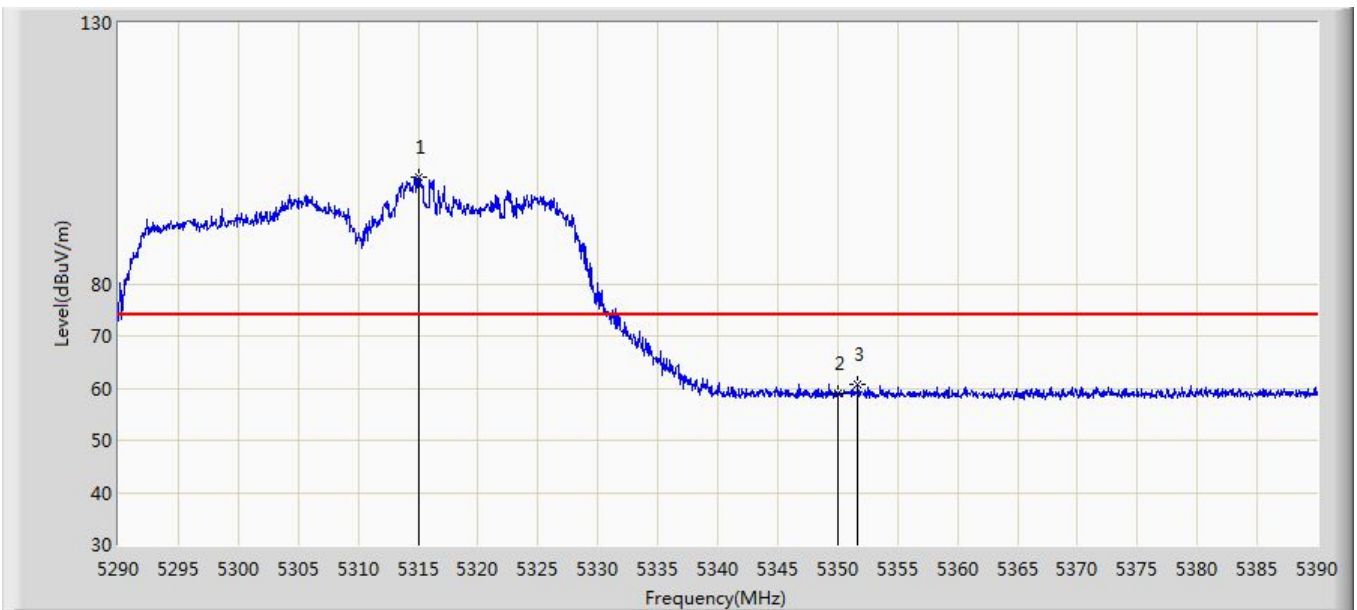


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.000	100.528	93.913	N/A	N/A	6.615	PK
2			5350.000	58.888	52.260	-15.112	74.000	6.629	PK
3			5351.700	60.633	54.016	-13.367	74.000	6.617	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with DAP646-RW Beam-Forming Mode	

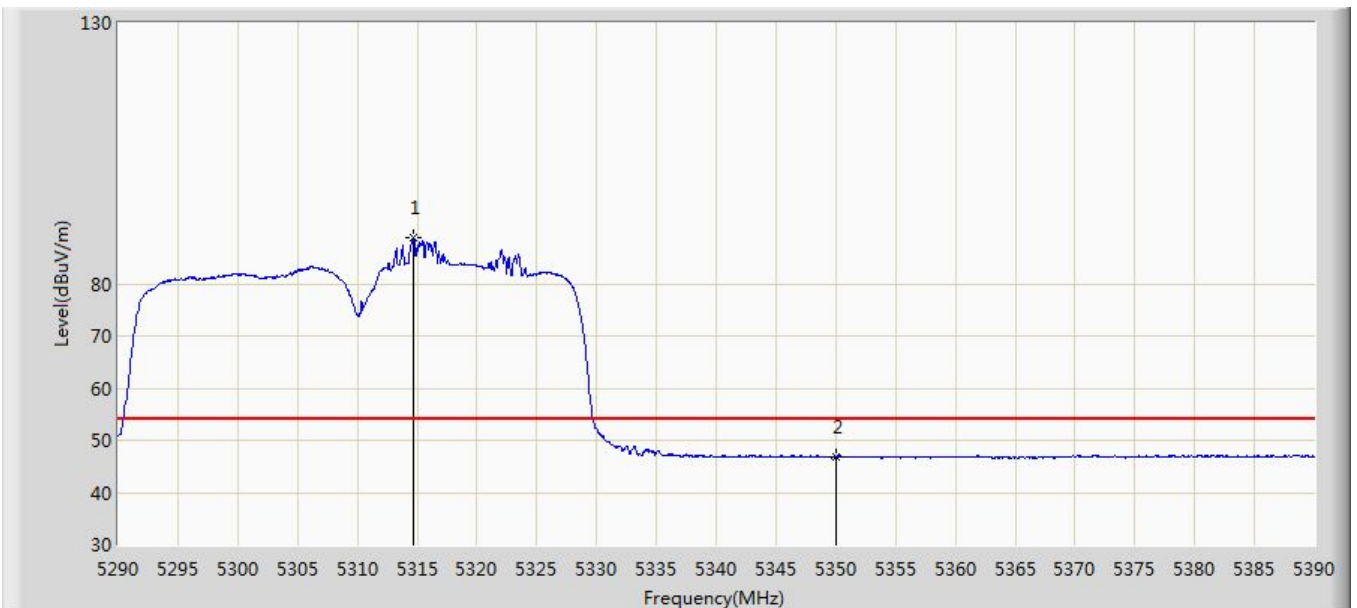


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.650	88.878	82.263	N/A	N/A	6.616	AV
2			5350.000	46.751	40.123	-7.249	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW Beam-Forming Mode	

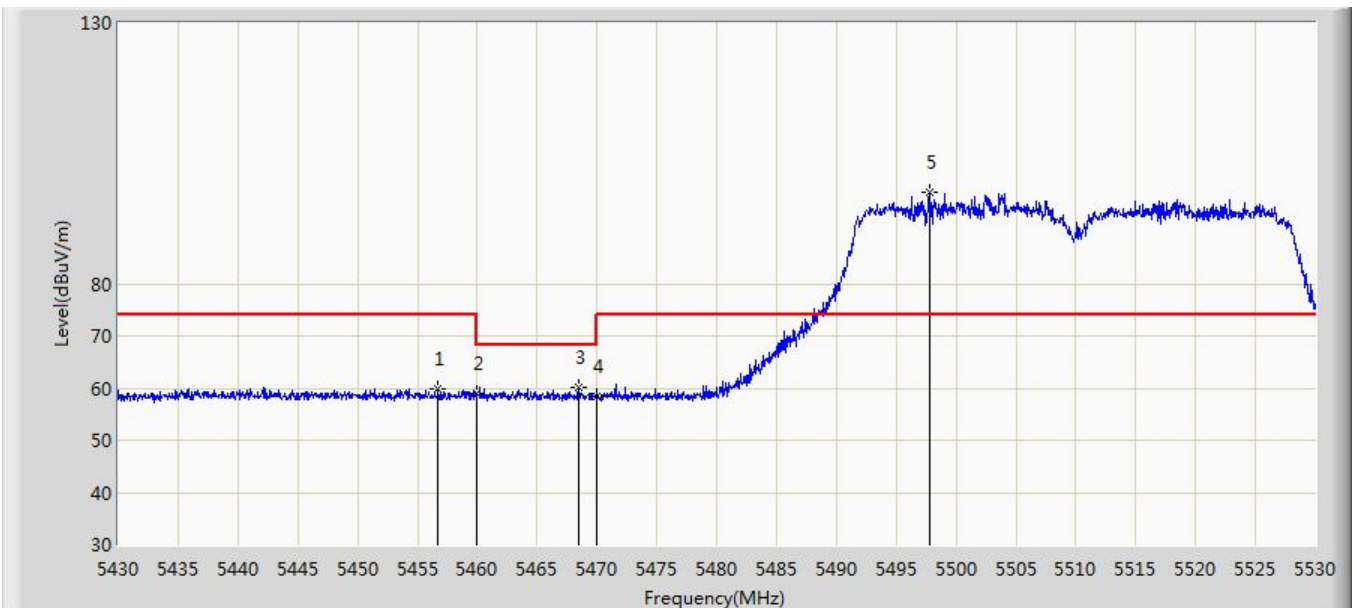


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.750	59.800	52.836	-14.200	74.000	6.964	PK
2			5460.000	58.888	51.911	-15.112	74.000	6.978	PK
3			5468.450	60.232	53.221	-7.968	68.200	7.011	PK
4			5470.000	58.416	51.399	-9.784	68.200	7.016	PK
5		*	5497.800	97.558	90.313	N/A	N/A	7.246	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW Beam-Forming Mode	

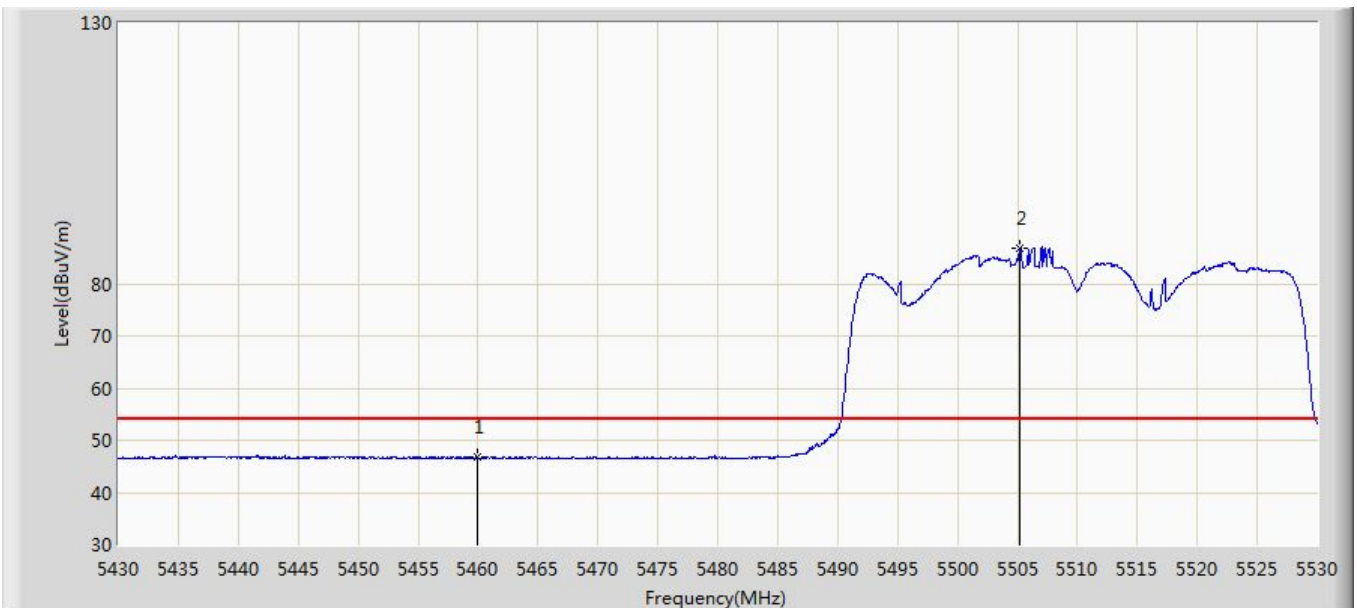


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.715	39.738	-7.285	54.000	6.978	AV
2		*	5505.250	86.843	79.525	N/A	N/A	7.318	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW Beam-Forming Mode	

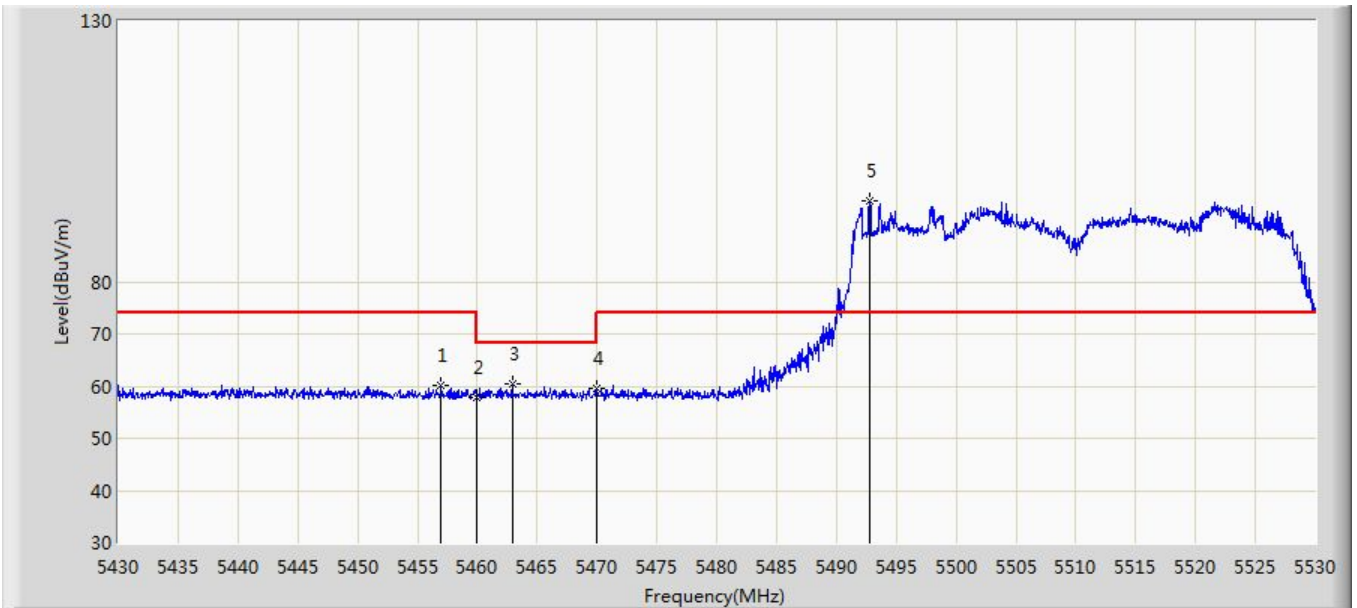


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.000	60.074	53.109	-13.926	74.000	6.966	PK
2			5460.000	57.923	50.946	-16.077	74.000	6.978	PK
3			5462.900	60.339	53.350	-7.861	68.200	6.989	PK
4			5470.000	59.618	52.601	-8.582	68.200	7.016	PK
5		*	5492.750	95.556	88.364	N/A	N/A	7.192	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with DAP646-RW Beam-Forming Mode	

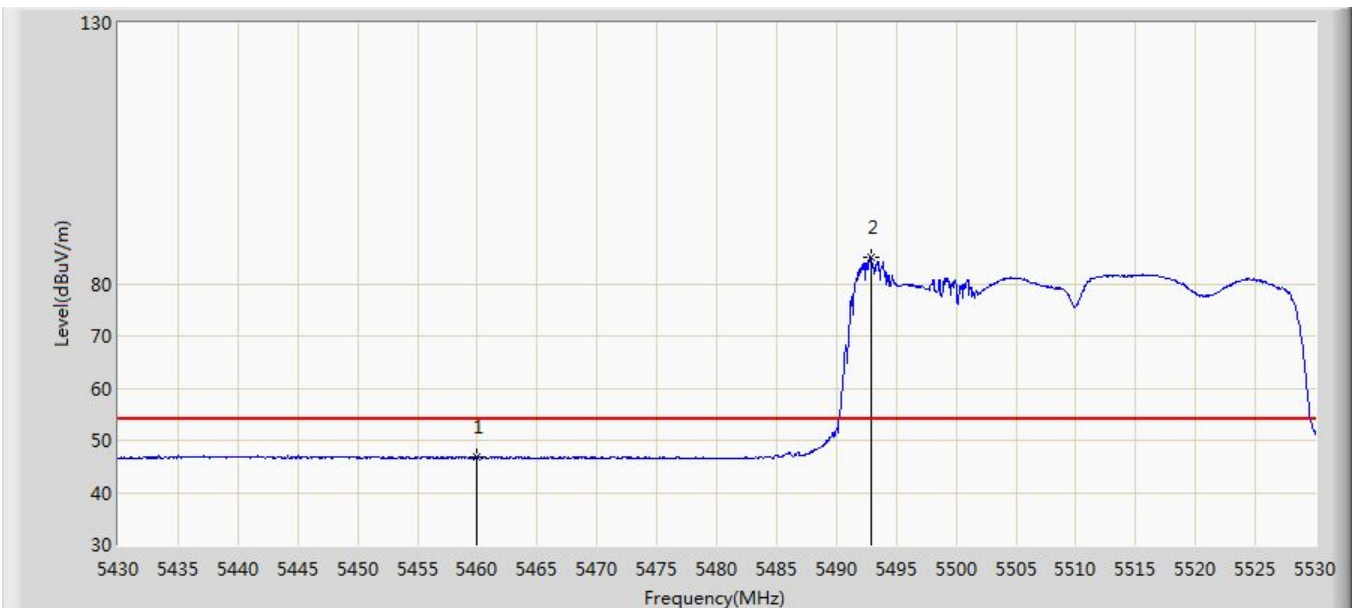


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.860	39.883	-7.140	54.000	6.978	AV
2		*	5492.850	85.161	77.968	N/A	N/A	7.192	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 02:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with DAP646-RW Beam-Forming Mode	

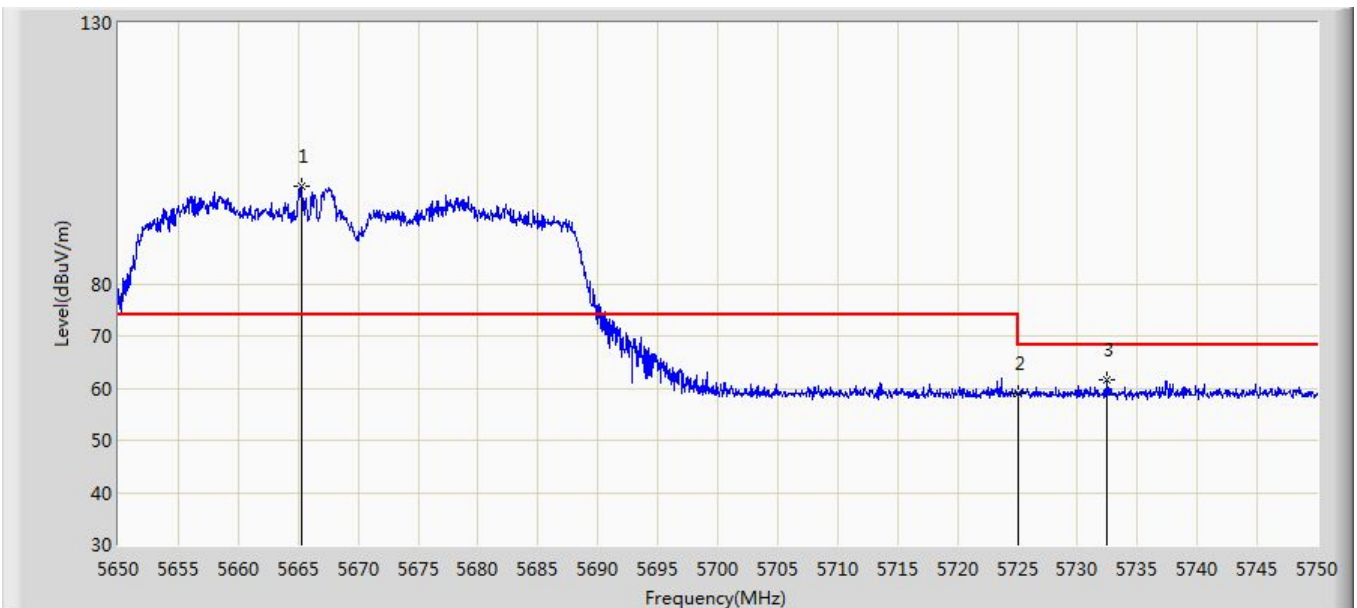


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5665.250	98.711	91.399	N/A	N/A	7.312	PK
2			5725.000	58.957	51.625	-9.243	68.200	7.332	PK
3			5732.400	61.613	54.231	-6.587	68.200	7.382	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 03:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with DAP646-RW Beam-Forming Mode	

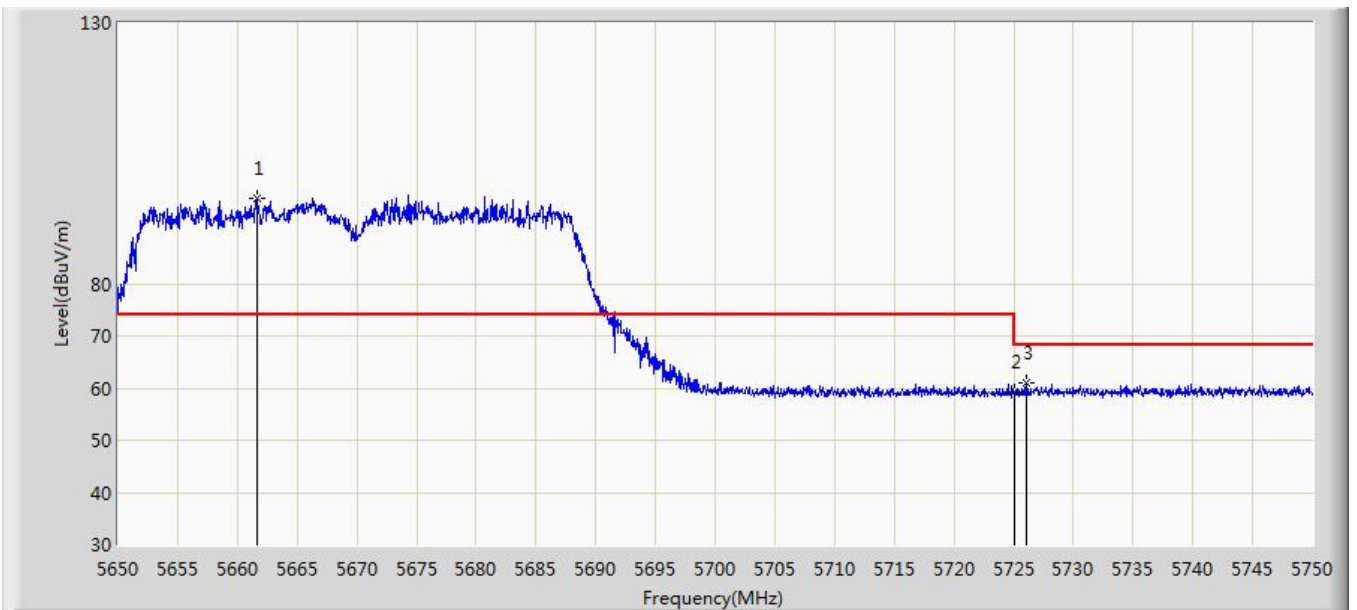


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.600	96.306	88.994	N/A	N/A	7.312	PK
2			5725.000	59.240	51.908	-8.960	68.200	7.332	PK
3			5726.050	60.964	53.620	-7.236	68.200	7.344	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

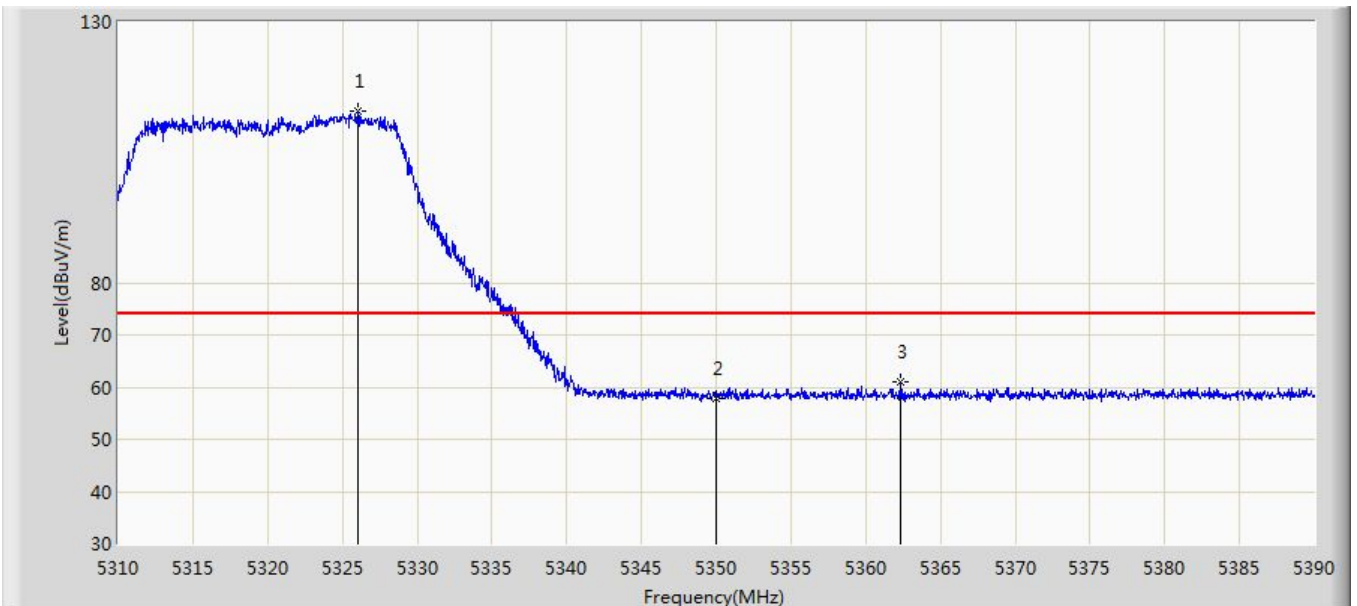


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.080	112.827	106.162	N/A	N/A	6.665	PK
2			5350.000	57.706	51.078	-16.294	74.000	6.629	PK
3			5362.360	61.074	54.473	-12.926	74.000	6.601	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

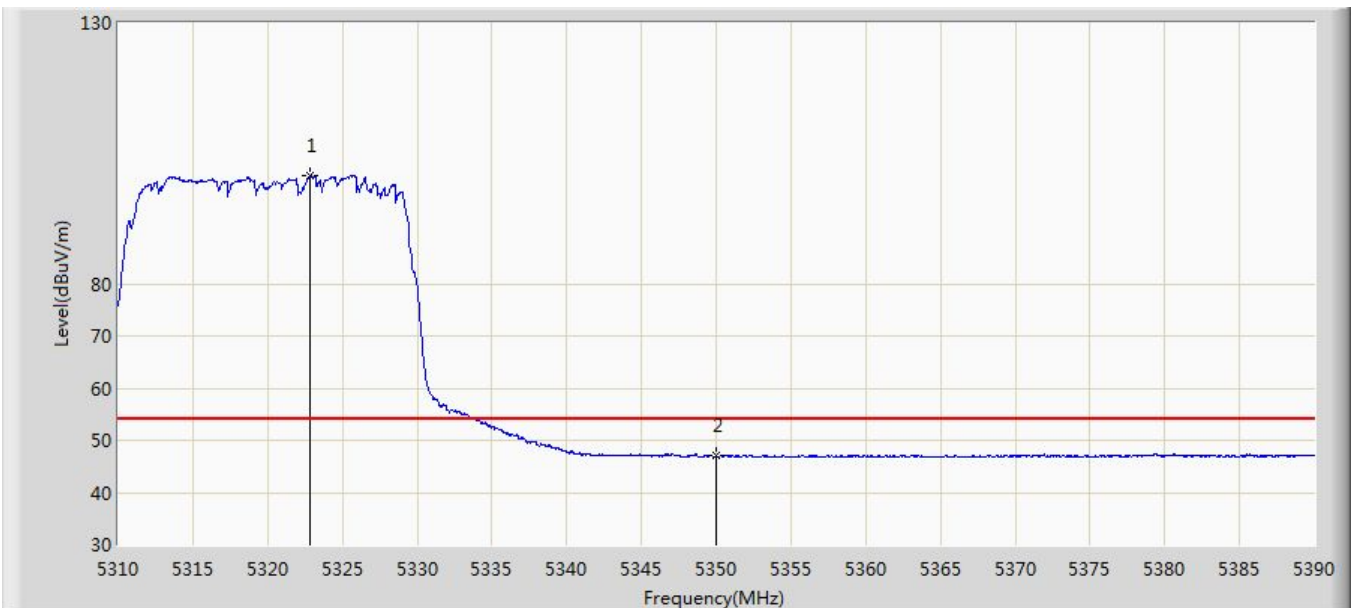


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.880	100.703	94.061	N/A	N/A	6.642	AV
2			5350.000	46.964	40.336	-7.036	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

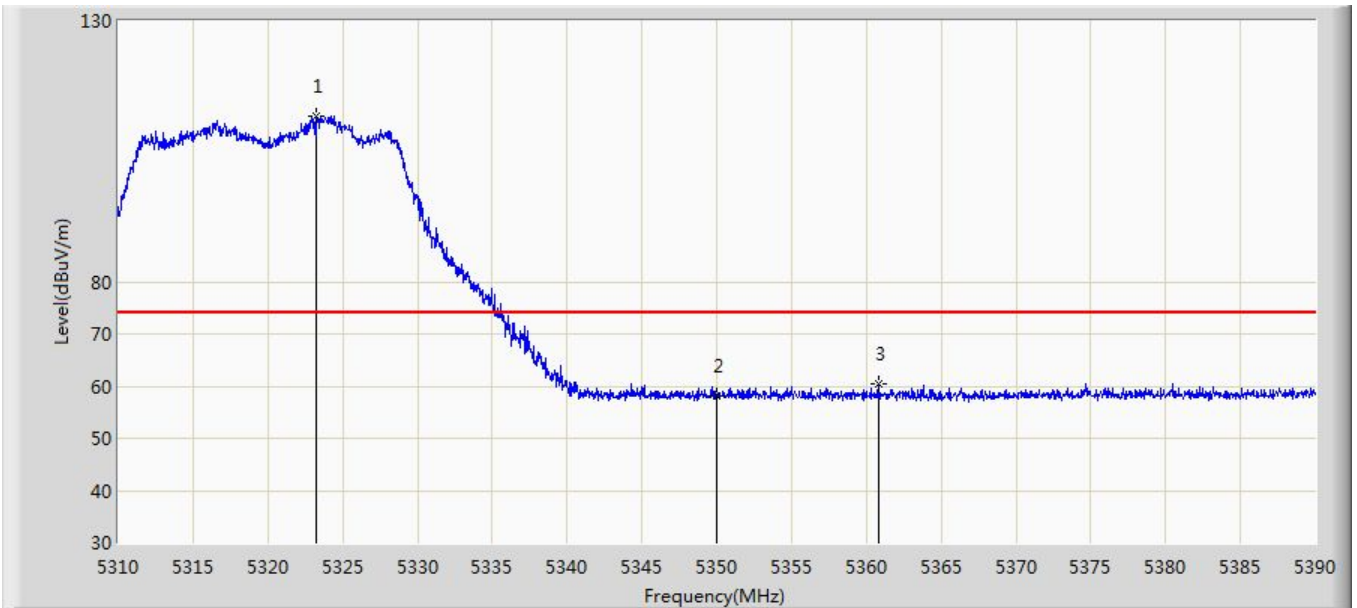


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.280	111.719	105.074	N/A	N/A	6.646	PK
2			5350.000	57.973	51.345	-16.027	74.000	6.629	PK
3			5360.800	60.344	53.740	-13.656	74.000	6.603	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with DAP646-RW Beam-Forming Mode	

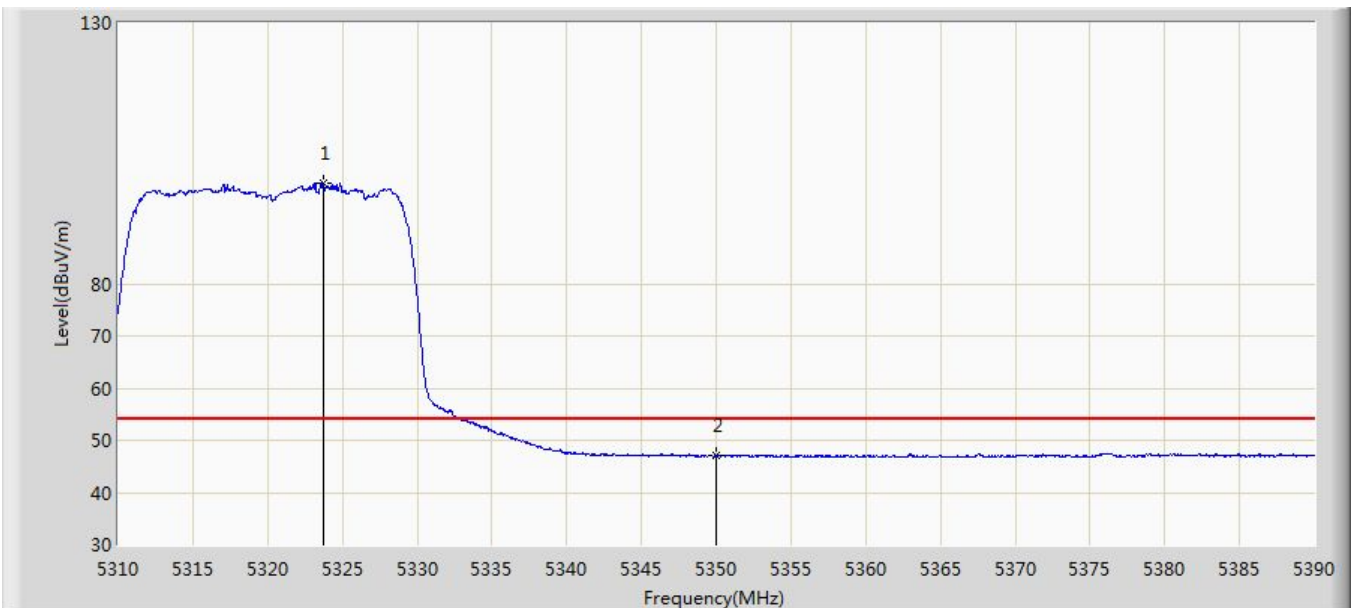


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.720	99.138	92.490	N/A	N/A	6.648	AV
2			5350.000	46.970	40.342	-7.030	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/12/28 - 04:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HIT Dragonfly Access Point	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with DAP646-RW Beam-Forming Mode	

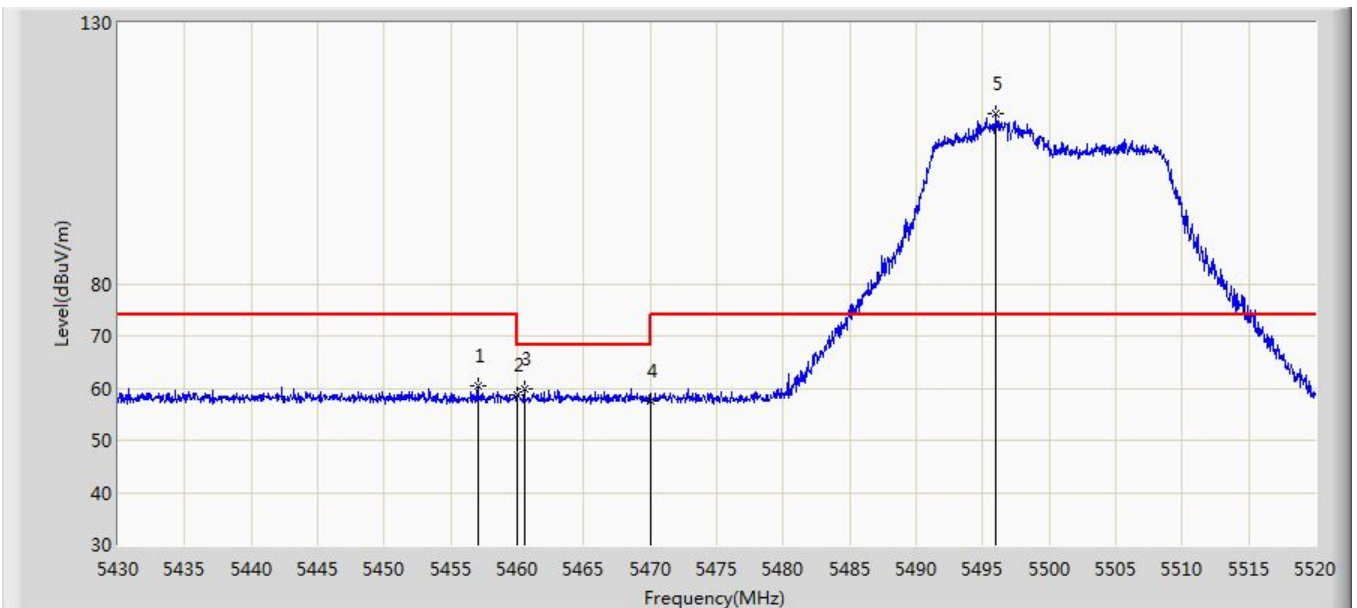

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.045	60.347	53.381	-13.653	74.000	6.966	PK
2			5460.000	58.588	51.611	-15.412	74.000	6.978	PK
3			5460.510	59.980	53.001	-8.220	68.200	6.980	PK
4			5470.000	57.627	50.610	-10.573	68.200	7.016	PK
5		*	5495.925	112.540	105.315	N/A	N/A	7.225	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)