



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: APOLLO

Test Model: APOLLO 7PRO

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu





A.1 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.96	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.953	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.94	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.278	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.277	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.286	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.302	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.309	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.302	N/A	Pass






Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

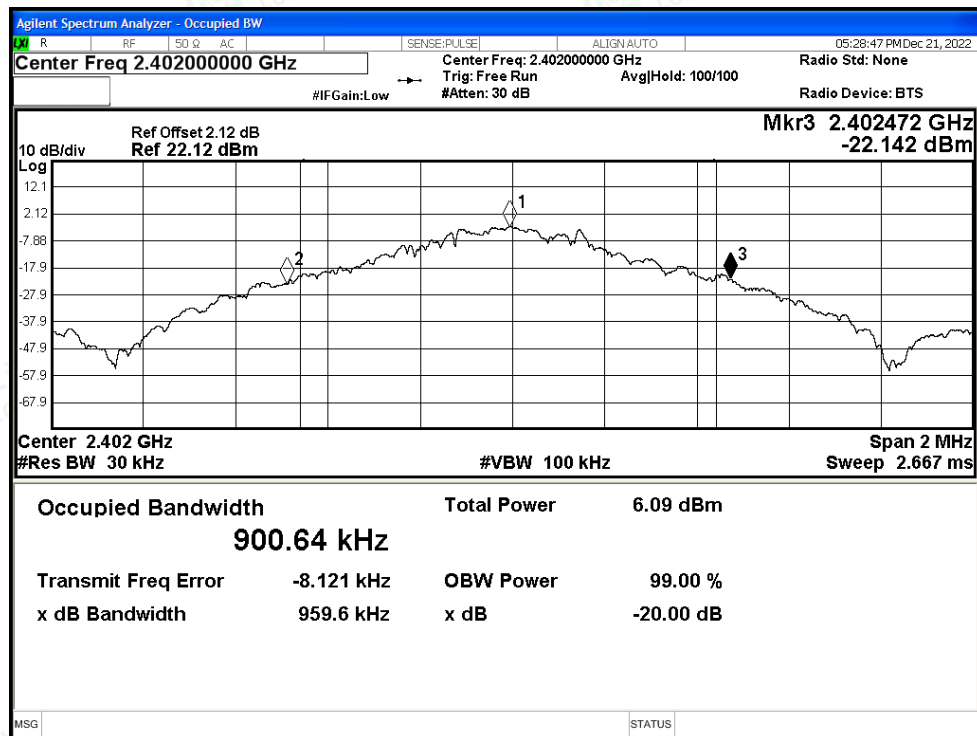


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

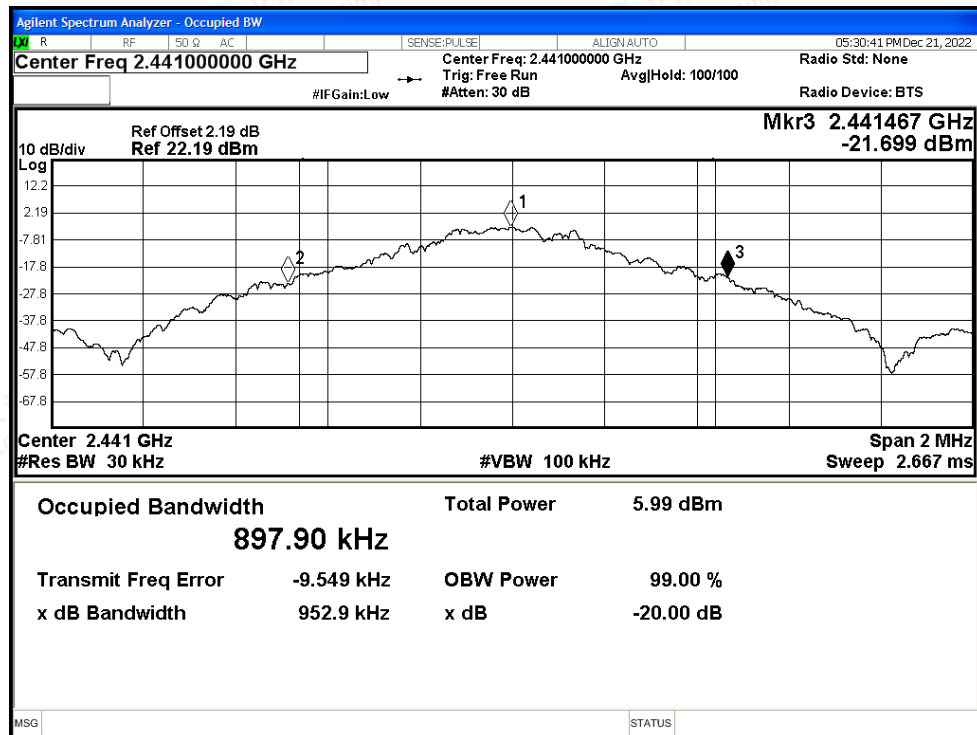




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

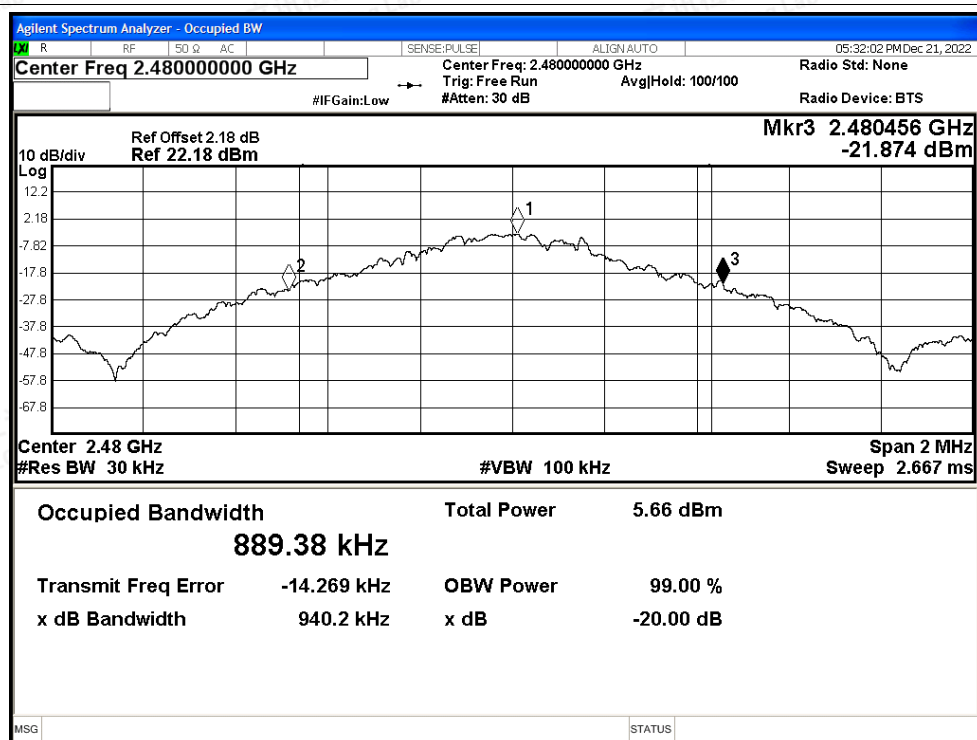

-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

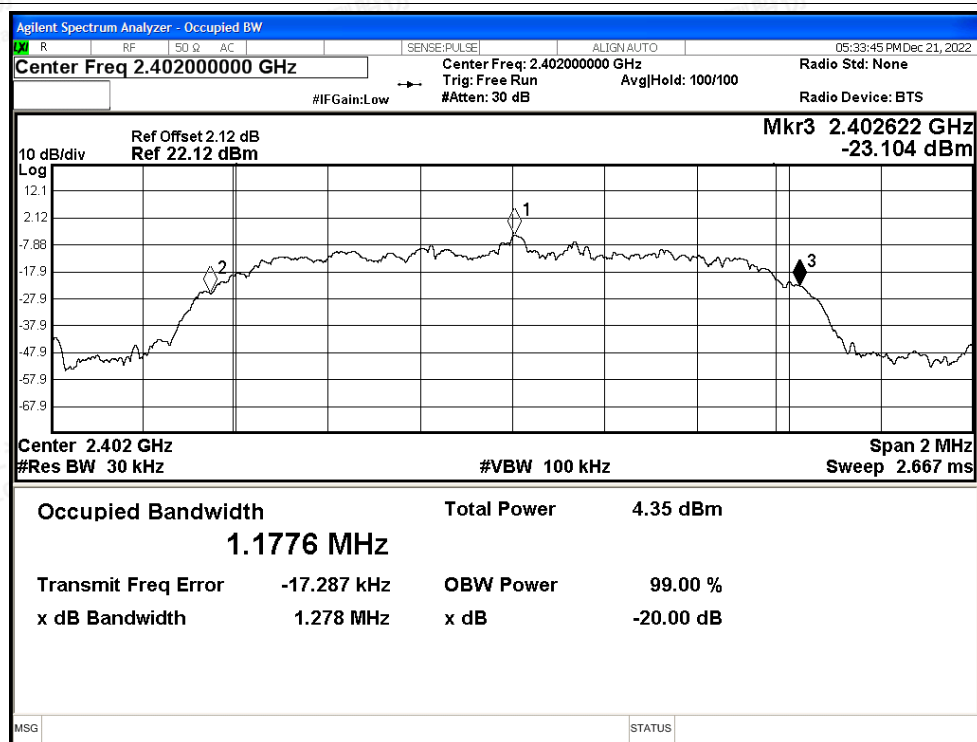

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

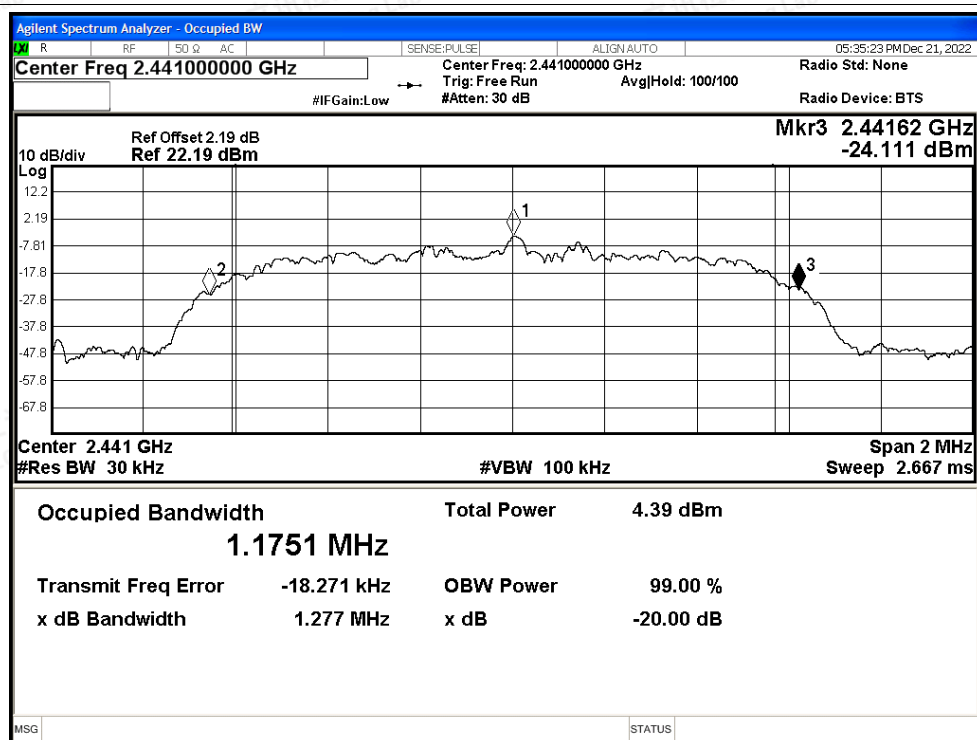

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

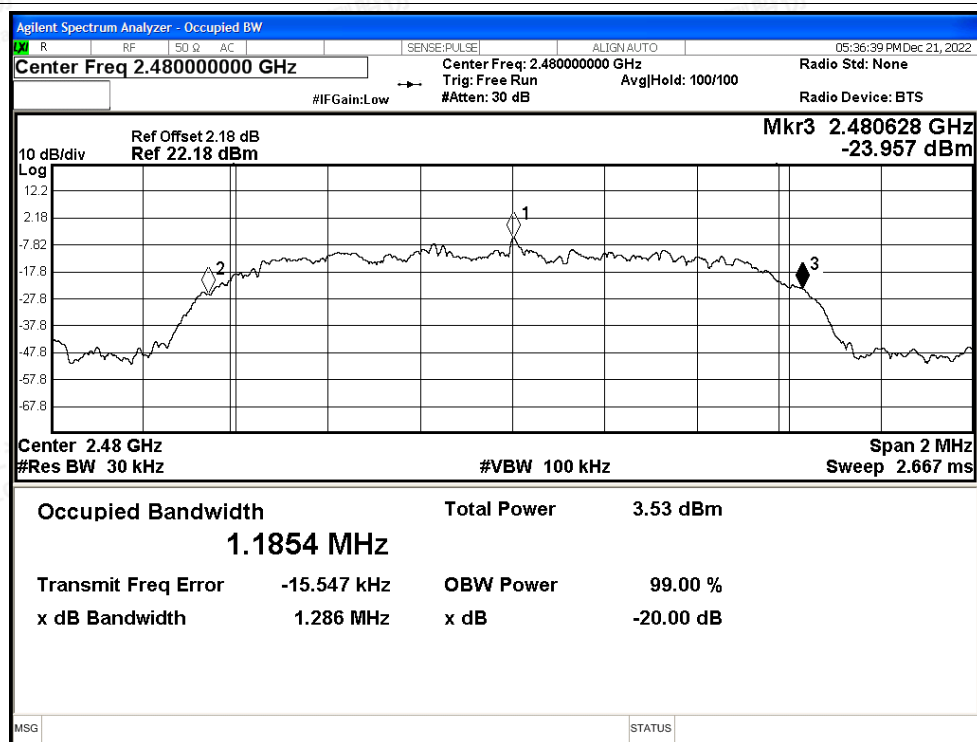

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

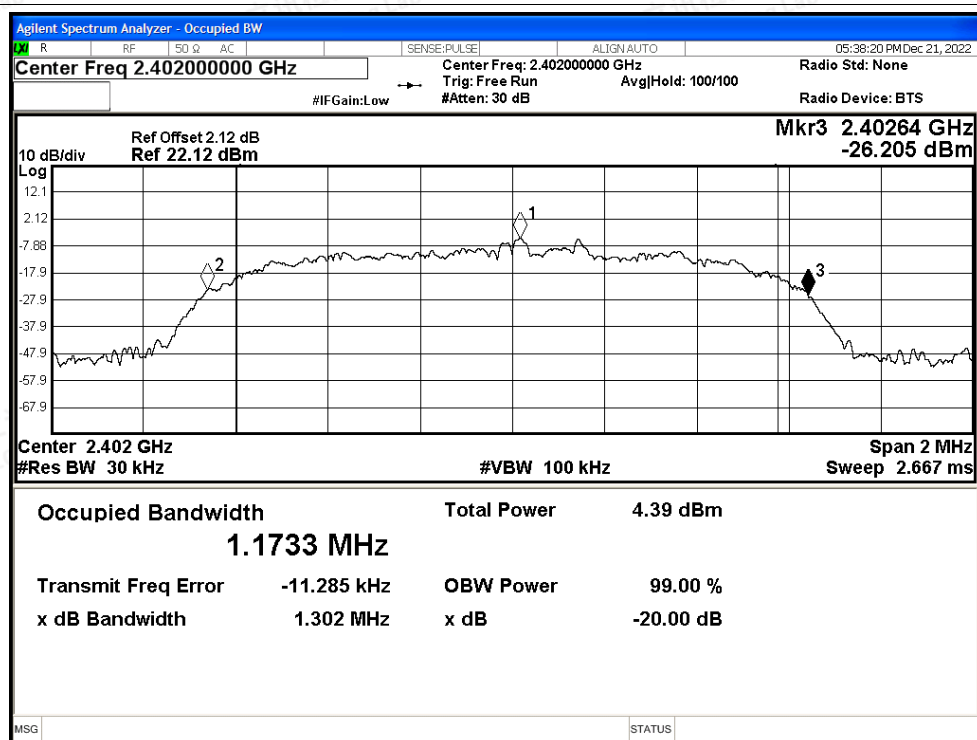

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

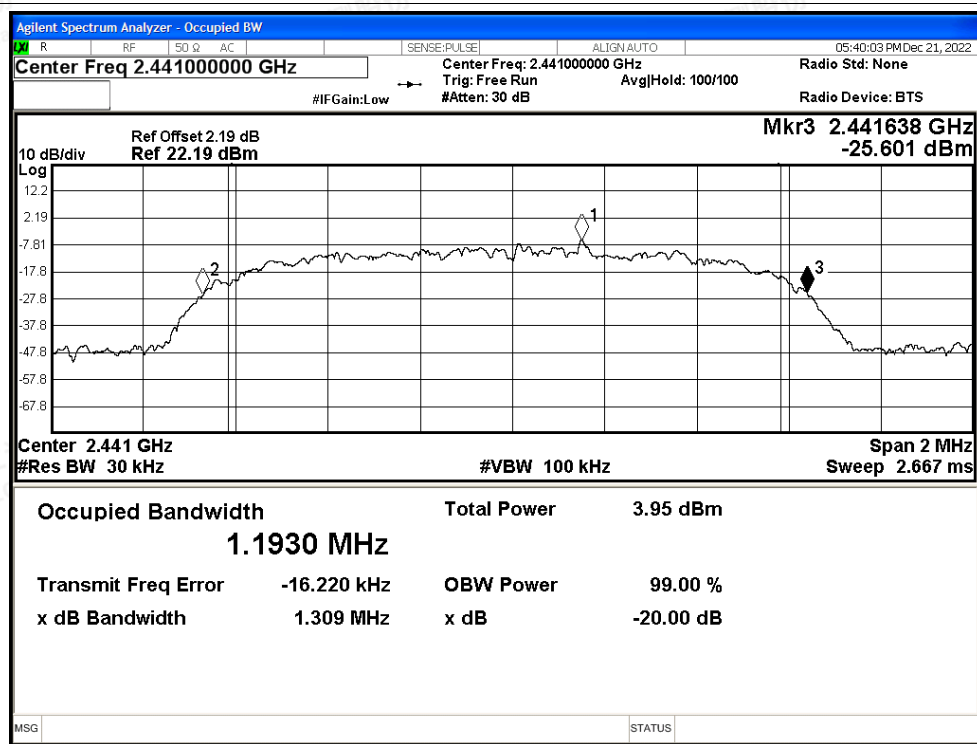


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

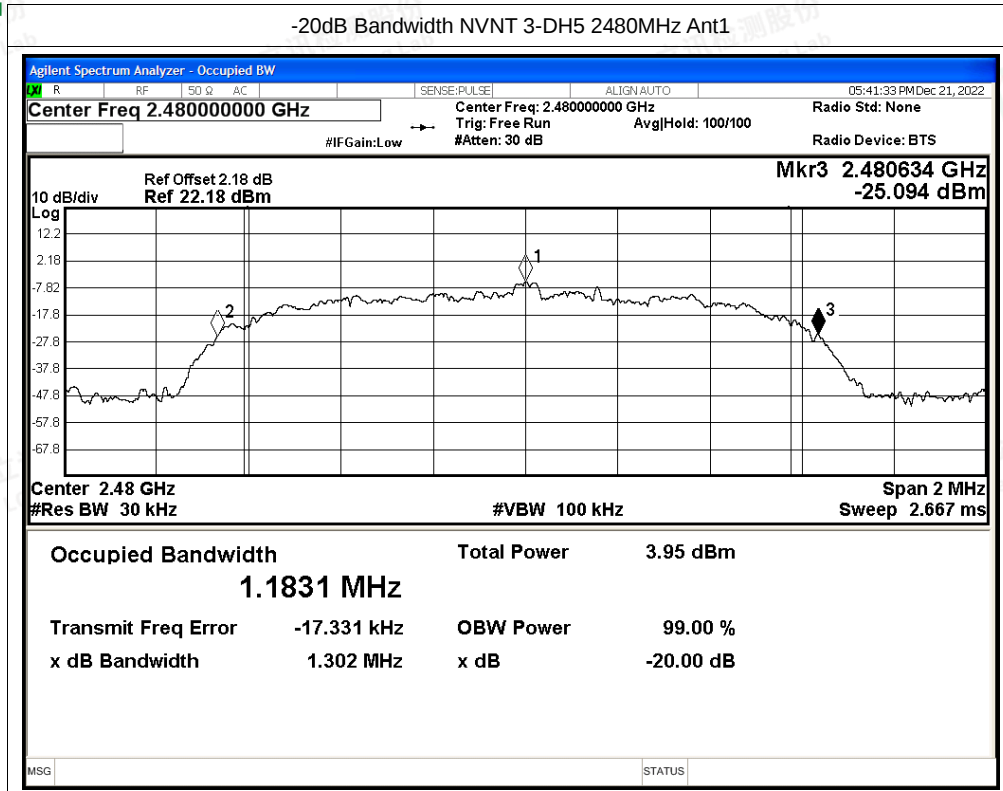



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-0.21	21	Pass
NVNT	1-DH5	2441	Ant1	-0.38	21	Pass
NVNT	1-DH5	2480	Ant1	-0.7	21	Pass
NVNT	2-DH5	2402	Ant1	-0.23	21	Pass
NVNT	2-DH5	2441	Ant1	-0.39	21	Pass
NVNT	2-DH5	2480	Ant1	-0.68	21	Pass
NVNT	3-DH5	2402	Ant1	-0.07	21	Pass
NVNT	3-DH5	2441	Ant1	-0.16	21	Pass
NVNT	3-DH5	2480	Ant1	-0.47	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

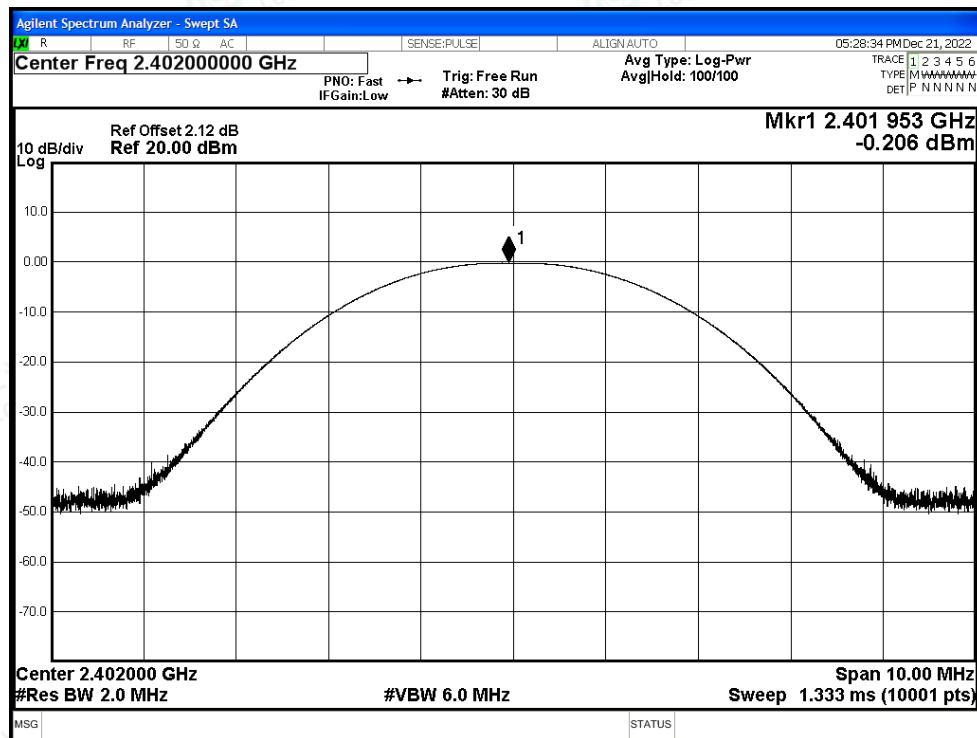


Power NVNT 1-DH5 2441MHz Ant1

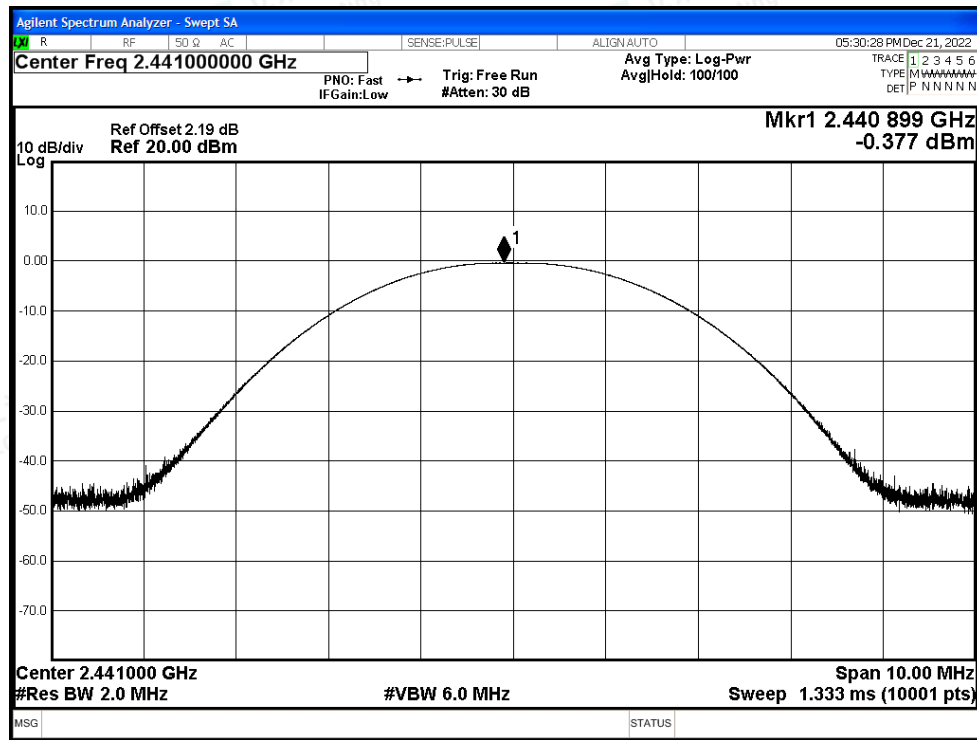




Power NVNT 1-DH5 2480MHz Ant1

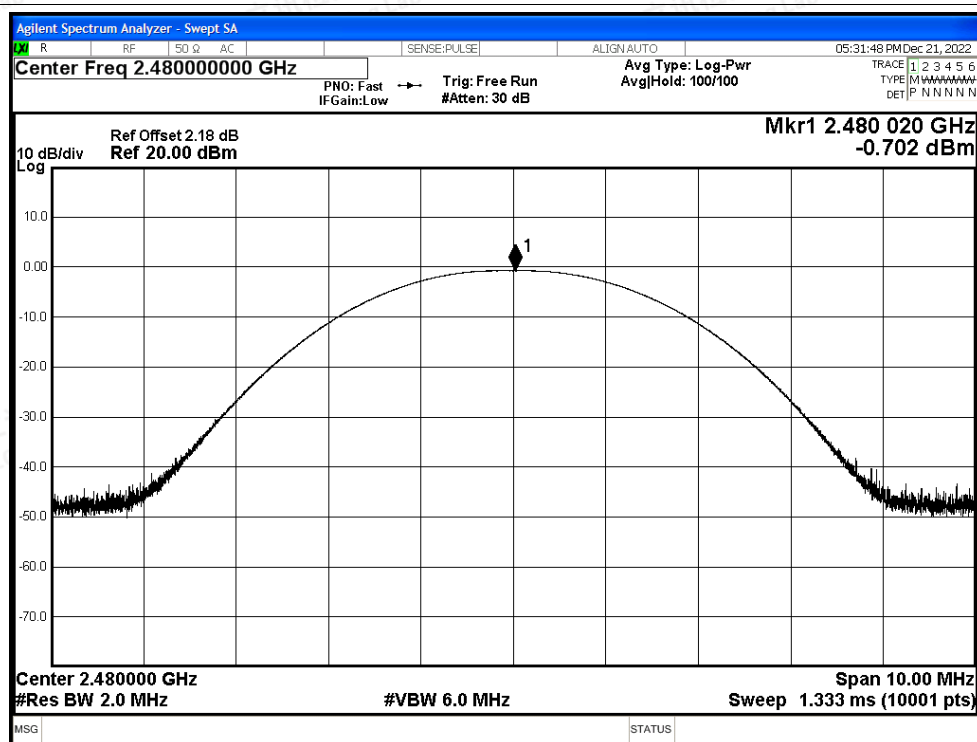


Power NVNT 2-DH5 2402MHz Ant1

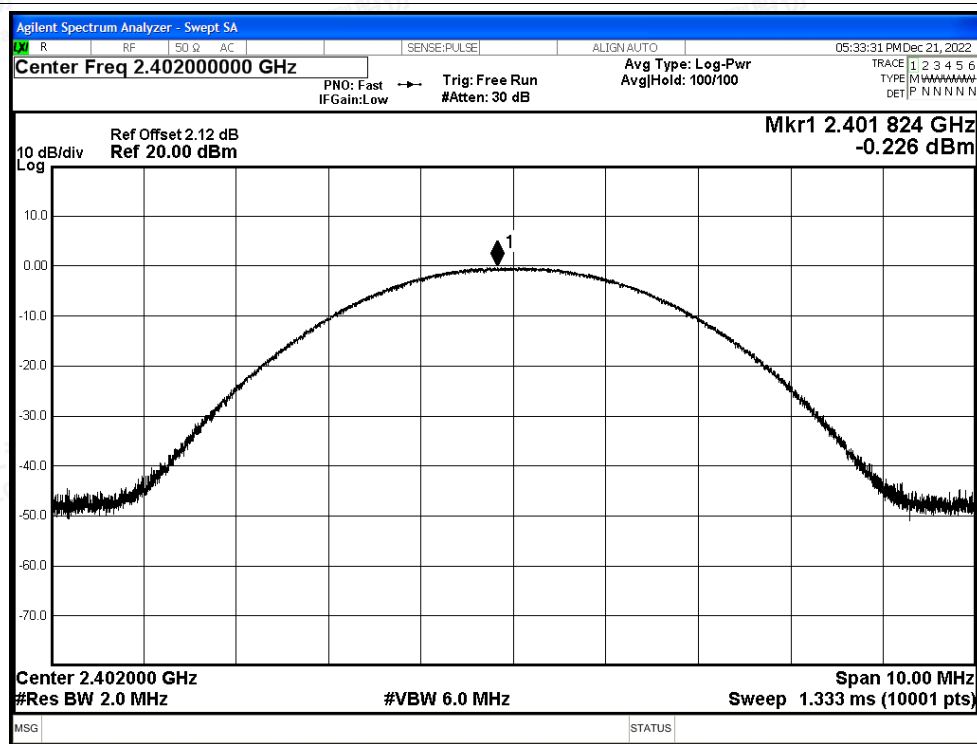




Power NVNT 2-DH5 2441MHz Ant1

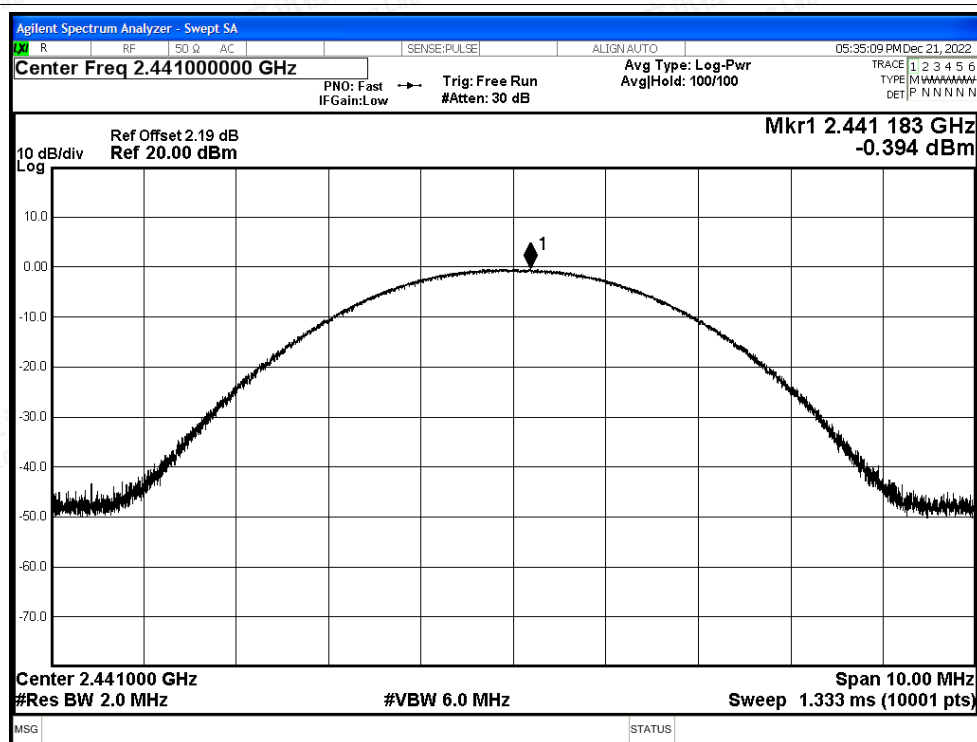


Power NVNT 2-DH5 2480MHz Ant1

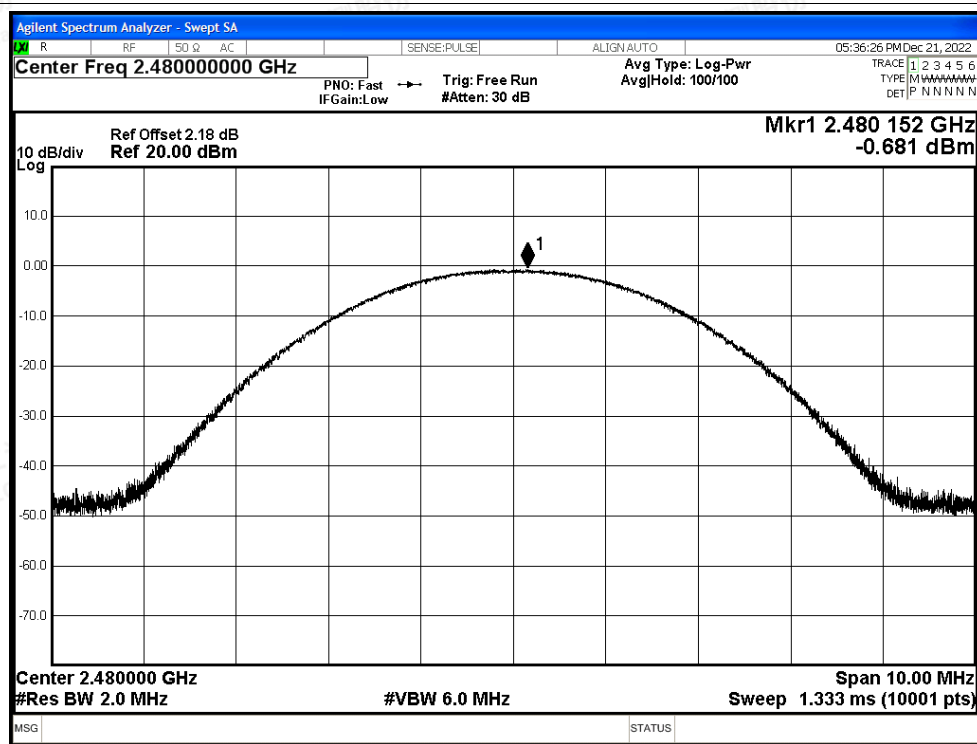





Power NVNT 3-DH5 2402MHz Ant1

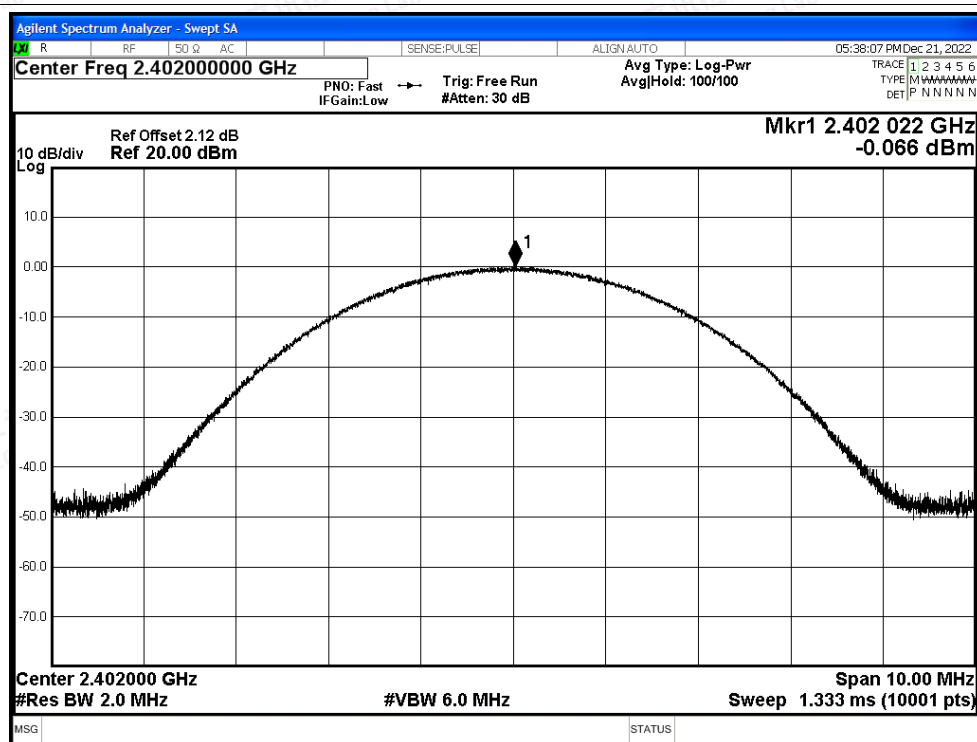

Power NVNT 3-DH5 2441MHz Ant1

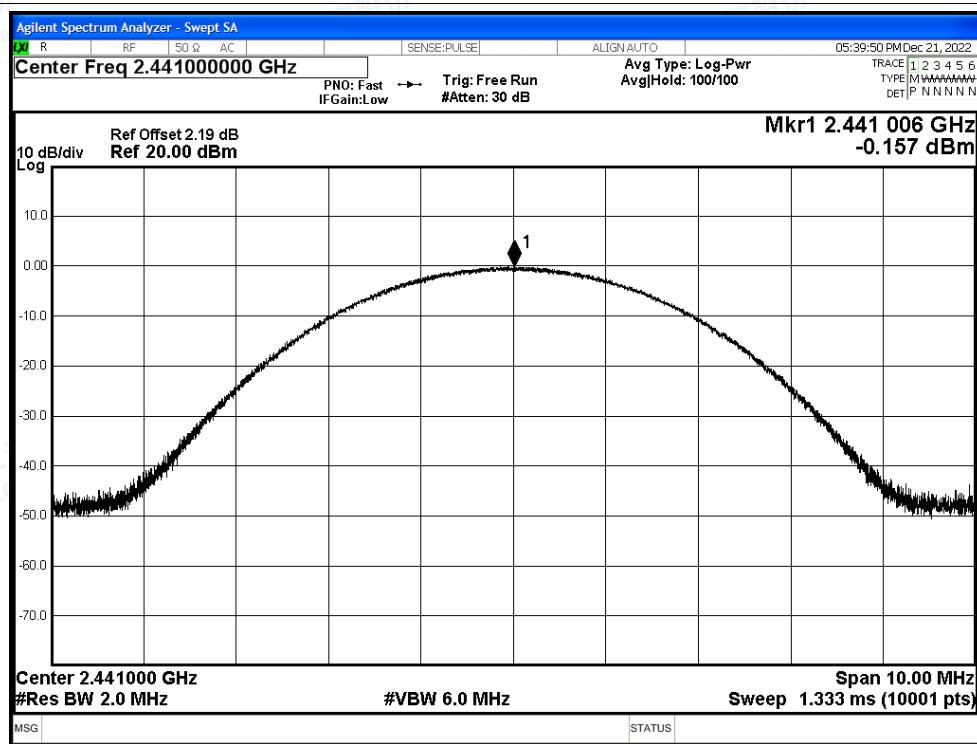

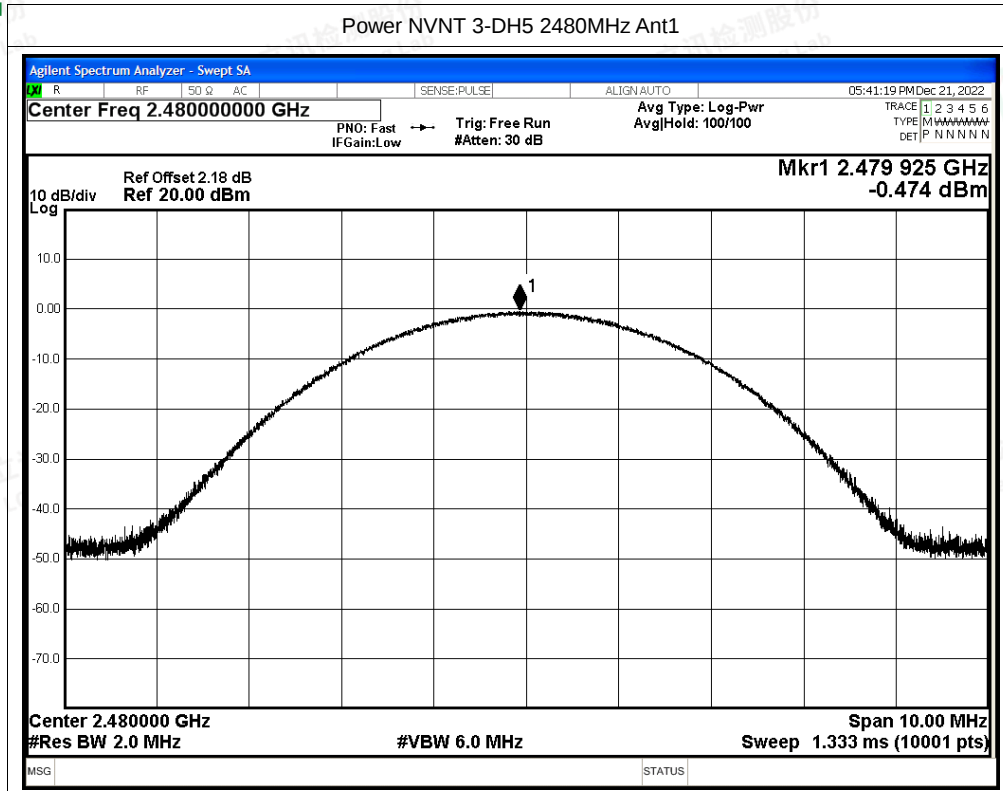



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.006	2402.952	0.946	0.640	Pass
NVNT	2-DH5	Ant1	2402.006	2403.006	1	0.858	Pass
NVNT	3-DH5	Ant1	2401.996	2403	1.004	0.873	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

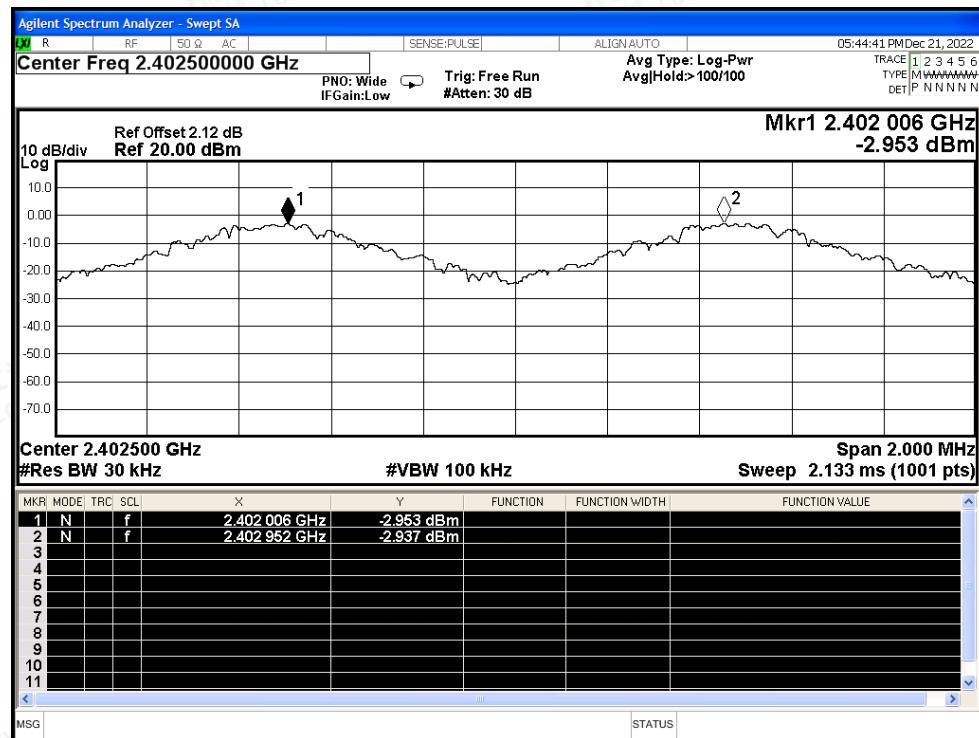

CFS NVNT 2-DH5 2402MHz Ant1

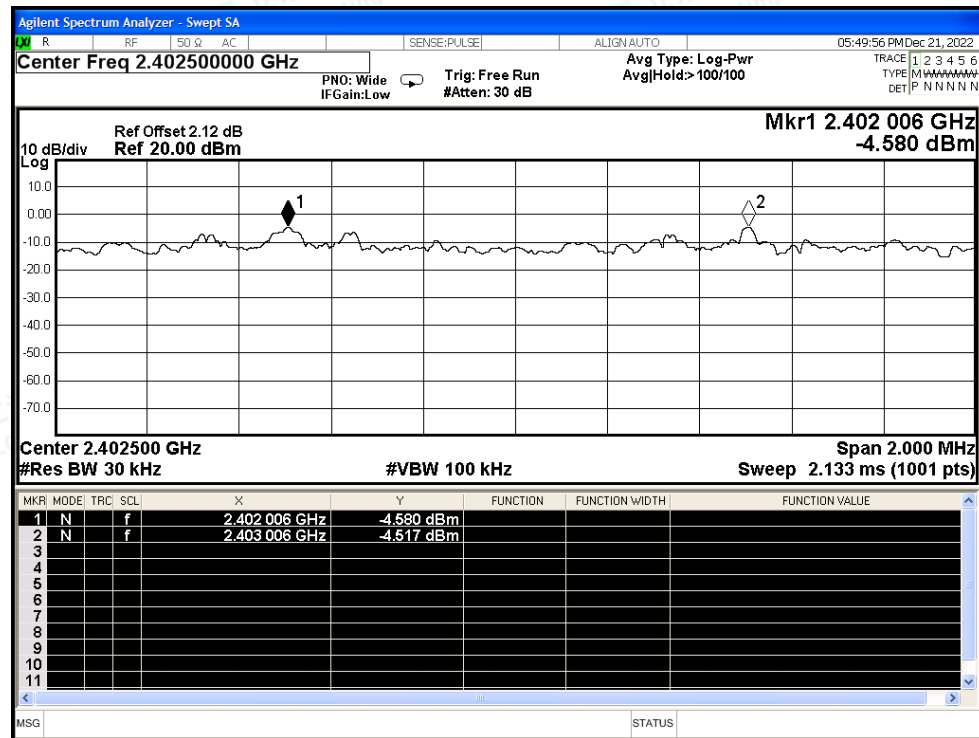

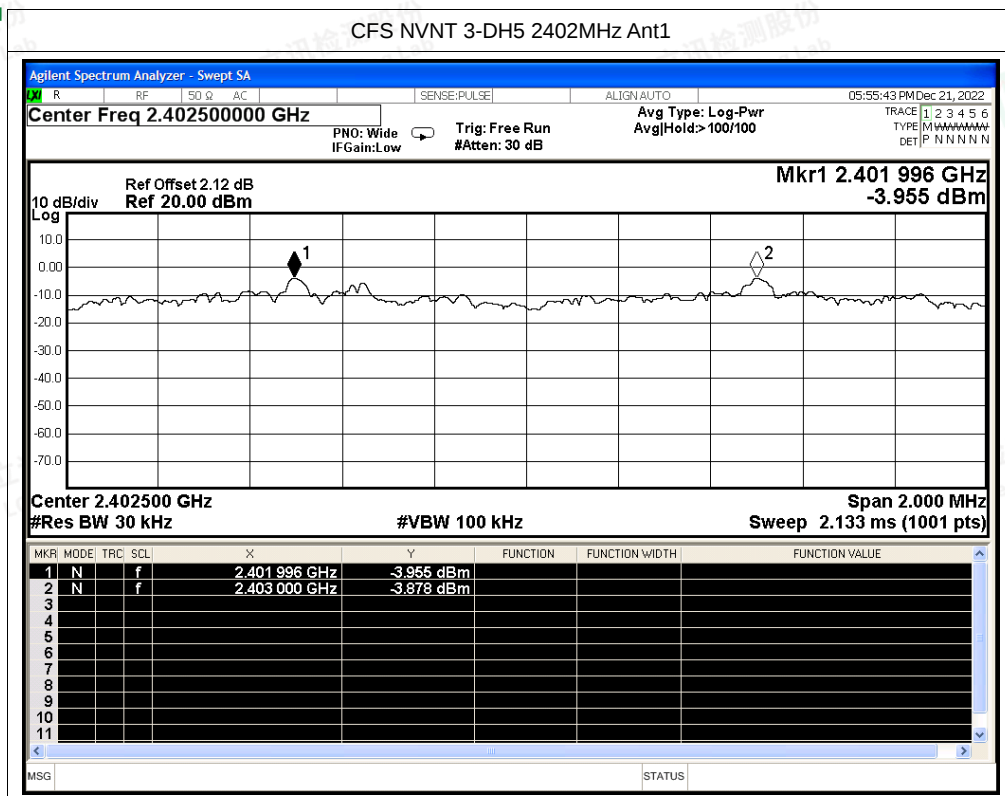



A.4 Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.886	311.688	108	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.887	303.135	105	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.889	297.567	103	31600	400	Pass






Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

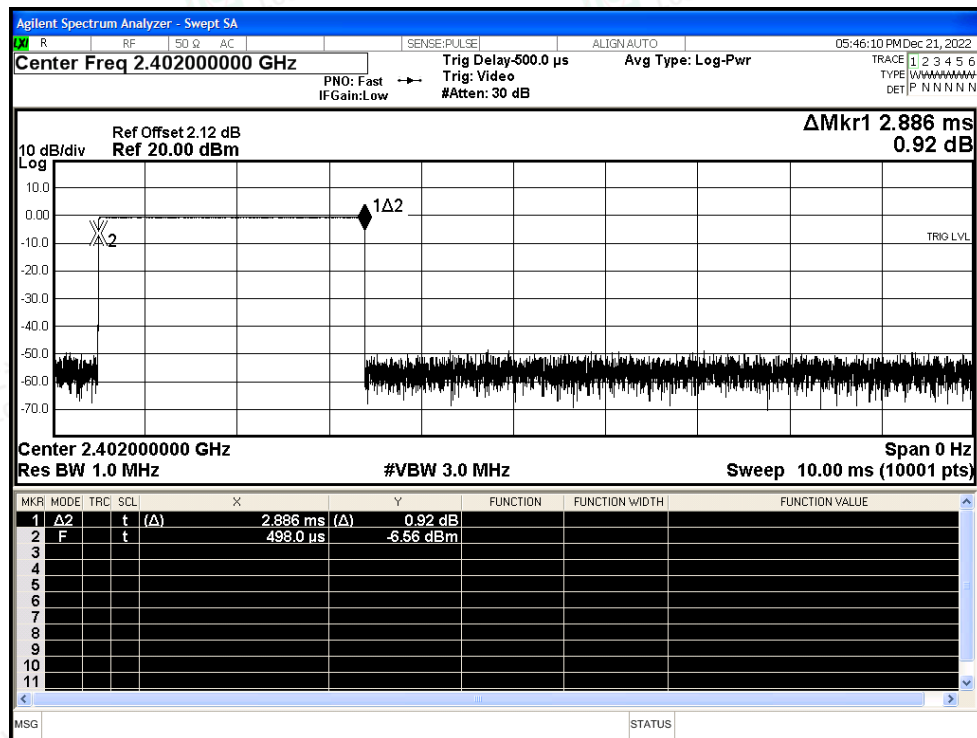


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

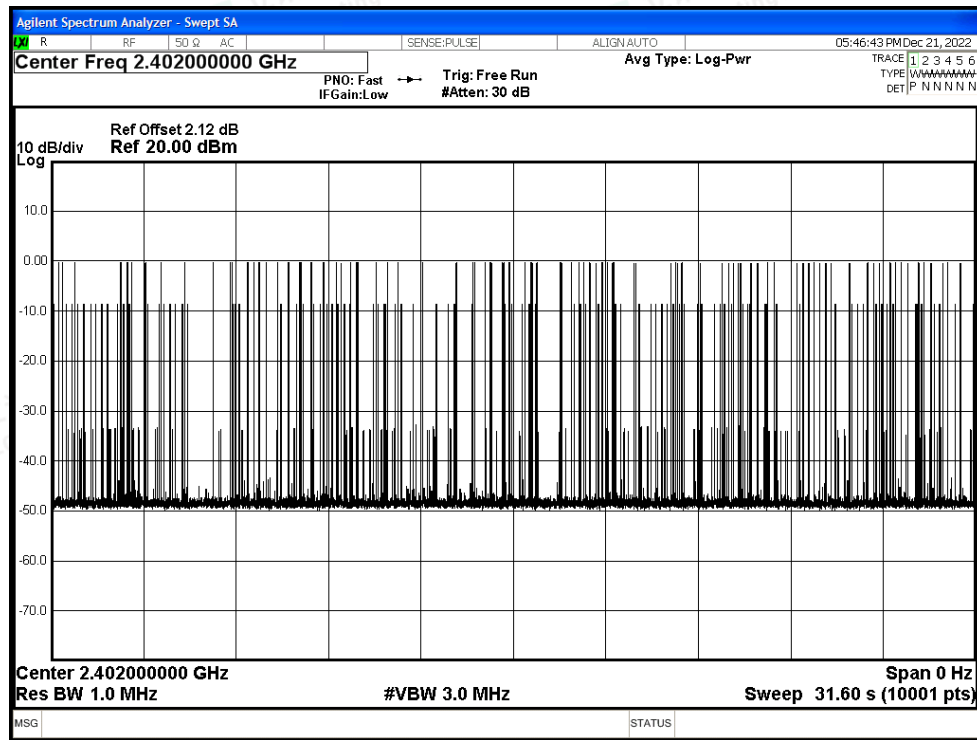




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

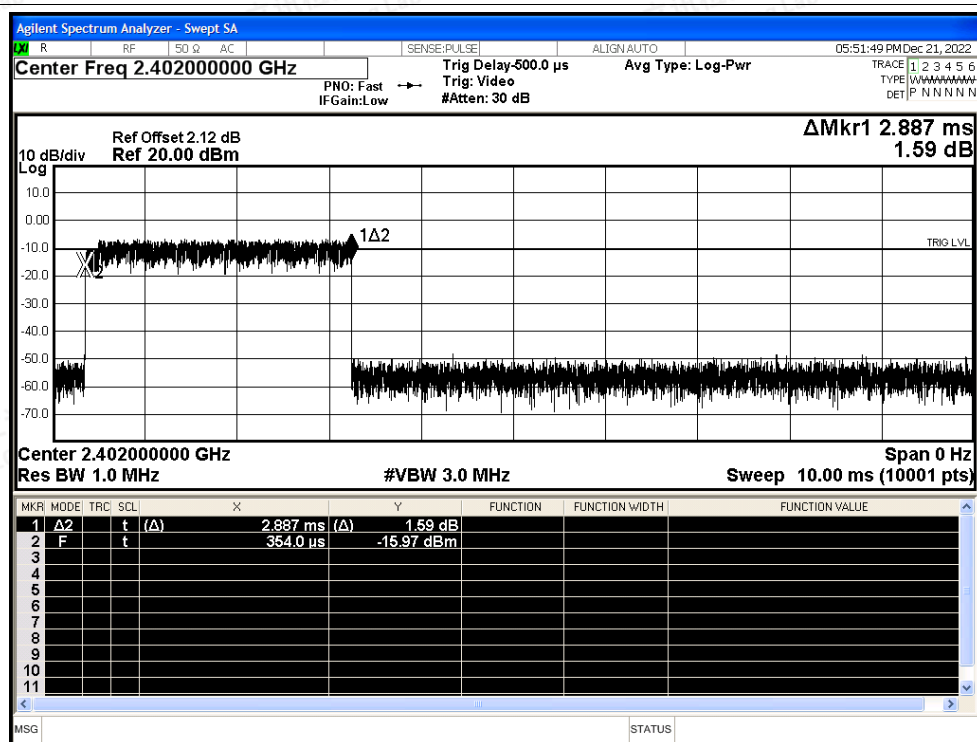


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

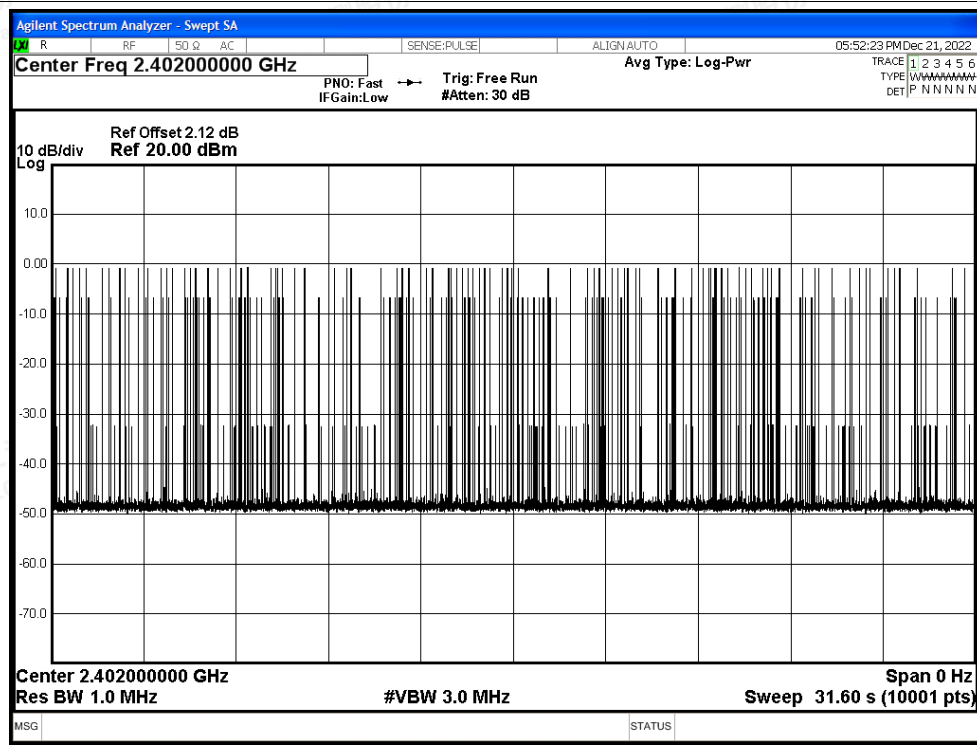




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

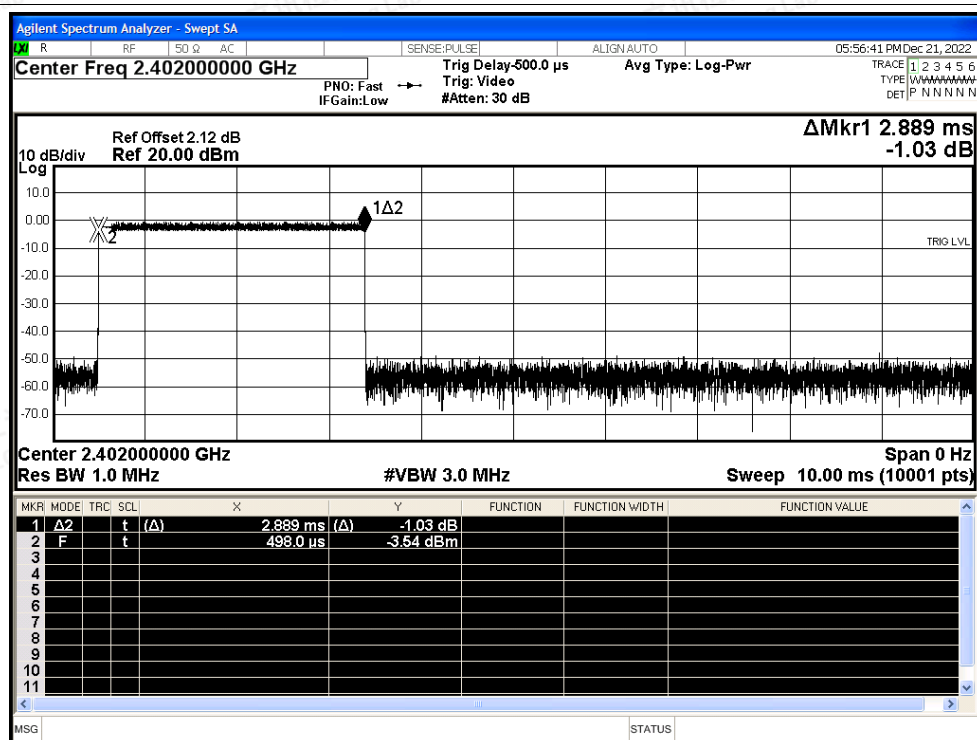

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

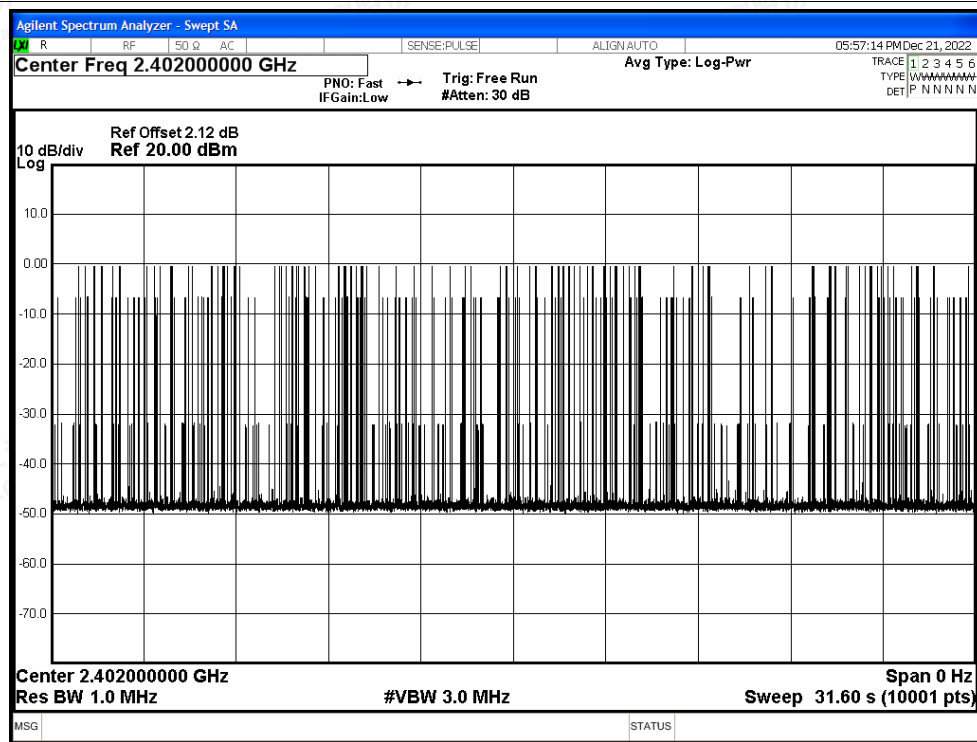



A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

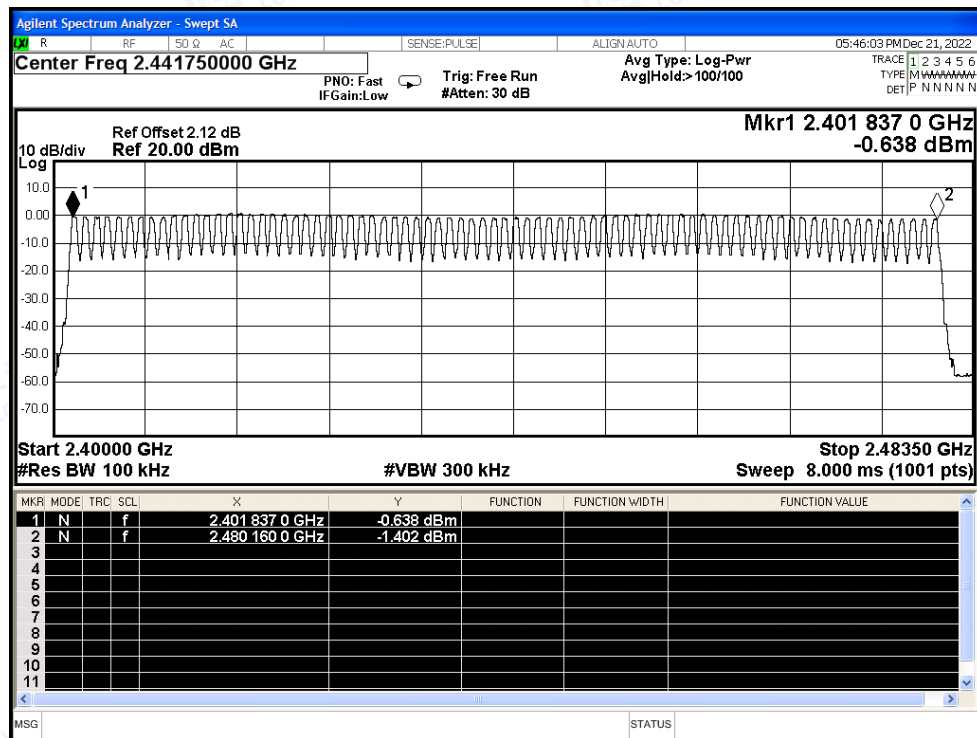


Hopping No. NVNT 2-DH5 2402MHz Ant1

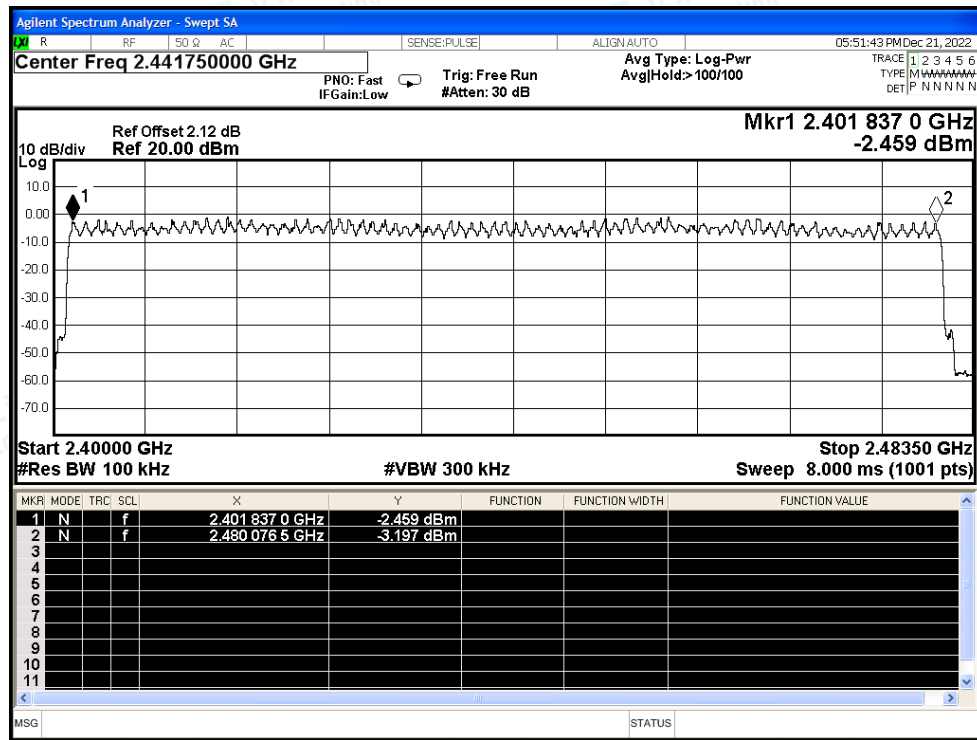



Hopping No. NVNT 3-DH5 2402MHz Ant1

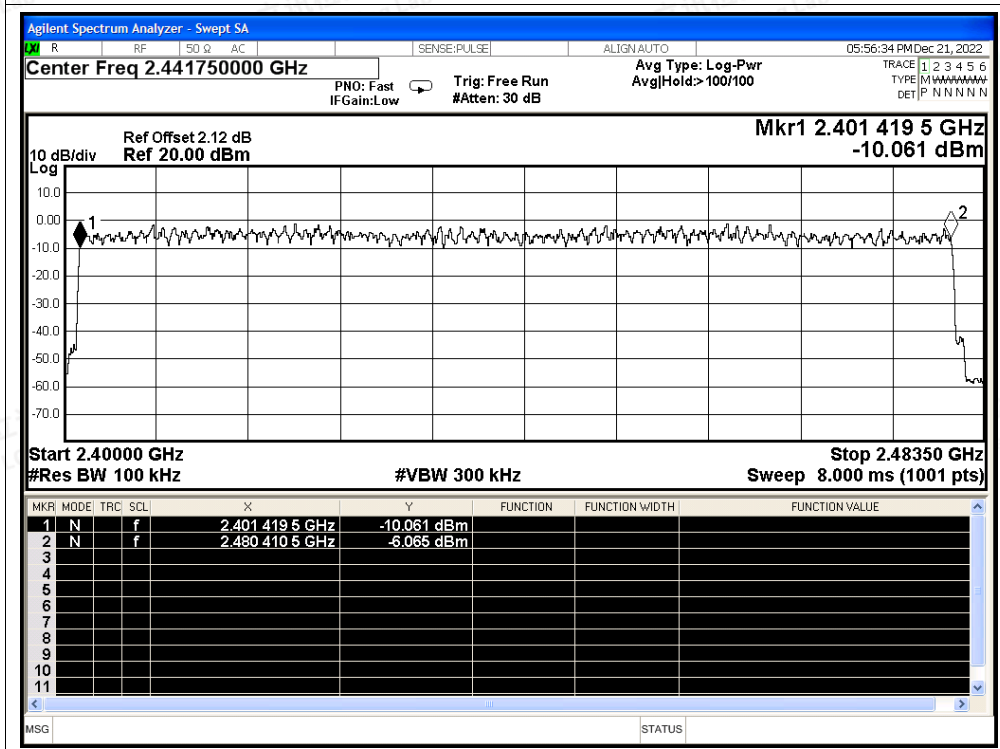



A.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-55.48	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-55.43	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-54.92	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-50.8	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-54.54	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-53.7	-20	Pass






Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

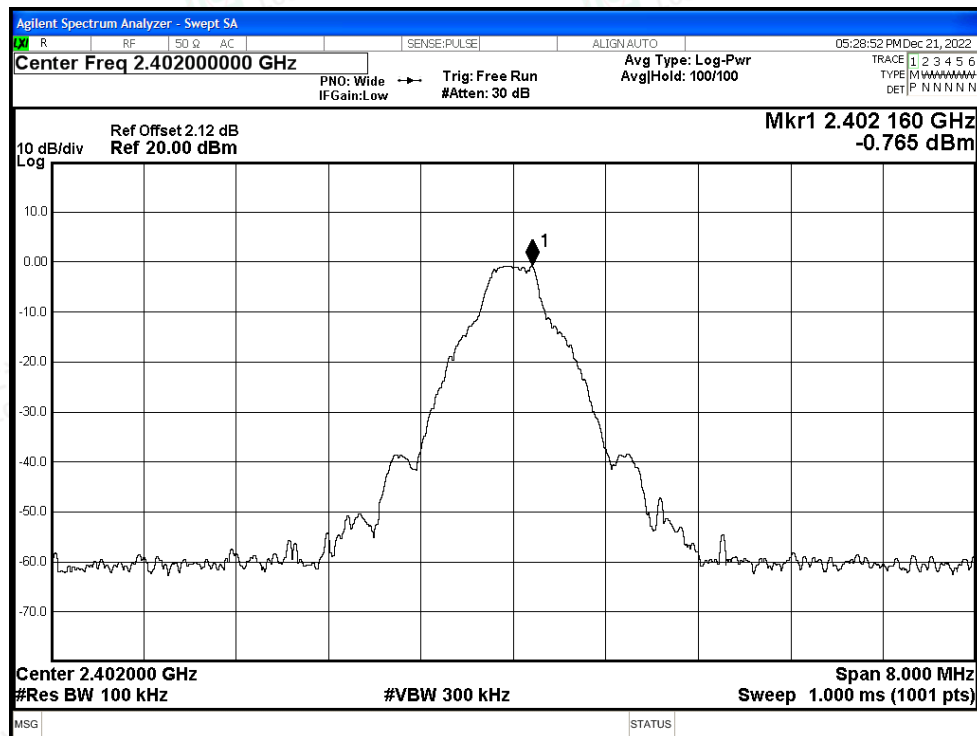

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

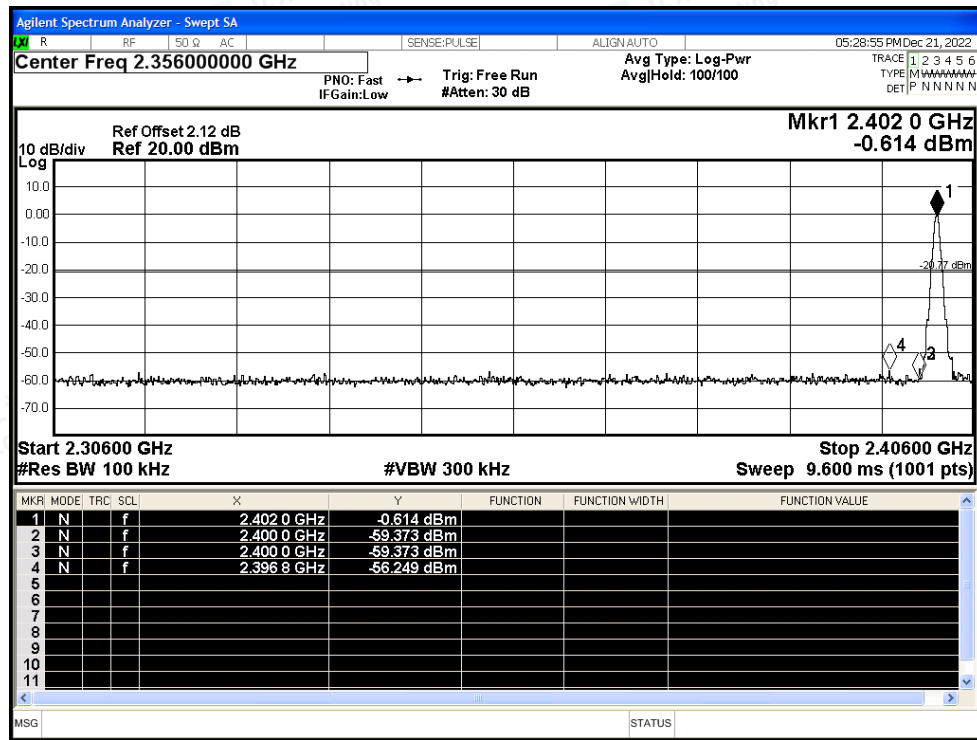

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

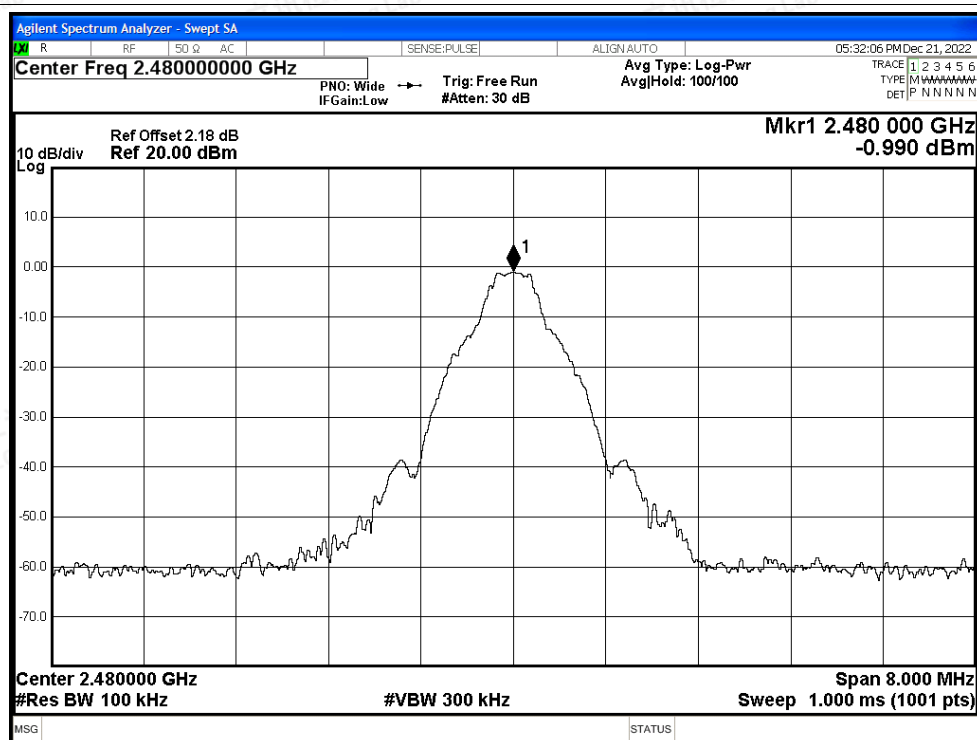

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

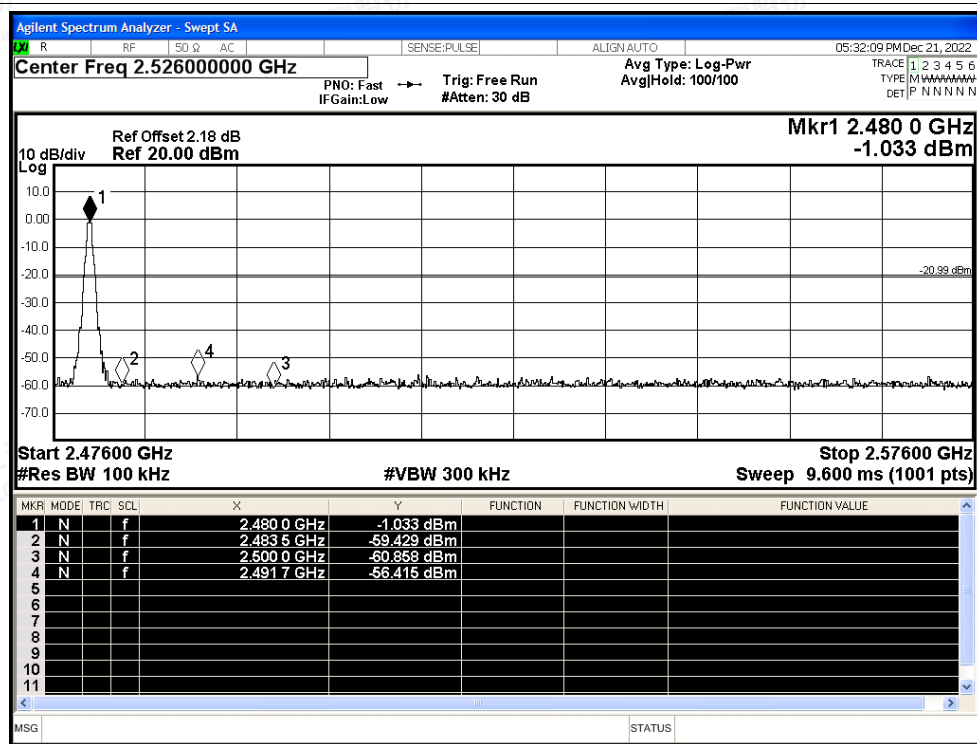

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

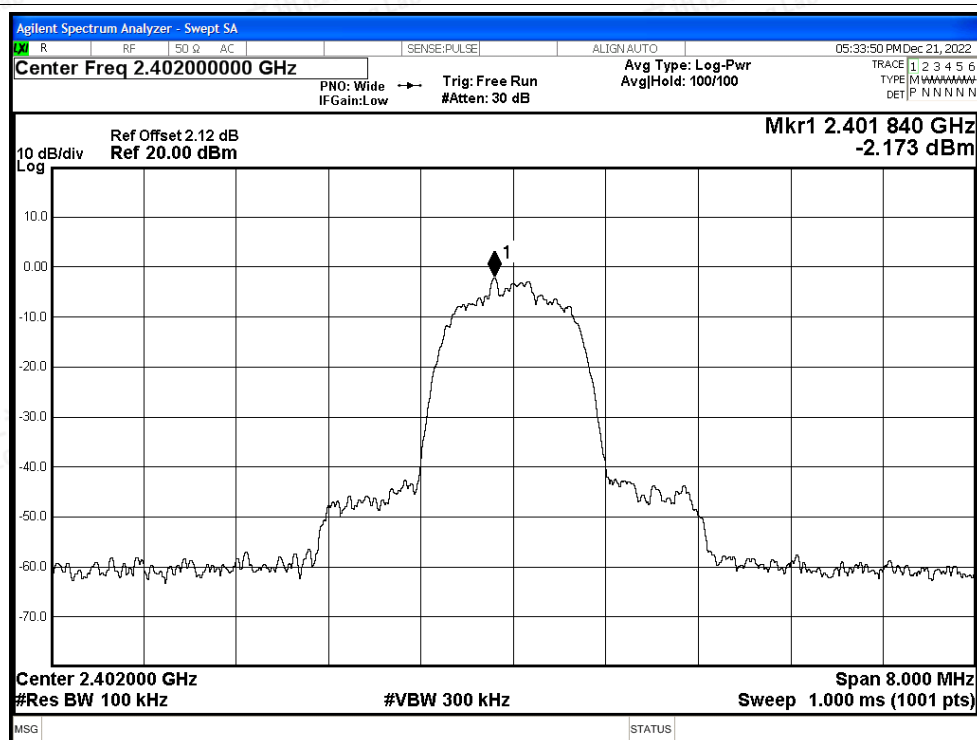

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

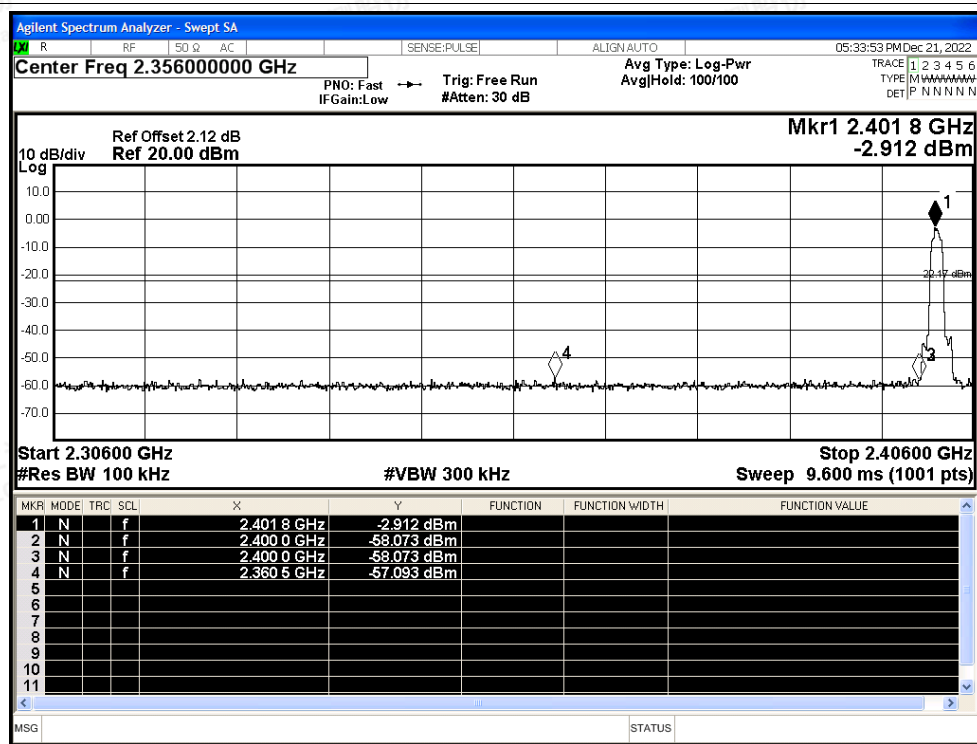

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

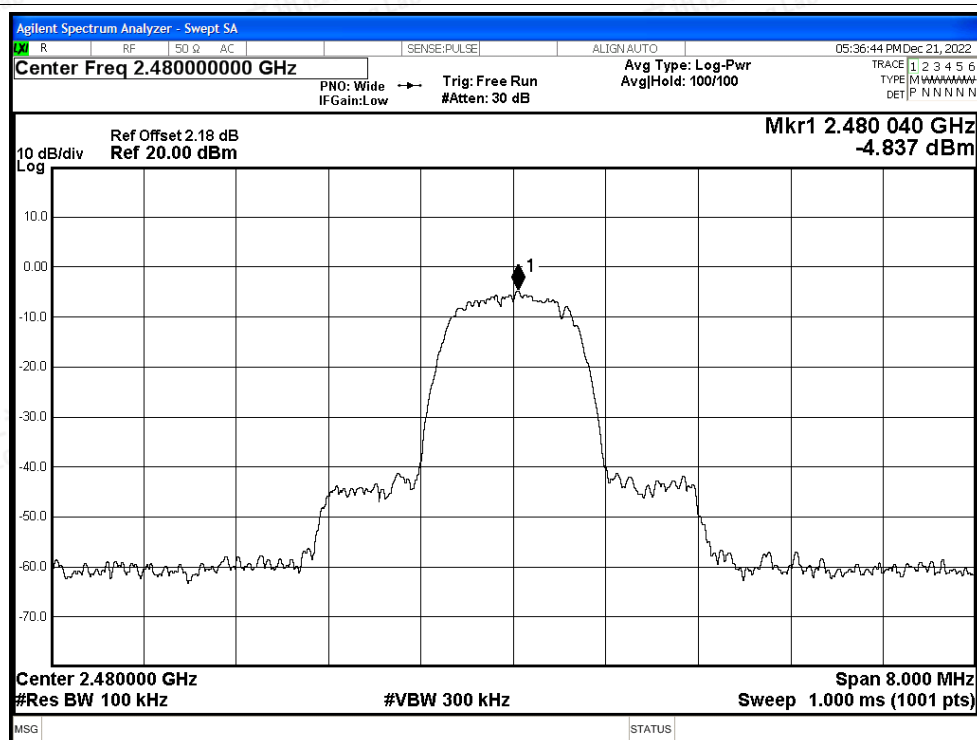


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

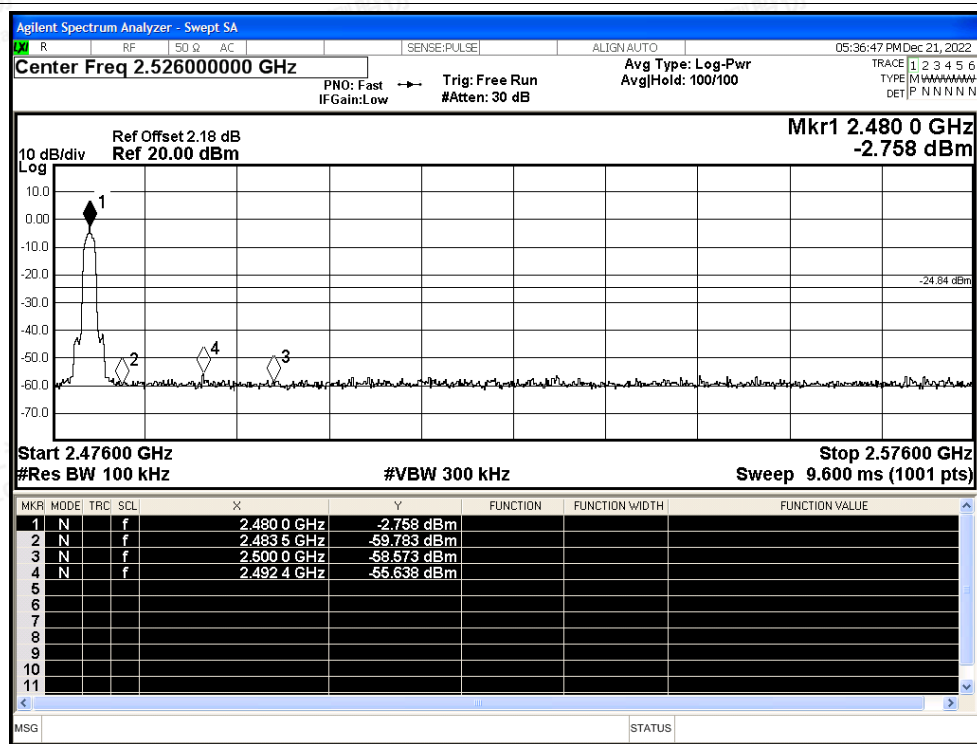




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

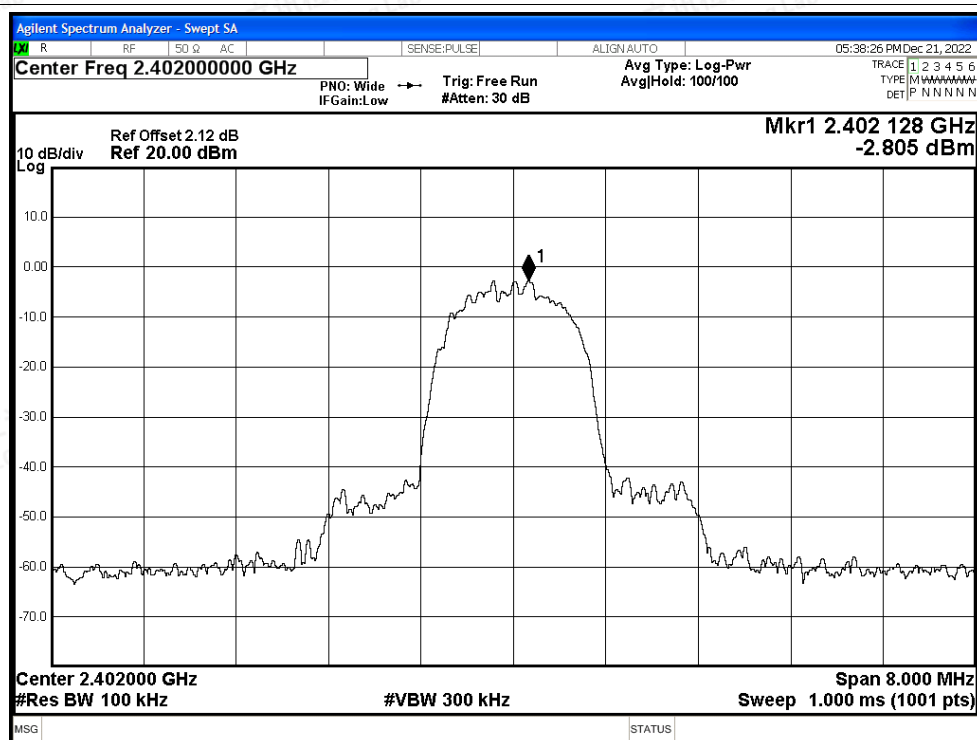

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

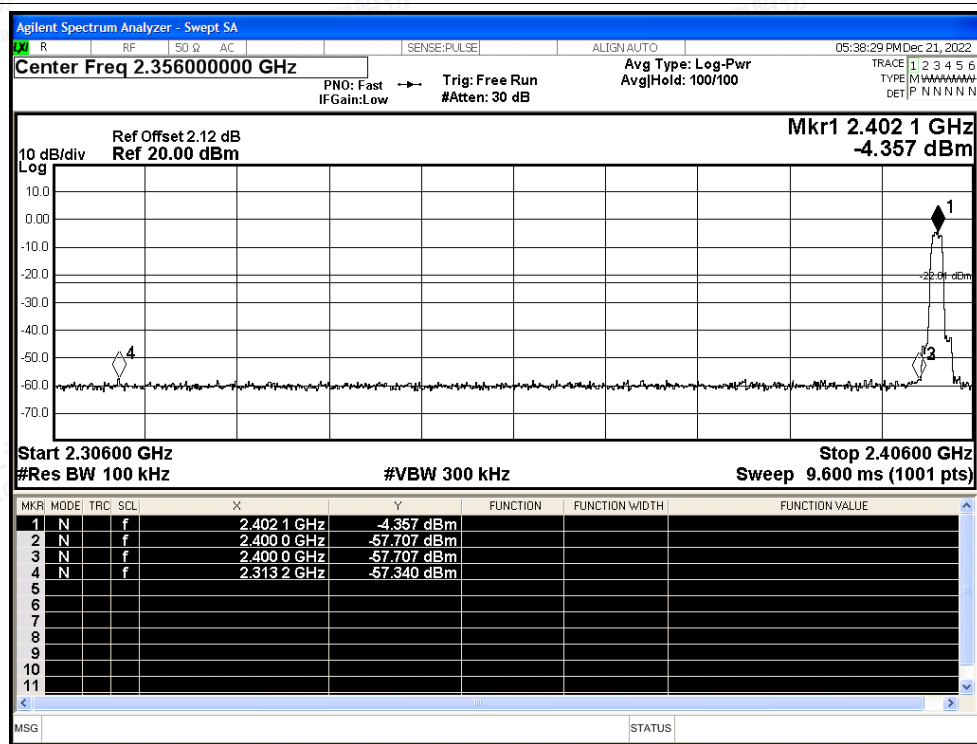

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

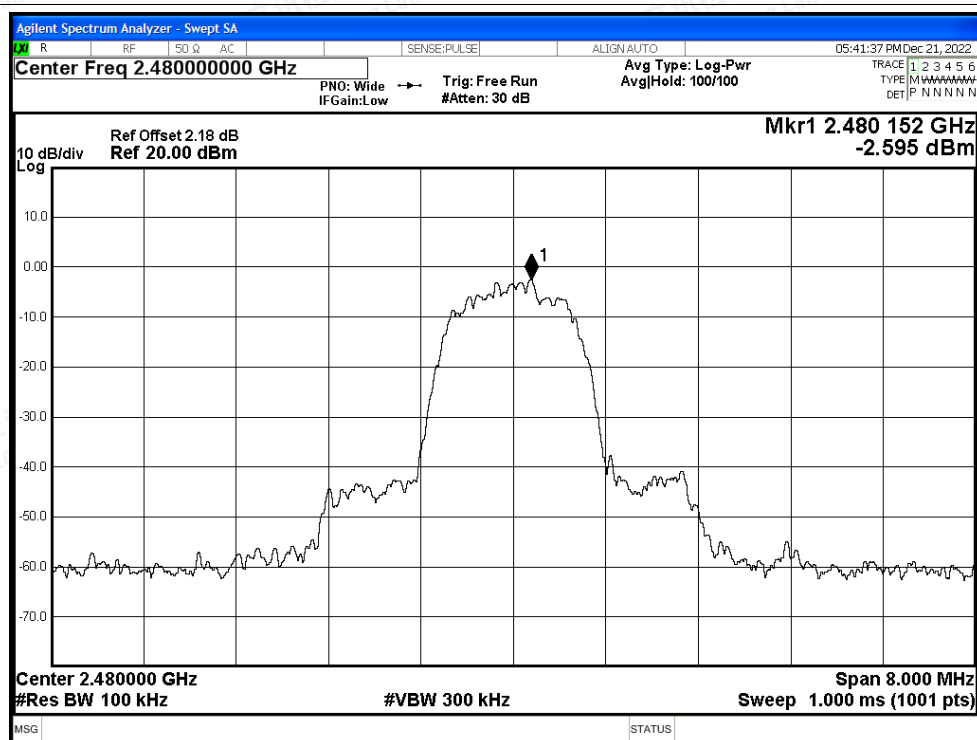

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

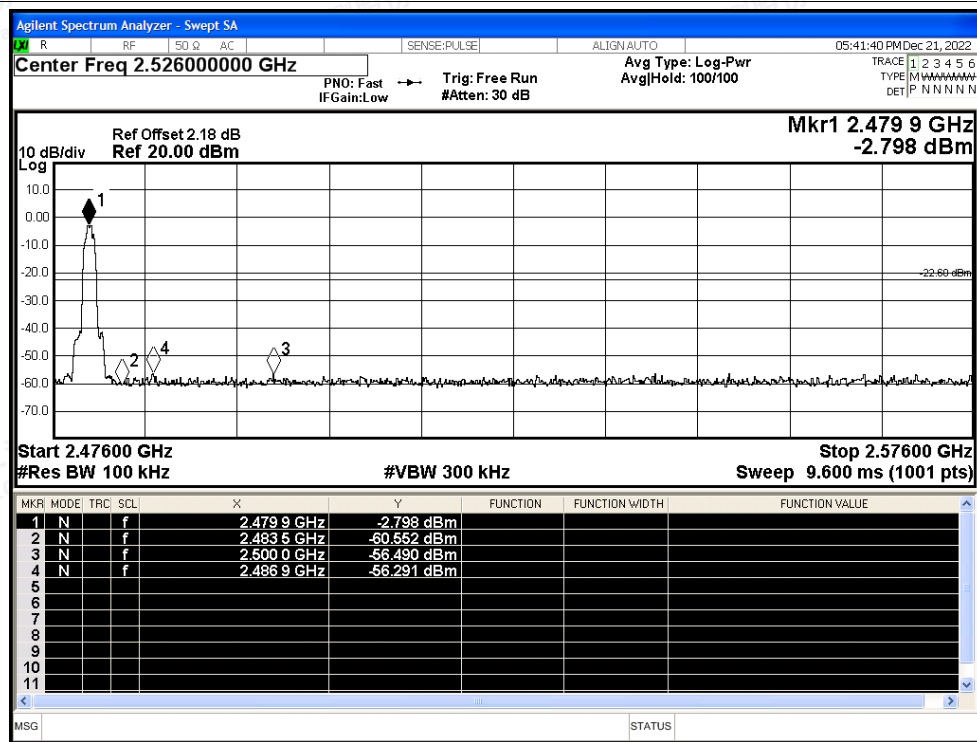



(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-55	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-55.39	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-53.1	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-53.57	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-53.54	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-52.65	-20	Pass






Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

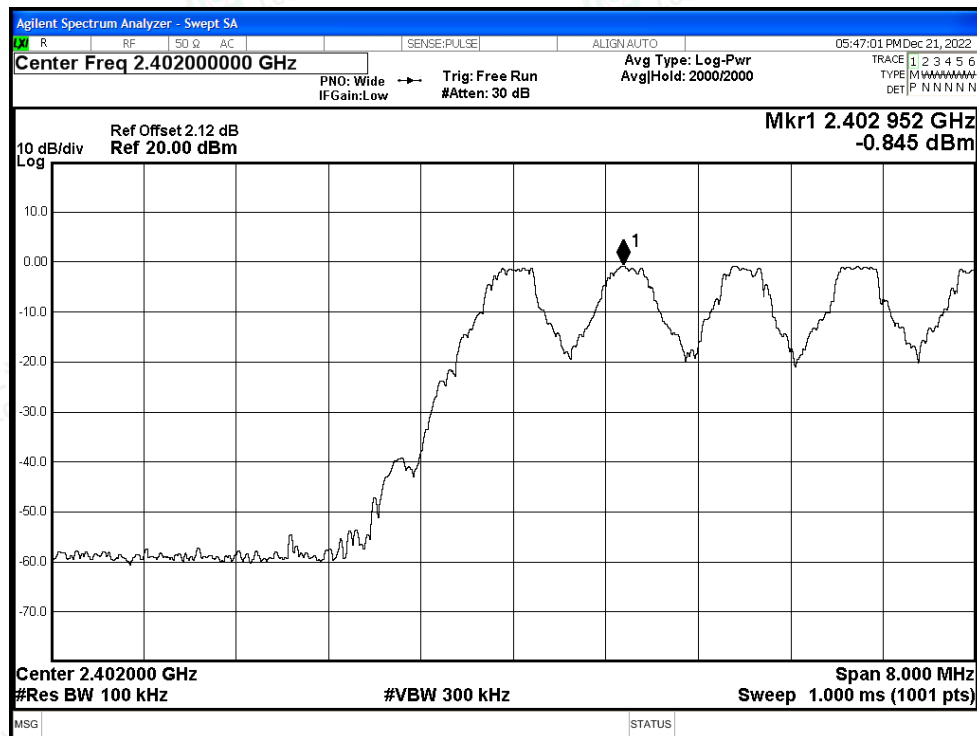

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

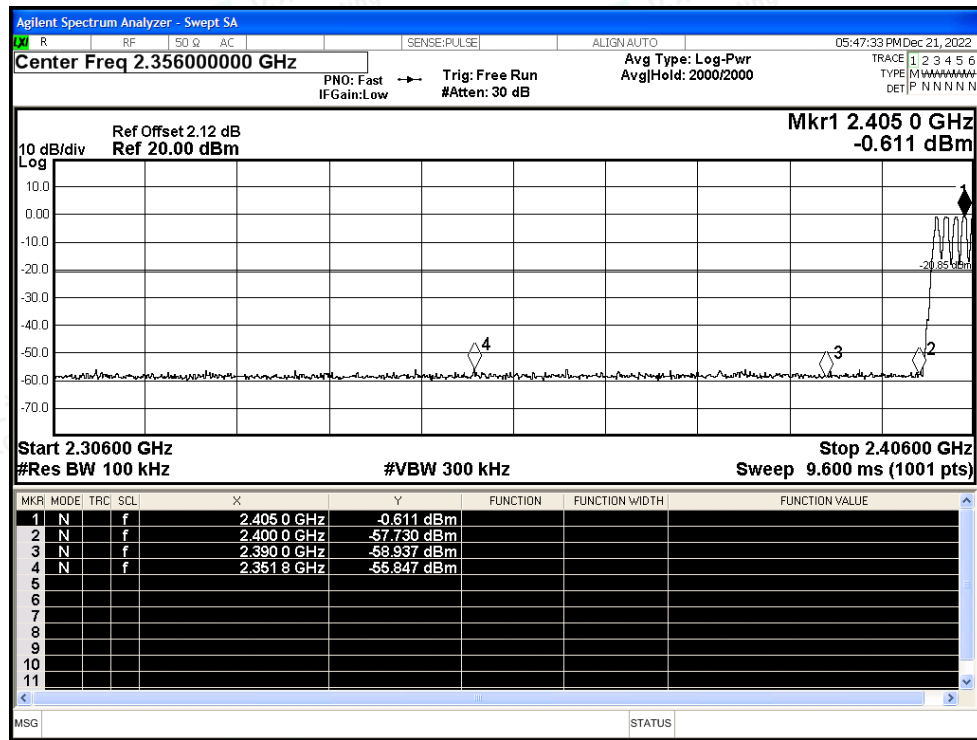

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

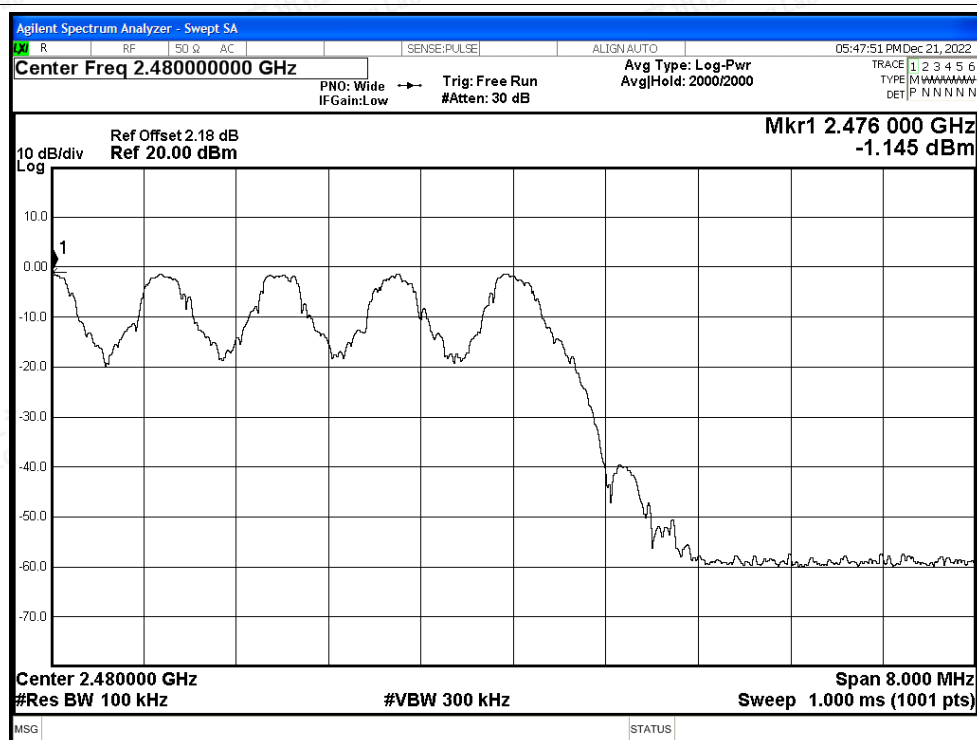

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

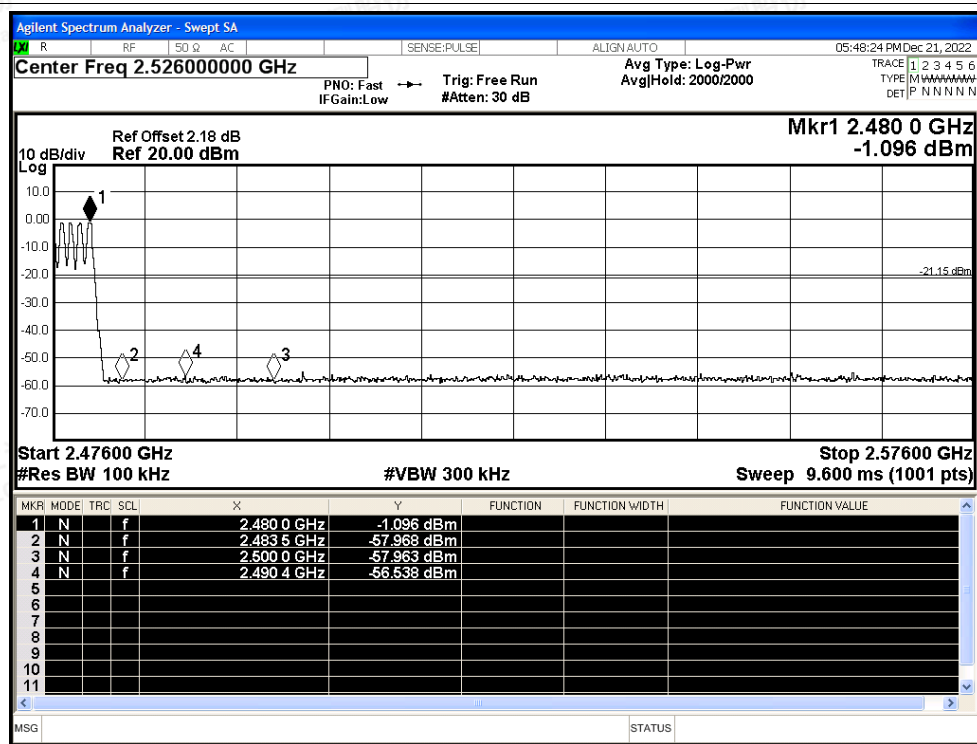

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

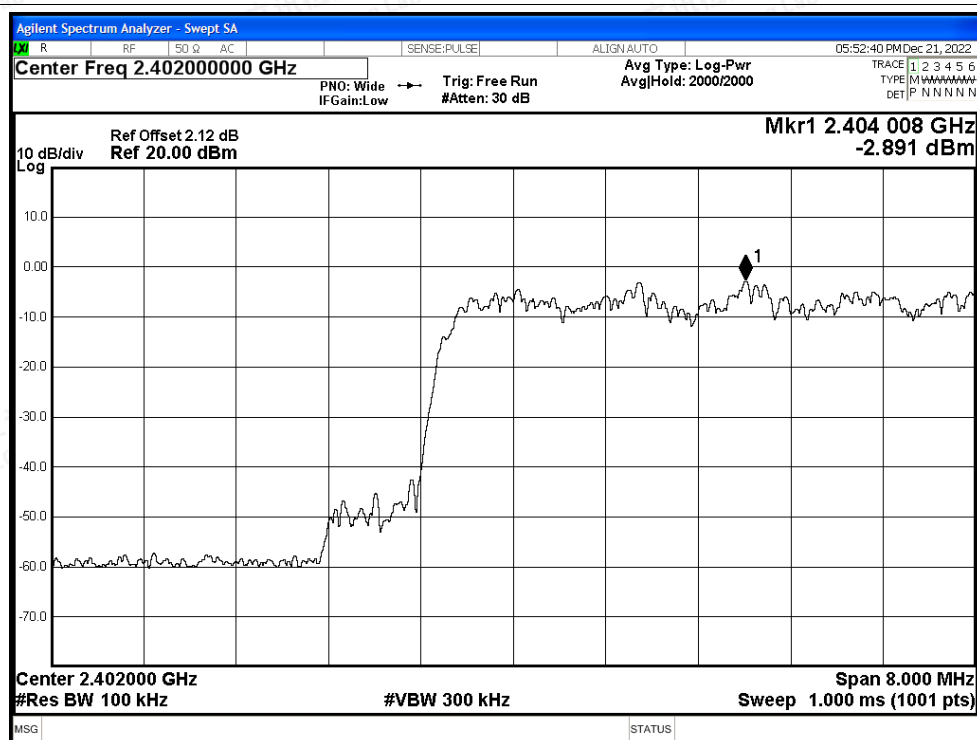

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

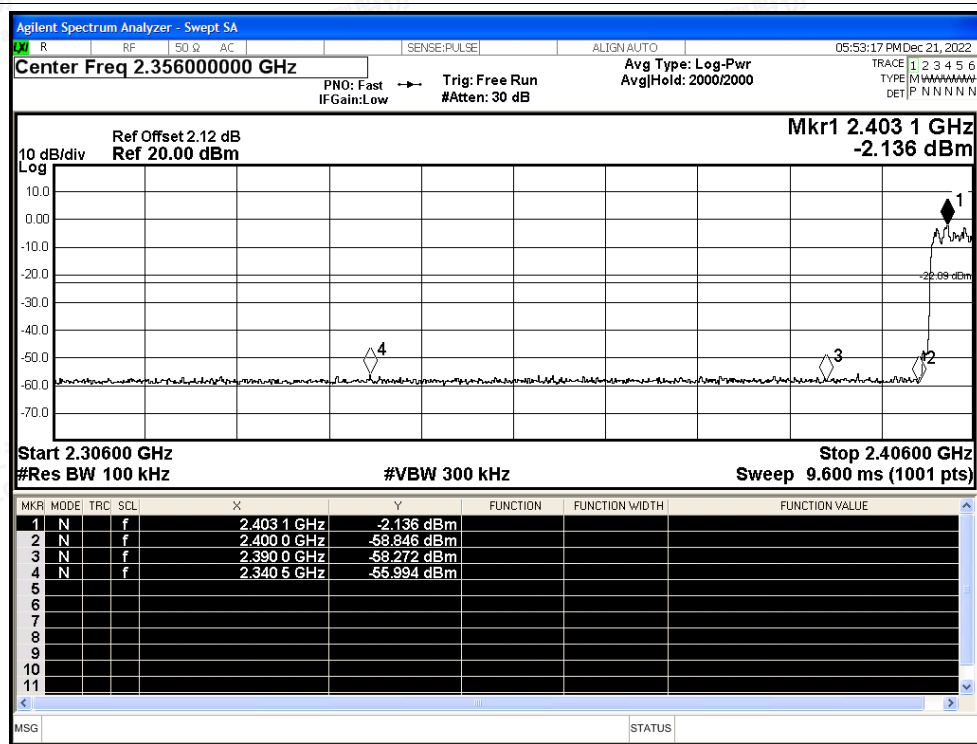

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

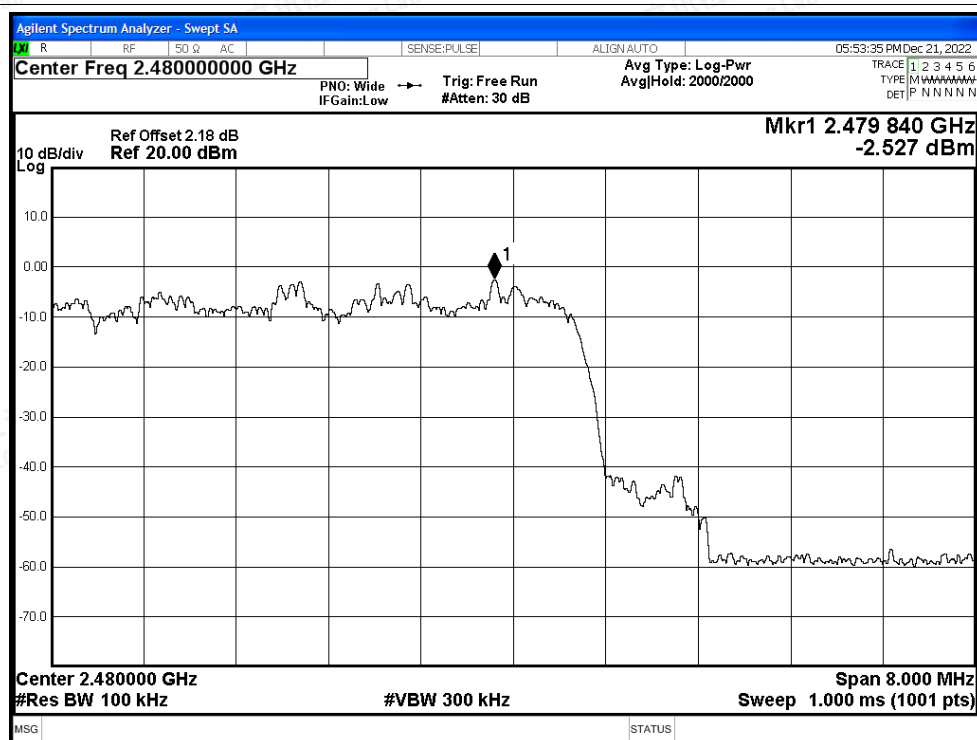

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

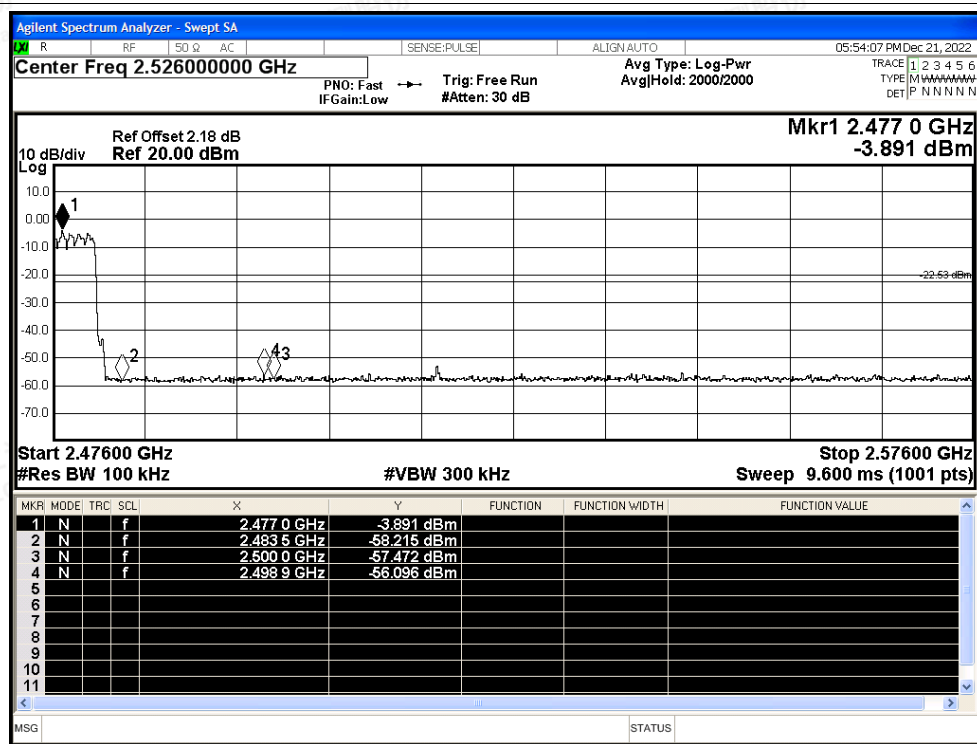

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

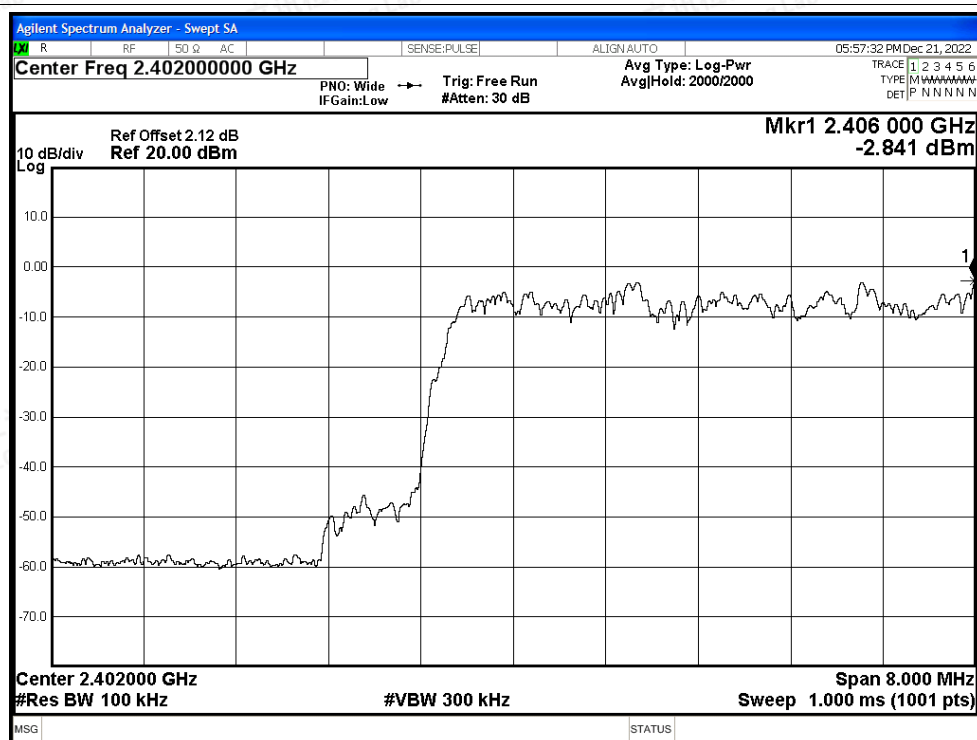

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

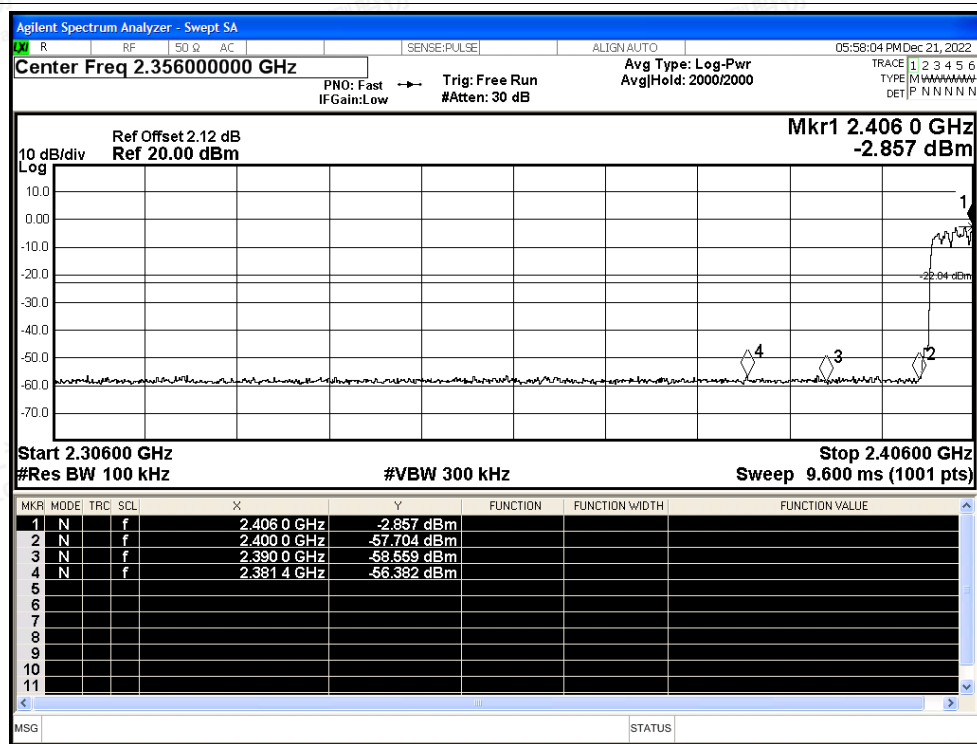

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

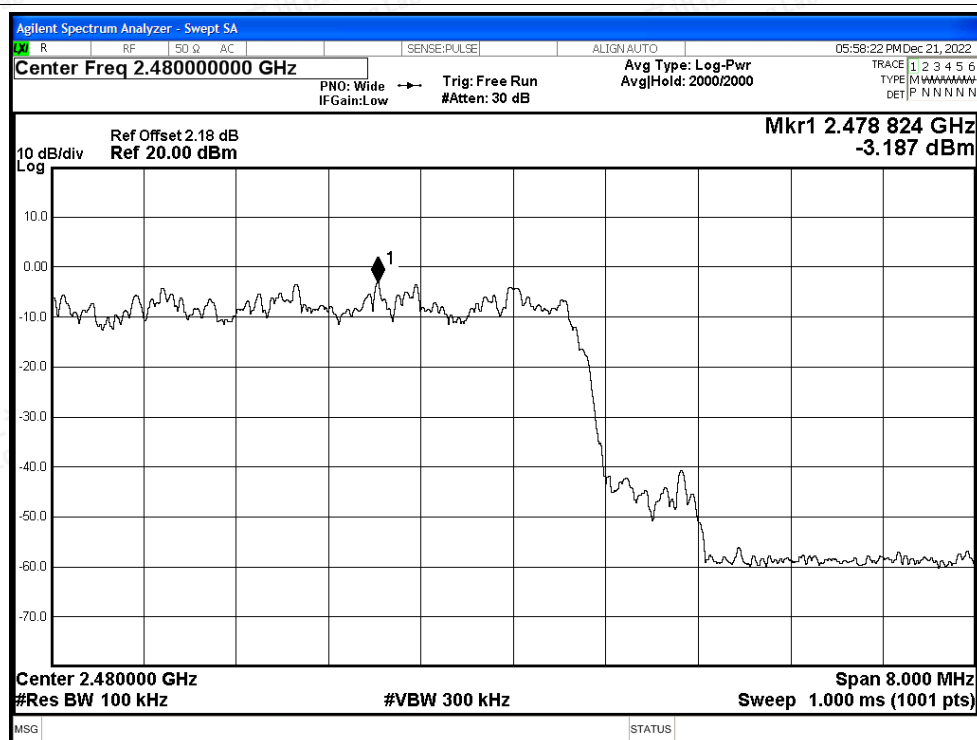

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

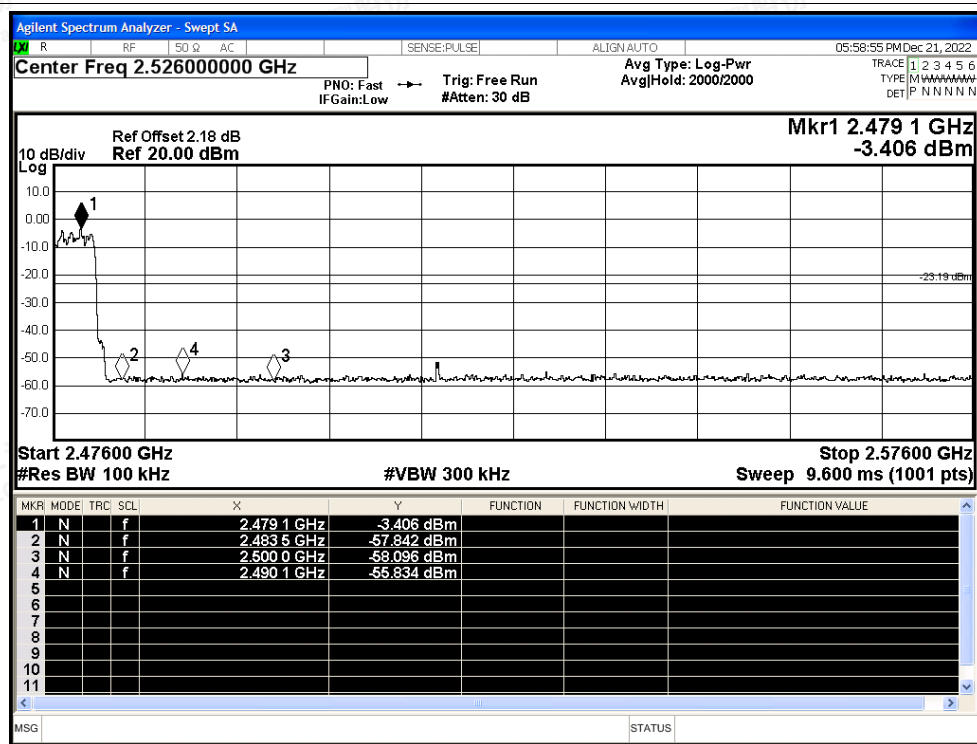

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-54.75	-20	Pass
NVNT	1-DH5	2441	Ant1	-55.01	-20	Pass
NVNT	1-DH5	2480	Ant1	-53.84	-20	Pass
NVNT	2-DH5	2402	Ant1	-53.16	-20	Pass
NVNT	2-DH5	2441	Ant1	-51.32	-20	Pass
NVNT	2-DH5	2480	Ant1	-51.54	-20	Pass
NVNT	3-DH5	2402	Ant1	-52.7	-20	Pass
NVNT	3-DH5	2441	Ant1	-51.39	-20	Pass
NVNT	3-DH5	2480	Ant1	-51.8	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

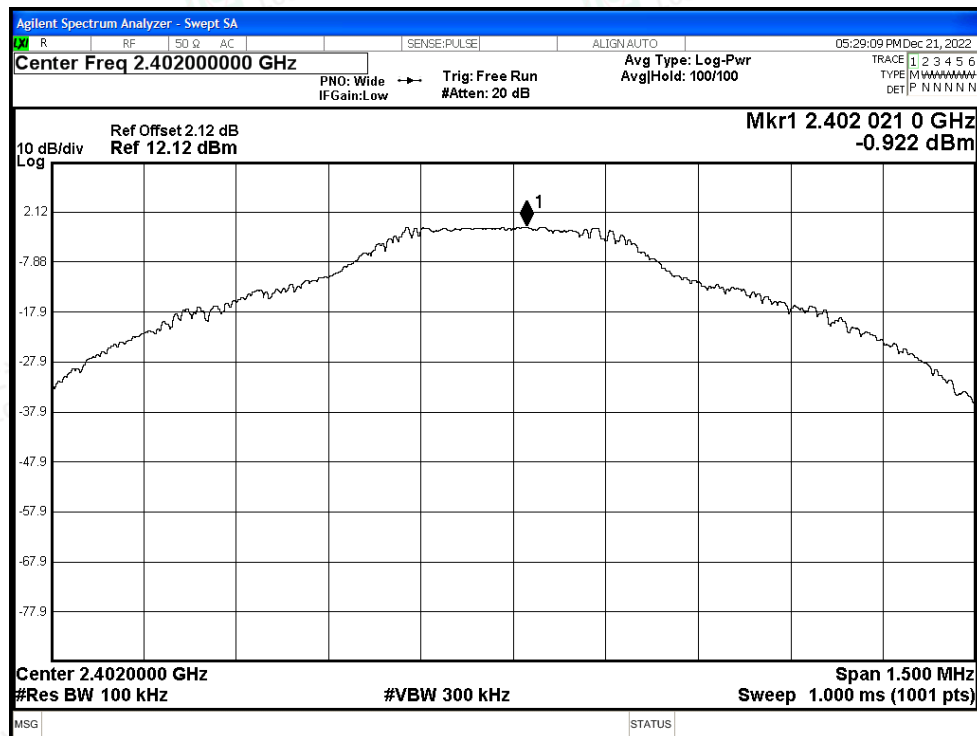

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

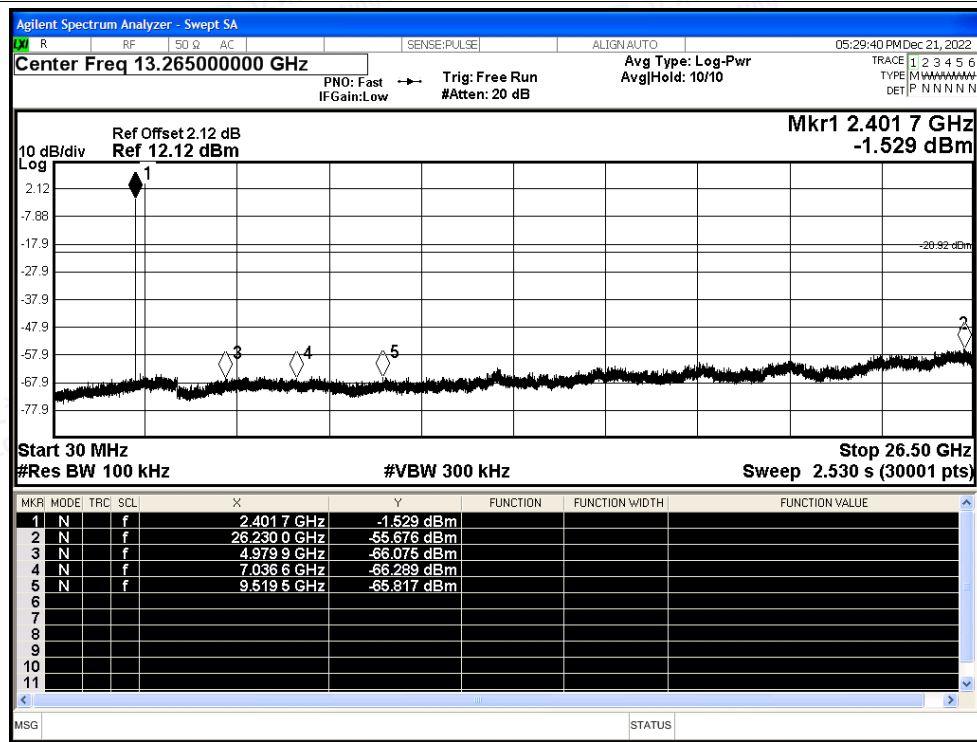

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

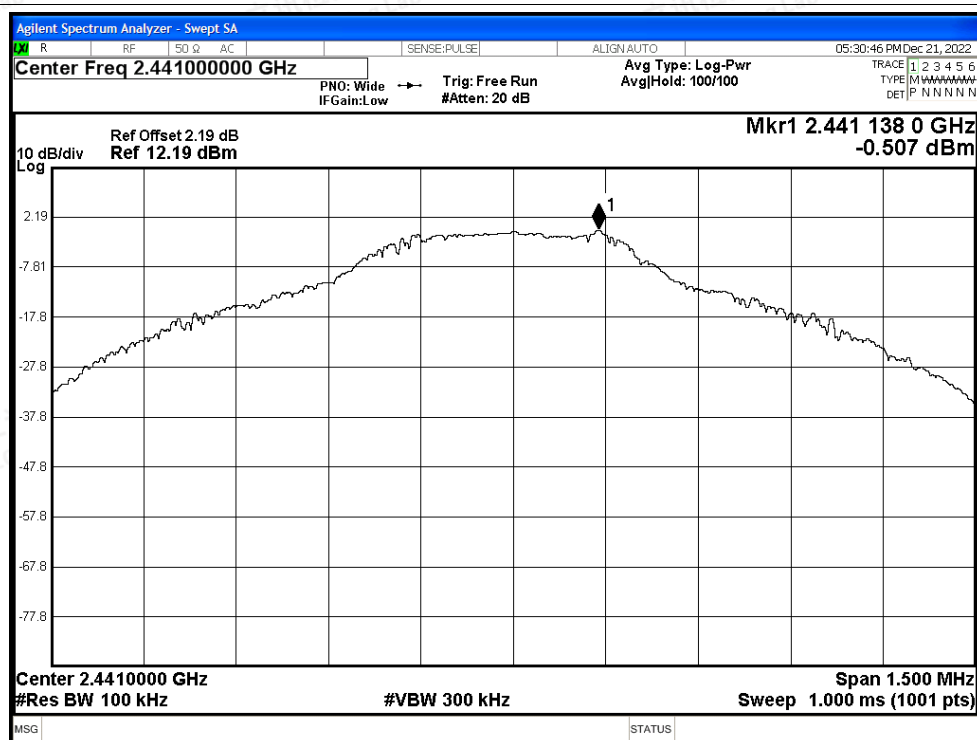


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

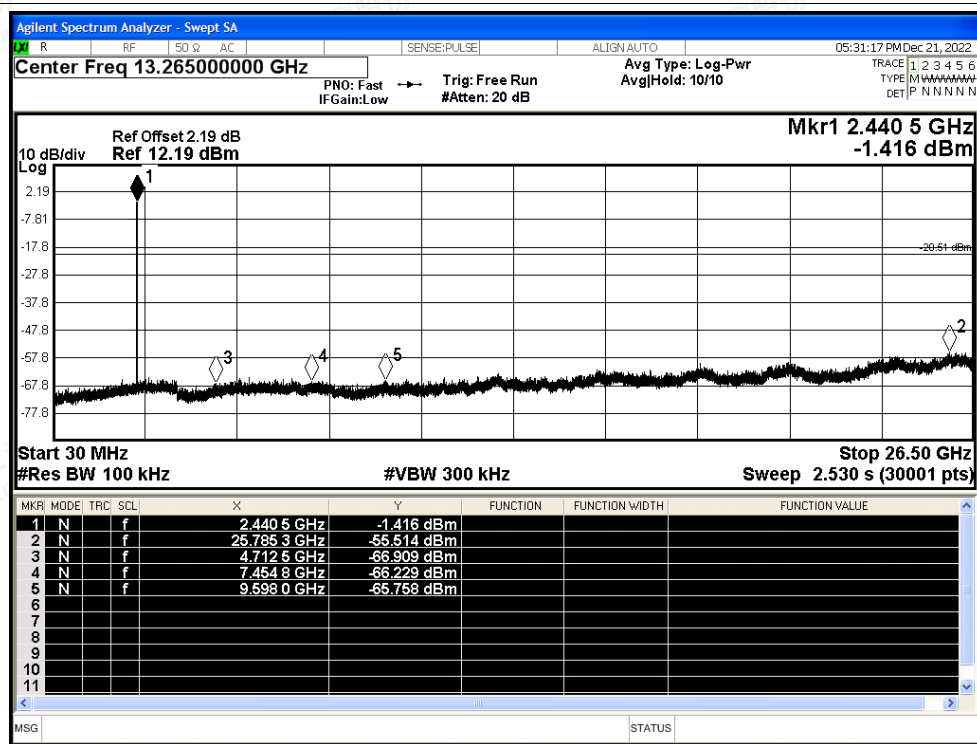




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

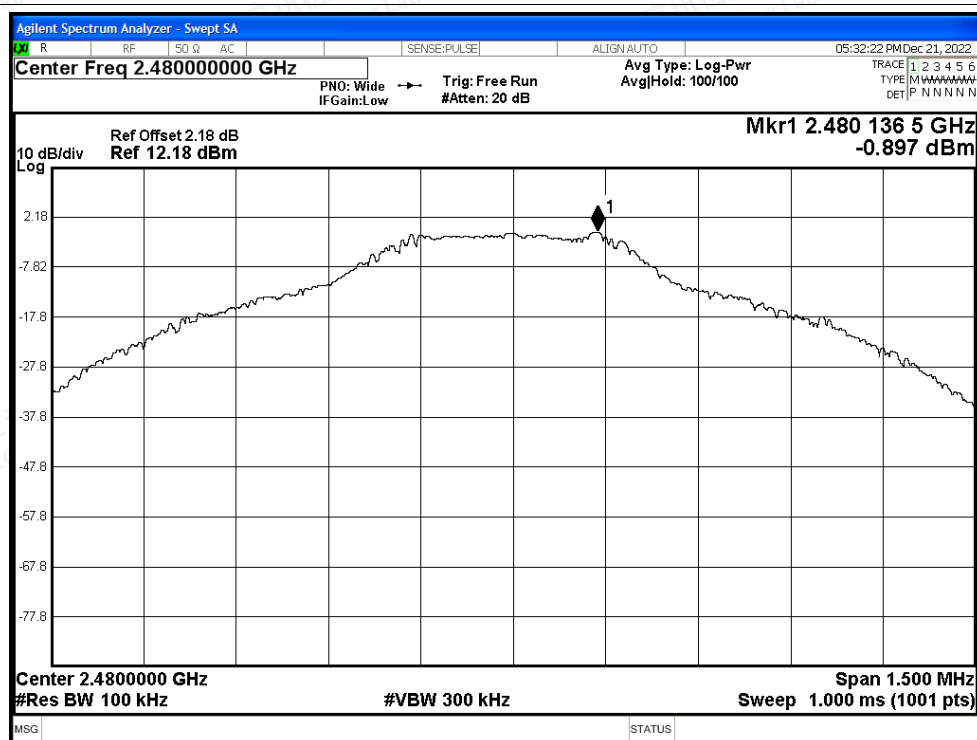


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

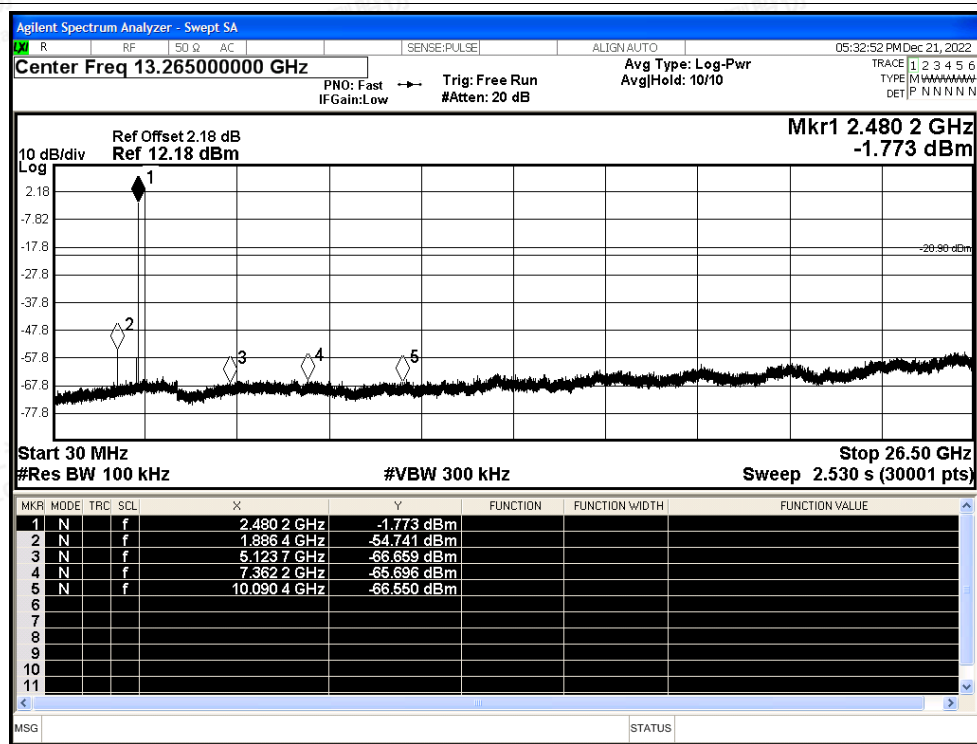




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

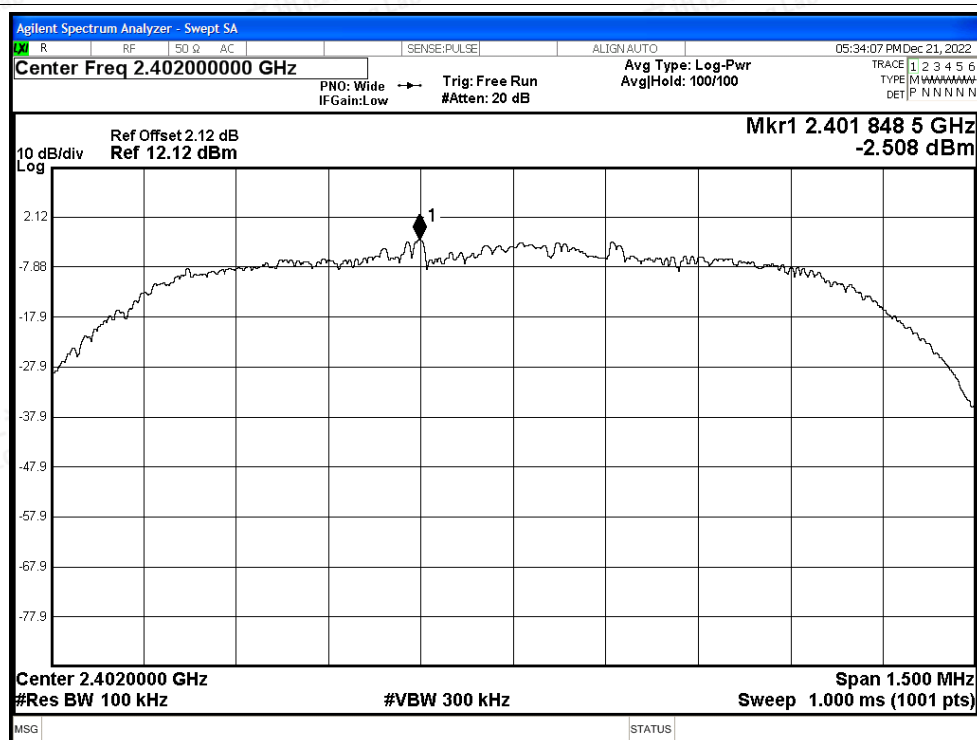


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

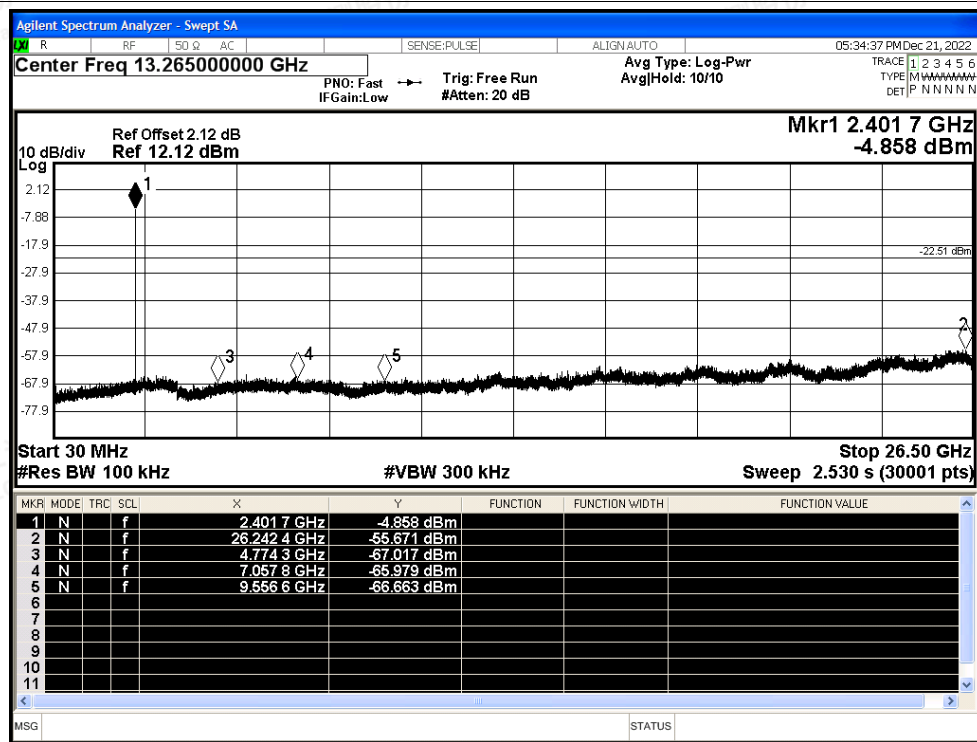




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

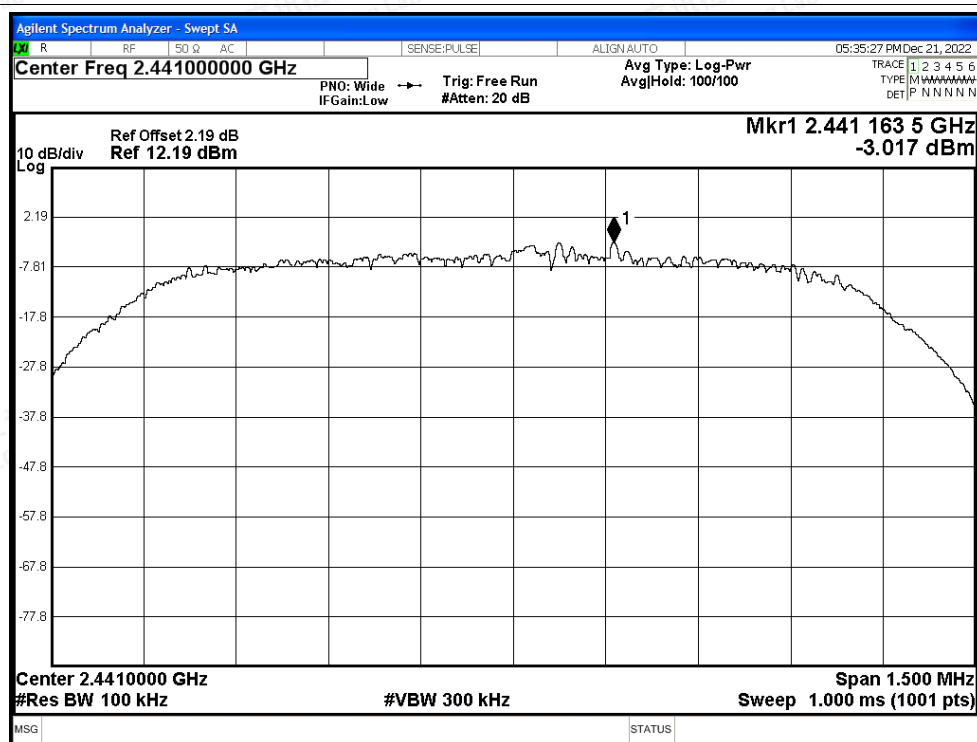


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

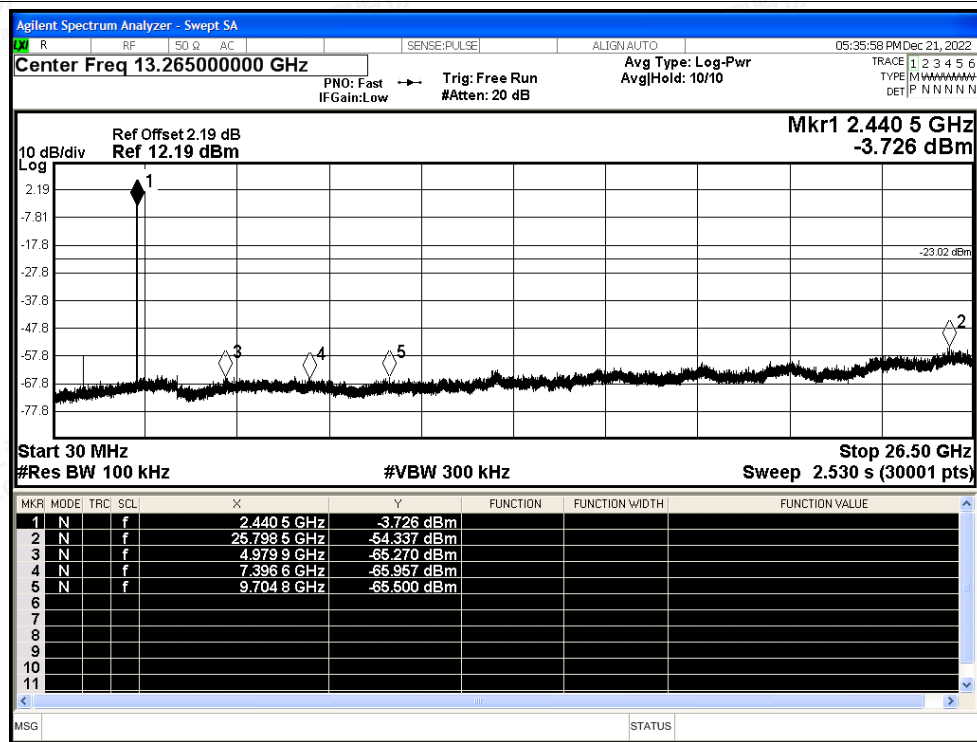




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

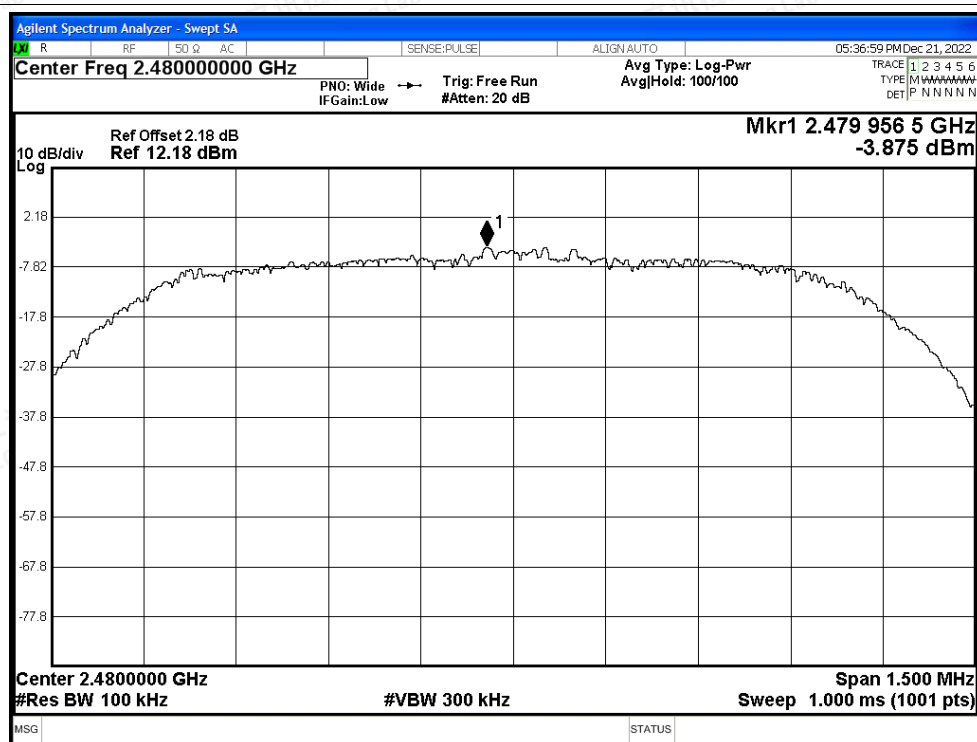


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

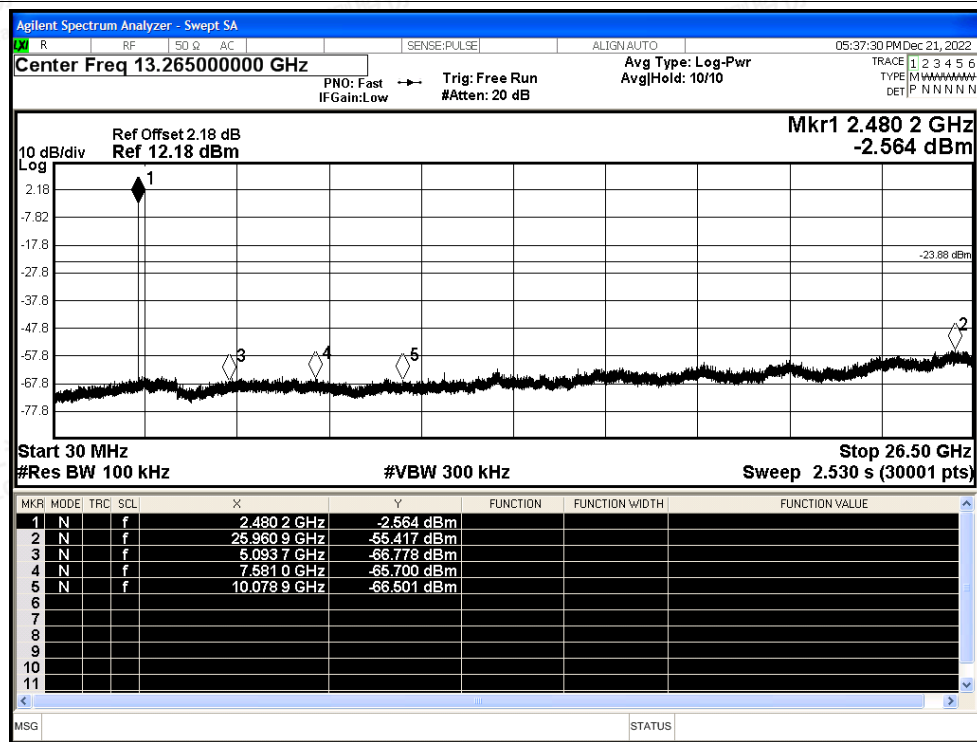




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

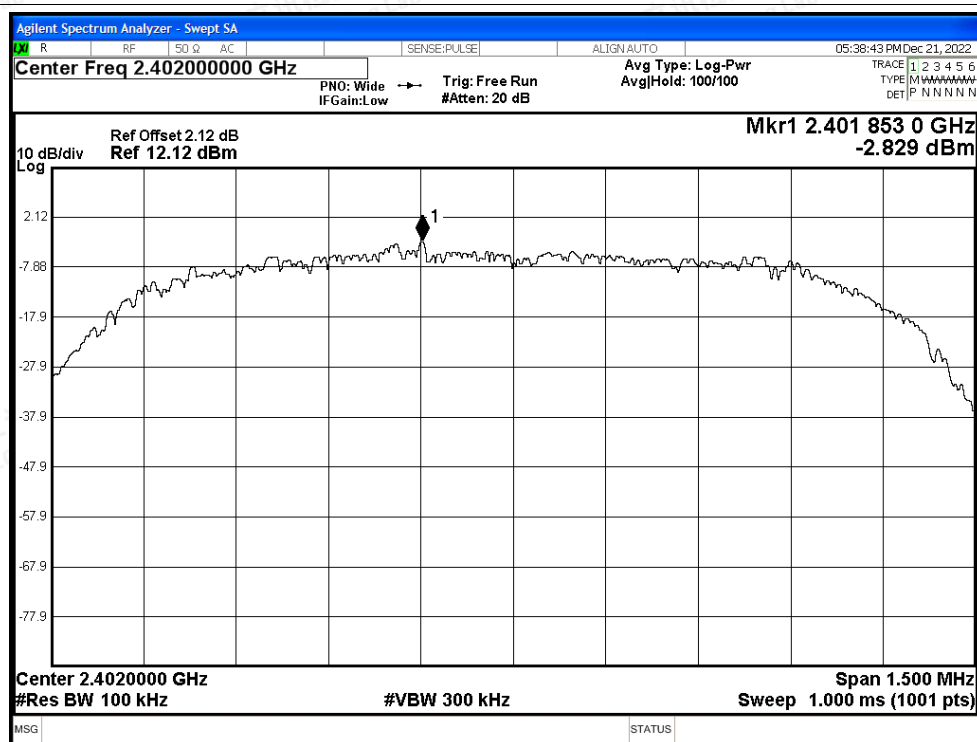

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

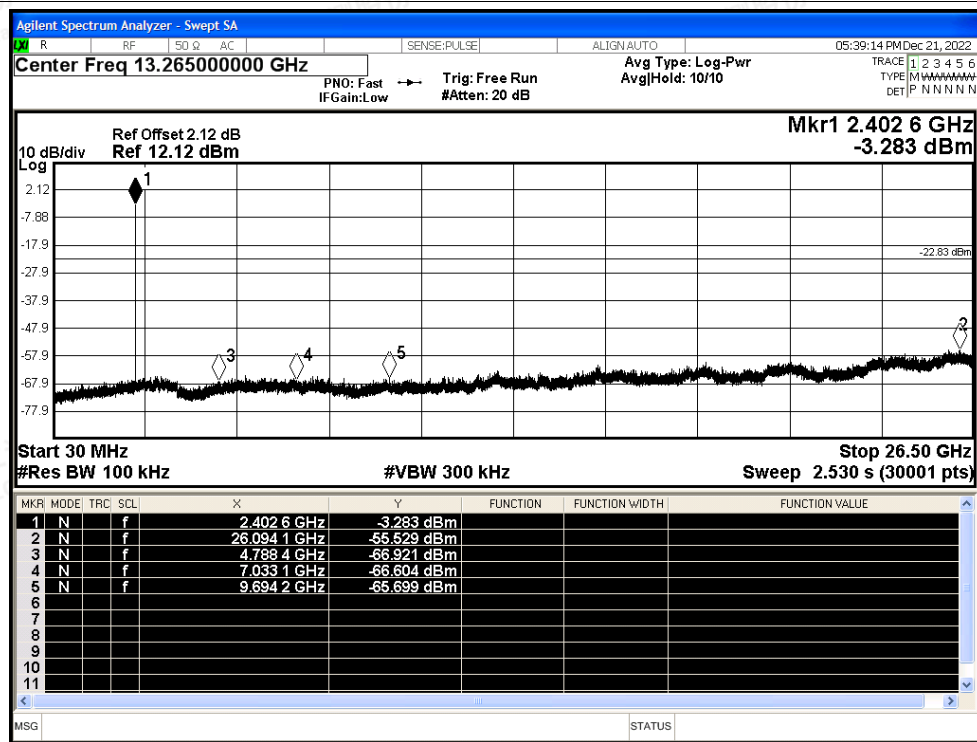

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

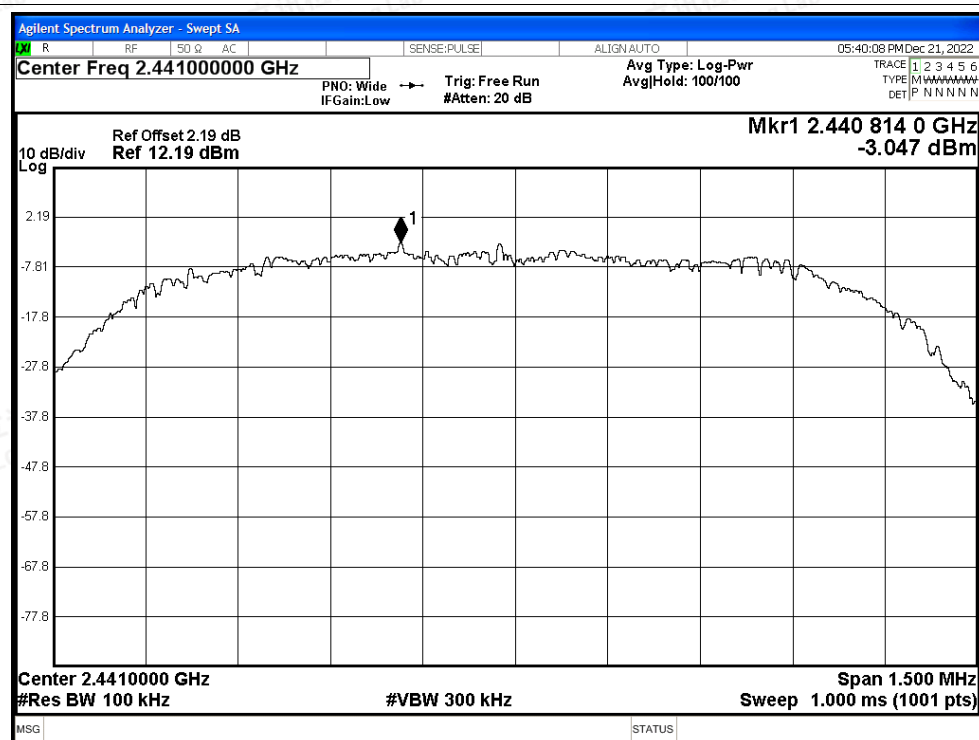


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

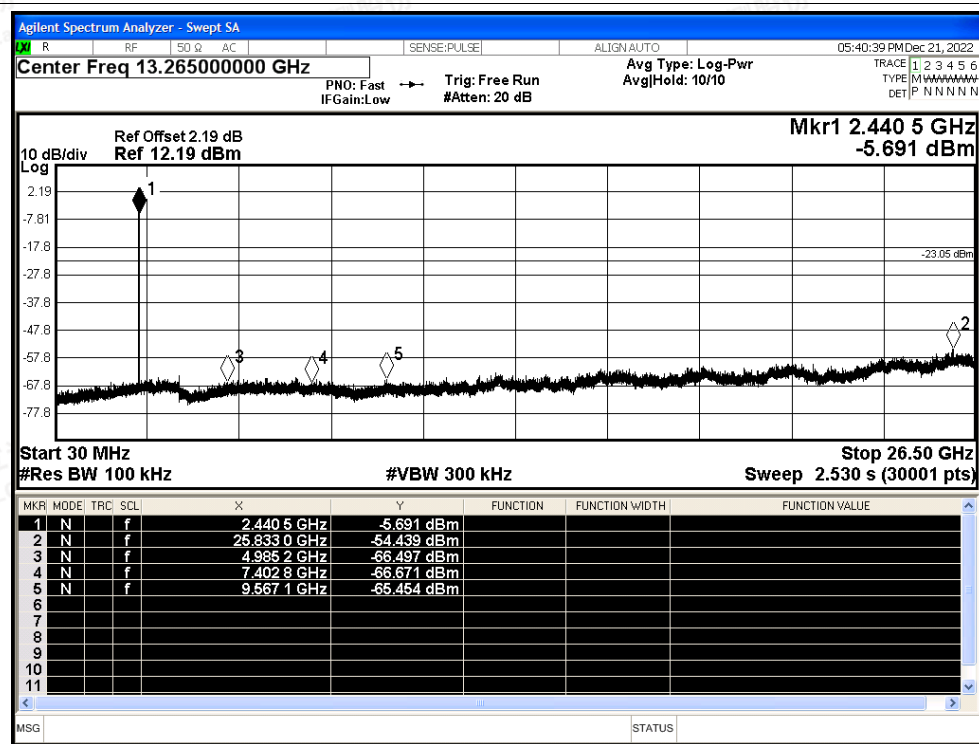




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

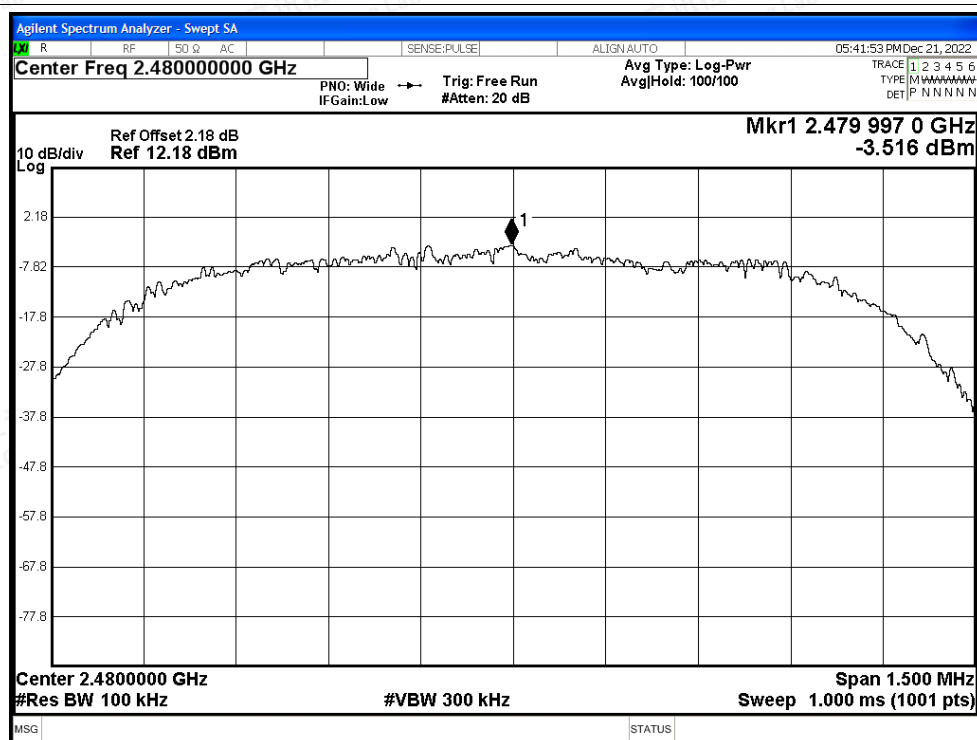

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

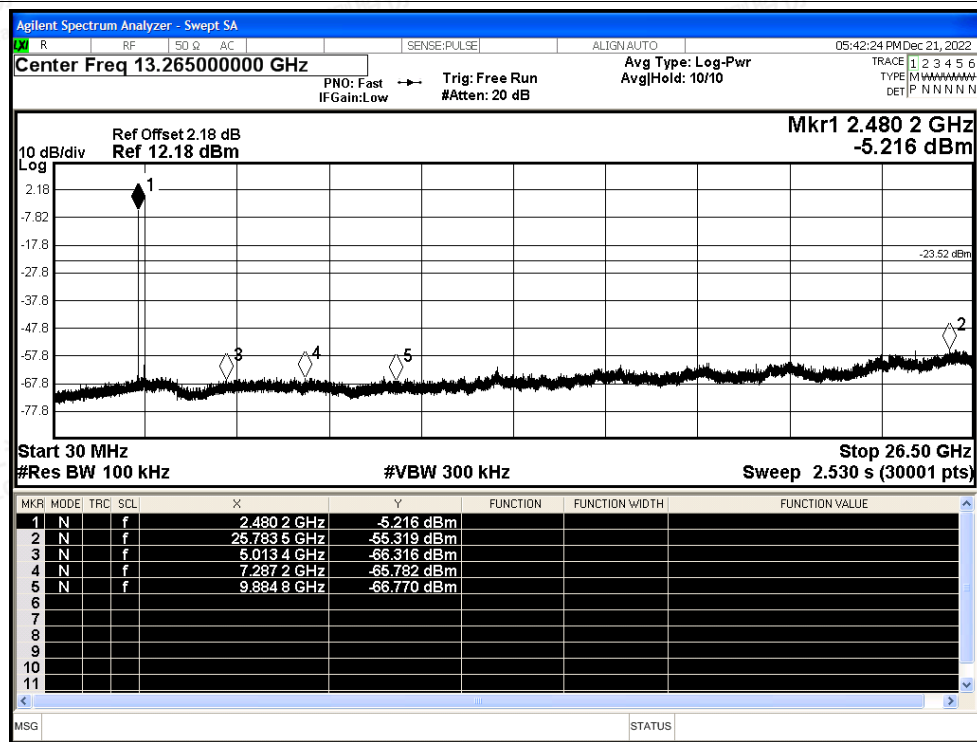



A.8 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-49.68	3.91	49.46	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-60.57	3.91	38.57	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2384.592	-47.22	3.91	51.92	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2378.64	-60.02	3.91	39.12	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-50.26	3.91	48.88	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-60.12	3.91	39.02	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-50.15	3.91	48.99	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-59.56	3.91	39.58	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.848	-46.94	3.91	52.20	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.56	-59.51	3.91	39.63	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-50.57	3.91	48.57	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-59.57	3.91	39.57	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-49.95	3.91	49.19	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-60.54	3.91	38.60	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2351.472	-47.03	3.91	52.11	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2383.44	-60.01	3.91	39.13	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-49.92	3.91	49.22	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-60.18	3.91	38.96	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-51.38	3.91	47.76	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-59.77	3.91	39.37	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2492.2	-46.46	3.91	52.68	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2491.624	-59.6	3.91	39.54	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-48.81	3.91	50.33	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-59.84	3.91	39.30	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-50.57	3.91	48.57	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-60.56	3.91	38.58	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2342.928	-47.55	3.91	51.59	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2379.888	-59.97	3.91	39.17	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-48.94	3.91	50.20	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-60.05	3.91	39.09	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-51.09	3.91	48.05	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-59.76	3.91	39.38	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2484.472	-46.47	3.91	52.67	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2495.584	-59.59	3.91	39.55	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-50.53	3.91	48.61	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-59.9	3.91	39.24	Average	54	Pass






Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

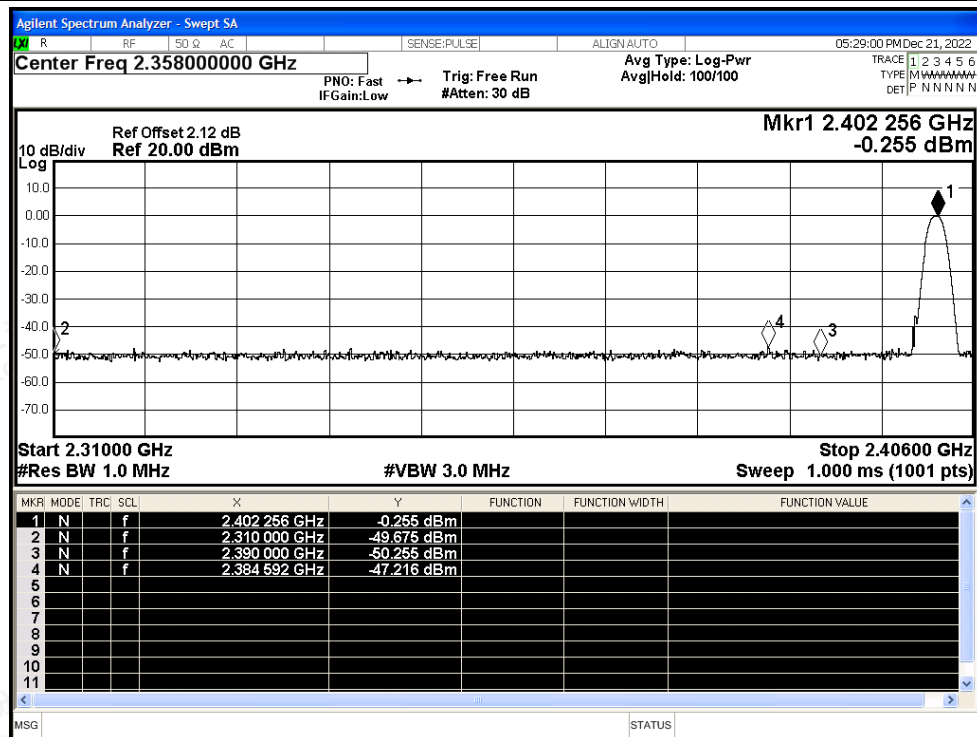


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

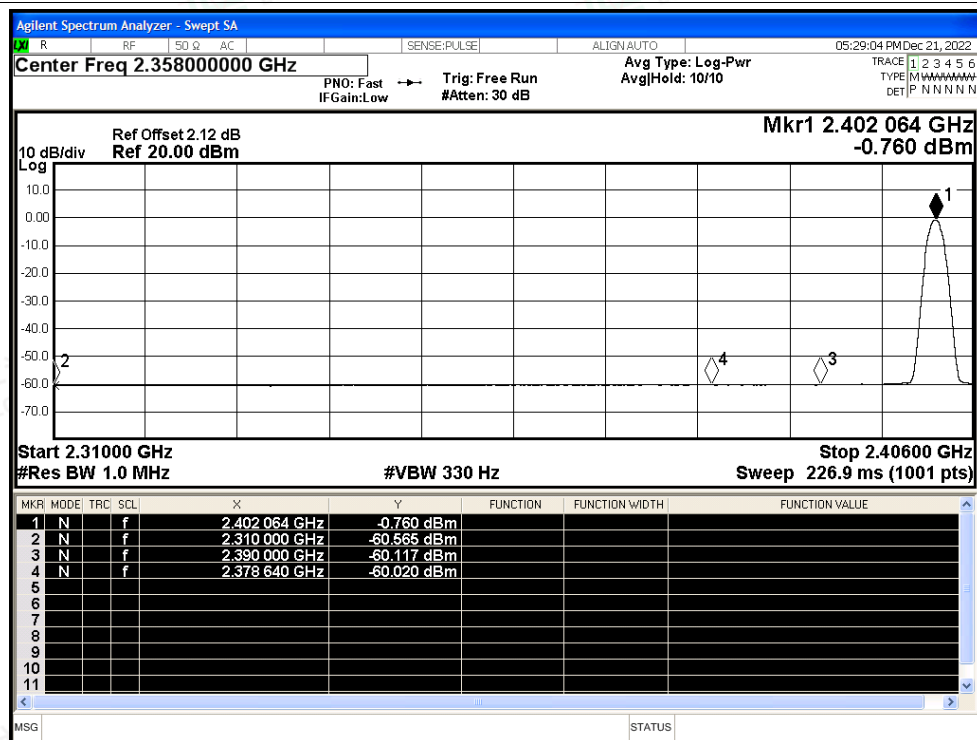




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

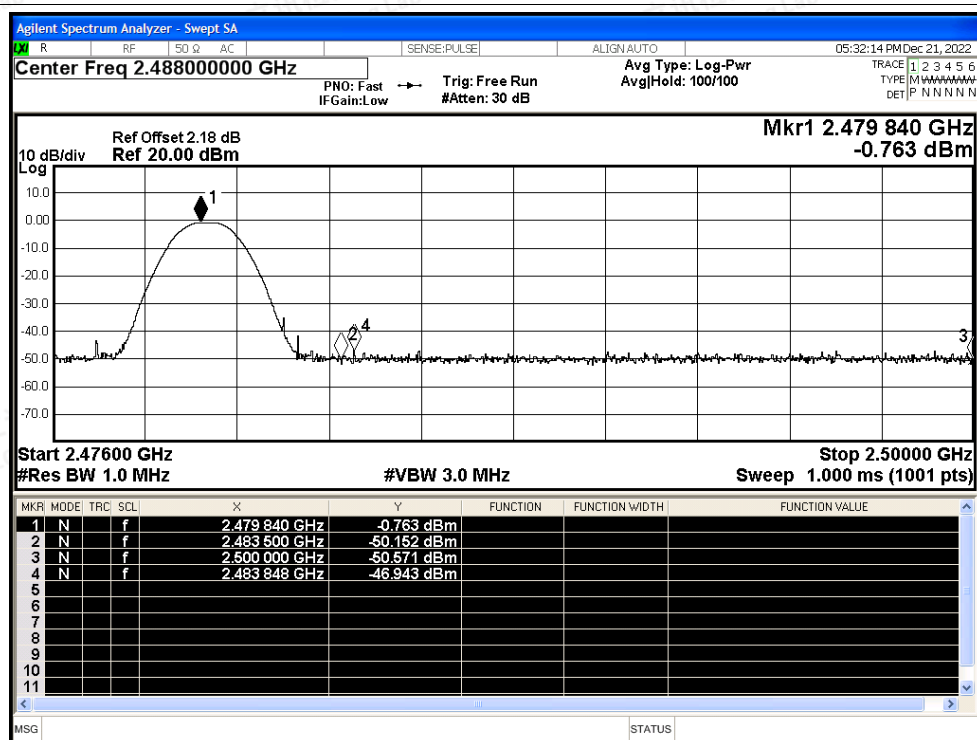


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

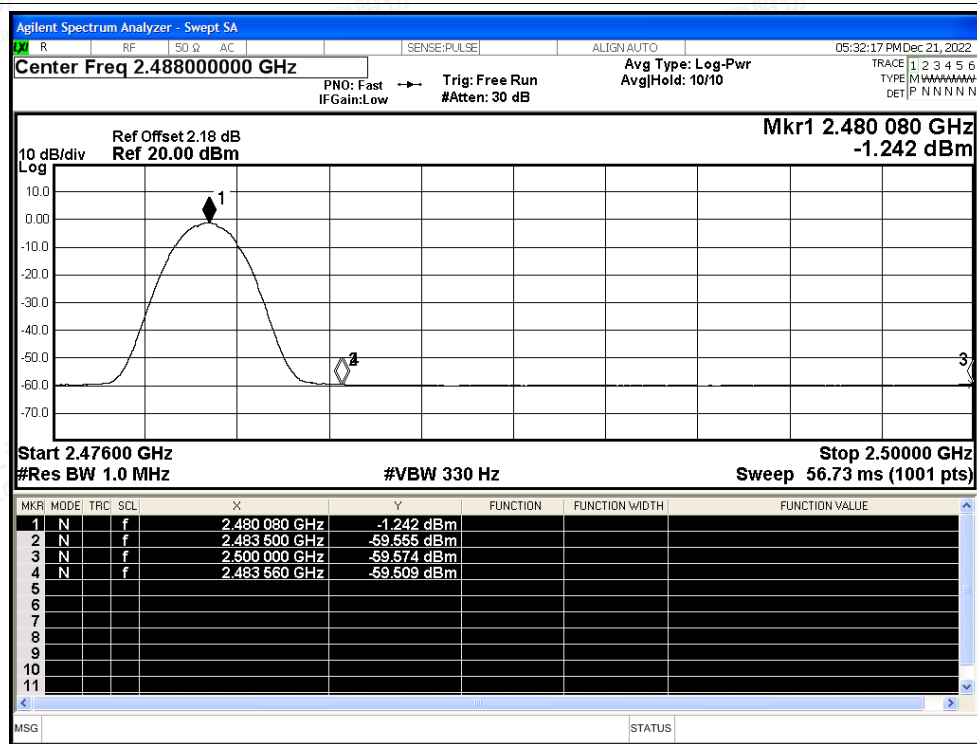




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

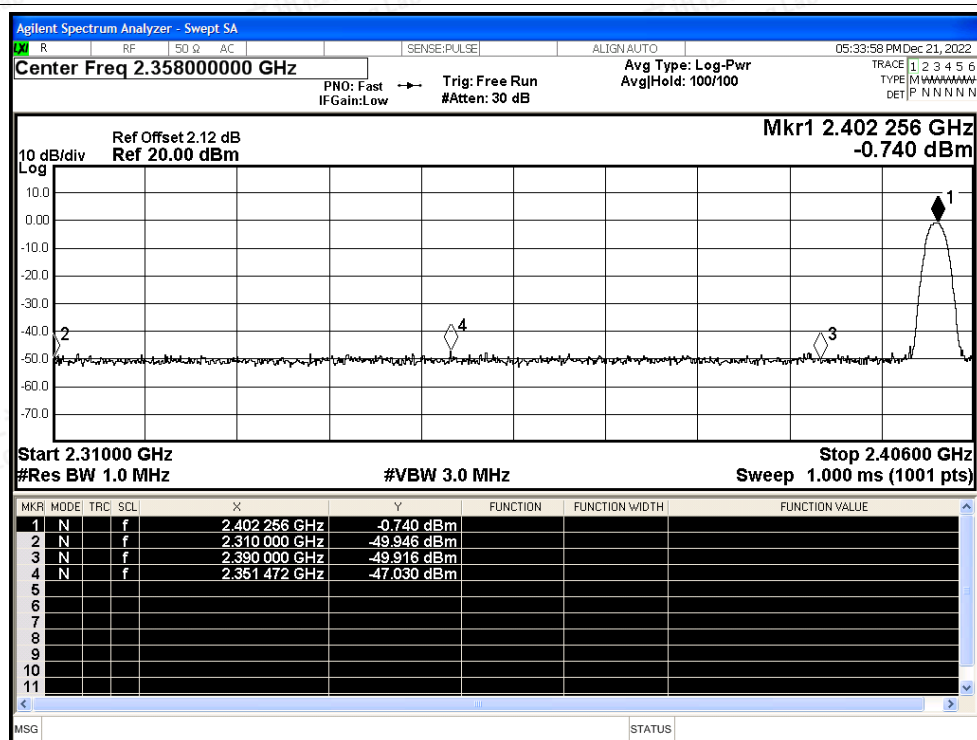


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

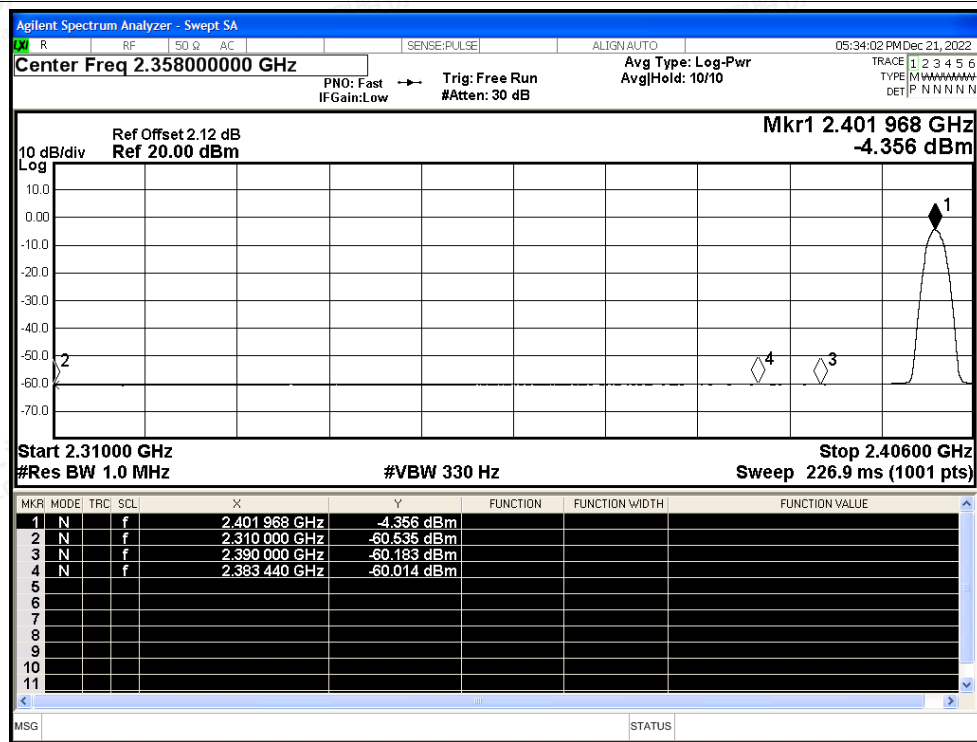




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

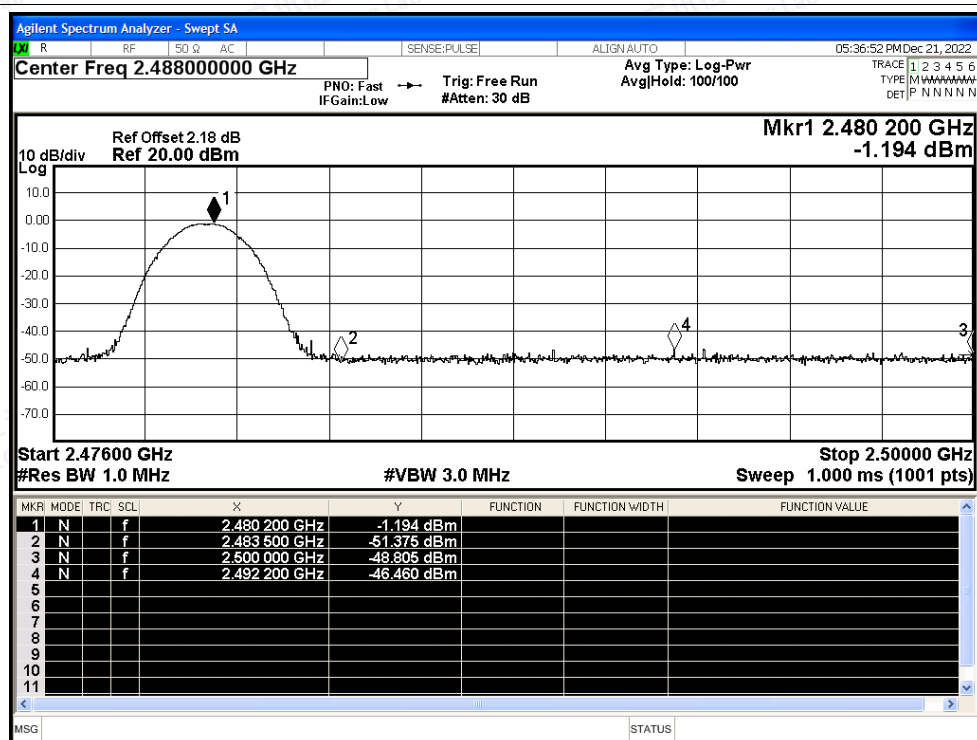


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

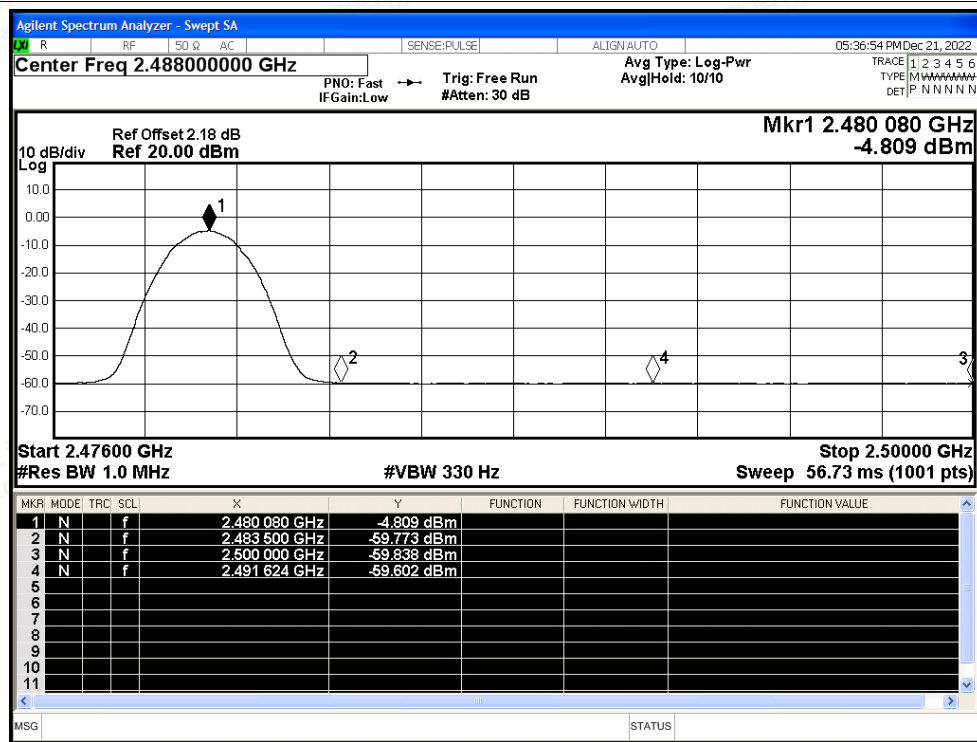




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

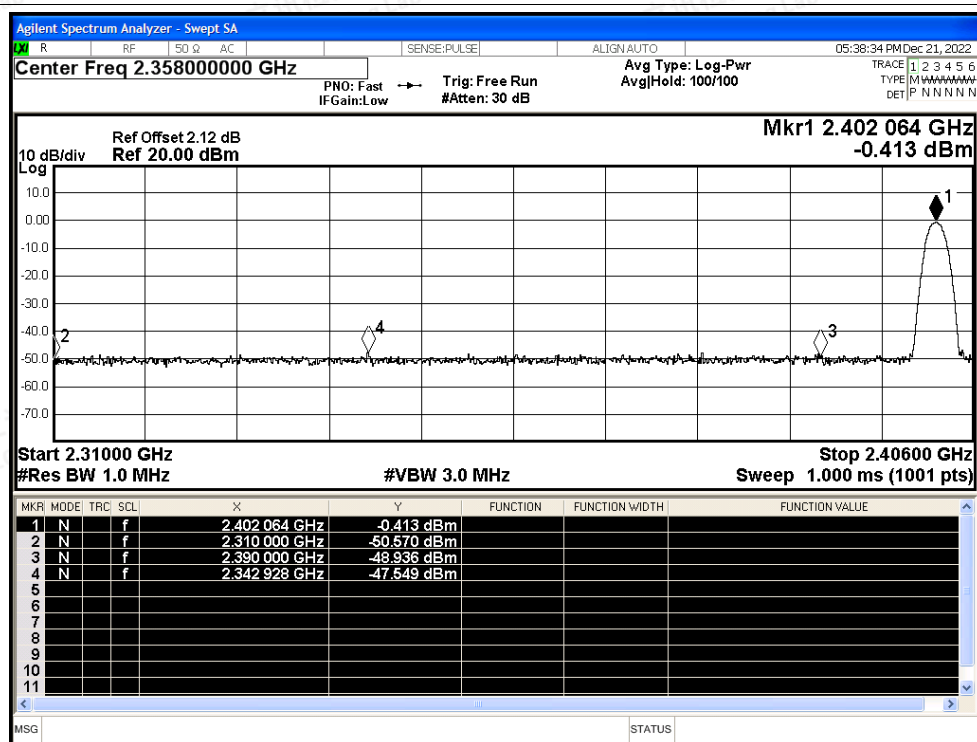


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

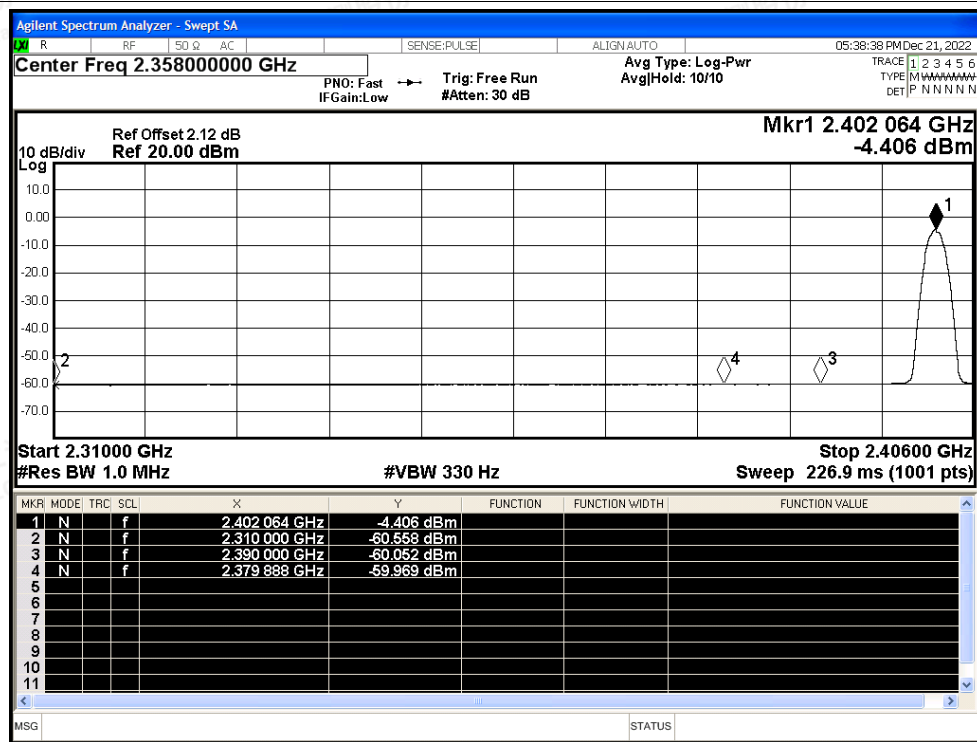




Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

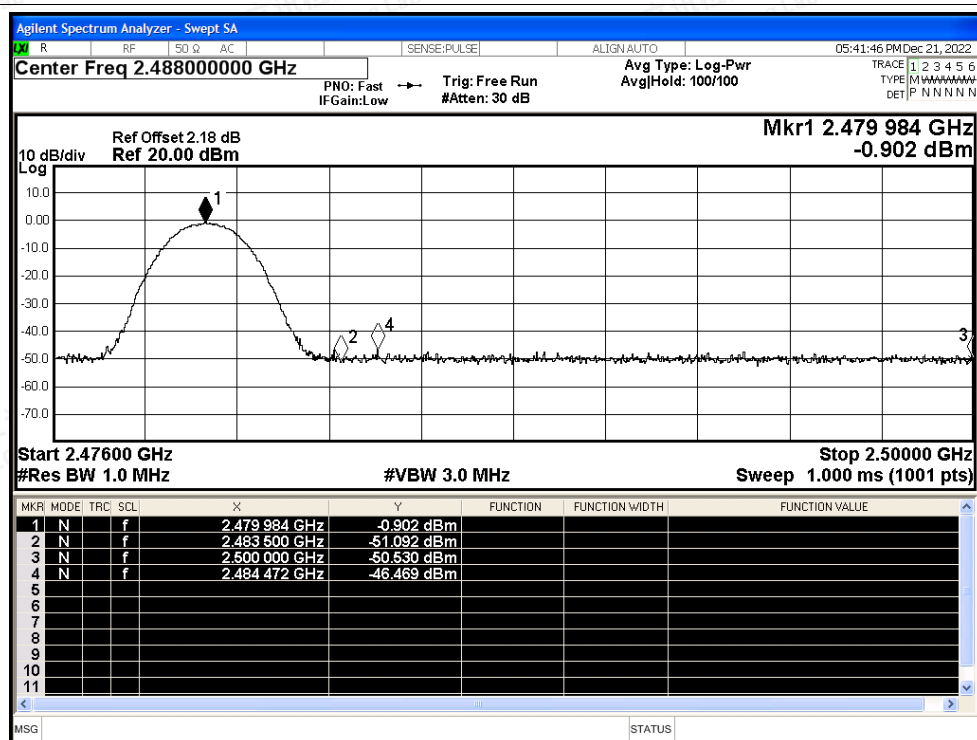

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

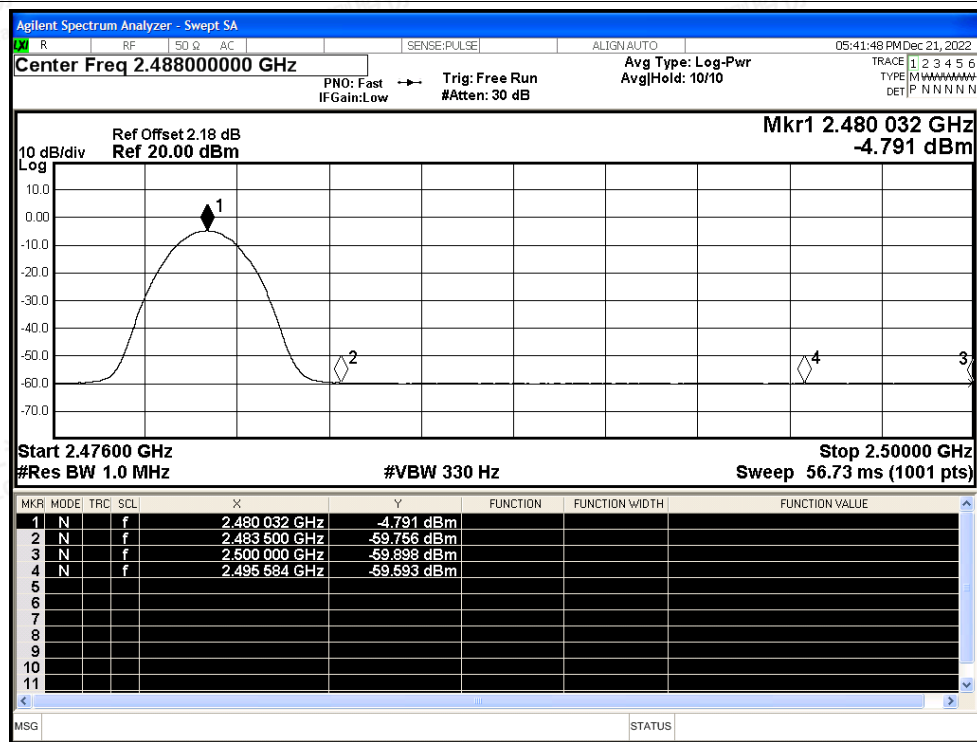

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity