



# FCC TEST REPORT

**Test report  
On Behalf of  
CF GROUP SZKMS CO., LTD.  
For  
LED LAMP  
Model No.: VF-TL802B  
FCC ID: 2A9U2-VF-TL802B**

**Prepared For : CF GROUP SZKMS CO., LTD.  
Room 101, Building 12, Renmin Road 221st, Fumin Community, Fucheng  
street, Long hua District, Shenzhen, Guangdong Province, China**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

**Date of Test: Dec. 15, 2022 ~ Dec. 23, 2022**

**Date of Report: Dec. 23, 2022**

**Report Number: HK2212155698-1E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : CF GROUP SZKMS CO., LTD.

Address ..... : Room 101, Building 12, Renmin Road 221st, Fumin Community, Fucheng street, Long hua District, Shenzhen, Guangdong Province, China

**Manufacturer's Name** ..... : CF GROUP SZKMS CO., LTD.

Address ..... : Room 101, Building 12, Renmin Road 221st, Fumin Community, Fucheng street, Long hua District, Shenzhen, Guangdong Province, China

**Product description**

Trade Mark: VAVOFO

Product name ..... : LED LAMP

Model and/or type reference : VF-TL802B

**Standards** ..... : FCC CFR 47 PART 18

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :

Date (s) of performance of tests ..... : Dec. 15, 2022 ~ Dec. 23, 2022

Date of Issue ..... : Dec. 23, 2022

Test Result ..... : Pass

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)

**Table of Contents**

	<b>Page</b>
1. TEST SUMMARY	5
1.1. Test Procedures And Results	5
1.2. Information of the Test Laboratory	5
1.3. Measurement Uncertainty	5
2. GENERAL INFORMATION	6
2.1. General Description of EUT	6
2.2. Carrier Frequency of Channels	7
2.3. Operation of EUT during testing	7
2.4. Description of Test Setup	7
2.5. Measurement Instruments List	8
3. CONDUCTED EMISSION TEST	9
3.1. Block Diagram of Test Setup	9
3.2. Conducted Power Line Emission Limit	9
3.3. Test Procedure	9
4. RADIATED EMISSIONS	12
4.1. Block Diagram of Test Setup	12
4.2. Rules and specifications	13
4.3. Test Procedure	13
4.4. Test Result	13
5. ANTENNA REQUIREMENT	17
6. PHOTOGRAPH OF TEST	18
7. PHOTOS OF THE EUT	20

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**\*\* Modified History \*\***

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Dec. 23, 2022	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 1. TEST SUMMARY

### 1.1. Test Procedures And Results

DESCRIPTION OF TEST	SECTION NUMBER	RESULT
CONDUCTED EMISSIONS TEST	18.307(c)	COMPLIANT
RADIATED EMISSION TEST	18.305(c)	COMPLIANT

#### Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 1.3. Measurement Uncertainty

#### Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



## 2. GENERAL INFORMATION

### 2.1. General Description of EUT

Equipment:	LED LAMP
Model Name:	VF-TL802B
Series Models:	N/A
Model Difference:	N/A
Trade Mark:	VAVOFO
FCC ID:	<b>2A9U2-VF-TL802B</b>
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Operation frequency:	112KHz~205KHz
Test frequency:	127KHz
Number of Channels:	1
Modulation Type:	ASK
Power Source:	DC 12V, 2A from adapter with AC100-240V 50/60Hz, 0.8A USB Output:5V, 1A Wireless Charging Output: 5W
Power Rating:	DC 12V, 2A from adapter with AC100-240V 50/60Hz, 0.8A USB Output:5V, 1A Wireless Charging Output: 5W

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 2.2. Carrier Frequency of Channels

Operation Frequency each of channel	
Channel	Frequency
1	127KHz


## 2.3. Operation of EUT during testing

### Operating Mode

The mode is used: Transmitting+lighting mode

## 2.4. Description of Test Setup

Operation of EUT during testing:

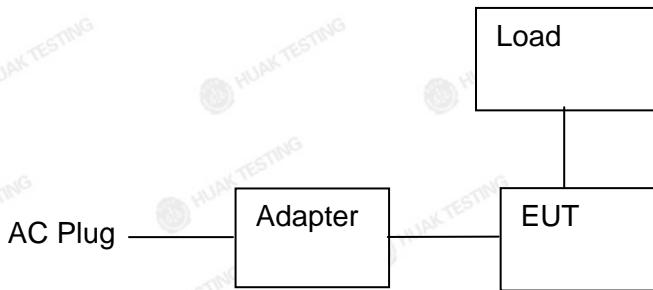

### Adapter information

Model:DZ024EHL120200U

Input: AC100-240V, 50-60Hz, 0.8A

Output: DC12V, 2A

The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz) ) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



## 2.5. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 18, 2022	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Feb. 18, 2022	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 18, 2022	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 18, 2022	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 18, 2022	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Feb. 18, 2022	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 18, 2022	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 18, 2022	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 18, 2022	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Feb. 18, 2022	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 18, 2022	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 18, 2022	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 18, 2022	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 18, 2022	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 09, 2021	3 Year

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



### 3. CONDUCTED EMISSION TEST

#### 3.1. Block Diagram of Test Setup

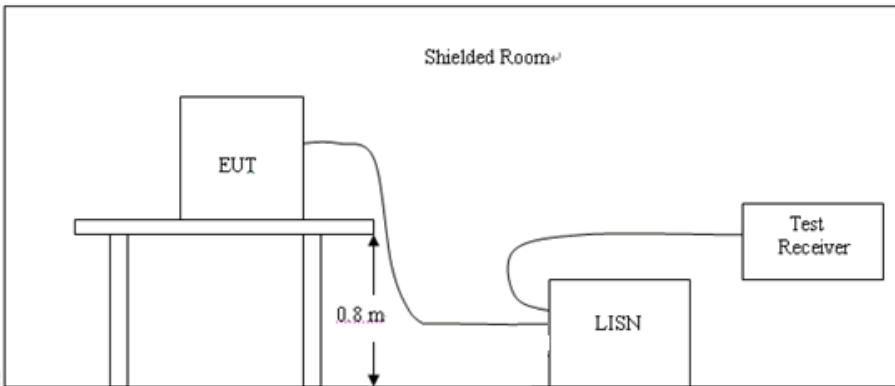

#### 3.2. Conducted Power Line Emission Limit

According to FCC Part 18.307(c)

Frequency (MHz)	Maximum RF line voltage measured with a 50 uH/50 ohm LISN (uV)
Consumer equipment:	
0.45 to 2.51	250
2.51 to 3.0	3,000
3.0 to 30	250

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §18.307 Line Conducted Emission Limit is same as above table.

#### 3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




## 3.4. Test Result

PASS

All the test modes completed for test. Only the worst result was reported as below:

Test Specification: Line

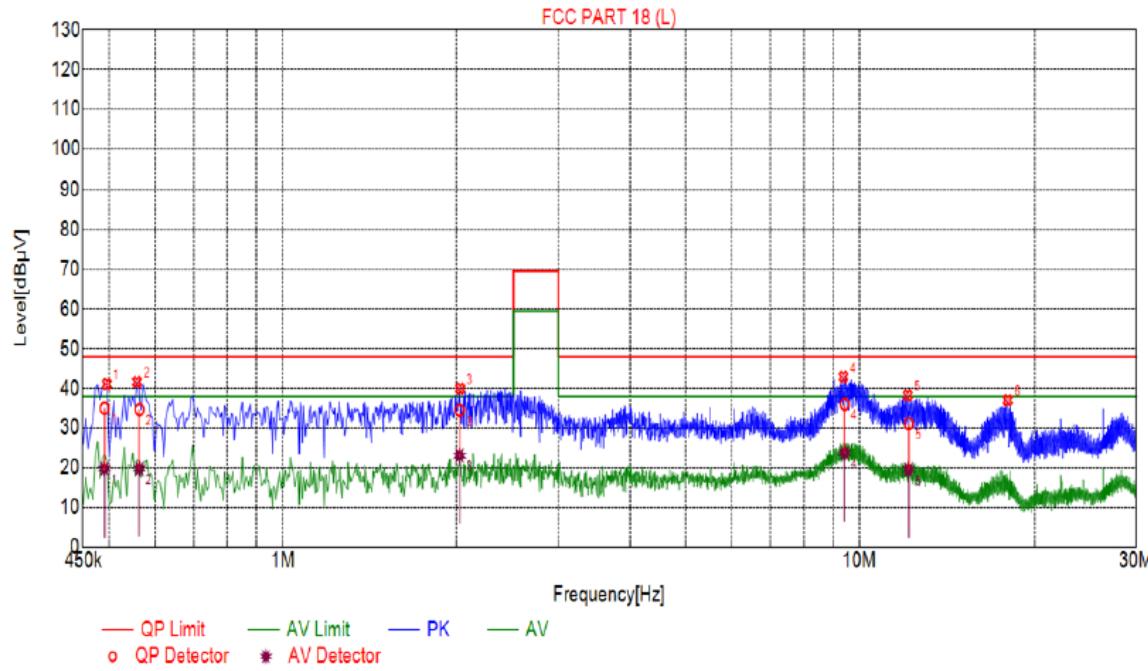**Suspected List**

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.4950	41.11	20.04	47.96	6.85	21.07	PK	L
2	0.5580	41.63	20.06	47.96	6.33	21.57	PK	L
3	2.0295	39.95	20.15	47.96	8.01	19.80	PK	L
4	9.3690	42.93	20.10	47.96	5.03	22.83	PK	L
5	12.1095	38.24	19.99	47.96	9.72	18.25	PK	L
6	17.9685	37.03	20.03	47.96	10.93	17.00	PK	L

**Final Data List**

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.4901	20.04	34.98	47.96	12.98	14.94	19.78	37.96	18.18	-0.26	L
2	0.5636	20.06	34.66	47.96	13.30	14.60	19.82	37.96	18.14	-0.24	L
3	2.0251	20.15	34.49	47.96	13.47	14.34	23.10	37.96	14.86	2.95	L
4	9.4222	20.10	35.98	47.96	11.98	15.88	23.80	37.96	14.16	3.70	L
5	12.1530	19.99	31.10	47.96	16.86	11.11	19.60	37.96	18.36	-0.39	L

Remark: Margin = Limit - Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Test Specification: Neutral

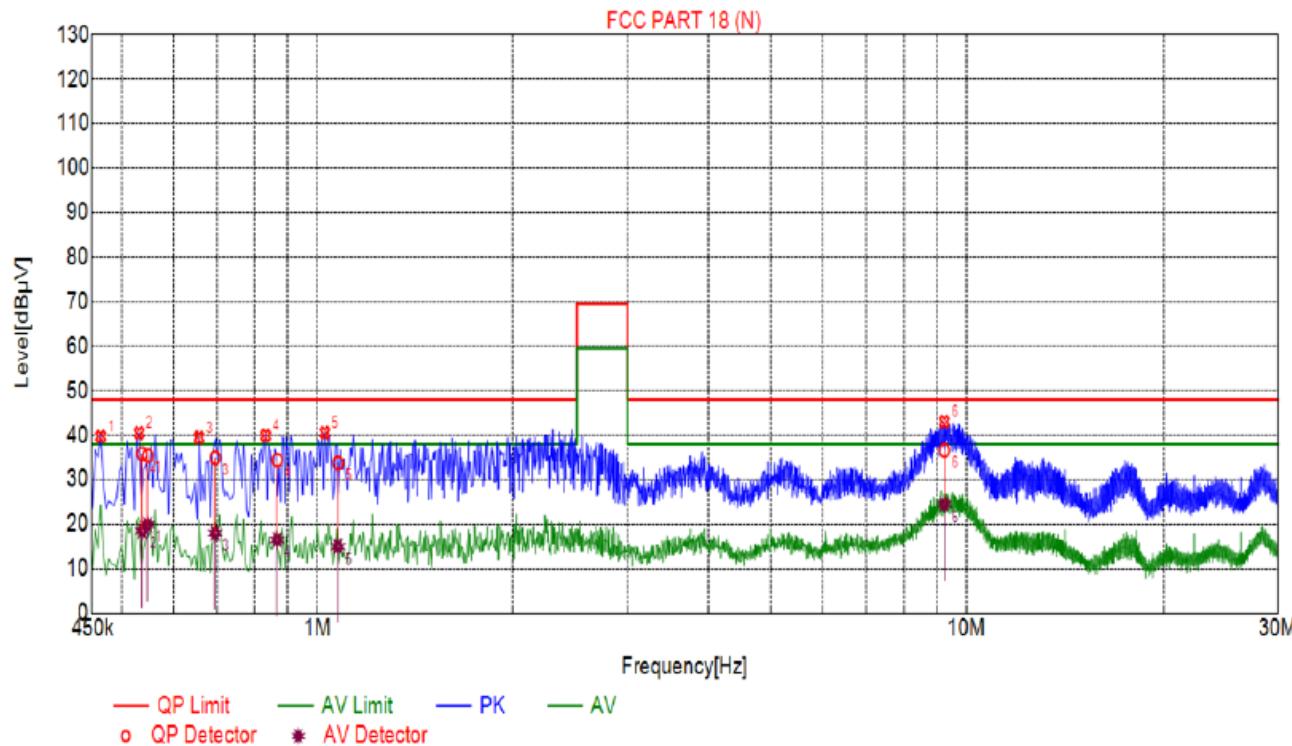

## Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.4635	39.70	20.04	47.96	8.26	19.66	PK	N
2	0.5310	40.47	20.04	47.96	7.49	20.43	PK	N
3	0.6570	39.45	20.05	47.96	8.51	19.40	PK	N
4	0.8325	39.90	20.06	47.96	8.06	19.84	PK	N
5	1.0260	40.54	20.07	47.96	7.42	20.47	PK	N
6	9.2385	43.01	20.10	47.96	4.95	22.91	PK	N

## Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.5475	20.06	35.42	47.96	12.54	15.36	19.91	37.96	18.05	-0.15	N
2	0.5368	20.05	35.80	47.96	12.16	15.75	18.48	37.96	19.48	-1.57	N
3	0.6959	20.05	34.92	47.96	13.04	14.87	18.02	37.96	19.94	-2.03	N
4	0.8664	20.06	34.41	47.96	13.55	14.35	16.48	37.96	21.48	-3.58	N
5	1.0756	20.07	33.72	47.96	14.24	13.65	15.00	37.96	22.96	-5.07	N
6	9.2408	20.10	36.58	47.96	11.38	16.48	24.44	37.96	13.52	4.34	N

Remark: Margin = Limit - Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 4. RADIATED EMISSIONS

### 4.1. Block Diagram of Test Setup

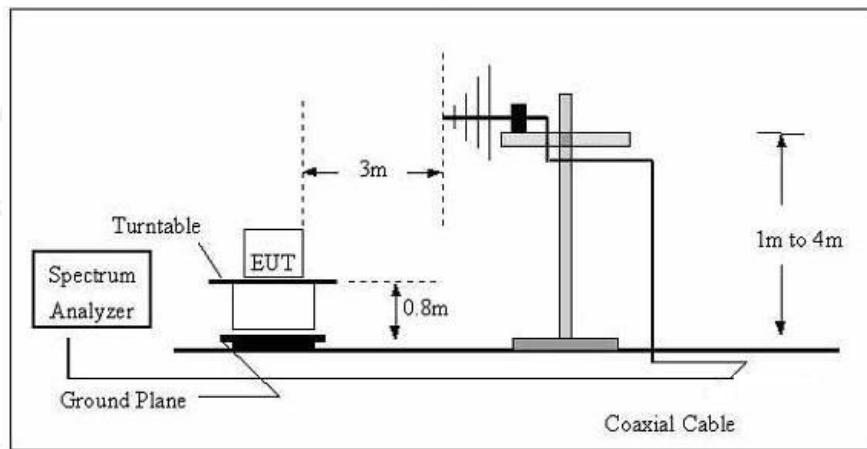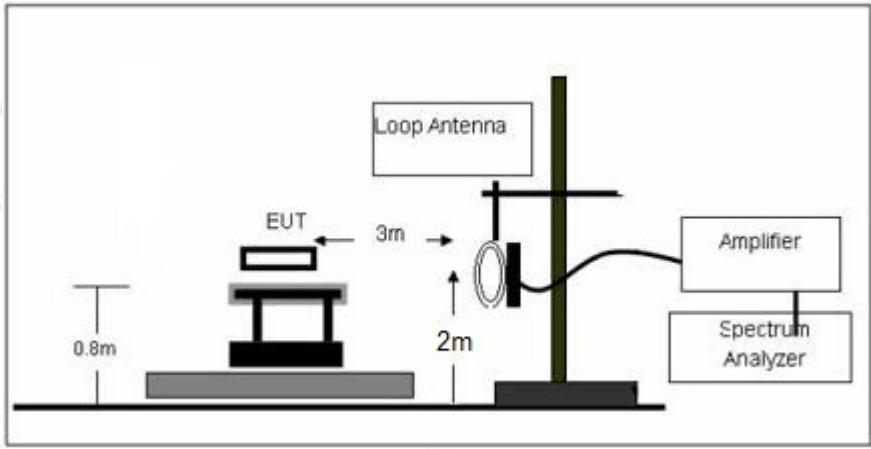

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



#### 4.2. Rules and specifications

Except as provided elsewhere in this Subpart 18.305 (c), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
(miscellaneous)				
	Any non-ISM frequency	Below 500 500 or more	15 15 × SQRT(power/500)	300 1300

The field strength limits for RF lighting devices shall be the following:

Frequency (MHz)	Field strength limit at 30 meters (uV/m)
Consumer equipment:	
30-88	10
88-216	15
216-1000	20

Remark:

- (1) Emission level dBuV/m for 0.009~30MHz = 20log (15) + 40log (300/3) dBuV/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurements are extrapolated to 300m and 30m distance respectively, by 40dB/decade, Per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


#### 4.4. Test Result

PASS

Note: All the test modes completed for test. Only the worst result was reported as below:



For 9KHz - 30MHz

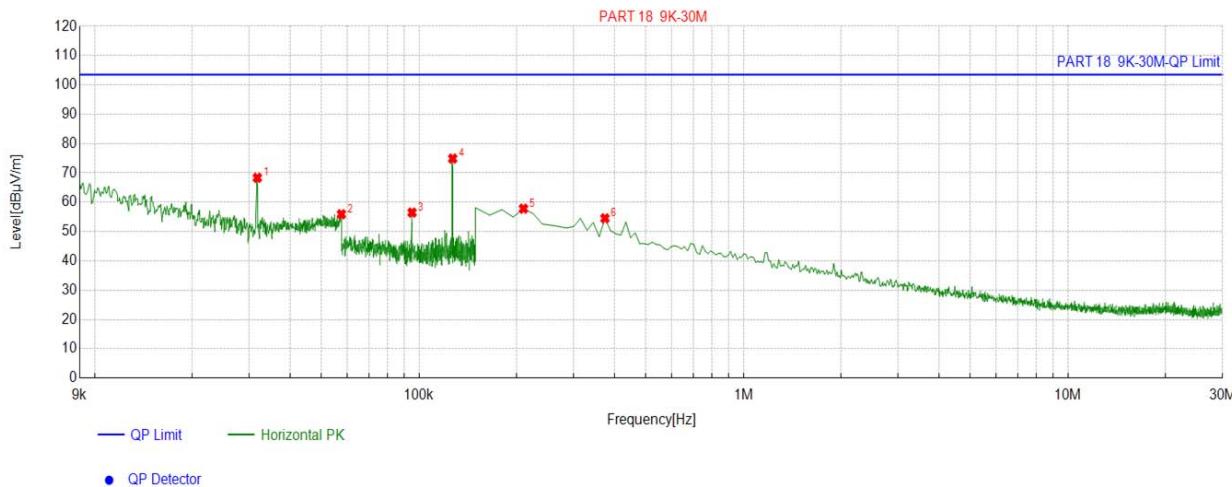

### Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
1	0.0317	14.69	53.63	68.32	103.50	35.18
2	0.0576	13.96	41.94	55.90	103.50	47.60
3	0.0951	13.96	42.51	56.47	103.50	47.03
4	0.1269	13.78	61.10	74.88	103.50	28.62
5	0.2097	13.67	44.13	57.80	103.50	45.70
6	0.3740	13.76	40.73	54.49	103.50	49.01

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



For 30MHz-1GHz

Antenna polarity: H

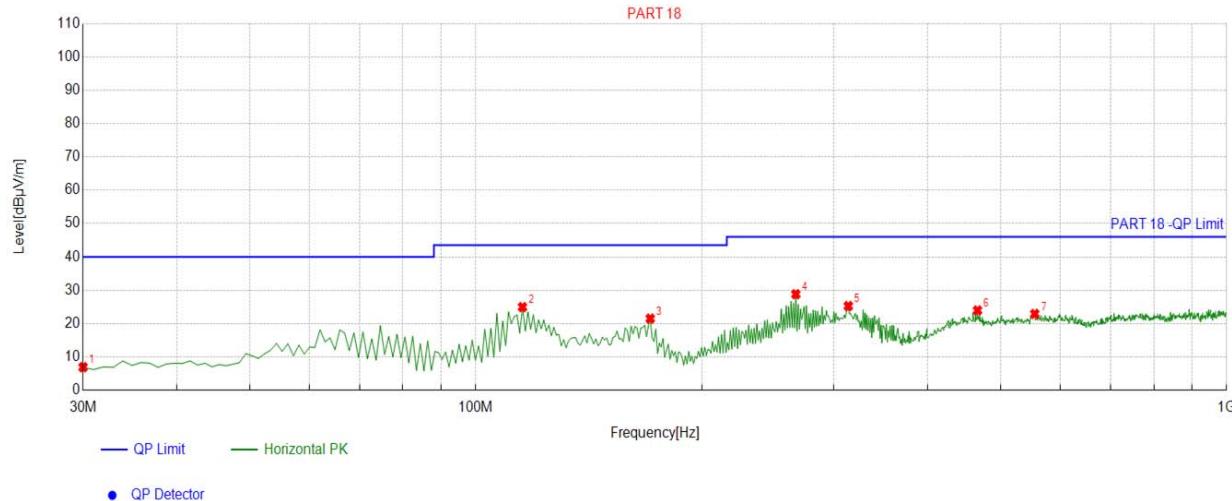


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.0000	-16.64	23.50	6.86	40.00	33.14	100	175	Horizontal
2	115.4454	-15.02	39.92	24.90	43.50	18.60	100	179	Horizontal
3	170.7908	-17.04	38.50	21.46	43.50	22.04	100	51	Horizontal
4	266.9169	-12.70	41.46	28.76	46.00	17.24	100	67	Horizontal
5	313.5235	-11.75	36.98	25.23	46.00	20.77	100	335	Horizontal
6	465.9660	-8.17	32.07	23.90	46.00	22.10	100	307	Horizontal
7	555.2953	-6.04	28.90	22.86	46.00	23.14	100	75	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor;  
Margin = Limit – Level



## Antenna polarity: V

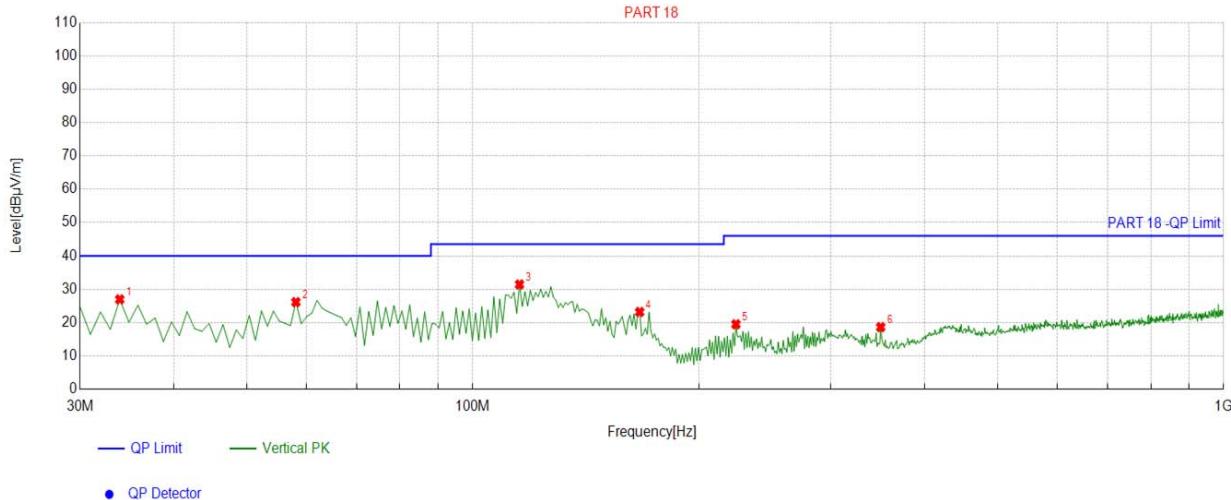

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.8839	-16.38	43.29	26.91	40.00	13.09	100	57	Vertical
2	58.1582	-14.51	40.61	26.10	40.00	13.90	100	105	Vertical
3	115.4454	-15.02	46.42	31.40	43.50	12.10	100	61	Vertical
4	166.9069	-16.93	40.07	23.14	43.50	20.36	100	153	Vertical
5	224.1942	-14.05	33.50	19.45	46.00	26.55	100	345	Vertical
6	349.4494	-11.23	29.83	18.60	46.00	27.40	100	157	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor;  
Margin = Limit – Level



## 5. ANTENNA REQUIREMENT


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a Coil Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.


Antenna location:

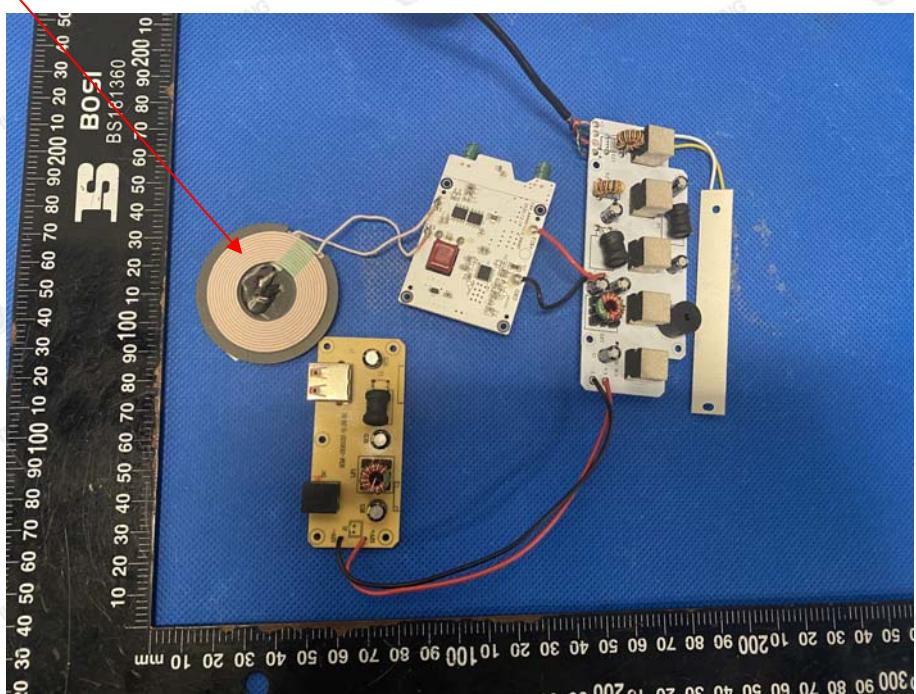



## 6. PHOTOGRAPH OF TEST


### Radiated Emission

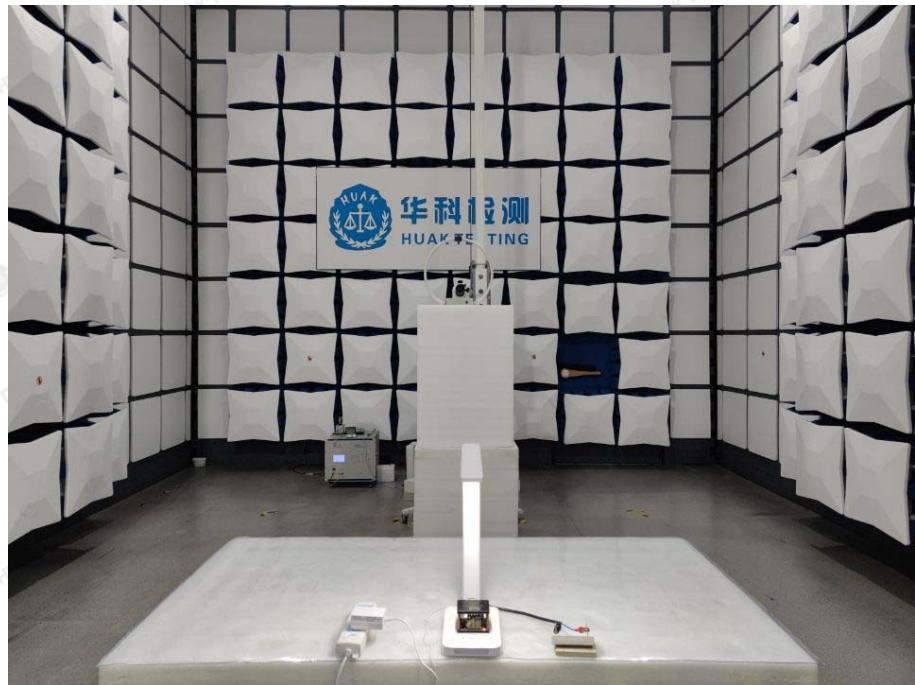

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

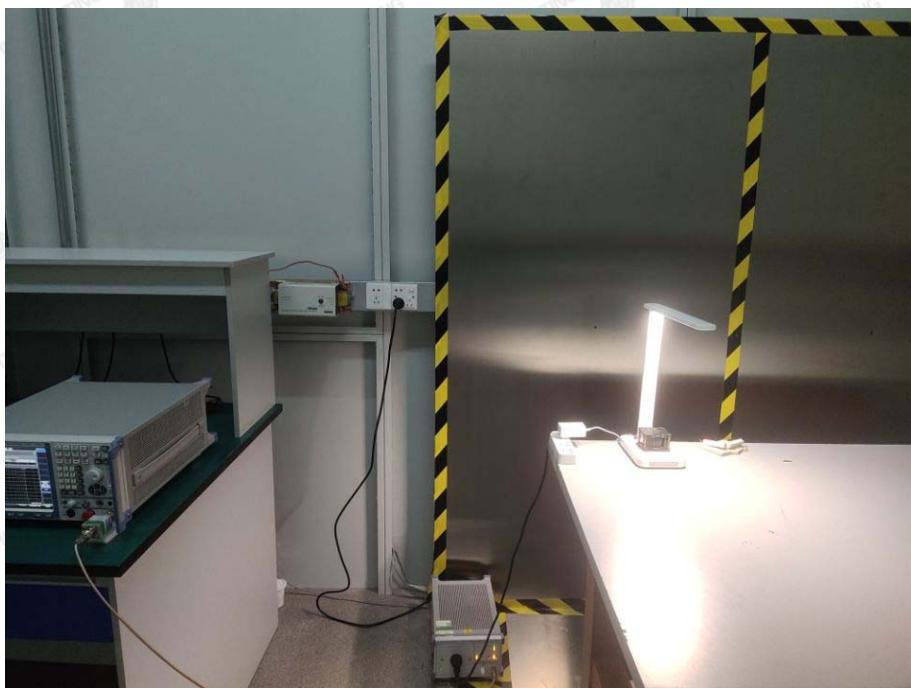**Conducted Emissions**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 7. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----