




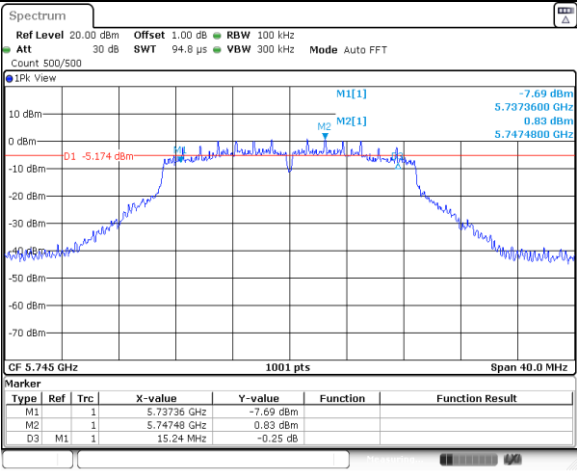


11N20SISO_Ant1_5785

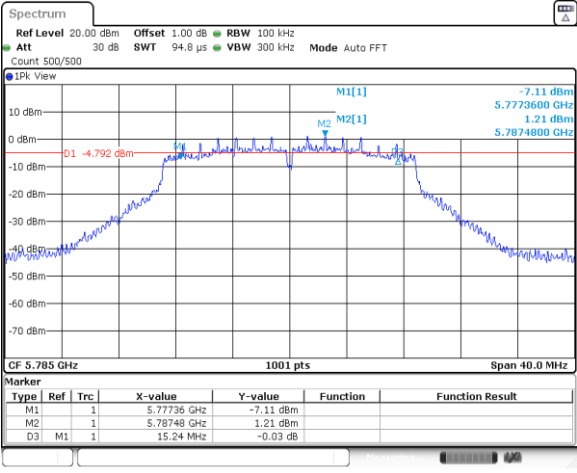


11N20SISO_Ant1_5825

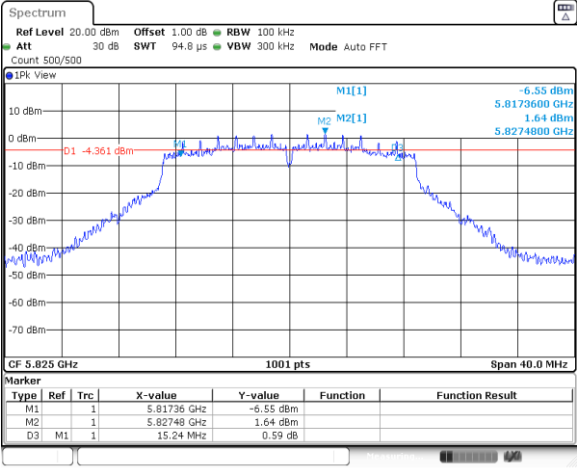


11N40SISO_Ant1_5755

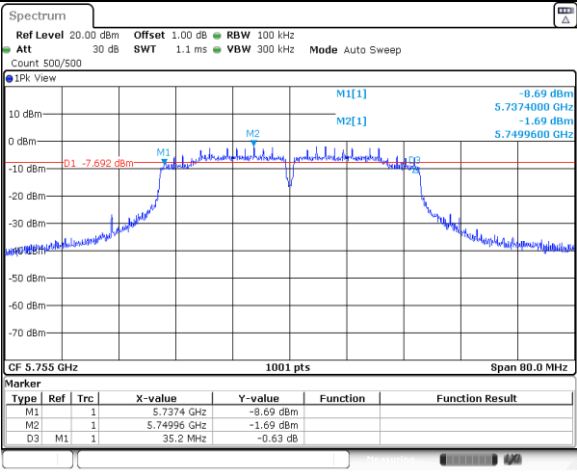


11N40SISO_Ant1_5795

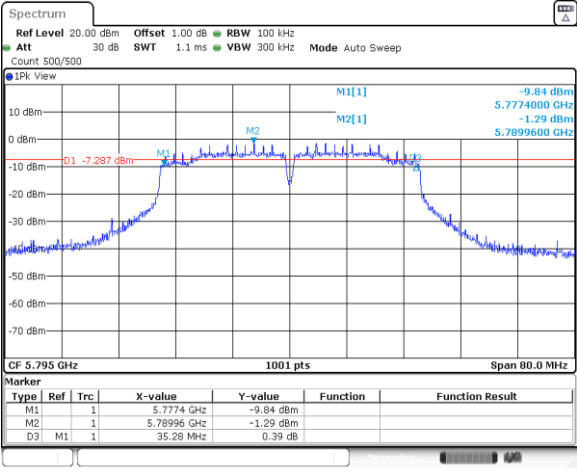


11AC20SISO_Ant1_5745

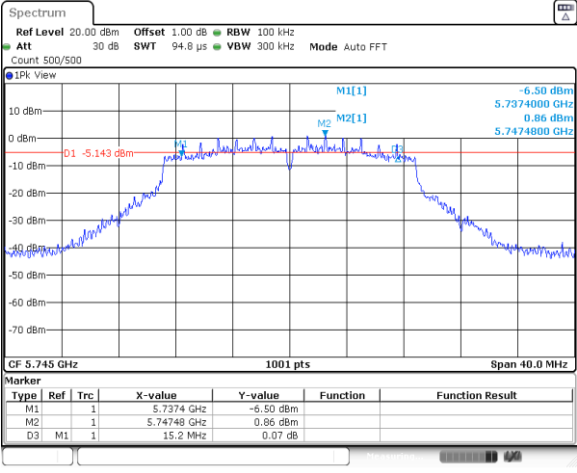


11AC20SISO_Ant1_5785

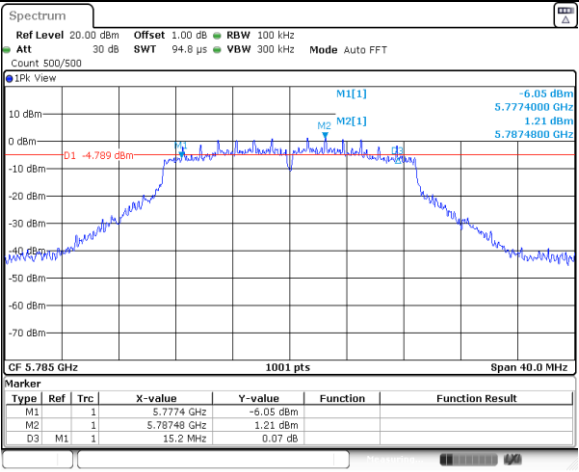


11AC20SISO Ant1 5825

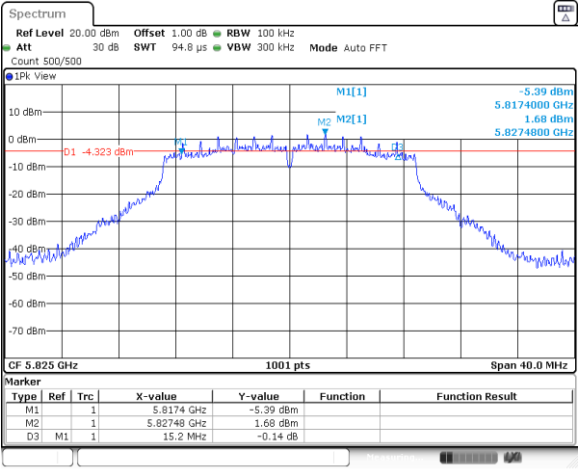


11AC40SISO Ant1 5755

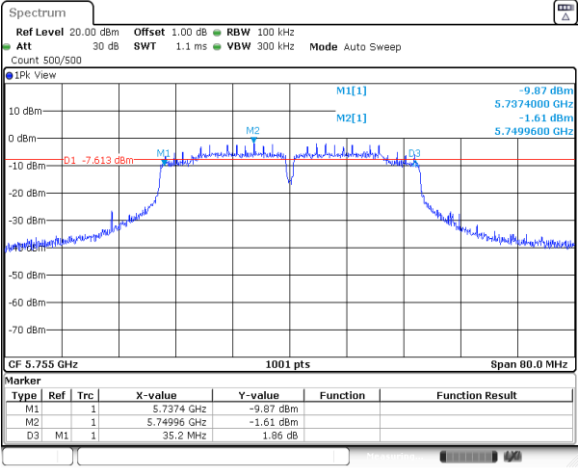

11AC40SISO Ant1 5795

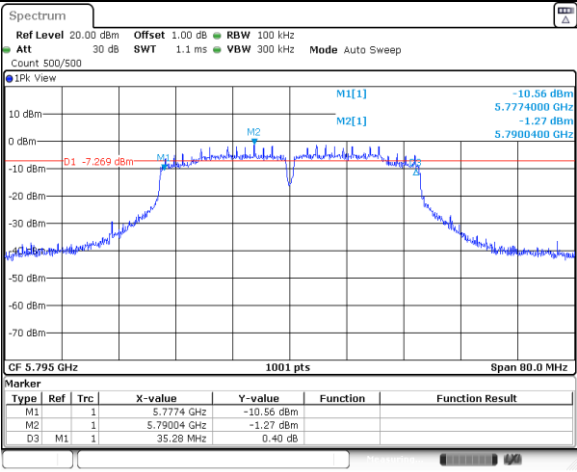

11AC80SISO Ant1 5775

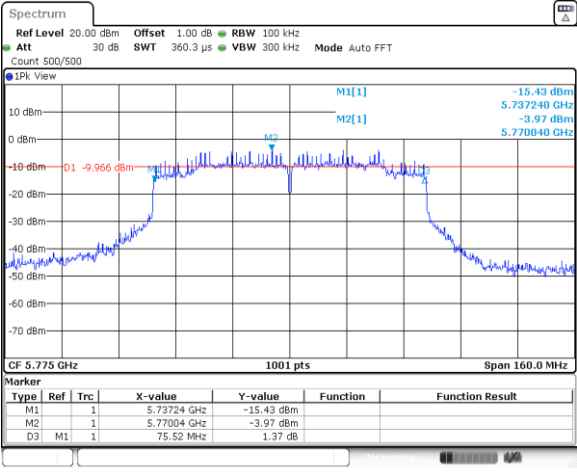

9.3 Maximum Conducted Output Power& EIRP

Test Method

According to KDB789033 D02

Limits: For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Test result as below table

IEEE 802.11a modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum Conducted Output Power (dBm)		Power Limit (dBm)
			Ant0	Ant1	
U-NII-1	Low	5180	12.9	14.1	24.00
	Middle	5220	12.0	14.2	24.00
	High	5240	12.2	13.4	24.00
U-NII-2A	Low	5260	12.4	14.2	24.00
	Middle	5300	12.6	14.2	24.00
	High	5320	12.3	13.6	24.00
U-NII-2C	Low	5500	11.6	10.9	24.00
	Middle	5580	12.0	11.6	24.00
	High	5700	11.9	10.6	24.00
		5720	11.7	11.3	24.00
U-NII-3	Low	5745	12.5	13.0	30.00
	Middle	5785	12.1	13.3	30.00
	High	5825	12.1	14.6	30.00

$$\text{Power}_{\text{SUM}} = 10 * \log(10^{(\text{Power}_{\text{Ant0}}/10)} + 10^{(\text{Power}_{\text{Ant1}}/10)})$$

IEEE 802.11n-HT20 modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum Conducted Output Power (dBm)			Power Limit (dBm)
			Ant0	Ant1	SUM	
U-NII-1	Low	5180	12.8	14.0	16.45	24.00
	Middle	5220	12.1	14.1	16.22	24.00
	High	5240	12.3	13.5	15.95	24.00
U-NII-2A	Low	5260	12.4	14.1	16.34	24.00
	Middle	5300	12.5	14.1	16.38	24.00
	High	5320	12.2	13.6	15.96	24.00
U-NII-2C	Low	5500	11.6	11.8	14.71	24.00
	Middle	5580	11.0	11.6	14.32	24.00
	High	5700	12.3	11.5	14.93	24.00
		5720	11.9	11.3	14.62	24.00
U-NII-3	Low	5745	12.2	13.0	15.63	30.00
	Middle	5785	12.3	13.2	15.78	30.00
	High	5825	12.4	14.6	16.65	30.00

IEEE 802.11n-HT40 modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum Conducted Output Power (dBm)			Power Limit (dBm)
			Ant0	Ant1	SUM	
U-NII-1	Low	5190	12.7	13.9	16.35	24.00
	High	5230	12.0	13.2	15.65	24.00
U-NII-2A	Low	5270	12.3	15.4	17.13	24.00
	High	5310	12.4	10.3	14.48	24.00
U-NII-2C	Low	5510	12.9	11.8	15.39	24.00
	Middle	5550	13.0	11.2	15.20	24.00
	High	5670	13.8	11.7	15.88	24.00
		5710	14.1	10.4	15.64	24.00
U-NII-3	Low	5755	14.3	14.0	17.16	30.00
	High	5795	14.4	13.6	17.03	30.00

IEEE 802.11ac-VHT20 modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum Conducted Output Power (dBm)			Power Limit (dBm)
			Ant0	Ant1	SUM	
U-NII-1	Low	5180	11.7	14.0	16.01	24.00
	Middle	5220	11.9	13.8	15.96	24.00
	High	5240	12.1	13.4	15.81	24.00
U-NII-2A	Low	5260	12.3	14.1	16.30	24.00
	Middle	5300	12.4	14.1	16.34	24.00
	High	5320	12.4	13.6	16.05	24.00
U-NII-2C	Low	5500	12.8	11.8	15.34	24.00
	Middle	5580	11.2	11.6	14.41	24.00
	High	5700	12.0	10.5	14.32	24.00
		5720	12.1	11.3	14.73	24.00
U-NII-3	Low	5745	12.2	13.0	15.63	30.00
	Middle	5785	12.3	13.2	15.78	30.00
	High	5825	12.4	14.6	16.65	30.00

IEEE 802.11ac-VHT40 modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum Conducted Output Power (dBm)			Power Limit (dBm)
			Ant0	Ant1	SUM	
U-NII-1	Low	5190	13.7	14.0	16.86	24.00
	High	5230	12.0	13.2	15.65	24.00
U-NII-2A	Low	5270	12.3	15.3	17.06	24.00
	High	5310	12.4	14.0	16.28	24.00
U-NII-2C	Low	5510	12.9	10.8	14.98	24.00
	Middle	5550	13.0	11.1	15.16	24.00
	High	5670	13.8	11.7	15.88	24.00
		5710	14.1	11.4	15.96	24.00
U-NII-3	Low	5755	14.3	14.0	17.16	30.00
	High	5795	14.4	13.6	17.03	30.00

IEEE 802.11ac-VHT80 modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum Conducted Output Power (dBm)			Power Limit (dBm)
			Ant0	Ant1	SUM	
U-NII-1	42	5210	11.9	15.2	16.86	24.00
U-NII-2A	58	5290	12.3	15.6	17.26	24.00
U-NII-2C	Low	5530	12.9	10.7	14.95	24.00
	Middle	5610	13.4	10.3	15.13	24.00
	High	5690	13.9	12.1	16.10	24.00
U-NII-3	155	5755	14.4	12.5	16.56	30.00

NOTE 1: the 11 dBm + 10 log B is greater than 250mW.

NOTE 2: $\text{PowerSUM} = 10 \cdot \log(10^{\text{PowerAnt0}/10} + 10^{\text{PowerAnt1}/10})$

9.4 Maximum Power Spectral Density

Test Method

According to KDB789033 D02

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

Limit: The maximum power spectral density shall not exceed 11dBm for the 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725 GHz Band and 30dBm for the 5.8GHz Band in any 1 megahertz band.

NOTE: The power of Ant0 is higher than Ant1, so PSD are performed at Ant0, the final result will add 3dB (10log2) according to the method from KDB 662911 D01.

IEEE 802.11a modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum PSD (dBm/MHz)		PSD Limit (dBm/MHz)
			Ant0	Ant1	
U-NII-1	Low	5180	3.85	2.44	11.00
	Middle	5220	3.75	2.92	11.00
	High	5240	2.65	1.95	11.00
U-NII-2A	Low	5260	3.14	3.13	11.00
	Middle	5300	3.61	3.26	11.00
	High	5320	3.61	2.54	11.00
U-NII-2C	Low	5500	2.61	-0.68	11.00
	Middle	5580	3.03	-1.28	11.00
	High	5700	2.6	-1.46	11.00
		5720 UNII-2C	2.7	-1.42	11.00
U-NII-3		5720 UNII-3	-1.24	-4.8	30.00
	Low	5745	3.08	-0.36	30.00
	Middle	5785	3.21	0.06	30.00
	High	5825	2.84	0.45	30.00

IEEE 802.11n-HT20 modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum PSD (dBm/MHz)			PSD Limit (dBm/MHz)
			Ant0	Ant1	SUM	
U-NII-1	Low	5180	4.16	2.73	6.513	11.00
	Middle	5220	3.4	2.9	6.167	11.00
	High	5240	2.82	1.96	5.421	11.00
U-NII-2A	Low	5260	3.02	3.07	6.055	11.00
	Middle	5300	3.45	3.01	6.246	11.00
	High	5320	3.42	2.51	5.991	11.00
U-NII-2C	Low	5500	2.32	-0.59	4.11	11.00
	Middle	5580	2.73	-1.32	4.171	11.00
	High	5700	2.54	-1.52	3.978	11.00
		5720 UNII-2C	3.43	-1.48	4.645	11.00
U-NII-3		5720 UNII-3	0.53	-4.53	1.709	30.00
	Low	5745	4.14	-0.17	5.509	30.00
	Middle	5785	4.08	0.2	5.57	30.00
	High	5825	4.02	0.69	5.677	30.00

IEEE 802.11n-HT40_MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Maximum PSD (dBm/MHz)			PSD Limit (dBm/MHz)
			Ant0	Ant1	SUM	
U-NII-1	Low	5190	1.38	-0.54	3.535	11.00
	High	5230	-0.14	-1.61	2.197	11.00
U-NII-2A	Low	5270	2.17	0.74	4.524	11.00
	High	5310	1.52	-0.43	3.664	11.00
U-NII-2C	Low	5510	0.19	-3.8	1.648	11.00
	Middle	5550	0.3	-3.64	1.772	11.00
	High	5670	0.34	-4.51	1.57	11.00
		5710_UNII-2C	0.4	-4.72	1.565	11.00
U-NII-3	Low	5710_UNII-3	-5.11	-9.85	-3.85	11.00
		5755	0.84	-3.07	2.321	30.00
	High	5795	0.75	-2.73	2.36	30.00

IEEE 802.11ac-VHT20_MIMO modulation Test Result

Band	Channel	Channel Frequency (MHz)	Maximum PSD (dBm/MHz)			PSD Limit (dBm/MHz)
			Ant0	Ant1	SUM	
U-NII-1	Low	5180	4.61	2.62	6.738	11.00
	Middle	5220	4.2	3.17	6.725	11.00
	High	5240	3.41	2.07	5.802	11.00
U-NII-2A	Low	5260	3.73	3.25	6.507	11.00
	Middle	5300	3.97	2.93	6.491	11.00
	High	5320	4.26	2.8	6.601	11.00
U-NII-2C	Low	5500	3.3	-0.53	4.804	11.00
	Middle	5580	3.52	-1.18	4.787	11.00
	High	5700	3.16	-1.77	4.37	11.00
		5720_UNII-2C	3.24	-1.46	4.507	11.00
U-NII-3		5720_UNII-3	-0.03	-4.82	1.214	11.00
	Low	5745	3.89	-0.22	5.314	30.00
	Middle	5785	3.78	0.22	5.365	30.00
	High	5825	3.72	0.74	5.491	30.00

IEEE 802.11ac-VHT40_MIMO modulation Test Result


Band	Channel	Frequency (MHz)	Maximum PSD (dBm/MHz)			PSD Limit (dBm/MHz)
			Ant0	Ant1	SUM	
U-NII-1	Low	5190	1.12	-0.35	3.457	11.00
	High	5230	-0.53	-1.64	1.96	11.00
U-NII-2A	Low	5270	2.07	0.87	4.521	11.00
	High	5310	1.17	-0.41	3.462	11.00
U-NII-2C	Low	5510	0.21	-3.67	1.7	11.00
	Middle	5550	-0.05	-3.56	1.55	11.00
	High	5670	0.04	-4.53	1.34	11.00
		5710_UNII-2C	-0.15	-4.65	1.169	11.00
U-NII-3	Low	5710_UNII-3	-5.33	-9.84	-4.013	11.00
		5755	0.53	-2.82	2.180	30.00
	High	5795	0.44	-2.55	2.207	30.00


IEEE 802.11ac-VHT80_MIMO modulation Test Result

Band	Channel	Frequency (MHz)	Maximum PSD (dBm/MHz)			PSD Limit (dBm/MHz)
			Ant0	Ant1	SUM	
U-NII-1	42	5210	-0.02	-1.34	2.380	11.00
U-NII-2A	58	5290	-0.95	-2.53	1.342	11.00
U-NII-2C	Low	5530	-2.15	-5.92	-0.63	11.00
	Middle	5610	-2.23	-6.19	-0.76	11.00
	High	5690_UNII-2C	-0.67	-4.78	0.754	11.00
		5690_UNII-3	-6.71	-11.28	-5.409	11.00
U-NII-3	155	5775	-1.91	-5.49	-0.33	30.00




Test Graphs:

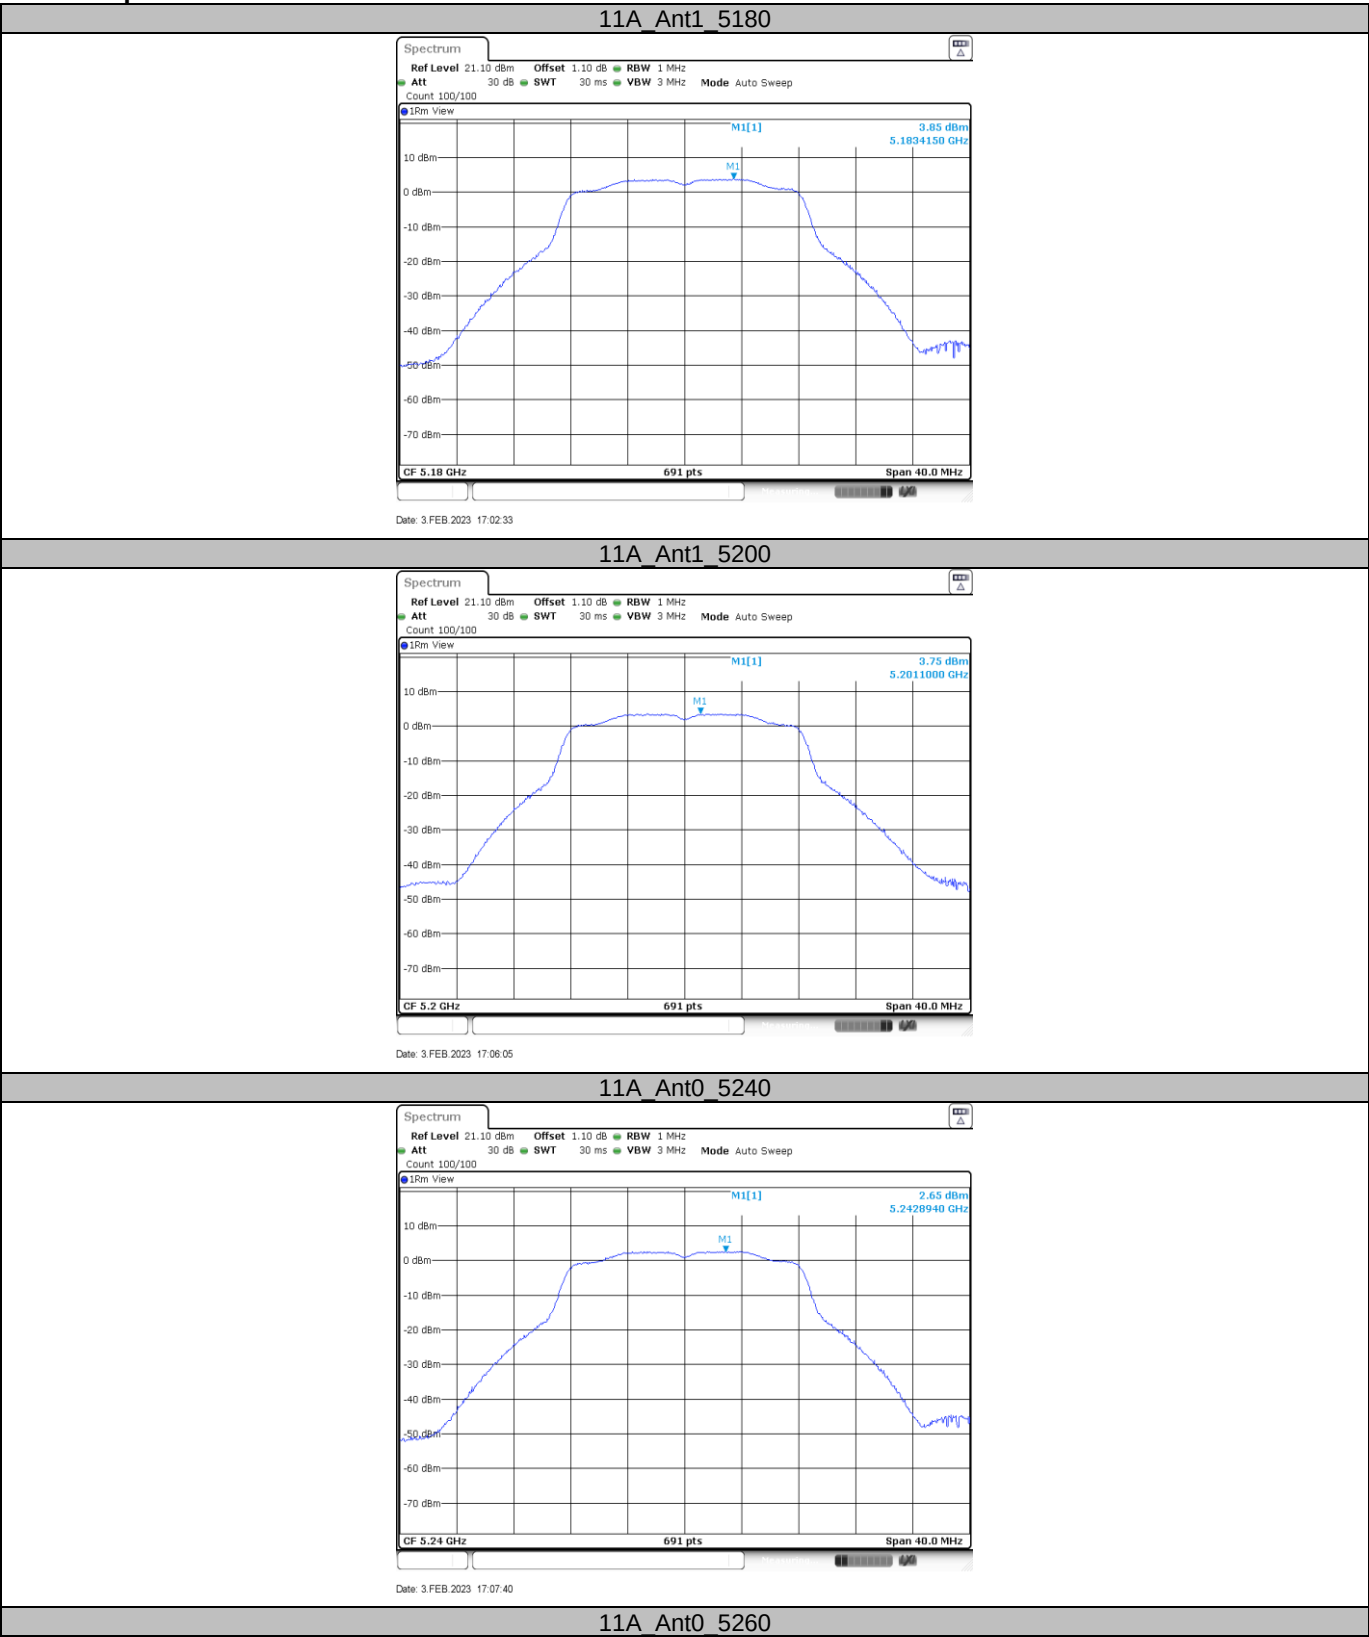

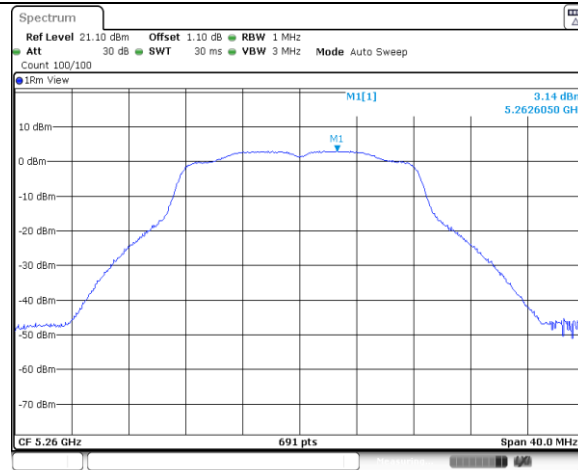


Date: 3 FEB 2023 17:09:53

11A Ant0 5280

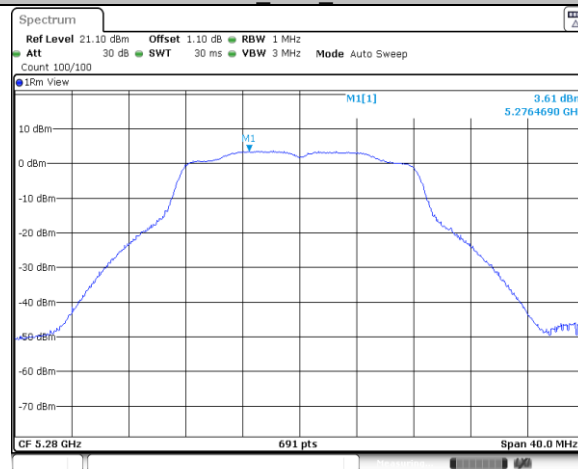


Date: 3 FEB 2023 17:12:48

11A Ant0 5320

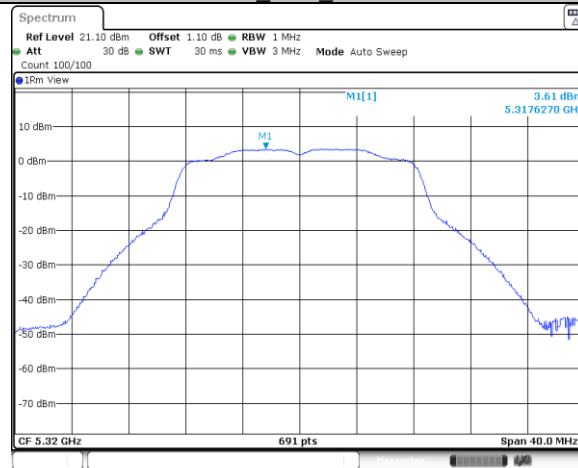


Date: 3 FEB 2023 17:14:47

11A Ant0 5500

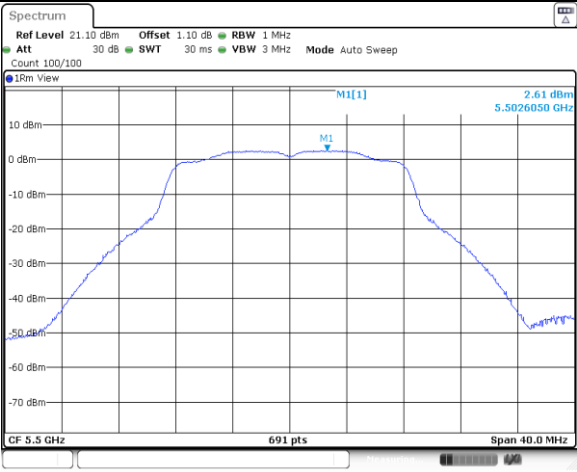


Date: 3.FEB.2023 17:16:53

11A Ant0 5580

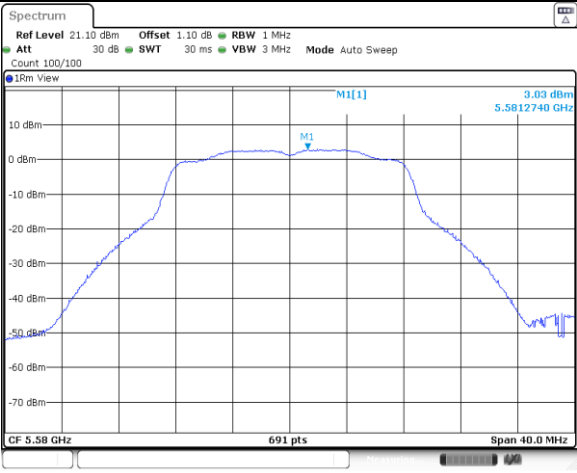


Date: 3.FEB.2023 17:19:40

11A Ant0 5700

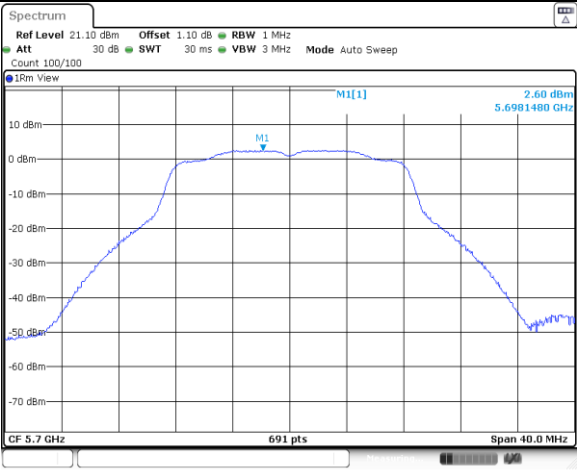


Date: 3.FEB.2023 17:21:46

11A Ant0 5720 UNII-2C

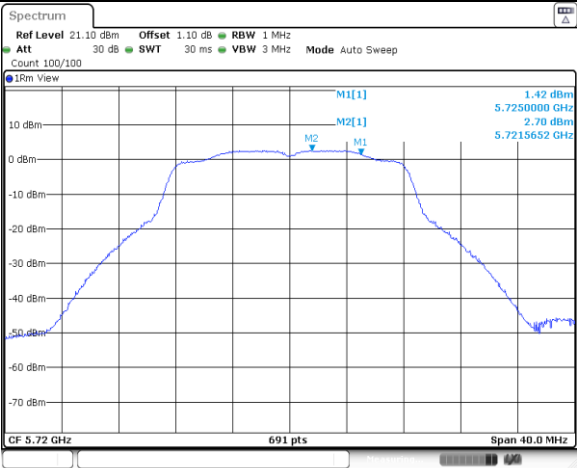


Date: 3.FEB.2023 17:25:12

11A Ant0 5720 UNII-3

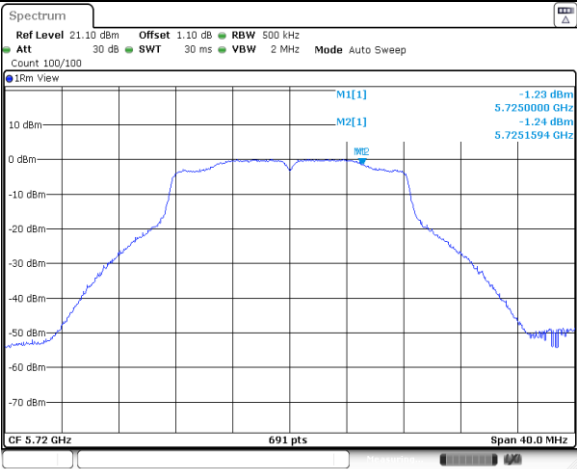


Date: 3.FEB.2023 17:25:21

11A Ant0 5745

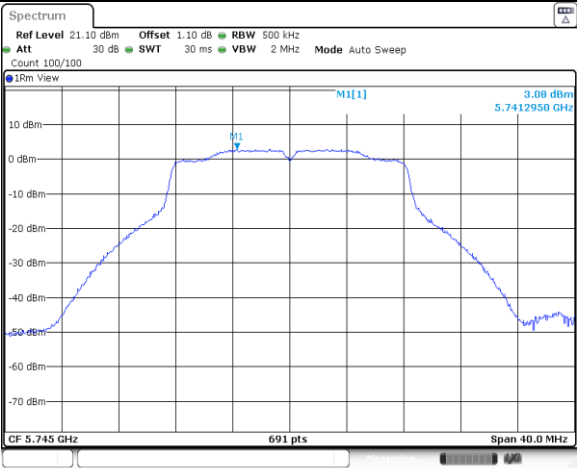


Date: 3.FEB.2023 17:27:48

11A Ant0 5785

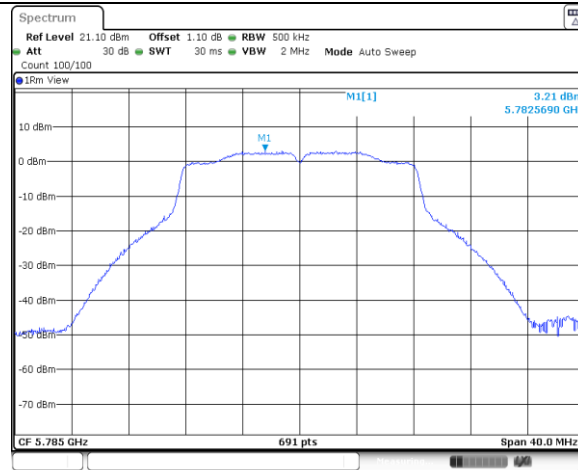


Date: 3.FEB.2023 17:30:01

11A Ant0 5825

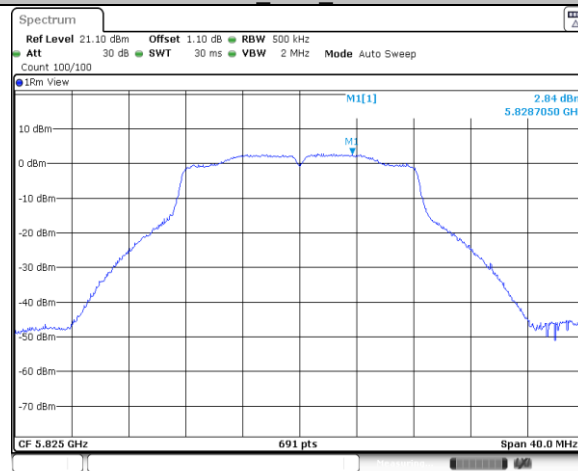


Date: 3.FEB.2023 17:32:53

11N20SISO Ant0 5180

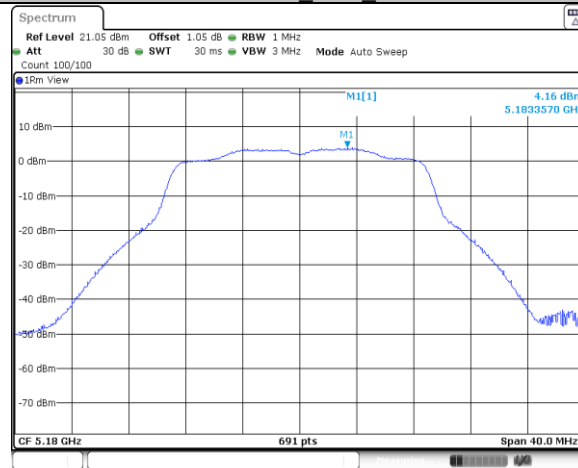


Date: 3.FEB.2023 17:35:18

11N20SISO Ant0 5200

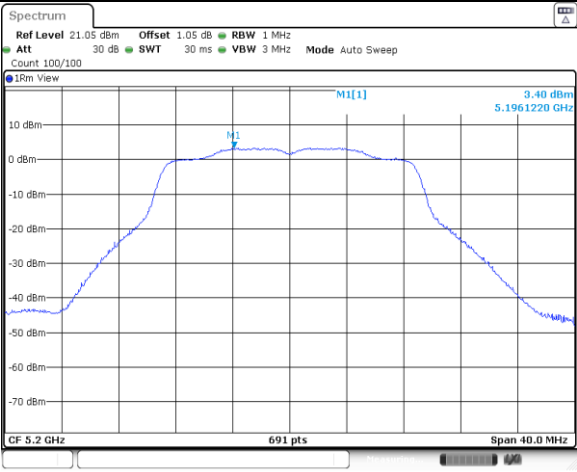


Date: 3.FEB.2023 17:37:07

11N20SISO_Ant0_5240

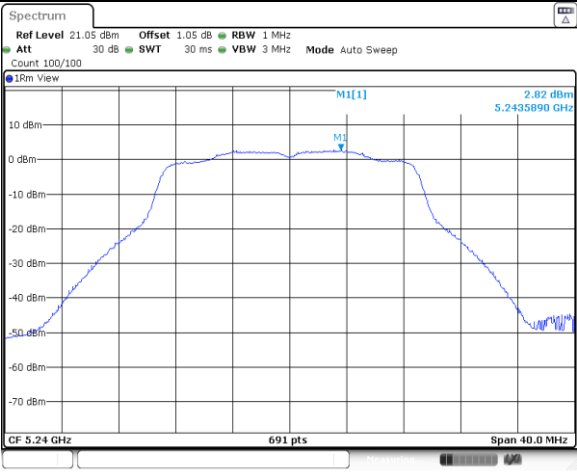


Date: 3.FEB.2023 17:39:18

11N20SISO_Ant0_5260

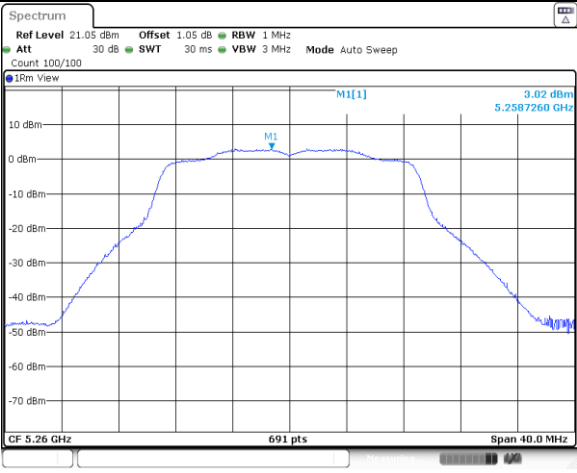


Date: 3.FEB.2023 17:41:08

11N20SISO_Ant0_5280

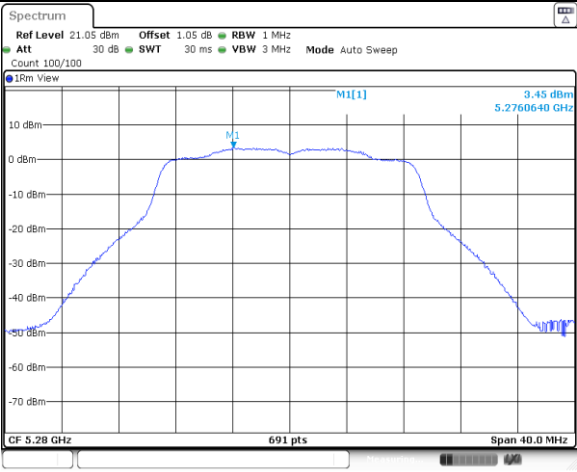


Date: 3.FEB.2023 17:44:23

11N20SISO_Ant0_5320

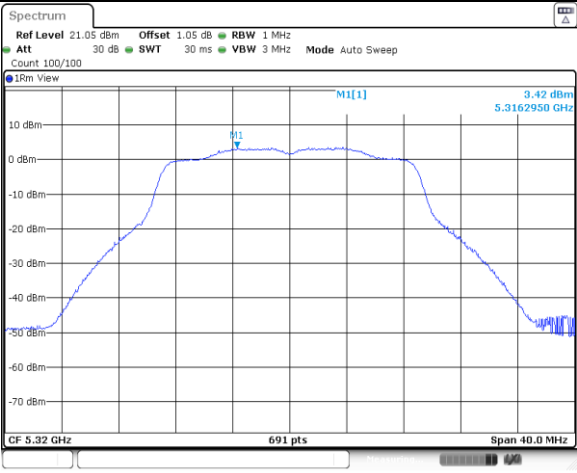


Date: 3.FEB.2023 17:47:13

11N20SISO_Ant0_5500

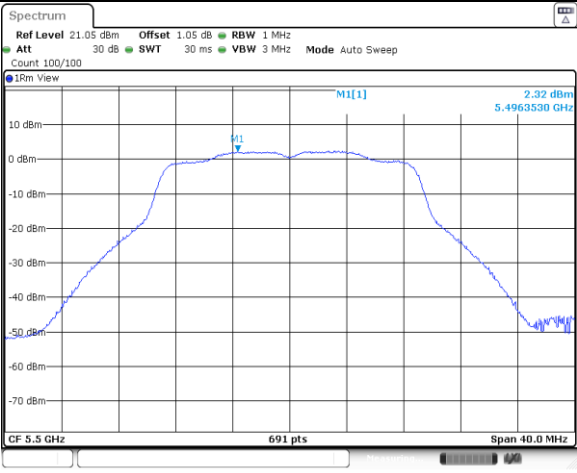


Date: 3.FEB.2023 17:49:14


11N20SISO_Ant0_5580

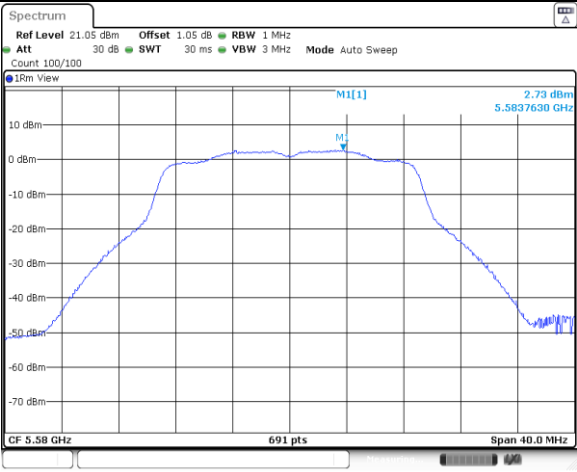


11N20SISO Ant0 5700

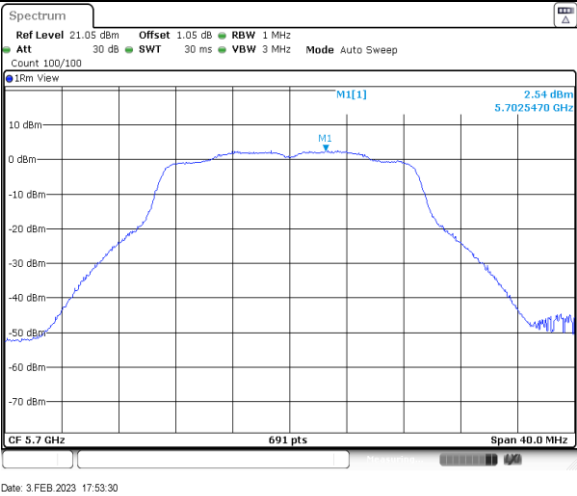


11N20SISO Ant0 5720 UNII-2C

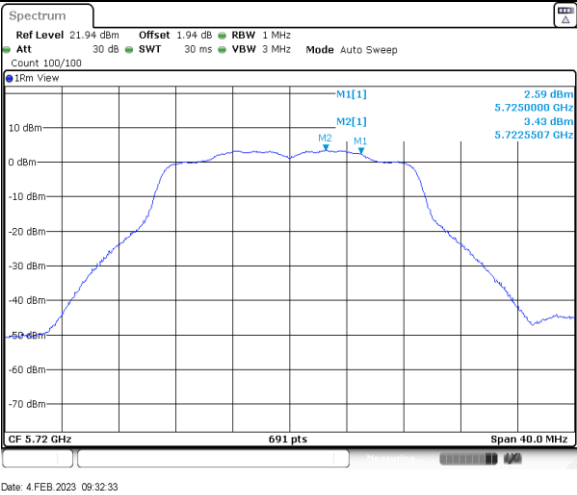


11N20SISO Ant0 5720 UNII-3

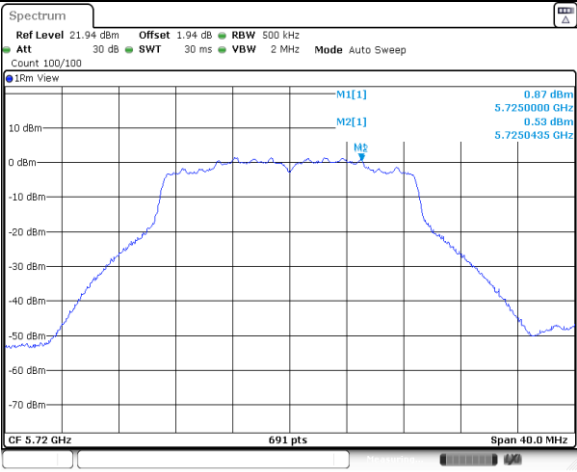


11N20SISO_Ant0_5745

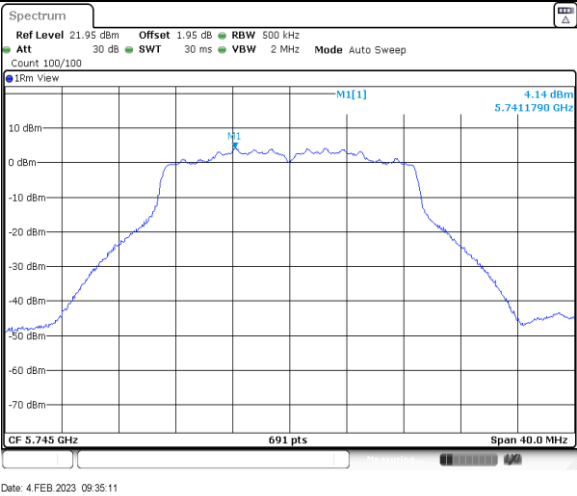

11N20SISO_Ant0_5785

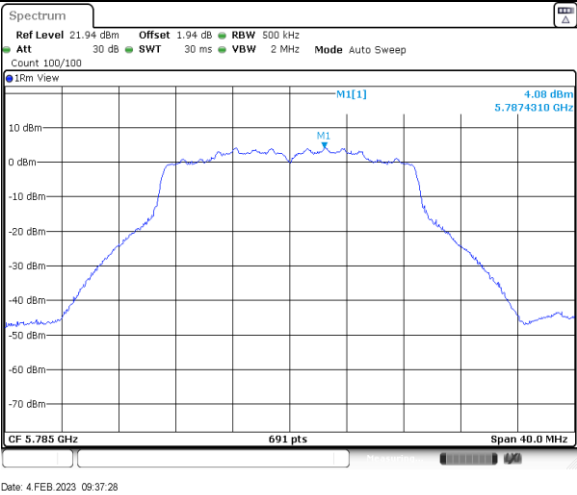


11N20SISO_Ant0_5825

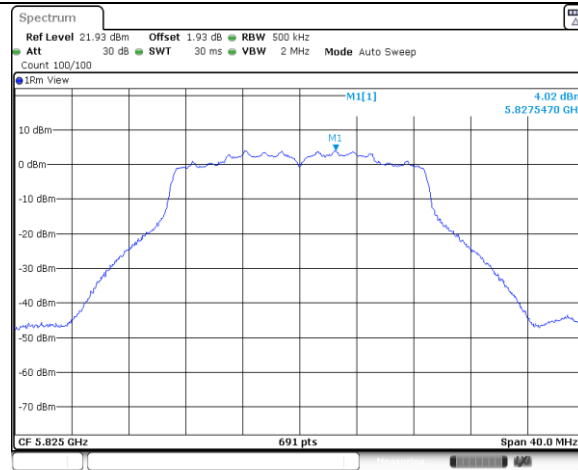


Date: 4 FEB 2023 09:39:27

11N40SISO_Ant0_5190

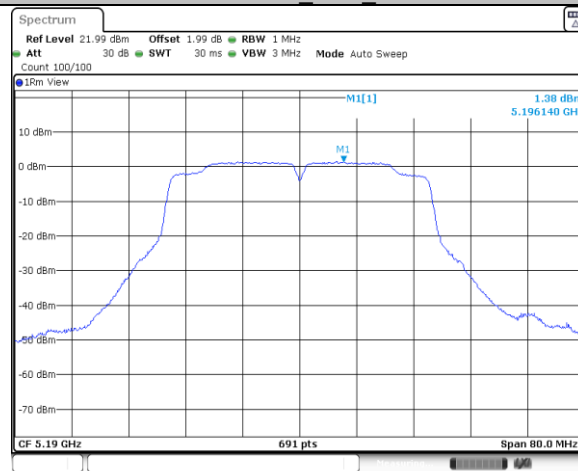


Date: 4 FEB 2023 09:41:40

11N40SISO_Ant0_5230

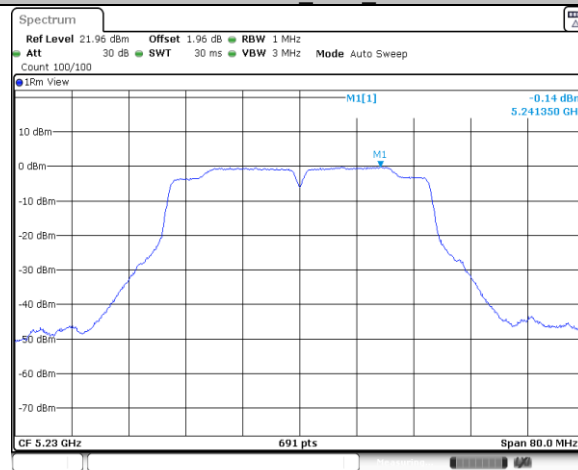


Date: 4 FEB 2023 09:43:46

11N40SISO_Ant0_5270

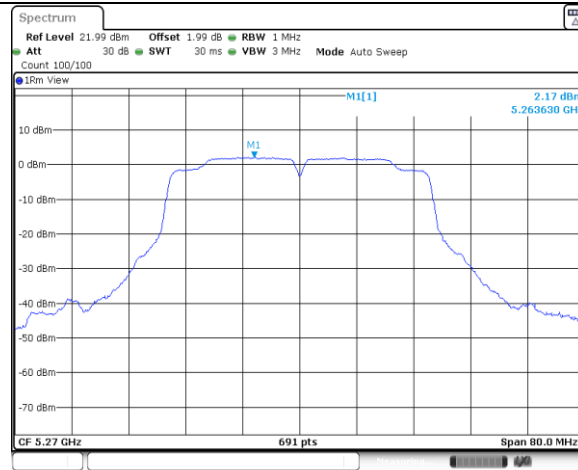


Date: 4 FEB 2023 09:45:26

11N40SISO_Ant0_5310

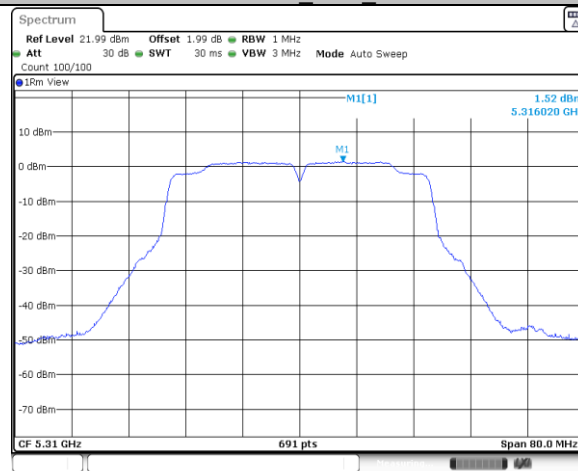


Date: 4 FEB 2023 09:47:08

11N40SISO_Ant0_5510

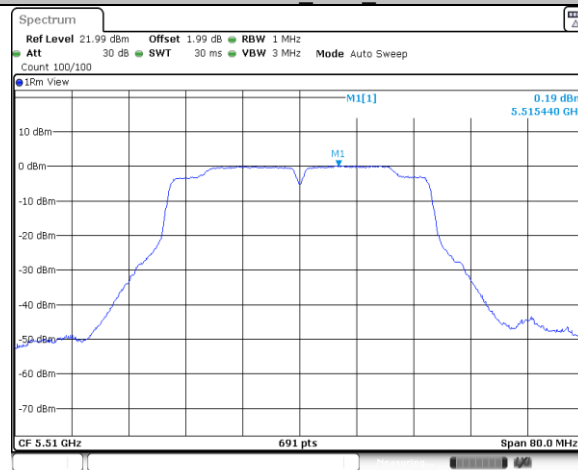


Date: 4 FEB 2023 09:49:01

11N40SISO_Ant0_5550

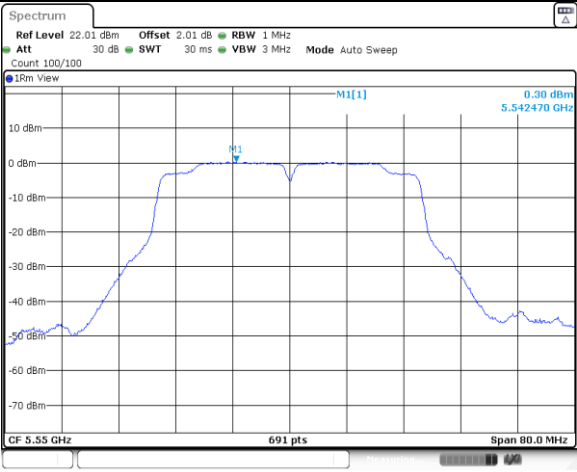


Date: 4 FEB 2023 09:51:01

11N40SISO Ant0 5670

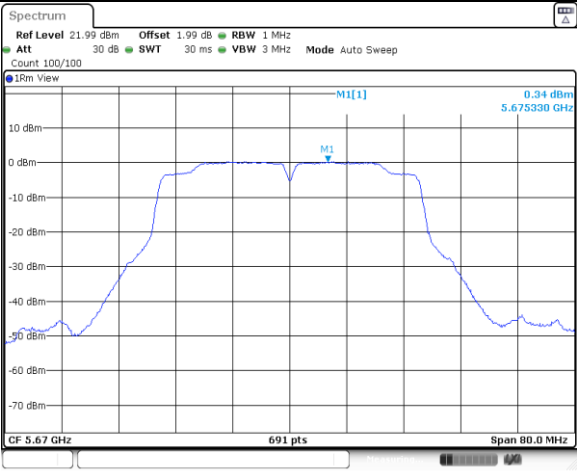


Date: 4 FEB 2023 09:52:42

11N40SISO Ant0 5710 UNII-2C

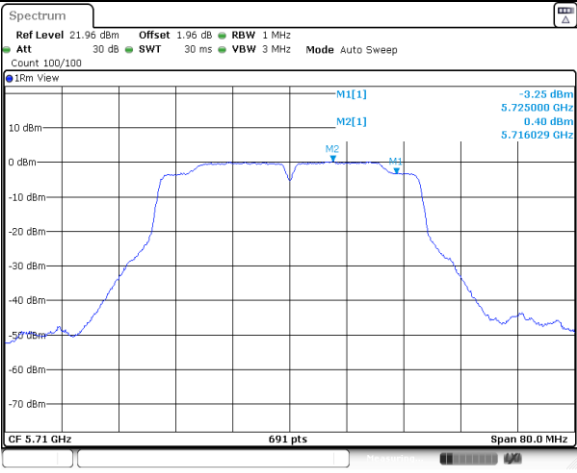


Date: 4 FEB 2023 10:00:17

11N40SISO Ant0 5710 UNII-3

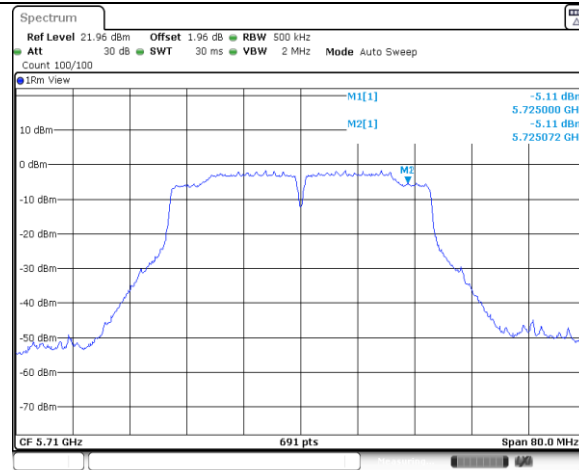


Date: 4 FEB 2023 10:00:26

11N40SISO Ant0 5755

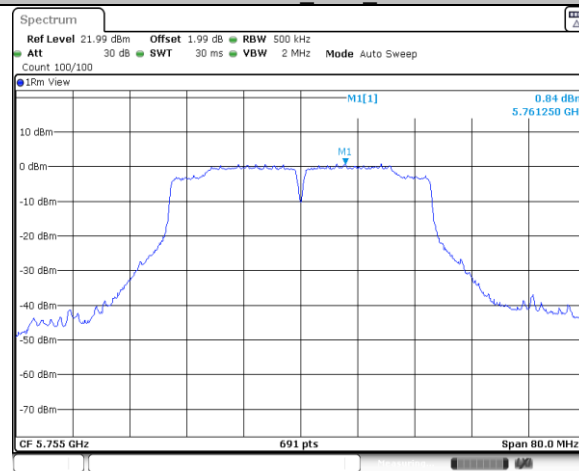


Date: 4 FEB 2023 09:57:25

11N40SISO Ant0 5795

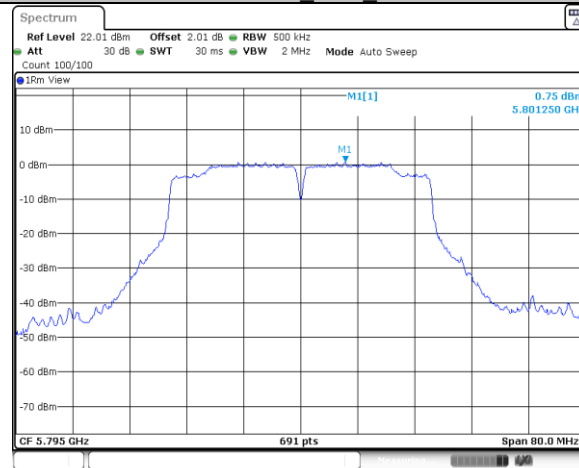


Date: 4 FEB 2023 10:03:08

11AC20SISO Ant0 5180

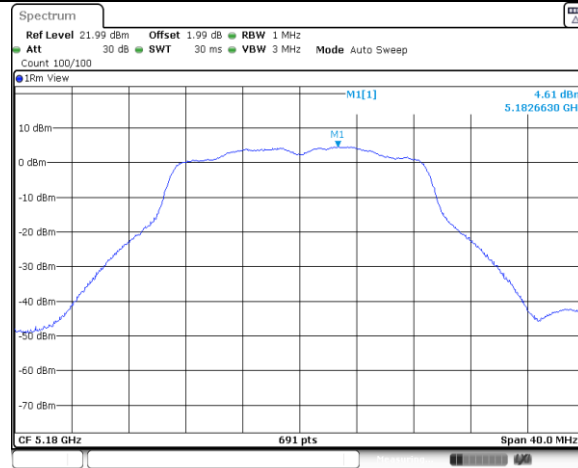


Date: 4 FEB 2023 10:06:37

11AC20SISO_Ant0_5200

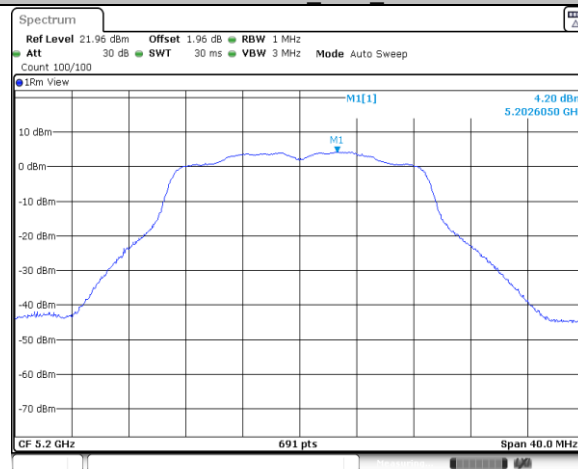


Date: 4 FEB 2023 10:08:28

11AC20SISO_Ant0_5240

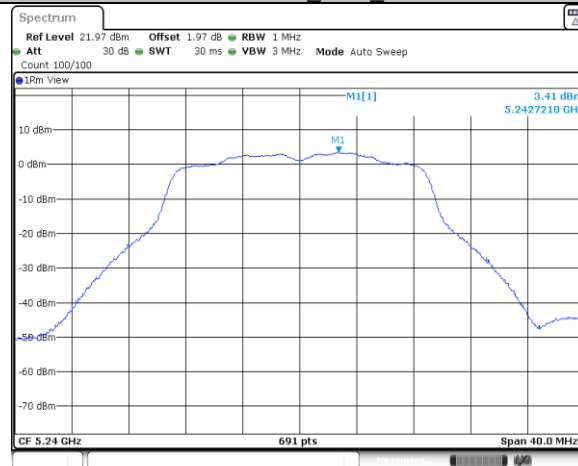


Date: 4 FEB 2023 10:10:05

11AC20SISO_Ant0_5260

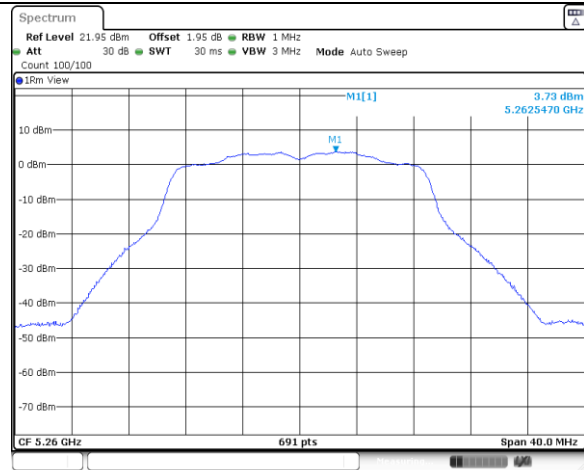

Date: 4 FEB 2023 10:11:50

11AC20SISO_Ant0_5280

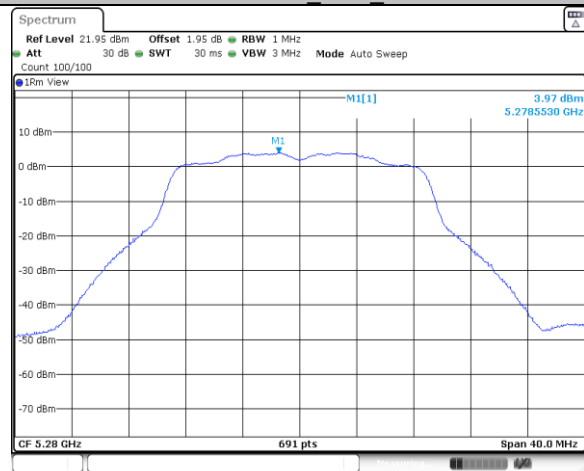


Date: 4 FEB 2023 10:13:27

11AC20SISO_Ant0_5320




Date: 4 FEB 2023 10:15:06

11AC20SISO_Ant0_5500

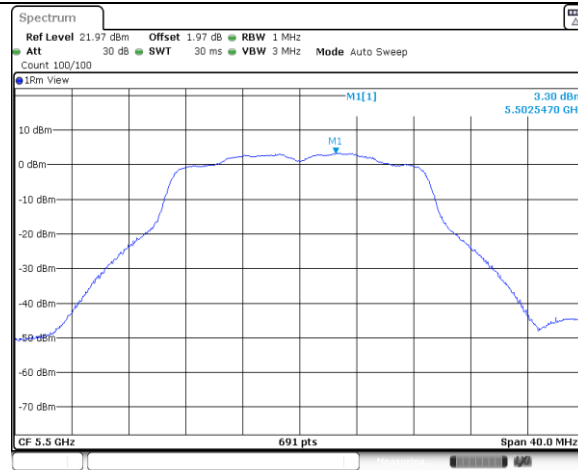


Date: 4 FEB 2023 10:16:58

11AC20SISO Ant0 5580

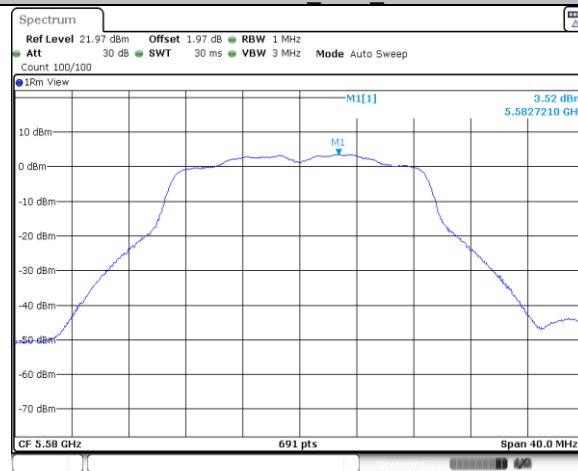


Date: 4 FEB 2023 10:19:04

11AC20SISO Ant0 5700

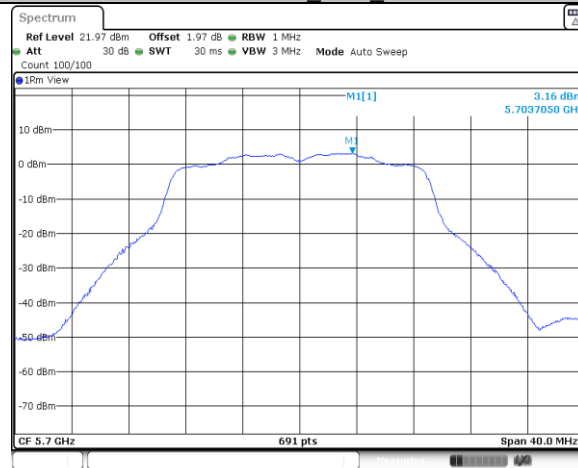


Date: 4 FEB 2023 10:20:43


11AC20SISO Ant0 5720_UNII-2C

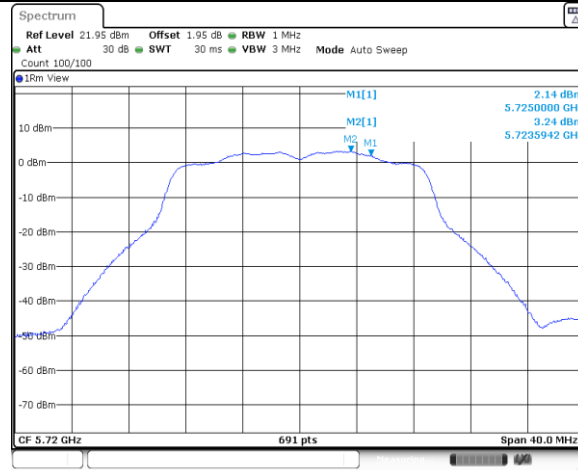


11AC20SISO_Ant0_5720_UNII-3

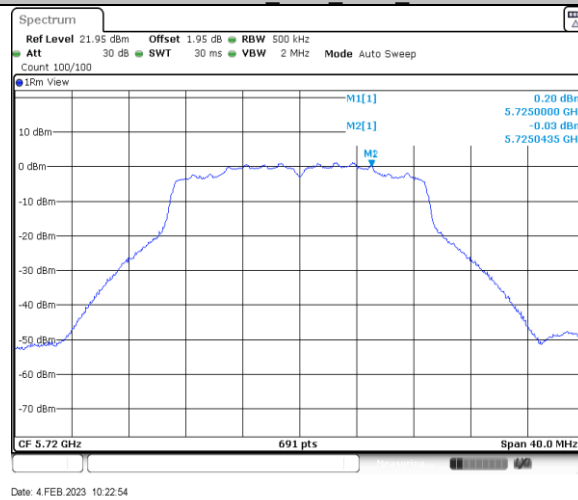

11AC20SISO_Ant0_5745

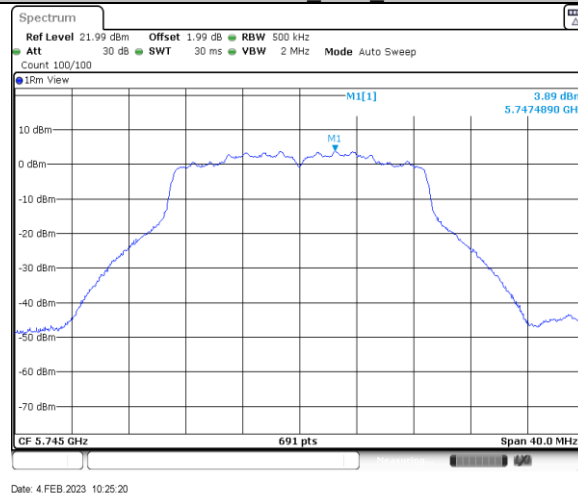


11AC20SISO_Ant0_5785

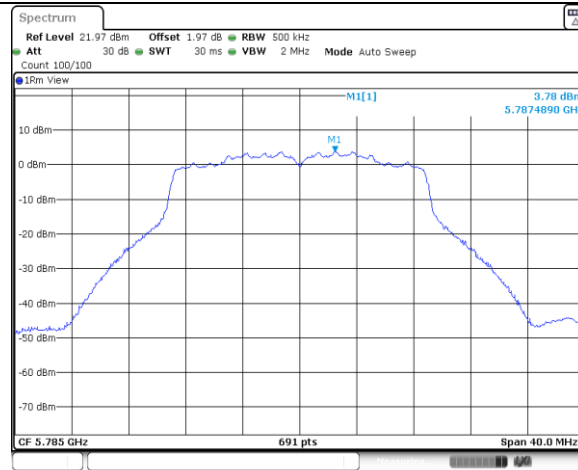


Date: 4 FEB 2023 10:27:44

11AC20SISO Ant0 5825

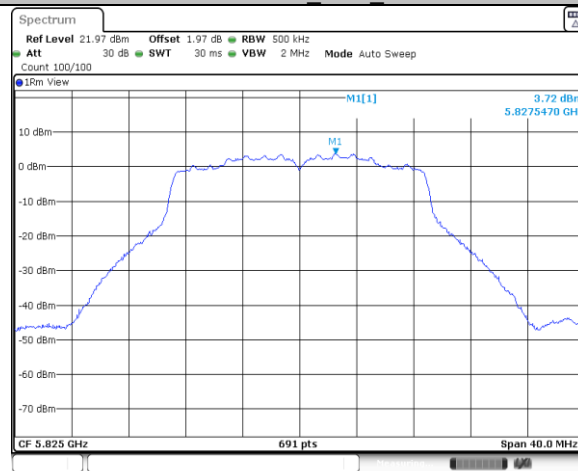


Date: 4 FEB 2023 10:29:53

11AC40SISO Ant0 5190

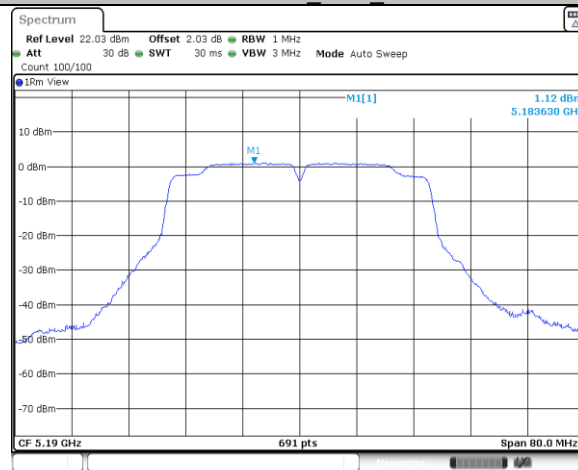


Date: 4 FEB 2023 10:32:20

11AC40SISO Ant0 5230

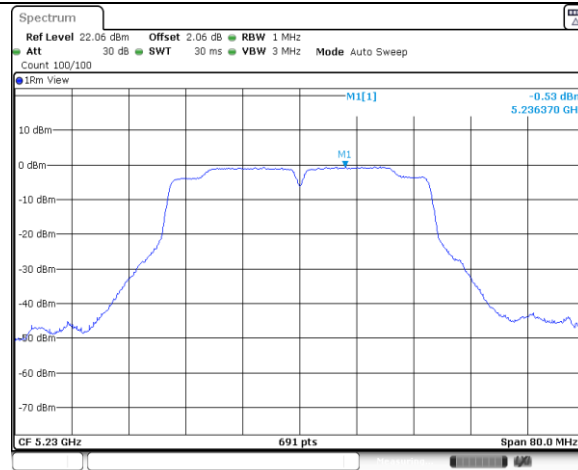


Date: 4 FEB 2023 10:34:11

11AC40SISO_Ant0_5270

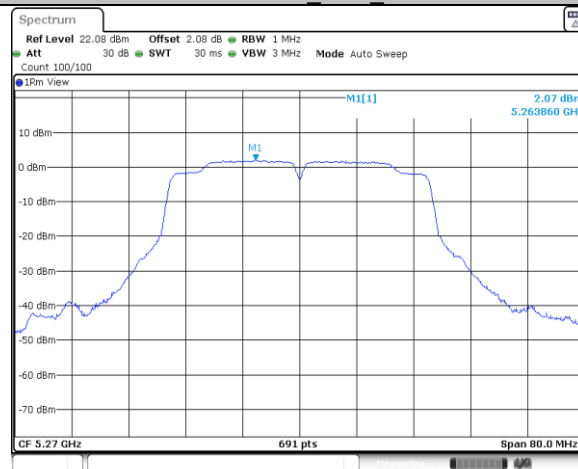


Date: 4 FEB 2023 10:35:57

11AC40SISO_Ant0_5310

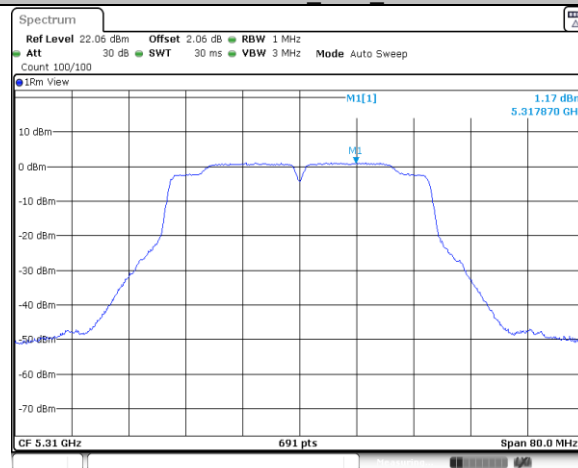


Date: 4 FEB 2023 10:37:34

11AC40SISO_Ant0_5510

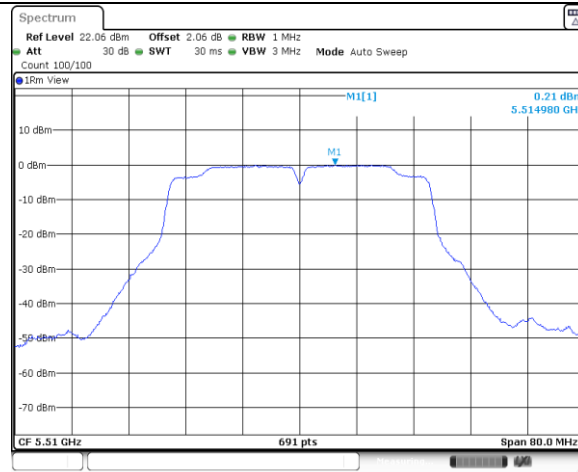


Date: 4 FEB 2023 10:39:25

11AC40SISO Ant0 5550

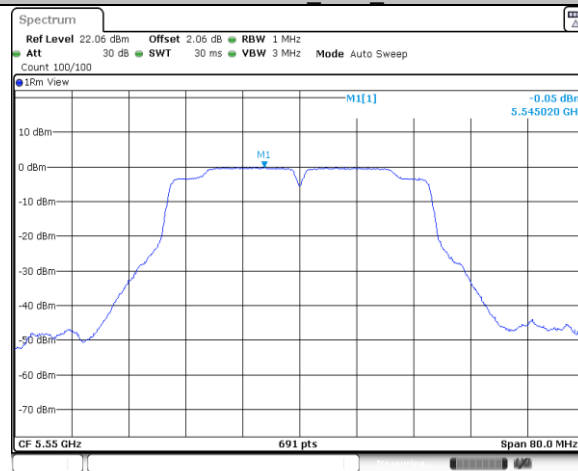


Date: 4 FEB 2023 10:41:16

11AC40SISO Ant0 5670

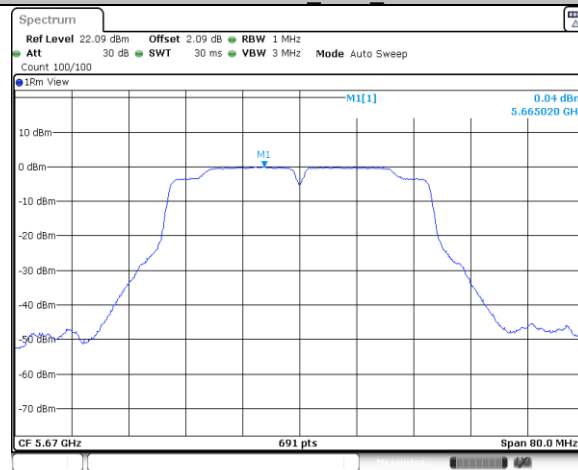


Date: 4 FEB 2023 10:42:58

11AC40SISO Ant0 5710_UNII-2C

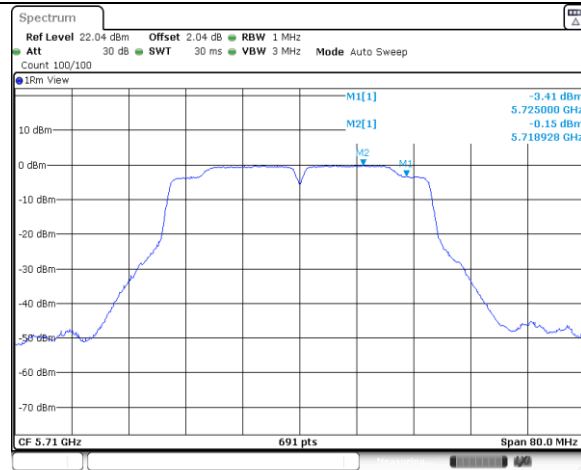


Date: 4 FEB 2023 10:45:05

11AC40SISO_Ant0_5710_UNII-3

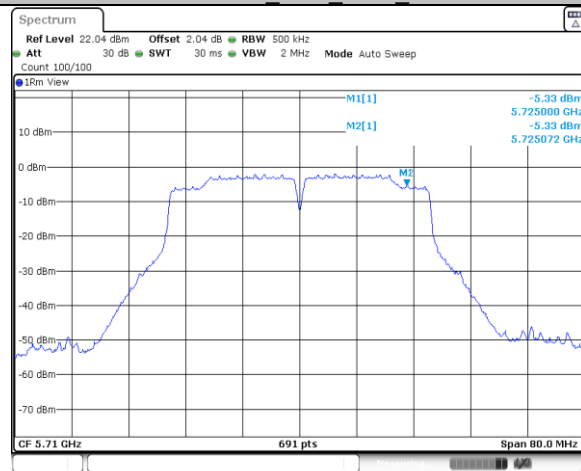


Date: 4 FEB 2023 10:45:13

11AC40SISO_Ant0_5755

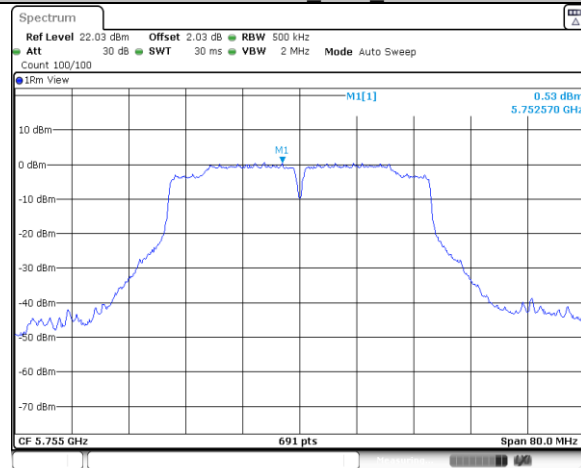


Date: 4 FEB 2023 10:47:38

11AC40SISO_Ant0_5795

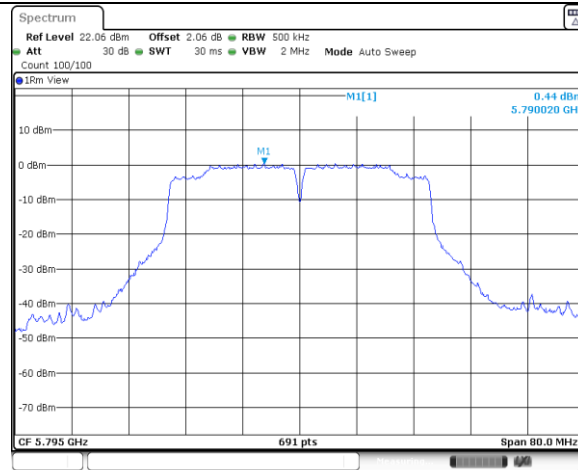


Date: 4 FEB 2023 10:49:53

11AC80SISO_Ant0_5210

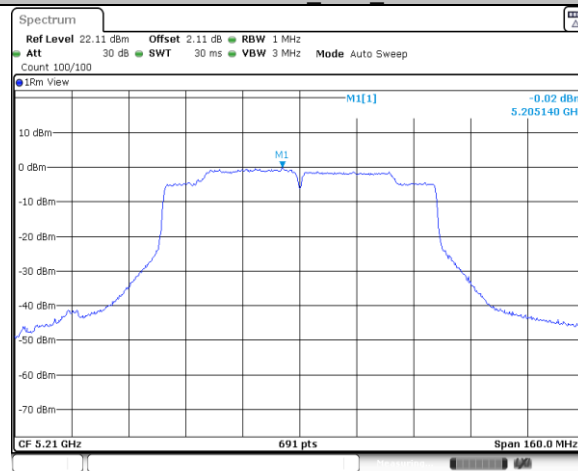


Date: 4 FEB 2023 10:51:59

11AC80SISO_Ant0_5290

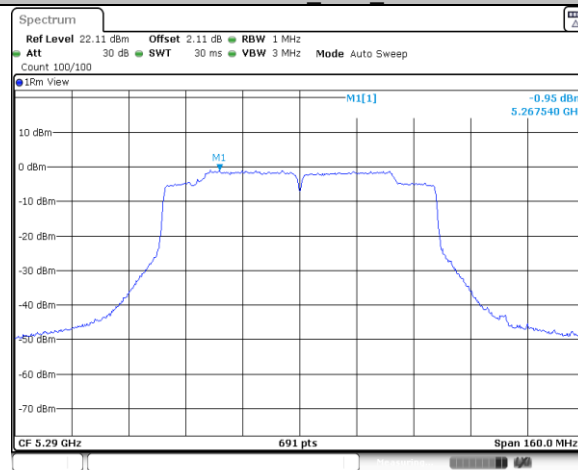


Date: 4 FEB 2023 10:53:51


11AC80SISO_Ant0_5530

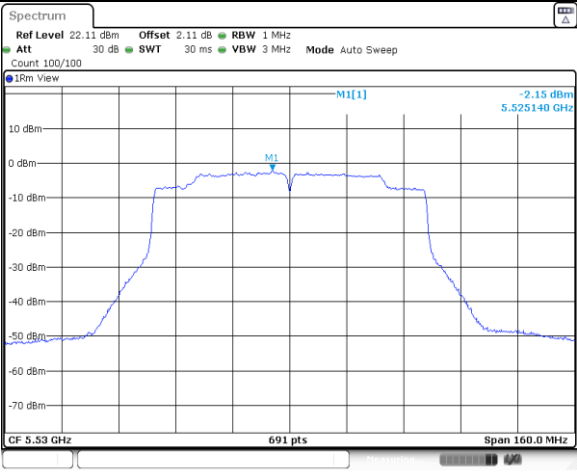


11AC80SISO Ant0 5610

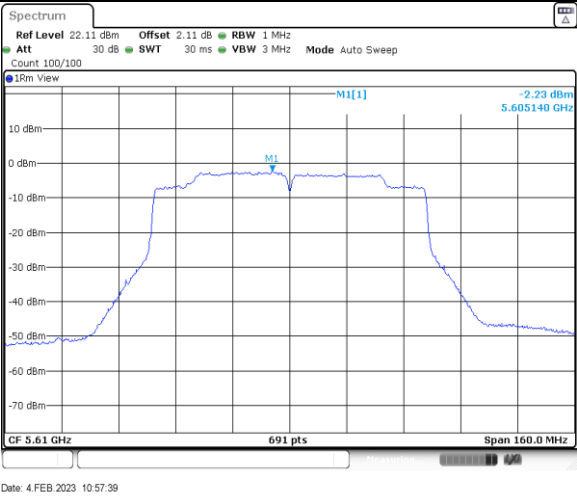

11AC80SISO Ant0 5690 UNII-2C

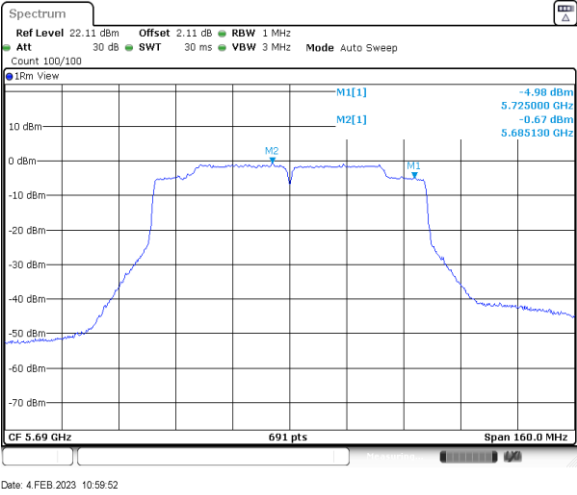


11AC80SISO Ant0 5690 UNII-3

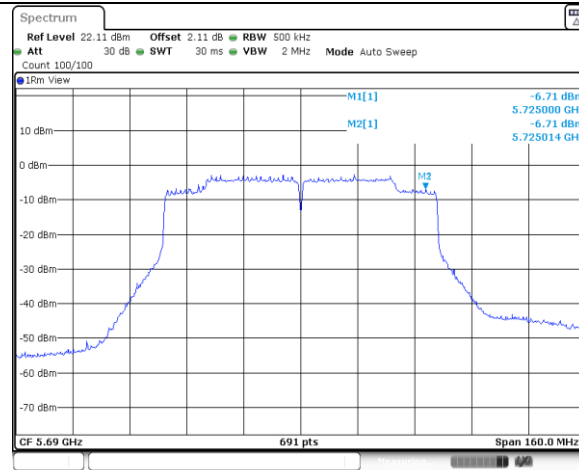


Date: 4 FEB 2023 11:00:00

11AC80SISO Ant0 5775

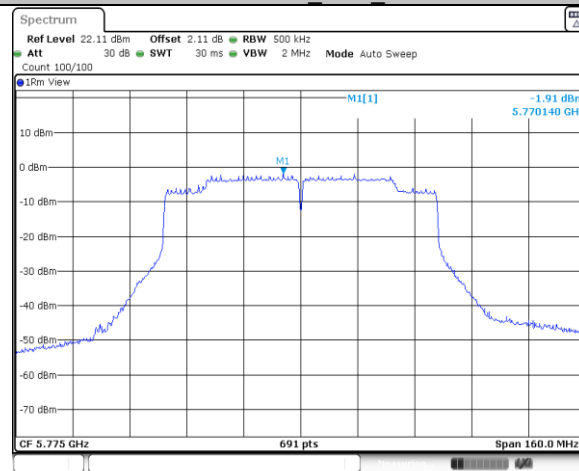


Date: 4 FEB 2023 11:02:22

11A Ant1 5180

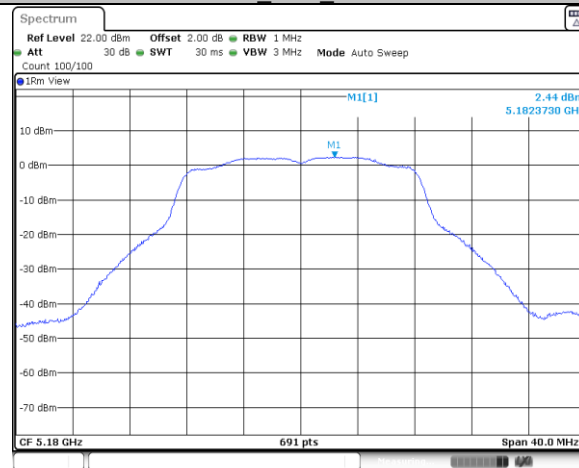


Date: 4 FEB 2023 11:53:28


11A Ant1 5200

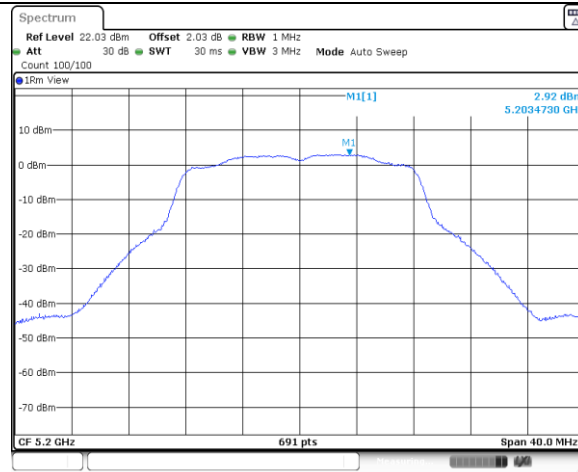


11A Ant1 5240

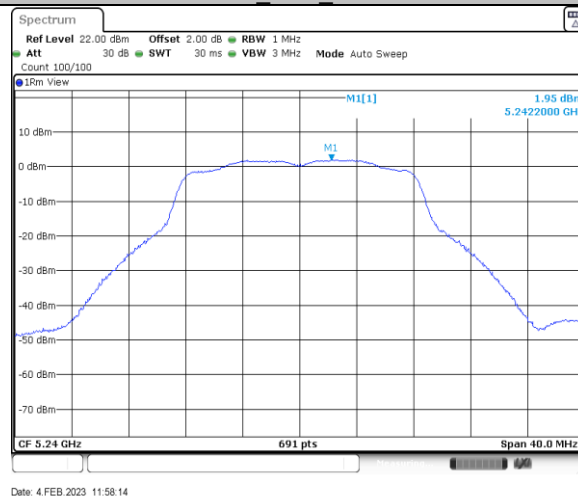

11A Ant1 5260

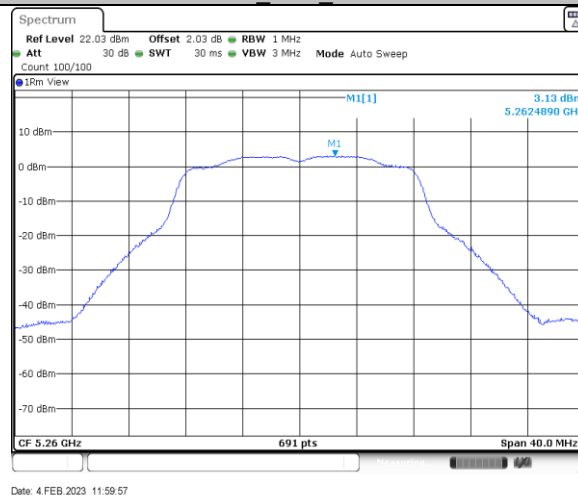


11A Ant1 5280

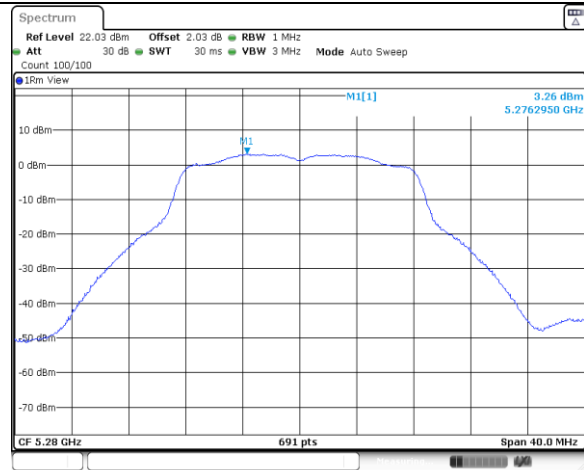


Date: 4 FEB 2023 12:01:32

11A Ant1 5320

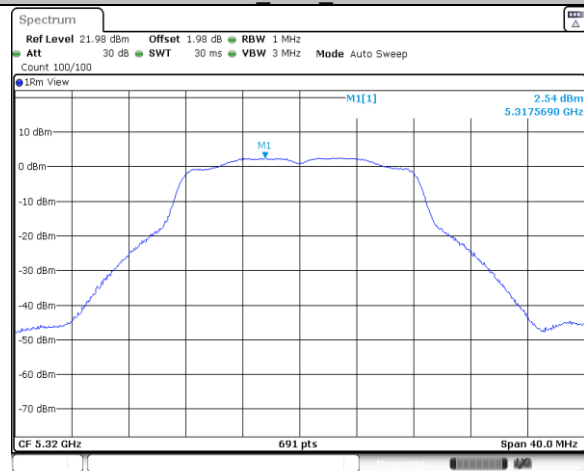


Date: 4 FEB 2023 12:03:09

11A Ant1 5500

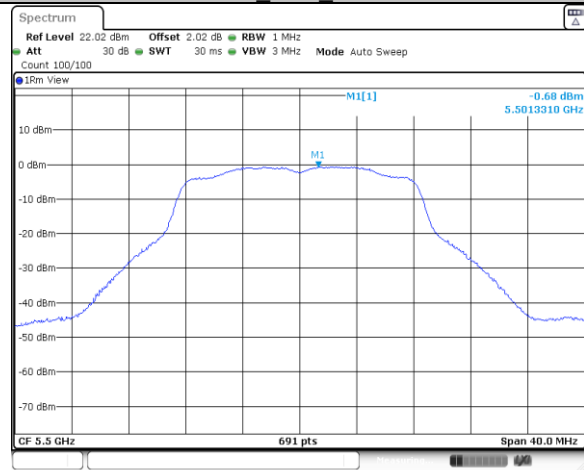


Date: 4 FEB 2023 12:04:57

11A Ant1 5580

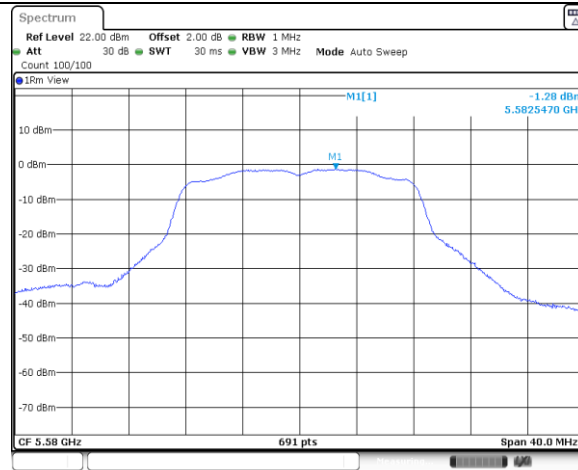


Date: 4 FEB 2023 12:07:30

11A Ant1 5700

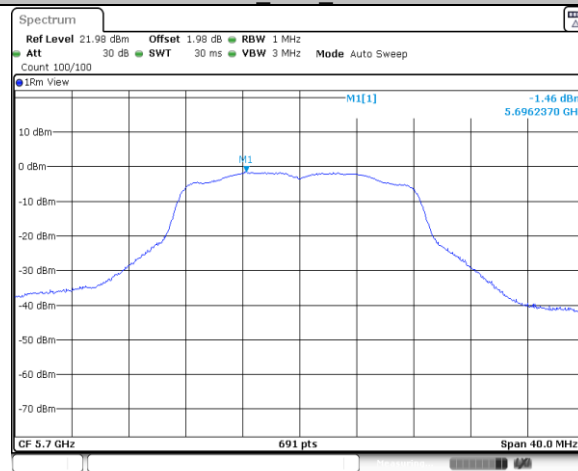


Date: 4 FEB 2023 12:09:14

11A Ant1 5720 UNII-2C

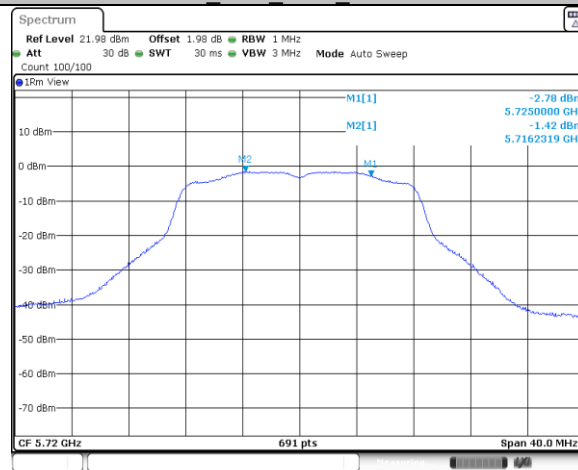


Date: 4 FEB 2023 12:11:17

11A Ant1 5720 UNII-3

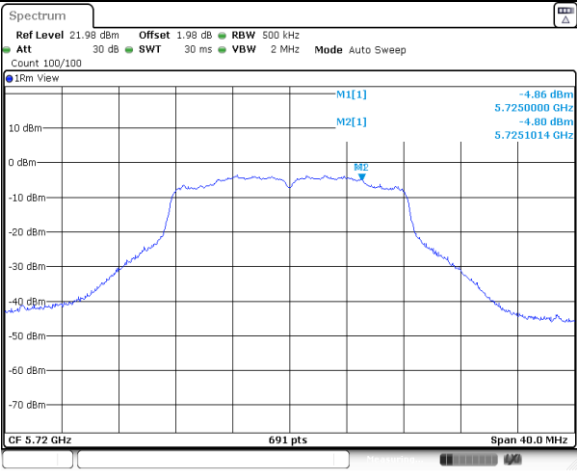


Date: 4 FEB 2023 12:11:26

11A Ant1 5745

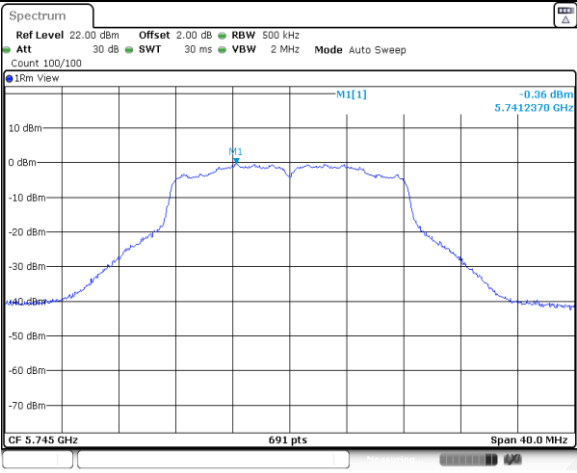


Date: 4 FEB 2023 12:13:31

11A Ant1 5785

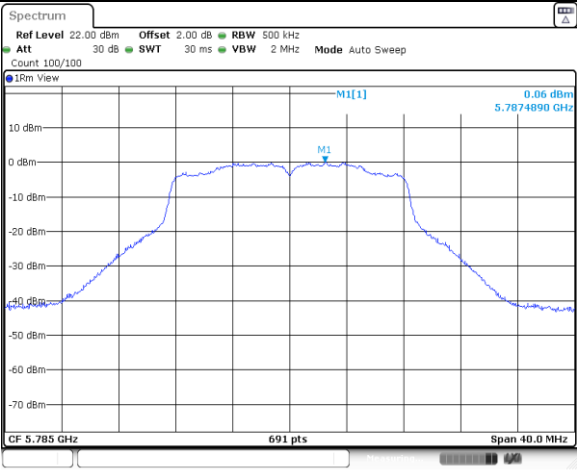


Date: 4 FEB 2023 12:38:01


11A Ant1 5825

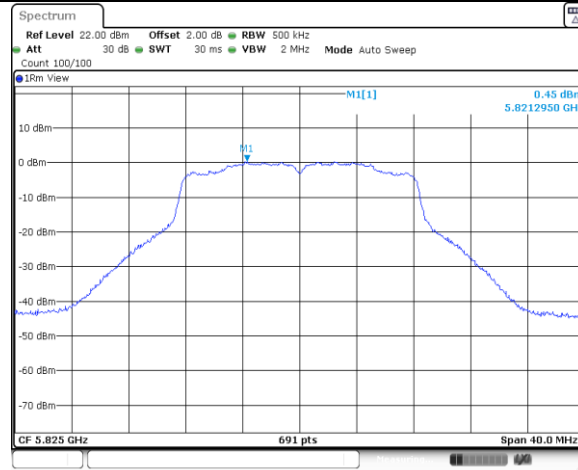


11N20SISO Ant1 5180

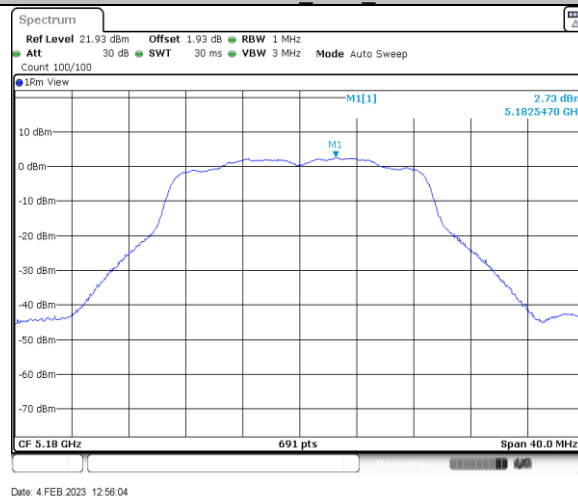

11N20SISO Ant1 5200

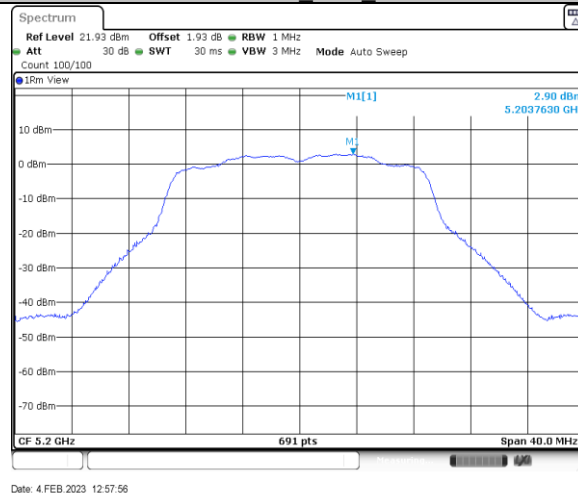


11N20SISO Ant1 5240

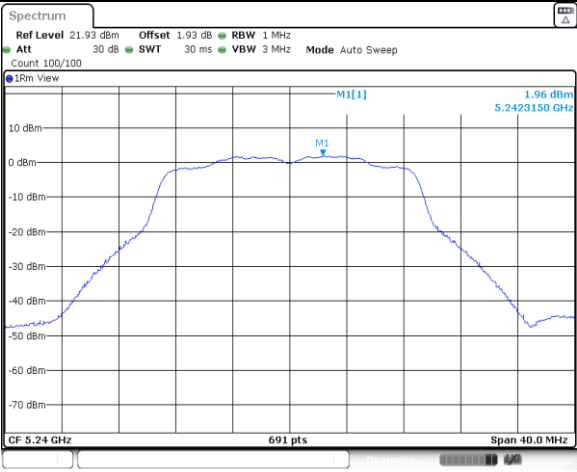


Date: 4 FEB 2023 12:59:35

11N20SISO Ant1 5260

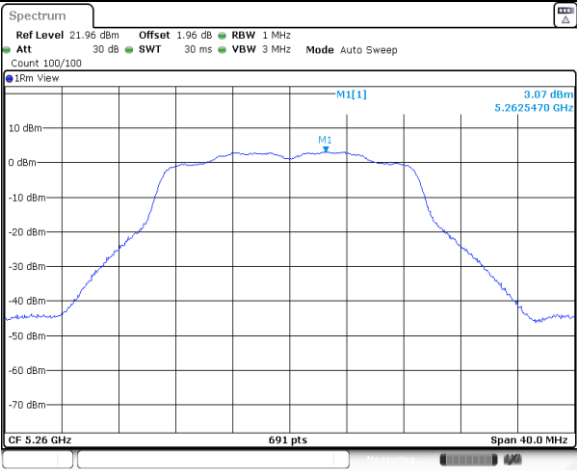


Date: 4 FEB 2023 13:02:34

11N20SISO Ant1 5280

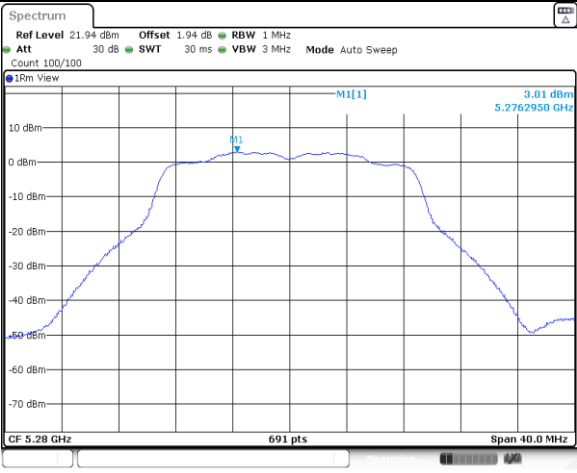


Date: 4 FEB 2023 13:05:39

11N20SISO Ant1 5320

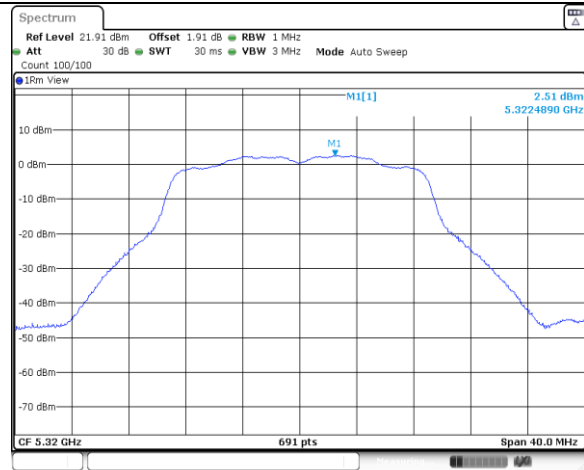


Date: 4 FEB 2023 13:16:28

11N20SISO Ant1 5500

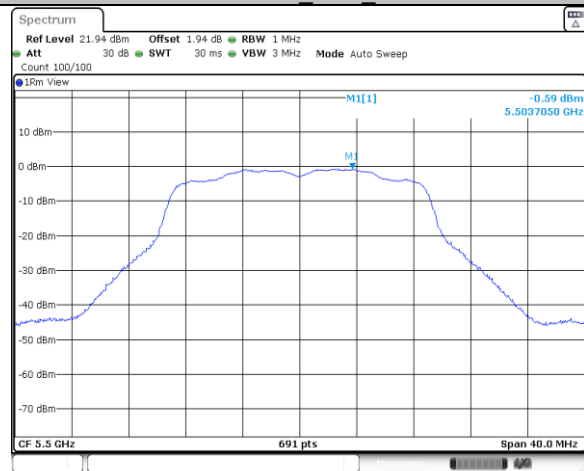


Date: 4 FEB 2023 13:18:37

11N20SISO Ant1 5580

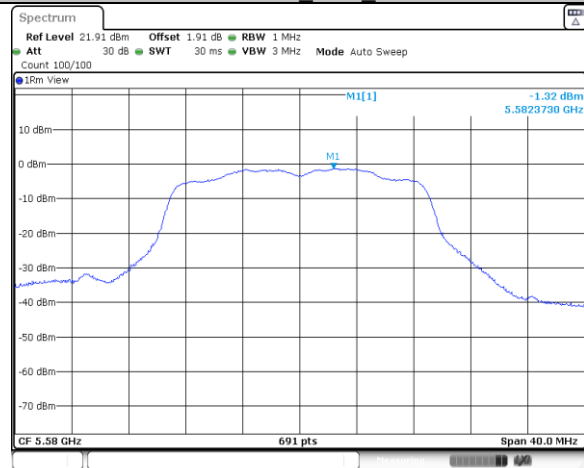


Date: 4 FEB 2023 13:20:32

11N20SISO Ant1 5700

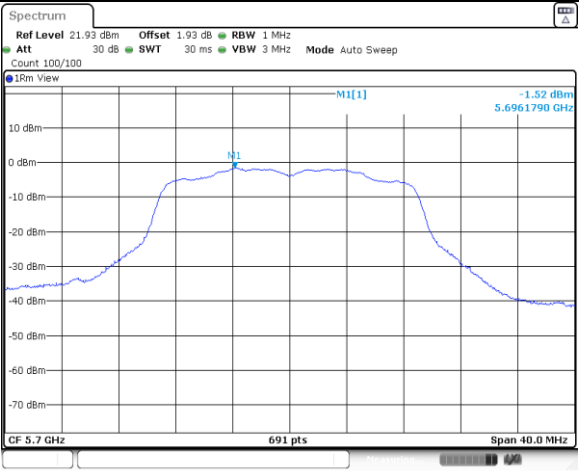


Date: 4 FEB 2023 13:23:50

11N20SISO_Ant1_5720_UNII-2C

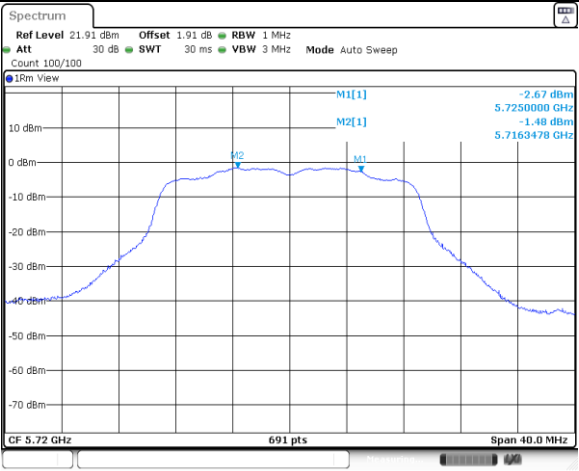


Date: 4 FEB 2023 13:25:52

11N20SISO_Ant1_5720_UNII-3

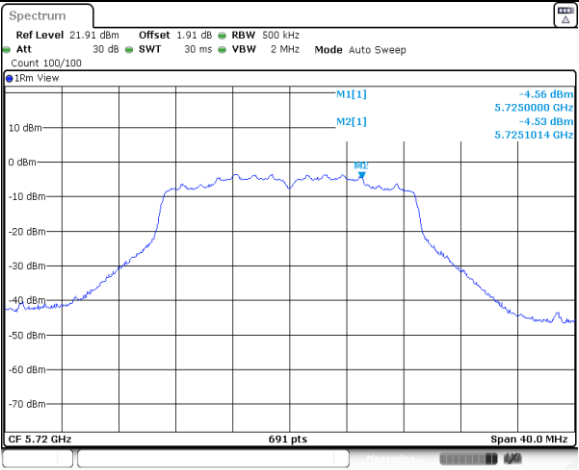


Date: 4 FEB 2023 13:26:00


11N20SISO_Ant1_5745

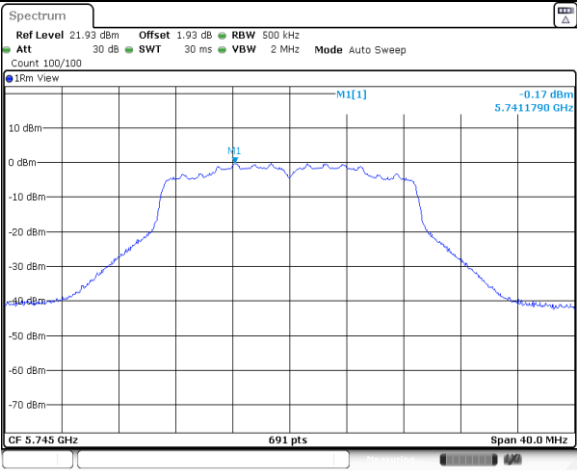


11N20SISO_Ant1_5785

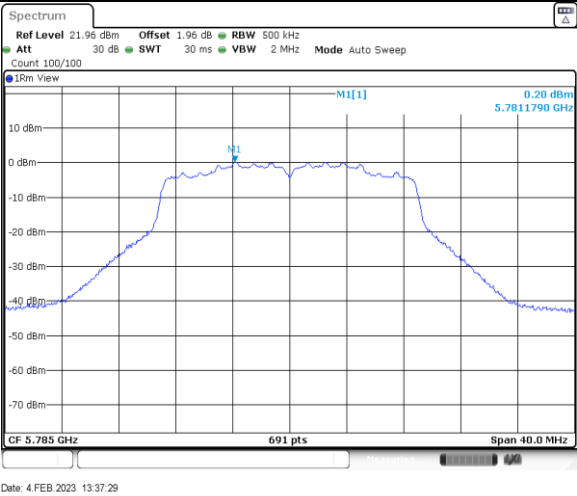

11N20SISO_Ant1_5825

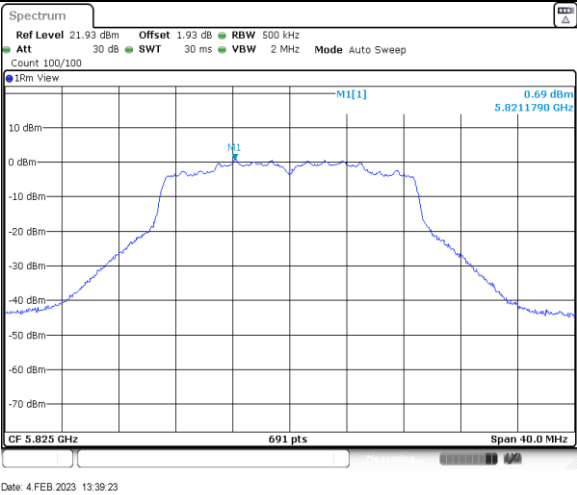


11N40SISO_Ant1_5190

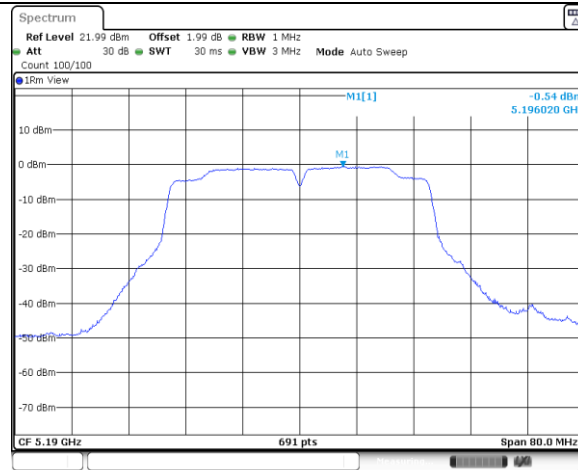


Date: 4 FEB 2023 13:41:24

11N40SISO Ant1 5230

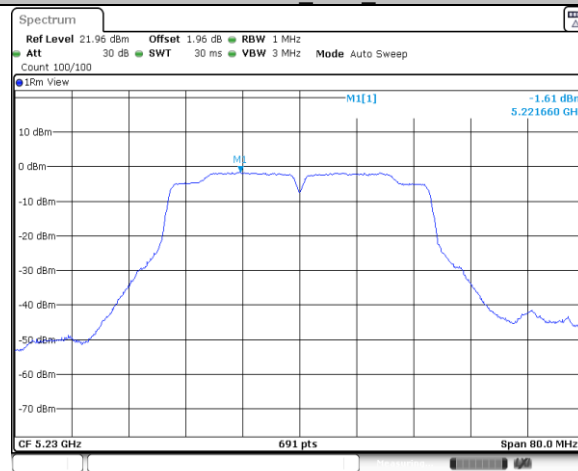


Date: 4 FEB 2023 13:43:18

11N40SISO Ant1 5270

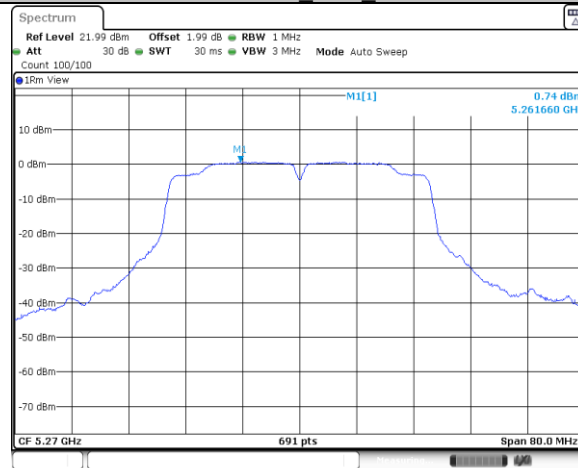


Date: 4 FEB 2023 13:45:10

11N40SISO Ant1 5310

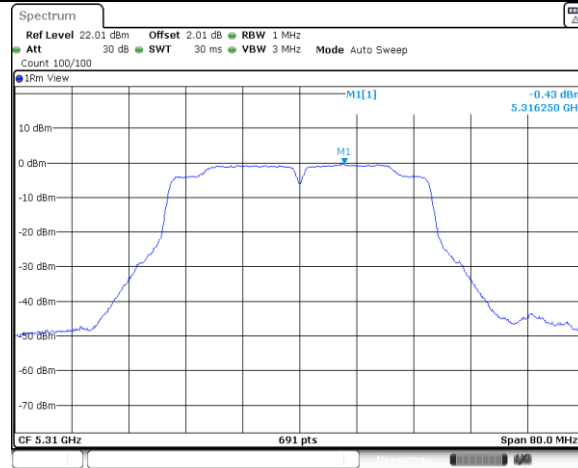


Date: 4 FEB 2023 13:46:51

11N40SISO_Ant1_5510

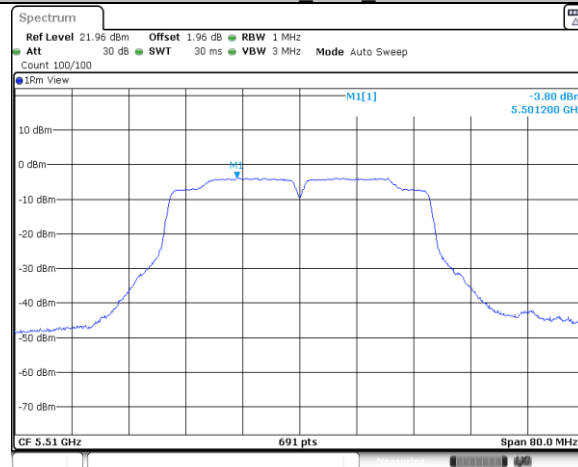


Date: 4 FEB 2023 13:48:43

11N40SISO_Ant1_5550

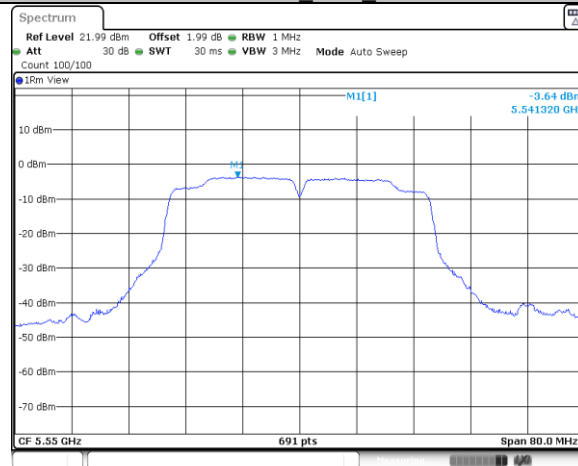


Date: 4 FEB 2023 13:50:33

11N40SISO_Ant1_5670

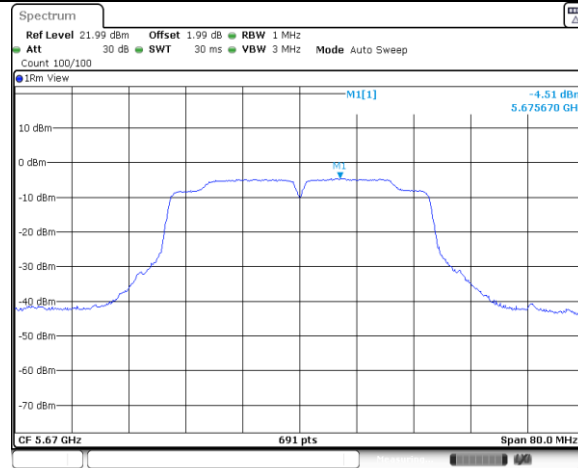


Date: 4 FEB 2023 13:52:35

11N40SISO Ant1 5710 UNII-2C

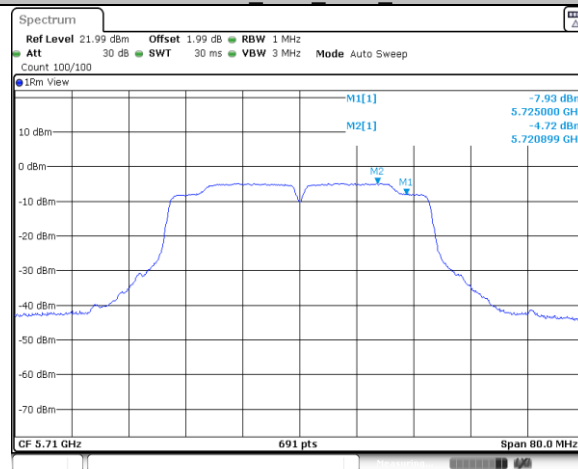


Date: 4 FEB 2023 13:54:47

11N40SISO Ant1 5710 UNII-3

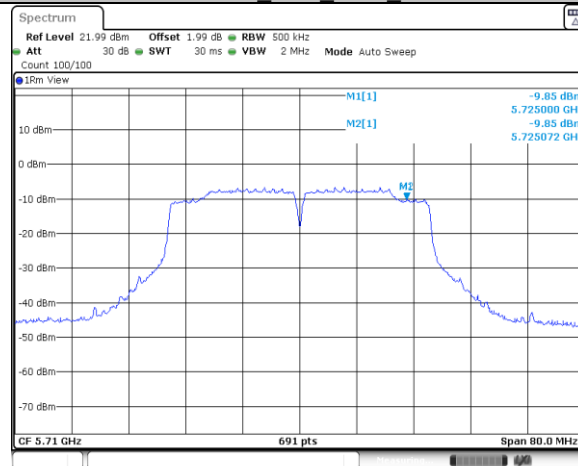


Date: 4 FEB 2023 13:54:56

11N40SISO Ant1 5755

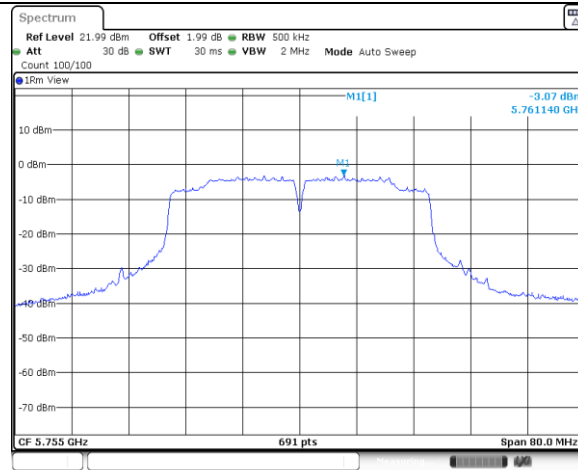


Date: 4 FEB 2023 13:57:19

11N40SISO Ant1 5795

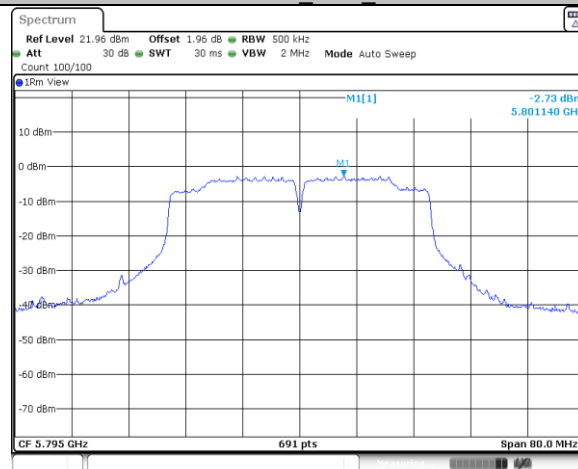


Date: 4 FEB 2023 13:59:31

11AC20SISO Ant1 5180

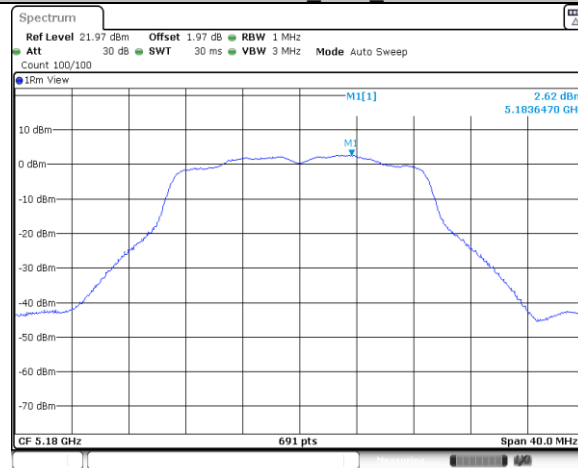


Date: 4 FEB 2023 14:01:40

11AC20SISO Ant1 5200

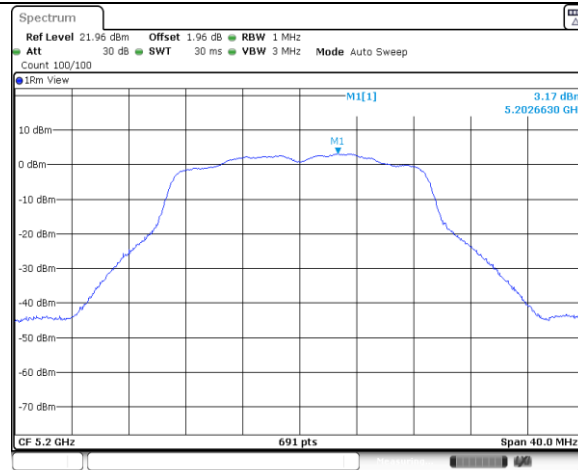


Date: 4 FEB 2023 14:04:00

11AC20SISO_Ant1_5240

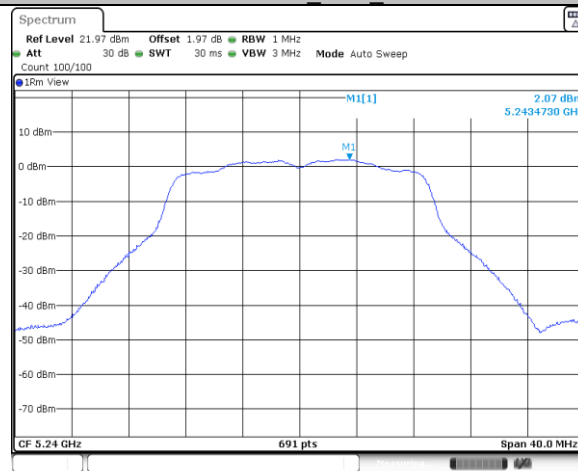

Date: 4 FEB 2023 14:05:42

11AC20SISO_Ant1_5260

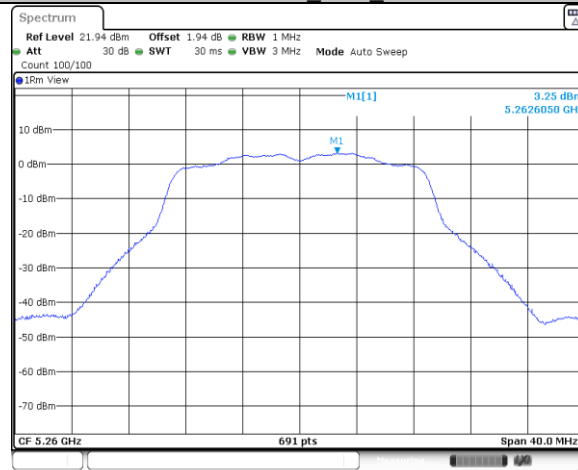

Date: 4 FEB 2023 14:07:17

11AC20SISO_Ant1_5280