

TEST REPORT

Reference No..... : WTX22X01001683W
FCC ID : 2A38X0001
Applicant : B. Better B.V.
Address..... : Nieuwlandsedijk 45, 4926 AM Lage Zwaluwe, Noord-Brabant, The Netherlands
Product Name : Pitch Perfect Sensor
Test Model. : Sensor v1.0
Standards : FCC Part 15.247
Date of Receipt sample : Jan. 05, 2022
Date of Test..... : Jan. 05, 2022 to Jan. 14, 2022
Date of Issue : Jan. 14, 2022
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Jason Su / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 SUMMARY OF TEST RESULTS/PLOTS	25
9. CONDUCTED EMISSIONS	30
9.1 TEST PROCEDURE	30
9.2 BASIC TEST SETUP BLOCK DIAGRAM	30
9.3 TEST RECEIVER SETUP	30
9.4 SUMMARY OF TEST RESULTS/PLOTS	30
APPENDIX SUMMARY	31
APPENDIX A	32
APPENDIX B	35
APPENDIX C	38
APPENDIX D	41
APPENDIX PHOTOGRAPHS	46

Report version

Version No.	Date of issue	Description
Rev.00	Jan. 14, 2022	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: B. Better B.V.
Address of applicant: Nieuwlandsedijk 45, 4926 AM Lage Zwaluwe,
Noord-Brabant, The Netherlands

Manufacturer: B. Better B.V.
Address of manufacturer: Nieuwlandsedijk 45, 4926 AM Lage Zwaluwe,
Noord-Brabant, The Netherlands

General Description of EUT	
Product Name:	Pitch Perfect Sensor
Trade Name	/
Model No.:	Sensor v1.0
Adding Model(s):	/
Rated Voltage:	Input voltage: 5VDC Battery:DC3.7V
Power Adapter:	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps:-10.4dBm (Conducted) 2Mbps: -10.38dBm (Conducted)
Data Rate:	1Mbps, 2Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Ceramic Patch RF Antenna
Antenna Gain:	2.7dBi
Note: The Antenna Gain is provided by the customer.	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91705	2021-04-27	2023-04-26

				82		
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
☐ Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
☐ Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2021-12-03	2022-12-02
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	N/A
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has a Ceramic Patch RF antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

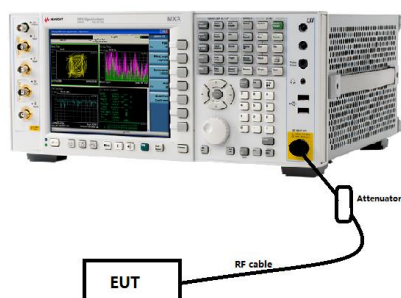

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

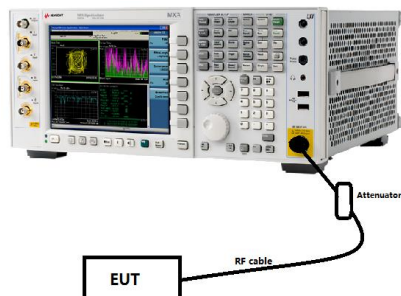

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

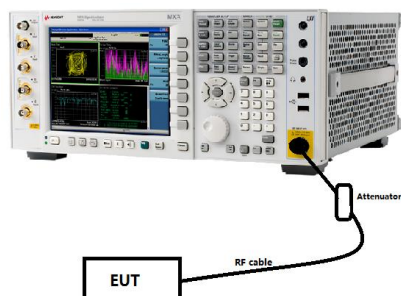

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the $RBW \geq DTS$ bandwidth.
- Set $VBW \geq 3 \times RBW$.
- Set $span \geq 3 \times RBW$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

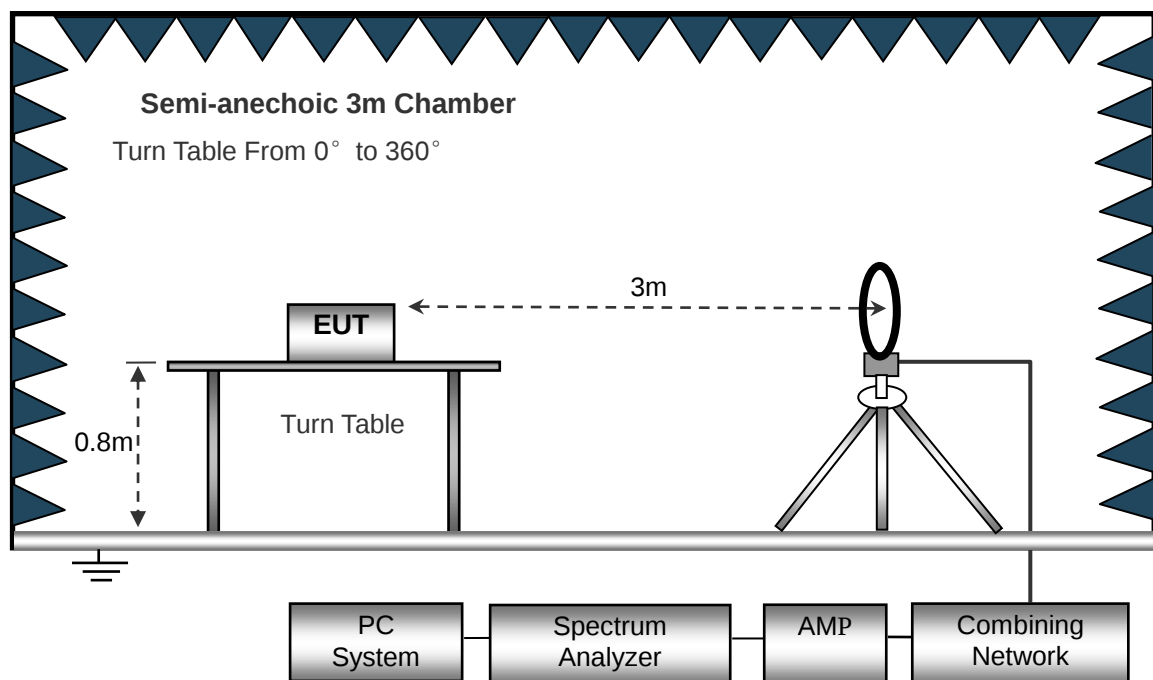

The test setup for emission measurement from 30MHz to 1GHz.

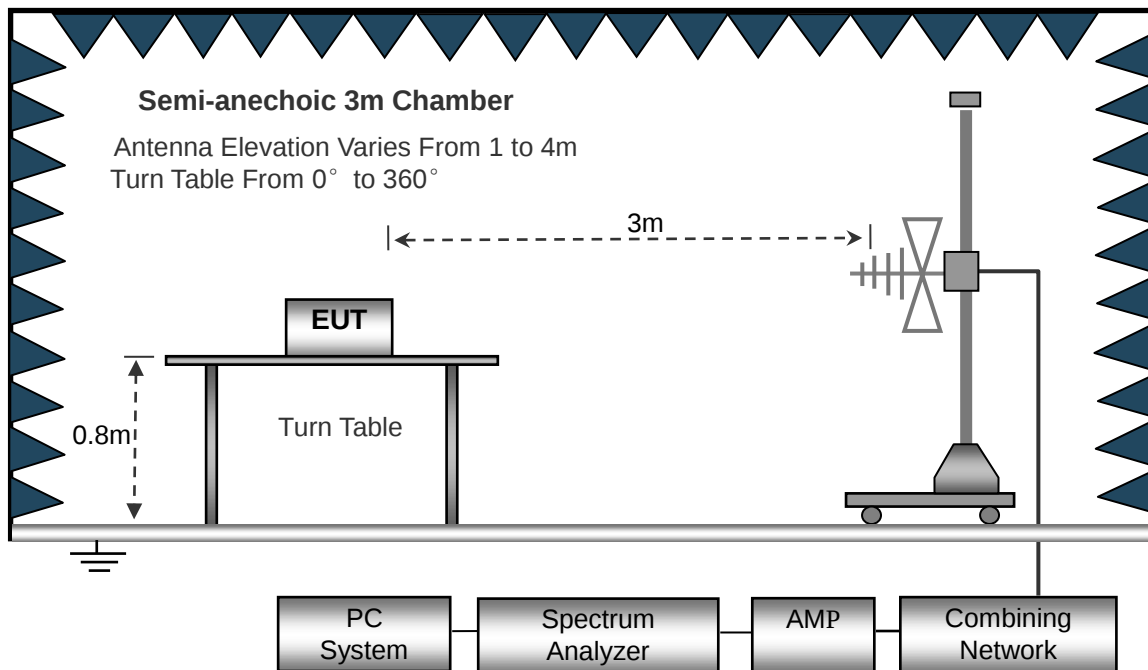

The test setup for emission measurement above 1GHz.

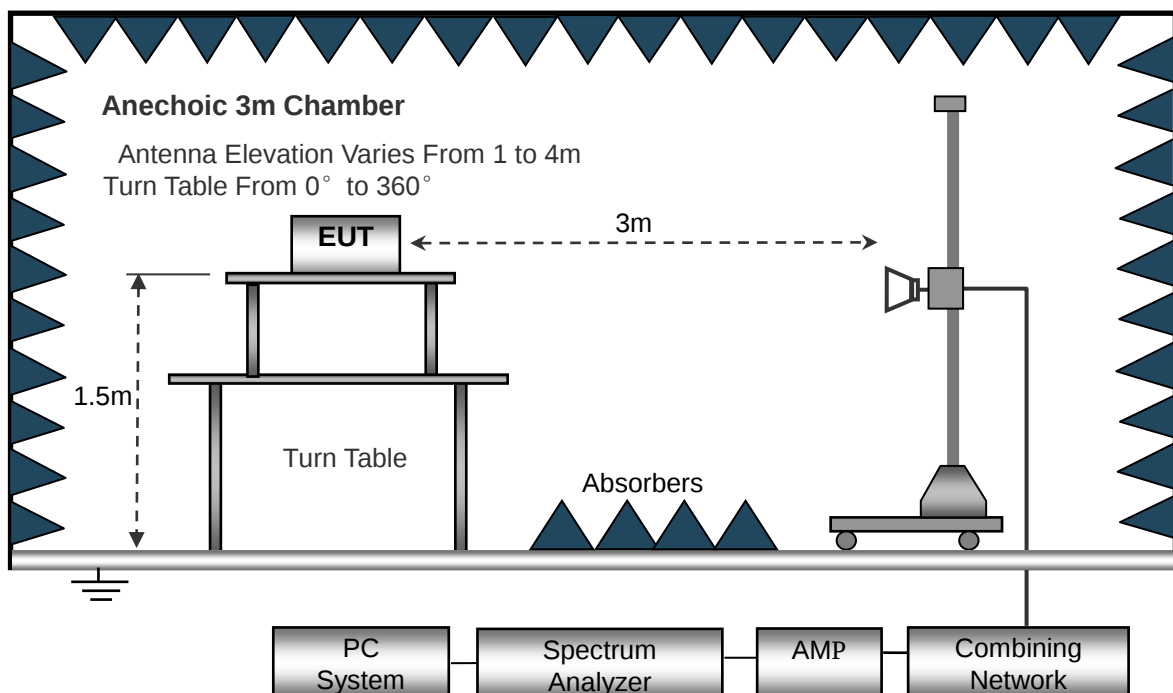

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emissions Below 1GHz
- 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

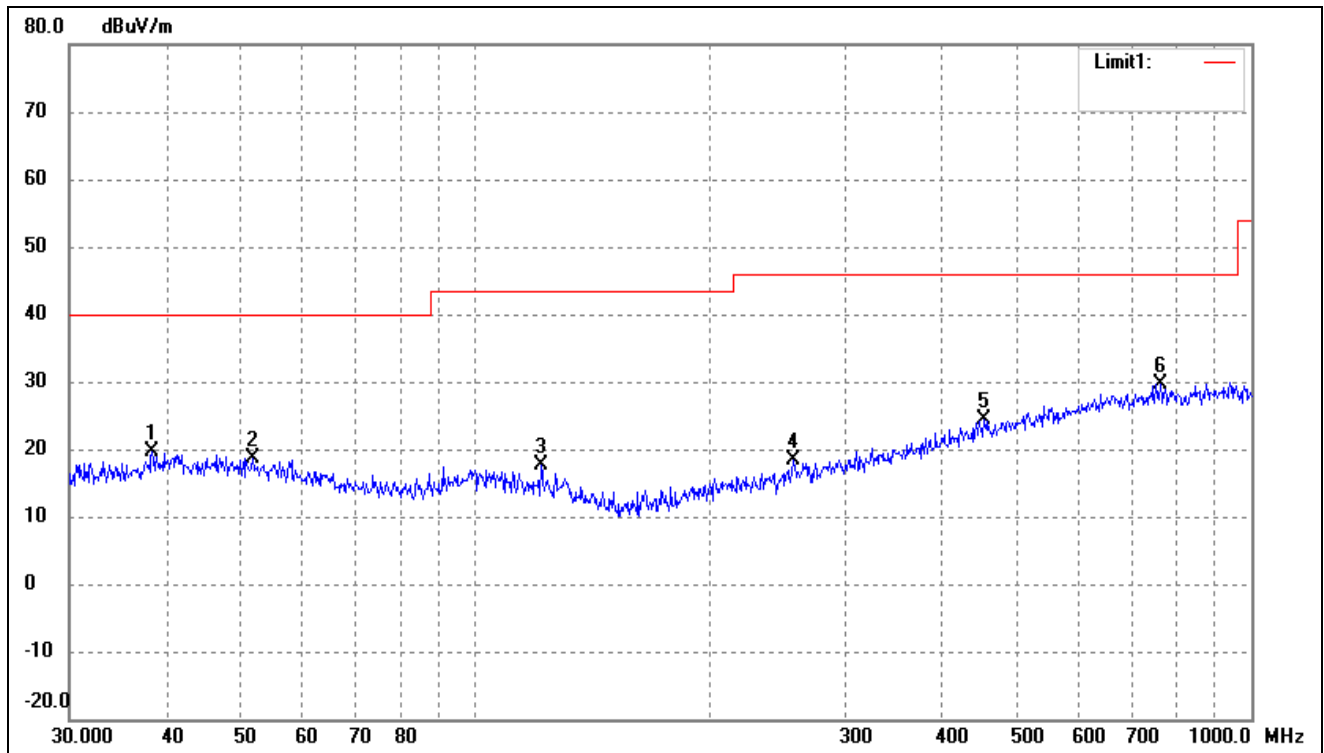

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	26.98	-7.40	19.58	40.00	-20.42	-	-	peak
2	51.6616	25.92	-7.20	18.72	40.00	-21.28	-	-	peak
3	121.5486	27.54	-9.88	17.66	43.50	-25.84	-	-	peak
4	256.5211	26.59	-8.13	18.46	46.00	-27.54	-	-	peak
5	452.7197	26.95	-2.49	24.46	46.00	-21.54	-	-	peak
6	763.3757	27.84	1.85	29.69	46.00	-16.31	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

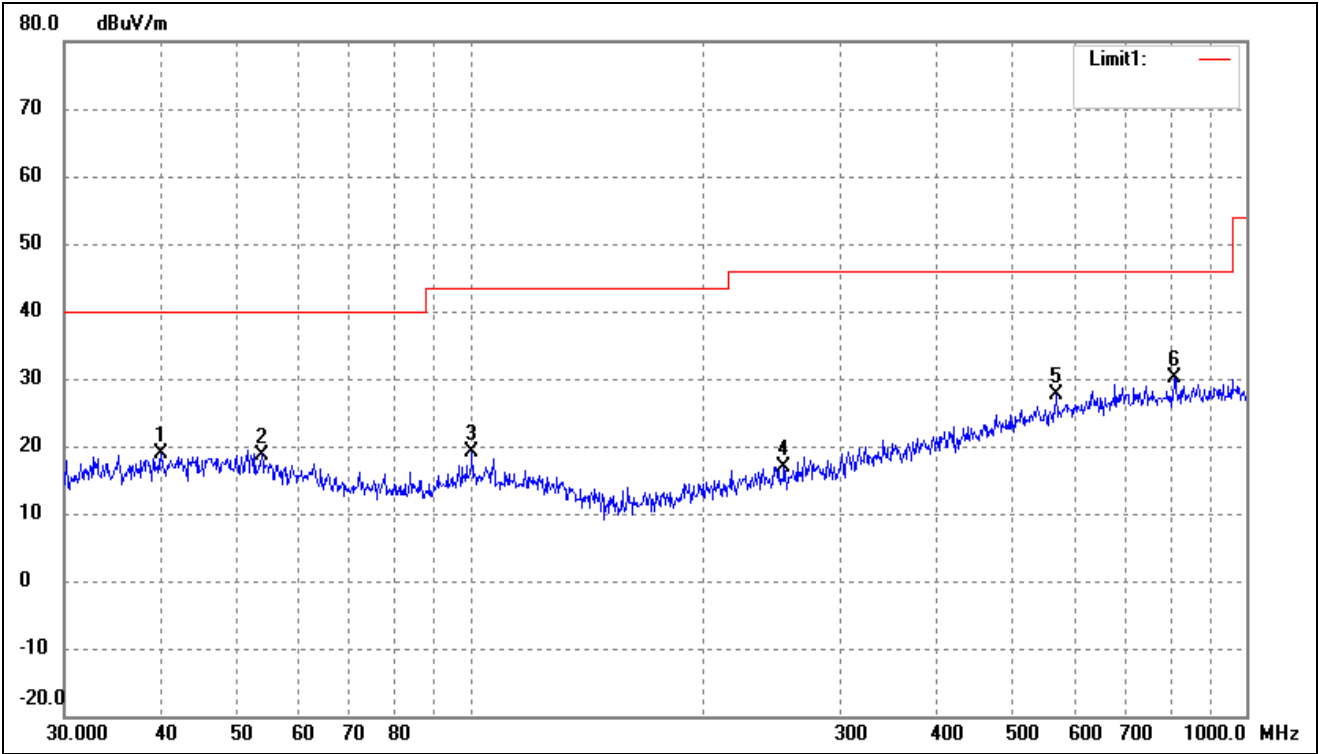

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	39.9942	25.76	-7.00	18.76	40.00	-21.24	-	-	peak
2	53.8818	26.28	-7.53	18.75	40.00	-21.25	-	-	peak
3	100.5806	27.97	-8.73	19.24	43.50	-24.26	-	-	peak
4	253.8367	25.11	-8.21	16.90	46.00	-29.10	-	-	peak
5	568.6127	27.88	-0.15	27.73	46.00	-18.27	-	-	peak
6	807.4291	28.08	2.15	30.23	46.00	-15.77	-	-	peak


➤ 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

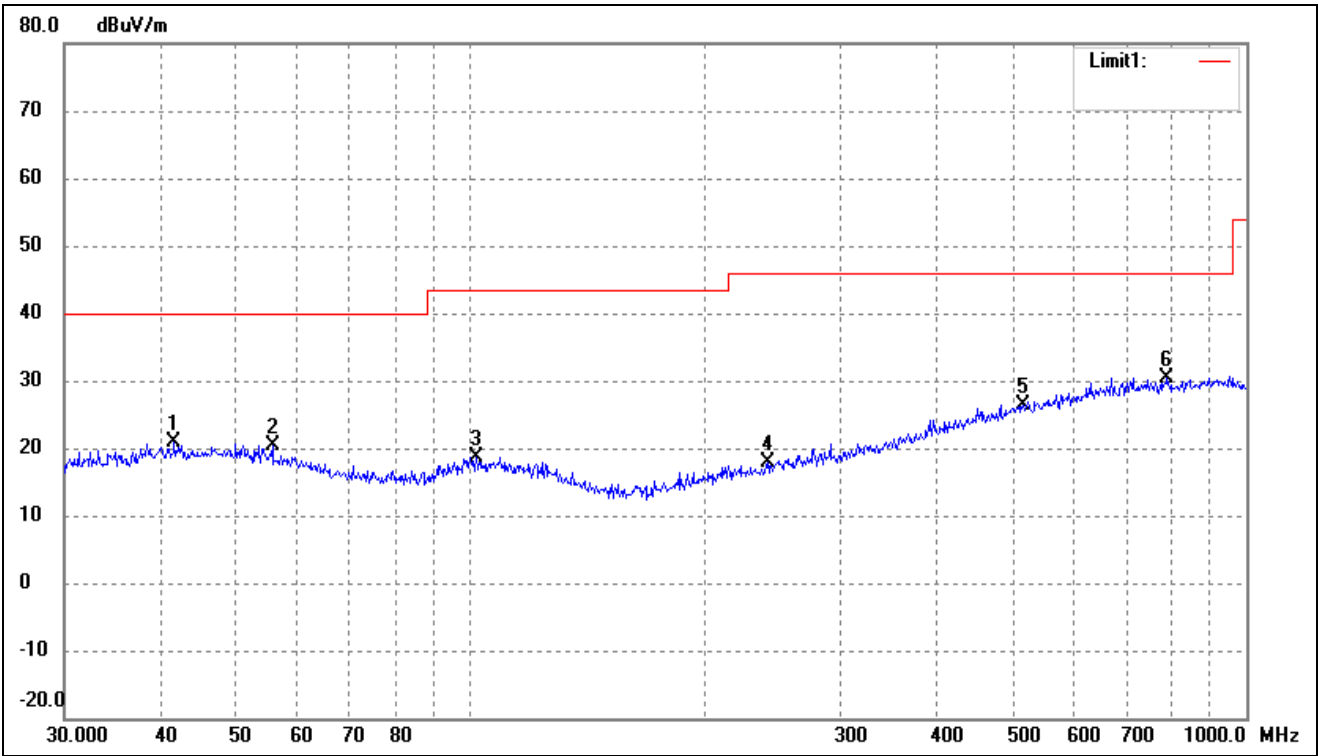

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	41.5670	27.95	-7.00	20.95	40.00	-19.05	-	-	peak
2	55.6094	28.09	-7.78	20.31	40.00	-19.69	-	-	peak
3	101.6443	27.49	-8.75	18.74	43.50	-24.76	-	-	peak
4	241.6763	26.33	-8.54	17.79	46.00	-28.21	-	-	peak
5	515.4374	27.51	-1.04	26.47	46.00	-19.53	-	-	peak
6	790.6188	28.41	2.03	30.44	46.00	-15.56	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

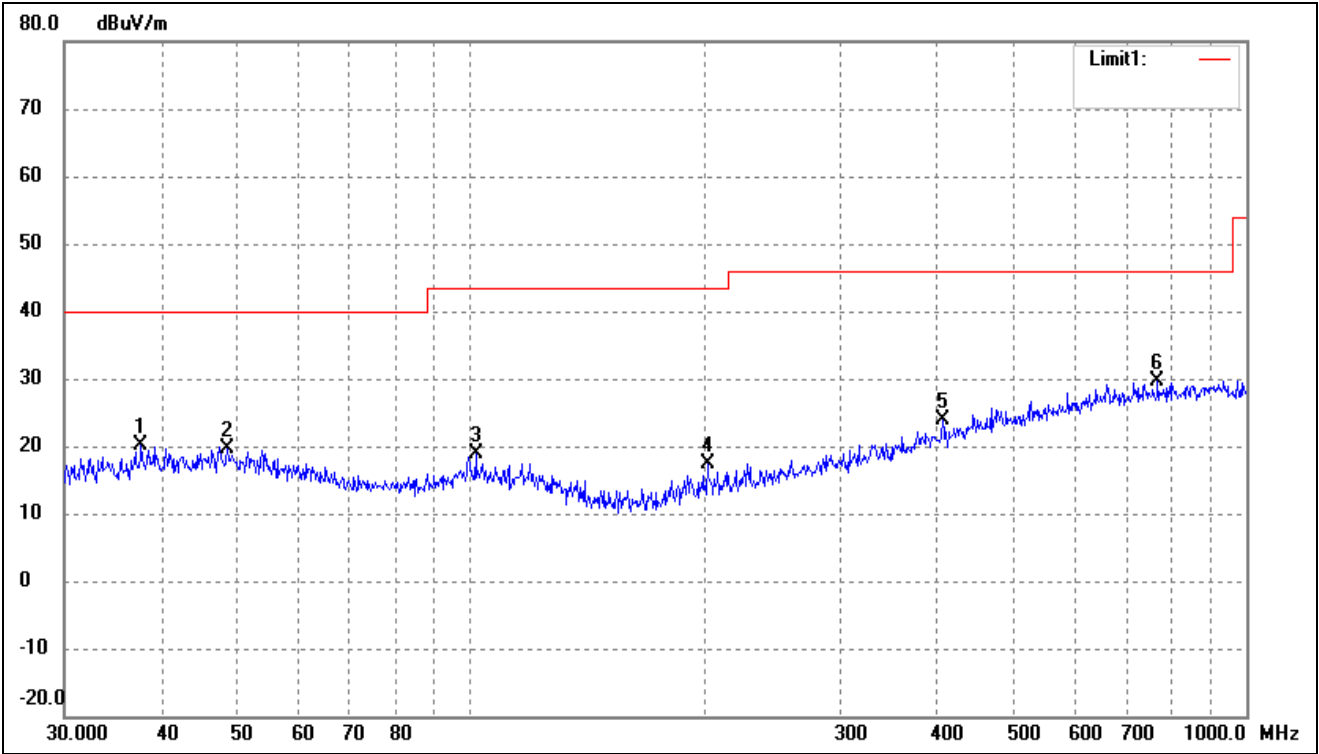

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.6798	27.58	-7.57	20.01	40.00	-19.99	-	-	peak
2	48.6719	26.62	-6.97	19.65	40.00	-20.35	-	-	peak
3	101.6443	27.57	-8.75	18.82	43.50	-24.68	-	-	peak
4	202.1005	27.03	-9.65	17.38	43.50	-26.12	-	-	peak
5	406.0880	27.71	-3.73	23.98	46.00	-22.02	-	-	peak
6	768.7482	27.80	1.89	29.69	46.00	-16.31	-	-	peak

Remark: ‘-’ Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- BLE 1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	54.98	-3.59	51.39	74	-22.61	H	PK
4804	50.93	-3.59	47.34	54	-6.66	H	AV
7206	54.34	-0.52	53.82	74	-20.18	H	PK
7206	45.10	-0.52	44.58	54	-9.42	H	AV
4804	54.25	-3.59	50.66	74	-23.34	V	PK
4804	48.94	-3.59	45.35	54	-8.65	V	AV
7206	45.40	-0.52	44.88	74	-29.12	V	PK
7206	43.20	-0.52	42.68	54	-11.32	V	AV
Middle Channel-2440MHz							
4880	53.19	-3.49	49.70	74	-24.30	H	PK
4880	49.79	-3.49	46.30	54	-7.70	H	AV
7320	55.59	-0.47	55.12	74	-18.88	H	PK
7320	44.24	-0.47	43.77	54	-10.23	H	AV
4880	55.34	-3.49	51.85	74	-22.15	V	PK
4880	47.63	-3.49	44.14	54	-9.86	V	AV
7320	46.13	-0.47	45.66	74	-28.34	V	PK
7320	43.28	-0.47	42.81	54	-11.19	V	AV
High Channel-2480MHz							
4960	53.18	-3.41	49.77	74	-24.23	H	PK
4960	50.32	-3.41	46.91	54	-7.09	H	AV
7440	55.70	-0.42	55.28	74	-18.72	H	PK
7440	44.53	-0.42	44.11	54	-9.89	H	AV
4960	53.96	-3.41	50.55	74	-23.45	V	PK
4960	47.30	-3.41	43.89	54	-10.11	V	AV
7440	44.51	-0.42	44.09	74	-29.91	V	PK
7440	43.10	-0.42	42.68	54	-11.32	V	AV

➤ BLE 2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	52.68	-3.59	49.09	74	-24.91	H	PK
4804	50.28	-3.59	46.69	54	-7.31	H	AV
7206	54.85	-0.52	54.33	74	-19.67	H	PK
7206	45.43	-0.52	44.91	54	-9.09	H	AV
4804	54.92	-3.59	51.33	74	-22.67	V	PK
4804	48.69	-3.59	45.10	54	-8.90	V	AV
7206	45.83	-0.52	45.31	74	-28.69	V	PK
7206	43.46	-0.52	42.94	54	-11.06	V	AV
Middle Channel-2440MHz							
4880	54.82	-3.49	51.33	74	-22.67	H	PK
4880	50.76	-3.49	47.27	54	-6.73	H	AV
7320	54.39	-0.47	53.92	74	-20.08	H	PK
7320	45.58	-0.47	45.11	54	-8.89	H	AV
4880	54.76	-3.49	51.27	74	-22.73	V	PK
4880	48.77	-3.49	45.28	54	-8.72	V	AV
7320	46.04	-0.47	45.57	74	-28.43	V	PK
7320	43.49	-0.47	43.02	54	-10.98	V	AV
High Channel-2480MHz							
4960	54.36	-3.41	50.95	74	-23.05	H	PK
4960	49.33	-3.41	45.92	54	-8.08	H	AV
7440	54.62	-0.42	54.20	74	-19.80	H	PK
7440	45.00	-0.42	44.58	54	-9.42	H	AV
4960	54.29	-3.41	50.88	74	-23.12	V	PK
4960	48.31	-3.41	44.90	54	-9.10	V	AV
7440	45.49	-0.42	45.07	74	-28.93	V	PK
7440	43.85	-0.42	43.43	54	-10.57	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


- Radiated test
- 1Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

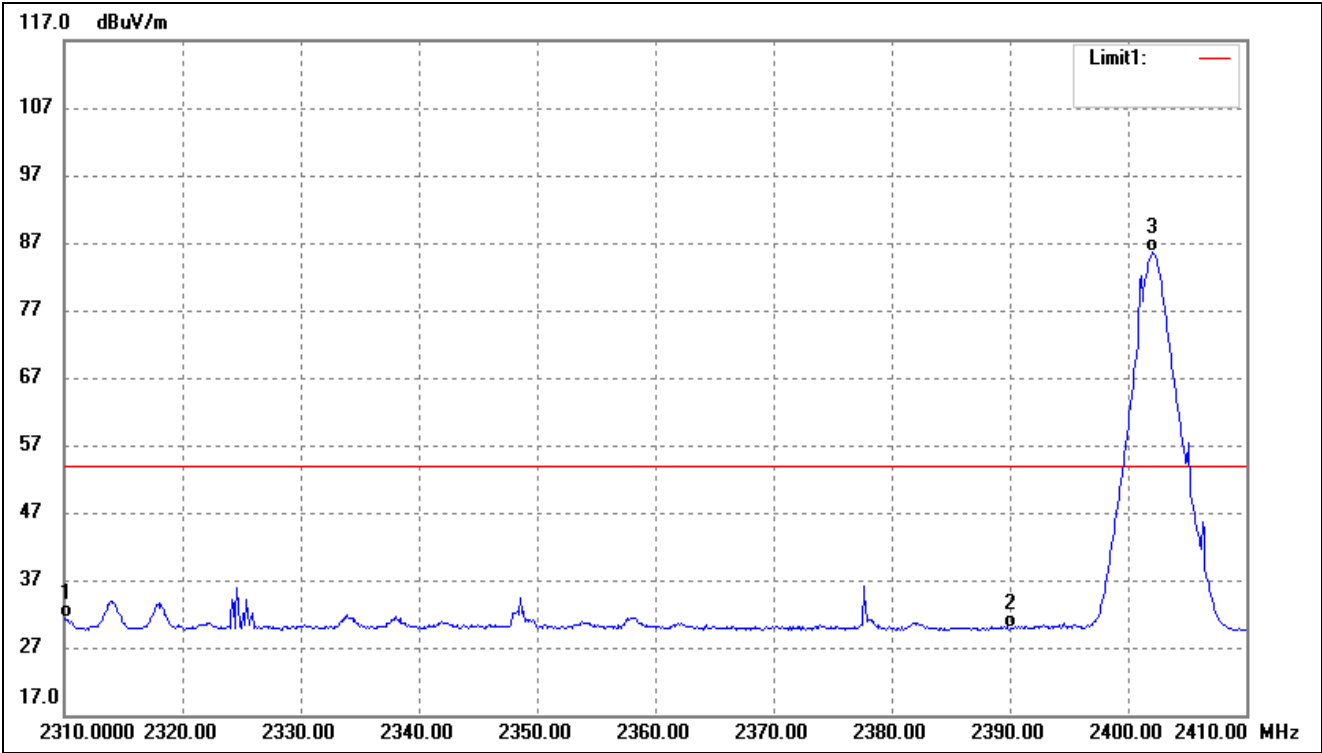

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.28	-10.82	31.46	54.00	-22.54	Average Detector
	2310.000	53.13	-10.82	42.31	74.00	-31.69	Peak Detector
2	2390.000	40.69	-10.70	29.99	54.00	-24.01	Average Detector
	2390.000	51.78	-10.70	41.08	74.00	-32.92	Peak Detector
3	2402.100	96.24	-10.69	85.55	/	/	Average Detector
	2402.100	100.49	-10.69	89.80	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

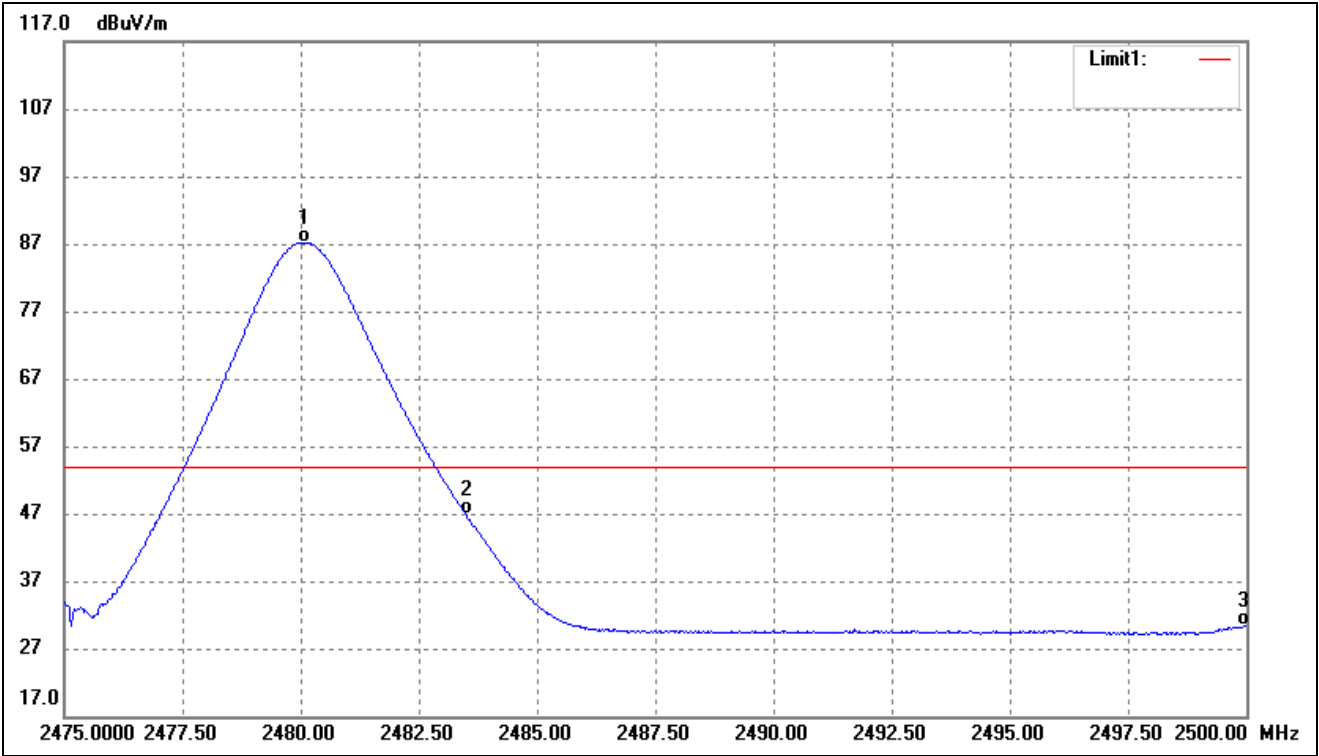

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.075	97.82	-10.58	87.24	/	/	Average Detector
	2480.275	98.51	-10.58	87.93	/	/	Peak Detector
2	2483.500	57.39	-10.58	46.81	54.00	-7.19	Average Detector
	2483.500	62.23	-10.58	51.65	74.00	-22.35	Peak Detector
3	2500.000	40.82	-10.55	30.27	54.00	-23.73	Average Detector
	2500.000	52.37	-10.55	41.82	74.00	-32.18	Peak Detector


➤ 2Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

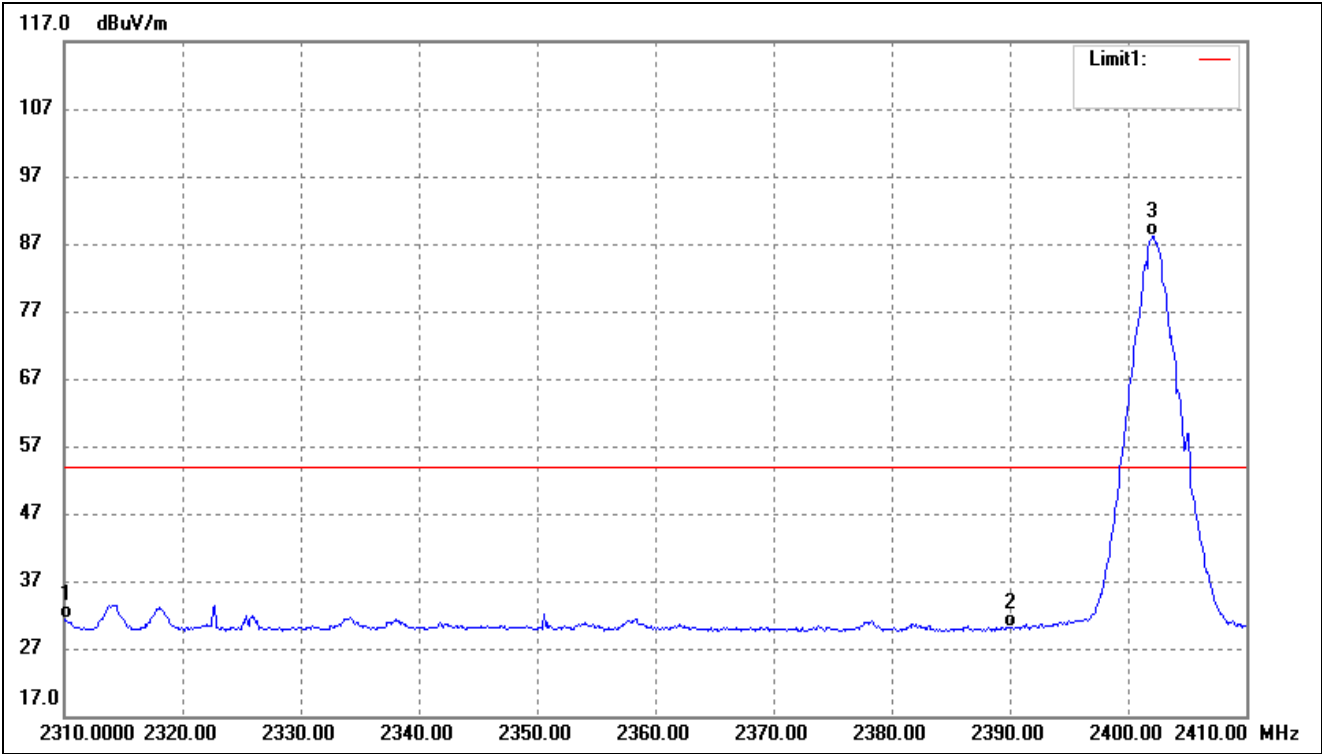

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	42.09	-10.82	31.27	54.00	-22.73	Average Detector
	2310.000	53.60	-10.82	42.78	74.00	-31.22	Peak Detector
2	2390.000	40.81	-10.70	30.11	54.00	-23.89	Average Detector
	2390.000	51.43	-10.70	40.73	74.00	-33.27	Peak Detector
3	2402.100	98.76	-10.69	88.07	/	/	Average Detector
	2402.600	100.54	-10.69	89.85	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

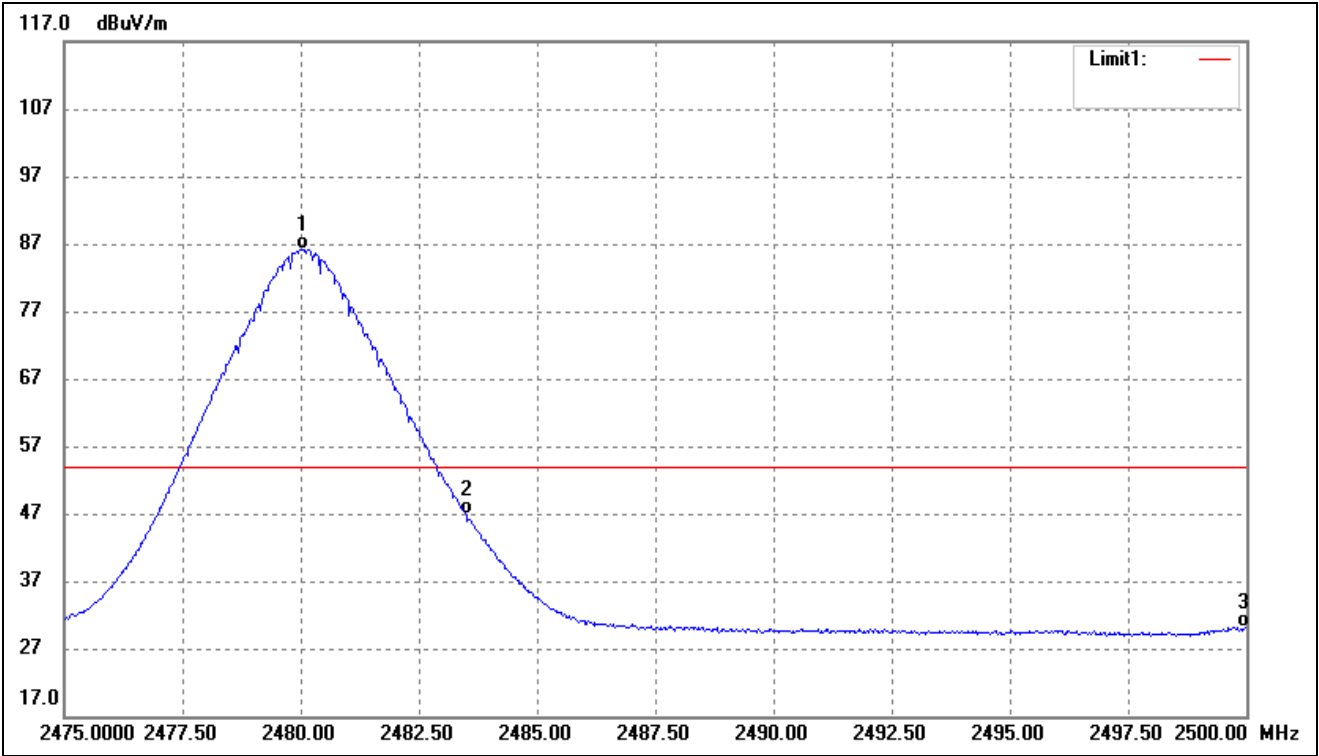

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.050	96.74	-10.58	86.16	/	/	Average Detector
	2480.550	98.87	-10.58	88.29	/	/	Peak Detector
2	2483.500	57.53	-10.58	46.95	54.00	-7.05	Average Detector
	2483.500	65.63	-10.58	55.05	74.00	-18.95	Peak Detector
3	2500.000	40.76	-10.55	30.21	54.00	-23.79	Average Detector
	2500.000	52.28	-10.55	41.73	74.00	-32.27	Peak Detector

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

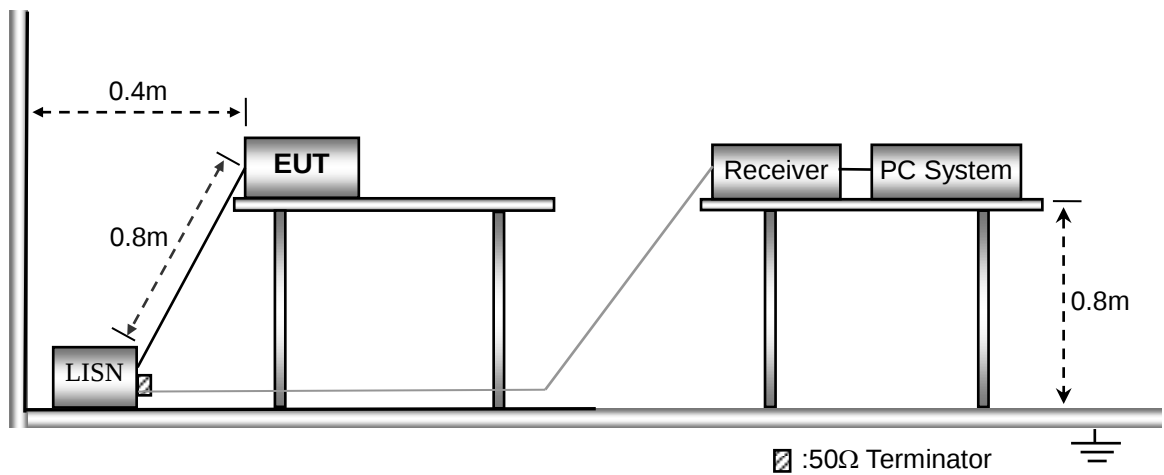

9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

9.4 Summary of Test Results/Plots

Not applicable




APPENDIX SUMMARY

Project No.	WTX22X01001683W	Test Engineer	BAIdi
Start date	2022/1/10	Finish date	2022/1/10
Temperature	23.2℃	Humidity	43%
RF specifications	BT-BLE		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE 1Mbps)	Low	-28.00	8
	Middle	-26.70	8
	High	-25.58	8
GFSK(BLE 2Mbps)	Low	-30.49	8
	Middle	-29.04	8
	High	-27.78	8

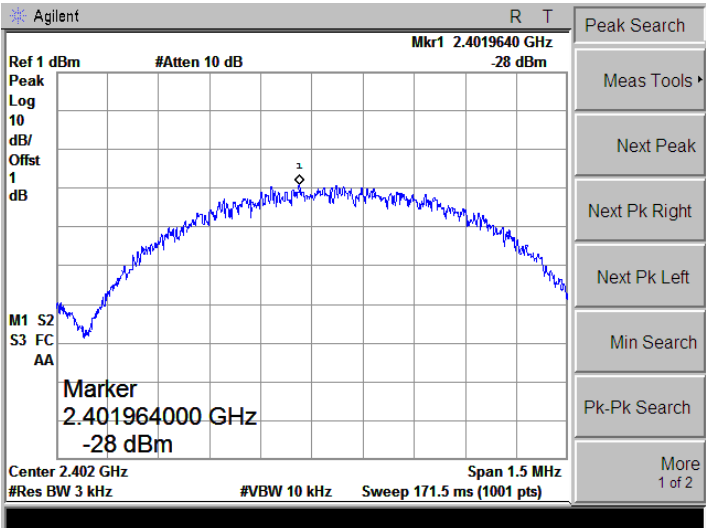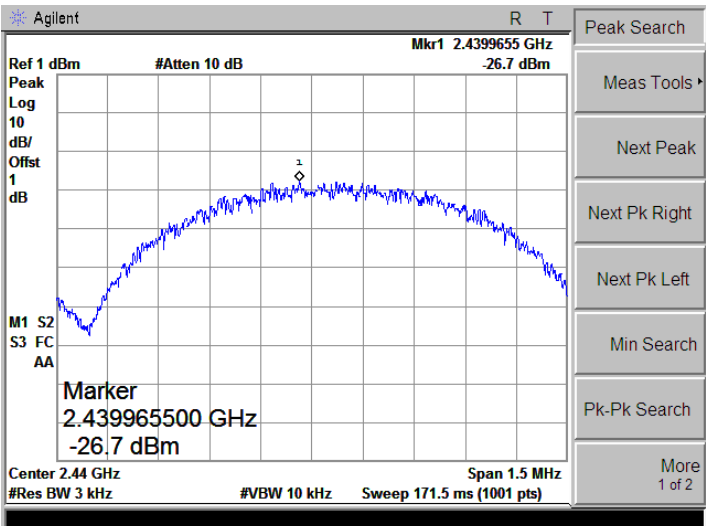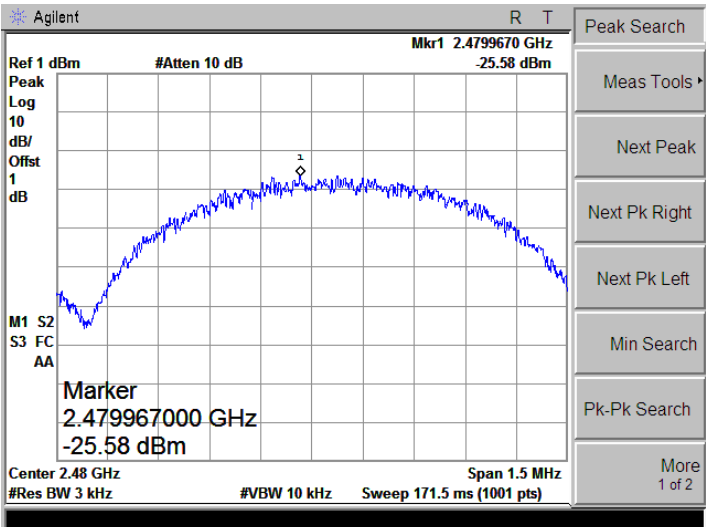GFSK(BLE 1Mbps) Low	
Middle	
High	

GFSK(BLE 2Mbps)	
Low	Agilent Ref 1 dBm #Atten 10 dB Mkr1 2.402099 GHz -30.49 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.402099000 GHz -30.49 dBm Center 2.402 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts) Span 3 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
Middle	Agilent Ref 1 dBm #Atten 10 dB Mkr1 2.440099 GHz -29.04 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.440099000 GHz -29.04 dBm Center 2.44 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts) Span 3 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
High	Agilent Ref 1 dBm #Atten 10 dB Mkr1 2.480099 GHz -27.78 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.480099000 GHz -27.78 dBm Center 2.48 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts) Span 3 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX B

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE 1Mbps)	Low	728.975	≥ 500
	Middle	707.888	≥ 500
	High	730.331	≥ 500
GFSK(BLE 2Mbps)	Low	1544.0	≥ 500
	Middle	1554.0	≥ 500
	High	1551.0	≥ 500

GFSK(BLE 1Mbps)	
Low	Agilent Ch Freq 2.402 GHz Occupied Bandwidth Center 2.402000000 GHz Ref 1 dBm #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.0758 MHz Transmit Freq Error 75.535 kHz x dB Bandwidth 728.975 kHz Occ BW % Pwr x dB -6.00 dB Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
Middle	Agilent Ch Freq 2.44 GHz Occupied Bandwidth Center 2.440000000 GHz Ref 1 dBm #Peak Log 10 dB/ Offst 1 dB Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.0778 MHz Transmit Freq Error 75.260 kHz x dB Bandwidth 707.888 kHz Occ BW % Pwr x dB -6.00 dB Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
High	Agilent Ch Freq 2.48 GHz Occupied Bandwidth Center 2.480000000 GHz Ref 1 dBm #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.0819 MHz Transmit Freq Error 77.012 kHz x dB Bandwidth 730.331 kHz Occ BW % Pwr x dB -6.00 dB Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

GFSK(BLE 2Mbps)	
Low	Agilent Ch Freq2.402 GHz TrigFree Occupied Bandwidth Span 5.000000000 MHz Ref 1 dBm Atten 10 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 5 MHz Occupied Bandwidth 2.2087 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 80.414 kHz x dB Bandwidth 1.544 MHz Trace/View Trace 123 Clear Write Max Hold Min Hold View Blank More1 of 2
Middle	Agilent Ch Freq2.44 GHz TrigFree Occupied Bandwidth Center 2.440000000 GHz Ref 1 dBm Atten 10 dB #Peak Log 10 dB/ Offst 1 dB Center 2.44 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 5 MHz Occupied Bandwidth 2.2163 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 80.461 kHz x dB Bandwidth 1.554 MHz Trace/View Trace 123 Clear Write Max Hold Min Hold View Blank More1 of 2
High	Agilent Ch Freq2.48 GHz TrigFree Occupied Bandwidth Center 2.480000000 GHz Ref 1 dBm Atten 10 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 5 MHz Occupied Bandwidth 2.2228 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 83.645 kHz x dB Bandwidth 1.551 MHz Trace/View Trace 123 Clear Write Max Hold Min Hold View Blank More1 of 2

APPENDIX C

RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
GFSK(BLE 1Mbps)	Low	-13.2	30.00
	Middle	-11.5	30.00
	High	-10.4	30.00
GFSK(BLE 2Mbps)	Low	-13.15	30.00
	Middle	-11.69	30.00
	High	-10.38	30.00

GFSK(BLE 1Mbps)	Agilent Ref 1 dBm #Atten 10 dB Mkr1 2.402250 GHz -13.2 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Center 2.402 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
Middle	Agilent Ref 1 dBm #Atten 10 dB Mkr1 2.439865 GHz -11.5 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Center 2.44 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
High	Agilent Ref 1 dBm #Atten 10 dB Mkr1 2.480285 GHz -10.4 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.480285000 GHz -10.4 dBm Center 2.48 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2


GFSK(BLE 2Mbps)	Agilent R T Ref 1 dBm #Atten 10 dB Mkr1 2.402620 GHz -13.15 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.402620000 GHz -13.15 dBm Center 2.402 GHz #Res BW 1 MHz #VBW 3 MHz Span 5 MHz Sweep 10 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
Middle	Agilent R T Ref 1 dBm #Atten 10 dB Mkr1 2.440580 GHz -11.69 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.440580000 GHz -11.69 dBm Center 2.44 GHz #Res BW 1 MHz #VBW 3 MHz Span 5 MHz Sweep 10 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
High	Agilent R T Ref 1 dBm #Atten 10 dB Mkr1 2.480575 GHz -10.38 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.480575000 GHz -10.38 dBm Center 2.48 GHz #Res BW 1 MHz #VBW 3 MHz Span 5 MHz Sweep 10 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX D



Conducted Out of Band Emissions

GFSK(BLE 1Mbps)


Low

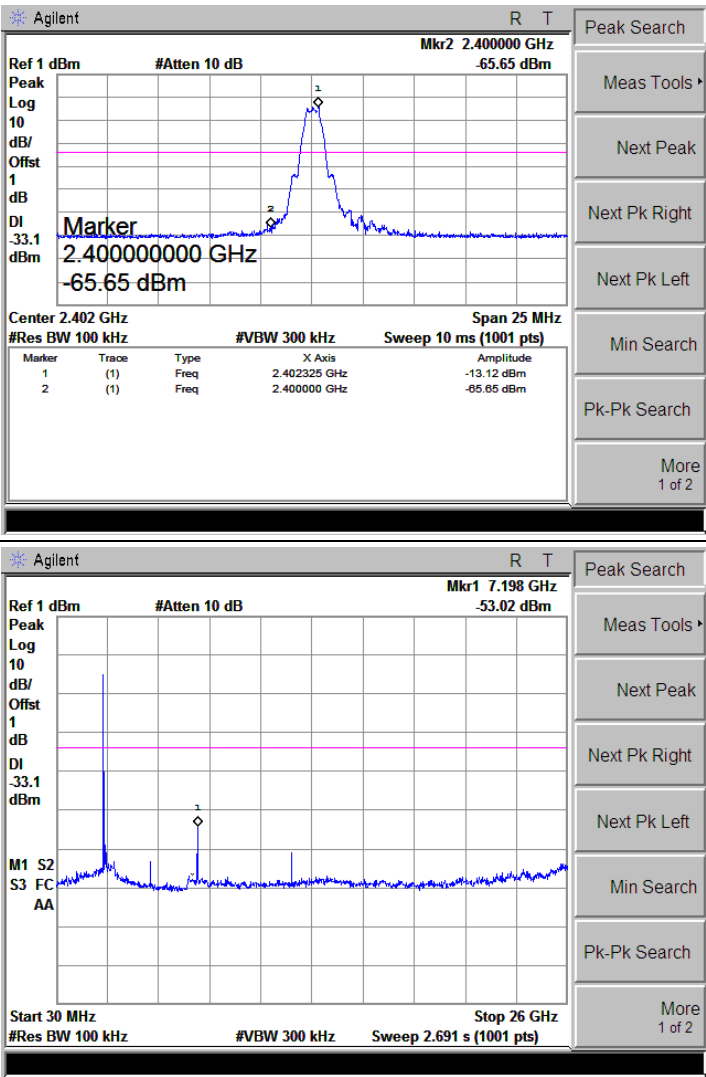


Middle

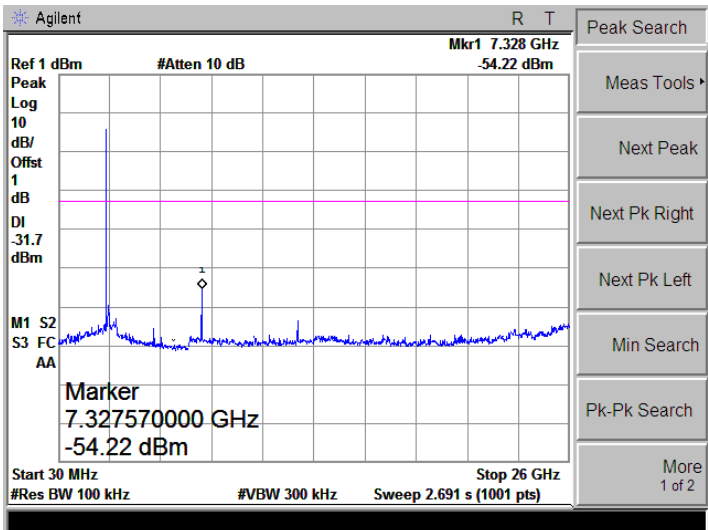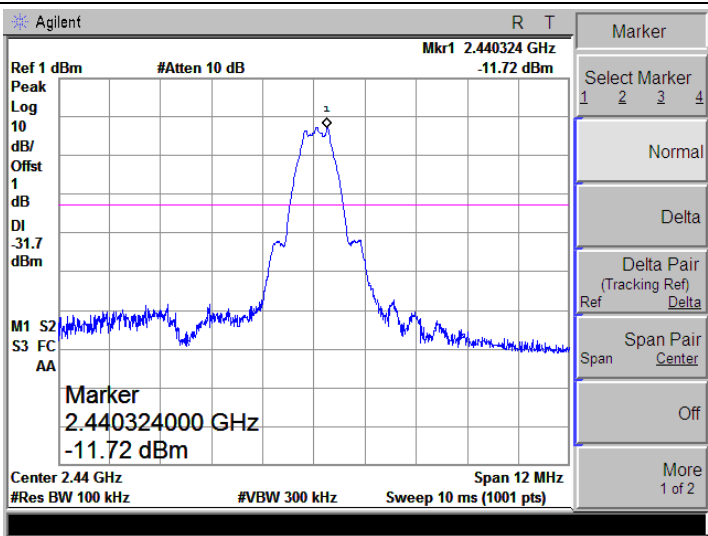


High

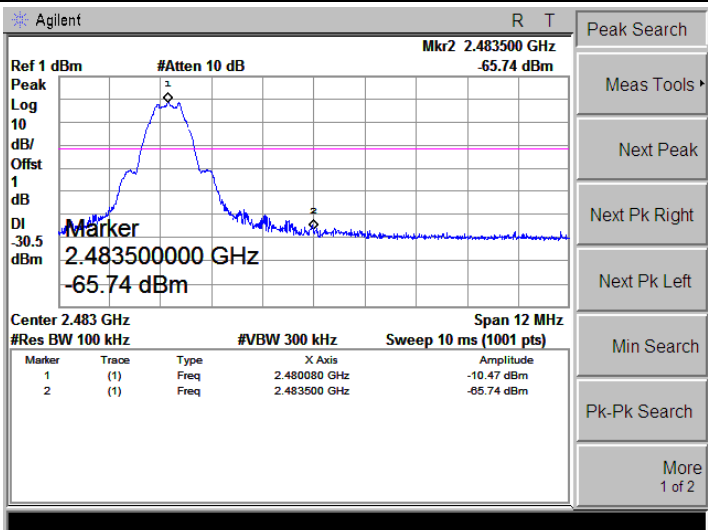


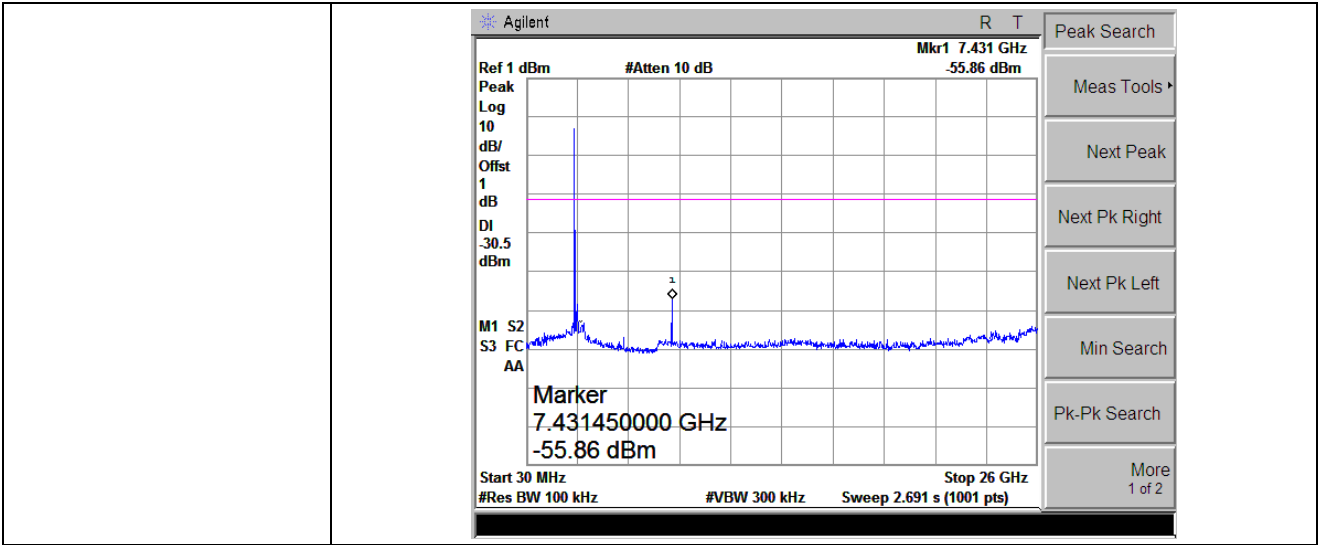



GFSK(BLE 2Mbps)

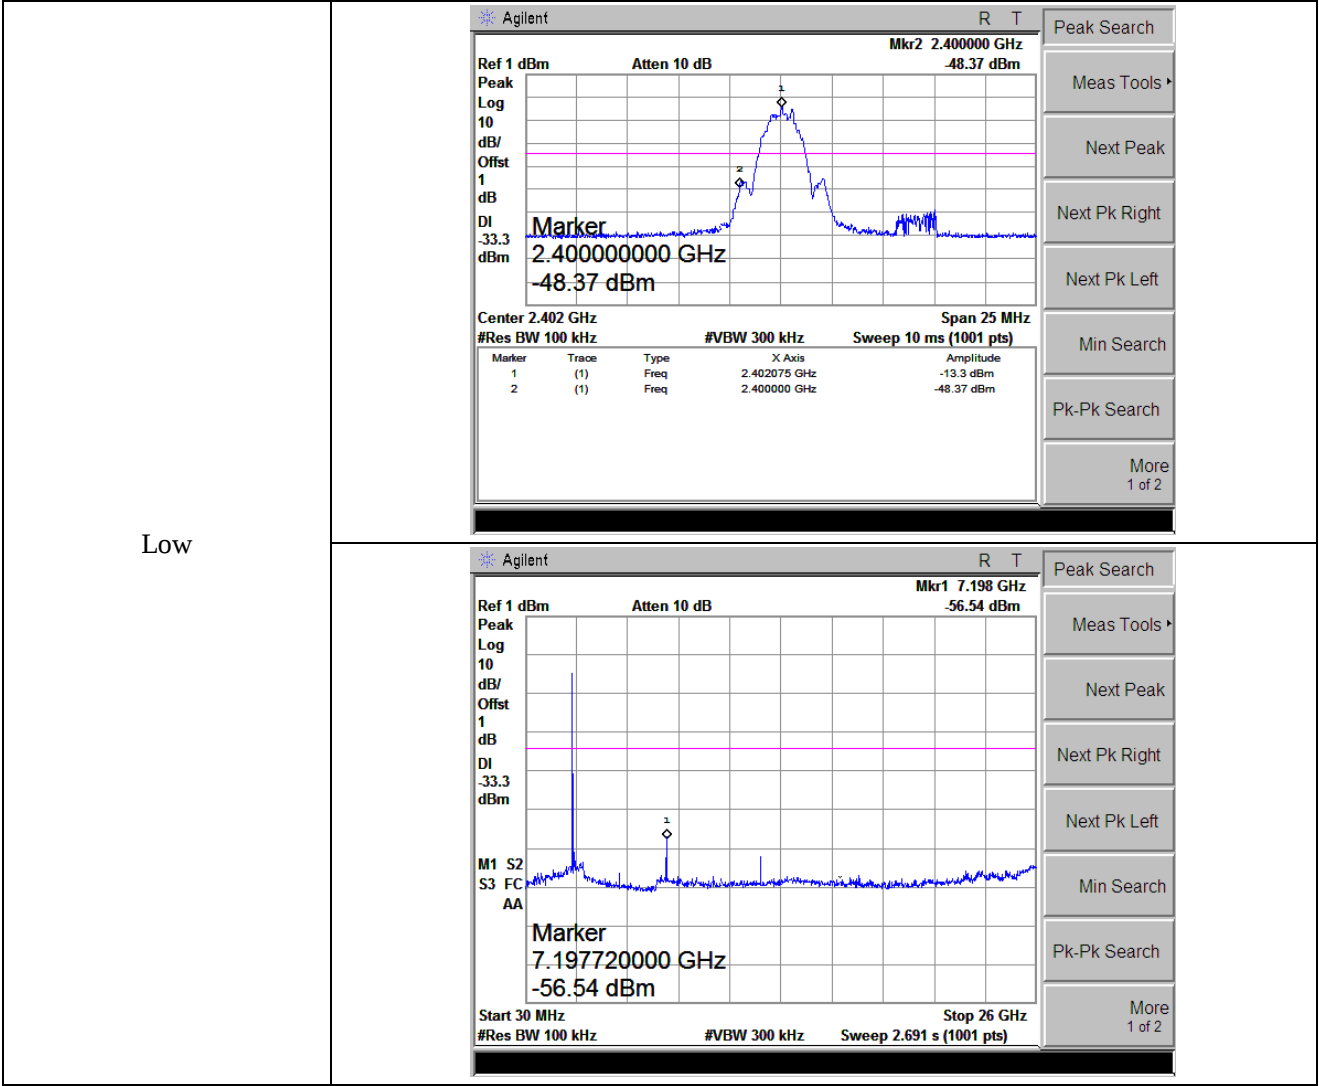


Middle

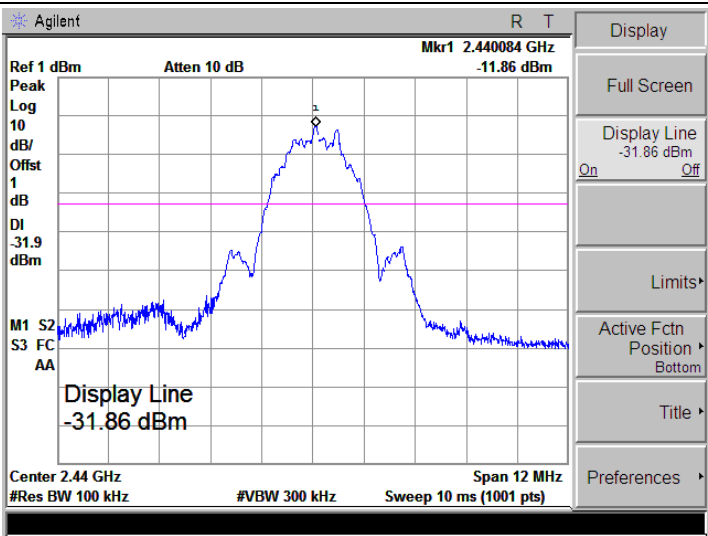

High

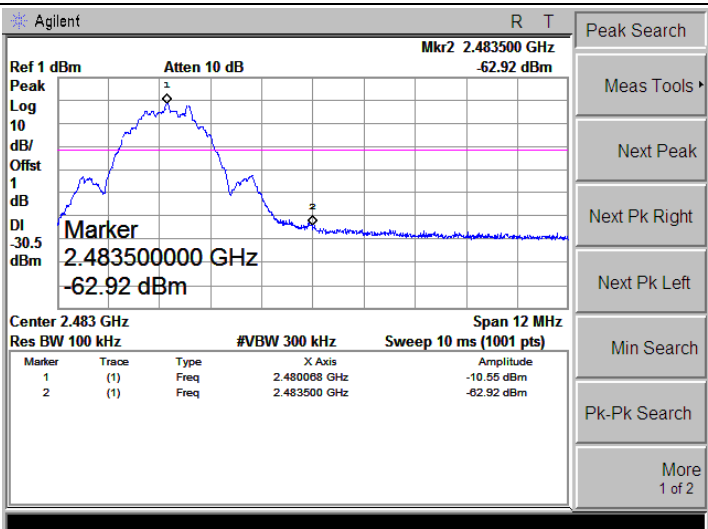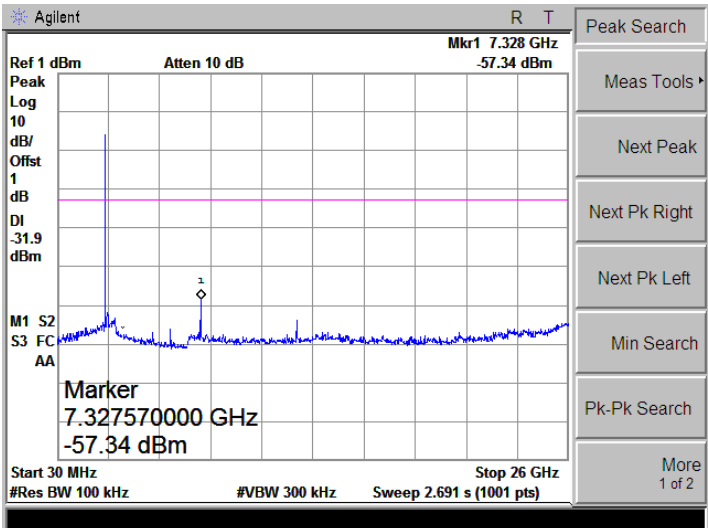

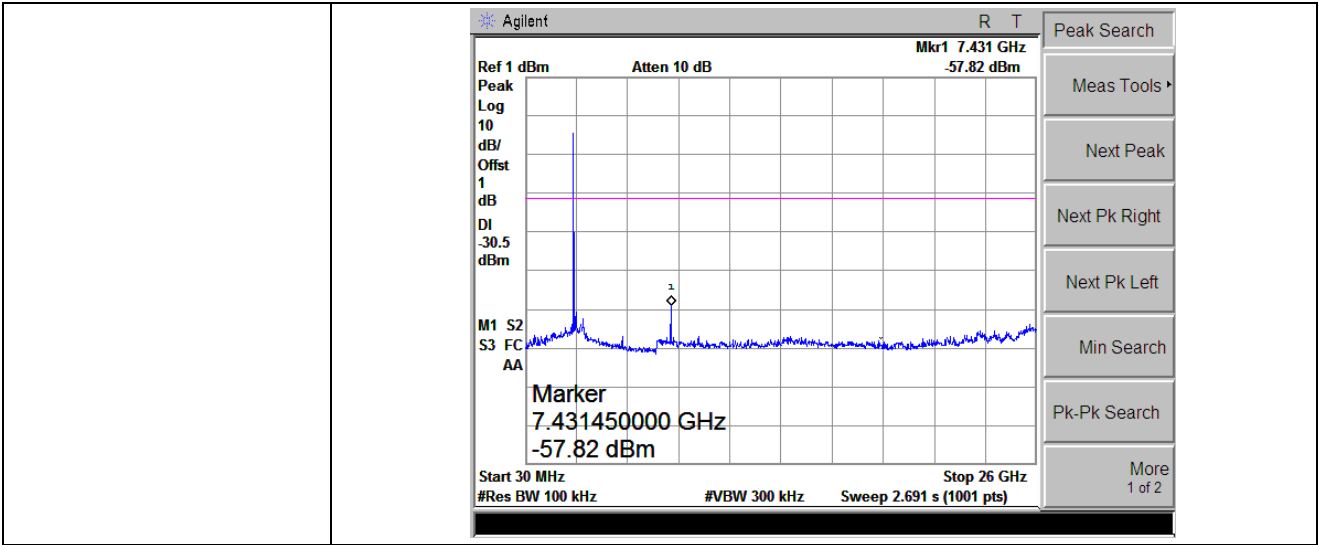

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******