

GoLife Extreme

User Manual

Copyright©2001-2013, PAPAGO INC., All rights reserved.

User Manual

Issues related to usage

- During the shut off procedure, please DO NOT remove Micro SD card immediately, to avoid damaging to the recorded video.
- Original connection cable is required. Use none original connection cable will void the warranty.

Issues related to battery

- Please recycle the battery according to the local regulation.
- Please DO NOT change the battery. Improper battery replacement might cause explosion!
- For the battery, please DO NOT disassemble the camera unit and the mobile charge cable.
- Please DO NOT short the battery.
- For the battery, please DO NOT expose to high temperature environment (such as direct sunshine or fire baking), to avoid explosion.
- Please DO NOT put the battery into fire to avoid explosion.

Issues related to the Micro SD card

- Please use Class 6, 8GB (and above) Micro SD card (maximum can support up to 32 GB).
- Use Micro SD card for the first time, please format the Micro SD card on the PC to ensure the reliable performance.


The function might be different by region, please follow the product you purchased.

English 1

Package Content

1. Video camera	2. Strap fixing pad	3. Power adaptor	4. micro USB cable	5. Bike mount	6. Bike stem strap
7. Bracket of video camera	8. Fixture screw	9. Adhesive pad	10. Tripod mount	11. User manual	12. Warranty card


Introduction of main body

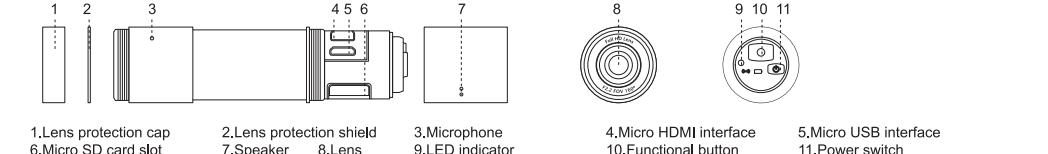

English 2

Bicycle Installation

- ① Thread the bike stem strap through the slot of bike mount.
- ② Install the video camera onto the bracket of video camera.
- ③ Attach the ① bike mount and ② bracket of video camera with fixture screw.
- ④ Place the strap fixing pad on the bike stem on the video camera installation location, with the grooved stripe side wrapped around the stem.
- ⑤ Place ③ video camera unit on top of strap fixing pad, then thread the strap through fixing slot, and fasten to secure the camera unit.

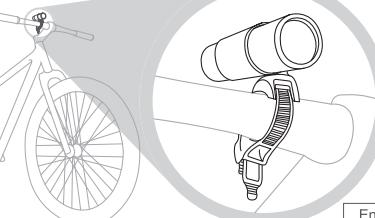

English 3

Tripod Installation

- ① Install the camera onto the bracket of video camera.
- ② Attach the ① bracket of video camera and tripod mount with fixture screw.
- ③ Mount the ② video camera unit onto the tripod to complete the installation.
- ④ Attach the ① bracket of video camera and adhesive pad with fixture screw.
- ⑤ Peel off the 3M adhesive liner from the ② camera unit, then attach it to the appropriate location onto the helmet.



English 4

Software download

- iOS user can search "GoLife Extreme" in App Store
- Android user can search "GoLife Extreme" in Google Play

Power on / off

- While in power off, press the button shortly, with a beep sound, the video camera will be powered on.
- Long press the button, with two beep-beep sound, the camera will be powered off.

For video recording

- While in power on, press the button shortly, then it will start the video recording (* red LED will be lighted).
- Press the button again will stop the video recording.

WIFI connection

- ① While in power on, press the for 3 seconds, it will start the WiFi function (* blue LED will be flashed).Press the button again for 3 seconds, it will shut off the WiFi connection.
- ② After the WiFi connection is enable, go to the mobile phone end to setup WiFi, select "PAPAGO", then confirm the connection.
- ③ Restart the GoLife Extreme, to preview the operations.

English 5

User Manual Warning :

FCC Mark Warning :

This device complies with FCC Rules Part 15. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a class B digital device pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

FCC Exposure Statement :

This equipment complies with RFCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum 20cm between the radiator and your body.

English 6

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Exposure Statement :

This equipment complies with RFCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum 20cm between the radiator and your body.

English 7

v3.9.17

PAPAGO INC.
Add:4F., No.200,Gangcian Rd., Neihu District,Taipei City 114, Taiwan
Tel:+886-2-2659-3008
Fax:+886-2-8751-1323

研勤科技股份有限公司
114台北市內湖區港墘路200號4樓
客服專線 : 02-2659-3008
傳真專線 : 02-8751-1323

料號	製作人	Rack Huang / 4205		日期	2013.09.18	
類別	<input type="checkbox"/> Giftbox	<input type="checkbox"/> CD	<input type="checkbox"/> Label	<input type="checkbox"/> Carton	<input type="checkbox"/> Label	<input checked="" type="checkbox"/> Manud
	<input checked="" type="checkbox"/> Q.G.	<input type="checkbox"/> Engine	<input type="checkbox"/> Other			
材質	<input type="checkbox"/> 灰銅卡/350P	<input type="checkbox"/> 雪銅/80P	<input type="checkbox"/> 特銅/80P	<input type="checkbox"/> 模造/80P	<input type="checkbox"/> 硝銀特多龍	<input type="checkbox"/> 亮銀龍
	<input checked="" type="checkbox"/> Other					
製法	<input type="checkbox"/> 模具雕刻	<input type="checkbox"/> 髮線處理	<input type="checkbox"/> 網版印刷	<input type="checkbox"/> 平版印刷	<input type="checkbox"/> POLY	<input type="checkbox"/> 壓凸
	<input type="checkbox"/> Other					
印色	<input checked="" type="checkbox"/> 單色 (特別色)	<input type="checkbox"/> 雙色	<input type="checkbox"/> 三色	<input type="checkbox"/> 四色	<input type="checkbox"/> 五色	<input type="checkbox"/> Other
尺寸	<input type="checkbox"/> A4	<input type="checkbox"/> A5	<input type="checkbox"/> A6	<input type="checkbox"/> 24x7mm	<input type="checkbox"/> 20x10mm	<input type="checkbox"/> 100x100 mm
	<input checked="" type="checkbox"/> Other	144 X 54 mm				
裝訂	<input checked="" type="checkbox"/> 騎馬釘	<input type="checkbox"/> 膠裝	<input type="checkbox"/> 線裝	<input type="checkbox"/> Other	頁數	
上光	<input type="checkbox"/> UV	<input type="checkbox"/> PP	<input type="checkbox"/> 霧PP	<input type="checkbox"/> A	<input type="checkbox"/> Other	白底
						口有 口無 (for CD)
備註						

封面封底180P銅西卡
內頁80P模造