

# FCC TEST REPORT

For

**Mobile Computer**

**Model Number: M52 Luna**

**FCC ID: 2A398-M52**

**Report Number : WT228000198**

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection  
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China  
Tel : 0086-755-86928965  
Fax : 0086-755-86009898-31396  
Web : [www.smq.com.cn](http://www.smq.com.cn)  
E-mail : [emcrf@smq.com.cn](mailto:emcrf@smq.com.cn)

## TEST REPORT DECLARATION



Applicant : Suzhou MobyData Smart System Co., Ltd.  
Address : 3f, building E,Yida science Park,No.11 Jinpu Road,SIP,Suzhou,Jiangsu,China.  
Manufacturer : Suzhou MobyData Smart System Co., Ltd.  
Address : 3f, building E,Yida science Park,No.11 Jinpu Road,SIP,Suzhou,Jiangsu,China.  
EUT Description : Mobile Computer  
Model No. : M52 Luna  
Trade mark : MobyData  
Serial Number : /  
FCC ID : 2A398-M52

Test Standards:

### FCC Part 15 Subpart C 15.225 (2020)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:		Date:	Mar.09, 2022
	(Zhou Fangai 周芳媛)		
Checked by:		Date:	Mar.09, 2022
	(Shi Changda 施昌达)		
Approved by:		Date:	Mar.09, 2022
	(Lin Yixiang 林奕翔)		

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION.....</b>	<b>2</b>
<b>1. TEST RESULTS SUMMARY.....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer .....	5
2.3. Measurement Uncertainty .....	5
<b>3. PRODUCT DESCRIPTION.....</b>	<b>7</b>
3.1. EUT Description .....	7
3.2. Related Submittal(s) / Grant (s).....	7
3.3. Block Diagram of EUT Configuration.....	7
3.4. Operating Condition of EUT .....	7
3.5. Support Equipment List .....	7
3.6. Test Conditions .....	8
3.7. Modifications .....	8
3.8. Equipment Modifications .....	8
<b>4. TEST EQUIPMENT USED.....</b>	<b>9</b>
<b>5. 20DB BANDWIDTH MEASUREMENT.....</b>	<b>10</b>
5.1. Test Standard.....	10
5.2. TEST PROCEDURE .....	10
5.3. TEST SETUP .....	10
5.4. Test Data.....	10
<b>6. IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS .....</b>	<b>12</b>
6.1. Test Standard.....	12
6.2. TEST PROCEDURE .....	12
6.3. TEST DATA.....	12
<b>7. RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND .....</b>	<b>14</b>
7.1. Test Standard and Limit .....	14
7.2. TEST PROCEDURE .....	14
7.3. Test Arrangement.....	14
7.4. TEST DATA.....	14
<b>8. CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT.....</b>	<b>18</b>
8.1. Test Standard and Limit .....	18
8.2. Test Procedure.....	18
8.3. Test Arrangement.....	18
8.4. Test Data.....	18
<b>9. FREQUENCY STABILITY TOLERANCE .....</b>	<b>21</b>
9.1. Test Standard.....	21
9.2. TEST PROCEDURE .....	21
9.3. TEST DATA.....	21
<b>10. ANTENNA REQUIREMENT .....</b>	<b>22</b>

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
20dB Bandwidth	2.1049	Pass
In-Band Emission	15.225(a)(b)(c)	Pass
Out-of-Band Emission	15.209 15.225(d)	Pass
Conducted emission test for AC power port	15.207	Pass
Frequency Stability Tolerance	15.225(e)	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

## **2. GENERAL INFORMATION**

### **2.1. Report information**

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

### **2.2. Laboratory Accreditation and Relationship to Customer**

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

### **2.3. Measurement Uncertainty**

Conducted Emission

9 kHz~150 kHz U=3.7dB k=2  
150 kHz~30MHz U=3.3dB k=2

Radiated Emission  
30MHz~1000MHz U=4.3dB k=2

### 3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.


#### 3.1. EUT Description

Description : Mobile Computer  
Manufacturer : Suzhou MobyData Smart System Co., Ltd.  
Model Number : M52 Luna  
Operate Frequency : 13.56MHz  
Modulation : ASK  
Operating voltage : DC3.6V (Low)/DC3.8V (Nominal)/DC4.35V (Max)  
Software Version : M09.01.03.20220124  
Hardware Version : H236WO\_V02  
Remark: --

#### 3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID:2A398-M52, filing to comply with Section 15.207, 15.209 and 15.225 of the FCC Part 15 Subpart C Rules.

#### 3.3. Block Diagram of EUT Configuration

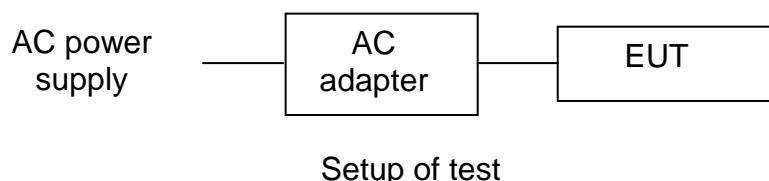

#### 3.4. Operating Condition of EUT

The Radiated spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

#### 3.5. Support Equipment List

Table 2 Support Equipment List

Name	Model No.	S/N	Manufacturer
Adapter for EUT	OP92KAUH	---	ShenZhen KunXing Technology Co., Ltd
Rechargeable Li-ion Polymer Battery for EUT	713965PPV	---	ZHONGSHAN TIANMAO BATTERY CO.,LTD
USB Cable for EUT	---	---	---

### **3.6. Test Conditions**

Date of test : Feb.08, 2022- Feb.25, 2022

Date of EUT Receive : Jan.19, 2022

Temperature: 18°C-23°C

Relative Humidity: 42%-58%

### **3.7. Modifications**

No modification was made.

### **3.8. Equipment Modifications**

Not available for this EUT intended for grant.

## 4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.24,2021	1 Year
SB4357	AMN	R&S	ENN216	Aug.25,2021	1 Year
SB9549	Shielded Room	Albatross	SR	Sep.24,2021	1 Year
SB17366	Test Receiver	R&S	ESR26	Jun.25,2021	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Dec.30,2021	1 Year
SB9555/01	Semi Anechoic Chamber	Albatross	9×6×6(m)	Aug.25,2021	1 Year
SB17366	Test Receiver	R&S	ESR26	Jun.25,2021	1 Year
SB3345	Loop Antenna	Schwarzbeck	FMZB1516-113	Jan.20,2022	1 Year
SB9555/01	Semi Anechoic Chamber	Albatross	9×6×6(m)	Aug.25,2021	1 Year
SB7941/02	Spectrum Analyzer	R&S	FSU26	May.17, 2021	1 Year
SB9721/07	DC Power Supply	Agilent	66319D	---	---
SB11818	Temperature Humidity Chamber	Espec	EH-010U	Mar.19,2021	1 Year

## 5. 20DB BANDWIDTH MEASUREMENT

### 5.1. Test Standard

#### 5.1.1. Test Standard

FCC part 2.1049

### 5.2. TEST PROCEDURE

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode

### 5.3. TEST SETUP




### 5.4. Test Data


Table 4 Bandwidth Test Data

FREQUENCY (MHz)	20dB BANDWIDTH (kHz)	99% BANDWIDTH (kHz)
13.56	3.205	2.244

## 20dB Bandwidth

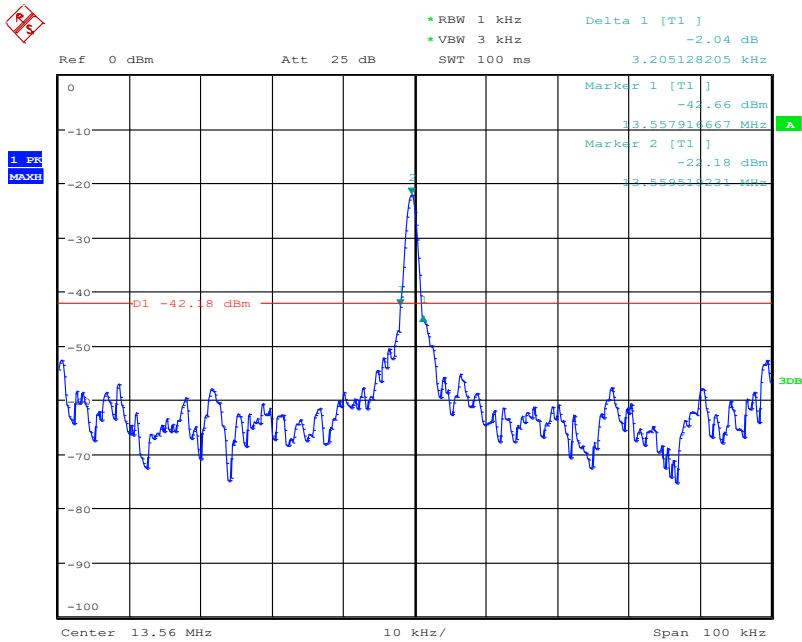

## 99% Bandwidth

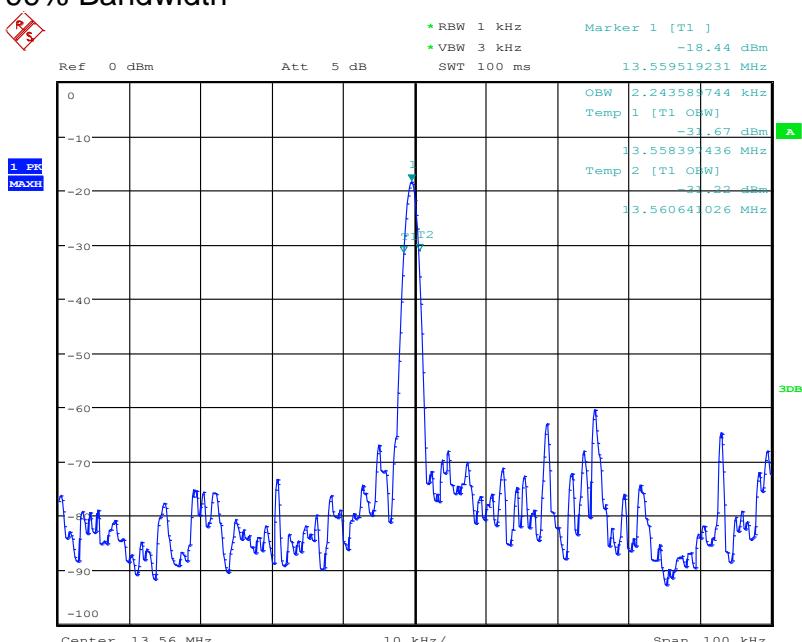

## 6. IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS

### 6.1. Test Standard

#### 6.1.1. Test Standard

FCC part 15.225(a)(b)(c)

### 6.2. TEST PROCEDURE

Radiated emission testing was performed in the band 13.110 – 14.010 MHz.

1. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.

2. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.

3. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).

Extrapolation Factor =  $20 \log 10 (30/3) 2 = 40\text{dB}$ .


4. The spectrum was investigated from 9 kHz up to 30MHz using the loop antenna. Only the emissions shown in the table above were found to be significant.

5. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.

### 6.3. TEST DATA

Emission level (dB<sub>uV</sub>)=Read Value(dB<sub>uV/m</sub>) + Antenna Factor(dB)+ Cable Loss + preamp (dB)

The emissions don't show in above result tables are more than 20dB below the limits

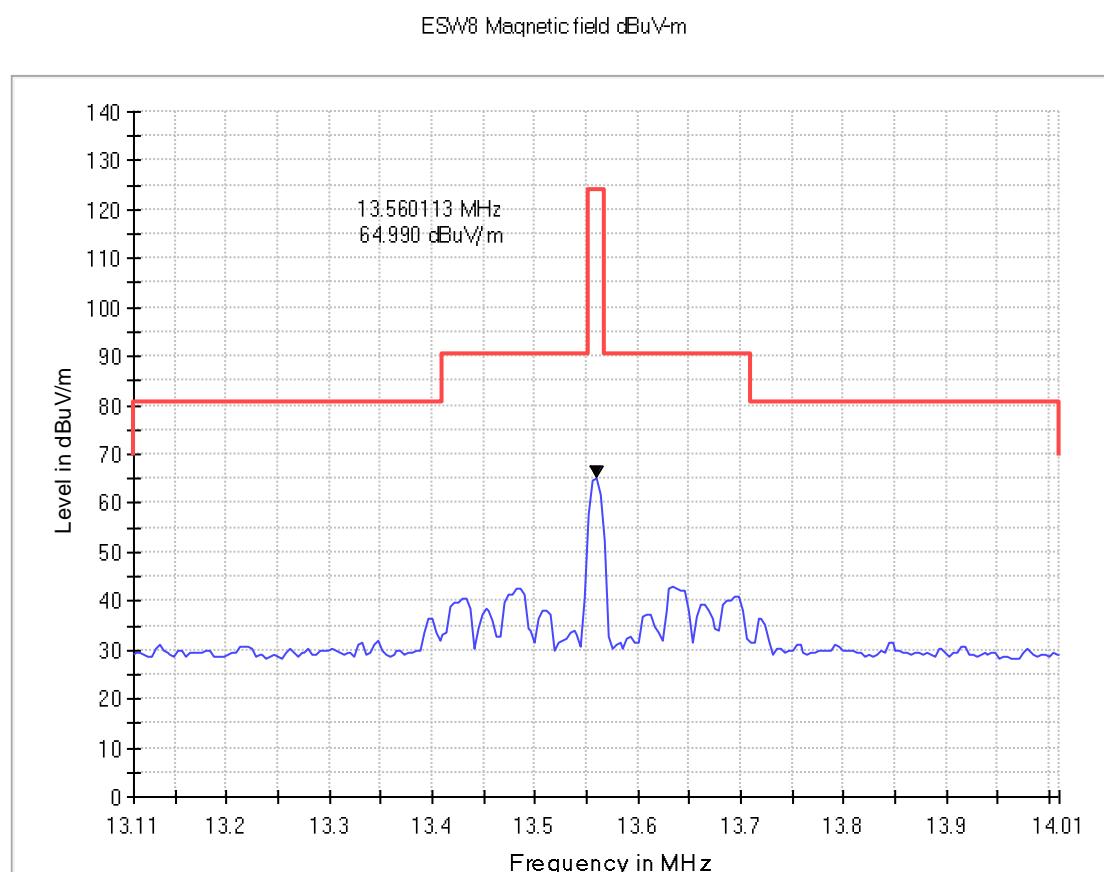

Frequency (MHz)	Quasi Peak (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Azimuth (deg)	Corr. (dB)
13.560	64.990	124	59.01	0	20

## 7. RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND

### 7.1. Test Standard and Limit

#### 7.1.1. Test Standard

FCC part 15.205, 15.209 &15.225(d)

#### 7.1.2. Test Limit

FCC Part 15.209

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

Formula for converting the field strength from  $\mu\text{V}/\text{m}$  to  $\text{dB}\mu\text{V}/\text{m}$  is:  
 $\text{dB}\mu\text{V}/\text{m} = 20\log(\mu\text{V}/\text{m})$

### 7.2. TEST PROCEDURE

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110 – 14.010 MHz. All measurement up to 960MHz were recorded with a spectrum analyzer employing a quasi-peak detector. All out-of-band emissions must not exceed the limits shown in Table 8-5 per Section 15.209. A loop antenna was used to investigate emissions below 30MHz

### 7.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.


### 7.4. TEST DATA

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 9 kHz-30MHz

ESW8 Magnetic field dBuV/m

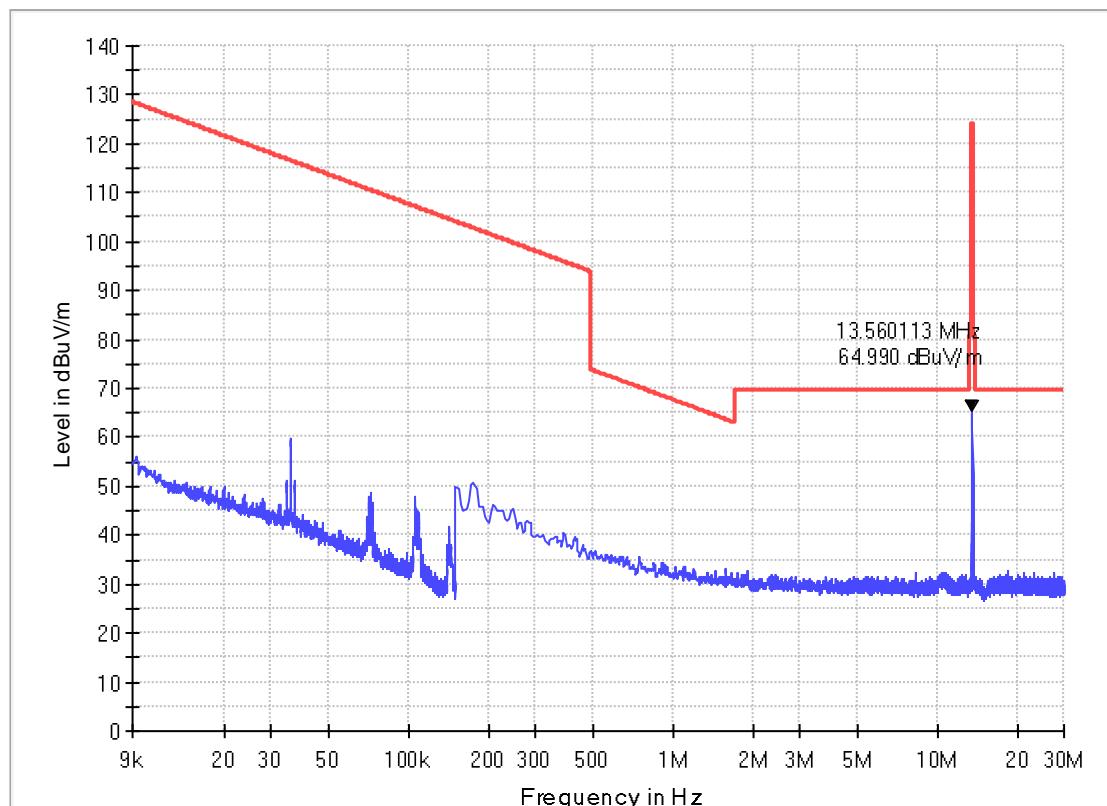

## 30MHz-1GHz


Table 5 Radiated Emission Test Data 30MHz-1GHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB $\mu$ V/m)	Level (dB $\mu$ V/m)	Polarity (Horizontal /Vertical)	Limit (dB $\mu$ V/m)	Margin (dB)	Note
38.148	0.7	12.3	11.4	24.4	Vertical	40	15.6	QP
44.453	0.7	13.6	8.6	22.9	Vertical	40	17.1	QP
57.742	0.8	13.0	5.0	18.8	Vertical	40	21.2	QP
103.332	1.2	13.2	5.5	19.9	Vertical	43.5	23.6	QP
156.682	1.4	8.3	9.0	18.7	Vertical	43.5	24.8	QP
197.713	1.7	10.6	10.9	23.2	Vertical	43.5	20.3	QP
46.199	0.8	13.6	-0.5	13.9	Horizontal	40	26.1	QP
55.220	0.8	13.0	3.4	17.2	Horizontal	40	22.8	QP
103.526	1.2	13.2	1.4	15.8	Horizontal	43.5	27.7	QP
123.411	1.2	10.5	3.5	15.2	Horizontal	43.5	28.3	QP
196.743	1.7	10.6	9.5	21.8	Horizontal	43.5	21.7	QP
863.521	3.8	20.1	0.4	24.3	Horizontal	46	21.7	QP

Remark: Emission level (dB $\mu$ V)=Read Value(dB $\mu$ V/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)


## Horizontal

ESR26 Field strength 30M-1GHz

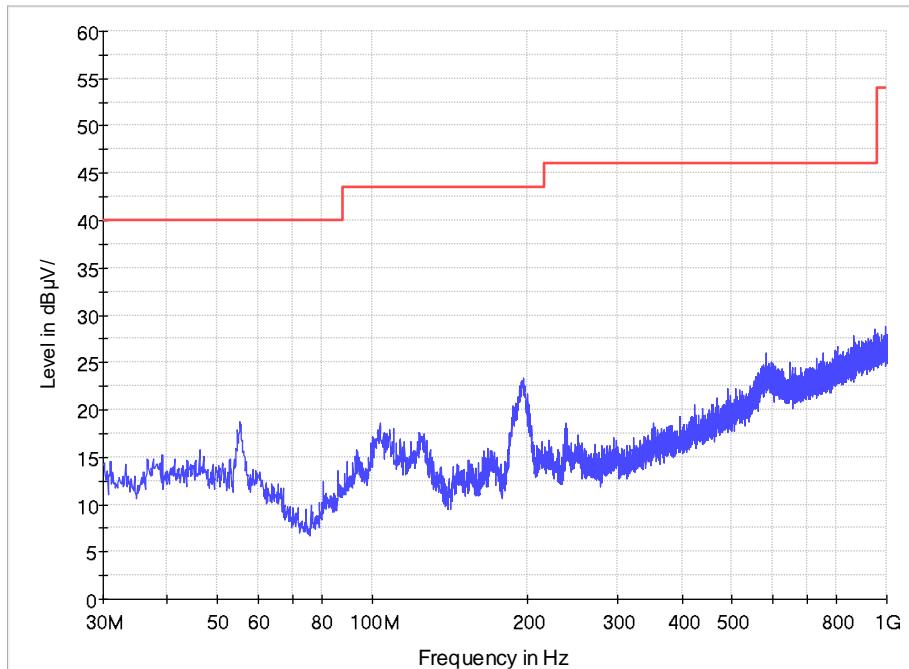

## Vertical

ESR26 Field strength 30M-1GHz

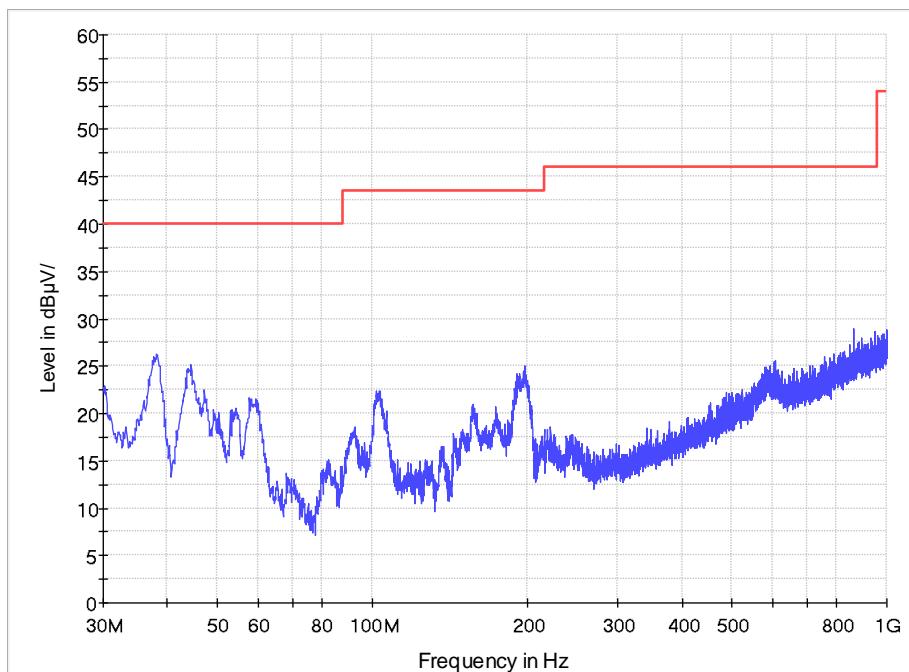

## 8. CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT

### 8.1. Test Standard and Limit

#### 8.1.1. Test Standard

FCC Part 15.207

#### 8.1.2. Test Limit

Table 6 Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

\* Decreasing linearly with logarithm of the frequency

\* The lower limit shall apply at the transition frequency.

### 8.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

### 8.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 8.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 7 Conducted Emission Test Data


	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limit (dB $\mu$ V)
Line	0.159	9.7	40.9	50.6	65.5	27.6	37.3	55.5
	0.177	9.7	37.1	46.8	64.6	25.5	35.2	54.6
	0.217	9.7	33.4	43.1	62.9	23.8	33.5	52.9
	0.393	9.7	28.9	38.6	58.0	25.2	34.9	48.0
	0.433	9.7	29.6	39.3	57.2	26.0	35.7	47.2
	0.865	9.8	26.6	36.4	56	21.3	31.1	46
Neutral	0.150	9.7	42.0	51.7	66	27.3	37.0	56
	0.181	9.7	35.9	45.6	64.4	23.0	32.7	54.4
	0.235	9.7	28.7	38.4	62.3	21.5	31.2	52.3
	0.393	9.7	26.8	36.5	58.0	23.3	33.0	48.0
	0.433	9.7	23.7	33.4	57.2	18.7	28.4	47.2
	0.586	9.8	22.7	32.5	56	17.1	26.9	46

REMARKS: 1. Emission level (dB $\mu$ V) = Read Value (dB $\mu$ V) + Correction Factor (dB)  
 2. Correction Factor (dB) = LISN Factor (dB) + Cable Factor (dB) + Limiter Factor (dB)  
 3. The other emission levels were very low against the limit.  
 4. 13.56MHz is a fundamental frequency of the EUT

## Line

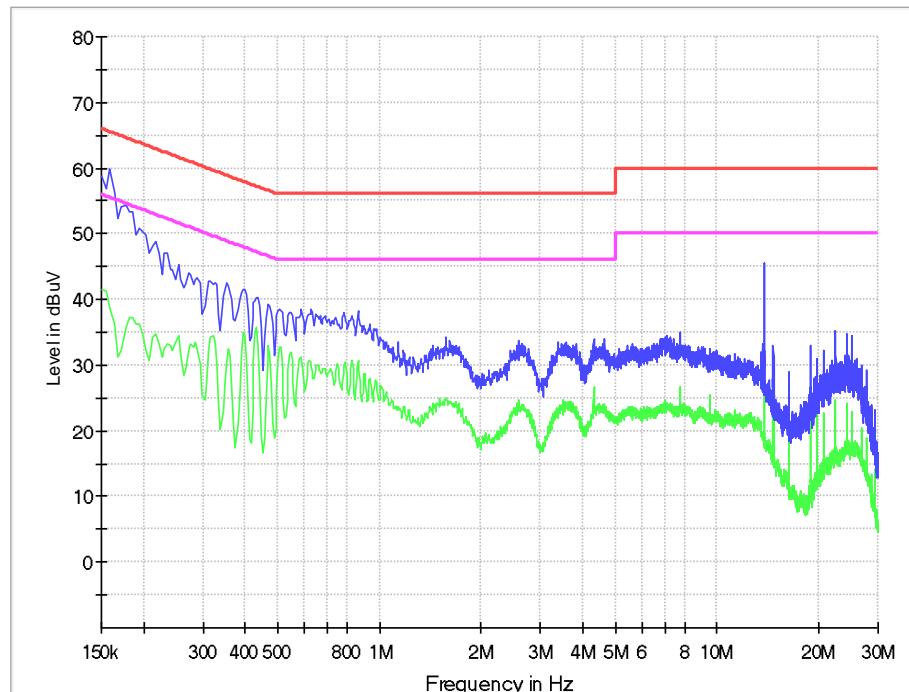

## Neutral

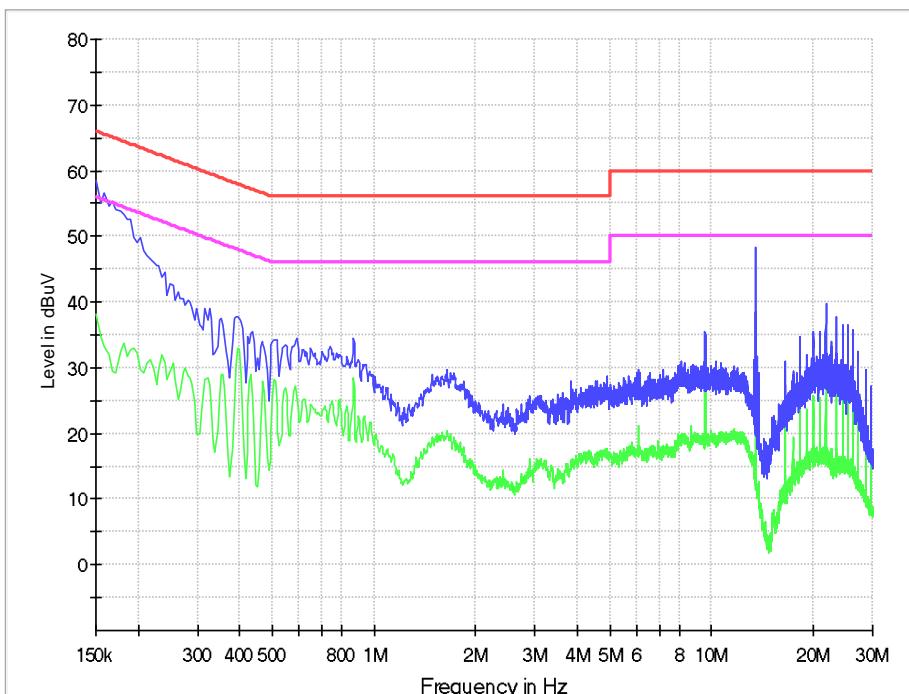

## 9. FREQUENCY STABILITY TOLERANCE

### 9.1. Test Standard

#### 9.1.1. Test Standard

FCC part 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 9.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 6.8

### 9.3. TEST DATA

Table 8 Frequency Stability Tolerance Test Data

Nominal Frequency (MHz)	Voltage (%)	Voltage (Vdc)	Temperature (°C)	Measured Frequency Error(Hz)	Limit (Hz)	Verdict
13.56	100%	3.8	-20	38	1356	PASS
	100%	3.8	-20	81	1356	PASS
	100%	3.8	-20	146	1356	PASS
	100%	3.8	-20	-63	1356	PASS
	100%	3.8	+20	4	1356	PASS
	100%	3.8	+30	51	1356	PASS
	100%	3.8	+40	73	1356	PASS
	100%	3.8	+50	-12	1356	PASS
	High	4.35	+20	0	1356	PASS
	End. Point	3.6	+20	60	1356	PASS

## **10. ANTENNA REQUIREMENT**

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.

---

-----End of Report -----