

FCC TEST REPORT

For

Mobile Computer

Model Number: M52 Luna

FCC ID: 2A398-M52

Report Number : WT228000196

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

TEST REPORT DECLARATION

Applicant : Suzhou MobyData Smart System Co., Ltd.
Address : 3f, building E,Yida science Park,No.11 Jinpu Road,SIP,Suzhou,Jiangsu,China.
Manufacturer : Suzhou MobyData Smart System Co., Ltd.
Address : 3f, building E,Yida science Park,No.11 Jinpu Road,SIP,Suzhou,Jiangsu,China.
EUT Description : Mobile Computer
Model No. : M52 Luna
Trade mark : MobyData
Serial Number : /
FCC ID : 2A398-M52


Test Standards:

FCC Part 15 Subpart B (2020)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: Mar.10, 2022
(Zhou Fangai 周芳媛)

Checked by:  Date: Mar.10, 2022
(Shi Changda 施昌达)


Approved by:  Date: Mar.10, 2022
(Lin Yixiang 林奕翔)

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	2
1. TEST RESULTS SUMMARY.....	4
2. GENERAL INFORMATION	5
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer	5
2.3. Measurement Uncertainty	5
3. PRODUCT DESCRIPTION.....	7
3.1. EUT Description	7
3.2. Block Diagram of EUT Configuration.....	8
3.3. Operating Condition of EUT	8
3.4. Support Equipment List	8
3.5. Test Conditions	9
3.6. Modifications	9
4. TEST EQUIPMENT USED.....	10
4.1. Test Equipment Used to Measure Conducted Emission	10
4.2. Test Equipment Used to Measure Radiated Emission	10
5. CONDUCTED EMISSION TEST.....	11
5.1. Test Standard and Limit	11
5.2. Test Procedure.....	11
5.3. Test Arrangement.....	11
5.4. Test Data.....	11
6. RADIATION EMISSION TEST.....	14
6.1. Test Standard and Limit	14
6.2. Test Procedure.....	14
6.3. Test Arrangement.....	15
6.4. Test Data.....	15

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Emission	15.107	Pass
Radiation Emission	15.109	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3. Measurement Uncertainty

Conducted Emission

9 kHz~150 kHz U=3.7dB k=2
150 kHz~30MHz U=3.3dB k=2

Radiated Emission
30MHz~1000MHz U=4.3dB k=2
1GHz~6GHz U=4.6 dB k=2
6GHz~40GHz U=5.1dB k=2

3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.

3.1. EUT Description


Description	:	Mobile Computer
Manufacturer	:	Suzhou MobyData Smart System Co., Ltd.
Model Number	:	M52 Luna
Operating voltage	:	DC3.6V (Low)/DC3.8V (Nominal)/DC4.35V (Max)
Test voltage	:	AC 120V/60Hz
Software Version	:	M09.01.03.20220124
Hardware Version	:	H236WO_V02
Frequency	:	GSM850:TX 824MHz~849MHz RX 869MHz~894MHz PCS1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz WCDMA 850: TX 824MHz~849MHz RX 869MHz~894MHz WCDMA 1900:TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band 2: TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band 4: TX 1710MHz~1755MHz RX 2110MHz~2155MHz LTE Band 5:TX 824MHz~849MHz RX 869MHz~894MHz LTE Band 7:TX 2500MHz~2570MHz RX 2620MHz~2690MHz LTE Band 12:TX 699MHz~716MHz RX 729MHz~746MHz LTE Band 26: TX 814MHz ~ 849MHz RX 859MHz ~ 894MHz 2.4G WiFi: 2412MHz~2462MHz 5G WiFi: U-NII 1(5180~5240 MHz) U-NII 2A(5260~5320 MHz) U-NII 2C(5500~5700 MHz) U-NII 3(5745~5825 MHz) BT:2402MHz~2480MHz
Type(s) of Modulation	:	GSM850/PCS1900:GMSK 8PSK WCDMA:QPSK LTE:QPSK, 16QAM DSSS (DBPSK, DQPSK, CCK) for 802.11b

OFDM (BPSK, QPSK, 16QAM, 64QAM) for 802.11a/g/n
 OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) for 802.11ac
 Bluetooth: GFSK, pi/4-DQPSK, 8DPSK

Antenna Type : GSM/WCDMA/LTE: PIFA Antenna
 GSM 850: 0.54 dBi
 PCS 1900: 0.7 dBi
 WCDMA 850: 0.54 dBi
 WCDMA 1900: 0.7 dBi
 LTE Band 2: 0.7 dBi
 LTE Band 4: 0.76 dBi
 LTE Band 5: 0.54dBi
 LTE Band 7: 1.14 dBi
 LTE Band 12: 0.48 dBi
 LTE Band 26: 0.52 dBi
 2.4G WiFi: PIFA ANTENNA 1dBi
 5G WiFi: PIFA ANTENNA 1.5dBi
 BT: PIFA ANTENNA 1dBi

Remark: --

3.2. Block Diagram of EUT Configuration

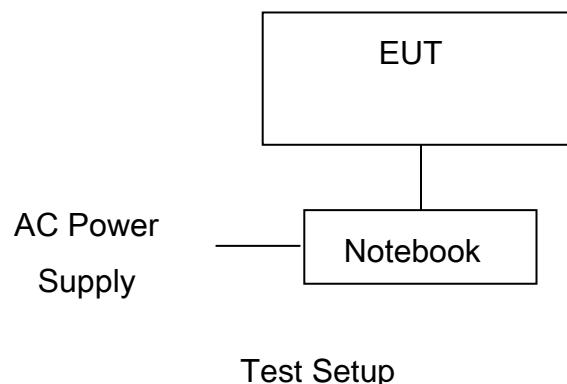

3.3. Operating Condition of EUT

Test mode 1: Connected to a pc and data transmission.

EUT has more than one typical operation, only the worst test mode will be recorded in this report.

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.4. Support Equipment List

Table 2 Support Equipment List

Name	Model No.	S/N	Manufacturer
Adapter for EUT	OP92KAUH	---	ShenZhen KunXing Technology Co., Ltd
Rechargeable Li-ion Polymer Battery for EUT	713965PPV	---	ZHONGSHAN TIANMAO BATTERY CO.,LTD
USB Cable for EUT	---	---	---
Notebook	HP ProBook 440 G6	---	HP

3.5. Test Conditions

Date of test : Feb.08, 2022- Feb.18, 2022

Date of EUT Receive : Jan.19, 2022

Temperature: 19-20°C

Relative Humidity: 51-57%

3.6. Modifications

No modification was made.

4. TEST EQUIPMENT USED

4.1. Test Equipment Used to Measure Conducted Emission

Table 3 Conducted Emission Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.24,2021	1 Year
SB4357	AMN	R&S	ENN216	Aug.25,2021	1 Year
SB9549	Shielded Room	Albatross	SR	Sep.24,2021	1 Year

4.2. Test Equipment Used to Measure Radiated Emission

Table 4 Radiated Emission Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB17366	Test Receiver	R&S	ESR26	Jun.25,2021	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Dec.30,2021	1 Year
SB13958	Horn Antenna	R&S	HF907	Mar.23,2021	1 Year
SB9555/01	Semi Anechoic Chamber	Albatross	9×6×6(m)	Aug.25,2021	1 Year

5. CONDUCTED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15: Section 15.107

5.1.2. Test Limit

Table 5 Conducted Emission Test Limit (Class B)

Frequency	Power Port limits (dB μ V)	
	Quasi-peak	Average
0.15MHz ~ 0.5MHz	66~56*	56~46*
0.5MHz ~ 5 MHz	56	46
5 MHz ~ 30MHz	60	50

* Decreasing linearly with logarithm of the frequency

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 6 Conducted Emission Test Data at mains Port


Test mode: 1								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)
Line	0.168	9.7	42.9	52.6	65.1	27.5	37.2	55.1
	0.217	9.7	32.9	42.6	62.9	19.5	29.2	52.9
	0.366	9.7	23.9	33.6	58.6	9.7	19.4	48.6
	0.469	9.7	18.3	28.0	56.5	10.8	20.5	46.5
	4.069	9.9	19.8	29.7	56	9.7	19.6	46
	5.860	10.0	18.8	28.8	60	11.6	21.6	50
Neutral	0.163	9.7	40.9	50.6	65.3	16.4	26.1	55.3
	0.190	9.7	43.0	52.7	64.0	27.7	37.4	54.0
	0.249	9.7	36.7	46.4	61.8	20.4	30.1	51.8
	0.316	9.7	30.3	40.0	59.8	13.8	23.5	49.8
	10.824	9.9	18.8	28.7	60	12.0	21.9	50
	14.100	9.9	21.6	31.5	60	15.1	25.0	50

REMARKS: 1. Emission level (dB μ V) =Read Value (dB μ V) + Correction Factor (dB)
 2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)
 3. The other emission levels were more than 20dB below the limits.

Line

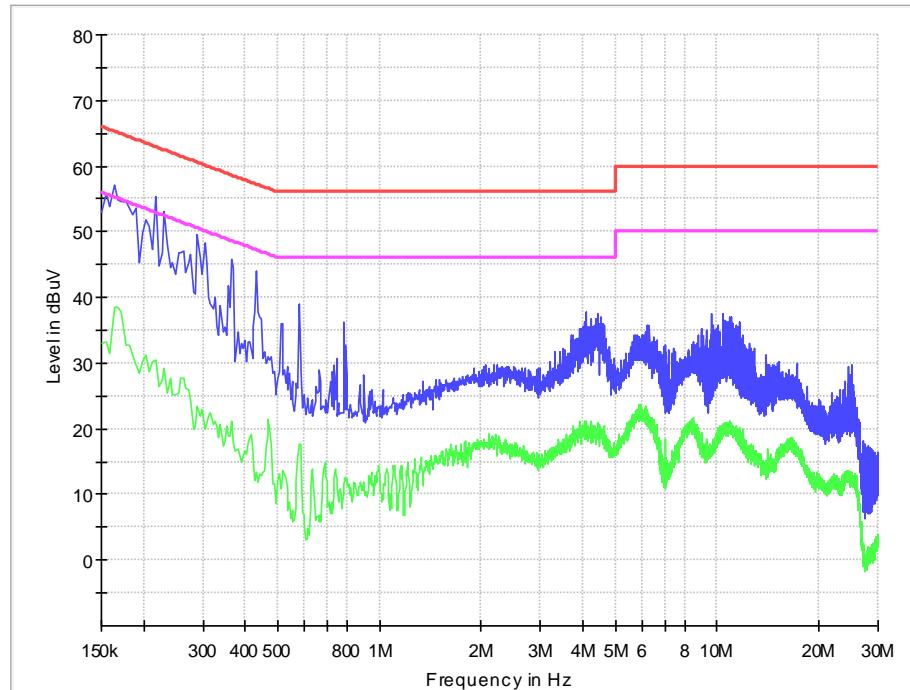

Neutral

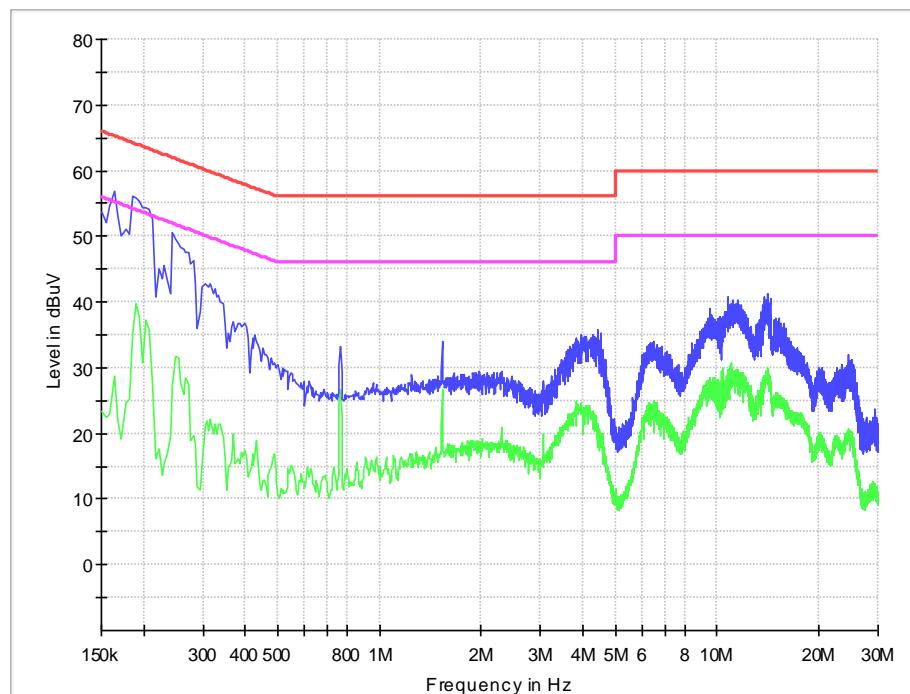

6. RADIATION EMISSION TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15: Section 15.109

6.1.2. Test Limit

Table 7 Radiation Emission Test Limit for FCC (Class B)

Frequency	Test distance	Limit dB(μ V/m)		
		Quasi-peak	Average	Peak
30MHz~88MHz	3m	40		
88MHz~216MHz	3m	43.5		
216MHz~960MHz	3m	46		
960MHz~1000MHz	3m	54		
>1000MHz	3m		54	74

Conditional testing procedure for above 1 GHz :

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705~108	1000
108~500	2000
500~1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set **3 meters** away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)

VBW \geq 3 x RBW

Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);

Peak & Average (frequency range above 1 GHz);

Changing VBW to 10 Hz for average measurement

The use of a higher-than-specified video bandwidth produces a conservative measurement result.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves. No record emission results above 18GHz as emission level lower than limits at least 20dB;

Table 8 Radiated Emission Test Data


Test mode: 1								
Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB μ V/m)	Level (dB μ V/m)	Polarity (Horizontal/Vertical)	Limits (dB μ V/m)	Margin (dB)	Note
30.097	0.6	12.3	8.3	21.2	Vertical	40	18.8	QP
118.367	1.3	12.3	18.2	31.8	Vertical	43.5	11.7	QP
132.238	1.3	10.5	14.1	25.9	Vertical	43.5	17.6	QP
832.675	3.7	20.1	2.0	25.8	Vertical	46	20.2	QP
75.008	1.0	7.8	8.1	16.9	Horizontal	40	23.1	QP
188.789	1.6	9.7	10.9	22.2	Horizontal	43.5	21.3	QP
252.712	1.9	12.1	11.2	25.2	Horizontal	46	20.8	QP
364.456	2.2	14.3	12.0	28.5	Horizontal	46	17.5	QP
1149.600	-41.0	24.4	55.2	38.6	Vertical	74	35.4	PK
2399.100	-40.2	28.3	54.7	42.8	Vertical	74	31.2	PK
4777.400	-39.4	33.4	60.5	54.5	Vertical	74	19.5	PK
17303.000	-32.1	42.5	50.2	60.6	Vertical	74	13.4	PK
2397.400	-40.2	28.3	59.5	47.6	Horizontal	74	26.4	PK
16959.600	-32.3	42.2	50.2	60.1	Horizontal	74	13.9	PK
17510.400	-32.5	42.9	50.5	60.9	Horizontal	74	13.1	PK
1149.600	-41.0	24.4	43.2	26.6	Vertical	54	27.4	AV
2399.100	-40.2	28.3	40.7	28.8	Vertical	54	25.2	AV
4777.400	-39.4	33.4	38.6	32.6	Vertical	54	21.4	AV
17303.000	-32.1	42.5	36.8	47.2	Vertical	54	6.8	AV
2397.400	-40.2	28.3	39.7	27.8	Horizontal	54	26.2	AV
16959.600	-32.3	42.2	37.2	47.1	Horizontal	54	6.9	AV
17510.400	-32.5	42.9	37.6	48.0	Horizontal	54	6.0	AV

Emission level (dB μ V)=Read Value(dB μ V/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz


Horizontal

ESR26 Field strength 30M-1GHz

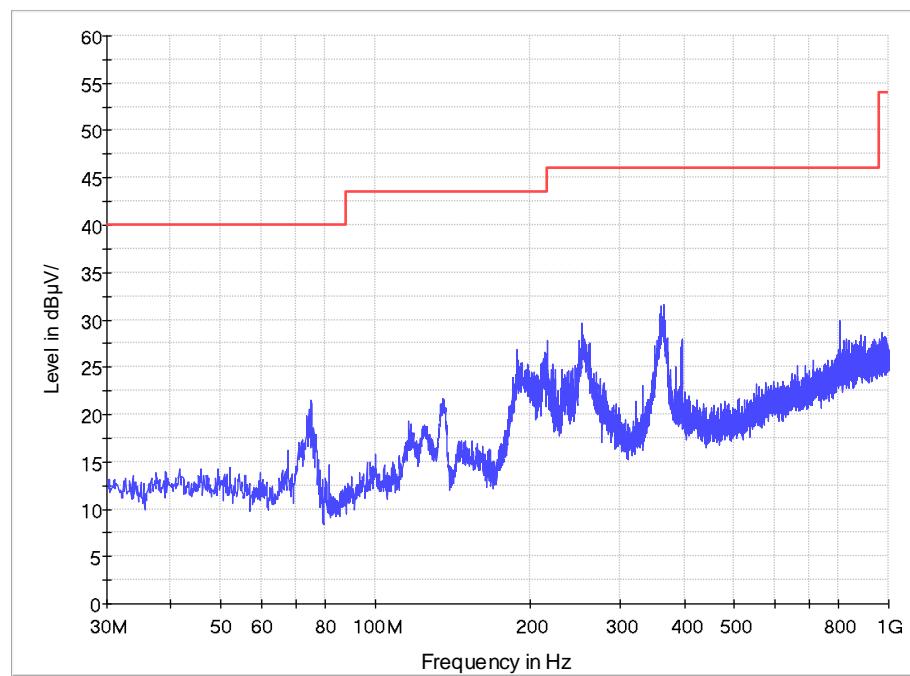

Vertical


ESR26 Field strength 30M-1GHz

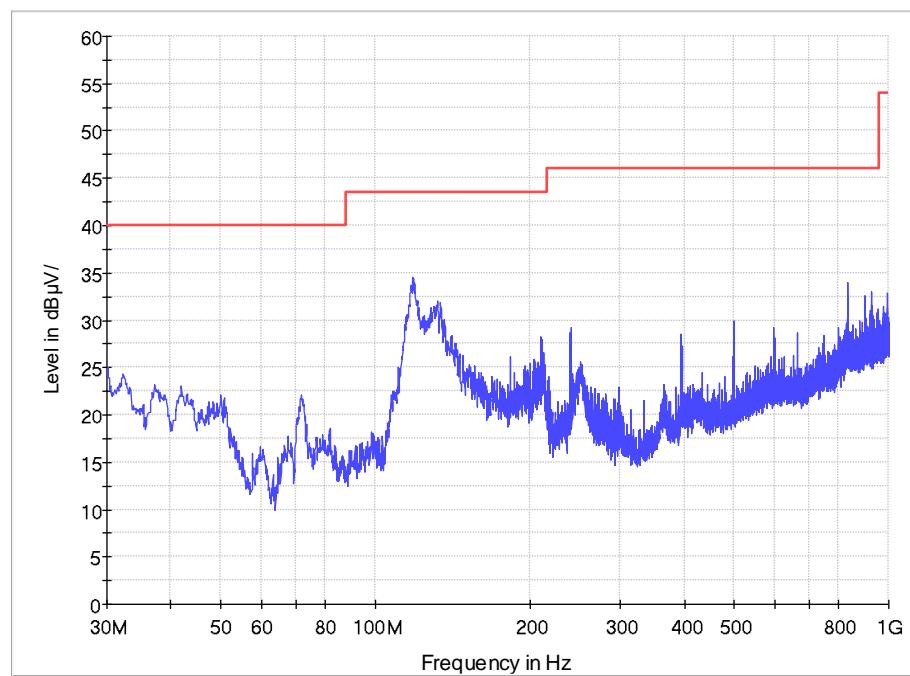

1GHz-18GHz


Horizontal

ESR26 Field strength 1-18GHz

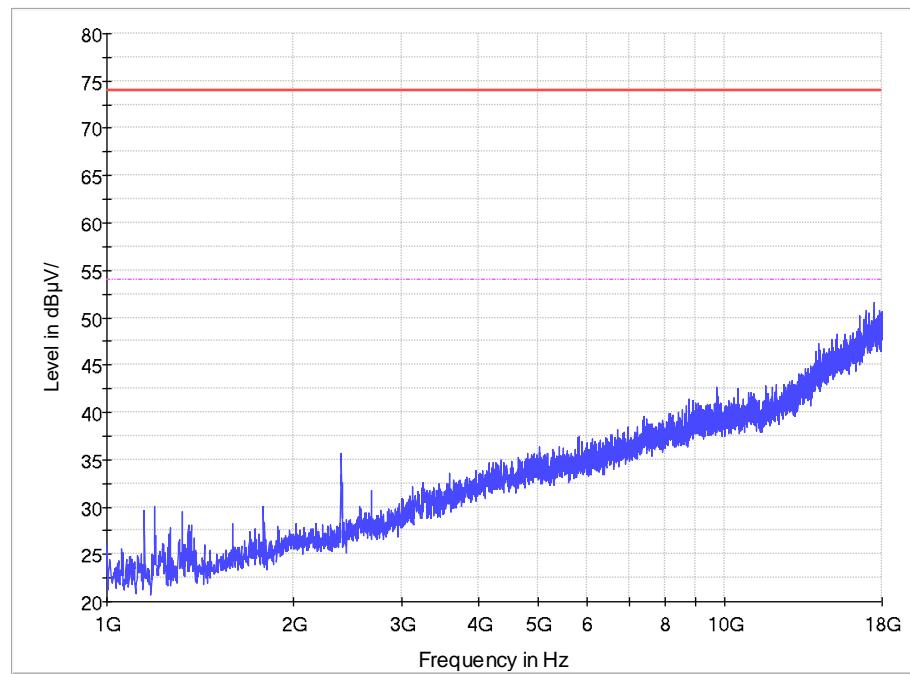

Vertical

ESR26 Field strength 1-18GHz

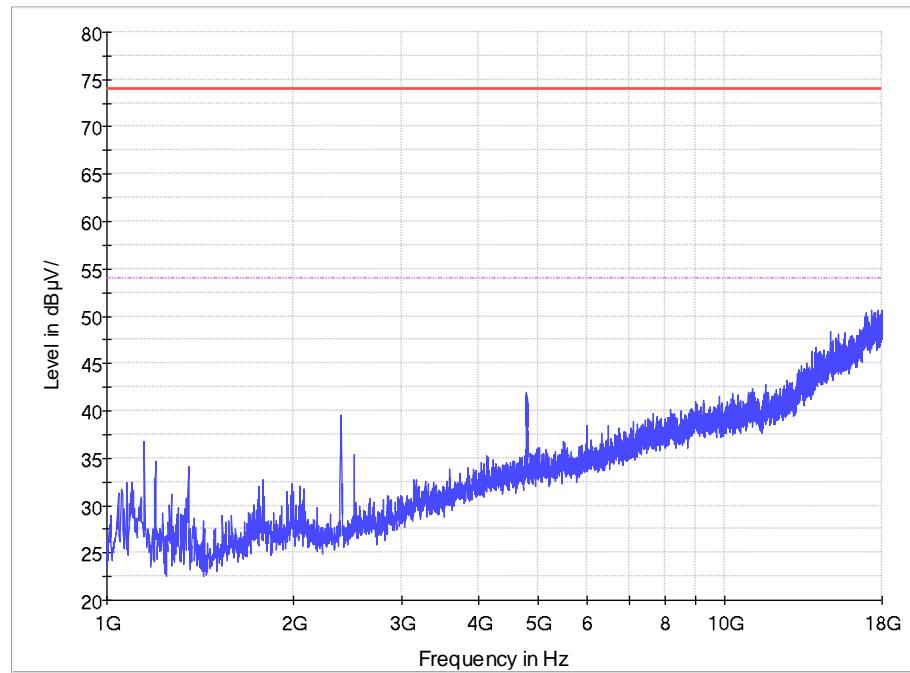

-----End of Report-----