



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial
Zone, Gushu 2nd Road, Bao'an District, Shenzhen
518126, P.R. China

TEST REPORT

FCC ID: 2AACD-POWERLINEECCO

Applicant : Advanced Panmobil Systems GmbH & Co. KG

Address : Hansestrasse 91 D- 51149 Koeln Germany

Equipment Under Test (EUT):

Name : Bar Code Reader

Model : powerLine ECCO

In Accordance with: FCC PART 15.247

Report No : STI130426061

Date of Test : May 19-28, 2013

Date of Issue : May 29, 2013

Test Result: **PASS**

In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

A handwritten signature in dark ink, appearing to read 'Mark Zhu', is written over a horizontal line.

(Mark Zhu)

General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

Contents

1. General Information.....	4
1.1. Description of Device (EUT).....	4
1.2. Accessories of device (EUT)	4
1.3. Test Lab information	4
2. Summary of test	5
2.1. Summary of test result	5
2.2. Assistant equipment used for test.....	5
2.3. Block Diagram	5
2.4. Test mode	6
2.5. Test Conditions.....	6
2.6. Measurement Uncertainty (95% confidence levels, k=2)	6
2.7. Test Equipment.....	7
3. Maximum Peak Output power	8
3.1. Limit.....	8
3.2. Test Procedure	8
3.3. Test Setup	8
3.4. Test Result.....	8
4. 20dB bandwidth	9
4.1. Limit.....	9
4.2. Test Procedure	9
4.3. Test Result.....	9
5. Carrier Frequency Separation.....	13
5.1. Limit.....	13
5.2. Test Procedure	13
5.3. Test Result.....	13
6. Number Of Hopping Channel.....	15
6.1. Limit.....	15
6.2. Test Procedure	15
6.3. Test Result.....	15
7. Dwell Time.....	18
7.1. Test limit	18
7.2. Test Procedure.....	18
7.3. Test Results	18
8. Radiated emissions.....	18
8.1. Limit.....	29
8.2. Block Diagram of Test setup.....	30
8.3. Test Procedure	30
8.4. Test Result.....	31
9. Band Edge Compliance	40
9.1. Block Diagram of Test Setup	40
9.2. Limit.....	40
9.3. Test Procedure	40

9.4. Test Result.....	40
10. Power Line Conducted Emissions	57
10.1. Block Diagram of Test Setup	57
10.2. Limit.....	57
10.3. Test Procedure	57
10.4. Test Result.....	57
11. Antenna Requirements.....	60
11.1. Limit.....	60
11.2. Result.....	60
12. Test setup photo	61
13. Photos of EUT	63

1. General Information

1.1. Description of Device (EUT)

EUT : Bar Code Reader

Model No. : powerLine ECCO

Trade mark : PANMOBIL

Power supply : DC 3.7V From battery
DC 5V From PC With AC 120V/60Hz

Radio : Bluetooth 2.1
Technology

FCC Operation : 2402MHz -2480MHz
frequency

Modulation : GFSK, $\pi/4$ DQPSK, 8-DPSK

Antenna Type : chip antenna, Gain: 1dBi

Applicant : Advanced Panmobil Systems GmbH & Co. KG
Address : Hansestrasse 91 D- 51149 Koeln Germany

Manufacturer : Advanced Panmobil Systems GmbH & Co. KG
Address : Hansestrasse 91 D- 51149 Koeln Germany

Accessories of device (EUT)

Accessories 1 : N/A

Type : N/A

1.2. Test Lab information

Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
FCC Registered No.:197647

2. Summary of test

2.1. Summary of test result


Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.4 :2003	PASS
20dB Bandwidth	FCC Part 15: 15.215 ANSI C63.4 :2003	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.4 :2003	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.4 :2003	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.4 :2003	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4 :2003	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.4 :2003	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4 :2003	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: the test with DA00-705 test procedure.		

2.2. Assistant equipment used for test


Description : Test PC 1
 Manufacturer : Dell
 Model No. : D430

2.3. Block Diagram

1, For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by Bluesuite software before test.



2, For Power Line Conducted Emissions Test: EUT was connected to power adapter by 1m USB line

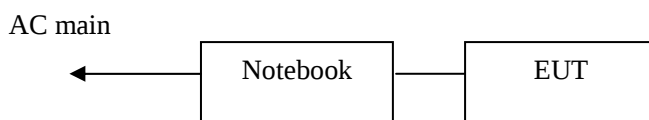

2.4. Test mode

The test software “Bluesuite” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
BDR:GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
EDR: $\pi/4$ QPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
EDR:8-DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Note: For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with 8-DPSK and GFSK.

2.5. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.65dB	

Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

2.7. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	Nov. 16, 12	1 Year
Spectrum analyzer	Agilent	E4407B	MY49510055	Oct. 31, 12	1 Year
Receiver	R&S	ESCI	101165	Oct. 31, 12	1 Year
Receiver	R&S	ESCI	101202	Oct. 31, 12	1 Year
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	Feb. 20, 13	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	Feb. 20, 13	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170 D(1432)	Feb. 20, 13	1 Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	Feb.20, 13	1 Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126466	Oct. 31, 12	1 Year
Cable	Resenberger	N/A	No.1	Oct. 31, 12	1 Year
Cable	SCHWARZBECK	N/A	No.2	Oct. 31, 12	1 Year
Cable	SCHWARZBECK	N/A	No.3	Oct. 31, 12	1 Year
Power Meter	Anritsu	ML2487A	6K00001491	Oct. 31, 12	1 Year
Power sensor	Anritsu	ML2491A	32516	Oct. 31, 12	1 Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	Oct. 31, 12	1 Year
Pre-amplifier	Quietek	AP-180C	CHM-0602012	Oct. 31, 12	1 Year

3. Maximum Peak Output power

3.1. Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup

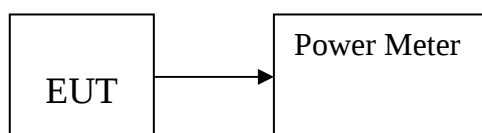

3.4. Test Result

EUT: Bar Code Reader		M/N: powerLine ECCO				
Test date: 2013-05-20		Test site: RF site		Tested by: Anna Fan		
Mode	Freq (MHz)	Reading Power (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
GFSK	2402	1.71	0.5	2.21	21	18.79
	2441	1.69	0.5	2.19	21	18.81
	2480	1.67	0.5	2.17	21	18.83
$\pi/4$ QPSK	2402	0.81	0.5	1.31	21	19.69
	2441	0.79	0.5	1.29	21	19.71
	2480	0.83	0.5	1.33	21	19.67
8-DPSK	2402	1.35	0.5	1.85	21	19.15
	2441	1.33	0.5	1.83	21	19.17
	2480	1.31	0.5	1.81	21	19.19
Conclusion: PASS						

4. 20dB bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.



4.2. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: Bar Code Reader		M/N: powerLine ECCO		
Test date: 2013-05-20		Test site: RF site	Tested by: Anna Fan	
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.9625	/	PASS
	2441	0.950	/	PASS
	2480	0.950	/	PASS
8-DPSK	2402	1.2375	/	PASS
	2441	1.2375	/	PASS
	2480	1.2375	/	PASS



Original Test data For 20dB bandwidth
GFSK

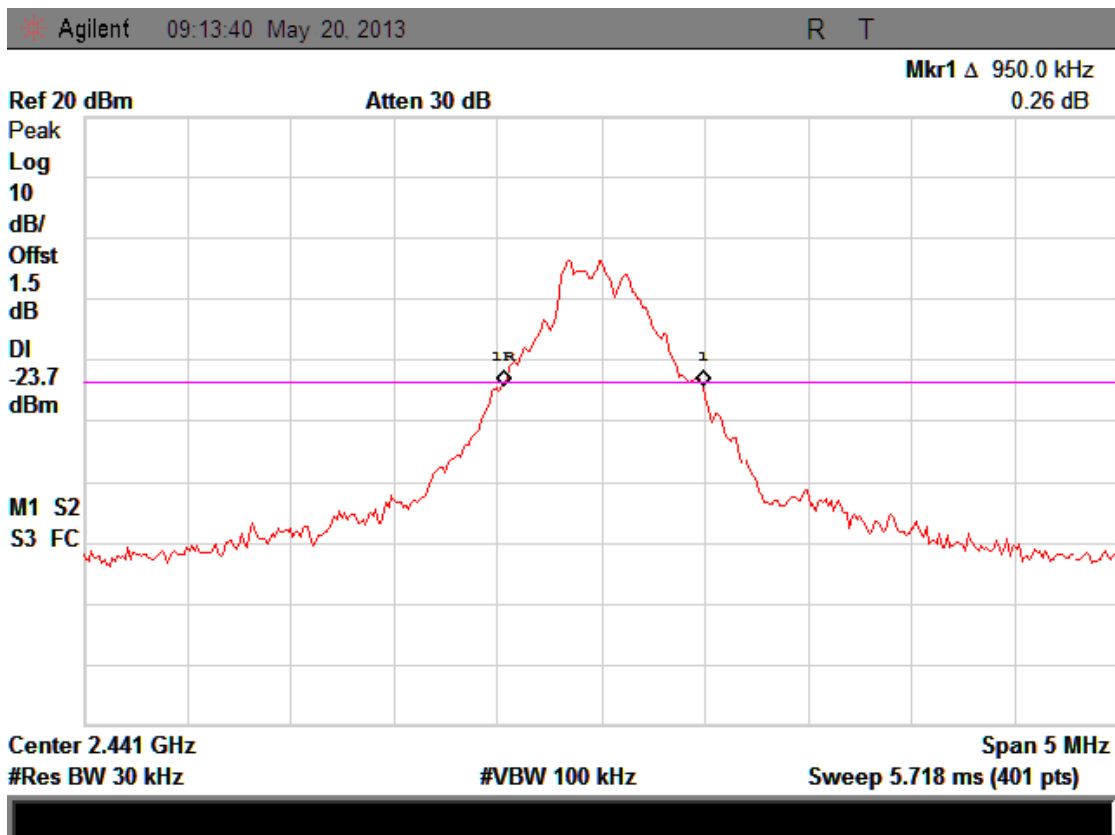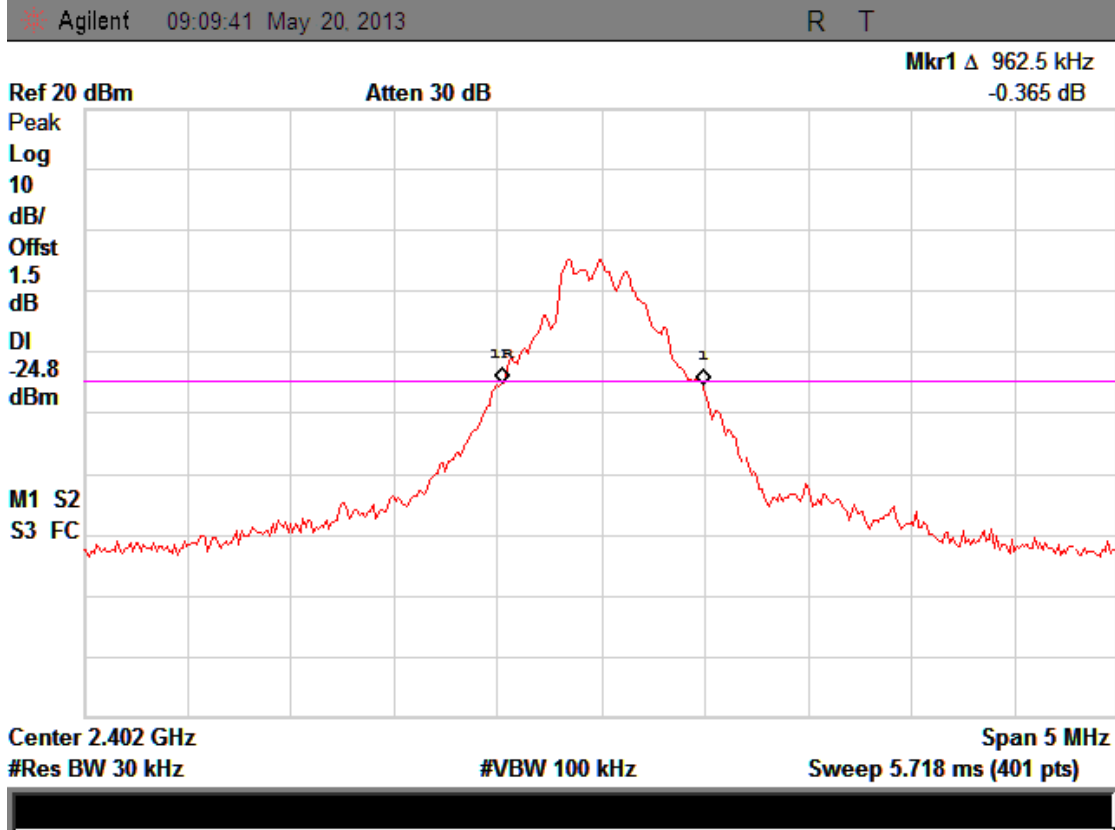

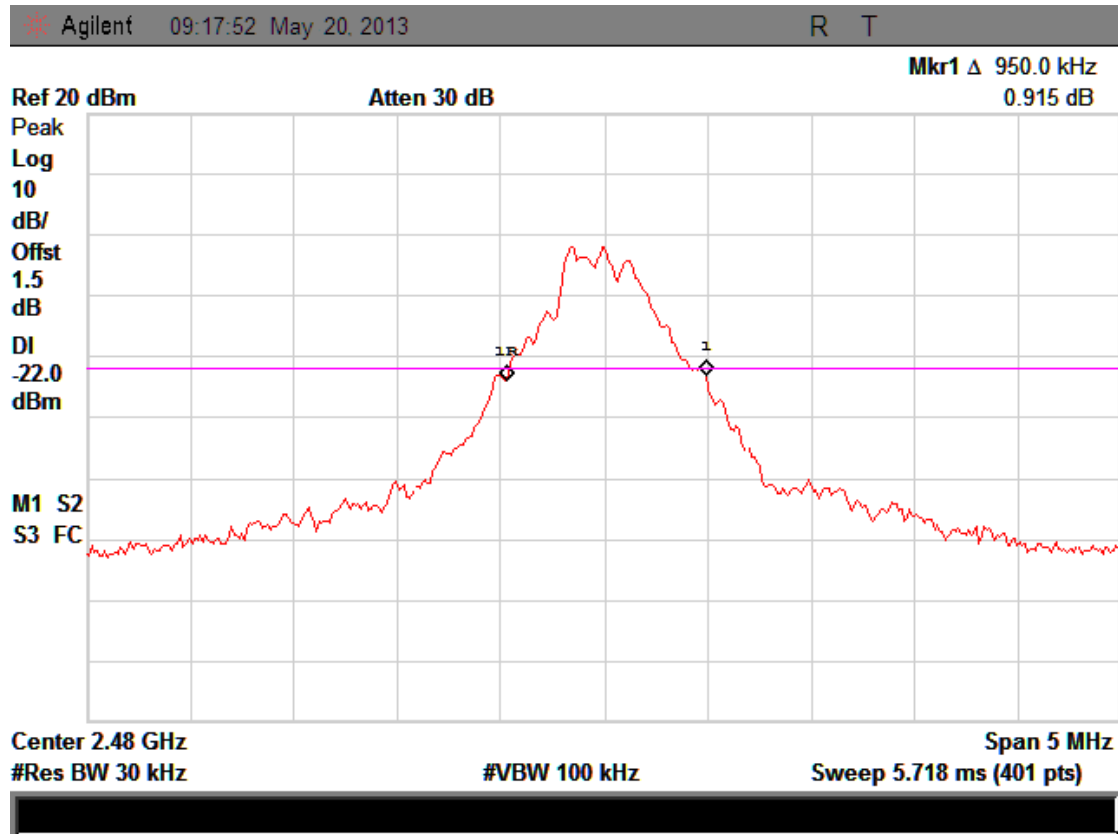

8-DPSK

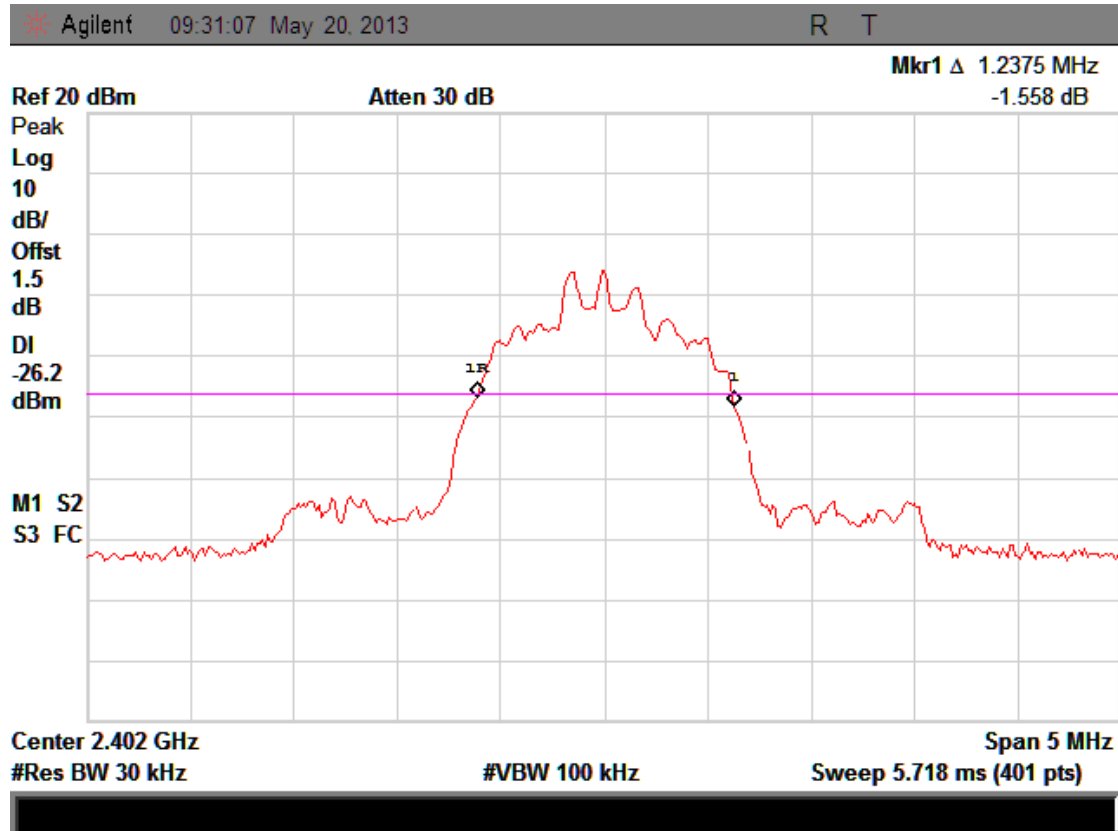

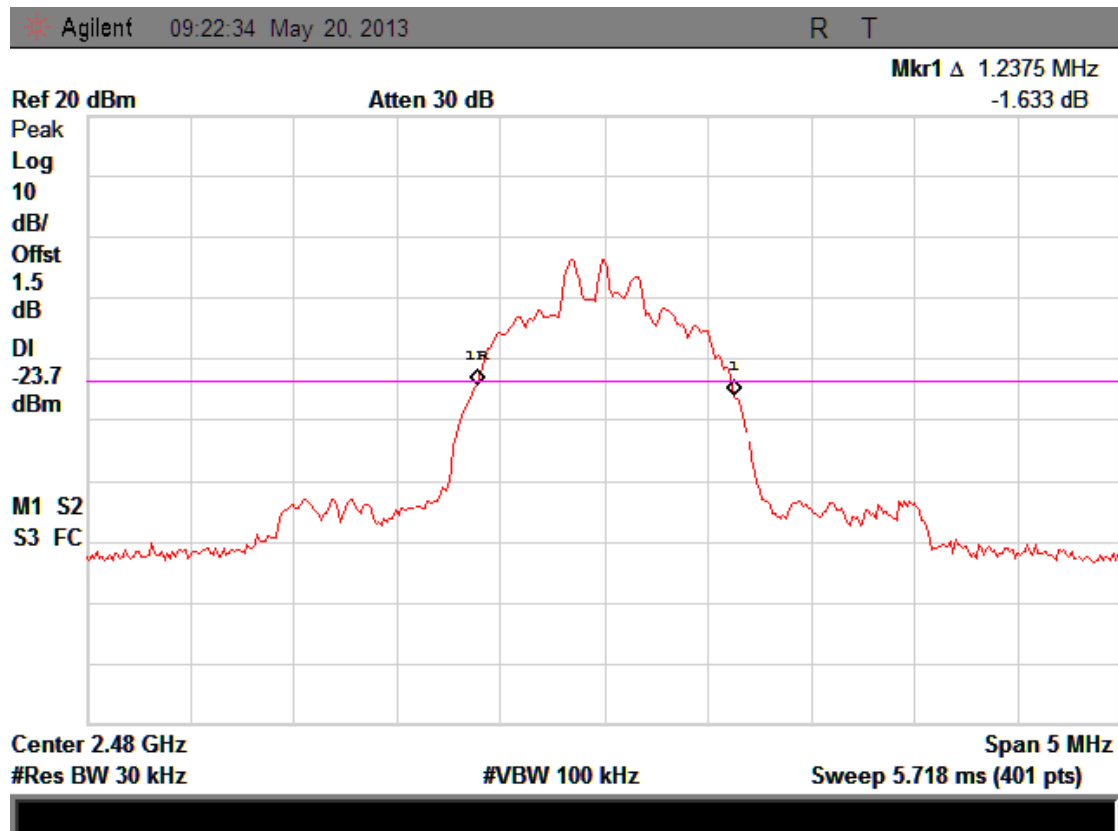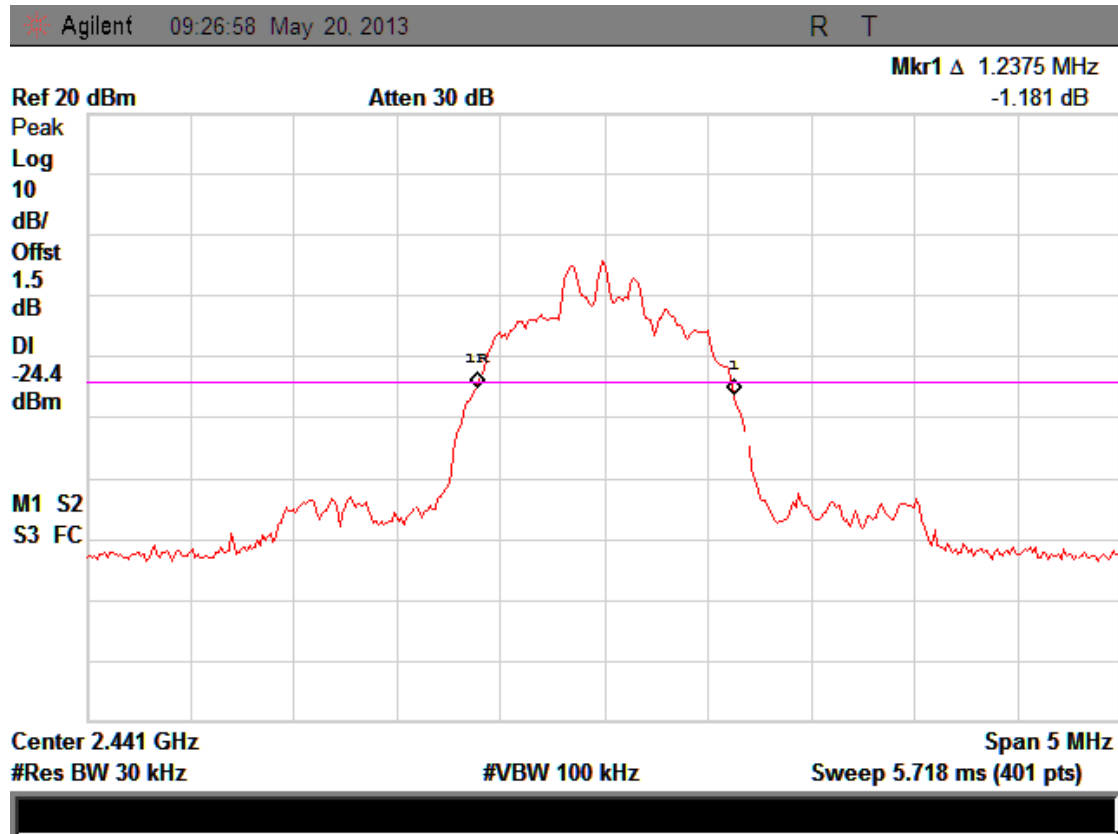

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result


EUT: Bar Code Reader		M/N: powerLine ECCO		
Test date: 2013-05-20		Test site: RF site	Tested by: Anna Fan	
Mode	Channel separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz) 2/3 20dB bandwidth	Conclusion
GFSK	1.0	0.9625	0.642	PASS
8-DPSK	1.0	1.2375	0.825	PASS

Original test data for channel separation

GFSK

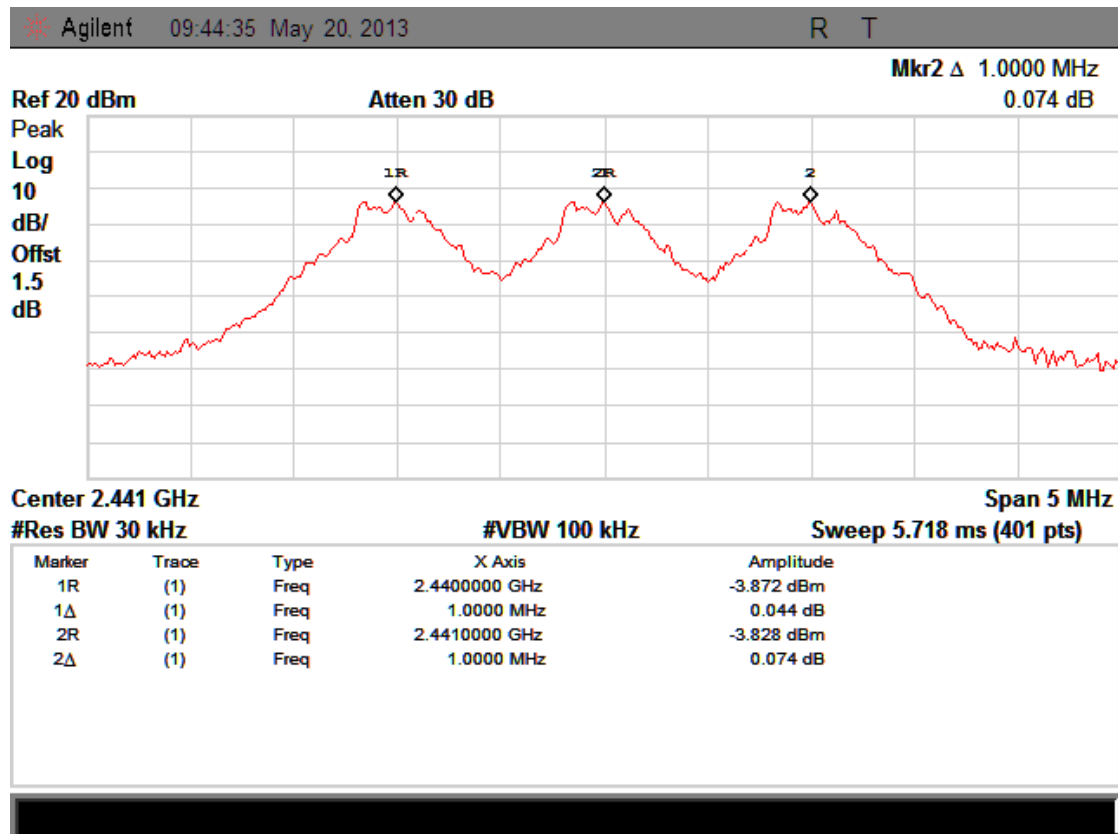

8-DPSK

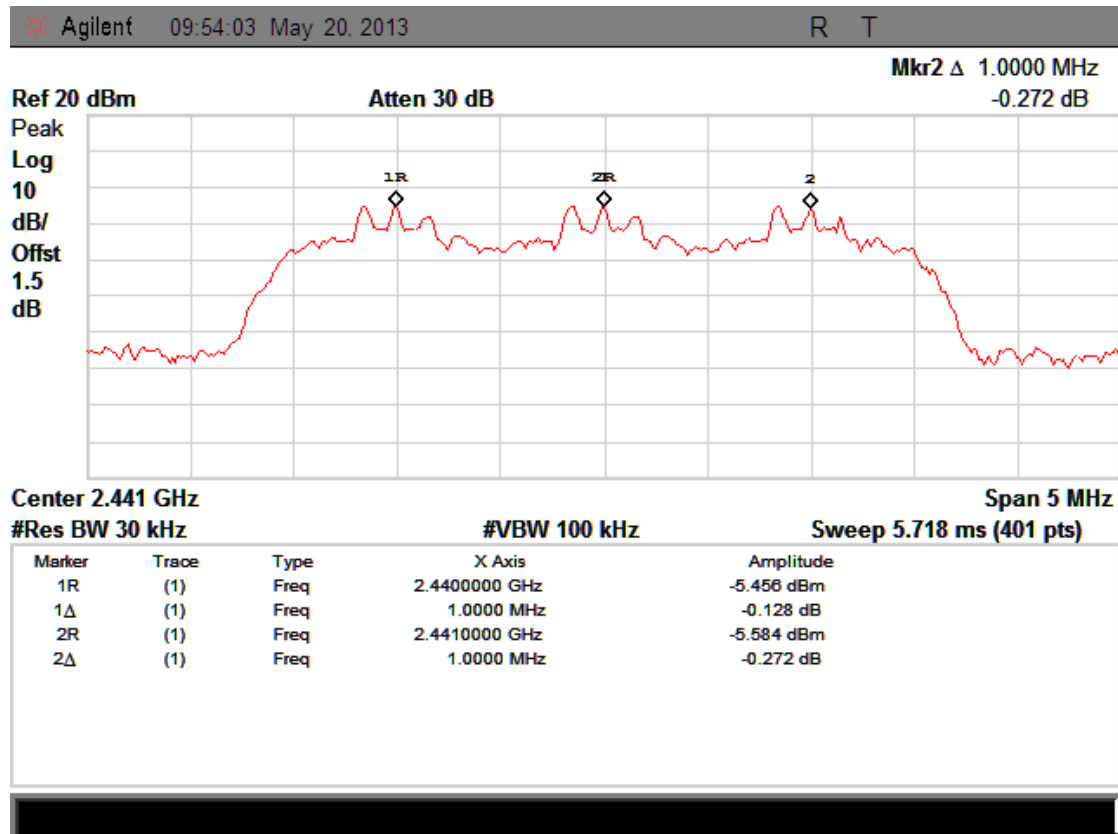

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels



6.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW.



6.3. Test Result

EUT: Bar Code Reader		M/N: powerLine ECCO	
Test date: 2013-05-20		Test site: RF site	Tested by: Anna Fan
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS

GFSK:

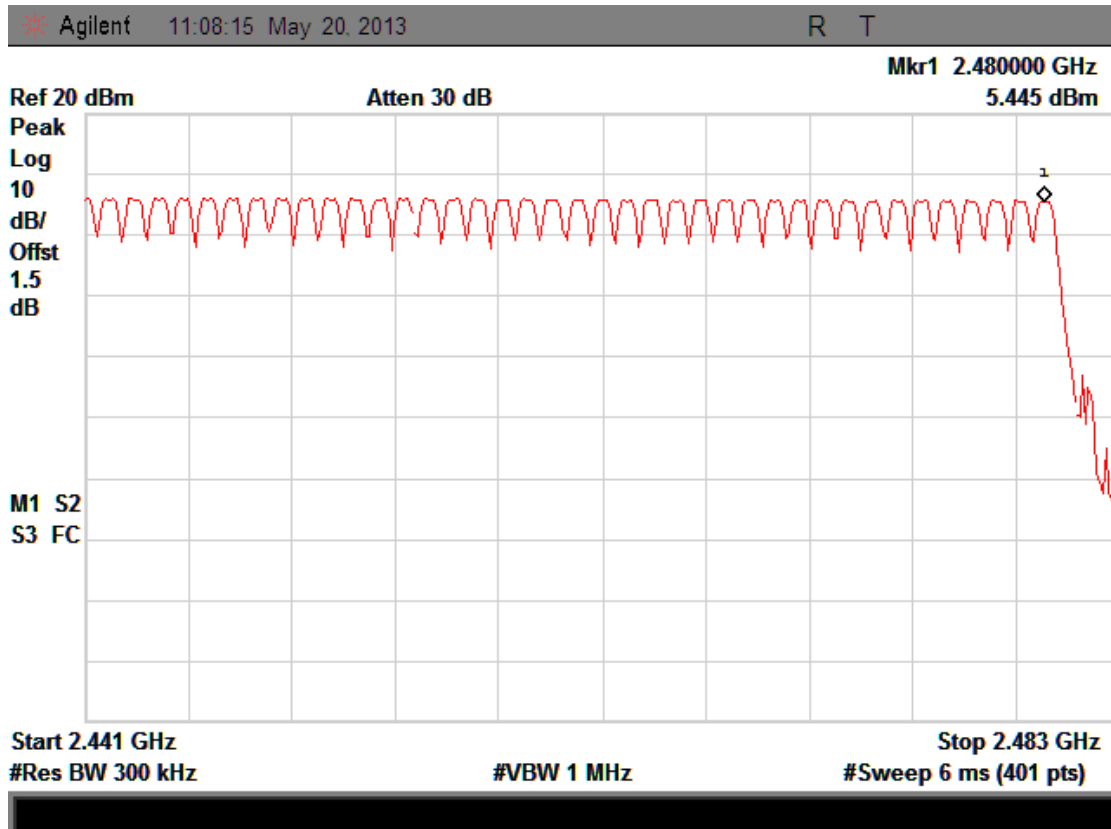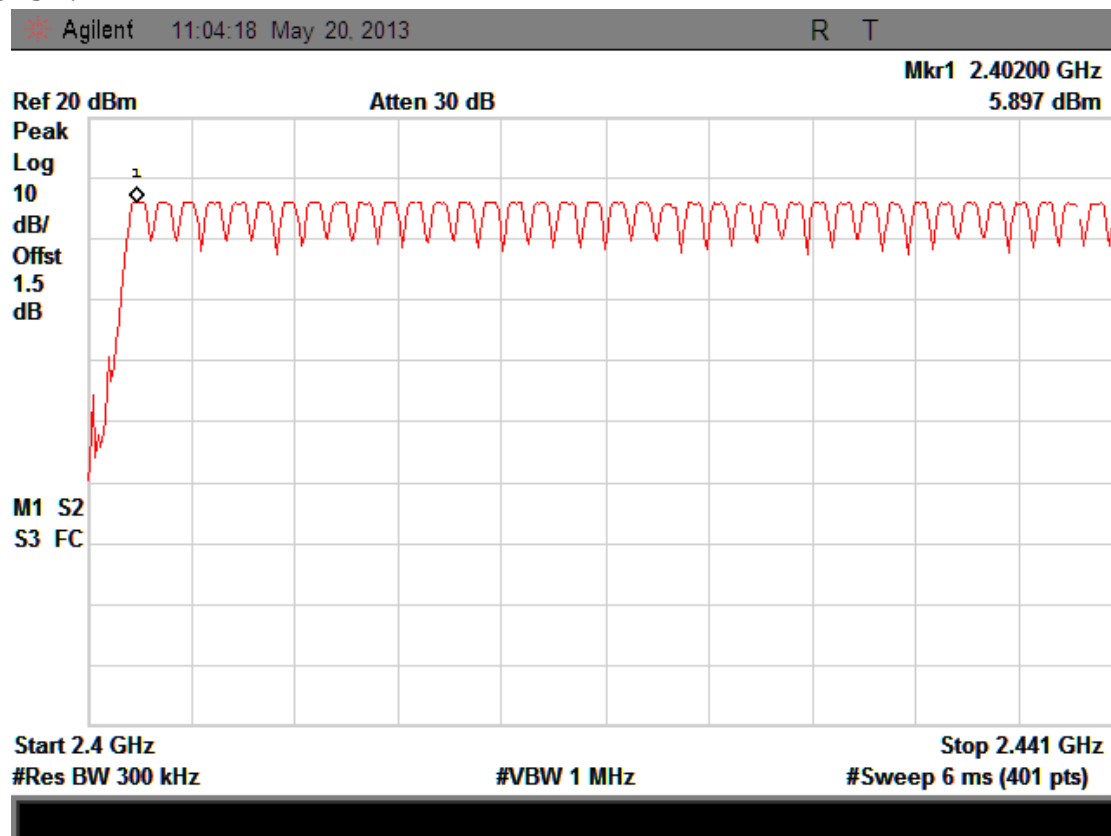

8-DPSK

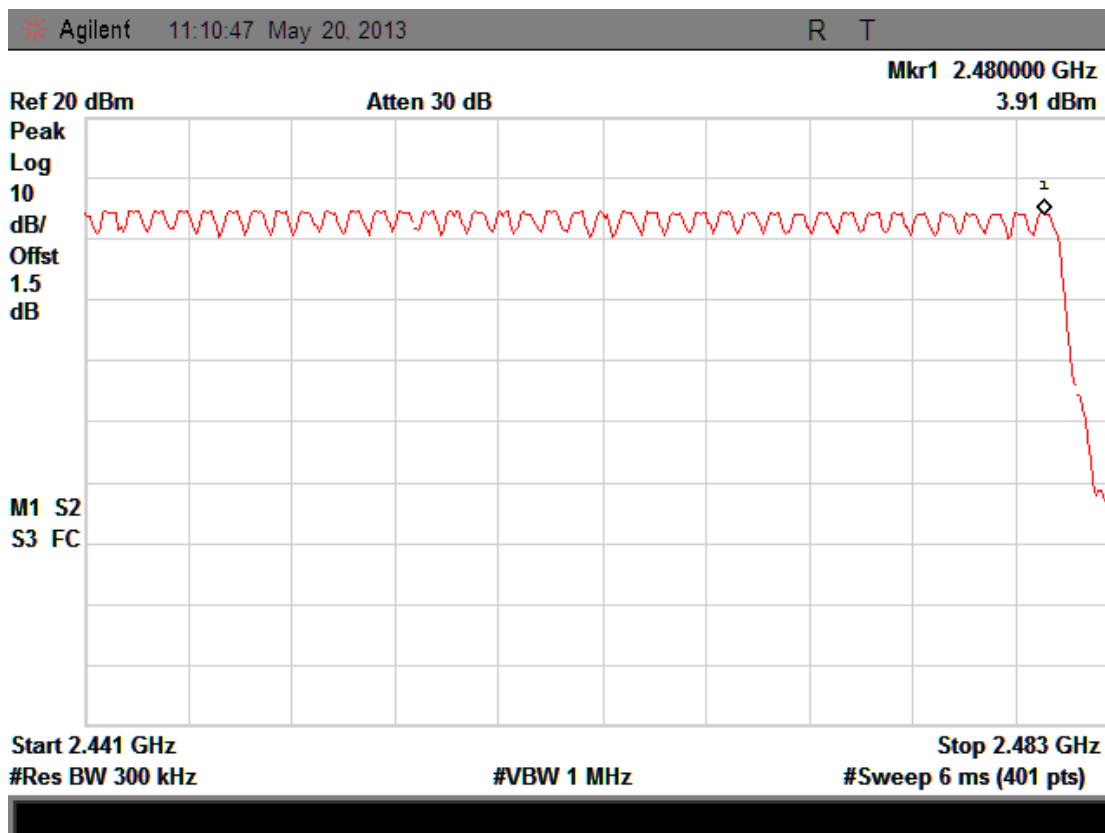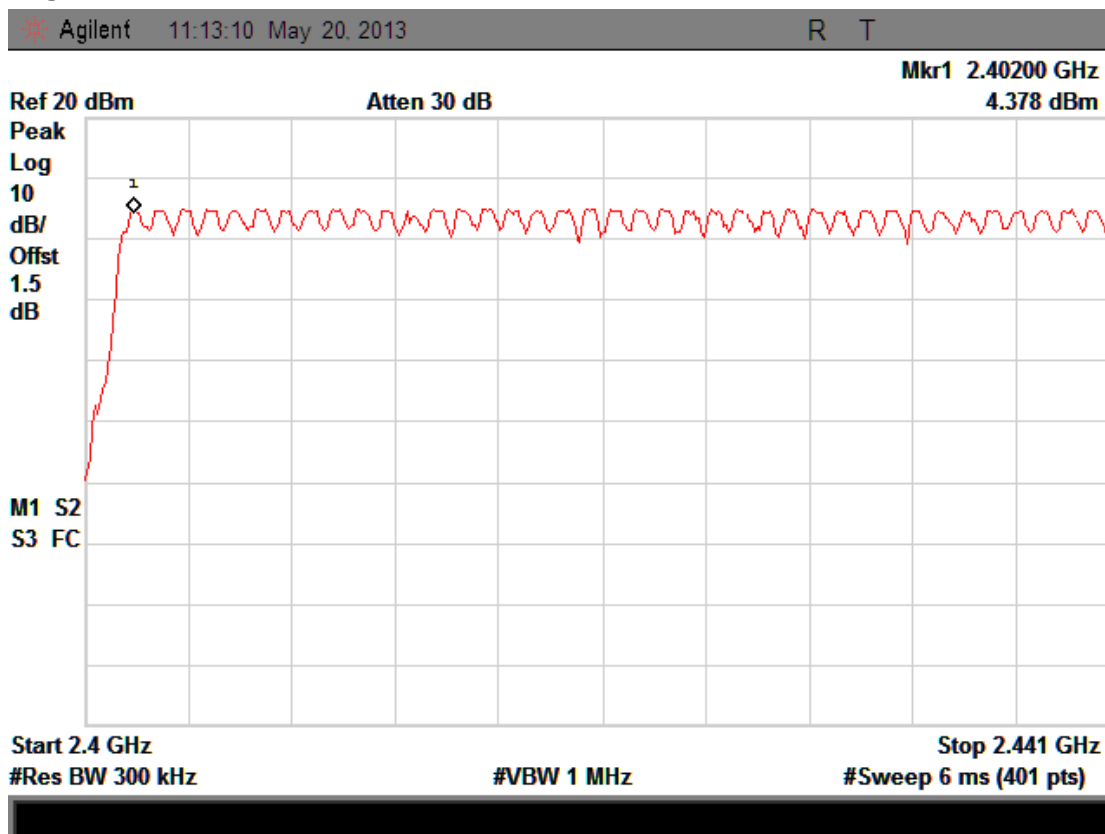

7. Dwell Time

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Results

PASS.

A period time = 0.4 (s) * 79 = 31.6(s)

CH Low: DH1 time slot = 0.390 (ms) * (1600/(1*79)) * 31.6 = 249.6 (ms)

DH3 time slot = 1.650 (ms) * (1600/(3*79)) * 31.6 = 352 (ms)

DH5 time slot = 2.895 (ms) * (1600/(5*79)) * 31.6 = 370.56 (ms)

3-DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

3-DH3 time slot = 1.654 (ms) * (1600/(3*79)) * 31.6 = 352.85 (ms)

3-DH5 time slot = 2.914 (ms) * (1600/(5*79)) * 31.6 = 372.99 (ms)

CH Mid: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.650 (ms) * (1600/(3*79)) * 31.6 = 352 (ms)

DH5 time slot = 2.895 (ms) * (1600/(5*79)) * 31.6 = 370.56 (ms)

3-DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

3-DH3 time slot = 1.650 (ms) * (1600/(3*79)) * 31.6 = 352 (ms)

3-DH5 time slot = 2.929 (ms) * (1600/(5*79)) * 31.6 = 374.91 (ms)

CH High: DH1 time slot = $0.390 \text{ (ms)} * (1600/(1*79)) * 31.6 = 249.6 \text{ (ms)}$

DH3 time slot = $1.650 \text{ (ms)} * (1600/(3*79)) * 31.6 = 352 \text{ (ms)}$

DH5 time slot = $2.895 \text{ (ms)} * (1600/(5*79)) * 31.6 = 370.56 \text{ (ms)}$


3-DH1 time slot = $0.405 \text{ (ms)} * (1600/(1*79)) * 31.6 = 259.2 \text{ (ms)}$

3-DH3 time slot = $1.665 \text{ (ms)} * (1600/(3*79)) * 31.6 = 355.2 \text{ (ms)}$


3-DH5 time slot = $2.895 \text{ (ms)} * (1600/(5*79)) * 31.6 = 370.56 \text{ (ms)}$

Detailed information please see the following page.


DH1: CH Low

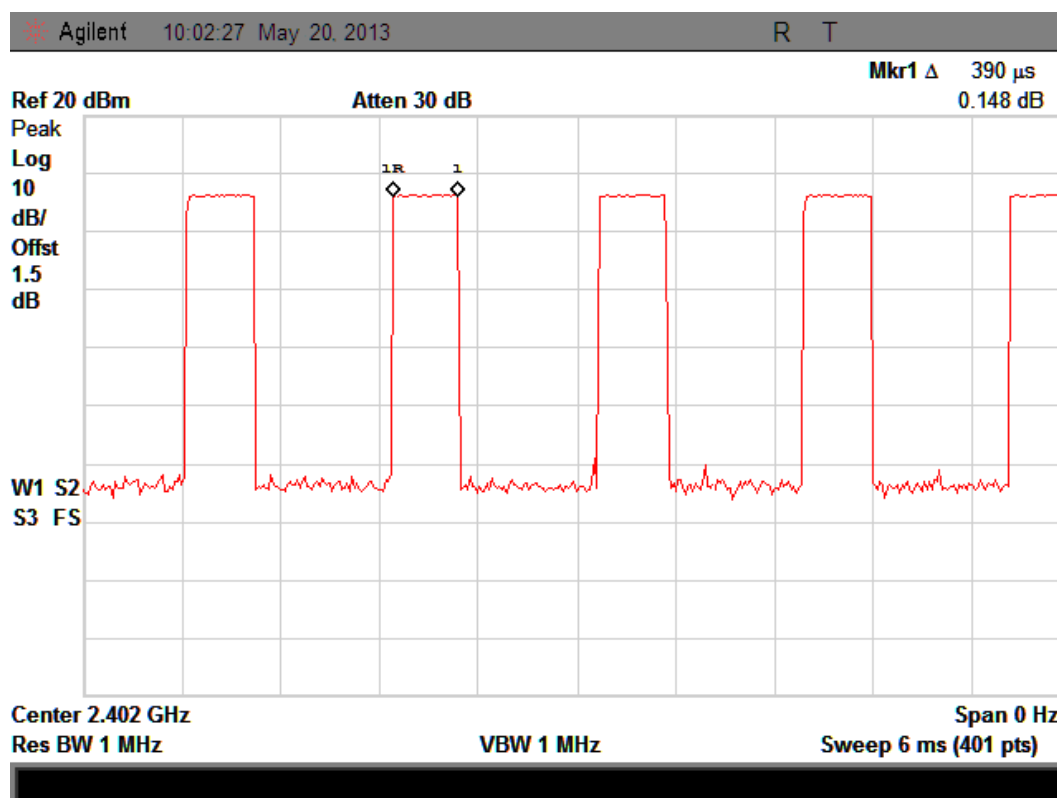


DH1: CH Mid

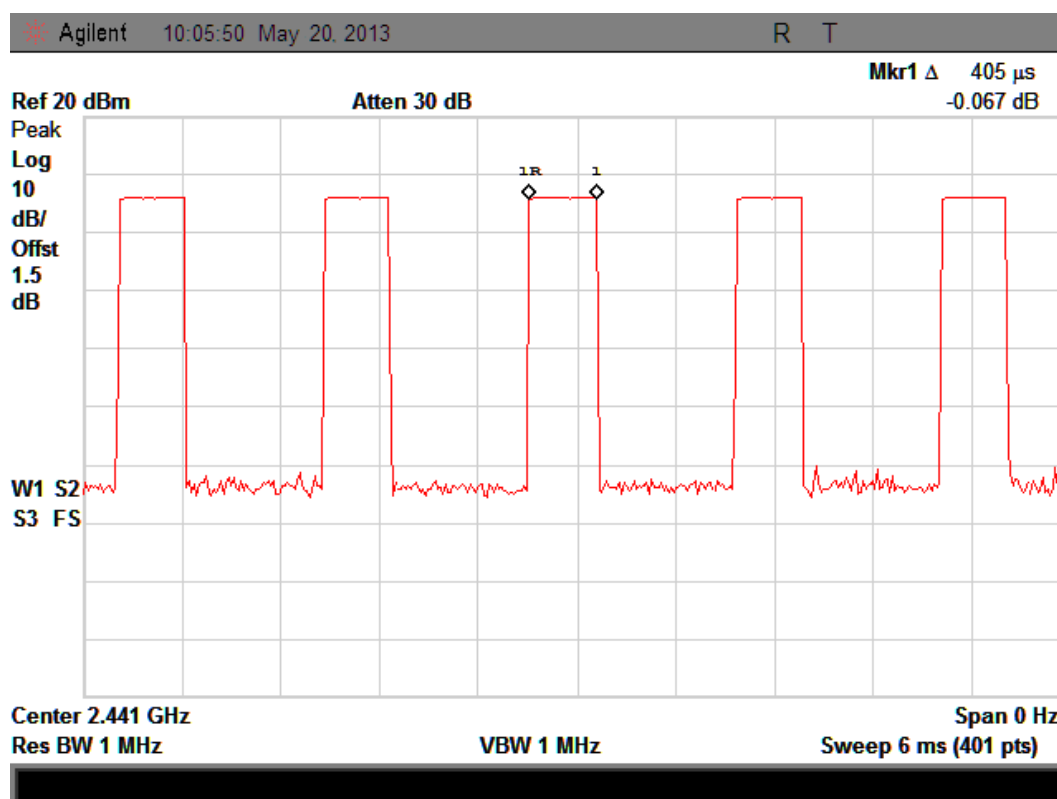


DH1: CH High

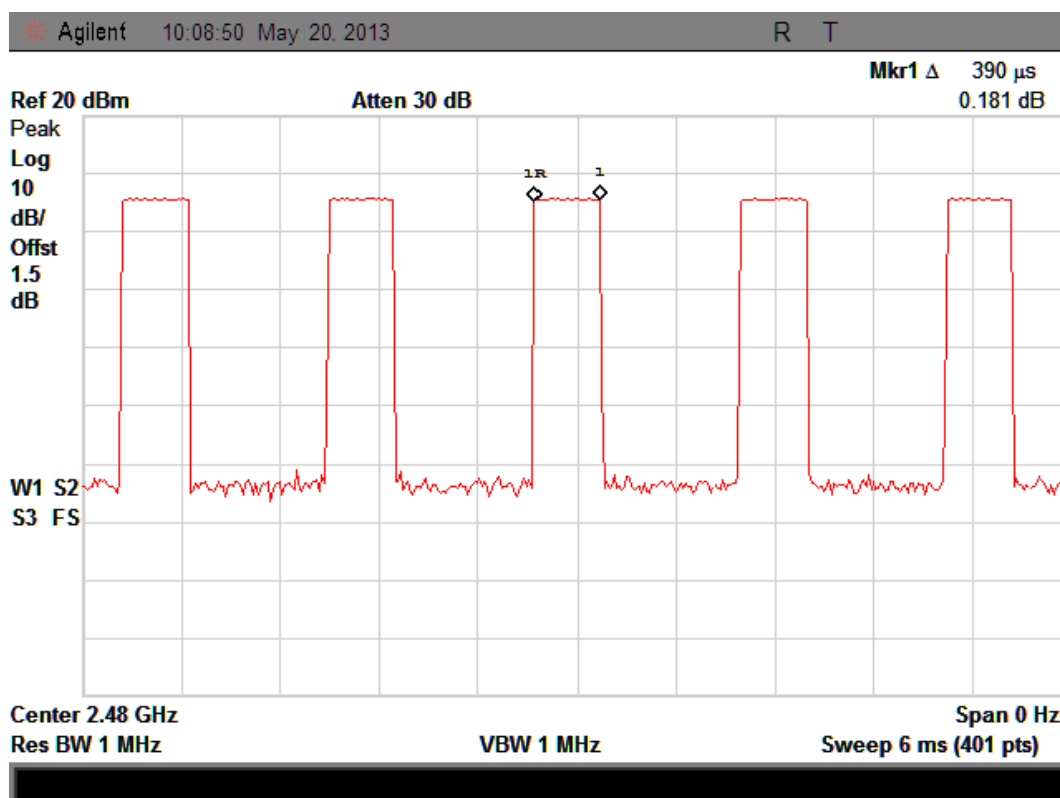


DH3: CH Low:

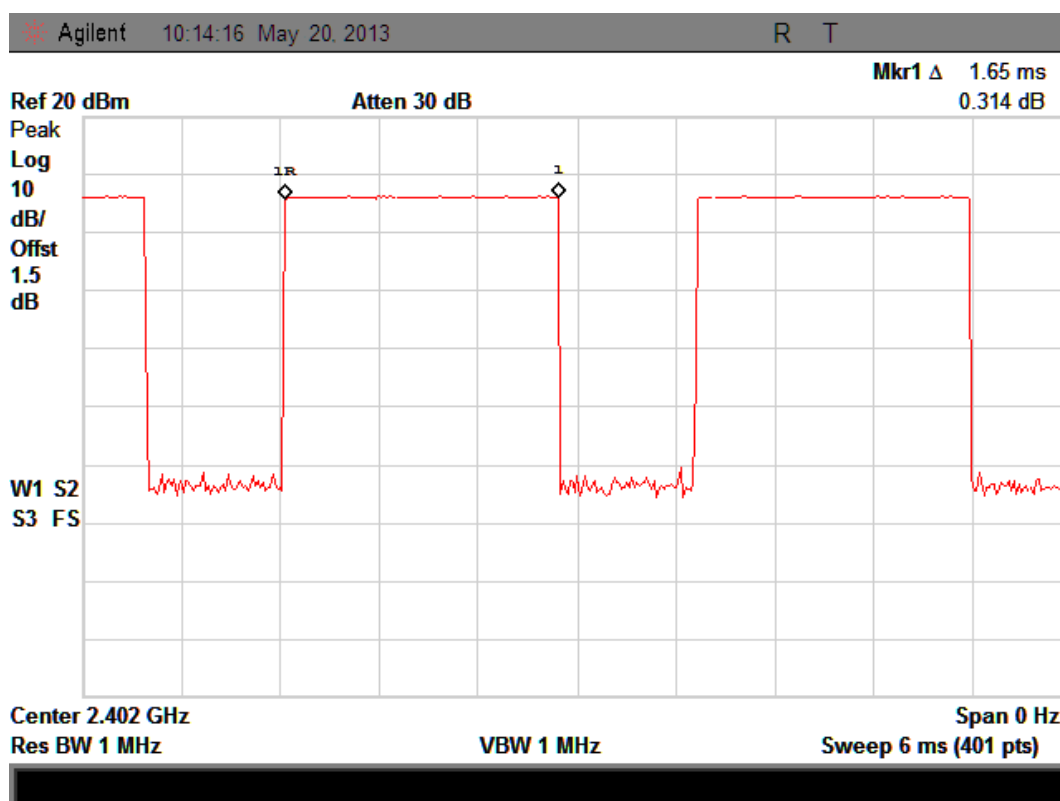


DH3: CH Mid

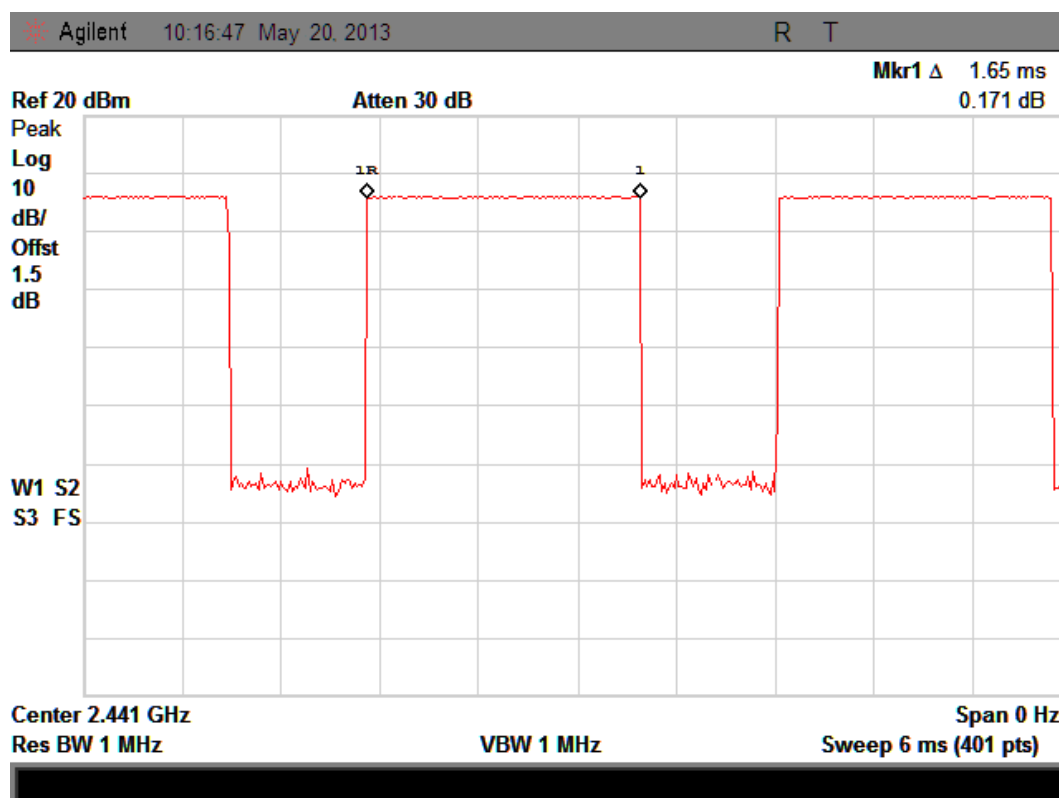


DH3 CH High

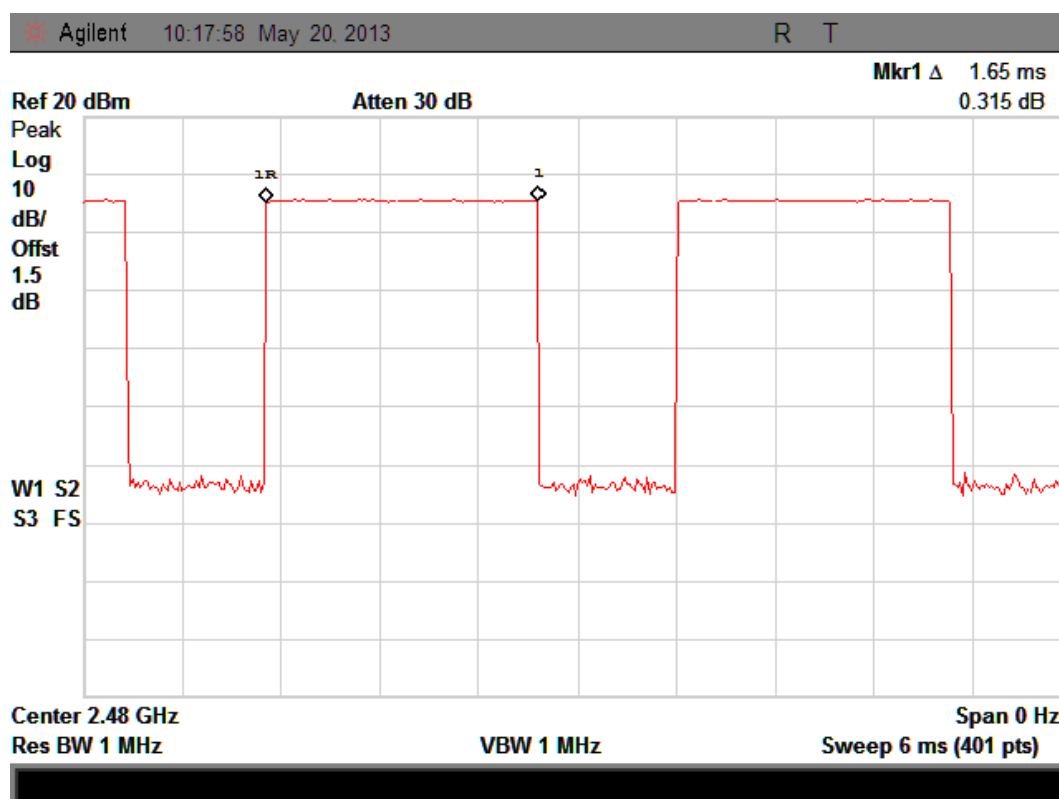


DH5 CH Low

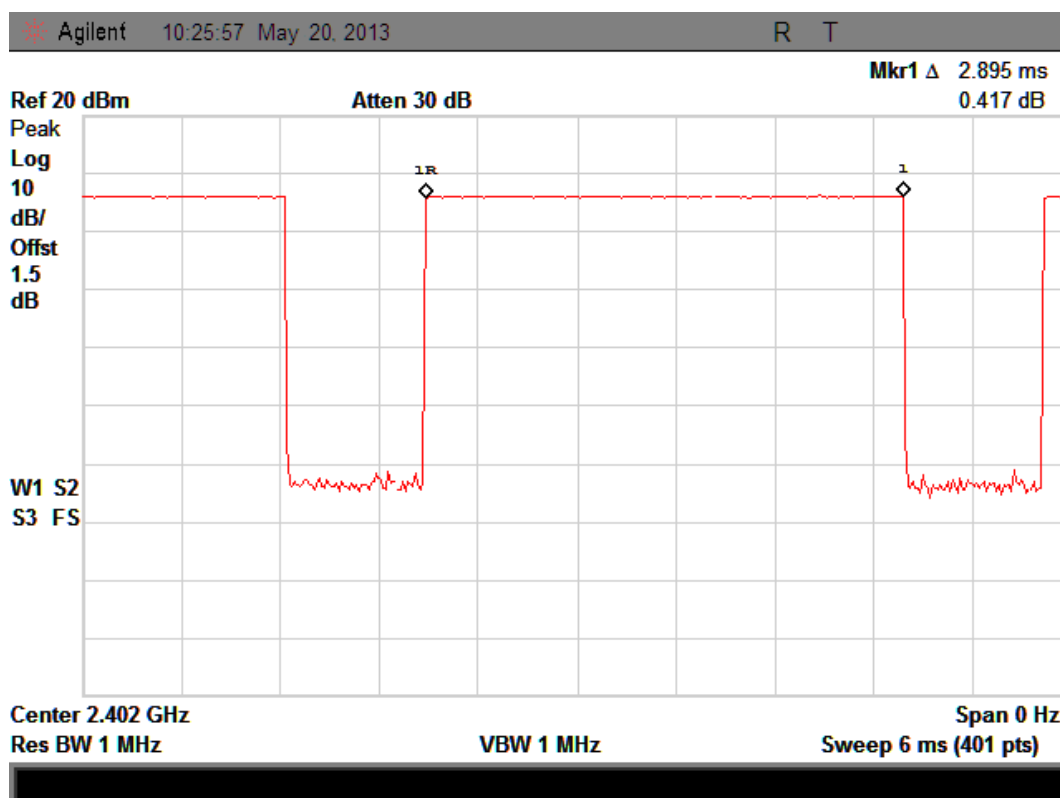


DH5 CH Mid

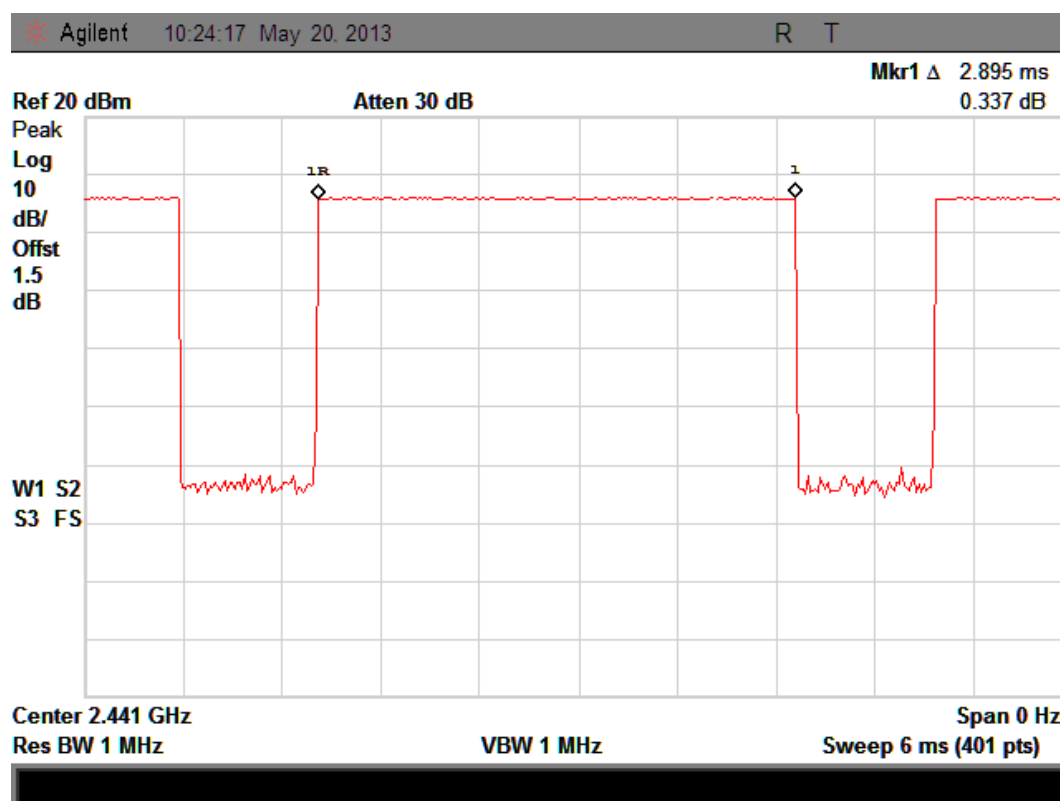


DH5 CH High

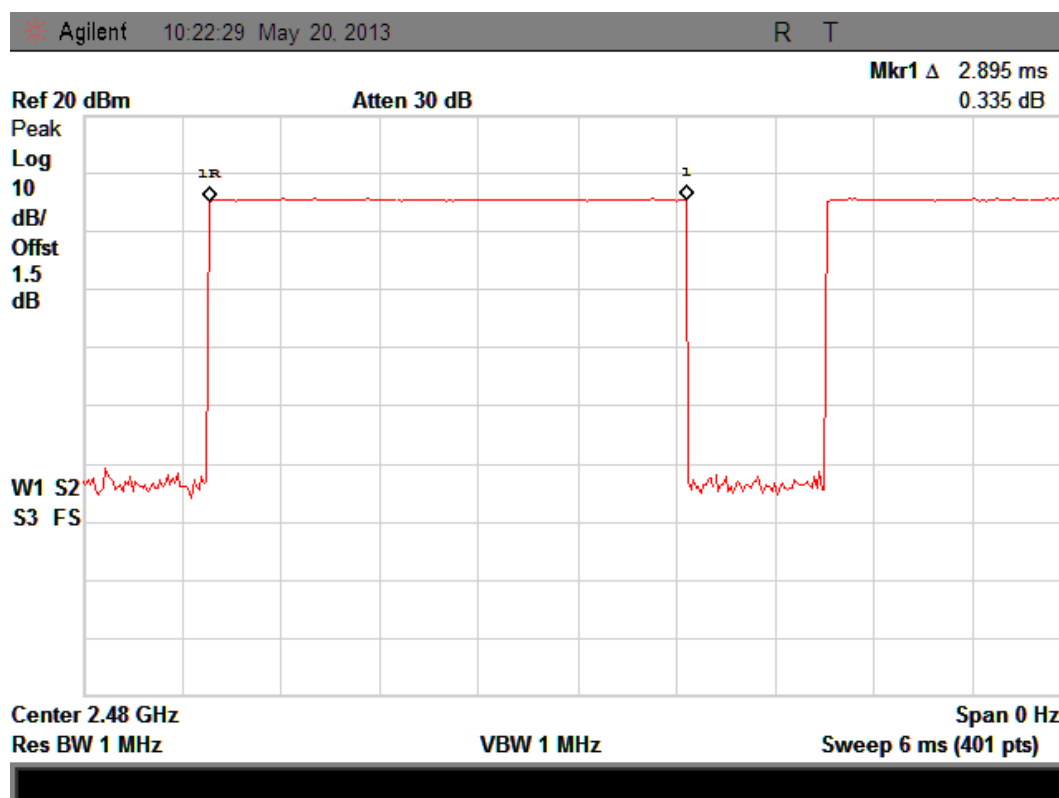


3-DH1: CH Low

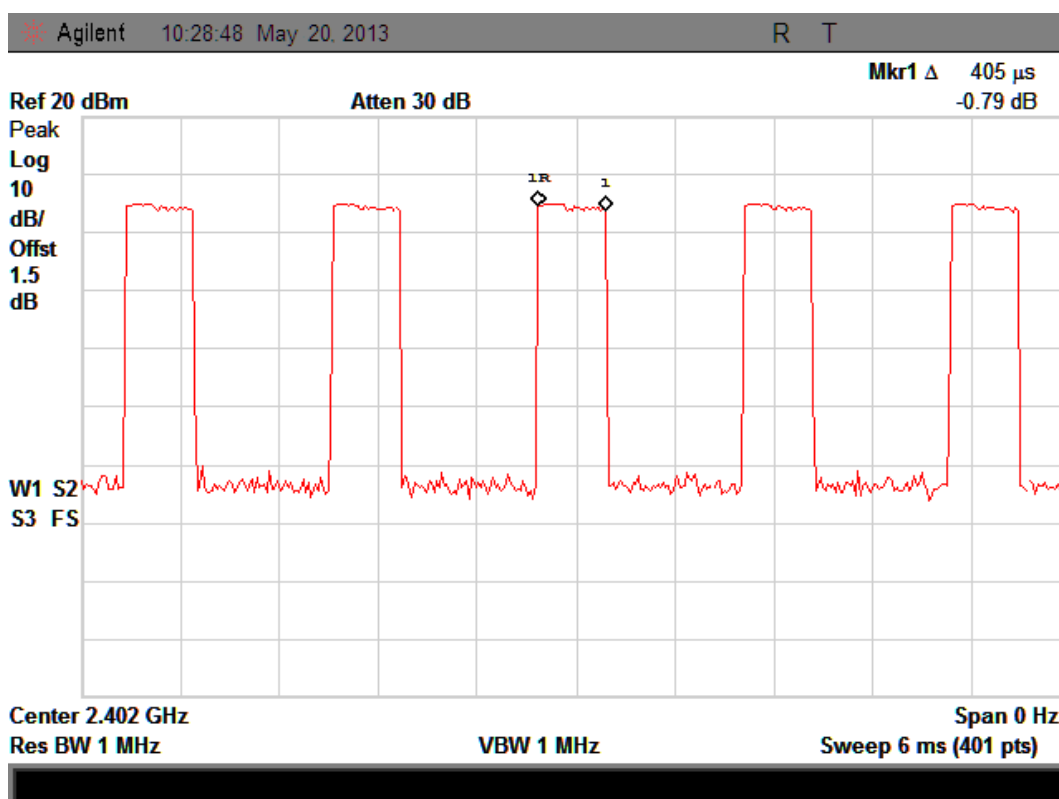


3-DH1: CH Mid

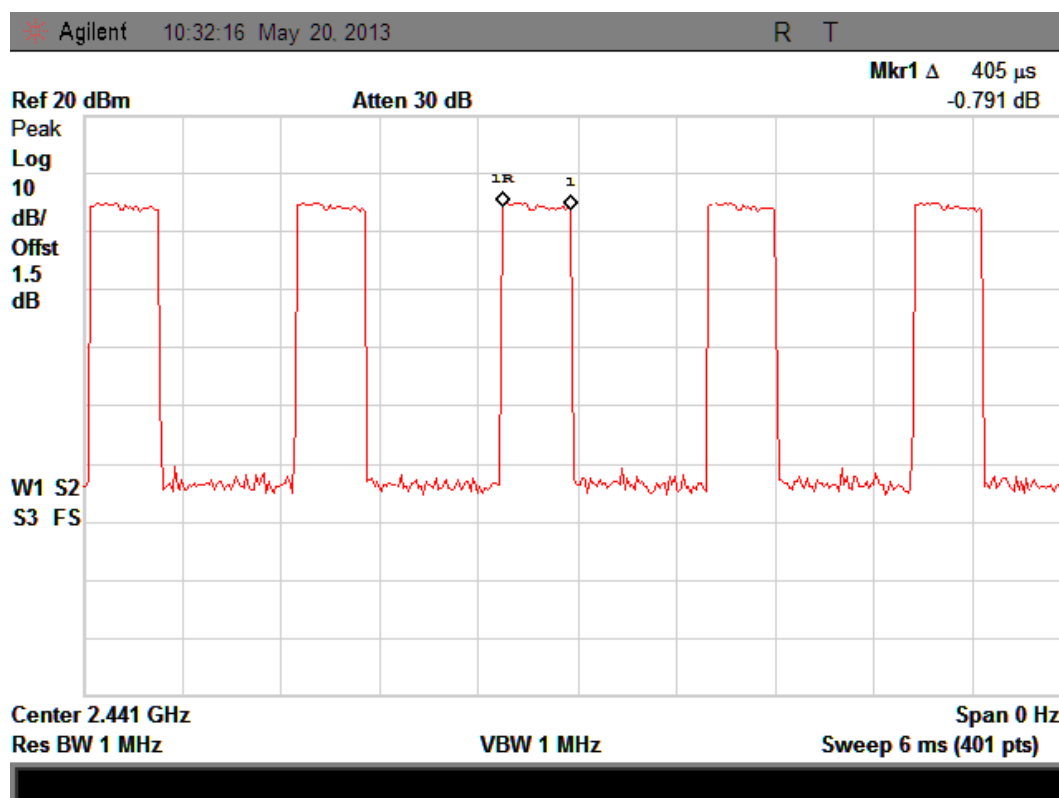


3-DH1: CH High

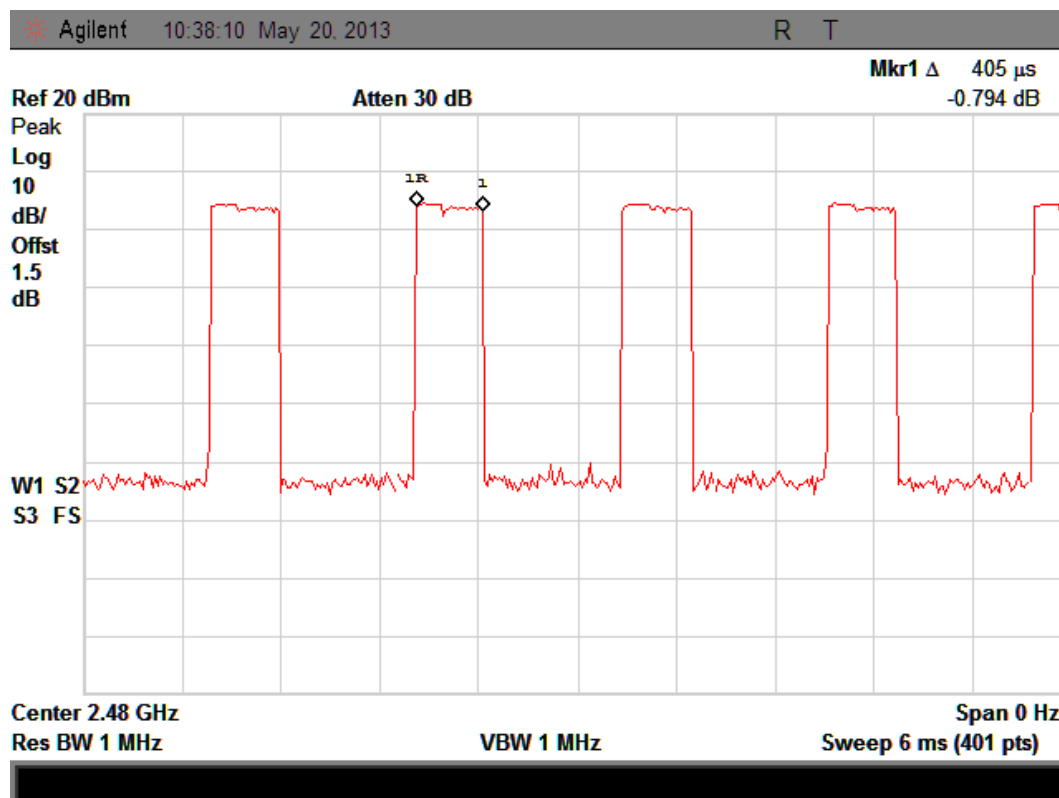


3-DH3: CH Low

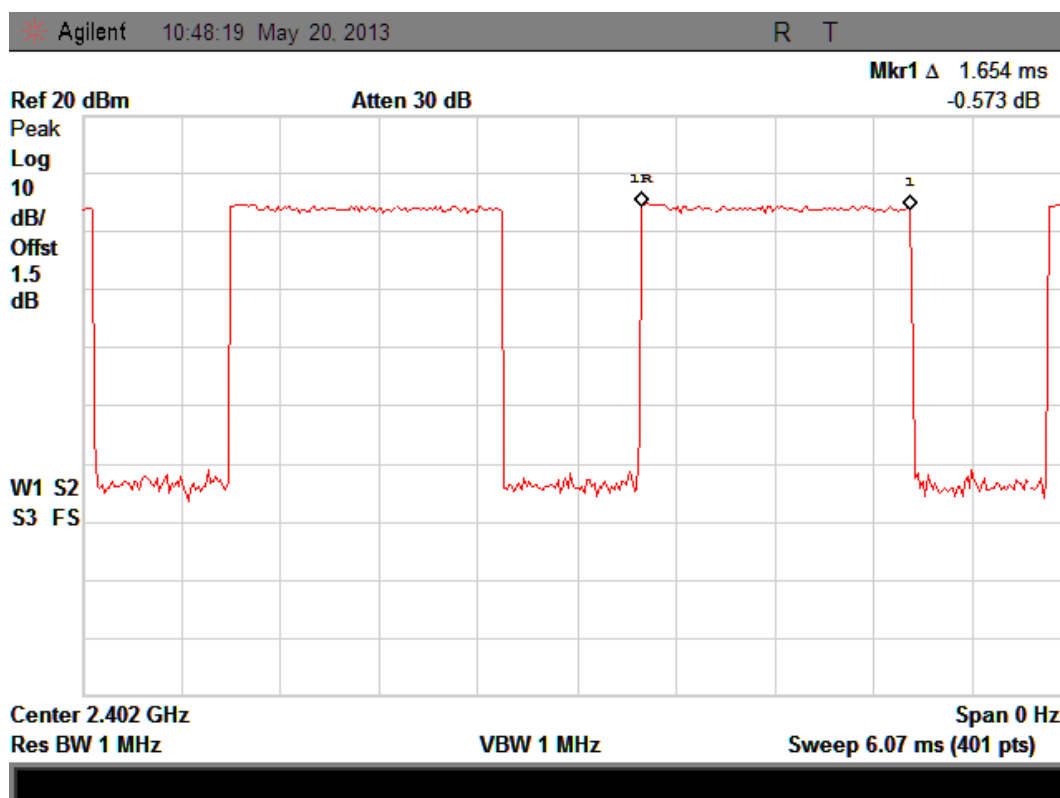


3-DH3: CH Mid

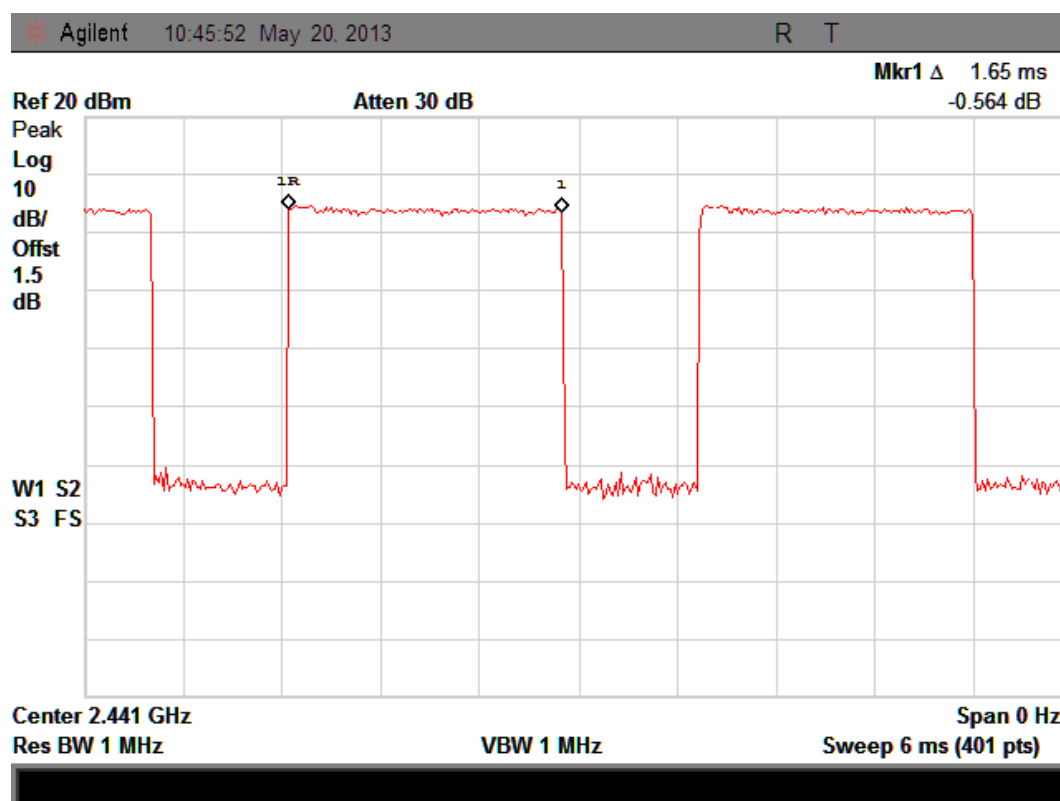


3-DH3: CH High

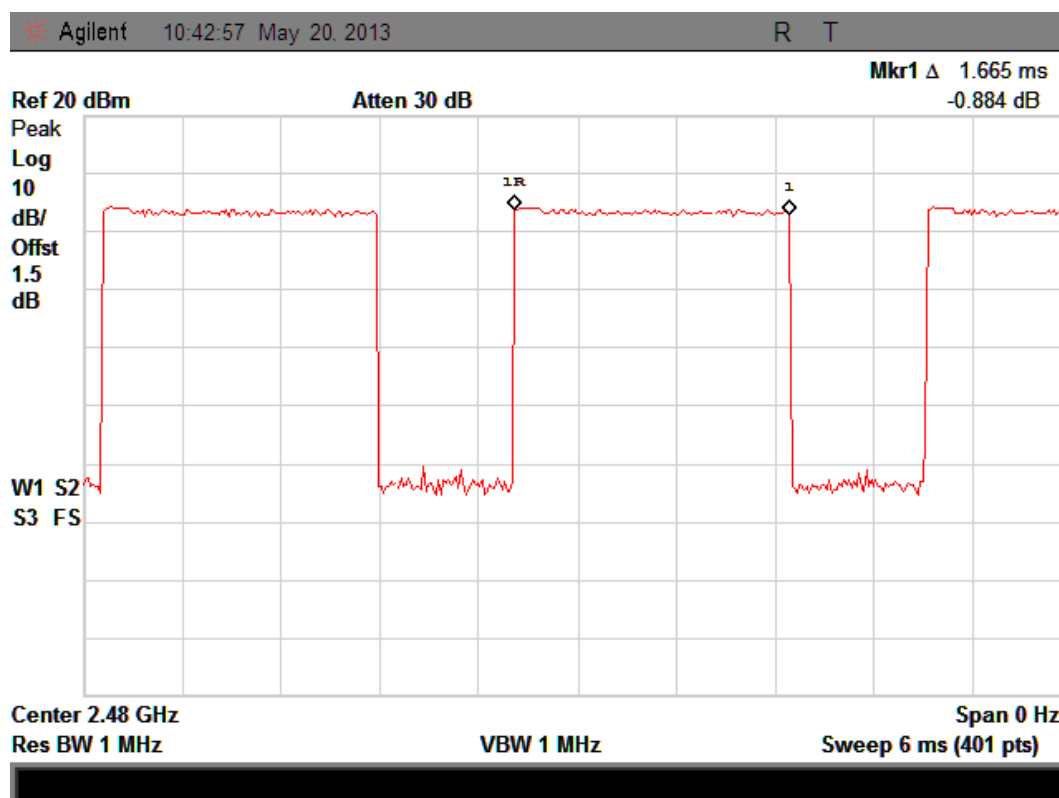


3-DH5: CH Low

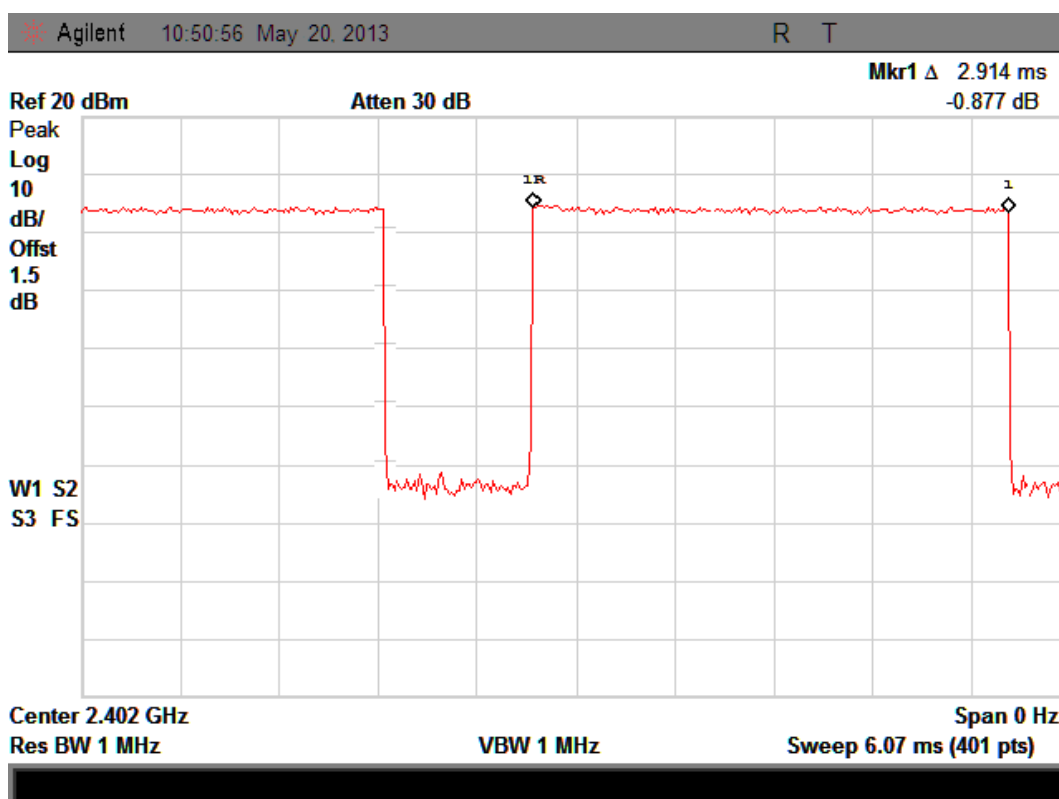

3-DH5: CH Mid

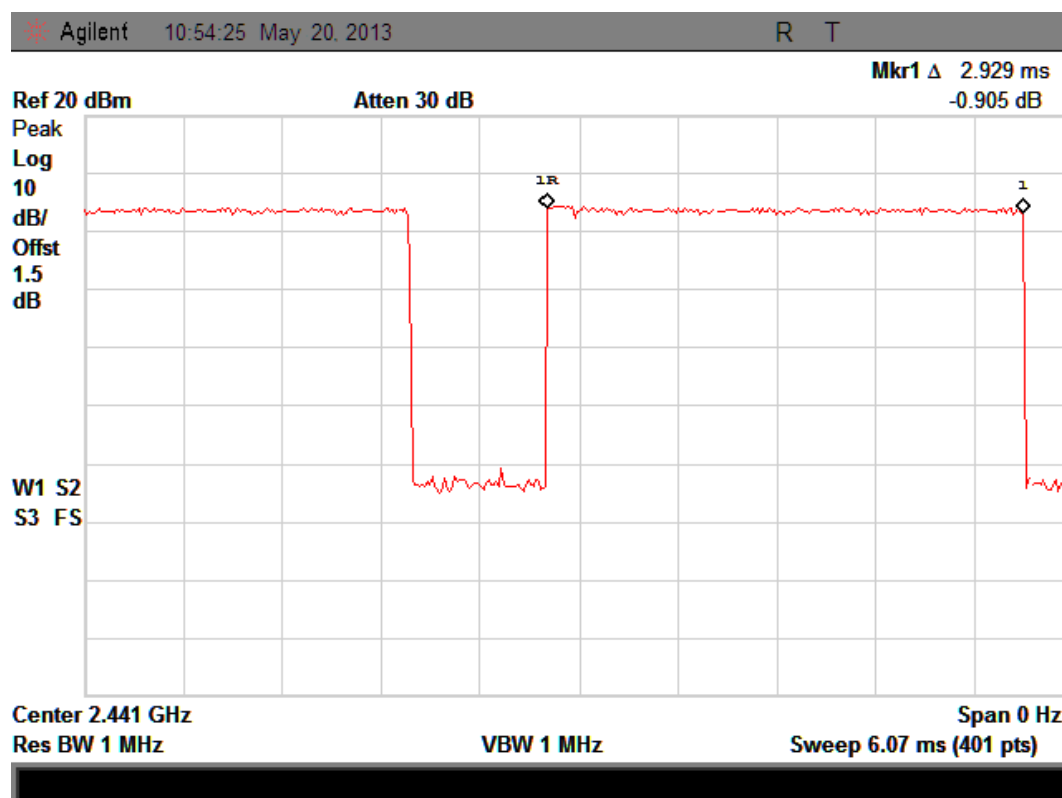

3-DH5: CH High

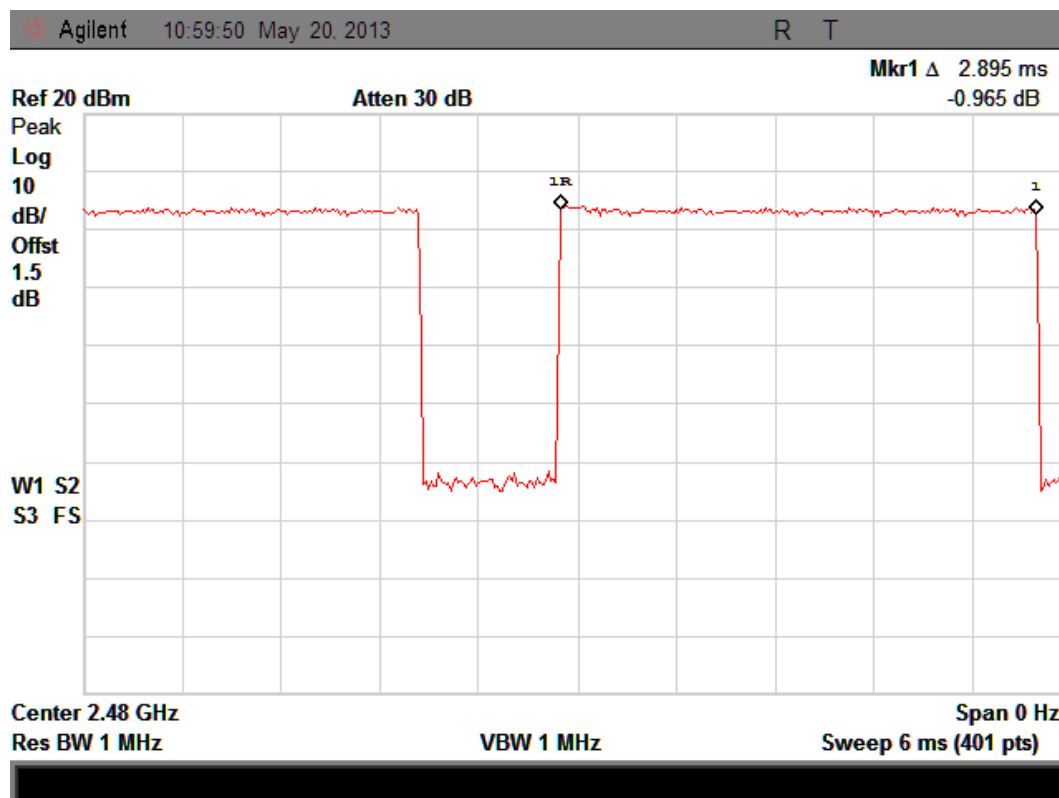

8. Radiated emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

8.2.1. In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

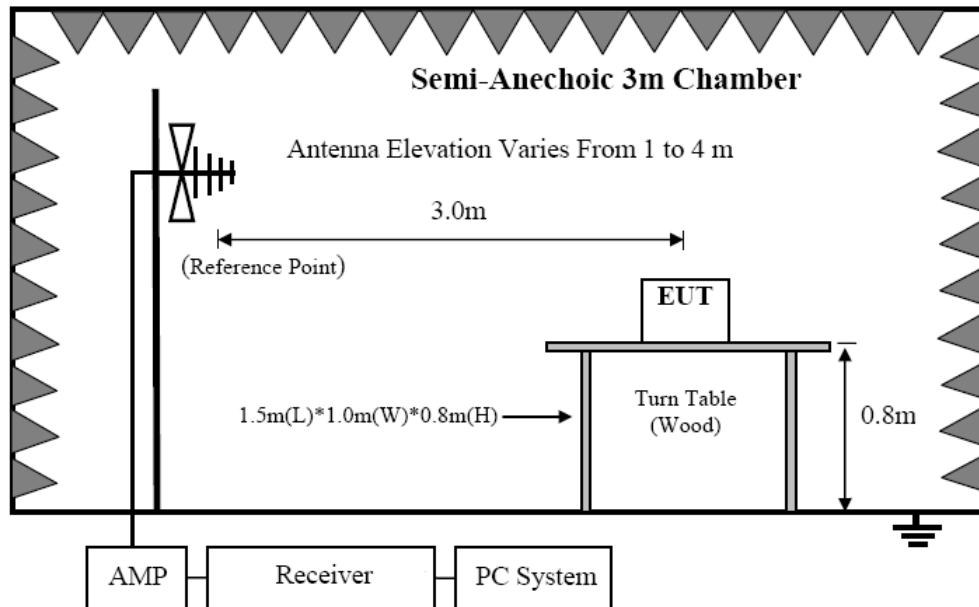

8.2.2. In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

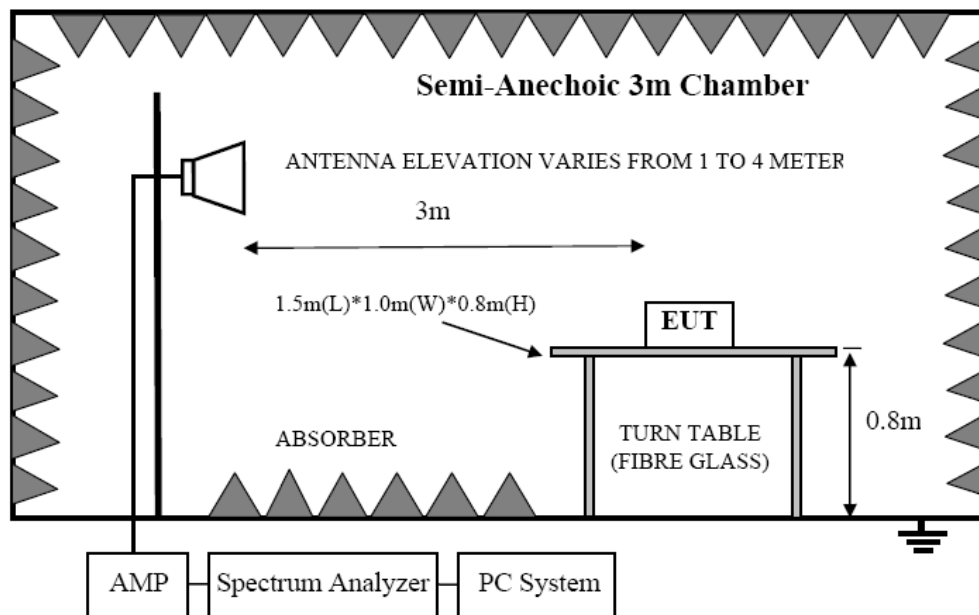

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.

- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Change power supply range from 85% to 115% of the rated supply voltage for AC power supply.
 - (d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2003 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT.


Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

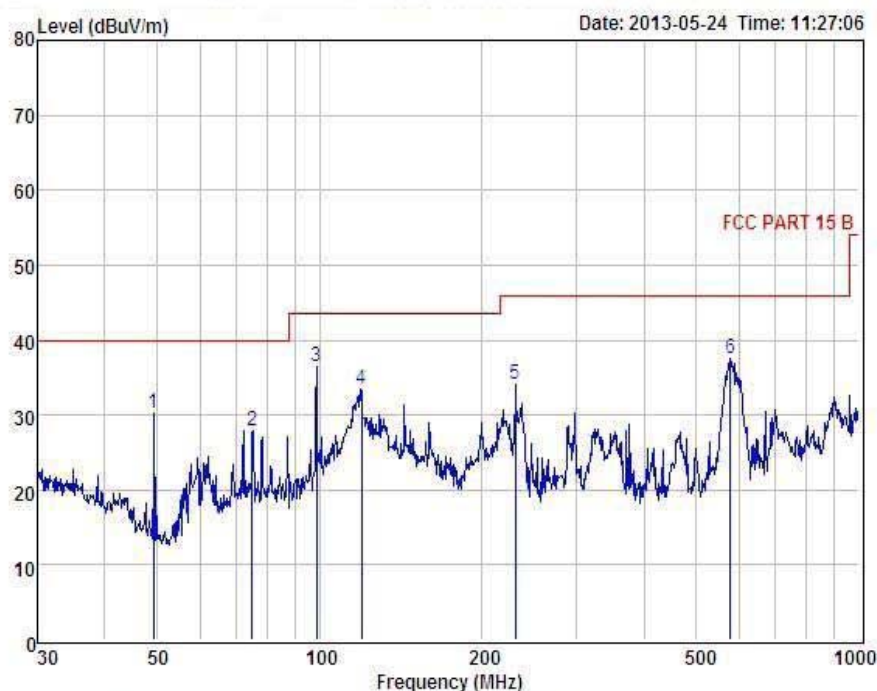


Condition : FCC PART 15 B 3m POL: HORIZONTAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : Link mode
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Store
 Remark : STI130426061
 Temp : 24°C
 Hum : 56%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	49.32	44.51	13.54	27.82	0.10	30.33	40.00	-9.67	QP
2	75.10	44.54	9.90	26.78	0.25	27.91	40.00	-12.09	QP
3	98.82	52.82	10.15	26.84	0.38	36.51	43.50	-6.99	QP
4	119.63	47.84	12.06	26.88	0.33	33.35	43.50	-10.15	QP
5	230.71	49.29	11.21	27.08	0.61	34.03	46.00	-11.97	QP
6	577.43	46.28	17.89	27.77	1.17	37.57	46.00	-8.43	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

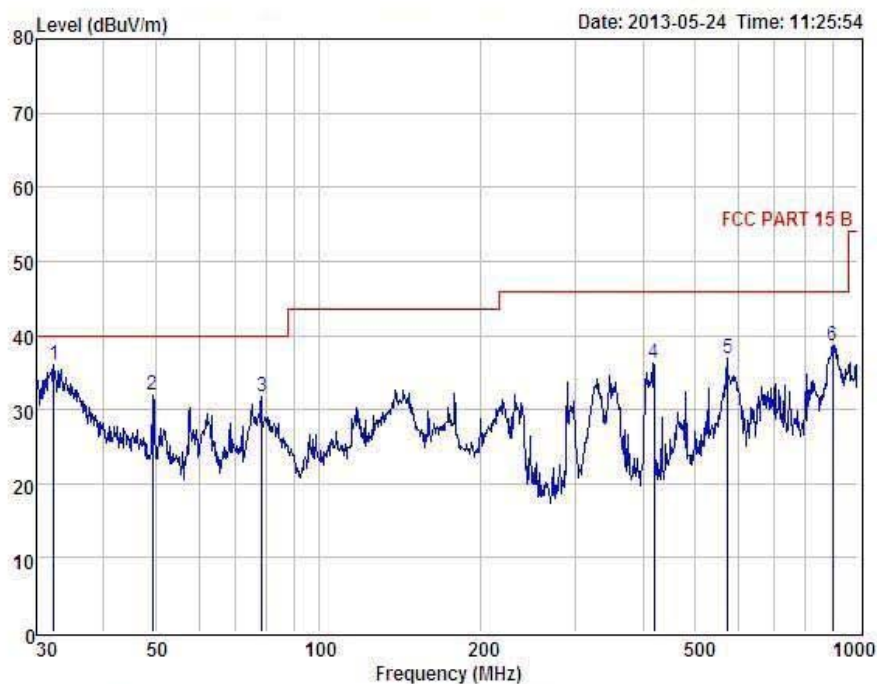

Condition : FCC PART 15 B 3m POL: VERTICAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : Link mode
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Store
 Remark : STI130426061
 Temp : 24°C
 Hum : 56%

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	32.29	50.11	13.28	27.51	0.11	35.99	40.00	-4.01	QP
2	49.31	46.04	13.54	27.82	0.10	31.86	40.00	-8.14	QP
3	78.54	48.85	9.29	26.79	0.31	31.66	40.00	-8.34	QP
4	418.37	47.78	15.18	27.45	0.74	36.25	46.00	-9.75	QP
5	573.25	45.46	17.77	27.76	1.32	36.79	46.00	-9.21	QP
6	897.18	43.40	21.61	27.64	1.22	38.59	46.00	-7.41	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

1GHz—25GHz Radiated emissison Test result									
EUT: Bar Code Reader					M/N: powerLine ECCO				
Power: DC 5V From PC with AC 120V/60Hz adapter									
Test date: 2013-05-24			Test site: 3m Chamber			Tested by: Anna Fan			
Test mode: GFSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804	48.25	34.01	10.35	34.11	58.50	74.00	15.50	PK
2	4804	33.18	34.01	10.35	34.11	43.43	54.00	10.57	AV
3	7206	/							
4	9608	/							
5	12010	/							
Antenna Polarity: Horizontal									
1	4804	47.43	34.01	10.35	34.11	57.68	74.00	16.32	PK
2	4804	32.95	34.01	10.35	34.11	43.20	54.00	10.80	AV
3	7206	/							
4	9608	/							
5	12010	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emissison Test result									
EUT: Bar Code Reader					M/N: powerLine ECCO				
Power: DC 5V From PC with AC 120V/60Hz adapter									
Test date: 2013-05-24 Test site: 3m Chamber Tested by: Anna Fan									
Test mode: GFSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	46.75	33.99	10.29	34.13	56.90	74.00	17.10	PK
2	4882	32.11	33.99	10.29	34.13	42.26	54.00	11.74	AV
3	7323	/							
4	9764	/							
5	12205	/							
Antenna Polarity: Horizontal									
1	4882	45.96	33.99	10.29	34.13	56.11	74.00	17.89	PK
2	4882	31.47	33.99	10.29	34.13	41.62	54.00	12.38	AV
3	7323	/							
4	9764	/							
5	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emissison Test result									
EUT: Bar Code Reader					M/N: powerLine ECCO				
Power: DC 5V From PC with AC 120V/60Hz adapter									
Test date: 2013-05-24 Test site: 3m Chamber Tested by: Anna Fan									
Test mode: GFSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(d B)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/ m)	Margin (dB)	Remark
1	4960	49.23	34.02	10.31	34.15	59.41	74.00	14.59	PK
2	4960	35.14	34.02	10.31	34.15	45.32	54.00	8.68	AV
3	7440	/							
4	9920	/							
5	12400	/							
Antenna Polarity: Horizontal									
1	4960	48.77	34.02	10.31	34.15	58.95	74.00	15.05	PK
2	4960	34.21	34.02	10.31	34.15	44.39	54.00	9.61	AV
3	7440	/							
4	9920	/							
5	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


1GHz—25GHz Radiated emissison Test result									
EUT: Bar Code Reader					M/N: powerLine ECCO				
Power: DC 5V From PC with AC 120V/60Hz adapter									
Test date: 2013-05-24 Test site: 3m Chamber Tested by: Anna Fan									
Test mode: 8-DPSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804	46.49	34.04	10.33	34.16	56.70	74.00	17.30	PK
2	4804	31.22	34.04	10.33	34.16	41.43	54.00	12.57	AV
3	7206	/							
4	9608	/							
5	12010	/							
Antenna Polarity: Horizontal									
1	4804	47.14	34.04	10.33	34.16	57.35	74.00	16.65	PK
2	4804	31.53	34.04	10.33	34.16	41.74	54.00	12.26	AV
3	7206	/							
4	9608	/							
5	12010	/							
Note:									
1,Measuring frequency from 1GHz to 25GHz									
2,Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2,Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3,Result = Read level + Antenna factor + cable loss-Amp factor									
4,All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emissison Test result									
EUT: Bar Code Reader					M/N: powerLine ECCO				
Power: DC 5V From PC with AC 120V/60Hz adapter									
Test date: 2013-05-24 Test site: 3m Chamber Tested by: Anna Fan									
Test mode: 8-DPSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	45.98	34.05	10.32	34.18	56.17	74.00	17.83	PK
2	4882	30.15	34.05	10.32	34.18	40.34	54.00	13.66	AV
3	7323	/							
4	9764	/							
5	12205	/							
Antenna Polarity: Horizontal									
1	4882	44.57	34.05	10.32	34.18	54.76	74.00	19.24	PK
2	4882	29.76	34.05	10.32	34.18	39.95	54.00	14.05	AV
3	7323	/							
4	9764	/							
5	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emissison Test result									
EUT: Bar Code Reader					M/N: powerLine ECCO				
Power: DC 5V From PC with AC 120V/60Hz adapter									
Test date: 2013-05-24 Test site: 3m Chamber Tested by: Anna Fan									
Test mode: 8-DPSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960	46.54	34.07	10.36	34.20	56.77	74.00	17.23	PK
2	4960	31.02	34.07	10.36	34.20	41.25	54.00	12.75	AV
3	7440	/							
4	9920	/							
5	12400	/							
Antenna Polarity: Horizontal									
1	4960	48.11	34.07	10.36	34.20	58.34	74.00	15.66	PK
2	4960	32.76	34.07	10.36	34.20	42.99	54.00	11.01	AV
3	7440	/							
4	9920	/							
5	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

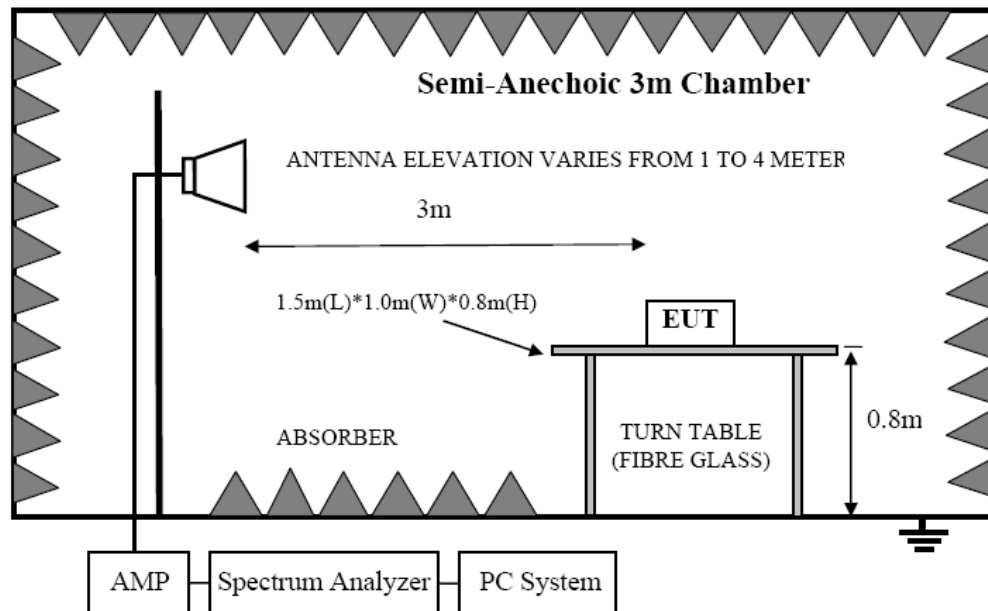

9.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

Same with clause 6.3 except change investigated frequency range from 2310MHz to 2415MHz, 2475MHz to 2500MHz and 5725MHz to 5850MHz


9.4. Test Result

PASS. (See below detailed test data)

GFSK
CH LOW :



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

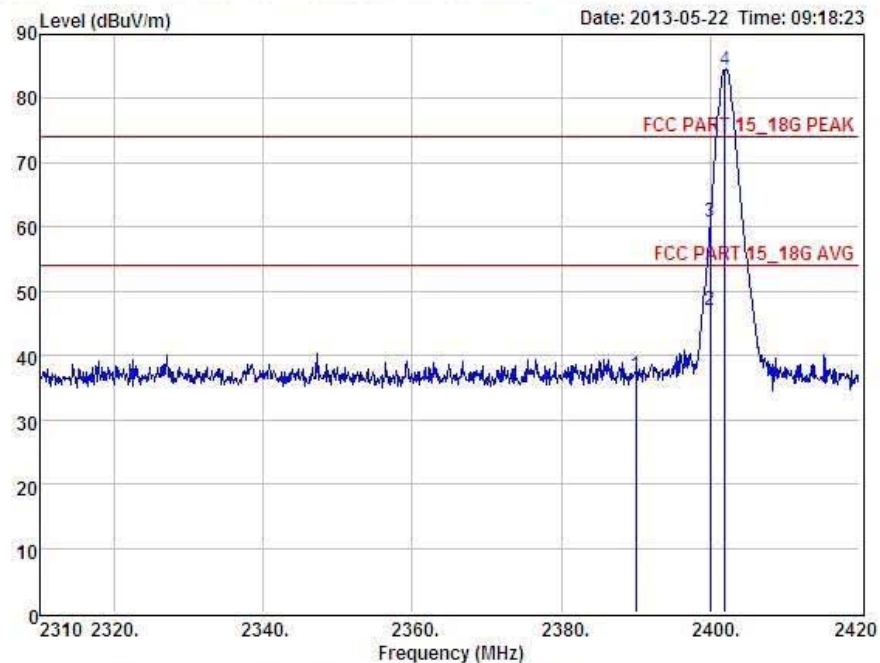


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : GFSK TX 2402MHz
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	40.26	27.62	34.97	3.92	36.83	74.00	-37.17	Peak
2	2400.00	50.46	27.62	34.97	3.94	47.05	54.00	-6.95	Average
3	2400.00	64.16	27.62	34.97	3.94	60.75	74.00	-13.25	Peak
4	2402.00	87.93	27.62	34.97	3.94	84.52	74.00	10.52	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

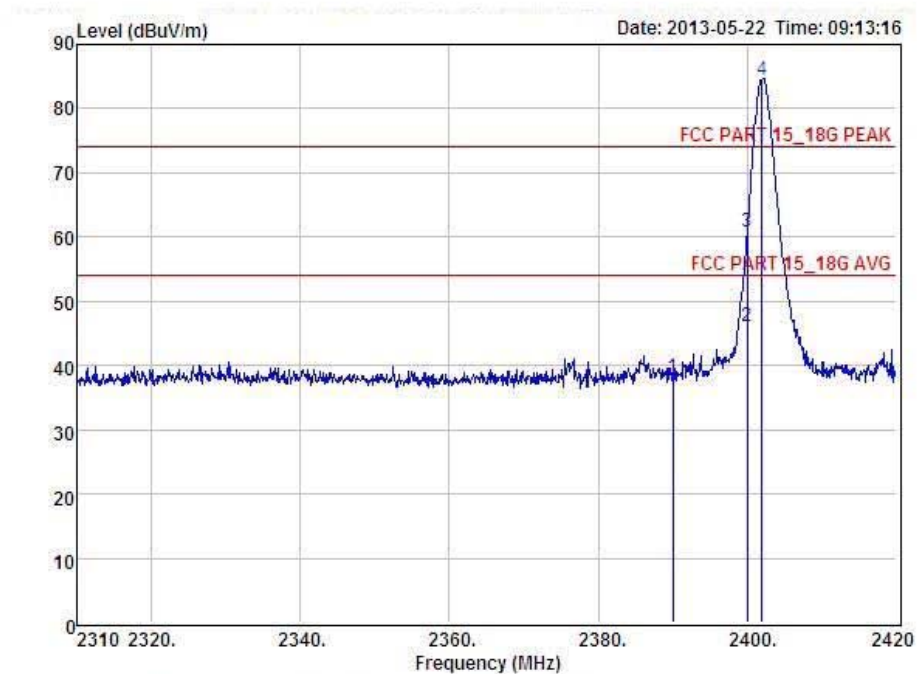

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : GFSK TX 2402MHz
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Anna
 Remark : STI130426061
 Temp :
 Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	41.56	27.62	34.97	3.92	38.13	74.00	-35.87	Peak
2	2400.00	49.56	27.62	34.97	3.94	46.15	54.00	-7.85	Average
3	2400.00	64.33	27.62	34.97	3.94	60.92	74.00	-13.08	Peak
4	2402.00	87.94	27.62	34.97	3.94	84.53	74.00	10.53	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

CH High :



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

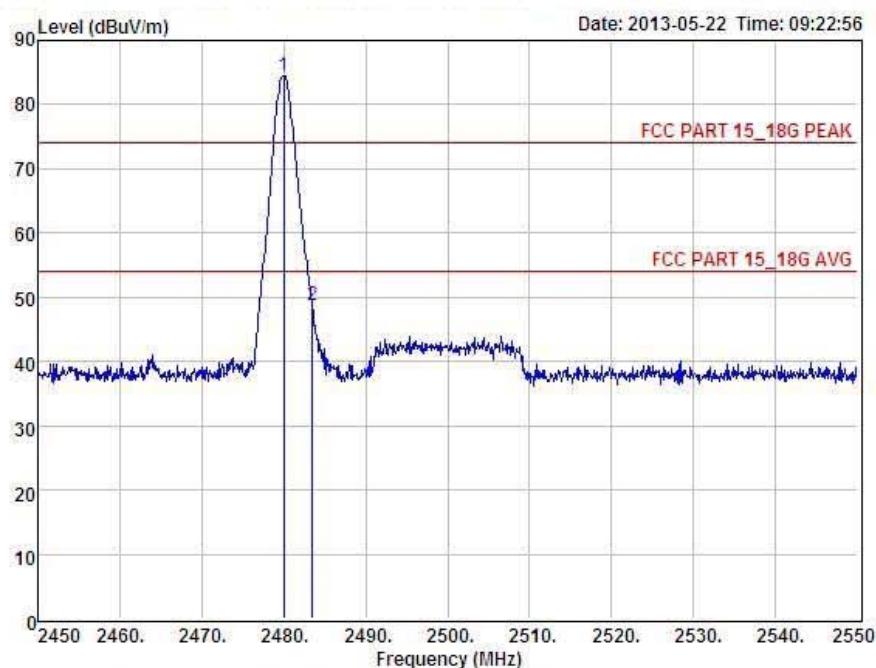


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : GFSK TX 2480MHz
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2480.00	87.78	27.59	34.97	4.00	84.40	74.00	10.40	Peak
2	2483.50	52.07	27.59	34.97	4.00	48.69	74.00	-25.31	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

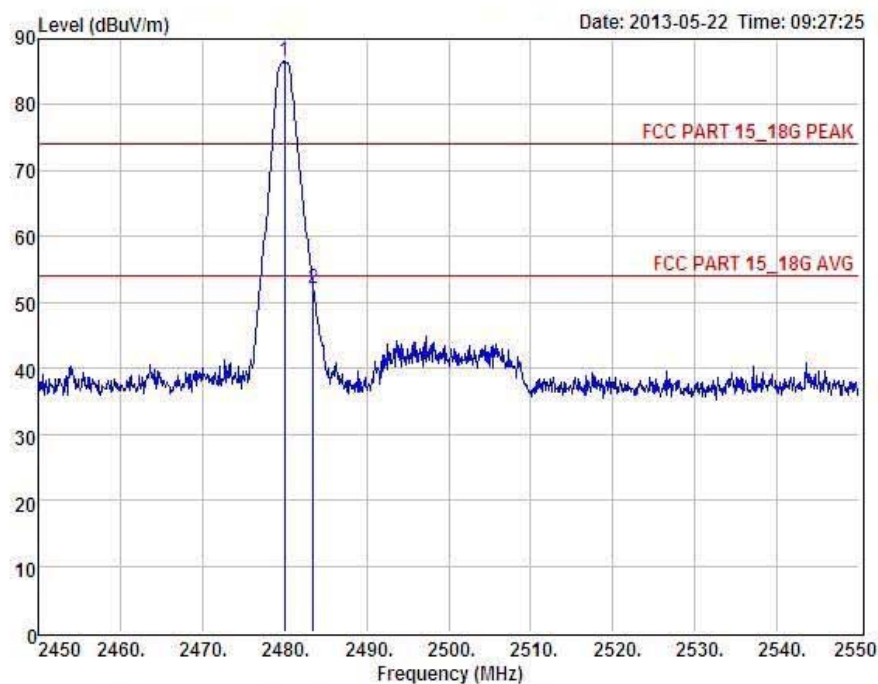

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : GFSK TX 2480MHz
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2480.00	89.91	27.59	34.97	4.00	86.53	74.00	12.53	Peak
2	2483.50	55.59	27.59	34.97	4.00	52.21	74.00	-21.79	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Hopping mode



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

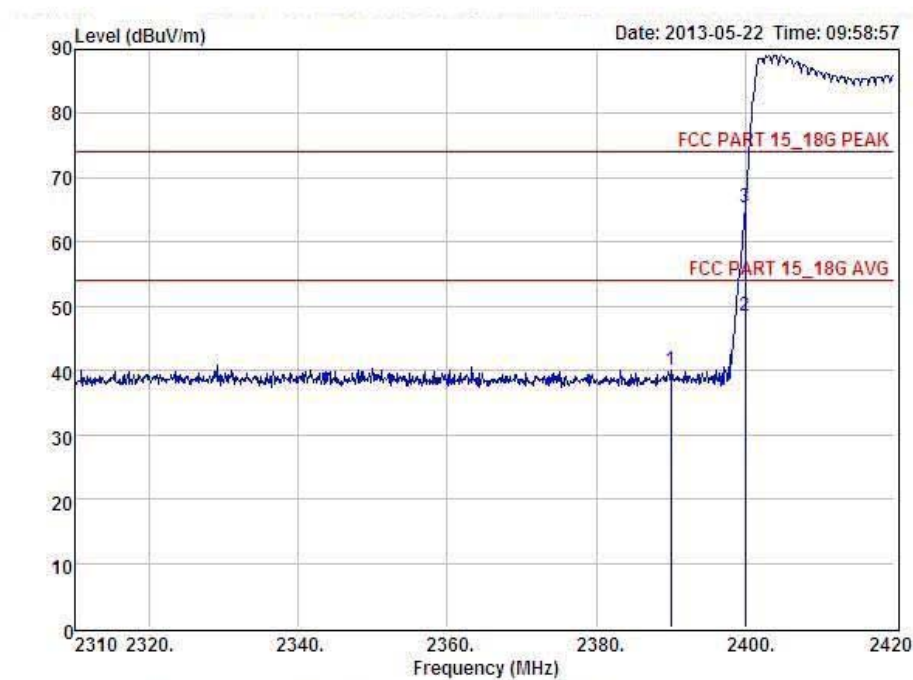


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : GFSK TX Hopping
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Anna
 Remark : STI130426061
 Temp :
 Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	43.38	27.62	34.97	3.92	39.95	74.00	-34.05	Peak
2	2400.00	51.85	27.62	34.97	3.94	48.44	54.00	-5.56	Average
3	2400.00	68.84	27.62	34.97	3.94	65.43	74.00	-8.57	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

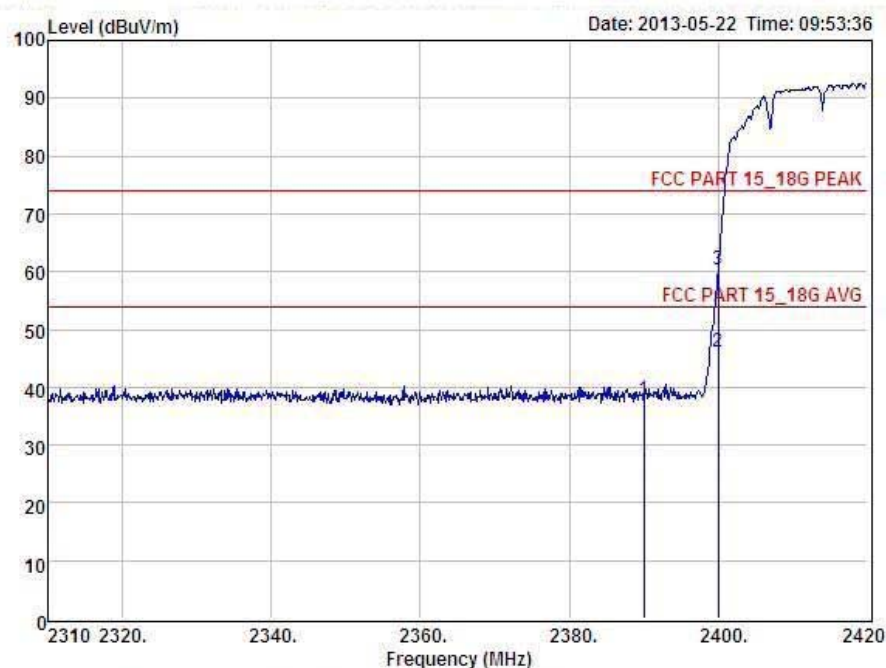


Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : GFSK TX Hopping
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Anna
 Remark : STI130426061
 Temp :
 Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	41.31	27.62	34.97	3.92	37.88	74.00	-36.12	Peak
2	2400.00	49.62	27.62	34.97	3.94	46.21	54.00	-7.79	Average
3	2400.00	63.78	27.62	34.97	3.94	60.37	74.00	-13.63	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

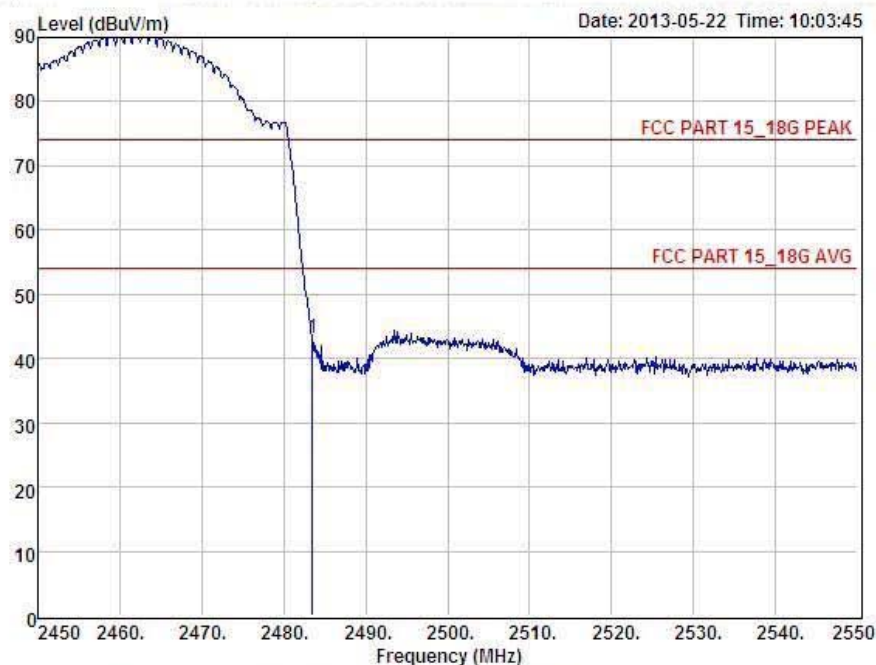


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : GFSK TX Hopping
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	46.66	27.59	34.97	4.00	43.28	74.00	-30.72	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

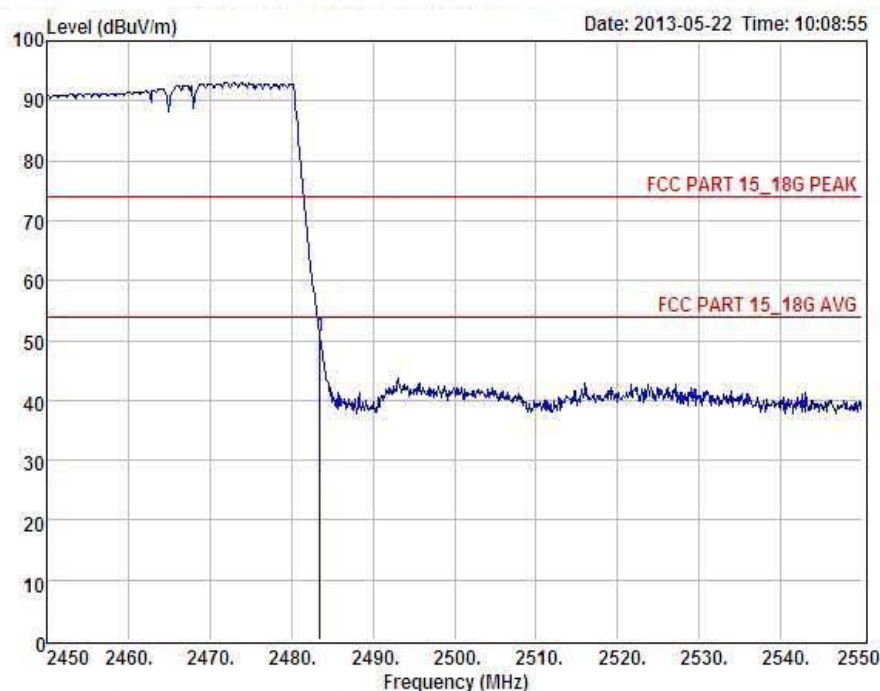

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : GFSK TX Hopping
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Anna
 Remark : STI130426061
 Temp :
 Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	54.15	27.59	34.97	4.00	50.77	74.00	-23.23	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

8-DPSK CH LOW :



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

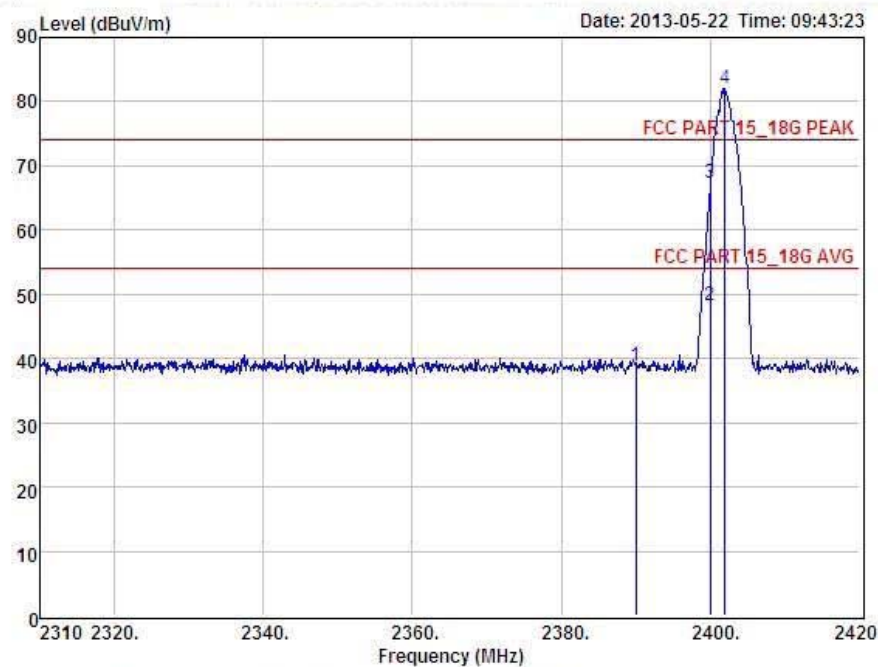


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : DPSK TX 2402MHz
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	42.34	27.62	34.97	3.92	38.91	74.00	-35.09	Peak
2	2400.00	51.63	27.62	34.97	3.94	45.22	54.00	-8.78	Average
3	2400.00	70.65	27.62	34.97	3.94	67.24	74.00	-6.76	Peak
4	2402.00	85.41	27.62	34.97	3.94	82.00	74.00	8.00	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

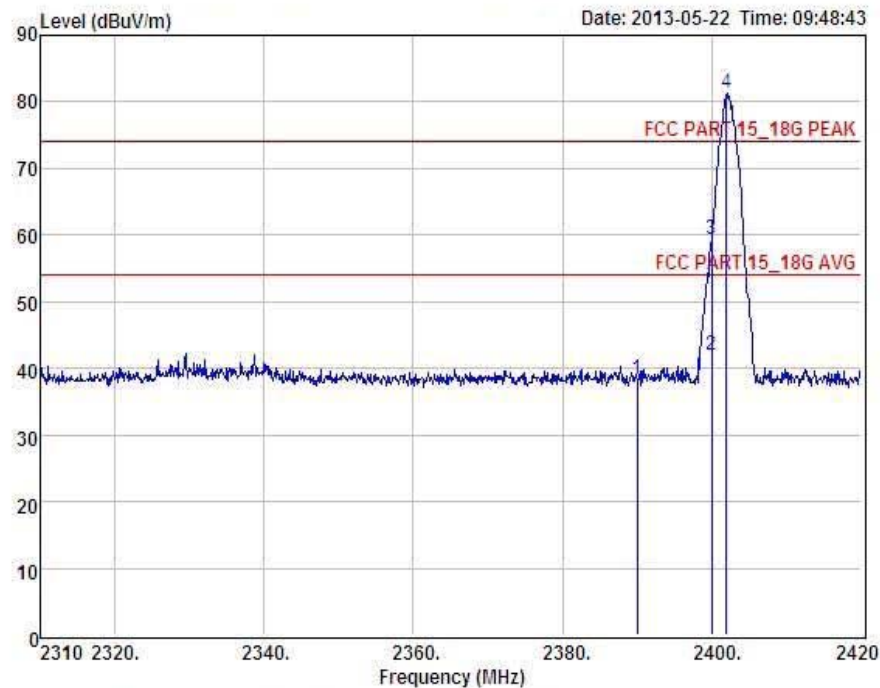

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : DPSK TX 2402MHz
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Anna
 Remark : STI130426061
 Temp :
 Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	41.90	27.62	34.97	3.92	38.47	74.00	-35.53	Peak
2	2400.00	45.36	27.62	34.97	3.94	41.95	54.00	-12.05	Average
3	2400.00	62.69	27.62	34.97	3.94	59.28	74.00	-14.72	Peak
4	2402.00	84.62	27.62	34.97	3.94	81.21	74.00	7.21	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

CH High :



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

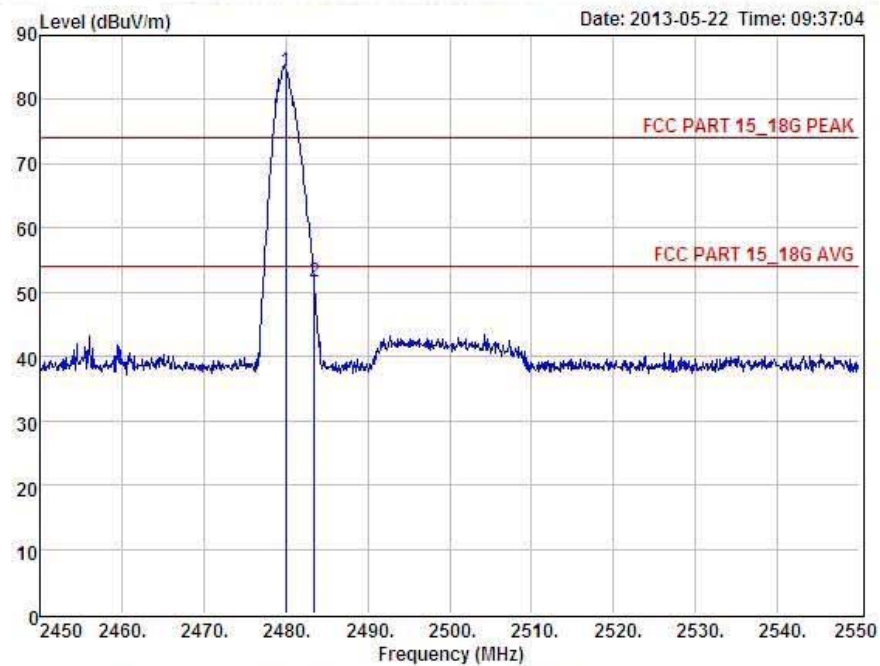


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : DPSK TX 2480MHz
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2480.00	87.83	27.59	34.97	4.00	84.45	74.00	10.45	Peak
2	2483.50	54.93	27.59	34.97	4.00	51.55	74.00	-22.45	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

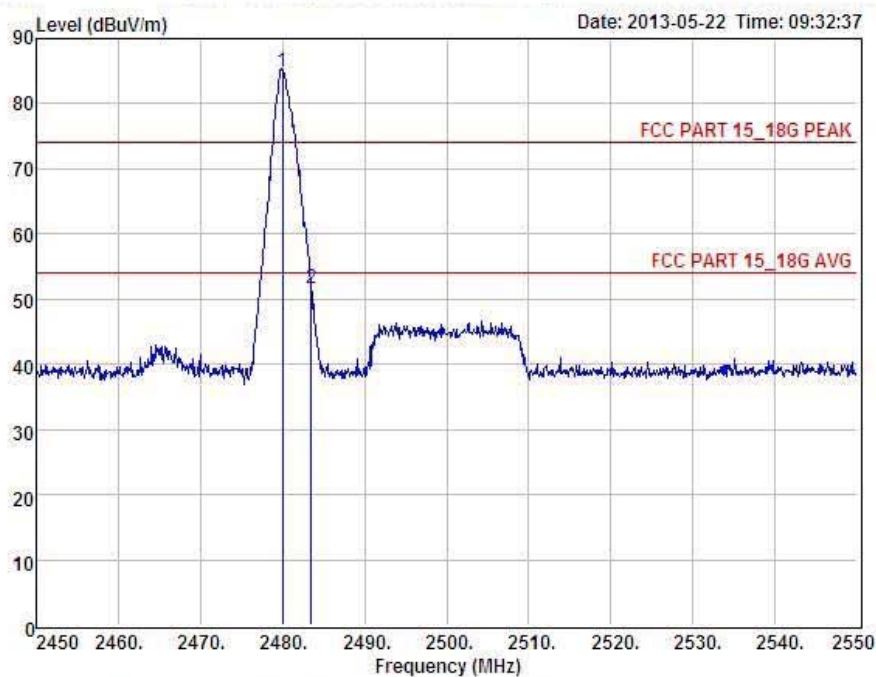

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : DPSK TX 2480MHz
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2480.00	88.39	27.59	34.97	4.00	88.01	74.00	11.01	Peak
2	2493.50	54.92	27.59	34.97	4.00	51.54	74.00	-22.46	Peak

Remark: Level = Read Level + Antenna Factor - Preamplifier Factor + Cable Loss

Hopping mode:



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

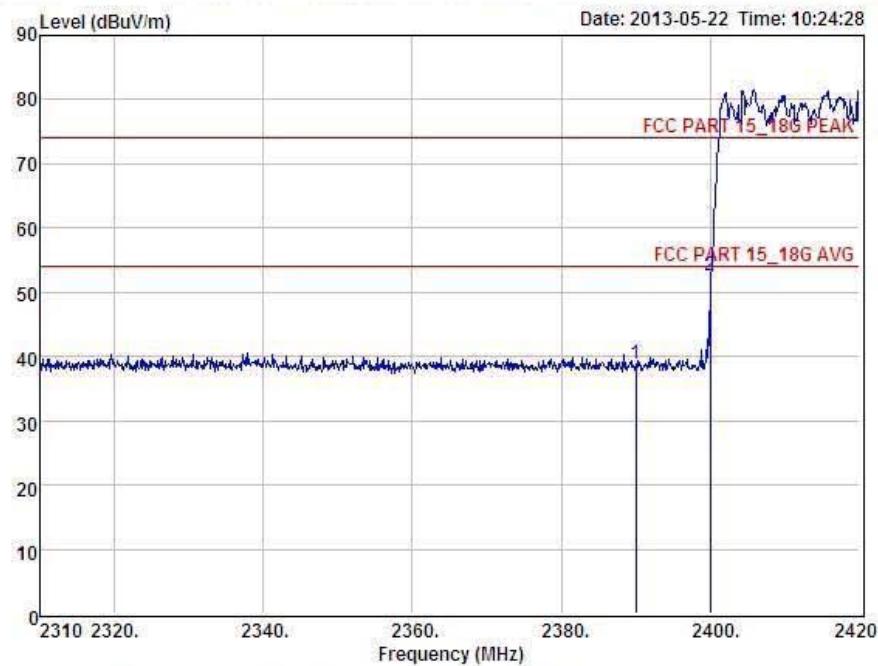


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : DSSS TX Hopping
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	42.39	27.62	34.97	3.92	38.96	74.00	-35.04	Peak
2	2400.00	55.89	27.62	34.97	3.94	52.48	74.00	-21.52	Peak

Remark: Level = Read Level + Antenna Factor - Preamplifier Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

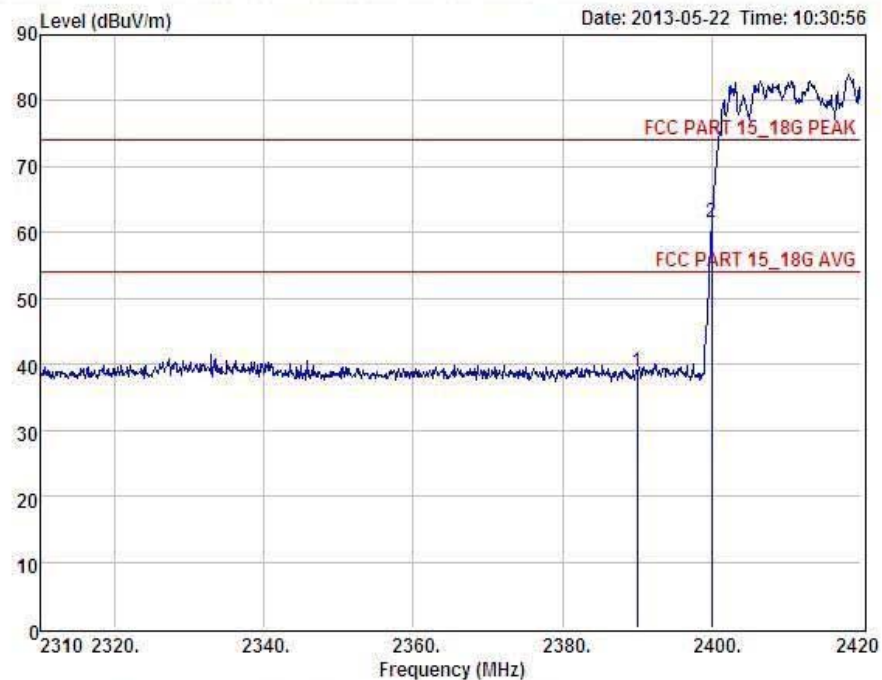


Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : DPSK TX Hopping
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	42.30	27.62	34.97	3.92	38.87	74.00	-35.13	Peak
2	2400.00	64.88	27.62	34.97	3.94	61.47	74.00	-12.53	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

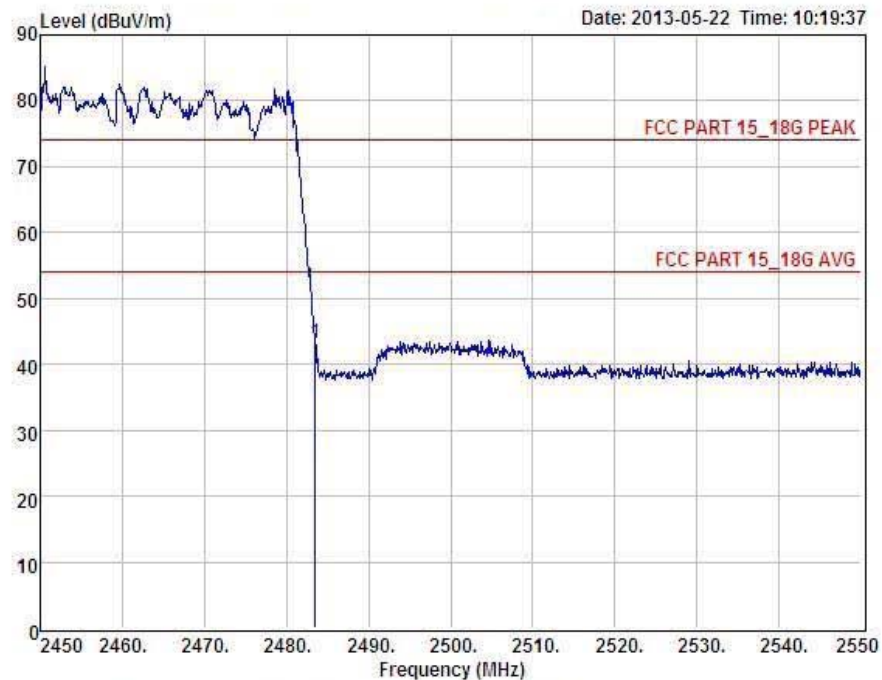


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : DPSK TX Hopping
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer : Anna
Remark : STI130426061
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	46.53	27.59	34.97	4.00	43.15	74.00	-30.85	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

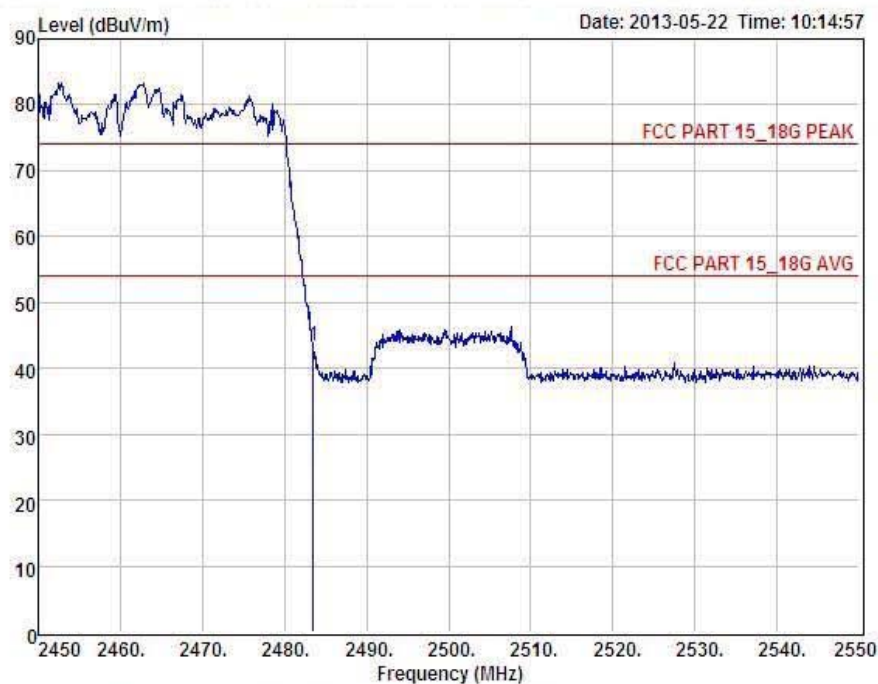


Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
 EUT : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : DPSK TX Hopping
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer : Anna
 Remark : STI130426061
 Temp :
 Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	46.84	27.59	34.97	4.00	43.46	74.00	-30.54	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

10. Power Line Conducted Emissions

10.1. Block Diagram of Test Setup

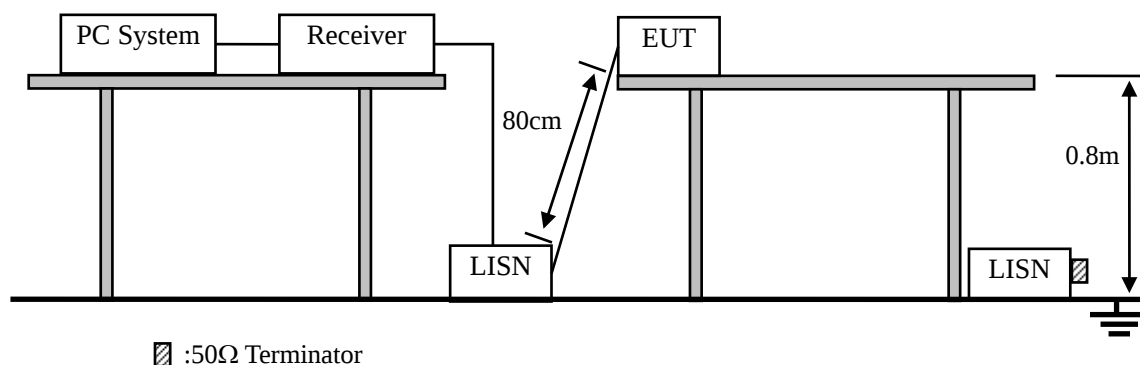

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2003 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 Fax: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

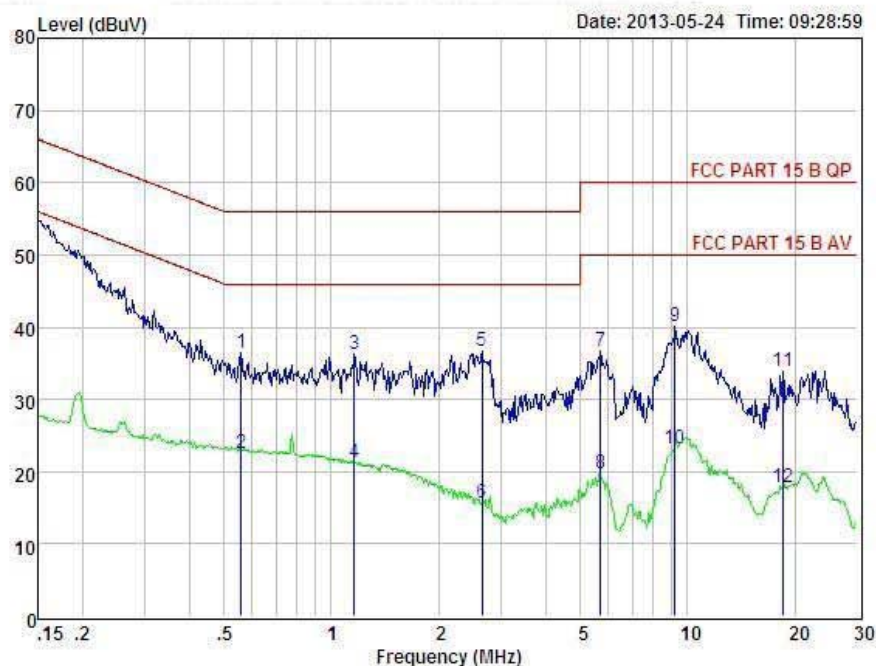


Condition : FCC PART 15 B QP POL: LINE Temp:24 °C Hum:56 %
 EUI : Bar Code Reader
 Model No : powerLine ECCO
 Test Mode : Link mode
 Power : DC 5V From PC with AC 120V/60Hz adapter
 Test Engineer: Store
 Remark : STI130426061

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
			dB	dB	dB				
1	0.558	26.71	0.03	-9.72	0.10	36.56	56.00	-19.44	QP
2	0.558	12.71	0.03	-9.72	0.10	22.56	46.00	-23.44	Average
3	1.160	26.45	0.04	-9.71	0.10	36.30	56.00	-19.70	QP
4	1.160	11.45	0.04	-9.71	0.10	21.30	46.00	-24.70	Average
5	2.650	26.77	0.06	-9.70	0.11	36.64	56.00	-19.36	QP
6	2.650	5.77	0.06	-9.70	0.11	15.64	46.00	-30.36	Average
7	5.713	26.79	0.10	-9.63	0.13	36.65	60.00	-23.35	QP
8	5.713	9.79	0.10	-9.63	0.13	19.65	50.00	-30.35	Average
9	9.204	30.35	0.16	-9.39	0.19	40.09	60.00	-19.91	QP
10	9.204	13.35	0.16	-9.39	0.19	23.09	50.00	-26.91	Average
11	18.622	23.72	0.30	-9.46	0.33	33.81	60.00	-26.19	QP
12	18.622	7.72	0.30	-9.46	0.33	17.81	50.00	-32.19	Average

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

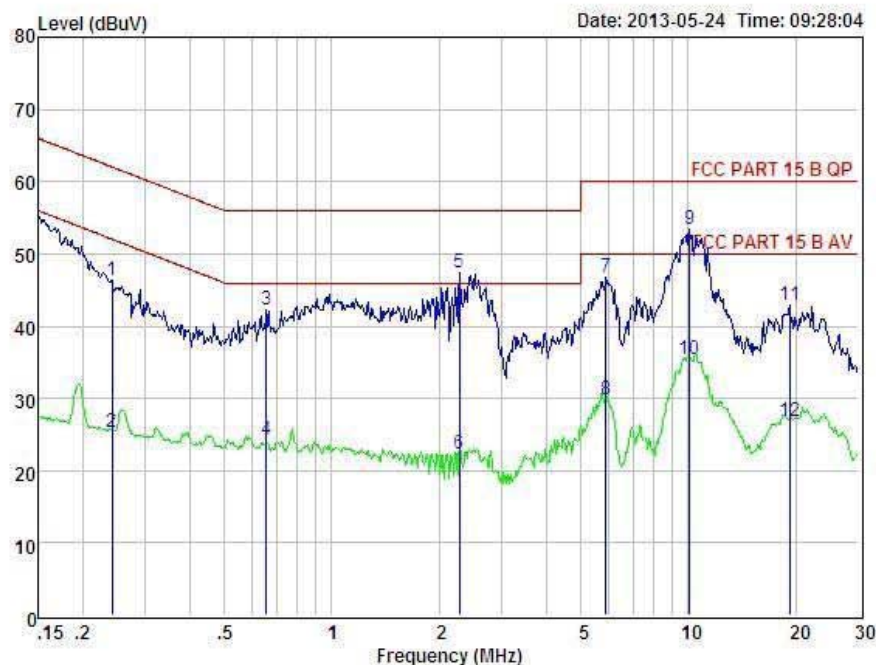

Condition : FCC PART 15 B QP POL: NEUTRAL Temp: 24 °C Hum: 56 %
EUT : Bar Code Reader
Model No : powerLine ECCO
Test Mode : Link mode
Power : DC 5V From PC with AC 120V/60Hz adapter
Test Engineer: Store
Remark : STI130426061

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.242	36.54	0.03	-9.72	0.10	46.39	62.04	-15.65	QP
2	0.242	15.54	0.03	-9.72	0.10	25.39	52.04	-26.65	Average
3	0.654	32.32	0.04	-9.72	0.10	42.18	56.00	-13.82	QP
4	0.654	14.32	0.04	-9.72	0.10	24.18	46.00	-21.82	Average
5	2.285	37.53	0.06	-9.70	0.11	47.40	56.00	-8.60	QP
6	2.285	12.53	0.06	-9.70	0.11	22.40	46.00	-23.60	Average
7	5.867	36.99	0.11	-9.62	0.14	46.86	60.00	-13.14	QP
8	5.867	19.99	0.11	-9.62	0.14	29.86	50.00	-20.14	Average
9	10.072	43.52	0.18	-9.52	0.21	53.43	60.00	-6.57	QP
10	10.072	25.52	0.18	-9.52	0.21	35.43	50.00	-14.57	Average
11	19.224	32.70	0.30	-9.47	0.33	42.80	60.00	-17.20	QP
12	19.224	16.70	0.30	-9.47	0.33	26.80	50.00	-23.20	Average

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable Loss

Note: If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

11. Antenna Requirements



11.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result


The antennas used for this product are chip Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1dBi.

12. Test setup photo

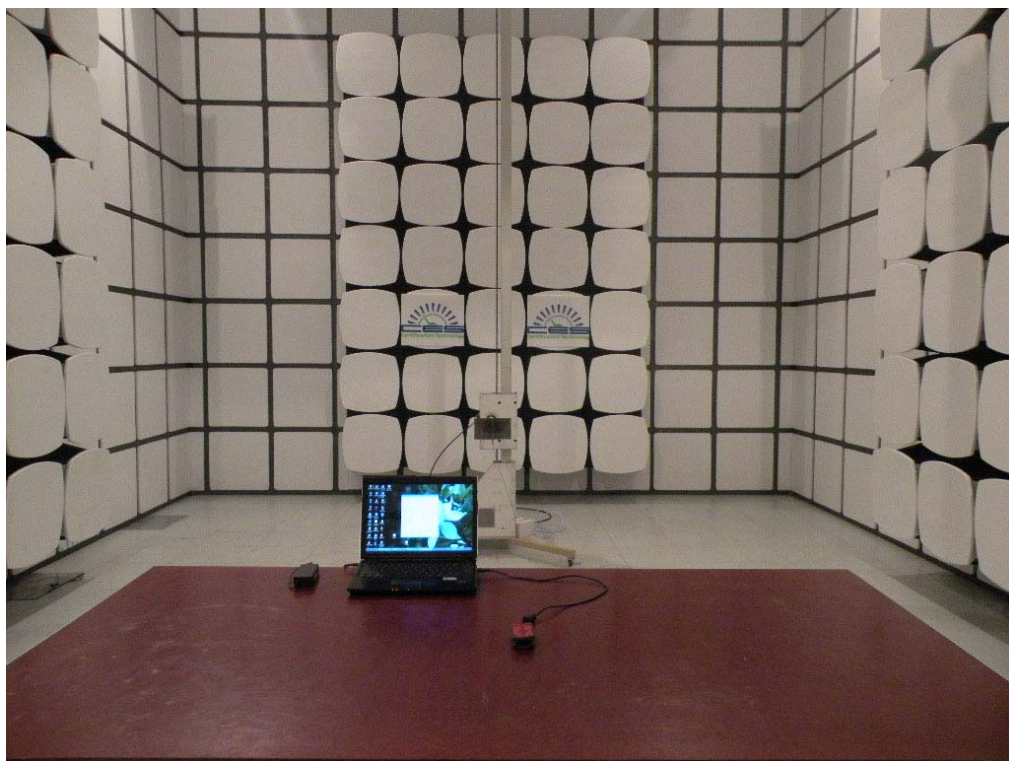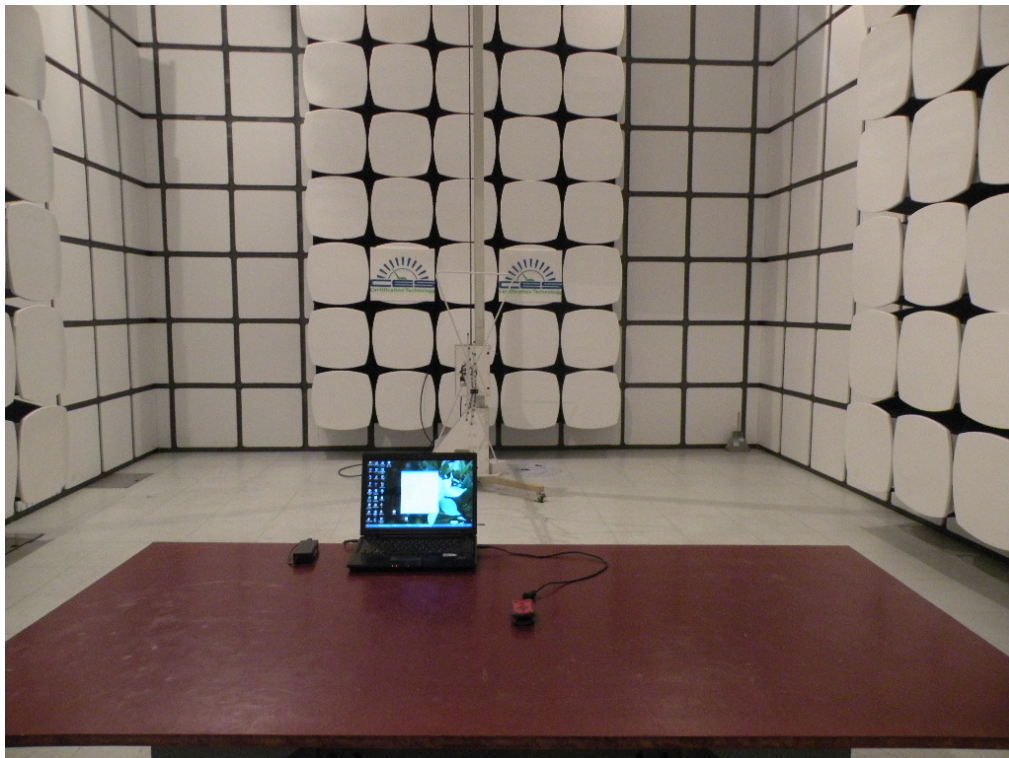

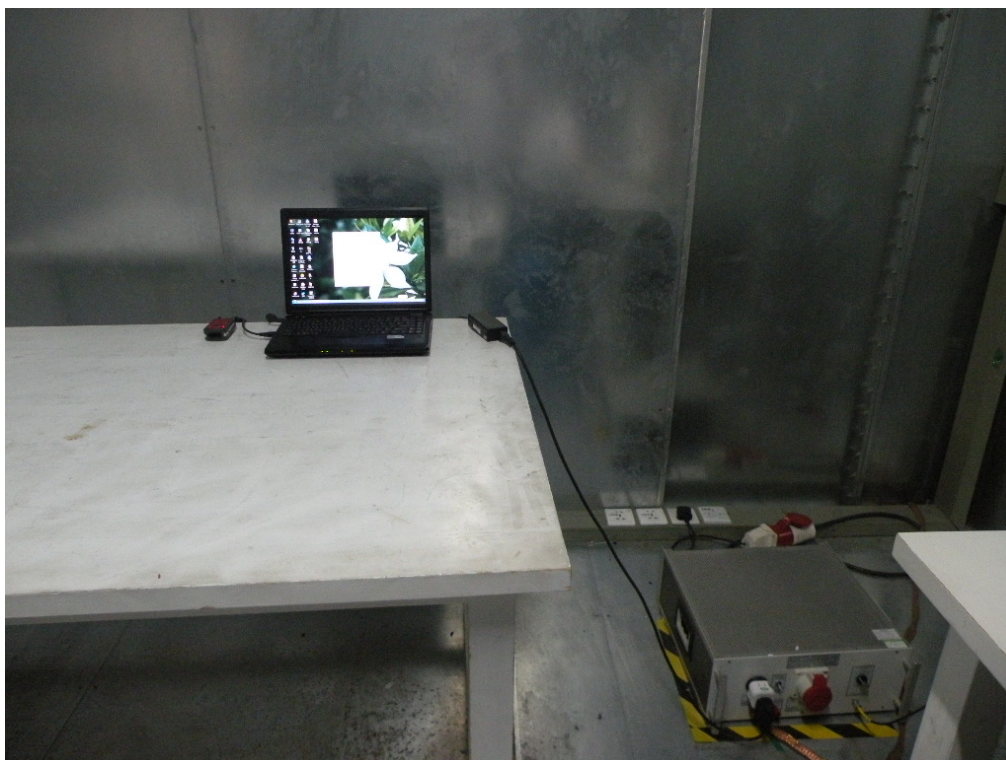




13.Photos of EUT


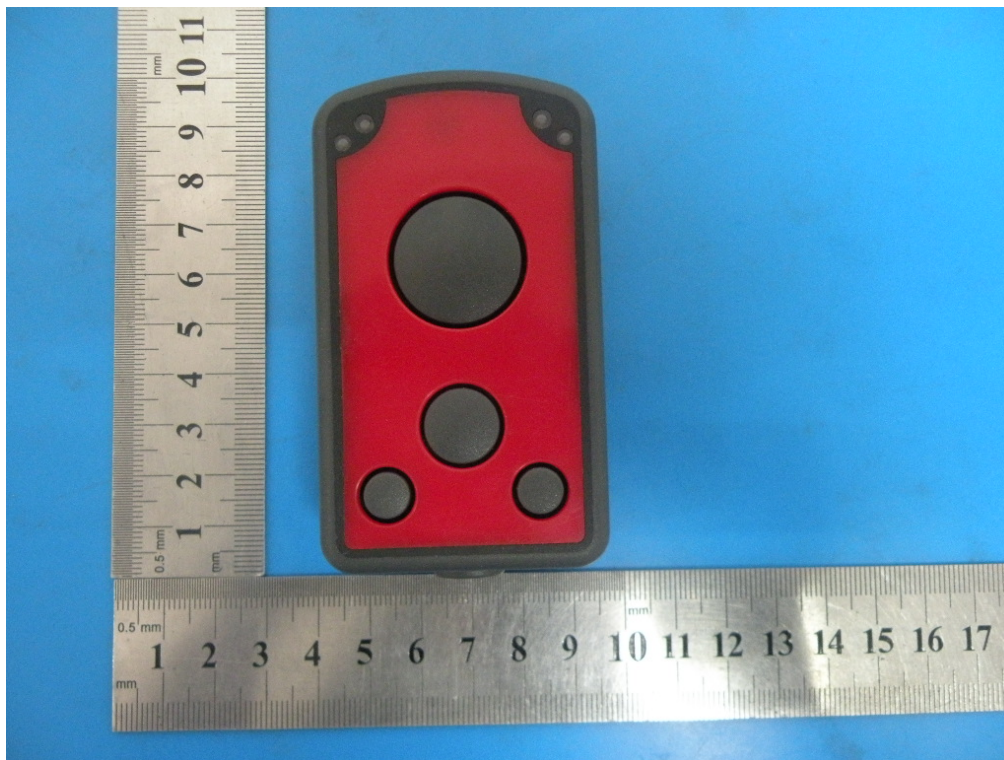






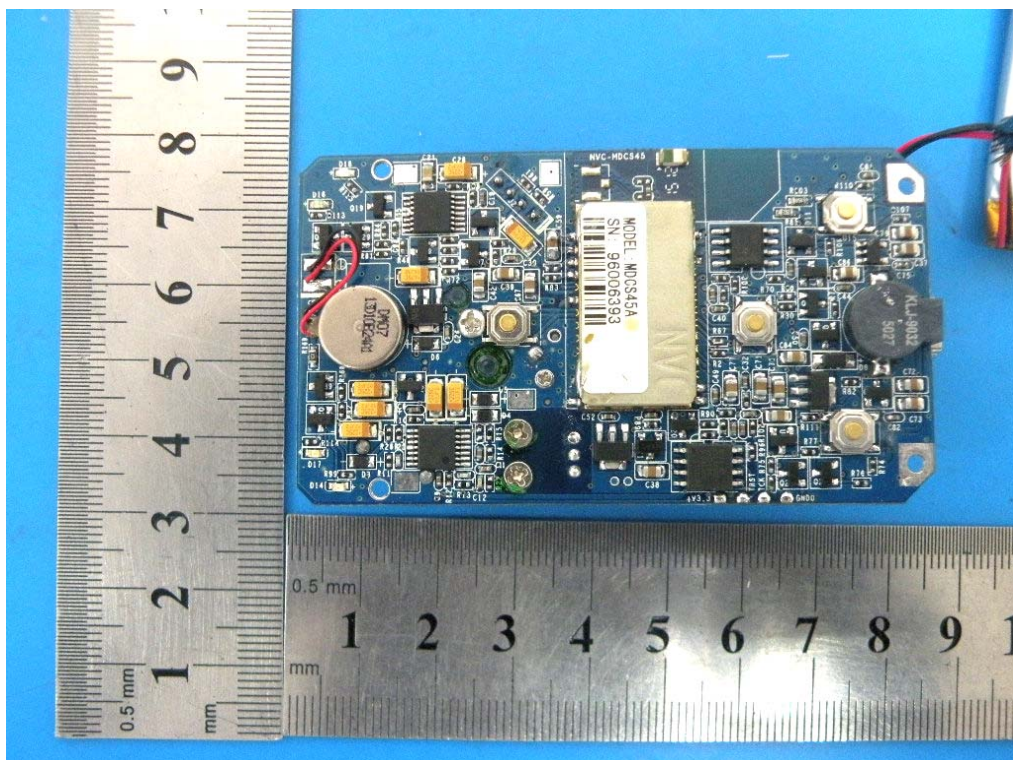

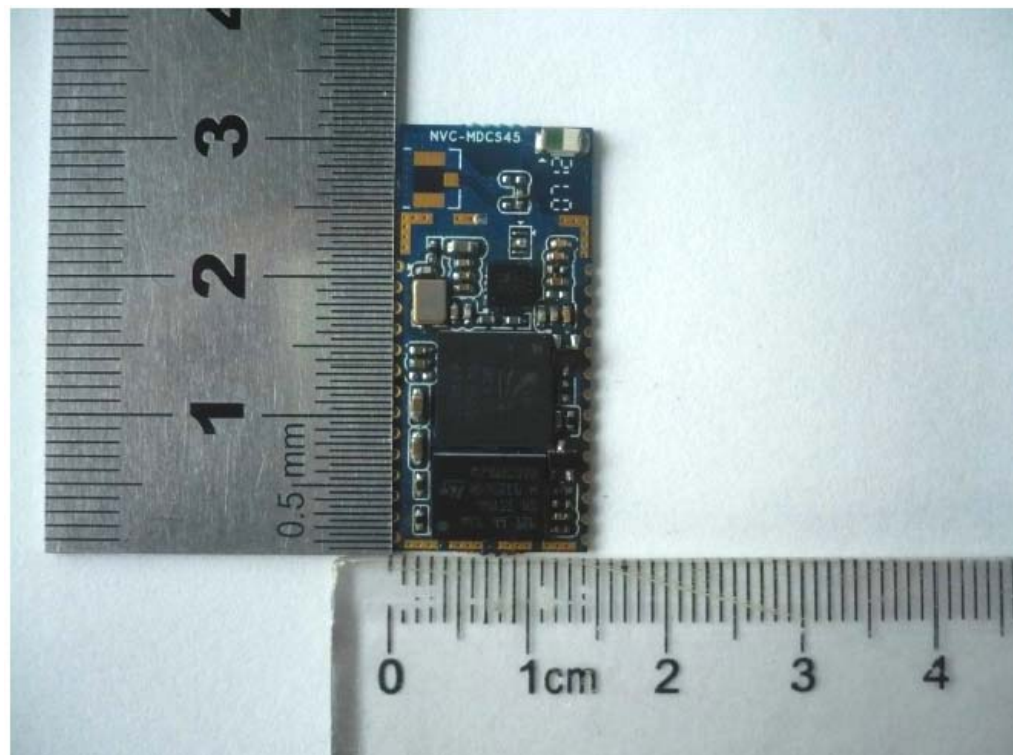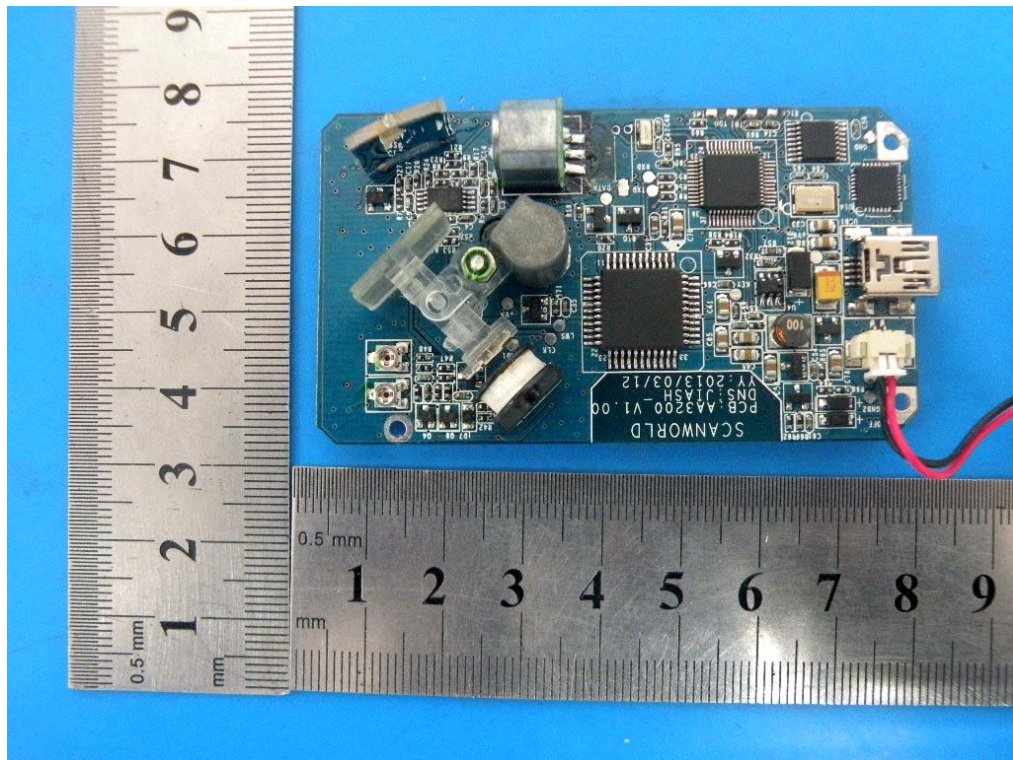

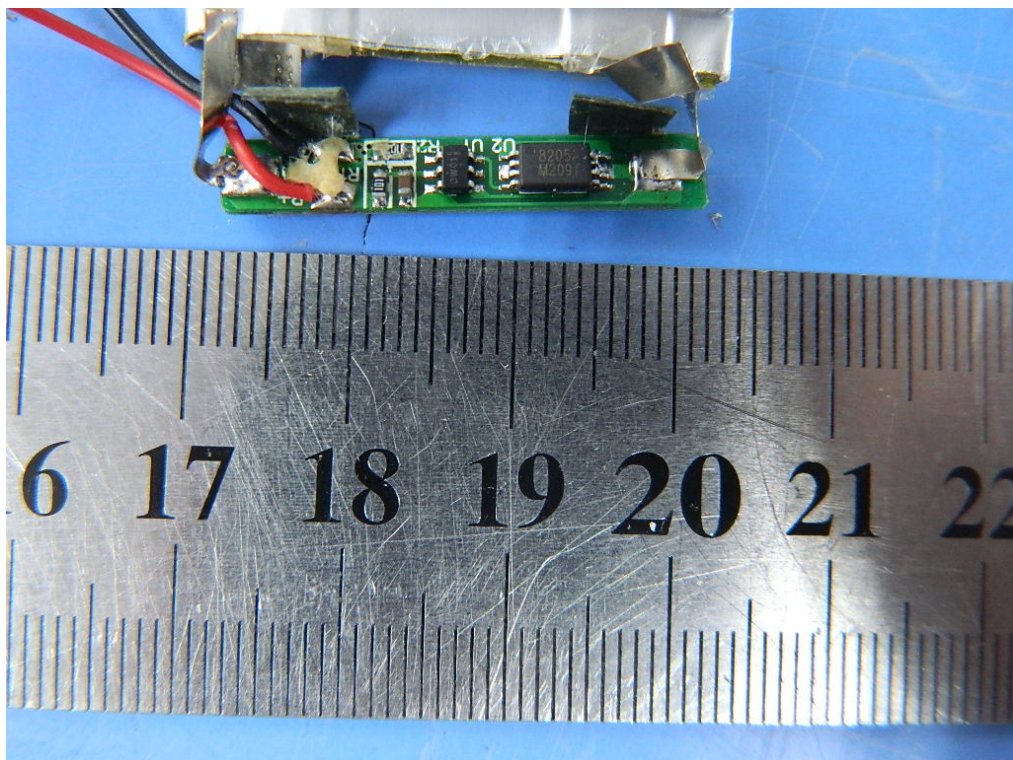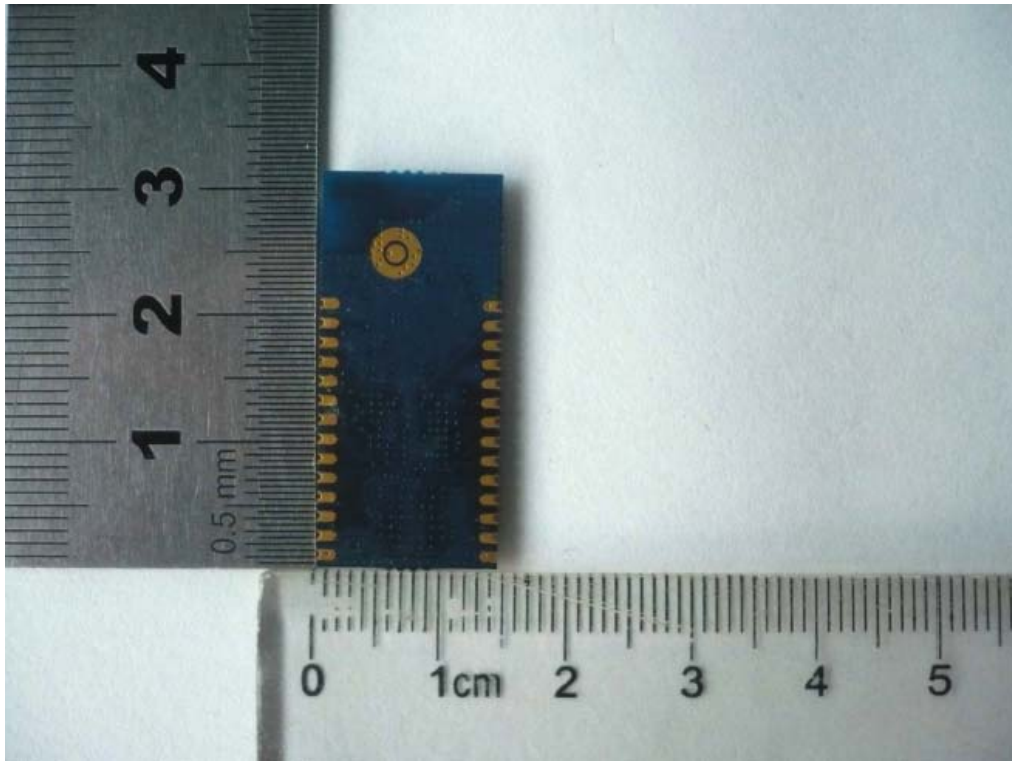

END OF THE REPORT