

cannice


Bluetooth Headset

FCC ID:2AAIH-M2C


Muses 2C INSTRUCTION

Start here

Following items are included

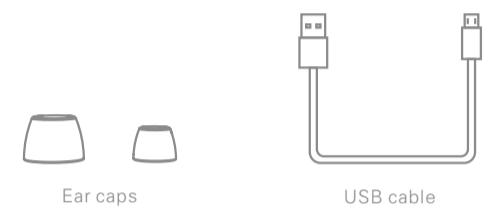

Product overview

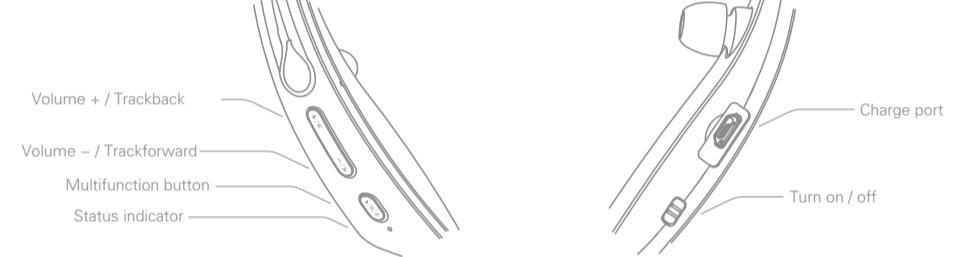

Basic operation

Volume adjust!
Press the Volume button "+" or "-" to turn volume up or down, you hear "beep" voice prompts once reach the maximum or minimum.

Instruction	LED status	Voice prompts & Alerts
Standby	Flashes blue twice every 5 seconds	Connection successful
Incoming call	Flashes blue continuously	Vibration alerts
Battery low	Flashes red twice every 5 seconds	Battery low
Charging	Red while charging	Blue fully charged

/

Pairing


Pair one phone

- Turn on Bluetooth headset, press and hold the Multifunction button for about 5 seconds, the LED indicator flashes red and blue alternately. Voice prompts "Pairing".
- Activate Bluetooth on your phone and set it to search for new devices.

- Select "Muses2C". If you phone asks, enter 0000 (four zeros) for the passcode or accept the connection. The LED indicator stops flashing red and blue once successfully paired. Voice prompts "Connection successful".

Pair another phone

Multipoint technology enables you to pair another phone and take a call from either. To pair with another mobile phone, follow the steps for "Pair One Phone". After pairing successfully, restart the Headset to connect to 2 paired mobile phone automatically.

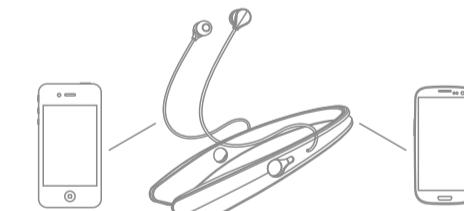

Call

Answer a call
Press the Multifunction button once.

Redial the last call
Double-press the Multifunction button in standby mode. The mobile phone will redial the last call number.

End a call
Press the Multifunction button once.

MIC mute on/off
Press the Volume button "-" for about 2 seconds to mute on/off.

Reject a call
Press and hold the Multifunction button for about 2 seconds.

Switch between the Headset and phone

Press the Volume button "+" for about 2 seconds during a call, the call will be switched to the mobile phone, redo this operation again, the call will be switched back to the Headset.

End current call and answer new call
When a new call rings during a call, press the Multifunction button for 2 seconds to end current call and answer new call. To switch between held call and active call, Hold the multifunction button for 2 seconds.

On hold current call and answer new call

Press the Volume button "+" and "-" in standby mode, wait for phone prompt and then tell the phone to dial the name of a stored contact.

Music

(Need media player support)

Trackforward
Press the Volume button "-" for 2 seconds to skip track forward.


Trackback
Press the Volume button "+" for 2 seconds to skip track back.

Switch Music and Call
When a call rings during a music playing, the music automatically pauses to allow you to answer or ignore the call. Once the call is ignored or ends, the music is resumed.

More features


Battery Indicator

When the Headset is connected to a device with iOS system, a battery indicator will appear at the upper right of the system, indicating battery status of the Headset.

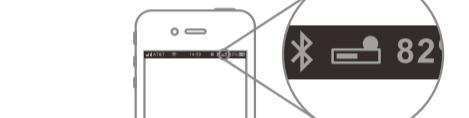

Charging

Your new Headset has enough power to pair and make a few calls.
When battery is low, you will hear the voice prompt "Battery low". It takes 2.5 hours to fully charge the Headset. While charging, the battery indicator light is red, the indicator light stays blue once charging is complete.

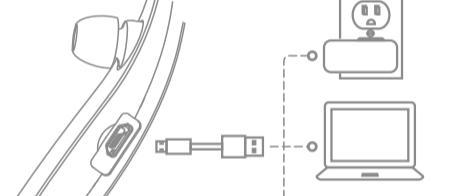

Power off

Switch the power button to Off position to turn off the Headset. (Note: Power off the Headset to save power when not in use.)

Hardware reset

Turn on Bluetooth headset, press and hold the Multifunction button, connect the Headset to a USB charger, hardware reset is done. (Note: The Headset automatically power off, please switch the power button off then on to power on the Headset)



Clear paired list

Turn on the Headset, connect it to a USB charger or USB, press and hold the Volume button "+" and "-" for about 5 seconds, LED flashes 5 times, paired list is cleared. (Note: The Headset automatically enter pairing mode when power on the first time after clear paired list)

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference
that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance
could void the user's authority to operate the equipment.