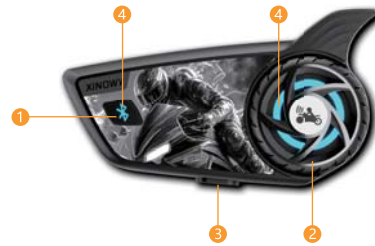
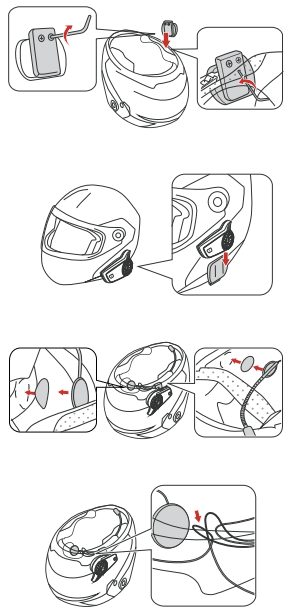
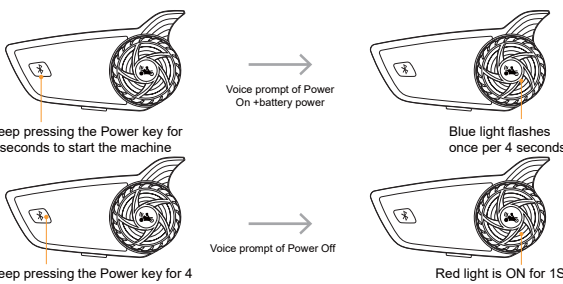

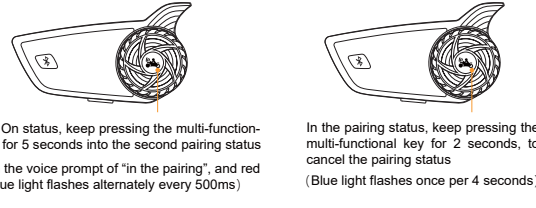



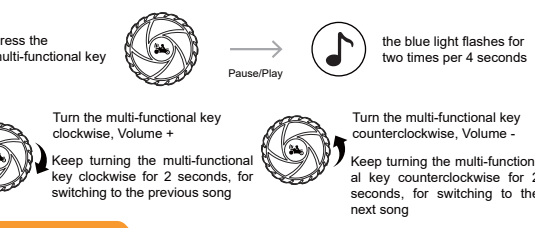
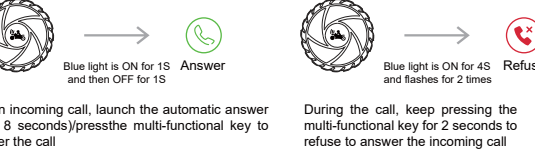

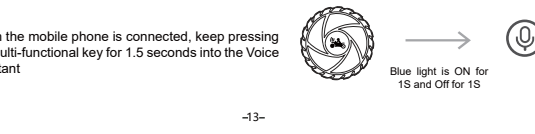

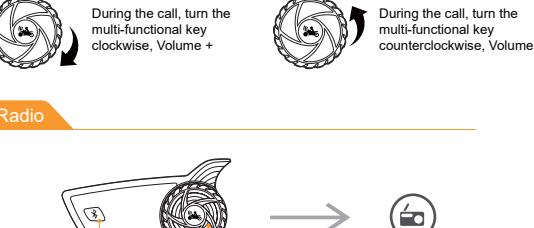


<div>English</div> <div>Instruction of S8 Helmet Bluetooth Earphone</div> <div></div> <div>Product functions</div> <div><p>S8 is a helmet-based Bluetooth intercom with stable performance. The maximum call distance is 1200m, and the inter-talk distance in the outdoor environment is generally 500m to 1000m.</p><p>In addition, as a high-performance Bluetooth earphone (with the range of 50m), it has the functions, such as automatic call answer, waterproofing and high-resolution voice. It is designed for the riding motorcycles, with the purpose of ensuring the riding safety.</p></div> <div>Product characteristics</div> <div><div><p>It supports the inner talk for two persons</p><p>It supports the play of MP3/navigation FM</p><p>DSP noise-reduction technology</p><p>Second-generation full-range high-quality HD horn</p><p>High endurance of battery</p><p>Voice dial/Redial of last number</p></div><div><p>Intimate voice prompt</p><p>Waterproofing and dustproofing level up to IPX6</p><p>General-purpose full helmet type</p><p>High endurance of battery</p><p>Voice dial/Redial of last number</p></div></div> <div>Remarks</div> <div><p>1. Automatic shutdown 25 minutes in case of no connection (except FM mode)</p><p>2. Function priority: Call &gt; Talk &gt;GPS&amp;FM&amp; music</p></div> <div>- 8 -</div>	<div>English</div> <div>Installation steps</div> <div></div> <div>① Fix it on the helmet</div> <div>② Install the intercom on the seat</div> <div>③ Attach it on the helmet with magic tape, choose the hard/soft microphone as required</div> <div>④ Sort the disorderly cables inside, place them in the foam of the helmet, for purpose of wearing</div> <div>- 9 -</div>	<div>English</div> <div>1. Power On/Off</div> <div></div> <div>Keep pressing the Power key for 2 seconds to start the machine.</div> <div>Blue light flashes once per 4 seconds</div> <div>Keep pressing the Power key for 4 seconds to stop the machine.</div> <div>Voice prompt of Power Off</div> <div>Red light is ON for 1S</div> <div>2. Low-power alarm</div> <div>When the battery power is below 3.4V, the low-power alarm voice is sent every 3 minutes, and red light flashes.</div> <div>(with the voice prompt of "insufficient battery power", and red light flashes two times per 3 minutes)</div> <div>3. Pairing</div> <div>Pairing:</div> <div></div> <div>In the Off status, keep pressing the Power key for about 5 seconds into the talk pairing status. (No matter for inner or outer devices).</div> <div>In the pairing status, keep pressing the multi-functional key for 2 seconds to cancel the pairing status (blue light flashes once per 4 seconds)</div> <div>- 10 -</div>	<div>English</div> <div>Second pairing:</div> <div></div> <div>In the On status, keep pressing the multi-functional key for 5 seconds into the second pairing status (with the voice prompt of "in the pairing", and red and blue light flashes alternately every 500ms)</div> <div>In the pairing status, keep pressing the multi-functional key for 2 seconds to cancel the pairing status (Blue light flashes once per 4 seconds)</div> <div>Clear the pairing record:</div> <div>Clear the pairing record: in the On status, keep pressing the Power key for 3 seconds to shut down the machine, and then keep pressing it for about 3 seconds.</div> <div>(with the voice prompt of long "beep", and red light flashes for three times per 300ms)</div> <div>4. Scanning</div> <div>In the pairing status, press the Power key into the active scanning status (with the voice prompt of "in searching", and the blue light quickly flashes every 300ms)</div> <div>5. Talk connection</div> <div></div> <div>Start the talk: after the successful pairing, for the connected device, press the Power key on any device once for successful reconnection, (with the voice prompt of "the bottom circuit beeps +be talk has been connected", and the blue light is ON for 1S and then OFF for 1S)</div> <div>Stop the talk: in the talk status, press the Power key on any device. (with the voice prompt of long "beep", and blue light flashes for two times per 4 seconds)</div> <div>- 11 -</div>	<div>English</div> <div>6. Mobile phone connection (GPS/MP3)</div> <div></div> <div>In the device pairing status, operate the mobile phone Bluetooth for scanning. When the pairing device is found, choose this device for connection. (With the voice prompt of "mobile phone has been connected", and the blue light flashes for two times per 4 seconds)</div> <div>Disconnect: when the mobile phone is in the connected status, disconnect the mobile phone Bluetooth (with the voice prompt of long "beep", and blue light flashes once per 4 seconds)</div> <div>7. Talk reconnection</div> <div></div> <div>Press the Power key once</div> <div>① In the talk status, the signal, if interrupted, will be subject to automatic reconnection (with the voice prompt of "the underlying link beeps +be talk has been connected", and blue light flashes for two times per 4 seconds)</div> <div>② In the On status, press the Power key once. If the reconnection with the talk is unsuccessful, give a long "beep" voice after 1S. (Blue light quickly flashes every 300ms)</div> <div>③ At the interruption of signal, the talk will be subject to automatic reconnection. In case of unsuccessful reconnection, press the Power key once after 4S for reconnection. (with the voice prompt of long "beep", and blue light quickly flashes every 300ms)</div> <div>8. Mobile phone reconnection</div> <div>In the On status, it is forced to reconnect the mobile phone being connected in the previous time; in the pairing status, disconnect the currently connected mobile phone. Only after the new pairing of the mobile phone, the connected mobile phone can be reconnected. In the On status, if the reconnection with the mobile phone is unsuccessful, press the multi-functional key once (with the voice prompt of "mobile phone has been connected", and blue light flashes for two times per 4 seconds)</div> <div>- 12 -</div>	<div>English</div> <div>9. Music</div> <div></div> <div>Press the multi-functional key</div> <div>Pause/Play</div> <div>the blue light flashes for two times per 4 seconds</div> <div>Turn the multi-functional key clockwise, Volume +</div> <div>Keep turning the multi-functional key clockwise for 2 seconds, for switching to the previous song</div> <div>Turn the multi-functional key counterclockwise, Volume -</div> <div>Keep turning the multi-functional key counterclockwise for 2 seconds, for switching to the next song</div> <div>10. Incoming call</div> <div></div> <div>Blue light is ON for 1S</div> <div>Answer</div> <div>For an incoming call, launch the automatic answer (after 8 seconds) / press the multi-functional key to answer the call</div> <div></div> <div>Blue light is ON for 1S</div> <div>End</div> <div>During the call, press the multi-functional key to hang up</div> <div></div> <div>Blue light is ON for 1S</div> <div>Refuse</div> <div>During the call, keep pressing the multi-functional key for 2 seconds to refuse to answer the incoming call</div> <div></div> <div>Blue light is ON for 1S and OFF for 1S</div> <div>During the course of connecting the mobile phone, double-click the multi-functional key to redial the last code</div> <div>When the mobile phone is connected, keep pressing the multi-functional key for 1.5 seconds into the Voice assistant</div> <div>- 13 -</div>	<div>English</div> <div>11. Radio</div> <div></div> <div>During the call, turn the multi-functional key clockwise, Volume +</div> <div>During the call, turn the multi-functional key counterclockwise, Volume -</div> <div>In the On status, press the Power key + multi-functional key, to start the broadcast function, with the voice prompt of "Turn on the radio".</div> <div>Turn the multi-functional key clockwise, Volume +</div> <div>Keep turning the multi-functional key clockwise for 2 seconds, with automatic upward selection of the radio station</div> <div>Turn the multi-functional key counterclockwise, Volume -</div> <div>Keep turning the multi-functional key counterclockwise for 2 seconds, with automatic downward selection of the radio station</div> <div>12. Language switching</div> <div>In the pairing status, double-click the multi-functional key, to switch the voice prompt in Chinese and English modes. (Blue light quickly flashes two times in 300ms)</div> <div>- 14 -</div>	<div>English</div> <div>13. Battery power</div> <div>When battery power is above 3.78V, voice prompt displays "sufficient battery power"</div> <div>When battery power is below 3.76~3.4V, voice prompt displays "medium battery power"</div> <div>When battery power is below 3.4V, voice prompt displays "insufficient battery power" (red light flashes two times every 3 minutes)</div> <div>14. Charging</div> <div>During the charging, the red light is ON, and when it is fully charged, red light is OFF</div> <div>15. Product specification</div> <div>Bluetooth version: V5.1</div> <div>Mode protocol: HFP/HSP, A2DP, AVRCP</div> <div>Battery type: Lithium battery</div> <div>Battery capacity: 1000mah</div> <div>Temperature range: -10~60°C</div> <div>Charging time: about 3 hours (TYPE-C)</div> <div>Charging voltage: 5V</div> <div>Charging current: 500mah</div> <div>Power supply voltage: VDD3.7V</div> <div>Standby time: 500 hours</div> <div>Working time: 12 hours</div> <div>Frequency range: 2.402GHZ-2.480GHZ</div> <div>Wireless transmission range of intercom: 1200M</div> <div>- 15 -</div>
--	---	--	--	--	---	--	--

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.