




WIESON
INTERNATIONAL
CO., LTD.

WM2011WU
User Manual

TYPE OF PRODUCT

WLAN MODULE

WM2011WU **WLAN USB Module**

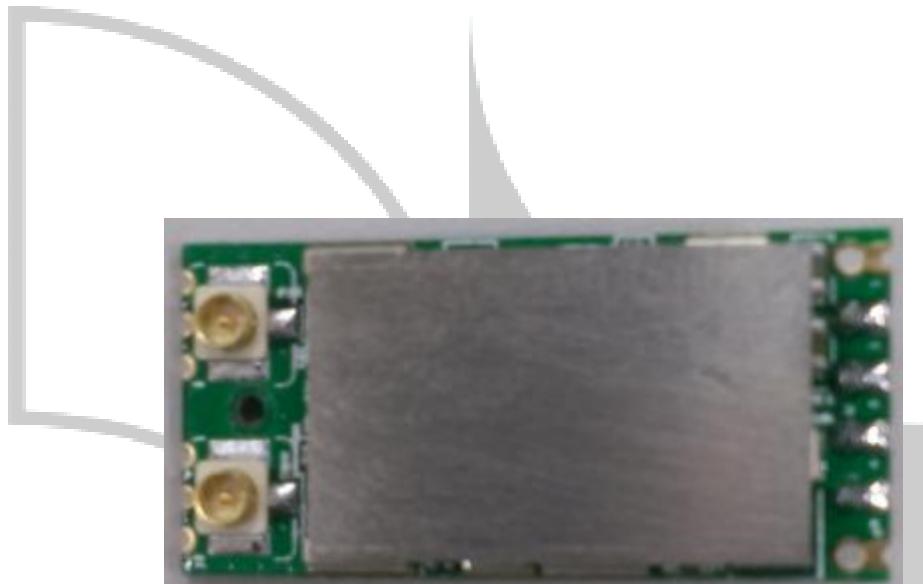

Version	Date	Change Description
1.0	5 Dec 2014	Initial release

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



Description

WM2011WU is a WLAN 11n USB module, which fully supports the features and functional compliance of IEEE 802.11n,e and i standards. It supports up to 300Mbps high-speed wireless network connections.

It is designed to provide excellent performance with low power consumption and enhance the advantages of robust system and cost-effective. It is targeted at competitive superior performance, better power management applications.

Features

- Operates in 2.4 GHz frequency bands
- 2x2 MIMO technology improves effective throughput and range over existing 802.11 b/g products
- Data rates: up to 300Mbps
- 802.11e-compatible bursting and I standards
- BPSK, QPSK, 16 QAM, 64 QAM modulation schemes
- WEP, TKIP, and AES, WPA, WPA2 hardware encryption schemes
- Small footprint: 25.0×12.0×2.2mm, 12-half-holes PCB module
- OS support: Android, Windows
- RoHS compliance

Application


- Mobile Internet Device
- Tablet PC
- Portable Media Player (PMP)
- Portable Navigation Device (PND)
- IP cam

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



Functional Block Diagram

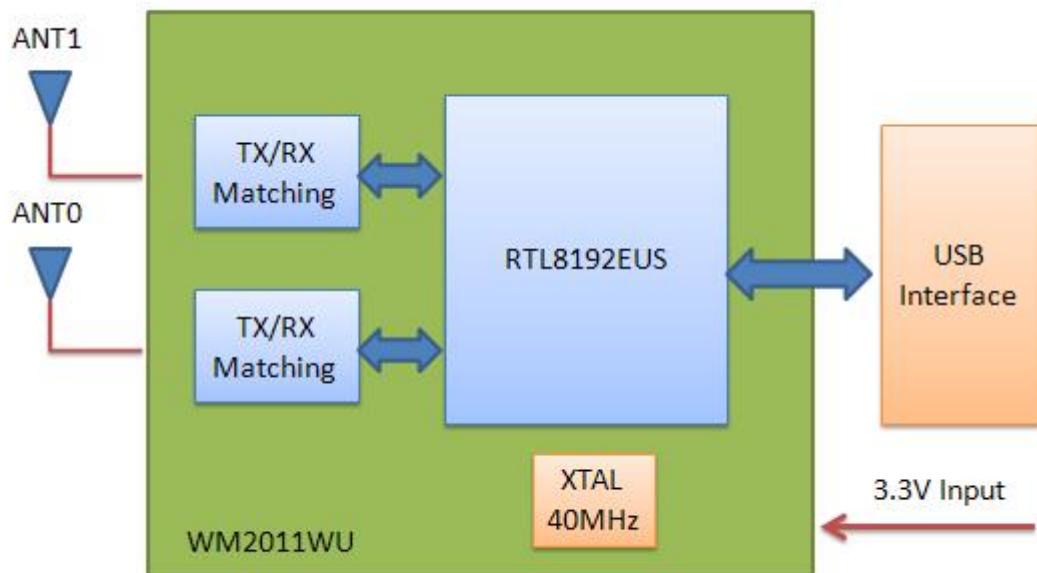

Block Diagram



WIESON

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of




WIESON
INTERNATIONAL
CO., LTD.

WM2011WU
User Manual

TYPE OF PRODUCT

WLAN MODULE

Pin Assignment (Top view)

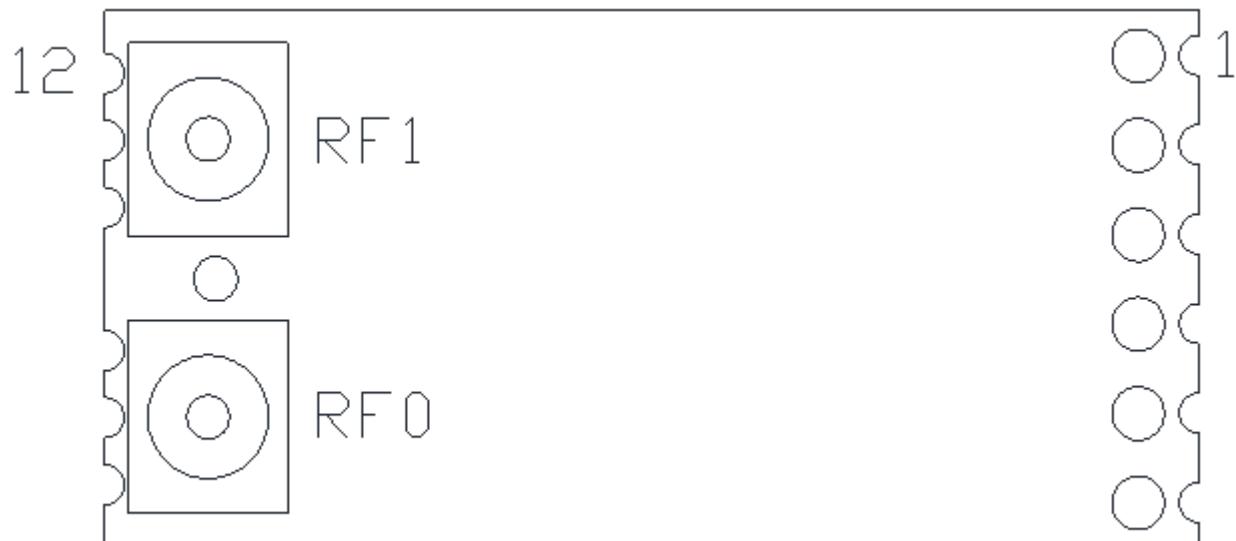




Pin Definition

Pin	Signal	Input /Output	Description
1	PDn	Input	WLAN Radio on/off function
2	VDD	Power	3.3V Power supply
3	D-	I/O	USB D-
4	D+	I/O	USB D+
5	GND	Power	Ground
6	LED	Output	Low enable LED
7	GND	Power	Ground
8	RF	I/O	WLAN RF port 0
9	GND	Power	Ground
10	GND	Power	Ground
11	RF	I/O	WLAN RF port 1
12	GND	Power	Ground

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of

Application Circuit

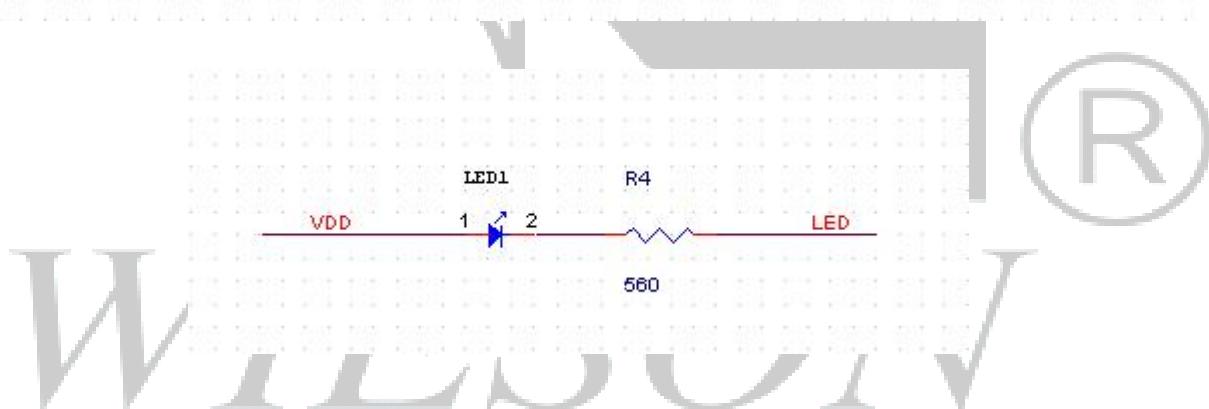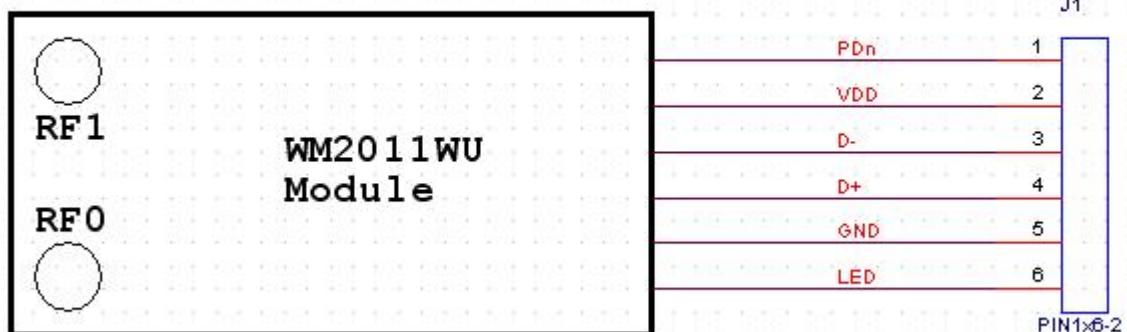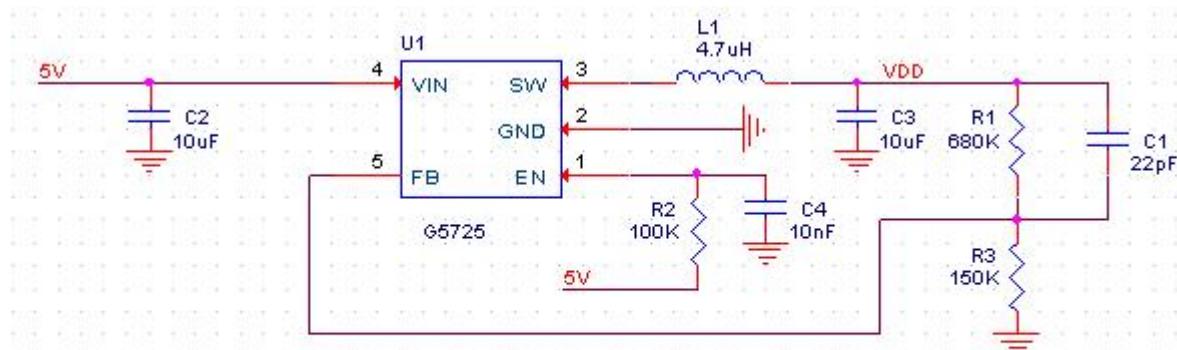

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



WIESON
INTERNATIONAL
CO., LTD.

WM2011WU
User Manual

TYPE OF PRODUCT

WLAN MODULE

Functional Specification

Product Description	
WLAN Standard	IEEE802.11b/g/n, Wi-Fi compliant
Host Interface	USB 2.0
Main Chipset	RTL8192EU
Dimension	25.0mm x 12.0mm x 2.2mm
Package	Half-hole PCB module
Electrical Specifications	
Frequency Range	2.412 to 2.484 GHz
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps DSSS 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps OFDM 802.11n: HT20 MCS0~15, HT40 MCS0~15
Modulation Technique	802.11b: CCK, DQPSK, DBPSK 802.11g: 64 QAM, 16 QAM, QPSK, BPSK 802.11n: BPSK, QPSK, 16-QAM, 64-QAM
Operational Channel	2.4GHz: 11: (Ch. 1-11) – United States 13: (Ch. 1-13) – Europe 14: (Ch. 1-14) – Japan
Security	WPA, WPA-PSK, WPA2, WPA2-PSK, WEP 64bit & 128bit, IEEE 802.11x, IEEE 802.11i
Operating Voltage	3.3V

Temperature Limit Ratings

Parameter	Min.	Max.	Units
Storage Temperature	-10	+70	°C
Ambient Operating Temperature	0	+70	°C

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
VDD	USB interface VDD	-0.3 to 3.6	V

Recommended Operating Range

Symbol	Parameter	Min	Typ	Max	Units
VDD	USB interface VDD	3.15	3.3	3.45	V

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of




WIESON
INTERNATIONAL
CO., LTD.

WM2011WU
User Manual

TYPE OF PRODUCT

WLAN MODULE

Module Dimensions

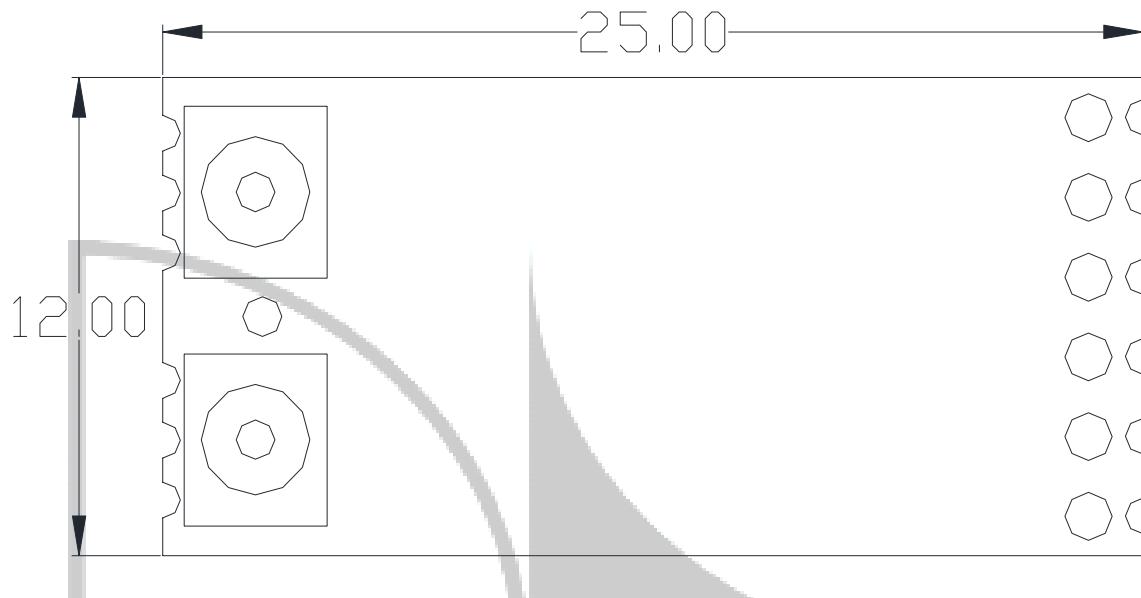

All dimensions are in millimeters.

Tolerance: +/- 0.15mm

WIESON

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



WIESON
INTERNATIONAL
CO., LTD.

WM2011WU
User Manual

TYPE OF PRODUCT

WLAN MODULE

Pin Header Specification

Recommend part is code 04.

REV.	ECN.	DATE	DWN	APVD															
MATERIAL: INSULATOR : PBT (UL-94V-0),BLACK, CONTACT MATERIAL : COPPER ALLOY FINISH : GOLD OVER NICKEL OR TIN PLATED.																			
SPECIFICATION: CURRENT RATING : 1 AMP. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR ONE MINUTE. INSULATION RESISTANCE : 1000MQ MIN. OPERATING TEMPERATURE : -55°C ~ +105°C.																			
ORDER INFORMATION : HPD11 1 - X X 1 X B 0 01 - R 1. SERIES NUMBER: 7. INSULATOR HIGH: 1 2 3 4 5 6 7 8 9 0=2.0 mm. 2. ROW TYPE: 8. PIN TAIL (A/B) LENGTH: 1=SINGLE ROW A/B: CUSTOM LENGTH AVAILABLE 3. POSITION PER ROW: 02-40 4. CONTACT MATERIAL: 1=COPPER ALLOY 9. GREEN PRODUT: R=RoHS COMPLIANT 5. CONTACT PLATING: 1= SELECTIVE GOLD FLASH 4= SELECTIVE 15u" GOLD 6= SELECTIVE 30u" GOLD A= GOLD FLASH T= TIN 6. INSULATOR MATERIAL: B=PBT C= NYLON 6T																			
<table border="1"><caption>PIN TAIL LENGTH</caption><thead><tr><th>CODE</th><th>A</th><th>B</th></tr></thead><tbody><tr><td>01</td><td>3.8</td><td>3.0</td></tr><tr><td>02</td><td>4.0</td><td>2.8</td></tr><tr><td>03</td><td>12</td><td>3.0</td></tr><tr><td>04</td><td>3.2</td><td>2.2</td></tr></tbody></table> <p><u>RECOMMENDED P.C.B HOLE LAYOUT</u></p>					CODE	A	B	01	3.8	3.0	02	4.0	2.8	03	12	3.0	04	3.2	2.2
CODE	A	B																	
01	3.8	3.0																	
02	4.0	2.8																	
03	12	3.0																	
04	3.2	2.2																	

CONFIDENTIAL


No part of the information shown of this document may be used in any way without office stamp or written consent of



Layout Design Guide

The recommended layout pads for WM2011WU module are shown below. (Module top view)

- DO NOT route any digital or analog signal traces between the RF traces and reference ground.
- DO NOT put any metal shielding in the surrounding area of module and try to leave the module placed in the corner of chassis board as close as possible.
- DO NOT put any metal plane into clearance area. Please keep the clearance area close to the corner of main board or out of the board's edge.

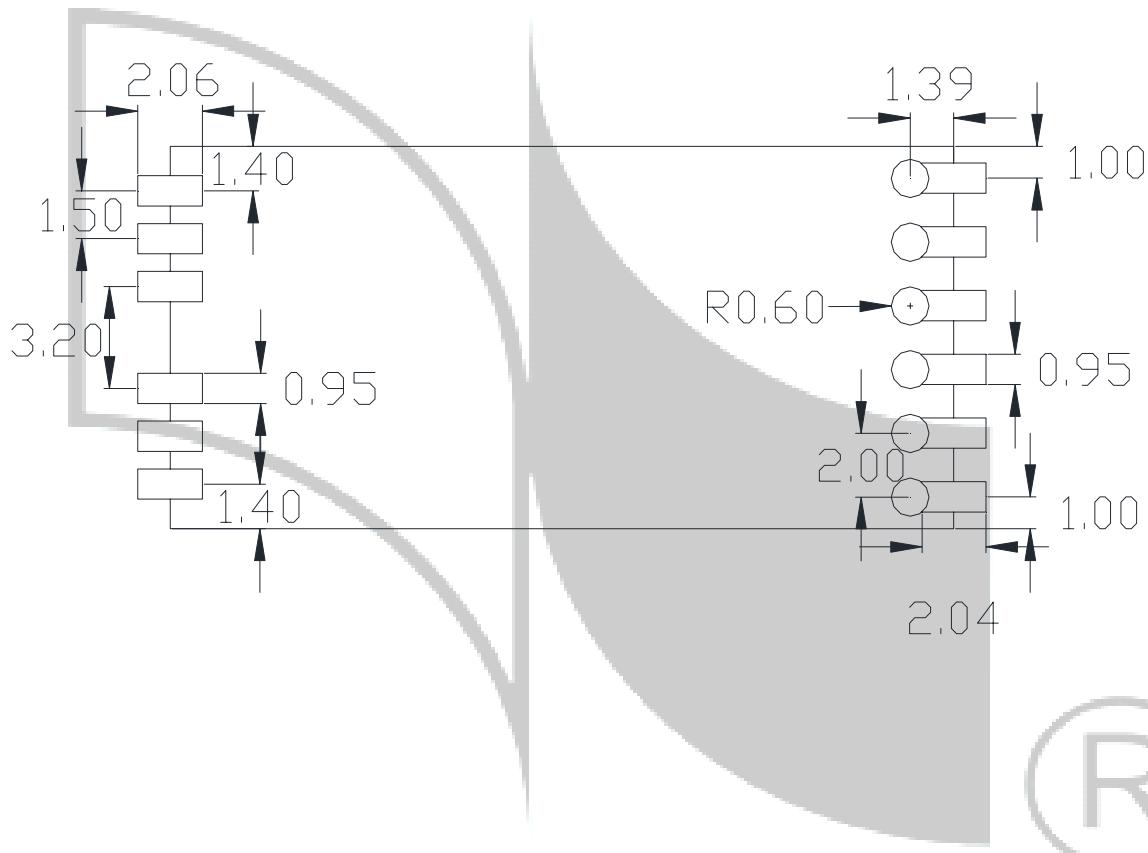

WIESON

All dimensions are in millimeters.

Tolerance: +/- 0.15mm


CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



Package Information

Wieson offer one box for 600 pcs module. Each box has 11 trays inside. The top of empty tray is using for fixed the first package tray. The other 10 trays packaged module inside. Each tray dimensions is shown below.

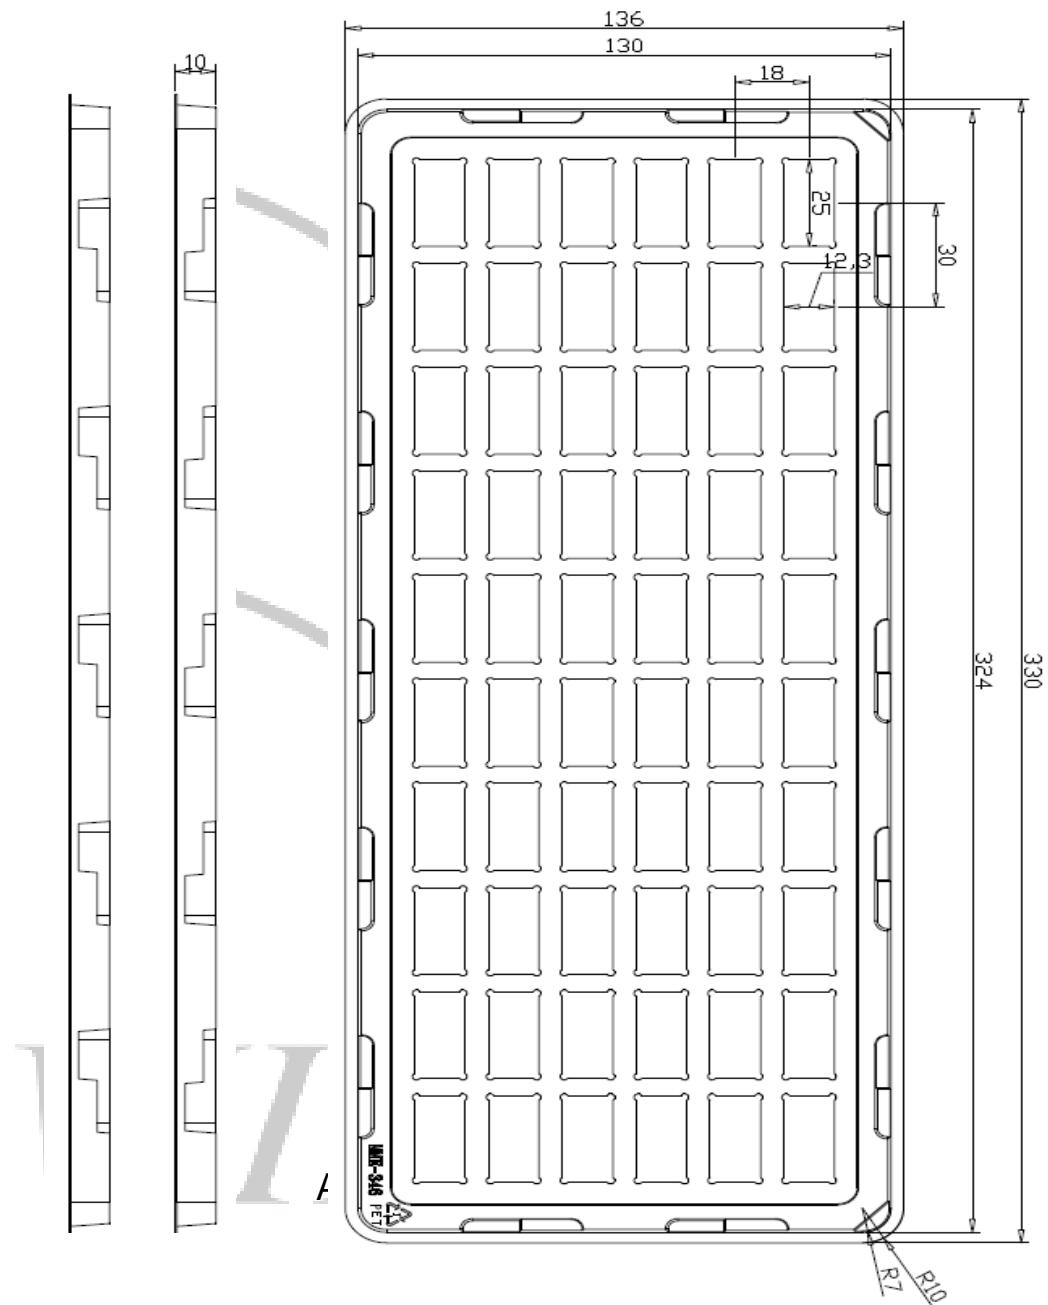


CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



Reference Temperature Reflow Chart

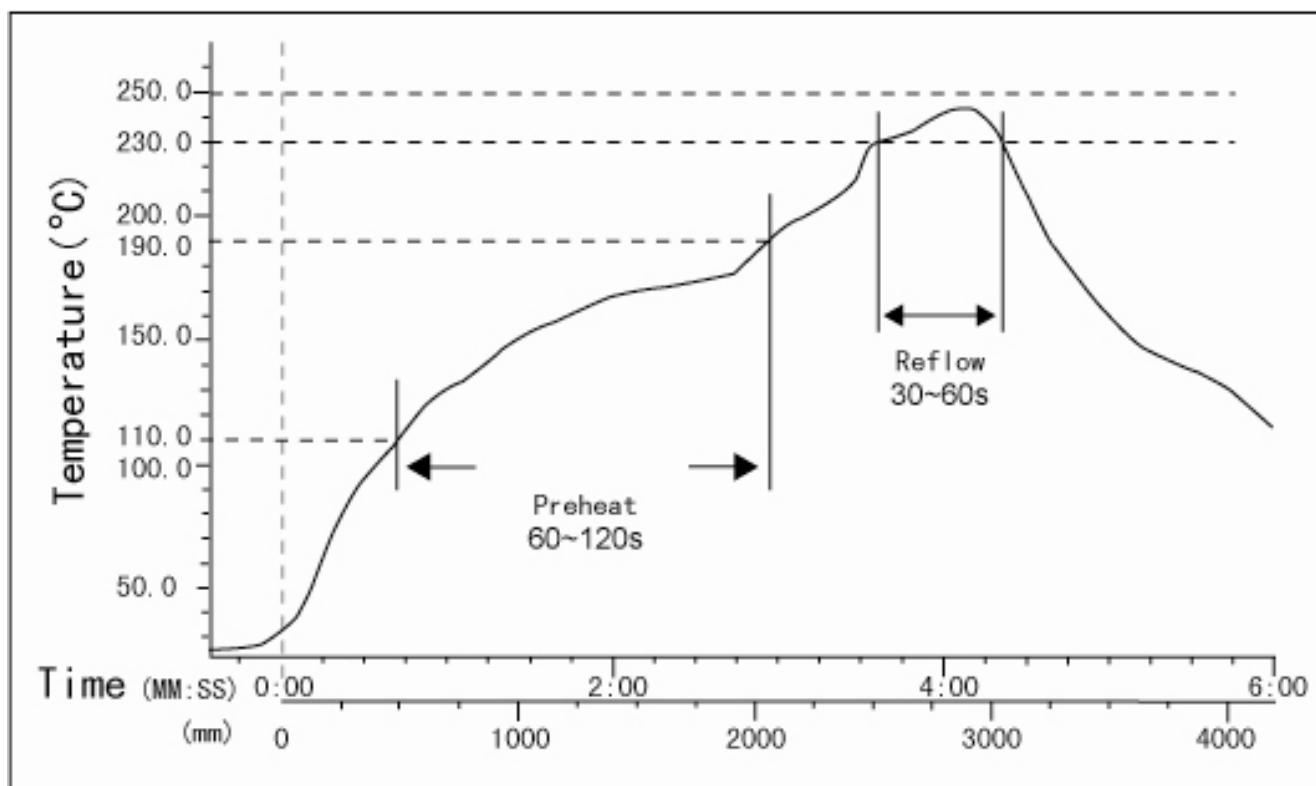

Note:

1. If the system PCBA is double side design please reflow the side without this module first.
2. Don't let the solder machine temperature over 250°C or follow solder paste vendor's recommended temperature.
3. The Ramp-up temperature speed is 1~4 °C per second, the Ramp-down temperature speed is 1~4 °C per second.
4. This temperature reflow chart is for reference only, it depends on the manufacturing machine's characters requirement.

WIESON

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



Compliance Information

■ FCC Compliance

This equipment has been tested and found to comply with the limits for a Class digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to the radio communications. However, there are no guarantees that interference will not occur in a particular installation.

■ Troubleshooting

If this equipment does cause harmful interference to radio reception, which can be determined by turning the equipment off and on, the user is encouraged to correct the interference by one or more of the following instructions.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Consult dealer or an experienced radio technician.

■ Conditions

Operation is subject to the following conditions

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

■ FCC Caution

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of



WIESON
INTERNATIONAL
CO., LTD.

WM2011WU
User Manual

TYPE OF PRODUCT

WLAN MODULE

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following:

“Contains FCC ID: 2AAK6WM2011WU”

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module

in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warming as shown in this manual.



CONFIDENTIAL

No part of the information shown of this document may be used in any way without office stamp or written consent of